



UL International EMC Services
333 Pfingsten Road
Northbrook, Illinois 60062-2096
(800) 873-8536
Fax No. (847) 272-8864
<http://www.ul.com/emc/>

October 24, 2001

Chamberlain Group Inc.
Attn: Mr. Hank Sieradzki
845 Larch Ave
Elmhurst, IL 60126

UL Reference: File MC3181, Project 01NK44624

Subject: EMC Test and Measurement Report for
Model G535-315LM Super-regenerative Receiver

Dear Mr. Sieradzki:

We have provided with this letter your EMC Test Report for the above referenced model. The product was determined to comply with the requirements noted in the report.

Please review the attached report and direct any questions or comments to me. Samples were returned to your attention.

We appreciate your interest in UL's EMC Services, and encourage you to contact us in the future should you need EMC test services. This closes Project 01NK44624.

Best regards,

Reviewed by:

A handwritten signature in black ink, appearing to read 'Bart Mucha'.

Bart Mucha (Ext 41216)
Associate Project Engineer
International EMC Services

A handwritten signature in black ink, appearing to read 'Jack Steiner'.

Jack Steiner
Engineering Group Leader
International EMC Services

EMC – TEST REPORT

Issue Date: October 24, 2001

Ö EMISSIONS IMMUNITY

Test Report File No. : MC3181
Project No. : 01NK44624

Model / Type : G535-315LM
Kind of Product : Super-regenerative Receiver

Applicant : Chamberlain Group Inc.
License Holder : Chamberlain Group Inc.
Address : 845 Larch Ave
: Elmhurst, IL 60126
:

Manufacturer : Same as Applicant
:
:
:

Test Result : COMPLIANT

This report without appendices consists of 9 pages. Appendix A contains test photos, and Appendix B contains original test data. The data contained in this report reflects only the items tested in the configurations and mode of operations described. An attempt has been made to arrange the EUT, with the equipment provided, into a test configuration which maximizes the observed emissions of the EUT while simulating, as close as practical, a typical end-use installation.

Underwriters Laboratories Inc. authorizes the above company to reproduce this report provided it is reproduced in its entirety.

**Underwriters Laboratories Inc. 333 Pfingsten Rd. Northbrook, IL 60062
Fax: (847) 272-8864**

REPORT DIRECTORY

<u>SECTION</u>	<u>TITLE</u>
----------------	--------------

GENERAL

- | | |
|-----|---|
| 1.0 | General Product Description |
| 1.1 | Model Differences |
| 1.2 | Environmental Conditions in Test Lab |
| 1.3 | Calibration Details of Equipment Used for Measurement |
| 1.4 | EUT (Equipment Under Test) Configuration |
| 1.5 | EUT Operating Mode |
| 1.6 | Device Modifications |

EMISSIONS

- | | |
|-----|-----------------------------------|
| 2.0 | Emissions Test Regulations |
| | Conducted Voltage |
| | Radiated Electric Field Emissions |

IMMUNITY

- | | |
|-----|---------------------------|
| 3.0 | Immunity Test Regulations |
|-----|---------------------------|

CONCLUSION

- | | |
|-----|-----------------|
| 4.0 | General Remarks |
| 4.1 | Summary |

APPENDICIES

- | | |
|---|---|
| A | Test Setups (Photos, Diagrams and Drawings) |
| B | Test Data |

1.0 GENERAL PRODUCT DESCRIPTION

The EUT (Equipment Under Test) was a super-regenerative receiver model: G535-315LM for use with garage door openers.

1.0.1 Equipment Mobility:

Wall, Ceiling-mount

1.0.2 Test Voltage and Frequency:

<u>Voltage (V)</u>	<u>Frequency (Hz)</u>
120	60

1.1 MODEL DIFFERENCES

Any other model(s) represented by the models tested in this investigation will be documented by the manufacturer.

1.2 ENVIRONMENTAL CONDITIONS IN TEST LAB

Temperature: 20-25 °C
Relative Humidity: 30-60% RH
Atmospheric Pressure: 860-1060 mbar

1.3 CALIBRATION OF EQUIPMENT USED FOR MEASUREMENT

All test equipment and test accessories are calibrated on a regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less.

All test equipment calibrations are traceable to the National Institute of Standards and Technology (NIST), therefore, all test data recorded in this report is traceable to NIST.

1.4 EUT CONFIGURATION(s)

See Appendix A for individual set-up configuration(s). In addition to the EUT, the following peripheral devices and/or cables were connected during the measurement:

Device	Manufacturer	Model	Serial #	FCC ID
Super – regenerative Receiver	Chamberlain	G535-315LM (PCB assembly 1A5573)	-	-
24VAC Adapter	LZR Electronics	AA-2420	-	-
GDO simulator	Chamberlain	1160LM	2912C00774	-

Cable	Manufacturer	Length	Type	Shield Type	Shield Termination
I/O	-	5M	CL2X	None	none

1.5 EUT OPERATING MODE(s)

The equipment under test was operated during the measurements under the following conditions:

The Receiver was tested in two modes:

IDLE – for Radiated Emissions and Conducted Emissions

COHERED – for Radiated Emissions Only (there was no difference in conducted emissions when compared to IDLE mode)

1.6 DEVICE MODIFICATIONS

The following modifications were necessary for compliance:

None.

2.0 EMISSIONS TEST REGULATIONS

The EUT was considered to be a Class B device.

Emissions testing was performed according to the following regulations:

47 CFR Part 15 Subpart B: 2000 + ANSI C63.4 - 1992

CONDUCTED VOLTAGE EMISSIONS

Test Location

Ground Plane (Test Station 3)

UL Procedure

3014ANBK-LPG-001

Test Instruments

Spectrum Analyzer / Quasi-peak Adapter

Advantest Model 3261A Spectrum Analyzer No. EMC4084
Model R3551 Preselector No. EMC4088

Line Impedance Stabilization Networks (LISNs)

SOLAR Model 8602-50-TS-50-N	S/N 963903	No. EMC4064
SOLAR Model 8602-50-TS-50-N	S/N 963904	No. EMC4065

Transient Limiter

Electro – Metrics Model: EM-7600-2 No. EMC4224

Frequency Range on each line

450 kHz to 30MHz

Test Results

The requirements are:
MET

Remarks

See App. B for complete test results.

RADIATED ELECTRIC FIELD EMISSIONS

Test Location

10 Meter Semi-Anechoic Chamber

UL Procedure

3014ANBK-LPG-002

Test Instruments

Spectrum Analyzer / Quasi-peak Adapter / Preamplifier / Preselector

Hewlett Packard Model 8566B Spectrum Analyzer

Model 85650A Quasi-peak Adapter

Miteq AM-3A-000110-N Preamp No. FCA4003, EMC4016, EMC4151

Model 85685A RF Preselector No. EMC4015

Antennas

Chase EMC Ltd., Biconical Antenna Model VBA6106A

S/N 1246

Chase EMC Ltd., Log Periodic Antenna Model UPA6108

S/N 1120

Frequency Range of Measurement

30MHz-1000MHz

Measurement Distance

10 meters

Test Results

The requirements are:

MET

Remarks

See App. B for complete test results.

3.0 IMMUNITY TEST REGULATIONS

Immunity testing was not performed per the request of the manufacturer.

4.0 GENERAL REMARKS

Sample Receipt Date : October 16, 2001

Test Dates

Start : October 19, 2001

End : October 22, 2001

4.1 SUMMARY

The requirements according to the technical regulations are:

MET

Underwriters Laboratories Inc.
333 Pfingsten Road
Northbrook, IL 60062 USA

Test Engineer:



Bart Mucha (Ext 41216)
Associate Project Engineer
International EMC Services

Reviewed by:



Jack Steiner
Engineering Group Leader
International EMC Services

APPENDIX A

PHOTOS



**Radiated Emissions
10M Chamber**



**Conducted Emissions
GP3**

APPENDIX B

TEST DATA


EMISSIONS

Conducted Voltage
Radiated Electric Field Emissions

UNDERWRITERS LABORATORIES INC.
Conducted Emissions

Date Tested: 22 October 2001

Manufacturer : Chamberlain Gropup Inc.
Equipment Under Test : G535-315LM Super-regenerative Receiver
Requirement : CFR 47 Part 15 Class B
Detection Mode : Quasi-peak (qp) or Peak (pk) or Average (ave)
Bandwidth : 200 Hz for measurements 9 kHz to 150 kHz
9 kHz for measurements 150 kHz to 30 MHz
Line : L1

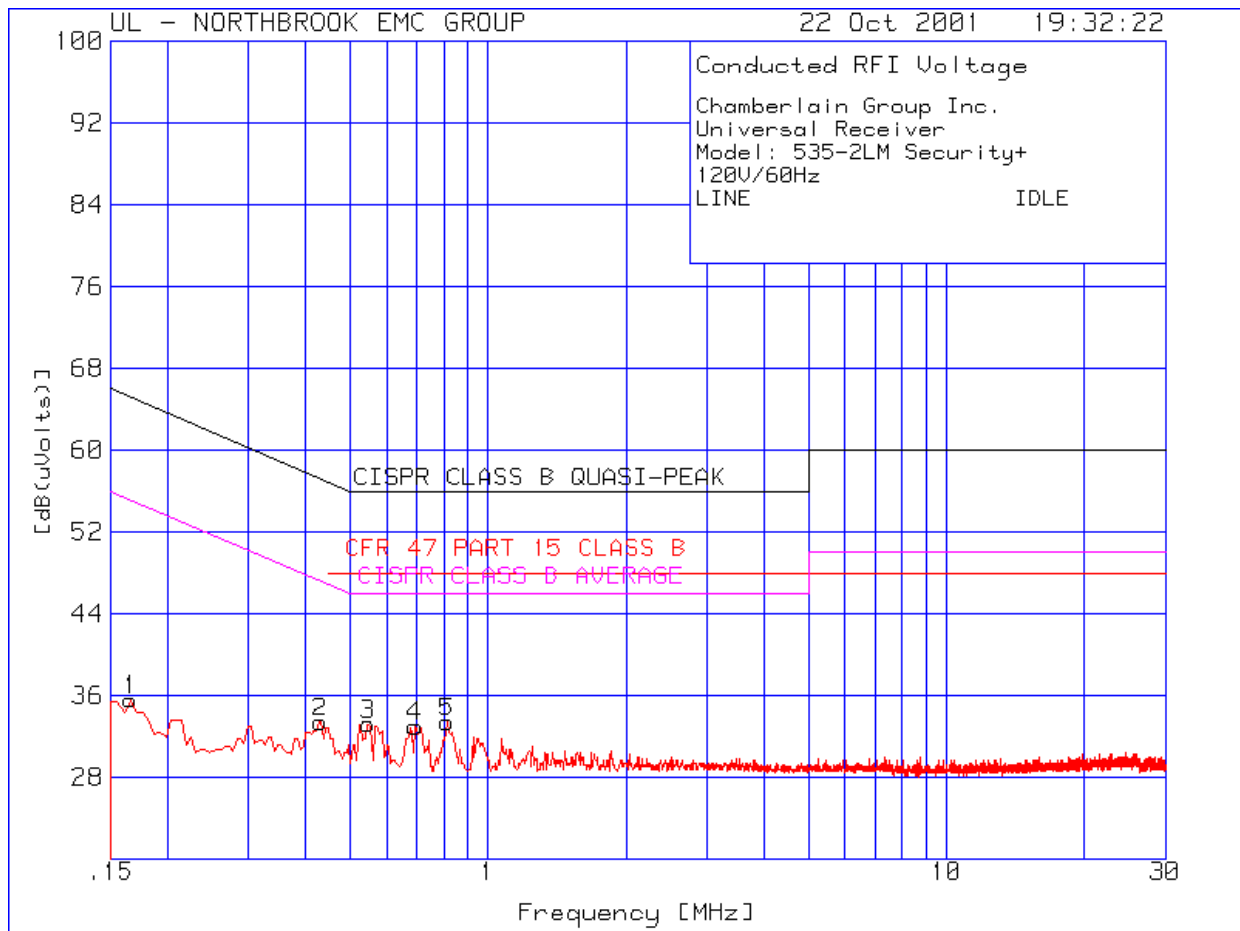

Chamberlain Group Inc.
 Universal Receiver
 Model: 535-2LM Security+
 120V/60Hz
 LINE

IDLE

Test No.	Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB(uVolts)]	Limit:1	2	3	4
1	.16597	25.6 pk	0	10	35.6	N/A	N/A	65.2	55.2
Azimuth: N/A		Height: N/A		Margin [dB]		N/A	N/A	-29.6	-19.6
2	.42949	23.3 pk	.1	10	33.4	N/A	N/A	57.3	47.3
Azimuth: N/A		Height: N/A		Margin [dB]		N/A	N/A	-23.9	-13.9
3	.54662	23.1 pk	.1	10	33.2	48	N/A	56	46
Azimuth: N/A		Height: N/A		Margin [dB]		-14.8	N/A	-22.8	-12.8
4	.69302	22.9 pk	.1	10	33	48	N/A	56	46
Azimuth: N/A		Height: N/A		Margin [dB]		-15	N/A	-23	-13
5	.81546	23.3 pk	.1	10	33.4	48	N/A	56	46
Azimuth: N/A		Height: N/A		Margin [dB]		-14.6	N/A	-22.6	-12.6


LIMIT 1: CFR 47 PART 15 CLASS B
 LIMIT 2: NONE
 LIMIT 3: CISPR CLASS B QUASI-PEAK
 LIMIT 4: CISPR CLASS B AVERAGE

pk - Peak detector
 qp - Quasi-Peak detector
 av - Average detector
 tm - Trace Math Result

UNDERWRITERS LABORATORIES INC.
Conducted Emissions

Date Tested: 22 October 2001

Manufacturer : Chamberlain Group Inc.
Equipment Under Test : G535-315LM Super-regenerative Receiver
Requirement : CISPR Class B
Detection Mode : Quasi-peak (qp) or Peak (pk) or Average (ave)
Bandwidth : 200 Hz for measurements 9 kHz to 150 kHz
9 kHz for measurements 150 kHz to 30 MHz
Line : L2

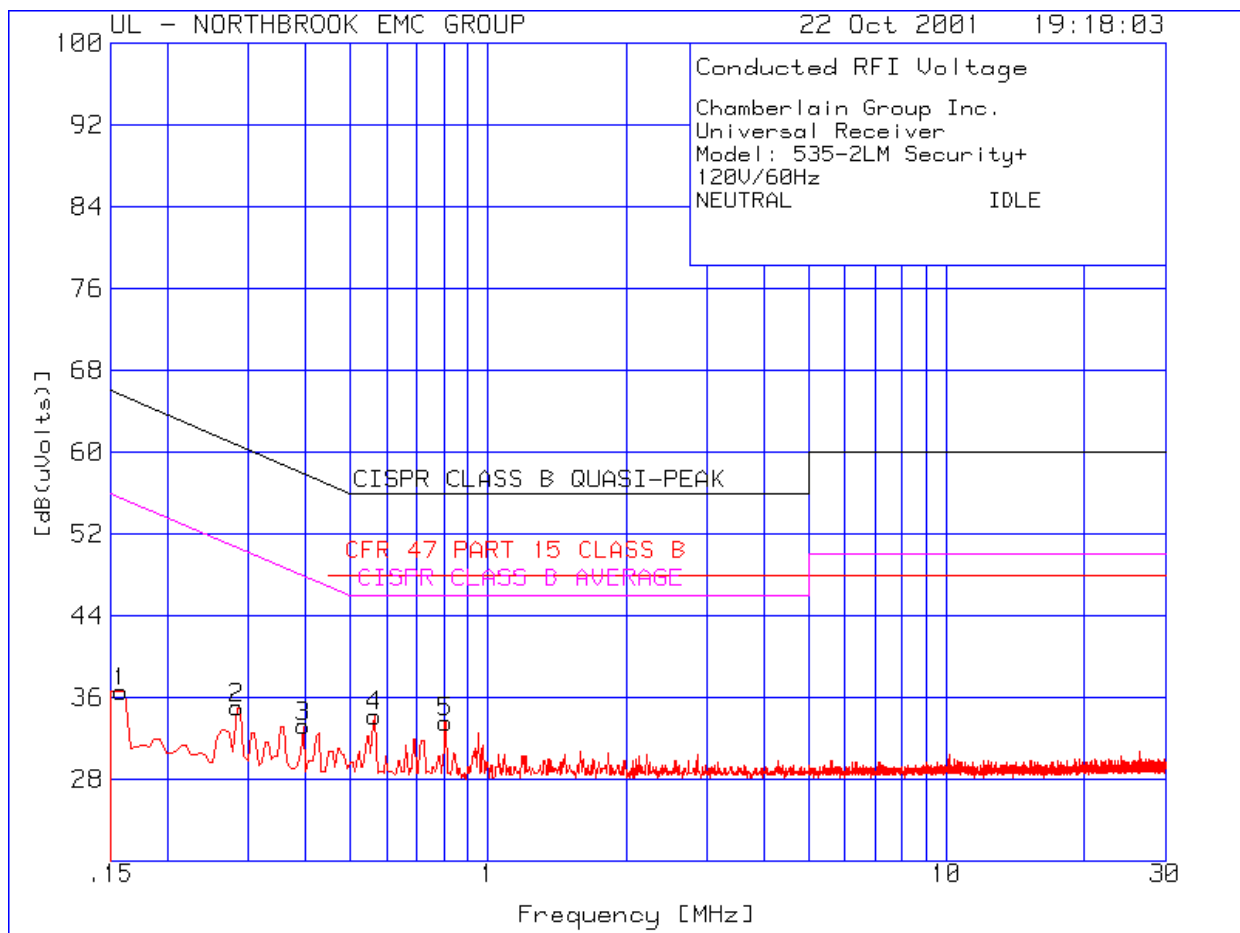

Chamberlain Group Inc.
 Universal Receiver
 Model: 535-2LM Security+
 120V/60Hz
 NEUTRAL IDLE

Test No.	Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level [dB(uVolts)]	Limit:1	2	3	4
1	.15799	26.6 pk	0	10	36.6	N/A	N/A	65.6	55.6
Azimuth: N/A		Height: N/A		Margin	[dB]	N/A	N/A	-29	-19
2	.28309	24.9 pk	.1	10	35	N/A	N/A	60.7	50.7
Azimuth: N/A		Height: N/A		Margin	[dB]	N/A	N/A	-25.7	-15.7
3	.39489	23.2 pk	.1	9.9	33.2	N/A	N/A	58	48
Azimuth: N/A		Height: N/A		Margin	[dB]	N/A	N/A	-24.8	-14.8
4	.56525	24.1 pk	.1	10	34.2	48	N/A	56	46
Azimuth: N/A		Height: N/A		Margin	[dB]	-13.8	N/A	-21.8	-11.8
5	.80748	23.5 pk	.1	10	33.6	48	N/A	56	46
Azimuth: N/A		Height: N/A		Margin	[dB]	-14.4	N/A	-22.4	-12.4

LIMIT 1: CFR 47 PART 15 CLASS B
 LIMIT 2: NONE
 LIMIT 3: CISPR CLASS B QUASI-PEAK
 LIMIT 4: CISPR CLASS B AVERAGE

pk - Peak detector
 qp - Quasi-Peak detector
 av - Average detector
 tm - Trace Math Result


UNDERWRITERS LABORATORIES INC.

Radiated Emissions

Date Tested: 19 October 2001

Manufacturer : Chamberlain Gropup Inc.
Equipment Under Test : G535-315LM Super-regenerative Receiver
Requirement : CFR 47 Part 15 Class B
Detection Mode : Quasi-peak (qp)
Bandwidth : 120 kHz
Measurement Distance : 10 meter
Antenna Type : 30 - 300 MHz, Biconical
300 - 1000 MHz, Log-Periodic

IDLE

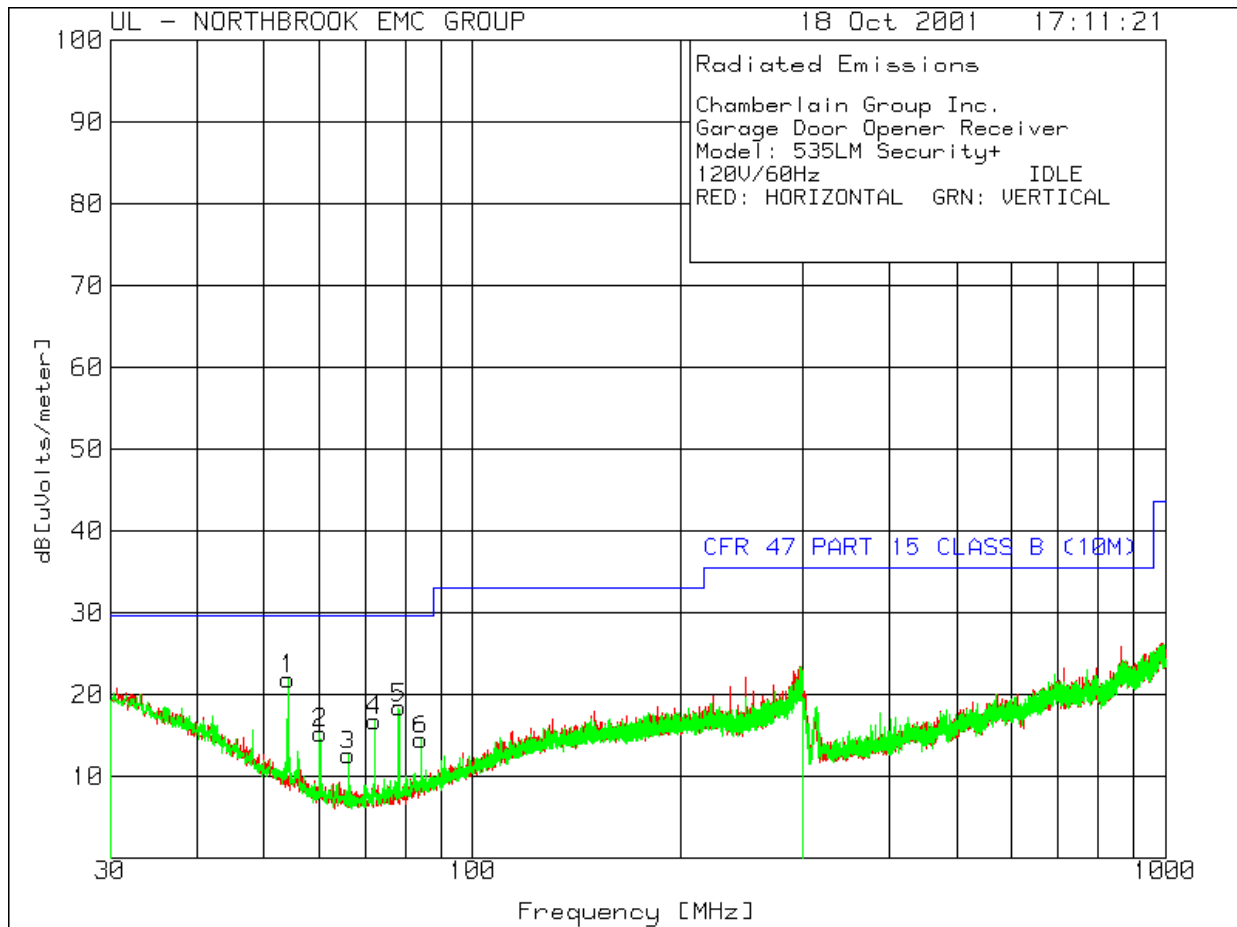

Chamberlain Group Inc.
Garage Door Opener Receiver
Model: 535LM Security+
120V/60Hz IDLE
RED: HORIZONTAL GRN: VERTICAL


Test No.	Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
1	54.1469	41.6 pk	-28.4	8.7	21.9	N/A	N/A	N/A	29.5
Azimuth: 14		Height:100	Vert	Margin	[dB]	N/A	N/A	N/A	-7.6
2	60.1499	36.8 pk	-28.6	7.1	15.3	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-14.2
3	66.1529	34.9 pk	-28.8	6.5	12.6	N/A	N/A	N/A	29.5
Azimuth: 357		Height:100	Vert	Margin	[dB]	N/A	N/A	N/A	-16.9
4	72.1559	39.1 pk	-29	6.7	16.8	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-12.7
5	78.1589	40.3 pk	-29.2	7.3	18.4	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-11.1
6	84.2968	35.5 pk	-29.3	8.3	14.5	N/A	N/A	N/A	29.5
Azimuth: 261		Height:100	Vert	Margin	[dB]	N/A	N/A	N/A	-15

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
54.1437	40.22 qp	-28.4	8.7	20.52	N/A	N/A	N/A	29.5
Azimuth: 156		Height:215	Vert	Margin	[dB]	N/A	N/A	-8.98
60.16	34.48 qp	-28.6	7.1	12.98	N/A	N/A	N/A	29.5
Azimuth: 226		Height:199	Vert	Margin	[dB]	N/A	N/A	-16.52
60.16	34.59 qp	-28.6	7.1	13.09	N/A	N/A	N/A	29.5
Azimuth: 226		Height:199	Vert	Margin	[dB]	N/A	N/A	-16.41
66.1606	34.88 qp	-28.8	6.5	12.58	N/A	N/A	N/A	29.5
Azimuth: 97		Height:245	Vert	Margin	[dB]	N/A	N/A	-16.92
72.1763	37.85 qp	-29	6.7	15.55	N/A	N/A	N/A	29.5
Azimuth: 58		Height:215	Vert	Margin	[dB]	N/A	N/A	-13.95
78.198	39.8 qp	-29.2	7.3	17.9	N/A	N/A	N/A	29.5
Azimuth: 129		Height:174	Vert	Margin	[dB]	N/A	N/A	-11.6
84.2138	34.52 qp	-29.3	8.3	13.52	N/A	N/A	N/A	29.5
Azimuth: 4		Height:208	Vert	Margin	[dB]	N/A	N/A	-15.98

LIMIT 1: NONE
LIMIT 2: NONE
LIMIT 3: NONE
LIMIT 4: CFR 47 PART 15 CLASS B (10M)

pk - Peak detector
qp - Quasi-Peak detector

COHERED

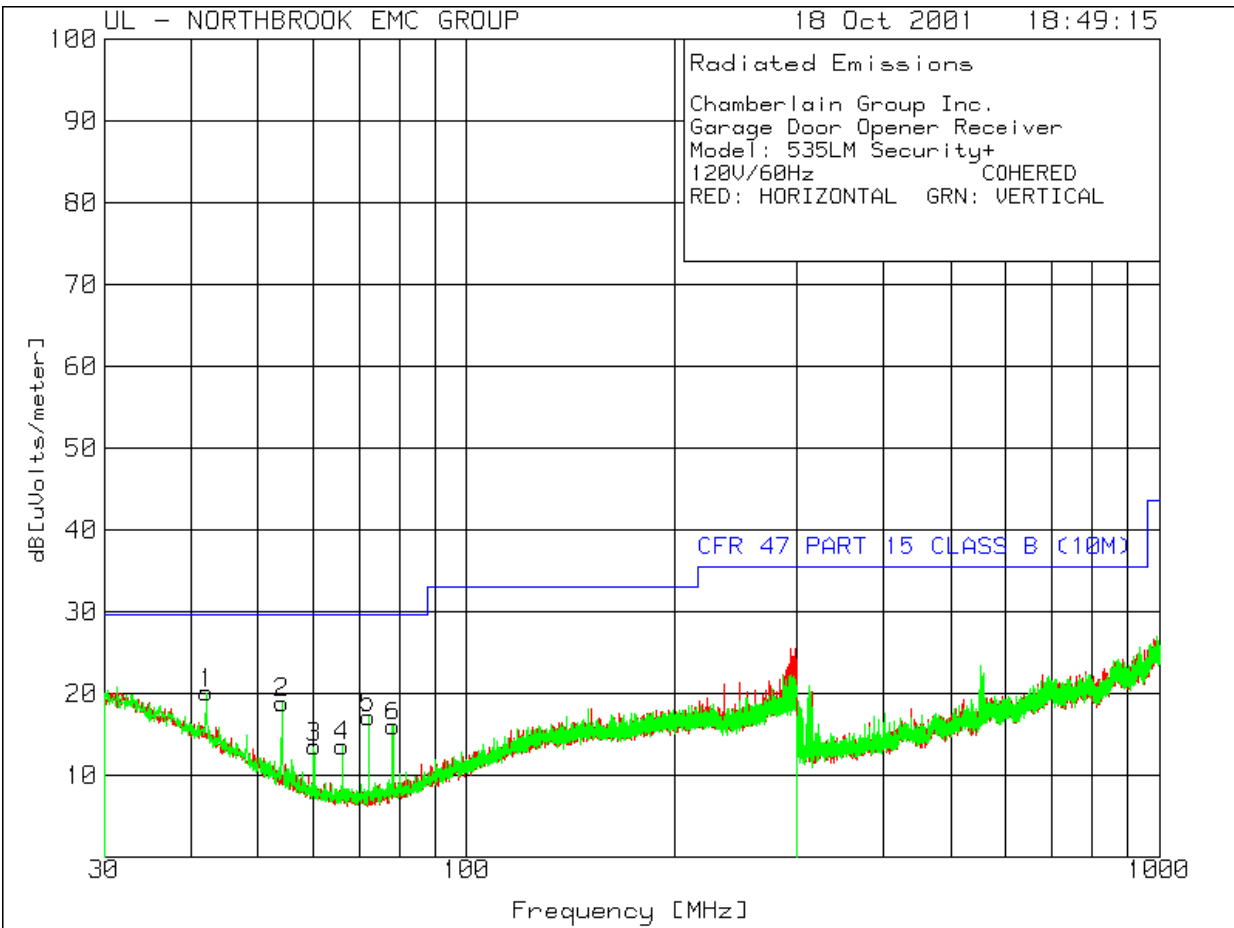

Chamberlain Group Inc.
Garage Door Opener Receiver
Model: 535LM Security+
120V/60Hz COHERED
RED: HORIZONTAL GRN: VERTICAL

Test No.	Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
1	42.1409	34 pk	-27.7	13.8	20.1	N/A	N/A	N/A	29.5
Azimuth: 12		Height:101	Vert	Margin	[dB]	N/A	N/A	N/A	-9.4
2	54.0794	38.6 pk	-28.4	8.7	18.9	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-10.6
3	60.1499	35 pk	-28.6	7.1	13.5	N/A	N/A	N/A	29.5
Azimuth: 358		Height:101	Vert	Margin	[dB]	N/A	N/A	N/A	-16
4	66.1529	35.9 pk	-28.8	6.5	13.6	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-15.9
5	72.1896	39.4 pk	-29	6.7	17.1	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-12.4
6	78.1926	37.9 pk	-29.2	7.3	16	N/A	N/A	N/A	29.5
Azimuth: 0		Height:301	Vert	Margin	[dB]	N/A	N/A	N/A	-13.5

Test Frequency [MHz]	Meter Reading [dB(uV)]	Gain/Loss Factor [dB]	Transducer Factor [dB]	Level dB[uVolts/meter]	Limit:1	2	3	4
42.1046	31.55 qp	-27.7	13.8	17.65	N/A	N/A	N/A	29.5
Azimuth: 4		Height:102	Vert	Margin	[dB]	N/A	N/A	-11.85
42.1036	31.78 qp	-27.7	13.8	17.88	N/A	N/A	N/A	29.5
Azimuth: 4		Height:100	Vert	Margin	[dB]	N/A	N/A	-11.62
60.1506	32.34 qp	-28.6	7.1	10.84	N/A	N/A	N/A	29.5
Azimuth: 147		Height:235	Vert	Margin	[dB]	N/A	N/A	-18.66
66.1678	33.47 qp	-28.8	6.5	11.17	N/A	N/A	N/A	29.5
Azimuth: 169		Height:254	Vert	Margin	[dB]	N/A	N/A	-18.33
72.181	38.12 qp	-29	6.7	15.82	N/A	N/A	N/A	29.5
Azimuth: 60		Height:310	Vert	Margin	[dB]	N/A	N/A	-13.68
78.1966	36.93 qp	-29.2	7.3	15.03	N/A	N/A	N/A	29.5
Azimuth: 79		Height:344	Vert	Margin	[dB]	N/A	N/A	-14.47

LIMIT 1: NONE
LIMIT 2: NONE
LIMIT 3: NONE
LIMIT 4: CFR 47 PART 15 CLASS B (10M)

pk - Peak detector
qp - Quasi-Peak detector

File: MC3181 Project: 01NK44624

Page B9 of B9