


Elite Electronic Engineering, Inc.  
1516 Centre Circle  
Downers Grove, Illinois  
(630) 495-9770  
www.elitetest.com

## Engineering Test Report Number 24445

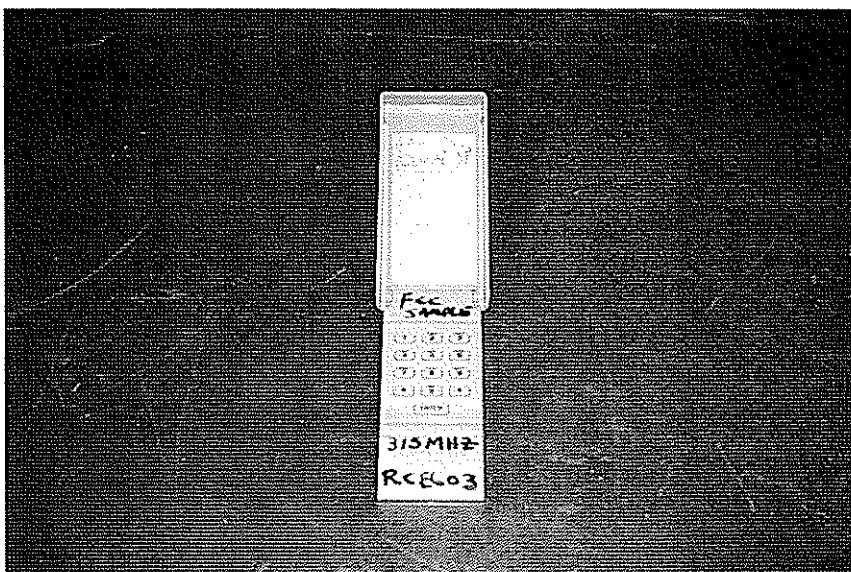


### MEASUREMENT OF RF INTERFERENCE FROM A MODEL 976-315LM TRANSMITTER

FOR: **Chamberlain**  
845 Larch Ave.  
Elmhurst, Illinois 60126

Dates Tested: January 14, 2002

Test Specifications: FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart C, Section 15.205



ENGINEERING TEST REPORT NO. 24445  
ADMINISTRATIVE DATA AND SUMMARY OF TESTS

**DESCRIPTION OF TEST ITEM:** Transmitter

**MODEL NO:** 976-315LM

**SERIAL NO:** None Assigned

**MANUFACTURER:** Chamberlain

**APPLICABLE SPECIFICATIONS:** FCC "Code of Federal Regulations"  
Title 47, Part 15, Subpart C

**QUANTITY OF ITEMS TESTED:** One (1)

**TEST PERFORMED BY:** ELITE ELECTRONIC ENGINEERING INCORPORATED  
Radio Interference Consultants  
Downers Grove, Illinois 60515

**DATE RECEIVED:** January 11, 2002

**DATE TESTED:** January 14, 2002

**PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):**

**CUSTOMER:** No Chamberlain personnel were present.

**ELITE ELECTRONIC:** Daniel E. Crowder

**ELITE JOB NO.:** 30606

**ABSTRACT:** The model 976-315LM Transmitter, does meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-1992.

The radiated emissions level closest to the limit (worst case) occurred at 315MHz. The emissions level at this frequency was 3.1dB within the limit. See data page 17 for more details.

Report By:

Daniel E. Crowder - NCE

Approved By:

  
Raymond J. Klouda  
Registered Professional  
Engineer of Illinois - 44894

## TABLE OF CONTENTS

| PARAGRAPH | DESCRIPTION OF CONTENTS              | PAGE NO. |
|-----------|--------------------------------------|----------|
| 1.0       | INTRODUCTION                         | 4        |
| 1.1       | DESCRIPTION OF TEST ITEM             | 4        |
| 1.2       | PURPOSE                              | 4        |
| 1.3       | DEVIATIONS, ADDITIONS AND EXCLUSIONS | 4        |
| 1.4       | APPLICABLE DOCUMENTS                 | 4        |
| 1.5       | SUBCONTRACTOR IDENTIFICATION         | 4        |
| 1.6       | LABORATORY CONDITIONS                | 5        |
| 2.0       | TEST ITEM SETUP AND OPERATION        | 5        |
| 2.1       | POWER INPUT                          | 5        |
| 2.2       | GROUNDING                            | 5        |
| 2.3       | PERIPHERAL EQUIPMENT                 | 5        |
| 2.4       | INTERCONNECT CABLES                  | 5        |
| 3.0       | TEST EQUIPMENT                       | 5        |
| 3.1       | TEST EQUIPMENT LIST                  | 5        |
| 3.2       | CALIBRATION TRACEABILITY             | 6        |
| 3.3       | MEASUREMENT UNCERTAINTY              | 6        |
| 4.0       | REQUIREMENTS, PROCEDURES AND RESULTS | 6        |
| 4.1       | POWERLINE CONDUCTED EMISSIONS        | 6        |
| 4.1.1     | REQUIREMENTS                         | 6        |
| 4.2       | DUTY CYCLE FACTOR MEASUREMENTS       | 6        |
| 4.2.2     | PROCEDURES                           | 7        |
| 4.2.3     | RESULTS                              | 7        |
| 4.3       | RADIATED MEASUREMENTS                | 7        |
| 4.3.1     | REQUIREMENTS                         | 7        |
| 4.3.2     | PROCEDURES                           | 8        |
| 4.3.3     | RESULTS                              | 8        |
| 4.4       | OCCUPIED BANDWIDTH MEASUREMENTS      | 9        |
| 4.4.1     | REQUIREMENTS                         | 9        |
| 4.4.2     | PROCEDURES                           | 9        |
| 4.4.3     | RESULTS                              | 9        |
| 5.0       | CONCLUSION                           | 9        |
| 6.0       | CERTIFICATION                        | 9        |
| 7.0       | ENDORSEMENT DISCLAIMER               | 10       |
|           | TABLE I - EQUIPMENT LIST             | 11       |

TOTAL NUMBER OF PAGES IN THIS DOCUMENT,  
(INCLUDING DATA SHEETS): 18

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE  
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.**

ENGINEERING TEST REPORT NO. 24445  
MEASUREMENT OF RF INTERFERENCE FROM  
A MODEL 976-315LM TRANSMITTER

**1.0 INTRODUCTION:**

**1.1 DESCRIPTION OF TEST ITEM:** This document presents the results of a series of radio interference measurements performed on a model 976-315LM Transmitter, (hereinafter referred to as the test item). No serial number was assigned to the test item. The test item was designed to transmit at approximately 315 MHz using an internal antenna. The tests were performed for Chamberlain of Elmhurst, Illinois.

**1.2 PURPOSE:** The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections for Intentional Radiators. Testing was performed in accordance with ANSI C63.4-1992.

**1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS:** There were no deviations, additions to, or exclusions from the test specification during this test series.

**1.4 APPLICABLE DOCUMENTS:** The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2000
- ANSI C63.4-2001, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**1.5 SUBCONTRACTOR IDENTIFICATION:** This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

**1.6 LABORATORY CONDITIONS:** The temperature at the time of the test was 22°C and the relative humidity was 22%.

## **2.0 TEST ITEM SETUP AND OPERATION:**

A block diagram of the test item setup is included as Figure 1.

**2.1 POWER INPUT:** The test item was powered with 6VDC through a 6VDC battery.

**2.2 GROUNDING:** Since the test item was powered with 6VDC through a 6VDC battery, it was ungrounded during the tests.

**2.3 PERIPHERAL EQUIPMENT:** There was no peripheral equipment submitted with the test item.

**2.4 INTERCONNECT CABLES:** There were no interconnect cables submitted with the test item.

**2.5 OPERATIONAL MODE:** For all tests the test item and all peripheral equipment were placed on a 80cm high non-conductive stand. The test item and all peripheral equipment was energized.

For all tests, the test item's transmit button was held down thereby setting the unit to transmit continuously. Transmission was verified by observation of an LED which was lit whenever the transmit button was enabled. The transmitting mechanism automatically deactivated when released. The battery voltage was periodically checked to ensure proper operation at maximum level. The tests were performed with the test item operating at 315MHz.

## **3.0 TEST EQUIPMENT:**

**3.1 TEST EQUIPMENT LIST:** A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

The fundamental, harmonics and spurious emissions were measured with a spectrum analyzer. The spectrum analyzer peak detected readings were converted to average readings using a duty cycle factor. All measurements were taken with the resolution and video bandwidth of the measuring instrument adjusted to 100kHz below 1GHz and 1MHz above 1GHz.

The duty cycle factor was calculated from the pulse train for the test item. A data plot was obtained to determine the duty cycle factor. The duty cycle factor was computed as the Word ON time divided by the Word period (ON time + OFF time). The duty cycle factor in dB =  $20 \log (\text{Word ON}/\text{Word period})$ . If the word period is more than 100 milliseconds, then the duty cycle would be computed on the maximum Word ON time during a 100 millisecond period.

**3.2 CALIBRATION TRACEABILITY:** Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

**3.3 MEASUREMENT UNCERTAINTY:** All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty budgets were based on guidelines in "ISO Guide to the Expression of Uncertainty in Measurements" and NAMAS NIS81 "The Treatment of Uncertainty in EMC Measurements".

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements:

|                                       |      |       |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty         | 1.07 | -1.07 |
| Expanded Uncertainty (95% confidence) | 2.1  | -2.1  |

Radiated Emission Measurements:

|                                       |      |       |
|---------------------------------------|------|-------|
| Combined Standard Uncertainty         | 2.26 | -2.18 |
| Expanded Uncertainty (95% confidence) | 4.5  | -4.4  |

#### **4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

##### **4.1 POWERLINE CONDUCTED EMISSIONS:**

**4.1.1 REQUIREMENTS:** Since the test item was powered by internal batteries, no conducted emissions tests were performed.

##### **4.2 DUTY CYCLE FACTOR MEASUREMENTS:**

**4.2.1 PROCEDURES:** The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude setting are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/word period) where the word period = (On-time + Off-time).

**4.2.2 RESULTS:** A representative plot of the duty cycle is shown on data page 14. Since the transmitters use a rolling code the duty cycles used were calculated based on the worst case. The worst case information was supplied by Chamberlain. With the test items transmitting at 315 MHz, the worst case duty cycle would be a WOT msec Word ON time during a 100 millisecond period. The duty cycle factor is  $20 \cdot \log(WOT/100) = -10.2\text{dB}$ .

#### 4.3 RADIATED MEASUREMENTS:

**4.3.1 REQUIREMENTS:** The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

Paragraph 15.231(b) has the following radiated emission limits:

| Fundamental<br>Frequency<br>MHz | Field Intensity<br>uV/m @ 3 meters | Field Strength<br>Harmonics and<br>Spurious @ 3 meters |
|---------------------------------|------------------------------------|--------------------------------------------------------|
| 260 to 470                      | 3,750 to 12,500*                   | 375 to 1,250*                                          |

\* - Linear Interpolation

For 315MHz, the limit at the fundamental is 6041.7uV/m @ 3m and the limit on the harmonics is 604.2uV/m @ 3m.

In addition, emissions appearing in the Restricted Bands of Operation listed in paragraph 15.205(a) shall not exceed the general requirements shown in paragraph

15.209.

**4.3.2 PROCEDURES:** All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4 1992 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

With the broadband measuring antennas positioned at a 3 meter distance from the test item, the frequency range from 30MHz to 4GHz was investigated using a peak detector function with the antennas set for horizontal polarization.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements were made using a peak detector and a broadband bi-log or double ridged waveguide antenna.
- 2) To ensure that maximum, or worst case, emission levels were measured, the following steps were taken:
  - (a) The test item was rotated so that all of its sides were exposed to the receiving antenna.
  - (b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - (c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
  - (d) The fundamental through the 10th harmonic of the transmit frequency were measured.

**4.3.3 RESULTS:** The preliminary plots, with the test item transmitting at 315MHz, are presented on data pages 15 and 16.. The plots are presented for a reference only, and are not used to determine compliance.

The final open area radiated levels, with the test item transmitting at 315MHz, are

presented on data pages 25 through 28. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 315MHz. The emissions level at this frequency was 3.1dB within the limit. See data page 17 for details. Photographs of the test configuration which yielded the highest, or worst case, radiated emission levels are shown on Figure 2.

#### **4.4 OCCUPIED BANDWIDTH MEASUREMENTS:**

**4.4.1 REQUIREMENTS:** In accordance with paragraph 15.231(c), all emissions within 20dB of the peak amplitude level of the center frequency are required to be within a band less than 0.25% of the center frequency wide.

**4.4.2 PROCEDURES:** The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 2 MHz. The frequency spectrum near the fundamental was plotted.

**4.4.3 RESULTS:** The plot of the emissions near the fundamental frequency are presented on data page 18. As can be seen from this data page, the transmitter met the occupied bandwidth requirements.

#### **5.0 CONCLUSION:**

It was found that the Chamberlain model 976-315LM Transmitter, does meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.205 et seq. for Intentional Radiators, when tested per ANSI C63.4-1992.

#### **6.0 CERTIFICATION:**

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains only to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified

test date will serve to invalidate the data and void this certification.

**7.0 ENDORSEMENT DISCLAIMER:**

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

## ENGINEERING TEST REPORT NO. 24445

TABLE 1: TEST EQUIPMENT LIST


ELITE ELECTRONIC ENG. INC.

Page: 1

| Eq ID                                      | Equipment Description     | Manufacturer    | Model No.    | Serial No. | Frequency Range | Cal Date | Cal Inv | Due Date |
|--------------------------------------------|---------------------------|-----------------|--------------|------------|-----------------|----------|---------|----------|
| Equipment Type: ACCESSORIES, MISCELLANEOUS |                           |                 |              |            |                 |          |         |          |
| XZG0                                       | ATTENUATOR/SWITCH DRIVER  | HEWLETT PACKARD | 11713A       | 3439A02724 | ---             |          |         | N/A      |
| Equipment Type: AMPLIFIERS                 |                           |                 |              |            |                 |          |         |          |
| APK0                                       | PRE-AMPLIFIER             | HEWLETT PACKARD | 8449B        | 3008A00662 | 1-26.5GHZ       | 02/15/01 | 12      | 02/15/02 |
| Equipment Type: ANTENNAS                   |                           |                 |              |            |                 |          |         |          |
| NDP0                                       | TUNED DIPOLE ANTENNA      | EMCO            | 3121C-DB3    | 311        | 140-400MHZ      | 12/11/01 | 12      | 12/11/02 |
| NDQ0                                       | TUNED DIPOLE ANTENNA      | EMCO            | 3121C-DB4    | 311        | 400-1000MHZ     | 12/11/01 | 12      | 12/11/02 |
| NTA0                                       | BILOG ANTENNA             | CHASE EMC LTD.  | BILOG CBL611 | 2057       | 0.03-2GHZ       | 05/09/01 | 12      | 05/09/02 |
| NWF0                                       | RIDGED WAVE GUIDE         | EMCO            | 3105         | 2035       | 1-12.4GHZ       | 09/08/01 | 12      | 09/08/02 |
| Equipment Type: CONTROLLERS                |                           |                 |              |            |                 |          |         |          |
| CDD2                                       | COMPUTER                  | HEWLETT PACKARD | D4171A#ABA   | US61654645 | ---             |          |         | N/A      |
| CMA0                                       | MULTI-DEVICE CONTROLLER   | EMCO            | 2090         | 9701-1213  | ---             |          |         | N/A      |
| Equipment Type: PRINTERS AND PLOTTERS      |                           |                 |              |            |                 |          |         |          |
| HRE1                                       | LASER JET 5P              | HEWLETT PACKARD | C3150A       | USHB061052 | ---             |          |         | N/A      |
| Equipment Type: RECEIVERS                  |                           |                 |              |            |                 |          |         |          |
| RAC1                                       | SPECTRUM ANALYZER         | HEWLETT PACKARD | 85660B       | 3407A08369 | 100HZ-22GHZ     | 01/16/01 | 12      | 01/16/02 |
| RACB                                       | RF PRESELECTOR            | HEWLETT PACKARD | 85685A       | 3506A01491 | 20HZ-2GHZ       | 05/09/01 | 12      | 05/09/02 |
| RAF3                                       | QUASIPeAK ADAPTER         | HEWLETT PACKARD | 85650A       | 3303A01775 | 0.01-1000MHZ    | 01/17/01 | 12      | 01/17/02 |
| Equipment Type: TEST CHAMBERS (EMI)        |                           |                 |              |            |                 |          |         |          |
| R21F                                       | 3M ANECHOIC CHAMBER MEETS | EMC TEST SYSTEM | 3M ANECHOIC  |            | 30MHZ-18GHZ     | 05/18/01 | 12      | 05/18/02 |

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

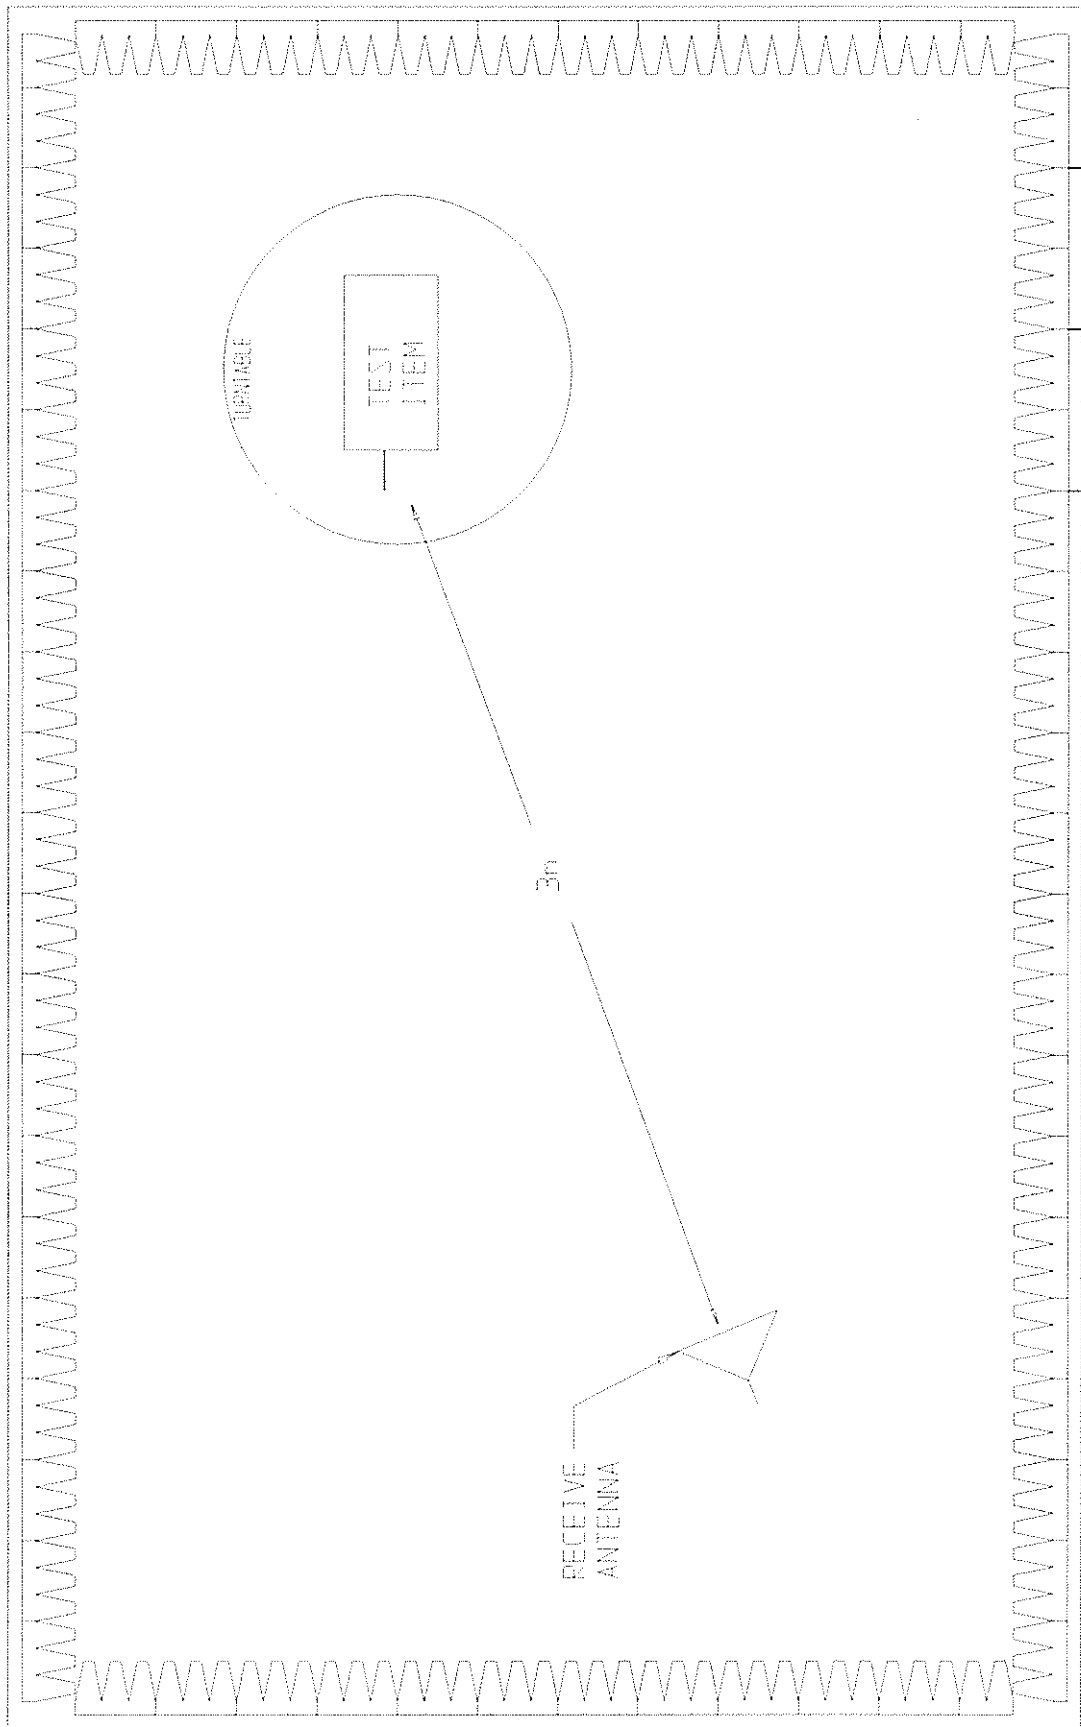

ETR 24445

FIGURE 1 BLOCK DIAGRAM OF TEST ITEM SETUP

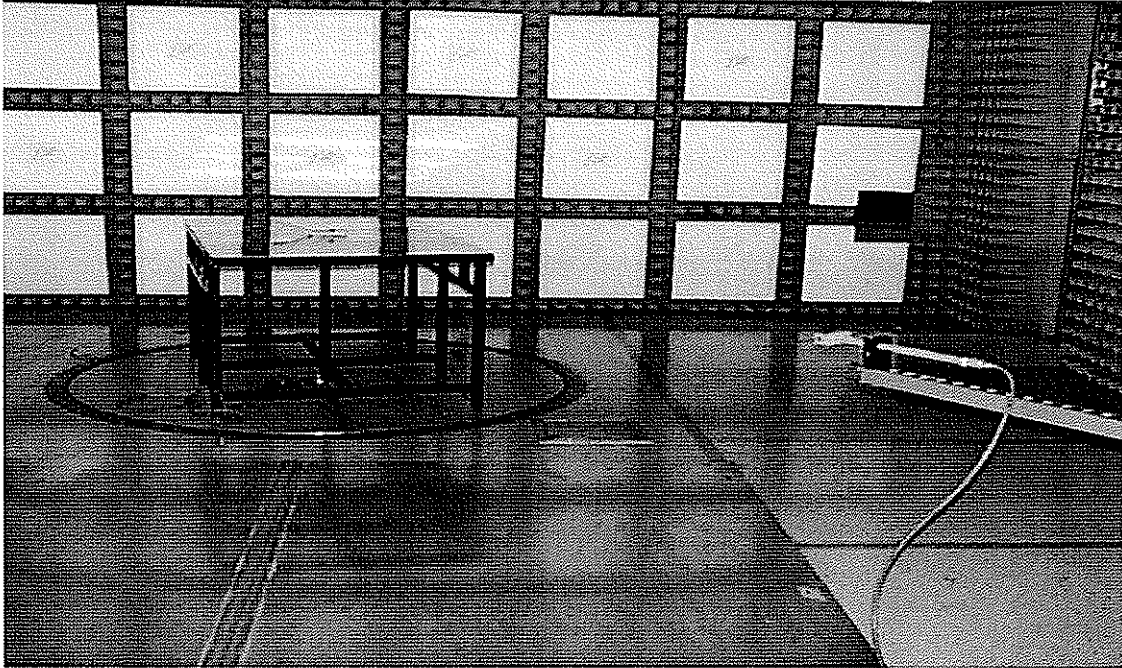


FIGURE 2a - TEST SETUP FOR HIGHEST RADIATED EMISSIONS MEASUREMENT  
HORIZONTAL POLARITY


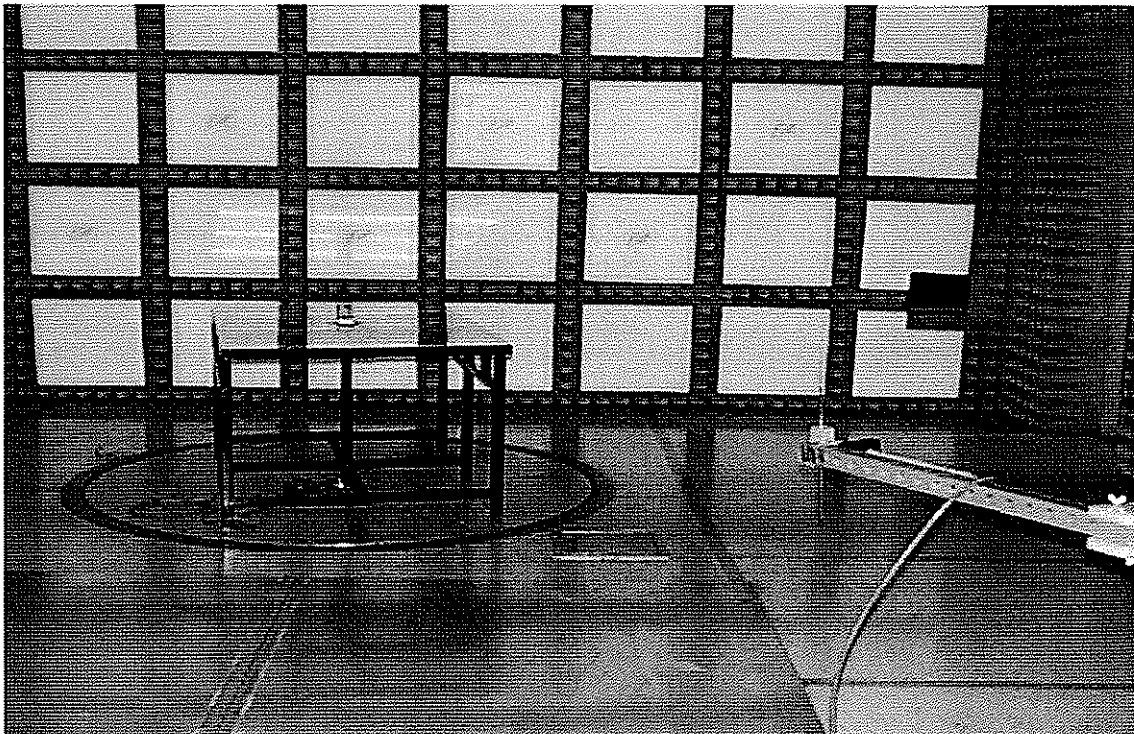


FIGURE 2b - TEST SETUP FOR HIGHEST RADIATED EMISSIONS MEASUREMENT  
VERTICAL POLARITY

ELITE ELECTRONIC ENGINEERING Co.  
Downers Grove, IL 60515

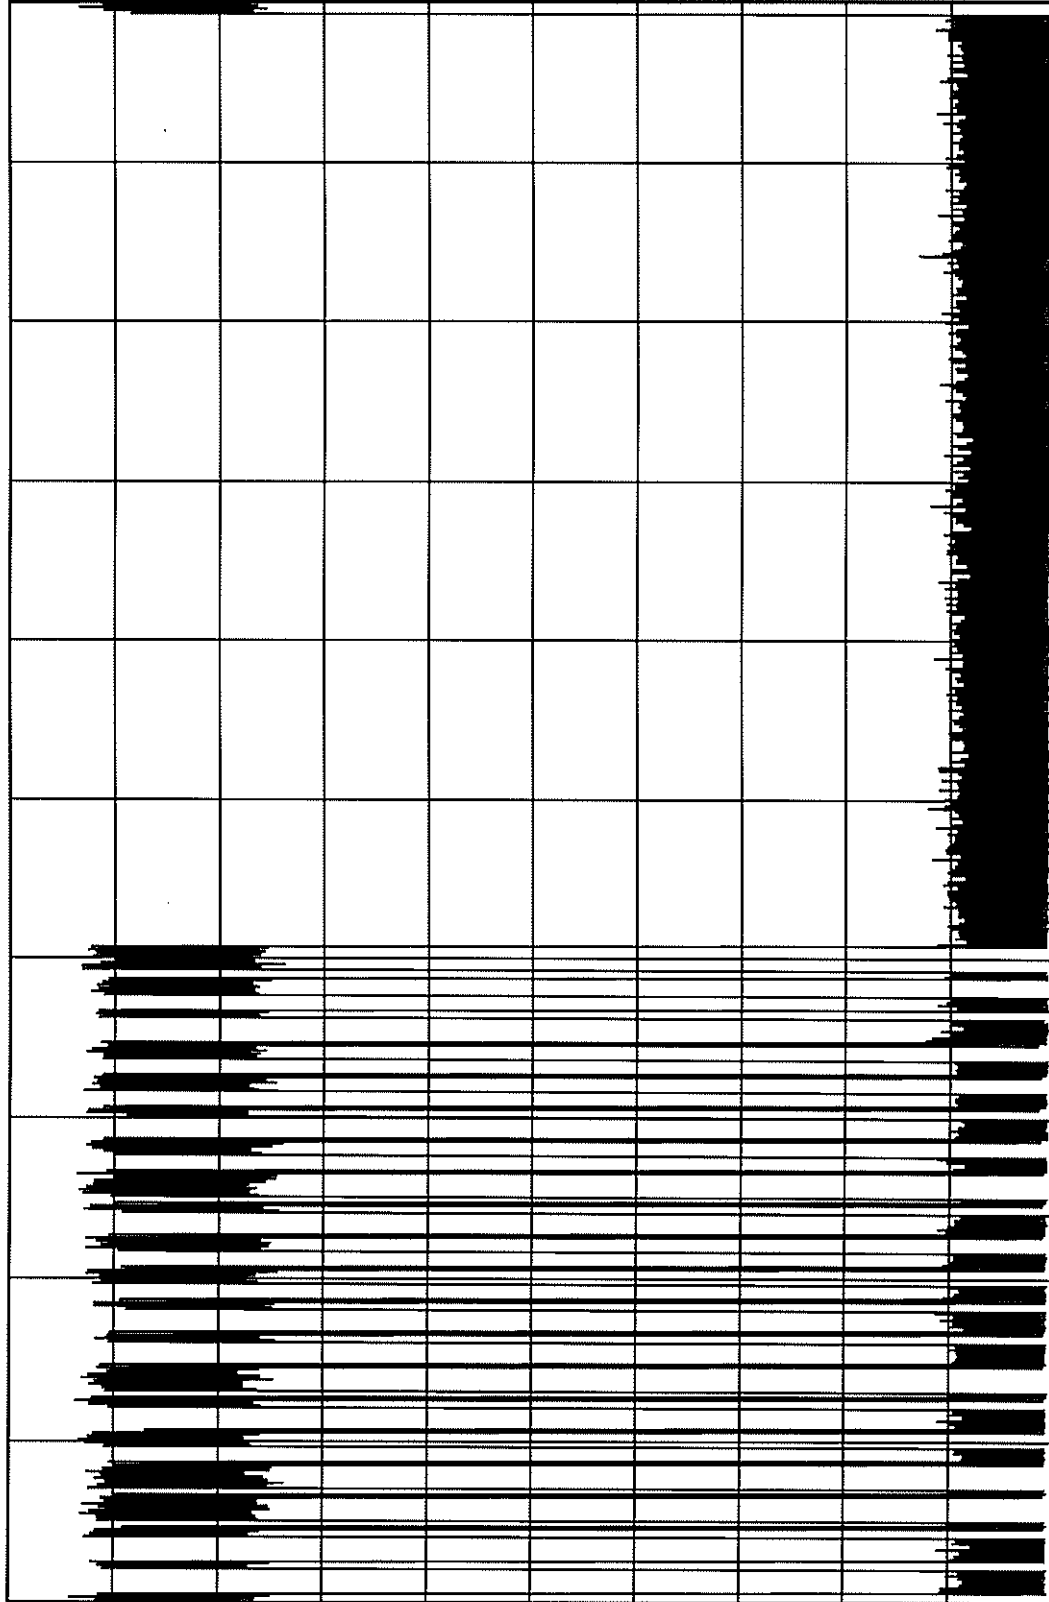

10 mSEC/DIV

TRANSMITTER DUTY CYCLE  
 FREQUENCY: 314.7868 MHz  
 ON TIME : 20.979 mSEC  
 OFF TIME : 79.021 mSEC  
 DUTY CYCLE = .21 or -13.56 dB  
 COMPUTED OVER 100 mSEC

MANUFACTURER : CHAMBERLAIN  
 MODEL : 976-315LM  
 S/N : NONE ASSIGNED  
 TEST DATE : 14 Jan 2002  
 NOTES :

14.f18

ETR 24445

ETR 24445


ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, Ill. 60515

UNTU\_EM RUN RUN 2

UKAB 11/26/01

EE

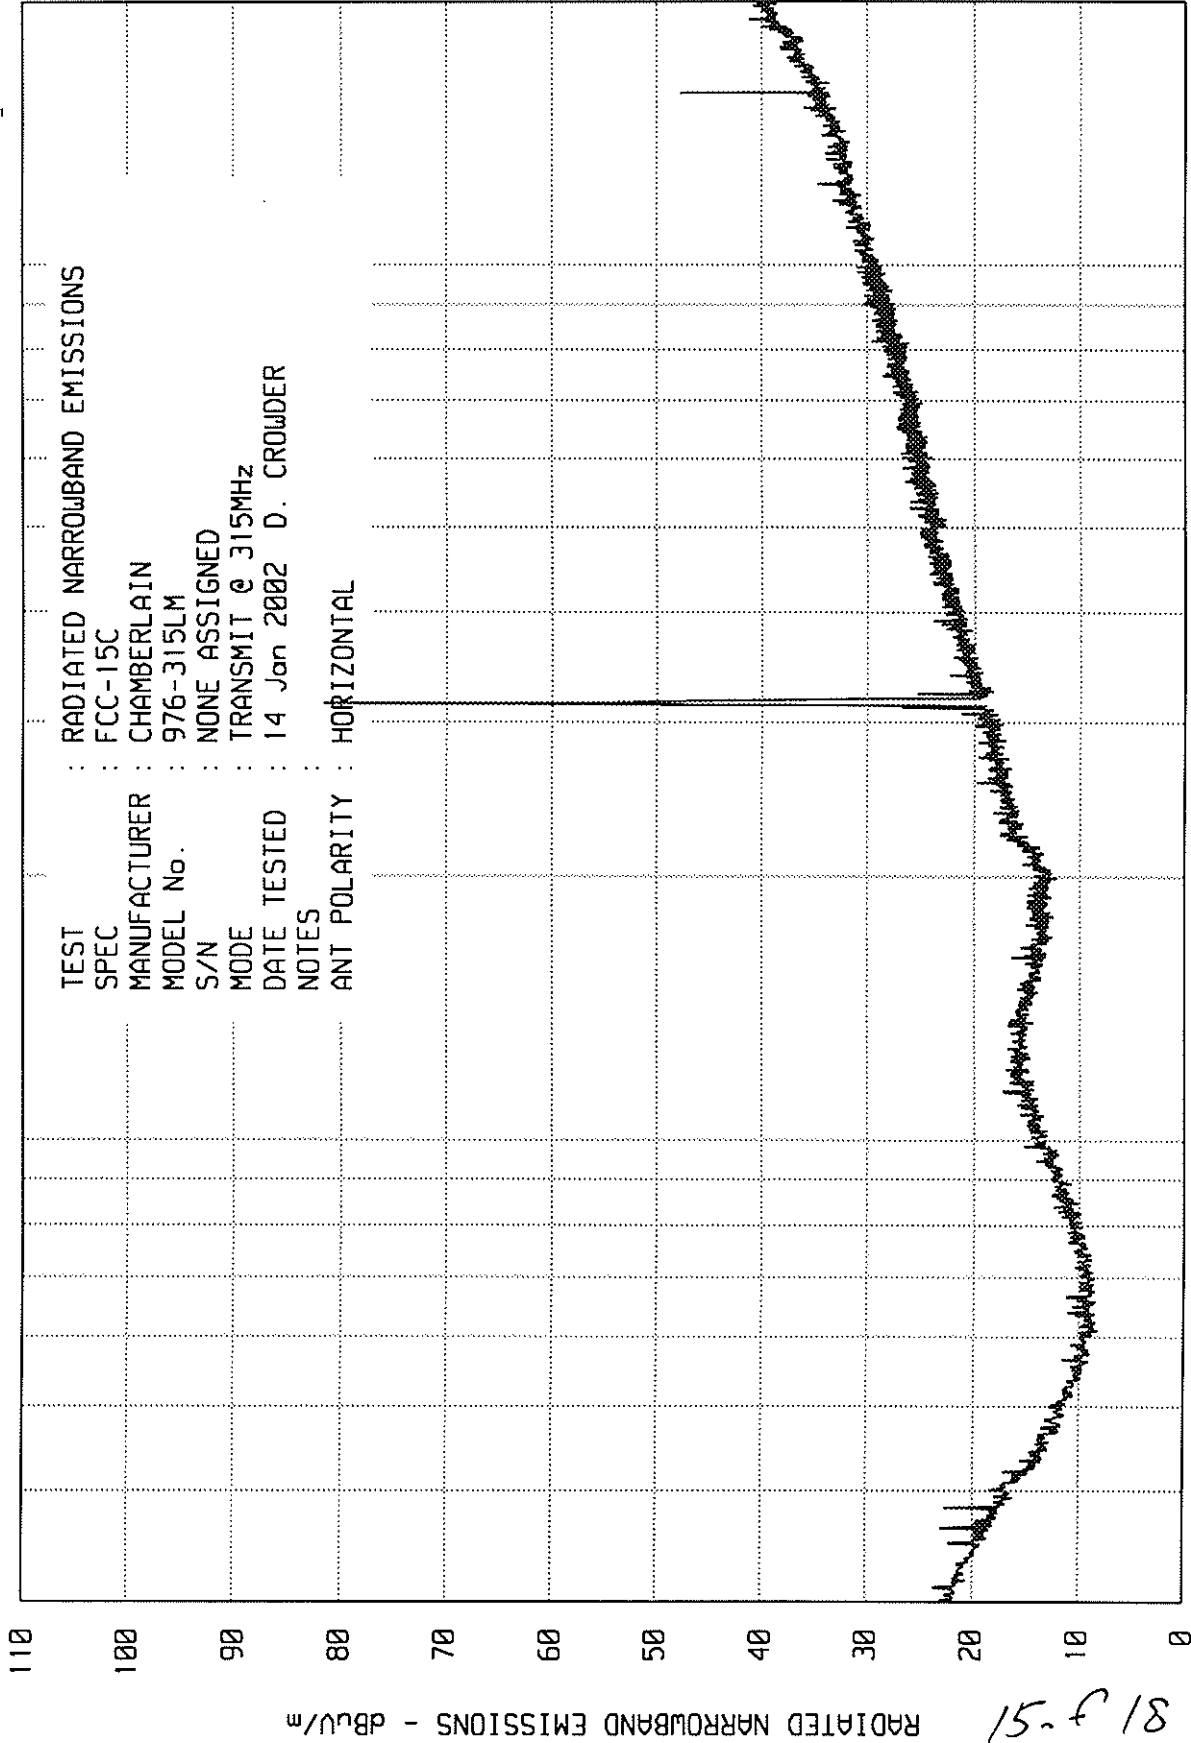

STOP = 2000

FREQUENCY - MHz

START = 30

81.5


EE

# ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, Ill. 60515

UKA0 11/26/01

UNTU\_EH RUN RUN 1

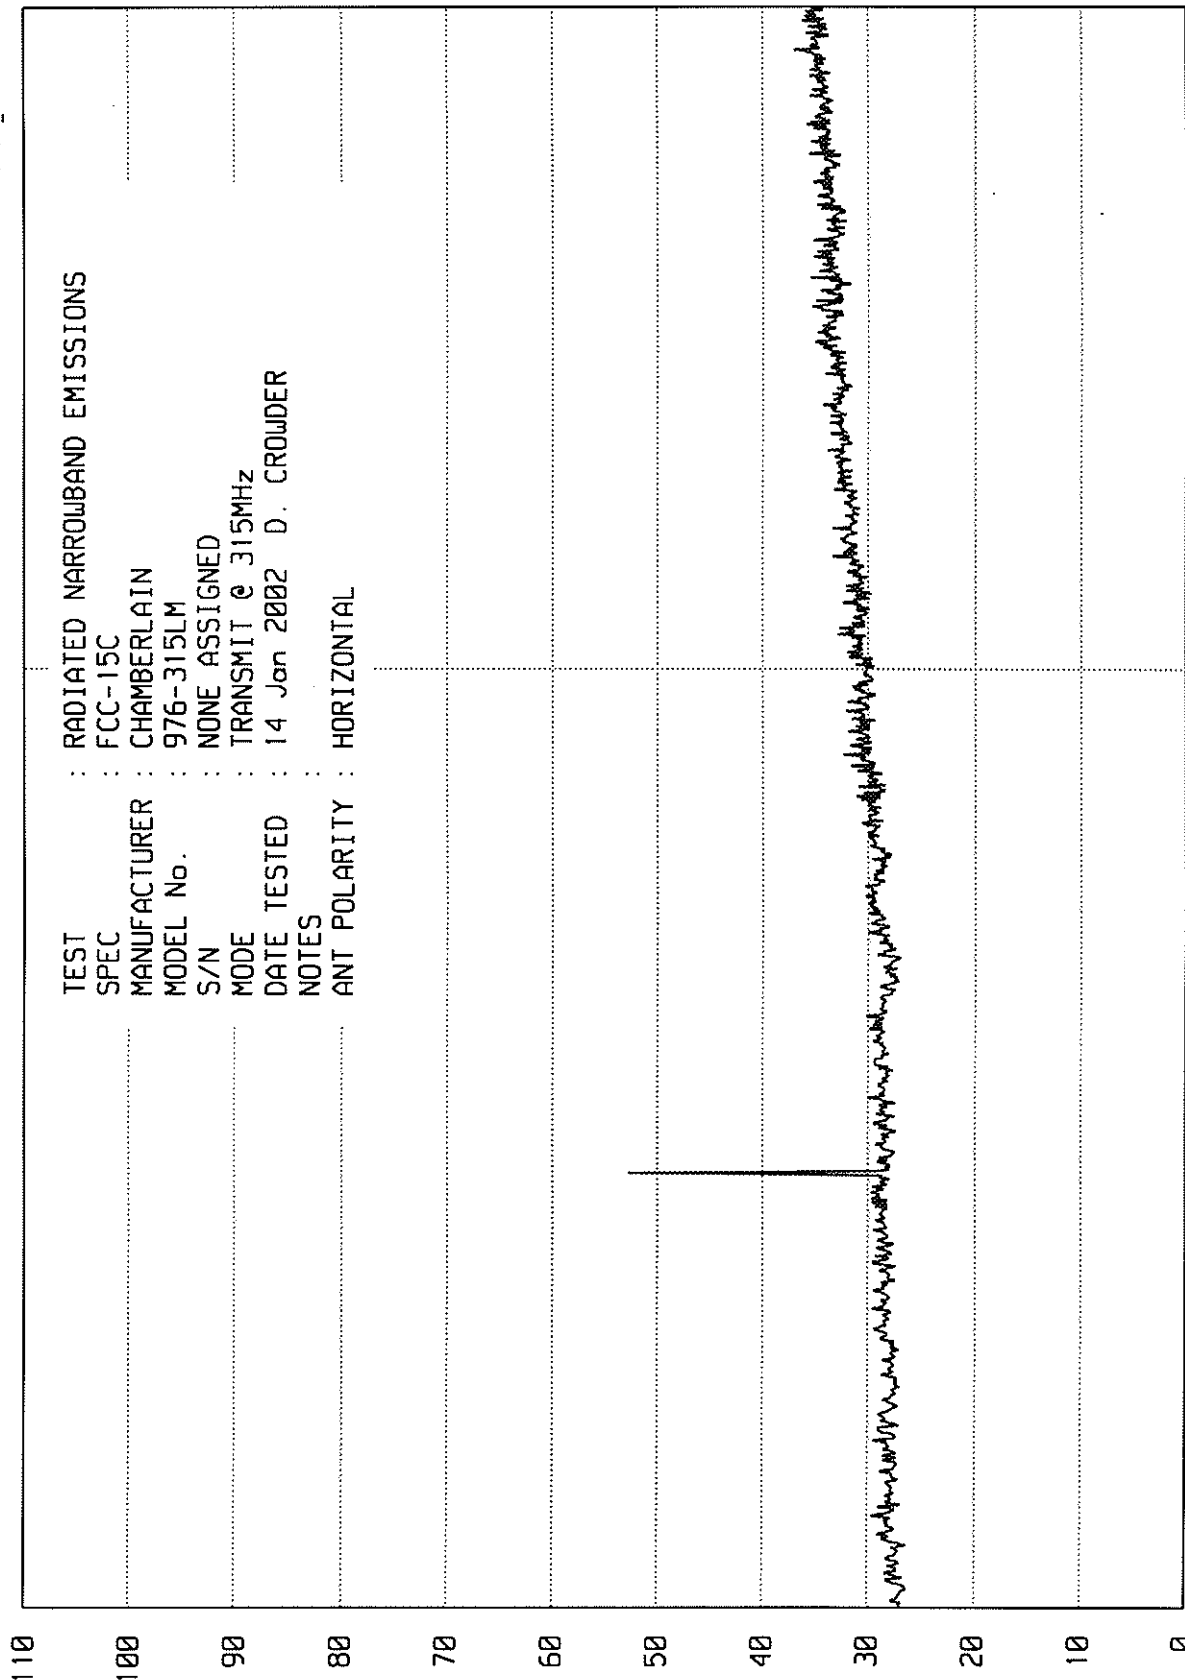

ETR 24445

ETR No. 24445  
DATA PAGE

SPECIFICATION : FCC PART 15C (REV OCT 1, 94) TRANSMITTER OPEN FIELD DATA  
MANUFACTURER : CHAMBERLAIN  
MODEL : 976-315LM  
S/N : NONE ASSIGNED  
TEST DATE : 14 Jan 2002  
NOTES :  
TEST ANTENNA : ROBERTS DIPOLE & DRWG ANTENNAS

| FREQUENCY<br>MHz | ANT<br>POL | MTR<br>RDG<br>dBuV | CBL<br>FAC<br>dB | ANT<br>FAC<br>dB | DUTY<br>CYCLE<br>dB | TOTAL<br>dBuV/m<br>@3m | TOTAL<br>uV/m<br>@3m | LIMIT<br>uV/m<br>@3m | NOTES |
|------------------|------------|--------------------|------------------|------------------|---------------------|------------------------|----------------------|----------------------|-------|
| 315.00           | H          | 62.1               | 1.8              | 18.8             | -10.2               | 72.5                   | 4230.0               | 6041.7               |       |
| 315.00           | V          | 49.8               | 1.8              | 18.8             | -10.2               | 60.2                   | 1026.5               | 6041.7               |       |
| 630.00           | H          | 19.7               | 2.7              | 24.6             | -10.2               | 36.8                   | 69.6                 | 604.2                |       |
| 630.00           | V          | 14.8               | 2.7              | 24.6             | -10.2               | 31.9                   | 39.6                 | 604.2                |       |
| 945.00           | H          | 20.9               | 3.4              | 28.6             | -10.2               | 42.7                   | 136.5                | 604.2                |       |
| 945.00           | V          | 7.3                | 3.4              | 28.6             | -10.2               | 29.1                   | 28.5                 | 604.2                |       |
| 1260.00          | H          | 22.2               | 4.1              | 24.8             | -10.2               | 40.9                   | 110.8                | 604.2                |       |
| 1260.00          | V          | 19.0               | 4.1              | 24.8             | -10.2               | 37.7                   | 76.6                 | 604.2                |       |
| 1575.00          | H          | 27.4               | 4.8              | 25.8             | -10.2               | 47.8                   | 244.3                | 500.0                | *     |
| 1575.00          | V          | 17.9               | 4.8              | 25.8             | -10.2               | 38.3                   | 81.8                 | 500.0                | *     |
| 1890.00          | H          | 25.1               | 5.5              | 27.2             | -10.2               | 47.5                   | 238.4                | 604.2                |       |
| 1890.00          | V          | 19.3               | 5.5              | 27.2             | -10.2               | 41.7                   | 122.3                | 604.2                |       |
| 2205.00          | H          | 20.9               | 6.1              | 28.2             | -10.2               | 44.9                   | 176.8                | 500.0                | *     |
| 2205.00          | V          | 13.3               | 6.1              | 28.2             | -10.2               | 37.3                   | 73.7                 | 500.0                | *     |
| 2520.00          | H          | 10.4               | 6.6              | 29.0             | -10.2               | 35.8                   | 61.6                 | 604.2                |       |
| 2520.00          | V          | 8.1                | 6.6              | 29.0             | -10.2               | 33.5                   | 47.3                 | 604.2                |       |
| 2835.00          | H          | 11.1               | 7.2              | 29.9             | -10.2               | 38.0                   | 79.0                 | 500.0                | *     |
| 2835.00          | V          | 5.3                | 7.2              | 29.9             | -10.2               | 32.2                   | 40.5                 | 500.0                | *     |
| 3150.00          | H          | 5.5                | 7.8              | 30.7             | -10.2               | 33.9                   | 49.3                 | 604.2                |       |
| 3150.00          | V          | 6.8                | 7.8              | 30.7             | -10.2               | 35.2                   | 57.2                 | 604.2                |       |

\* DENOTES A FREQUENCY CONFLICT WITH RESTRICTED BANDS

checked by:

  
D. CROWDER

# ELITE ELECTRONIC ENGINEERING CO

MKR 314.755 MHz  
-65.70 dBm

hp


REF -34.3 dBm ATTN 0 dB

10 dB/

MANUFACTURER : CHAMBERLAIN  
MODEL : 976-315LM  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED : FCC-15C OCCUPIED BANDWIDTH  
MODE : TRANSMIT @ 315MHz  
NOTES :

D. CROWDER  
14 Jan 2002  
10:41:17

0.25% BW

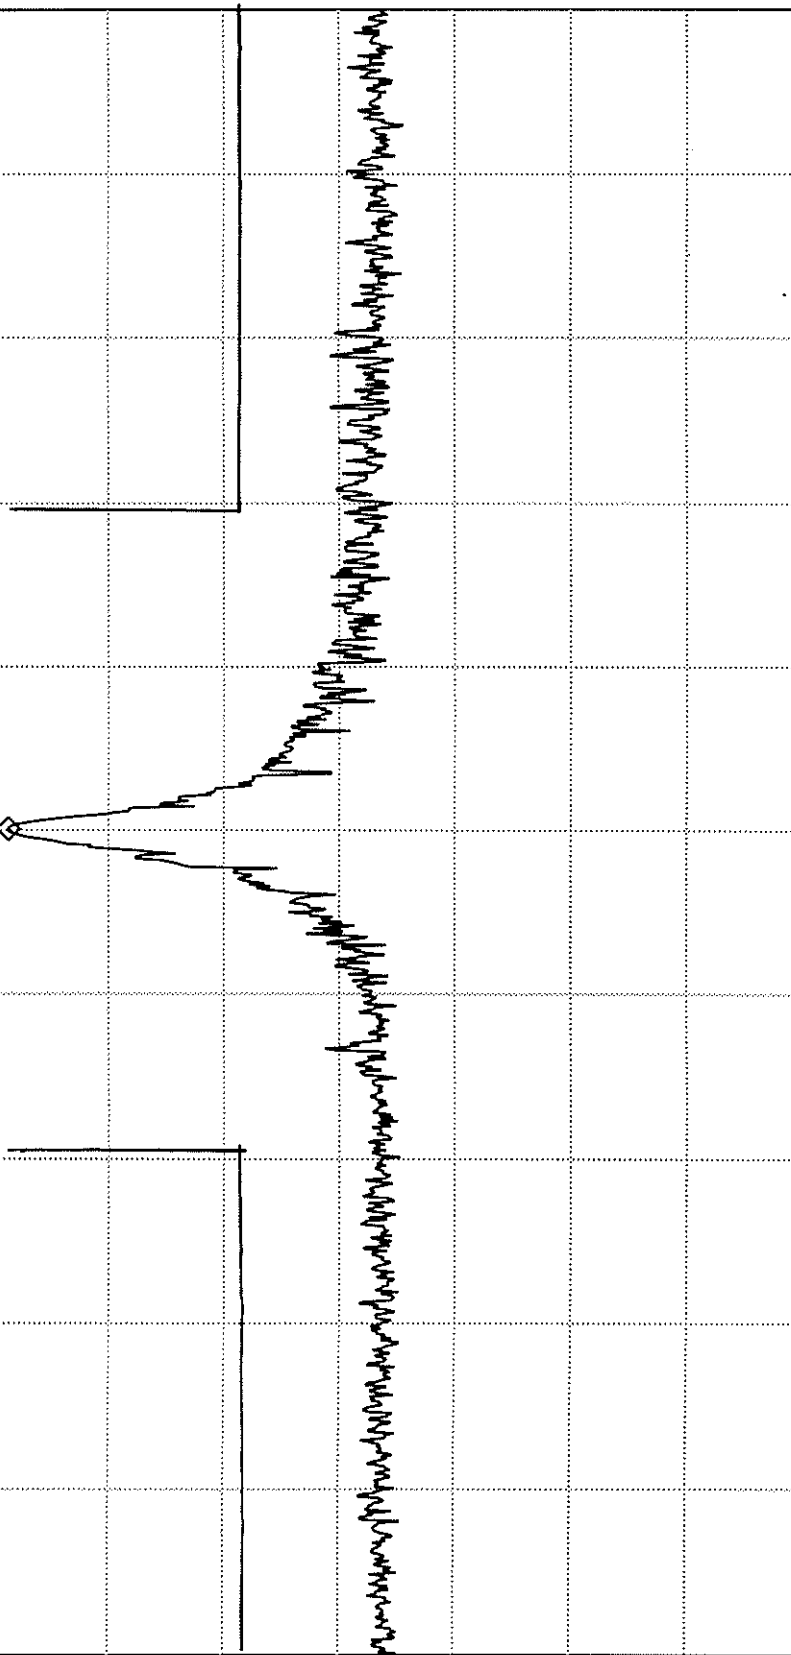

ETR 24445

81.5° 81

CENTER 314.75 MHz SPAN 2.00 MHz  
RES BW 30 kHz (i) SWP 20.0 msec  
VBW 300 kHz