



TEST REPORT

Report Number: 102654813DEN-001

Project Number: G102654813

Report Issue Date: 7/26/2016

Product Designation: Model: EN1244

Standards: FCC Part 15 Subpart C (15.247)

Operation within the bands 902-928 MHz

IC RSS-247, Issue 1: 2015

IC RSS-GEN, Issue 4: 2014

Tested by:
Intertek Testing Services NA, Inc.
1795 Dogwood St. Suite 200
Louisville, CO 80027
USA

Client:
Inovonics Wireless Corp.
397 S. Taylor Ave.
Louisville, CO 80027
USA

Report prepared by

Son La
EMC Project Engineer

Report reviewed by

Michael Spataro
Engineering Team Leader

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1	<i>Introduction and Conclusion</i>	3
2	<i>Test Summary</i>	4
3	<i>Description of Equipment Under Test.....</i>	6
4	<i>System setup including cable interconnection details, support equipment and simplified block diagram</i>	9
5	<i>AC Supply Variation – Not Applicable (Product Battery Operated)</i>	12
6	<i>Maximum Peak Output Power - Radiated</i>	13
7	<i>-20dB Bandwidth of the Hopping Channel</i>	18
8	<i>Hopping Channel Carrier Frequency Separation.....</i>	22
9	<i>Number of Hopping Channels</i>	25
10	<i>Average Time of Occupancy of the Hopping Channel.....</i>	27
11	<i>Spurious and Band Edge Emissions - Radiated</i>	31
12	<i>Spurious and Band Edge/Restricted Band Emissions - Radiated.....</i>	40
13	<i>Antenna Requirement</i>	48
14	<i>AC Mains Conducted Emissions – Transmitter – Not Applicable</i>	49
15	<i>RF Exposure Requirements – Not Applicable</i>	50
16	<i>Measurement Uncertainty.....</i>	51
17	<i>Revision History</i>	52

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded **the product tested complies with the requirements of the standard(s) indicated**. The results obtained in this test report pertain only to the item(s) tested.

General Test Methodology

All measurements were performed according to the procedures in the following documents:

- ANSI C63.10:2013 – ANSI Standard for Testing Unlicensed Wireless Devices

Test Facility

Intertek Denver's testing facilities are located at 1795 Dogwood St. Suite 200 Louisville, CO 80027. The testing facility is ISO17025:2005 accredited by A2LA, our lab code is 2506.02, our VCCI registration numbers are. R-1643, C-1752 and T-1558, our FCC designation no. US1121 and our IC lab no. 2042N.

Testing contained in this test report may not be covered under the laboratories scope of accreditation. A note will be placed in the specific test section for testing not covered under the laboratories scope.

2 Test Summary

Section	Test Specification	Test Description	Test Date	Result
5	15.31(e)	AC Supply Variation		N/A(1)
6	15.247(b)(1)/RSS-247 5.4(1)	Maximum Peak Output Power - Radiated	7/14/2016	Pass
7	15.247(a)(1)/RSS-247 5.1 (3)	-20dB Bandwidth of the Hopping Channel	7/15/2016	Pass
8	15.247(a)(1)/RSS-247 5.1 (2)	Hopping Channel Carrier Frequency Separation	7/15/2016	Pass
9	15.247(b)(1)(i)/RSS-247 5.1 (3)	Number of Hopping Channels	7/15/2016	Pass
10	15.247(a)(1)(i)/RSS-247 5.1 (3)	Average Time of Occupancy of the Hopping Channel - DCCF	7/15/2016	Pass
11	15.247(d)/RSS-247 5.5	Spurious and Band Edge Emissions - Radiated	7/14/2016	Pass
12	15.247(d)/15.209/RSS-247 5.5 /RSS-GEN 8.10	Spurious and Band Edge Restricted Band Emissions - Radiated	7/14/2016	Pass
13	15.203	Antenna Requirement	7/14/2016	Pass
14	15.207/RSS-GEN 8.8	Transmitter Power Line Conducted Emissions.		N/A(1)
15	FCC 15.247(i)/RSS-GEN 5.6	RF Exposure Requirements	7/15/2016	Pass

Notes:

- 1) The product is battery powered.

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

General Radio Test Notes:

- ANSI C63.10, Section 4.1.4/ FCC 15.35: Measurement detector functions and bandwidths utilized in this testing were per the preceding guidelines. 15.35(b): When an average limit is specified, the peak emission must also be measured to ensure the emissions is less than 20dB above the average limit and/or below the peak limit specified. This report includes both average and peak test data.
- ANSI C63.10, Section 5.3/ FCC 15.31: All radiated field strength measurements taken at an antenna-to-product test distance of 3-meters.
- ANSI C63.10, Section 5.5, Table 2/ FCC 15.33(a): The frequency range of measurement was per the requirements of the preceding standards. The product was tested from 30MHz to 10GHz.
- ANSI C63.10, Section 6.3.3/ FCC 15.35(b): Measurement bandwidths utilized for fundamental peak emissions were equal to or greater than the 6dB bandwidth of the emission.
- ANSI C63.10, Section 5.6/ FCC 15.31(m): Measurements were taken for at the lowest, near the middle and highest channels of the product tested.

3 Description of Equipment Under Test

Model:	EN1244
Type of EUT:	Smoke Detector with FHSS Transmitter
Serial Number:	N/A
FCC ID:	HCQ3B6OT9GSK
Industry Canada ID:	2309A-OT9GSK
Related Submittal(s) Grants:	NA
Company:	Inovonics Wireless Corp.
Customer:	Corey Leavitt
Address:	397 S. Taylor Ave. Louisville, CO 80027 USA
Phone:	303-209-7143
Fax:	303-209-7243
e-mail:	Cleavitt@inovonics.com
Test Standards:	☒ 47 CFR, Part 15C:§15.247 ☒ RSS-247, Issue 1: 2015 ☒ RSS-GEN, Issue 4: 2014 ☐ 47 CFR, Part 15B:§15.107 and §15.109, Class B ☐ AS/NZS 4268, Issue 3: 2012
Type of radio:	☒ Stand -alone ☐ Module ☐ Hybrid
Date Sample Submitted:	07/14/2016
Test Work Started:	07/14/2016
Test Work Completed:	07/20/2016
Test Sample Conditions:	☐ Damaged ☐ Poor (Usable) ☒ Good

Product Description:	Smoke Detector Transmitter
Transmitter Type:	☒ FHSS ☐ Digital Modulation ☐ WiFi ☐ Blue Tooth
Operating Frequency Range(s):	902 MHz – 928 MHz
Number of Channels:	25
Modulation:	2FSK
Emission Designator:	328KF1D
Antenna(s) Info:	Integral
Rated Power:	<100mW
Antenna Installation:	☒ User ☐ Professional ☒ Factory
Transmitter power configuration:	☒ Internal battery ☐ External power source
Special Test Arrangement:	The EUT was rotated and tested in three orthogonal axes to determine the maximum emissions.
Test Facility Accreditation:	A2LA (Certificate No. 2506.01)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2013 and FCC Publication Number DA 00-705

Description of Equipment Under Test (provided by client)
EUT shall be powered by an internal battery, energized as intended & programmed to broadcast continuously at one of three channel frequencies, low (902.4MHz), center (914.8MHz) and high (927.6MHz).

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
3 Vdc	120 mA maximum	NA DCV	NA DCV


Descriptions of EUT Exercising	
☐	Standby/Idle Mode
☒	Continuous transmission, un-modulated carrier (CW)
☒	Continuous transmission, modulated carrier (CW)
☐	Continuous Receive Mode

Note: The chosen mode of operation described above is dependent upon the specific test to be performed.

4 System setup including cable interconnection details, support equipment and simplified block diagram

Method:

Record the details of EUT cabling, document the support equipment, and show the interconnections in a block diagram.

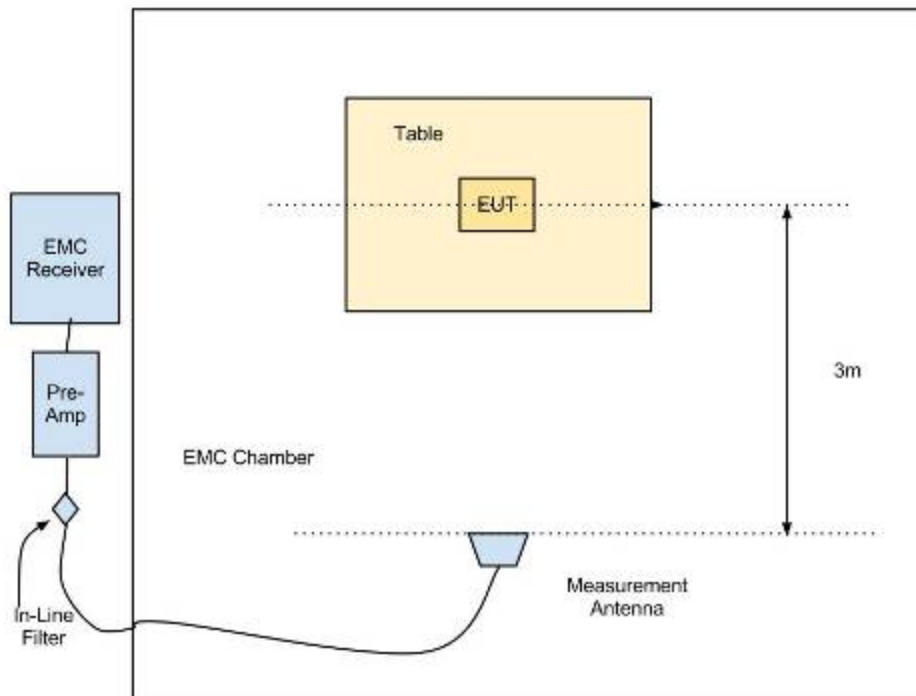EUT Block Diagram: EMC Perspective

Note: Dashed lines indicate auxiliary/support equipment

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

Support Data:

ID	Description/ Function	Shield Type	Length	Connector	Connection	Ferrites
	None					

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None			

Notes:

Photograph: Product Tested - X, Y, Z Dimensional

EN1244 – Axis 1



EN1244 – Axis 2 (worse Case)



EN1244 – Axis 3

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

5 AC Supply Variation – Not Applicable (Product Battery Operated)

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

6 Maximum Peak Output Power - Radiated

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.247 or RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

The maximum peak conducted output power

Fundamental Frequency	Number of Hopping Channels	Output power (Watts)
902 - 928 MHz	≥50	1
902 - 928 MHz	≤50	0.25

- FCC 15.247(b)(1)
- RSS-247 5.4 (1)

Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
18886	Ridged Guide Antenna 1-18GHz	TENSOR	4105	2020	12/28/2015	12/28/2017
18743	Pre Amp: 700 kHz- 1GHz	Mini-Circuits	AM-34-000110	686965	9/3/2015	9/3/2016
18906	Pre Amp: 1GHz – 4GHz	Mini-Circuits Lab	ZHL-42	N052792-2	4/26/2016	4/26/2017
DEN-032	4-18 GHz LNA	NARDA	DBL-0618N615	031	4/13/2016	4/13/2017
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	HP	5	3/31/2016	3/31/2017
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702 002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Software Utilized:

Name	Manufacturer	Version
SW-6: Software for Radiated and Conducted emissions.	Intertek	OATS cvi, V.1.0

Results:

The sample tested was found to comply.

Test Summary: Radiated Field Strength Emissions – Tx Fundamental

Fundamental	Radiated Max Output Power					
Frequency Range:	☒ 902-928MHz		☐ 2400-2483.5MHz		☐ 5725-5850MHz	
Low Frequency MHz	Measured Power (dBm)	Duty Cycle Correction (dB)	Final Corrected (dBm)	Standard Limit (dBm)	Limit Reduction (dB)	Margin (dB)
Vertical: 902.3	18.7	0	18.7	24	N/A	5.3
Horizontal: 902.3	20.4	0	20.4	24	N/A	3.6
Mid Frequency MHz						
Vertical: 914.7	17.7	0	17.7	24	N/A	6.3
Horizontal: 914.7	19.0	0	19.0	24	N/A	5.0
High Frequency MHz						
Vertical: 927.5	17.9	0	17.9	24	N/A	6.1
Horizontal: 927.5	19.1	0	19.1	24	N/A	4.9
RBW:	☐ 100kHz	☐ 300kHz	☐ 500kHz	☒ 1MHz	☐ 3MHz	☐ 10MHz
VBW:	☐ 300kHz	☐ 1MHz	☐ 1MHz	☒ 3 MHz	☐ 10MHz	☐ 10MHz
Antenna Gain:	☒ < 6dBi ☐ >6dBi and = dBi, Output power reduction = dB					

Test Method:

- ANSI C63.10:2013, Section 6.5.


Notes:

1. The limit for RSS-247 is identical to the limit for FCC 15.247.

Setup Photographs: Radiated Field Strength Emissions – Tx Fundamental



Antenna Setup – Front (30-1000 MHz)

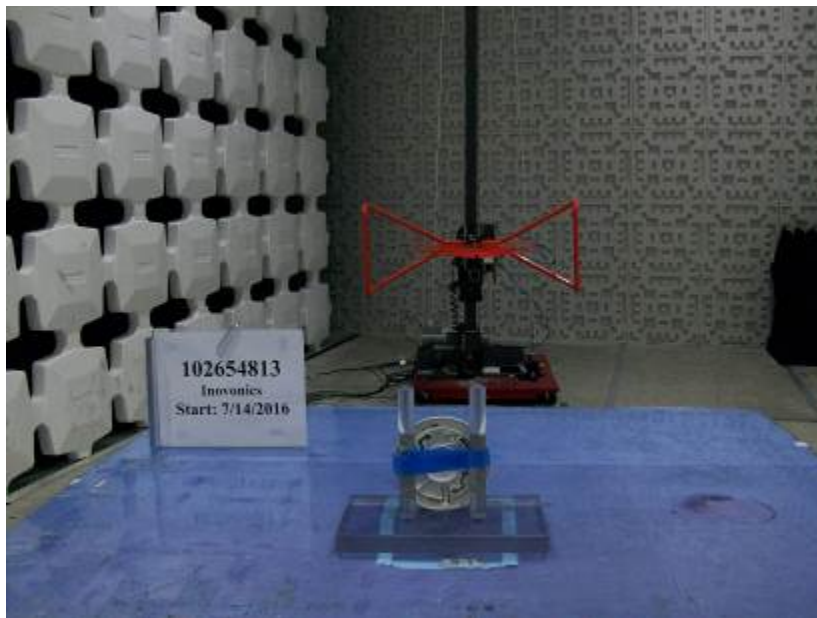

Antenna Setup – Rear (30-1000 MHz)

Intertek

Report Number: 102654813DEN-001

Issued: 7/26/2016

Data:

FREQ	LEVEL	DET	CABLE	ANT	FINAL	POL	HGT	AZ	LIMIT	DELT A	RBW
<u>MHz</u>	<u>dBuV</u>	<u>Qp</u> <u>Av</u> <u>Pk</u> <u>Rms</u>	+ [dB]	+ [dB/m]	= [dBuV]	(V/H)	(m)	(DEG)	125.2 dBuV	dBuV	(MHz)
Fundamental											
Low Channel Axis-1											
902.5000	82.84	Pk	2.70	28.40	113.94	V	1.19	99.8	125.2	-11.36	1.000
902.4160	79.14	Pk	2.70	28.40	110.24	H	1.56	199.7	125.2	-15.06	1.000
Low Channel Axis-2											
902.4160	75.00	Pk	2.70	28.40	106.10	V	1.00	356.1	125.2	-19.20	1.000
902.4160	84.51	Pk	2.70	28.40	115.61	H	1.00	196.4	125.2	-9.69	1.000
Low Channel Axis-3											
902.4160	81.95	Pk	2.70	28.40	113.05	V	1.00	160.2	125.2	-12.25	1.000
902.4160	83.53	Pk	2.70	28.40	114.63	H	1.37	253.7	125.2	-10.67	1.000
Mid channel Axis-1											
914.7917	80.97	Pk	2.75	28.50	112.22	V	1.00	118.9	125.2	-13.08	1.000
914.7917	78.71	Pk	2.75	28.50	109.96	H	1.41	197.8	125.2	-15.34	1.000
Mid channel Axis-2											
914.7917	74.03	Pk	2.75	28.50	105.28	V	1.00	357.4	125.2	-20.02	1.000
914.7917	82.95	Pk	2.75	28.50	114.20	H	1.65	150.9	125.2	-11.10	1.000
Mid channel Axis-3											
914.7917	81.70	Pk	2.75	28.50	112.95	V	1.00	32.0	125.2	-12.35	1.000
914.7917	79.01	Pk	2.75	28.50	110.26	H	1.38	213.7	125.2	-15.04	1.000
High Channel Axis-1											
927.5962	81.50	Pk	2.77	28.85	113.12	V	1.15	156.3	125.2	-12.18	1.000
927.5962	79.07	Pk	2.77	28.85	110.69	H	2.33	174.0	125.2	-14.61	1.000
High Channel Axis-2											
927.5962	74.72	Pk	2.77	28.85	106.34	V	2.62	359.9	125.2	-18.96	1.000
927.5962	82.65	Pk	2.77	28.85	114.27	H	1.61	116.6	125.2	-11.03	1.000
High Channel Axis-3											
927.5962	80.13	Pk	2.77	28.85	111.75	V	1.59	36.8	125.2	-13.55	1.000
927.5962	76.42	Pk	2.77	28.85	108.04	H	1.31	200.9	125.2	-17.26	1.000

Convert Power from Field Strength.

$$P=(E*D)^2/(30*G)$$

Where

P=Power in Watts

E=Field in V/m

D=Distance

G=Linear gain of the antenna

Freq. MHz	Final dBuV/m	Calculated Watts	Limit Watts	Delta
Low Channel Axis-1				
902.5000	113.94	0.074	0.25	- 0.176
902.4160	110.24	0.032	0.25	- 0.218
Low Channel Axis-2				
902.4160	106.10	0.012	0.25	- 0.238
902.4160	115.61	0.109	0.25	- 0.141
Low Channel Axis-3				
902.4160	113.05	0.061	0.25	- 0.189
902.4160	114.63	0.087	0.25	- 0.163
Mid channel Axis-1				
914.7917	112.22	0.050	0.25	- 0.200
914.7917	109.96	0.030	0.25	- 0.220
Mid channel Axis-2				
914.7917	105.28	0.010	0.25	- 0.240
914.7917	114.20	0.079	0.25	- 0.171
Mid channel Axis-3				
914.7917	112.95	0.059	0.25	- 0.191
914.7917	110.26	0.032	0.25	- 0.218
High Channel Axis-1				
927.5962	113.12	0.062	0.25	- 0.188
927.5962	110.69	0.035	0.25	- 0.215
High Channel Axis-2				
927.5962	106.34	0.013	0.25	- 0.237
927.5962	114.27	0.080	0.25	- 0.170
High Channel Axis-3				
927.5962	111.75	0.045	0.25	- 0.205
927.5962	108.04	0.019	0.25	- 0.231

7 -20dB Bandwidth of the Hopping Channel**Method:**

Unless otherwise stated no deviations were made from FCC 15.247 or RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification

- 15.247(a)(1)
- RSS-247 5.1(3)

Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
18886	Ridged Guide Antenna 1-18GHz	TENSOR	4105	2020	12/28/2015	12/28/2017
18743	Pre Amp: 700 kHz- 1GHz	Mini-Circuits	AM-34-000110	686965	9/3/2015	9/3/2016
18906	Pre Amp: 1GHz – 4GHz	Mini-Circuits Lab	ZHL-42	N052792-2	4/26/2016	4/26/2017
DEN-032	4-18 GHz LNA	NARDA	DBL-0618N615	031	4/13/2016	4/13/2017
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	HP	5	3/31/2016	3/31/2017
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Results:

The sample tested was found to comply.

Test Summary:

Frequency Range:	☒ 902-928MHz ☐ 2400-2483.5MHz ☐ 5725-5850MHz			
Low Frequency Channel (kHz)	Middle Frequency Channel (kHz)	Upper Frequency Channel (kHz)	Limit (kHz)	Result
328	323	322	250	Pass
Span: 500kHz RBW: ☐ 3kHz ☐ 30kHz ☒ 100kHz ☐ other 30kHz VBW: ☐ 3kHz ☐ 10kHz ☒ 300kHz ☐ other 300kHz				


Test Method:

FCC Publication Number DA 00-705

Notes:


1. The limit for RSS-247 is identical to the limit for FCC 15.247.

Setup Photographs: Radiated

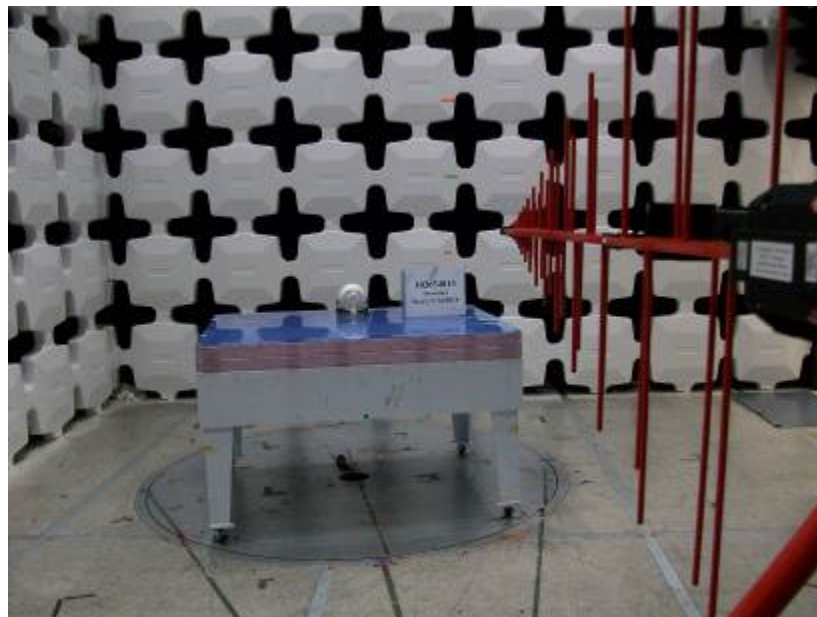


Plots: 20 dB Bandwidth

Low Channel

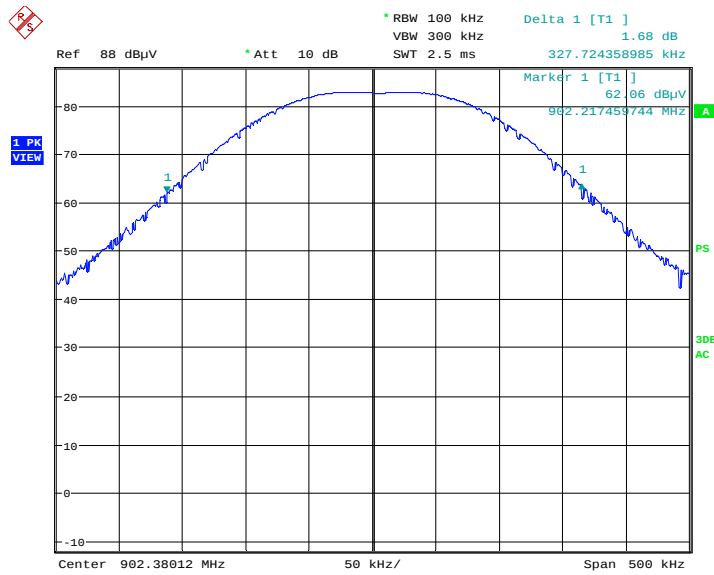


Date: 15.JUL.2016 15:18:58

Mid Channel

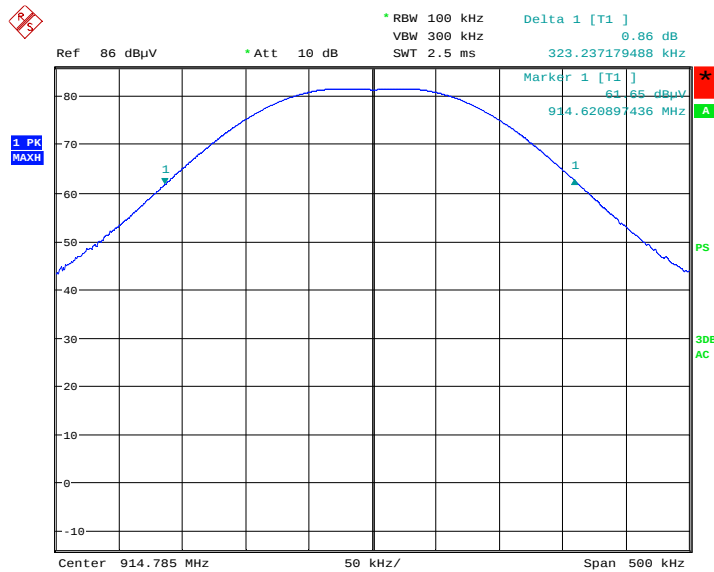

Date: 15.JUL.2016 15:27:37

High Channel

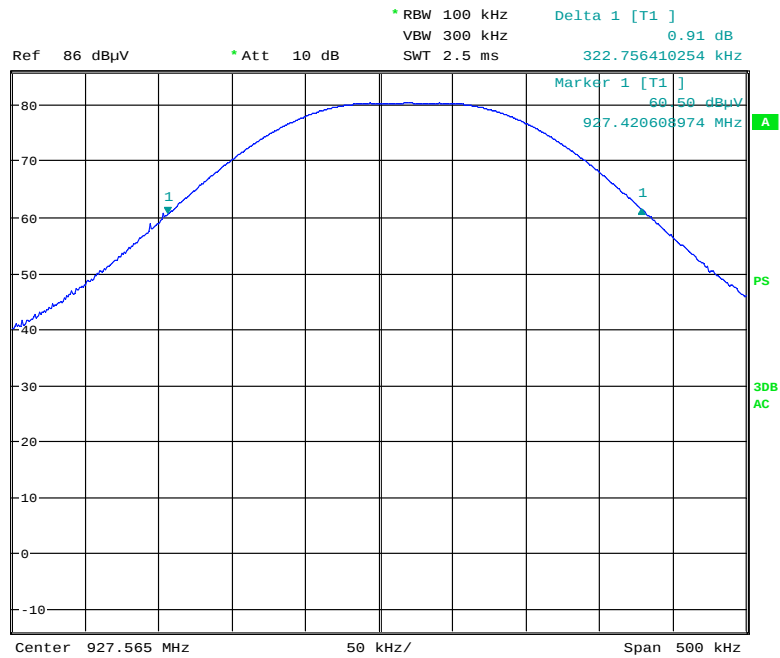

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

8 Hopping Channel Carrier Frequency Separation

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.247 and RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

- FCC 15.247(a)(1)
- RSS-247 5.1(3)

Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
18886	Ridged Guide Antenna 1-18GHz	TENSOR	4105	2020	12/28/2015	12/28/2017
18743	Pre Amp:700 kHz- 1GHz	Mini-Circuits	AM-34-000110	686965	9/3/2015	9/3/2016
18906	Pre Amp: 1GHz – 4GHz	Mini-Circuits Lab	ZHL-42	N052792-2	4/26/2016	4/26/2017
DEN-032	4-18 GHz LNA	NARDA	DBL-0618N615	031	4/13/2016	4/13/2017
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	HP	5	3/31/2016	3/31/2017
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702 002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Results:

The sample tested was found to comply.

Test Summary:

Frequency Range:	☒ 902-928MHz	☐ 2400-2483.5MHz	☐ 5725-5850MHz
Measured Separation (kHz)	Limit (kHz)		Result
801	328		Pass
Limit:	☐ 25kHz ☒ 20dB channel bandwidth ☐ 2/3 of 20dB channel bandwidth		
Span:	2 MHz		
RBW:	☐ 3kHz ☐ 10kHz ☐ 100kHz ☒ other 200kHz		
VBW:	☐ 3kHz ☐ 10kHz ☐ 100kHz ☒ other 500kHz		


Test Method:

- ANSI C63.10:2013, Section 7.8.2


Notes:

1. The limit for RSS-247 is identical to the limit for FCC 15.247.

Setup Photographs: Radiated

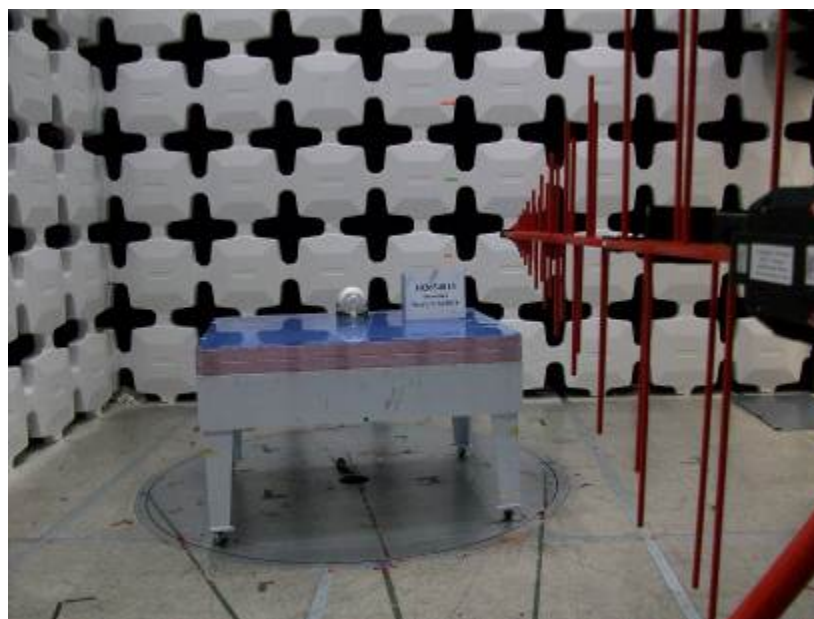

Plots:

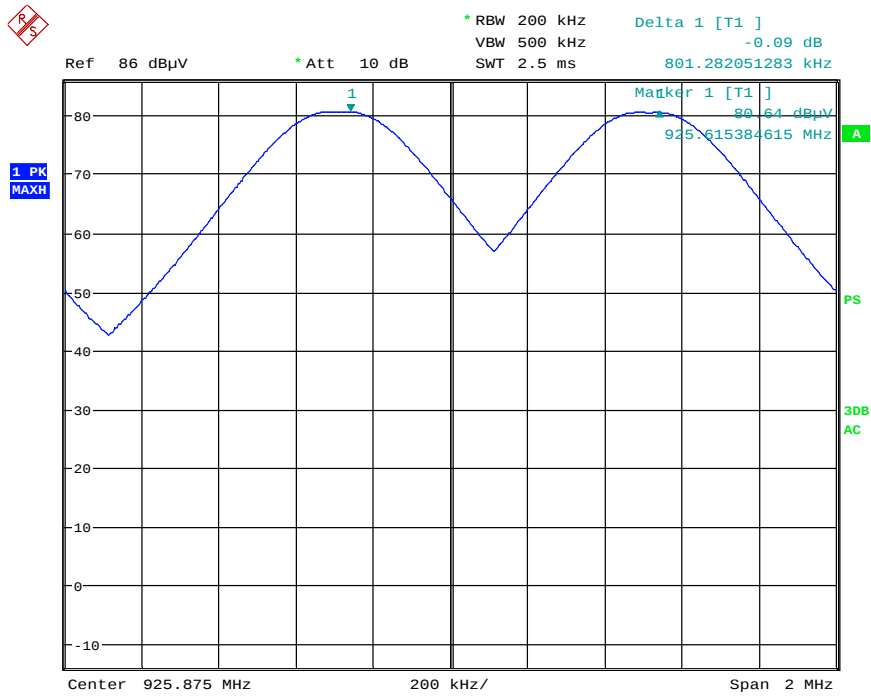

9 Number of Hopping Channels

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from 15.247 or RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

- 15.247(b)(1)(i)
- RSS-247 5.1(3)

Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
18886	Ridged Guide Antenna 1-18GHz	TENSOR	4105	2020	12/28/2015	12/28/2017
18743	Pre Amp:700 kHz- 1GHz	Mini-Circuits	AM-34-000110	686965	9/3/2015	9/3/2016
18906	Pre Amp: 1GHz – 4GHz	Mini-Circuits Lab	ZHL-42	N052792-2	4/26/2016	4/26/2017
DEN-032	4-18 GHz LNA	NARDA	DBL-0618N615	031	4/13/2016	4/13/2017
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	HP	5	3/31/2016	3/31/2017
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
19937	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-2	3/9/2016	3/9/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Results:

The sample tested was found to comply.

Test Summary:

Frequency Range:	☒ 902-928MHz ☐ 2400-2483.5MHz ☐ 5725-5850MHz	
Measured Number	Requirements	Result
25	≥25	Pass
Channel 20dB Bandwidth:	☐ <250kHz ☒ ≥250kHz	


Test Method:

- ANSI C63.10:2013, Section 7.8.3


Notes:

1. The limit for RSS-247 is identical to the limit for FCC 15.247.

Test Setup Photographs:



Plots:

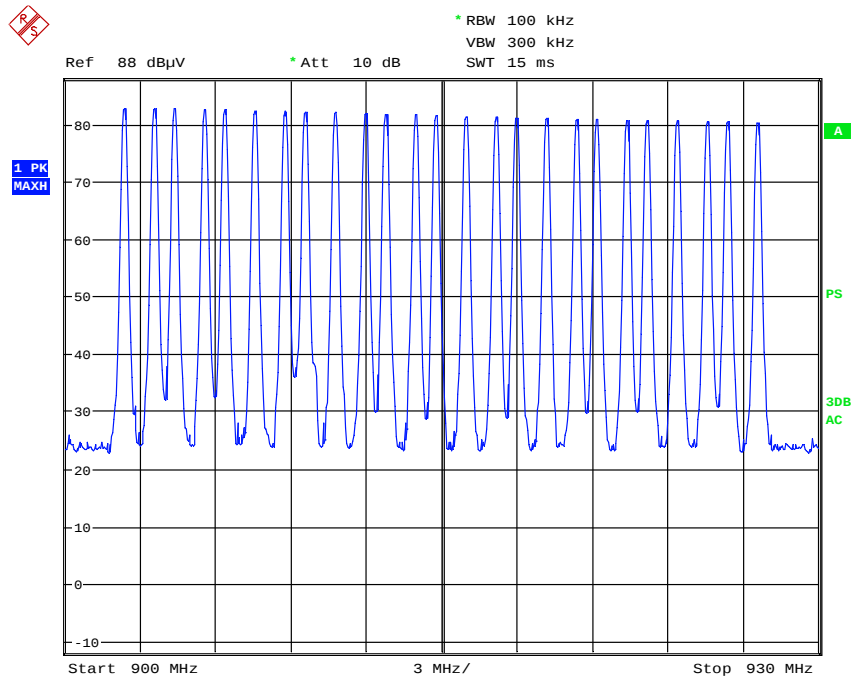

Date: 15.JUL.2016 15:09:29

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

10 Average Time of Occupancy of the Hopping Channel

Method:

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC 15.247 & RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

- 15.247(a)(1)(i)
- RSS-247 5.1(3)

Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Results:

The sample tested was found to comply.

Test Summary:

Frequency Range:	☒ 902-928MHz ☐ 2400-2483.5MHz ☐ 5725-5850MHz		
Measured / Calculated Time sec	Period sec	Limit sec	Result
0.102	10	0.4	Pass
Period:	☒ 10s ☐ 20s ☐ 30s ☐ 0.4s multiplied by the channel number		
Channel 20dB Bandwidth:	☐ <250kHz ☒ ≥250kHz		

Time of occupancy calculation:

The minimum measured repetition of the channel occupancy (repetition) = 5
 Single occupancy duration (single duration) = .0204 sec
 Period = 10 sec

Time of occupancy = (single duration) x (period) = 5 * 0.0204 = 0.102 s

Test Method:


- ANSI C63.10:2013, Section 7.8.4

Notes:


1. The limit for RSS-247 is identical to the limit for FCC 15.247.

Setup Photographs:

Plots:

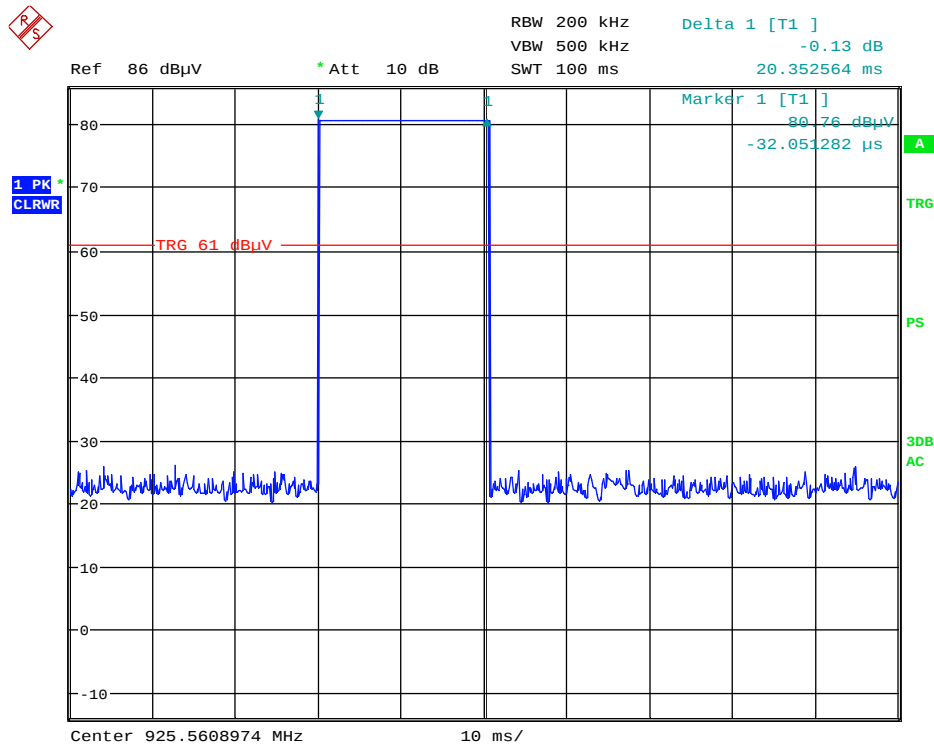

Date: 15.JUL.2016 16:12:30

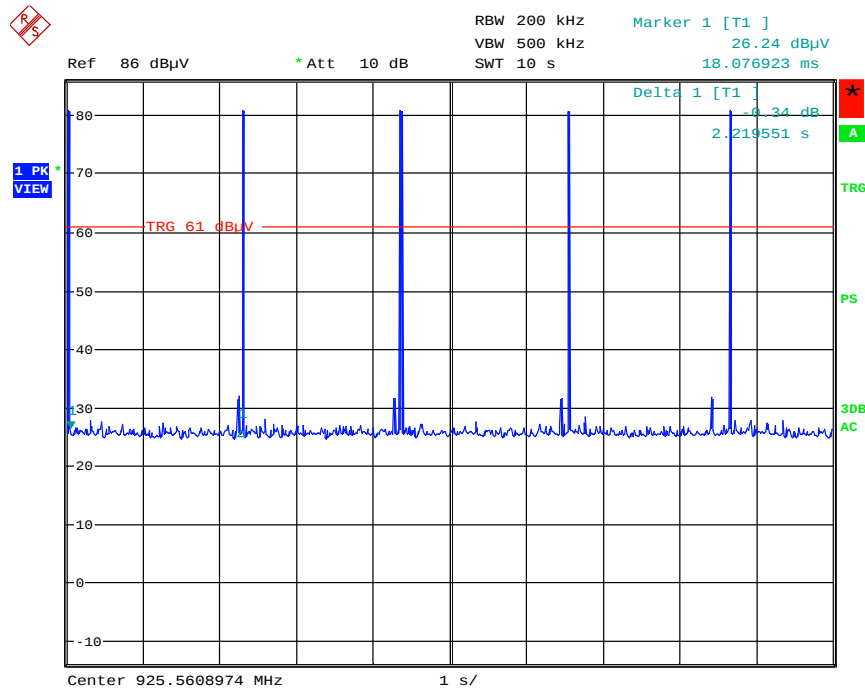

Date: 15.JUL.2016 16:03:54

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

DCCF Calculation:

$$20 \log (t/100\text{mS})$$

Where t is the transmission time in a 100mS window.

$$t = 20.3\text{ mS}$$

$$20 \log (0.203) = -13.8 \text{ dB}$$

Maximum allowable DCCF correction is -13.8dB.

11 Spurious and Band Edge Emissions - Radiated

The test methods used comply with ANSI C63.4. Unless otherwise stated no deviations were made from FCC 15.247 & RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

- 15.247(d)
- RSS-247 5.5

Frequency Range:	☒ 902-928MHz ☐ 2400-2483.5MHz ☐ 5725-5850MHz		
	Output Power with 100 kHz Bandwidth	Minimum Allowed Attenuation dB	Limit dB
	Vertical		
914.78	101.7	20	81.7
Analyzer Settings:	☒ RBW=100KHz		
Minimum Allowed Attenuation:	☒ 20dB ☐ 30dB (for digital systems with conducted power measured using RMS averaging over a time interval)		

Test Equipment Used:



Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz - 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016

Results:


The sample tested was found to comply.

Test Method:

- ANSI C63.10: 2009, Clause 7.8.6

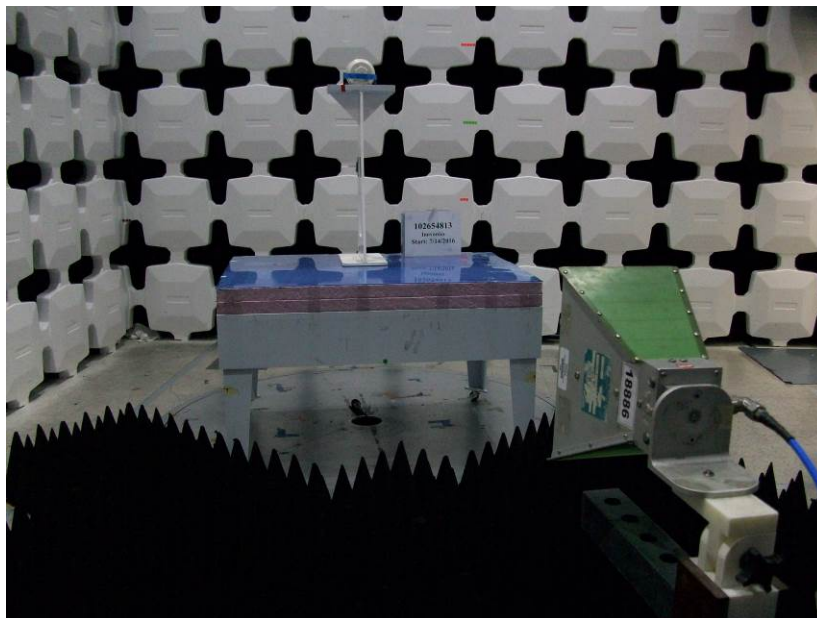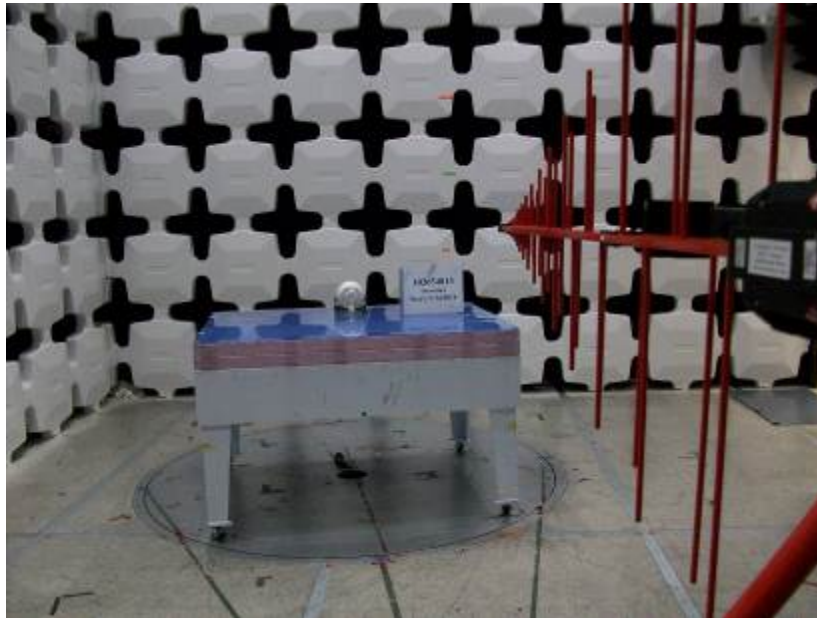Setup Photographs:

Plots: Output into 100kHz RBW:

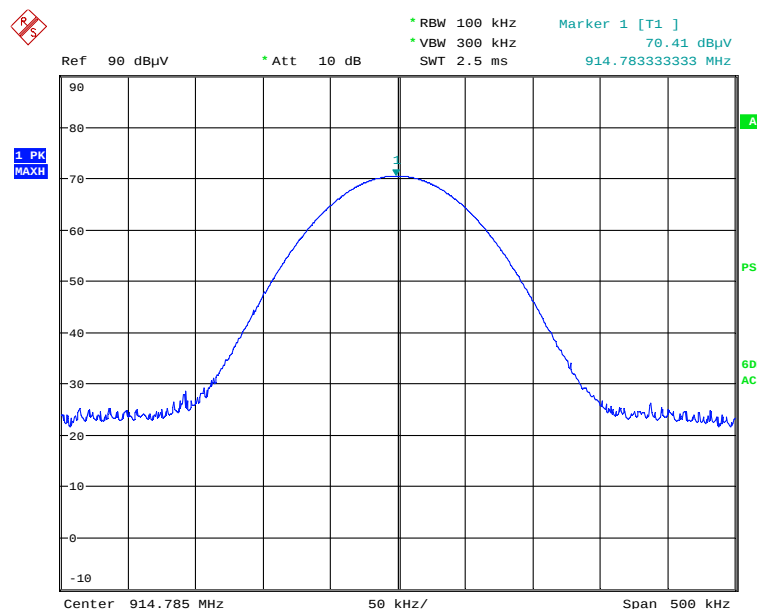

Date: 20.JUL.2016 18:38:01

Mid Channel Axis 2 represents the lowest measured fundamental, and represents the lowest possible 20dBc limit for non-restricted band harmonics.

FREQ	LEVEL	DET	CABLE	ANT	FINAL	POL	HGT	AZ	RBW
MHz	dBuV	$\frac{Qp}{Av}$ Pk Rms	+ [dB]	+ [dB/m]	= [dBuV]	(V/H)	(m)	(DEG)	(MHz)
Mid channel Axis-2									
914.7850	70.41	Pk	2.75	28.50	101.66	V	1.00	357.4	0.100

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	FINAL	POL	HGT	AZ	LIMIT	DELTA2	RBW
MHz	dBuV	$\frac{Qp}{Av}$ Pk Rms	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)		-20dBc	(MHz)
LC-Axis 1 (Harmonics None Restricted Band) EN 1244													
1804.77	72.93	Pk	3.86	26.85	37.83	0.72	66.52	V	1.94	341.50	81.70	-15.18	1.00
6316.69	53.32	Pk	7.62	34.97	45.91	0.00	50.00	V	1.99	353.30	81.70	-31.70	1.00
7219.07	56.55	Pk	8.26	36.32	47.17	0.00	53.96	V	1.14	210.20	81.70	-27.74	1.00
1804.77	70.34	Pk	3.86	26.85	37.83	0.72	63.93	H	1.49	212.60	81.70	-17.77	1.00
6316.69	51.39	Pk	7.62	34.97	45.91	0.00	48.07	H	2.63	247.70	81.70	-33.63	1.00
7219.07	55.93	Pk	8.26	36.32	47.17	0.00	53.34	H	2.44	40.00	81.70	-28.36	1.00
LC-Axis 2 (Harmonics None Restricted Band) EN 1244													
1804.77	65.99	Pk	3.86	26.85	37.83	0.72	59.58	V	1.15	196.20	81.70	-22.12	1.00
6316.68	52.00	Pk	7.62	34.97	45.91	0.00	48.68	V	1.00	153.60	81.70	-33.02	1.00

Intertek

Report Number: 102654813DEN-001

Issued: 7/26/2016

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	FINAL	POL	HGT	AZ	LIMIT	DELTA2	RBW
MHz	dBuV	Qp Av Pk Rms	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)		-20dBc	(MHz)
7219.07	56.75	Pk	8.26	36.32	47.17	0.00	54.16	V	2.07	188.20	81.70	-27.54	1.00
1804.77	69.36	Pk	3.86	26.85	37.83	0.72	62.95	H	1.63	273.70	81.70	-18.75	1.00
6316.68	52.58	Pk	7.62	34.97	45.91	0.00	49.26	H	1.53	201.80	81.70	-32.44	1.00
7219.07	55.88	Pk	8.26	36.32	47.17	0.00	53.29	H	1.86	188.20	81.70	-28.41	1.00
LC-Axis 3 (Harmonics None Restricted Band) EN 1244													
1804.77	67.88	Pk	3.86	26.85	37.83	0.72	61.47	V	1.20	273.70	81.70	-20.23	1.00
6315.77	51.14	Pk	7.62	34.97	45.91	0.00	47.82	V	1.44	229.10	81.70	-33.88	1.00
7219.07	57.27	Pk	8.26	36.32	47.17	0.00	54.68	V	1.48	220.00	81.70	-27.02	1.00
1804.77	67.85	Pk	3.86	26.85	37.83	0.72	61.44	H	2.29	359.90	81.70	-20.26	1.00
6315.77	51.14	Pk	7.62	34.97	45.91	0.00	47.82	H	1.79	187.40	81.70	-33.88	1.00
7219.07	57.27	Pk	8.26	36.32	47.17	0.00	54.68	H	2.02	290.90	81.70	-27.02	1.00
MC-Axis 1 (Harmonics None Restricted Band) EN 1244													
1829.57	70.96	Pk	3.88	27.04	37.83	0.68	64.74	V	1.00	140.10	81.70	-16.96	1.00
5488.70	54.04	Pk	7.01	34.39	43.27	0.00	52.16	V	1.24	248.40	81.70	-29.54	1.00
6403.49	54.11	Pk	7.66	34.92	46.24	0.00	50.45	V	1.78	161.00	81.70	-31.25	1.00
1829.57	69.88	Pk	3.88	27.04	37.83	0.68	63.66	H	2.03	28.60	81.70	-18.04	1.00
5488.70	54.67	Pk	7.01	34.39	43.27	0.00	52.79	H	2.10	178.50	81.70	-28.91	1.00
6403.49	52.59	Pk	7.66	34.92	46.24	0.00	48.93	H	2.44	196.20	81.70	-32.77	1.00
MC-Axis 2 (Harmonics None Restricted Band) EN 1244													
1829.57	61.44	Pk	3.88	27.04	37.83	0.68	55.22	V	1.32	209.90	81.70	-26.48	1.00
5488.70	55.81	Pk	7.01	34.39	43.27	0.00	53.93	V	1.29	100.30	81.70	-27.77	1.00
1829.57	69.32	Pk	3.88	27.04	37.83	0.68	63.10	H	1.85	53.90	81.70	-18.60	1.00
5488.70	55.81	Pk	7.01	34.39	43.27	0.00	53.93	H	1.89	165.50	81.70	-27.77	1.00
6403.49	52.01	Pk	7.66	34.92	46.24	0.00	48.35	H	1.73	215.80	81.70	-33.35	1.00
6403.49	52.25	Pk	7.66	34.92	46.24	0.00	48.59	H	1.31	170.40	81.70	-33.11	1.00
MC-Axis 3 (Harmonics None Restricted Band) EN 1244													
1829.57	69.34	Pk	3.88	27.04	37.83	0.68	63.12	V	1.59	236.00	81.70	-18.58	1.00
5488.70	55.34	Pk	7.01	34.39	43.27	0.00	53.46	V	1.21	194.30	81.70	-28.24	1.00
6403.34	52.08	Pk	7.66	34.92	46.24	0.00	48.43	V	1.00	239.40	81.70	-33.27	1.00
1829.57	65.81	Pk	3.88	27.04	37.83	0.68	59.59	H	2.13	211.50	81.70	-22.11	1.00
5488.70	57.13	Pk	7.01	34.39	43.27	0.00	55.25	H	1.67	93.50	81.70	-26.45	1.00
6403.34	53.03	Pk	7.66	34.92	46.24	0.00	49.38	H	1.54	263.90	81.70	-32.32	1.00
HC-Axis-1 (Harmonics None Restricted Band) EN 1244													
1855.17	75.98	Pk	3.90	27.24	37.84	0.64	69.93	V	1.27	166.80	81.70	-11.77	1.00
5565.50	53.86	Pk	7.06	34.34	43.45	0.00	51.80	V	1.40	237.30	81.70	-29.90	1.00
6493.08	54.43	Pk	7.71	34.91	46.55	0.00	50.50	V	1.53	39.90	81.70	-31.20	1.00
9275.09	52.50	Pk	9.33	37.55	47.45	0.00	51.93	V	1.67	146.70	81.70	-29.77	1.00
1855.17	70.15	Pk	3.90	27.24	37.84	0.64	64.10	H	2.31	359.90	81.70	-17.60	1.00



Intertek

Report Number: 102654813DEN-001


Issued: 7/26/2016

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	FINAL	POL	HGT	AZ	LIMIT	DELTA2	RBW
<u>MHz</u>	<u>dBuV</u>	<u>Qp</u> <u>Av</u> <u>Pk</u> <u>Rms</u>	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	= [dBuV]	(V/H)	(m)	(DEG)		-20dBc	(MHz)
5565.50	53.63	Pk	7.06	34.34	43.45	0.00	51.57	H	1.79	285.20	81.70	-30.13	1.00
6493.08	54.43	Pk	7.71	34.91	46.55	0.00	50.50	H	1.79	136.70	81.70	-31.20	1.00
9275.09	52.00	Pk	9.33	37.55	47.45	0.00	51.43	H	2.23	167.70	81.70	-30.27	1.00
HC-Axis-2 (Harmonics None Restricted Band) EN 1244													
1855.17	62.08	Pk	3.90	27.24	37.84	0.64	56.03	V	1.00	271.90	81.70	-25.67	1.00
5565.50	58.16	Pk	7.06	34.34	43.45	0.00	56.10	V	1.47	137.90	81.70	-25.60	1.00
6493.08	53.39	Pk	7.71	34.91	46.55	0.00	49.46	V	2.02	142.60	81.70	-32.24	1.00
9275.83	54.06	Pk	9.33	37.55	47.45	0.00	53.49	V	1.24	170.30	81.70	-28.21	1.00
1855.17	69.14	Pk	3.90	27.24	37.84	0.64	63.09	H	1.32	164.60	81.70	-18.61	1.00
5565.50	58.16	Pk	7.06	34.34	43.45	0.00	56.10	H	1.10	63.80	81.70	-25.60	1.00
6493.08	52.98	Pk	7.71	34.91	46.55	0.00	49.05	H	1.63	116.90	81.70	-32.65	1.00
9275.83	54.06	Pk	9.33	37.55	47.45	0.00	53.49	H	1.68	147.00	81.70	-28.21	1.00
HC-Axis-3 (Harmonics None Restricted Band) EN 1244													
1855.17	70.51	Pk	3.90	27.24	37.84	0.64	64.46	V	1.31	115.20	81.70	-17.24	1.00
5565.50	56.78	Pk	7.06	34.34	43.45	0.00	54.72	V	1.52	158.40	81.70	-26.98	1.00
6493.08	54.20	Pk	7.71	34.91	46.55	0.00	50.27	V	1.14	128.10	81.70	-31.43	1.00
9275.84	53.23	Pk	9.33	37.55	47.45	0.00	52.66	V	1.86	90.60	81.70	-29.04	1.00
1855.17	70.21	Pk	3.90	27.24	37.84	0.64	64.16	H	1.83	164.60	81.70	-17.54	1.00
5565.50	56.78	Pk	7.06	34.34	43.45	0.00	54.72	H	2.01	127.40	81.70	-26.98	1.00
6493.08	54.20	Pk	7.71	34.91	46.55	0.00	50.27	H	2.07	164.50	81.70	-31.43	1.00
9275.84	52.65	Pk	9.33	37.55	47.45	0.00	52.08	H	1.90	125.10	81.70	-29.62	1.00


Plots: Band Edge

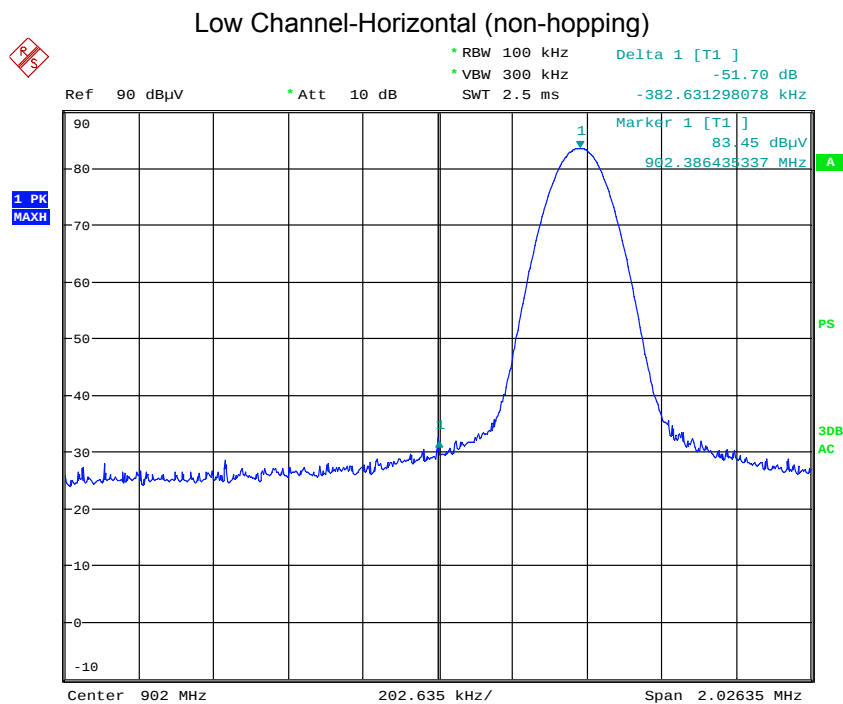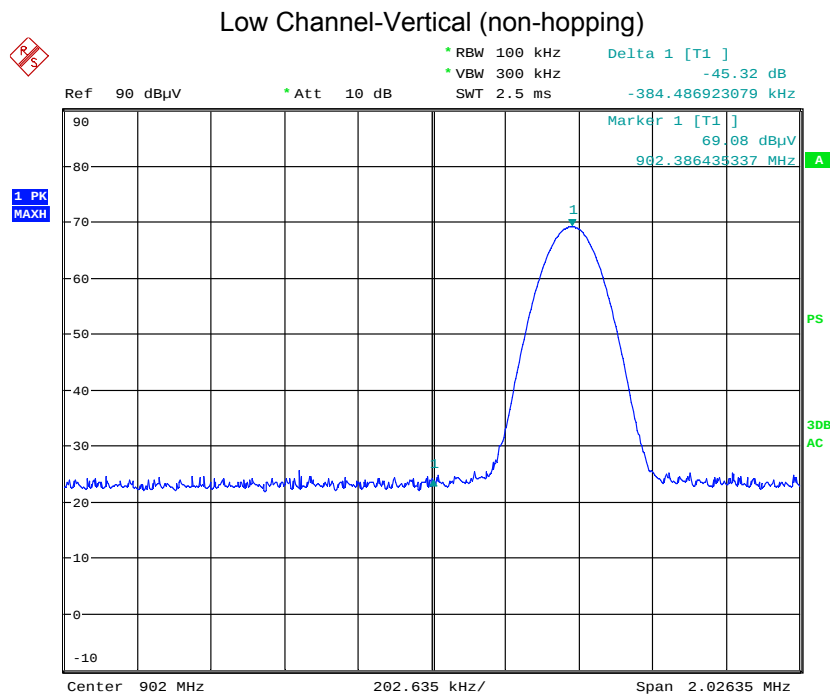


High Channel-Vertical (non-hopping)

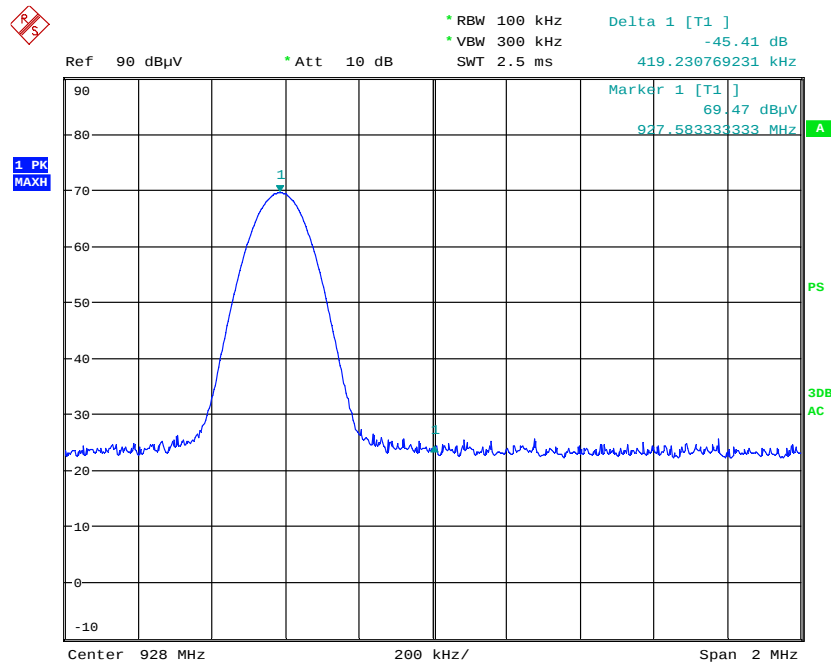


High Channel-Horizontal (non-hopping)

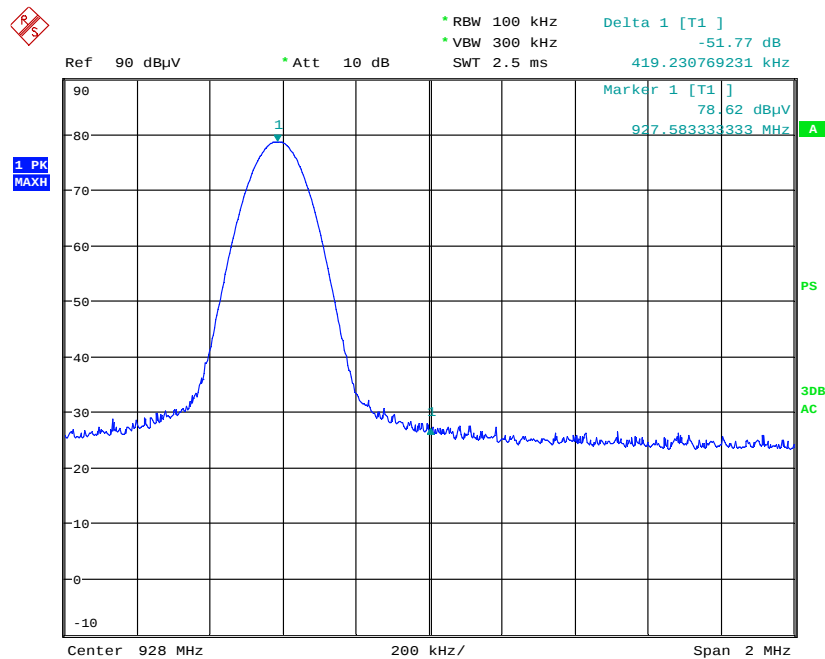


Low Channel-Vertical (hopping)

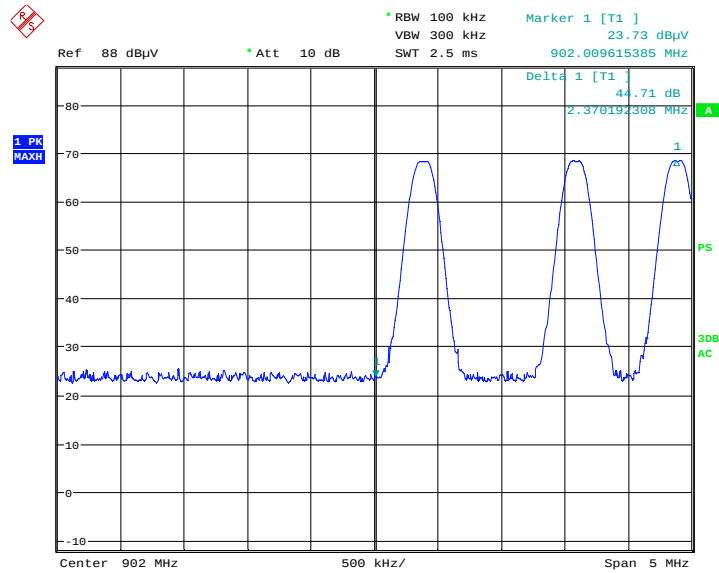


Low Channel-Horizontal (hopping)

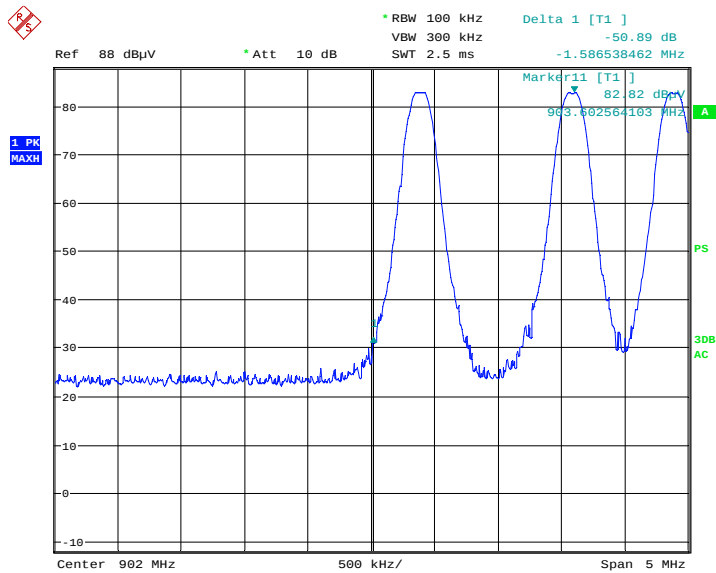

High Channel-Vertical (hopping)

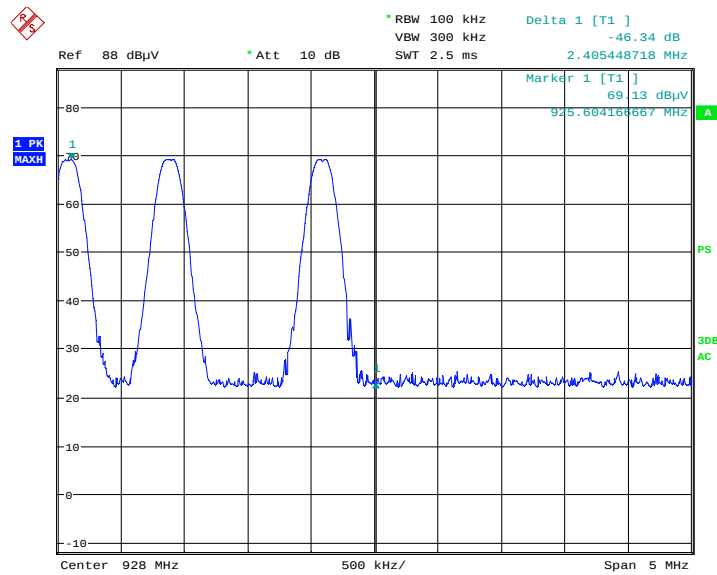

High Channel-Horizontal (hopping)

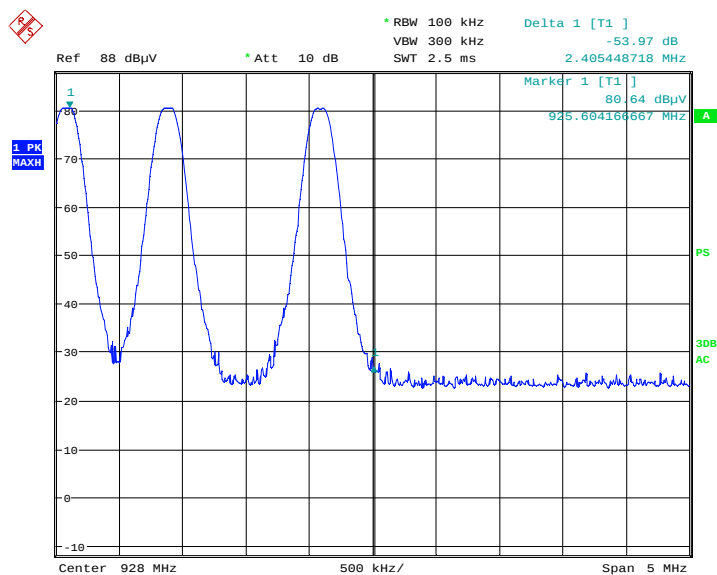

Notes: None

12 Spurious Restricted Band Emissions - Radiated**Method:**

The test methods used comply with ANSI C63.4. Unless otherwise stated no deviations were made from FCC 15.247 and RSS-247.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification:

FCC part 15.209	
Freq. MHz	Amp. dBuV/m @ 3 m
30	40
88	40
88	43.5
216	43.5
216	46
960	46
960	54
40000	54


- 15.247(d)/15.209
- RSS-247 5.5/RSS-GEN 8.10

Test Equipment Used:



Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
18886	Ridged Guide Antenna 1-18GHz	TENSOR	4105	2020	12/28/2015	12/28/2017
18743	Pre Amp: 700 kHz- 1GHz	Mini-Circuits	AM-34-000110	686965	9/3/2015	9/3/2016
18906	Pre Amp: 1GHz – 4GHz	Mini-Circuits Lab	ZHL-42	N052792-2	4/26/2016	4/26/2017
DEN-032	4-18 GHz LNA	NARDA	DBL-0618N615	031	4/13/2016	4/13/2017
18912	9 kHz- 1.3GHz Pre Amp	Hewlett-Packard	HP	5	3/31/2016	3/31/2017
19936	Bilog Antenna 30MHz - 6GHz	Sunol Sciences	JB6	A050707-1	6/22/2016	6/22/2017
DEN-152	Hi Pass Filter: VHF-1320+, 1700-3800MHz	Mini-Circuits	VHF-1320	30716	9/3/2015	9/3/2016
DEN-155	Notch Filter: 902MHz - 928MHz	Micro-Tronics	BRC50722	004	04/27/2016	04/27/2017
DEN-073	EMI Receiver (10Hz – 26.5GHz)	RHODE & SCHWARZ	ESU 26	100265	12/19/2015	12/19/2016
CC1-E2	Radiated Cable	Teledyne	90-206-300; PN:F-130-S1S1-100; 90-206-072;	E2-A; 5026702002; E2-C; E2-D	11/17/2015	11/17/2016
LAB-012	Wireless BP, Tem and Humidity sensor	Omega	zED-BTH	0070368	9/01/2015	9/1/2016



Results:



The sample tested was found to comply.

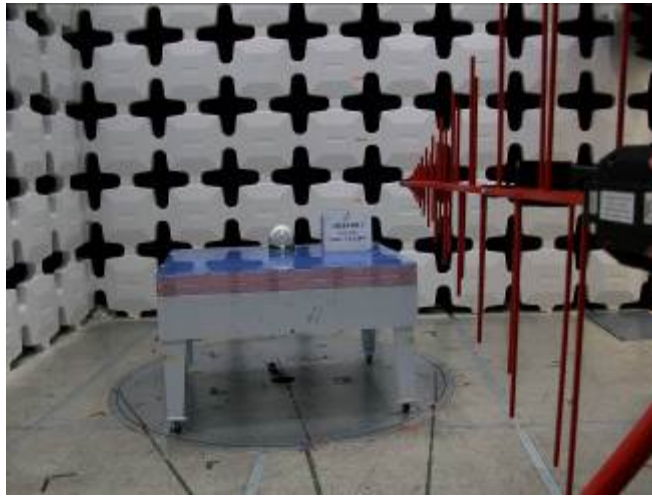Setup Photographs:

Plots: Prescan only

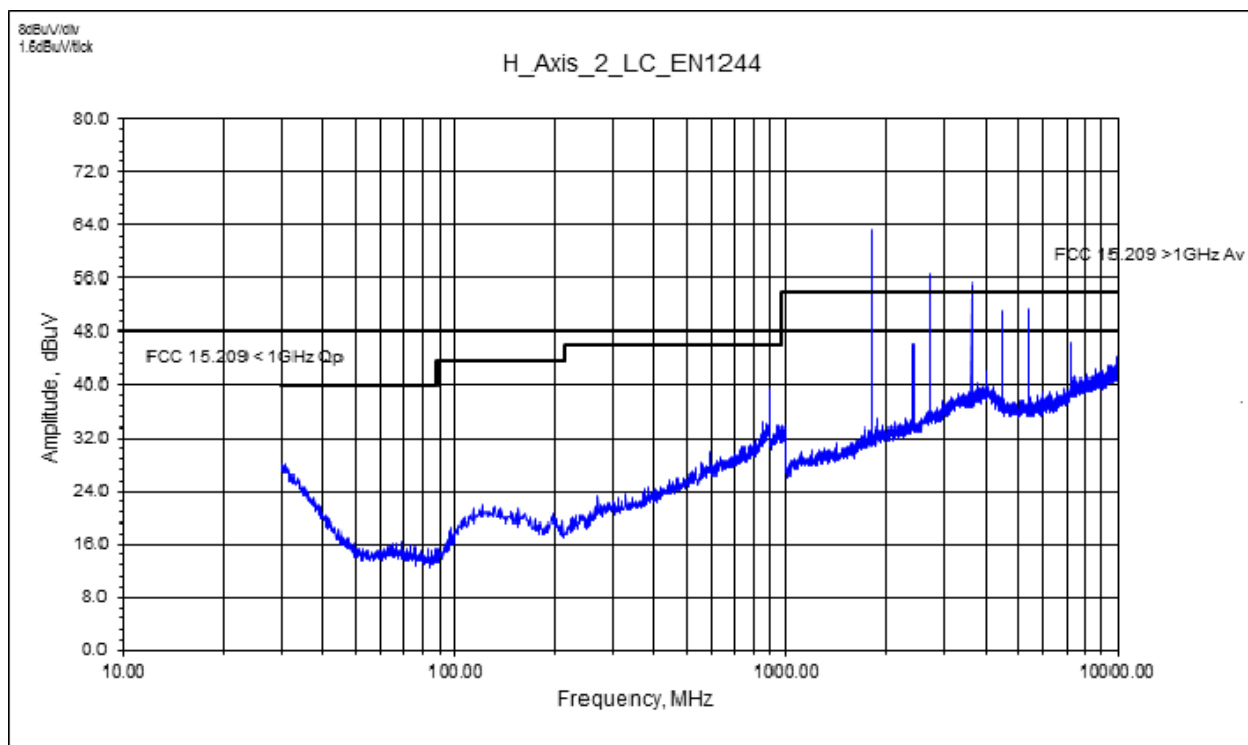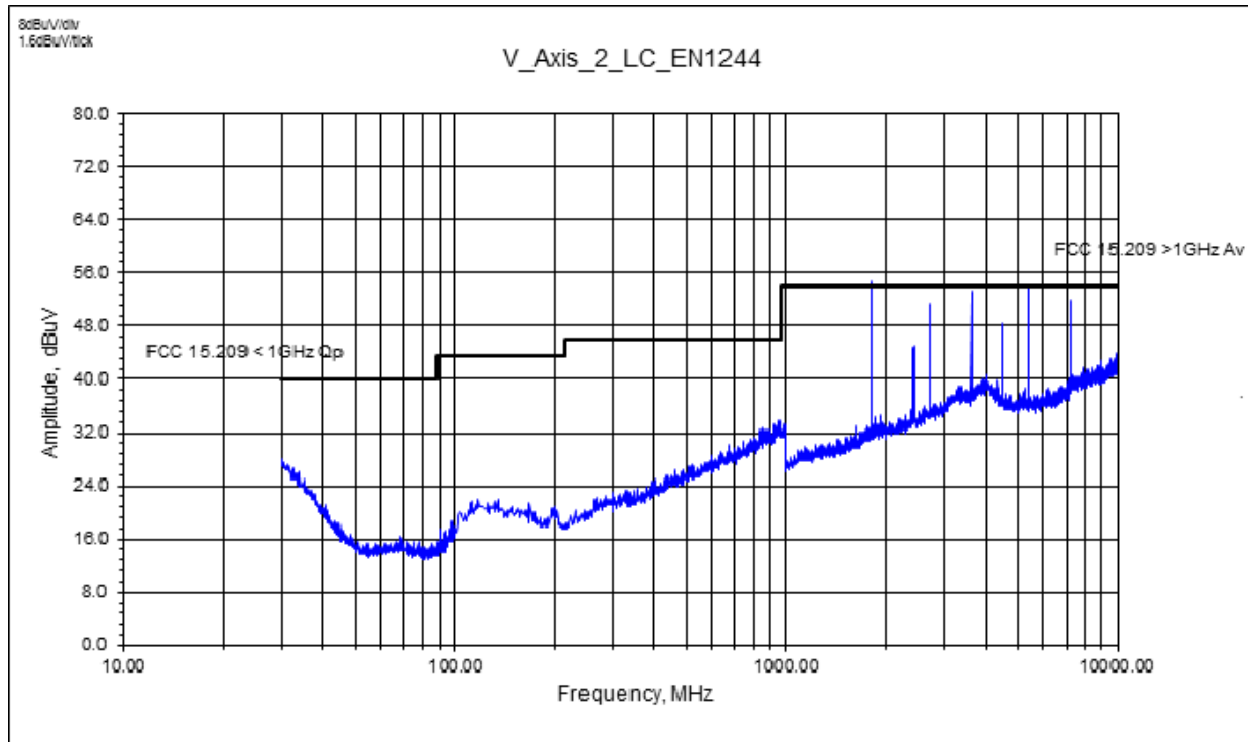

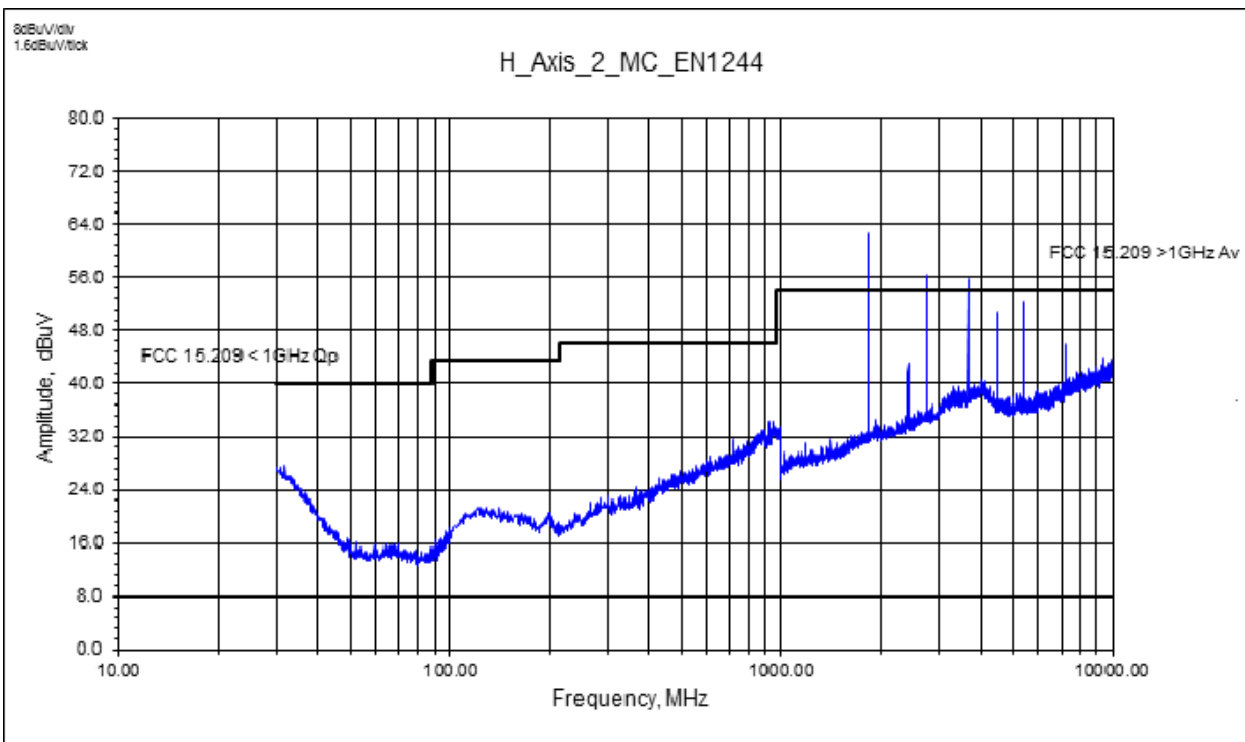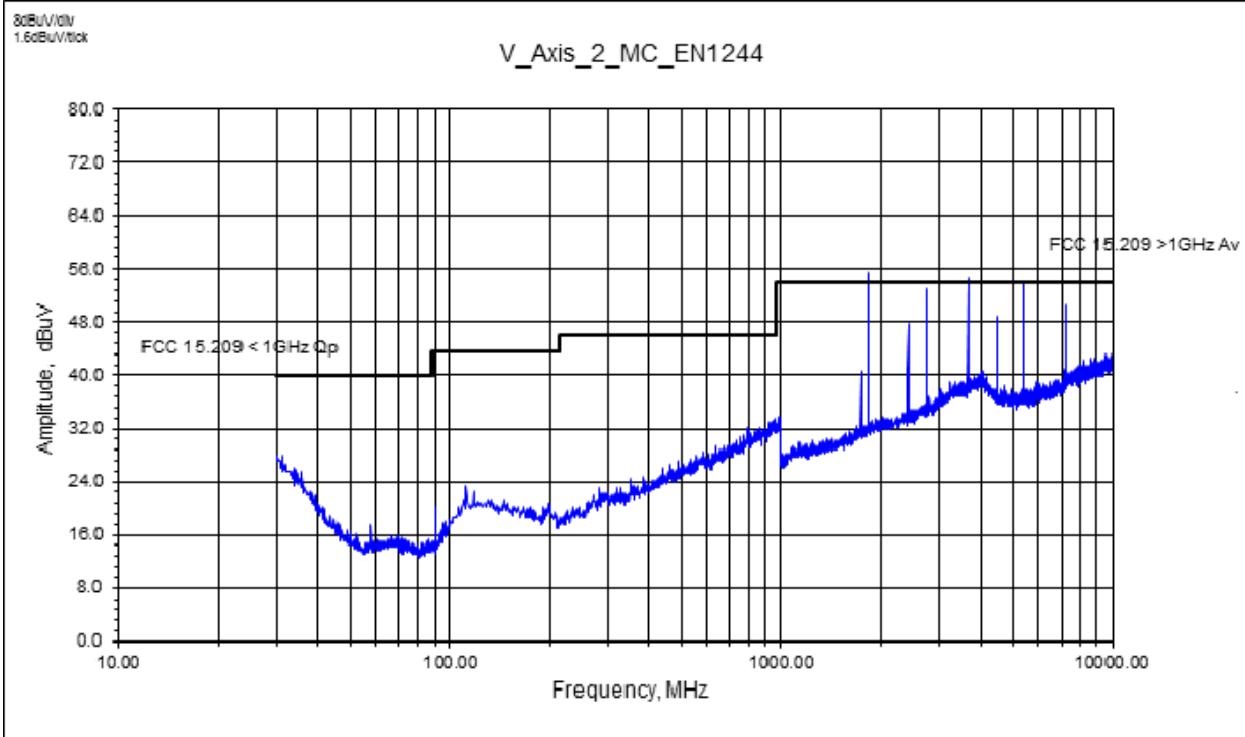

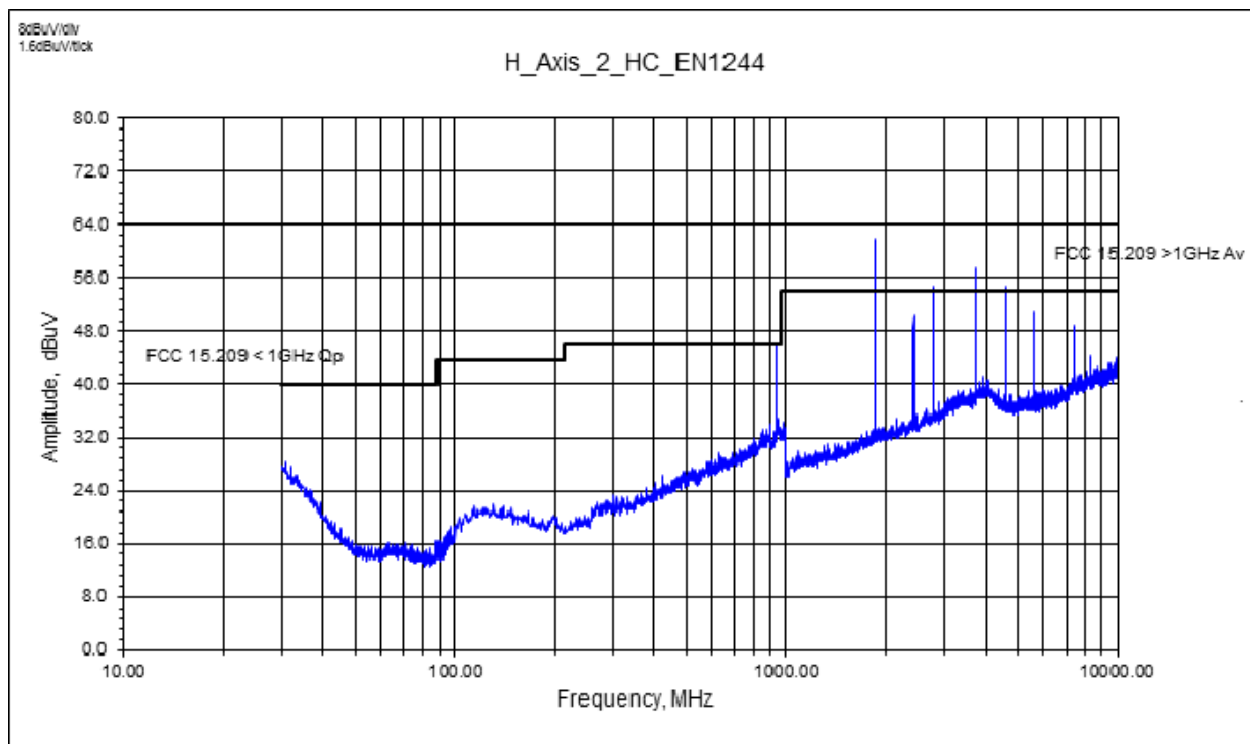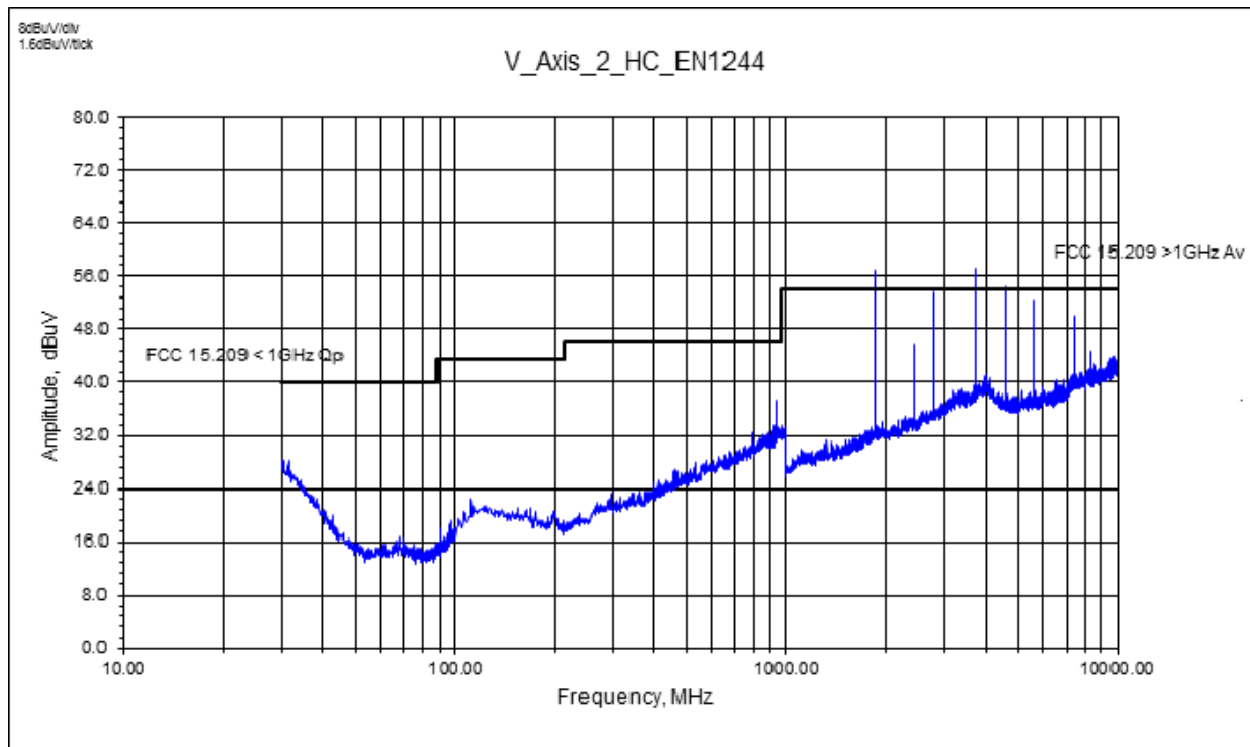

Intertek

Report Number: 102654813DEN-001

Issued: 7/26/2016

Data:

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	DUTY CC	FINAL	POL	HGT	AZ	LIMIT 1	LIMIT 2	DELTA 1	DELTA2	RBW
MHz	dBuV	Qp Av Pk Rms	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	- [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	(MHz)
Harmonics Restricted Band																
LC Axis 1 EN1244																
2707.152	58.32	Pk	4.79	29.11	37.94	0.52	N/A	54.8	V	2.091	97.7	N/A	73.98	N/A	-19.18	1
3609.535	58.06	Pk	5.56	31.75	38.4	0.51	N/A	57.47	V	2.091	97.7	N/A	73.98	N/A	-16.51	1
4511.918	50.32	Pk	6.25	32.69	34.84	0	N/A	54.42	V	1	1.8	N/A	73.98	N/A	-19.56	1
5414.301	57.25	Pk	6.94	34.3	43.03	0	N/A	55.47	V	1.001	29.2	N/A	73.98	N/A	-18.51	1
8122.508	51.63	Pk	8.84	36.98	46.22	0	N/A	51.24	V	1.519	232.1	N/A	73.98	N/A	-22.74	1
9025.181	53.02	Pk	9.22	37.41	47.28	0	N/A	52.37	V	1.001	94.6	N/A	73.98	N/A	-21.61	1
2707.152	58.12	Pk	4.79	29.11	37.94	0.52	N/A	54.6	H	1.442	146.4	N/A	73.98	N/A	-19.38	1
3609.535	58.06	Pk	5.56	31.75	38.4	0.51	N/A	57.47	H	1.301	33.3	N/A	73.98	N/A	-16.51	1
4511.918	51.28	Pk	6.25	32.69	34.84	0	N/A	55.38	H	1.561	211	N/A	73.98	N/A	-18.6	1
5414.301	57.36	Pk	6.94	34.3	43.03	0	N/A	55.58	H	1.703	171.8	N/A	73.98	N/A	-18.4	1
8122.508	52.13	Pk	8.84	36.98	46.22	0	N/A	51.74	H	1.753	250.7	N/A	73.98	N/A	-22.24	1
9025.181	52.5	Pk	9.22	37.41	47.28	0	N/A	51.85	H	1.597	151.4	N/A	73.98	N/A	-22.13	1
2707.152	58.32	Av	4.79	29.11	37.94	0.52	13.7	41.1	V	2.091	97.7	53.98	N/A	-12.88	N/A	1
3609.535	58.06	Av	5.56	31.75	38.4	0.51	13.7	43.78	V	2.091	97.7	53.98	N/A	-10.2	N/A	1
4511.918	50.32	Av	6.25	32.69	34.84	0	13.7	40.72	V	1	1.8	53.98	N/A	-13.26	N/A	1
5414.301	57.25	Av	6.94	34.3	43.03	0	13.7	41.76	V	1.001	29.2	53.98	N/A	-12.22	N/A	1
8122.508	51.63	Av	8.84	36.98	46.22	0	13.7	37.53	V	1.519	232.1	53.98	N/A	-16.45	N/A	1
9025.181	53.02	Av	9.22	37.41	47.28	0	13.7	38.67	V	1.001	94.6	53.98	N/A	-15.31	N/A	1
2707.152	58.12	Av	4.79	29.11	37.94	0.52	13.7	40.9	H	1.442	146.4	53.98	N/A	-13.08	N/A	1
3609.535	58.06	Av	5.56	31.75	38.4	0.51	13.7	43.78	H	1.301	33.3	53.98	N/A	-10.2	N/A	1
4511.918	51.28	Av	6.25	32.69	34.84	0	13.7	41.68	H	1.561	211	53.98	N/A	-12.3	N/A	1
5414.301	57.36	Av	6.94	34.3	43.03	0	13.7	41.87	H	1.703	171.8	53.98	N/A	-12.11	N/A	1
8122.508	52.13	Av	8.84	36.98	46.22	0	13.7	38.03	H	1.753	250.7	53.98	N/A	-15.95	N/A	1
9025.181	52.5	Av	9.22	37.41	47.28	0	13.7	38.15	H	1.597	151.4	53.98	N/A	-15.83	N/A	1
LC Axis 2 EN1244																
2707.152	60.53	Pk	4.79	29.11	37.94	0.52	N/A	57.01	V	1.302	27.2	N/A	73.98	N/A	-16.97	1
3609.535	56.82	Pk	5.56	31.75	38.4	0.51	N/A	56.23	V	1.287	135.7	N/A	73.98	N/A	-17.75	1
4511.917	49.25	Pk	6.25	32.69	34.84	0	N/A	53.35	V	1.219	359.9	N/A	73.98	N/A	-20.63	1
5414.301	58.1	Pk	6.94	34.3	43.03	0	N/A	56.32	V	1.411	41.9	N/A	73.98	N/A	-17.66	1
8122.709	52	Pk	8.84	36.98	46.22	0	N/A	51.61	V	1.155	33.2	N/A	73.98	N/A	-22.37	1
9024.904	52.63	Pk	9.22	37.42	47.28	0	N/A	51.99	V	1.144	86.7	N/A	73.98	N/A	-21.99	1
2707.152	62.58	Pk	4.79	29.11	37.94	0.52	N/A	59.06	H	1.918	86.4	N/A	73.98	N/A	-14.92	1
3609.535	57.23	Pk	5.56	31.75	38.4	0.51	N/A	56.64	H	1.785	75.6	N/A	73.98	N/A	-17.34	1
4511.917	46.7	Pk	6.25	32.69	34.84	0	N/A	50.8	H	1.845	124.4	N/A	73.98	N/A	-23.18	1
5414.301	58.1	Pk	6.94	34.3	43.03	0	N/A	56.32	H	1.676	267.4	N/A	73.98	N/A	-17.66	1
8122.709	52.21	Pk	8.84	36.98	46.22	0	N/A	51.82	H	1.643	76	N/A	73.98	N/A	-22.16	1
9024.904	53.11	Pk	9.22	37.42	47.28	0	N/A	52.47	H	1.311	112.2	N/A	73.98	N/A	-21.51	1
2707.152	60.53	Av	4.79	29.11	37.94	0.52	13.7	43.31	V	1.302	27.2	53.98	N/A	-10.67	N/A	1
3609.535	56.82	Av	5.56	31.75	38.4	0.51	13.7	42.54	V	1.287	135.7	53.98	N/A	-11.44	N/A	1
4511.917	49.25	Av	6.25	32.69	34.84	0	13.7	39.65	V	1.219	359.9	53.98	N/A	-14.33	N/A	1
5414.301	58.1	Av	6.94	34.3	43.03	0	13.7	42.61	V	1.411	41.9	53.98	N/A	-11.37	N/A	1
8122.709	52	Av	8.84	36.98	46.22	0	13.7	37.9	V	1.155	33.2	53.98	N/A	-16.08	N/A	1
9024.904	52.63	Av	9.22	37.42	47.28	0	13.7	38.29	V	1.144	86.7	53.98	N/A	-15.69	N/A	1
2707.152	62.58	Av	4.79	29.11	37.94	0.52	13.7	45.36	H	1.918	86.4	53.98	N/A	-8.62	N/A	1
3609.535	57.23	Av	5.56	31.75	38.4	0.51	13.7	42.95	H	1.785	75.6	53.98	N/A	-11.03	N/A	1
4511.917	46.7	Av	6.25	32.69	34.84	0	13.7	37.1	H	1.845	124.4	53.98	N/A	-16.88	N/A	1
5414.301	58.1	Av	6.94	34.3	43.03	0	13.7	42.61	H	1.676	267.4	53.98	N/A	-11.37	N/A	1
8122.709	52.21	Av	8.84	36.98	46.22	0	13.7	38.11	H	1.643	76	53.98	N/A	-15.87	N/A	1
9024.904	53.11	Av	9.22	37.42	47.28	0	13.7	38.77	H	1.311	112.2	53.98	N/A	-15.21	N/A	1
LC Axis 3 EN1244																
2707.152	62.48	Pk	4.79	29.11	37.94	0.52	N/A	58.96	V	1.257	89.2	N/A	73.98	N/A	-15.02	1
3609.534	57.84	Pk	5.56	31.75	38.4	0.51	N/A	57.25	V	1	123.7	N/A	73.98	N/A	-16.73	1
4512.601	43.41	Pk	6.26	32.69	34.85	0	N/A	47.5	V	1.253	80	N/A	73.98	N/A	-26.48	1
5414.407	50.17	Pk	6.94	34.3	43.03	0	N/A	48.39	V	1.125	43.2	N/A	73.98	N/A	-25.59	1
8119.84	51.72	Pk	8.84	36.98	46.22	0	N/A	51.33	V	1.191	131.5	N/A	73.98	N/A	-22.65	1
9025.737	52.64	Pk	9.22	37.41	47.28	0	N/A	51.99	V	1.156	17.4	N/A	73.98	N/A	-21.99	1
2707.152	63.97	Pk	4.79	29.11	37.94	0.52	N/A	60.45	H	1.889	163	N/A	73.98	N/A	-13.53	1
3609.534	58.4	Pk	5.56	31.75	38.4	0.51	N/A	57.81	H	1.605	205.4	N/A	73.98	N/A	-16.17	1
4512.601	44.22	Pk	6.26	32.69	34.85	0	N/A	48.31	H	1.518	131.3	N/A	73.98	N/A	-25.67	1
5414.407	50.67	Pk	6.94	34.3	43.03	0	N/A	48.89	H	1.792	60.7	N/A	73.98	N/A	-25.09	1
8119.84	51.72	Pk	8.84	36.98	46.22	0	N/A	51.33	H	1.696	172.2	N/A	73.98	N/A	-22.65	1
9025.737	53.53	Pk	9.22	37.41	47.28	0	N/A	52.88	H	1.761	53.1	N/A	73.98	N/A	-21.1	1
2707.152	62.48	Av	4.79	29.11	37.94	0.52	13.7	45.26	V	1.257	89.2	53.98	N/A	-8.72	N/A	1
3609.534	57.84	Av	5.56	31.75	38.4	0.51	13.7	43.56	V	1	123.7	53.98	N/A	-10.42	N/A	1
4512.601	43.41	Av	6.26	32.69	34.85	0	13.7	33.81	V	1.253	80	53.98	N/A	-20.17	N/A	1
5414.407	50.17	Av	6.94	34.3	43.03	0	13.7	34.68	V	1.125	43.2	53.98	N/A	-19.3	N/A	1
8119.84	51.72	Av	8.84	36.98	46.22	0	13.7	37.62	V	1.191	131.5	53.98	N/A	-16.36	N/A	1
9025.737	52.64	Av	9.22	37.41	47.28	0	13.7	38.29	V	1.156	17.4	53.98	N/A	-15.69	N/A	1
2707.152	63.97	Av	4.79	29.11	37.94	0.52	13.7	46.75	H	1.889	163	53.98	N/A	-7.23	N/A	1
3609.534	58.4	Av	5.56	31.75	38.4	0.51	13.7	44.12	H	1.605	205.4	53.98	N/A	-9.86	N/A	1
4512.601	44.22	Av	6.26	32.69	34.85	0	13.7	34.62	H	1.518	131.3	53.98	N/A	-19.36	N/A	1
5414.407	50.67	Av	6.94	34.3	43.03	0	13.7	35.18	H	1.792	60.7	53.98	N/A	-18.8	N/A	1
8119.84	51.72	Av	8.84	36.98	46.22	0	13.7	37.62	H	1.696	172.2	53.98	N/A	-16.36	N/A	1
9025.737	53.53	Av	9.22	37.41	47.28	0	13.7	39.18	H	1.761	53.1	53.98	N/A	-14.8	N/A	1

Intertek

Report Number: 102654813DEN-001

Issued: 7/26/2016

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	DUTY CC	FINAL	POL	HGT	AZ	LIMIT 1	LIMIT 2	DELTA 1	DELTA2	RBW
MHz	dBuV	Qp Av Pk Rms	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	- [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	(MHz)
MC Axis 1 EN1244																
2744.35	59.26	Pk	4.80	29.24	37.94	0.52	N/A	55.88	V	1.31	246.80	N/A	73.98	N/A	-18.10	1.00
3659.13	58.18	Pk	5.60	31.94	38.45	0.54	N/A	57.82	V	1.12	139.20	N/A	73.98	N/A	-16.16	1.00
4573.83	44.95	Pk	6.30	32.68	35.58	0.00	N/A	48.35	V	1.21	29.50	N/A	73.98	N/A	-25.63	1.00
7318.22	52.82	Pk	8.31	36.79	47.06	0.00	N/A	50.86	V	1.17	40.70	N/A	73.98	N/A	-23.12	1.00
8233.17	51.67	Pk	8.89	36.97	46.26	0.00	N/A	51.28	V	1.17	57.10	N/A	73.98	N/A	-22.70	1.00
9147.78	52.47	Pk	9.27	37.33	47.38	0.00	N/A	51.69	V	1.12	104.80	N/A	73.98	N/A	-22.29	1.00
2744.35	64.63	Pk	4.80	29.24	37.94	0.52	N/A	61.25	H	1.95	114.40	N/A	73.98	N/A	-12.73	1.00
3659.13	58.18	Pk	5.60	31.94	38.45	0.54	N/A	57.82	H	2.21	341.70	N/A	73.98	N/A	-16.16	1.00
4573.83	47.86	Pk	6.30	32.68	35.58	0.00	N/A	51.26	H	1.93	56.20	N/A	73.98	N/A	-22.72	1.00
7318.22	52.85	Pk	8.31	36.79	47.06	0.00	N/A	50.89	H	1.50	38.70	N/A	73.98	N/A	-23.09	1.00
8233.17	51.67	Pk	8.89	36.97	46.26	0.00	N/A	51.28	H	1.65	85.40	N/A	73.98	N/A	-22.70	1.00
9147.78	52.47	Pk	9.27	37.33	47.38	0.00	N/A	51.69	H	1.66	118.20	N/A	73.98	N/A	-22.29	1.00
2744.35	59.26	Av	4.80	29.24	37.94	0.52	13.70	42.18	V	1.31	246.80	53.98	N/A	-11.80	N/A	1.00
3659.13	58.18	Av	5.60	31.94	38.45	0.54	13.70	44.11	V	1.12	139.20	53.98	N/A	-9.87	N/A	1.00
4573.83	44.95	Av	6.30	32.68	35.58	0.00	13.70	34.65	V	1.21	29.50	53.98	N/A	-19.33	N/A	1.00
7318.22	52.82	Av	8.31	36.79	47.06	0.00	13.70	37.16	V	1.17	40.70	53.98	N/A	-16.82	N/A	1.00
8233.17	51.67	Av	8.89	36.97	46.26	0.00	13.70	37.57	V	1.17	57.10	53.98	N/A	-16.41	N/A	1.00
9147.78	52.47	Av	9.27	37.33	47.38	0.00	13.70	37.99	V	1.12	104.80	53.98	N/A	-15.99	N/A	1.00
2744.35	64.63	Av	4.80	29.24	37.94	0.52	13.70	47.55	H	1.95	114.40	53.98	N/A	-6.43	N/A	1.00
3659.13	58.18	Av	5.60	31.94	38.45	0.54	13.70	44.11	H	2.21	341.70	53.98	N/A	-9.87	N/A	1.00
4573.83	47.86	Av	6.30	32.68	35.58	0.00	13.70	37.56	H	1.93	56.20	53.98	N/A	-16.42	N/A	1.00
7318.22	52.85	Av	8.31	36.79	47.06	0.00	13.70	37.19	H	1.50	38.70	53.98	N/A	-16.79	N/A	1.00
8233.17	51.67	Av	8.89	36.97	46.26	0.00	13.70	37.57	H	1.65	85.40	53.98	N/A	-16.41	N/A	1.00
9147.78	52.47	Av	9.27	37.33	47.38	0.00	13.70	37.99	H	1.66	118.20	53.98	N/A	-15.99	N/A	1.00
MC Axis 2 EN1244																
2744.35	65.15	Pk	4.80	29.24	37.94	0.52	N/A	61.77	V	1.30	285.60	N/A	73.98	N/A	-12.21	1.00
3659.13	57.82	Pk	5.60	31.94	38.45	0.54	N/A	57.46	V	1.29	201.60	N/A	73.98	N/A	-16.52	1.00
4573.99	44.04	Pk	6.30	32.68	35.58	0.00	N/A	47.44	V	1.20	39.60	N/A	73.98	N/A	-26.54	1.00
7318.61	52.68	Pk	8.31	36.79	47.06	0.00	N/A	50.72	V	1.10	78.80	N/A	73.98	N/A	-23.26	1.00
8232.84	51.86	Pk	8.89	36.97	46.26	0.00	N/A	51.47	V	1.14	35.60	N/A	73.98	N/A	-22.51	1.00
9148.13	52.76	Pk	9.27	37.33	47.38	0.00	N/A	51.98	V	1.09	153.00	N/A	73.98	N/A	-22.00	1.00
2744.35	65.15	Pk	4.80	29.24	37.94	0.52	N/A	61.77	H	1.86	68.40	N/A	73.98	N/A	-12.21	1.00
3659.13	57.82	Pk	5.60	31.94	38.45	0.54	N/A	57.46	H	1.75	14.20	N/A	73.98	N/A	-16.52	1.00
4573.99	45.40	Pk	6.30	32.68	35.58	0.00	N/A	48.80	H	1.49	77.10	N/A	73.98	N/A	-25.18	1.00
7318.61	52.68	Pk	8.31	36.79	47.06	0.00	N/A	50.72	H	1.50	103.60	N/A	73.98	N/A	-23.26	1.00
8232.84	51.95	Pk	8.89	36.97	46.26	0.00	N/A	51.56	H	1.61	64.80	N/A	73.98	N/A	-22.42	1.00
9148.13	52.76	Pk	9.27	37.33	47.38	0.00	N/A	51.98	H	1.21	112.70	N/A	73.98	N/A	-22.00	1.00
2744.35	65.15	Av	4.80	29.24	37.94	0.52	13.70	48.07	V	1.30	285.60	53.98	N/A	-5.91	N/A	1.00
3659.13	57.82	Av	5.60	31.94	38.45	0.54	13.70	43.75	V	1.29	201.60	53.98	N/A	-10.23	N/A	1.00
4573.99	44.04	Av	6.30	32.68	35.58	0.00	13.70	33.74	V	1.20	39.60	53.98	N/A	-20.24	N/A	1.00
7318.61	52.68	Av	8.31	36.79	47.06	0.00	13.70	37.02	V	1.10	78.80	53.98	N/A	-16.96	N/A	1.00
8232.84	51.86	Av	8.89	36.97	46.26	0.00	13.70	37.76	V	1.14	35.60	53.98	N/A	-16.22	N/A	1.00
9148.13	52.76	Av	9.27	37.33	47.38	0.00	13.70	38.28	V	1.09	153.00	53.98	N/A	-15.70	N/A	1.00
2744.35	65.15	Av	4.80	29.24	37.94	0.52	13.70	48.07	H	1.86	68.40	53.98	N/A	-5.91	N/A	1.00
3659.13	57.82	Av	5.60	31.94	38.45	0.54	13.70	43.75	H	1.75	14.20	53.98	N/A	-10.23	N/A	1.00
4573.99	45.40	Av	6.30	32.68	35.58	0.00	13.70	35.10	H	1.49	77.10	53.98	N/A	-18.88	N/A	1.00
7318.61	52.68	Av	8.31	36.79	47.06	0.00	13.70	37.02	H	1.50	103.60	53.98	N/A	-16.96	N/A	1.00
8232.84	51.95	Av	8.89	36.97	46.26	0.00	13.70	37.85	H	1.61	64.80	53.98	N/A	-16.13	N/A	1.00
9148.13	52.76	Av	9.27	37.33	47.38	0.00	13.70	38.28	H	1.21	112.70	53.98	N/A	-15.70	N/A	1.00
MC Axis 3 EN1244																
2744.35	64.57	Pk	4.80	29.24	37.94	0.52	N/A	61.19	V	1.56	359.90	N/A	73.98	N/A	-12.79	1.00
3659.13	59.45	Pk	5.60	31.94	38.45	0.54	N/A	59.09	V	1.22	29.50	N/A	73.98	N/A	-14.89	1.00
4573.86	49.20	Pk	6.30	32.68	35.58	0.00	N/A	52.60	V	1.32	131.50	N/A	73.98	N/A	-21.38	1.00
7318.28	52.29	Pk	8.31	36.79	47.06	0.00	N/A	50.33	V	1.18	57.10	N/A	73.98	N/A	-23.65	1.00
8233.31	51.55	Pk	8.89	36.97	46.26	0.00	N/A	51.16	V	1.22	39.80	N/A	73.98	N/A	-22.82	1.00
9147.92	52.27	Pk	9.27	37.33	47.38	0.00	N/A	51.49	V	1.16	124.00	N/A	73.98	N/A	-22.49	1.00
2744.35	64.57	Pk	4.80	29.24	37.94	0.52	N/A	61.19	H	1.64	261.60	N/A	73.98	N/A	-12.79	1.00
3659.13	59.45	Pk	5.60	31.94	38.45	0.54	N/A	59.09	H	1.67	149.80	N/A	73.98	N/A	-14.89	1.00
4573.86	49.20	Pk	6.30	32.68	35.58	0.00	N/A	52.60	H	1.83	94.90	N/A	73.98	N/A	-21.38	1.00
7318.28	53.01	Pk	8.31	36.79	47.06	0.00	N/A	51.05	H	1.61	96.50	N/A	73.98	N/A	-22.93	1.00
8233.31	51.55	Pk	8.89	36.97	46.26	0.00	N/A	51.16	H	1.66	98.50	N/A	73.98	N/A	-22.82	1.00
9147.92	52.45	Pk	9.27	37.33	47.38	0.00	N/A	51.67	H	1.73	191.50	N/A	73.98	N/A	-22.31	1.00
2744.35	64.57	Av	4.80	29.24	37.94	0.52	13.70	47.49	V	1.56	359.90	53.98	N/A	-6.49	N/A	1.00
3659.13	59.45	Av	5.60	31.94	38.45	0.54	13.70	45.38	V	1.22	29.50	53.98	N/A	-8.60	N/A	1.00
4573.86	49.20	Av	6.30	32.68	35.58	0.00	13.70	38.90	V	1.32	131.50	53.98	N/A	-15.08	N/A	1.00
7318.28	52.29	Av	8.31	36.79	47.06	0.00	13.70	36.63	V	1.18	57.10	53.98	N/A	-17.35	N/A	1.00
8233.31	51.55	Av	8.89	36.97	46.26	0.00	13.70	37.45	V	1.22	39.80	53.98	N/A	-16.53	N/A	1.00
9147.92	52.27	Av	9.27	37.33	47.38	0.00	13.70	37.79	V	1.16	124.00	53.98	N/A	-16.19	N/A	1.00
2744.35	64.57	Av	4.80	29.24	37.94	0.52	13.70	47.49	H	1.64	261.60	53.98	N/A	-6.49	N/A	1.00
3659.13	59.45	Av	5.60	31.94	38.45	0.54	13.70	45.38	H	1.67	149.80	53.98	N/A	-8.60	N/A	1.00
4573.86	49.20	Av	6.30	32.68	35.58	0.00	13.70	38.90	H	1.83	94.90	53.98	N/A	-15.08	N/A	1.00
7318.28	53.01	Av	8.31	36.79	47.06	0.00	13.70	37.35	H	1.61	96.50	53.98	N/A	-16.63	N/A	1.00
8233.31	51.55	Av	8.89	36.97	46.26	0.00	13.70	37.45	H	1.66	98.50	53.98	N/A	-16.53	N/A	1.00
9147.92	52.45	Av	9.27	37.33	47.38	0.00	13.70	37.97	H	1.73	191.50	53.98	N/A	-16.01	N/A	1.00

Intertek

Report Number: 102654813DEN-001

Issued: 7/26/2016

FREQ	LEVEL	DET	CABLE	ANT	PREAMP	ATTEN	DUTY CC	FINAL	POL	HGT	AZ	LIMIT 1	LIMIT 2	DELTA 1	DELTA2	RBW
MHz	dBuV	Qp Av Pk Rms	+ [dB]	+ [dB/m]	- [dB]	+ [dB]	- [dB]	= [dBuV]	(V/H)	(m)	(DEG)	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	FCC 15.209 >1GHz Av	FCC 15.209 >1GHz Pk	(MHz)
HC Axis 1 EN1244																
2782.75	61.07	Pk	4.85	29.38	38.00	0.52	N/A	57.82	V	1.56	235.00	N/A	73.98	N/A	-16.16	1.00
3710.33	58.94	Pk	5.64	32.16	38.39	0.58	N/A	58.93	V	1.43	256.30	N/A	73.98	N/A	-15.05	1.00
4637.92	54.38	Pk	6.34	32.81	36.31	0.00	N/A	57.22	V	1.40	177.90	N/A	73.98	N/A	-16.76	1.00
7420.67	56.47	Pk	8.38	36.82	46.88	0.00	N/A	54.79	V	1.28	33.10	N/A	73.98	N/A	-19.19	1.00
8348.25	52.47	Pk	8.91	37.02	46.41	0.00	N/A	51.99	V	1.48	151.10	N/A	73.98	N/A	-21.99	1.00
2782.75	59.89	Pk	4.85	29.38	38.00	0.52	N/A	56.64	H	2.70	103.90	N/A	73.98	N/A	-17.34	1.00
3710.33	59.75	Pk	5.64	32.16	38.39	0.58	N/A	59.74	H	3.08	139.40	N/A	73.98	N/A	-14.24	1.00
4637.92	55.80	Pk	6.34	32.81	36.31	0.00	N/A	58.64	H	2.94	305.30	N/A	73.98	N/A	-15.34	1.00
7420.67	56.47	Pk	8.38	36.82	46.88	0.00	N/A	54.79	H	1.73	113.50	N/A	73.98	N/A	-19.19	1.00
8348.25	52.47	Pk	8.91	37.02	46.41	0.00	N/A	51.99	H	1.76	205.80	N/A	73.98	N/A	-21.99	1.00
2782.75	61.07	Av	4.85	29.38	38.00	0.52	13.70	44.12	V	1.56	235.00	N/A	N/A	-9.86	N/A	1.00
3710.33	58.94	Av	5.64	32.16	38.39	0.58	13.70	45.23	V	1.43	256.30	N/A	N/A	-8.75	N/A	1.00
4637.92	54.38	Av	6.34	32.81	36.31	0.00	13.70	43.52	V	1.40	177.90	53.98	N/A	-10.46	N/A	1.00
7420.67	56.47	Av	8.38	36.82	46.88	0.00	13.70	41.09	V	1.28	33.10	53.98	N/A	-12.89	N/A	1.00
8348.25	52.47	Av	8.91	37.02	46.41	0.00	13.70	38.29	V	1.48	151.10	53.98	N/A	-15.69	N/A	1.00
2782.75	59.89	Av	4.85	29.38	38.00	0.52	13.70	42.94	H	2.70	103.90	53.98	N/A	-11.04	N/A	1.00
3710.33	59.75	Av	5.64	32.16	38.39	0.58	13.70	46.04	H	3.08	139.40	53.98	N/A	-7.94	N/A	1.00
4637.92	55.80	Av	6.34	32.81	36.31	0.00	13.70	44.94	H	2.94	305.30	53.98	N/A	-9.04	N/A	1.00
7420.67	56.47	Av	8.38	36.82	46.88	0.00	13.70	41.09	H	1.73	113.50	53.98	N/A	-12.89	N/A	1.00
8348.25	52.47	Av	8.91	37.02	46.41	0.00	13.70	38.29	H	1.76	205.80	53.98	N/A	-15.69	N/A	1.00
HC Axis 2 EN1244																
2782.75	60.94	Pk	4.85	29.38	38.00	0.52	N/A	57.69	V	1.21	10.70	N/A	73.98	N/A	-16.29	1.00
3710.34	59.11	Pk	5.64	32.16	38.39	0.58	N/A	59.10	V	1.24	10.70	N/A	73.98	N/A	-14.88	1.00
4637.92	54.38	Pk	6.34	32.81	36.31	0.00	N/A	57.22	V	3.62	60.00	N/A	73.98	N/A	-16.76	1.00
7420.67	56.24	Pk	8.38	36.82	46.88	0.00	N/A	54.56	V	1.80	76.40	N/A	73.98	N/A	-19.42	1.00
8348.25	53.34	Pk	8.91	37.02	46.41	0.00	N/A	52.86	V	1.46	26.30	N/A	73.98	N/A	-21.12	1.00
2782.75	59.03	Pk	4.85	29.38	38.00	0.52	N/A	55.78	H	2.23	167.10	N/A	73.98	N/A	-18.20	1.00
3710.34	60.14	Pk	5.64	32.16	38.39	0.58	N/A	60.13	H	1.12	260.20	N/A	73.98	N/A	-13.85	1.00
4637.92	54.19	Pk	6.34	32.81	36.31	0.00	N/A	57.03	H	2.52	7.30	N/A	73.98	N/A	-16.95	1.00
7420.67	57.56	Pk	8.38	36.82	46.88	0.00	N/A	55.88	H	2.81	217.20	N/A	73.98	N/A	-18.10	1.00
8348.25	53.34	Pk	8.91	37.02	46.41	0.00	N/A	52.86	H	1.98	54.90	N/A	73.98	N/A	-21.12	1.00
2782.75	60.94	Av	4.85	29.38	38.00	0.52	13.70	43.99	V	1.21	10.70	N/A	N/A	-9.99	N/A	1.00
3710.34	59.11	Av	5.64	32.16	38.39	0.58	13.70	45.40	V	1.24	10.70	N/A	N/A	-8.58	N/A	1.00
4637.92	54.38	Av	6.34	32.81	36.31	0.00	13.70	43.52	V	3.62	60.00	53.98	N/A	-10.46	N/A	1.00
7420.67	56.24	Av	8.38	36.82	46.88	0.00	13.70	40.86	V	1.80	76.40	53.98	N/A	-13.12	N/A	1.00
8348.25	53.34	Av	8.91	37.02	46.41	0.00	13.70	39.16	V	1.46	26.30	53.98	N/A	-14.82	N/A	1.00
2782.75	59.03	Av	4.85	29.38	38.00	0.52	13.70	42.08	H	2.23	167.10	53.98	N/A	-11.90	N/A	1.00
3710.34	60.14	Av	5.64	32.16	38.39	0.58	13.70	46.43	H	1.12	260.20	53.98	N/A	-7.55	N/A	1.00
4637.92	54.19	Av	6.34	32.81	36.31	0.00	13.70	43.33	H	2.52	7.30	53.98	N/A	-10.65	N/A	1.00
7420.67	57.56	Av	8.38	36.82	46.88	0.00	13.70	42.18	H	2.81	217.20	53.98	N/A	-11.80	N/A	1.00
8348.25	53.34	Av	8.91	37.02	46.41	0.00	13.70	39.16	H	1.98	54.90	53.98	N/A	-14.82	N/A	1.00
HC Axis 3 EN1244																
2782.75	63.92	Pk	4.85	29.38	38.00	0.52	N/A	60.67	V	1.56	182.20	N/A	73.98	N/A	-13.31	1.00
3710.33	59.16	Pk	5.64	32.16	38.39	0.58	N/A	59.15	V	1.94	153.10	N/A	73.98	N/A	-14.83	1.00
4637.92	52.63	Pk	6.34	32.81	36.31	0.00	N/A	55.47	V	1.72	92.10	N/A	73.98	N/A	-18.51	1.00
7420.67	56.76	Pk	8.38	36.82	46.88	0.00	N/A	55.08	V	1.57	187.00	N/A	73.98	N/A	-18.90	1.00
8348.25	53.92	Pk	8.91	37.02	46.41	0.00	N/A	53.44	V	1.48	124.00	N/A	73.98	N/A	-20.54	1.00
2782.75	63.92	Pk	4.85	29.38	38.00	0.52	N/A	60.67	H	1.62	312.60	N/A	73.98	N/A	-13.31	1.00
4637.92	56.51	Pk	6.34	32.81	36.31	0.00	N/A	59.35	H	4.00	284.00	N/A	73.98	N/A	-14.63	1.00
7420.67	56.76	Pk	8.38	36.82	46.88	0.00	N/A	55.08	H	2.01	218.00	N/A	73.98	N/A	-18.90	1.00
8348.25	53.92	Pk	8.91	37.02	46.41	0.00	N/A	53.44	H	1.94	182.00	N/A	73.98	N/A	-20.54	1.00
2782.75	63.92	Av	4.85	29.38	38.00	0.52	13.70	46.97	V	1.56	182.20	N/A	N/A	-7.01	N/A	1.00
3710.33	59.16	Av	5.64	32.16	38.39	0.58	13.70	45.45	V	1.94	153.10	N/A	N/A	-8.53	N/A	1.00
4637.92	52.63	Av	6.34	32.81	36.31	0.00	13.70	41.77	V	1.72	92.10	N/A	N/A	-12.21	N/A	1.00
7420.67	56.76	Av	8.38	36.82	46.88	0.00	13.70	41.38	V	1.57	187.00	53.98	N/A	-12.60	N/A	1.00
8348.25	53.92	Av	8.91	37.02	46.41	0.00	13.70	39.74	V	1.48	124.00	53.98	N/A	-14.24	N/A	1.00
2782.75	63.92	Av	4.85	29.38	38.00	0.52	13.70	46.97	H	1.62	312.60	53.98	N/A	-7.01	N/A	1.00
4637.92	56.51	Av	6.34	32.81	36.31	0.00	13.70	45.65	H	4.00	284.00	53.98	N/A	-8.33	N/A	1.00
7420.67	56.76	Av	8.38	36.82	46.88	0.00	13.70	41.38	H	2.01	218.00	53.98	N/A	-12.60	N/A	1.00
8348.25	53.92	Av	8.91	37.02	46.41	0.00	13.70	39.74	H	1.94	182.00	53.98	N/A	-14.24	N/A	1.00

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

13 Antenna Requirement

Method

The test methods used comply with ANSI C63.10. Unless otherwise stated no deviations were made from FCC CFR47 15.203.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/Specification

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- FCC 15.203

Results:

The product utilizes an integral antenna – not user accessible; therefore, the sample tested was found to comply.

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

14 AC Mains Conducted Emissions – Transmitter – Not Applicable

15 RF Exposure Requirements

Method

Unless otherwise stated no deviations were made from FCC Part 2.1091/2.093.

This testing was performed at Intertek Denver, located at 1795 Dogwood St. Suite 200, Louisville, CO 80027.

Test Requirement/ Specification:

- Power Density Limit for Frequency Range: 1500 to 100,000 MHz = 3 mW/cm²

Test Results:

The sample tested was found to comply.

RF Exposure Requirements - MPE

The following limit is from table 1 (B) Limits for General Population/Uncontrolled Exposure in FCC part 1.1310:

Power Density Limit for Frequency Range: 300 to 1500 MHz = $f/1500 = 0.6 \text{ mW/cm}^2$

The following calculation was used to determine compliance to the above limit. The calculation is from FCC OET bulletin 65.

$$\text{Power Density}(S) = PG/4\pi R^2 \text{ or } S = \text{EIRP}/4\pi R^2$$

Where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (mW).

G = numeric power gain of the antenna in the direction of interest relative to an isotropic radiator.

R = distance to the center of radiation of the antenna (cm)

In this case, 20cm will be used.

=====

Maximum measured rf output power = 20.4dBm = 109 mW

Maximum typical gain declared by the manufacture = -1 dBi = 0.79 (numeric gain)

Power Density

Power (mW)	Gain (dbi)	Gain numeric	Distance (cm)	Power Density (mW/cm ²)
109	-1	0.79	20	0.017

Therefore: Power Density Margin (Δ Limit) = $0.017 - 0.6 = -0.583 \text{ mW/cm}^2$

To determine what minimum distance the product can satisfy the Power Density Limit:

$$R(\text{cm}) = \text{SQRT}[(P \cdot G)/(4 \cdot \pi \cdot S)] = 3.4\text{cm}$$

16 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty $\pm$	Notes
Radiated emissions, 10kHz to 30 MHz	3.4 dB	
Radiated emissions, 30 to 200 MHz HP	2.2 dB	
Radiated emissions, 30 to 200 MHz VP	3.8 dB	
Radiated emissions, 200 to 1000 MHz HP	2.8 dB	
Radiated emissions, 200 to 1000 MHz VP	2.7 dB	
Radiated emissions, 1 to 18 GHz	5.2 dB	
Conducted port emissions 10kHz to 1000 MHz	1.0 dB	
Conducted port emissions 1 to 18 GHz	1.6 dB	
AC mains Conducted emissions, 9kHz to 30 MHz	3.14 dB	

Intertek	
Report Number: 102654813DEN-001	Issued: 7/26/2016

17 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	7/26/2016	102654813DEN-001	SL	1/AS	Original Issue
1	9/20/2016	102654813DEN-001	SL	1/AS	Modified RF exposure calculation on page 50.
2	10/25/2016	102654813DEN-001	SL	1/AS	Modified RF exposure calculation on page 50.