Date: 2024-08-08

01_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)
Frequency: 2412.000 MHz;Duty Cycle: 1:1.01
Medium: HSL Medium parameters used: f= 2412.000 MHz; σ= 1.80 S/m; ε_r = 37.5
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.557 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.589 W/kg; SAR (10g) = 0.291 W/kg
Smallest distance from peaks to all points 3 dB below = 7.0 mm
Ratio of SAR at M2 to SAR at M1 = 85.8 %

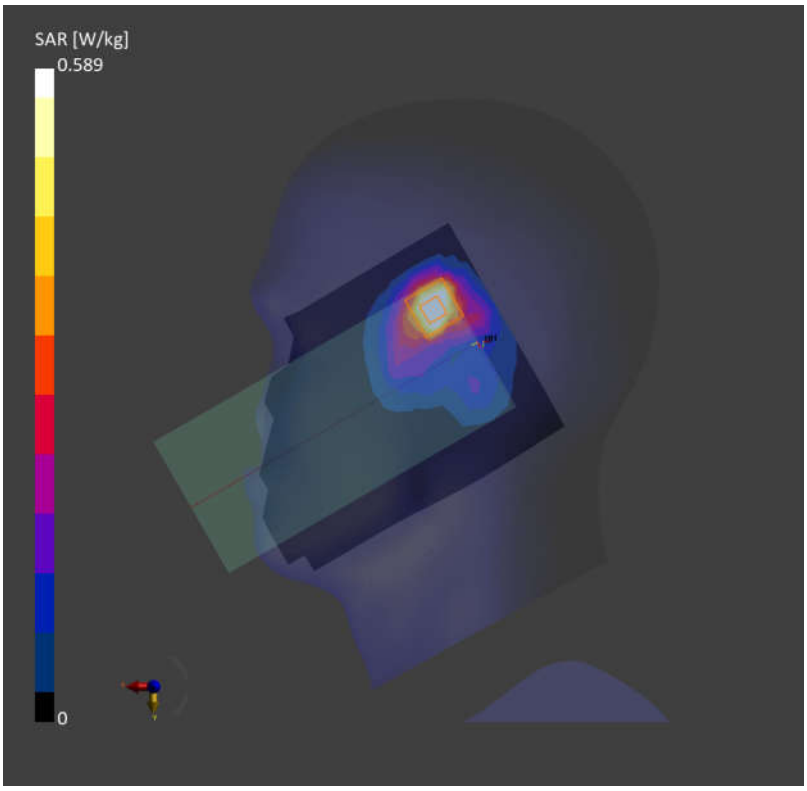

Date: 2024-08-10

02_WLAN5GHz_802.11n-HT40 MCS0_Right Cheek_0mm_Ch54

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)
Frequency:5270.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5270.000 MHz; σ= 4.60 S/m; ε_r = 35.7
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.672 W/kg; SAR (10g) = 0.198 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.685 W/kg; SAR (10g) = 0.229 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 67.3 %

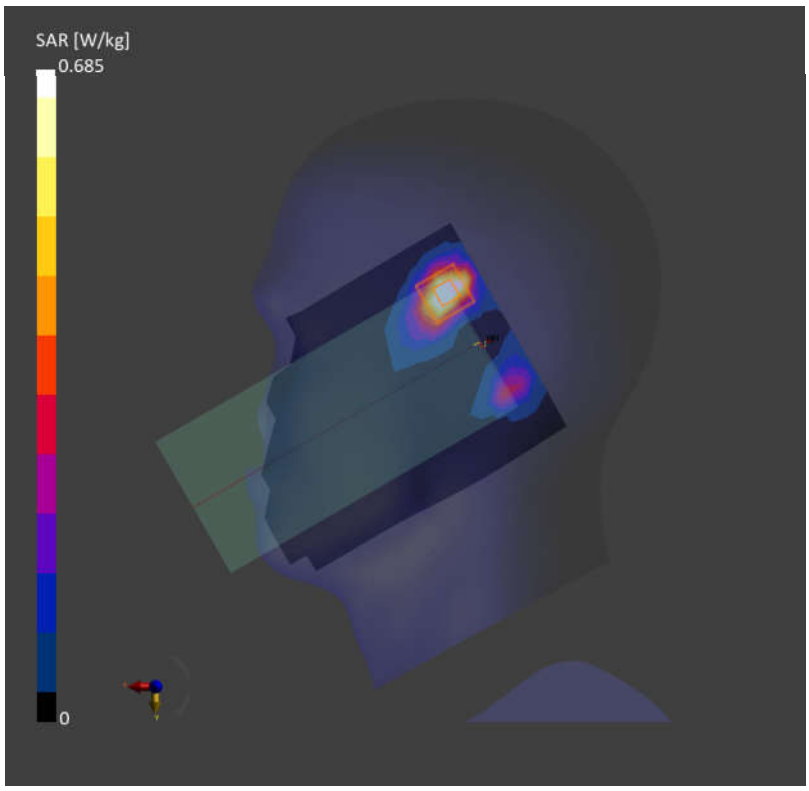

Date: 2024-08-10

03_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch122

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency: 5610.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5610.000 MHz; σ= 4.97 S/m; ε_r = 35.1
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(4.83, 5.71, 4.9); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.794 W/kg; SAR (10g) = 0.261 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.725 W/kg; SAR (10g) = 0.265 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 69.6 %

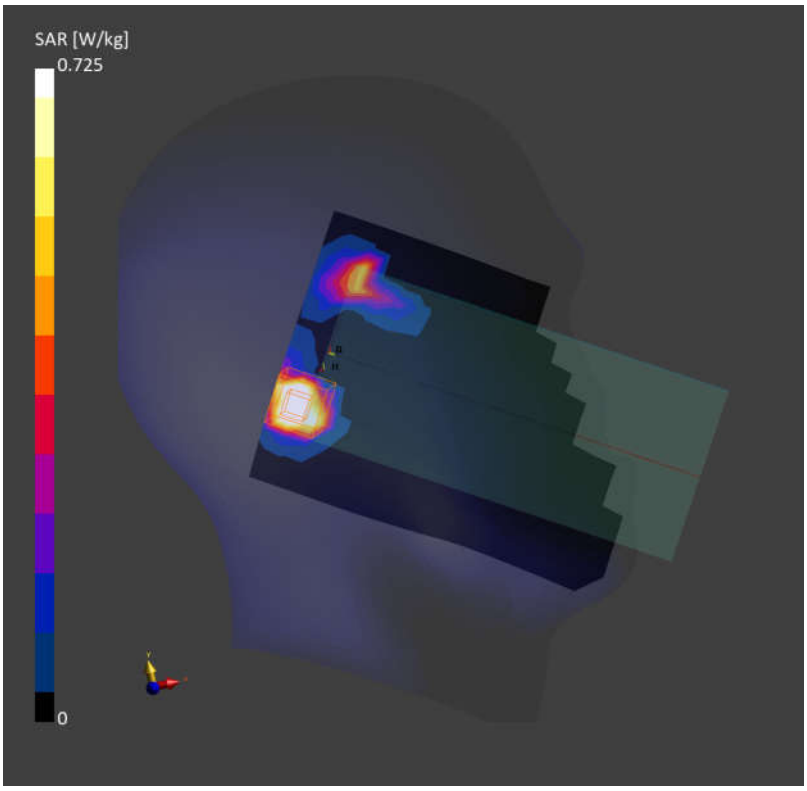

Date: 2024-08-10

04_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency:5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5775.000 MHz; σ= 5.14 S/m; ε_r = 34.8
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.630 W/kg; SAR (10g) = 0.204 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.717 W/kg; SAR (10g) = 0.214 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 63.1 %

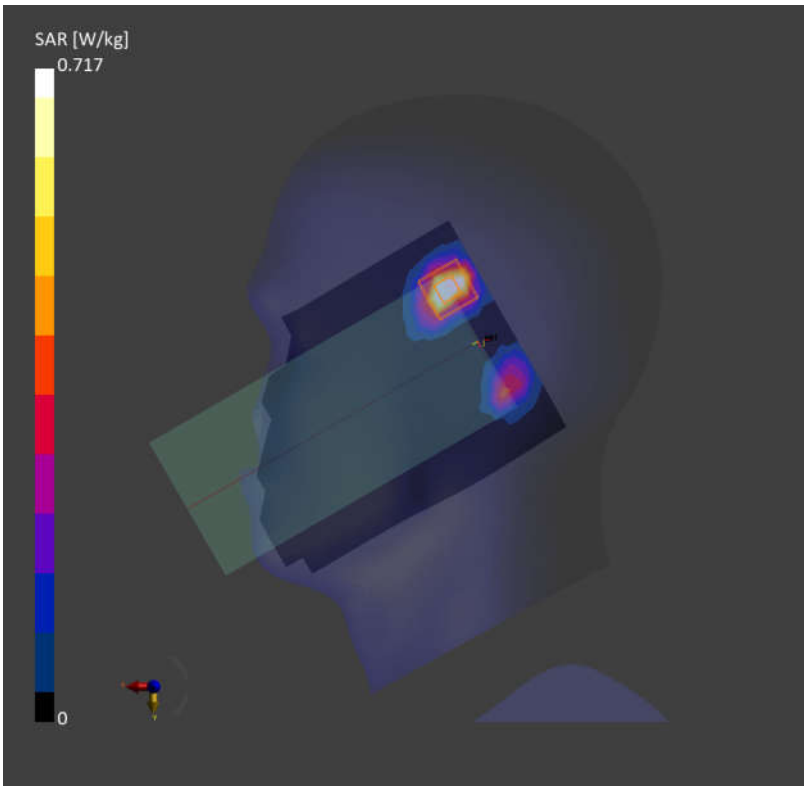

Date: 2024-08-10

05_WLAN6GHz_802.11ax-HE160 MCS0_Left Tilted_0mm_Ch15

Communication System: IEEE 802.11ax (160MHz, MCS0, 99pc duty cycle)
Frequency: 6025.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 6025.000 MHz; σ= 5.39 S/m; ε_r = 34.4
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 0.733 W/kg; SAR (10g) = 0.223 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.734 W/kg; SAR (10g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 61.4 %
psAPD (4.0cm2, sq) = 5.23 [W/m2]

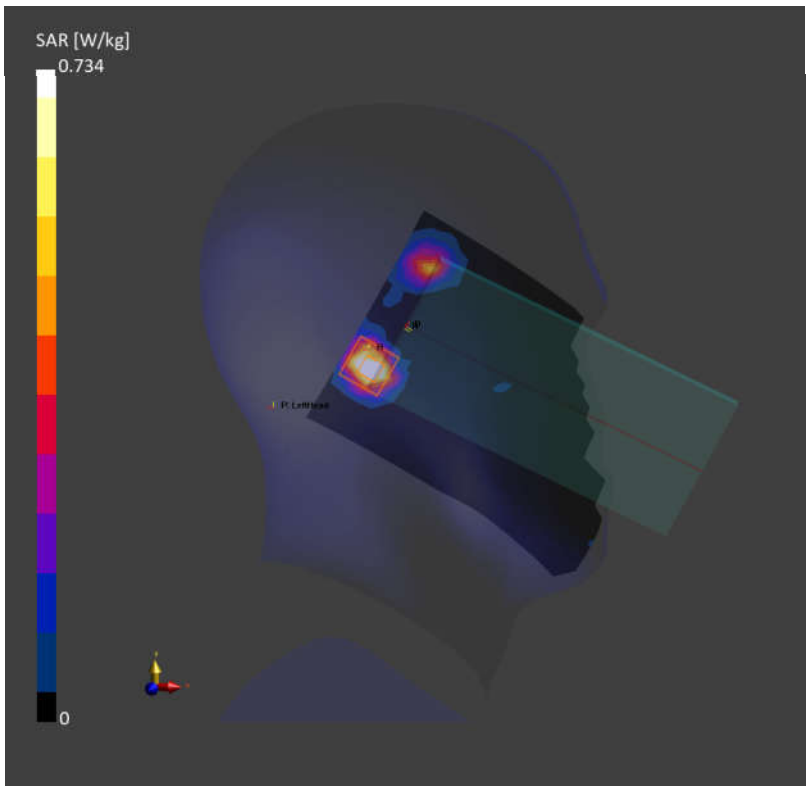

Date: 2024-08-08

06_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)
Frequency: 2412.000 MHz;Duty Cycle: 1:1.01
Medium: HSL Medium parameters used: f= 2412.000 MHz; σ= 1.80 S/m; ε_r = 37.5
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.624 W/kg; SAR (10g) = 0.313 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.617 W/kg; SAR (10g) = 0.329 W/kg
Smallest distance from peaks to all points 3 dB below = 7.9 mm
Ratio of SAR at M2 to SAR at M1 = 61.0 %

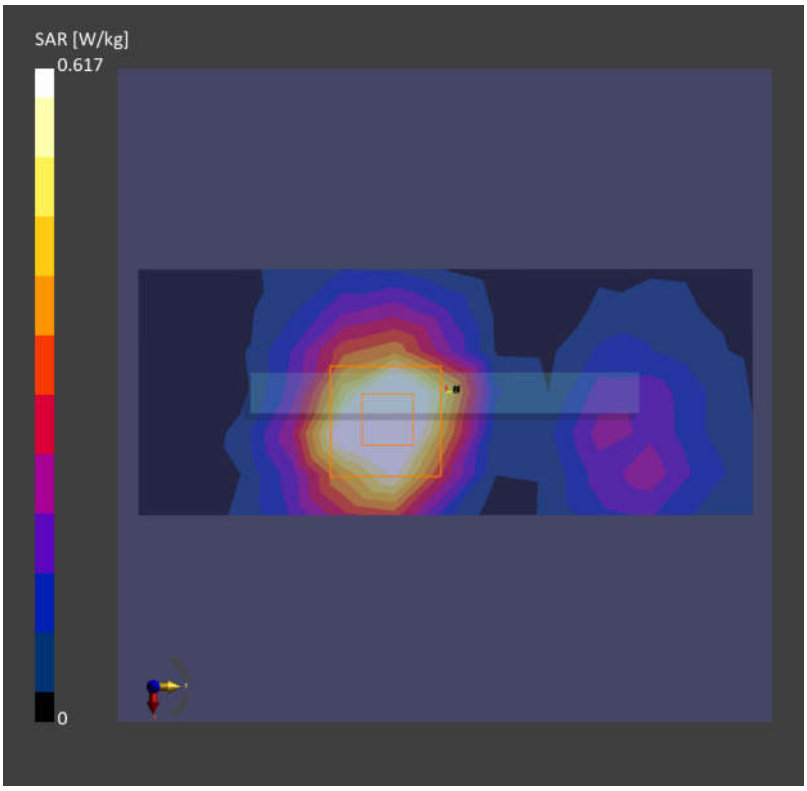

Date: 2024-08-10

07_WLAN5GHz_802.11n-HT40 MCS0_Right Side_10mm_Ch46

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)
Frequency:5230.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5230.000 MHz; σ= 4.56 S/m; ε_r = 35.8
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.207 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.203 W/kg; SAR (10g) = 0.079 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 68.3 %

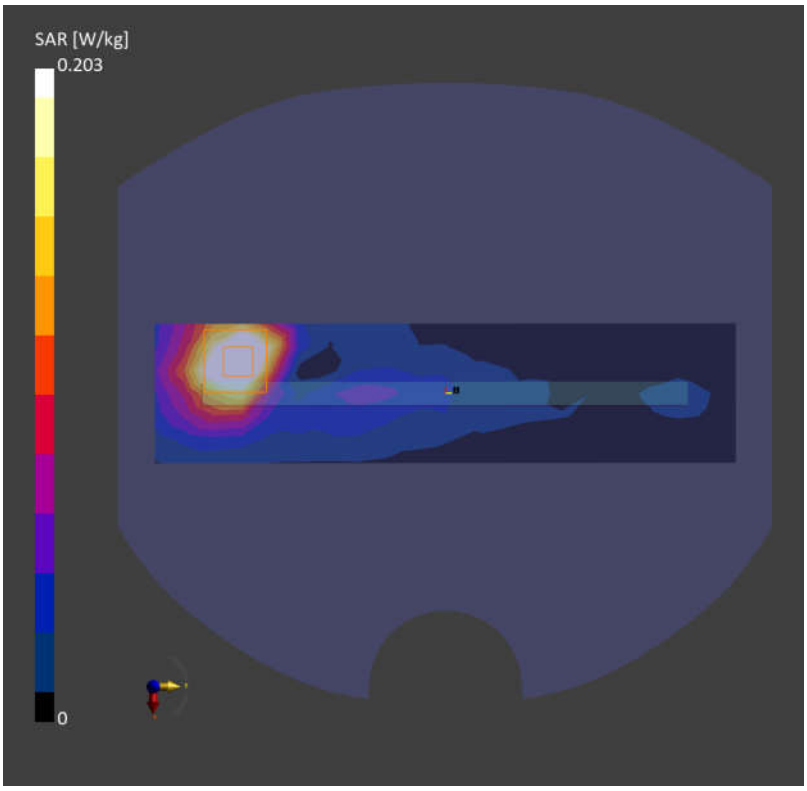

Date: 2024-08-10

08_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency:5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5775.000 MHz; σ= 5.14 S/m; ε_r = 34.8
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.806 W/kg; SAR (10g) = 0.317 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 0.817 W/kg; SAR (10g) = 0.317 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.8 %

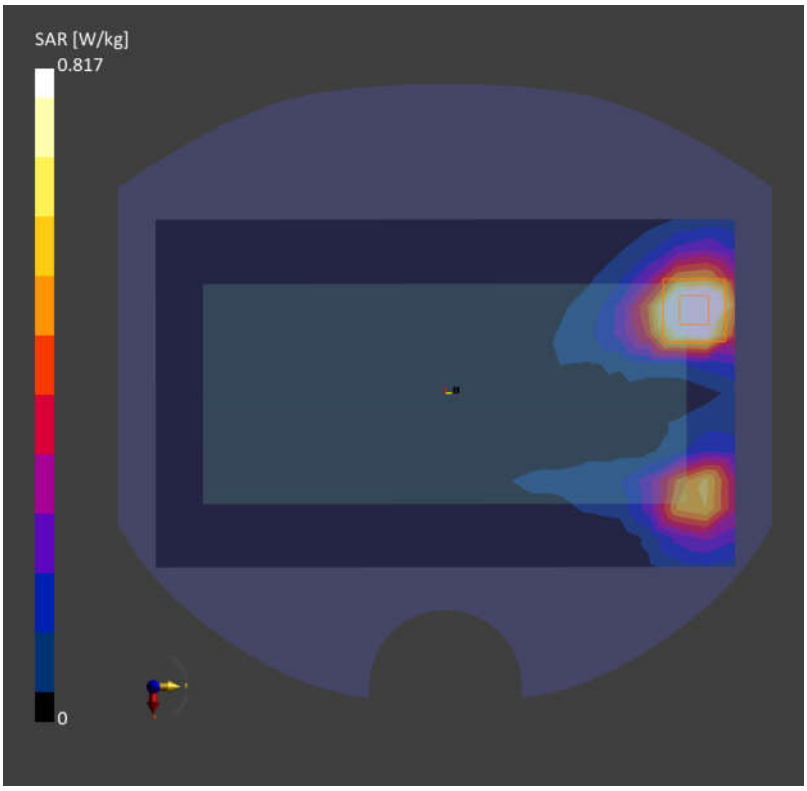

Date: 2024-08-08

09_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)
Frequency: 2412.000 MHz;Duty Cycle: 1:1.01
Medium: HSL Medium parameters used: f= 2412.000 MHz; σ= 1.80 S/m; ε_r = 37.5
Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(7.47, 8.61, 7.55); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.396 W/kg; SAR (10g) = 0.216 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.429 W/kg; SAR (10g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 74.0 %

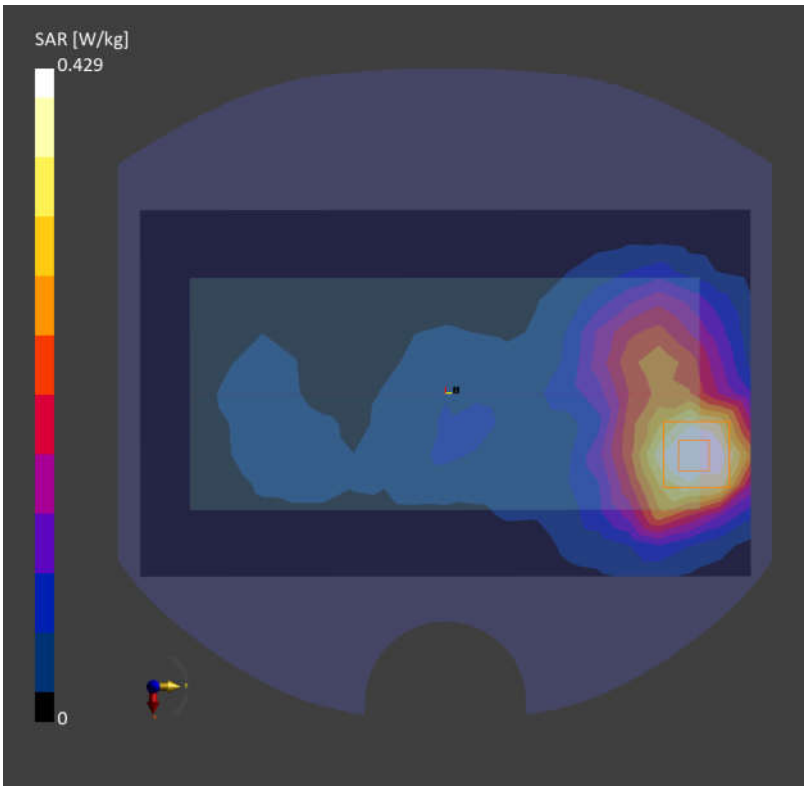

Date: 2024-08-10

10_WLAN5GHz_802.11n-HT40 MCS0_Front_10mm_Ch54

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)
Frequency:5270.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5270.000 MHz; σ= 4.60 S/m; ε_r = 35.7
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.457 W/kg; SAR (10g) = 0.184 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.08 dB
SAR (1g) = 0.469 W/kg; SAR (10g) = 0.193 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 68.9 %

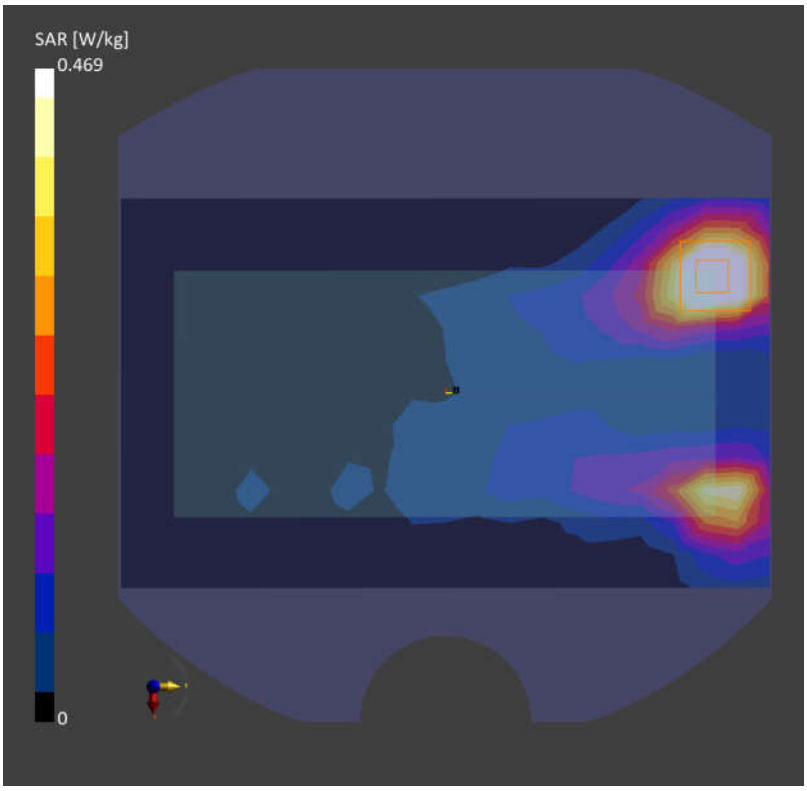

Date: 2024-08-10

11_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch138

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency:5690.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5690.000 MHz; σ= 5.05 S/m; ε_r = 35.0
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.588 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.13 dB
SAR (1g) = 0.573 W/kg; SAR (10g) = 0.216 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 66.8 %

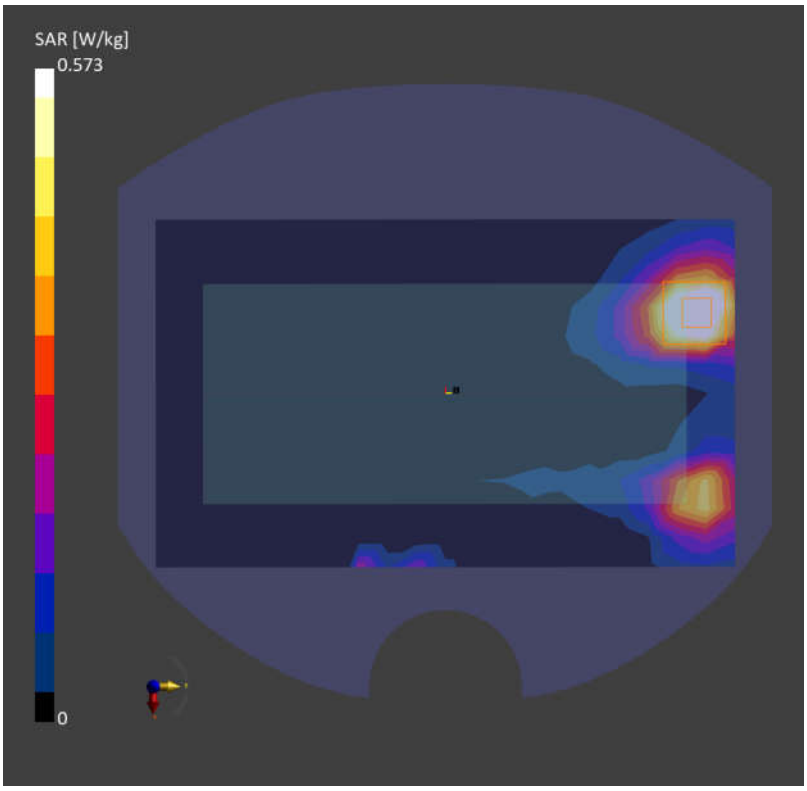

Date: 2024-08-10

12_WLAN5GHz_802.11ac-VHT80 MCS0_Front_10mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency:5775.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5775.000 MHz; σ= 5.14 S/m; ε_r = 34.8
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.806 W/kg; SAR (10g) = 0.317 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.09 dB
SAR (1g) = 0.817 W/kg; SAR (10g) = 0.317 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 65.8 %

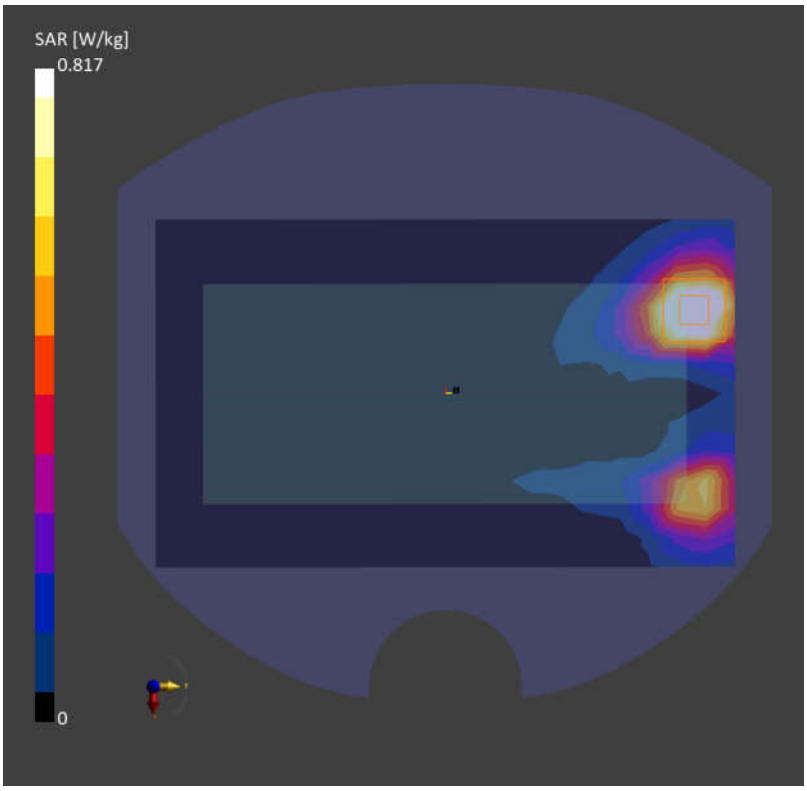

Date: 2024-08-10

13_WLAN6GHz_802.11ax-HE160 MCS0_Back_10mm_Ch143

Communication System: IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle)
Frequency: 6665.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 6665.000 MHz; σ= 6.37 S/m; ε_r = 34.3
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10743-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 0.276 W/kg; SAR (10g) = 0.105 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.16 dB
SAR (1g) = 0.282 W/kg; SAR (10g) = 0.106 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 55.9 %
psAPD (4.0cm2, sq) = 2.36 [W/m2]

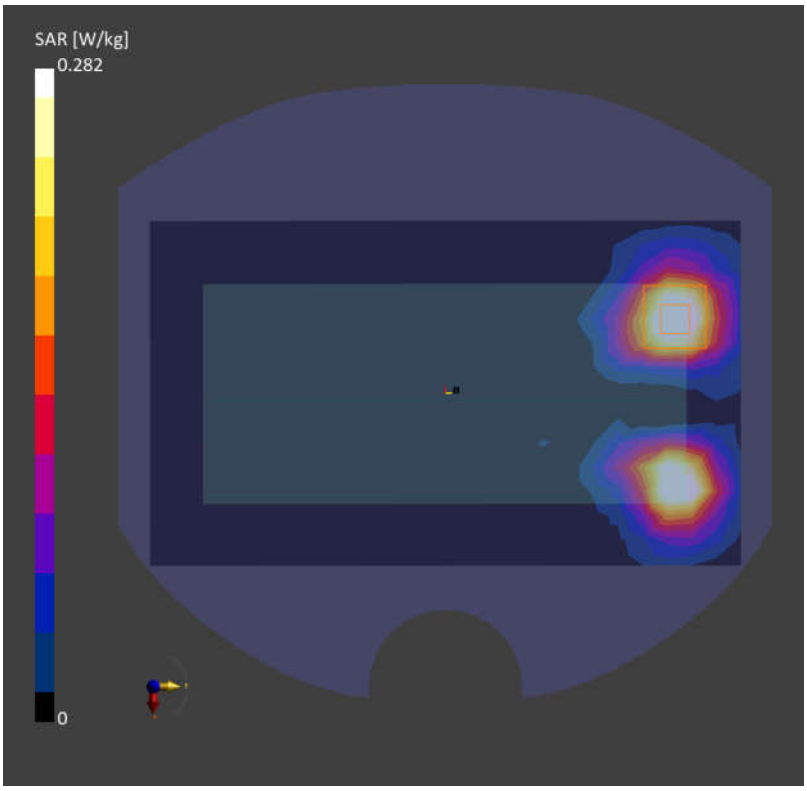

Date: 2024-08-10

14_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)
Frequency:5270.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5270.000 MHz; σ= 4.60 S/m; ε_r = 35.7
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.84, 6.82, 5.88); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 3.07 W/kg; SAR (10g) = 0.901 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.12 dB
SAR (1g) = 3.56 W/kg; SAR (10g) = 0.986 W/kg
Smallest distance from peaks to all points 3 dB below = 4.7 mm
Ratio of SAR at M2 to SAR at M1 = 66.5 %

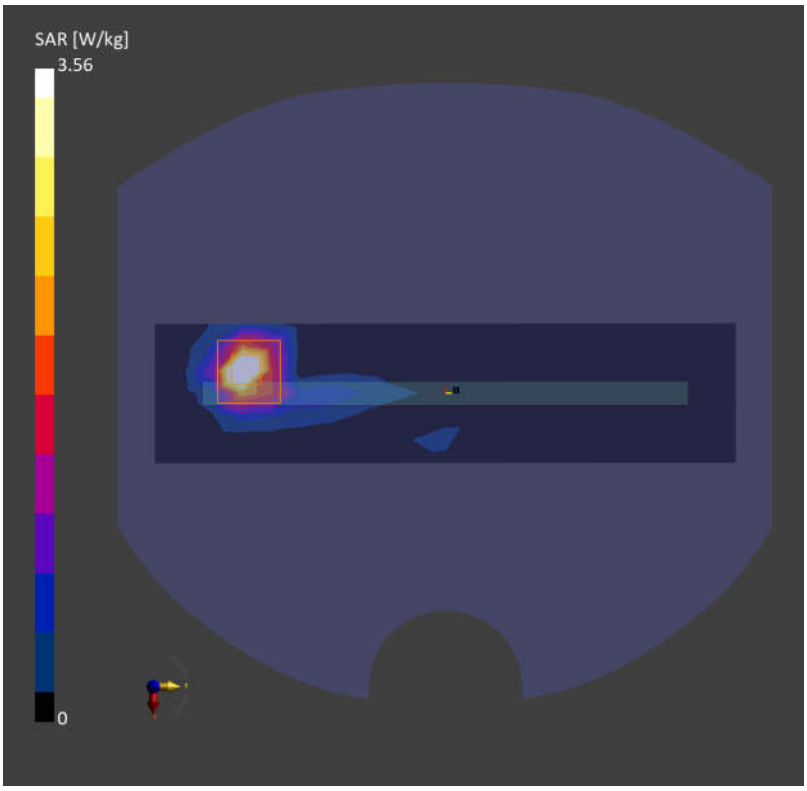

Date: 2024-08-10

15_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_0mm_Ch138

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)
Frequency:5690.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 5690.000 MHz; σ= 5.05 S/m; ε_r = 35.0
Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.03, 5.88, 5.16); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 2.03 W/kg; SAR (10g) = 0.628 W/kg;

Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.18 dB
SAR (1g) = 2.10 W/kg; SAR (10g) = 0.623 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 62.4 %

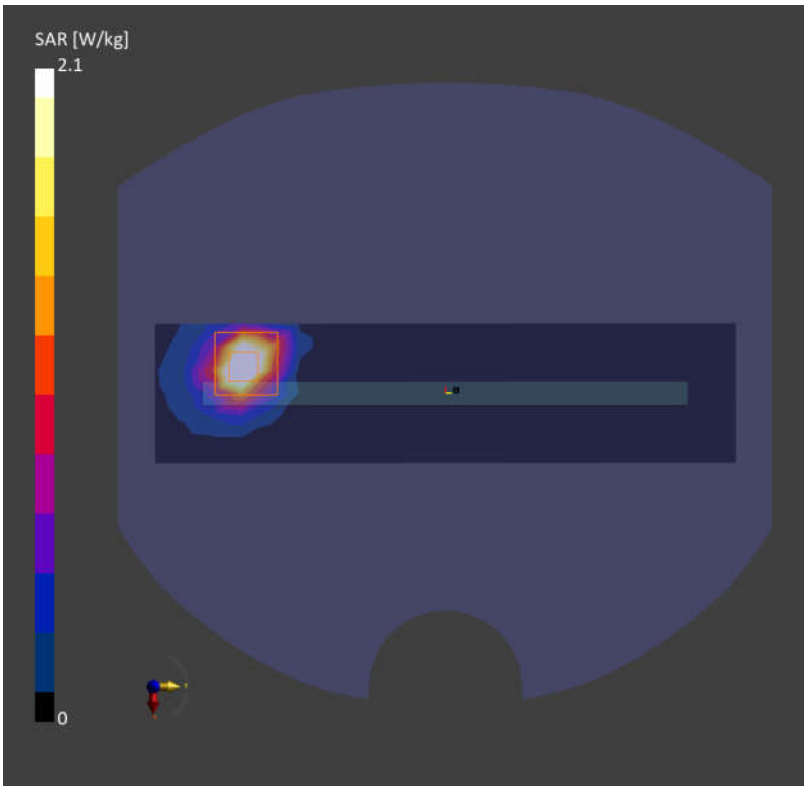

Date: 2024-08-10

16_WLAN6GHz_802.11ax-HE160 MCS0_Back_0mm_Ch143

Communication System: IEEE 802.11ax (160MHz, MCS0, 90pc duty cycle)
Frequency: 6665.000MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: f= 6665.000 MHz; σ= 6.37 S/m; ε_r = 34.3
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:
- Probe: EX3DV4 - SN7706; ConvF(5.27, 6.32, 5.24); Calibrated: 2024-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1649; Calibrated: 2024-07-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10743-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 0.933 W/kg; SAR (10g) = 0.222 W/kg;
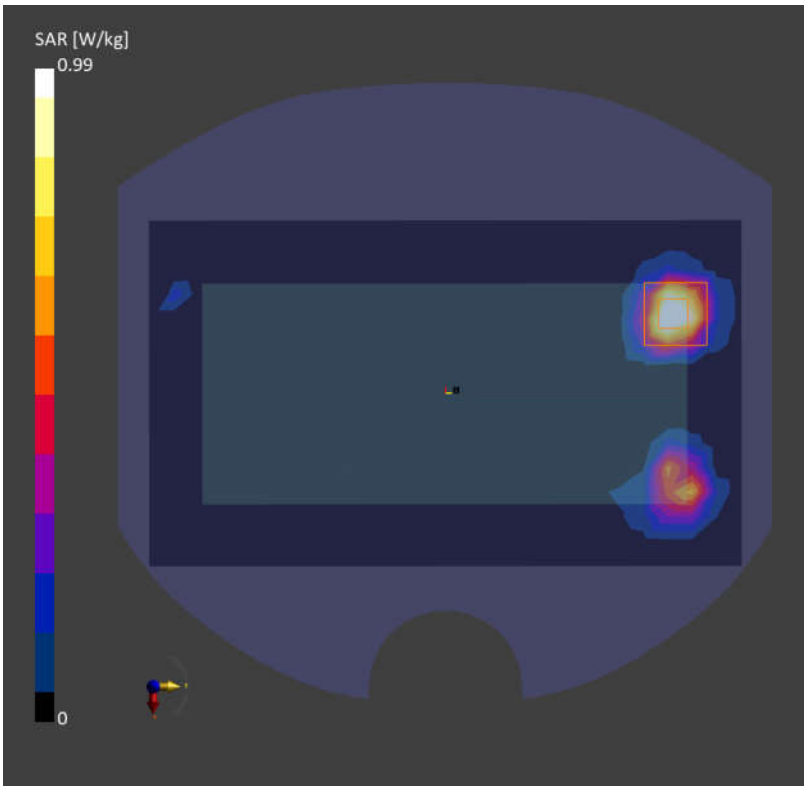
Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = 0.03 dB
SAR (1g) = 0.990 W/kg; SAR (10g) = 0.238 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 52.1 %
psAPD (4.0cm2, sq) = 3.86 [W/m2]