Site: AC1	Time: 2020/07/06 - 22:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

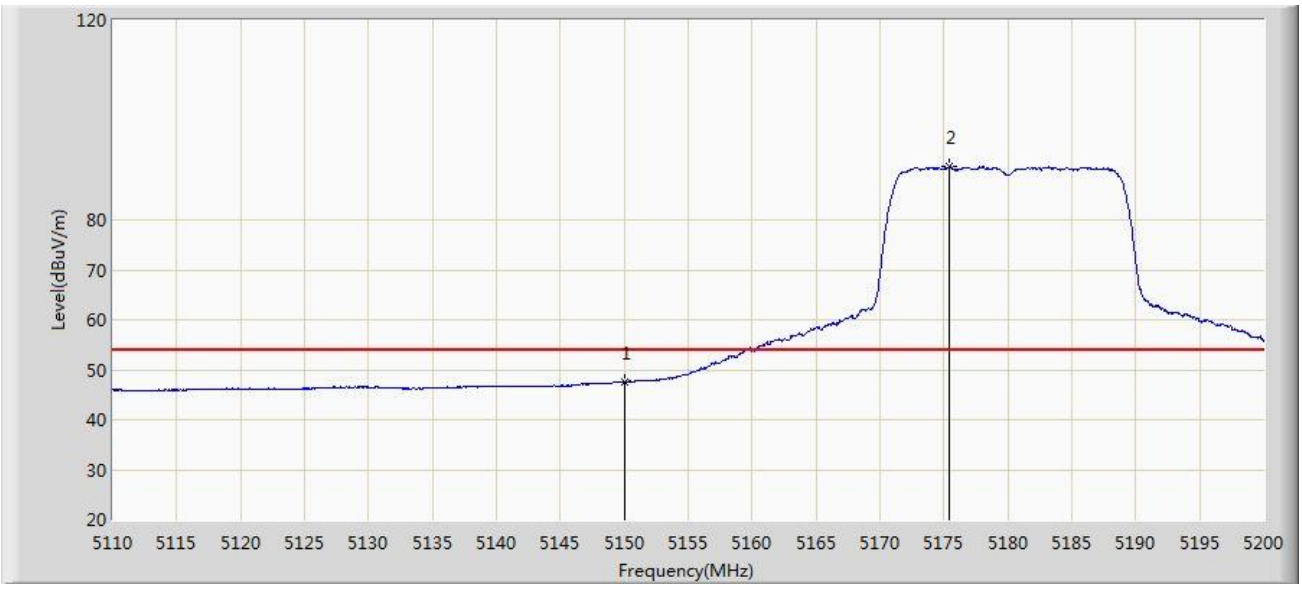

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.576	41.124	-6.424	54.000	6.452	AV
2		*	5175.430	90.678	84.194	N/A	N/A	6.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

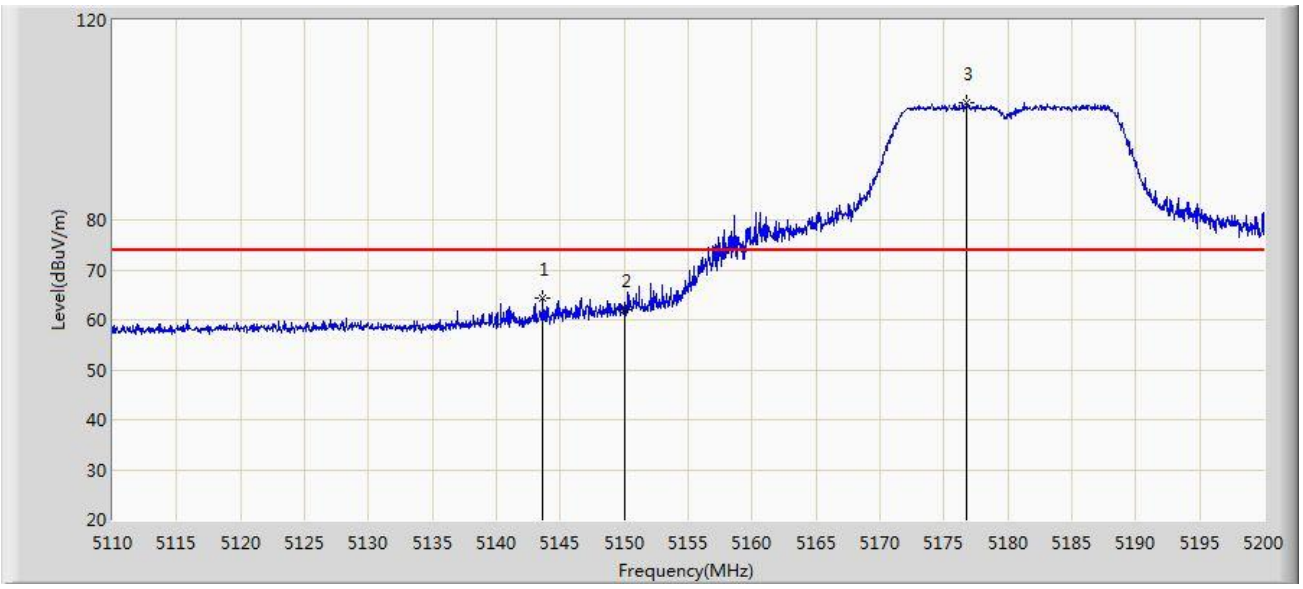

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.660	64.461	57.931	-9.539	74.000	6.529	PK
2			5150.000	62.024	55.572	-11.976	74.000	6.452	PK
3		*	5176.780	103.612	97.119	N/A	N/A	6.493	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0	

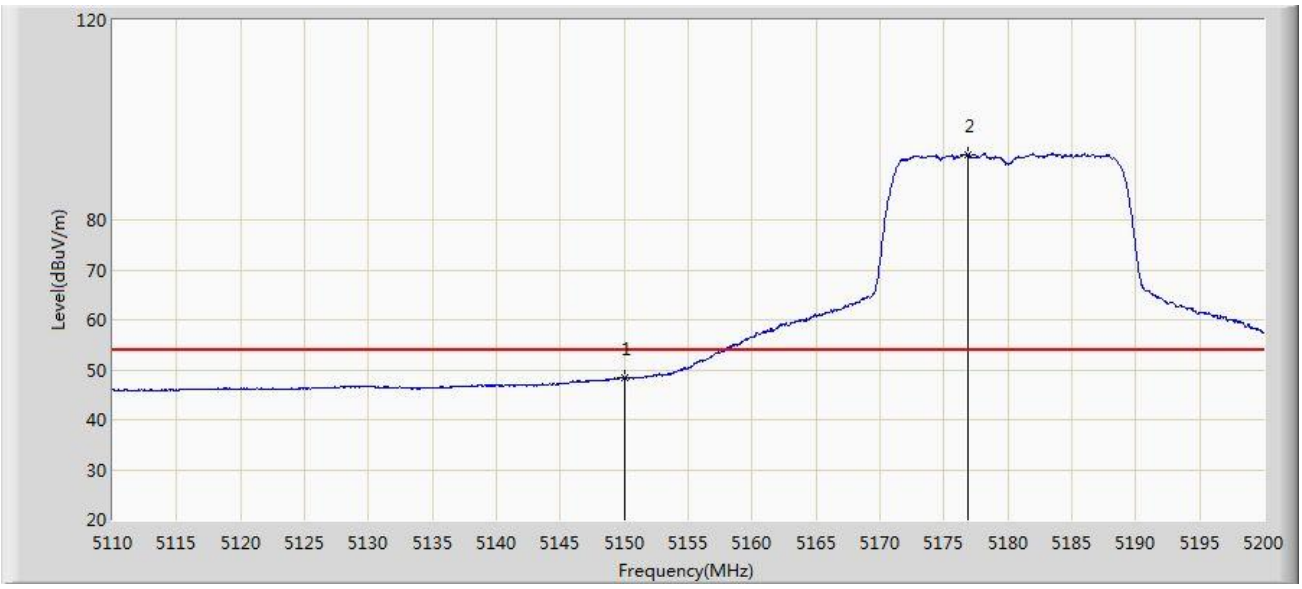

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.330	41.878	-5.670	54.000	6.452	AV
2		*	5176.825	93.179	86.685	N/A	N/A	6.493	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

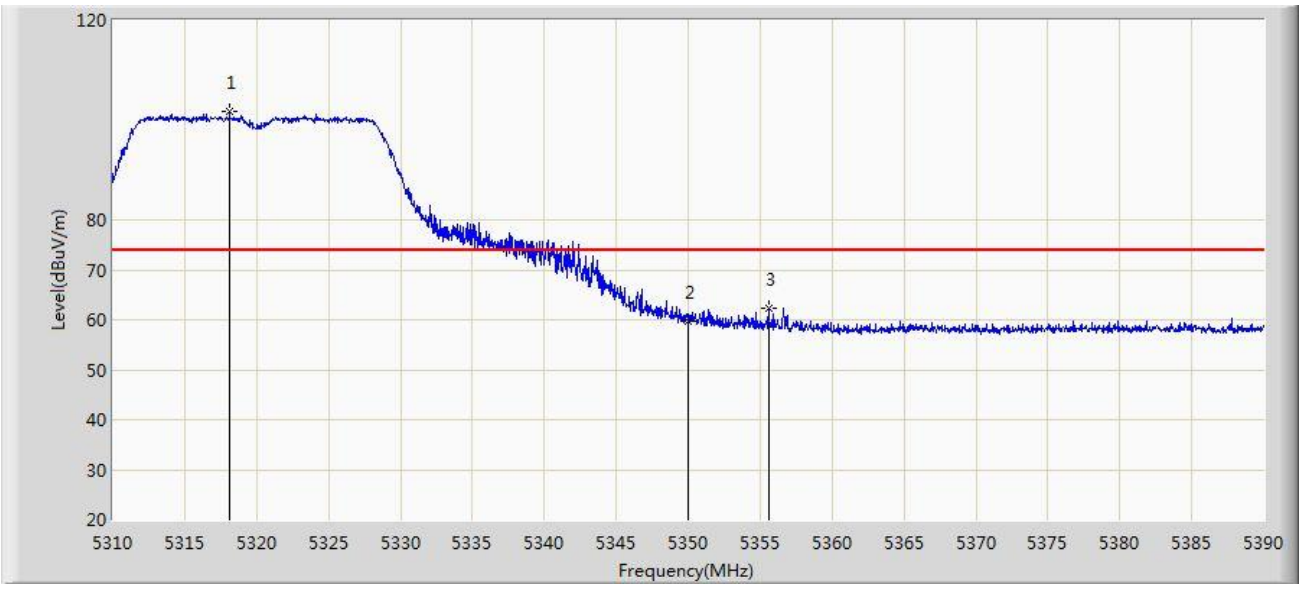

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.120	101.761	95.659	N/A	N/A	6.102	PK
2			5350.000	59.764	53.306	-14.236	74.000	6.458	PK
3			5355.600	62.208	55.906	-11.792	74.000	6.302	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

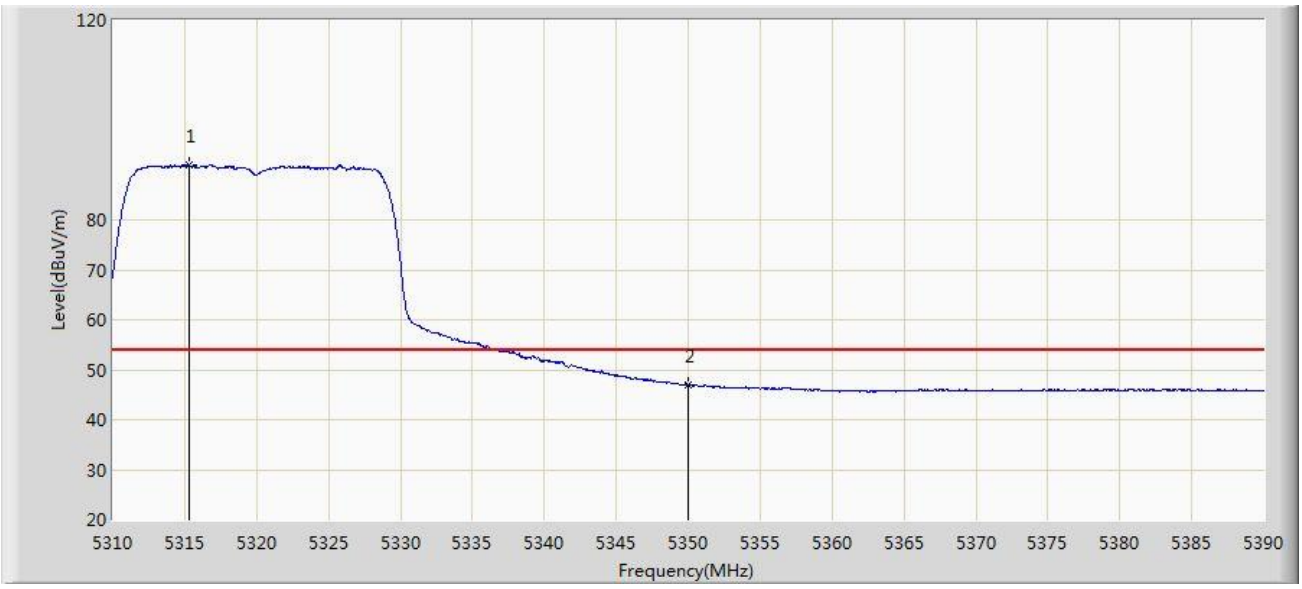

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.320	90.963	84.921	N/A	N/A	6.043	AV
2			5350.000	46.977	40.519	-7.023	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

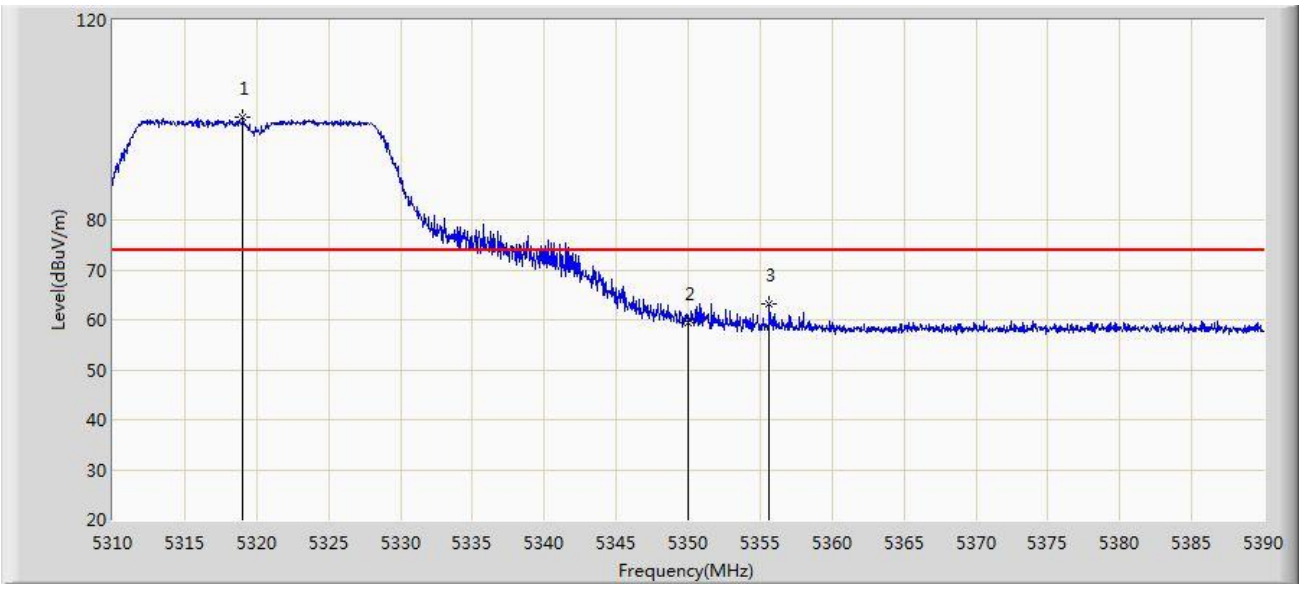

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.040	100.622	94.497	N/A	N/A	6.125	PK
2			5350.000	59.375	52.917	-14.625	74.000	6.458	PK
3			5355.640	63.217	56.916	-10.783	74.000	6.301	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 22:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0	

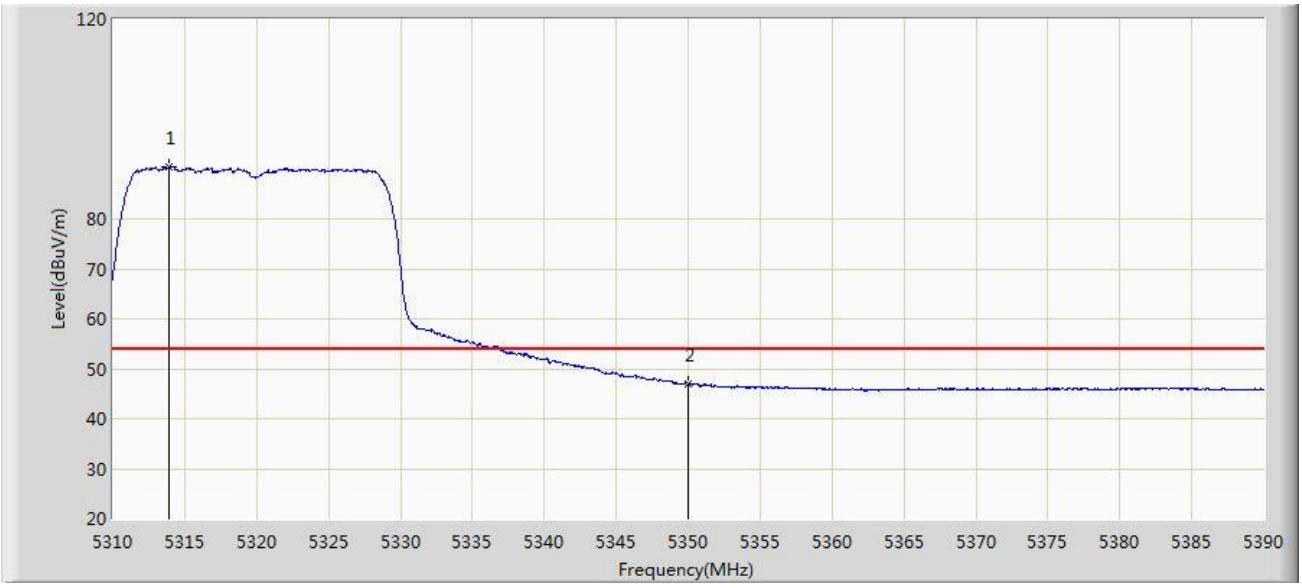

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	90.382	84.370	N/A	N/A	6.012	AV
2			5350.000	47.060	40.602	-6.940	54.000	6.458	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

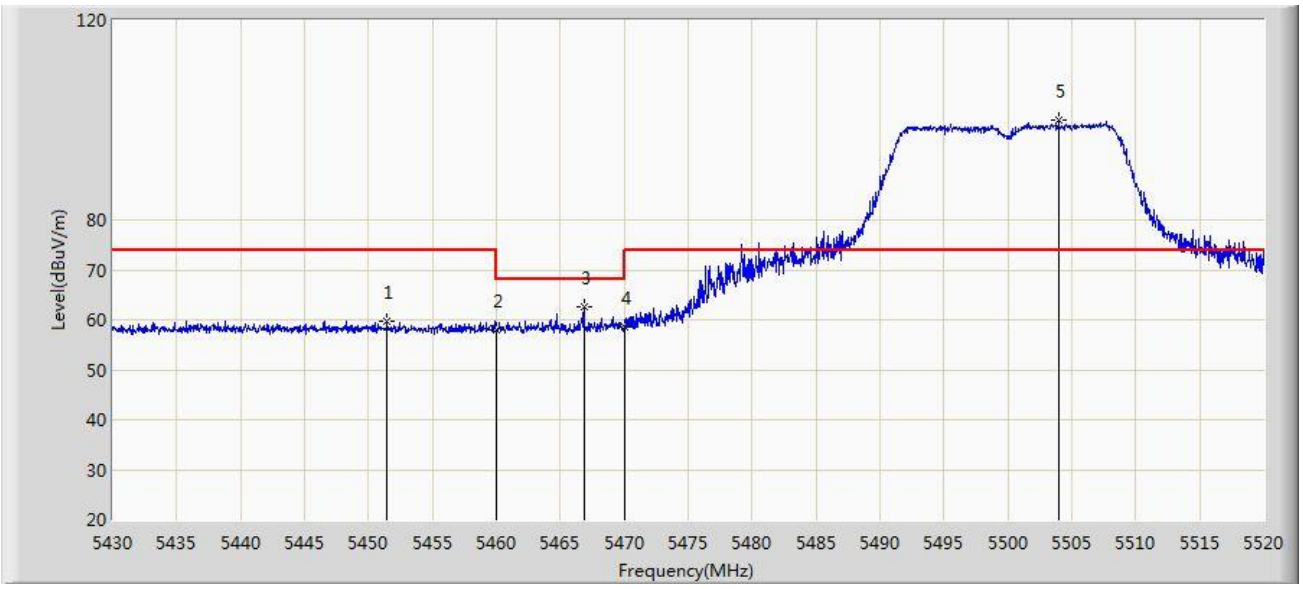

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.420	59.640	53.180	-14.360	74.000	6.460	PK
2			5460.000	57.873	51.387	-16.127	74.000	6.486	PK
3			5466.855	62.508	55.995	-5.692	68.200	6.512	PK
4			5470.000	58.511	51.986	-9.689	68.200	6.524	PK
5		*	5503.980	100.085	93.552	N/A	N/A	6.533	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

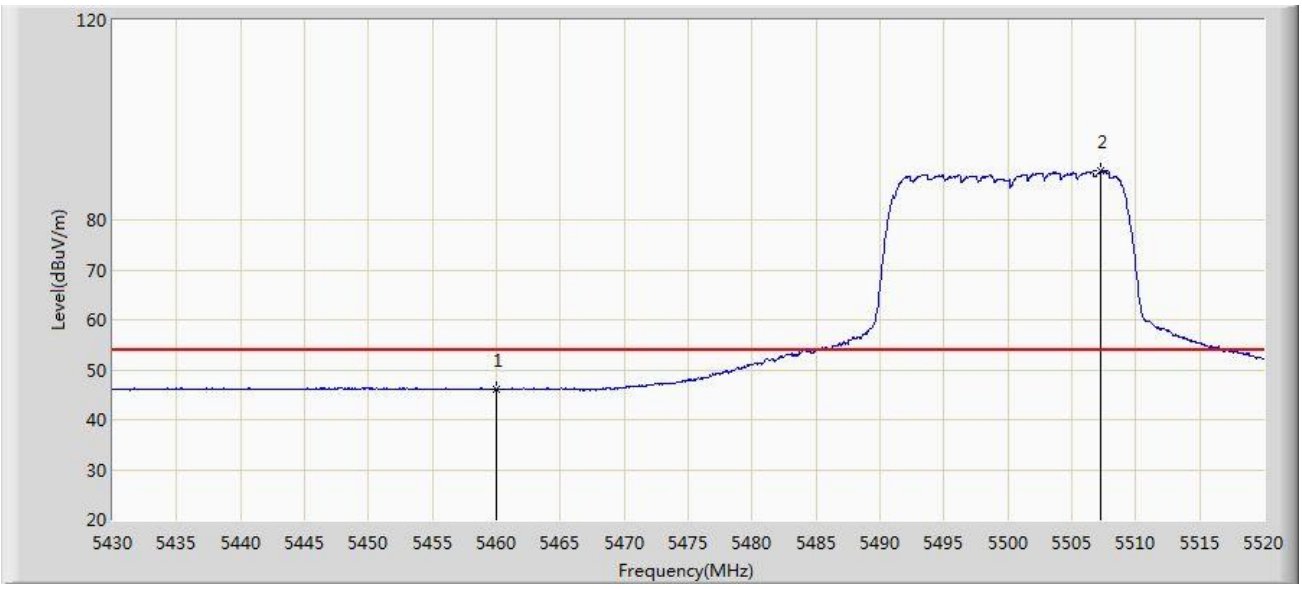

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.101	39.615	-7.899	54.000	6.486	AV
2		*	5507.310	89.737	83.241	N/A	N/A	6.496	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

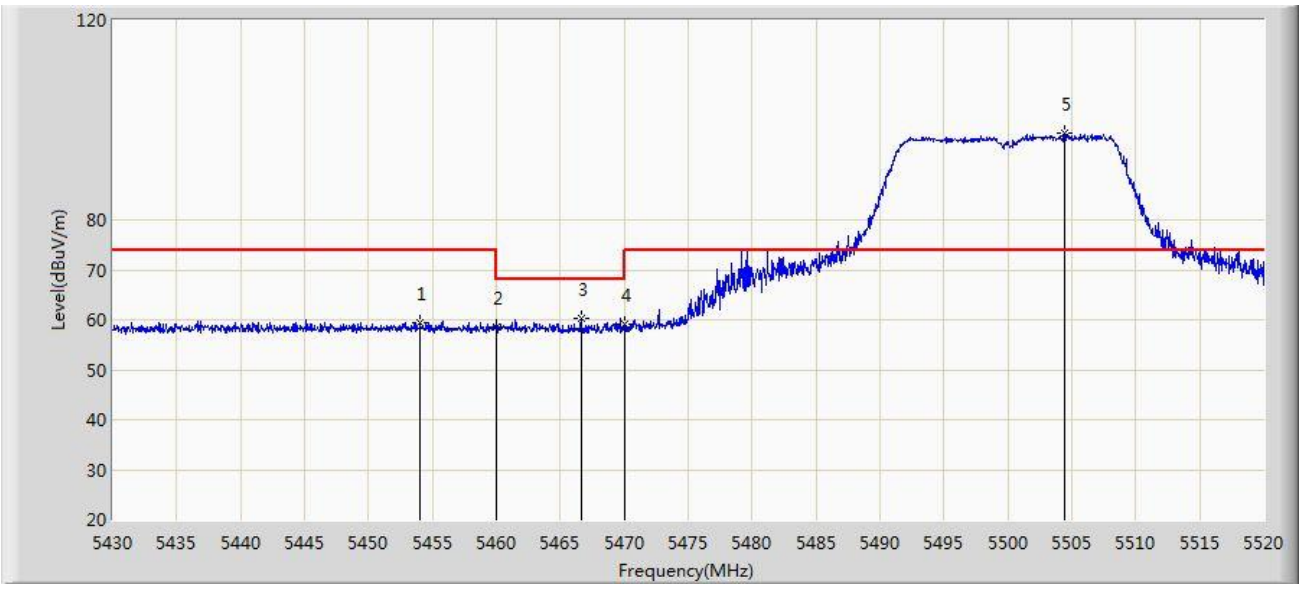

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.075	59.292	52.830	-14.708	74.000	6.462	PK
2			5460.000	58.555	52.069	-15.445	74.000	6.486	PK
3			5466.630	60.398	53.886	-7.802	68.200	6.512	PK
4			5470.000	59.028	52.503	-9.172	68.200	6.524	PK
5		*	5504.475	97.534	90.999	N/A	N/A	6.535	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0	

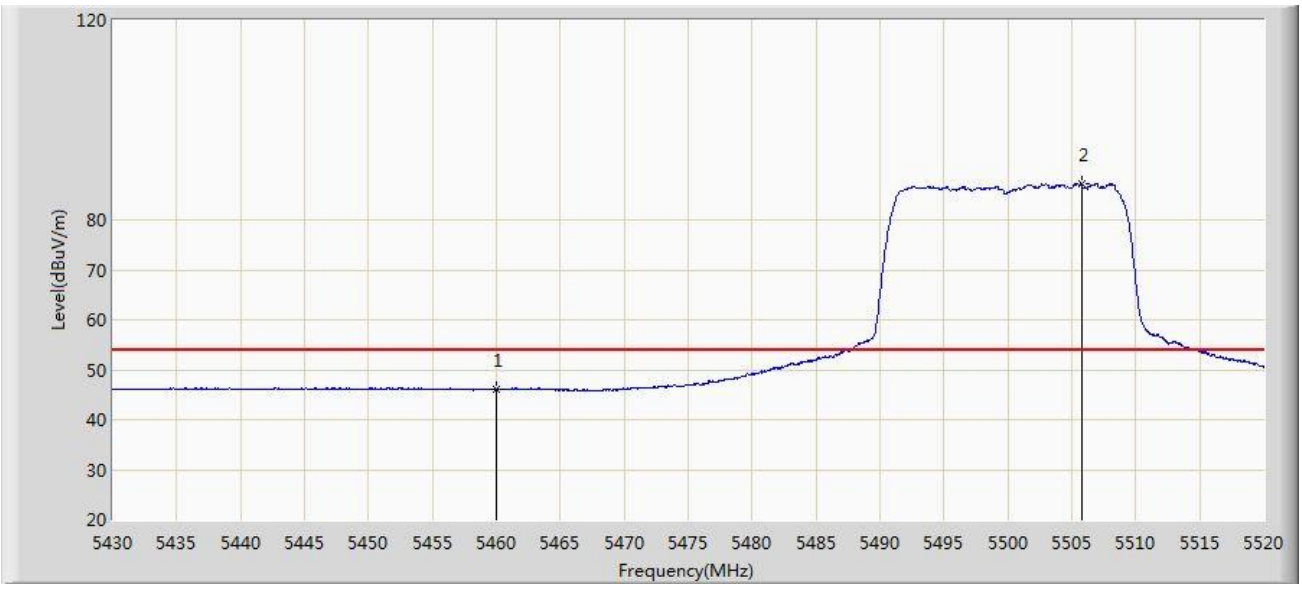

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.189	39.703	-7.811	54.000	6.486	AV
2		*	5505.735	87.252	80.728	N/A	N/A	6.525	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0	

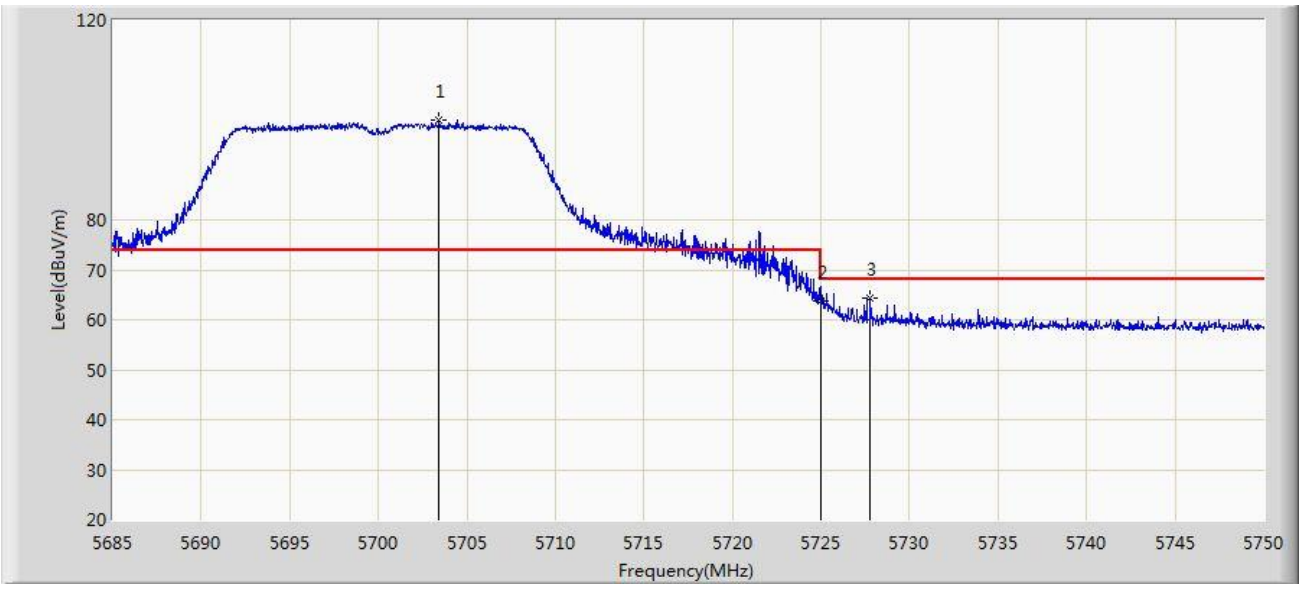

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.428	100.057	93.608	N/A	N/A	6.450	PK
2			5725.000	63.640	57.216	-4.560	68.200	6.424	PK
3			5727.803	64.408	57.929	-3.792	68.200	6.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0	

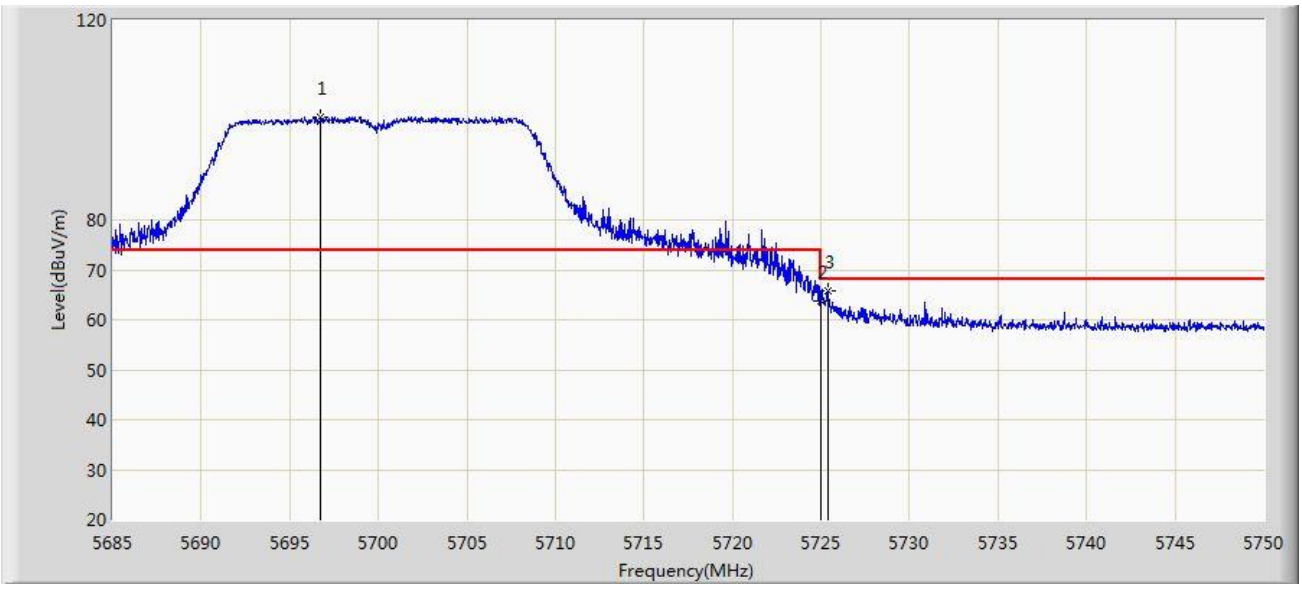

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.765	100.596	94.193	N/A	N/A	6.402	PK
2			5725.000	63.859	57.435	-4.341	68.200	6.424	PK
3			5725.365	65.733	59.302	-2.467	68.200	6.432	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0	

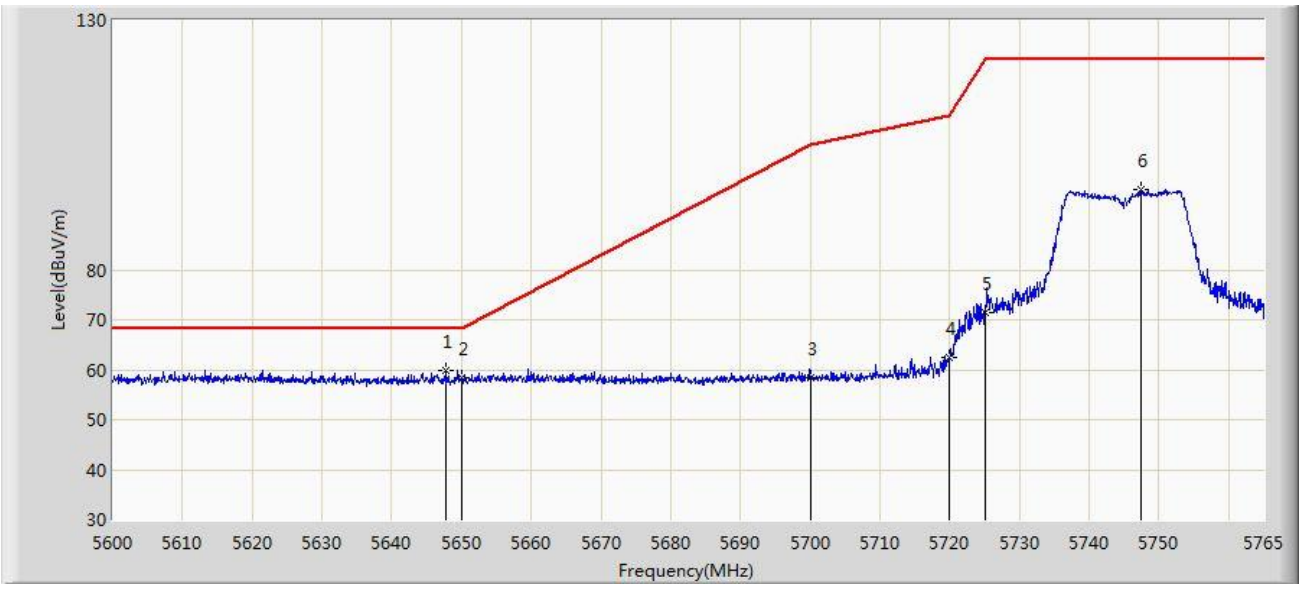

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5647.685	59.906	53.696	-8.294	68.200	6.210	PK
2			5650.000	58.465	52.206	-9.735	68.200	6.258	PK
3			5700.000	58.265	51.840	-46.935	105.200	6.426	PK
4			5720.000	62.423	56.038	-48.377	110.800	6.386	PK
5			5725.000	71.507	65.083	-50.693	122.200	6.424	PK
6			5747.510	96.052	89.271	N/A	N/A	6.781	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0	

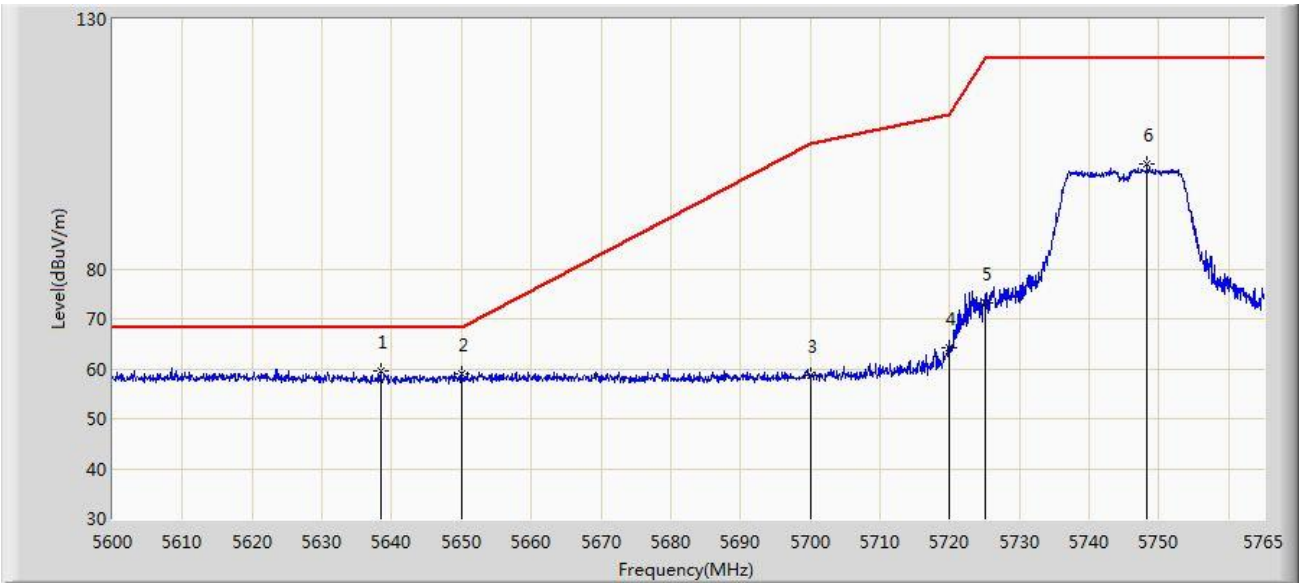

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5638.362	59.556	53.492	-8.644	68.200	6.063	PK
2			5650.000	59.092	52.833	-9.108	68.200	6.258	PK
3			5700.000	58.572	52.147	-46.628	105.200	6.426	PK
4			5720.000	64.226	57.841	-46.574	110.800	6.386	PK
5			5725.000	73.123	66.699	-49.077	122.200	6.424	PK
6			5748.335	100.916	94.129	N/A	N/A	6.787	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:12
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0	

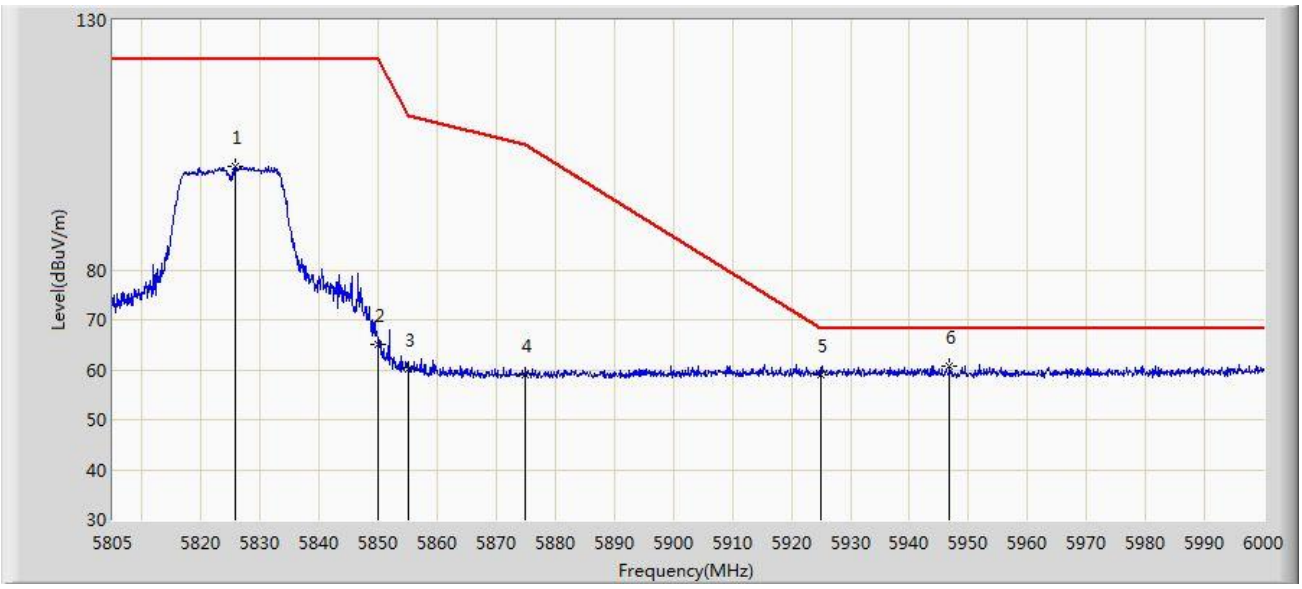

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5825.865	100.785	93.733	N/A	N/A	7.052	PK
2			5850.000	65.139	58.331	-57.061	122.200	6.808	PK
3			5855.000	60.160	53.340	-50.640	110.800	6.820	PK
4			5875.000	58.995	52.077	-46.205	105.200	6.918	PK
5			5925.000	59.101	52.004	-9.099	68.200	7.097	PK
6		*	5946.765	60.704	53.601	-7.496	68.200	7.103	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:16
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0	

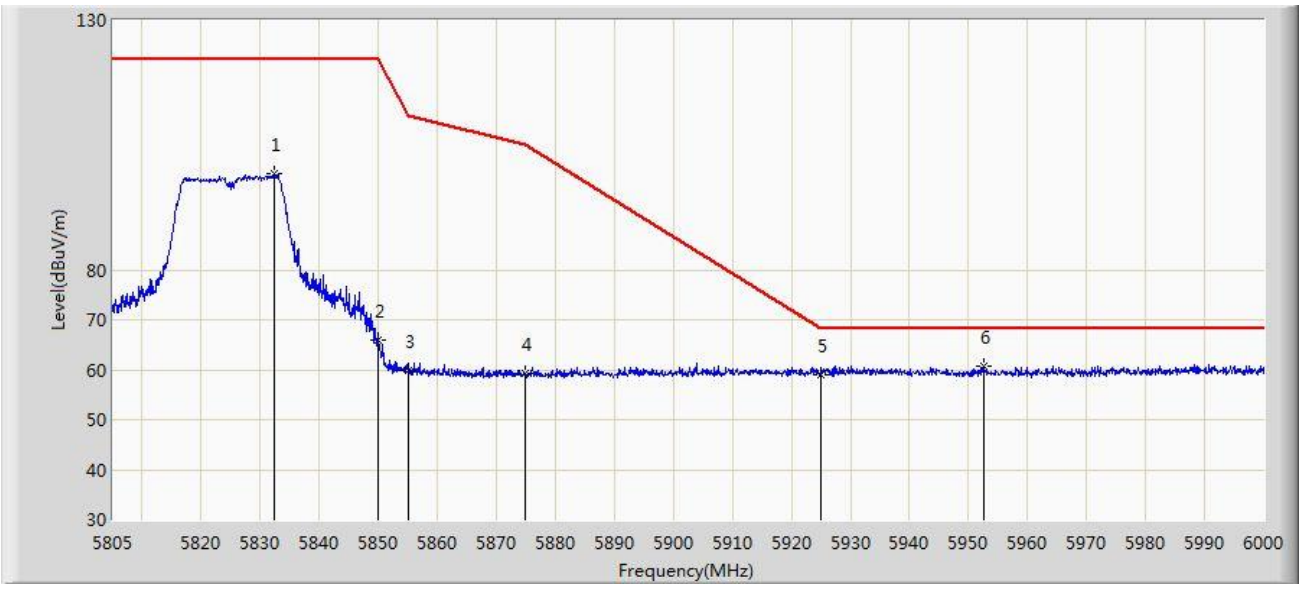

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5832.397	99.205	92.153	N/A	N/A	7.052	PK
2			5850.000	66.031	59.223	-56.169	122.200	6.808	PK
3			5855.000	59.906	53.086	-50.894	110.800	6.820	PK
4			5875.000	59.338	52.420	-45.862	105.200	6.918	PK
5			5925.000	59.061	51.964	-9.139	68.200	7.097	PK
6		*	5952.518	60.623	53.569	-7.577	68.200	7.053	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

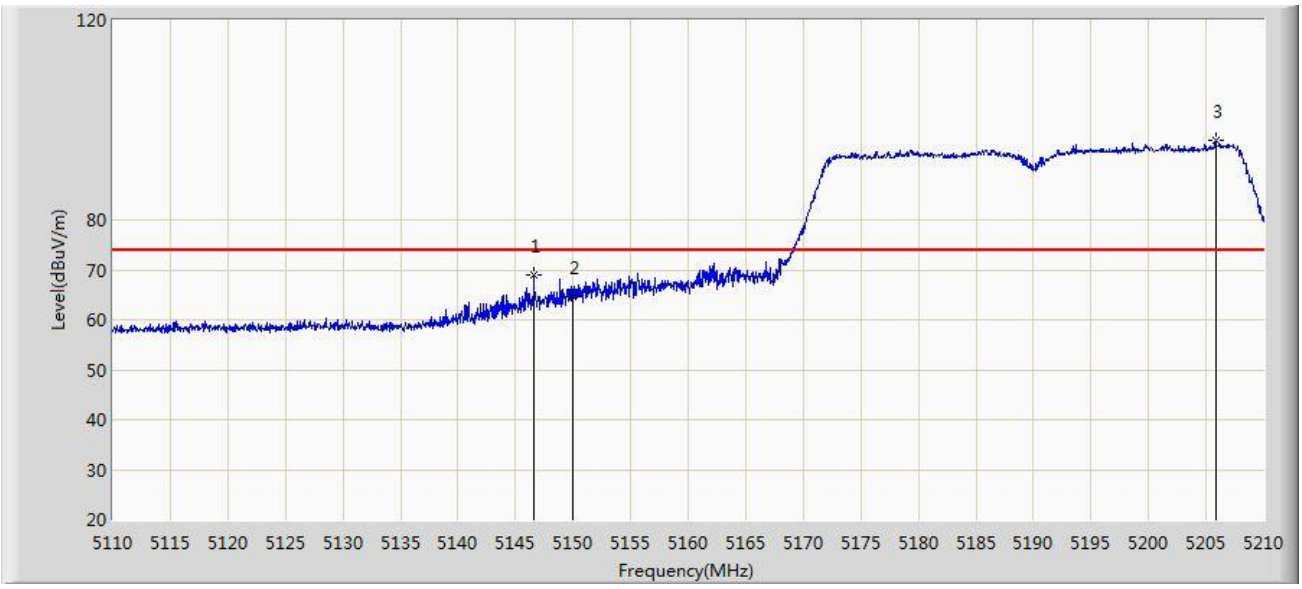

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.600	68.912	62.434	-5.088	74.000	6.479	PK
2			5150.000	64.743	58.291	-9.257	74.000	6.452	PK
3		*	5205.850	95.836	89.576	N/A	N/A	6.260	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

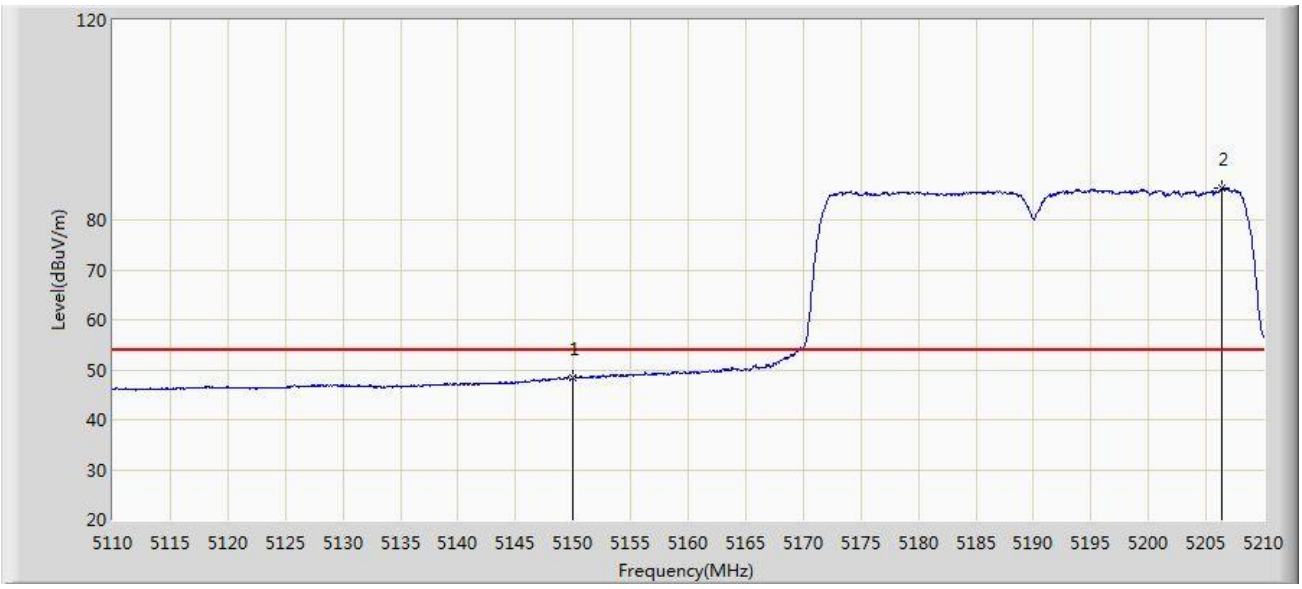

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.506	42.054	-5.494	54.000	6.452	AV
2		*	5206.400	86.380	80.129	N/A	N/A	6.251	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

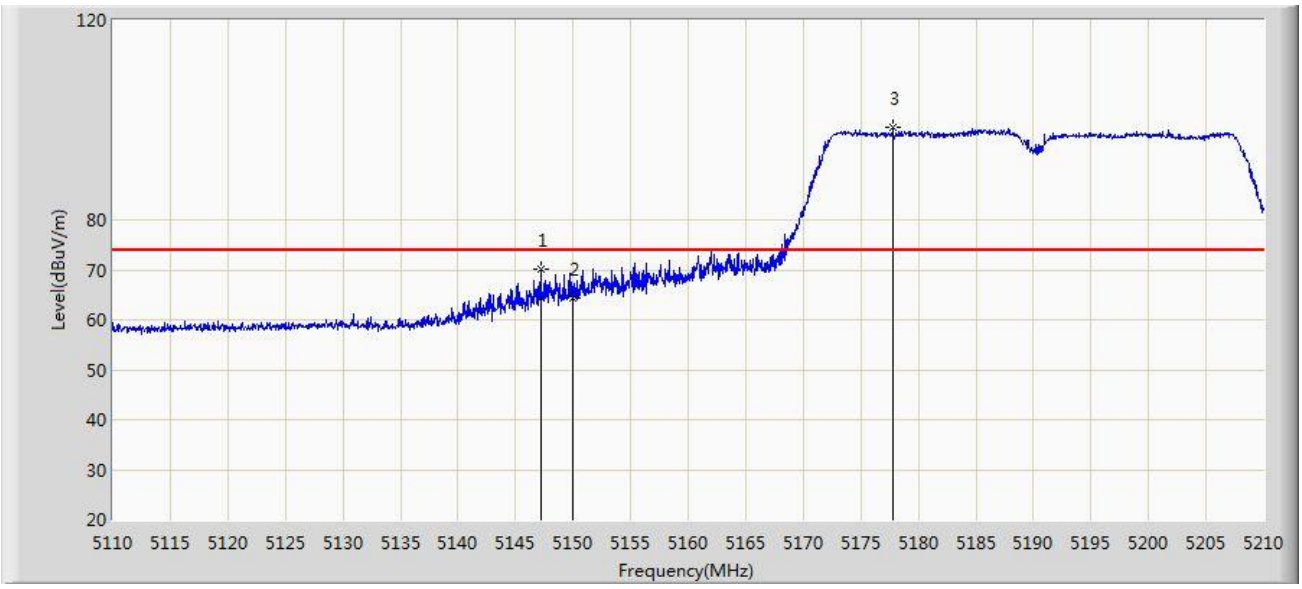

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.200	70.271	63.803	-3.729	74.000	6.469	PK
2			5150.000	64.460	58.008	-9.540	74.000	6.452	PK
3		*	5177.800	98.424	91.924	N/A	N/A	6.500	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0	

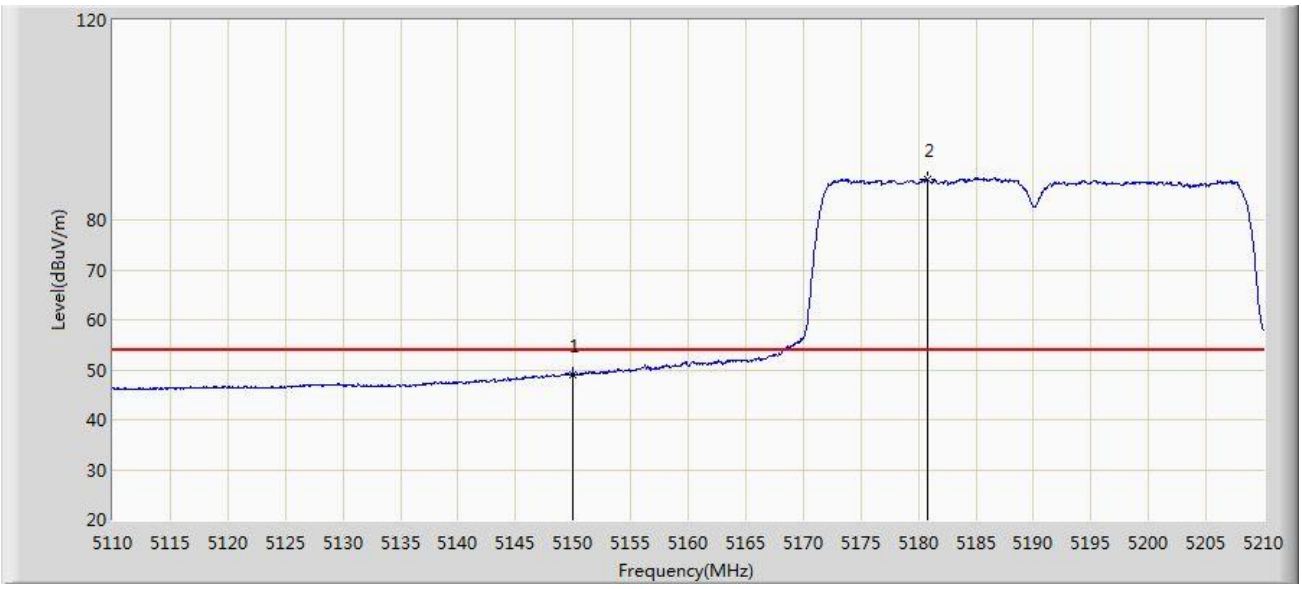

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.899	42.447	-5.101	54.000	6.452	AV
2		*	5180.800	88.240	81.720	N/A	N/A	6.520	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

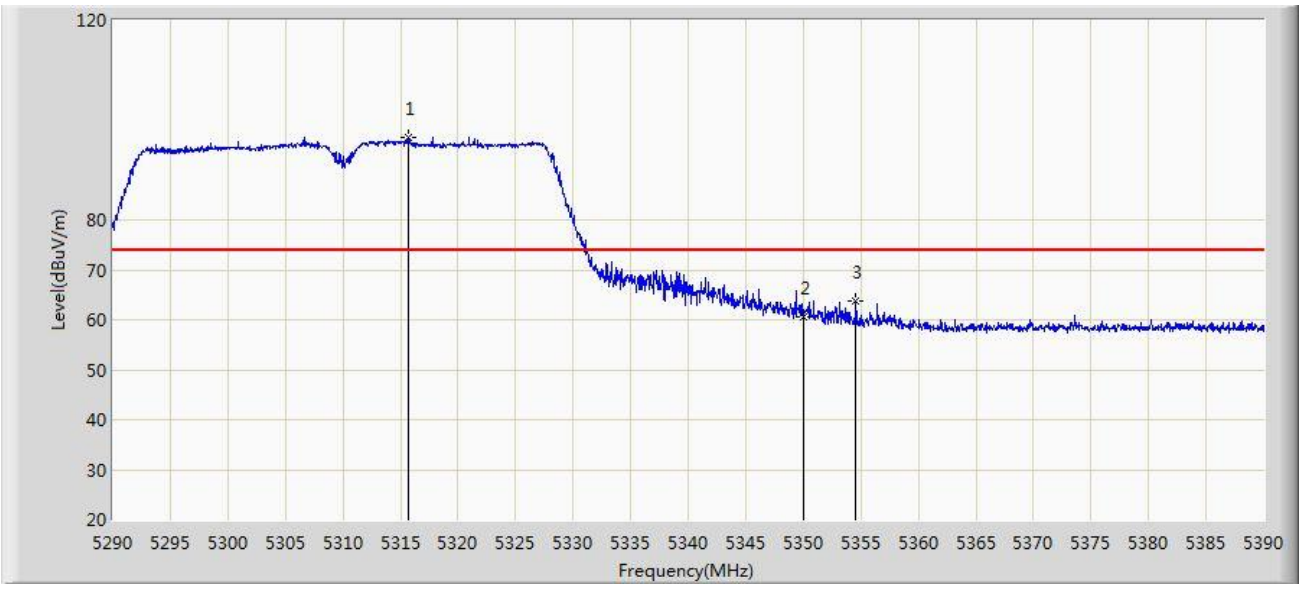

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.650	96.657	90.608	N/A	N/A	6.050	PK
2			5350.000	60.672	54.214	-13.328	74.000	6.458	PK
3			5354.550	63.732	57.403	-10.268	74.000	6.329	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

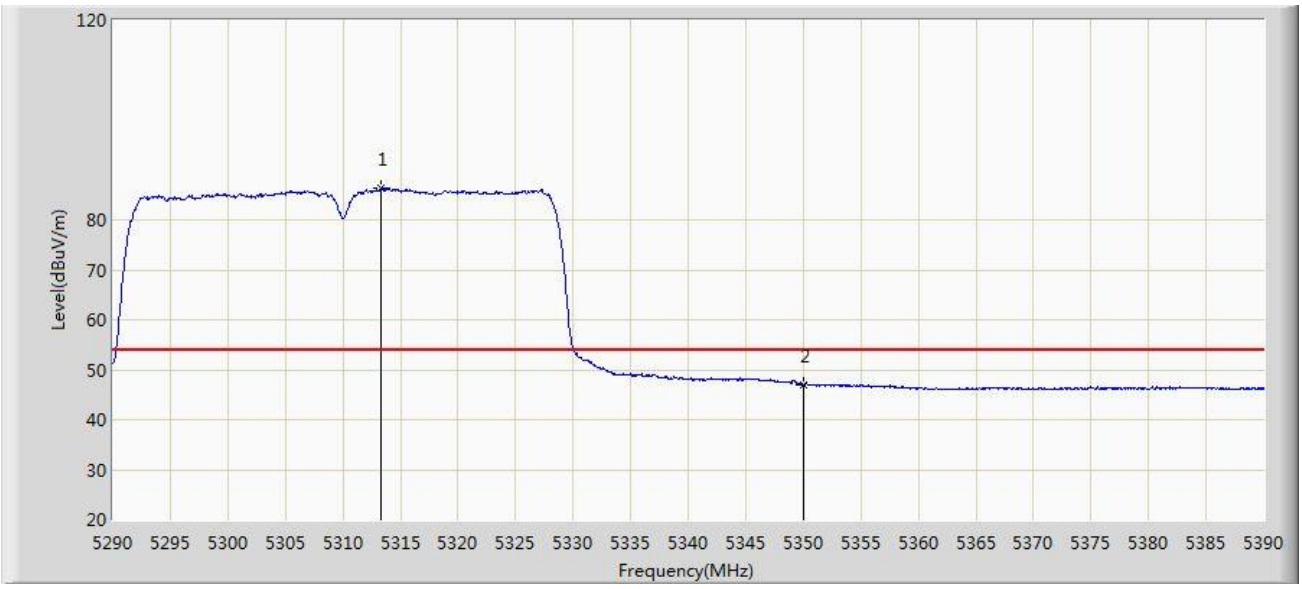

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.350	86.317	80.317	N/A	N/A	6.000	AV
2			5350.000	46.978	40.520	-7.022	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

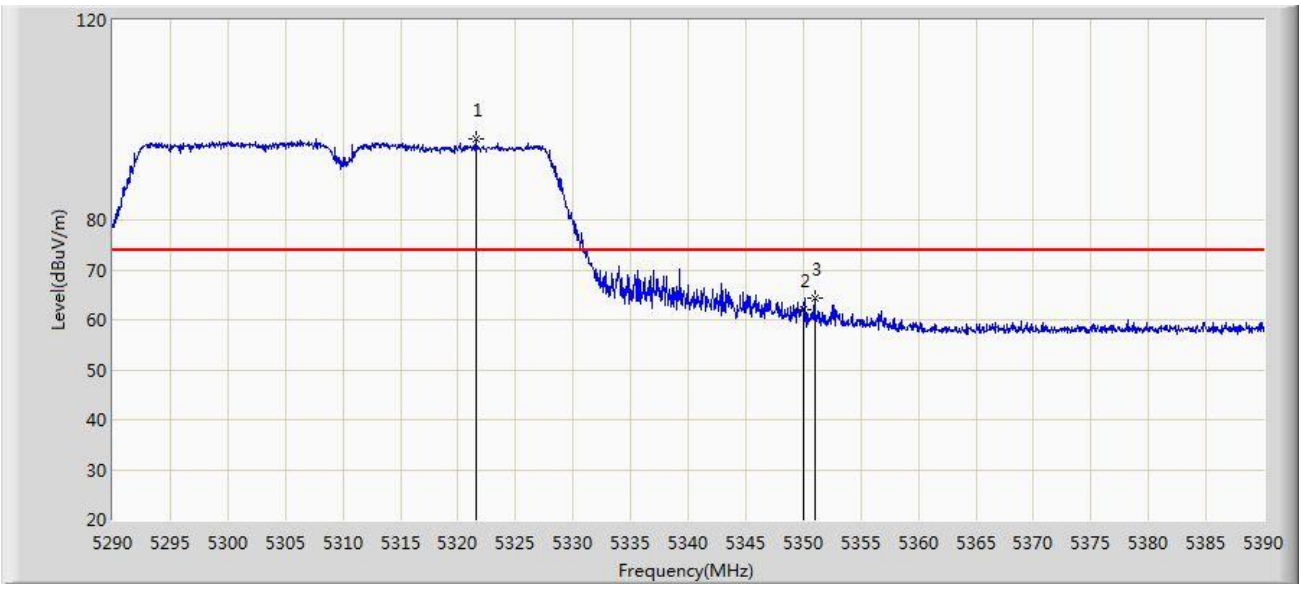

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.550	96.265	90.076	N/A	N/A	6.189	PK
2			5350.000	62.034	55.576	-11.966	74.000	6.458	PK
3			5351.000	64.383	57.957	-9.617	74.000	6.427	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0	

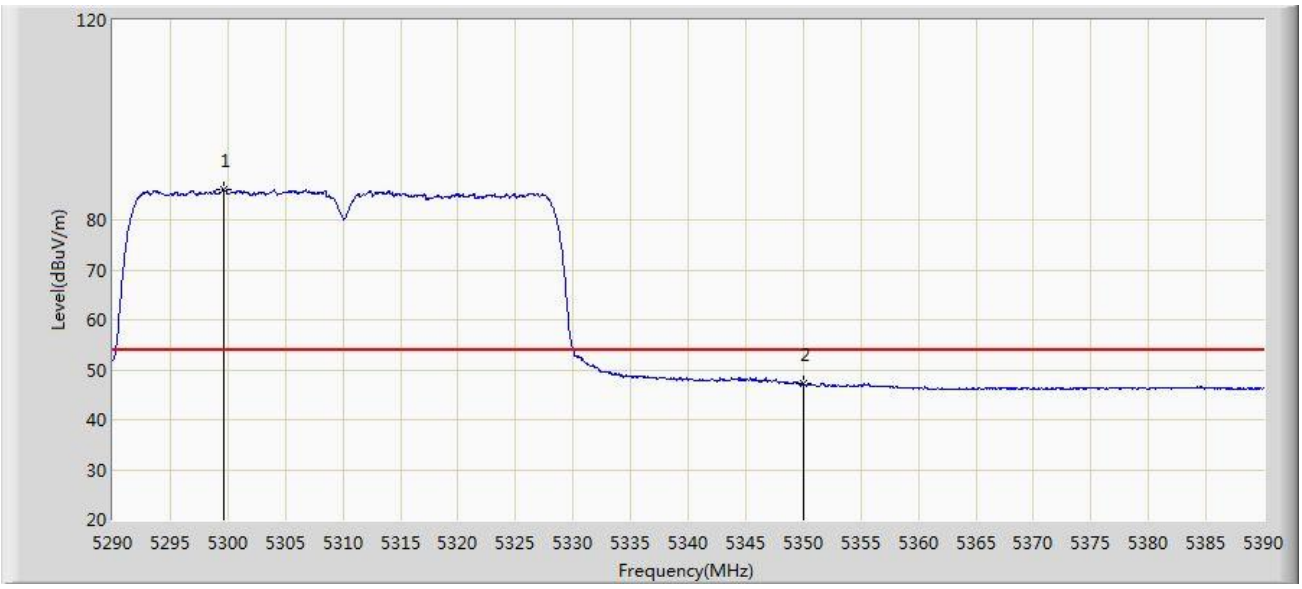

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.600	86.000	80.042	N/A	N/A	5.958	AV
2			5350.000	47.112	40.654	-6.888	54.000	6.458	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

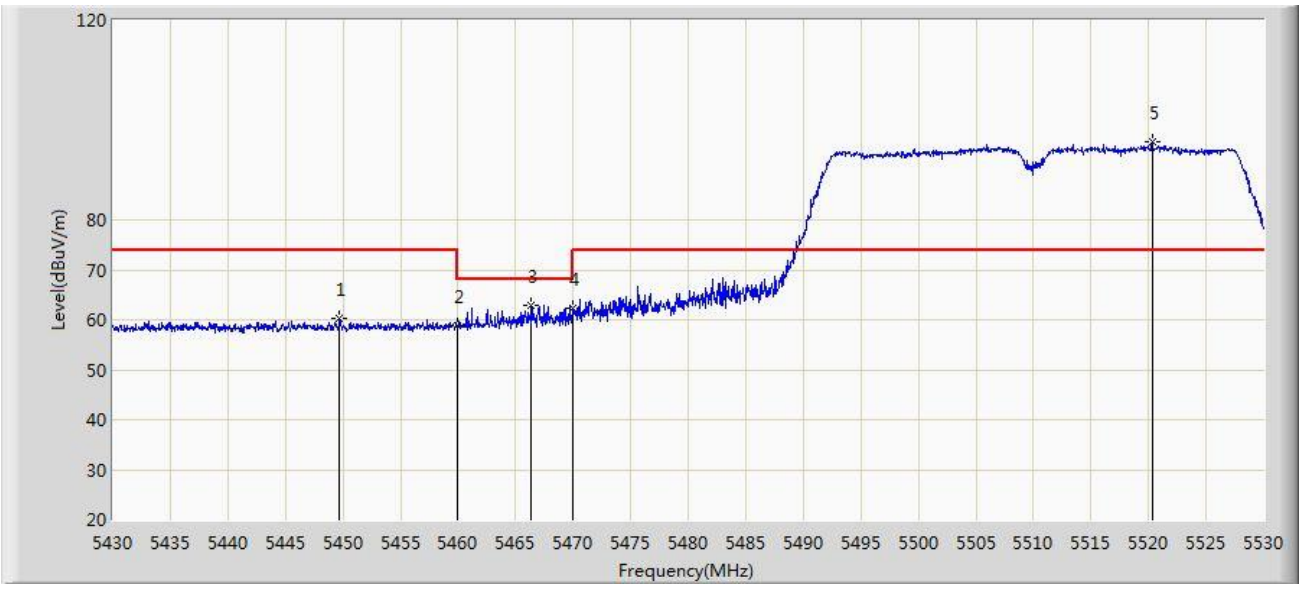

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.700	60.232	53.777	-13.768	74.000	6.456	PK
2			5460.000	58.732	52.246	-15.268	74.000	6.486	PK
3			5466.400	62.819	56.308	-5.381	68.200	6.511	PK
4			5470.000	62.181	55.656	-6.019	68.200	6.524	PK
5		*	5520.300	95.686	89.316	N/A	N/A	6.370	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

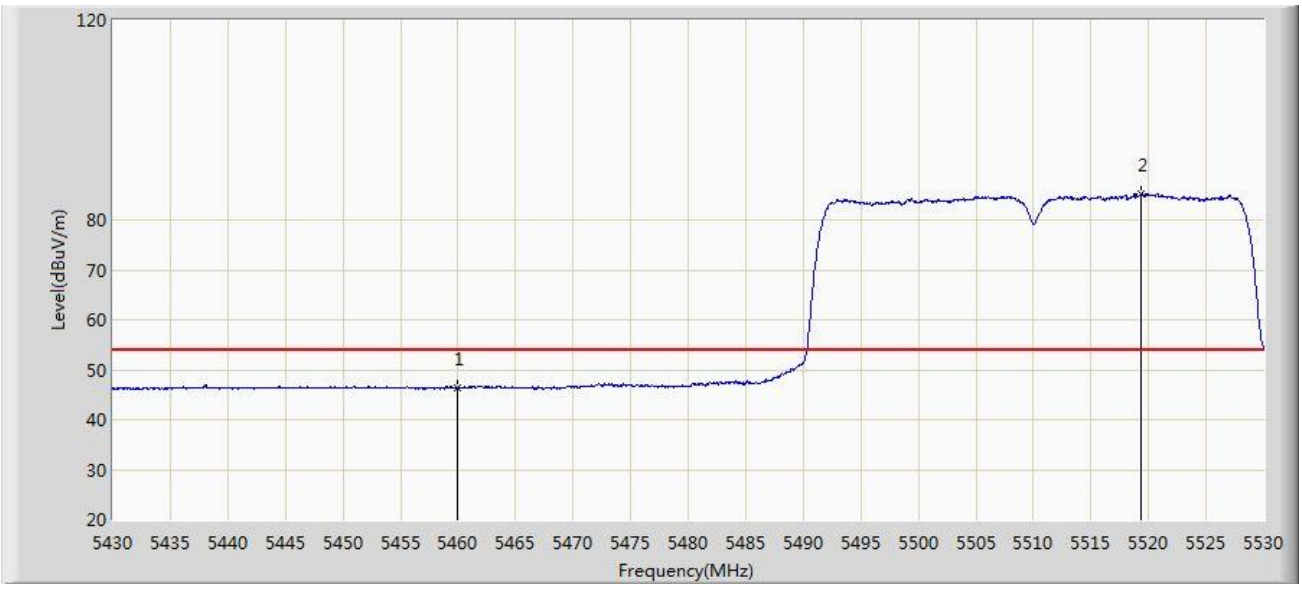

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.511	40.025	-7.489	54.000	6.486	AV
2		*	5519.300	85.119	78.739	N/A	N/A	6.380	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

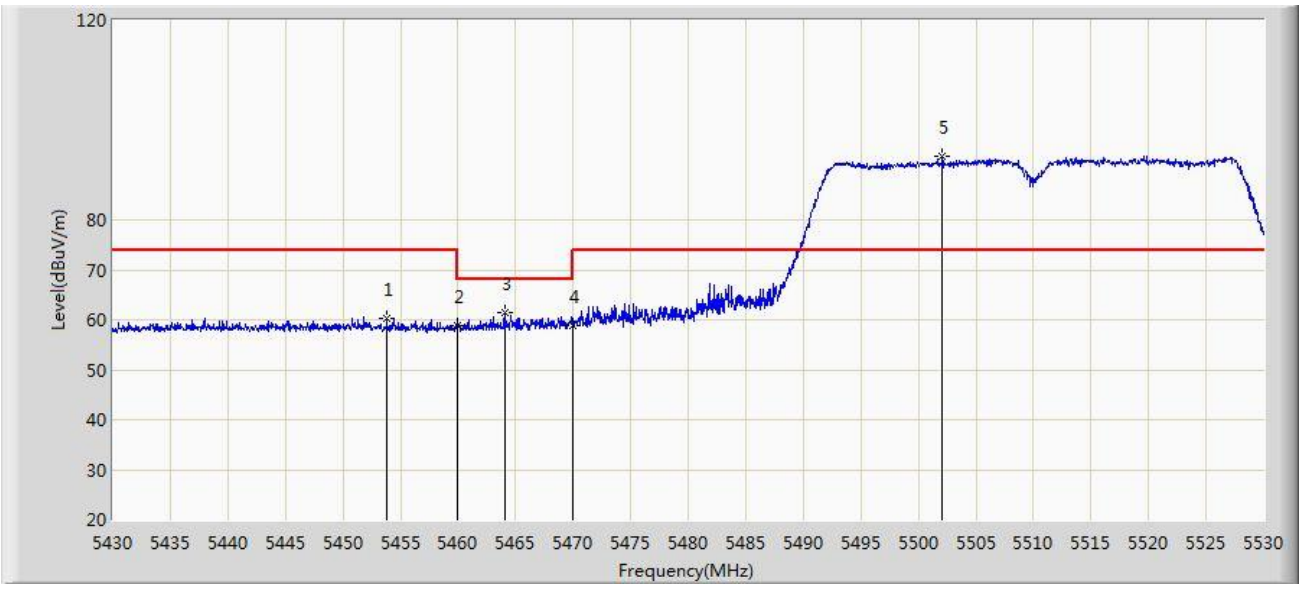

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.800	60.249	53.786	-13.751	74.000	6.464	PK
2			5460.000	58.908	52.422	-15.092	74.000	6.486	PK
3			5464.050	61.561	55.059	-6.639	68.200	6.501	PK
4			5470.000	58.924	52.399	-9.276	68.200	6.524	PK
5		*	5502.100	92.842	86.318	N/A	N/A	6.524	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0	

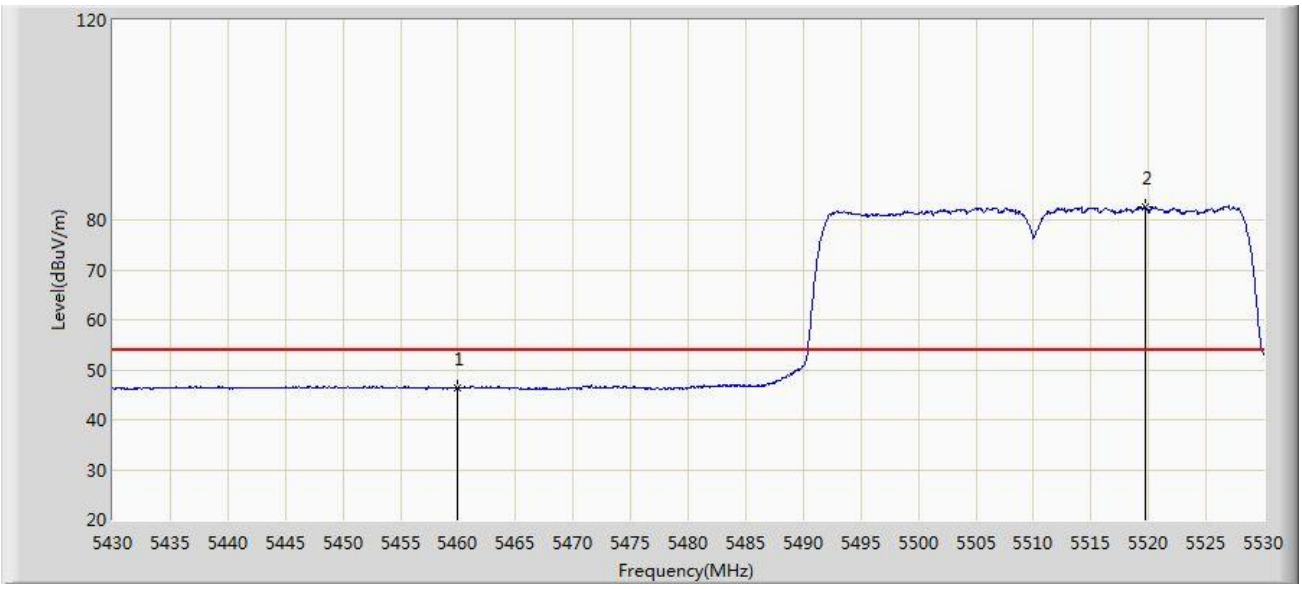

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.376	39.890	-7.624	54.000	6.486	AV
2		*	5519.700	82.690	76.314	N/A	N/A	6.376	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0	

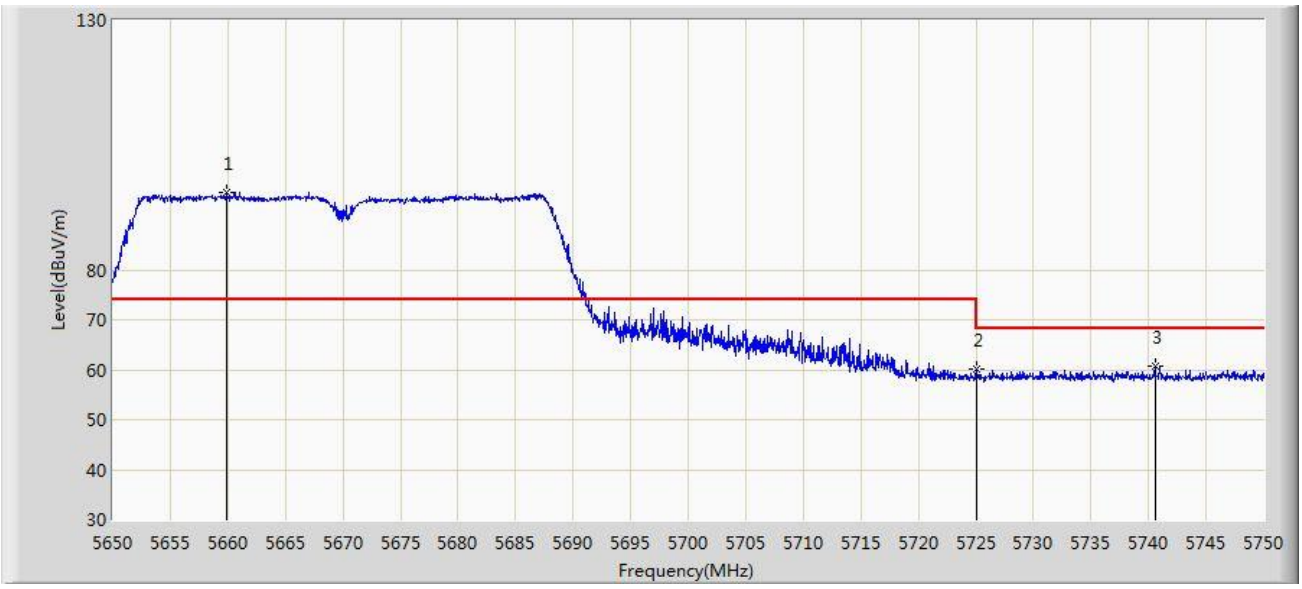

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5659.900	95.515	89.121	N/A	N/A	6.394	PK
2			5725.000	60.098	53.674	-8.102	68.200	6.424	PK
3			5740.550	60.865	54.149	-7.335	68.200	6.715	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0	

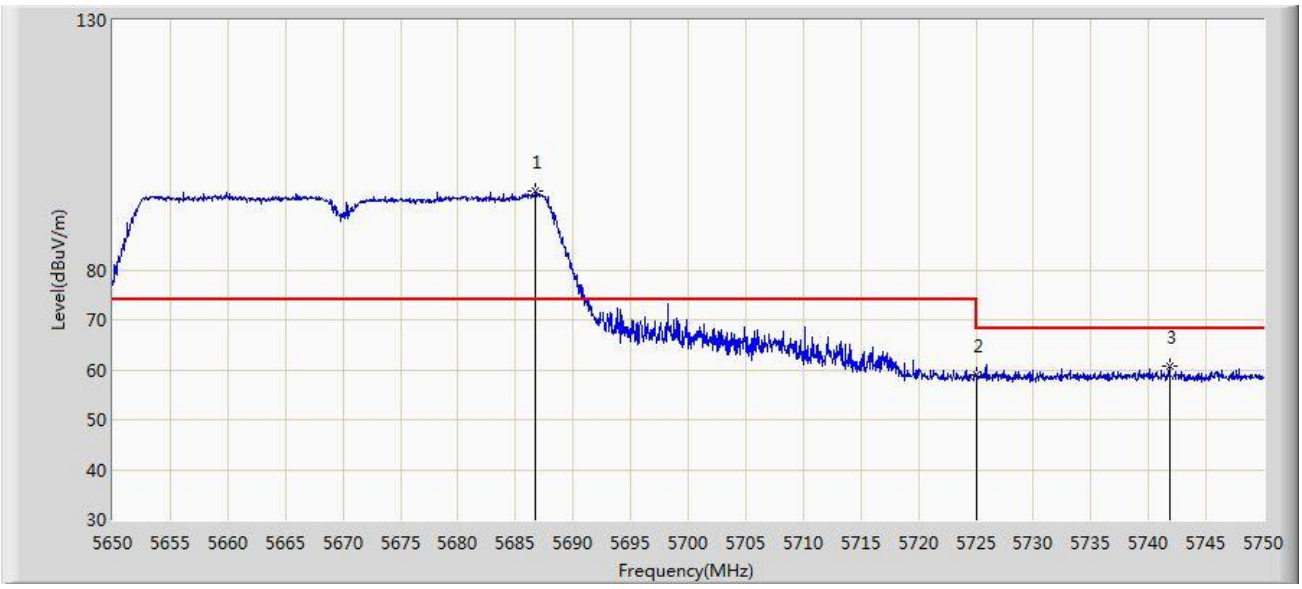

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.750	95.685	89.386	N/A	N/A	6.298	PK
2			5725.000	58.924	52.500	-9.276	68.200	6.424	PK
3			5741.800	60.637	53.901	-7.563	68.200	6.735	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:28
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0	

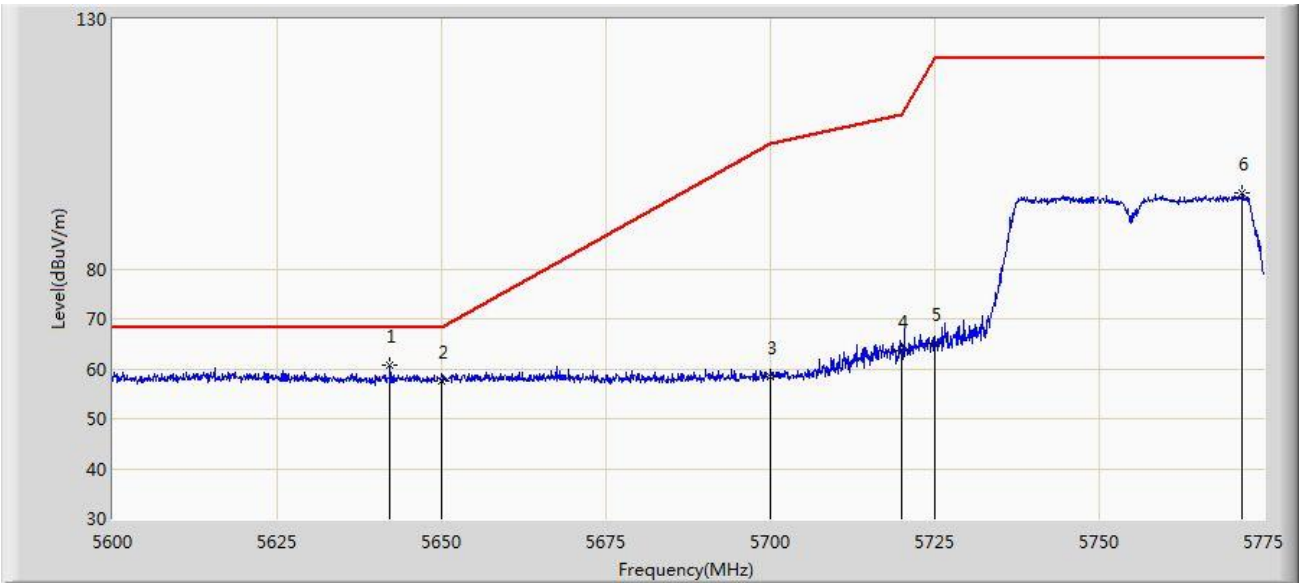

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.087	60.691	54.597	-7.509	68.200	6.094	PK
2			5650.000	57.609	51.350	-10.591	68.200	6.258	PK
3			5700.000	58.374	51.949	-46.826	105.200	6.426	PK
4			5720.000	63.484	57.099	-47.316	110.800	6.386	PK
5			5725.000	65.095	58.671	-57.105	122.200	6.424	PK
6			5771.763	95.200	88.477	N/A	N/A	6.722	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:35
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0	

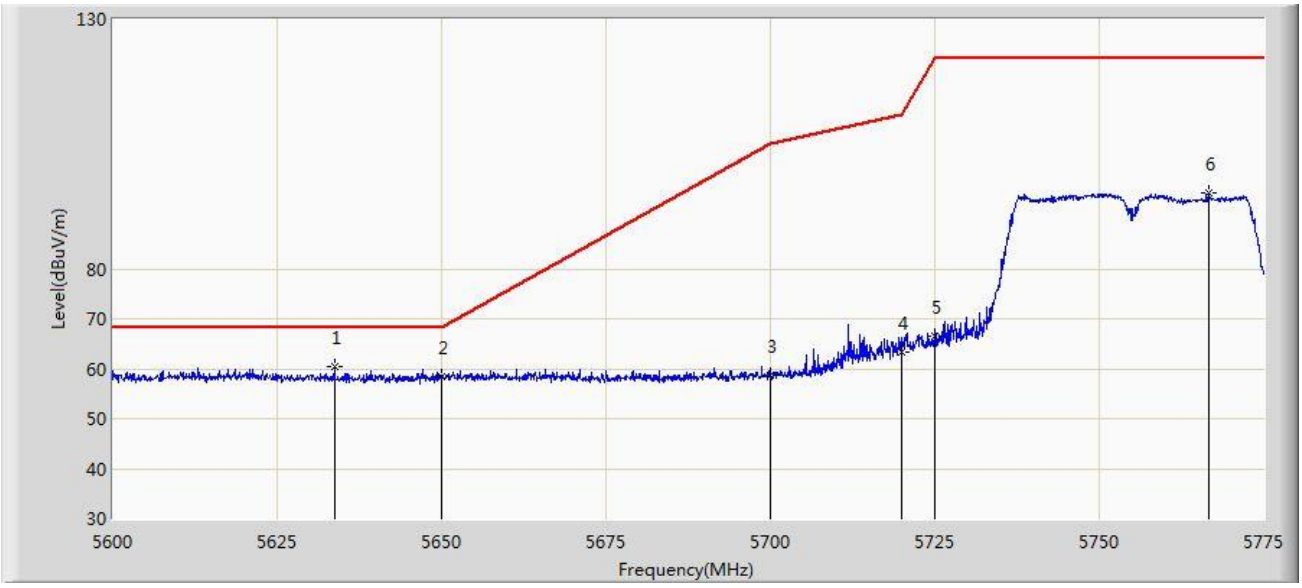

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.775	60.338	54.288	-7.862	68.200	6.049	PK
2			5650.000	58.318	52.059	-9.882	68.200	6.258	PK
3			5700.000	58.762	52.337	-46.438	105.200	6.426	PK
4			5720.000	63.389	57.004	-47.411	110.800	6.386	PK
5			5725.000	66.398	59.974	-55.802	122.200	6.424	PK
6			5766.600	95.191	88.417	N/A	N/A	6.774	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/06 - 23:57
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0	

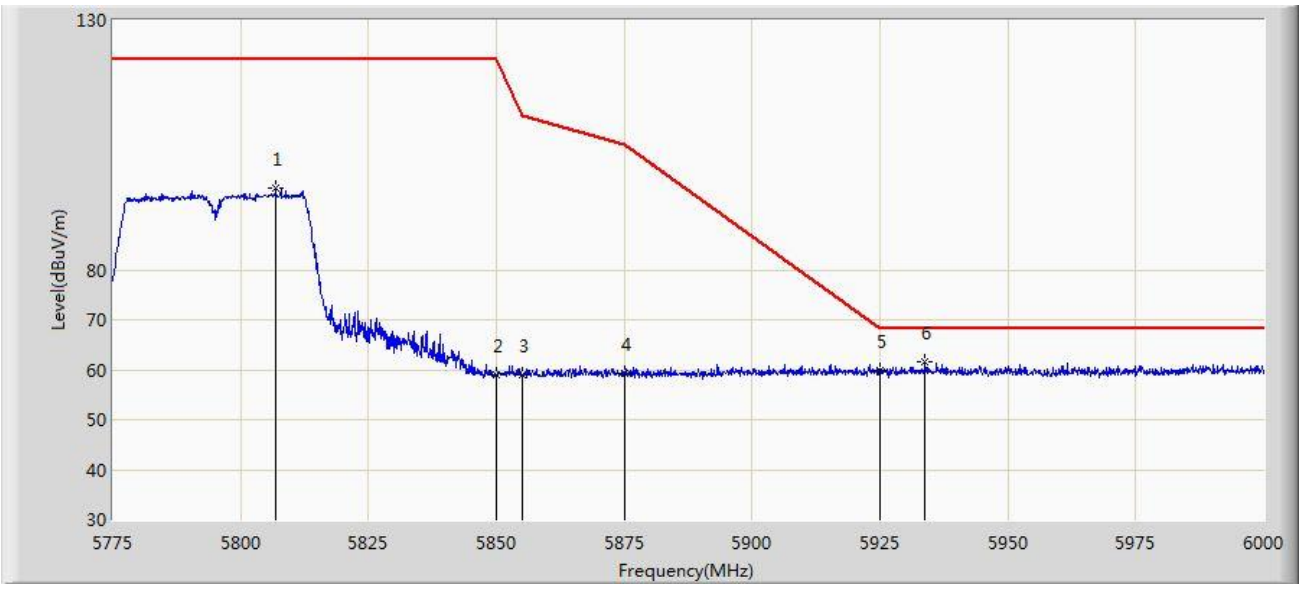

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5806.837	96.395	89.617	N/A	N/A	6.778	PK
2			5850.000	58.920	52.112	-63.280	122.200	6.808	PK
3			5855.000	58.984	52.164	-51.816	110.800	6.820	PK
4			5875.000	59.194	52.276	-46.006	105.200	6.918	PK
5			5925.000	59.943	52.846	-8.257	68.200	7.097	PK
6		*	5933.850	61.709	54.527	-6.491	68.200	7.181	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:00
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0	

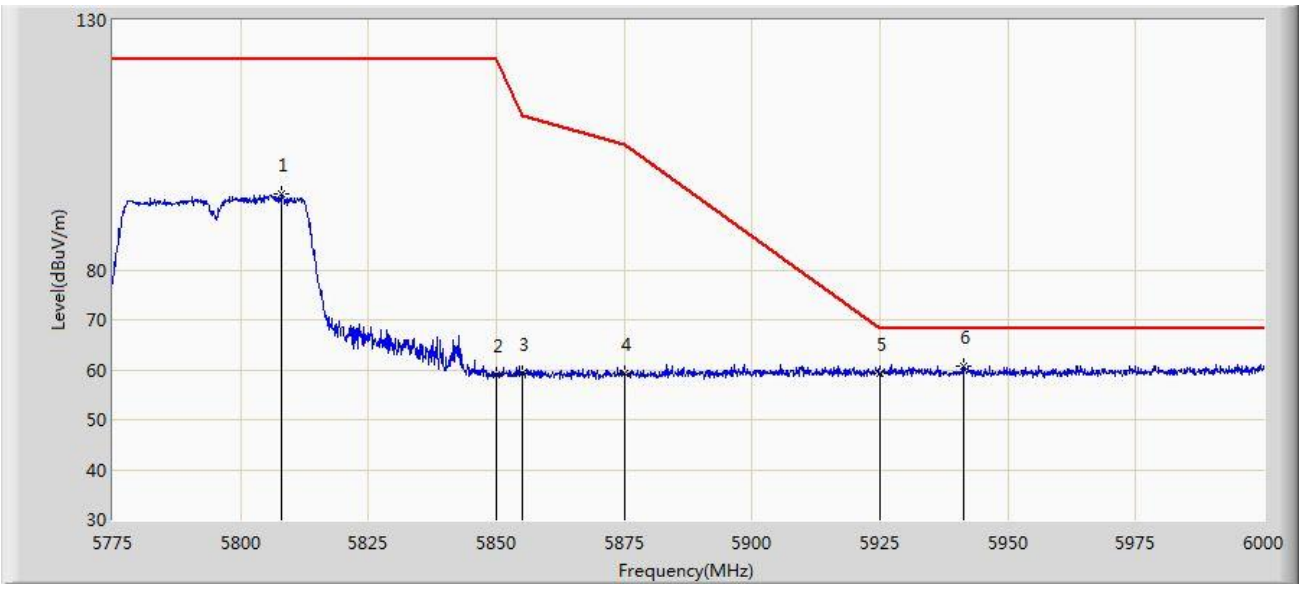

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5808.075	95.162	88.378	N/A	N/A	6.784	PK
2			5850.000	59.125	52.317	-63.075	122.200	6.808	PK
3			5855.000	59.207	52.387	-51.593	110.800	6.820	PK
4			5875.000	59.216	52.298	-45.984	105.200	6.918	PK
5			5925.000	59.203	52.106	-8.997	68.200	7.097	PK
6		*	5941.275	60.839	53.662	-7.361	68.200	7.177	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

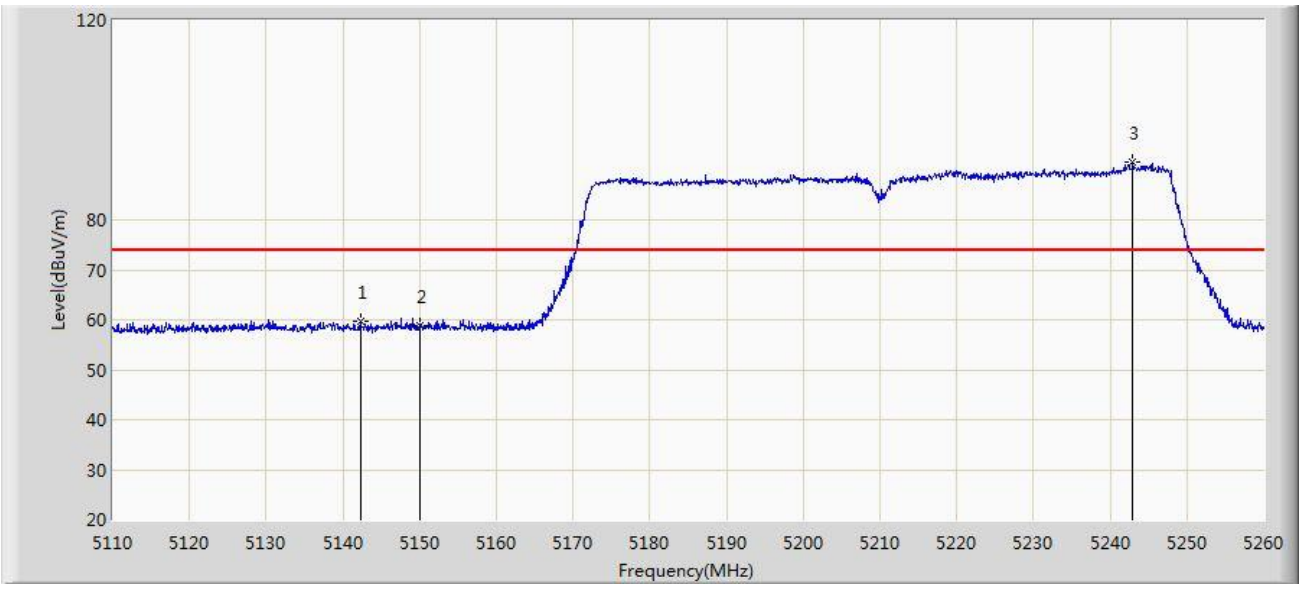

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.250	59.800	53.245	-14.200	74.000	6.555	PK
2			5150.000	58.940	52.488	-15.060	74.000	6.452	PK
3		*	5242.900	91.618	85.476	N/A	N/A	6.142	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

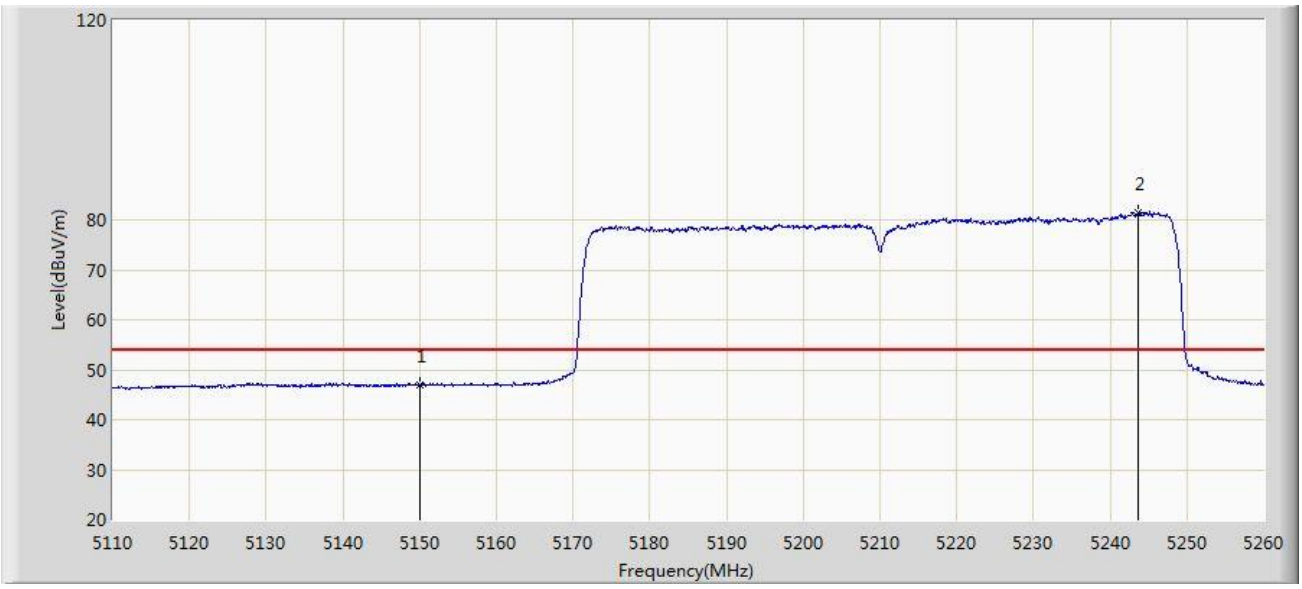

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.892	40.440	-7.108	54.000	6.452	AV
2		*	5243.575	81.374	75.224	N/A	N/A	6.149	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

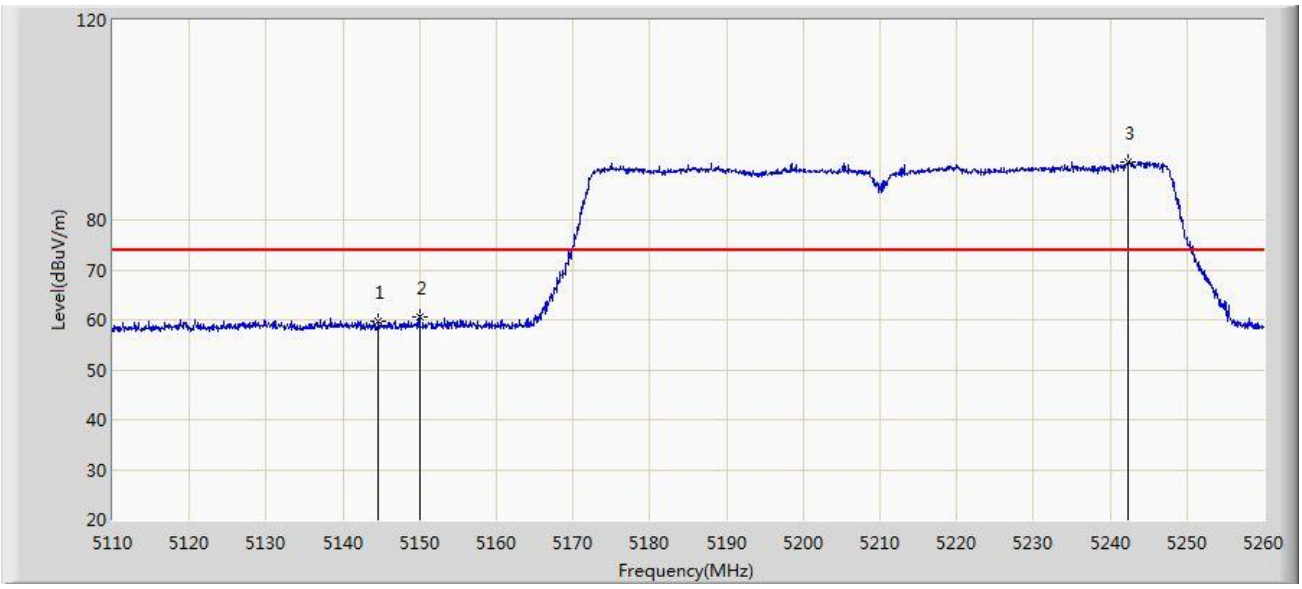

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.650	59.622	53.109	-14.378	74.000	6.513	PK
2			5150.000	60.627	54.175	-13.373	74.000	6.452	PK
3		*	5242.300	91.667	85.532	N/A	N/A	6.135	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0	

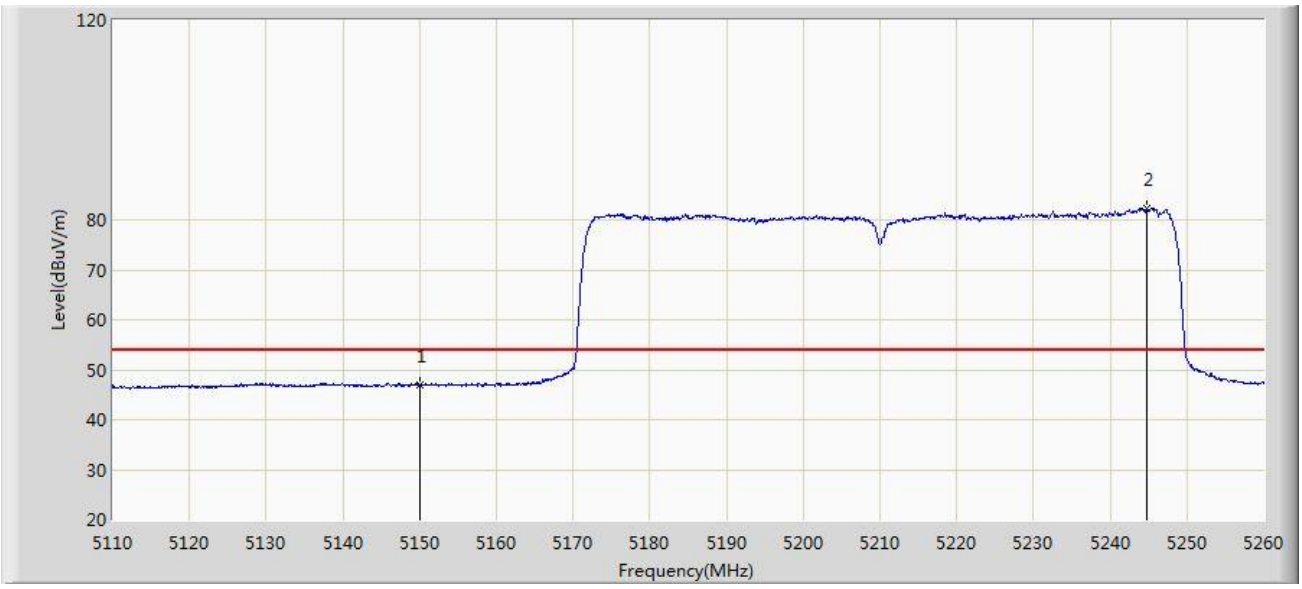

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.030	40.578	-6.970	54.000	6.452	AV
2		*	5244.775	82.321	76.157	N/A	N/A	6.163	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

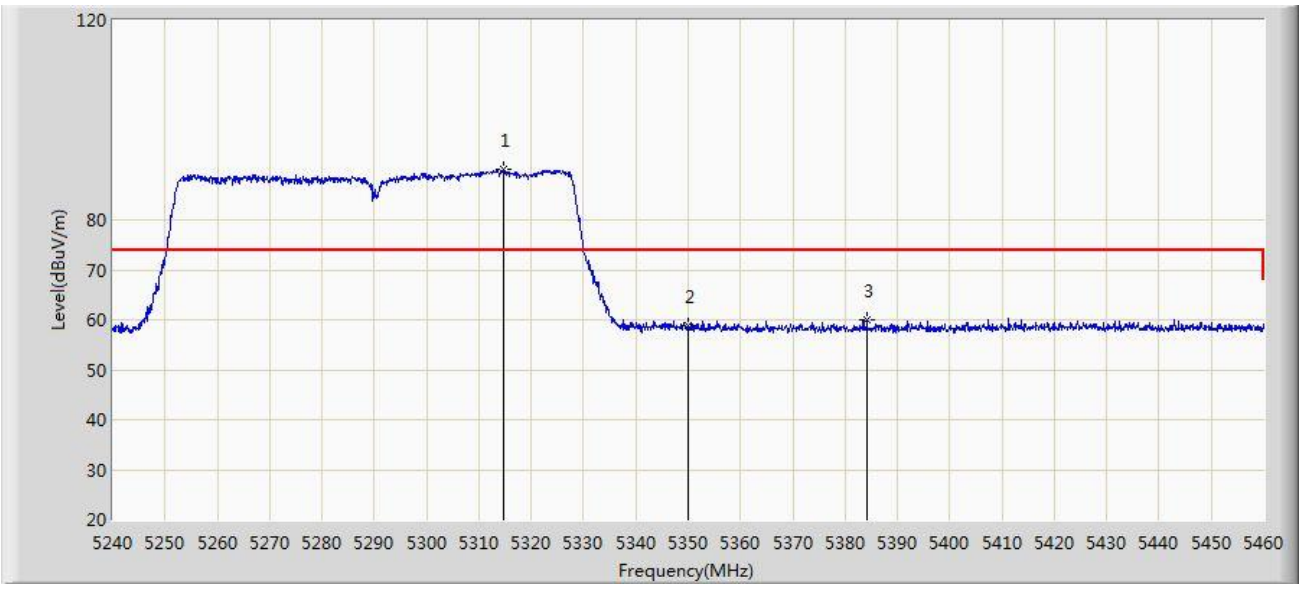

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	90.097	84.066	N/A	N/A	6.031	PK
2			5350.000	58.849	52.391	-15.151	74.000	6.458	PK
3			5384.210	59.910	53.622	-14.090	74.000	6.287	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

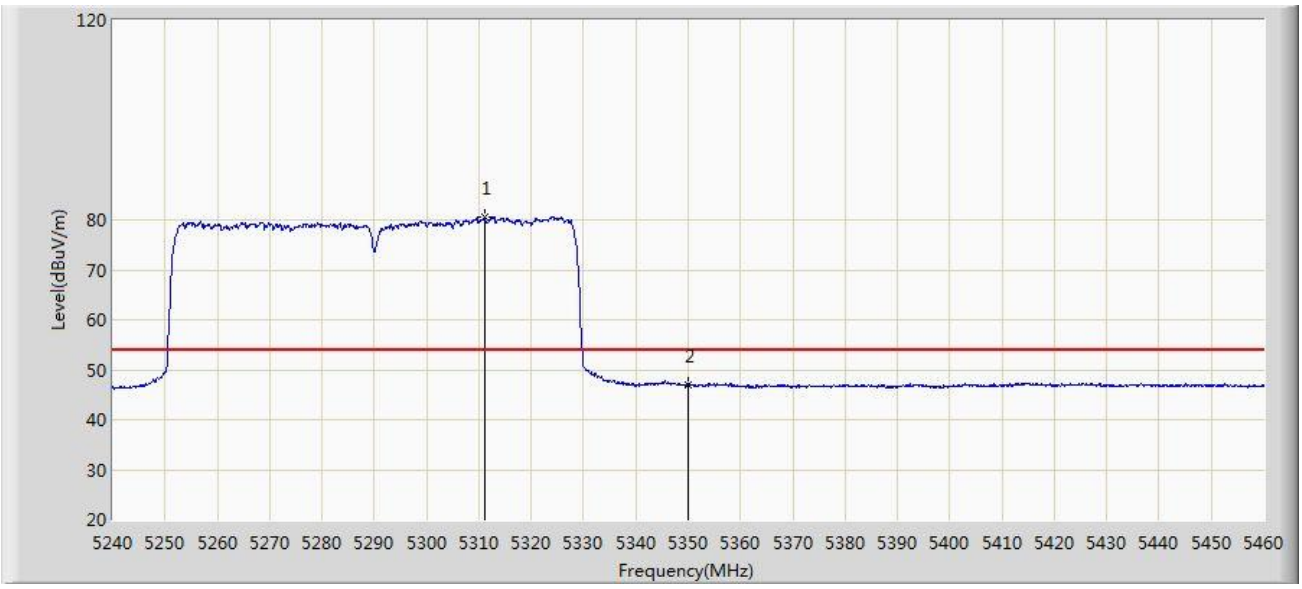

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.170	80.435	74.481	N/A	N/A	5.954	AV
2			5350.000	46.935	40.477	-7.065	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

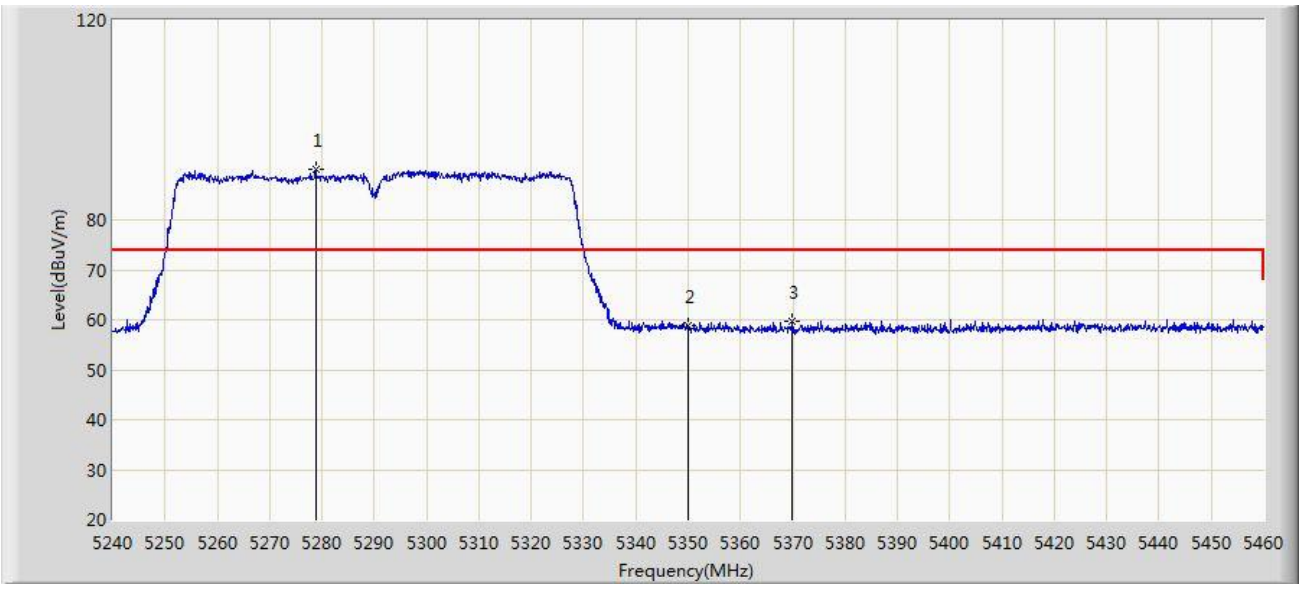

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5278.830	90.183	84.318	N/A	N/A	5.865	PK
2			5350.000	58.696	52.238	-15.304	74.000	6.458	PK
3			5369.910	59.642	53.518	-14.358	74.000	6.124	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0	

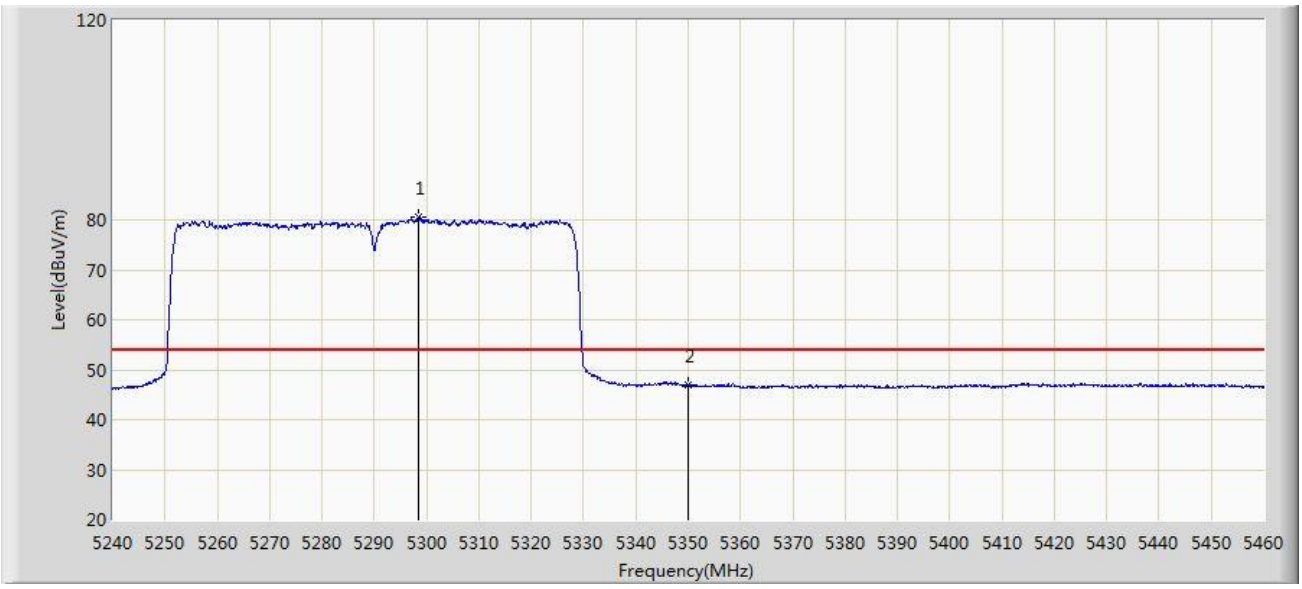

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.520	80.520	74.565	N/A	N/A	5.955	AV
2			5350.000	47.073	40.615	-6.927	54.000	6.458	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

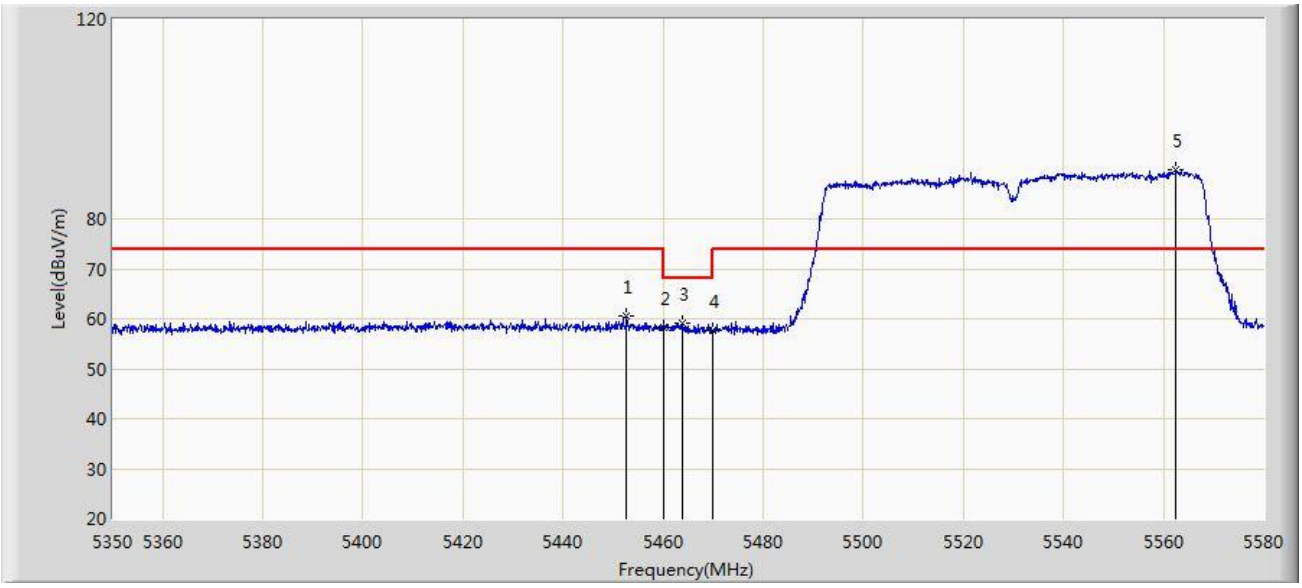

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.695	60.586	54.122	-13.414	74.000	6.463	PK
2			5460.000	58.133	51.647	-15.867	74.000	6.486	PK
3			5463.735	59.163	52.663	-9.037	68.200	6.500	PK
4			5470.000	57.747	51.222	-10.453	68.200	6.524	PK
5		*	5562.520	89.767	83.129	N/A	N/A	6.638	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

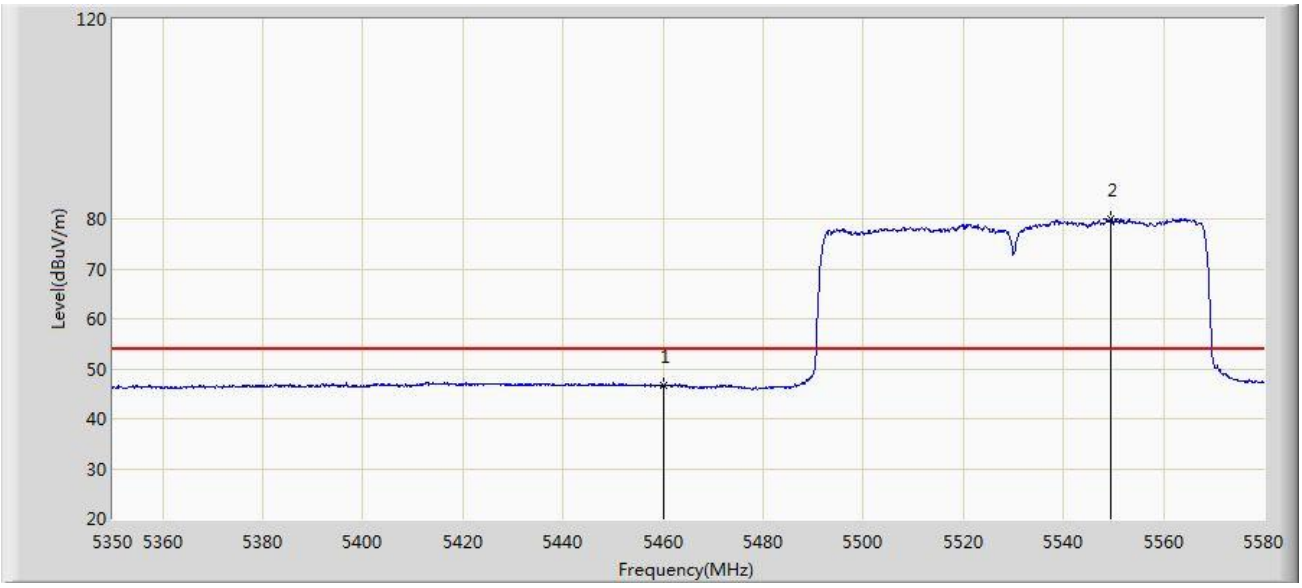

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.619	40.133	-7.381	54.000	6.486	AV
2		*	5549.525	80.118	73.320	N/A	N/A	6.798	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

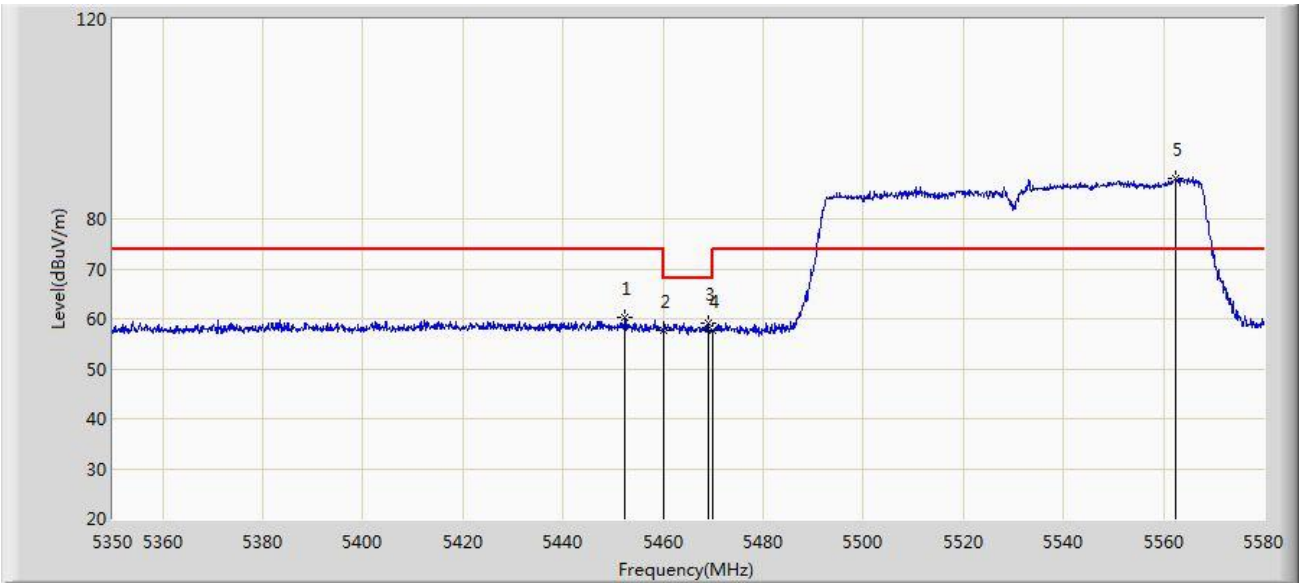

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.350	60.151	53.688	-13.849	74.000	6.462	PK
2			5460.000	57.766	51.280	-16.234	74.000	6.486	PK
3			5469.025	59.232	52.711	-8.968	68.200	6.521	PK
4			5470.000	57.772	51.247	-10.428	68.200	6.524	PK
5		*	5562.290	88.173	81.535	N/A	N/A	6.637	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0	

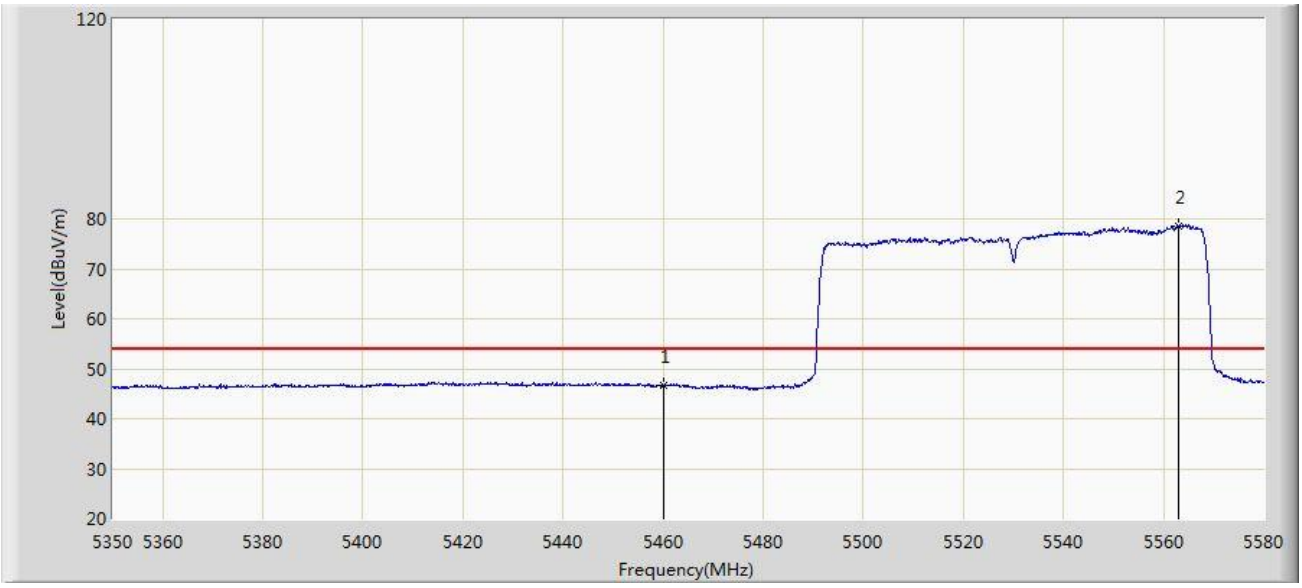

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.575	40.089	-7.425	54.000	6.486	AV
2		*	5563.095	78.693	72.054	N/A	N/A	6.640	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:36
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0	

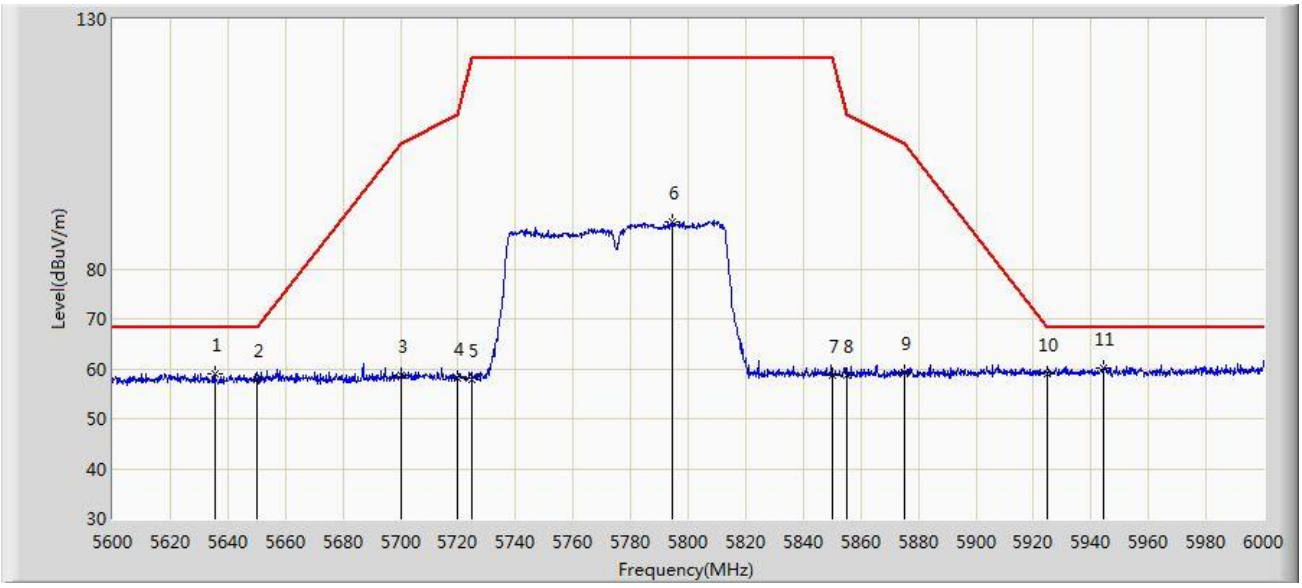

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.600	59.093	53.038	-9.107	68.200	6.055	PK
2			5650.000	57.874	51.615	-10.326	68.200	6.258	PK
3			5700.000	58.605	52.180	-46.595	105.200	6.426	PK
4			5720.000	58.045	51.660	-52.755	110.800	6.386	PK
5			5725.000	57.723	51.299	-64.477	122.200	6.424	PK
6			5794.400	89.547	82.823	N/A	N/A	6.724	PK
7			5850.000	58.681	51.873	-63.519	122.200	6.808	PK
8			5855.000	58.756	51.936	-52.044	110.800	6.820	PK
9			5875.000	59.376	52.458	-45.824	105.200	6.918	PK
10			5925.000	58.890	51.793	-9.310	68.200	7.097	PK
11		*	5944.400	60.251	53.116	-7.949	68.200	7.135	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 00:38
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0	

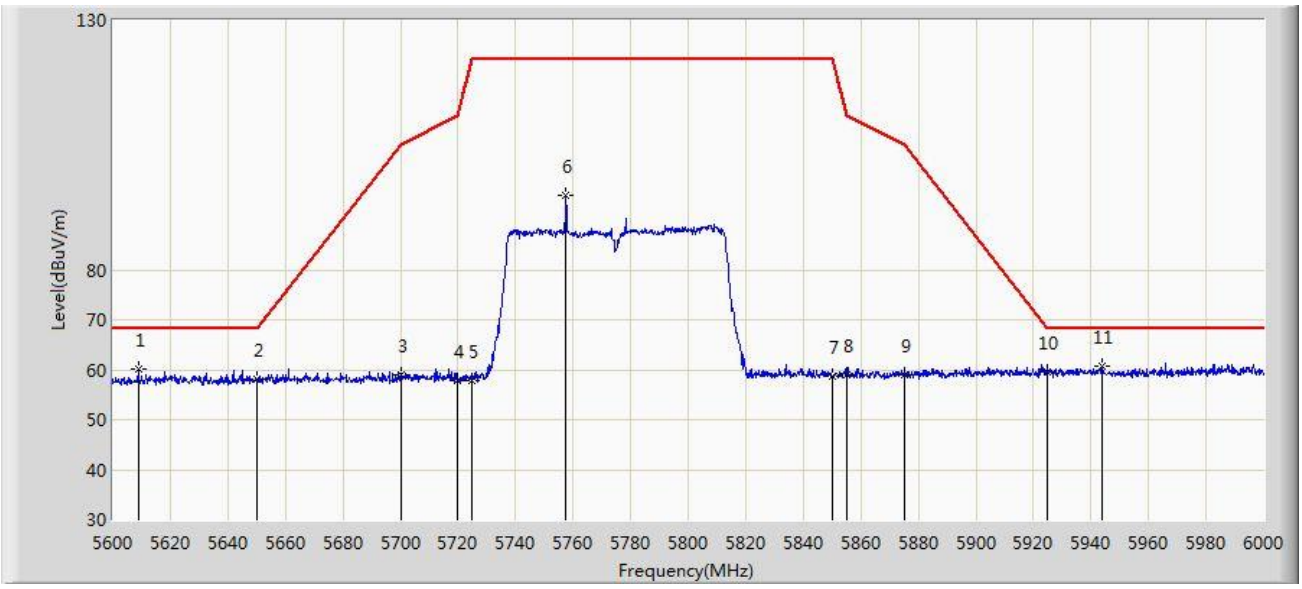

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5608.800	60.288	53.766	-7.912	68.200	6.522	PK
2			5650.000	58.021	51.762	-10.179	68.200	6.258	PK
3			5700.000	58.942	52.517	-46.258	105.200	6.426	PK
4			5720.000	57.696	51.311	-53.104	110.800	6.386	PK
5			5725.000	57.949	51.525	-64.251	122.200	6.424	PK
6			5757.400	94.815	87.970	N/A	N/A	6.844	PK
7			5850.000	58.837	52.029	-63.363	122.200	6.808	PK
8			5855.000	59.032	52.212	-51.768	110.800	6.820	PK
9			5875.000	59.113	52.195	-46.087	105.200	6.918	PK
10			5925.000	59.575	52.478	-8.625	68.200	7.097	PK
11		*	5943.800	60.753	53.610	-7.447	68.200	7.142	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

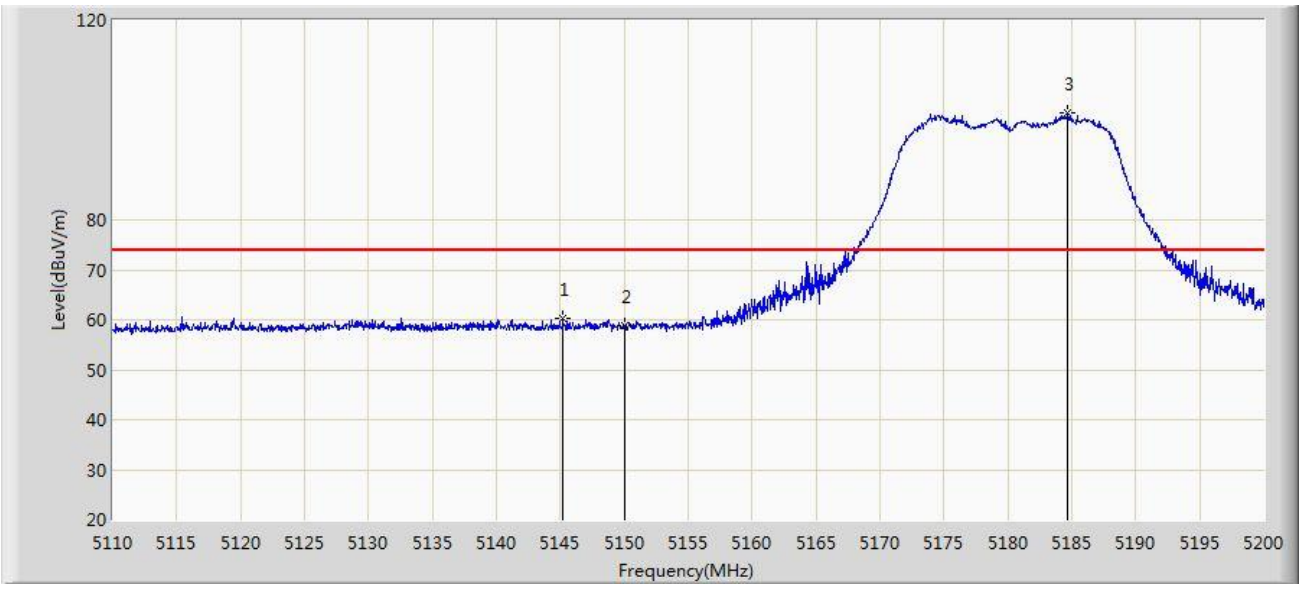

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.190	60.365	53.862	-13.635	74.000	6.503	PK
2			5150.000	58.701	52.249	-15.299	74.000	6.452	PK
3		*	5184.700	101.379	94.861	N/A	N/A	6.517	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 0 + 1	

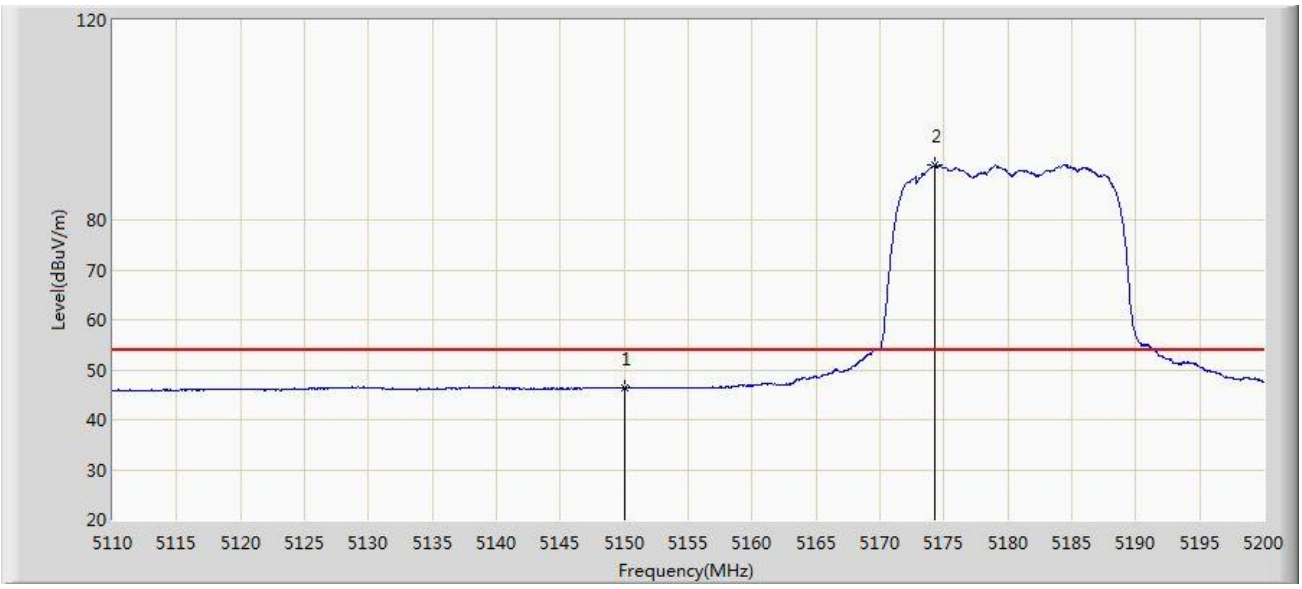

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.424	39.972	-7.576	54.000	6.452	AV
2		*	5174.305	90.967	84.490	N/A	N/A	6.476	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20at channel 5180MHz Ant 0 + 1	

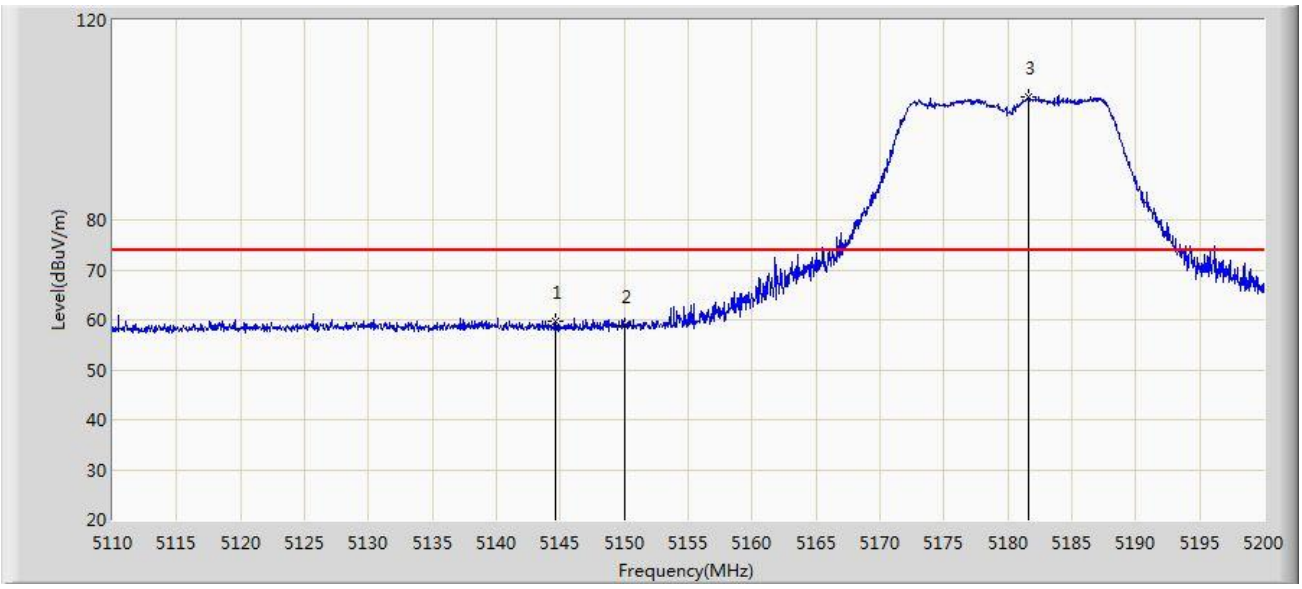

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.605	59.712	53.199	-14.288	74.000	6.513	PK
2			5150.000	58.830	52.378	-15.170	74.000	6.452	PK
3		*	5181.595	104.677	98.151	N/A	N/A	6.525	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20at channel 5180MHz Ant 0 + 1	

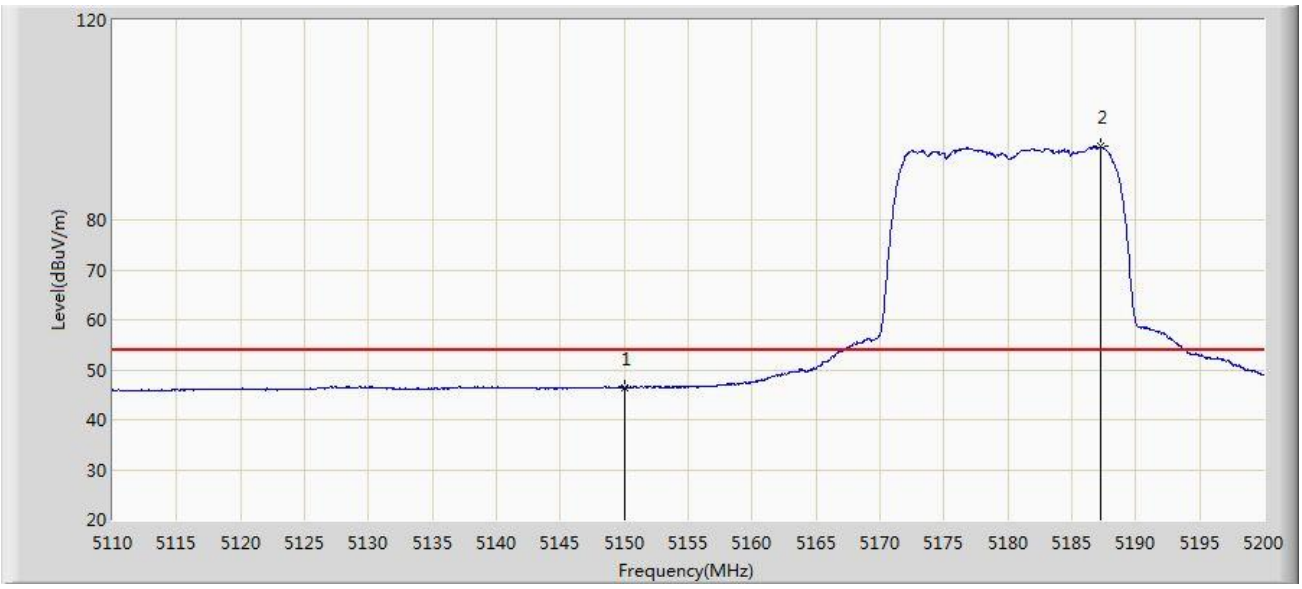

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.407	39.955	-7.593	54.000	6.452	AV
2		*	5187.310	94.721	88.236	N/A	N/A	6.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

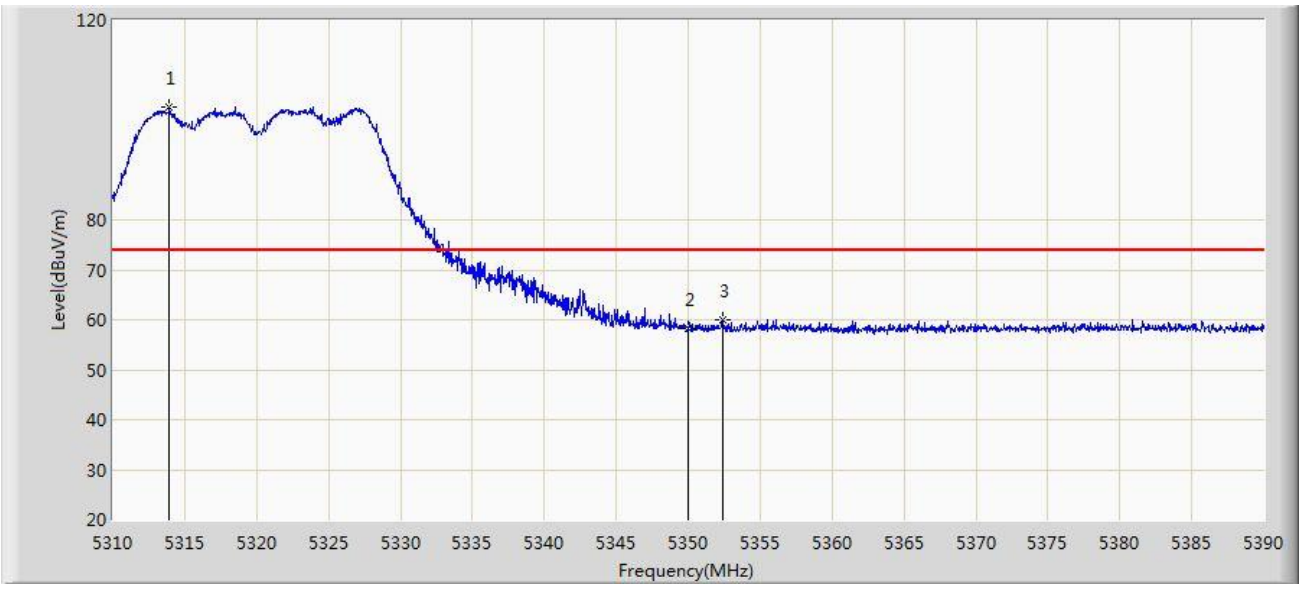

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.920	102.626	96.614	N/A	N/A	6.012	PK
2			5350.000	58.308	51.850	-15.692	74.000	6.458	PK
3			5352.360	59.911	53.526	-14.089	74.000	6.386	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

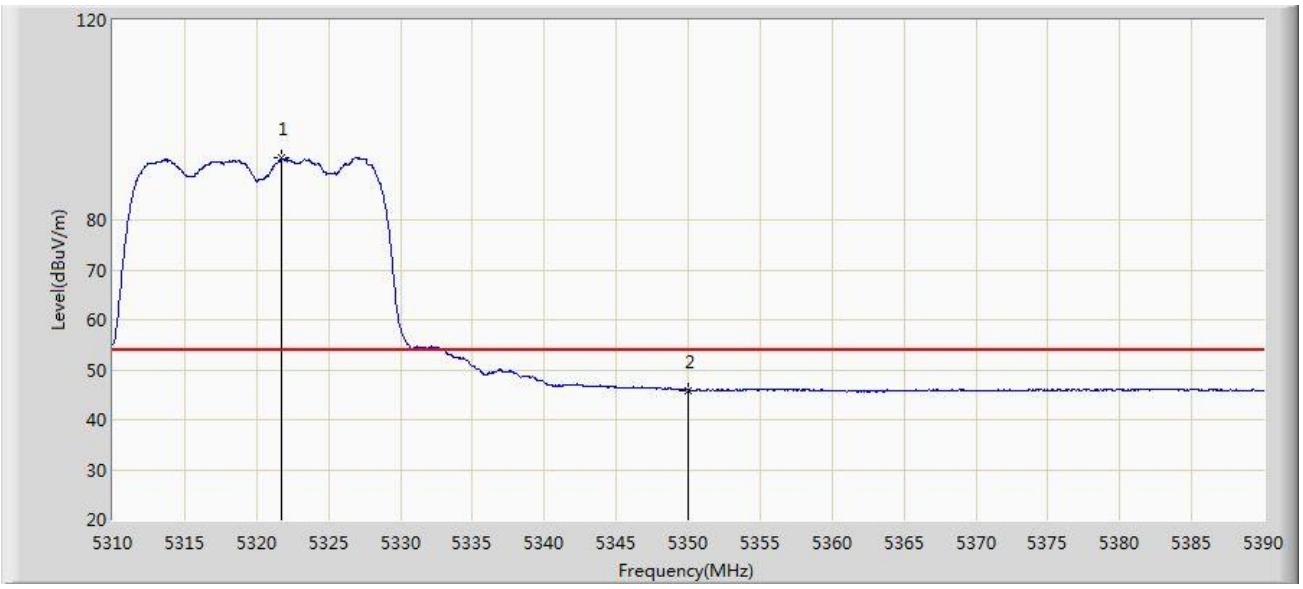

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.760	92.346	86.151	N/A	N/A	6.195	AV
2			5350.000	45.928	39.470	-8.072	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

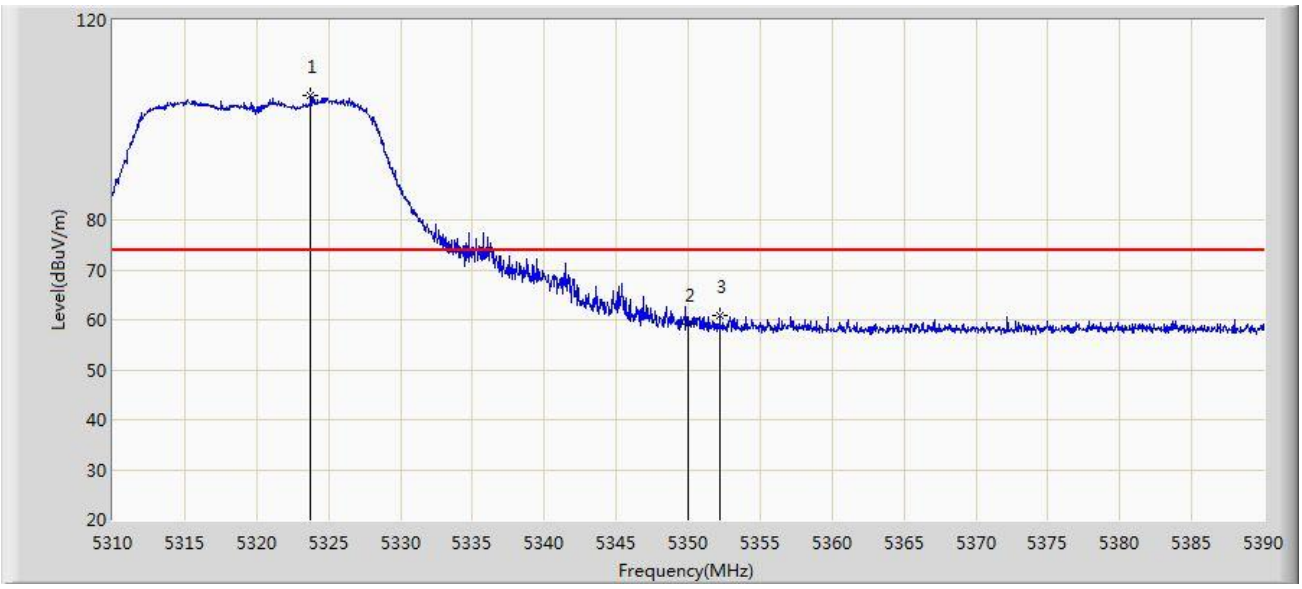

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.760	104.833	98.588	N/A	N/A	6.246	PK
2			5350.000	59.209	52.751	-14.791	74.000	6.458	PK
3			5352.200	60.832	54.443	-13.168	74.000	6.389	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz Ant 0 + 1	

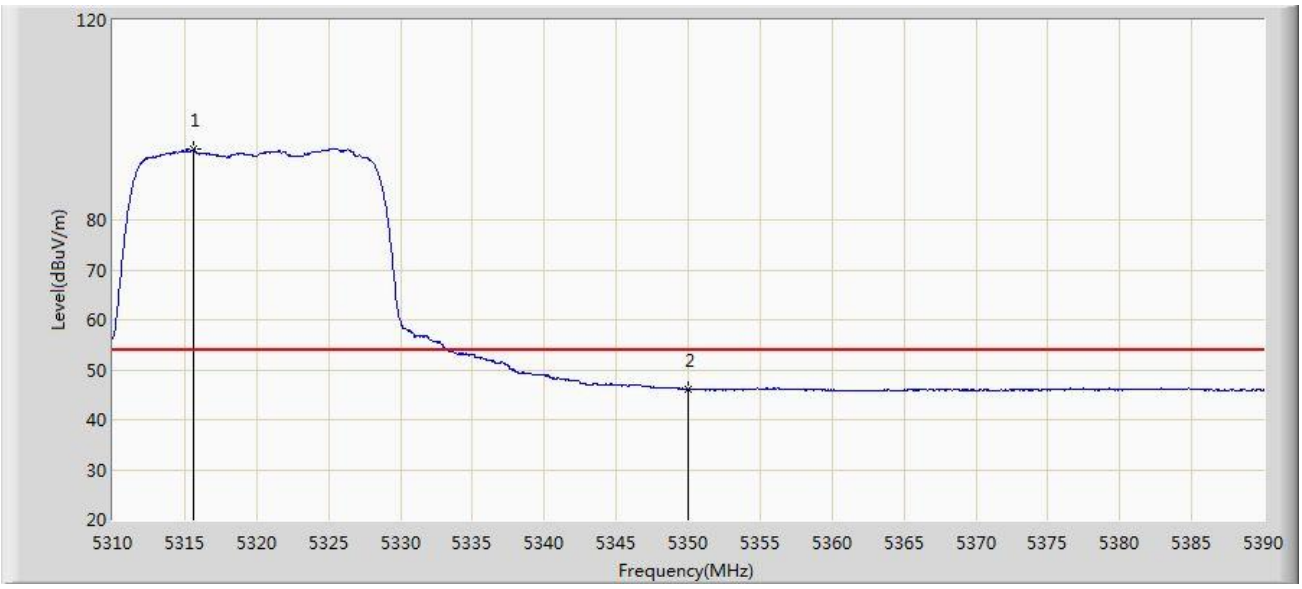

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.640	94.097	88.048	N/A	N/A	6.049	AV
2			5350.000	46.156	39.698	-7.844	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

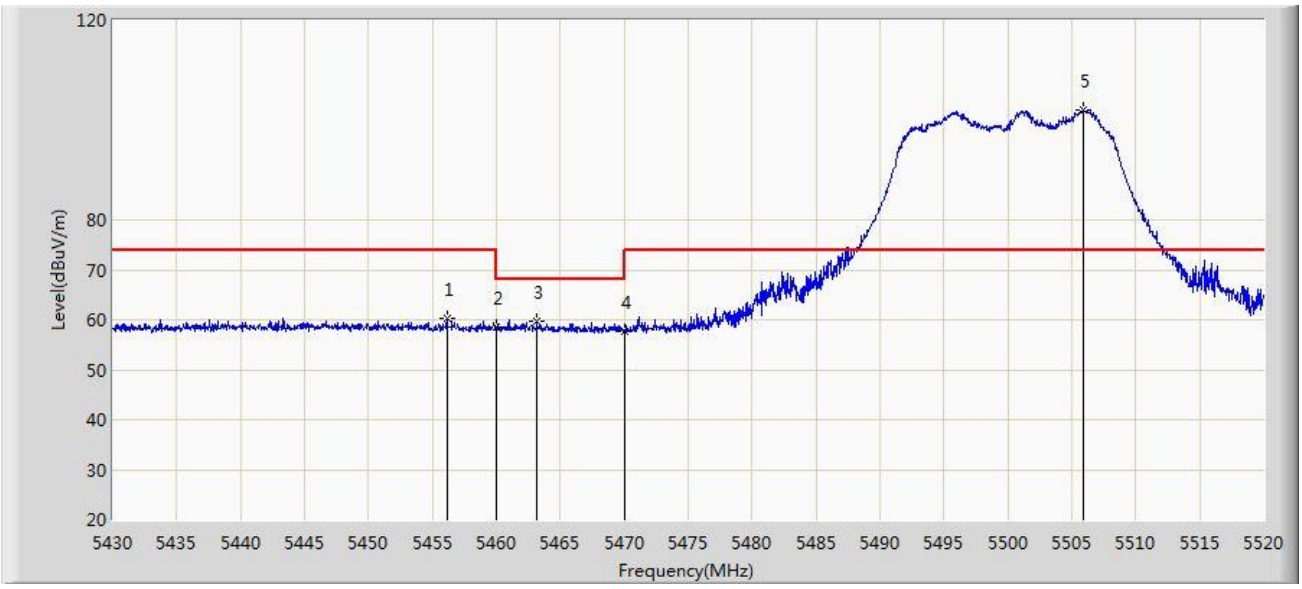

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.145	60.250	53.779	-13.750	74.000	6.471	PK
2			5460.000	58.455	51.969	-15.545	74.000	6.486	PK
3			5463.165	59.745	53.247	-8.455	68.200	6.498	PK
4			5470.000	57.628	51.103	-10.572	68.200	6.524	PK
5		*	5505.870	102.020	95.499	N/A	N/A	6.522	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 01:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

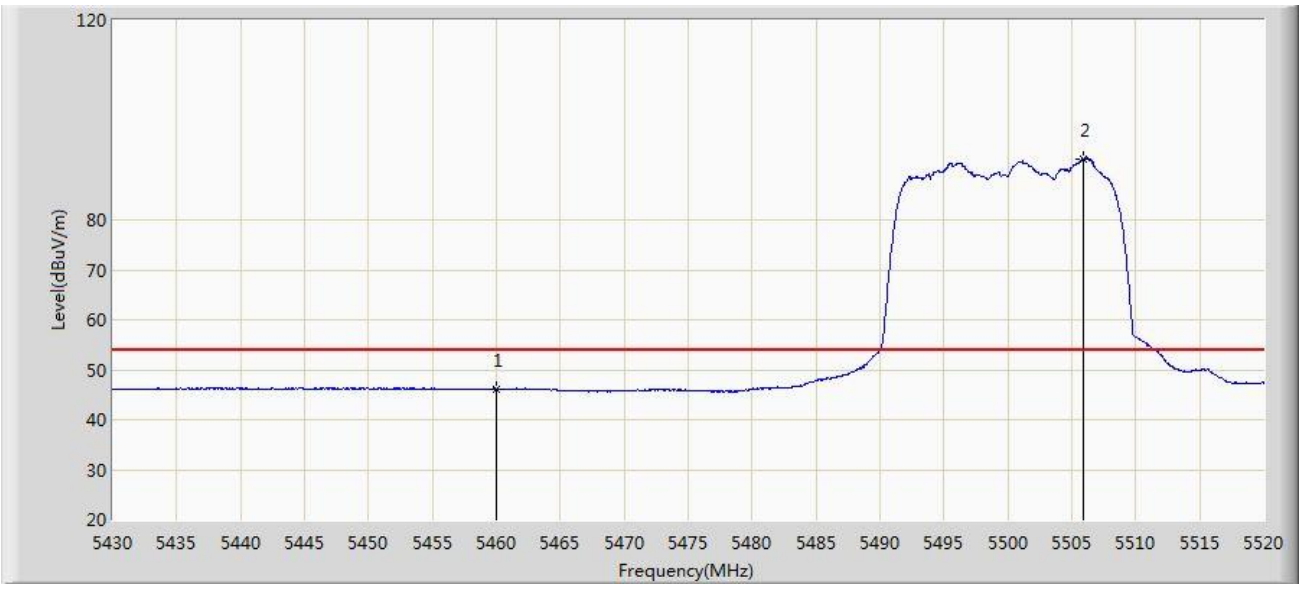

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.080	39.594	-7.920	54.000	6.486	AV
2		*	5505.915	92.280	85.759	N/A	N/A	6.521	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 02:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

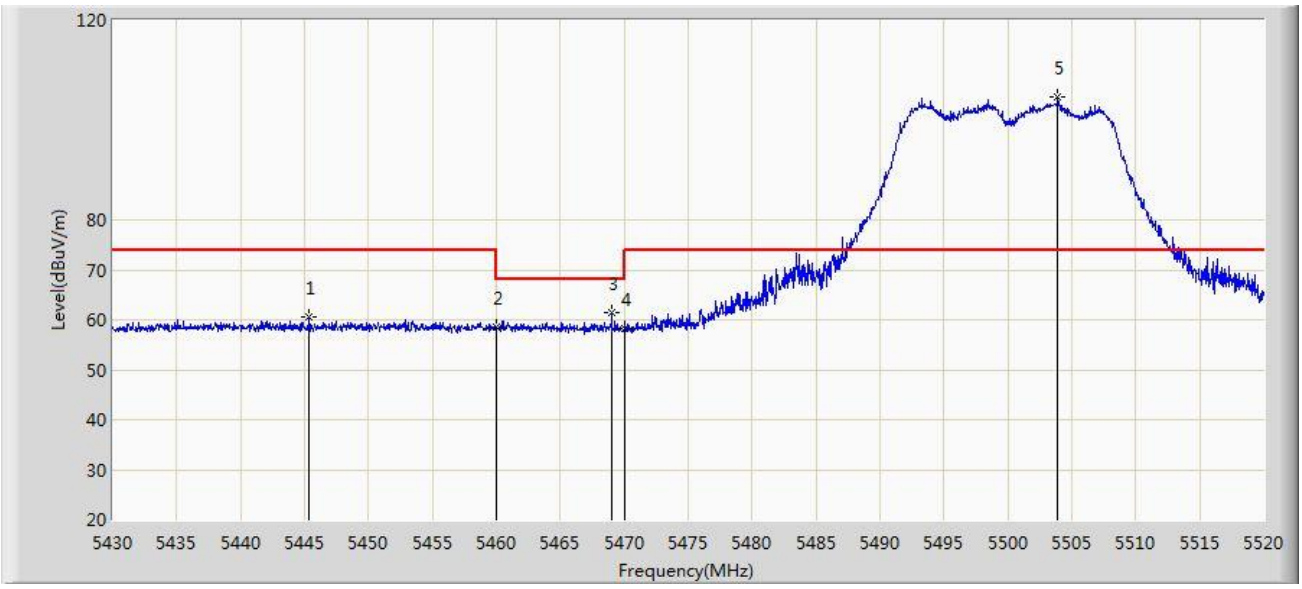

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.390	60.682	54.239	-13.318	74.000	6.443	PK
2			5460.000	58.521	52.035	-15.479	74.000	6.486	PK
3			5469.015	61.451	54.930	-6.749	68.200	6.521	PK
4			5470.000	58.184	51.659	-10.016	68.200	6.524	PK
5		*	5503.890	104.572	98.040	N/A	N/A	6.532	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 02:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz Ant 0 + 1	

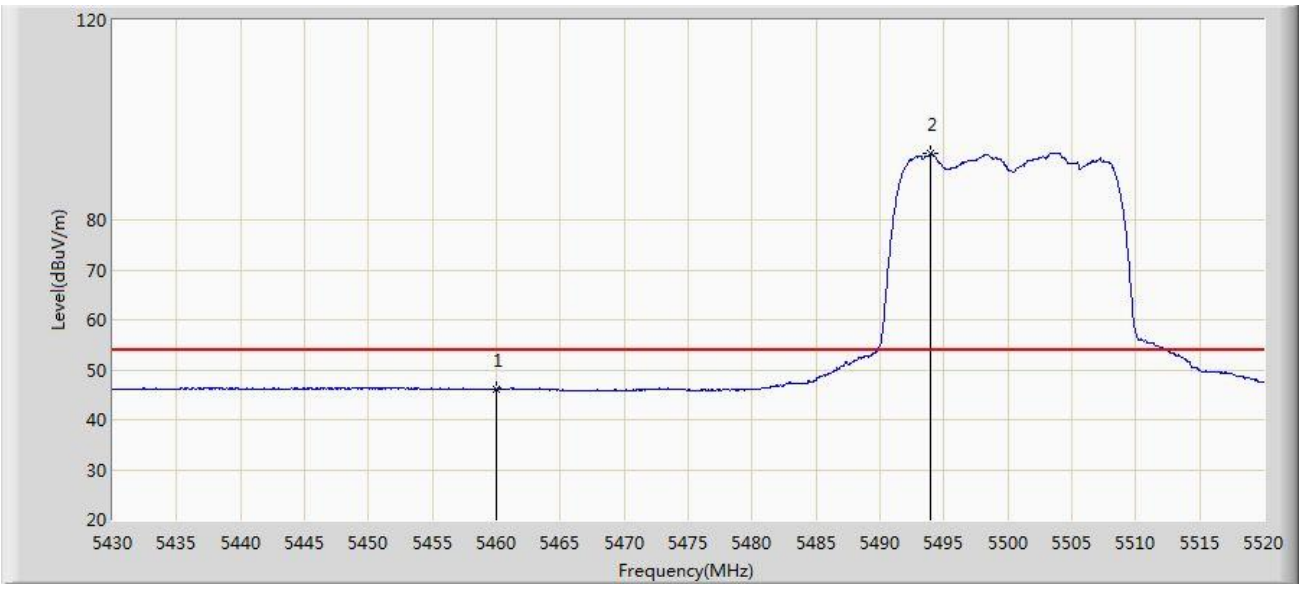

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.037	39.551	-7.963	54.000	6.486	AV
2		*	5493.945	93.219	86.730	N/A	N/A	6.489	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

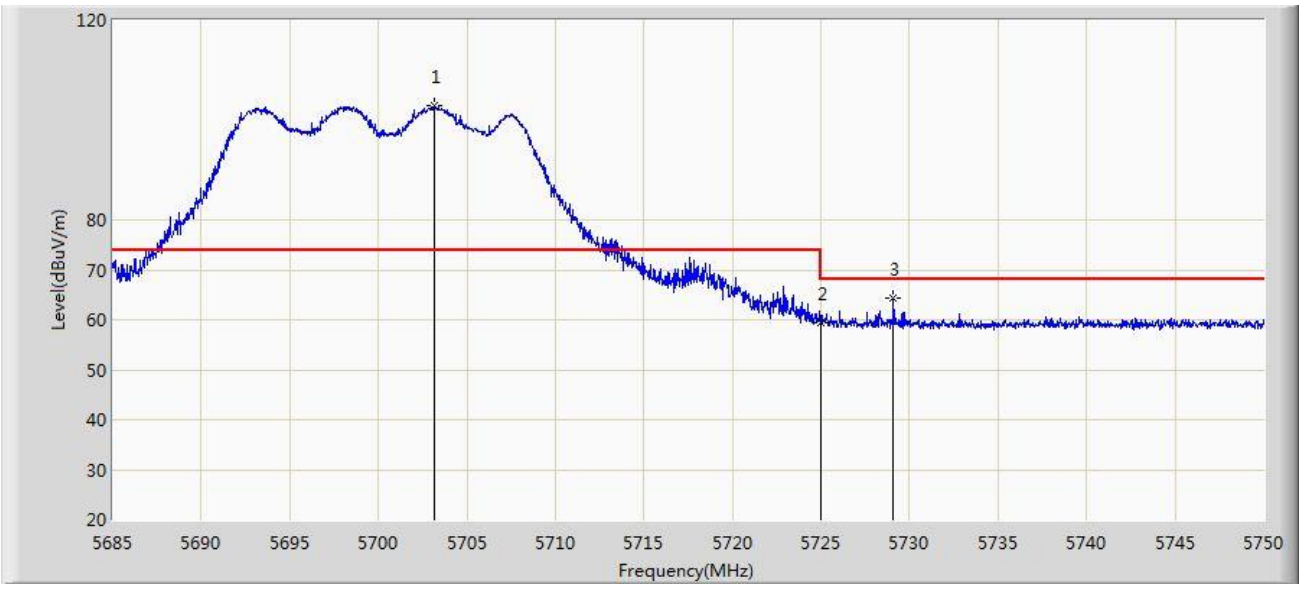

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.167	102.769	96.322	N/A	N/A	6.447	PK
2			5725.000	59.554	53.130	-8.646	68.200	6.424	PK
3			5729.103	64.330	57.827	-3.870	68.200	6.502	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz Ant 0 + 1	

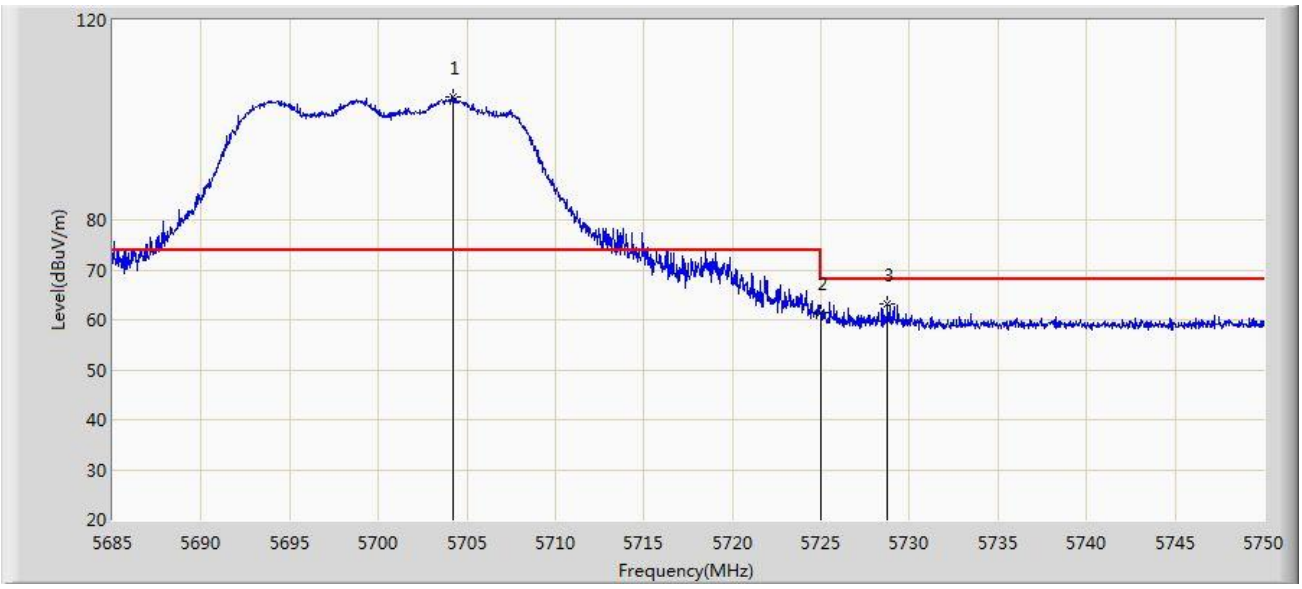

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.240	104.681	98.226	N/A	N/A	6.455	PK
2			5725.000	61.396	54.972	-6.804	68.200	6.424	PK
3			5728.777	63.157	56.660	-5.043	68.200	6.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

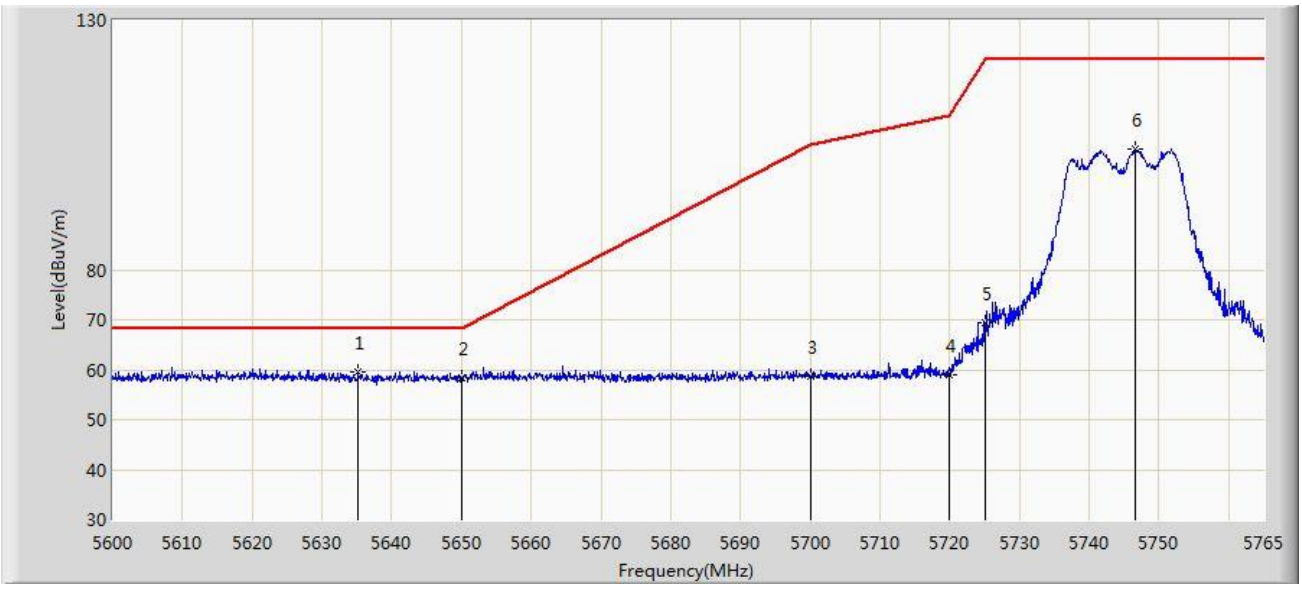

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.145	59.696	53.642	-8.504	68.200	6.053	PK
2			5650.000	58.333	52.074	-9.867	68.200	6.258	PK
3			5700.000	58.567	52.142	-46.633	105.200	6.426	PK
4			5720.000	59.025	52.640	-51.775	110.800	6.386	PK
5			5725.000	69.498	63.074	-52.702	122.200	6.424	PK
6			5746.685	104.188	97.412	N/A	N/A	6.776	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:26
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 0 + 1	

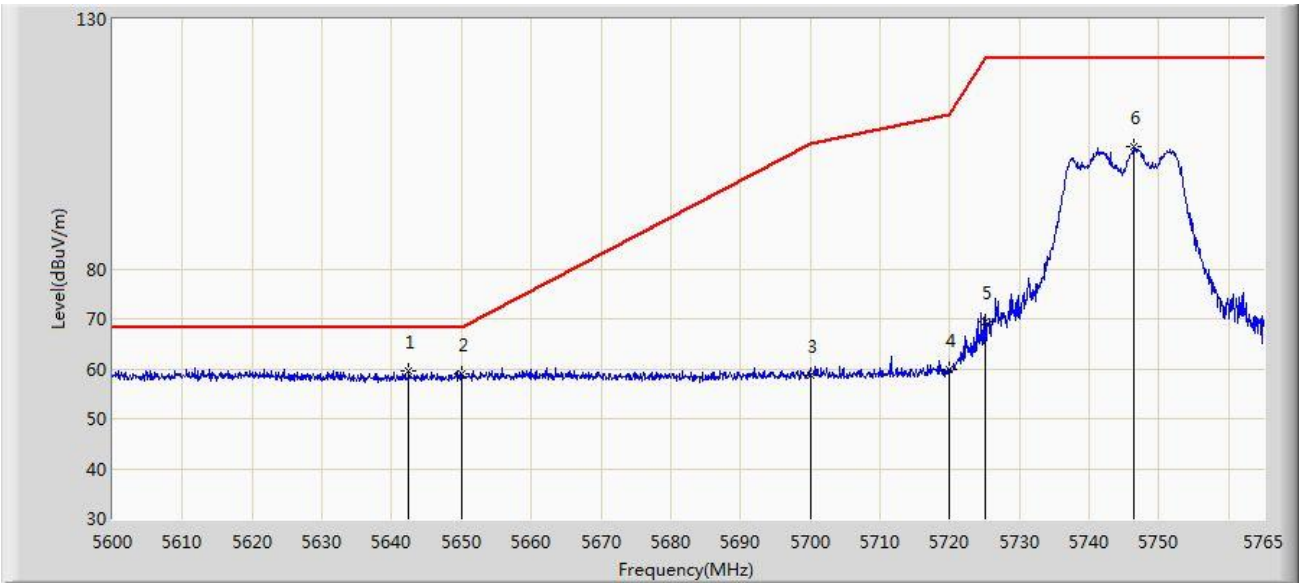

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.487	59.450	53.347	-8.750	68.200	6.103	PK
2			5650.000	58.996	52.737	-9.204	68.200	6.258	PK
3			5700.000	58.687	52.262	-46.513	105.200	6.426	PK
4			5720.000	59.841	53.456	-50.959	110.800	6.386	PK
5			5725.000	69.529	63.105	-52.671	122.200	6.424	PK
6			5746.355	104.414	97.640	N/A	N/A	6.773	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

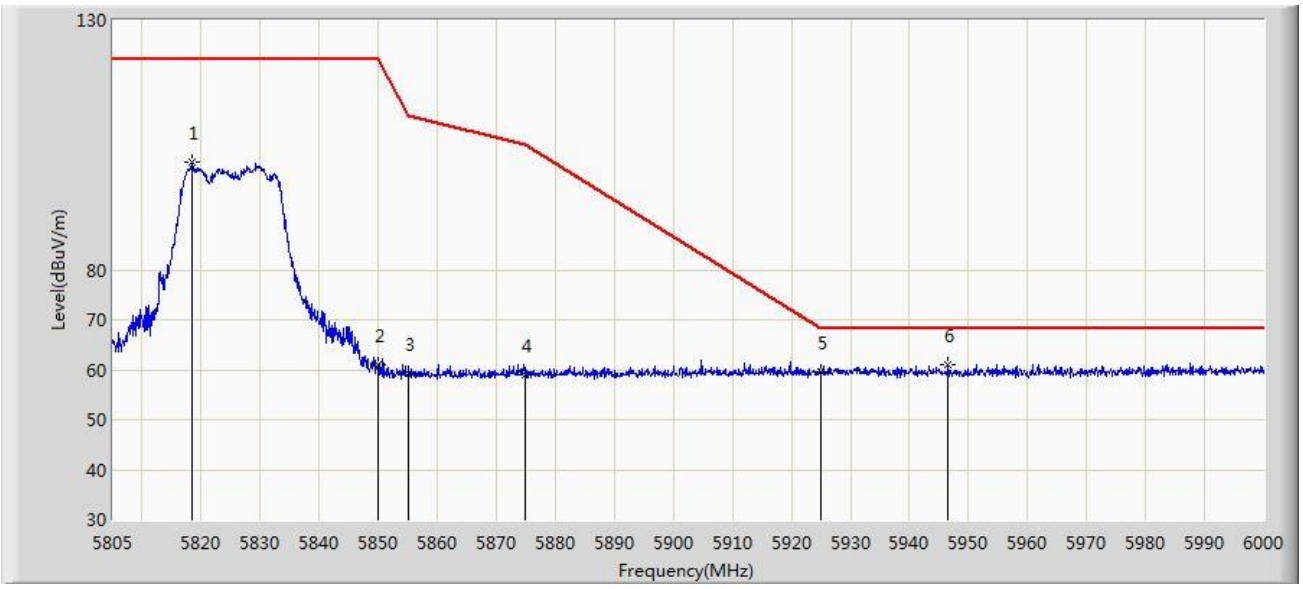

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5818.357	101.659	94.732	N/A	N/A	6.927	PK
2			5850.000	60.938	54.130	-61.262	122.200	6.808	PK
3			5855.000	59.259	52.439	-51.541	110.800	6.820	PK
4			5875.000	59.121	52.203	-46.079	105.200	6.918	PK
5			5925.000	59.429	52.332	-8.771	68.200	7.097	PK
6		*	5946.570	60.945	53.840	-7.255	68.200	7.105	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:32
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 0 + 1	

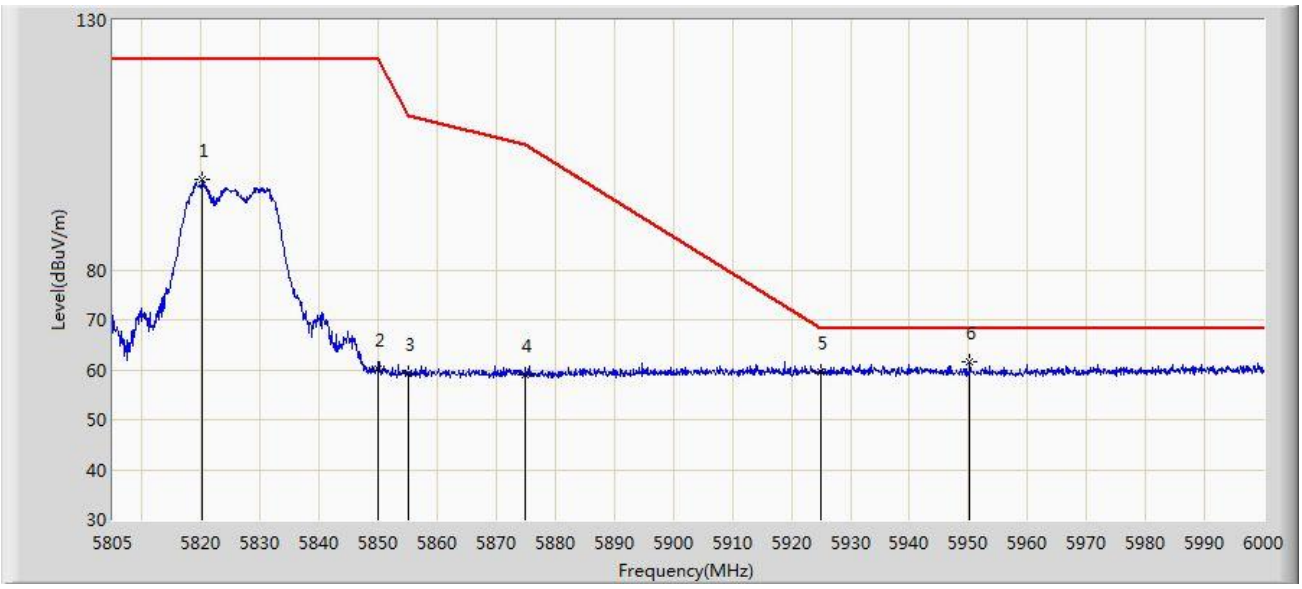

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.210	98.020	91.062	N/A	N/A	6.958	PK
2			5850.000	60.095	53.287	-62.105	122.200	6.808	PK
3			5855.000	59.395	52.575	-51.405	110.800	6.820	PK
4			5875.000	58.865	51.947	-46.335	105.200	6.918	PK
5			5925.000	59.516	52.419	-8.684	68.200	7.097	PK
6		*	5950.178	61.467	54.394	-6.733	68.200	7.073	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

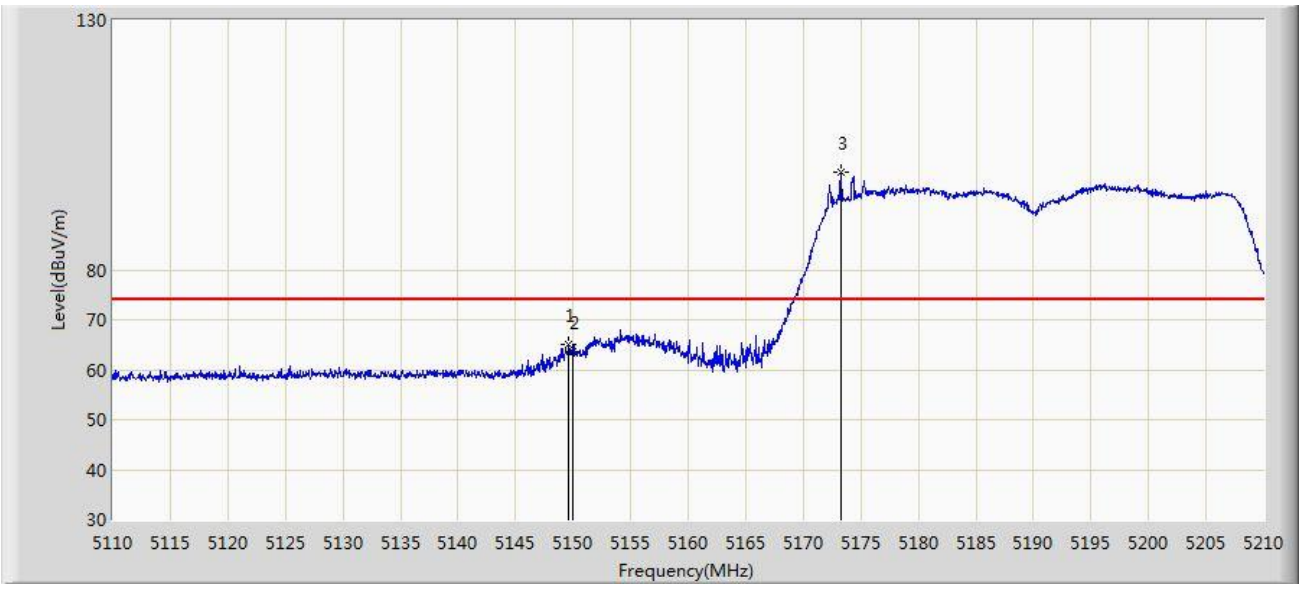

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.600	65.052	58.600	-8.948	74.000	6.453	PK
2			5150.000	63.571	57.119	-10.429	74.000	6.452	PK
3		*	5173.250	99.501	93.031	N/A	N/A	6.469	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

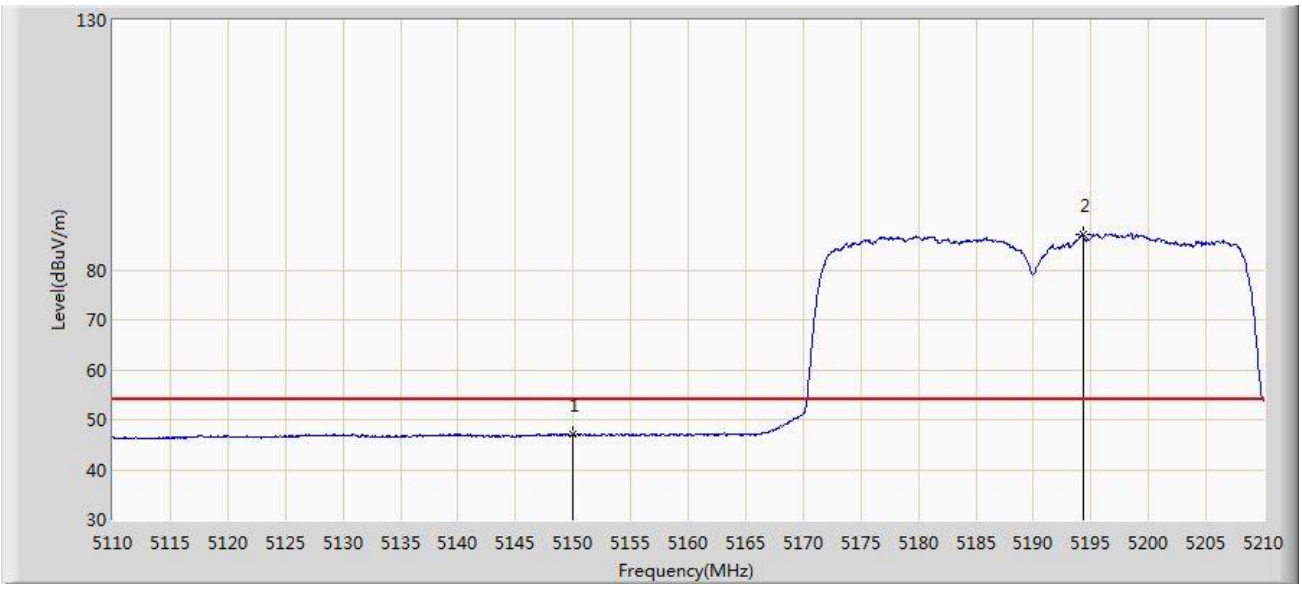

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.045	40.593	-6.955	54.000	6.452	AV
2		*	5194.300	87.077	80.681	N/A	N/A	6.396	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

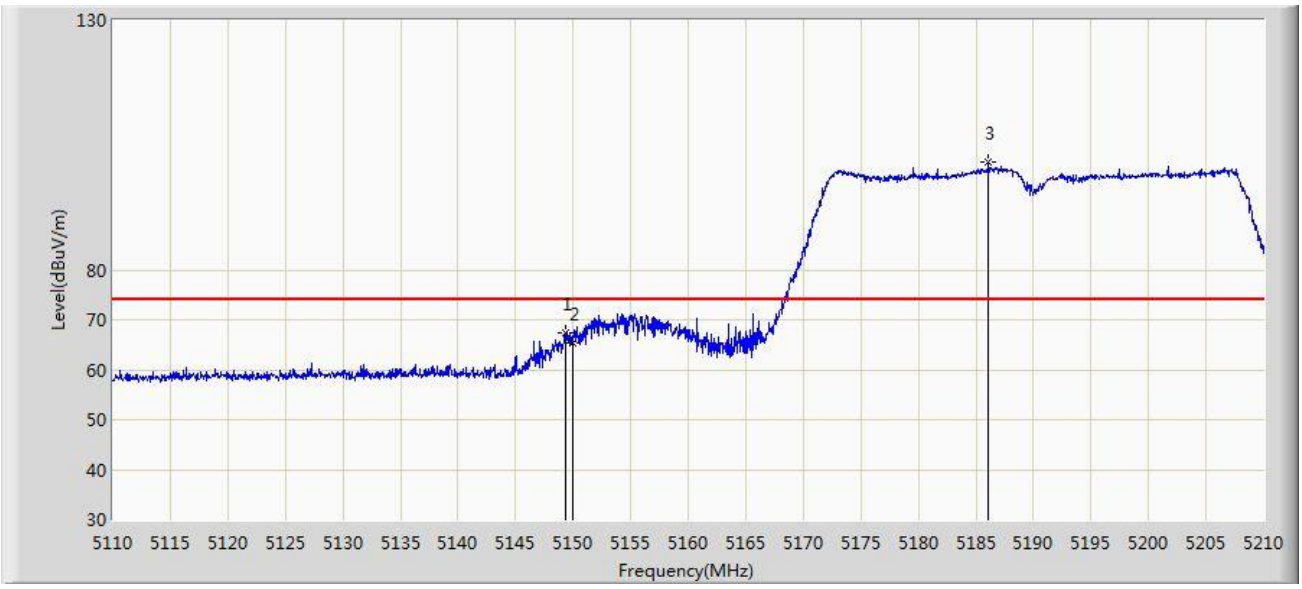

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.300	67.454	61.001	-6.546	74.000	6.453	PK
2			5150.000	65.239	58.787	-8.761	74.000	6.452	PK
3		*	5186.100	101.462	94.962	N/A	N/A	6.501	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 0 + 1	

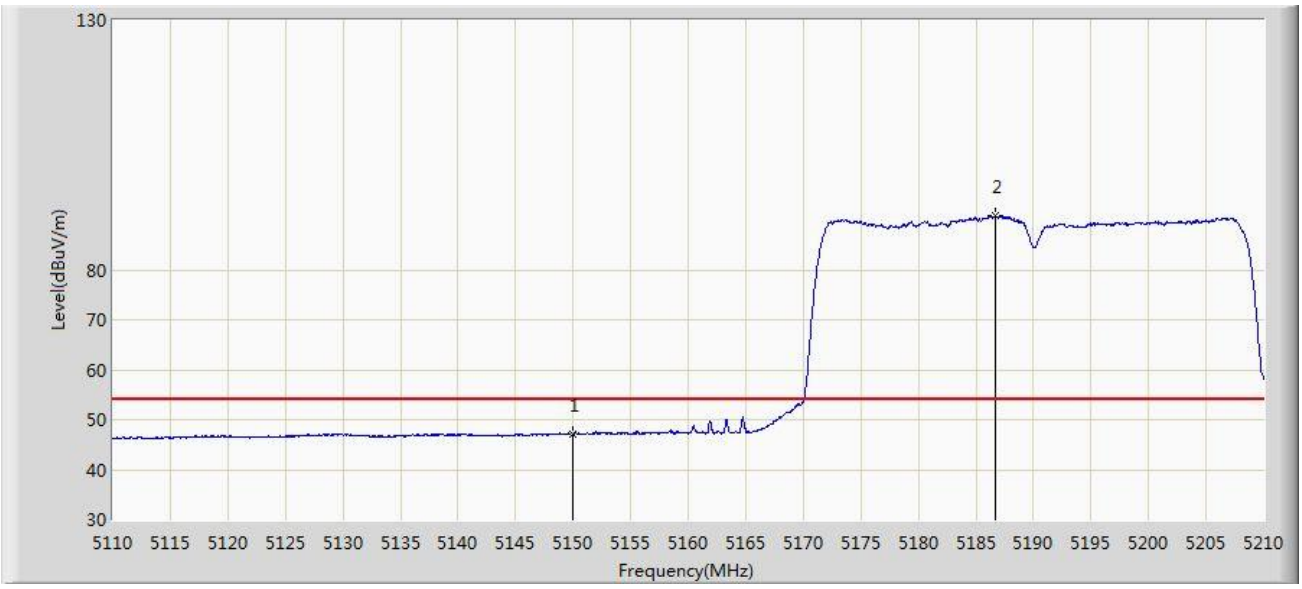

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.199	40.747	-6.801	54.000	6.452	AV
2		*	5186.650	90.766	84.273	N/A	N/A	6.493	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 03:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

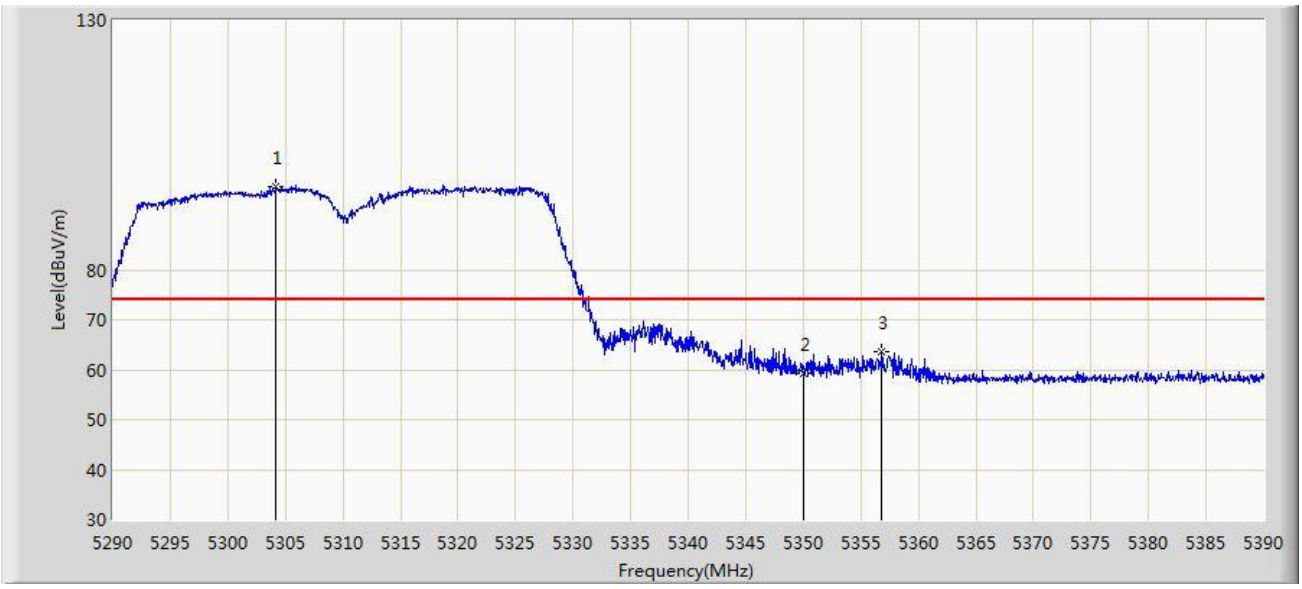

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5304.200	96.642	90.695	N/A	N/A	5.947	PK
2			5350.000	59.227	52.769	-14.773	74.000	6.458	PK
3			5356.850	63.541	57.272	-10.459	74.000	6.270	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

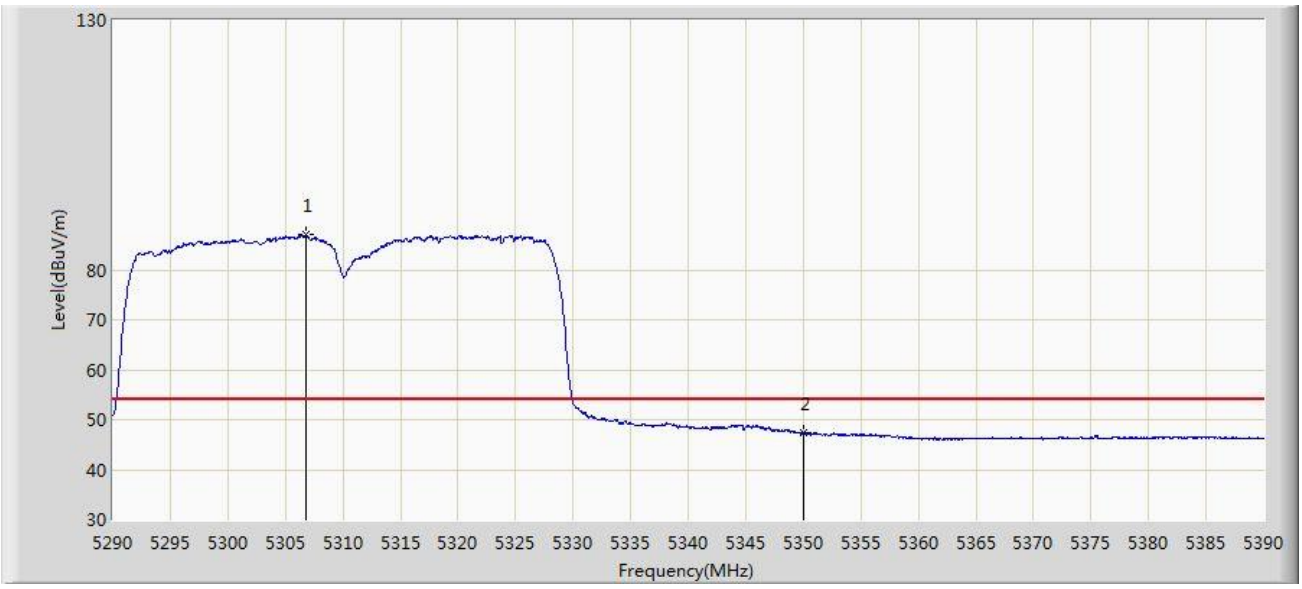

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.800	86.995	81.060	N/A	N/A	5.935	AV
2			5350.000	47.282	40.824	-6.718	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

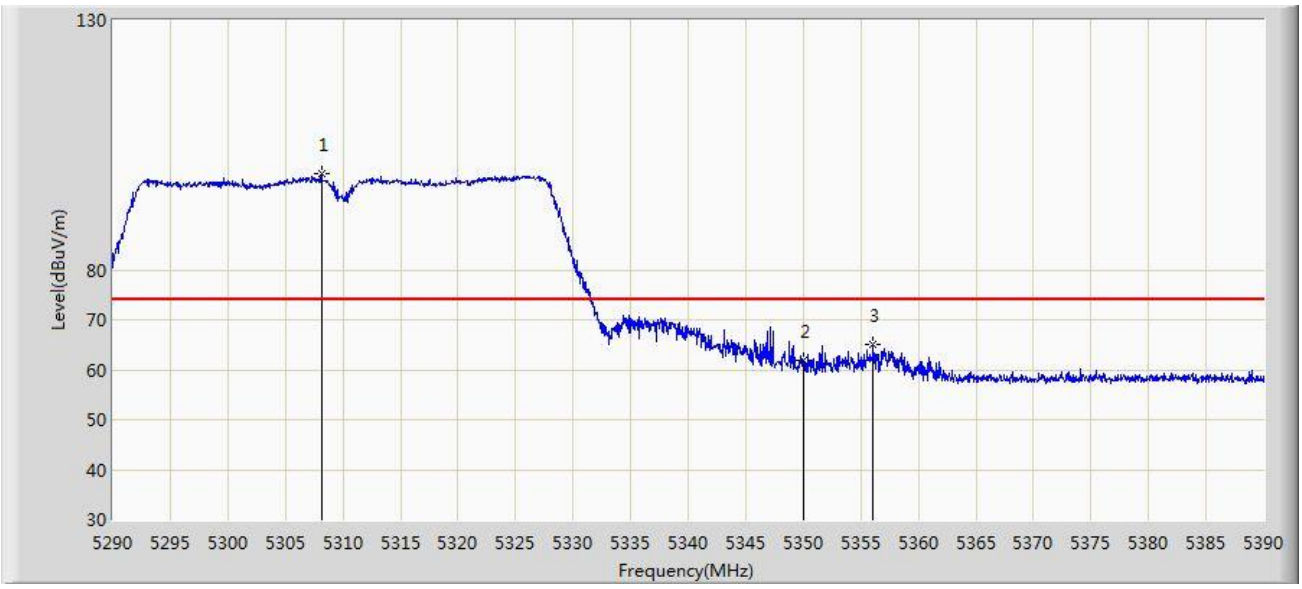

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.150	99.397	93.468	N/A	N/A	5.929	PK
2			5350.000	61.869	55.411	-12.131	74.000	6.458	PK
3			5356.100	64.992	58.703	-9.008	74.000	6.289	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz Ant 0 + 1	

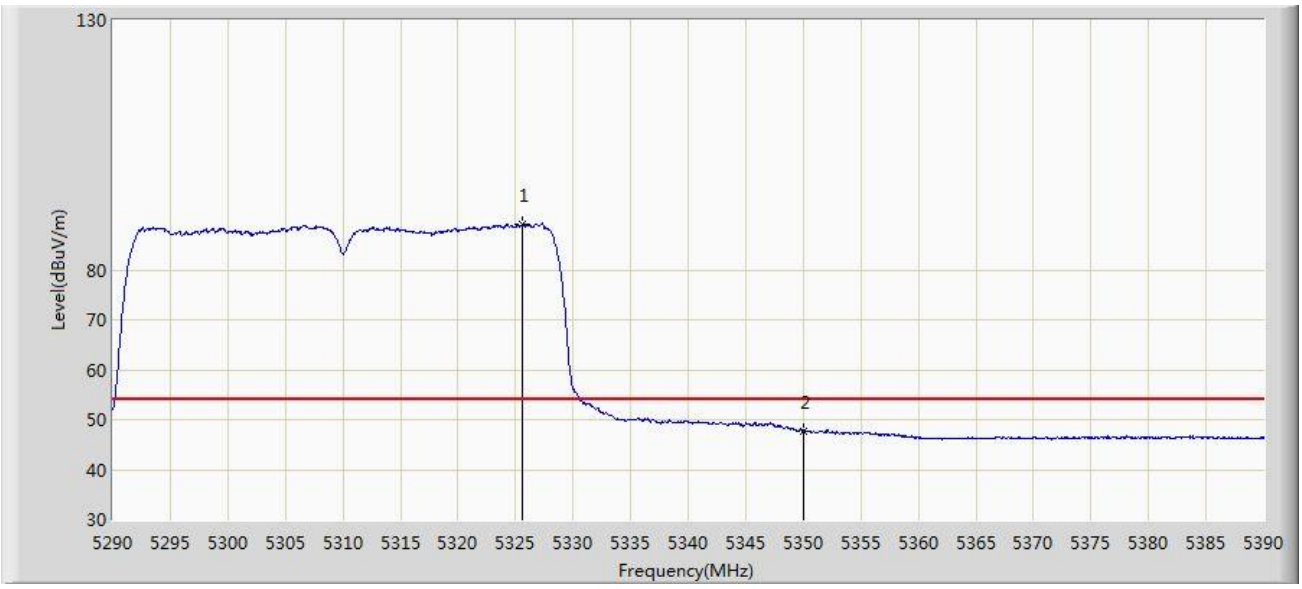

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.550	89.173	82.882	N/A	N/A	6.291	AV
2			5350.000	47.615	41.157	-6.385	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

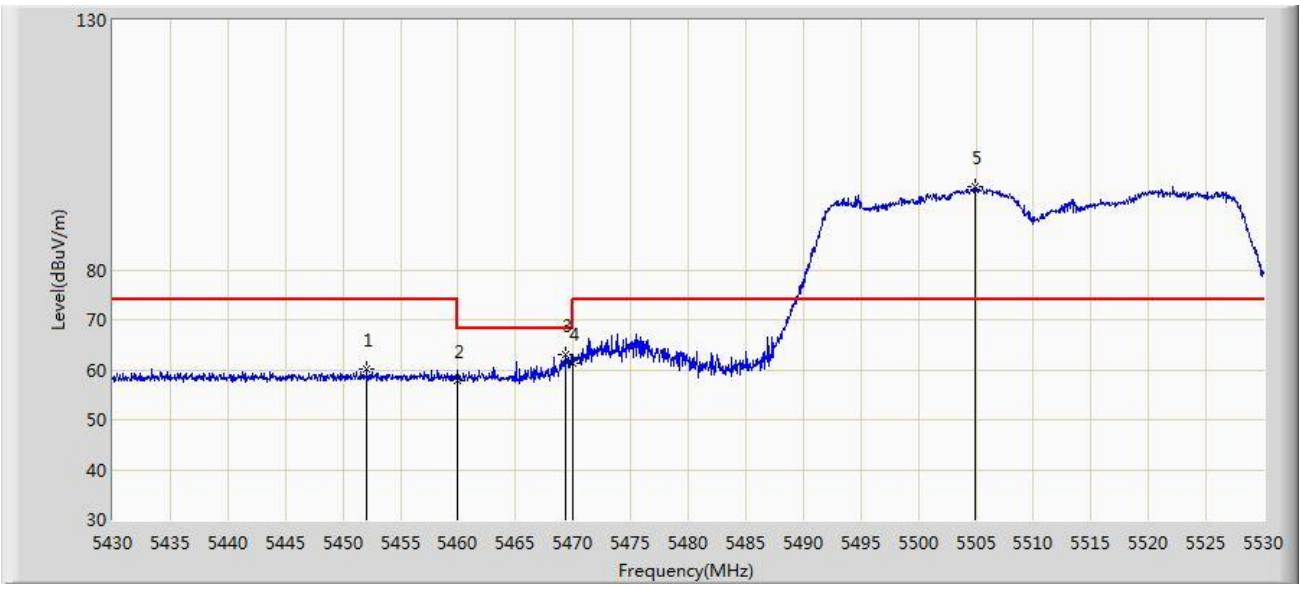

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.100	60.080	53.618	-13.920	74.000	6.462	PK
2			5460.000	57.770	51.284	-16.230	74.000	6.486	PK
3			5469.300	63.119	56.597	-5.081	68.200	6.522	PK
4			5470.000	61.209	54.684	-6.991	68.200	6.524	PK
5		*	5504.950	96.761	90.224	N/A	N/A	6.537	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

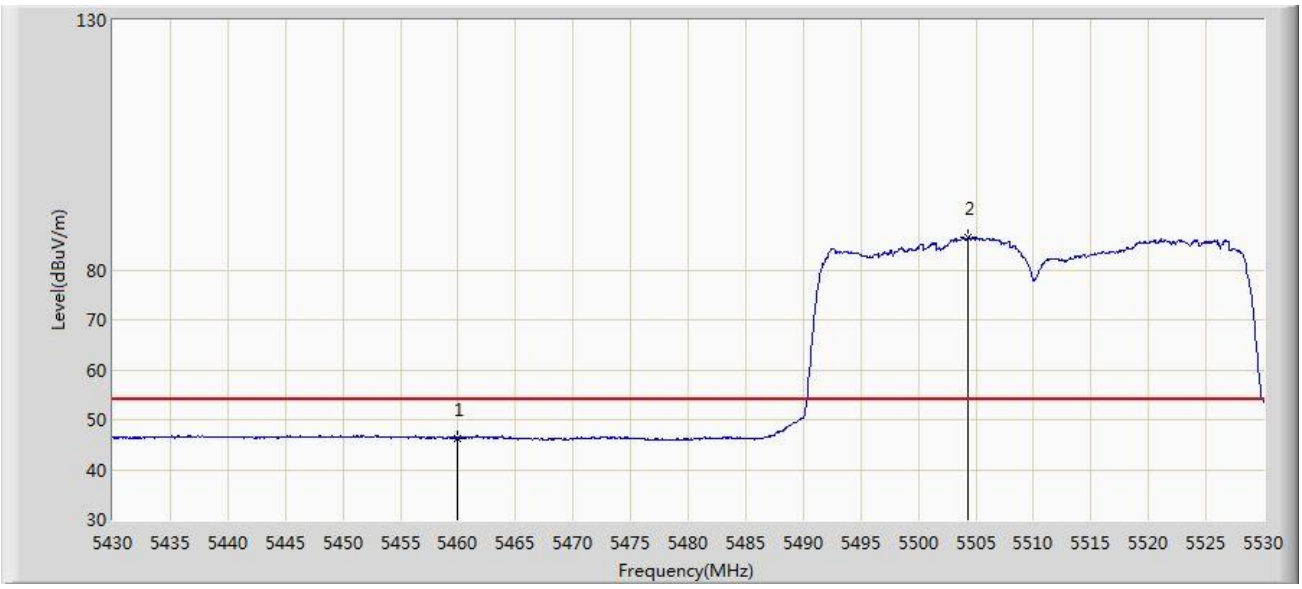

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.326	39.840	-7.674	54.000	6.486	AV
2		*	5504.300	86.379	79.845	N/A	N/A	6.533	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

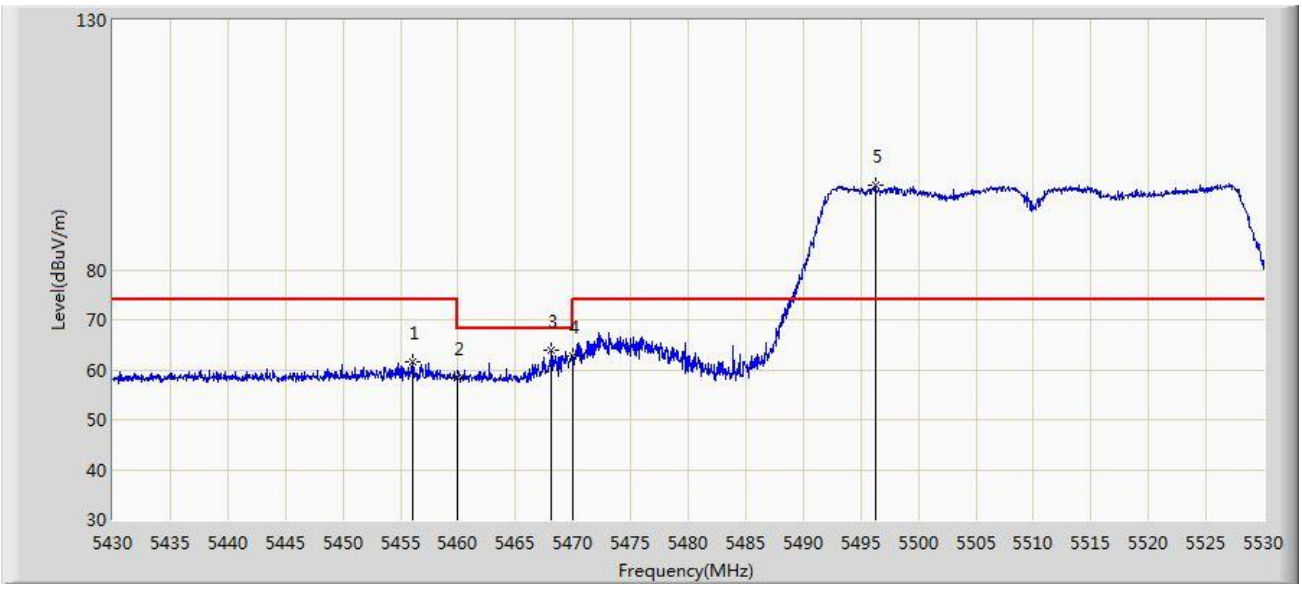

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.100	61.581	55.111	-12.419	74.000	6.470	PK
2			5460.000	58.345	51.859	-15.655	74.000	6.486	PK
3			5468.100	63.807	57.289	-4.393	68.200	6.518	PK
4			5470.000	62.854	56.329	-5.346	68.200	6.524	PK
5		*	5496.250	97.027	90.528	N/A	N/A	6.499	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz Ant 0 + 1	

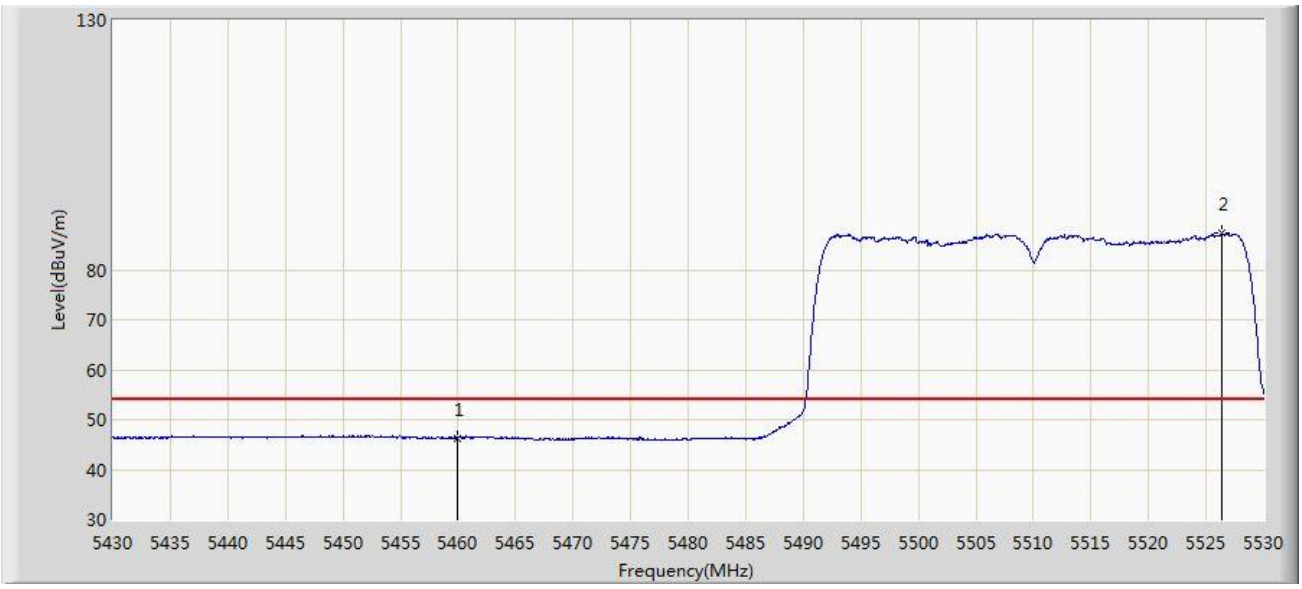

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.360	39.874	-7.640	54.000	6.486	AV
2		*	5526.400	87.315	80.925	N/A	N/A	6.391	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

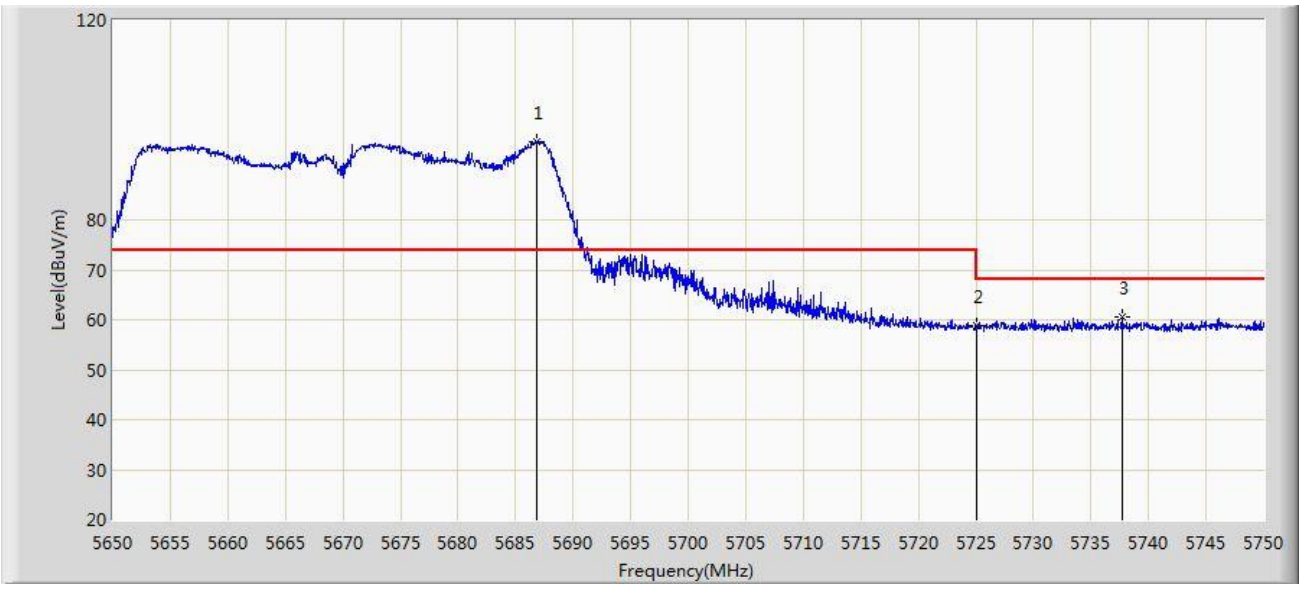

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5686.850	95.679	89.381	N/A	N/A	6.298	PK
2			5725.000	58.858	52.434	-9.342	68.200	6.424	PK
3			5737.700	60.682	54.019	-7.518	68.200	6.663	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz Ant 0 + 1	

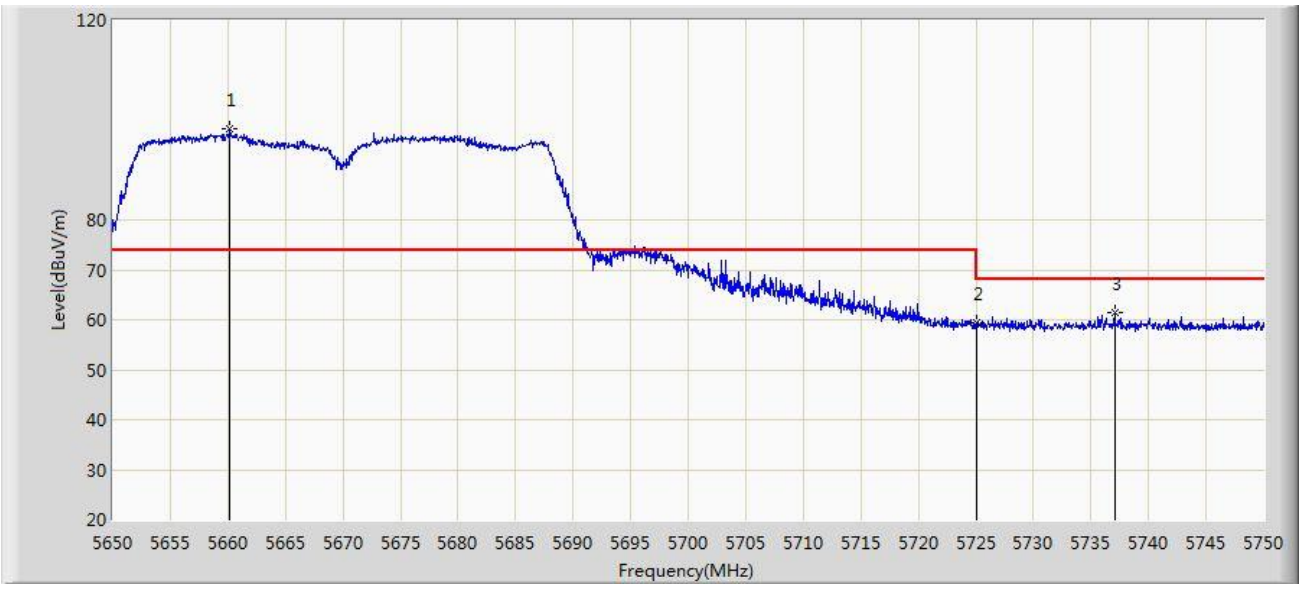

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5660.200	98.192	91.798	N/A	N/A	6.393	PK
2			5725.000	59.414	52.990	-8.786	68.200	6.424	PK
3			5737.050	61.532	54.881	-6.668	68.200	6.650	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

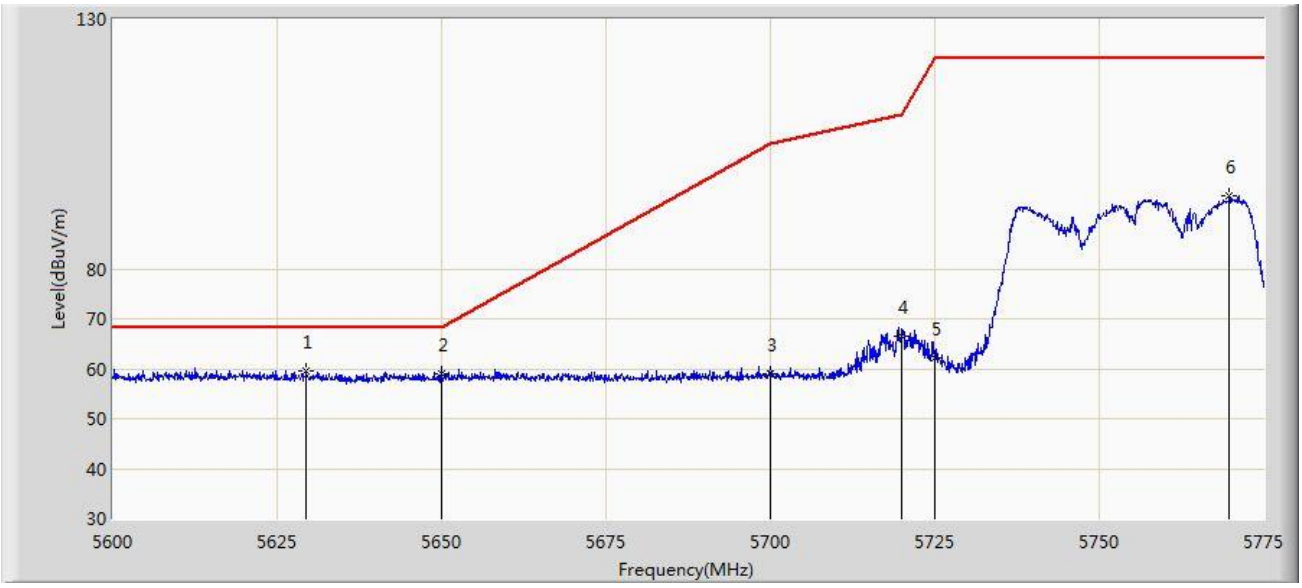

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.487	59.708	53.565	-8.492	68.200	6.143	PK
2			5650.000	59.038	52.779	-9.162	68.200	6.258	PK
3			5700.000	58.856	52.431	-46.344	105.200	6.426	PK
4			5720.000	66.625	60.240	-44.175	110.800	6.386	PK
5			5725.000	62.250	55.826	-59.950	122.200	6.424	PK
6			5769.837	94.641	87.899	N/A	N/A	6.741	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:31
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 0 + 1	

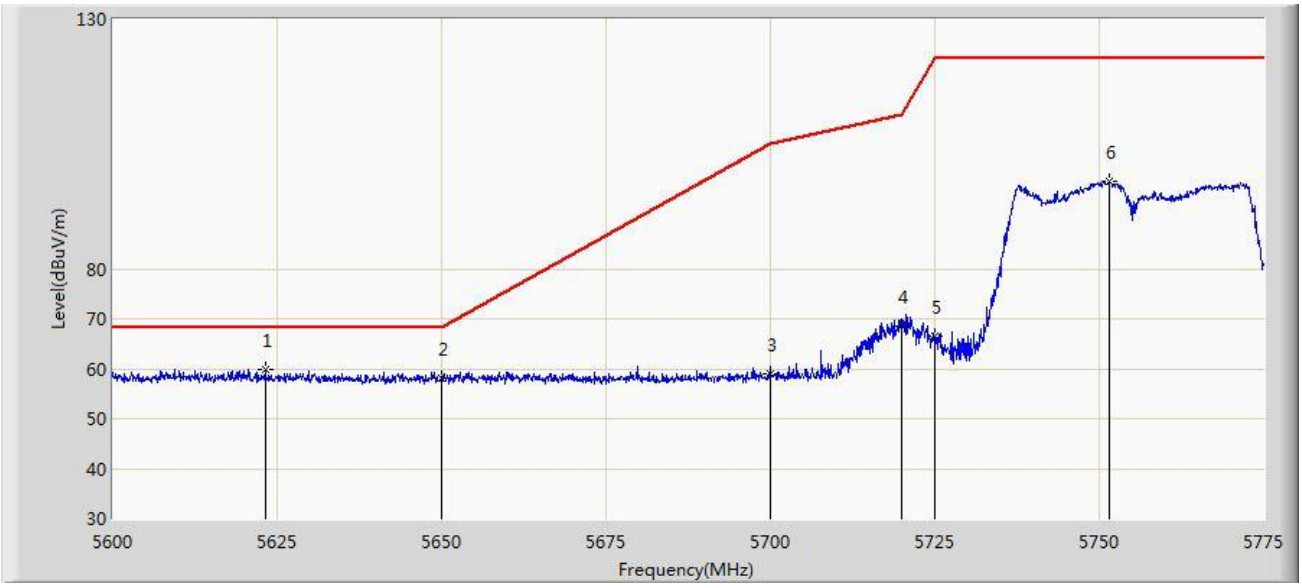

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.187	59.817	53.511	-8.383	68.200	6.306	PK
2			5650.000	58.079	51.820	-10.121	68.200	6.258	PK
3			5700.000	59.118	52.693	-46.082	105.200	6.426	PK
4			5720.000	68.647	62.262	-42.153	110.800	6.386	PK
5			5725.000	66.564	60.140	-55.636	122.200	6.424	PK
6			5751.462	97.554	90.747	N/A	N/A	6.807	PK

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

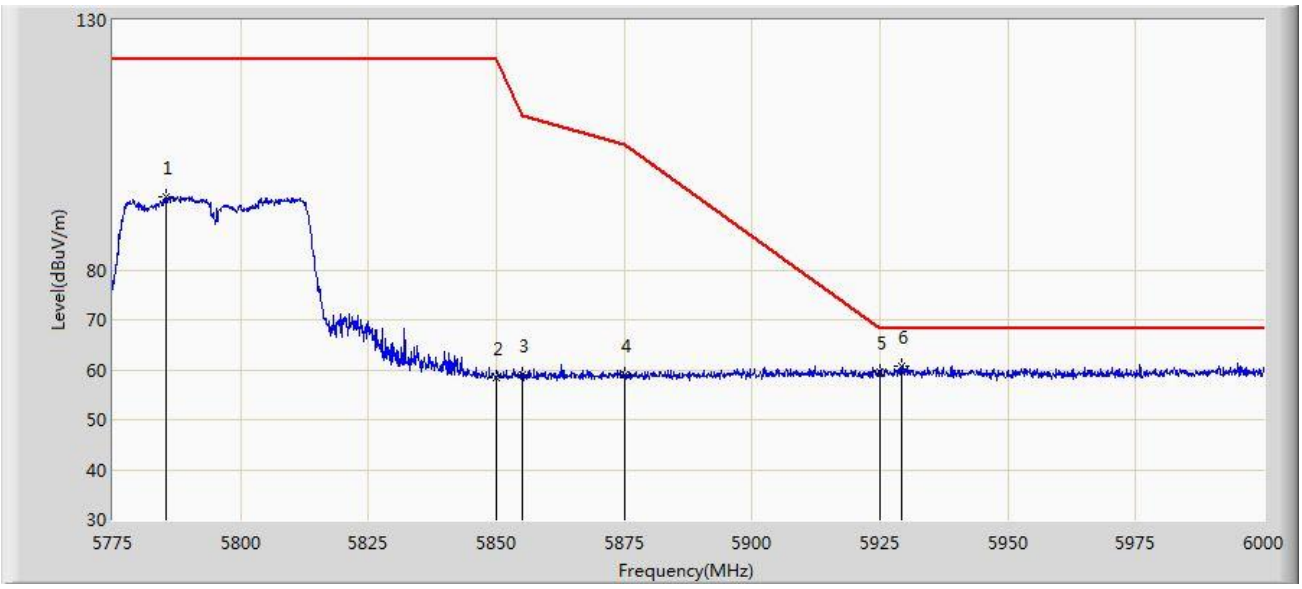

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5785.462	94.537	87.840	N/A	N/A	6.696	PK
2			5850.000	58.445	51.637	-63.755	122.200	6.808	PK
3			5855.000	59.090	52.270	-51.710	110.800	6.820	PK
4			5875.000	58.846	51.928	-46.354	105.200	6.918	PK
5			5925.000	59.570	52.473	-8.630	68.200	7.097	PK
6		*	5929.350	60.709	53.557	-7.491	68.200	7.151	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 04:37
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 0 + 1	

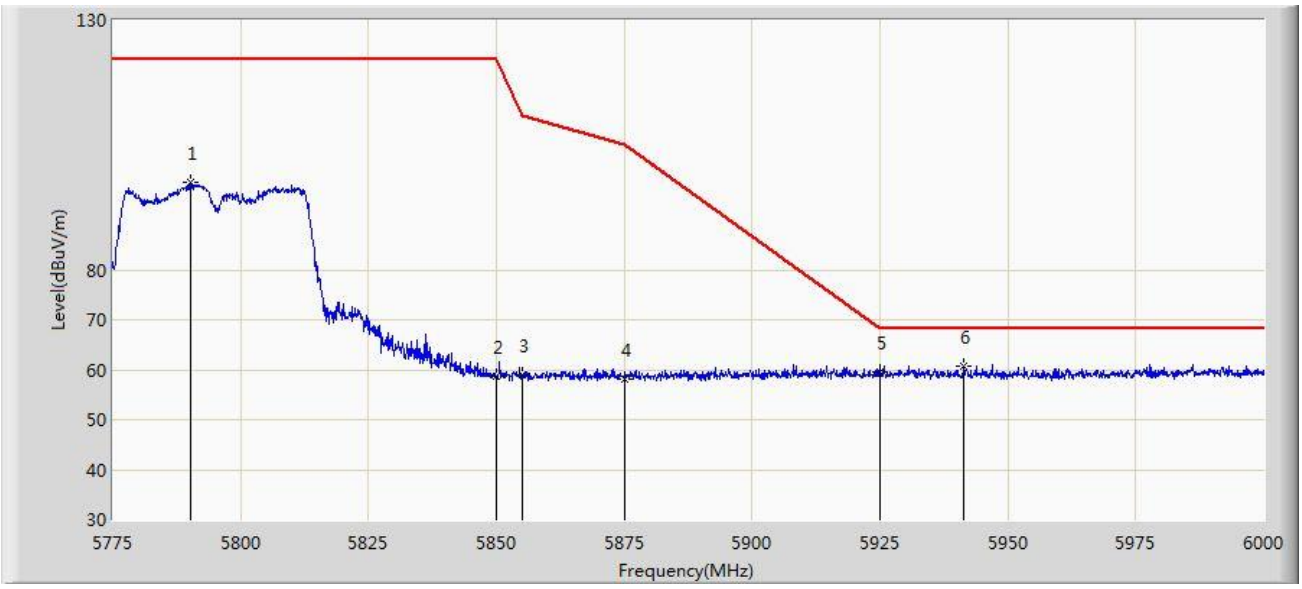

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5790.187	97.579	90.868	N/A	N/A	6.711	PK
2			5850.000	58.646	51.838	-63.554	122.200	6.808	PK
3			5855.000	59.088	52.268	-51.712	110.800	6.820	PK
4			5875.000	58.153	51.235	-47.047	105.200	6.918	PK
5			5925.000	59.618	52.521	-8.582	68.200	7.097	PK
6		*	5941.388	60.679	53.504	-7.521	68.200	7.176	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

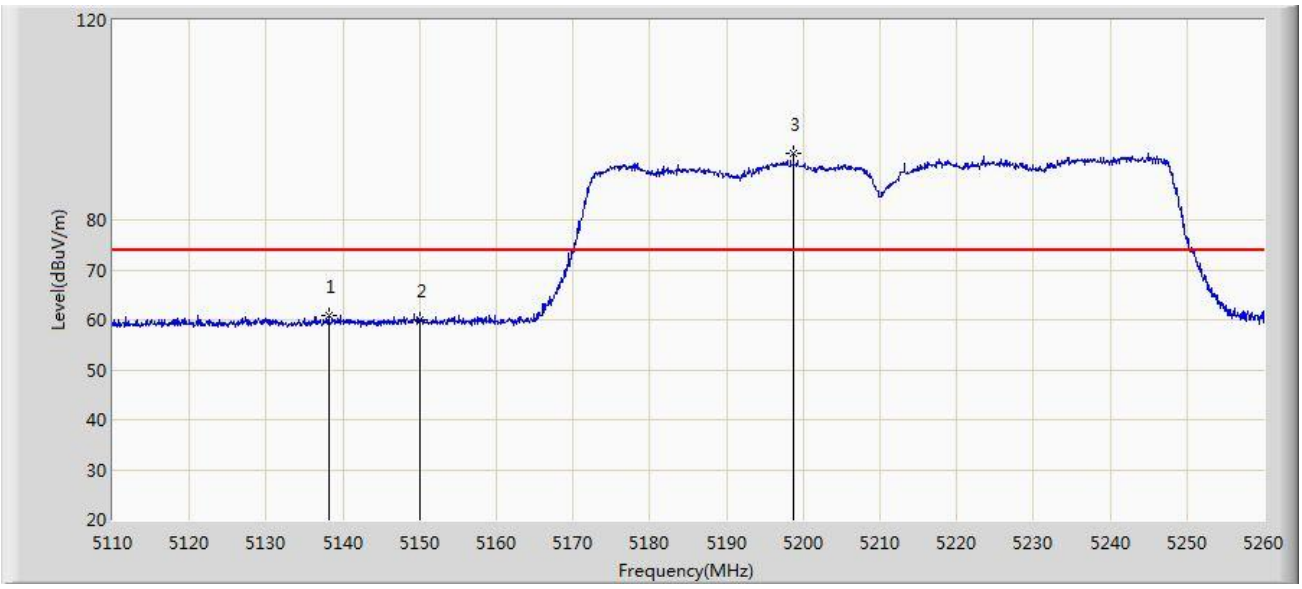

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5138.125	60.991	54.364	-13.009	74.000	6.628	PK
2			5150.000	59.867	53.415	-14.133	74.000	6.452	PK
3		*	5198.725	93.454	87.114	N/A	N/A	6.339	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

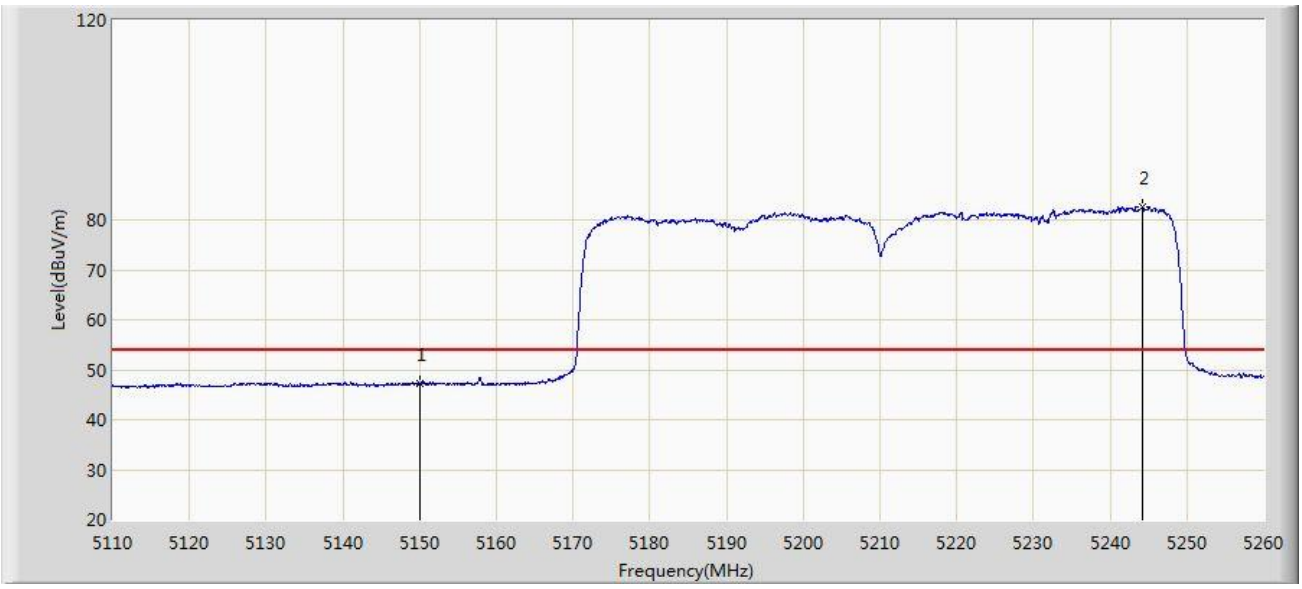

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.267	40.815	-6.733	54.000	6.452	AV
2		*	5244.175	82.604	76.447	N/A	N/A	6.157	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

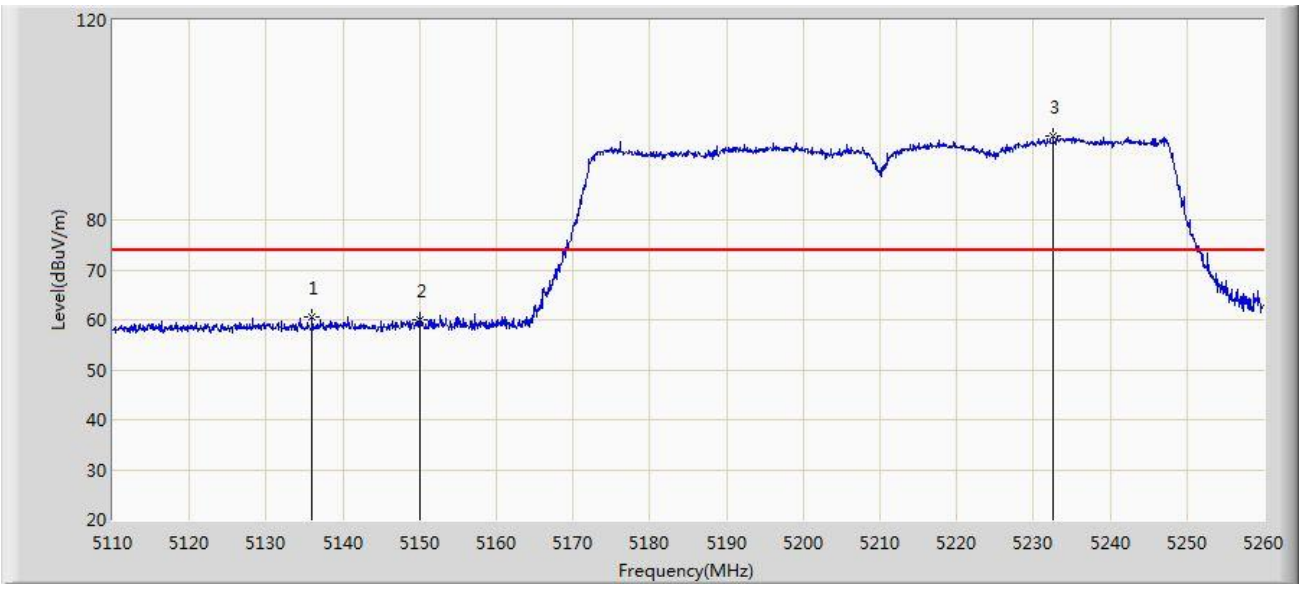

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5136.025	60.666	54.002	-13.334	74.000	6.664	PK
2			5150.000	60.120	53.668	-13.880	74.000	6.452	PK
3		*	5232.550	96.687	90.569	N/A	N/A	6.119	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 0 + 1	

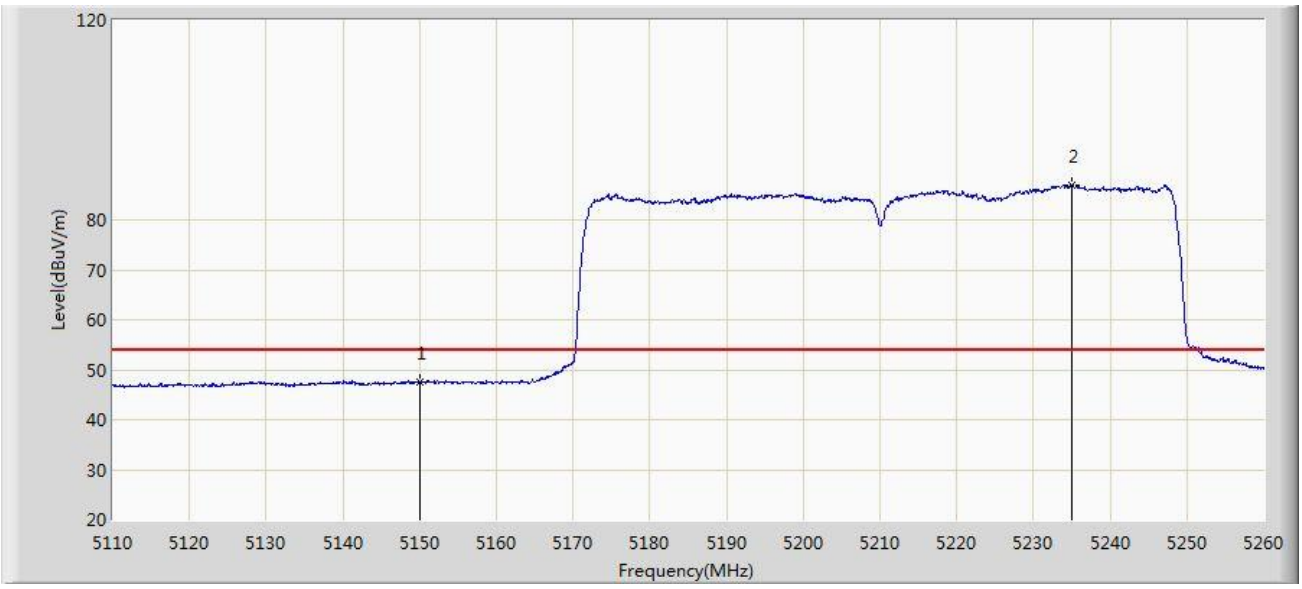

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.535	41.083	-6.465	54.000	6.452	AV
2		*	5235.025	87.021	80.918	N/A	N/A	6.103	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

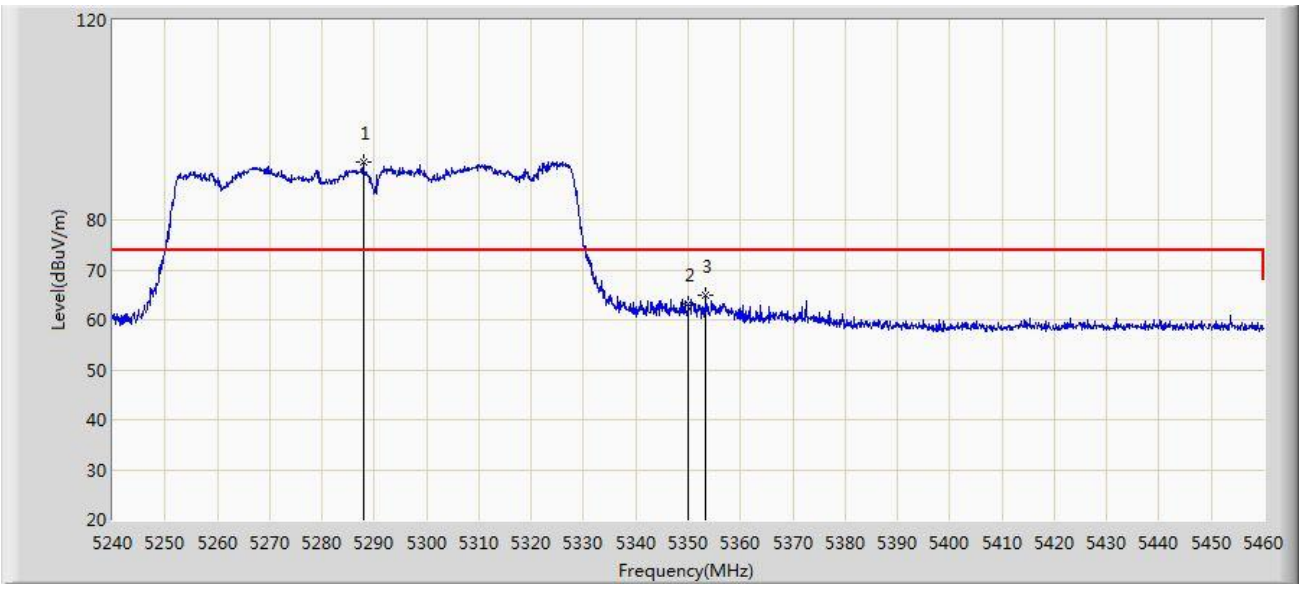

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5287.850	91.580	85.695	N/A	N/A	5.884	PK
2			5350.000	63.265	56.807	-10.735	74.000	6.458	PK
3			5353.300	65.060	58.699	-8.940	74.000	6.361	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

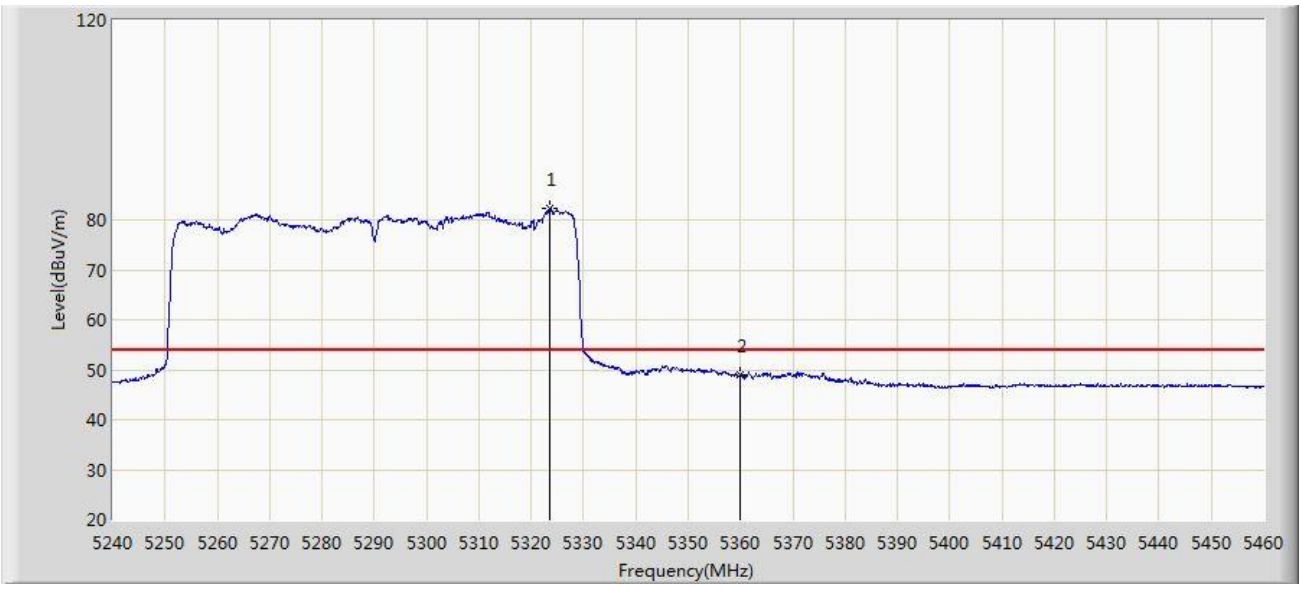

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.600	82.398	76.157	N/A	N/A	6.241	AV
2			5360.000	48.996	42.808	-5.004	54.000	6.188	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

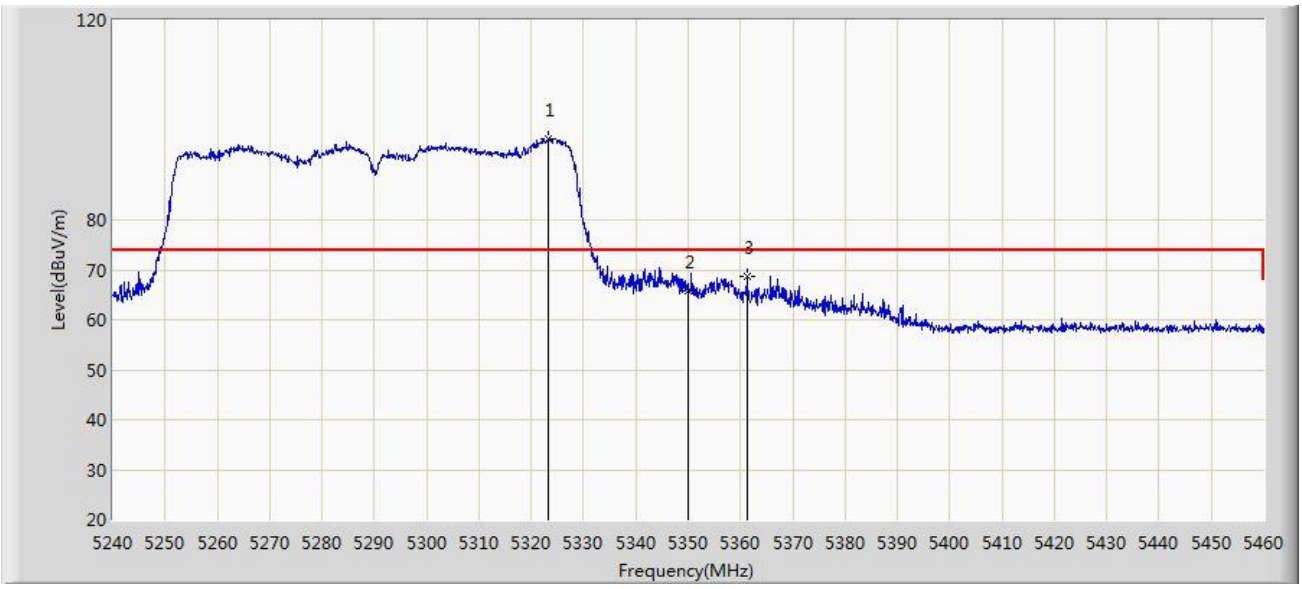

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.380	96.365	90.129	N/A	N/A	6.236	PK
2			5350.000	65.875	59.417	-8.125	74.000	6.458	PK
3			5361.220	68.622	62.466	-5.378	74.000	6.157	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz Ant 0 + 1	

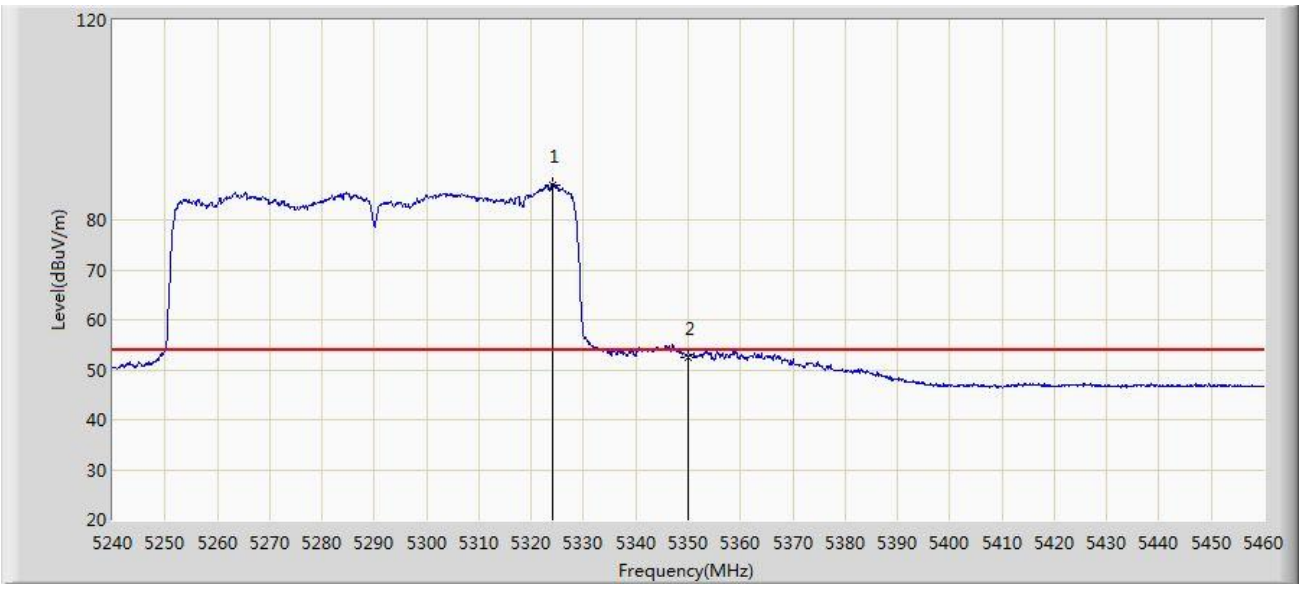

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.040	87.036	80.783	N/A	N/A	6.252	AV
2			5350.000	52.564	46.106	-1.436	54.000	6.458	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

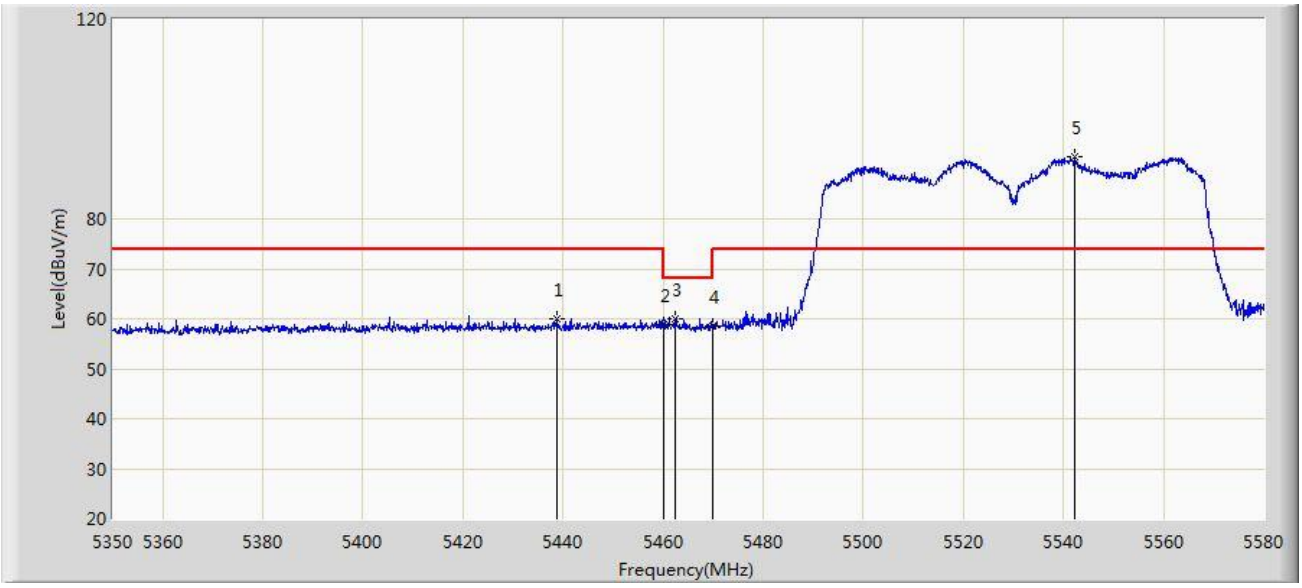

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5438.665	59.965	53.540	-14.035	74.000	6.425	PK
2			5460.000	58.758	52.272	-15.242	74.000	6.486	PK
3			5462.470	59.950	53.455	-8.250	68.200	6.494	PK
4			5470.000	58.486	51.961	-9.714	68.200	6.524	PK
5		*	5542.165	92.559	85.714	N/A	N/A	6.845	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

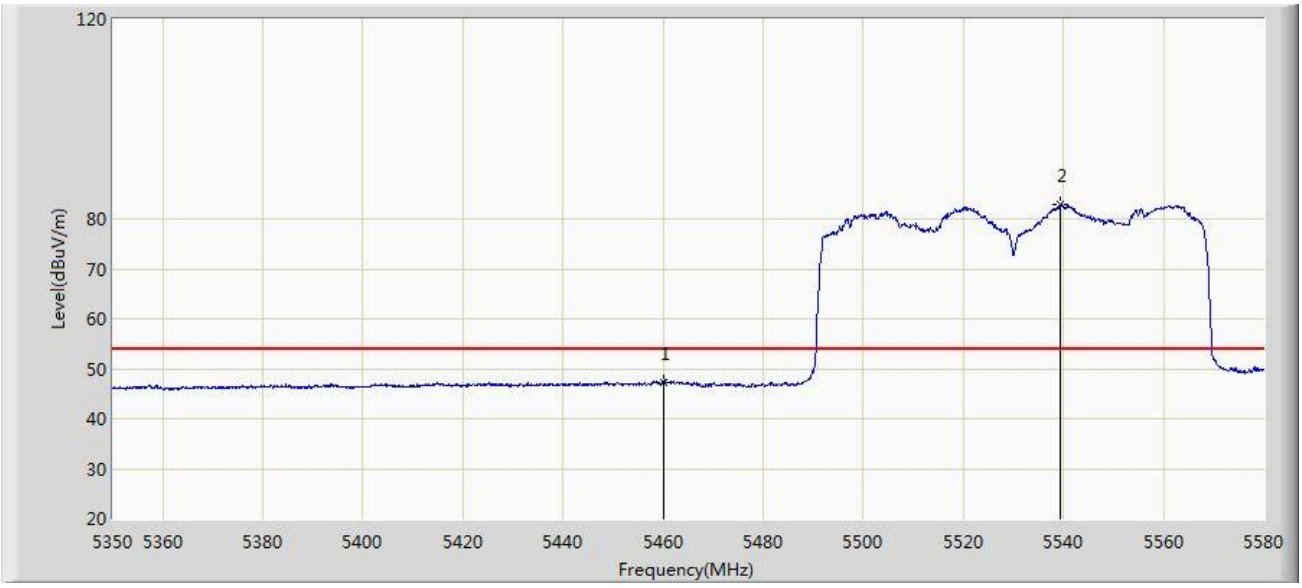

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.255	40.769	-6.745	54.000	6.486	AV
2		*	5539.405	82.774	76.025	N/A	N/A	6.749	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

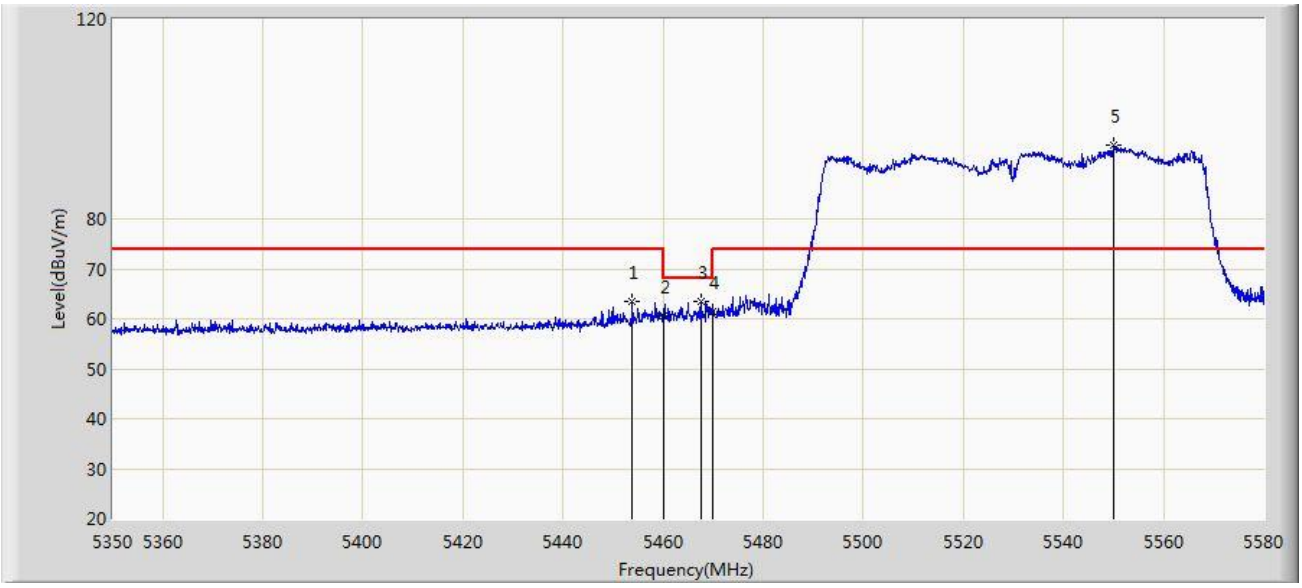

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.845	63.527	57.064	-10.473	74.000	6.463	PK
2			5460.000	60.713	54.227	-13.287	74.000	6.486	PK
3			5467.530	63.590	57.075	-4.610	68.200	6.515	PK
4			5470.000	61.332	54.807	-6.868	68.200	6.524	PK
5		*	5549.985	94.883	88.092	N/A	N/A	6.792	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz Ant 0 + 1	

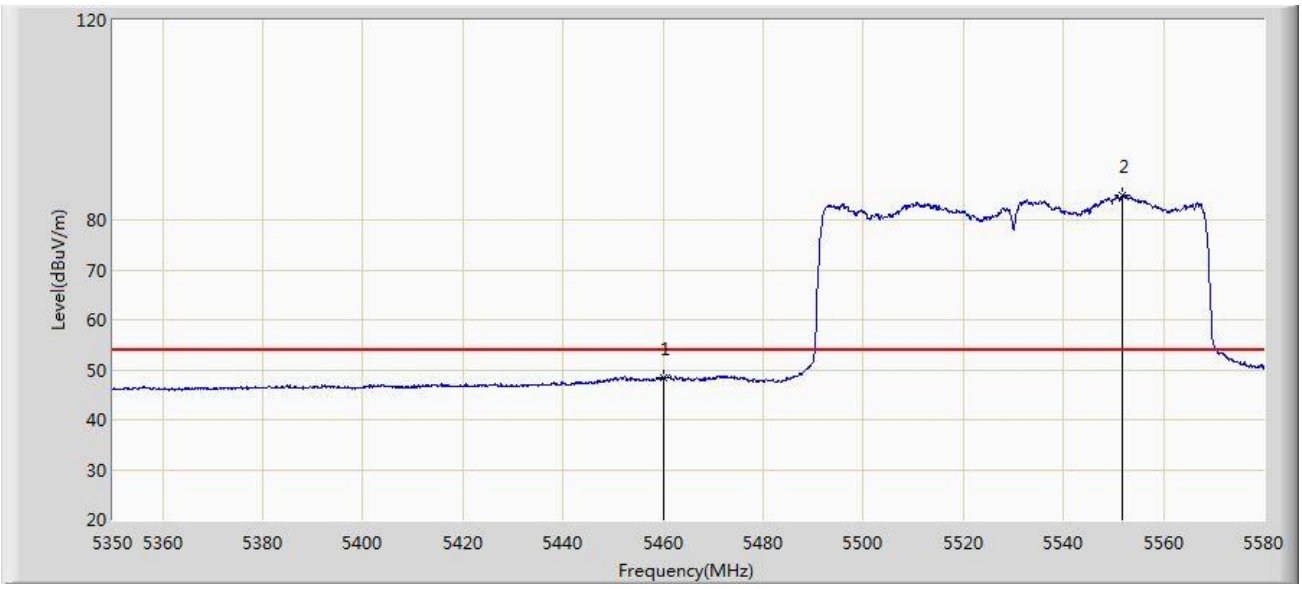

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.269	41.783	-5.731	54.000	6.486	AV
2		*	5551.710	84.807	78.040	N/A	N/A	6.767	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

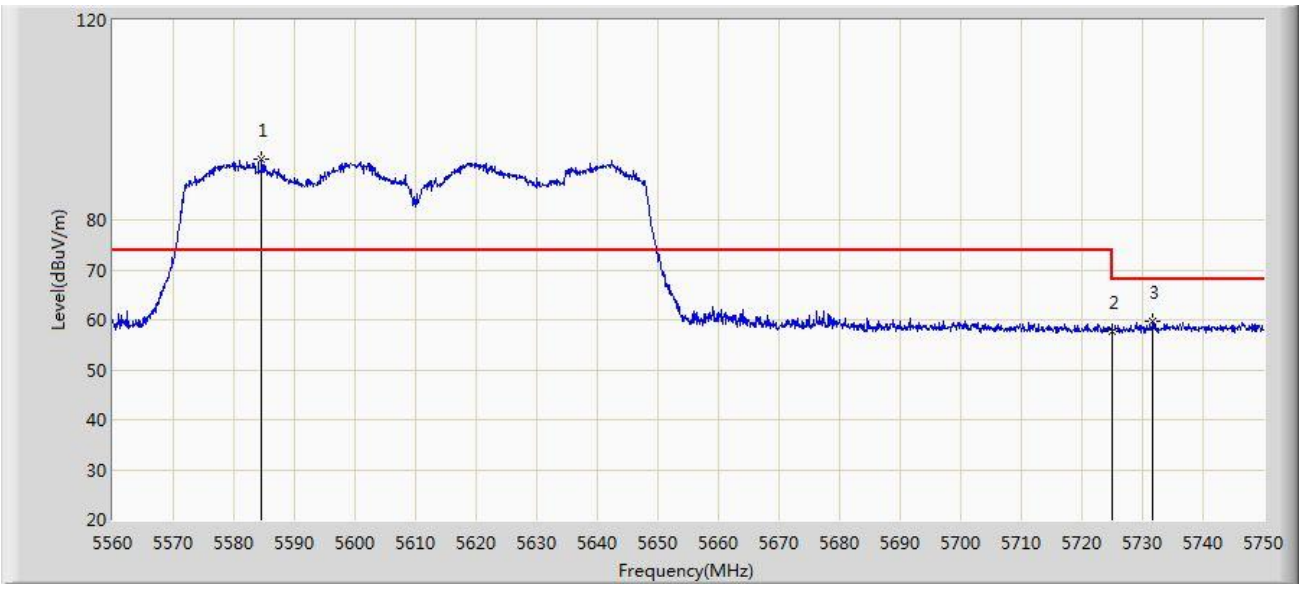

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5584.510	92.084	85.433	N/A	N/A	6.651	PK
2			5725.000	57.759	51.335	-10.441	68.200	6.424	PK
3			5731.760	59.779	53.227	-8.421	68.200	6.552	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz Ant 0 + 1	

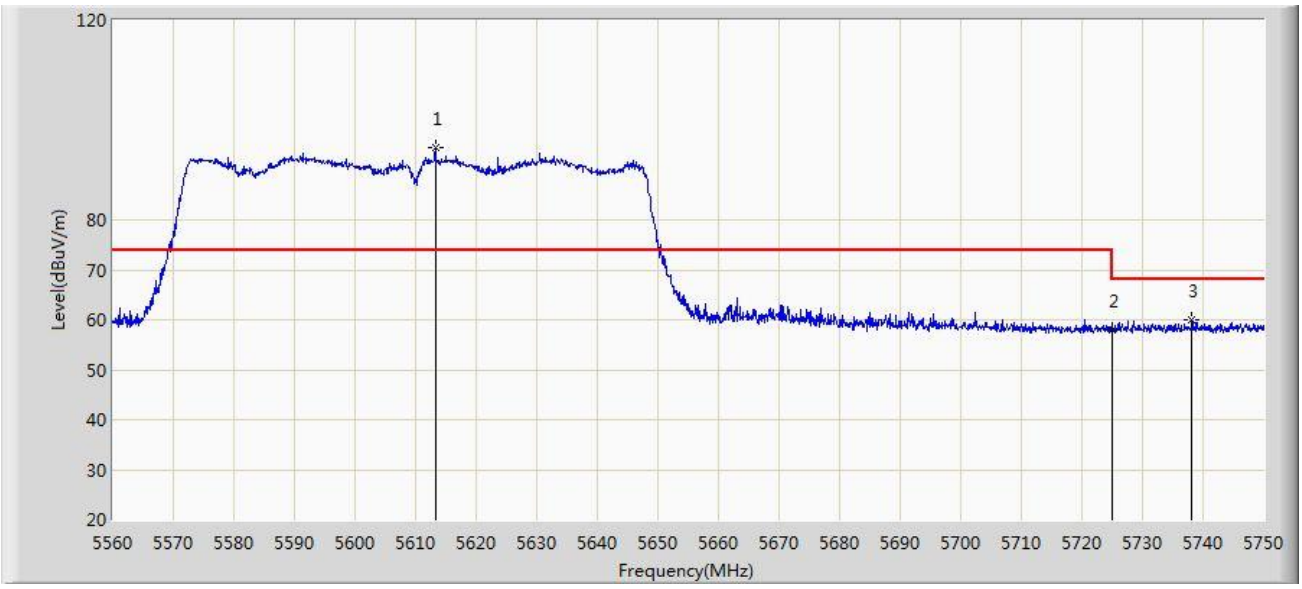

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.295	94.485	87.958	N/A	N/A	6.527	PK
2			5725.000	58.057	51.633	-10.143	68.200	6.424	PK
3			5738.125	59.920	53.249	-8.280	68.200	6.671	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:22
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

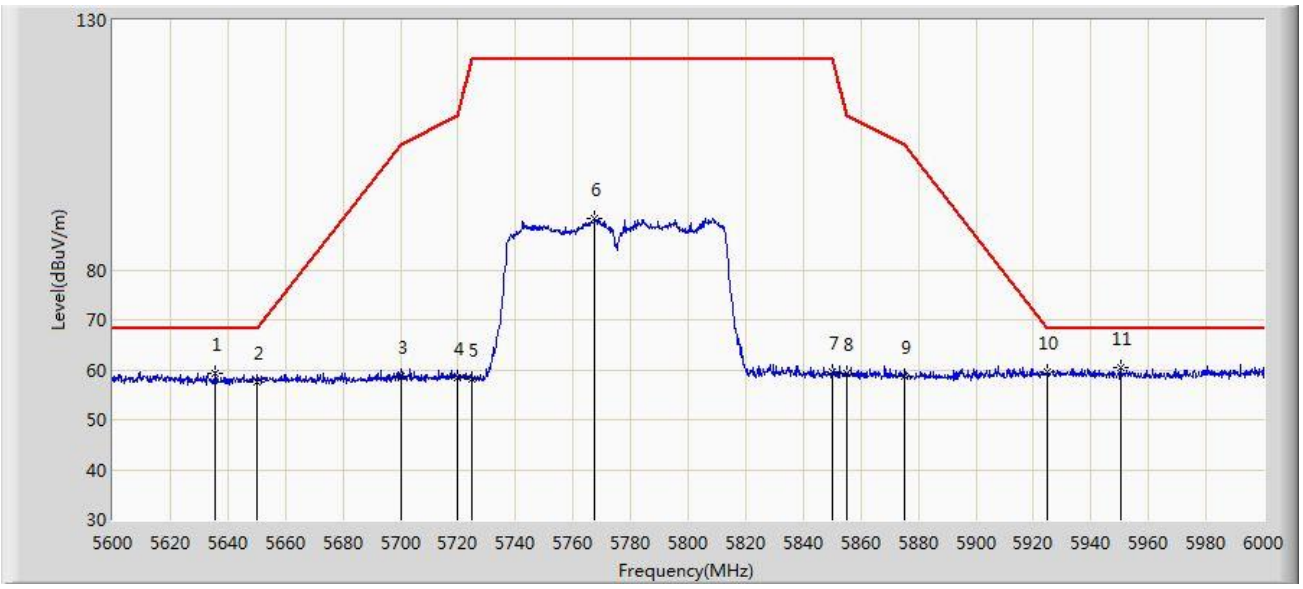

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.400	59.414	53.359	-8.786	68.200	6.054	PK
2			5650.000	57.558	51.299	-10.642	68.200	6.258	PK
3			5700.000	58.732	52.307	-46.468	105.200	6.426	PK
4			5720.000	58.469	52.084	-52.331	110.800	6.386	PK
5			5725.000	58.194	51.770	-64.006	122.200	6.424	PK
6			5767.400	90.146	83.380	N/A	N/A	6.766	PK
7			5850.000	59.710	52.902	-62.490	122.200	6.808	PK
8			5855.000	59.314	52.494	-51.486	110.800	6.820	PK
9			5875.000	58.733	51.815	-46.467	105.200	6.918	PK
10			5925.000	59.552	52.455	-8.648	68.200	7.097	PK
11		*	5950.400	60.298	53.227	-7.902	68.200	7.071	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2020/07/07 - 22:23
Limit: FCC_Part15.407_RE(3m)	Engineer: Edgar Ma
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 0 + 1	

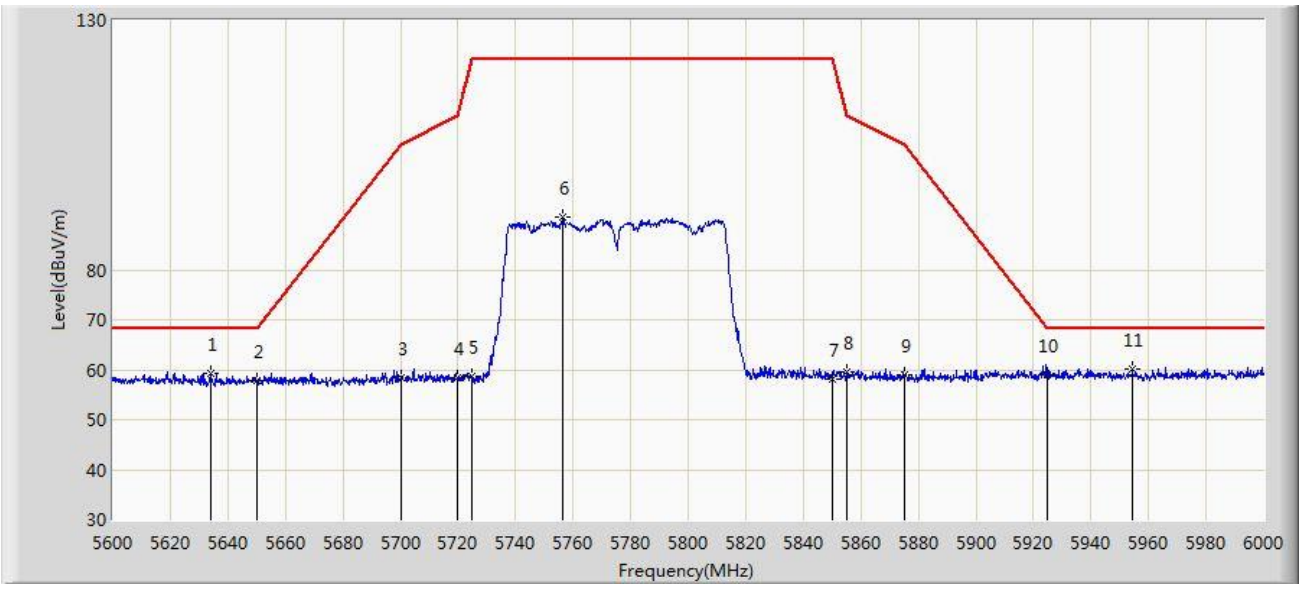

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5634.200	59.260	53.209	-8.940	68.200	6.050	PK
2			5650.000	57.731	51.472	-10.469	68.200	6.258	PK
3			5700.000	58.383	51.958	-46.817	105.200	6.426	PK
4			5720.000	58.268	51.883	-52.532	110.800	6.386	PK
5			5725.000	58.753	52.329	-63.447	122.200	6.424	PK
6			5756.200	90.700	83.863	N/A	N/A	6.838	PK
7			5850.000	58.019	51.211	-64.181	122.200	6.808	PK
8			5855.000	59.441	52.621	-51.359	110.800	6.820	PK
9			5875.000	59.082	52.164	-46.118	105.200	6.918	PK
10			5925.000	58.928	51.831	-9.272	68.200	7.097	PK
11		*	5954.400	60.084	53.046	-8.116	68.200	7.038	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement

7.10.1. TestLimit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBμV)	Average (dBμV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50
Note 1: The lower limit shall apply at the transition frequencies. Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.		

7.10.2. Test Setup

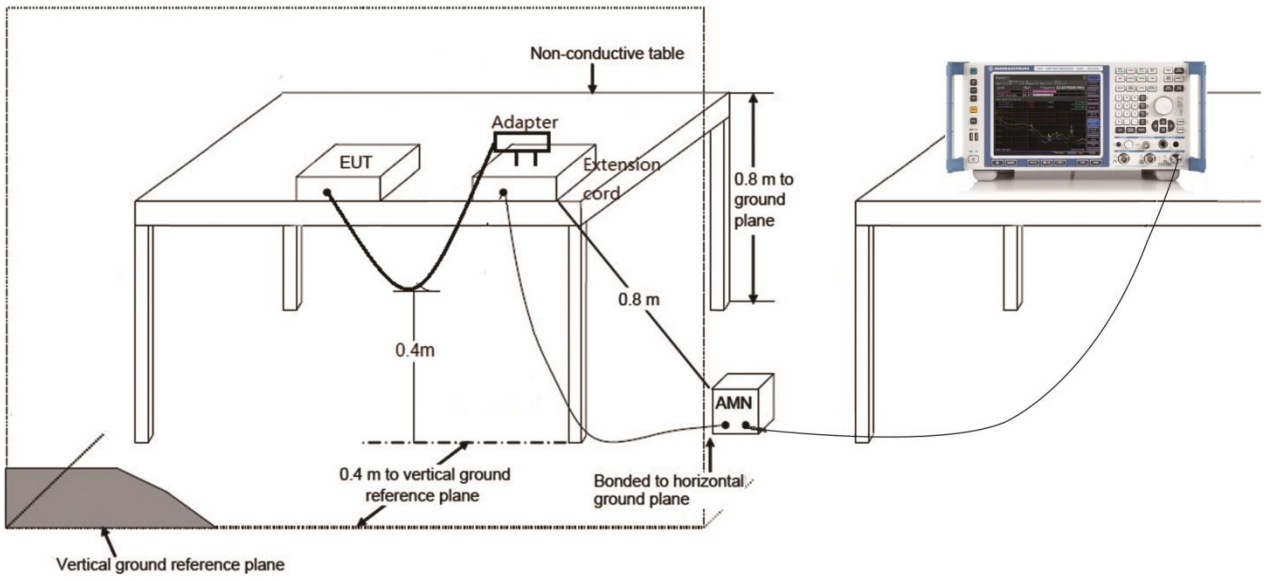

7.10.3.Test Result

Site: SR2	Time: 2020/07/13 - 17:51
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

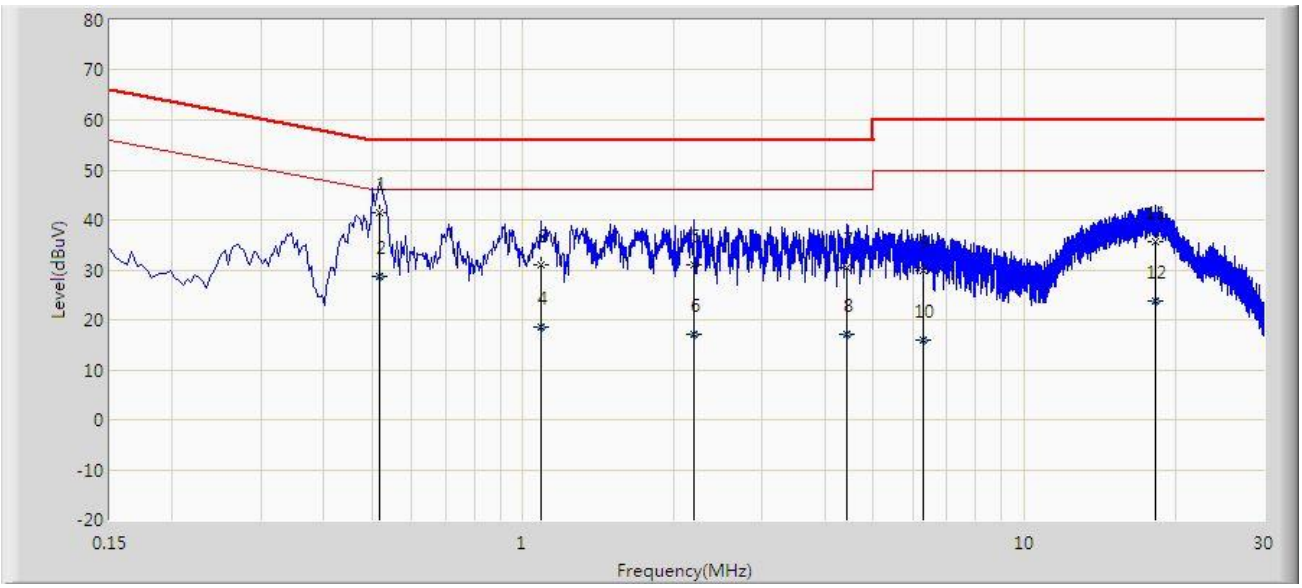

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.518	41.428	31.688	-14.572	56.000	9.740	QP
2			0.518	28.572	18.832	-17.428	46.000	9.740	AV
3			1.086	30.920	21.079	-25.080	56.000	9.840	QP
4			1.086	18.419	8.578	-27.581	46.000	9.840	AV
5			2.194	30.978	21.143	-25.022	56.000	9.834	QP
6			2.194	17.153	7.318	-28.847	46.000	9.834	AV
7			4.434	30.539	20.445	-25.461	56.000	10.095	QP
8			4.434	16.984	6.889	-29.016	46.000	10.095	AV
9			6.294	29.859	19.560	-30.141	60.000	10.299	QP
10			6.294	16.057	5.758	-33.943	50.000	10.299	AV
11			18.226	35.775	25.463	-24.225	60.000	10.313	QP
12			18.226	23.832	13.519	-26.168	50.000	10.313	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/07/13 - 17:55
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

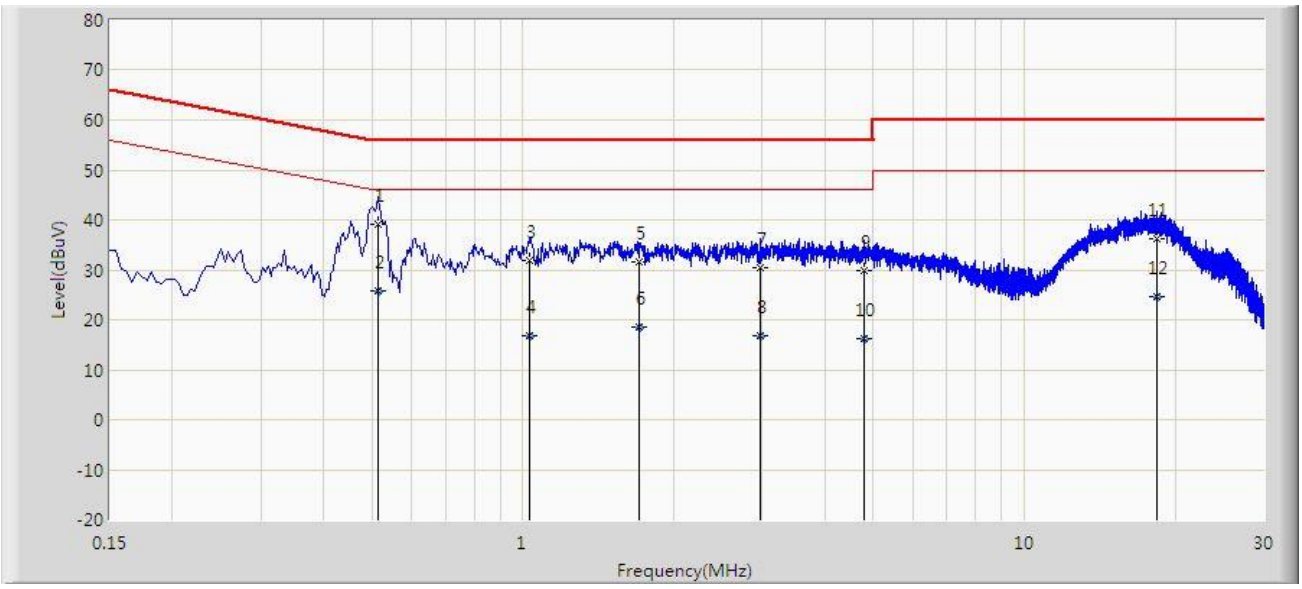

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.514	39.182	29.523	-16.818	56.000	9.659	QP
2			0.514	25.835	16.176	-20.165	46.000	9.659	AV
3			1.034	31.892	22.195	-24.108	56.000	9.697	QP
4			1.034	16.882	7.184	-29.118	46.000	9.697	AV
5			1.702	31.585	21.832	-24.415	56.000	9.753	QP
6			1.702	18.503	8.750	-27.497	46.000	9.753	AV
7			2.982	30.398	20.584	-25.602	56.000	9.815	QP
8			2.982	16.688	6.873	-29.312	46.000	9.815	AV
9			4.782	29.745	19.674	-26.255	56.000	10.071	QP
10			4.782	16.327	6.256	-29.673	46.000	10.071	AV
11			18.322	36.254	25.992	-23.746	60.000	10.262	QP
12			18.322	24.642	14.380	-25.358	50.000	10.262	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that thedeviceis in compliance with Part 15E of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2006RSU069-UT” file.

Appendix B - EUT Photograph

Refer to “2006RSU069-UE” file.