

VARIANT FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	Honeywell International Inc
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States


Manufacturer or Supplier:	Honeywell International Inc
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L0N
FCC ID:	HD5-CT45L0N
Date of tests:	Oct, 09, 2025 ~ Dec. 12, 2025

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

☒ **ANSI C63.10-2020**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Hanwen Xu Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Dec. 12, 2025	Date: Dec. 12, 2025

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1. SUMMARY OF TEST RESULTS.....	4
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	9
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
2.3 DUTY CYCLE OF TEST SIGNAL	11
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
2.5 DESCRIPTION OF SUPPORT UNITS	12
3 TEST TYPES AND RESULTS.....	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
3.1.2 TEST INSTRUMENTS.....	13
3.1.3 TEST PROCEDURES	14
3.1.4 DEVIATION FROM TEST STANDARD	14
3.1.5 TEST SETUP	15
3.1.6 EUT OPERATING CONDITIONS	15
3.1.7 TEST RESULTS	16
3.1 RADIATED EMISSION MEASUREMENT	18
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.2 TEST INSTRUMENTS.....	19
3.2.3 TEST PROCEDURES	20
3.2.4 DEVIATION FROM TEST STANDARD	20
3.2.5 TEST SETUP	21
3.2.6 EUT OPERATING CONDITIONS	22
3.2.7 TEST RESULTS	23
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	39
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	
40	
6 APPENDIX: THE ORIGINAL REPORT	41



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFBGDJ-W7L-P21060011-3	Original release	Jul. 02, 2021
RFBGDJ-W7L-P21060011-5	Original release	Jul. 02, 2021
PSU-QBJ2512030314RF02	Based on the original report, the new product add alternate parts, the electrical specs of the alternate part is equivalent to the current part. This report update the SW version, verify power, CE and RSE worst case. The verify results of conducted power are similar or lower. So this report updates CE and the low frequency data and the high frequency data (802.11b_CH1 & BLE 2M_CH0) of RSE, other data please refer to original report.	Dec. 12, 2025



1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
15.207	AC Power Conducted Emission	Compliance	A
15.205 15.209	Radiated Emissions	Compliance	A
15.247(d)	Out of band Emission Measurement	See note	--
15.247(a)(2)	6dB bandwidth	See note	--
15.247(b)	Conducted Output power	See note	--
15.247(e)	Power Spectral Density	See note	--
15.203	Antenna Requirement	See note	--

Note: Please refer to report RFBGDJ-W7L-P21060011-3 & RFBGDJ-W7L-P21060011-5 (FCC ID: HD5-CT45L0N).

*Test Lab Information Reference

Lab A:

Huarui 7Layers High Technology (Suzhou) Co., Ltd.

Lab Address:

Tower N, Innovation Center, 88 Zuyi Road, High-tech District, Suzhou City, Anhui Province, China

Accredited Test Lab Cert 6613.01

The FCC Site Registration No. is 434559; The Designation No. is CN1325.




1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	$\pm 2.70\text{dB}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Power Spectral Density	$\pm 0.85\text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

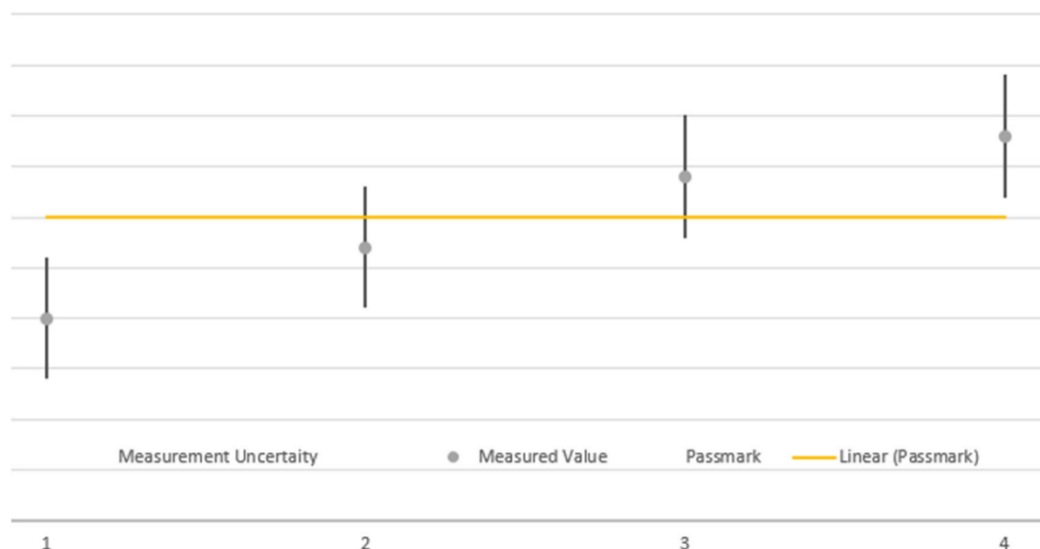

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Mobile Computer	
BRAND NAME*	Honeywell	
MODEL NAME*	CT45-L0N	
NOMINAL VOLTAGE*	5Vdc (adapter) 3.85Vdc (Lithium-ion cell, battery)	
MODULATION *	BLE	GFSK
	2.4G WIFI	DSSS, OFDM
TRANSMISSION RATE*	BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps	
	802.11b: 11/5.5/2.0/1.0 Mbps	
	802.11g: 54/48/36/24/18/9/6 Mbps	
	802.11n(HT20): up to 65 Mbps	
	802.11n(HT40): up to 135 Mbps	
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK) 2422-2452MHz for 11n(HT40)	
MAX. OUTPUT POWER	WLAN: 37.07mW (Maximum)	
	BT-LE: 4.53mW (Maximum)	
ANTENNA GAIN*	☒ Provided by client	
	BLE	1.4dBi
	2.4G WIFI	1.4dBi
ANTENNA TYPE*	BLE	LDS type Antenna
	2.4G WIFI	LDS type Antenna
HW VERSION*	V1.0	
SW VERSION*	311.C0.00.0343-N	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n(HT20)	1TX/1RX
802.11n(HT40)	1TX/1RX
BT_LE(1MHz)	1TX/1RX
BT_LE(2MHz)	1TX/1RX
BT_LE(S2)	1TX/1RX
BT_LE(S8)	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
5. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.
6. This product includes the following four SKU which hardware is exactly same, the difference is described as following, Sample 1 was full test, sample 2 verify the worst case, check worst case Radiated emission;

SAMPL E	EUT CONFIGURATION INFORMATION
1	SKU ID:CT45-L0N-27D100G ,Assembled Scanner Imager: 7-S0703
2	SKU ID:CT45-L0N-28D100G ,Assembled Scanner Imager: 8 - N6308/S0803
3	SKU ID: CT45-L0N-28D200G, The device is same #2, only software is none GMS package
4	SKU ID: CT45-L0N-27D200G, The device is same #1, only software is none GMS package

7. List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery	Honeywell	CT50-BTSC	Capacity : 3.85vdc 4020mAh
AC Adapter	HONOR	ADS-12B-06 05010E	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB Cable	Honeywell	CT40-SN	Shielded, 1.25meter
Earphone	Honeywell	PTE-300N 3.5L	Shielded, 1.27meter

2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.
The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 13	1	DSSS	1.0
BT-LE	1 to 38	1	GFSK	2.0

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 13	1	DSSS	1.0
BT-LE	1 to 38	1	GFSK	2.0

**POWER LINE CONDUCTED EMISSION TEST**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 13	1	DSSS	1.0

TEST CONDITION			
APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
PLC	23deg. C, 70%RH	DC 5.0V By Adapter	Hanwen Xu
RE<1G	23deg. C, 70%RH	DC 5.0V By Adapter	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 5.0V By Adapter	Hanwen Xu

2.3 DUTY CYCLE OF TEST SIGNAL

Please refer to report RFBGDJ-W7L-P21060011-3 and RFBGDJ-W7L-P21060011-3 (FCC ID: HD5-CT45L0N).

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.



2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A
2	PC Adapter	Lenovo	ADLX65YCC3D	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1.25m;
2	PC USB Line: Unshielded, Detachable, 1.0m;



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Mar.28,24	Mar.27,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Mar.28,24	Mar.27,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.26,25	Apr.25,26
CABLE	Rohde&Schwarz	W601	N/A	Apr.26,25	Apr.25,26

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



3.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

3.1.5 TEST SETUP

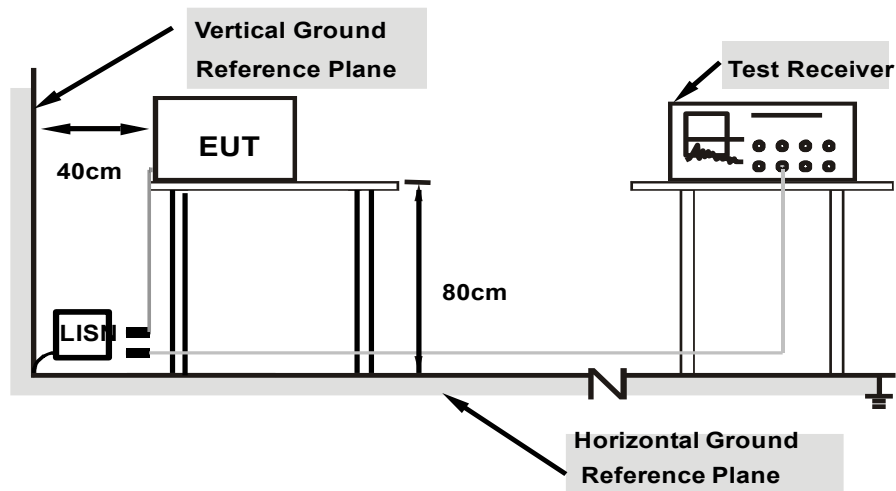

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




CONDUCTED WORST-CASE DATA

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.515	41.59	56.00	14.41	33.04	46.00	12.96	9.75	L1	9.000
1	1.149	38.06	56.00	17.94	28.35	46.00	17.65	9.77	L1	9.000
1	6.225	37.19	60.00	22.81	25.51	50.00	24.49	10.32	L1	9.000
1	8.250	40.63	60.00	19.37	31.95	50.00	18.05	10.67	L1	9.000
1	10.158	42.13	60.00	17.87	35.17	50.00	14.83	11.02	L1	9.000
1	17.975	37.02	60.00	22.98	25.22	50.00	24.78	13.02	L1	9.000

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

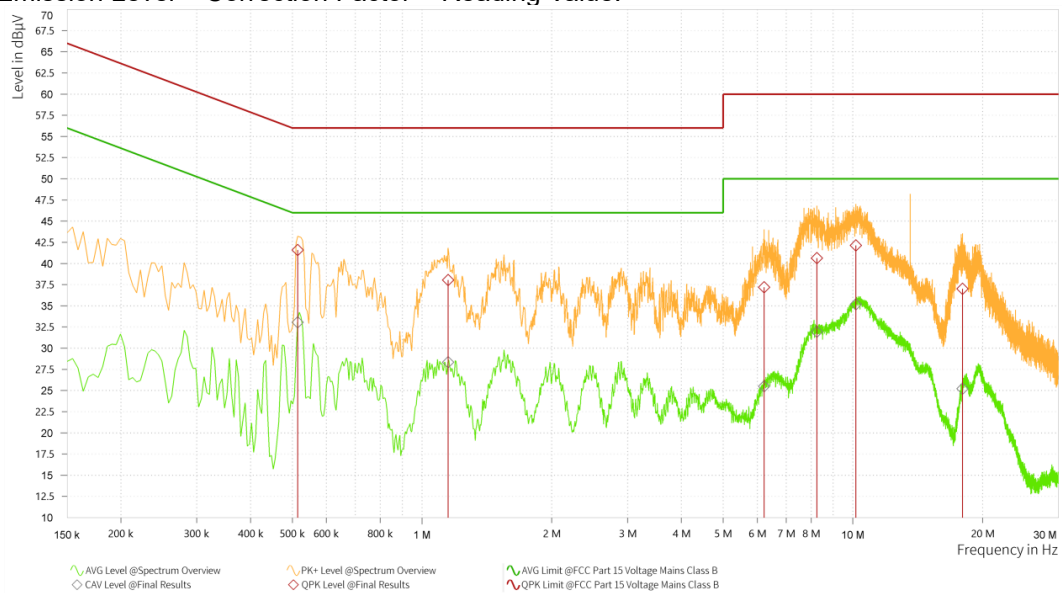




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Hanwen Xu		

Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.528	39.16	56.00	16.84	26.07	46.00	19.93	9.75	N	9.000
1	1.127	39.97	56.00	16.03	25.59	46.00	20.41	9.77	N	9.000
1	3.179	38.73	56.00	17.27	26.22	46.00	19.78	9.97	N	9.000
1	7.980	44.87	60.00	15.13	34.97	50.00	15.03	10.62	N	9.000
1	10.523	44.94	60.00	15.06	35.84	50.00	14.16	11.12	N	9.000
1	18.285	38.41	60.00	21.59	29.79	50.00	20.21	13.10	N	9.000

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Limit value - Emission level
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

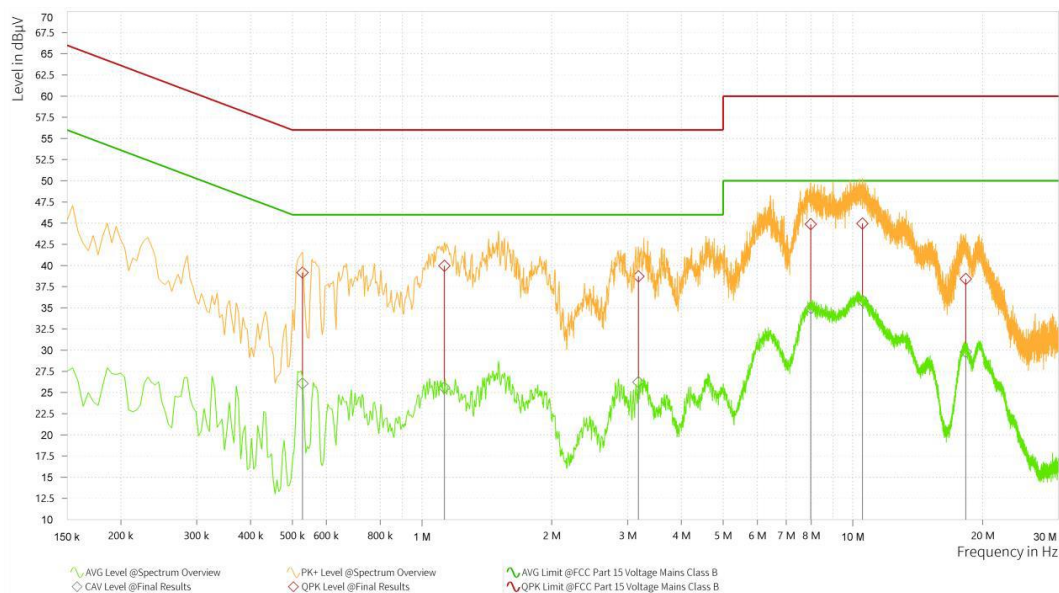

3.1 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pre-Amplifier	R&S	SCU18F1	100815	Aug.29,25	Aug.28,27
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Signal Generator	R&S	SMB100A	182185	Mar.29,24	Mar.28,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.24,22	Nov.23,25
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.23,25	Nov.22,28
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Aug.20,25	Aug.19,28
EMI TEST Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Jul.04,25	Jul.03,27
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.20,25	Aug.19,27
Horn Antenna (18GHz-40GHz)	Steatite Q-par Antennas	QMS 00880	23486	Jul.15,24	Jul.14,26
Horn Antenna	Steatite Q-par Antennas	QMS 00208	23485	Mar.22,25	Mar.21,27
Loop Antenna	SCHWARZ	HFH2-Z2/Z2E	100976	Jul.08,25	Jul.07,27
WIDEBANDRADIO COMMUNICATION TESTER	R&S	CMW500	169399	Jun.19,24	Jun.18,26
Test Software	ELEKTRA	ELEKTRA4.32	N/A	N/A	N/A
Open Switch and Control Unit	R&S	OSP220	101964	N/A	N/A
DC Source	HYELEC	HY3010B	551016	Jul.31,25	Jul.30,27
Hygrothermograph	DELI	20210528	SZ014	Mar.18,25	Mar.17,27
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
PC	LENOVO	E14	HRSW0024	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-7.00M	N/A	N/A	N/A
TMC-AMI18843A(CABLE)	R&S	HF290-NMNM-4.00M	N/A	N/A	N/A
CABLE	R&S	W13.02	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W12.14	N/A	Apr.26,25	Apr.25,26

NOTE:

1. The calibration interval of the above test instruments is 12/ 24 / 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 DEVIATION FROM TEST STANDARD

No deviation




3.2.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

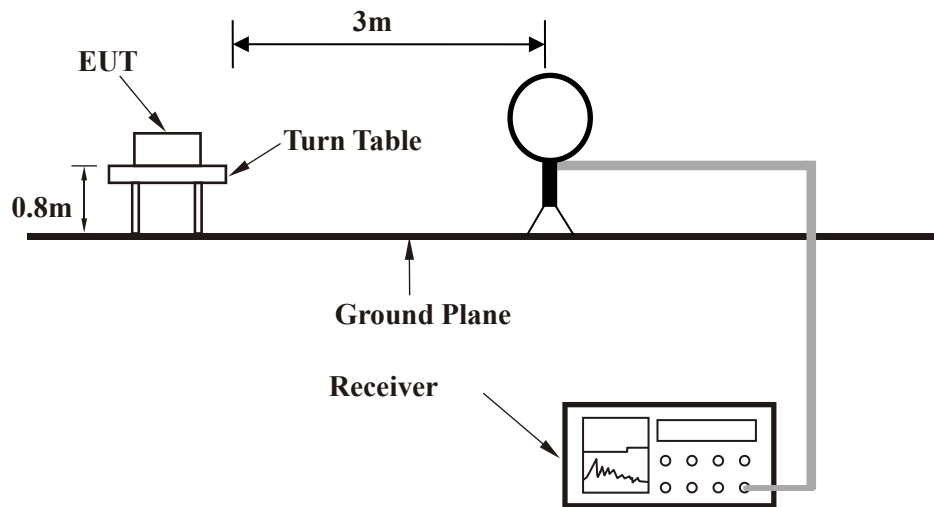

< Frequency Range 30MHz~1GHz >

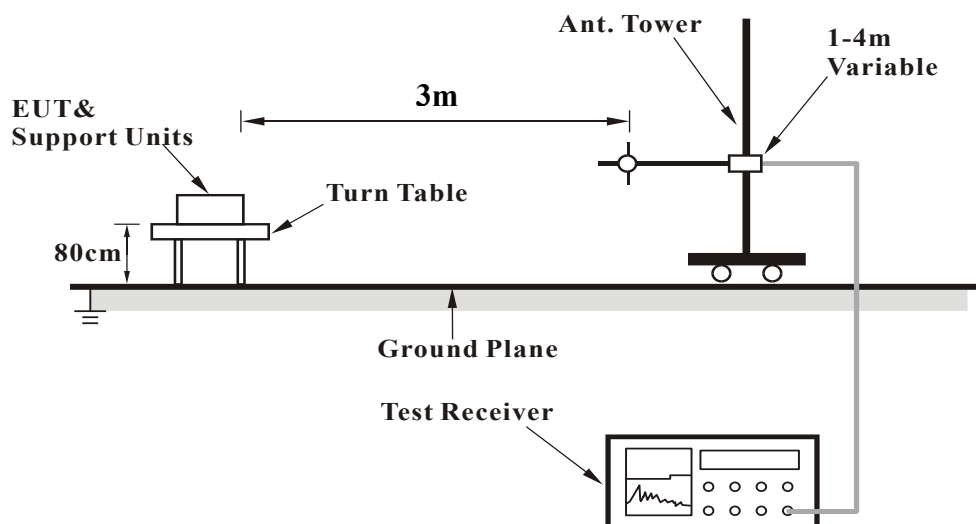

<Frequency Range above 1GHz>

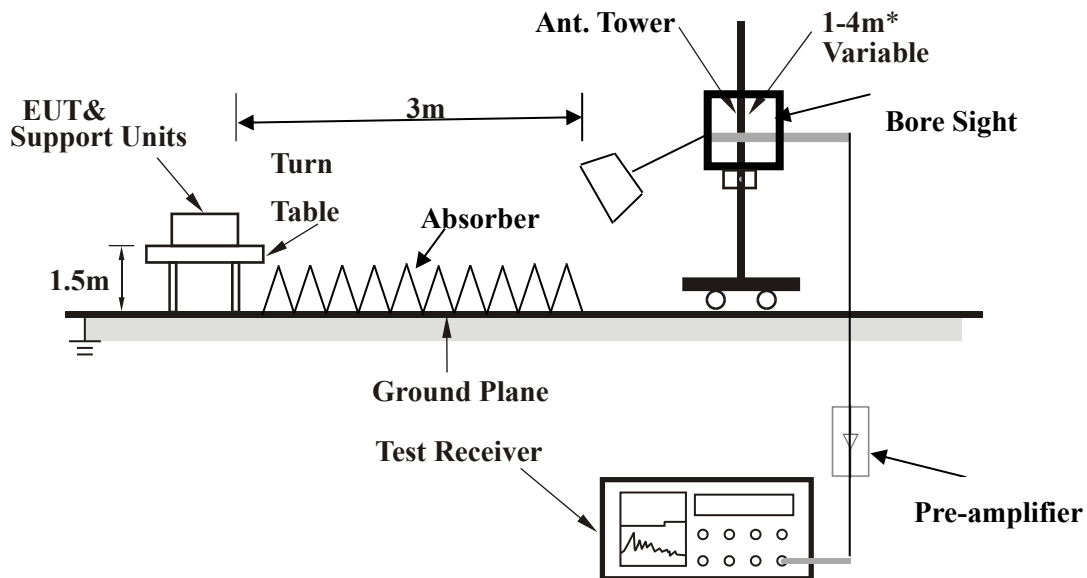

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).


3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.2.7 TEST RESULTS

BANDEDGE MEASUREMENT

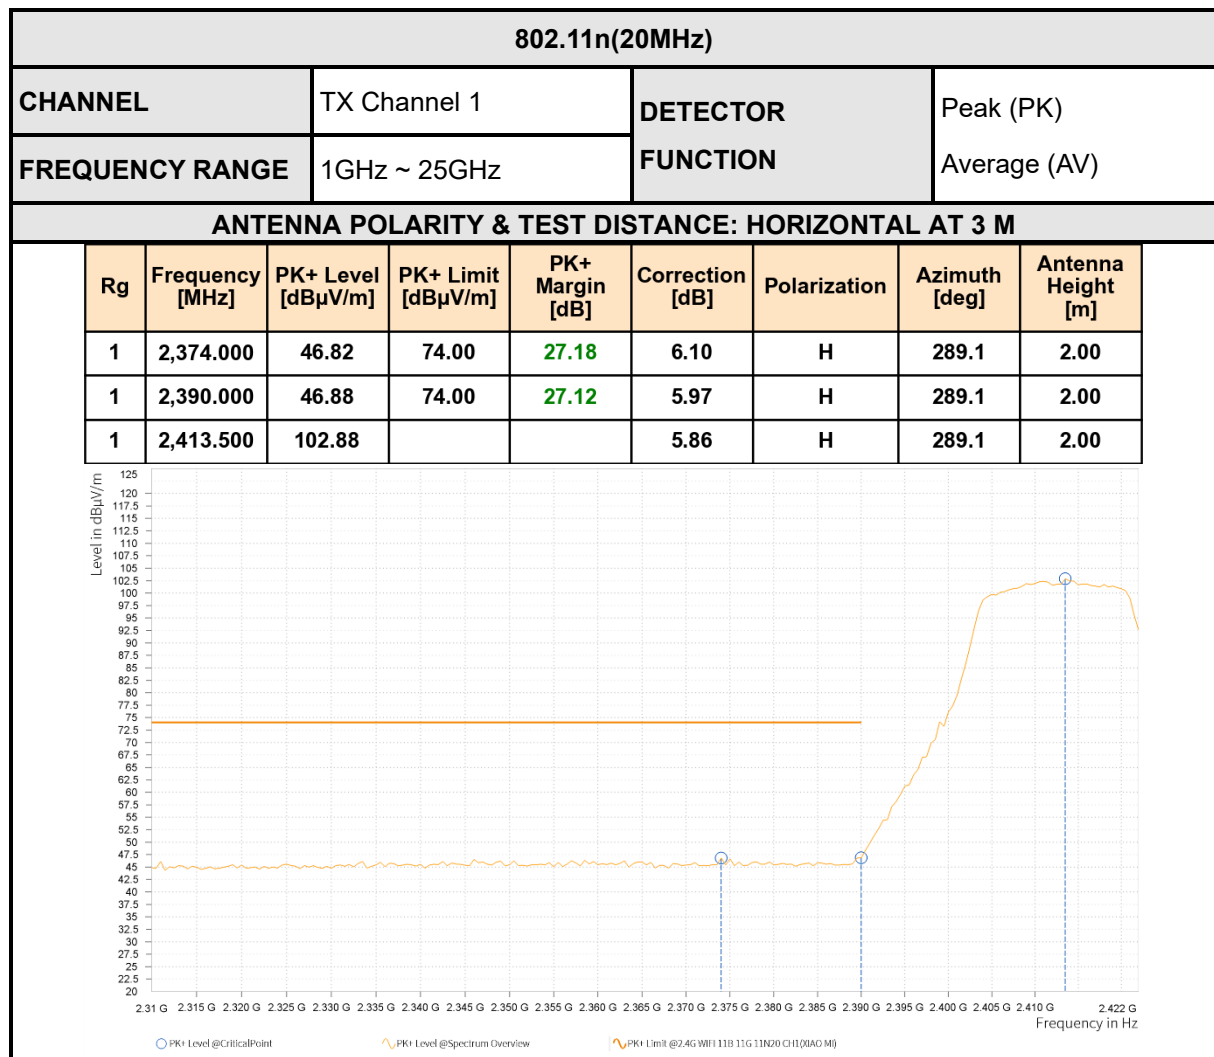



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,360.000	31.88	54.00	22.12	6.18	H	359	1.00
1	2,390.000	33.30	54.00	20.70	5.97	H	289	2.00
1	2,413.500	90.22			5.86	H	289	2.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,385.500	46.50	74.00	27.50	6.01	V	0.9	2.00
1	2,390.000	49.37	74.00	24.63	5.97	V	213.8	2.00
1	2,413.500	100.11			5.86	V	357.7	1.00

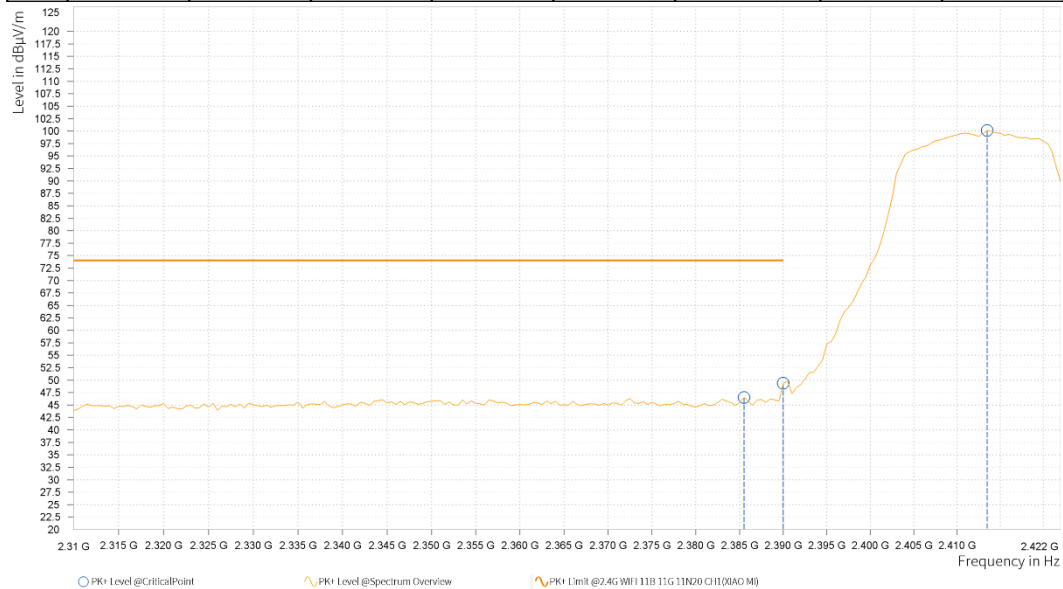



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,357.000	31.53	54.00	22.47	6.20	V	136.1	2.00
1	2,390.000	32.00	54.00	22.00	5.97	V	357.7	1.00
1	2,413.500	87.39			5.86	V	359.1	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 2412MHz: Fundamental frequency.



RADIATED EMISSION

BELOW 1GHz WORST-CASE DATA

NOTE: The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	33.153	23.76	40.00	16.24	-13.04	H	4.2	1.00	120.000
1	48.479	24.89	40.00	15.11	-10.07	H	359	1.00	120.000
1	99.840	19.57	43.50	23.93	-12.21	H	355.1	2.00	120.000
1	210.178	17.40	43.50	26.10	-11.49	H	205.4	2.00	120.000
1	398.261	20.36	46.00	25.64	-4.21	H	205.4	2.00	120.000
1	746.151	24.95	46.00	21.05	-0.25	H	51.1	2.00	120.000

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor

2. Margin value = Limit value- Emission level.

Level in dBμV/m

55

50

47.5

45

42.5

40

37.5

35

32.5

30

27.5

25

22.5

20

17.5

15

12.5

10

7.5

5

2.5

0

-2.5

-5

-7.5

-10

-12.5

-15

-17.5

-20

30 M

40 M

50 M

60 M

70 M

80 M

90 M

100 M

200 M

300 M

400 M

500 M

600 M

700 M

800 M

900 M

1 G

◇

QPK Level @Final Results

▽

QPK Limit @FCC LIMITRE




CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	32.619	28.38	40.00	11.62	-13.09	V	155.8	1.00	120.000
1	56.724	23.78	40.00	16.22	-10.73	V	310	1.00	120.000
1	92.711	21.41	43.50	22.09	-13.57	V	155.8	1.00	120.000
1	199.993	20.97	43.50	22.53	-11.12	V	359.1	1.00	120.000
1	401.704	18.89	46.00	27.11	-4.08	V	354.6	2.00	120.000
1	739.846	25.32	46.00	20.68	-0.41	V	4.9	1.00	120.000

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.

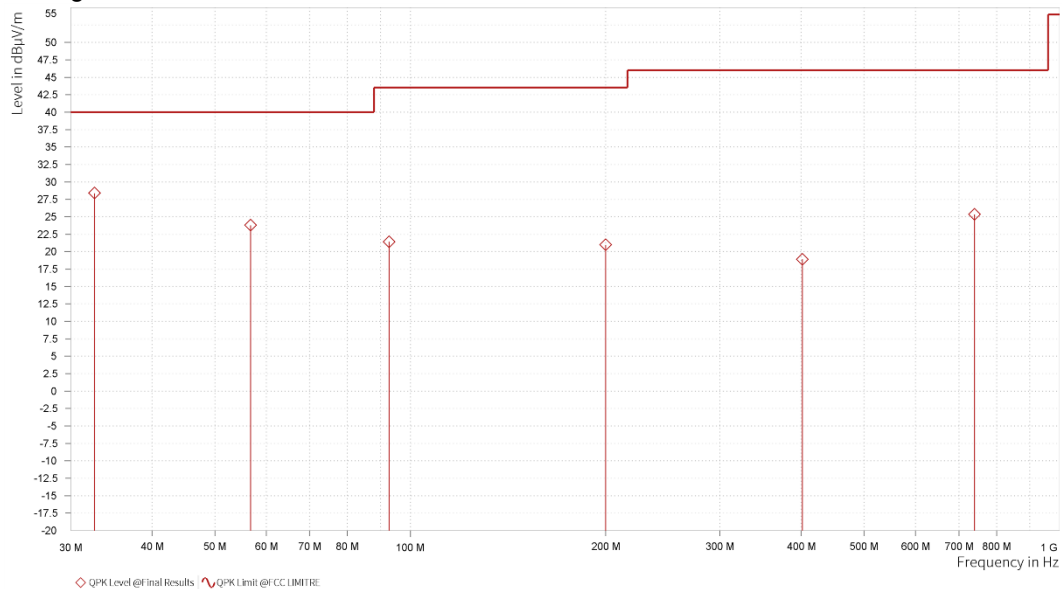




ABOVE 1GHz WORST-CASE DATA

Note:

1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.
2. All other emissions were greater than 20dB below the limit was not recorded


802.11b

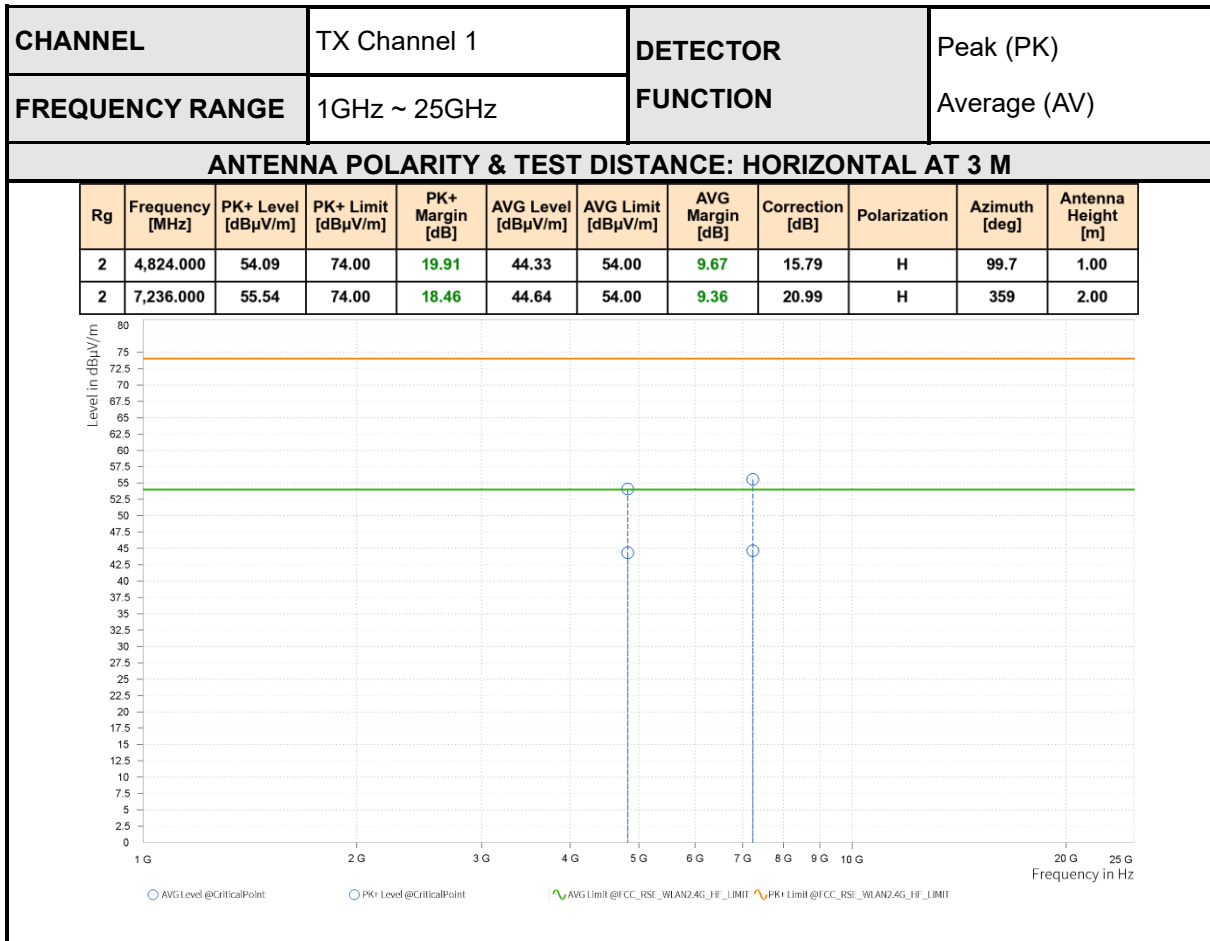



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,824.000	54.43	74.00	19.57	46.11	54.00	7.89	15.79	V	269.9	2.00
2	7,236.000	55.33	74.00	18.67	44.64	54.00	9.36	20.99	V	269.9	2.00

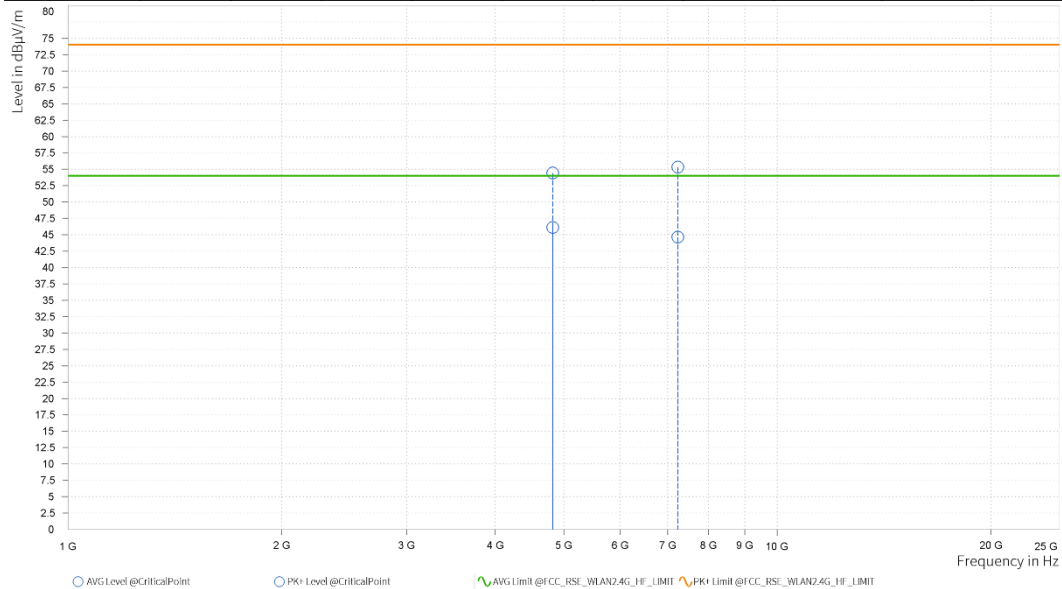


REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value- Emission level.
3. 2437MHz: Fundamental frequency.



BANDEDGE MEASUREMENT

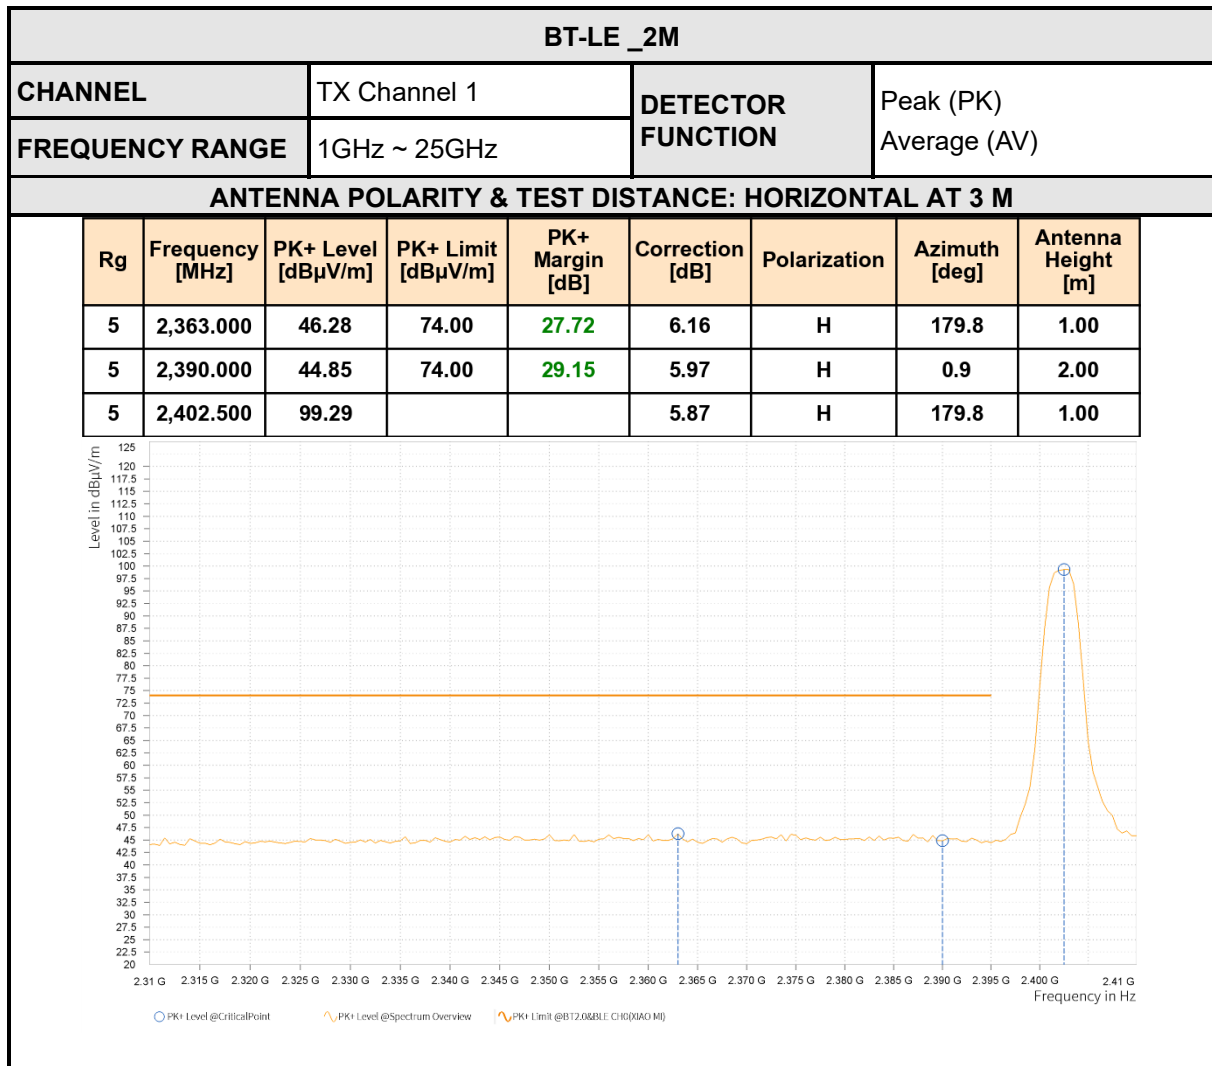



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,359.000	31.23	54.00	22.77	6.19	H	272.3	2.00
5	2,390.000	31.07	54.00	22.93	5.97	H	359.1	1.00
5	2,402.000	62.32			5.87	H	179.8	1.00





ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,389.000	47.53	74.00	26.47	5.98	V	179	2.00
5	2,390.000	46.29	74.00	27.71	5.97	V	179	2.00
5	2,402.500	91.75			5.87	V	359.1	1.00

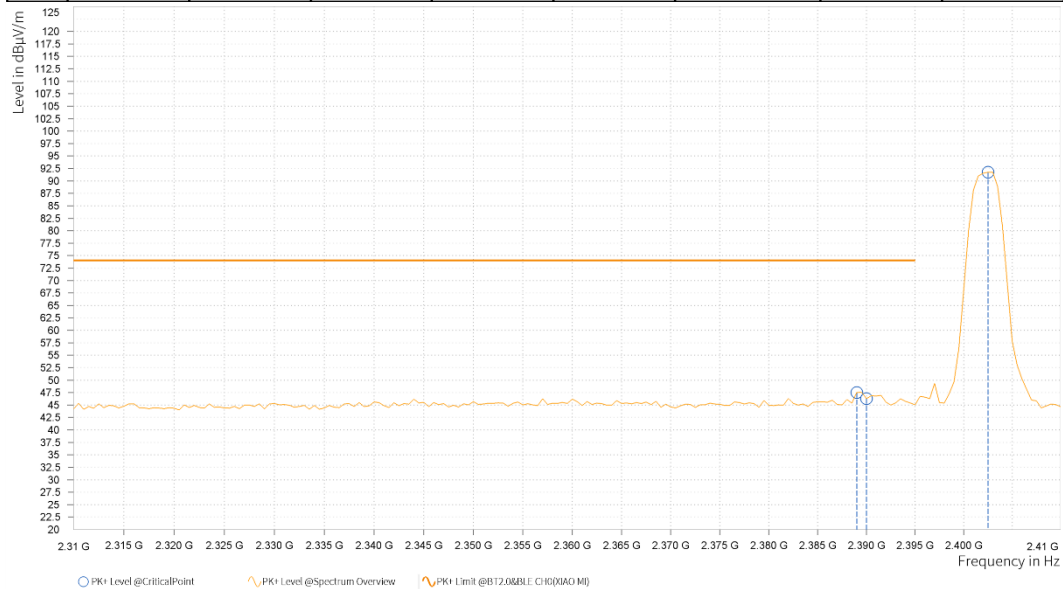



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,363.000	31.52	54.00	22.48	6.16	V	225.7	2.00
5	2,390.000	31.19	54.00	22.81	5.97	V	225.7	2.00
5	2,402.000	58.16			5.87	V	319.5	1.00



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2404MHz: Fundamental frequency.



RADIATED EMISSION

BELOW 1GHz WORST-CASE DATA

BT-LE_2M


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	48.624	24.73	40.00	15.27	-10.06	H	355.8	2.00	120.000
1	94.748	20.53	43.50	22.97	-13.10	H	4.9	1.00	120.000
1	209.741	17.47	43.50	26.03	-11.49	H	209	2.00	120.000
1	350.003	18.62	46.00	27.38	-5.26	H	305.3	1.00	120.000
1	612.922	22.65	46.00	23.35	-2.33	H	57.2	2.00	120.000
1	911.148	26.57	46.00	19.43	2.39	H	57.2	2.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

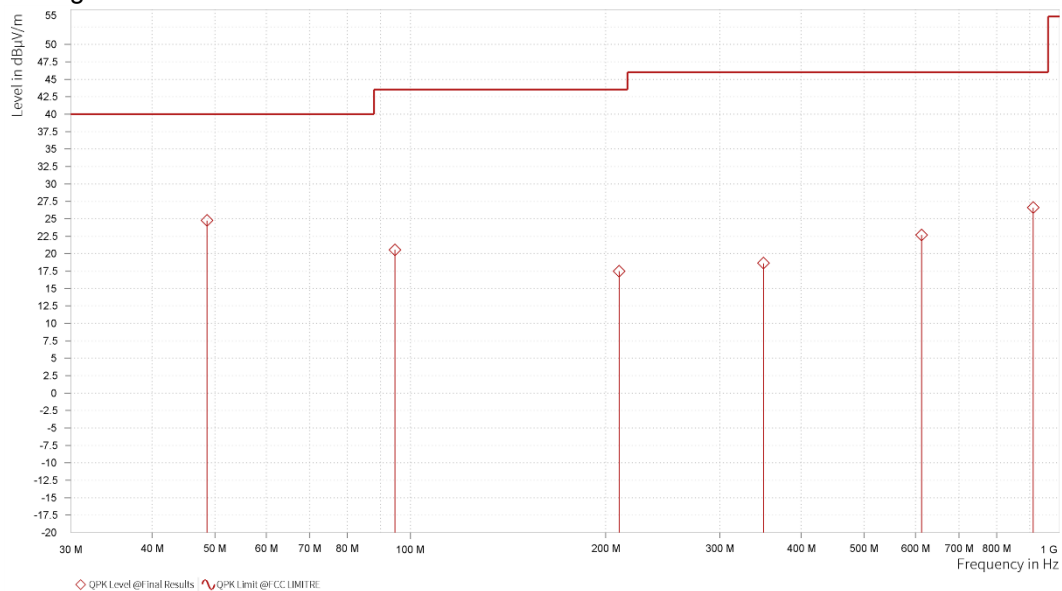




CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	33.007	28.51	40.00	11.49	-13.06	V	4.8	1.00	120.000
1	56.578	24.06	40.00	15.94	-10.70	V	152.2	1.00	120.000
1	94.942	20.42	43.50	23.08	-13.06	V	152.2	1.00	120.000
1	199.993	21.03	43.50	22.47	-11.12	V	359	1.00	120.000
1	416.060	19.11	46.00	26.89	-3.83	V	305.1	1.00	120.000
1	750.807	24.69	46.00	21.31	-0.15	V	1	2.00	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

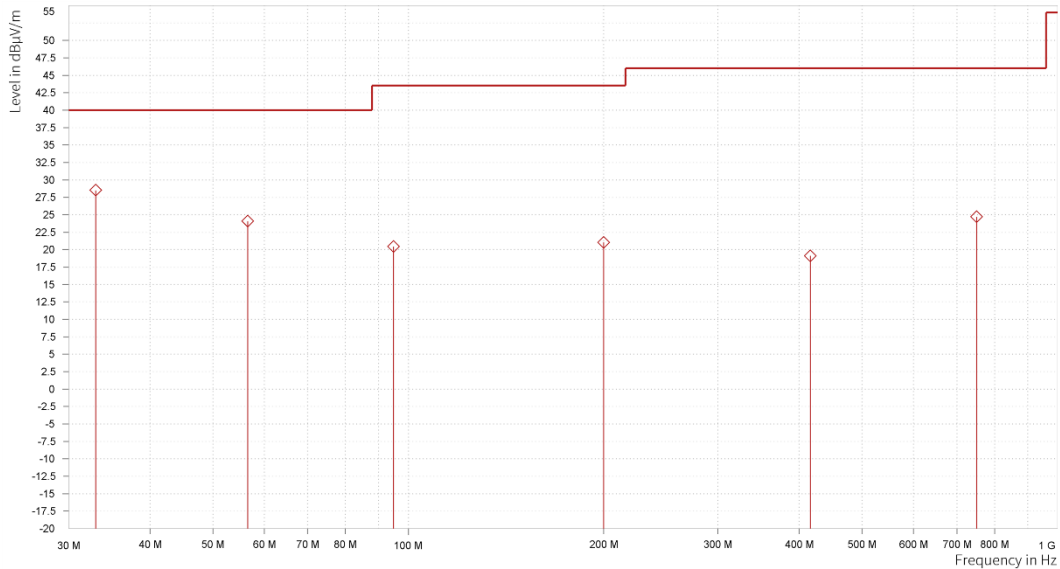




ABOVE 1GHz TEST DATA

Note:

1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.
2. All other emissions were greater than 20dB below the limit was not recorded


BT-LE_2M

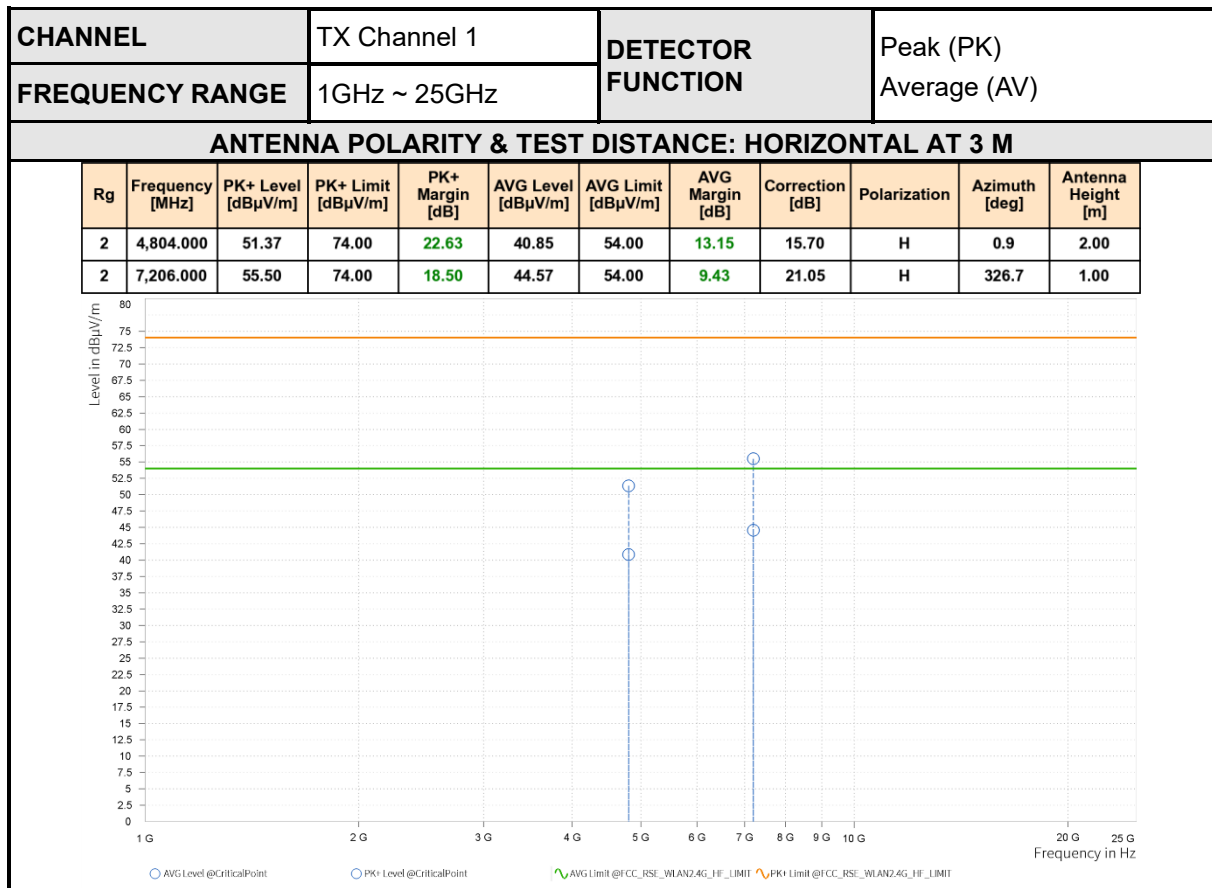



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	4,804.000	51.01	74.00	22.99	41.01	54.00	12.99	15.70	V	359	1.00
2	7,206.000	55.25	74.00	18.75	44.62	54.00	9.38	21.05	V	269.9	2.00

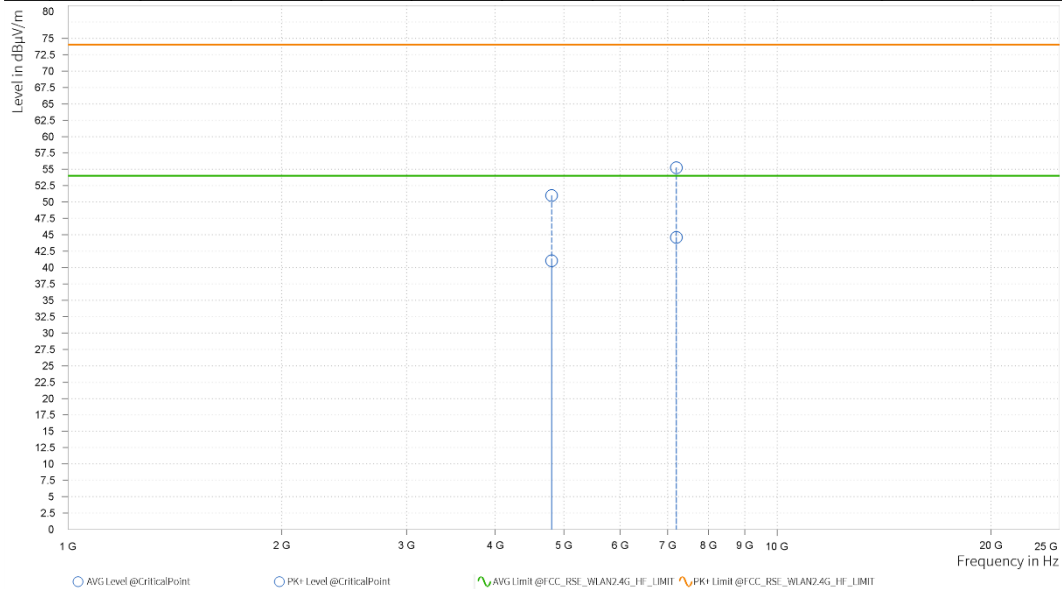

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor.
2. Margin value = Limit value–Emission level.
3. 2440MHz: Fundamental frequency.



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSU-QBJ2512030314RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



Test Report No.: PSU-QBJ2512030314RF02

6 APPENDIX: THE ORIGINAL REPORT

RADIO TEST REPORT

(FCC Part 15 Subpart C / IC RSS-247)



Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States

Manufacturer:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L0N
FCC ID:	HD5-CT45L0N
Date of tests:	2021-06-11 to 2021-07-01

The tests have been carried out according to the requirements of the following standard:

☒ **Part 15 Subpart C §15. 247 / IC RSS-247 issue 2**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jul. 02, 2021	 Date: Jul. 02, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.07.02	Valid	Original Report

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	APPLICANT	5
1.2	MANUFACTURER	5
1.3	GENERAL DESCRIPTION OF EUT	5
1.4	MODIFICATION OF EUT	6
1.5	APPLICABLE STANDARDS	6
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1	DESCRIPTIONS OF TEST MODE	7
2.2	TEST MODE	7
2.3	SUPPORT EQUIPMENT	8
2.4	TEST SETUP	9
2.5	MEASUREMENT RESULTS EXPLANATION EXAMPLE	12
3	TEST RESULT	13
3.1	DTS AND OCCUPIED CHANNEL BANDWIDTH MEASUREMENT	13
3.2	MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	14
3.3	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	15
3.4	BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	16
3.5	RADIATED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	17
3.6	AC CONDUCTED EMISSION MEASUREMENT	101
3.7	ANTENNA REQUIREMENTS	104
4	LIST OF MEASURING EQUIPMENT	105
5	UNCERTAINTY OF EVALUATION	107
	APPENDIX A: DTS BANDWIDTH	108
	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	115
	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER & E.I.R.P.	122
	APPENDIX D: DUTY CYCLE	129
	APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY	136
	APPENDIX F: BAND EDGE MEASUREMENTS	143
	APPENDIX G: CONDUCTED SPURIOUS EMISSION	148

Summary Of Test Result

FCC Rule	IC Rule	Description	Limit	Result	Remark
15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
-	RSS-Gen 6.7	99% Bandwidth	-	Pass	-
15.247(b)(3)	RSS-247 A5.4(d)	Output Power	$\leq 30\text{dBm}$	Pass	-
15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass	-
15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.76 dB at 2390 MHz
15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 17.16 dB at 0.497 MHz
15.203 & 15.247(b)	RSS-GEN 6.8	Antenna Requirement	15.203 & 15.247(b) RSS-GEN 6.8	Pass	-

1 General Description

1.1 Applicant

Honeywell International Inc
Honeywell Safety and Productivity Solutions
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

1.2 Manufacturer

XHoneywell International Inc
Honeywell Safety and Productivity Solutions
 9680 Old Bailes Road, Fort Mill, SC 29707 United States

1.3 General Description Of EUT

Product	Mobile Computer
Model No.	CT45-L0N
Additional No.	N/A
Difference Description	N/A
Power Supply	3.85Vdc for EUT
Modulation Technology	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Type	802.11b : DSSS 802.11g/n : OFDM
Operating Frequency	2412-2462MHz
Number Of Channel	11
Max. Output Power	802.11b : 15.12 dBm (0.0325 W) 802.11g : 14.38 dBm (0.0274 W) 802.11n HT20 : 14.21 dBm (0.0264 W) 802.11n HT40 : 15.69 dBm (0.0371 W)
Max. e.i.r.p.	16.52 dBm (0.0449W)
Antenna Type	LDS type Antenna with 1.4dBi gain
HW Version	V1.0
SW Version	OS.11.001
I/O Ports	Refer to user's manual

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 5
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B&ICES-003, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n(HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
		7	2442 MHz
		8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz		
5	2432 MHz		
6	2437 MHz		

The transmitter has a maximum conducted output power as follows:

Frequency Range(MHz)	Mode	Rate	Output Power(dBm)
2412~2462	802.11b	1Mbps	15.12
2412~2462	802.11g	6Mbps	14.38
2412~2462	802.11n HT20	MCS0	14.21
2422~2452	802.11n HT40	MCS0	15.69

- a. Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

2.2 Test Mode

2.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases				
Test Item	Modulation			
	802.11 b	802.11 g	802.11n HT20	802.11n HT40
Conducted	Mode 1: CH01	Mode 1: CH01	Mode 1: CH01	Mode 1: CH03

Test Cases	Mode 2: CH06 Mode 3: CH011	Mode 2: CH06 Mode 3: CH011	Mode 2: CH06 Mode 3: CH011	Mode 2: CH06 Mode 3: CH09
-------------------	-------------------------------	-------------------------------	-------------------------------	------------------------------

2.2.2 Radiated Emission Test (Below 1GHz)

Radiated	802.11 b
Test Cases	Mode 1: CH01

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

2.2.3 Radiated Emission Test (Above 1GHz)

Test Item	Modulation			
	802.11 b	802.11 g	802.11n HT20	802.11n HT40
Radiated	Mode 1: CH01	Mode 1: CH01	Mode 1: CH01	Mode 1: CH03
Test Cases	Mode 2: CH06	Mode 2: CH06	Mode 2: CH06	Mode 2: CH06
	Mode 3: CH11	Mode 3: CH11	Mode 3: CH11	Mode 3: CH09

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

2.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : WLAN Linking + Earphone + Adapter
--------------------------------------	--

2.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGEAR	R7800	PY315100319	N/A	shielded, 1.8 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC




						I/P cable 1.2 m
3.	Earphone	Honeywell	PTE-300N	FCC sDoC	N/A	N/A
4.	Adapter	Honeywell	ADS-12B-06 05010E	FCC sDoC	N/A	N/A

2.4 Test Setup


The EUT is continuously communicating to the WIFI tester during the tests.

EUT was set in the Hidden menu mode to enable WIFI communications.


The following picture is a screenshot of the test software

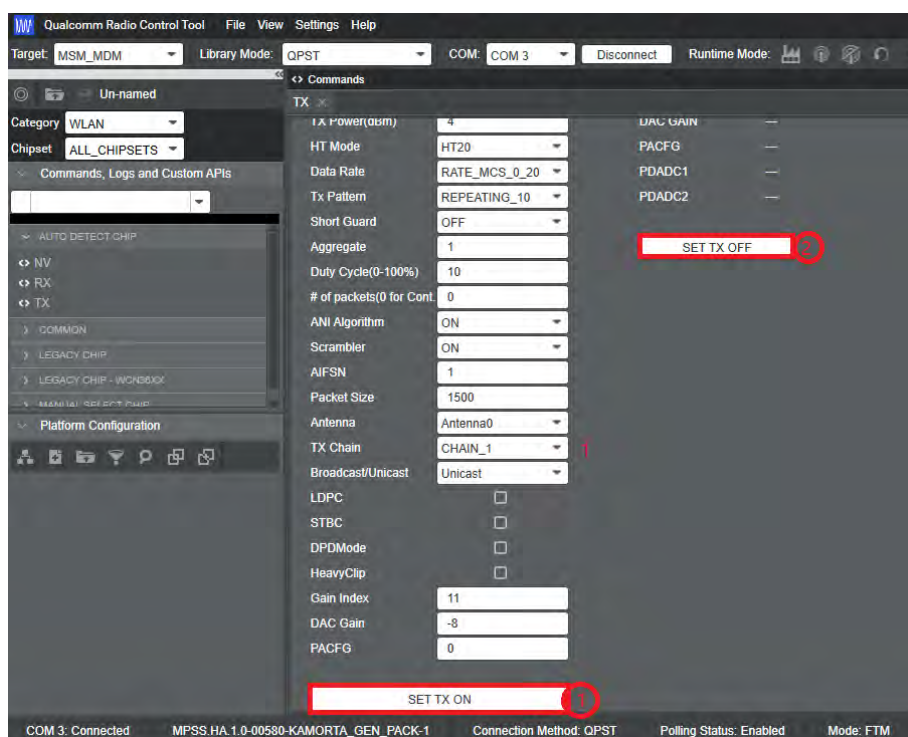


Setup diagram for Conducted Test

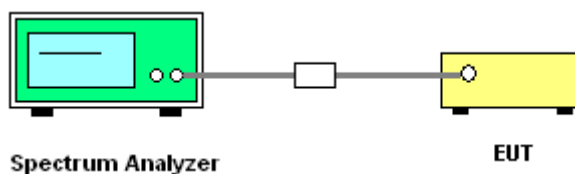


Setup diagram for Radiation(9KHz~30MHz) Test

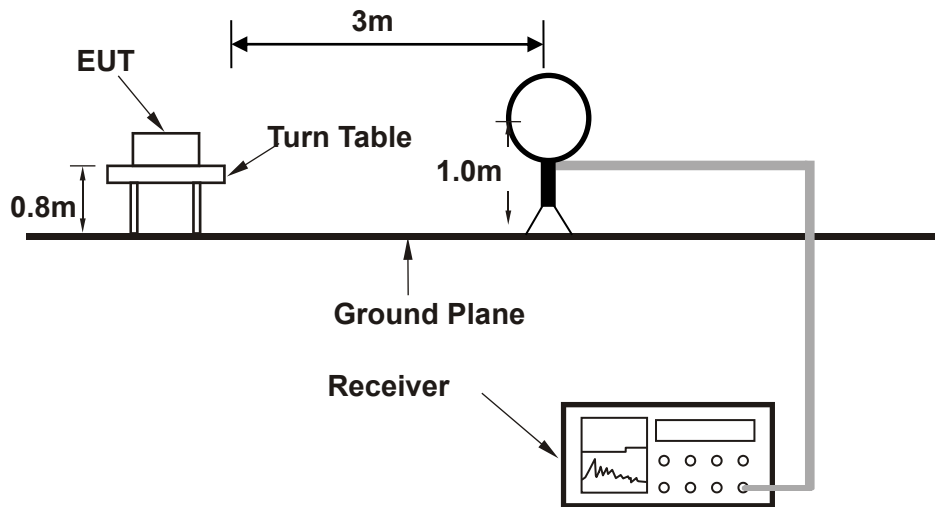


Setup diagram for Radiation(Below 1G) Test

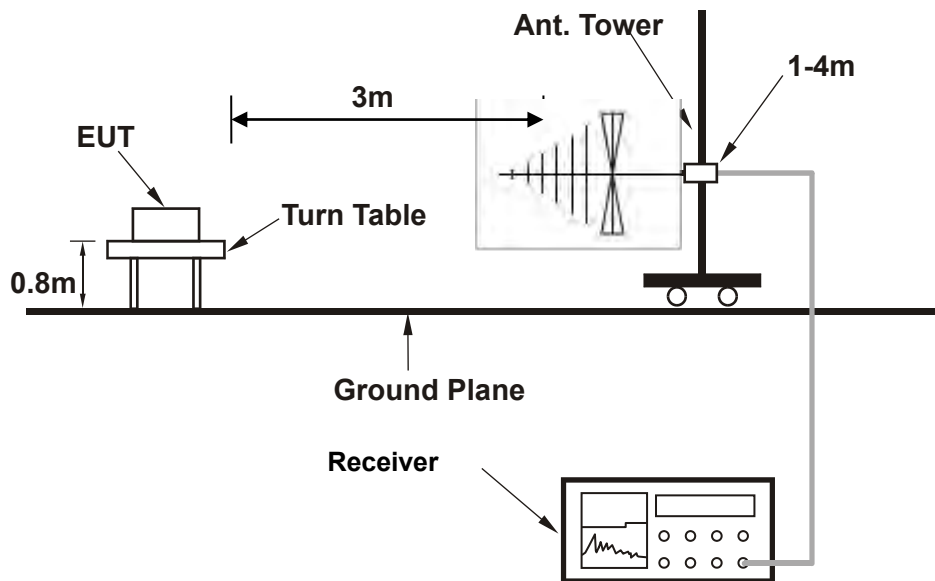

Setup diagram for Radiation(Above1G) Test

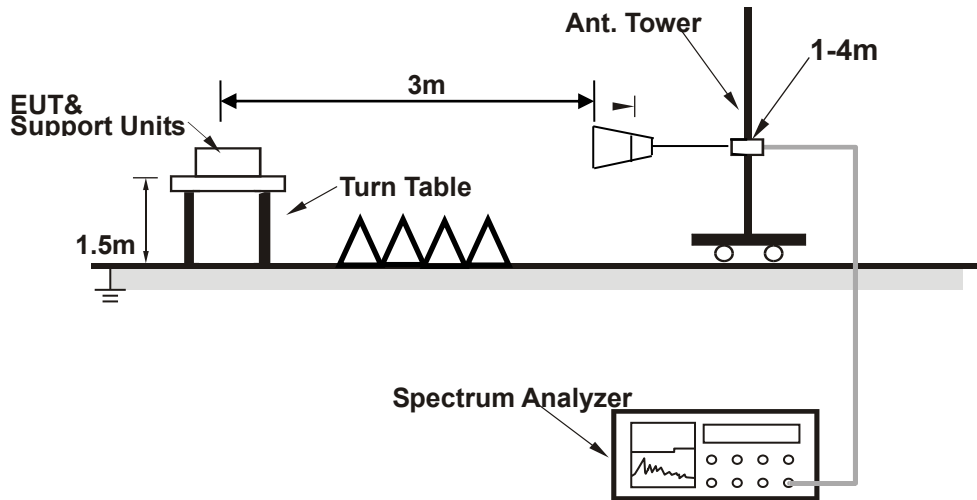

Setup diagram for AC Conducted Emission Test

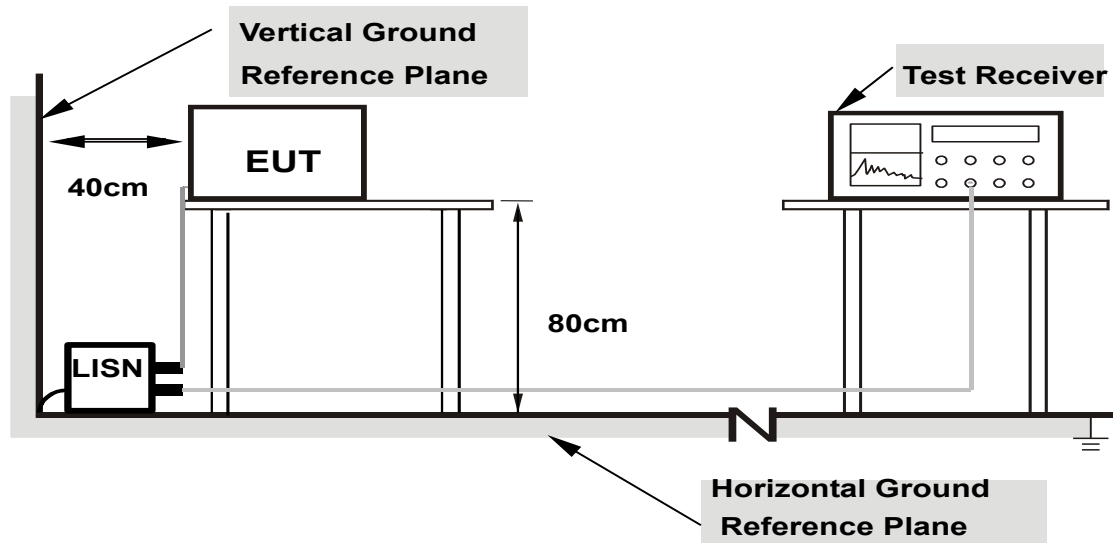

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level

Over Limit (dB μ V/m) = Level(dB μ V/m) - Limit Level (dB μ V/m)

3 Test Result

3.1 DTS and Occupied Channel Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

FCC §15.247 (a) (2)

IC RSS-247 5.2(a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v05r02.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Turn on the EUT and connect it to measurement instrument.
4. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
5. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) setting should be 1%-5% of OBW, please revise and set the Video bandwidth (VBW) $\geq 3 \times$ RBW.

3.1.3 Test Result of 6dB Bandwidth

Refer to Appendix A of this test report.

3.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Output Power

FCC §15.247 (b)(3)

For systems using digital modulation in the 2400-2483.5 MHz bands: 30dBm.

IC RSS-247 A5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928MHz and 2400-2483.5MHz, the maximum conducted output power shall not exceed 1 W.

The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e)

3.2.2 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 section 11.9.2.2.4 Measurement using a spectrum analyzer.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Turn on the EUT and connect it to spectrum analyzer.
4. Set to the maximum power setting and enable Transmitting the EUT transmit continuously
5. Measure the duty cycle, x, of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
6. Set span to at least 1.5*OBW. Set RBW=510KHz, VBW=2MHz, Number of points in sweep $\geq 2/3^*$ span, Sweep time = auto. Detector = RMS
7. Allow the sweep to "free run". Trace average 100 traces in RMS mode
8. Compute power by integrating the spectrum across the OBW of the signal using the instrument's Channel power measurement function with band limits set equal to the OBW band edges.
9. Add $10 \log (1/x)$, where x is the duty cycle. The duty cycle factor has been compensated to the 'offset' of the spectrum analyser.

3.2.3 Test Result of Output Power

Refer to Appendix C of this test report.

3.2.4 Test Result of Duty Cycle

Refer to Appendix D of this test report.

3.3 Maximum Power Spectral Density Measurement

3.3.1 Limits of Power Spectral Density

FCC§15.247(e)

IC RSS-247 5.2(b)

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Test Procedure

1. The testing follows Measurement Procedure 8.4 DTS maximum power spectral density level in the fundamental emission of ANSI C63.10-2013 section 11.9.2.2.4
2. Turn on the EUT and connect it to measurement instrument.
3. Measure the duty cycle, x , of the transmitter output signal as described in below:
 - a. Set the center frequency of the instrument to the center frequency of the transmission.
 - b. Set RBW to the largest available Transmitting value.
 - c. Set detector = peak
4. Set span to at least $1.5 \times \text{OBW}$. Set RBW= 30 KHz, VBW=100 KHz, Number of points in sweep $\geq 2/3 \times \text{span}$, Sweep time = auto.
5. Detector = power averaging (rms), Sweep time = auto couple, Trace mode = averaging (rms) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.
6. Add $10 \log(1/x)$, where x is the duty cycle.
7. Measure and record the results in the test report.
8. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.
9. Add $10 \log(1/x)$, where x is the duty cycle. The duty cycle factor has been compensated to the 'offset' of the spectrum analyser.

3.3.3 Test Result of Power Spectral Density

Refer to Appendix E of this test report.

3.4 Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

Maximum conducted (average) output power was used to determine compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

3.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.3 Test Result of Conducted Band Edges

Refer to Appendix F of this test report.

3.4.4 Test Result of Conducted Spurious Emission

Refer to Appendix G of this test report.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

IC RSS-247 5.5

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 30 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.20	-	-	10Hz
802.11g	98.10	-	-	10Hz
802.11n HT20	97.96	1.92	0.52	1kHz
802.11n HT40	95.00	0.95	1.05	3kHz

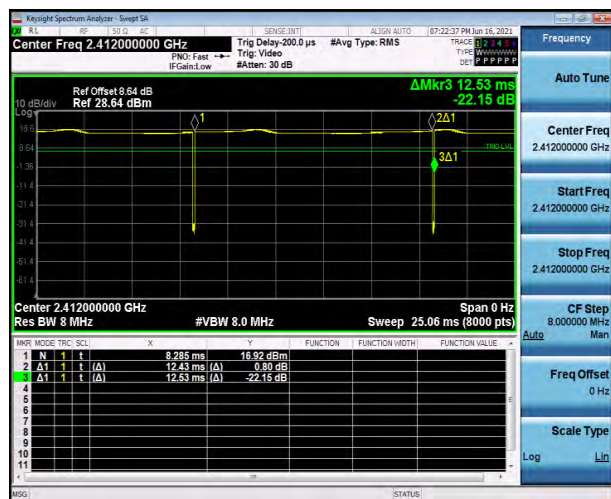


802.11b

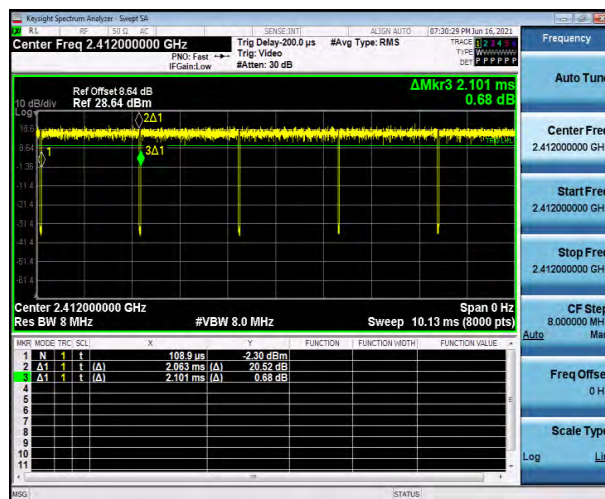

802.11g

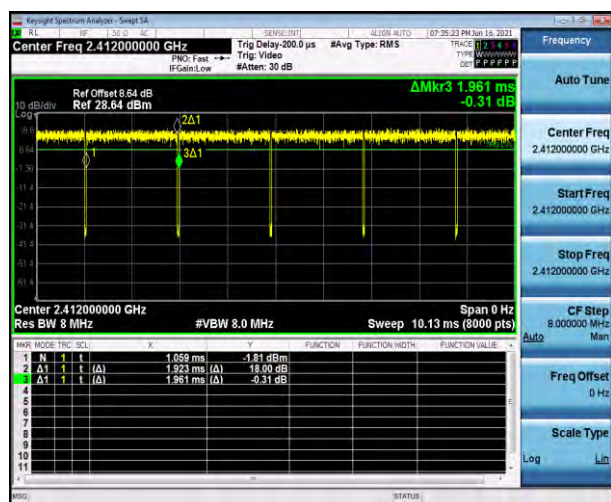

802.11n HT20

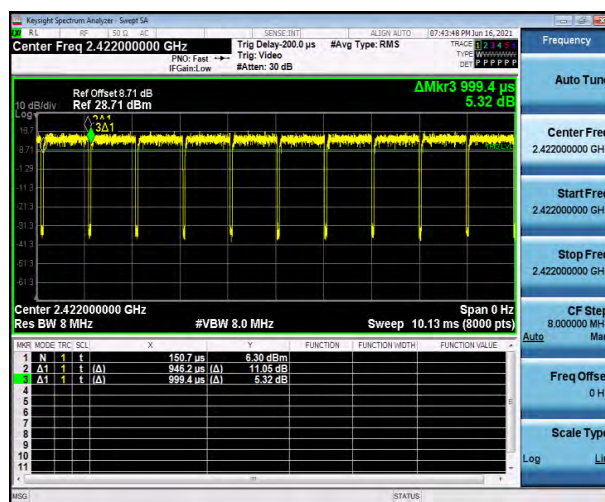

802.11n HT40

6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.5.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



**BUREAU
VERITAS**

Test Report No.: RFBGDJ-W7L-P21060011-3

3.5.4 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	23~25℃
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25℃/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		


Data: 8

Date: 2021-06-21

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	49.59	27.38	3.48	35.61	44.84	74.00	-29.16	Peak
2390.000	49.32	27.56	3.53	35.79	44.62	74.00	-29.38	Peak
2410.875	102.17	27.60	3.55	35.84	97.48	74.00	23.48	Peak


Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

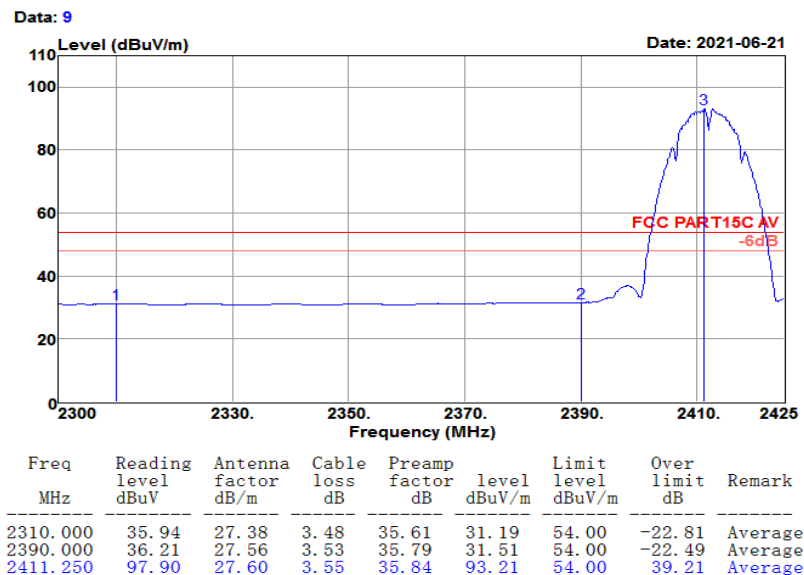

Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

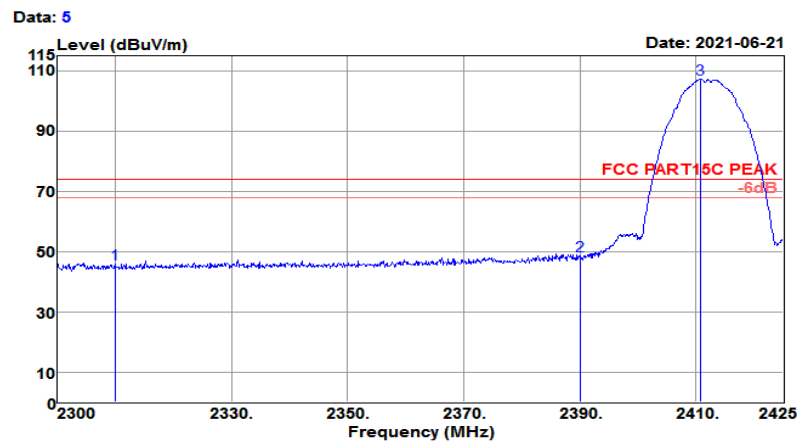

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	50.54	27.38	3.48	35.61	45.79	74.00	-28.21	Peak
2390.000	53.21	27.56	3.53	35.79	48.51	74.00	-25.49	Peak
2410.875	111.90	27.60	3.55	35.84	107.21	74.00	33.21	Peak


Test Mode :	802.11b CH01 (2412 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.425GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH01(2412MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

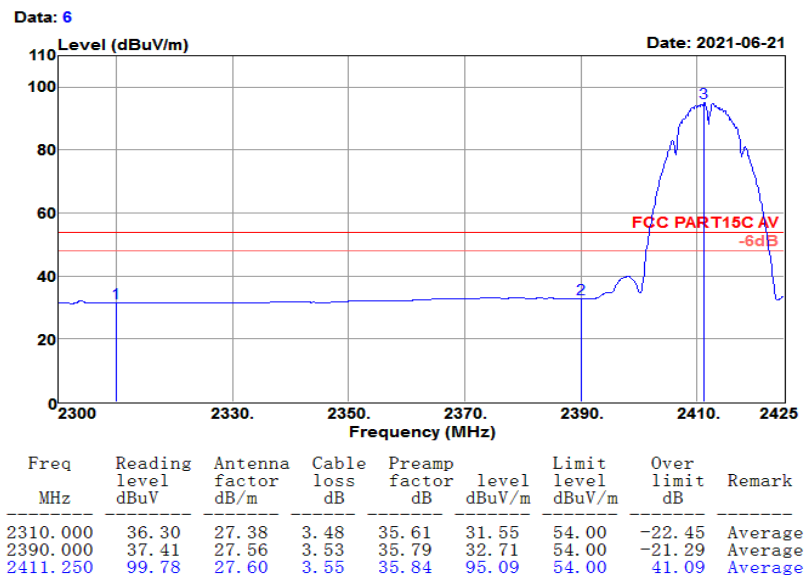

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site : 3m Chamber	Temp/Humi : 25°C/64%
Tested by : Jack	Pol/Phase : HORIZONTAL
Test Mode : 802.11b CH11(2462MHz)	Power rating: DC 3.85V
EUT : Mobile Computer	
Model No. : CT45-L0N	

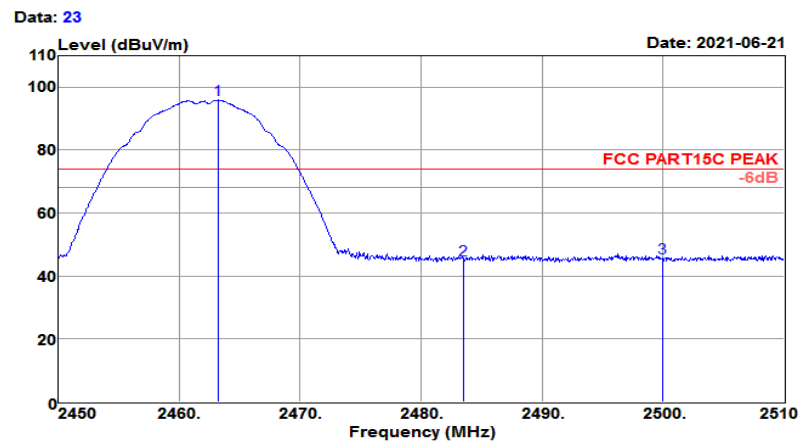

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.200	100.80	27.72	3.58	35.96	96.14	74.00	22.14	Peak
2483.500	49.85	27.76	3.59	36.00	45.20	74.00	-28.80	Peak
2500.000	50.28	27.80	3.60	36.04	45.64	74.00	-28.36	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating	: DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

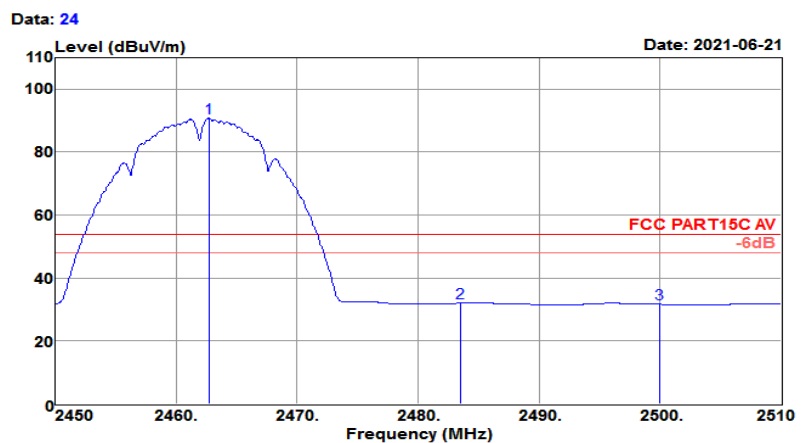

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.720	95.46	27.72	3.58	35.96	90.80	54.00	36.80	Average
2483.500	36.63	27.76	3.59	36.00	31.98	54.00	-22.02	Average
2500.000	36.30	27.80	3.60	36.04	31.66	54.00	-22.34	Average

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

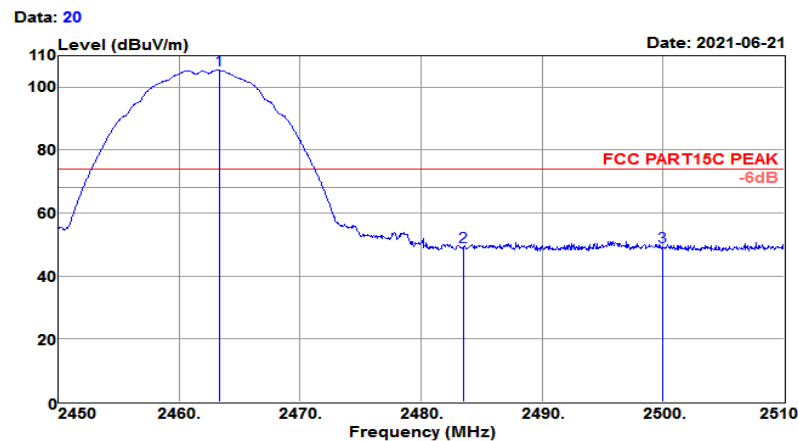

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2463.320	110.15	27.72	3.58	35.96	105.49	74.00	31.49	Peak
2483.500	54.05	27.76	3.59	36.00	49.40	74.00	-24.60	Peak
2500.000	54.07	27.80	3.60	36.04	49.43	74.00	-24.57	Peak

Test Mode :	802.11b CH11 (2462 MHz)	Temperature :	23~25°C
Test Engineer :	Jack Liu	Relative Humidity :	63~65%
Frequency Range	2.45GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 25°C/64%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: 802.11b CH11(2462MHz)	Power rating:	DC 3.85V
EUT	: Mobile Computer		
Model No.	: CT45-L0N		

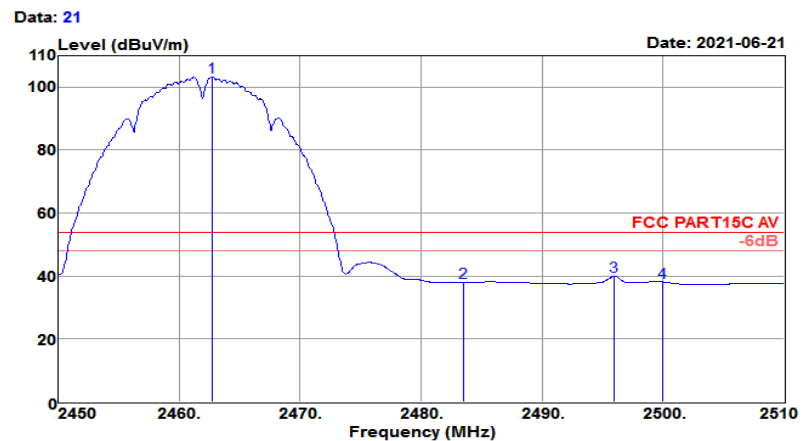

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2462.720	107.96	27.72	3.58	35.96	103.30	54.00	49.30	Average
2483.500	42.66	27.76	3.59	36.00	38.01	54.00	-15.99	Average
2495.960	44.57	27.79	3.60	36.03	39.93	54.00	-14.07	Average
2500.000	42.76	27.80	3.60	36.04	38.12	54.00	-15.88	Average