

VARIANT FCC TEST REPORT

(Part 15, Subpart C)


Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States

Manufacturer or Supplier:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45P-L1N-2
FCC ID:	HD5-CT45PL1N2
Date of tests:	Oct. 25, 2021 ~ Jan. 14, 2022

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC Part 15, Subpart C, Section 15.247**
- ☒ **ANSI C63.10-2013**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jan. 14, 2022	 Date: Jan. 14, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
1.2 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION	6
2.2 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	9
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	10
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.2 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS.....	14
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	14
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	14
3.1.2 TEST INSTRUMENTS.....	15
3.1.3 TEST PROCEDURES	16
3.1.4 DEVIATION FROM TEST STANDARD	16
3.1.5 TEST SETUP	17
3.1.6 EUT OPERATING CONDITIONS	18
3.1.7 TEST RESULTS	19
3.2 CONDUCTED OUTPUT POWER.....	22
3.2.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	22
3.2.2 TEST SETUP	22
3.2.3 TEST INSTRUMENTS.....	22
3.2.4 TEST PROCEDURES	22
3.2.5 DEVIATION FROM TEST STANDARD	22
3.2.6 EUT OPERATING CONDITIONS	22
3.2.7 TEST RESULTS	23
3.2.7.1 MAXIMUM PEAK OUTPUT POWER	23
3.2.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE).....	26
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	29
5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	30



**BUREAU
VERITAS**

Test Report No.: W7L-211129W002RF13

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21080006RF13	Original release	Sep. 01, 2021
W7L-P21110008RF13	Based on the original report W7L-P21080006RF13 add the band 41C, changing components.	Nov. 12, 2021
W7L-211129W002RF13	Based on the original report W7L-P21110008RF13 Changing components	Jan. 14, 2022



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.207	AC Power Conducted Emission	(See Note 2)
15.205 15.209	Radiated Emissions	Compliance (See Note 1)
15.247(d)	Out of band Emission Measurement	(See Note 2)
15.247(a)(2)	6dB bandwidth	(See Note 2)
15.247(b)	Conducted Output power	Compliance (See Note 1)
15.247(e)	Power Spectral Density	(See Note 2)
15.203	Antenna Requirement	(See Note 2)

NOTE:

- 1 Per the change notice provide by manufactory, the difference is changing components, all the change no effect any RF parameter. Therefore only verify the power and radiated emission worse case. The report only show the verify test data. More test details please refer to the original report.
2. Please refer to original report W7L-P21110008RF13



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Radiated emissions (30MHz~1GMHz)	±4.98dB
Radiated emissions (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted Output power	±2.06dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.2 GENERAL DESCRIPTION OF EUT

PRODUCT	Mobile Computer
BRAND NAME	Honeywell
MODEL NAME	CT45P-L1N-2
NOMINAL VOLTAGE	3.85Vdc (Lithium-ion cell, battery)
MODULATION	DSSS, OFDM, GFSK
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n20: up to 65 Mbps 802.11n40: up to 135 Mbps BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps 2SECEND-BT_LE: 0.125 Mbps /0.5 Mbps /1 Mbps/2 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 171.4mW (Maximum) BT-LE: 4.83mW (Maximum) 2SECEND-BT-LE: 3.25mW (Maximum)
ANTENNA TYPE	PIFA Antenna with 0.51dBi gain
HW VERSION	V1.0
SW VERSION	OS.11.002-HON.11.002
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB CUP: unshielded without ferrite, 1.25 meter Earphone cable: unshielded without ferrite, 1.27 meter



**BUREAU
VERITAS**

Test Report No.: W7L-211129W002RF13

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. This product includes the following three SKU which hardware is exactly same, the difference is described as following, Sample 1 was full test, sample 2 verify the worst case, check worst case Radiated emission:

SAMPLE	EUT CONFIGURATION INFORMATION
1	SKU ID:CT45-L1N-37D120G ,Assembled Scanner Imager: 7-S0703
2	SKU ID:CT45-L1N-38D120G ,Assembled Scanner Imager: 8 - N6803/S0803
3	SKU ID: CT45-L1N-37D220G , Assembled with Scanner: 7-S0703 for China Only with Android non-GMS

3. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
802.11n (40MHz)	1TX /1RX
BT_LE(1MHz)	1TX /1RX
BT_LE(2MHz)	1TX /1RX
BT_LE(S2)	1TX /1RX
BT_LE(S8)	1TX /1RX
2second BT_LE(S8)	1TX /1RX
2second BT_LE(S2)	1TX /1RX
2second BT_LE(1MHz)	1TX /1RX
2second BT_LE(2MHz)	1TX /1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



5.

List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery	Honeywell	CT50-BTSC	Capacity : 3.85vdc 4020mAh
AC Adapter	HONOR	ADS-12B-06 05010E	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB CUP	Honeywell	CT40-SN	Shielded, 1.25meter
Earphone	VIVO	N/A	Shielded, 1.27meter
LCD Panel	CASIL	CTM10801920T01	5.0" FHD(1928*1080)



2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE (GFSK)& 2SECEND-BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	-	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT40	3 to 9	9	OFDM	MCS0

**RADIATED EMISSION TEST (ABOVE 1GHz):**

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11n HT40	3 to 9	9	OFDM	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	1.0
802.11g	1 to 11	1, 6, 11	OFDM	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	MCS0
802.11n HT40	3 to 9	3, 6, 9	OFDM	MCS0
BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1&2
2SECEND-BT-LE	0 to 39	0,19, 39	GFSK	0.125&0.5&1&2



**BUREAU
VERITAS**

Test Report No.: W7L-211129W002RF13

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.85V By Battery	Carl Xie
RE≥1G	23deg. C, 70%RH	DC 3.85V By Battery	Carl Xie
APCM	25deg. C, 60%RH	DC 3.85V By Battery	Lily Zhao



2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	Thnikpad T450	PC-049PT1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m



3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



3.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 DEVIATION FROM TEST STANDARD

No deviation.




3.1.5 TEST SETUP

< Frequency Range 30MHz~1GHz >

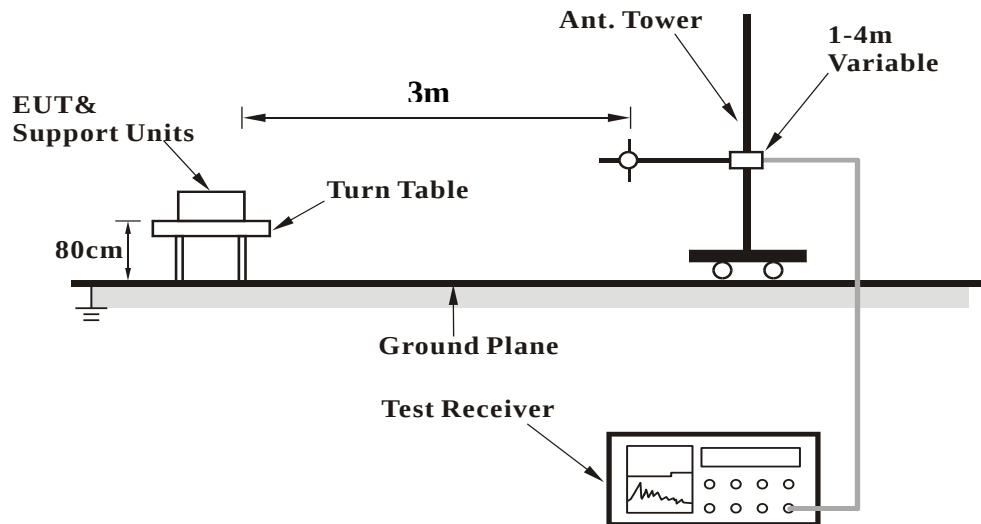

<Frequency Range above 1GHz>

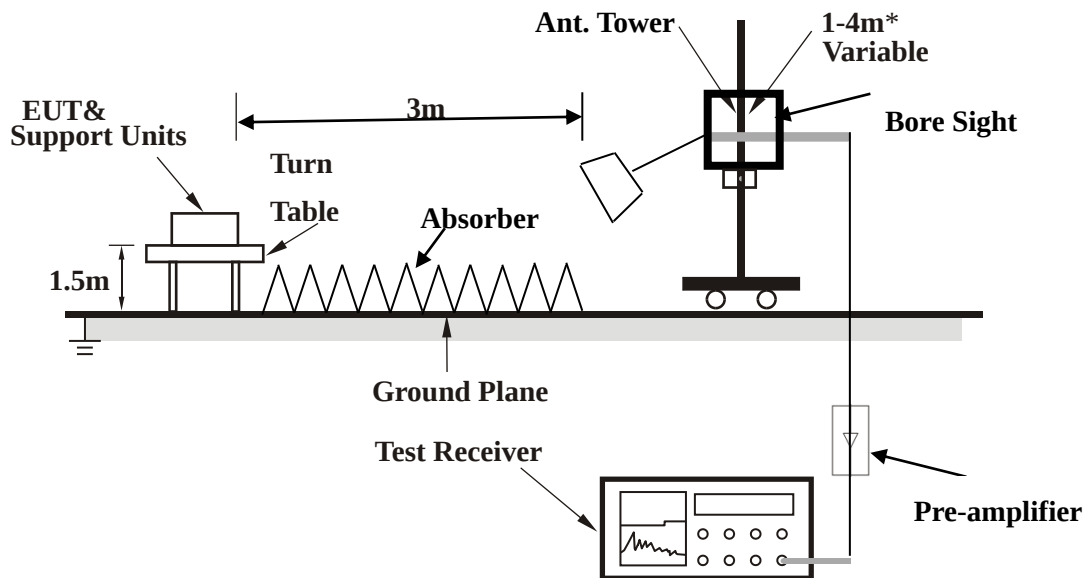

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.1.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**BUREAU
VERITAS**

Test Report No.: W7L-211129W002RF13

3.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


802.11n (40MHz)

CHANNEL	Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.318	29.35	55.61	40	-10.65	11.13	0.87	38.26	200	0	QP
120.21	28.78	57.32	43.5	-14.72	7.89	1.4	37.83	200	0	QP
172.59	26.3	51.7	43.5	-17.2	10.46	1.67	37.53	200	0	QP
304.28	33.45	54.33	46	-12.55	14.12	2.22	37.22	200	0	QP
400.27	30.46	48.35	46	-15.54	16.9	2.55	37.34	200	0	QP
600.36	27.44	41.34	46	-18.56	20.71	3.22	37.83	200	0	QP

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

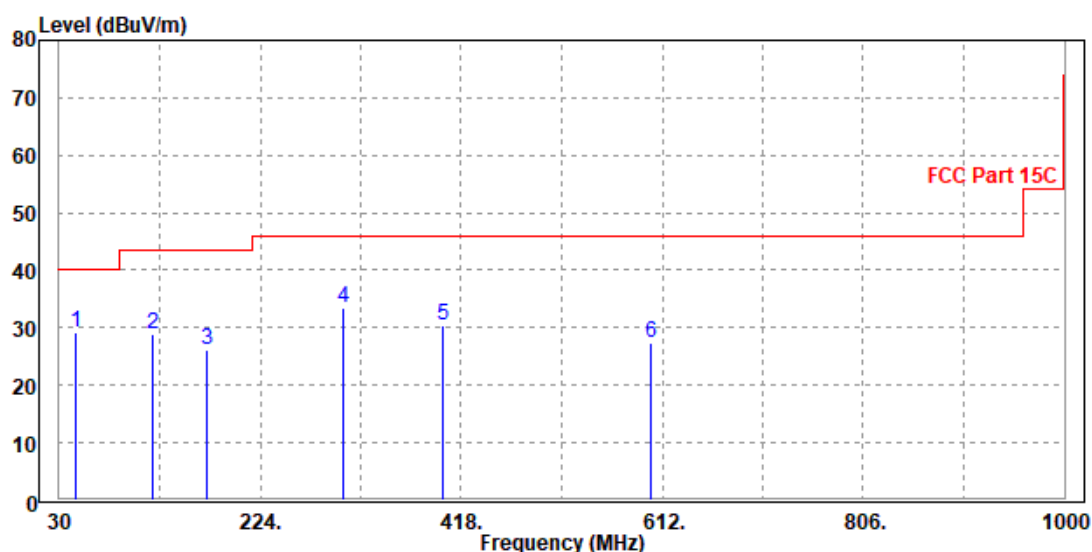



**BUREAU
VERITAS**


Test Report No.: W7L-211129W002RF13

CHANNEL	Channel 9	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
43.248	34.08	60.32	40	-5.92	11.16	0.85	38.25	100	360	QP
147.814	26.16	52.65	43.5	-17.34	9.63	1.55	37.67	100	360	QP
278.641	30.64	51.28	46	-15.36	14.49	2.12	37.25	100	360	QP
450.348	27.34	43.87	46	-18.66	18.16	2.74	37.43	100	360	QP
600.27	30.52	44.23	46	-15.48	20.9	3.22	37.83	100	360	QP
724	30.55	42.65	46	-15.45	22.49	3.62	38.21	100	360	QP

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

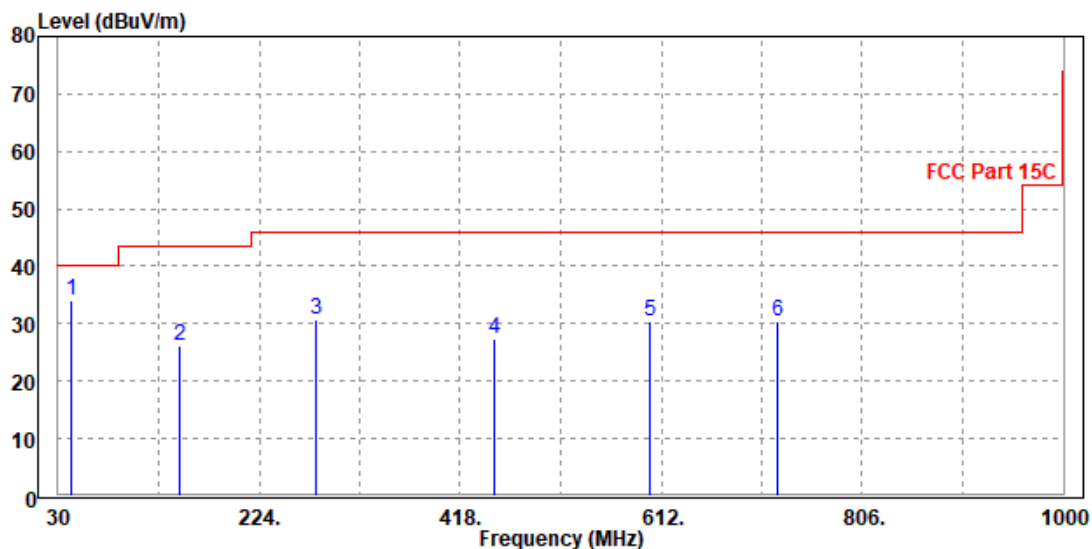



**BUREAU
VERITAS**

Test Report No.: W7L-211129W002RF13

ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

802.11n (40MHz)

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.84	60.82	74	-21.16	31.75	5.86	45.59	100	205	Peak
2390	43.66	51.64	54	-10.34	31.75	5.86	45.59	100	205	Average
2452	99.71	107.35			31.95	5.95	45.54	100	205	Peak
2452	91.97	99.61			31.95	5.95	45.54	100	205	Average
2483.5	57.34	64.82	74	-16.66	32.05	5.99	45.52	100	205	Peak
2483.5	48.53	56.01	54	-5.47	32.05	5.99	45.52	100	205	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.75	61.34	74	-20.25	32.14	5.86	45.59	100	130	Peak
2390	43.74	51.33	54	-10.26	32.14	5.86	45.59	100	130	Average
2452	96.27	103.58			32.28	5.95	45.54	100	130	Peak
2452	88.92	96.23			32.28	5.95	45.54	100	130	Average
2483.5	54.65	61.82	74	-19.35	32.36	5.99	45.52	100	130	Peak
2483.5	47.45	54.62	54	-6.55	32.36	5.99	45.52	100	130	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2452MHz: Fundamental frequency.




3.2 CONDUCTED OUTPUT POWER

3.2.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.2.2 TEST SETUP

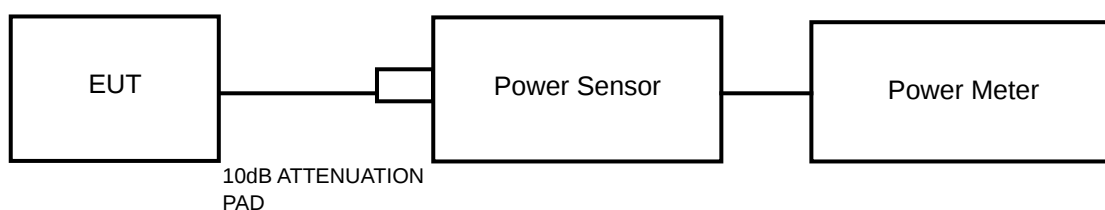

3.2.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 25,21	Feb. 24,22
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Apr. 26,21	Apr. 25,22
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 25,21	Feb. 24,22

3.2.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.2.5 DEVIATION FROM TEST STANDARD

No deviation.

3.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.2.7 TEST RESULTS

3.2.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	15.06	32.06	1	PASS
6	2437	16.70	46.77	1	PASS
11	2462	17.65	58.21	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	18.80	75.86	1	PASS
6	2437	19.86	96.83	1	PASS
11	2462	19.36	86.3	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	19.08	80.91	1	PASS
6	2437	19.73	93.97	1	PASS
11	2462	19.28	84.72	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
3	2422	20.79	119.95	1	PASS
6	2437	22.34	171.4	1	PASS
9	2452	20.59	114.55	1	PASS

**BT-LE (1MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	4.62	2.9	1	PASS
19	2440	4.67	2.93	1	PASS
39	2480	6.54	4.51	1	PASS

BT-LE (2MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	4.97	3.14	1	PASS
19	2440	5.13	3.26	1	PASS
39	2480	6.84	4.83	1	PASS

BT-LE (S2)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	4.74	2.98	1	PASS
19	2440	4.86	3.06	1	PASS
39	2480	6.61	4.58	1	PASS

BT-LE (S8)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	4.66	2.92	1	PASS
19	2440	4.81	3.03	1	PASS
39	2480	6.56	4.53	1	PASS



BUREAU VERITAS Test Report No.: W7L-211129W002RF13

2SECEND-BT-LE (1MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	3.65	2.32	1	PASS
19	2440	4.48	2.81	1	PASS
39	2480	5.07	3.21	1	PASS

2SECEND-BT-LE (2MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	3.59	2.29	1	PASS
19	2440	4.46	2.79	1	PASS
39	2480	5.12	3.25	1	PASS

2SECEND-BT-LE (S2)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	3.67	2.33	1	PASS
19	2440	4.42	2.77	1	PASS
39	2480	5.06	3.21	1	PASS

2SECEND-BT-LE (S8)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	3.65	2.32	1	PASS
19	2440	4.51	2.82	1	PASS
39	2480	5.04	3.19	1	PASS

**3.2.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	12.85	N/A
6	2437	13.98	N/A
11	2462	15.07	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.19	N/A
6	2437	14.91	N/A
11	2462	14.22	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.03	N/A
6	2437	14.59	N/A
11	2462	13.99	N/A

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
3	2422	14.06	N/A
6	2437	16.08	N/A
9	2452	13.61	N/A

**BT-LE (1MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	2.44	N/A
19	2440	2.45	N/A
39	2480	4.33	N/A

BT-LE (2MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	-0.39	N/A
19	2440	0.04	N/A
39	2480	1.51	N/A

BT-LE (S2)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	2.06	N/A
19	2440	2.29	N/A
39	2480	3.86	N/A

BT-LE (S8)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	3.73	N/A
19	2440	4.06	N/A
39	2480	5.49	N/A

**2SECEND-BT-LE (1MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	3.08	N/A
19	2440	3.81	N/A
39	2480	4.51	N/A

2SECEND-BT-LE (2MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	1.62	N/A
19	2440	2.55	N/A
39	2480	3.11	N/A

2SECEND-BT-LE (S2)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	3.38	N/A
19	2440	3.94	N/A
39	2480	4.51	N/A

2SECEND-BT-LE (S8)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	3.47	N/A
19	2440	4.37	N/A
39	2480	4.94	N/A



Test Report No.: W7L-211129W002RF13

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-211129W002RF13

5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---