




BUREAU
VERITAS


Test Report No.: W7L-P21080009RF16



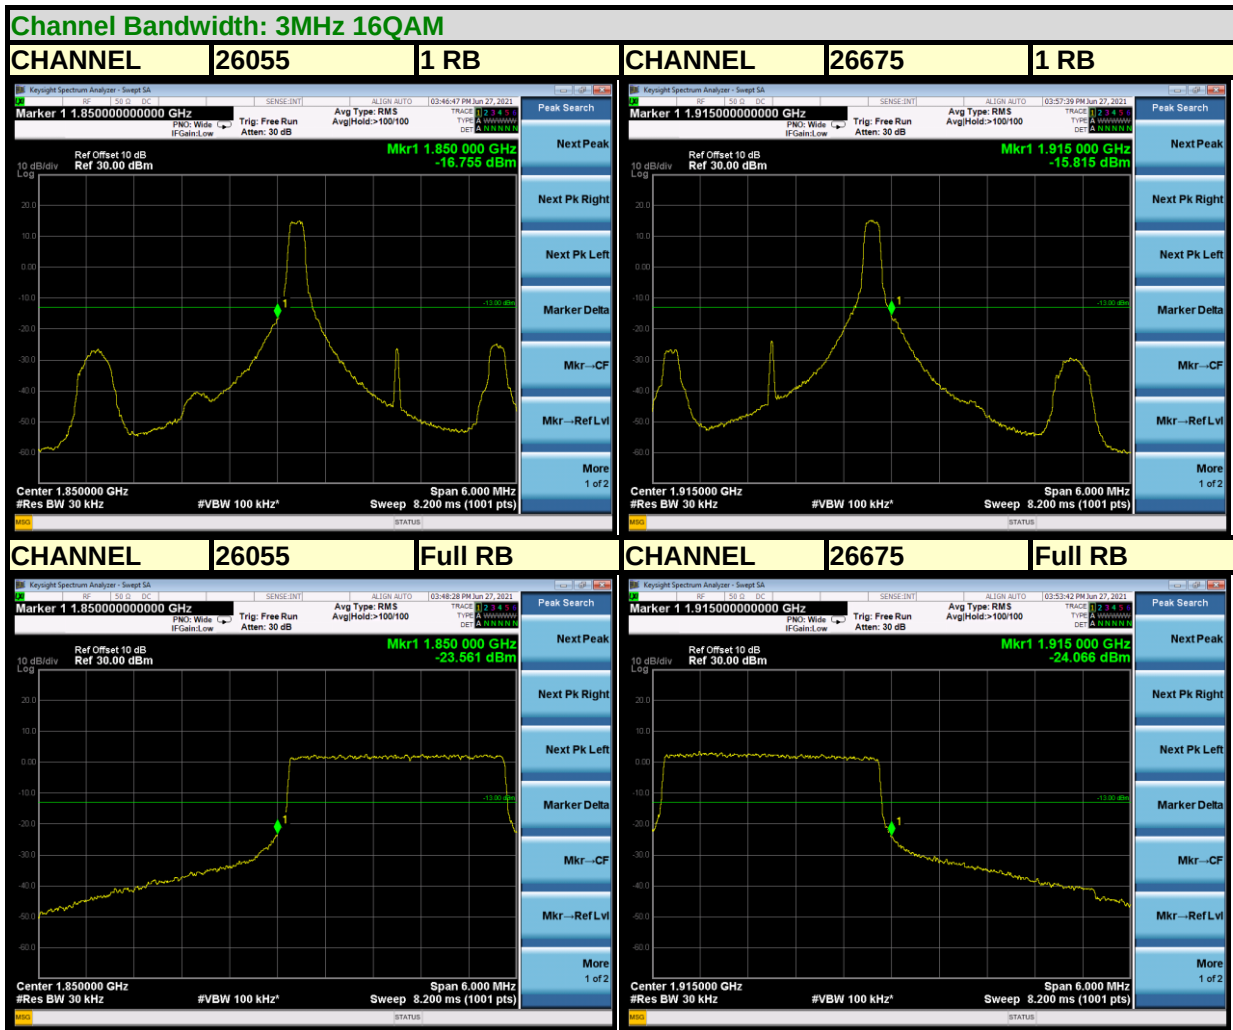

BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

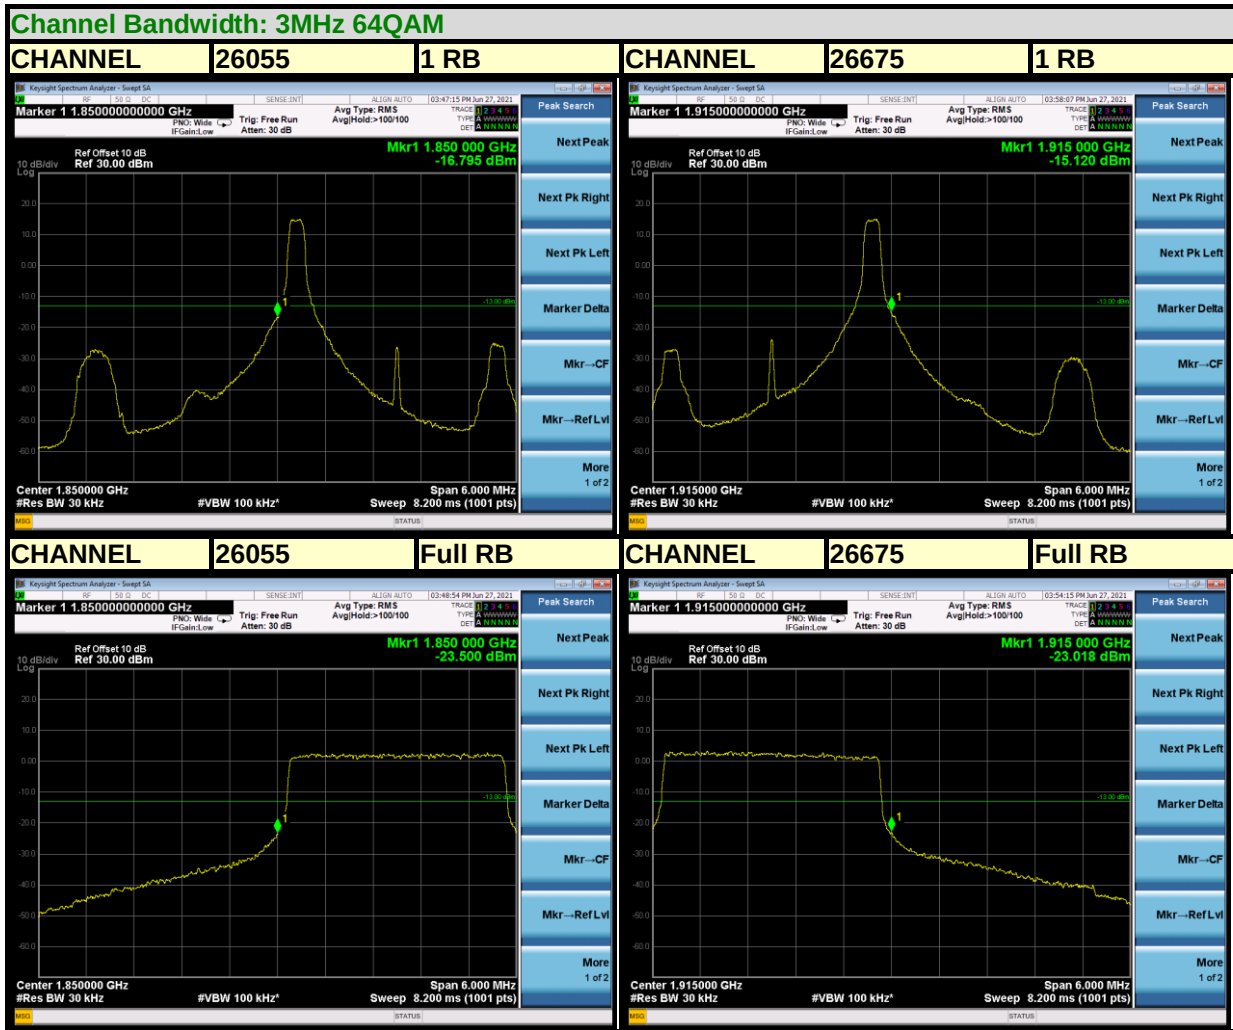



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

LTE BAND 25


Channel Bandwidth: 5MHz QPSK





BUREAU
VERITAS


Test Report No.: W7L-P21080009RF16

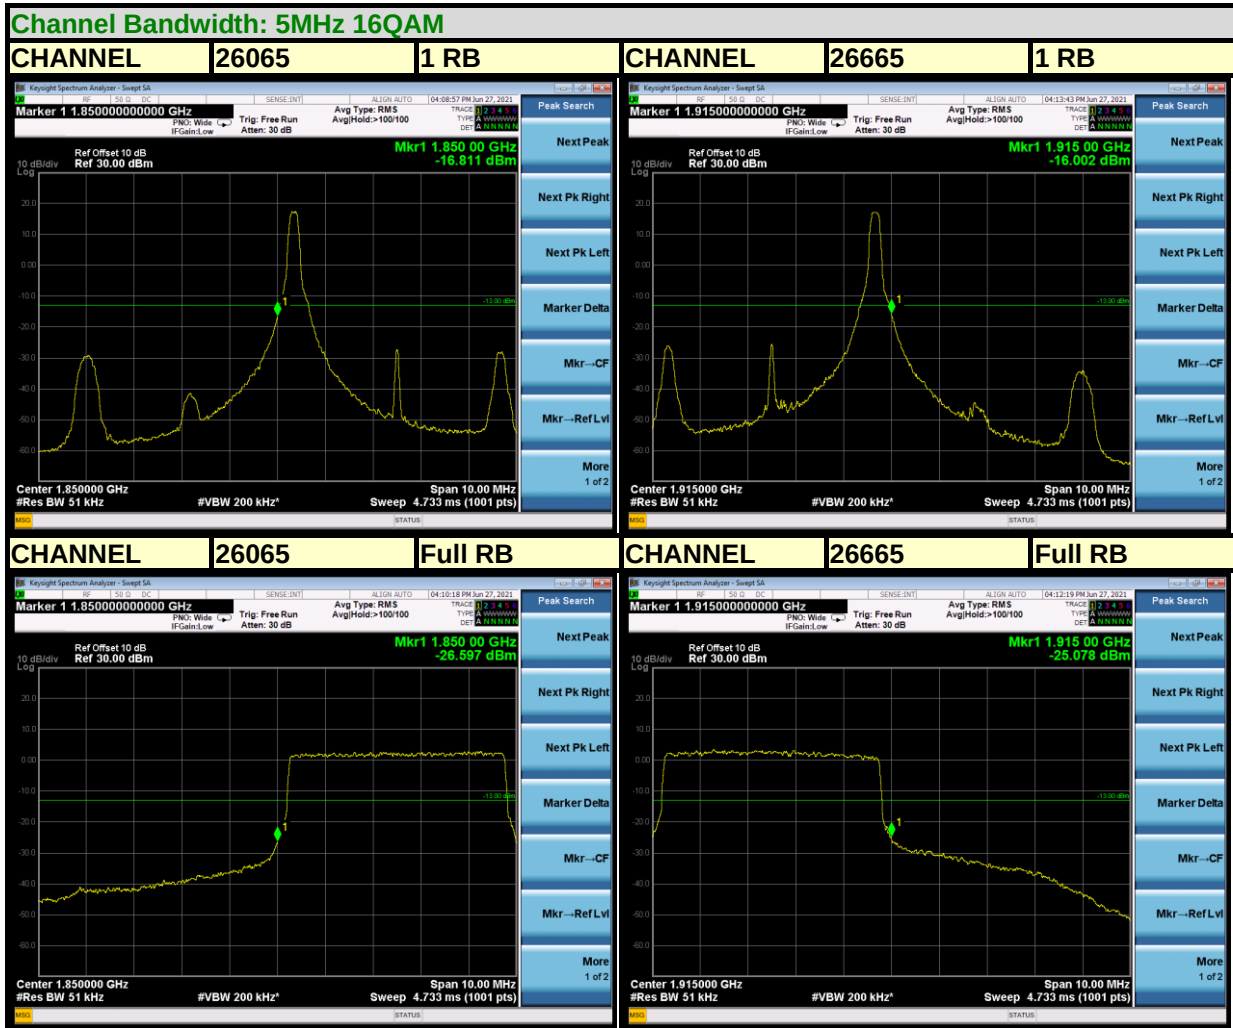



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

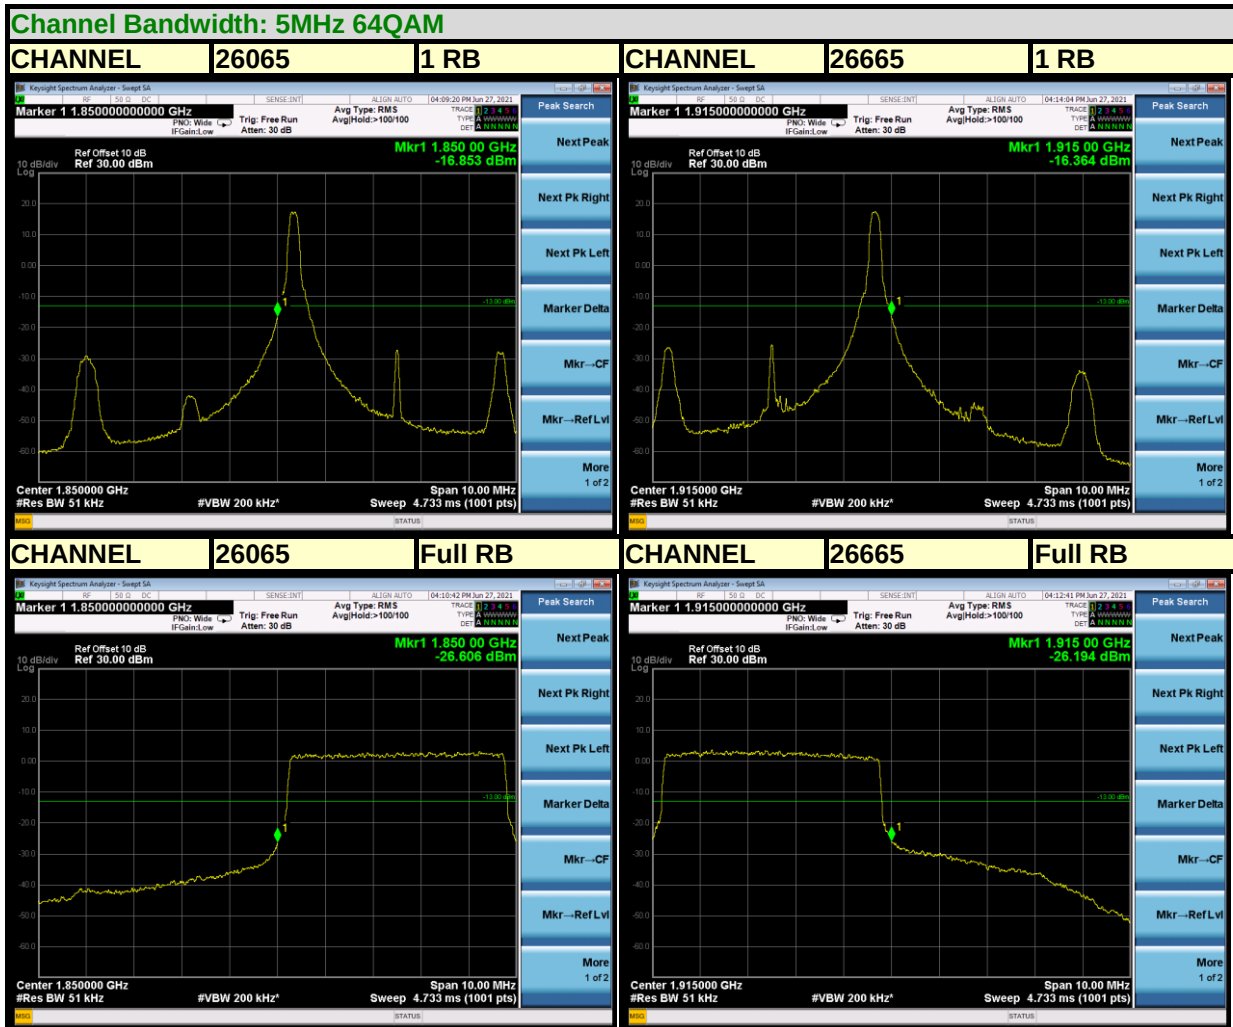




BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

LTE BAND 25


Channel Bandwidth: 10MHz QPSK

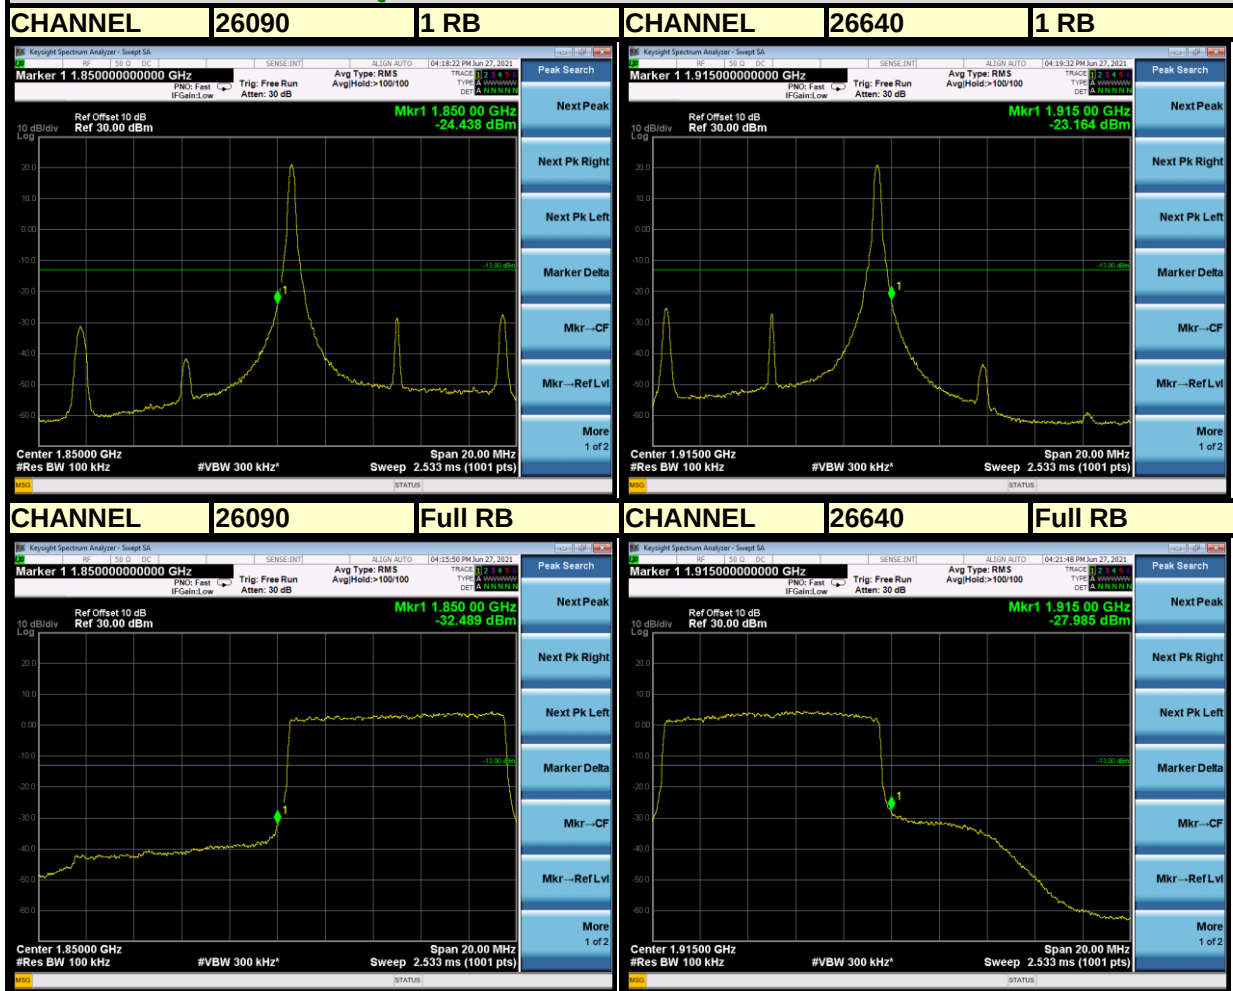



BUREAU
VERITAS


Test Report No.: W7L-P21080009RF16

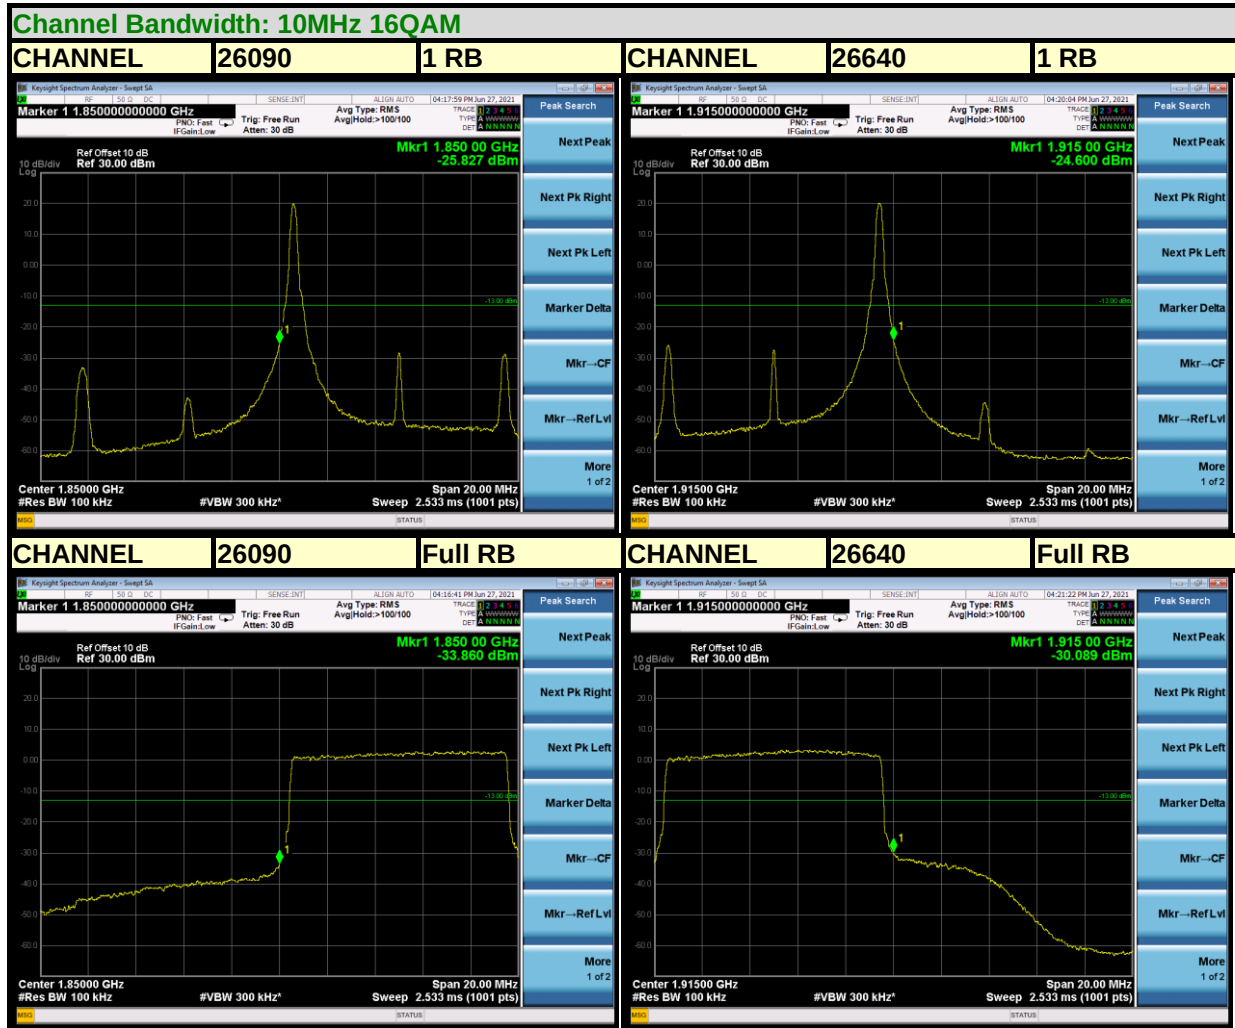



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

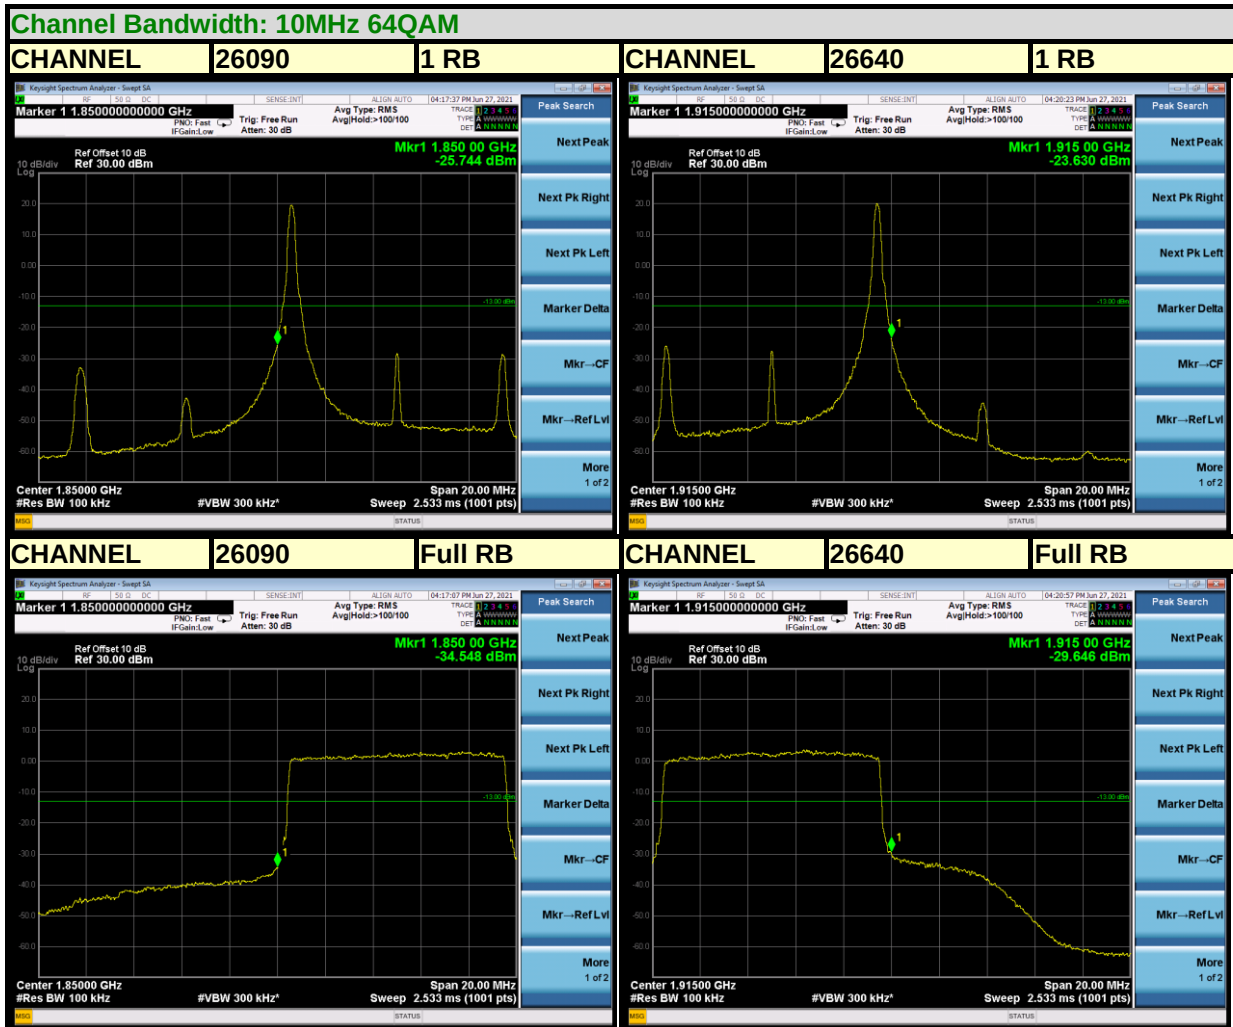



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

LTE BAND 25


Channel Bandwidth: 15MHz QPSK





BUREAU
VERITAS


Test Report No.: W7L-P21080009RF16

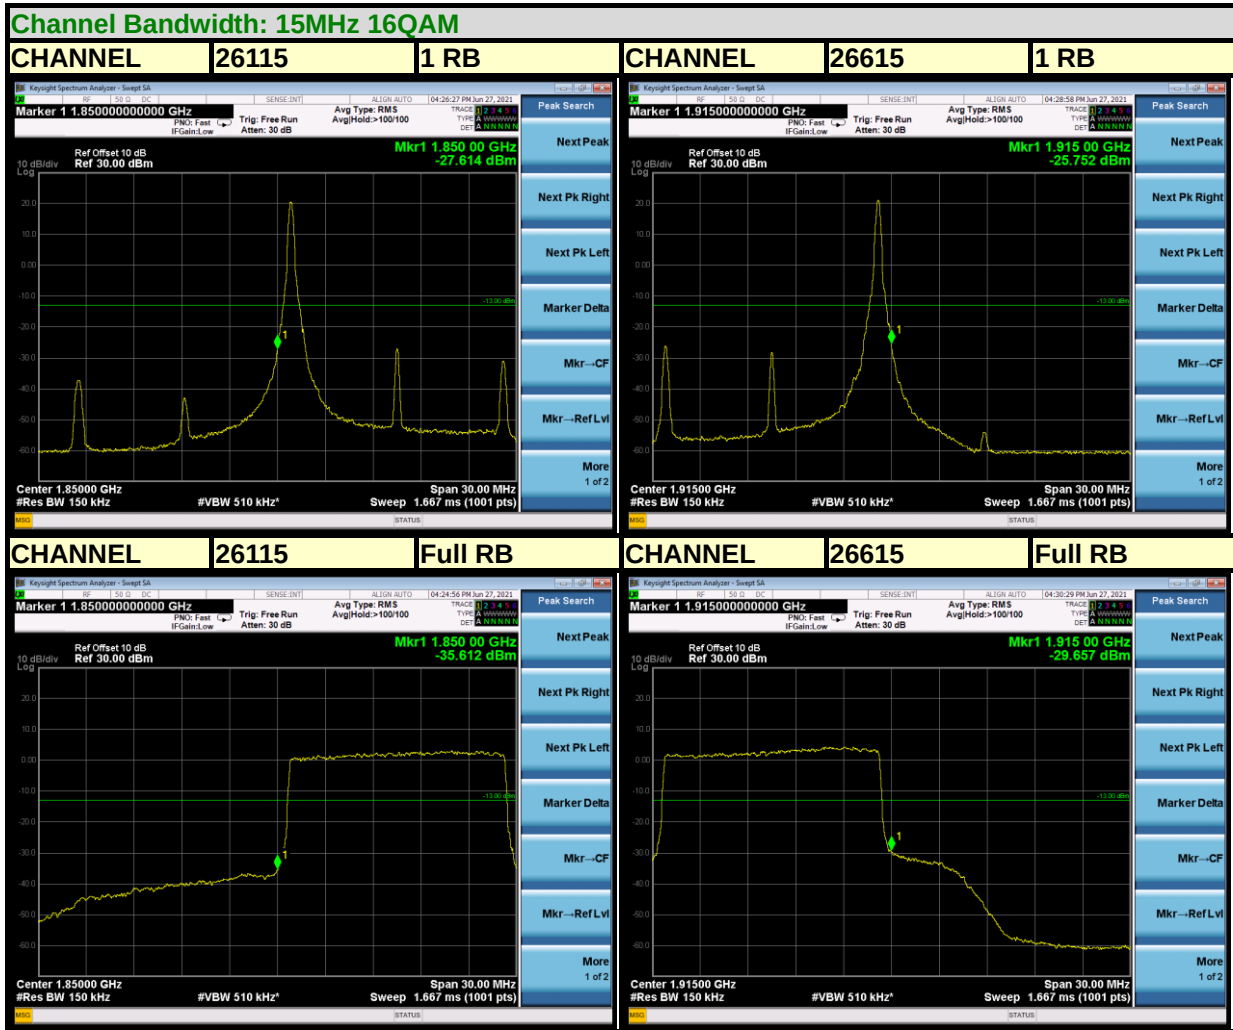



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

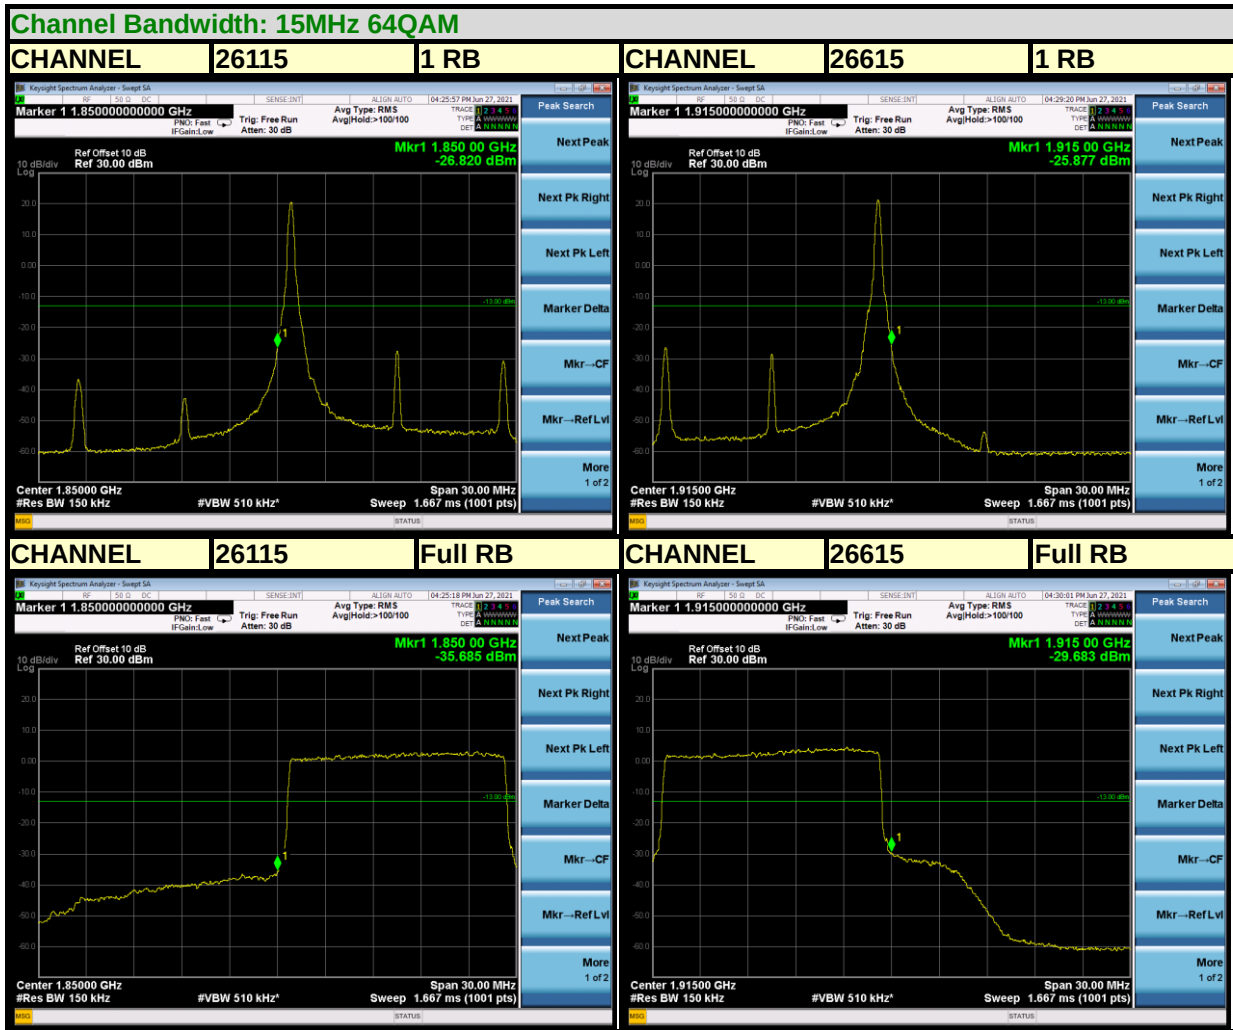




BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

LTE BAND 25

Channel Bandwidth: 20MHz QPSK

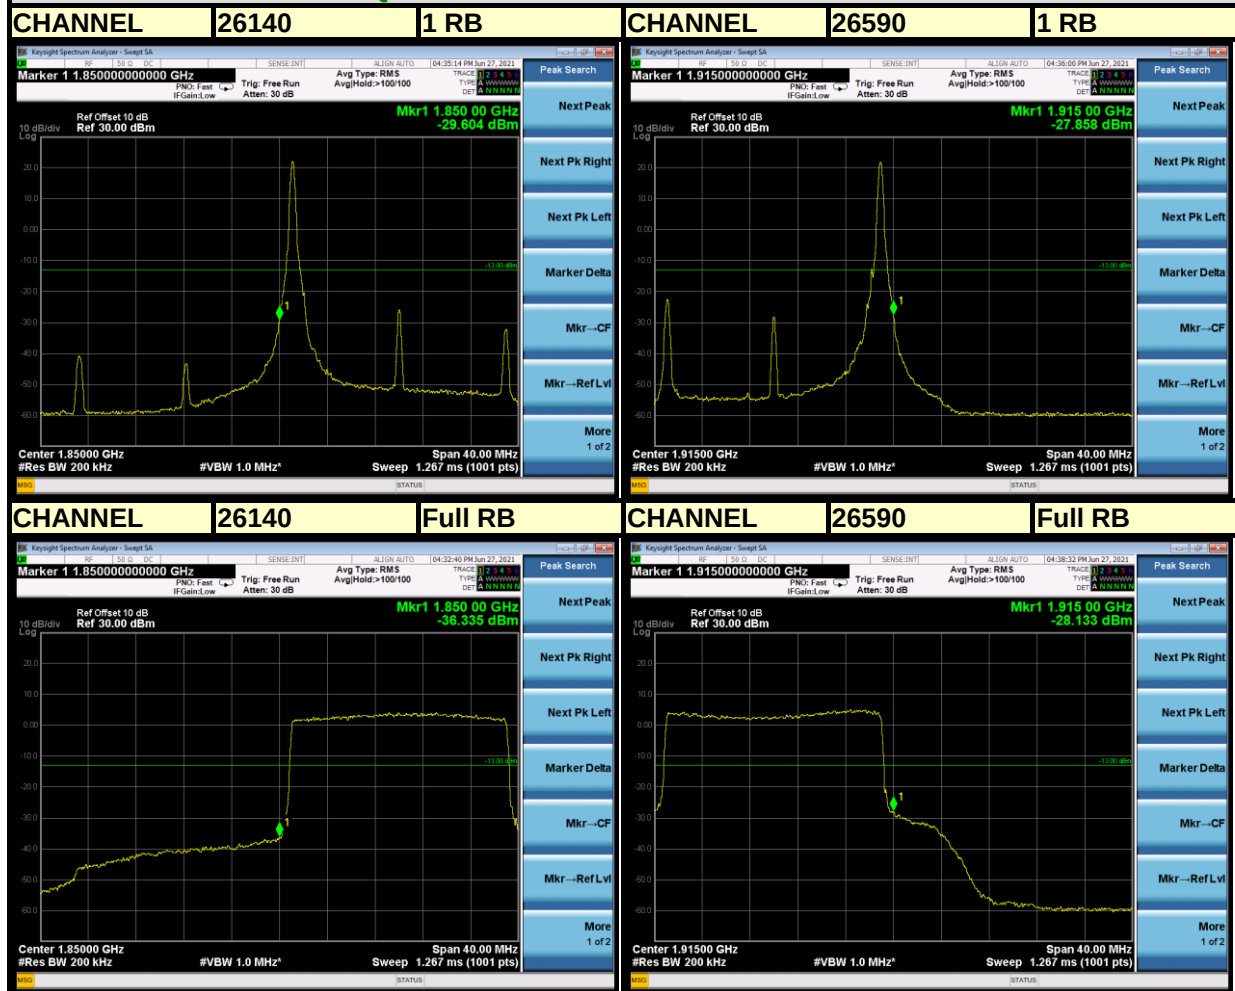



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16





BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16





3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

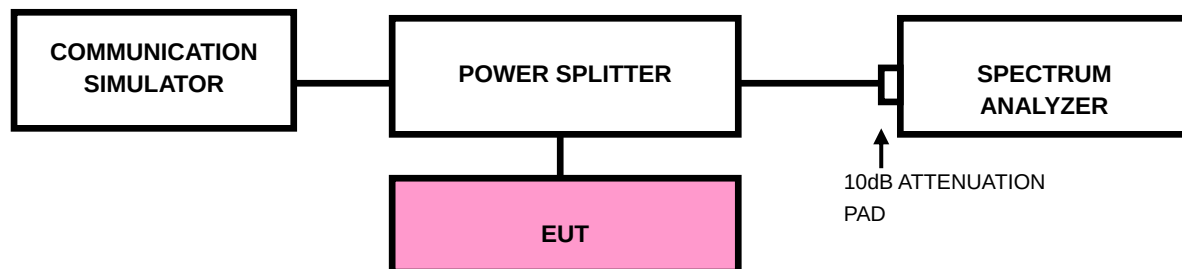




BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16


3.5.4 TEST RESULTS

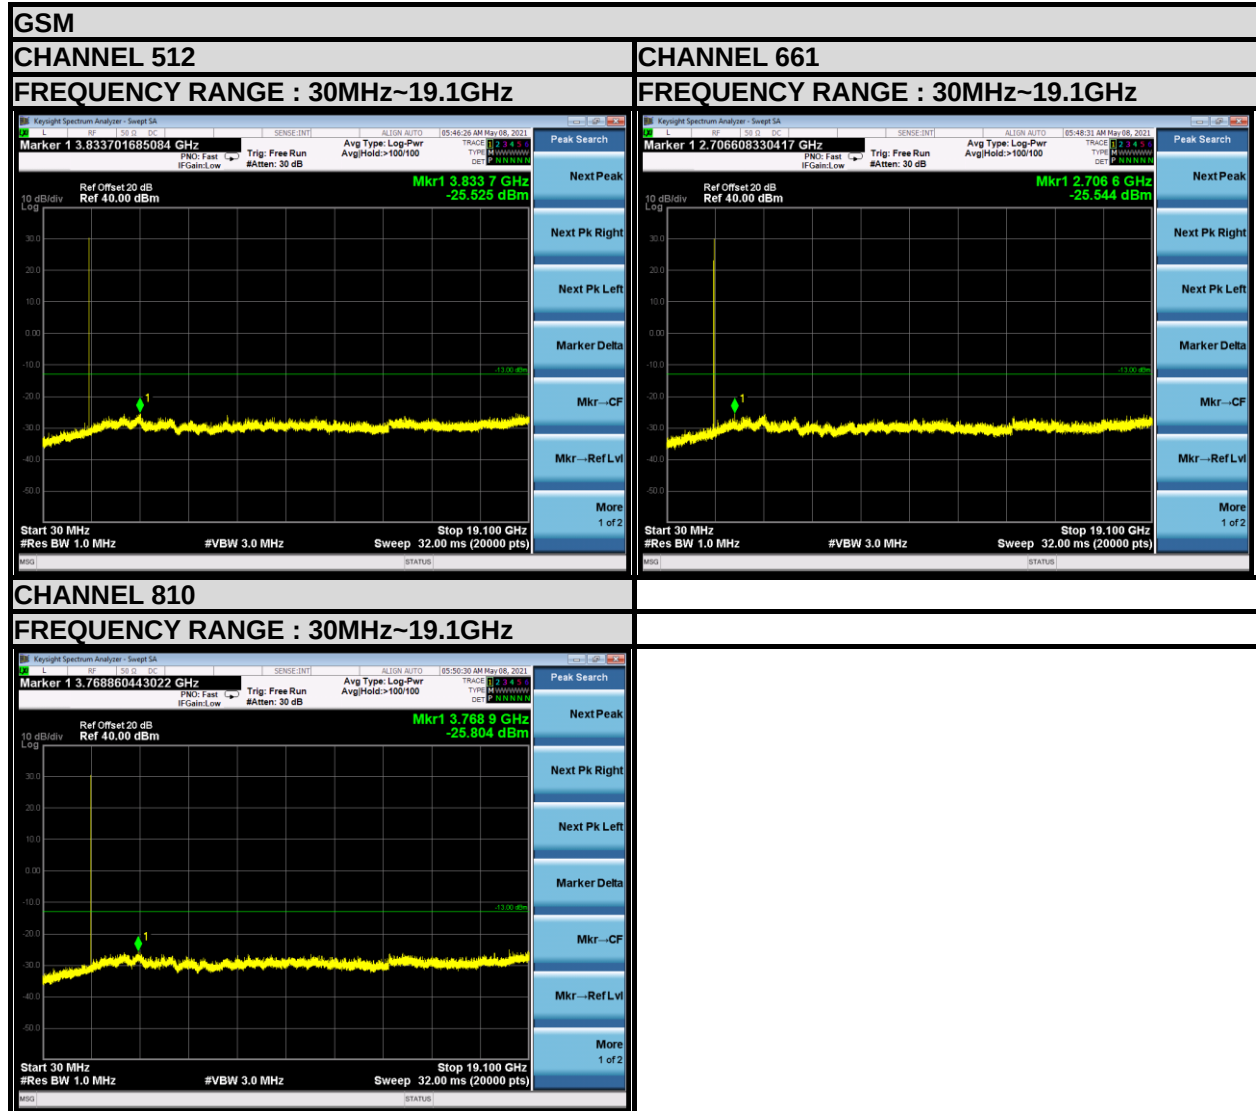



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

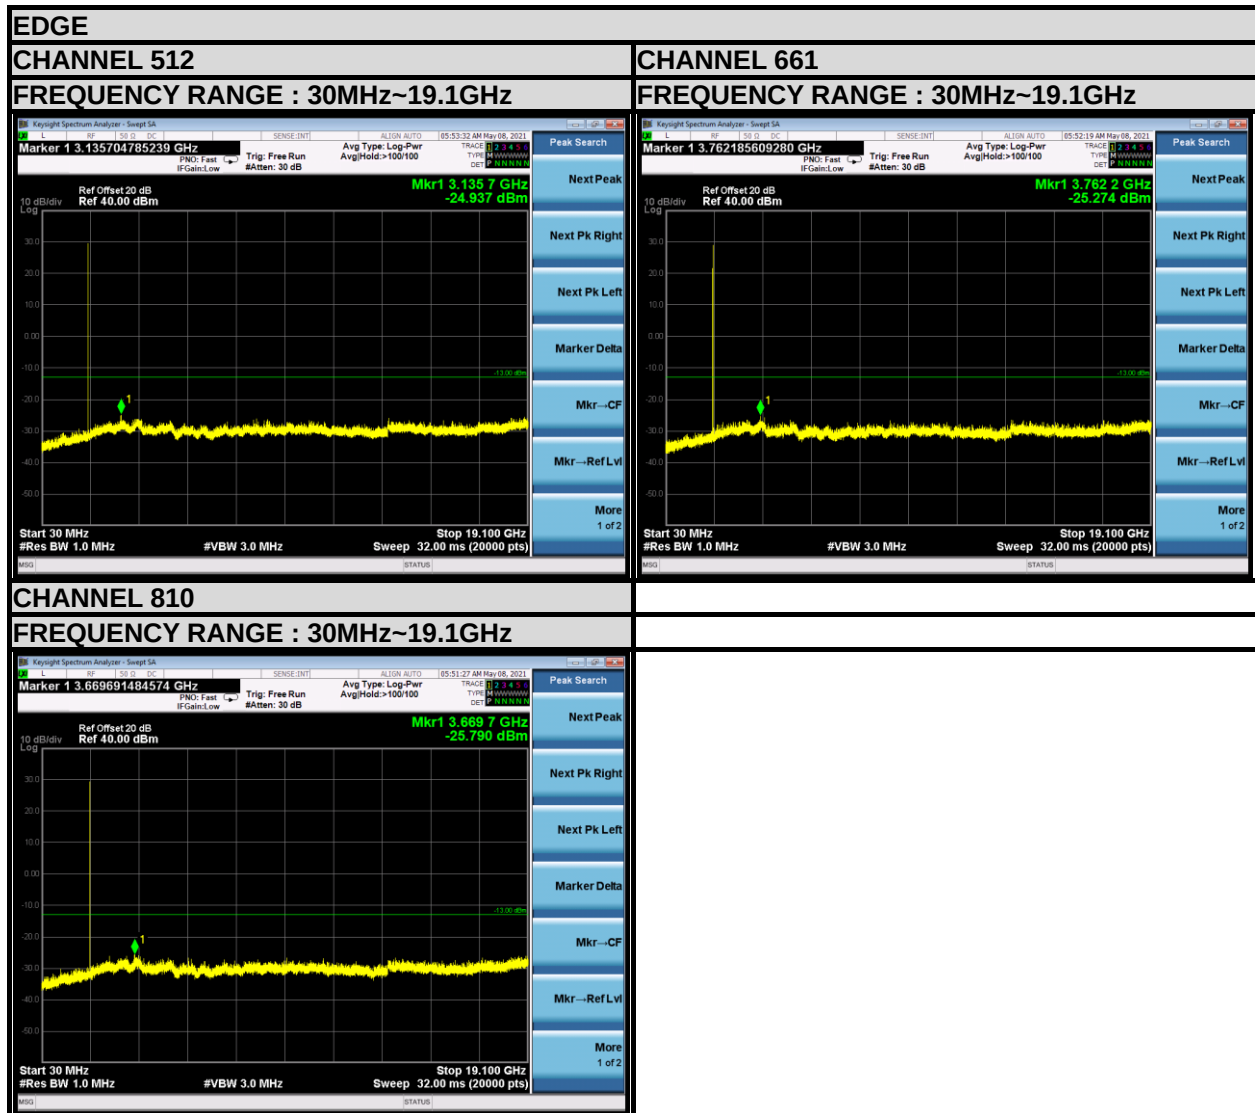



BUREAU
VERITAS

Test Report No.: W7L-P21080009RF16

