



RF MEASUREMENT REPORT

Output Power & Radiated Spurious Emission & Radiated Band Edge

FCC ID: HD5-SDMAC
Applicant: Honeywell International Inc.
Honeywell Safety and Productivity Solutions
Product: SDIO Wireless Module
Model No.: SX-SDMAC
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Test Date: 2022-08-16 ~ 2022-08-26

Reviewed By:

Jame Yuan

Jame Yuan

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2208RSU021-U3	Rev. 01	Initial Report	2022-08-31	Valid

Note: This is a class II permissive change project. This EUT is installed inside the portable device (Product Name: Thermal Printer, M/N: RP2D), we perform SAR testing and radiated spurious emission / band edge spot check testing.

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Host Information.....	6
1.6. Radio Specification under test	6
1.7. Antenna Details.....	7
1.8. Working Frequencies	7
2. Test Configuration	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Software	8
2.4. Applied Standards.....	9
2.5. Test Environment Condition	9
3. Measuring Instrument	10
4. Measurement Uncertainty.....	11
5. Test Result.....	12
5.1. Summary	12
5.2. Output Power Measurement	13
5.2.1. Test Limit	13
5.2.2. Test Procedure	13
5.2.3. Test Setting	13
5.2.4. Test Setup	13
5.2.5. Test Result	13
5.3. Radiated Spurious Emission Measurement.....	14
5.3.1. Test Limit	14
5.3.2. Test Procedure	14
5.3.3. Test Setting	14
5.3.4. Test Setup	16
5.3.5. Test Result	16
5.4. Radiated Restricted Band Edge Measurement	17
5.4.1. Test Limit	17
5.4.2. Test Procedure	18
5.4.3. Test Setting	18

5.4.4. Test Setup	19
5.4.5. Test Result	19
Appendix A – Test Result.....	20
A.1 Output Power Test Result	20
A.2 Radiated Spurious Emission Test Result.....	21
A.3 Radiated Restricted Band Edge Test Result.....	25
Appendix B – Test Setup Photograph	49
Appendix C – EUT Photograph	50

1. General Information

1.1. Applicant

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Baires Road, Fort Mill, SC 29707 United States

1.2. Manufacturer

Honeywell International Inc
Honeywell Safety and Productivity Solutions
9680 Old Bales Road, Fort Mill, SC 29707 United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory				
	Laboratory Location (Suzhou - Wuzhong)				
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China				
	Laboratory Location (Suzhou - SIP)				
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China				
	Laboratory Accreditations				
A2LA: 3628.01		CNAS: L10551			
FCC: CN1166		ISED: CN0001			
VCCI:	☐ R-20025	☐ G-20034	☐ C-20020	☐ T-20020	
	☐ R-20141	☐ G-20134	☐ C-20103	☐ T-20104	
☒	Test Site – MRT Shenzhen Laboratory				
	Laboratory Location (Shenzhen)				
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China				
	Laboratory Accreditations				
	A2LA: 3628.02		CNAS: L10551		
	FCC: CN1284		ISED: CN0105		
☐	Test Site – MRT Taiwan Laboratory				
	Laboratory Location (Taiwan)				
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)				
	Laboratory Accreditations				
	TAF: L3261-190725				
	FCC: 291082, TW3261		ISED: TW3261		

1.4. Product Information

Product Name	SDIO Wireless Module
Model No.	SX-SDMAC
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Version	v5.0 dual mode
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Host Information

Applicant	Honeywell International Inc Honeywell Safety and Productivity Solutions
Applicant Address	9680 Old Bailes Rd, Fort Mill, SC 29707, USA
Product Name	Thermal Printer
Model No.	RP2D
Serial No.	22206B8B91 (Conducted Sample) 22206B8B84 (Radiated Sample)

1.6. Radio Specification under test

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452 MHz
Channel Number	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps

Note: For other features of this EUT, test report will be issued separately.

1.7. Antenna Details

Antenna No.	Antenna Type	Manufacturer	Part No.	Max. Peak Gain (dBi)
Antenna 1 (Wi-Fi/BT Antenna)	PCB Embedded Antenna	Ethertronics, Inc.	1004075	2.4GHz: 3.3, 5GHz: 5.1
Antenna 2 (Wi-Fi Antenna)			1004078	2.4GHz: 3.4, 5GHz: 4.2

Note: Only support SISO mode, both antennas can be switched automatically refer to receive signal strength.

1.8. Working Frequencies

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11b (1Mbps)
Mode 2: Transmit by 802.11g (6Mbps)
Mode 3: Transmit by 802.11n-HT20 (MCS0)
Mode 4: Transmit by 802.11n-HT40 (MCS0)

For radiated spurious emission and band edge measurement, some worst-case mode (Refer to module report) was selected for testing.

2.2. Test System Connection Diagram

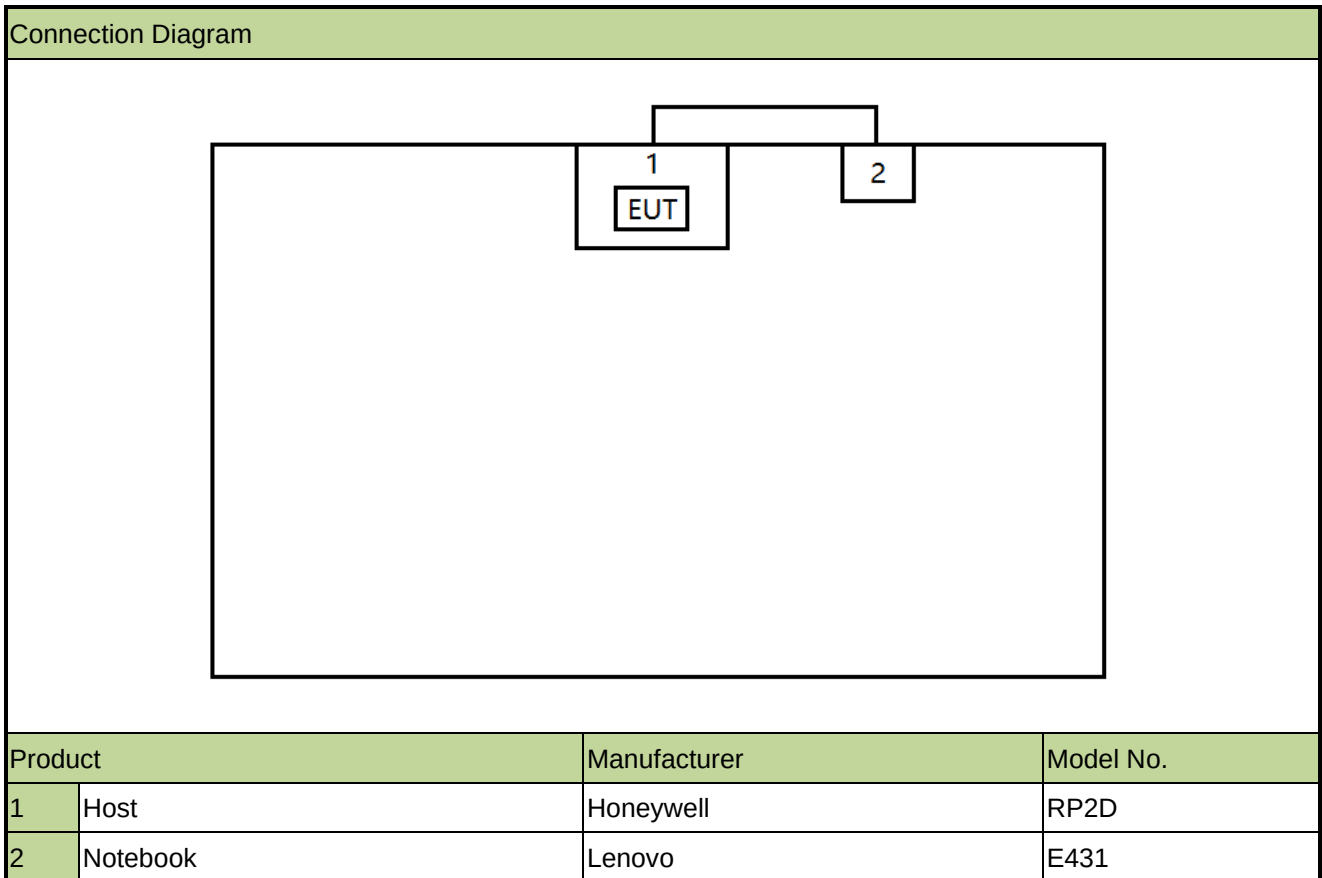

2.3. Test Software

The test utility software used during testing was “QRCT”, and the version was 3.0.268.0.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06292	1 year	2022-10-20	NS-AC1
Anechoic Chamber	BOOMWAVE	NS-AC1	MRTSUE06496	1 year	2023-07-23	NS-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06572	1 year	2023-04-01	NS-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06573	1 year	2023-06-21	NS-AC1
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06574	1 year	2023-07-11	NS-AC1
EMI Test Receiver	R&S	ESR3	MRTSUE06575	1 year	2023-06-19	NS-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2023-01-13	NS-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11020	1 year	2023-05-15	NS-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11104	1 year	2023-05-03	NS-AC1
Signal Analyzer	Agilent	N9010A	MRTSUE06195	1 year	2023-04-13	NS-AC1
Signal Analyzer	Keysight	N9020A	MRTSUE10065	1 year	2023-01-11	NS-AC1
Signal Generator	Agilent	E4438C	MRTSUE06081	1 year	2023-02-14	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2023-04-06	WZ-SR5
Bluetooth Test Set	Anritsu	MT8852B	MRTSUE06389	1 year	2023-06-01	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2023-06-04	WZ-SR5

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_T-E-TAC-2	1.02	RE Antenna & Turntable
Agilent Power Panel	V R03.09.00	Power Meter

Note: The test site with “WZ” code is in the MRT Suzhou laboratory, the test site with “NS” code is in the MRT Shenzhen Laboratory.

4. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB

5. Test Result

5.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(b)(3)	Output Power	Conducted	Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass

Remark:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

5.2. Output Power Measurement

5.2.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.2.3.2

5.2.3. Test Setting


Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

5.2.4. Test Setup

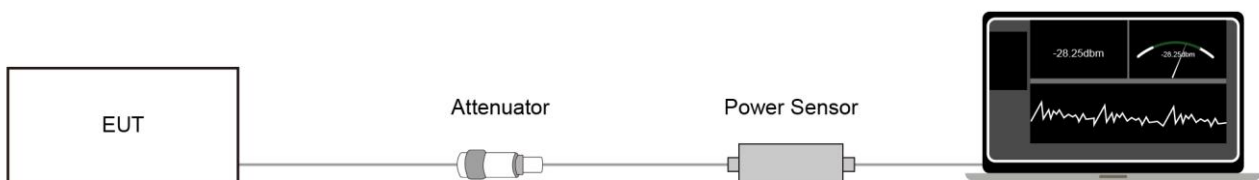

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Radiated Spurious Emission Measurement

5.3.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

5.3.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

5.3.4. Test Setup

Below 1GHz Test Setup:

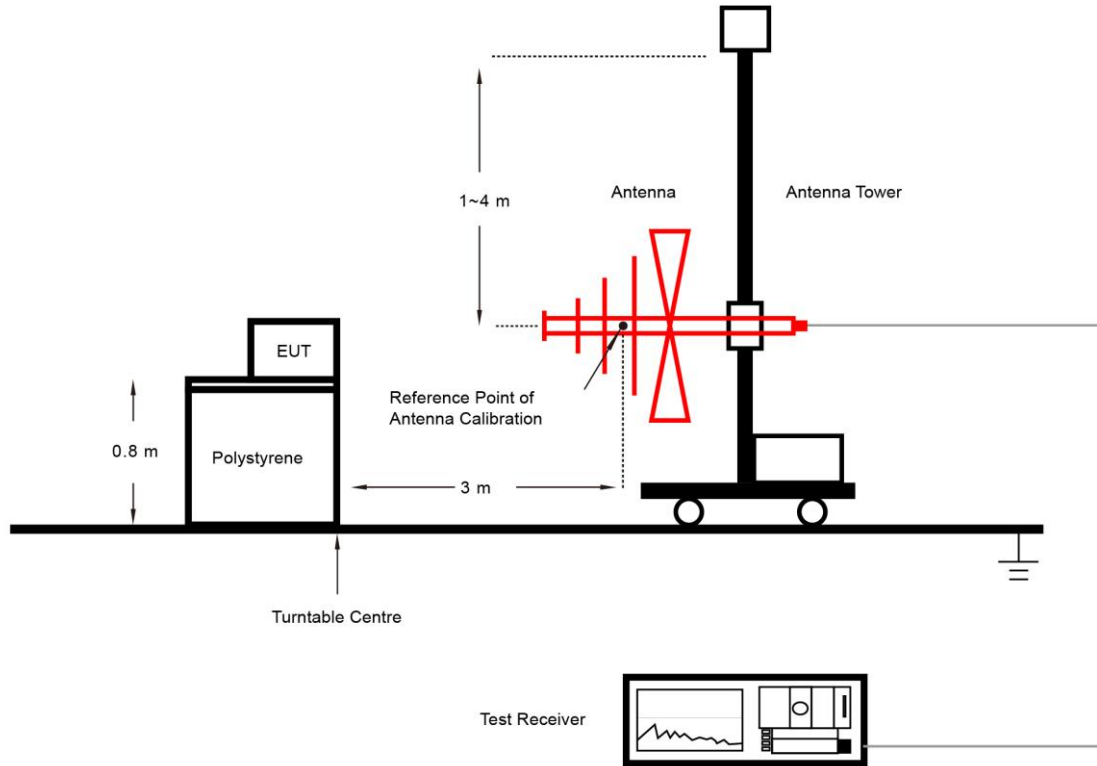

Above 1GHz Test Setup:

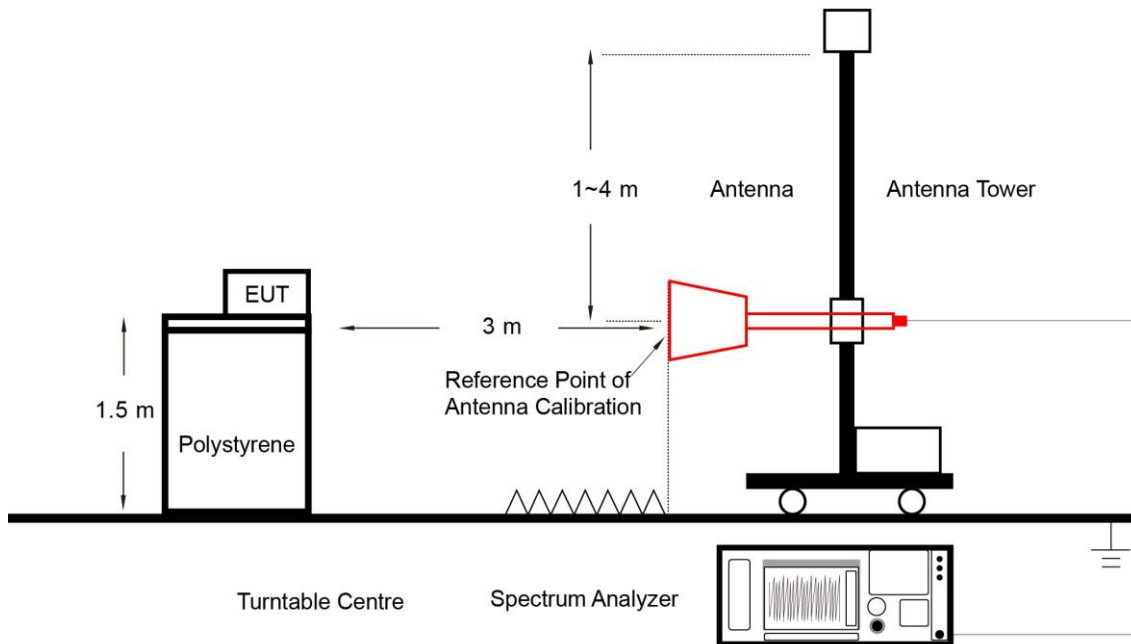

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Radiated Restricted Band Edge Measurement

5.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.4.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

5.4.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

5.4.4. Test Setup

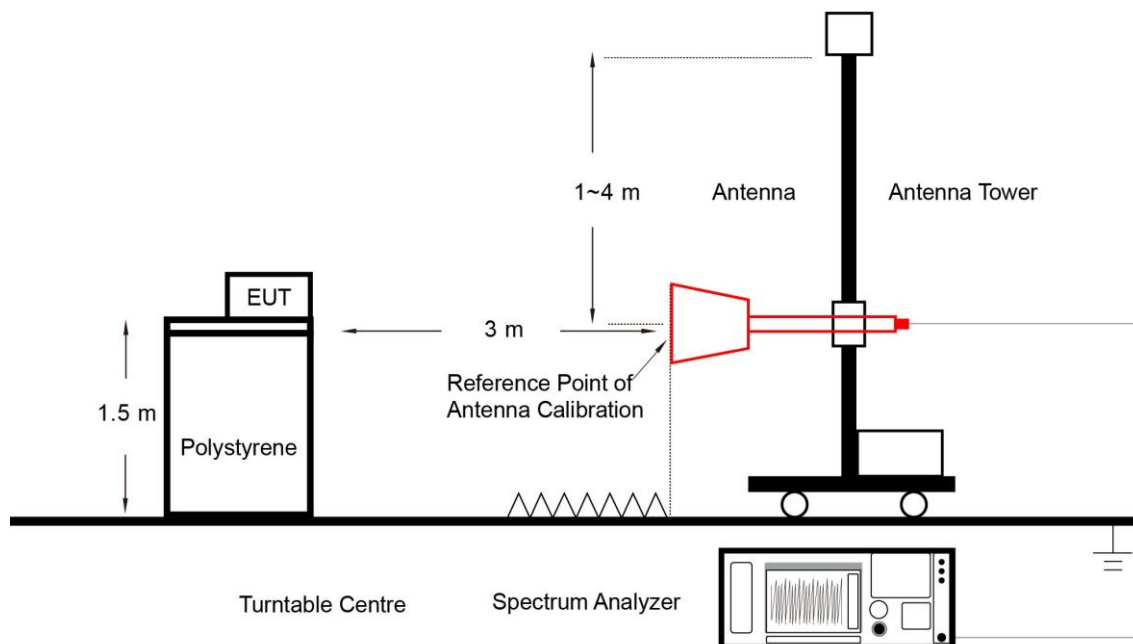

5.4.5. Test Result

Refer to Appendix A.3.

Appendix A – Test Result

A.1 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022-08-16	Test Mode	SISO Mode

Test Result of Peak Output Power

Test Mod	Data Rate/ MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)		Limit (dBm)
				Antenna 1	Antenna 2	
11b	1Mbps	01	2412	20.78	20.68	≤ 30.00
11b	1Mbps	06	2437	21.30	21.25	≤ 30.00
11b	1Mbps	11	2462	21.03	21.00	≤ 30.00
11g	6Mbps	01	2412	19.21	19.68	≤ 30.00
11g	6Mbps	06	2437	21.73	21.62	≤ 30.00
11g	6Mbps	11	2462	19.04	18.88	≤ 30.00
11n-HT20	MCS0	01	2412	18.61	18.73	≤ 30.00
11n-HT20	MCS0	06	2437	21.49	21.66	≤ 30.00
11n-HT20	MCS0	11	2462	18.46	18.70	≤ 30.00
11n-HT40	MCS0	3	2422	17.21	16.15	≤ 30.00
11n-HT40	MCS0	6	2437	18.53	17.79	≤ 30.00
11n-HT40	MCS0	9	2452	17.30	17.32	≤ 30.00

Test Result of Average Output Power (Reporting Only)

Test Mod	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Limit (dBm)
				Antenna 1	Antenna 2	
11b	1Mbps	01	2412	18.14	18.16	≤ 30.00
11b	1Mbps	06	2437	18.70	18.69	≤ 30.00
11b	1Mbps	11	2462	18.44	18.43	≤ 30.00
11g	6Mbps	01	2412	12.95	13.10	≤ 30.00
11g	6Mbps	06	2437	15.43	15.46	≤ 30.00
11g	6Mbps	11	2462	12.46	12.51	≤ 30.00
11n-HT20	MCS0	01	2412	12.02	12.05	≤ 30.00
11n-HT20	MCS0	06	2437	15.09	15.06	≤ 30.00
11n-HT20	MCS0	11	2462	11.87	11.93	≤ 30.00
11n-HT40	MCS0	3	2422	9.10	9.10	≤ 30.00
11n-HT40	MCS0	6	2437	10.57	10.53	≤ 30.00
11n-HT40	MCS0	9	2452	9.66	9.76	≤ 30.00

A.2 Radiated Spurious Emission Test Result

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022-08-22 ~ 2022-08-24	Test Mode:	802.11b Antenna 1
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.000	44.1	1.8	45.9	74.0	-28.1	Peak	Horizontal
	7477.000	35.5	10.2	45.7	74.0	-28.3	Peak	Horizontal
	8497.000	36.3	10.7	47.0	74.0	-27.0	Peak	Horizontal
	4825.000	49.2	1.8	51.0	74.0	-23.0	Peak	Vertical
	7613.000	35.7	9.8	45.5	74.0	-28.5	Peak	Vertical
	8488.500	35.9	10.8	46.7	74.0	-27.3	Peak	Vertical
11	4927.000	46.0	1.4	47.4	74.0	-26.6	Peak	Horizontal
	7460.000	35.3	10.3	45.6	74.0	-28.4	Peak	Horizontal
	8420.500	36.9	10.2	47.1	74.0	-26.9	Peak	Horizontal
	4924.000	51.5	1.4	52.9	54.0	-1.1	Average	Vertical
	4927.000	53.2	1.4	54.6	74.0	-19.4	Peak	Vertical
	7434.500	35.4	10.2	45.6	74.0	-28.4	Peak	Vertical
	8463.000	36.1	10.7	46.8	74.0	-27.2	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Ted Chen
Test Date	2022-08-22 ~ 2022-08-24	Test Mode:	802.11b Antenna 2
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.000	43.3	1.8	45.1	74.0	-28.9	Peak	Horizontal
	7409.000	35.8	10.3	46.1	74.0	-27.9	Peak	Horizontal
	8412.000	36.9	10.1	47.0	74.0	-27.0	Peak	Horizontal
	4825.000	42.7	1.8	44.5	74.0	-29.5	Peak	Vertical
	7536.500	35.8	10.1	45.9	74.0	-28.1	Peak	Vertical
	9151.500	35.9	12.7	48.6	74.0	-25.4	Peak	Vertical
11	4927.000	47.4	1.4	48.8	74.0	-25.2	Peak	Horizontal
	7672.500	36.1	9.4	45.5	74.0	-28.5	Peak	Horizontal
	8420.500	36.8	10.2	47.0	74.0	-27.0	Peak	Horizontal
	4927.000	49.4	1.4	50.8	74.0	-23.2	Peak	Vertical
	7570.500	33.9	9.7	43.6	74.0	-30.4	Peak	Vertical
	9092.000	34.7	12.8	47.5	74.0	-26.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst-case test data of radiated spurious emission above 1GHz

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz Ant 1	

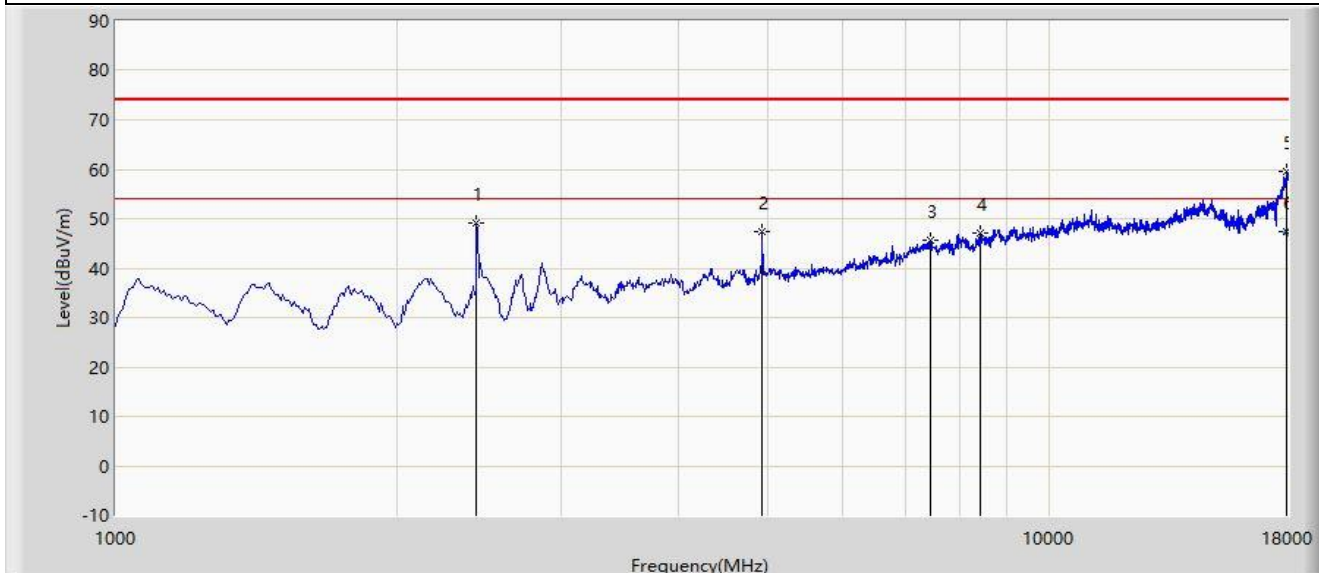

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2436.500	49.273	52.396	N/A	N/A	-3.123	PK
2			4927.000	47.321	45.953	-26.679	74.000	1.368	PK
3			7460.000	45.633	35.330	-28.367	74.000	10.303	PK
4			8420.500	47.031	36.870	-26.969	74.000	10.160	PK
5			17966.000	59.476	34.287	-14.524	74.000	25.189	PK
6		*	17966.000	47.269	22.080	-6.731	54.000	25.189	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).


Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Note 5: Point 1 is fundamental frequency, no need to be evaluated in this item.

Note 6: The amplitude of radiated emissions (frequency range from 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11b at 2462MHz Ant 1	

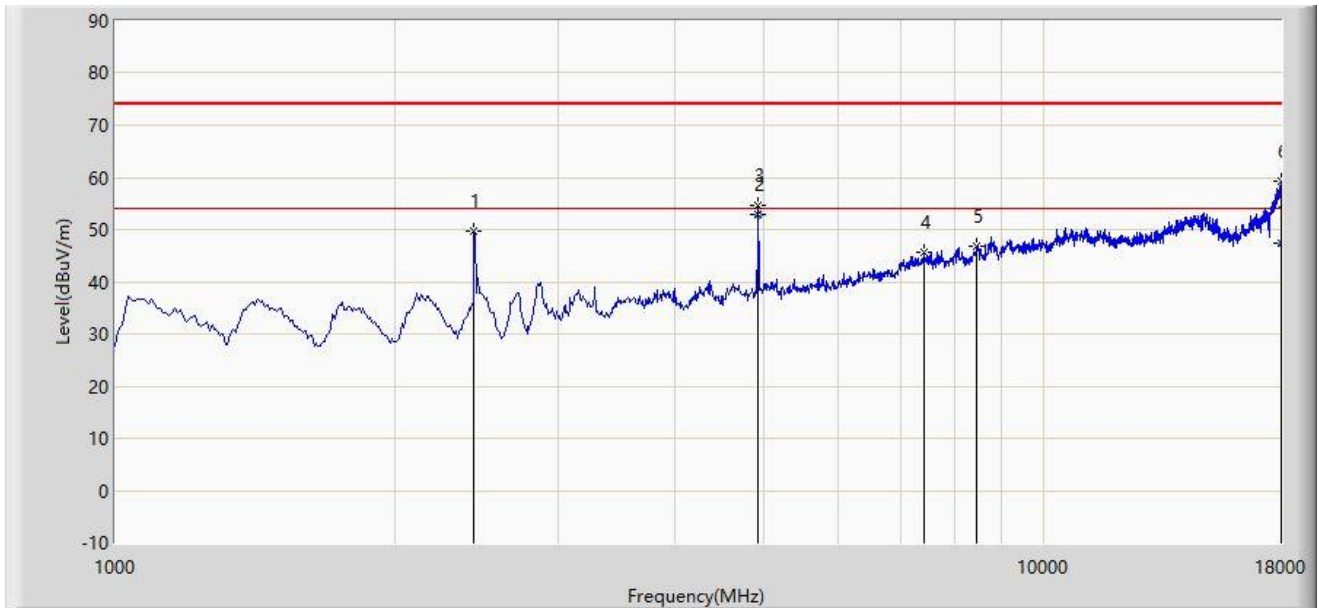

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			2436.500	49.708	52.831	N/A	N/A	-3.123	PK
2		*	4924.000	52.913	51.528	-1.087	54.000	1.386	AV
3			4927.000	54.583	53.215	-19.417	74.000	1.368	PK
4			7434.500	45.605	35.357	-28.395	74.000	10.248	PK
5			8463.000	46.719	36.058	-27.281	74.000	10.661	PK
6			17991.500	59.371	33.777	-14.629	74.000	25.595	PK
7			17991.500	47.508	21.914	-6.492	54.000	25.595	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).


Note 4: Average measurement was not performed when peak measure level was lower than the average limit.

Note 5: Point 1 is fundamental frequency, no need to be evaluated in this item.

Note 6: The amplitude of radiated emissions (frequency range from 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.3 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Test Date: 2022-08-22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 1	

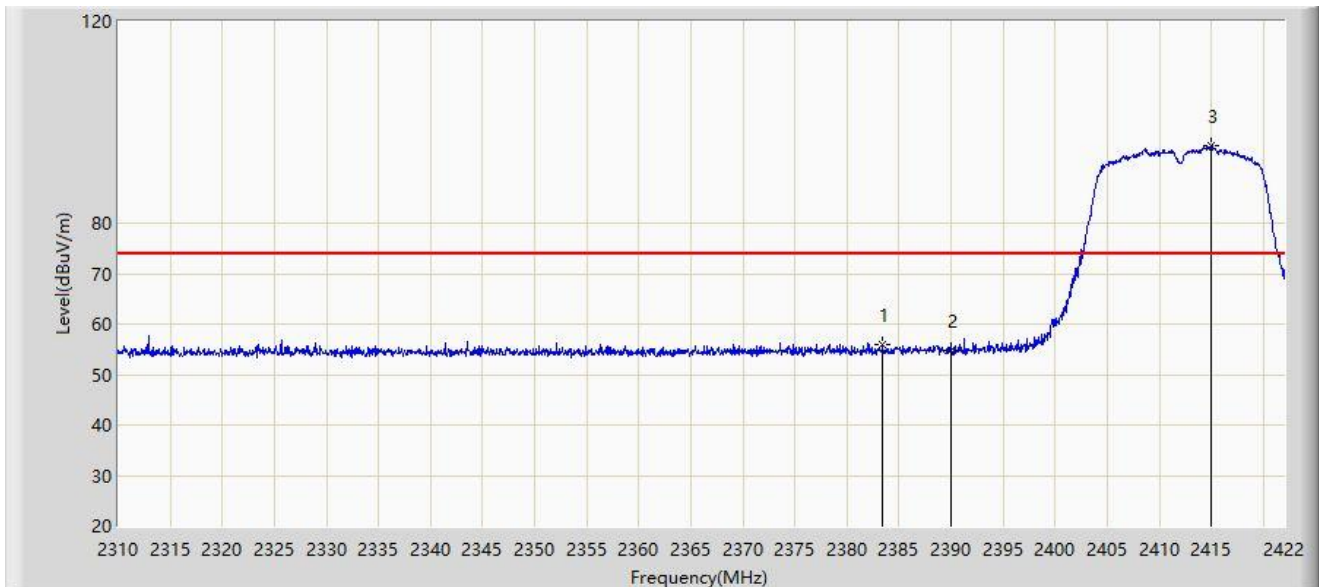


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2383.416	55.875	24.993	-18.125	74.000	30.883	PK
2		2390.000	54.896	24.073	-19.104	74.000	30.823	PK
3		2414.944	95.360	64.549	N/A	N/A	30.811	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 1	

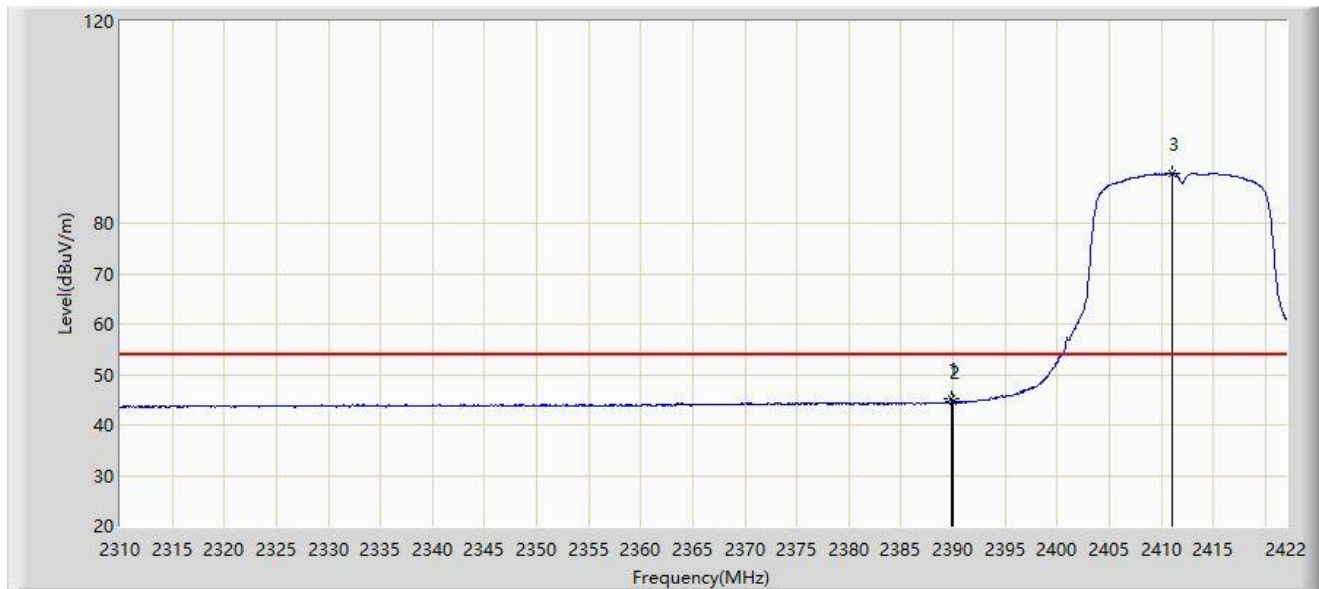


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	45.201	14.377	-8.799	54.000	30.824	AV
2		2390.000	44.767	13.944	-9.233	54.000	30.823	AV
3		2411.024	89.875	59.032	N/A	N/A	30.843	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 1	

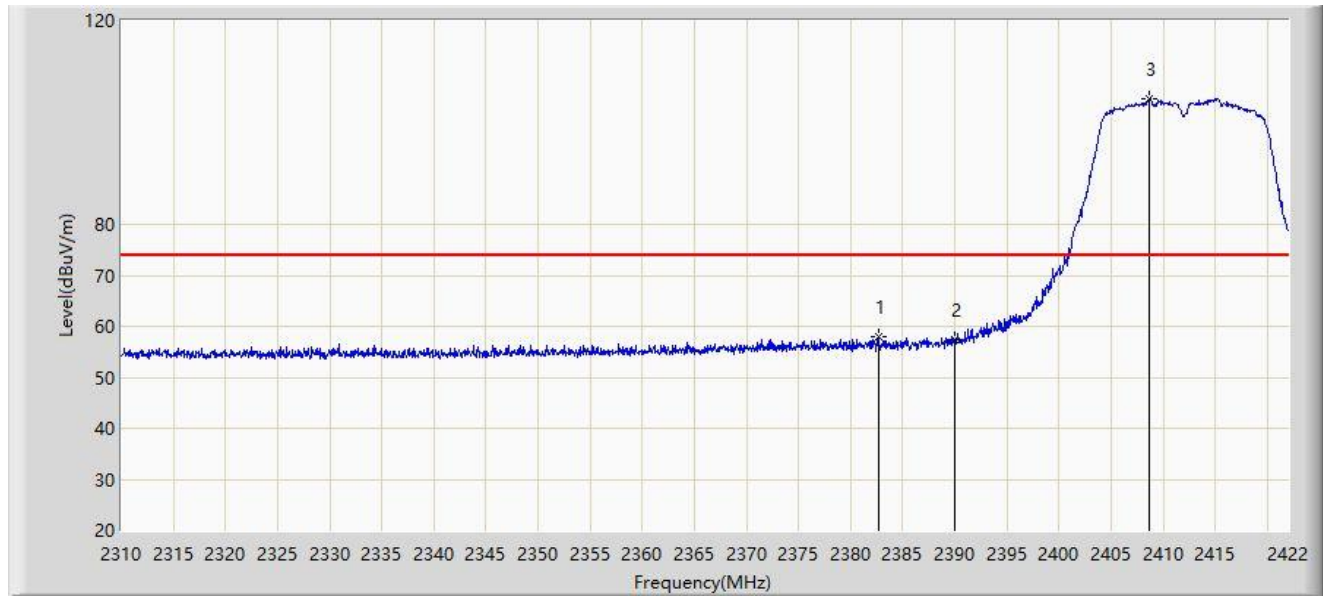


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2382.688	57.892	27.003	-16.108	74.000	30.889	PK
2		2390.000	57.247	26.424	-16.753	74.000	30.823	PK
3		2408.672	104.634	73.799	N/A	N/A	30.835	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 1	

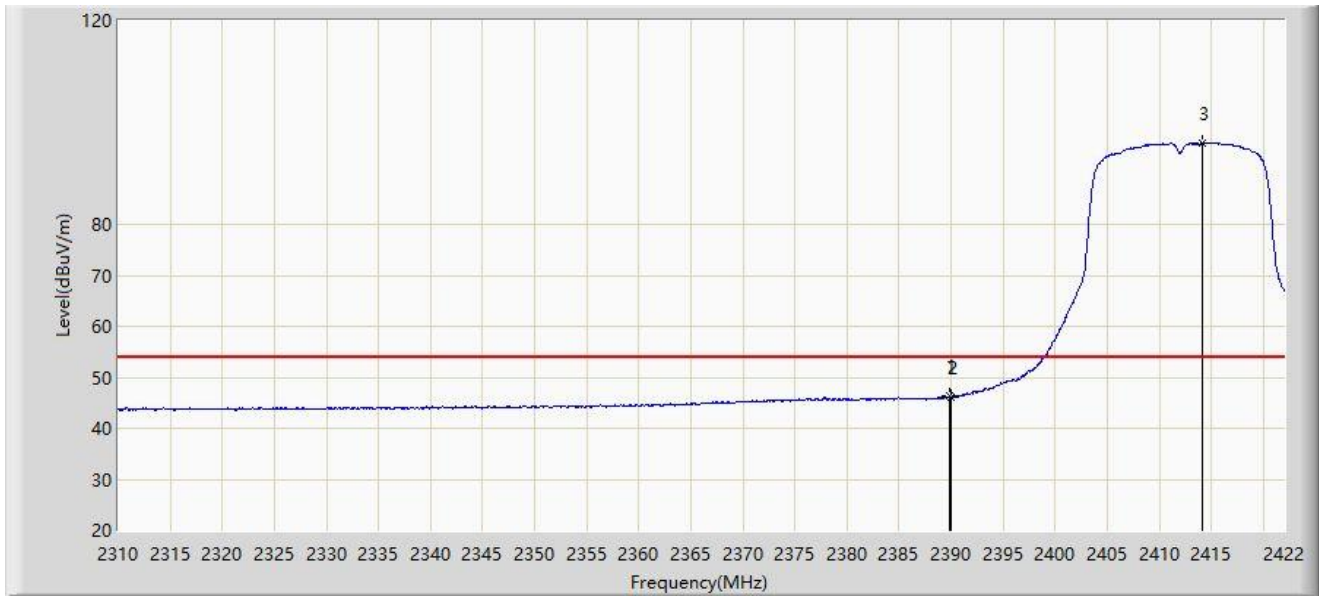


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	46.246	15.421	-7.754	54.000	30.825	AV
2		2390.000	46.161	15.338	-7.839	54.000	30.823	AV
3		2414.104	95.882	65.064	N/A	N/A	30.818	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 1	

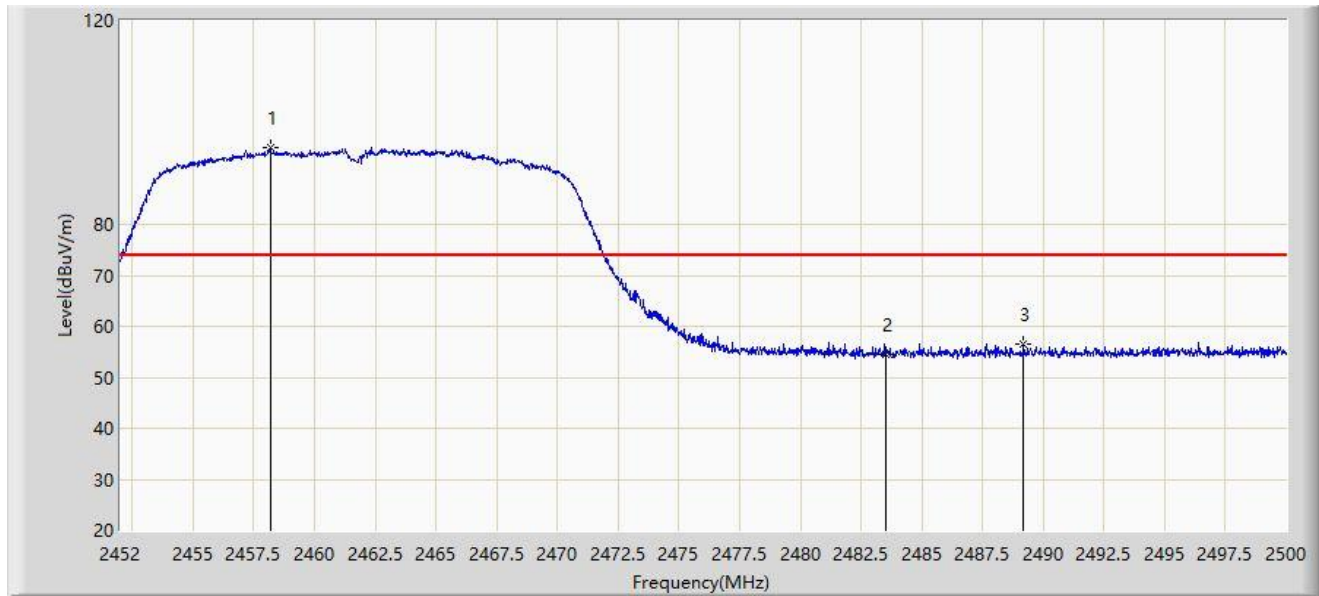


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.192	94.950	64.106	N/A	N/A	30.844	PK
2		2483.500	54.541	23.806	-19.459	74.000	30.734	PK
3	*	2489.200	56.615	25.877	-17.385	74.000	30.738	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 1	

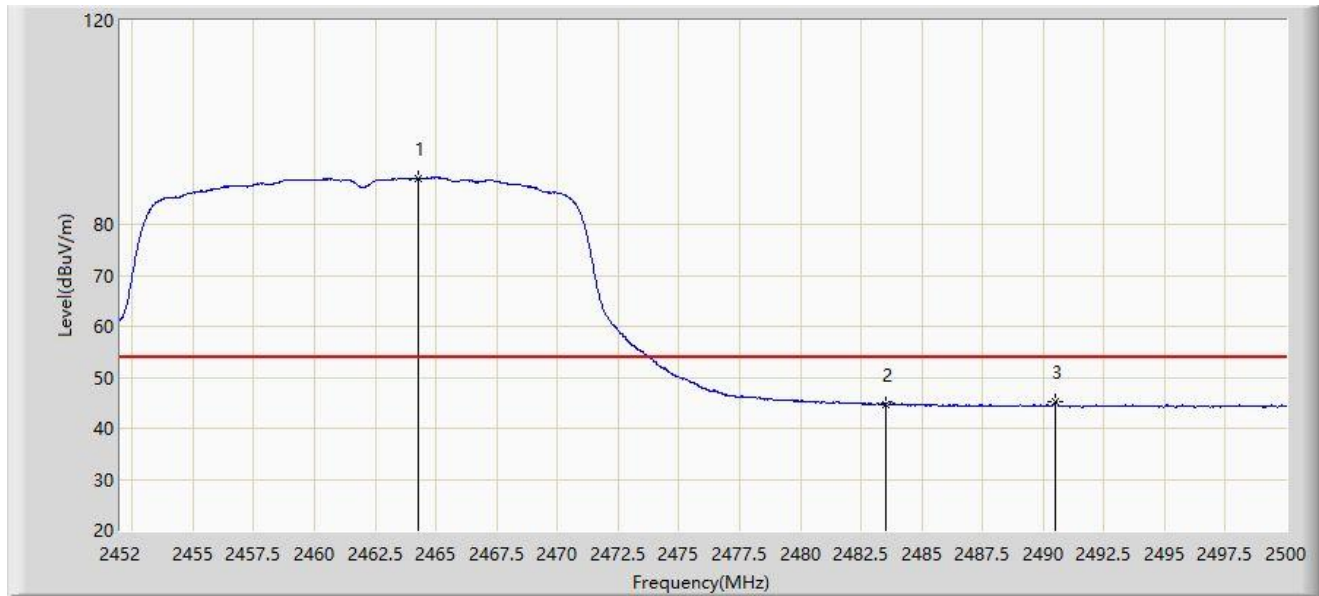


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.288	89.098	58.262	N/A	N/A	30.836	AV
2		2483.500	44.705	13.970	-9.295	54.000	30.734	AV
3	*	2490.472	45.102	14.363	-8.898	54.000	30.738	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 1	

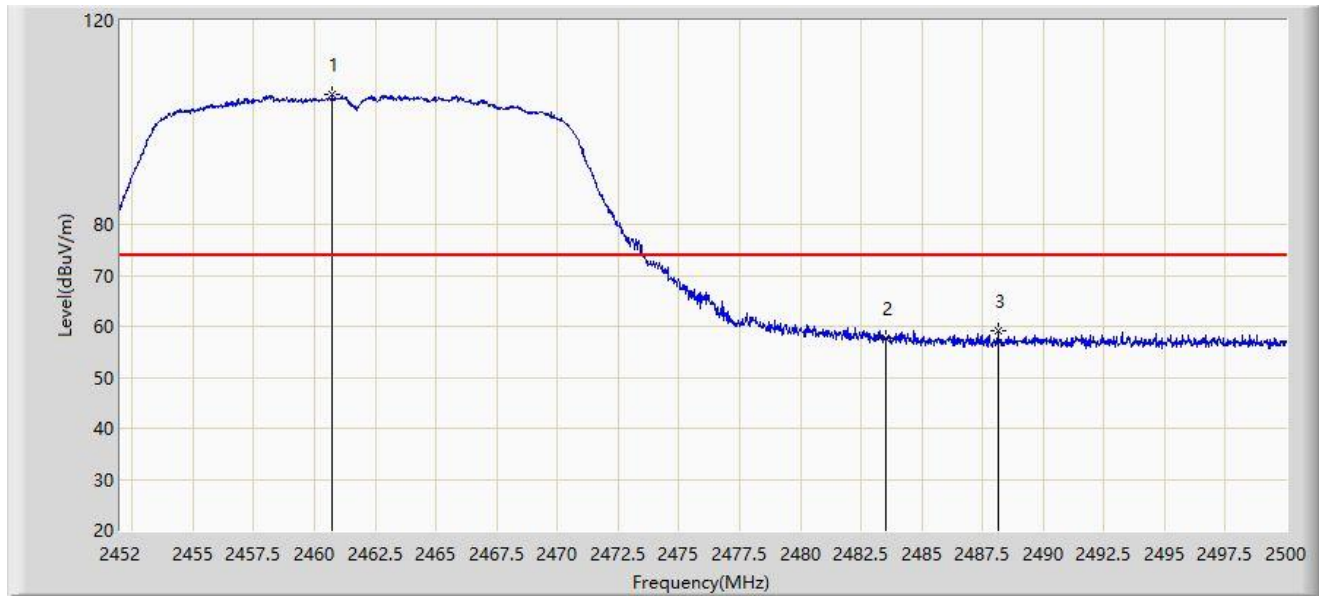


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.736	105.634	74.785	N/A	N/A	30.849	PK
2		2483.500	57.635	26.900	-16.365	74.000	30.734	PK
3	*	2488.144	59.056	28.319	-14.944	74.000	30.737	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 1	

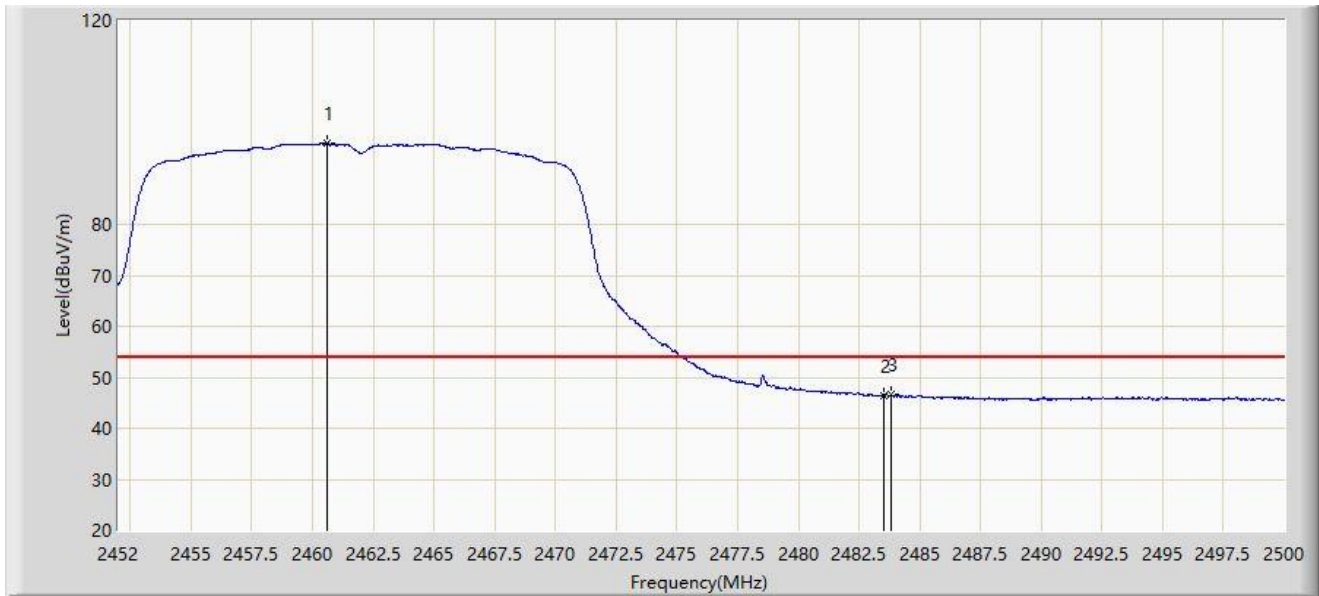


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.616	95.886	65.037	N/A	N/A	30.849	AV
2		2483.500	46.438	15.703	-7.562	54.000	30.734	AV
3	*	2483.848	46.546	15.811	-7.454	54.000	30.735	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 1	

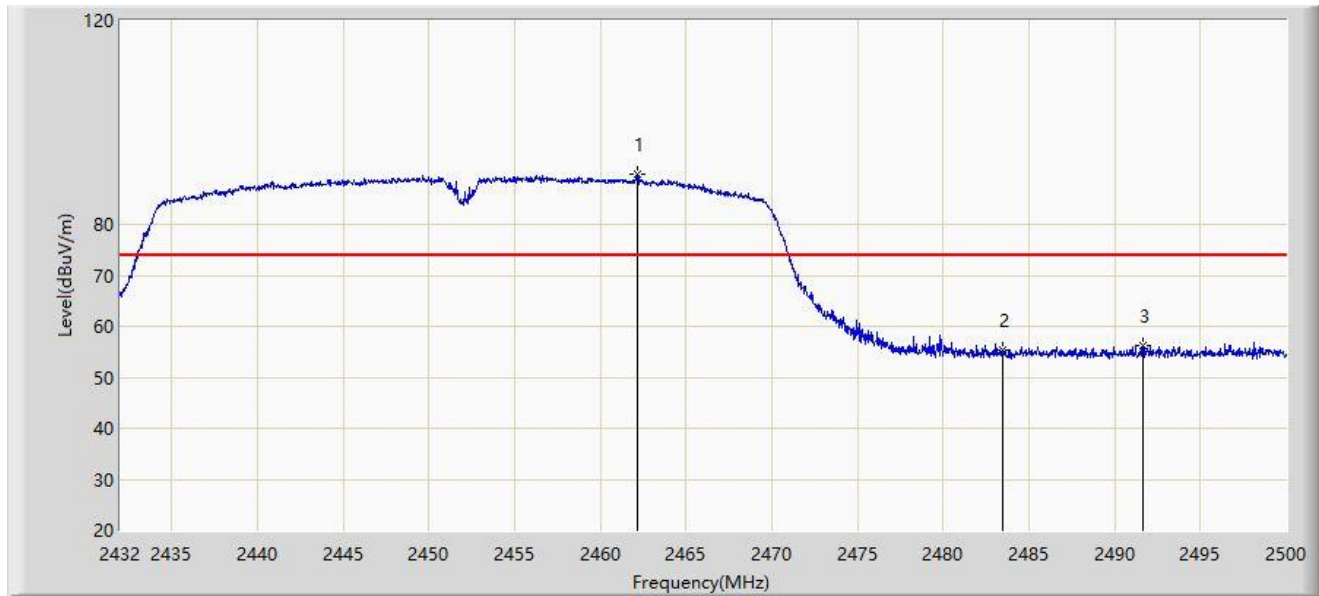


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2462.158	89.797	58.946	N/A	N/A	30.851	PK
2		2483.500	55.311	24.576	-18.689	74.000	30.734	PK
3	*	2491.636	56.182	25.443	-17.818	74.000	30.740	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 1	

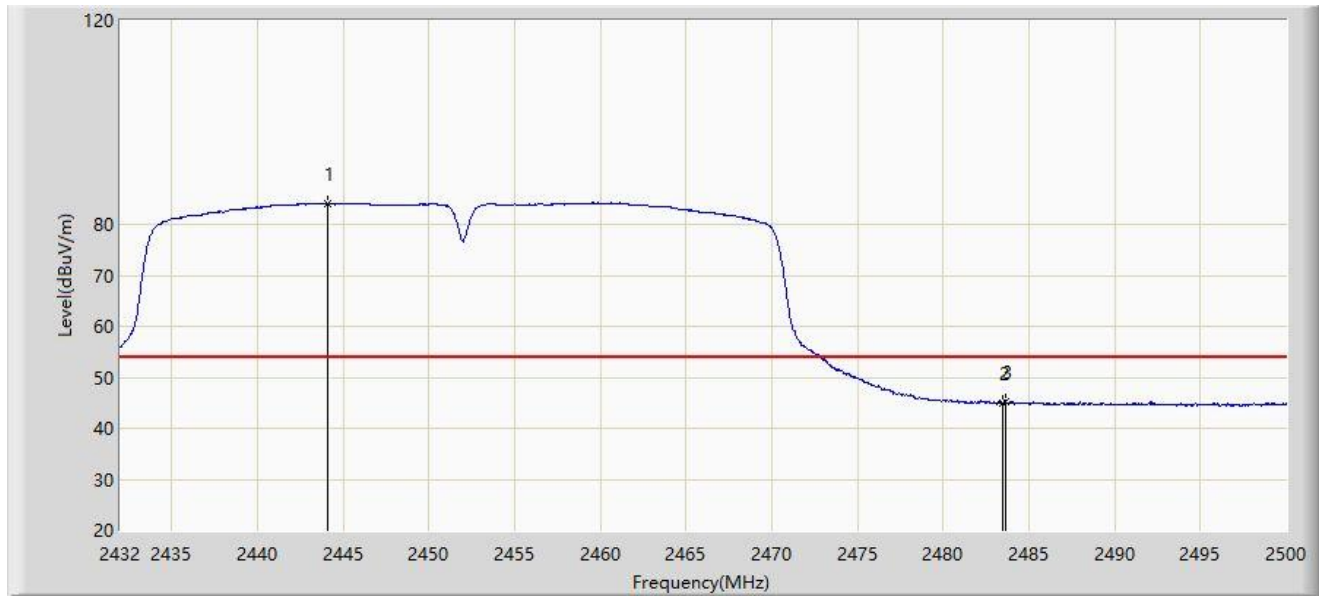


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2444.104	84.170	53.358	N/A	N/A	30.812	AV
2		2483.500	44.933	14.198	-9.067	54.000	30.734	AV
3	*	2483.646	45.213	14.478	-8.787	54.000	30.735	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 1	

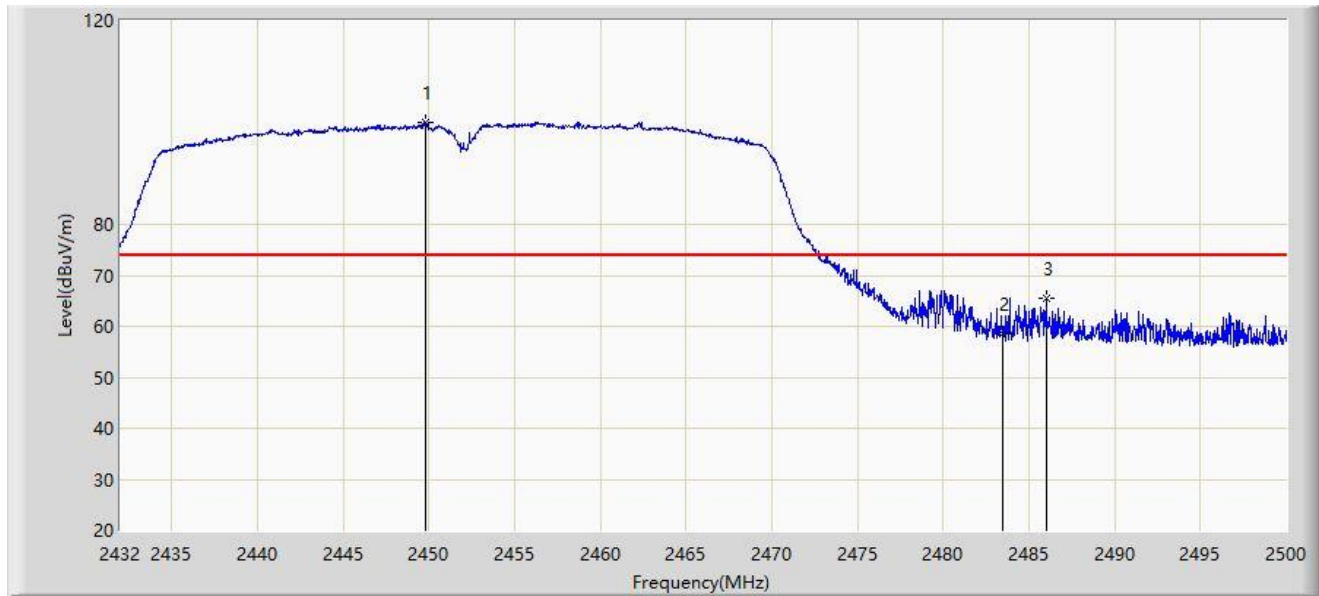


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.850	100.075	69.247	N/A	N/A	30.828	PK
2		2483.500	58.688	27.953	-15.312	74.000	30.734	PK
3	*	2486.026	65.540	34.804	-8.460	74.000	30.736	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 1	

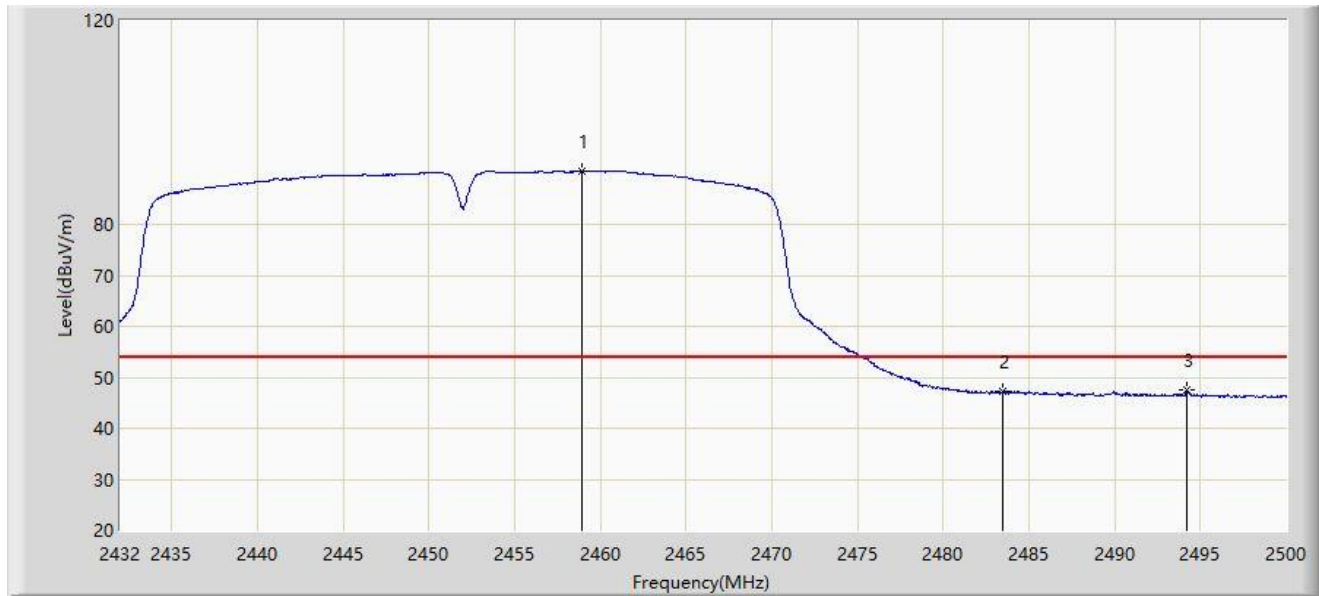


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.962	90.472	59.626	N/A	N/A	30.846	AV
2		2483.500	47.119	16.384	-6.881	54.000	30.734	AV
3	*	2494.186	47.403	16.662	-6.597	54.000	30.741	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 2	

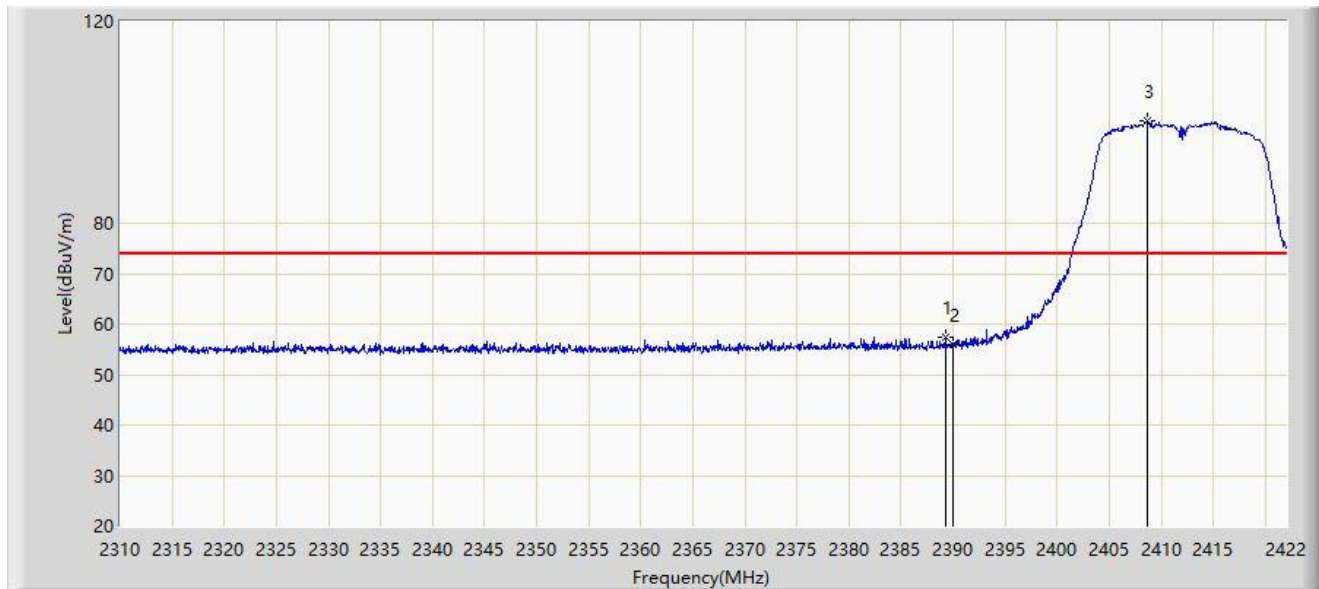


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.240	57.270	26.440	-16.730	74.000	30.829	PK
2		2390.000	55.908	25.085	-18.092	74.000	30.823	PK
3		2408.672	100.394	69.559	N/A	N/A	30.835	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/22
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 2	

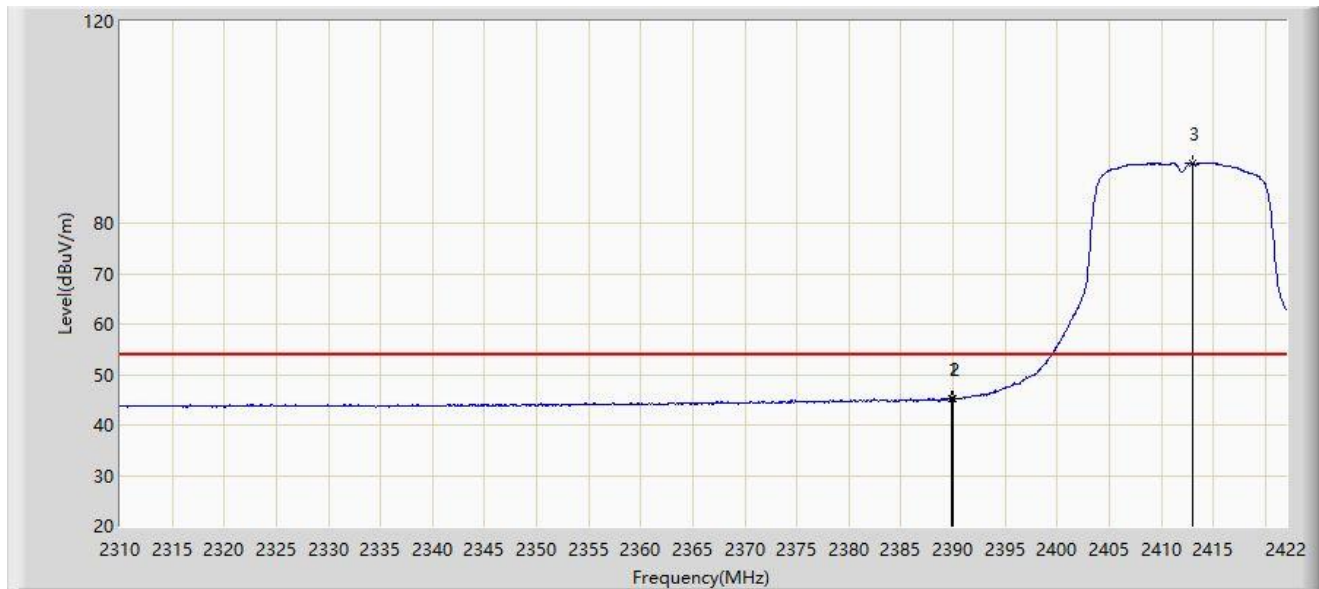


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.856	45.307	14.483	-8.693	54.000	30.824	AV
2		2390.000	45.182	14.359	-8.818	54.000	30.823	AV
3		2413.040	91.891	61.064	N/A	N/A	30.827	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/26
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 2	

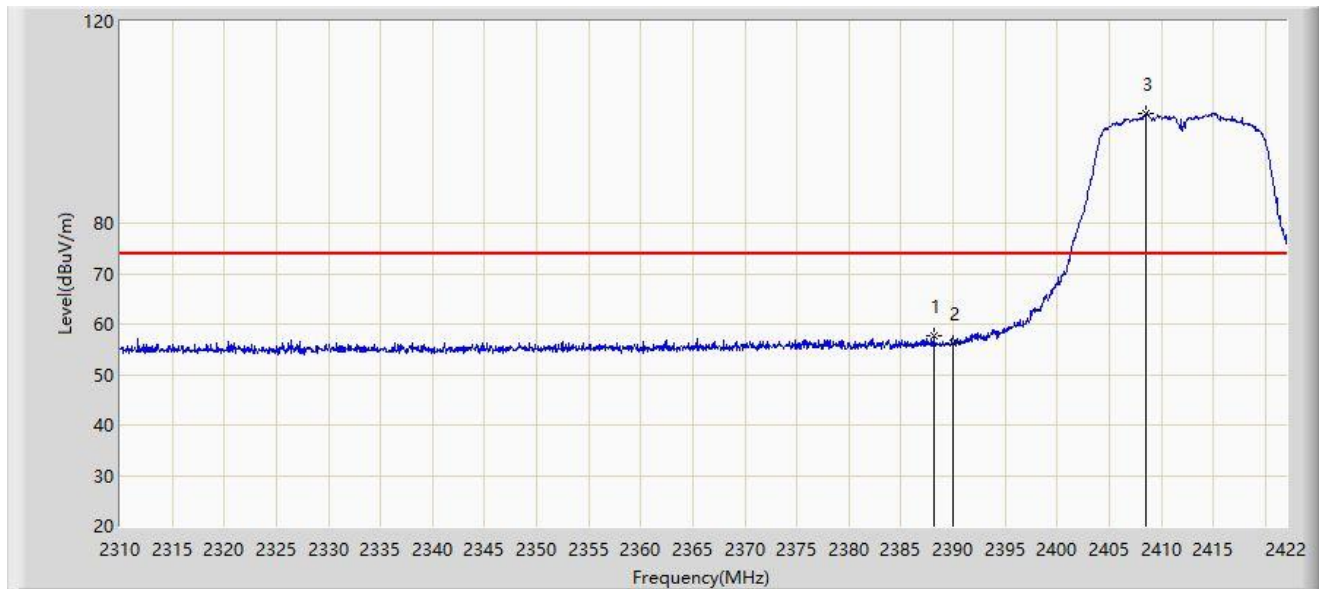


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.120	57.647	26.807	-16.353	74.000	30.840	PK
2		2390.000	56.131	25.308	-17.869	74.000	30.823	PK
3		2408.560	101.807	70.972	N/A	N/A	30.835	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/26
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11g at 2412MHz Ant 2	

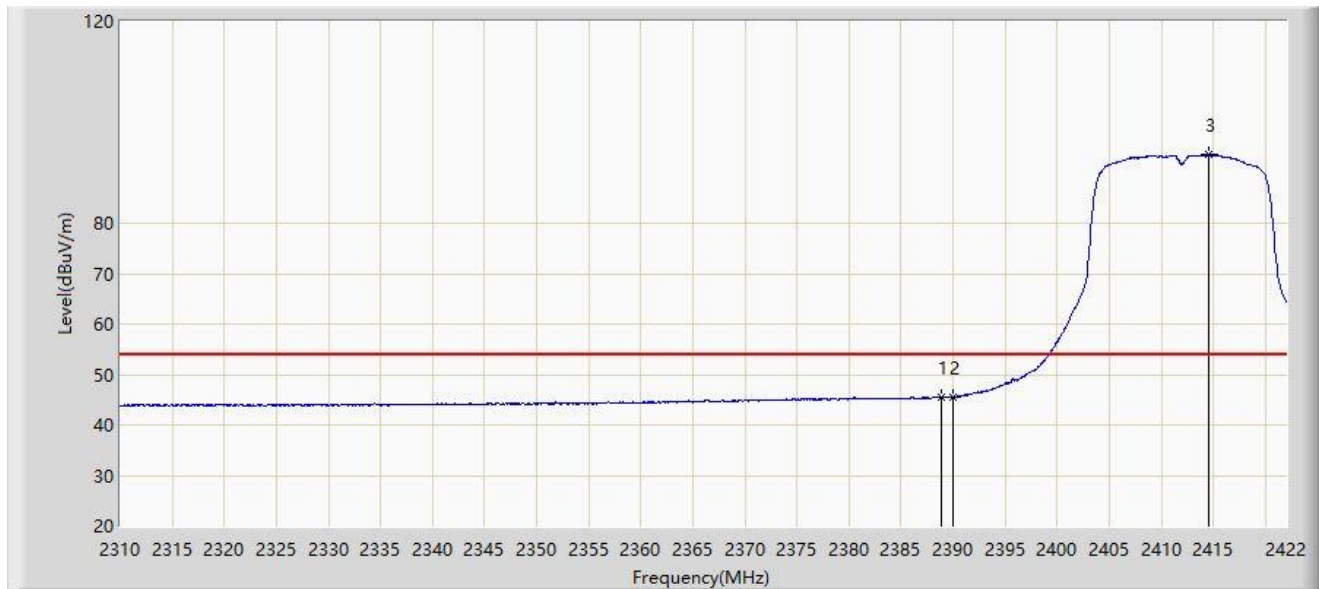


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.904	45.649	14.816	-8.351	54.000	30.833	AV
2		2390.000	45.622	14.799	-8.378	54.000	30.823	AV
3		2414.496	93.584	62.769	N/A	N/A	30.815	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/24
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 2	

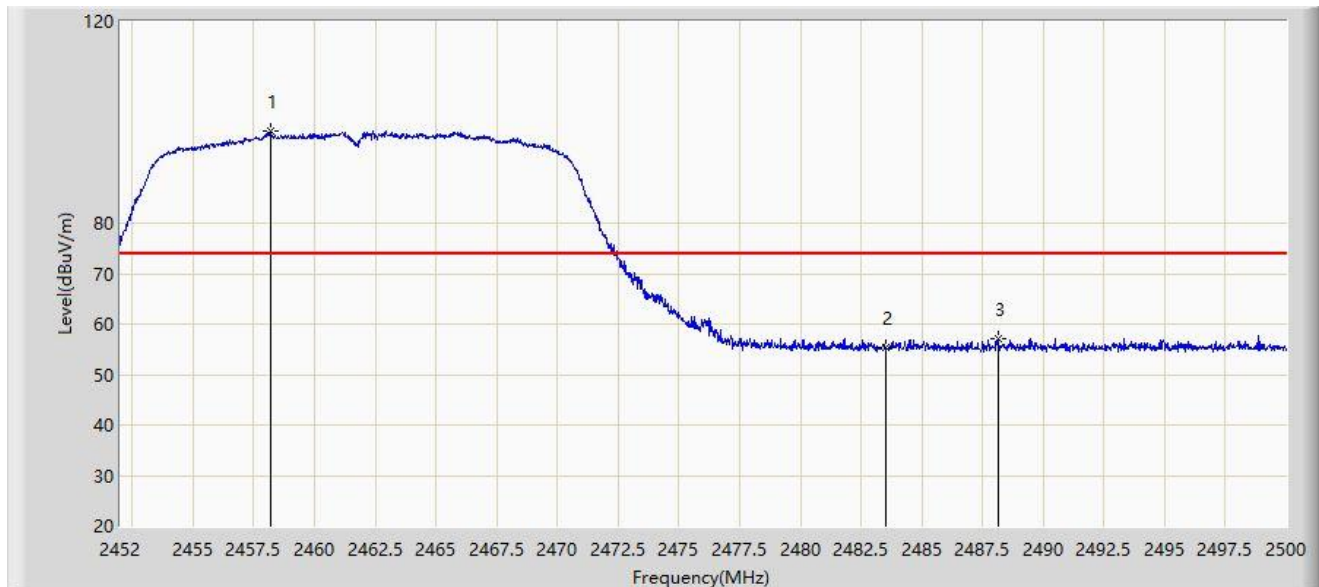


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.192	98.136	67.292	N/A	N/A	30.844	PK
2		2483.500	55.301	24.566	-18.699	74.000	30.734	PK
3	*	2488.144	57.156	26.419	-16.844	74.000	30.737	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/24
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 2	

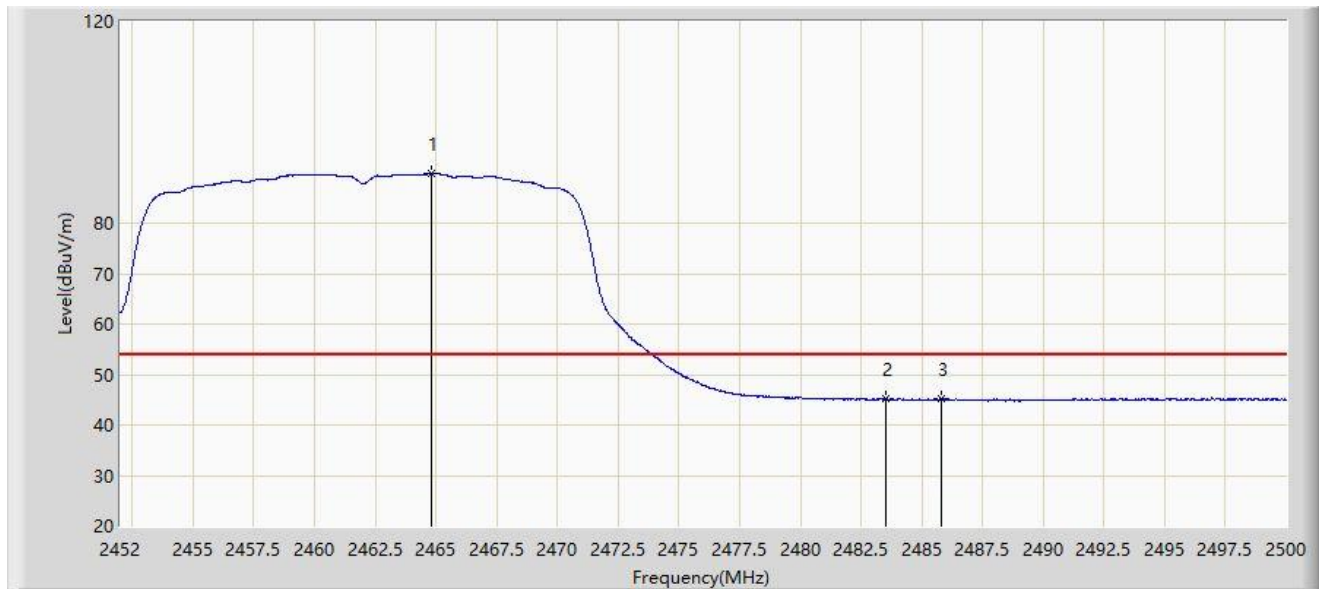


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.840	89.767	58.935	N/A	N/A	30.832	AV
2		2483.500	45.170	14.435	-8.830	54.000	30.734	AV
3	*	2485.816	45.287	14.551	-8.713	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 2	

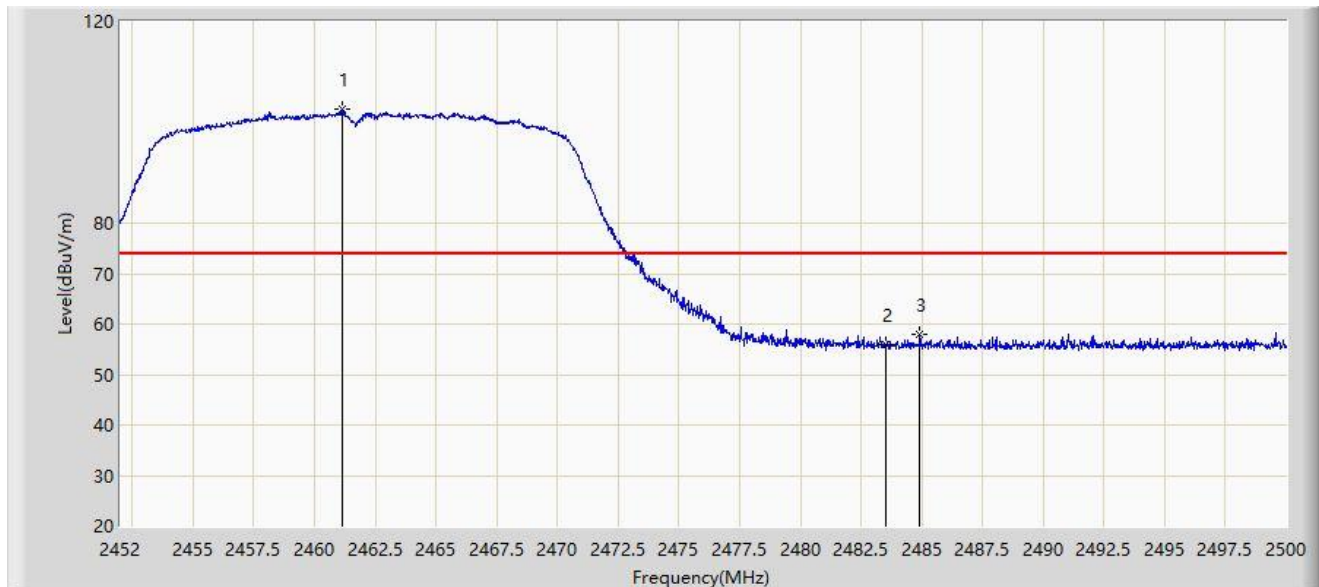


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.120	102.684	71.834	N/A	N/A	30.850	PK
2		2483.500	55.865	25.130	-18.135	74.000	30.734	PK
3	*	2484.928	57.917	27.182	-16.083	74.000	30.736	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at 2462MHz Ant 2	

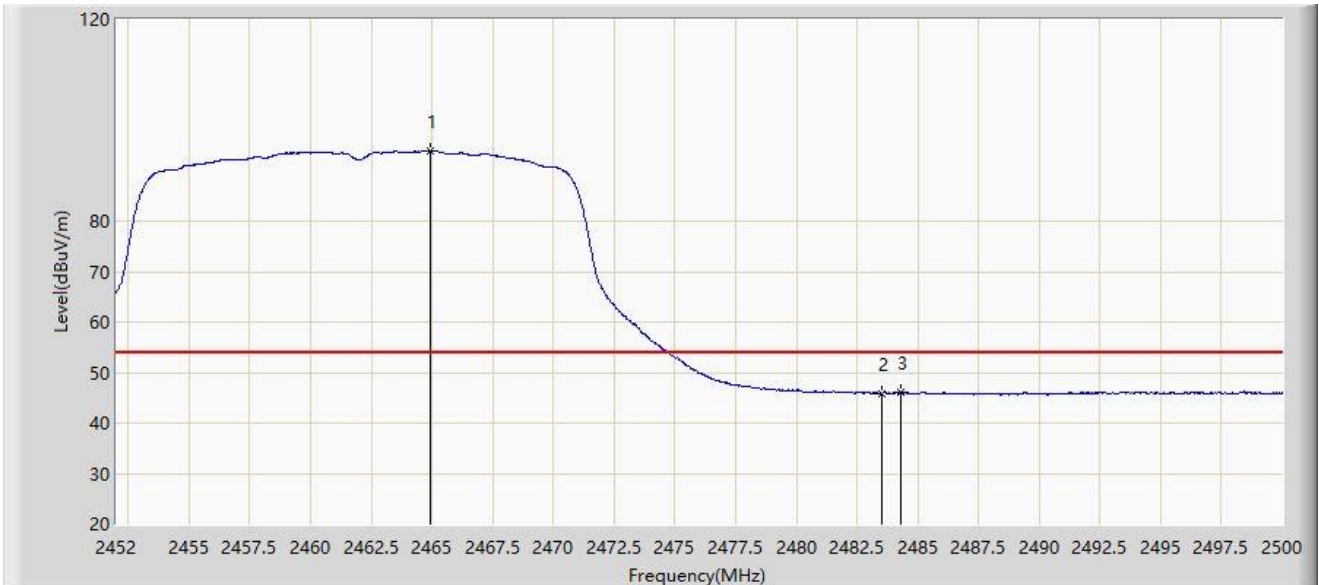


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2464.960	93.931	63.100	N/A	N/A	30.831	AV
2		2483.500	45.915	15.180	-8.085	54.000	30.734	AV
3	*	2484.328	46.170	15.435	-7.830	54.000	30.735	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 2	

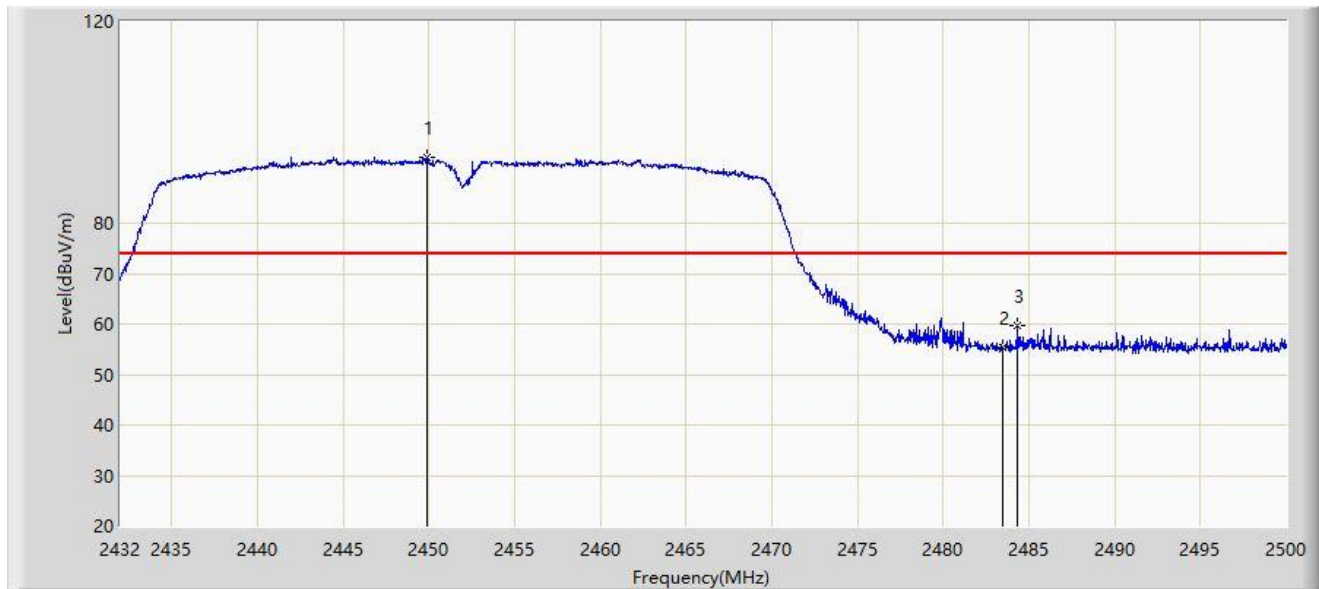


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.884	93.136	62.308	N/A	N/A	30.828	PK
2		2483.500	55.282	24.547	-18.718	74.000	30.734	PK
3	*	2484.360	59.847	29.112	-14.153	74.000	30.735	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Horizontal
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 2	

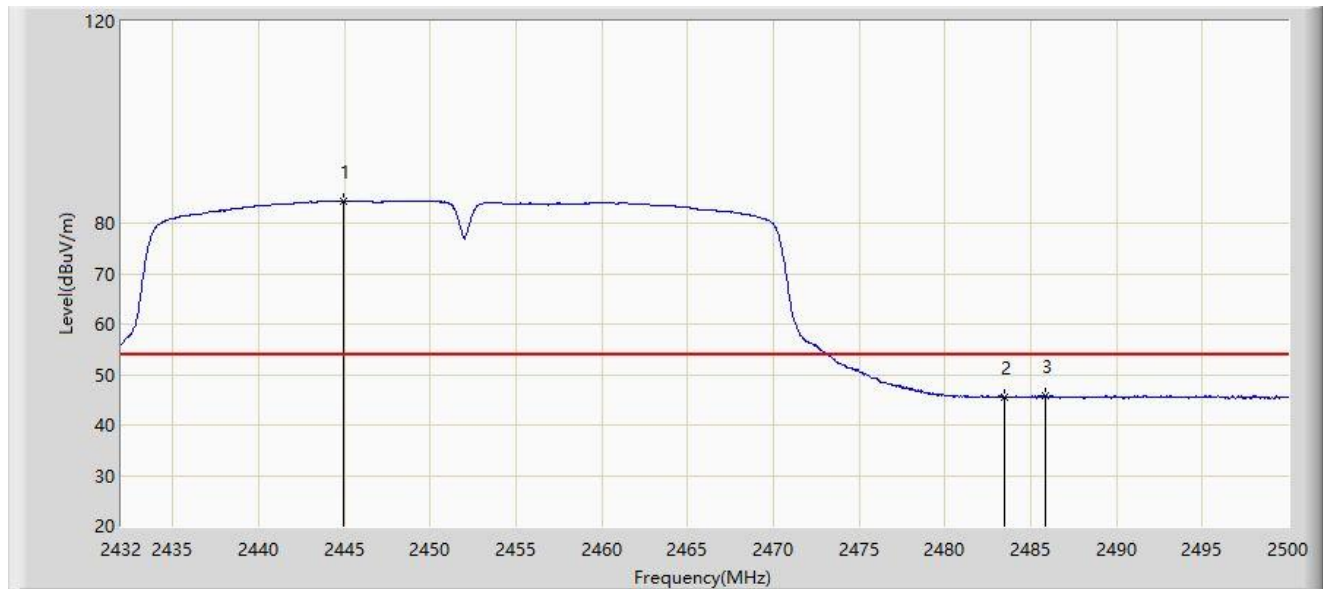


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2444.988	84.473	53.655	N/A	N/A	30.818	AV
2		2483.500	45.468	14.733	-8.532	54.000	30.734	AV
3	*	2485.856	45.749	15.013	-8.251	54.000	30.736	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 2	

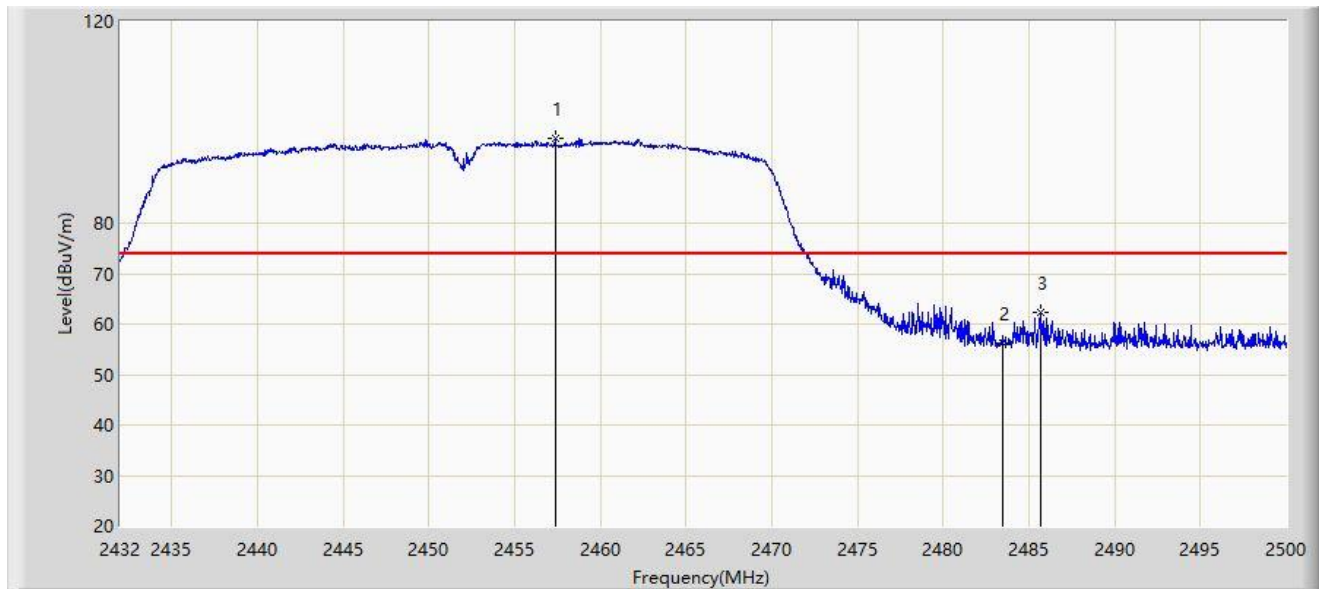


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2457.364	96.800	65.957	N/A	N/A	30.843	PK
2		2483.500	56.124	25.389	-17.876	74.000	30.734	PK
3	*	2485.720	62.379	31.643	-11.621	74.000	30.736	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022/08/25
Limit: FCC_Part 15.209_RE(3m)	Engineer: Ted Chen
Probe: NS-AC1_BBHA9120D_2111_1-18GHz	Polarity: Vertical
EUT: Thermal Printer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at 2452MHz Ant 2	

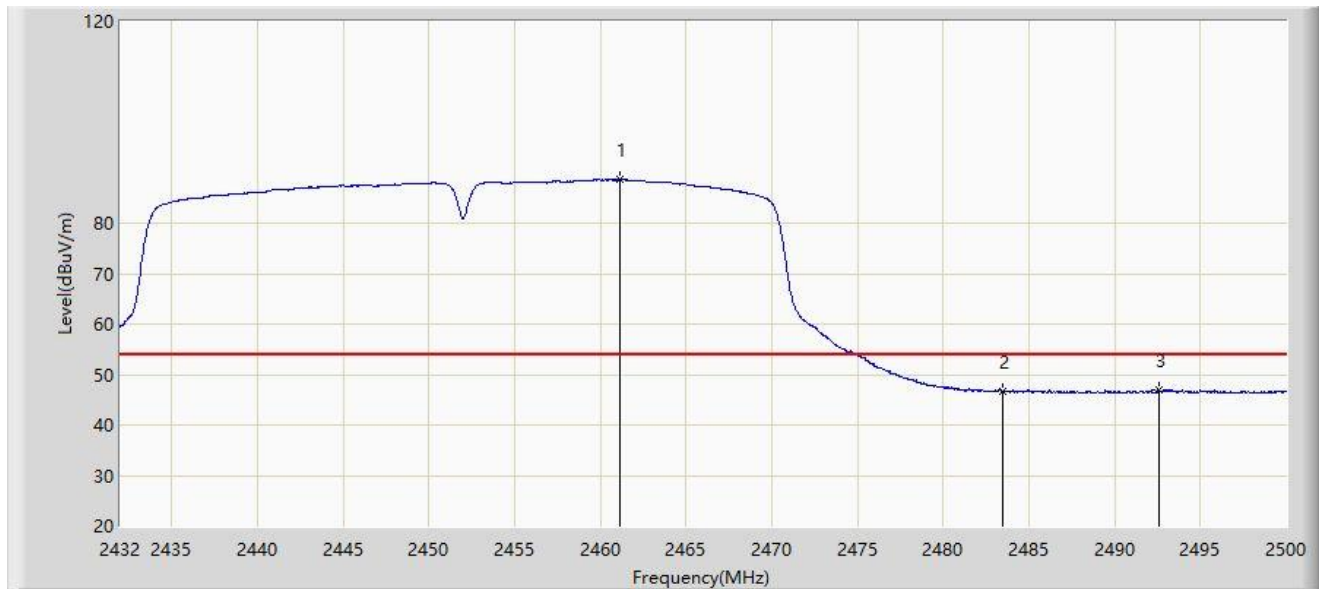

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.138	88.699	57.849	N/A	N/A	30.851	AV
2		2483.500	46.710	15.975	-7.290	54.000	30.734	AV
3	*	2492.554	47.082	16.342	-6.918	54.000	30.740	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Appendix B – Test Setup Photograph

Refer to “2208RSU021-UT” file.

Appendix C – EUT Photograph

Refer to “2208RSU021-UE” file.

The End
