



FCC / IC Test Report

FOR:
Honeywell International Inc.

Product Description:
Dolphin 70e Black Enterprise Digital Assistant (EDA)

Model: 70eLGN, 70eLG0 & 70eL00

FCC ID: HD570ELGN/ HD570ELG0/ HD570EL00

FCC CFR47 Part 15.407, subpart E

TEST REPORT #: EMC_HONEY-154-15001_70e_UNII_UPDATE

DATE: 2015-10-21



CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

TABLE OF CONTENTS

1	Assessment	3
2	Administrative Data	4
2.1	Identification of the Testing Laboratory Issuing the Test Report	4
2.2	Identification of the Client	4
2.3	Identification of the Manufacturer	4
3	Equipment under Test (EUT)	5
3.1	Specification of the Equipment under Test	5
3.2	Identification of the Equipment under Test (EUT)	6
3.3	Identification of Accessory equipment	6
3.4	Environmental conditions during Test:	6
3.5	Dates of Testing:	6
3.6	Test mode of operation:	6
3.7	Testing notes:	6
4	Subject of Investigation	7
5	Summary of Measurement Results	8
6	Measurements	9
6.1	Conducted Measurement Setup	9
6.2	Measurement Uncertainty	9
6.3	Duty Cycle Correction	10
7	Out Of Band EIRP Emission	11
7.1	References:	11
7.2	Test Setup:	11
7.3	Verdict:	11
7.4	Results:	12
7.5	Plots	13
7.5.1	5500MHz to 5715MHz	13
7.5.2	5715MHz to 5725MHz	14
7.5.3	5850MHz to 5950MHz	15
8	Power Spectral Density	16
8.1	References:	16
8.2	Test Setup:	16
8.3	Verdict:	16
8.4	Results:	16
8.5	Plots	17
8.5.1	PSD Channel 149	17
8.5.2	PSD Channel 157	18
8.5.3	PSD Channel 165	19
9	Setup Pictures	20
9.1	Measurement Setup	20
9.2	Software Tool Settings	21
10	Test Equipment and Ancillaries used for tests	22
11	Revision History	23

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

1 Assessment

The following device meets the applicable criteria of FCC CFR47 15.407 for the U-NII-3 Band affected by the 5 GHz U-NII (R&O) FCC 14-30 released: April 1, 2014 which becomes mandatory after June 2nd 2016.

Company	Description	Model #
Honeywell International Inc.	Dolphin 70e Black Enterprise Digital Assistant (EDA)	70eLGN, 70eLG0 & 70eL00

Responsible for Testing Laboratory:

2015-10-21	Compliance	Franz Engert (Compliance Manager)	 Digitally signed by Franz Engert DN: cn=Franz Engert, c=US, o=CETECOM, ou=Compliance, email=franz. engert@cetecom.com
Date	Section	Name	Signature

Responsible for the Report:

2015-10-21	Compliance	Douglas Antioco (EMC Engineer)	Douglas Antioco 2015.10.21 16:27:26 -07'00'
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Compliance Manager:	Franz Engert
Responsible Project Leader:	Douglas Antioco

2.2 Identification of the Client

Applicant's Name:	Honeywell International Inc.
Street Address:	9680 Old Bailes Road
City/Zip Code	Fort Mill SC 29707
Country	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Client
Manufacturers Address:	
City/Zip Code	
Country	

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Model:	70eLGN, 70eLG0 & 70eL00
HW Version :	5
SW Version :	40.03
FCC-ID:	HD570ELGN/ HD570ELG0/ HD570EL00
Product Description:	Dolphin 70e Black Enterprise Digital Assistant (EDA)
Technology/ Type(s) of Modulation:	802.11a/n
Modes of Operation	Client in all UNII sub bands
Channel Bandwidths	20 MHz
Operating Frequency Ranges (MHz)/ Channels:	5150-5250 MHz 5250-5350MHz 5470-5725 MHz 5725-5850 MHz
Antenna Info	Internal PIFA; Documented maximum antenna gain (5GHz): 3.1dBi
Rated Operating Voltage / Power Supply:	Li-ion Battery (Removable) Vmin: 3.3V/ Vnom: 3.6V/ Vmax: 4.3V
Operating temperature range:	Tmin: -20°C / Tmax:+50°C
Test Sample:	Production
Other Radios included in the device:	- Sierra Wireless SL8092 Radio Module 850/900/1800/1900Mhz GSM power class 4/1 GPRS Class B, Multislot 10 operation EDGE Multislot class 12 operation 900/2100 Mhz WCDMA / HSPA+ HSDPA Category 10 data rate - 14.4 Mbps HSUPA Category 6 data rate - 5.76 Mbps - BT 2.1+EDR Murata LBEH5Z9UWC module 2.4 GHz band of operation - GPS 1575.42 MHz - NFC (NXP PN65N Module; 13.56 MHz)

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

3.2 Identification of the Equipment under Test (EUT)

EUT #	Serial Number	Model	HW Version	SW Version	Notes/Comments
1	14235J00DD	70eLG0	5	40.03	Conducted RF Sample

3.3 Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
1	AC-DC Adapter	Phihong	PSAI05R-050Q	P142801648A1

3.4 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

3.5 Dates of Testing:

2015-10-12 to 2015-10-15

3.6 Test mode of operation:

Mode	Data rate (Mbps)	Modulation scheme
802.11n	6.55Mbps	OFDM/BPSK

The mode with the highest output power from the original equipment certification has been used.

3.7 Testing notes:

Based on the product equality statement provided by the manufacturer, models 70eLGN, 70eLG0, and 70eL00 include the same WLAN radio and associated circuitry, and hence testing was only performed on the 70eLG0 model and its results deemed sufficient to establish compliance of the other models to the applicable requirements.

The EUT was configured to continuously transmit at maximum power on the low, middle and high channels in the U-NII-3 band using a software tool that is not available to the end user.

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

4 Subject of Investigation

The following device was evaluated against the criteria affected by the 5 GHz U-NII (R&O) FCC 14-30 released: April 1, 2014 which becomes mandatory after June 2nd 2016. The intention of this testing and report is to prove compliance to the “new rules” according to FCC 15.407 in combination with the reports which is currently on file with the FCC.

Test report no.:

EMC_HONEY_095_12003_70eLGN_DTS (Cetecom, inc, 2013-05-28) for Model 70eLGN.

EMC_HONEY_095_12003_70eLG0_DTS (Cetecom, inc, 2013-05-28) for Model 70eLG0.

EMC_HONEY_095_12003_70eL00_DTS (Cetecom, inc, 2013-05-28) for Model 70eL00.

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

5 Summary of Measurement Results


Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
15.407 b	Out Of Band EIRP Emission	Nominal	802.11n	■	□	□	□	Complies
15.407 a	Max Conducted Power Spectral Density (PSD)	Nominal	802.11n	■	□	□	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

6 Measurements

6.1 Conducted Measurement Setup

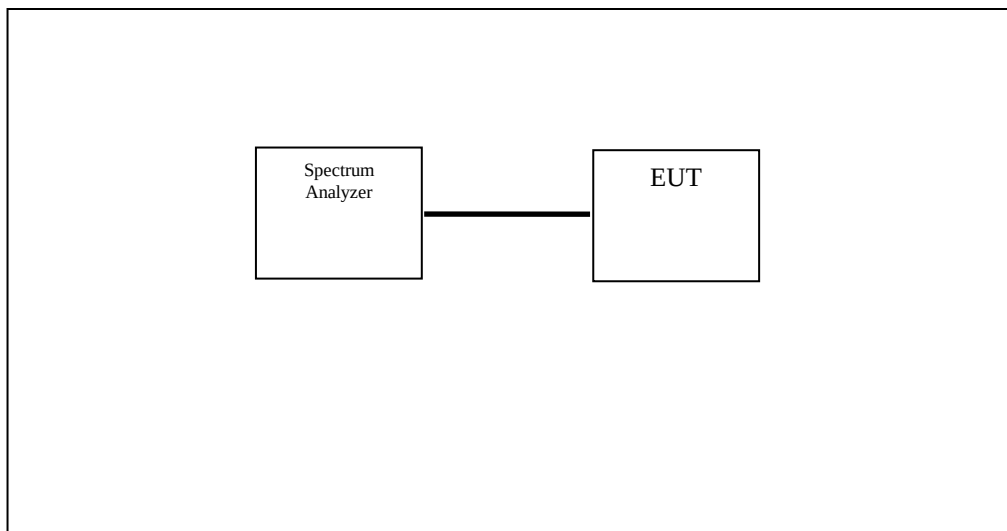


6.2 Measurement Uncertainty

	Uncertainty in dB Conducted measurement
standard deviation k=1	0.63
95% confidence interval in dB	1.24
95% confidence interval in dB in delta to Result	+/-0.7dB

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

6.3 Duty Cycle Correction

For RMS measurements, the duty cycle correction factor was added per FCC KDB 789033 D02 General UNII Test Procedures New Rules v01 Section II B point 2.

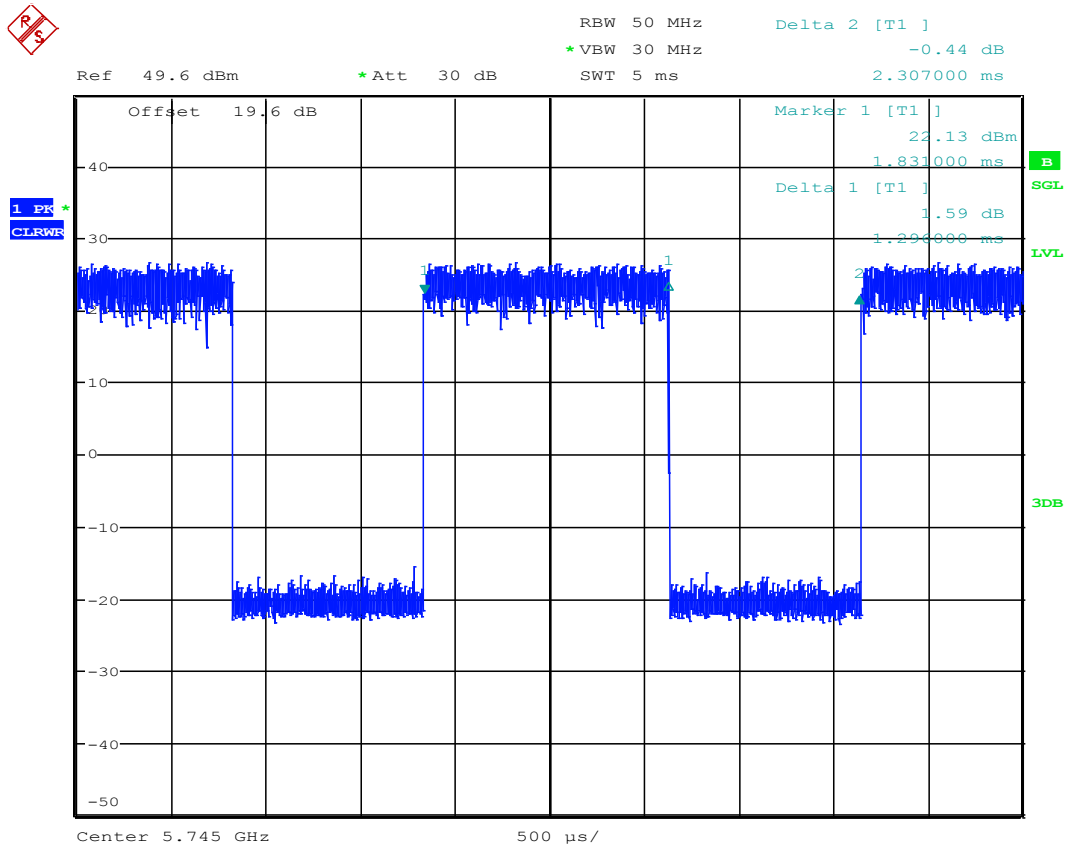

Date: 8.OCT.2015 14:30:34

Duty Cycle: $1.29/2.31 = 55.8\%$

Duty Cycle Correction Factor (for Power Averaging)
 $DCCF = 10 \cdot \log(1/0.558) = 2.53 \text{ dB}$

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

7 **Out Of Band EIRP Emission**

7.1 **References:**

789033 D02 General UNII Test Procedures New Rules v01 Section II G 6 c)

7.2 **Test Setup:**

See 6.1.1

For the low band edge and below Channel 149 has been used, for high band edge and above 165 has been used.

The EUT was configured to continuously transmit at maximum power on the low, middle and high channels in the U-NII-3 band using a software tool (TI1273_FCC) that is not available to the end user. Software tool settings are shown in section 9.2.

The following correction factor is noted in the spectrum analyzer plot in section 7.5.

Correction Factor: 15 dB Attenuator + 3.1 dBi Antenna Gain +1.5 dB Cable Loss + 2.5 dB DCCF= 22.1 dB

7.3 **Verdict:**

PASS

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	


7.4 Results:

Frequency Range	Applicable Limit	Verdict
5500MHz to 5715MHz	-27dBm/MHz RMS power during active transmission	PASS
5715MHz to 5725MHz	-17dBm/MHz RMS power during active transmission	PASS
5850MHz to 5860MHz	-17dBm/MHz RMS power during active transmission	PASS
5860MHz to 6000MHz	-27dBm/MHz RMS power during active transmission	PASS

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

7.5
Plots


7.5.1
5500MHz to 5715MHz

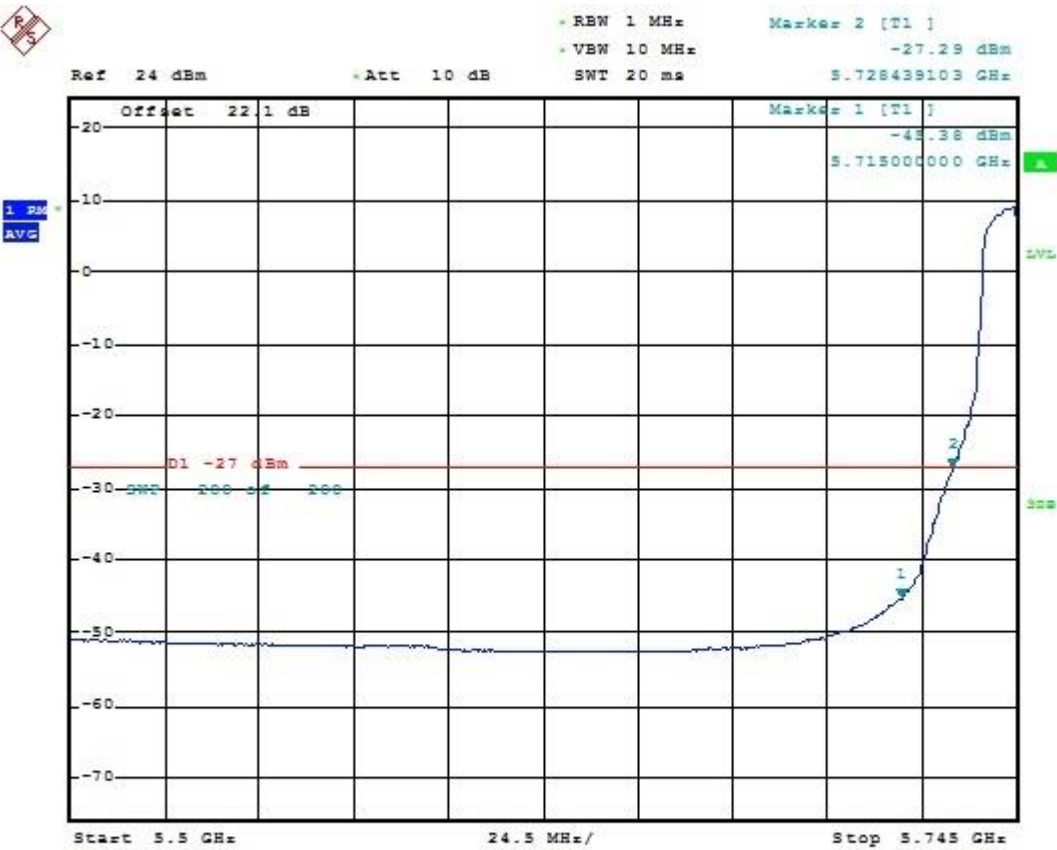

Date: 8.OCT.2015 15:10:15

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	


7.5.2
5715MHz to 5725MHz

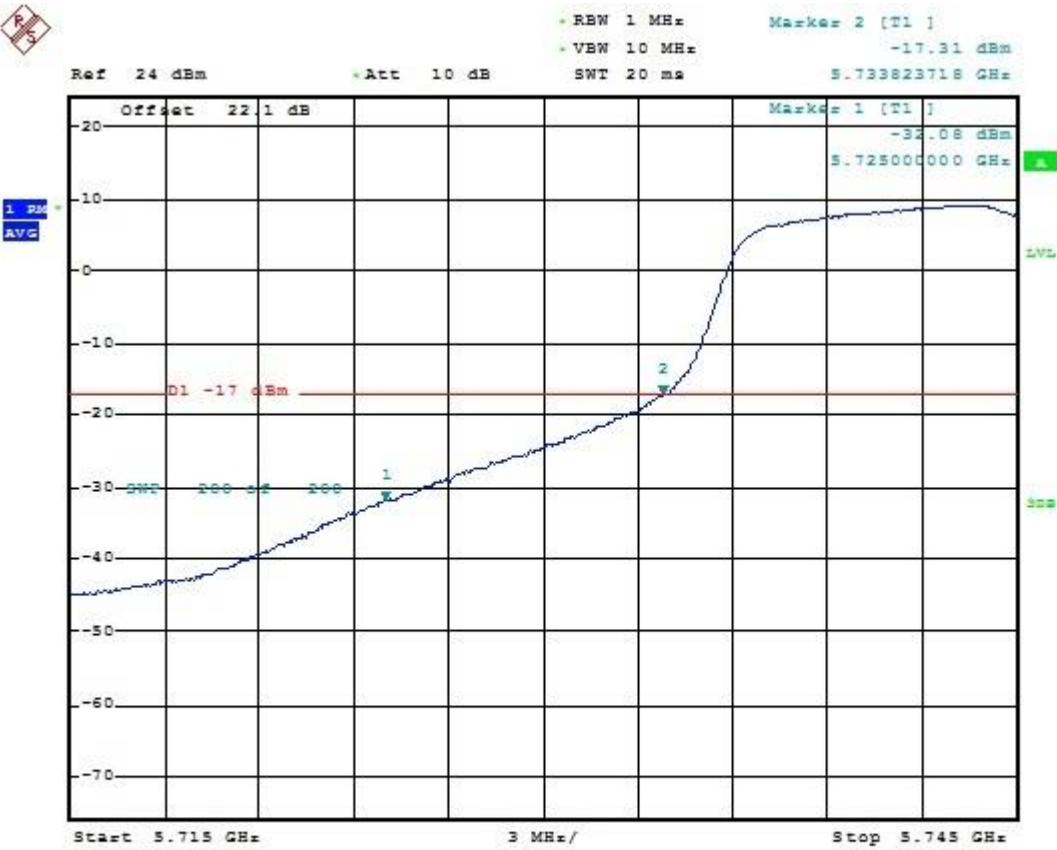

Date: 8.OCT.2015 15:11:31

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0/HD570EL00	

7.5.3 5850MHz to 5950MHz

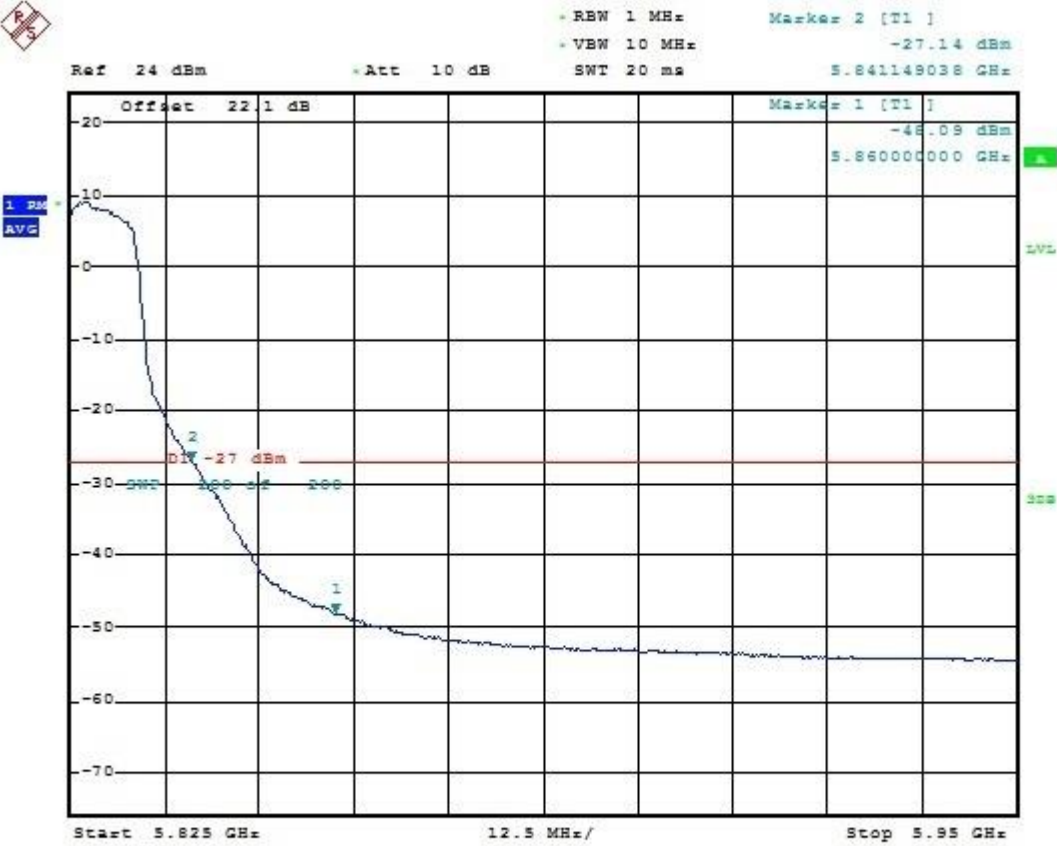

Date: 9.OCT.2015 10:56:50

Note: This plot shows compliance for both the 5850-5860MHz and >5860MHz band edges, the limit shown is the >5860MHz limit and is worse case.

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

8 Power Spectral Density

8.1 References:

789033 D02 General UNII Test Procedures New Rules v01 Section II F

8.2 Test Setup:

See 6.1.1

The EUT was configured to continuously transmit at maximum power on the low, middle and high channels in the U-NII-3 band using software that is not available to the end user.

Channels 149, 157 and 165 have been used to cover low, mid and high channel of the band under investigation.

The following correction factor is noted in the spectrum analyzer plot in section 8.5.

Correction Factor: 15 dB Attenuator + 1.5 dB Cable Loss + 2.5 dB DCCF= 19.0 dB

8.3 Verdict:

PASS


8.4 Results:

Frequency Range	Applicable Limit in dBm/500kHz	Highest measured Value (dBm)	Verdict
Channel 149	30	2.63	PASS
Channel 157	30	2.76	PASS
Channel 165	30	2.79	PASS

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	HD570ELGN/HD570ELG0 /HD570EL00	
Date of Report:	2015-10-21			

8.5 Plots

8.5.1 PSD Channel 149

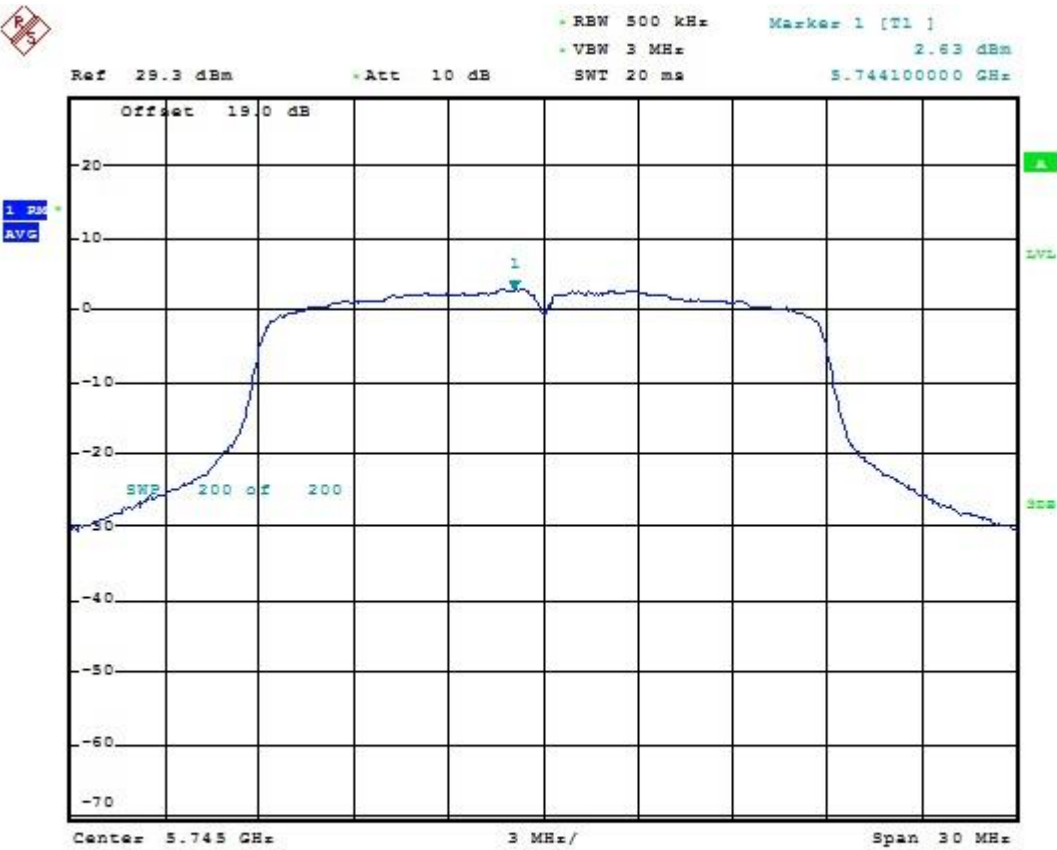

Date: 9.OCT.2015 13:35:54

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

8.5.2
PSD Channel 157



Date: 9.OCT.2015 13:37:00

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	HD570ELGN/HD570ELG0 /HD570EL00	
Date of Report:	2015-10-21			

8.5.3 PSD Channel 165




Date: 9.OCT.2015 13:37:41

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	


9 Setup Pictures

9.1 Measurement Setup

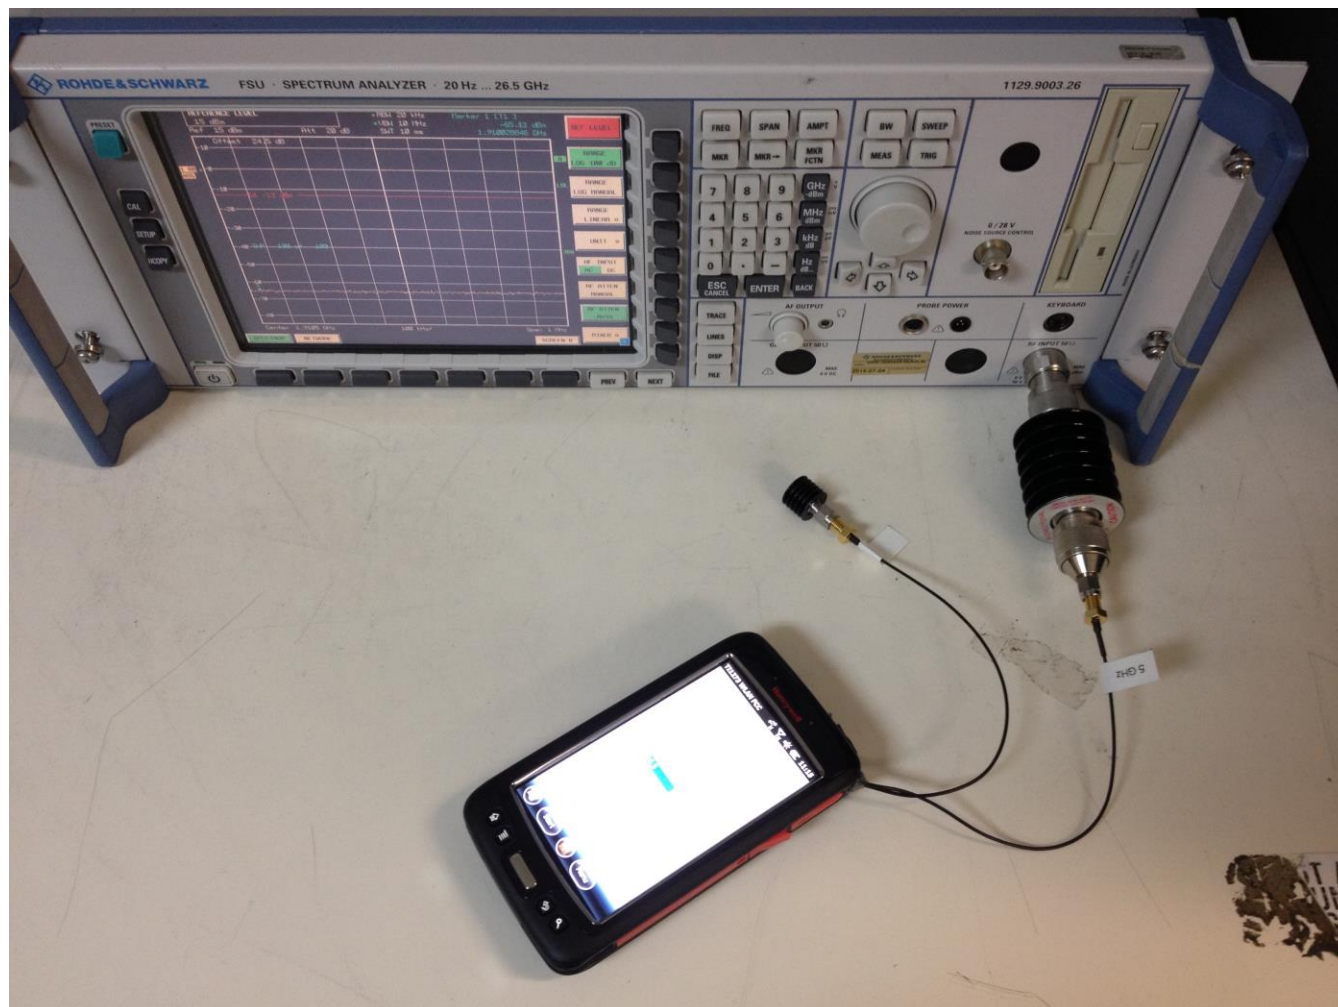

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

9.2 Software Tool Settings

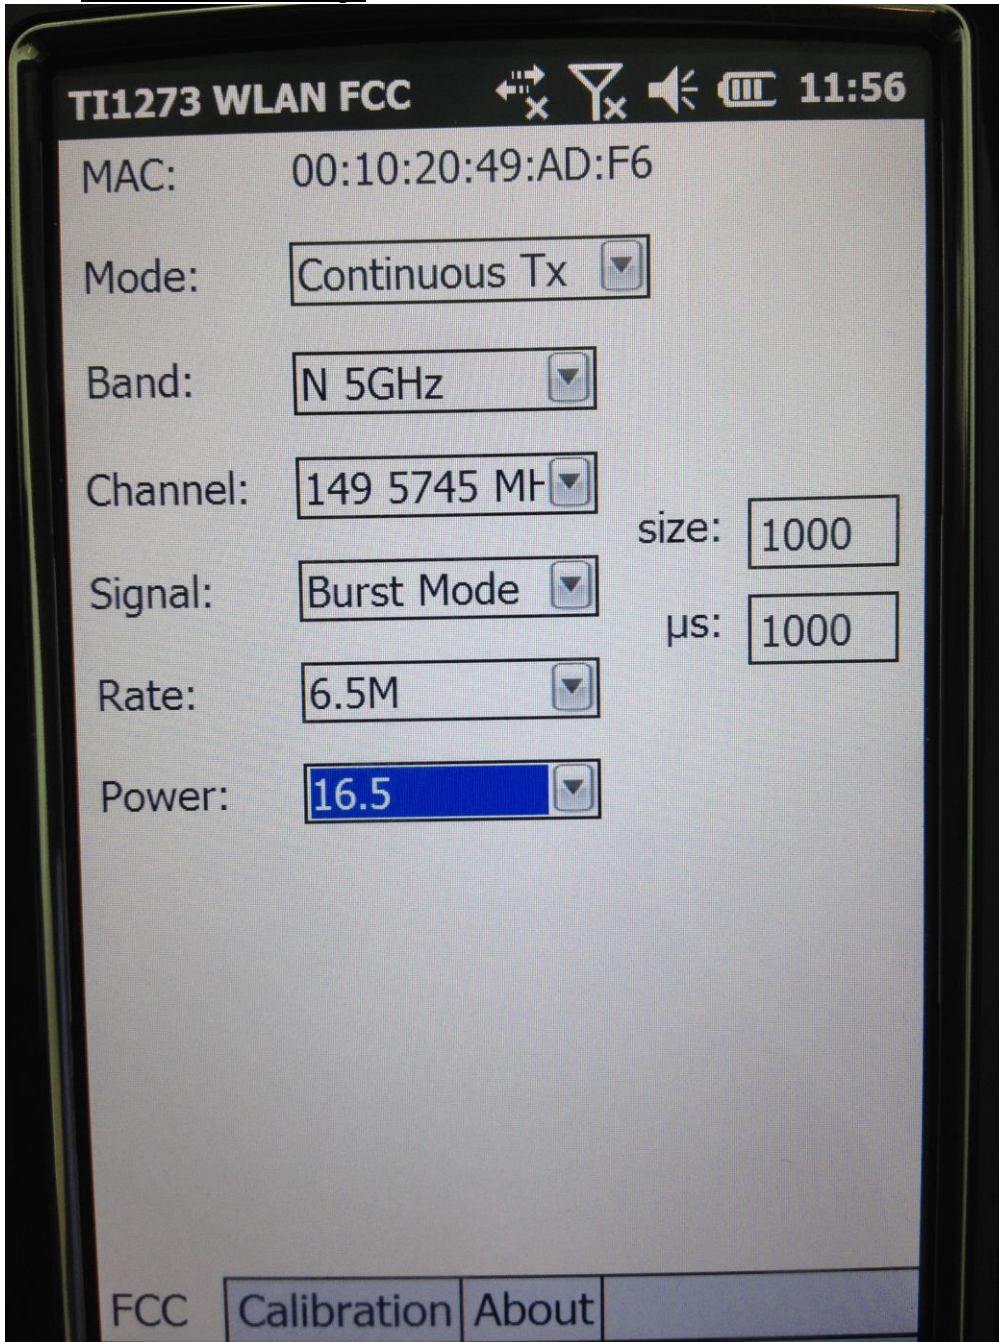

The screenshot shows the TI1273 WLAN FCC software interface. At the top, the title bar reads "TI1273 WLAN FCC" followed by icons for USB, antenna, speaker, and battery, and the time "11:56". The main display area shows the following settings:

- MAC: 00:10:20:49:AD:F6
- Mode: Continuous Tx (dropdown menu)
- Band: N 5GHz (dropdown menu)
- Channel: 149 5745 MHz (dropdown menu)
- Signal: Burst Mode (dropdown menu)
- Rate: 6.5M (dropdown menu)
- Power: 16.5 (dropdown menu)
- size: 1000 (text input)
- μs: 1000 (text input)

At the bottom, there are three buttons: "FCC", "Calibration", and "About".

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

10 Test Equipment and Ancillaries used for tests

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
1	Spectrum Analyzer	Rohde&Schwarz	FSU 26.5	100189	August 2015	3 Years

Test Report #:	EMC_HONEY-154-15001_70e_UNII_UPDATE	FCC ID:	
Date of Report:	2015-10-21	HD570ELGN/HD570ELG0 /HD570EL00	

11 Revision History

Date	Report Name	Changes to the report	Report prepared by
2015-10-21	EMC_HONEY-154-15001_70e_UNII_UPDATE	First Version	Douglas Antioco