
REPORT ON

Simultaneous Transmitters: Limited FCC Parts 15 C and 24 E Testing in support of an
Application for Grant of Equipment Authorisation
of a Handheld D9500 (Co-Located Operation)

COMMERCIAL-IN-CONFIDENCE

FCC ID: HD5595009

Report No OR611654/06 Issue 1

March 2004



TÜV Product Service Ltd, Segensworth Road,
Fareham, Hampshire, PO15 5RH, United Kingdom
Tel: +44 (0)1329 443300
Website: www.tuvps.co.uk



REPORT ON

Simultaneous Transmitters: Limited FCC Part 15 C and 24 E Testing in support of an Application for Grant of Equipment Authorisation of a Handheld D9500 (Co-Located Operation)

FCC ID: HD5595009

Report No OR611654/06 Issue 1

March 2004

PREPARED FOR

Handheld Products
700 Visions Drive
PO Box 208
Skaneateles Falls
NY
13153-0208
United States of America

PREPARED BY



V King
Principal Engineer

APPROVED BY



J Adams
EMC Signatory

DATED

25th March 2004

DISTRIBUTION

Handheld Products	Copy 1
BABT Product Service	Copy 2
Copy No	

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Parts 15 C and 24 E. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineers;



S Hartley



A Guy



G Lawler





CONTENTS

Section	Page No
1	REPORT SUMMARY
1.1	Status..... 4
1.2	Introduction or Test and Assessment Schedule..... 5
1.3	Brief Summary of Results (and Observations)..... 7
1.4	Opinions and Interpretations 8
1.5	Product information 9
1.6	Test Conditions (Configuration)..... 9
1.7	Deviations from the Standard..... 9
1.8	Modification Record..... 9
2	TEST DETAILS
2.1	Spurious Radiated Emissions 11
3	TEST EQUIPMENT USED
3.1	Table of Test Equipment Used..... 16
3.2	Measurement Uncertainty 17
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT
4.1	Accreditation, Disclaimers And Copyright 19
APPENDICES	
A	Titchfield FCC Site Compliance Letter 21



SECTION 1

REPORT SUMMARY

Simultaneous Transmitters: Limited FCC Part 15 C and 24 E Testing in support of an
Application for Grant of Equipment Authorisation
of a Handheld Products D9500 (Co-Located Operation)



1.1 STATUS

EQUIPMENT UNDER TEST	D9500
OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specification.
NAME AND ADDRESS OF CLIENT	Handheld Products 700 Visions Drive PO Box 208 Skaneateles Falls NY 13153-0208
TYPE NUMBER	D9500
PART NUMBER	D9500-09
SERIAL NUMBER	000001869
HARDWARE VERSION	Rev. 2
DECLARED VARIANTS	None
TEST SPECIFICATION / ISSUE / DATE	FCC CFR 47: Part 15, Subpart C, August 2002 & Part 24, Subpart E, January 2001
NUMBER OF ITEMS TESTED	One
SECURITY CLASSIFICATION OF EUT	Commercial In Confidence
INCOMING RELEASE DATE	Declaration of Build Status 22 nd March 2004
DISPOSAL REFERENCE NUMBER DATE	Held pending disposal Not Applicable Not Applicable
ORDER NUMBER DATE	DO93486-00 1 st September 2003
START OF TEST FINISH OF TEST	4 th February 2004 6 th February 2004
RELATED DOCUMENTS	ANSI C63.4 2001. Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



1.2 INTRODUCTION

The information contained within this report is intended to show limited verification of compliance of the Handheld Products D9500 to the requirements of FCC Specification Parts 15 C and 24, for Simultaneous Transmission of Co-Located Transmitters.

Testing was carried out in support of an application for Grant of Equipment Authorisation in the name of Handheld Products.

The purpose of this Test Report is to show compliance for Simultaneous Radio Operation of GSM/GPRS 1900 with Bluetooth.

Although testing is carried out against both FCC Specification Parts 15 C and 24, it is only a requirement for the EUT to comply with the least stringent limit when both Radios are transmitting. Therefore in this report only the limits for Part 24 have been applied.



1.2.1 DECLARATION OF BUILD STATUS

MAIN EUT			
MANUFACTURING DESCRIPTION	Mobile Computer		
MANUFACTURER	Hand Held Products Inc.		
COUNTRY OF ORIGIN	USA		
TYPE	Dolphin 9500		
PART NUMBER	D9500-09		
SERIAL NUMBER	000001869		
HARDWARE VERSION	Revision 2		
FCC ID	HD55950009		
INDUSTRY CANADA ID	1693B9509		
RADIO MODULES INTEGRATED	GSM/GPRS 900/1800/1900, 802.11b, Bluetooth		
TECHNICAL DESCRIPTION	Hand held computer with 3 radios		
BATTERY/POWER SUPPLY			
MANUFACTURING DESCRIPTION	Rechargeable battery		
MANUFACTURER	Hand Held Products Inc.		
COUNTRY OF ORIGIN	USA		
TYPE	Li-ion		
PART NUMBER	20000591-01		
VOLTAGE	7.4V		
UK AGENT	N/A		
RADIO MODULES			
MANUFACTURING DESCRIPTION	GPRS/GSM Tri-Band Radio Module	802.11b WLAN Radio Module	Bluetooth Radio Module
MANUFACTURER	Siemens AG	Sychip	Socket Communications
COUNTRY OF ORIGIN	Germany	Not known	Japan
TYPE	MC45	WLAN6060EB	BC01
POWER	3.2 – 4.5V	3.0 – 3.6V	2.7 – 3.3V
TRANSMITTER OPERATING RANGE	880-915 / 1710-1785 / 1850-1910	2412MHz to 2462MHz	2402MHz to 2480MHz
TRANSMITTER POWER	2W (GSM900) / 1W (GSM1800/1900)	14.5dBm typical	2bBm typical
RECEIVER OPERATING RANGE	925-960 / 1805-1880 / 1930-1990	2414MHz to 2484MHz	2402MHz to 2480MHz
INTERMEDIATE FREQUENCIES	Receiver: 0; Transmitter: 80MHz	Direct Conversion	Not known
EMISSION DESIGNATOR	GXW	11MOF9W	Not known
DHSS/FHSS/COMBINED OR OTHER	GSM	DSSS	FHSS
FCC ID	QIPMC45	QPUWLAN6060EBK	LUBBTM-1
INDUSTRY CANADA ID			
ANCILLARIES			
MANUFACTURING DESCRIPTION	None		
MANUFACTURER			
TYPE			
PART NUMBER			
SERIAL NUMBER			
HARDWARE VERSION			
COUNTRY OF ORIGIN			
UK AGENT			

Signature

Date

22nd March 2004



1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out is shown below.

Test	Spec Clause	Test Description	Result	Levels/Comments
2.1	24.238	Radiated Emissions	Pass	



1.4 OPINIONS AND INTERPRETATIONS

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.



1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) was a D9500, which offers 2.4GHz 802.11b Wireless LAN, Bluetooth A, GSM 900, DCS 1800 and PCS 1900 Functionality connectivity.

The terminal utilises the approved HHP Compact Flash 802.11b RLAN radio card, the Socket Communications Bluetooth Module. FCC ID numbers are detailed in Section 1.2.1 Declaration of Build Status.

The radios integrated in this terminal are not designed to operate simultaneously and are therefore tested co-located.

1.5.2 Modes of Operation

Modes of operation of the EUT during testing were as follows:

Applicable testing was carried out with the EUT transmitting at maximum power or receiving as detailed in Section 1.5.3 "Test Configuration".

1.5.3 Test Configuration

1.5.3.1 Test Configuration 1– PCS 1900 with Bluetooth (Co-Located)

Measurements were made with the EUT transmitting on the following frequencies.

PCS 1900 (Bottom)	Bluetooth (Top)
Channel 512 (1.8502GHz)	2.480GHz

The Output Power level (controlled by application software) was set to maximum

1.5.3.2 Test Configuration 2 - PCS 1900 with Bluetooth (Co-Located)

Measurements were made with the EUT transmitting on the following frequencies.

PCS 1900 (Top)	Bluetooth (Bottom)
Channel 810 (1.9098GHz)	2.402GHz

The Output Power level (controlled by application software) was set to maximum.

1.6 TEST CONDITIONS

For all tests, the Handheld D9500 was powered by its own internal battery.

1.7 DEVIATIONS FROM THE STANDARD

Not Applicable

1.8 MODIFICATION RECORD

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	N/A	N/A



SECTION 2

TEST DETAILS

Simultaneous Transmitters: Limited FCC Part 15 C and 24 E Testing in support of an
Application for Grant of Equipment Authorisation
of a Handheld Products D9500 (Co-Located Operation)



2.1 SPURIOUS RADIATED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47: Part 24 Subpart E, Section 24.238

2.1.2 Equipment Under Test

D9500

2.1.3 Date of Test

4th to 6th March 2004

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified as Section 2.1 within the Test Equipment Used table shown in Section 3.1.

2.1.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisation. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector.

Emissions identified within the range 1GHz – 20GHz were then formally measured using Peak and Average Detectors, as appropriate.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown in the table below using the following formula:

Field Strength of Carrier $-(43 + 10\text{Log}(P))$

Where:

Field Strength is measured in dB μ V/m

P is Declared Transmitter Power in Watts

Test Mode	Carrier Frequency MHz	Carrier Field Strength dB μ V/m	Declared Power MW	Limit for Spurious Emissions dB μ V/m
Bottom Channel	1850.2	126.1	724.44	89.5
Top Channel	1909.8	125.5	933.25	82.8

These limits have been used to determine Pass or Fail for the harmonics measured and detailed in the following tables.



2.2.6 Test Results

30MHz – 1GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC Part 24.238 for Radiated Emissions (30MHz – 1GHz).

Co-Located. PCS 1900 Tx on Bottom Channel (1850.2MHz) with Bluetooth on Top Channel (2480MHz)

Measurements were made with the EUT in Configuration 1.

No emissions within 40dB of the specification limit were detected.

Co-Located. PCS 1900 EUT Tx on Top Channel (1909.8MHz) with Bluetooth on Bottom Channel (2402MHz)

Measurements were made with the EUT in Configuration 2.

No emissions within 40dB of the specification limit were detected.



2.2 RADIATED EMISSIONS - continued

2.2.6 Test Results - continued

1GHz – 20GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC Part 24.238 for Radiated Emissions (1GHz - 20GHz).

Co-Located. PCS 1900 Tx on Bottom Channel (1850.2MHz) with Bluetooth on Top Channel (2480MHz)

Measurements were made with the EUT in Configuration 1.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Peak Limit
MHz	H/V	cm	deg	dBµV/m	dBµV/m
5.550	V	109	357	53.1	84.5
5.550	H	100	249	54.5	84.5
11.100	V	100	021	61.5	84.5
11.100	H	182	270	62.8	84.5

Co-Located. PCS 1900 EUT Tx on Top Channel (1909.8MHz) with Bluetooth on Bottom Channel (2402MHz)


Measurements were made with the EUT in Configuration 2.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Average Field Strength
MHz	H/V	cm	Deg	dBµV/m	dBµV/m
4.804	V	122	183	63.1	82.8
4.804	H	100	120	62.6	82.8
5.727	H	100	248	59.4	82.8
5.727	V	100	196	59.3	82.8
9.608	V	100	007	56.5	82.8
9.608	H	122	294	53.9	82.8
11.458	H	128	348	62.3	82.8
11.458	V	158	285	68.7	82.8



2.2 RADIATED EMISSIONS - continued

2.2.7 Set Up Photograph

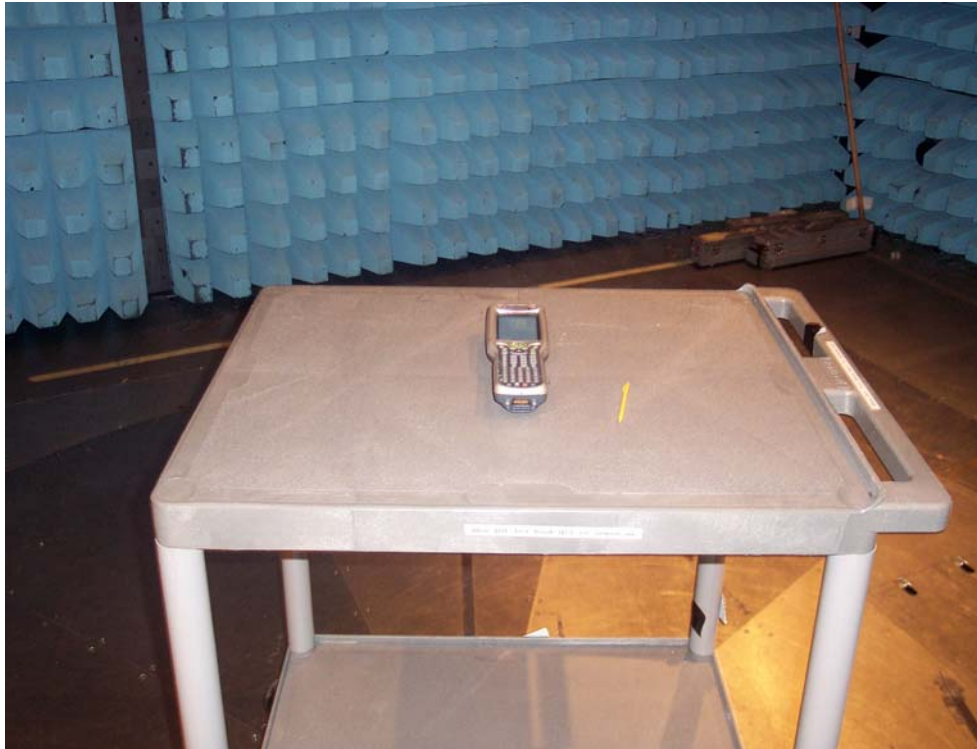

Radiated Emissions Set Up Photograph



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

Item	Instrument	Manufacturer	Type No	EMC / INV No	Cal. Due
Section 2.2					
1	Turntable & Controller	HD Gmbh	HD 050	2528	TU
2	Antenna Mast	EMCO	2070	-	TU
3	Antenna Mast Controller	EMCO	2090	-	TU
4	Bilog antenna	Chase	CBL6143	2860	11-4-04
5	Spectrum Analyser	Rhode & Schwarz	ESIB40	2917	11-2-05
6	Horn	EMCO	3115	2397	4-7-04
7	Signal Generator	Hewlett Packard	8673B	954	14-6-04
8	Low Noise Amplifier 1-8GHz	Miteq	AMF-3D-001080-18-13P	2457	TU
9	Amplifier 8-18GHz	Avantek	AWT 18036	1081	26-6-04
10	Amplifier 18-26GHz	Avantek	AMT 26177-33	2072	26-6-04
11	Hydrometer	Rotronic	A1	INV3155	28-8-04
12	Antenna	FMI	18-40Ghz	1396	TU

TU: Traceability Unscheduled



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

IN THE FREQUENCY RANGE 30MHz TO 1000MHz		
TEST	FREQUENCY	AMPLITUDE
For Radiated Emissions, Quasi-Peak Measurements using the ESVP Test Receiver and Bilog Antenna	$\pm 5\text{ppm} + 500\text{Hz}$	$\pm 4.1\text{dB}$
IN THE FREQUENCY RANGE 1GHz TO 26GHz		
TEST	FREQUENCY	AMPLITUDE
For Spurious Radiated Emissions measurements	$\pm 2 \times 10^{-7} \times \text{Centre Frequency}$	$\pm 3.4\text{dB}$



SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2004 TÜV Product Service Limited



APPENDIX A

TITCHFIELD FCC SITE COMPLIANCE LETTER



FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

October 18, 2002

Registration Number: 90987

TUV Product Service Ltd
Segensworth Road
Titchfield
Fareham, Hampshire, PO15 5RH
United Kingdom
Attention: Kevan Adsetts

Re: Measurement facility located at Titchfield
Anechoic chamber (3 meters) and 3 & 10 meter OATS
Date of Listing: October 18, 2002

Gentlemen:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Thomas W Phillips
Electronics Engineer