




Non-beamforming mode

Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 63%

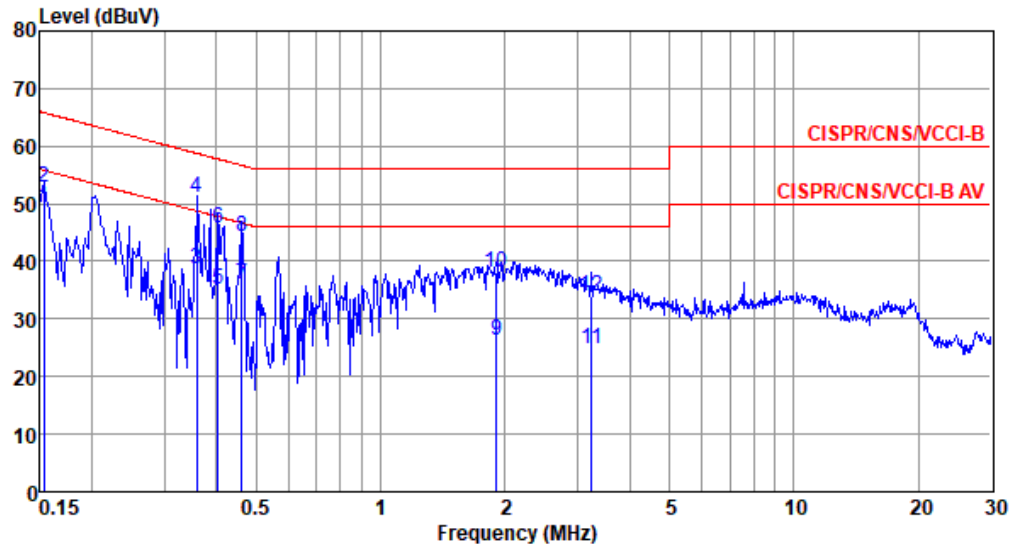

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.153	49.40	55.82	-6.42	39.53	9.63	0.06	0.18	Average
2	0.153	52.86	65.82	-12.96	42.99	9.63	0.06	0.18	QP
3	0.360	38.63	48.74	-10.11	28.67	9.62	0.06	0.28	Average
4	0.360	51.18	58.74	-7.56	41.22	9.62	0.06	0.28	QP
5	0.404	35.16	47.77	-12.61	25.18	9.62	0.06	0.30	Average
6	0.404	45.83	57.77	-11.94	35.85	9.62	0.06	0.30	QP
7	0.461	36.11	46.67	-10.56	26.12	9.62	0.07	0.30	Average
8	0.461	44.41	56.67	-12.26	34.42	9.62	0.07	0.30	QP
9	1.908	26.29	46.00	-19.71	16.17	9.63	0.13	0.36	Average
10	1.908	37.95	56.00	-18.05	27.83	9.63	0.13	0.36	QP
11	3.241	24.91	46.00	-21.09	14.71	9.64	0.16	0.40	Average
12	3.241	34.02	56.00	-21.98	23.82	9.64	0.16	0.40	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	ax HE40	Test Freq. (MHz)	5230																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 22°C Humidity: 63%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1*</td><td>0.201</td><td>44.01</td><td>53.58</td><td>-9.57</td><td>34.13</td><td>9.63</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>2</td><td>0.201</td><td>48.45</td><td>63.58</td><td>-15.13</td><td>38.57</td><td>9.63</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>3</td><td>0.369</td><td>22.80</td><td>48.52</td><td>-25.72</td><td>12.83</td><td>9.62</td><td>0.06</td><td>0.29</td><td>Average</td></tr><tr><td>4</td><td>0.369</td><td>42.39</td><td>58.52</td><td>-16.13</td><td>32.42</td><td>9.62</td><td>0.06</td><td>0.29</td><td>QP</td></tr><tr><td>5</td><td>0.454</td><td>31.67</td><td>46.80</td><td>-15.13</td><td>21.68</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.454</td><td>46.93</td><td>56.80</td><td>-9.87</td><td>36.94</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>0.555</td><td>24.59</td><td>46.00</td><td>-21.41</td><td>14.58</td><td>9.62</td><td>0.08</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.555</td><td>38.21</td><td>56.00</td><td>-17.79</td><td>28.20</td><td>9.62</td><td>0.08</td><td>0.31</td><td>QP</td></tr><tr><td>9</td><td>2.133</td><td>12.73</td><td>46.00</td><td>-33.27</td><td>2.59</td><td>9.64</td><td>0.13</td><td>0.37</td><td>Average</td></tr><tr><td>10</td><td>2.133</td><td>25.74</td><td>56.00</td><td>-30.26</td><td>15.60</td><td>9.64</td><td>0.13</td><td>0.37</td><td>QP</td></tr><tr><td>11</td><td>17.383</td><td>33.29</td><td>50.00</td><td>-16.71</td><td>22.52</td><td>9.78</td><td>0.48</td><td>0.51</td><td>Average</td></tr><tr><td>12</td><td>17.383</td><td>38.38</td><td>60.00</td><td>-21.62</td><td>27.61</td><td>9.78</td><td>0.48</td><td>0.51</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1*	0.201	44.01	53.58	-9.57	34.13	9.63	0.06	0.19	Average	2	0.201	48.45	63.58	-15.13	38.57	9.63	0.06	0.19	QP	3	0.369	22.80	48.52	-25.72	12.83	9.62	0.06	0.29	Average	4	0.369	42.39	58.52	-16.13	32.42	9.62	0.06	0.29	QP	5	0.454	31.67	46.80	-15.13	21.68	9.62	0.07	0.30	Average	6	0.454	46.93	56.80	-9.87	36.94	9.62	0.07	0.30	QP	7	0.555	24.59	46.00	-21.41	14.58	9.62	0.08	0.31	Average	8	0.555	38.21	56.00	-17.79	28.20	9.62	0.08	0.31	QP	9	2.133	12.73	46.00	-33.27	2.59	9.64	0.13	0.37	Average	10	2.133	25.74	56.00	-30.26	15.60	9.64	0.13	0.37	QP	11	17.383	33.29	50.00	-16.71	22.52	9.78	0.48	0.51	Average	12	17.383	38.38	60.00	-21.62	27.61	9.78	0.48	0.51	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1*	0.201	44.01	53.58	-9.57	34.13	9.63	0.06	0.19	Average																																																																																																																												
2	0.201	48.45	63.58	-15.13	38.57	9.63	0.06	0.19	QP																																																																																																																												
3	0.369	22.80	48.52	-25.72	12.83	9.62	0.06	0.29	Average																																																																																																																												
4	0.369	42.39	58.52	-16.13	32.42	9.62	0.06	0.29	QP																																																																																																																												
5	0.454	31.67	46.80	-15.13	21.68	9.62	0.07	0.30	Average																																																																																																																												
6	0.454	46.93	56.80	-9.87	36.94	9.62	0.07	0.30	QP																																																																																																																												
7	0.555	24.59	46.00	-21.41	14.58	9.62	0.08	0.31	Average																																																																																																																												
8	0.555	38.21	56.00	-17.79	28.20	9.62	0.08	0.31	QP																																																																																																																												
9	2.133	12.73	46.00	-33.27	2.59	9.64	0.13	0.37	Average																																																																																																																												
10	2.133	25.74	56.00	-30.26	15.60	9.64	0.13	0.37	QP																																																																																																																												
11	17.383	33.29	50.00	-16.71	22.52	9.78	0.48	0.51	Average																																																																																																																												
12	17.383	38.38	60.00	-21.62	27.61	9.78	0.48	0.51	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).																																																																																																																																					

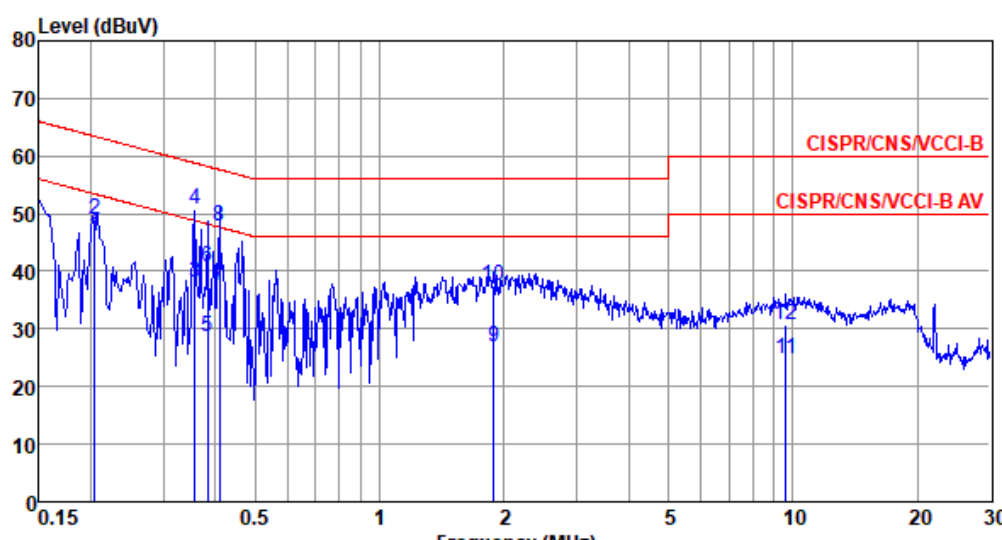

Modulation Mode	11a	Test Freq. (MHz)	5745																																																																																																																																																						
Power Phase	Line																																																																																																																																																								
Test by : Joe Liao Temperature: 22°C Humidity: 63%																																																																																																																																																									
Level (dBuV)  Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th></th><th>dB</th><th></th><th></th></tr><tr><td>1*</td><td>0.204</td><td>46.10</td><td>53.45</td><td>-7.35</td><td>36.23</td><td>9.62</td><td>0.06</td><td>0.19</td><td>Average</td></tr><tr><td>2</td><td>0.204</td><td>49.14</td><td>63.45</td><td>-14.31</td><td>39.27</td><td>9.62</td><td>0.06</td><td>0.19</td><td>QP</td></tr><tr><td>3</td><td>0.358</td><td>38.07</td><td>48.78</td><td>-10.71</td><td>28.11</td><td>9.62</td><td>0.06</td><td>0.28</td><td>Average</td></tr><tr><td>4</td><td>0.358</td><td>50.87</td><td>58.78</td><td>-7.91</td><td>40.91</td><td>9.62</td><td>0.06</td><td>0.28</td><td>QP</td></tr><tr><td>5</td><td>0.383</td><td>28.50</td><td>48.21</td><td>-19.71</td><td>18.53</td><td>9.62</td><td>0.06</td><td>0.29</td><td>Average</td></tr><tr><td>6</td><td>0.383</td><td>40.85</td><td>58.21</td><td>-17.36</td><td>30.88</td><td>9.62</td><td>0.06</td><td>0.29</td><td>QP</td></tr><tr><td>7</td><td>0.410</td><td>37.45</td><td>47.64</td><td>-10.19</td><td>27.47</td><td>9.62</td><td>0.06</td><td>0.30</td><td>Average</td></tr><tr><td>8</td><td>0.410</td><td>47.95</td><td>57.64</td><td>-9.69</td><td>37.97</td><td>9.62</td><td>0.06</td><td>0.30</td><td>QP</td></tr><tr><td>9</td><td>1.888</td><td>26.95</td><td>46.00</td><td>-19.05</td><td>16.83</td><td>9.63</td><td>0.13</td><td>0.36</td><td>Average</td></tr><tr><td>10</td><td>1.888</td><td>37.39</td><td>56.00</td><td>-18.61</td><td>27.27</td><td>9.63</td><td>0.13</td><td>0.36</td><td>QP</td></tr><tr><td>11</td><td>9.603</td><td>24.73</td><td>50.00</td><td>-25.27</td><td>14.25</td><td>9.69</td><td>0.35</td><td>0.44</td><td>Average</td></tr><tr><td>12</td><td>9.603</td><td>30.79</td><td>60.00</td><td>-29.21</td><td>20.31</td><td>9.69</td><td>0.35</td><td>0.44</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux			MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark				dBuV	dB	dBuV		dB			1*	0.204	46.10	53.45	-7.35	36.23	9.62	0.06	0.19	Average	2	0.204	49.14	63.45	-14.31	39.27	9.62	0.06	0.19	QP	3	0.358	38.07	48.78	-10.71	28.11	9.62	0.06	0.28	Average	4	0.358	50.87	58.78	-7.91	40.91	9.62	0.06	0.28	QP	5	0.383	28.50	48.21	-19.71	18.53	9.62	0.06	0.29	Average	6	0.383	40.85	58.21	-17.36	30.88	9.62	0.06	0.29	QP	7	0.410	37.45	47.64	-10.19	27.47	9.62	0.06	0.30	Average	8	0.410	47.95	57.64	-9.69	37.97	9.62	0.06	0.30	QP	9	1.888	26.95	46.00	-19.05	16.83	9.63	0.13	0.36	Average	10	1.888	37.39	56.00	-18.61	27.27	9.63	0.13	0.36	QP	11	9.603	24.73	50.00	-25.27	14.25	9.69	0.35	0.44	Average	12	9.603	30.79	60.00	-29.21	20.31	9.69	0.35	0.44	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																																	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark																																																																																																																																																
			dBuV	dB	dBuV		dB																																																																																																																																																		
1*	0.204	46.10	53.45	-7.35	36.23	9.62	0.06	0.19	Average																																																																																																																																																
2	0.204	49.14	63.45	-14.31	39.27	9.62	0.06	0.19	QP																																																																																																																																																
3	0.358	38.07	48.78	-10.71	28.11	9.62	0.06	0.28	Average																																																																																																																																																
4	0.358	50.87	58.78	-7.91	40.91	9.62	0.06	0.28	QP																																																																																																																																																
5	0.383	28.50	48.21	-19.71	18.53	9.62	0.06	0.29	Average																																																																																																																																																
6	0.383	40.85	58.21	-17.36	30.88	9.62	0.06	0.29	QP																																																																																																																																																
7	0.410	37.45	47.64	-10.19	27.47	9.62	0.06	0.30	Average																																																																																																																																																
8	0.410	47.95	57.64	-9.69	37.97	9.62	0.06	0.30	QP																																																																																																																																																
9	1.888	26.95	46.00	-19.05	16.83	9.63	0.13	0.36	Average																																																																																																																																																
10	1.888	37.39	56.00	-18.61	27.27	9.63	0.13	0.36	QP																																																																																																																																																
11	9.603	24.73	50.00	-25.27	14.25	9.69	0.35	0.44	Average																																																																																																																																																
12	9.603	30.79	60.00	-29.21	20.31	9.69	0.35	0.44	QP																																																																																																																																																
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).																																																																																																																																																									



Modulation Mode	11a	Test Freq. (MHz)	5745																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 22°C Humidity: 63%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1*</td><td>0.153</td><td>47.23</td><td>55.82</td><td>-8.59</td><td>37.36</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>51.22</td><td>65.82</td><td>-14.60</td><td>41.35</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.354</td><td>37.78</td><td>48.87</td><td>-11.09</td><td>27.82</td><td>9.62</td><td>0.06</td><td>0.28</td><td>Average</td></tr><tr><td>4</td><td>0.354</td><td>49.23</td><td>58.87</td><td>-9.64</td><td>39.27</td><td>9.62</td><td>0.06</td><td>0.28</td><td>QP</td></tr><tr><td>5</td><td>0.408</td><td>37.37</td><td>47.68</td><td>-10.31</td><td>27.39</td><td>9.62</td><td>0.06</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.408</td><td>48.31</td><td>57.68</td><td>-9.37</td><td>38.33</td><td>9.62</td><td>0.06</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>0.454</td><td>30.14</td><td>46.80</td><td>-16.66</td><td>20.15</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>8</td><td>0.454</td><td>43.74</td><td>56.80</td><td>-13.06</td><td>33.75</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>9</td><td>2.358</td><td>18.13</td><td>46.00</td><td>-27.87</td><td>7.98</td><td>9.64</td><td>0.14</td><td>0.37</td><td>Average</td></tr><tr><td>10</td><td>2.358</td><td>26.74</td><td>56.00</td><td>-29.26</td><td>16.59</td><td>9.64</td><td>0.14</td><td>0.37</td><td>QP</td></tr><tr><td>11</td><td>17.849</td><td>32.06</td><td>50.00</td><td>-17.94</td><td>21.28</td><td>9.79</td><td>0.48</td><td>0.51</td><td>Average</td></tr><tr><td>12</td><td>17.849</td><td>37.31</td><td>60.00</td><td>-22.69</td><td>26.53</td><td>9.79</td><td>0.48</td><td>0.51</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1*	0.153	47.23	55.82	-8.59	37.36	9.63	0.06	0.18	Average	2	0.153	51.22	65.82	-14.60	41.35	9.63	0.06	0.18	QP	3	0.354	37.78	48.87	-11.09	27.82	9.62	0.06	0.28	Average	4	0.354	49.23	58.87	-9.64	39.27	9.62	0.06	0.28	QP	5	0.408	37.37	47.68	-10.31	27.39	9.62	0.06	0.30	Average	6	0.408	48.31	57.68	-9.37	38.33	9.62	0.06	0.30	QP	7	0.454	30.14	46.80	-16.66	20.15	9.62	0.07	0.30	Average	8	0.454	43.74	56.80	-13.06	33.75	9.62	0.07	0.30	QP	9	2.358	18.13	46.00	-27.87	7.98	9.64	0.14	0.37	Average	10	2.358	26.74	56.00	-29.26	16.59	9.64	0.14	0.37	QP	11	17.849	32.06	50.00	-17.94	21.28	9.79	0.48	0.51	Average	12	17.849	37.31	60.00	-22.69	26.53	9.79	0.48	0.51	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1*	0.153	47.23	55.82	-8.59	37.36	9.63	0.06	0.18	Average																																																																																																																												
2	0.153	51.22	65.82	-14.60	41.35	9.63	0.06	0.18	QP																																																																																																																												
3	0.354	37.78	48.87	-11.09	27.82	9.62	0.06	0.28	Average																																																																																																																												
4	0.354	49.23	58.87	-9.64	39.27	9.62	0.06	0.28	QP																																																																																																																												
5	0.408	37.37	47.68	-10.31	27.39	9.62	0.06	0.30	Average																																																																																																																												
6	0.408	48.31	57.68	-9.37	38.33	9.62	0.06	0.30	QP																																																																																																																												
7	0.454	30.14	46.80	-16.66	20.15	9.62	0.07	0.30	Average																																																																																																																												
8	0.454	43.74	56.80	-13.06	33.75	9.62	0.07	0.30	QP																																																																																																																												
9	2.358	18.13	46.00	-27.87	7.98	9.64	0.14	0.37	Average																																																																																																																												
10	2.358	26.74	56.00	-29.26	16.59	9.64	0.14	0.37	QP																																																																																																																												
11	17.849	32.06	50.00	-17.94	21.28	9.79	0.48	0.51	Average																																																																																																																												
12	17.849	37.31	60.00	-22.69	26.53	9.79	0.48	0.51	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).																																																																																																																																					




Beamforming mode

Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 63%

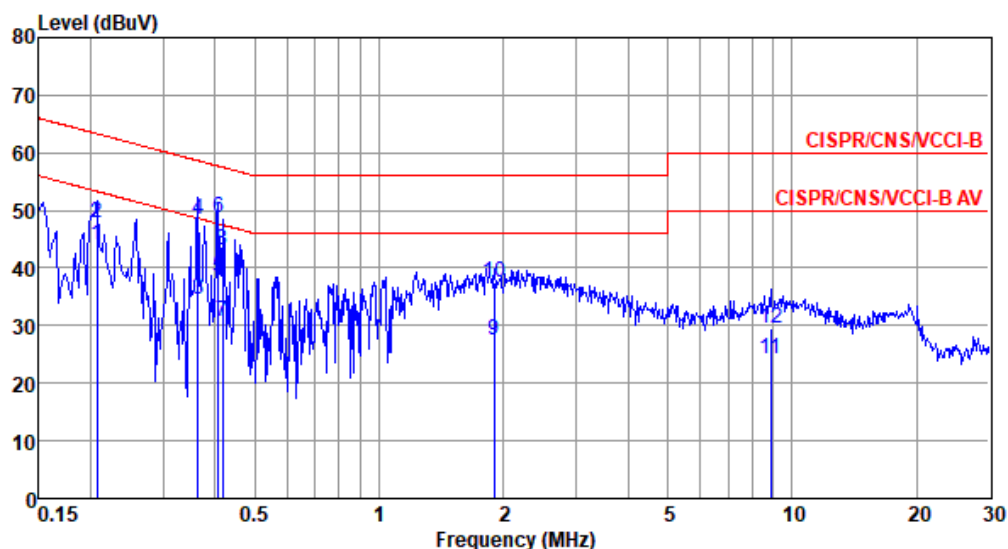

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.207	44.00	53.32	-9.32	34.12	9.62	0.06	0.20	Average
2	0.207	47.86	63.32	-15.46	37.98	9.62	0.06	0.20	QP
3	0.363	34.56	48.65	-14.09	24.60	9.62	0.06	0.28	Average
4	0.363	48.44	58.65	-10.21	38.48	9.62	0.06	0.28	QP
5	0.408	38.52	47.68	-9.16	28.54	9.62	0.06	0.30	Average
6*	0.408	48.72	57.68	-8.96	38.74	9.62	0.06	0.30	QP
7	0.417	30.58	47.51	-16.93	20.60	9.62	0.06	0.30	Average
8	0.417	43.09	57.51	-14.42	33.11	9.62	0.06	0.30	QP
9	1.898	27.54	46.00	-18.46	17.42	9.63	0.13	0.36	Average
10	1.898	37.37	56.00	-18.63	27.25	9.63	0.13	0.36	QP
11	8.869	24.25	50.00	-25.75	13.79	9.68	0.34	0.44	Average
12	8.869	29.62	60.00	-30.38	19.16	9.68	0.34	0.44	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 63%

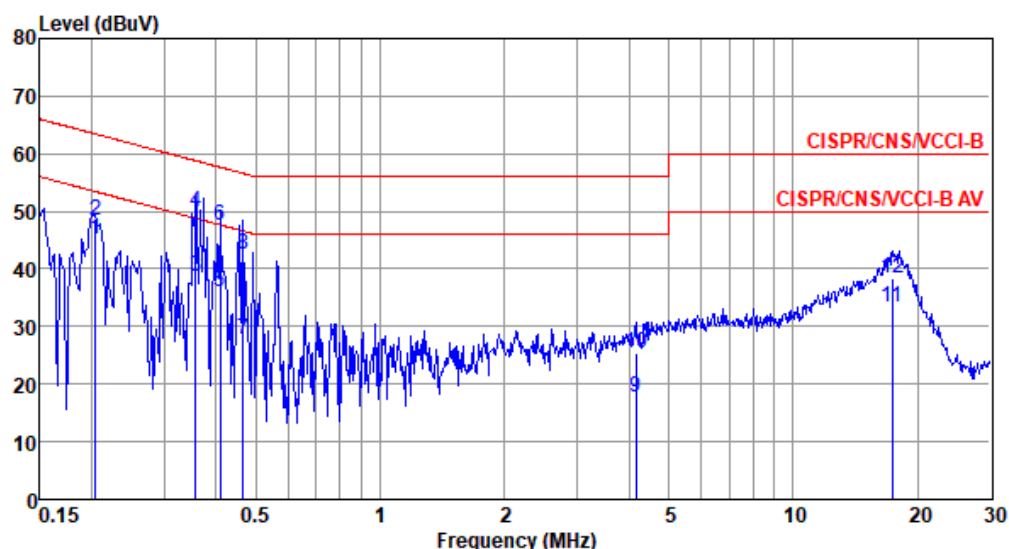

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.204	45.28	53.45	-8.17	35.40	9.63	0.06	0.19	Average
2	0.204	48.37	63.45	-15.08	38.49	9.63	0.06	0.19	QP
3	0.358	38.53	48.78	-10.25	28.57	9.62	0.06	0.28	Average
4	0.358	49.90	58.78	-8.88	39.94	9.62	0.06	0.28	QP
5	0.410	36.13	47.64	-11.51	26.15	9.62	0.06	0.30	Average
6	0.410	47.63	57.64	-10.01	37.65	9.62	0.06	0.30	QP
7	0.466	27.86	46.58	-18.72	17.86	9.62	0.07	0.31	Average
8	0.466	42.58	56.58	-14.00	32.58	9.62	0.07	0.31	QP
9	4.158	17.65	46.00	-28.35	7.39	9.65	0.19	0.42	Average
10	4.158	25.52	56.00	-30.48	15.26	9.65	0.19	0.42	QP
11	17.383	33.34	50.00	-16.66	22.57	9.78	0.48	0.51	Average
12	17.383	38.25	60.00	-21.75	27.48	9.78	0.48	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	ax HE20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao

Temperature: 22°C

Humidity: 63%

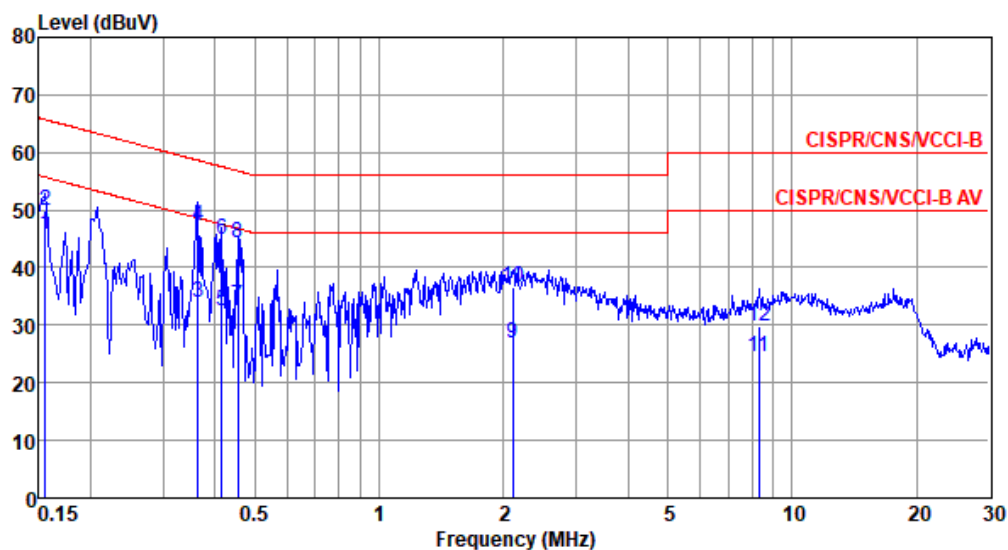

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.156	45.62	55.69	-10.07	35.75	9.63	0.06	0.18	Average
2	0.156	49.79	65.69	-15.90	39.92	9.63	0.06	0.18	QP
3	0.363	34.06	48.65	-14.59	24.10	9.62	0.06	0.28	Average
4	0.363	47.27	58.65	-11.38	37.31	9.62	0.06	0.28	QP
5	0.415	32.60	47.55	-14.95	22.62	9.62	0.06	0.30	Average
6	0.415	44.76	57.55	-12.79	34.78	9.62	0.06	0.30	QP
7	0.454	33.41	46.80	-13.39	23.42	9.62	0.07	0.30	Average
8	0.454	44.17	56.80	-12.63	34.18	9.62	0.07	0.30	QP
9	2.110	26.75	46.00	-19.25	16.63	9.63	0.13	0.36	Average
10	2.110	36.56	56.00	-19.44	26.44	9.63	0.13	0.36	QP
11	8.323	24.37	50.00	-25.63	13.93	9.68	0.32	0.44	Average
12	8.323	29.85	60.00	-30.15	19.41	9.68	0.32	0.44	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation Mode	ax HE20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 22°C

Humidity: 63%

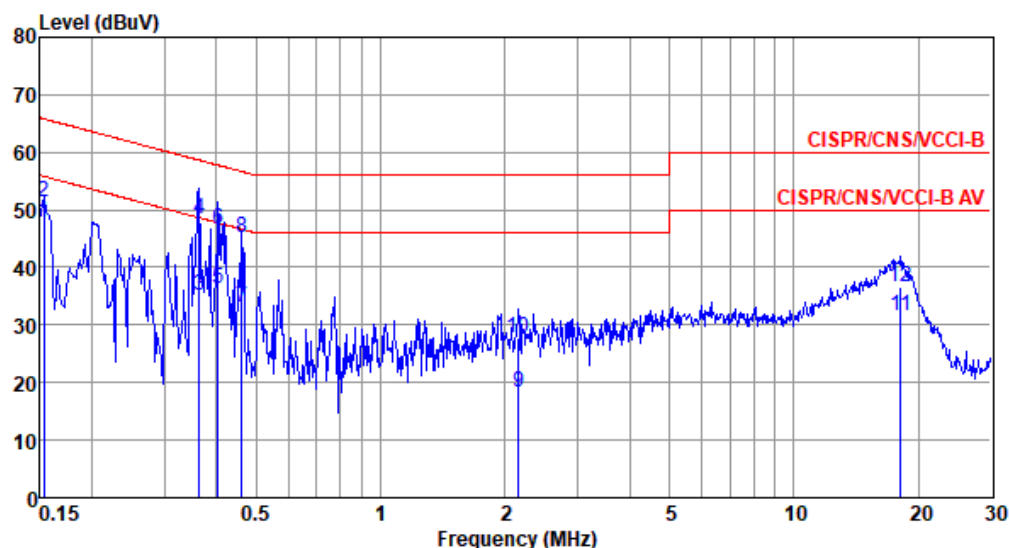

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.153	47.90	55.82	-7.92	38.03	9.63	0.06	0.18	Average
2	0.153	51.26	65.82	-14.56	41.39	9.63	0.06	0.18	QP
3	0.363	35.15	48.65	-13.50	25.19	9.62	0.06	0.28	Average
4	0.363	48.47	58.65	-10.18	38.51	9.62	0.06	0.28	QP
5	0.404	36.22	47.77	-11.55	26.24	9.62	0.06	0.30	Average
6	0.404	46.67	57.77	-11.10	36.69	9.62	0.06	0.30	QP
7	0.461	32.93	46.67	-13.74	22.94	9.62	0.07	0.30	Average
8	0.461	45.02	56.67	-11.65	35.03	9.62	0.07	0.30	QP
9	2.155	18.17	46.00	-27.83	8.02	9.64	0.14	0.37	Average
10	2.155	27.72	56.00	-28.28	17.57	9.64	0.14	0.37	QP
11	18.135	31.60	50.00	-18.40	20.81	9.79	0.49	0.51	Average
12	18.135	36.73	60.00	-23.27	25.94	9.79	0.49	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).