





Modulation	ax HE20	Test Freq. (MHz)	6895																																																																							
Polarization	Vertical																																																																									
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13790.00</td><td>44.89</td><td>68.20</td><td>-23.31</td><td>38.62</td><td>6.27</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>2</td><td>13790.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>52.10</td><td>6.27</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>3</td><td>20685.00</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>39.23</td><td>2.22</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>20685.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>51.39</td><td>2.22</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>27580.00</td><td>42.84</td><td>68.20</td><td>-25.36</td><td>34.81</td><td>8.03</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>27580.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>48.91</td><td>8.03</td><td>Peak</td><td>100</td><td>122</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13790.00	44.89	68.20	-23.31	38.62	6.27	Average	100	68	2	13790.00	58.37	88.20	-29.83	52.10	6.27	Peak	100	68	3	20685.00	41.45	54.00	-12.55	39.23	2.22	Average	100	109	4	20685.00	53.61	74.00	-20.39	51.39	2.22	Peak	100	109	5	27580.00	42.84	68.20	-25.36	34.81	8.03	Average	100	122	6	27580.00	56.94	88.20	-31.26	48.91	8.03	Peak	100	122			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	13790.00	44.89	68.20	-23.31	38.62	6.27	Average	100	68																																																																	
2	13790.00	58.37	88.20	-29.83	52.10	6.27	Peak	100	68																																																																	
3	20685.00	41.45	54.00	-12.55	39.23	2.22	Average	100	109																																																																	
4	20685.00	53.61	74.00	-20.39	51.39	2.22	Peak	100	109																																																																	
5	27580.00	42.84	68.20	-25.36	34.81	8.03	Average	100	122																																																																	
6	27580.00	56.94	88.20	-31.26	48.91	8.03	Peak	100	122																																																																	
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																										




Modulation	ax HE20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14030.00</td><td>45.78</td><td>68.20</td><td>-22.42</td><td>38.98</td><td>6.80</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>2</td><td>14030.00</td><td>58.71</td><td>88.20</td><td>-29.49</td><td>51.91</td><td>6.80</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>3</td><td>21045.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>38.80</td><td>3.02</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>4</td><td>21045.00</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>50.89</td><td>3.02</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>5</td><td>28060.00</td><td>44.68</td><td>68.20</td><td>-23.52</td><td>36.12</td><td>8.56</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>6</td><td>28060.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>49.93</td><td>8.56</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	45.78	68.20	-22.42	38.98	6.80	Average	100	112	2	14030.00	58.71	88.20	-29.49	51.91	6.80	Peak	100	112	3	21045.00	41.82	54.00	-12.18	38.80	3.02	Average	100	54	4	21045.00	53.91	74.00	-20.09	50.89	3.02	Peak	100	54	5	28060.00	44.68	68.20	-23.52	36.12	8.56	Average	100	45	6	28060.00	58.49	88.20	-29.71	49.93	8.56	Peak	100	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	45.78	68.20	-22.42	38.98	6.80	Average	100	112																																																																
2	14030.00	58.71	88.20	-29.49	51.91	6.80	Peak	100	112																																																																
3	21045.00	41.82	54.00	-12.18	38.80	3.02	Average	100	54																																																																
4	21045.00	53.91	74.00	-20.09	50.89	3.02	Peak	100	54																																																																
5	28060.00	44.68	68.20	-23.52	36.12	8.56	Average	100	45																																																																
6	28060.00	58.49	88.20	-29.71	49.93	8.56	Peak	100	45																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

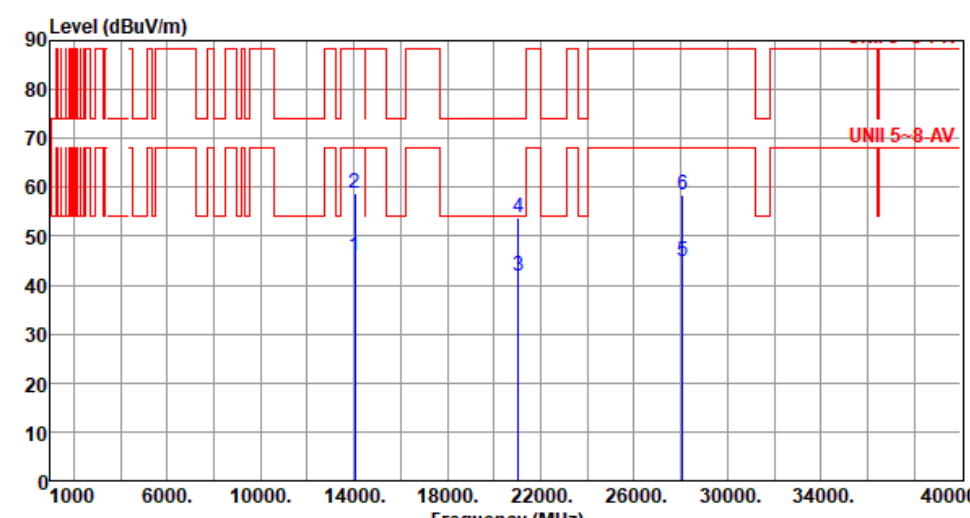

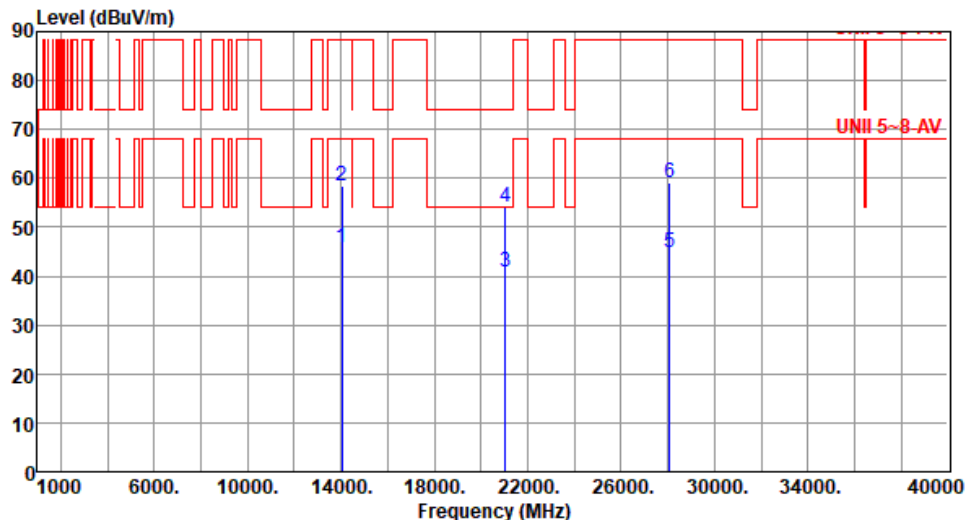Modulation	ax HE20	Test Freq. (MHz)	7015						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	14030.00	45.89	68.20	-22.31	39.09	6.80	Average	100	69
2	14030.00	58.57	88.20	-29.63	51.77	6.80	Peak	100	69
3	21045.00	40.82	54.00	-13.18	37.80	3.02	Average	100	108
4	21045.00	54.18	74.00	-19.82	51.16	3.02	Peak	100	108
5	28060.00	44.75	68.20	-23.45	36.19	8.56	Average	100	61
6	28060.00	58.96	88.20	-29.24	50.40	8.56	Peak	100	61
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

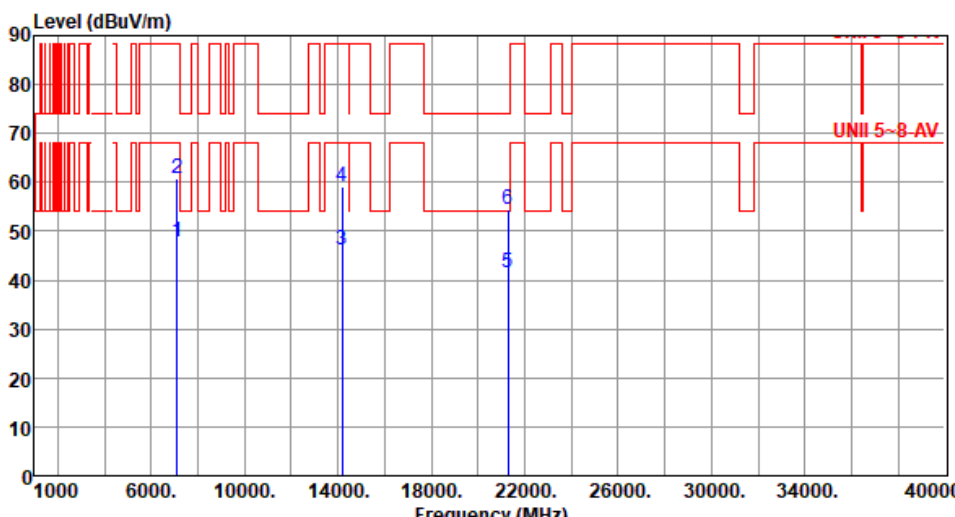


Modulation	ax HE20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.84</td><td>68.20</td><td>-20.36</td><td>43.06</td><td>4.78</td><td>Average</td><td>155</td><td>12</td></tr><tr><td>2</td><td>7125.00</td><td>60.92</td><td>88.20</td><td>-27.28</td><td>56.14</td><td>4.78</td><td>Peak</td><td>155</td><td>12</td></tr><tr><td>3</td><td>14190.00</td><td>46.22</td><td>68.20</td><td>-21.98</td><td>39.07</td><td>7.15</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>4</td><td>14190.00</td><td>58.95</td><td>88.20</td><td>-29.25</td><td>51.80</td><td>7.15</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>5</td><td>21285.00</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>38.13</td><td>3.33</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>6</td><td>21285.00</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>51.05</td><td>3.33</td><td>Peak</td><td>100</td><td>78</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.84	68.20	-20.36	43.06	4.78	Average	155	12	2	7125.00	60.92	88.20	-27.28	56.14	4.78	Peak	155	12	3	14190.00	46.22	68.20	-21.98	39.07	7.15	Average	100	85	4	14190.00	58.95	88.20	-29.25	51.80	7.15	Peak	100	85	5	21285.00	41.46	54.00	-12.54	38.13	3.33	Average	100	78	6	21285.00	54.38	74.00	-19.62	51.05	3.33	Peak	100	78
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.84	68.20	-20.36	43.06	4.78	Average	155	12																																																																
2	7125.00	60.92	88.20	-27.28	56.14	4.78	Peak	155	12																																																																
3	14190.00	46.22	68.20	-21.98	39.07	7.15	Average	100	85																																																																
4	14190.00	58.95	88.20	-29.25	51.80	7.15	Peak	100	85																																																																
5	21285.00	41.46	54.00	-12.54	38.13	3.33	Average	100	78																																																																
6	21285.00	54.38	74.00	-19.62	51.05	3.33	Peak	100	78																																																																




Modulation	ax HE20	Test Freq. (MHz)	7095
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 17125.0047.8268.20-20.3843.044.78Average13342 27125.0061.7588.20-26.4556.974.78Peak13342 314190.0046.0268.20-22.1838.877.15Average10098 414190.0058.8788.20-29.3351.727.15Peak10098 521285.0041.6554.00-12.3538.323.33Average100114 621285.0054.7374.00-19.2751.403.33Peak100114 Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			

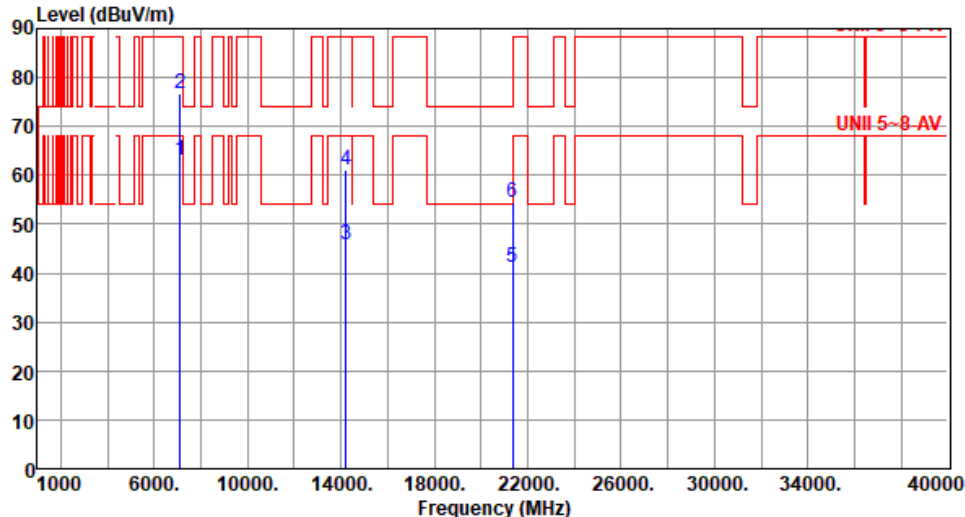

Modulation	ax HE20	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>63.08</td><td>68.20</td><td>-5.12</td><td>58.30</td><td>4.78</td><td>Average</td><td>159</td><td>16</td></tr><tr><td>2</td><td>7125.00</td><td>76.68</td><td>88.20</td><td>-11.52</td><td>71.90</td><td>4.78</td><td>Peak</td><td>159</td><td>16</td></tr><tr><td>3</td><td>14230.00</td><td>45.88</td><td>68.20</td><td>-22.32</td><td>38.70</td><td>7.18</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>4</td><td>14230.00</td><td>61.27</td><td>88.20</td><td>-26.93</td><td>54.09</td><td>7.18</td><td>Peak</td><td>100</td><td>97</td></tr><tr><td>5</td><td>21345.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>37.92</td><td>3.40</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>21345.00</td><td>54.37</td><td>74.00</td><td>-19.63</td><td>50.97</td><td>3.40</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	63.08	68.20	-5.12	58.30	4.78	Average	159	16	2	7125.00	76.68	88.20	-11.52	71.90	4.78	Peak	159	16	3	14230.00	45.88	68.20	-22.32	38.70	7.18	Average	100	97	4	14230.00	61.27	88.20	-26.93	54.09	7.18	Peak	100	97	5	21345.00	41.32	54.00	-12.68	37.92	3.40	Average	100	155	6	21345.00	54.37	74.00	-19.63	50.97	3.40	Peak	100	155
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	63.08	68.20	-5.12	58.30	4.78	Average	159	16																																																																
2	7125.00	76.68	88.20	-11.52	71.90	4.78	Peak	159	16																																																																
3	14230.00	45.88	68.20	-22.32	38.70	7.18	Average	100	97																																																																
4	14230.00	61.27	88.20	-26.93	54.09	7.18	Peak	100	97																																																																
5	21345.00	41.32	54.00	-12.68	37.92	3.40	Average	100	155																																																																
6	21345.00	54.37	74.00	-19.63	50.97	3.40	Peak	100	155																																																																

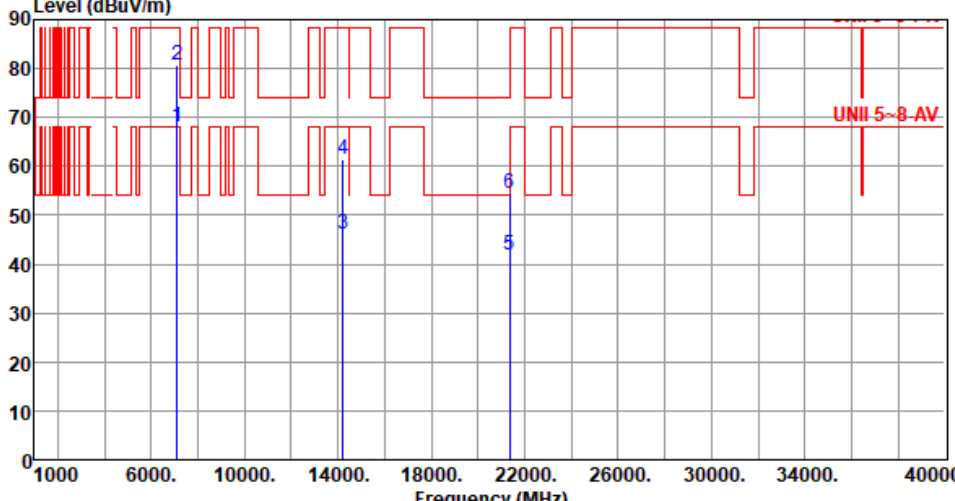

Modulation	ax HE20	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz)																																																																									
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>68.05</td><td>68.20</td><td>-0.15</td><td>63.27</td><td>4.78</td><td>Average</td><td>146</td><td>335</td></tr><tr><td>2</td><td>7125.00</td><td>80.67</td><td>88.20</td><td>-7.53</td><td>75.89</td><td>4.78</td><td>Peak</td><td>146</td><td>335</td></tr><tr><td>3</td><td>14230.00</td><td>46.15</td><td>68.20</td><td>-22.05</td><td>38.97</td><td>7.18</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>4</td><td>14230.00</td><td>61.43</td><td>88.20</td><td>-26.77</td><td>54.25</td><td>7.18</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>5</td><td>21345.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>38.32</td><td>3.40</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>6</td><td>21345.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>51.06</td><td>3.40</td><td>Peak</td><td>100</td><td>101</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	68.05	68.20	-0.15	63.27	4.78	Average	146	335	2	7125.00	80.67	88.20	-7.53	75.89	4.78	Peak	146	335	3	14230.00	46.15	68.20	-22.05	38.97	7.18	Average	100	122	4	14230.00	61.43	88.20	-26.77	54.25	7.18	Peak	100	122	5	21345.00	41.72	54.00	-12.28	38.32	3.40	Average	100	101	6	21345.00	54.46	74.00	-19.54	51.06	3.40	Peak	100	101
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	68.05	68.20	-0.15	63.27	4.78	Average	146	335																																																																
2	7125.00	80.67	88.20	-7.53	75.89	4.78	Peak	146	335																																																																
3	14230.00	46.15	68.20	-22.05	38.97	7.18	Average	100	122																																																																
4	14230.00	61.43	88.20	-26.77	54.25	7.18	Peak	100	122																																																																
5	21345.00	41.72	54.00	-12.28	38.32	3.40	Average	100	101																																																																
6	21345.00	54.46	74.00	-19.54	51.06	3.40	Peak	100	101																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Unwanted Emissions (Above 1GHz) for ax HE40


Modulation	ax HE40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.39	68.20	-24.81	42.20	1.19	Average	182	284
2	5925.00	55.15	88.20	-33.05	53.96	1.19	Peak	182	284
3	11930.00	42.15	54.00	-11.85	36.03	6.12	Average	100	144
4	11930.00	54.39	74.00	-19.61	48.27	6.12	Peak	100	144
5	17895.00	41.29	54.00	-12.71	31.22	10.07	Average	100	156
6	17895.00	54.89	74.00	-19.11	44.82	10.07	Peak	100	156

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	ax HE40	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.84</td><td>68.20</td><td>-23.36</td><td>43.65</td><td>1.19</td><td>Average</td><td>271</td><td>328</td></tr><tr><td>2</td><td>5925.00</td><td>56.75</td><td>88.20</td><td>-31.45</td><td>55.56</td><td>1.19</td><td>Peak</td><td>271</td><td>328</td></tr><tr><td>3</td><td>11930.00</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>36.33</td><td>6.12</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>4</td><td>11930.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>48.55</td><td>6.12</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>5</td><td>17895.00</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>31.42</td><td>10.07</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>6</td><td>17895.00</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>44.89</td><td>10.07</td><td>Peak</td><td>100</td><td>208</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.84	68.20	-23.36	43.65	1.19	Average	271	328	2	5925.00	56.75	88.20	-31.45	55.56	1.19	Peak	271	328	3	11930.00	42.45	54.00	-11.55	36.33	6.12	Average	100	94	4	11930.00	54.67	74.00	-19.33	48.55	6.12	Peak	100	94	5	17895.00	41.49	54.00	-12.51	31.42	10.07	Average	100	208	6	17895.00	54.96	74.00	-19.04	44.89	10.07	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.84	68.20	-23.36	43.65	1.19	Average	271	328																																																																
2	5925.00	56.75	88.20	-31.45	55.56	1.19	Peak	271	328																																																																
3	11930.00	42.45	54.00	-11.55	36.33	6.12	Average	100	94																																																																
4	11930.00	54.67	74.00	-19.33	48.55	6.12	Peak	100	94																																																																
5	17895.00	41.49	54.00	-12.51	31.42	10.07	Average	100	208																																																																
6	17895.00	54.96	74.00	-19.04	44.89	10.07	Peak	100	208																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

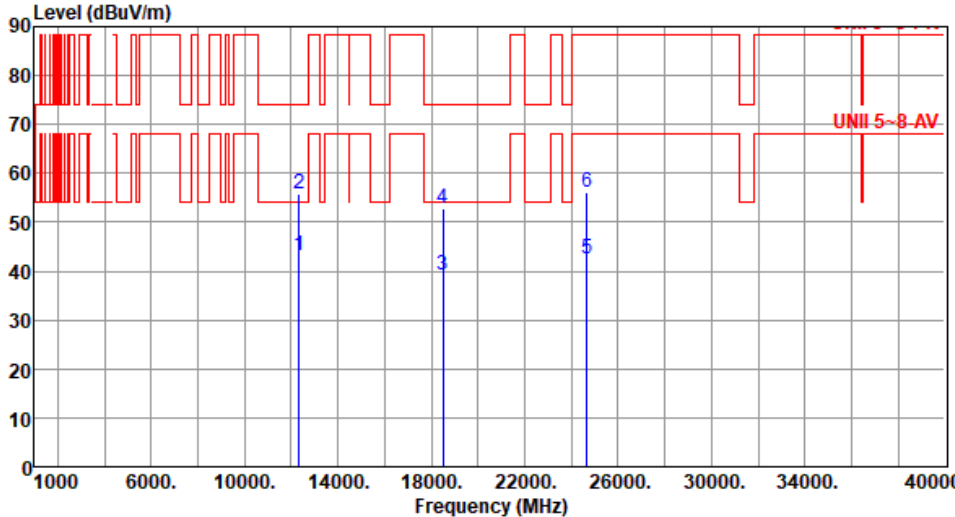


Modulation	ax HE40	Test Freq. (MHz)	6165																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12330.00</td><td>43.18</td><td>54.00</td><td>-10.82</td><td>36.99</td><td>6.19</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>2</td><td>12330.00</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>49.73</td><td>6.19</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>3</td><td>18495.00</td><td>39.24</td><td>54.00</td><td>-14.76</td><td>38.66</td><td>0.58</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>18495.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>52.28</td><td>0.58</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>24660.00</td><td>42.45</td><td>68.20</td><td>-25.75</td><td>34.91</td><td>7.54</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>24660.00</td><td>56.02</td><td>88.20</td><td>-32.18</td><td>48.48</td><td>7.54</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12330.00	43.18	54.00	-10.82	36.99	6.19	Average	100	56	2	12330.00	55.92	74.00	-18.08	49.73	6.19	Peak	100	56	3	18495.00	39.24	54.00	-14.76	38.66	0.58	Average	100	66	4	18495.00	52.86	74.00	-21.14	52.28	0.58	Peak	100	66	5	24660.00	42.45	68.20	-25.75	34.91	7.54	Average	100	105	6	24660.00	56.02	88.20	-32.18	48.48	7.54	Peak	100	105
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12330.00	43.18	54.00	-10.82	36.99	6.19	Average	100	56																																																																
2	12330.00	55.92	74.00	-18.08	49.73	6.19	Peak	100	56																																																																
3	18495.00	39.24	54.00	-14.76	38.66	0.58	Average	100	66																																																																
4	18495.00	52.86	74.00	-21.14	52.28	0.58	Peak	100	66																																																																
5	24660.00	42.45	68.20	-25.75	34.91	7.54	Average	100	105																																																																
6	24660.00	56.02	88.20	-32.18	48.48	7.54	Peak	100	105																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

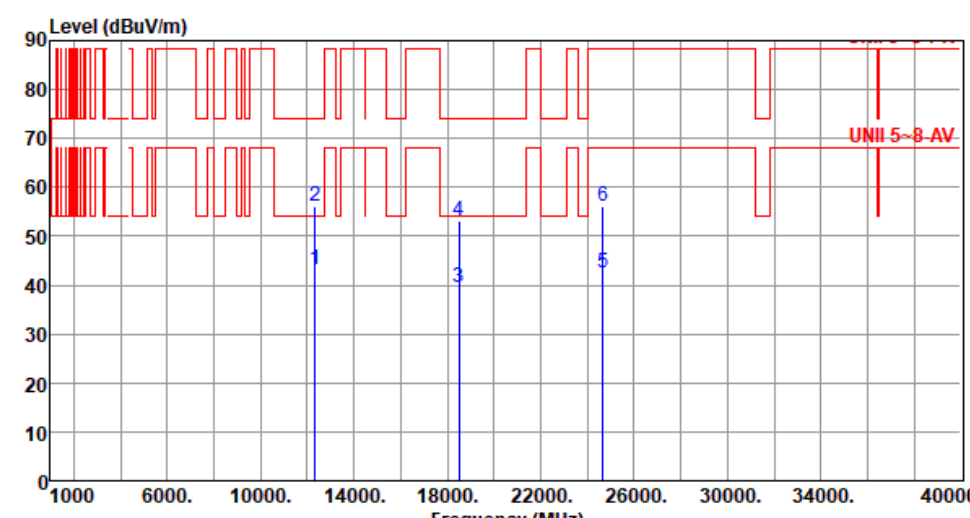


Modulation	ax HE40	Test Freq. (MHz)	6165						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	43.25	54.00	-10.75	37.06	6.19	Average	100	67
2	12330.00	56.11	74.00	-17.89	49.92	6.19	Peak	100	67
3	18495.00	39.45	54.00	-14.55	38.87	0.58	Average	100	85
4	18495.00	53.08	74.00	-20.92	52.50	0.58	Peak	100	85
5	24660.00	42.67	68.20	-25.53	35.13	7.54	Average	100	118
6	24660.00	56.29	88.20	-31.91	48.75	7.54	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

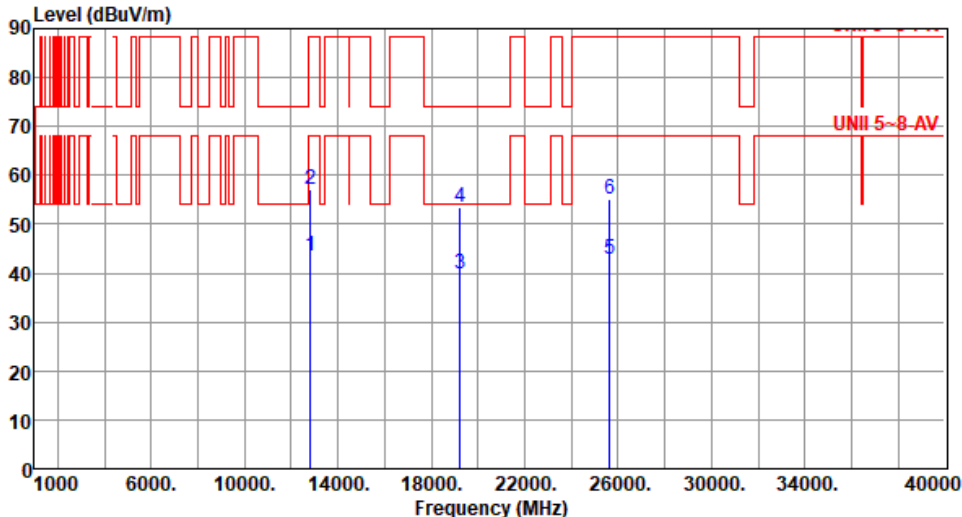


Modulation	ax HE40		Test Freq. (MHz)		6405																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12810.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>37.05</td><td>6.30</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>2</td><td>12810.00</td><td>57.15</td><td>88.20</td><td>-31.05</td><td>50.85</td><td>6.30</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>3</td><td>19215.00</td><td>39.73</td><td>54.00</td><td>-14.27</td><td>38.85</td><td>0.88</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>4</td><td>19215.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>52.50</td><td>0.88</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>5</td><td>25620.00</td><td>42.95</td><td>68.20</td><td>-25.25</td><td>35.54</td><td>7.41</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>6</td><td>25620.00</td><td>54.99</td><td>88.20</td><td>-33.21</td><td>47.58</td><td>7.41</td><td>Peak</td><td>100</td><td>53</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12810.00	43.35	68.20	-24.85	37.05	6.30	Average	100	104	2	12810.00	57.15	88.20	-31.05	50.85	6.30	Peak	100	104	3	19215.00	39.73	54.00	-14.27	38.85	0.88	Average	100	29	4	19215.00	53.38	74.00	-20.62	52.50	0.88	Peak	100	29	5	25620.00	42.95	68.20	-25.25	35.54	7.41	Average	100	53	6	25620.00	54.99	88.20	-33.21	47.58	7.41	Peak	100	53
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12810.00	43.35	68.20	-24.85	37.05	6.30	Average	100	104																																																																																										
2	12810.00	57.15	88.20	-31.05	50.85	6.30	Peak	100	104																																																																																										
3	19215.00	39.73	54.00	-14.27	38.85	0.88	Average	100	29																																																																																										
4	19215.00	53.38	74.00	-20.62	52.50	0.88	Peak	100	29																																																																																										
5	25620.00	42.95	68.20	-25.25	35.54	7.41	Average	100	53																																																																																										
6	25620.00	54.99	88.20	-33.21	47.58	7.41	Peak	100	53																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

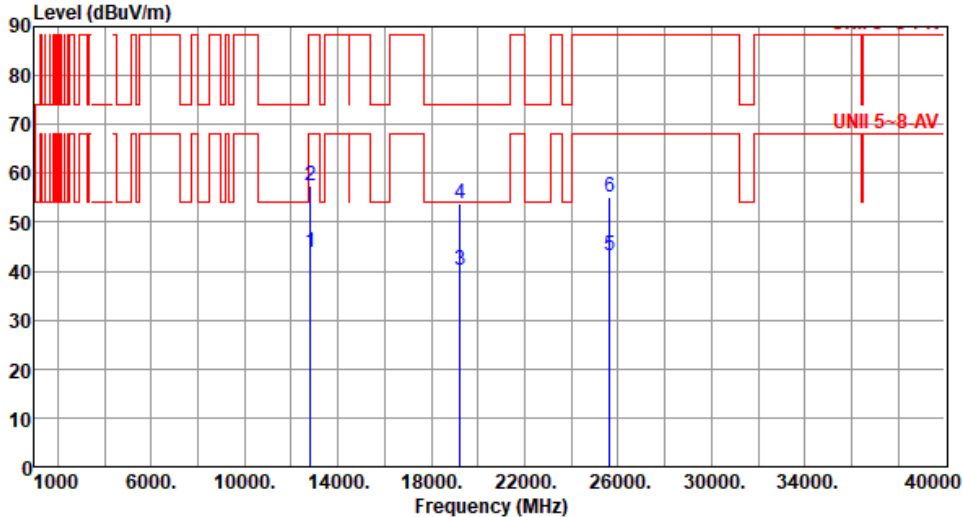


Modulation	ax HE40	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12810.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>37.52</td><td>6.30</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>12810.00</td><td>57.39</td><td>88.20</td><td>-30.81</td><td>51.09</td><td>6.30</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>19215.00</td><td>40.29</td><td>54.00</td><td>-13.71</td><td>39.41</td><td>0.88</td><td>Average</td><td>100</td><td>44</td></tr><tr><td>4</td><td>19215.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>52.83</td><td>0.88</td><td>Peak</td><td>100</td><td>44</td></tr><tr><td>5</td><td>25620.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>35.88</td><td>7.41</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>25620.00</td><td>55.23</td><td>88.20</td><td>-32.97</td><td>47.82</td><td>7.41</td><td>Peak</td><td>100</td><td>18</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	43.82	68.20	-24.38	37.52	6.30	Average	100	128	2	12810.00	57.39	88.20	-30.81	51.09	6.30	Peak	100	128	3	19215.00	40.29	54.00	-13.71	39.41	0.88	Average	100	44	4	19215.00	53.71	74.00	-20.29	52.83	0.88	Peak	100	44	5	25620.00	43.29	68.20	-24.91	35.88	7.41	Average	100	18	6	25620.00	55.23	88.20	-32.97	47.82	7.41	Peak	100	18
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	43.82	68.20	-24.38	37.52	6.30	Average	100	128																																																																
2	12810.00	57.39	88.20	-30.81	51.09	6.30	Peak	100	128																																																																
3	19215.00	40.29	54.00	-13.71	39.41	0.88	Average	100	44																																																																
4	19215.00	53.71	74.00	-20.29	52.83	0.88	Peak	100	44																																																																
5	25620.00	43.29	68.20	-24.91	35.88	7.41	Average	100	18																																																																
6	25620.00	55.23	88.20	-32.97	47.82	7.41	Peak	100	18																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

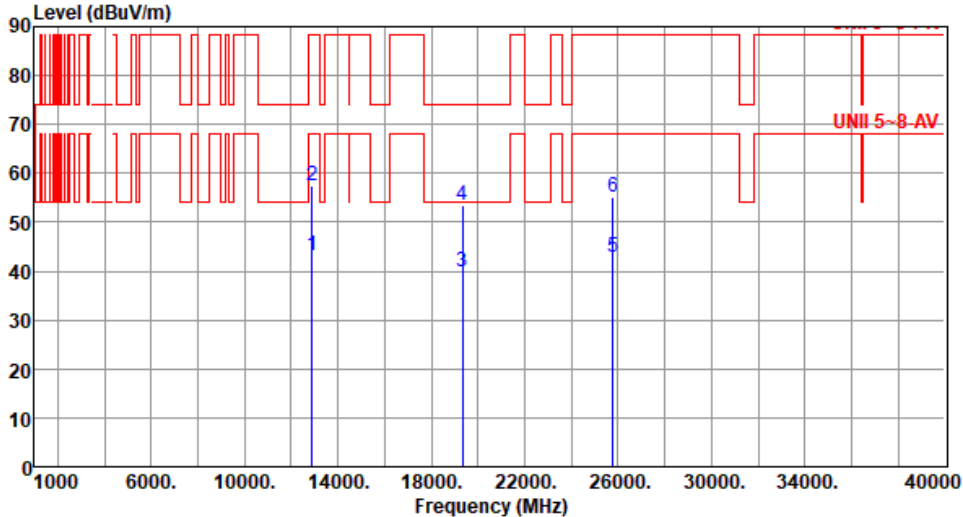


Modulation	ax HE40	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66			
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg 112890.0043.3168.20-24.8936.896.42Average10092 212890.0057.3388.20-30.8750.916.42Peak10092 319335.0039.7454.00-14.2638.800.94Average100129 419335.0053.3974.00-20.6152.450.94Peak100129 525780.0042.8968.20-25.3135.507.39Average10081 625780.0054.9788.20-33.2347.587.39Peak10081 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

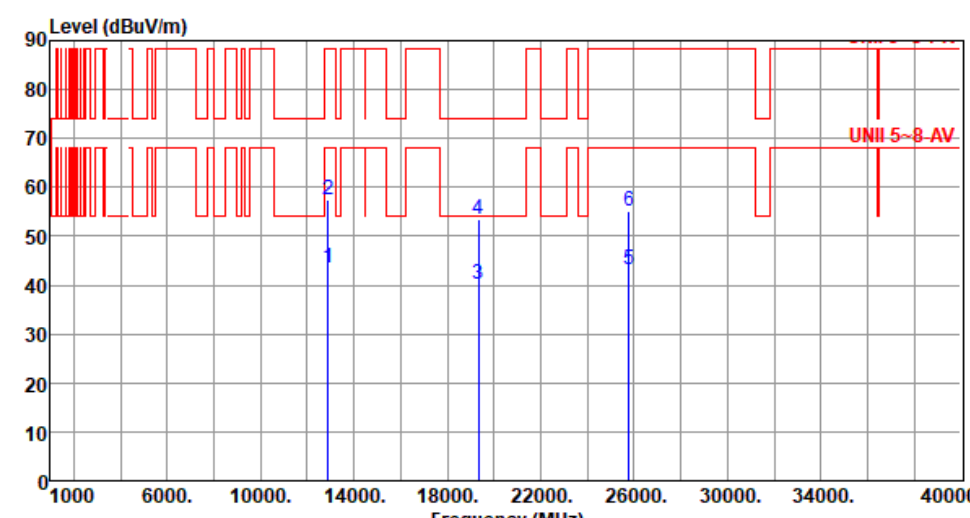

Modulation	ax HE40	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12890.00</td><td>43.49</td><td>68.20</td><td>-24.71</td><td>37.07</td><td>6.42</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>2</td><td>12890.00</td><td>57.46</td><td>88.20</td><td>-30.74</td><td>51.04</td><td>6.42</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>3</td><td>19335.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>39.08</td><td>0.94</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>4</td><td>19335.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>52.64</td><td>0.94</td><td>Peak</td><td>100</td><td>75</td></tr><tr><td>5</td><td>25780.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>35.93</td><td>7.39</td><td>Average</td><td>100</td><td>191</td></tr><tr><td>6</td><td>25780.00</td><td>55.29</td><td>88.20</td><td>-32.91</td><td>47.90</td><td>7.39</td><td>Peak</td><td>100</td><td>191</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	43.49	68.20	-24.71	37.07	6.42	Average	100	82	2	12890.00	57.46	88.20	-30.74	51.04	6.42	Peak	100	82	3	19335.00	40.02	54.00	-13.98	39.08	0.94	Average	100	75	4	19335.00	53.58	74.00	-20.42	52.64	0.94	Peak	100	75	5	25780.00	43.32	68.20	-24.88	35.93	7.39	Average	100	191	6	25780.00	55.29	88.20	-32.91	47.90	7.39	Peak	100	191
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	43.49	68.20	-24.71	37.07	6.42	Average	100	82																																																																
2	12890.00	57.46	88.20	-30.74	51.04	6.42	Peak	100	82																																																																
3	19335.00	40.02	54.00	-13.98	39.08	0.94	Average	100	75																																																																
4	19335.00	53.58	74.00	-20.42	52.64	0.94	Peak	100	75																																																																
5	25780.00	43.32	68.20	-24.88	35.93	7.39	Average	100	191																																																																
6	25780.00	55.29	88.20	-32.91	47.90	7.39	Peak	100	191																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

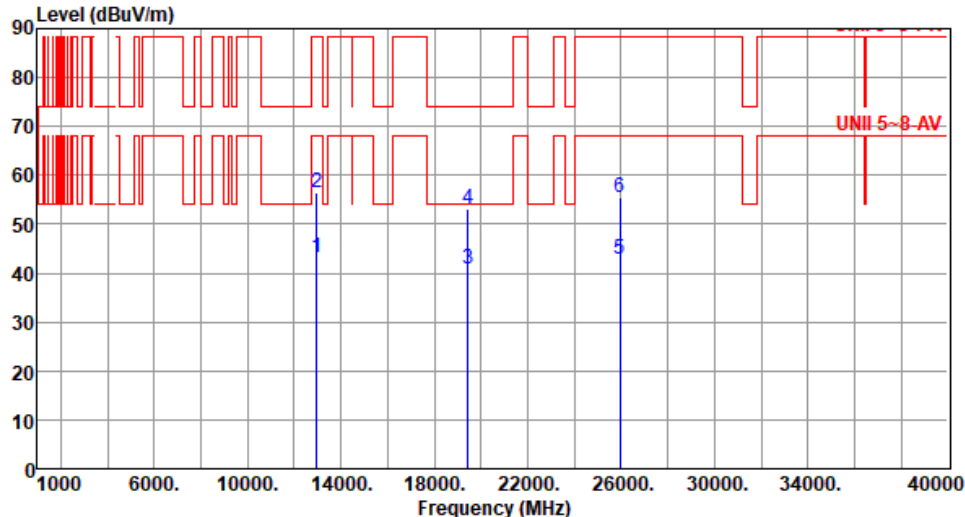


Modulation	ax HE40	Test Freq. (MHz)	6485						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12970.00	43.03	68.20	-25.17	36.56	6.47	Average	100	113
2	12970.00	56.31	88.20	-31.89	49.84	6.47	Peak	100	113
3	19455.00	40.89	54.00	-13.11	39.83	1.06	Average	100	177
4	19455.00	53.13	74.00	-20.87	52.07	1.06	Peak	100	177
5	25940.00	42.88	68.20	-25.32	35.44	7.44	Average	100	142
6	25940.00	55.49	88.20	-32.71	48.05	7.44	Peak	100	142
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	ax HE40	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12970.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>36.80</td><td>6.47</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>2</td><td>12970.00</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>50.02</td><td>6.47</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>3</td><td>19455.00</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>40.22</td><td>1.06</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>4</td><td>19455.00</td><td>53.47</td><td>74.00</td><td>-20.53</td><td>52.41</td><td>1.06</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>5</td><td>25940.00</td><td>43.14</td><td>68.20</td><td>-25.06</td><td>35.70</td><td>7.44</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>25940.00</td><td>55.75</td><td>88.20</td><td>-32.45</td><td>48.31</td><td>7.44</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12970.00	43.27	68.20	-24.93	36.80	6.47	Average	100	101	2	12970.00	56.49	88.20	-31.71	50.02	6.47	Peak	100	101	3	19455.00	41.28	54.00	-12.72	40.22	1.06	Average	100	205	4	19455.00	53.47	74.00	-20.53	52.41	1.06	Peak	100	205	5	25940.00	43.14	68.20	-25.06	35.70	7.44	Average	100	155	6	25940.00	55.75	88.20	-32.45	48.31	7.44	Peak	100	155
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12970.00	43.27	68.20	-24.93	36.80	6.47	Average	100	101																																																																
2	12970.00	56.49	88.20	-31.71	50.02	6.47	Peak	100	101																																																																
3	19455.00	41.28	54.00	-12.72	40.22	1.06	Average	100	205																																																																
4	19455.00	53.47	74.00	-20.53	52.41	1.06	Peak	100	205																																																																
5	25940.00	43.14	68.20	-25.06	35.70	7.44	Average	100	155																																																																
6	25940.00	55.75	88.20	-32.45	48.31	7.44	Peak	100	155																																																																

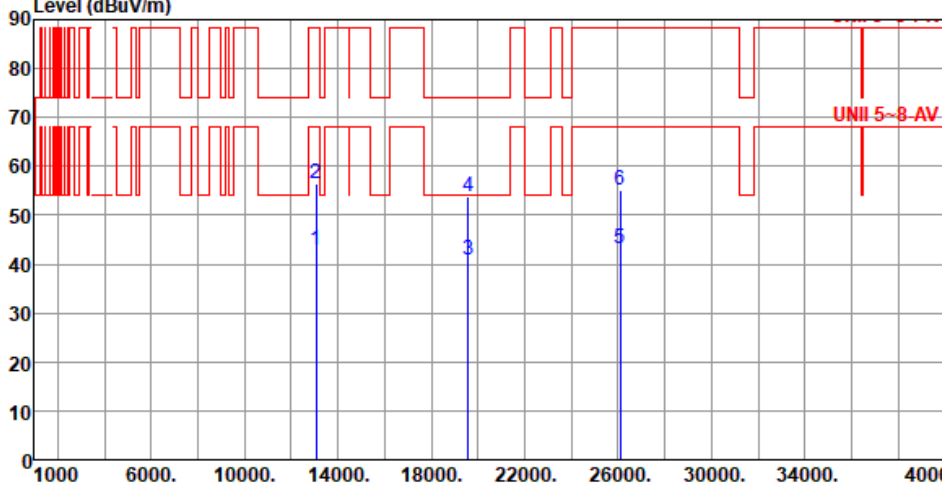


Modulation	ax HE40	Test Freq. (MHz)	6525																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>42.97</td><td>68.20</td><td>-25.23</td><td>36.75</td><td>6.22</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>13050.00</td><td>56.42</td><td>88.20</td><td>-31.78</td><td>50.20</td><td>6.22</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>19575.00</td><td>40.75</td><td>54.00</td><td>-13.25</td><td>39.62</td><td>1.13</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>4</td><td>19575.00</td><td>53.91</td><td>74.00</td><td>-20.09</td><td>52.78</td><td>1.13</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>5</td><td>26100.00</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>35.50</td><td>7.53</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>6</td><td>26100.00</td><td>55.22</td><td>88.20</td><td>-32.98</td><td>47.69</td><td>7.53</td><td>Peak</td><td>100</td><td>128</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	42.97	68.20	-25.23	36.75	6.22	Average	100	61	2	13050.00	56.42	88.20	-31.78	50.20	6.22	Peak	100	61	3	19575.00	40.75	54.00	-13.25	39.62	1.13	Average	100	77	4	19575.00	53.91	74.00	-20.09	52.78	1.13	Peak	100	77	5	26100.00	43.03	68.20	-25.17	35.50	7.53	Average	100	128	6	26100.00	55.22	88.20	-32.98	47.69	7.53	Peak	100	128
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	42.97	68.20	-25.23	36.75	6.22	Average	100	61																																																																
2	13050.00	56.42	88.20	-31.78	50.20	6.22	Peak	100	61																																																																
3	19575.00	40.75	54.00	-13.25	39.62	1.13	Average	100	77																																																																
4	19575.00	53.91	74.00	-20.09	52.78	1.13	Peak	100	77																																																																
5	26100.00	43.03	68.20	-25.17	35.50	7.53	Average	100	128																																																																
6	26100.00	55.22	88.20	-32.98	47.69	7.53	Peak	100	128																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

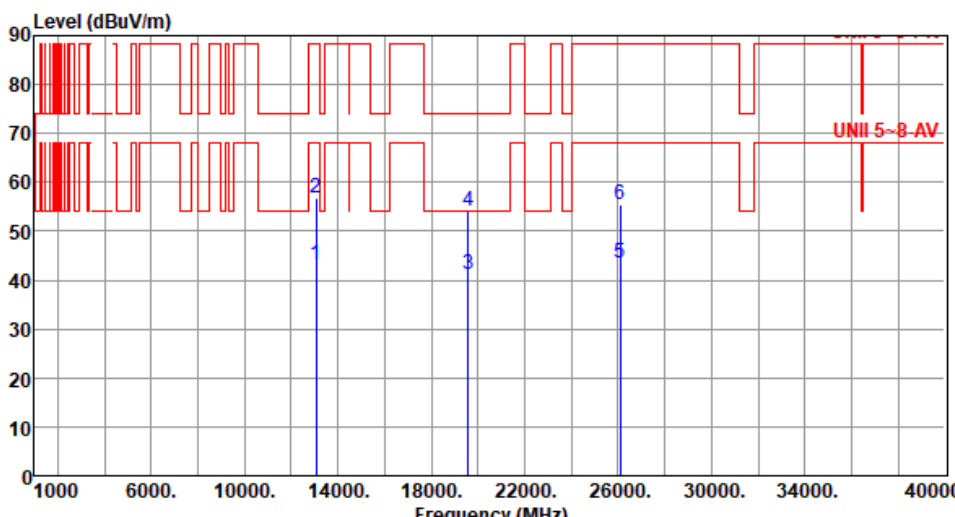


Modulation	ax HE40	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>37.01</td><td>6.22</td><td>Average</td><td>100</td><td>47</td></tr><tr><td>2</td><td>13050.00</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>50.49</td><td>6.22</td><td>Peak</td><td>100</td><td>47</td></tr><tr><td>3</td><td>19575.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>40.09</td><td>1.13</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>4</td><td>19575.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.14</td><td>1.13</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>5</td><td>26100.00</td><td>43.35</td><td>68.20</td><td>-24.85</td><td>35.82</td><td>7.53</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>6</td><td>26100.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>47.95</td><td>7.53</td><td>Peak</td><td>100</td><td>166</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	43.23	68.20	-24.97	37.01	6.22	Average	100	47	2	13050.00	56.71	88.20	-31.49	50.49	6.22	Peak	100	47	3	19575.00	41.22	54.00	-12.78	40.09	1.13	Average	100	94	4	19575.00	54.27	74.00	-19.73	53.14	1.13	Peak	100	94	5	26100.00	43.35	68.20	-24.85	35.82	7.53	Average	100	166	6	26100.00	55.48	88.20	-32.72	47.95	7.53	Peak	100	166
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	43.23	68.20	-24.97	37.01	6.22	Average	100	47																																																																
2	13050.00	56.71	88.20	-31.49	50.49	6.22	Peak	100	47																																																																
3	19575.00	41.22	54.00	-12.78	40.09	1.13	Average	100	94																																																																
4	19575.00	54.27	74.00	-19.73	53.14	1.13	Peak	100	94																																																																
5	26100.00	43.35	68.20	-24.85	35.82	7.53	Average	100	166																																																																
6	26100.00	55.48	88.20	-32.72	47.95	7.53	Peak	100	166																																																																

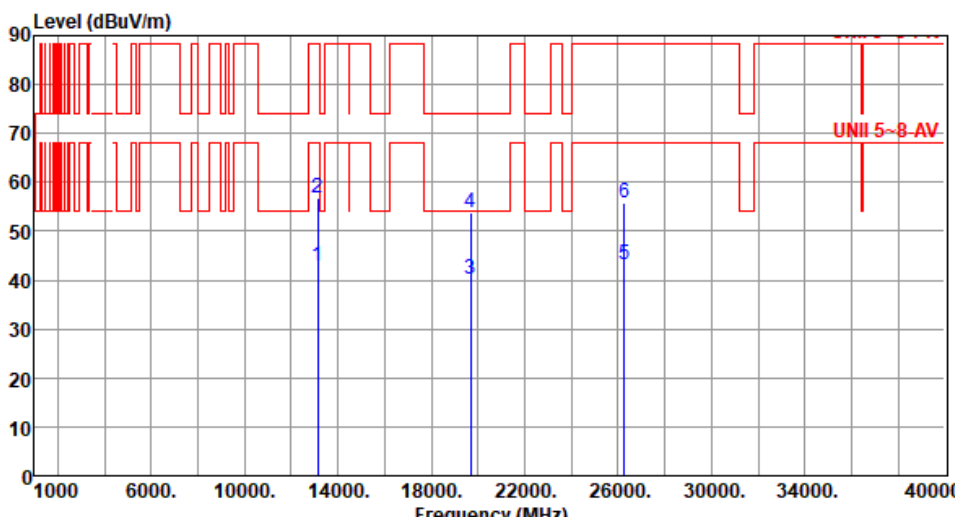

Modulation	ax HE40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>36.79</td><td>5.96</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>2</td><td>13130.00</td><td>56.88</td><td>88.20</td><td>-31.32</td><td>50.92</td><td>5.96</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>3</td><td>19695.00</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>38.84</td><td>1.18</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>4</td><td>19695.00</td><td>53.96</td><td>74.00</td><td>-20.04</td><td>52.78</td><td>1.18</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>5</td><td>26260.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>35.63</td><td>7.65</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>6</td><td>26260.00</td><td>55.79</td><td>88.20</td><td>-32.41</td><td>48.14</td><td>7.65</td><td>Peak</td><td>100</td><td>107</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.75	68.20	-25.45	36.79	5.96	Average	100	34	2	13130.00	56.88	88.20	-31.32	50.92	5.96	Peak	100	34	3	19695.00	40.02	54.00	-13.98	38.84	1.18	Average	100	71	4	19695.00	53.96	74.00	-20.04	52.78	1.18	Peak	100	71	5	26260.00	43.28	68.20	-24.92	35.63	7.65	Average	100	107	6	26260.00	55.79	88.20	-32.41	48.14	7.65	Peak	100	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.75	68.20	-25.45	36.79	5.96	Average	100	34																																																																
2	13130.00	56.88	88.20	-31.32	50.92	5.96	Peak	100	34																																																																
3	19695.00	40.02	54.00	-13.98	38.84	1.18	Average	100	71																																																																
4	19695.00	53.96	74.00	-20.04	52.78	1.18	Peak	100	71																																																																
5	26260.00	43.28	68.20	-24.92	35.63	7.65	Average	100	107																																																																
6	26260.00	55.79	88.20	-32.41	48.14	7.65	Peak	100	107																																																																

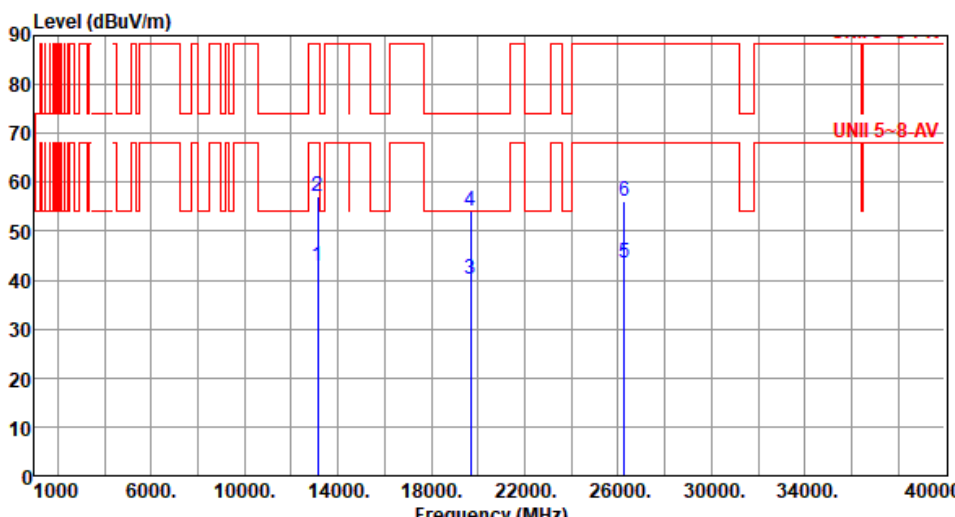

Modulation	ax HE40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.89</td><td>68.20</td><td>-25.31</td><td>36.93</td><td>5.96</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>2</td><td>13130.00</td><td>57.19</td><td>88.20</td><td>-31.01</td><td>51.23</td><td>5.96</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>3</td><td>19695.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>39.07</td><td>1.18</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>4</td><td>19695.00</td><td>54.14</td><td>74.00</td><td>-19.86</td><td>52.96</td><td>1.18</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>5</td><td>26260.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>35.96</td><td>7.65</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>26260.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>48.44</td><td>7.65</td><td>Peak</td><td>100</td><td>122</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.89	68.20	-25.31	36.93	5.96	Average	100	103	2	13130.00	57.19	88.20	-31.01	51.23	5.96	Peak	100	103	3	19695.00	40.25	54.00	-13.75	39.07	1.18	Average	100	58	4	19695.00	54.14	74.00	-19.86	52.96	1.18	Peak	100	58	5	26260.00	43.61	68.20	-24.59	35.96	7.65	Average	100	122	6	26260.00	56.09	88.20	-32.11	48.44	7.65	Peak	100	122
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.89	68.20	-25.31	36.93	5.96	Average	100	103																																																																
2	13130.00	57.19	88.20	-31.01	51.23	5.96	Peak	100	103																																																																
3	19695.00	40.25	54.00	-13.75	39.07	1.18	Average	100	58																																																																
4	19695.00	54.14	74.00	-19.86	52.96	1.18	Peak	100	58																																																																
5	26260.00	43.61	68.20	-24.59	35.96	7.65	Average	100	122																																																																
6	26260.00	56.09	88.20	-32.11	48.44	7.65	Peak	100	122																																																																



Modulation	ax HE40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13450.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>37.62</td><td>6.20</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>2</td><td>13450.00</td><td>58.79</td><td>88.20</td><td>-29.41</td><td>52.59</td><td>6.20</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>3</td><td>20175.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>38.94</td><td>1.52</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>4</td><td>20175.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>52.23</td><td>1.52</td><td>Peak</td><td>100</td><td>93</td></tr><tr><td>5</td><td>26900.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>35.35</td><td>8.03</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>6</td><td>26900.00</td><td>56.21</td><td>88.20</td><td>-31.99</td><td>48.18</td><td>8.03</td><td>Peak</td><td>100</td><td>166</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	43.82	68.20	-24.38	37.62	6.20	Average	100	40	2	13450.00	58.79	88.20	-29.41	52.59	6.20	Peak	100	40	3	20175.00	40.46	54.00	-13.54	38.94	1.52	Average	100	93	4	20175.00	53.75	74.00	-20.25	52.23	1.52	Peak	100	93	5	26900.00	43.38	68.20	-24.82	35.35	8.03	Average	100	166	6	26900.00	56.21	88.20	-31.99	48.18	8.03	Peak	100	166
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13450.00	43.82	68.20	-24.38	37.62	6.20	Average	100	40																																																																
2	13450.00	58.79	88.20	-29.41	52.59	6.20	Peak	100	40																																																																
3	20175.00	40.46	54.00	-13.54	38.94	1.52	Average	100	93																																																																
4	20175.00	53.75	74.00	-20.25	52.23	1.52	Peak	100	93																																																																
5	26900.00	43.38	68.20	-24.82	35.35	8.03	Average	100	166																																																																
6	26900.00	56.21	88.20	-31.99	48.18	8.03	Peak	100	166																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	ax HE40		Test Freq. (MHz)		6725																																																																										
Polarization	Vertical																																																																														
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13450.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>37.86</td><td>6.20</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>2</td><td>13450.00</td><td>59.11</td><td>88.20</td><td>-29.09</td><td>52.91</td><td>6.20</td><td>Peak</td><td>100</td><td>85</td></tr><tr><td>3</td><td>20175.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>39.40</td><td>1.52</td><td>Average</td><td>100</td><td>139</td></tr><tr><td>4</td><td>20175.00</td><td>54.17</td><td>74.00</td><td>-19.83</td><td>52.65</td><td>1.52</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>5</td><td>26900.00</td><td>43.71</td><td>68.20</td><td>-24.49</td><td>35.68</td><td>8.03</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>26900.00</td><td>56.63</td><td>88.20</td><td>-31.57</td><td>48.60</td><td>8.03</td><td>Peak</td><td>100</td><td>188</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13450.00	44.06	68.20	-24.14	37.86	6.20	Average	100	85	2	13450.00	59.11	88.20	-29.09	52.91	6.20	Peak	100	85	3	20175.00	40.92	54.00	-13.08	39.40	1.52	Average	100	139	4	20175.00	54.17	74.00	-19.83	52.65	1.52	Peak	100	139	5	26900.00	43.71	68.20	-24.49	35.68	8.03	Average	100	188	6	26900.00	56.63	88.20	-31.57	48.60	8.03	Peak	100	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13450.00	44.06	68.20	-24.14	37.86	6.20	Average	100	85																																																																						
2	13450.00	59.11	88.20	-29.09	52.91	6.20	Peak	100	85																																																																						
3	20175.00	40.92	54.00	-13.08	39.40	1.52	Average	100	139																																																																						
4	20175.00	54.17	74.00	-19.83	52.65	1.52	Peak	100	139																																																																						
5	26900.00	43.71	68.20	-24.49	35.68	8.03	Average	100	188																																																																						
6	26900.00	56.63	88.20	-31.57	48.60	8.03	Peak	100	188																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	ax HE40	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13690.00</td><td>44.12</td><td>68.20</td><td>-24.08</td><td>37.88</td><td>6.24</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>2</td><td>13690.00</td><td>58.11</td><td>88.20</td><td>-30.09</td><td>51.87</td><td>6.24</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>3</td><td>20535.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.66</td><td>2.01</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>4</td><td>20535.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>50.95</td><td>2.01</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>5</td><td>27380.00</td><td>43.31</td><td>68.20</td><td>-24.89</td><td>35.36</td><td>7.95</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>6</td><td>27380.00</td><td>57.45</td><td>88.20</td><td>-30.75</td><td>49.50</td><td>7.95</td><td>Peak</td><td>100</td><td>169</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13690.00	44.12	68.20	-24.08	37.88	6.24	Average	100	57	2	13690.00	58.11	88.20	-30.09	51.87	6.24	Peak	100	57	3	20535.00	40.67	54.00	-13.33	38.66	2.01	Average	100	51	4	20535.00	52.96	74.00	-21.04	50.95	2.01	Peak	100	51	5	27380.00	43.31	68.20	-24.89	35.36	7.95	Average	100	169	6	27380.00	57.45	88.20	-30.75	49.50	7.95	Peak	100	169
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13690.00	44.12	68.20	-24.08	37.88	6.24	Average	100	57																																																																
2	13690.00	58.11	88.20	-30.09	51.87	6.24	Peak	100	57																																																																
3	20535.00	40.67	54.00	-13.33	38.66	2.01	Average	100	51																																																																
4	20535.00	52.96	74.00	-21.04	50.95	2.01	Peak	100	51																																																																
5	27380.00	43.31	68.20	-24.89	35.36	7.95	Average	100	169																																																																
6	27380.00	57.45	88.20	-30.75	49.50	7.95	Peak	100	169																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

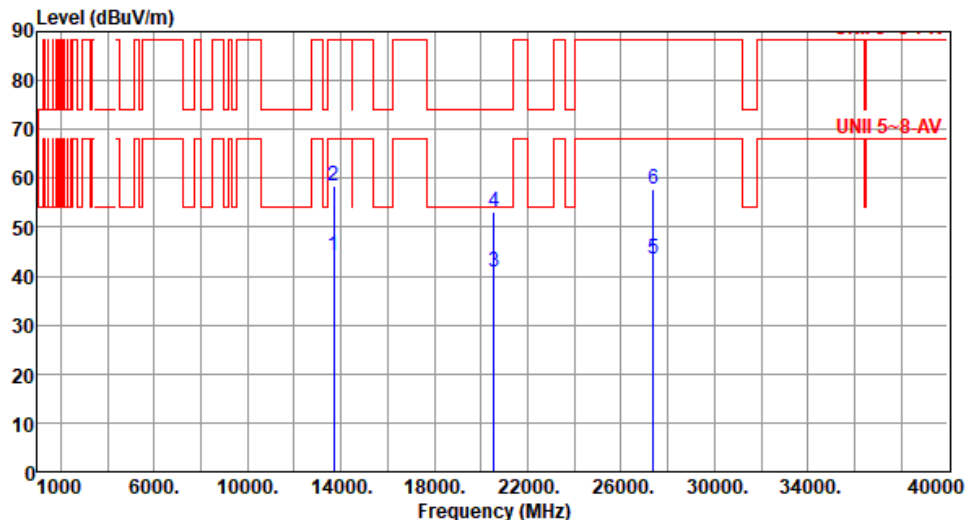


Modulation	ax HE40	Test Freq. (MHz)	6845						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13690.00	44.29	68.20	-23.91	38.05	6.24	Average	100	68
2	13690.00	58.37	88.20	-29.83	52.13	6.24	Peak	100	68
3	20535.00	40.91	54.00	-13.09	38.90	2.01	Average	100	114
4	20535.00	53.27	74.00	-20.73	51.26	2.01	Peak	100	114
5	27380.00	43.65	68.20	-24.55	35.70	7.95	Average	100	183
6	27380.00	57.76	88.20	-30.44	49.81	7.95	Peak	100	183
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

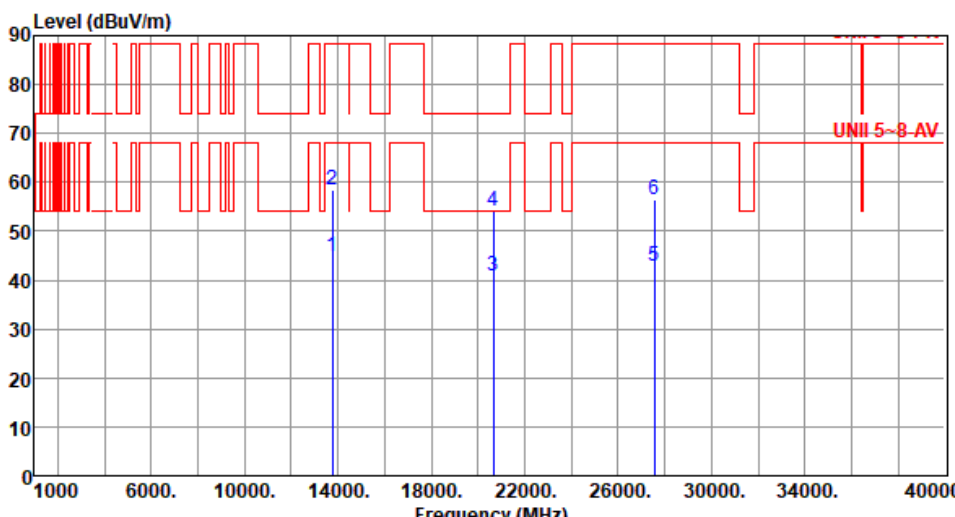


Modulation	ax HE40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13770.00</td><td>44.96</td><td>68.20</td><td>-23.24</td><td>38.69</td><td>6.27</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>2</td><td>13770.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>52.10</td><td>6.27</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>3</td><td>20655.00</td><td>40.91</td><td>54.00</td><td>-13.09</td><td>38.73</td><td>2.18</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>20655.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>51.98</td><td>2.18</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>27540.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>35.00</td><td>7.98</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>6</td><td>27540.00</td><td>56.59</td><td>88.20</td><td>-31.61</td><td>48.61</td><td>7.98</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	44.96	68.20	-23.24	38.69	6.27	Average	100	136	2	13770.00	58.37	88.20	-29.83	52.10	6.27	Peak	100	136	3	20655.00	40.91	54.00	-13.09	38.73	2.18	Average	100	112	4	20655.00	54.16	74.00	-19.84	51.98	2.18	Peak	100	112	5	27540.00	42.98	68.20	-25.22	35.00	7.98	Average	100	169	6	27540.00	56.59	88.20	-31.61	48.61	7.98	Peak	100	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13770.00	44.96	68.20	-23.24	38.69	6.27	Average	100	136																																																																
2	13770.00	58.37	88.20	-29.83	52.10	6.27	Peak	100	136																																																																
3	20655.00	40.91	54.00	-13.09	38.73	2.18	Average	100	112																																																																
4	20655.00	54.16	74.00	-19.84	51.98	2.18	Peak	100	112																																																																
5	27540.00	42.98	68.20	-25.22	35.00	7.98	Average	100	169																																																																
6	27540.00	56.59	88.20	-31.61	48.61	7.98	Peak	100	169																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

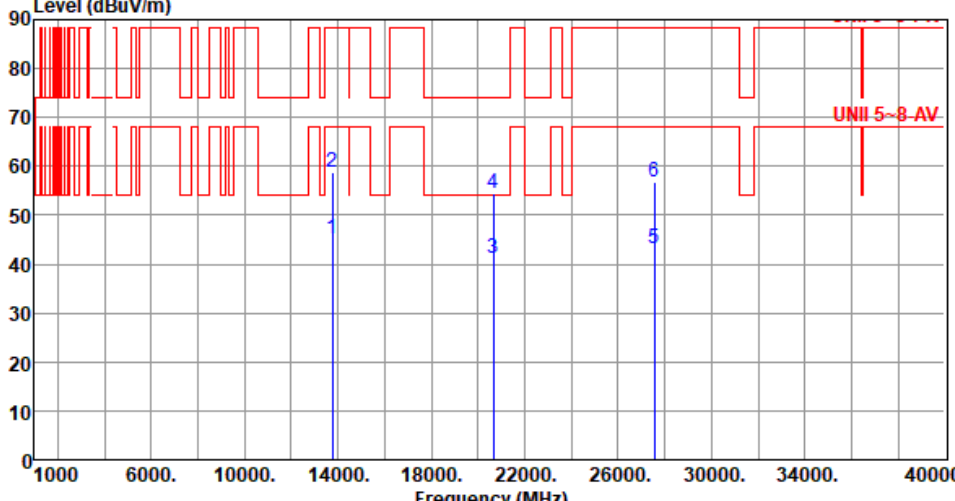


Modulation	ax HE40	Test Freq. (MHz)	6885																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13770.00</td><td>45.15</td><td>68.20</td><td>-23.05</td><td>38.88</td><td>6.27</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>2</td><td>13770.00</td><td>58.67</td><td>88.20</td><td>-29.53</td><td>52.40</td><td>6.27</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>3</td><td>20655.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>38.98</td><td>2.18</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>20655.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>52.23</td><td>2.18</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>27540.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>35.20</td><td>7.98</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>27540.00</td><td>56.72</td><td>88.20</td><td>-31.48</td><td>48.74</td><td>7.98</td><td>Peak</td><td>100</td><td>157</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	45.15	68.20	-23.05	38.88	6.27	Average	100	148	2	13770.00	58.67	88.20	-29.53	52.40	6.27	Peak	100	148	3	20655.00	41.16	54.00	-12.84	38.98	2.18	Average	100	184	4	20655.00	54.41	74.00	-19.59	52.23	2.18	Peak	100	184	5	27540.00	43.18	68.20	-25.02	35.20	7.98	Average	100	157	6	27540.00	56.72	88.20	-31.48	48.74	7.98	Peak	100	157
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13770.00	45.15	68.20	-23.05	38.88	6.27	Average	100	148																																																																
2	13770.00	58.67	88.20	-29.53	52.40	6.27	Peak	100	148																																																																
3	20655.00	41.16	54.00	-12.84	38.98	2.18	Average	100	184																																																																
4	20655.00	54.41	74.00	-19.59	52.23	2.18	Peak	100	184																																																																
5	27540.00	43.18	68.20	-25.02	35.20	7.98	Average	100	157																																																																
6	27540.00	56.72	88.20	-31.48	48.74	7.98	Peak	100	157																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

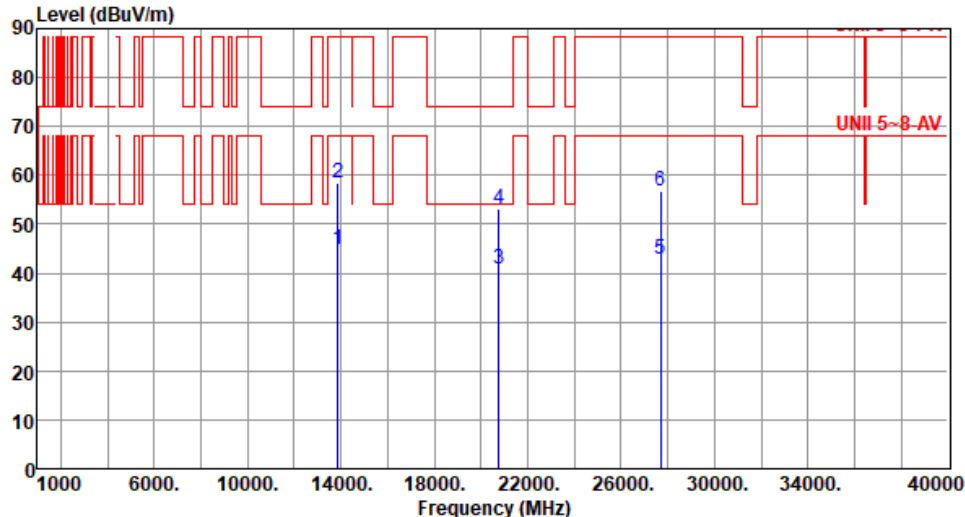


Modulation	ax HE40	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>44.97</td><td>68.20</td><td>-23.23</td><td>38.54</td><td>6.43</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>2</td><td>13850.00</td><td>58.41</td><td>88.20</td><td>-29.79</td><td>51.98</td><td>6.43</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>3</td><td>20775.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>38.61</td><td>2.38</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>20775.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>50.63</td><td>2.38</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>27700.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>34.69</td><td>8.16</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>6</td><td>27700.00</td><td>56.92</td><td>88.20</td><td>-31.28</td><td>48.76</td><td>8.16</td><td>Peak</td><td>100</td><td>82</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	44.97	68.20	-23.23	38.54	6.43	Average	100	63	2	13850.00	58.41	88.20	-29.79	51.98	6.43	Peak	100	63	3	20775.00	40.99	54.00	-13.01	38.61	2.38	Average	100	25	4	20775.00	53.01	74.00	-20.99	50.63	2.38	Peak	100	25	5	27700.00	42.85	68.20	-25.35	34.69	8.16	Average	100	82	6	27700.00	56.92	88.20	-31.28	48.76	8.16	Peak	100	82
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	44.97	68.20	-23.23	38.54	6.43	Average	100	63																																																																
2	13850.00	58.41	88.20	-29.79	51.98	6.43	Peak	100	63																																																																
3	20775.00	40.99	54.00	-13.01	38.61	2.38	Average	100	25																																																																
4	20775.00	53.01	74.00	-20.99	50.63	2.38	Peak	100	25																																																																
5	27700.00	42.85	68.20	-25.35	34.69	8.16	Average	100	82																																																																
6	27700.00	56.92	88.20	-31.28	48.76	8.16	Peak	100	82																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

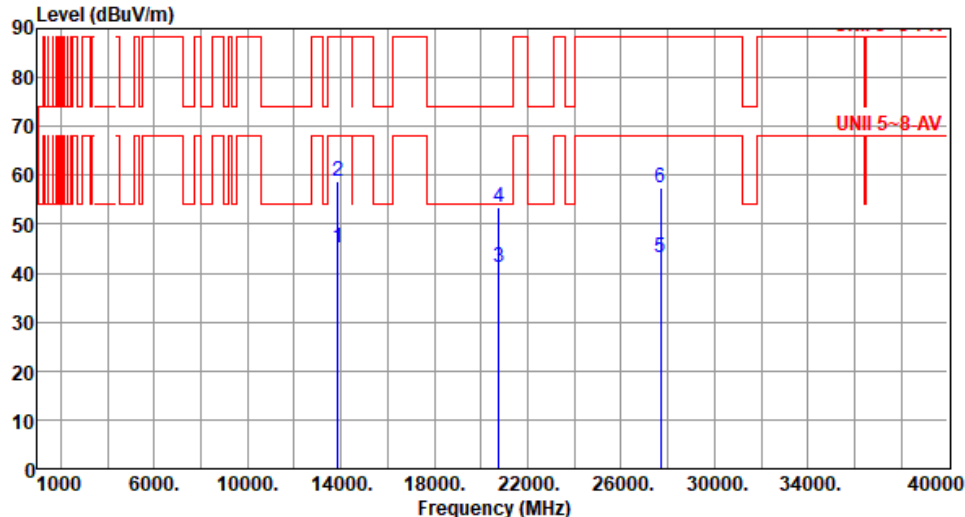

Modulation	ax HE40	Test Freq. (MHz)	6925																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13850.00</td><td>45.13</td><td>68.20</td><td>-23.07</td><td>38.70</td><td>6.43</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>2</td><td>13850.00</td><td>58.74</td><td>88.20</td><td>-29.46</td><td>52.31</td><td>6.43</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>3</td><td>20775.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>38.84</td><td>2.38</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>4</td><td>20775.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>51.11</td><td>2.38</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>5</td><td>27700.00</td><td>43.05</td><td>68.20</td><td>-25.15</td><td>34.89</td><td>8.16</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>6</td><td>27700.00</td><td>57.38</td><td>88.20</td><td>-30.82</td><td>49.22</td><td>8.16</td><td>Peak</td><td>100</td><td>151</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	45.13	68.20	-23.07	38.70	6.43	Average	100	107	2	13850.00	58.74	88.20	-29.46	52.31	6.43	Peak	100	107	3	20775.00	41.22	54.00	-12.78	38.84	2.38	Average	100	35	4	20775.00	53.49	74.00	-20.51	51.11	2.38	Peak	100	35	5	27700.00	43.05	68.20	-25.15	34.89	8.16	Average	100	151	6	27700.00	57.38	88.20	-30.82	49.22	8.16	Peak	100	151
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	45.13	68.20	-23.07	38.70	6.43	Average	100	107																																																																
2	13850.00	58.74	88.20	-29.46	52.31	6.43	Peak	100	107																																																																
3	20775.00	41.22	54.00	-12.78	38.84	2.38	Average	100	35																																																																
4	20775.00	53.49	74.00	-20.51	51.11	2.38	Peak	100	35																																																																
5	27700.00	43.05	68.20	-25.15	34.89	8.16	Average	100	151																																																																
6	27700.00	57.38	88.20	-30.82	49.22	8.16	Peak	100	151																																																																

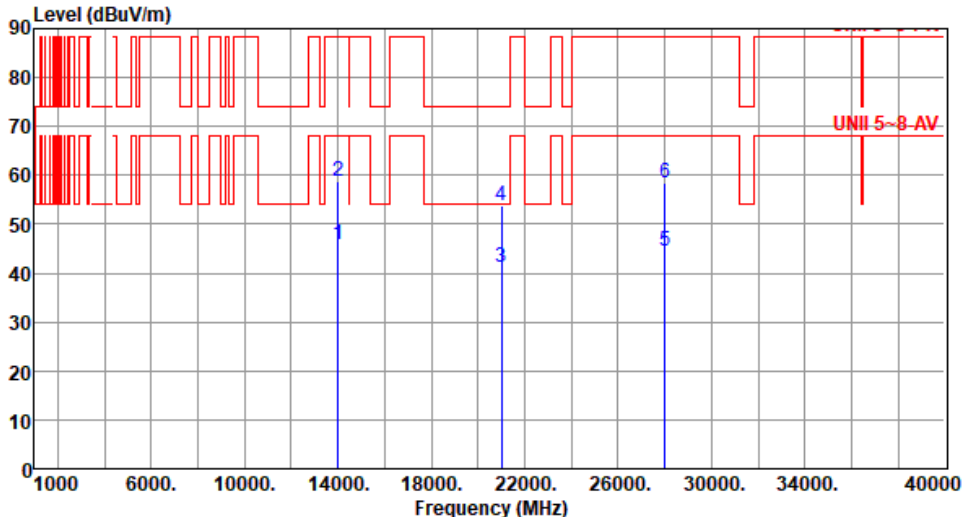

Modulation	ax HE40		Test Freq. (MHz)		7005																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14010.00</td><td>45.67</td><td>68.20</td><td>-22.53</td><td>38.92</td><td>6.75</td><td>Average</td><td>100</td><td>11</td></tr><tr><td>2</td><td>14010.00</td><td>58.62</td><td>88.20</td><td>-29.58</td><td>51.87</td><td>6.75</td><td>Peak</td><td>100</td><td>11</td></tr><tr><td>3</td><td>21015.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>38.34</td><td>2.98</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>4</td><td>21015.00</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>50.96</td><td>2.98</td><td>Peak</td><td>100</td><td>38</td></tr><tr><td>5</td><td>28020.00</td><td>44.62</td><td>68.20</td><td>-23.58</td><td>36.08</td><td>8.54</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>28020.00</td><td>58.54</td><td>88.20</td><td>-29.66</td><td>50.00</td><td>8.54</td><td>Peak</td><td>100</td><td>59</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	14010.00	45.67	68.20	-22.53	38.92	6.75	Average	100	11	2	14010.00	58.62	88.20	-29.58	51.87	6.75	Peak	100	11	3	21015.00	41.32	54.00	-12.68	38.34	2.98	Average	100	38	4	21015.00	53.94	74.00	-20.06	50.96	2.98	Peak	100	38	5	28020.00	44.62	68.20	-23.58	36.08	8.54	Average	100	59	6	28020.00	58.54	88.20	-29.66	50.00	8.54	Peak	100	59
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	14010.00	45.67	68.20	-22.53	38.92	6.75	Average	100	11																																																																																										
2	14010.00	58.62	88.20	-29.58	51.87	6.75	Peak	100	11																																																																																										
3	21015.00	41.32	54.00	-12.68	38.34	2.98	Average	100	38																																																																																										
4	21015.00	53.94	74.00	-20.06	50.96	2.98	Peak	100	38																																																																																										
5	28020.00	44.62	68.20	-23.58	36.08	8.54	Average	100	59																																																																																										
6	28020.00	58.54	88.20	-29.66	50.00	8.54	Peak	100	59																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>45.88</td><td>68.20</td><td>-22.32</td><td>39.13</td><td>6.75</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>2</td><td>14010.00</td><td>58.85</td><td>88.20</td><td>-29.35</td><td>52.10</td><td>6.75</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>3</td><td>21015.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>38.66</td><td>2.98</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>4</td><td>21015.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>51.28</td><td>2.98</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>5</td><td>28020.00</td><td>44.93</td><td>68.20</td><td>-23.27</td><td>36.39</td><td>8.54</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>6</td><td>28020.00</td><td>58.83</td><td>88.20</td><td>-29.37</td><td>50.29</td><td>8.54</td><td>Peak</td><td>100</td><td>71</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	45.88	68.20	-22.32	39.13	6.75	Average	100	39	2	14010.00	58.85	88.20	-29.35	52.10	6.75	Peak	100	39	3	21015.00	41.64	54.00	-12.36	38.66	2.98	Average	100	56	4	21015.00	54.26	74.00	-19.74	51.28	2.98	Peak	100	56	5	28020.00	44.93	68.20	-23.27	36.39	8.54	Average	100	71	6	28020.00	58.83	88.20	-29.37	50.29	8.54	Peak	100	71
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	45.88	68.20	-22.32	39.13	6.75	Average	100	39																																																																
2	14010.00	58.85	88.20	-29.35	52.10	6.75	Peak	100	39																																																																
3	21015.00	41.64	54.00	-12.36	38.66	2.98	Average	100	56																																																																
4	21015.00	54.26	74.00	-19.74	51.28	2.98	Peak	100	56																																																																
5	28020.00	44.93	68.20	-23.27	36.39	8.54	Average	100	71																																																																
6	28020.00	58.83	88.20	-29.37	50.29	8.54	Peak	100	71																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.52</td><td>68.20</td><td>-20.68</td><td>42.74</td><td>4.78</td><td>Average</td><td>162</td><td>51</td></tr><tr><td>2</td><td>7125.00</td><td>60.45</td><td>88.20</td><td>-27.75</td><td>55.67</td><td>4.78</td><td>Peak</td><td>162</td><td>51</td></tr><tr><td>3</td><td>14170.00</td><td>45.68</td><td>68.20</td><td>-22.52</td><td>38.57</td><td>7.11</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>4</td><td>14170.00</td><td>61.04</td><td>88.20</td><td>-27.16</td><td>53.93</td><td>7.11</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>5</td><td>21255.00</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>37.95</td><td>3.29</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>21255.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>50.93</td><td>3.29</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.52	68.20	-20.68	42.74	4.78	Average	162	51	2	7125.00	60.45	88.20	-27.75	55.67	4.78	Peak	162	51	3	14170.00	45.68	68.20	-22.52	38.57	7.11	Average	100	64	4	14170.00	61.04	88.20	-27.16	53.93	7.11	Peak	100	64	5	21255.00	41.24	54.00	-12.76	37.95	3.29	Average	100	103	6	21255.00	54.22	74.00	-19.78	50.93	3.29	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.52	68.20	-20.68	42.74	4.78	Average	162	51																																																																
2	7125.00	60.45	88.20	-27.75	55.67	4.78	Peak	162	51																																																																
3	14170.00	45.68	68.20	-22.52	38.57	7.11	Average	100	64																																																																
4	14170.00	61.04	88.20	-27.16	53.93	7.11	Peak	100	64																																																																
5	21255.00	41.24	54.00	-12.76	37.95	3.29	Average	100	103																																																																
6	21255.00	54.22	74.00	-19.78	50.93	3.29	Peak	100	103																																																																



Modulation	ax HE40	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.68</td><td>68.20</td><td>-20.52</td><td>42.90</td><td>4.78</td><td>Average</td><td>199</td><td>179</td></tr><tr><td>2</td><td>7125.00</td><td>59.99</td><td>88.20</td><td>-28.21</td><td>55.21</td><td>4.78</td><td>Peak</td><td>199</td><td>179</td></tr><tr><td>3</td><td>14170.00</td><td>45.83</td><td>68.20</td><td>-22.37</td><td>38.72</td><td>7.11</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>14170.00</td><td>61.22</td><td>88.20</td><td>-26.98</td><td>54.11</td><td>7.11</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>21255.00</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>38.05</td><td>3.29</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>6</td><td>21255.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>51.16</td><td>3.29</td><td>Peak</td><td>100</td><td>166</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.68	68.20	-20.52	42.90	4.78	Average	199	179	2	7125.00	59.99	88.20	-28.21	55.21	4.78	Peak	199	179	3	14170.00	45.83	68.20	-22.37	38.72	7.11	Average	100	114	4	14170.00	61.22	88.20	-26.98	54.11	7.11	Peak	100	114	5	21255.00	41.34	54.00	-12.66	38.05	3.29	Average	100	166	6	21255.00	54.45	74.00	-19.55	51.16	3.29	Peak	100	166
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.68	68.20	-20.52	42.90	4.78	Average	199	179																																																																
2	7125.00	59.99	88.20	-28.21	55.21	4.78	Peak	199	179																																																																
3	14170.00	45.83	68.20	-22.37	38.72	7.11	Average	100	114																																																																
4	14170.00	61.22	88.20	-26.98	54.11	7.11	Peak	100	114																																																																
5	21255.00	41.34	54.00	-12.66	38.05	3.29	Average	100	166																																																																
6	21255.00	54.45	74.00	-19.55	51.16	3.29	Peak	100	166																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for ax HE80

Modulation	ax HE80	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.87</td><td>68.20</td><td>-24.33</td><td>42.68</td><td>1.19</td><td>Average</td><td>128</td><td>7</td></tr><tr><td>2</td><td>5925.00</td><td>56.67</td><td>88.20</td><td>-31.53</td><td>55.48</td><td>1.19</td><td>Peak</td><td>128</td><td>7</td></tr><tr><td>3</td><td>11970.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>36.10</td><td>6.15</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>4</td><td>11970.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>48.37</td><td>6.15</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>5</td><td>17955.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>30.16</td><td>11.17</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>6</td><td>17955.00</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>43.72</td><td>11.17</td><td>Peak</td><td>100</td><td>76</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.87	68.20	-24.33	42.68	1.19	Average	128	7	2	5925.00	56.67	88.20	-31.53	55.48	1.19	Peak	128	7	3	11970.00	42.25	54.00	-11.75	36.10	6.15	Average	100	45	4	11970.00	54.52	74.00	-19.48	48.37	6.15	Peak	100	45	5	17955.00	41.33	54.00	-12.67	30.16	11.17	Average	100	76	6	17955.00	54.89	74.00	-19.11	43.72	11.17	Peak	100	76
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.87	68.20	-24.33	42.68	1.19	Average	128	7																																																																
2	5925.00	56.67	88.20	-31.53	55.48	1.19	Peak	128	7																																																																
3	11970.00	42.25	54.00	-11.75	36.10	6.15	Average	100	45																																																																
4	11970.00	54.52	74.00	-19.48	48.37	6.15	Peak	100	45																																																																
5	17955.00	41.33	54.00	-12.67	30.16	11.17	Average	100	76																																																																
6	17955.00	54.89	74.00	-19.11	43.72	11.17	Peak	100	76																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>47.40</td><td>68.20</td><td>-20.80</td><td>46.21</td><td>1.19</td><td>Average</td><td>157</td><td>197</td></tr><tr><td>2</td><td>5925.00</td><td>59.08</td><td>88.20</td><td>-29.12</td><td>57.89</td><td>1.19</td><td>Peak</td><td>157</td><td>197</td></tr><tr><td>3</td><td>11970.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>36.46</td><td>6.15</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>4</td><td>11970.00</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>48.71</td><td>6.15</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>5</td><td>17955.00</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>30.31</td><td>11.17</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>6</td><td>17955.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>44.02</td><td>11.17</td><td>Peak</td><td>100</td><td>254</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	47.40	68.20	-20.80	46.21	1.19	Average	157	197	2	5925.00	59.08	88.20	-29.12	57.89	1.19	Peak	157	197	3	11970.00	42.61	54.00	-11.39	36.46	6.15	Average	100	154	4	11970.00	54.86	74.00	-19.14	48.71	6.15	Peak	100	154	5	17955.00	41.48	54.00	-12.52	30.31	11.17	Average	100	254	6	17955.00	55.19	74.00	-18.81	44.02	11.17	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	47.40	68.20	-20.80	46.21	1.19	Average	157	197																																																																
2	5925.00	59.08	88.20	-29.12	57.89	1.19	Peak	157	197																																																																
3	11970.00	42.61	54.00	-11.39	36.46	6.15	Average	100	154																																																																
4	11970.00	54.86	74.00	-19.14	48.71	6.15	Peak	100	154																																																																
5	17955.00	41.48	54.00	-12.52	30.31	11.17	Average	100	254																																																																
6	17955.00	55.19	74.00	-18.81	44.02	11.17	Peak	100	254																																																																

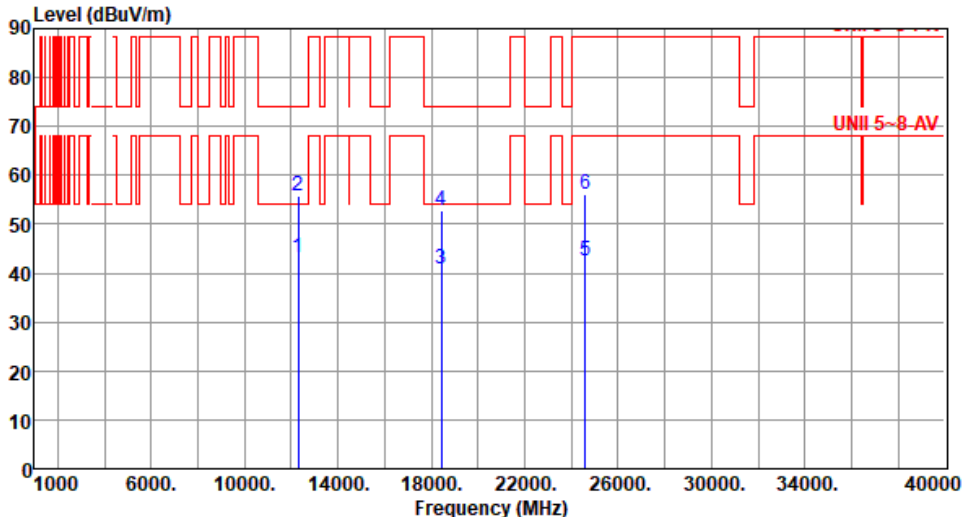

Modulation	ax HE80		Test Freq. (MHz)		6145																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12290.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>37.07</td><td>6.20</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>2</td><td>12290.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.48</td><td>6.20</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>3</td><td>18435.00</td><td>40.78</td><td>54.00</td><td>-13.22</td><td>40.22</td><td>0.56</td><td>Average</td><td>100</td><td>93</td></tr><tr><td>4</td><td>18435.00</td><td>52.88</td><td>74.00</td><td>-21.12</td><td>52.32</td><td>0.56</td><td>Peak</td><td>100</td><td>93</td></tr><tr><td>5</td><td>24580.00</td><td>42.51</td><td>68.20</td><td>-25.69</td><td>35.06</td><td>7.45</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>6</td><td>24580.00</td><td>56.06</td><td>88.20</td><td>-32.14</td><td>48.61</td><td>7.45</td><td>Peak</td><td>100</td><td>82</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	12290.00	43.27	54.00	-10.73	37.07	6.20	Average	100	59	2	12290.00	55.68	74.00	-18.32	49.48	6.20	Peak	100	59	3	18435.00	40.78	54.00	-13.22	40.22	0.56	Average	100	93	4	18435.00	52.88	74.00	-21.12	52.32	0.56	Peak	100	93	5	24580.00	42.51	68.20	-25.69	35.06	7.45	Average	100	82	6	24580.00	56.06	88.20	-32.14	48.61	7.45	Peak	100	82
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	12290.00	43.27	54.00	-10.73	37.07	6.20	Average	100	59																																																																																										
2	12290.00	55.68	74.00	-18.32	49.48	6.20	Peak	100	59																																																																																										
3	18435.00	40.78	54.00	-13.22	40.22	0.56	Average	100	93																																																																																										
4	18435.00	52.88	74.00	-21.12	52.32	0.56	Peak	100	93																																																																																										
5	24580.00	42.51	68.20	-25.69	35.06	7.45	Average	100	82																																																																																										
6	24580.00	56.06	88.20	-32.14	48.61	7.45	Peak	100	82																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	ax HE80	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>37.17</td><td>6.20</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>12290.00</td><td>55.81</td><td>74.00</td><td>-18.19</td><td>49.61</td><td>6.20</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>18435.00</td><td>40.98</td><td>54.00</td><td>-13.02</td><td>40.42</td><td>0.56</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>4</td><td>18435.00</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>52.48</td><td>0.56</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>5</td><td>24580.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>35.31</td><td>7.45</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>24580.00</td><td>56.19</td><td>88.20</td><td>-32.01</td><td>48.74</td><td>7.45</td><td>Peak</td><td>100</td><td>77</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	43.37	54.00	-10.63	37.17	6.20	Average	100	65	2	12290.00	55.81	74.00	-18.19	49.61	6.20	Peak	100	65	3	18435.00	40.98	54.00	-13.02	40.42	0.56	Average	100	122	4	18435.00	53.04	74.00	-20.96	52.48	0.56	Peak	100	122	5	24580.00	42.76	68.20	-25.44	35.31	7.45	Average	100	77	6	24580.00	56.19	88.20	-32.01	48.74	7.45	Peak	100	77
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	43.37	54.00	-10.63	37.17	6.20	Average	100	65																																																																
2	12290.00	55.81	74.00	-18.19	49.61	6.20	Peak	100	65																																																																
3	18435.00	40.98	54.00	-13.02	40.42	0.56	Average	100	122																																																																
4	18435.00	53.04	74.00	-20.96	52.48	0.56	Peak	100	122																																																																
5	24580.00	42.76	68.20	-25.44	35.31	7.45	Average	100	77																																																																
6	24580.00	56.19	88.20	-32.01	48.74	7.45	Peak	100	77																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12770.00</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>36.71</td><td>6.25</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>2</td><td>12770.00</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>50.46</td><td>6.25</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>3</td><td>19155.00</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>38.65</td><td>0.89</td><td>Average</td><td>100</td><td>135</td></tr><tr><td>4</td><td>19155.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>52.33</td><td>0.89</td><td>Peak</td><td>100</td><td>135</td></tr><tr><td>5</td><td>25540.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>35.42</td><td>7.43</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>25540.00</td><td>54.97</td><td>88.20</td><td>-33.23</td><td>47.54</td><td>7.43</td><td>Peak</td><td>100</td><td>49</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.96	68.20	-25.24	36.71	6.25	Average	100	104	2	12770.00	56.71	88.20	-31.49	50.46	6.25	Peak	100	104	3	19155.00	39.54	54.00	-14.46	38.65	0.89	Average	100	135	4	19155.00	53.22	74.00	-20.78	52.33	0.89	Peak	100	135	5	25540.00	42.85	68.20	-25.35	35.42	7.43	Average	100	49	6	25540.00	54.97	88.20	-33.23	47.54	7.43	Peak	100	49
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12770.00	42.96	68.20	-25.24	36.71	6.25	Average	100	104																																																																
2	12770.00	56.71	88.20	-31.49	50.46	6.25	Peak	100	104																																																																
3	19155.00	39.54	54.00	-14.46	38.65	0.89	Average	100	135																																																																
4	19155.00	53.22	74.00	-20.78	52.33	0.89	Peak	100	135																																																																
5	25540.00	42.85	68.20	-25.35	35.42	7.43	Average	100	49																																																																
6	25540.00	54.97	88.20	-33.23	47.54	7.43	Peak	100	49																																																																

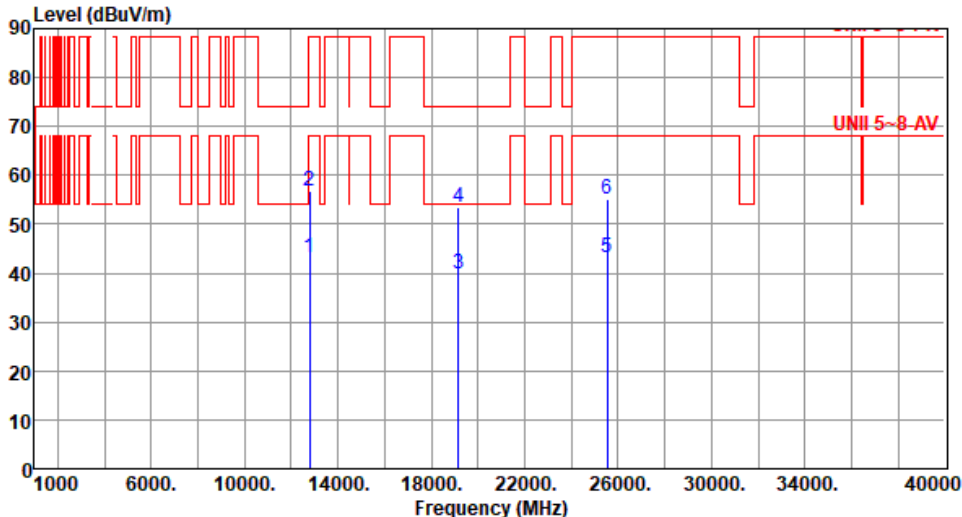

Modulation	ax HE80		Test Freq. (MHz)		6385																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12770.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>36.88</td><td>6.25</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>12770.00</td><td>56.89</td><td>88.20</td><td>-31.31</td><td>50.64</td><td>6.25</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>19155.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>38.92</td><td>0.89</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>19155.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>52.60</td><td>0.89</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>25540.00</td><td>43.01</td><td>68.20</td><td>-25.19</td><td>35.58</td><td>7.43</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>25540.00</td><td>55.15</td><td>88.20</td><td>-33.05</td><td>47.72</td><td>7.43</td><td>Peak</td><td>100</td><td>55</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12770.00	43.13	68.20	-25.07	36.88	6.25	Average	100	137	2	12770.00	56.89	88.20	-31.31	50.64	6.25	Peak	100	137	3	19155.00	39.81	54.00	-14.19	38.92	0.89	Average	100	112	4	19155.00	53.49	74.00	-20.51	52.60	0.89	Peak	100	112	5	25540.00	43.01	68.20	-25.19	35.58	7.43	Average	100	55	6	25540.00	55.15	88.20	-33.05	47.72	7.43	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12770.00	43.13	68.20	-25.07	36.88	6.25	Average	100	137																																																																																										
2	12770.00	56.89	88.20	-31.31	50.64	6.25	Peak	100	137																																																																																										
3	19155.00	39.81	54.00	-14.19	38.92	0.89	Average	100	112																																																																																										
4	19155.00	53.49	74.00	-20.51	52.60	0.89	Peak	100	112																																																																																										
5	25540.00	43.01	68.20	-25.19	35.58	7.43	Average	100	55																																																																																										
6	25540.00	55.15	88.20	-33.05	47.72	7.43	Peak	100	55																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	ax HE80	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12930.00</td><td>42.95</td><td>68.20</td><td>-25.25</td><td>36.50</td><td>6.45</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>2</td><td>12930.00</td><td>56.29</td><td>88.20</td><td>-31.91</td><td>49.84</td><td>6.45</td><td>Peak</td><td>100</td><td>97</td></tr><tr><td>3</td><td>19395.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>40.07</td><td>1.01</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>4</td><td>19395.00</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>52.10</td><td>1.01</td><td>Peak</td><td>100</td><td>195</td></tr><tr><td>5</td><td>25860.00</td><td>42.97</td><td>68.20</td><td>-25.23</td><td>35.56</td><td>7.41</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>6</td><td>25860.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>48.18</td><td>7.41</td><td>Peak</td><td>100</td><td>73</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	42.95	68.20	-25.25	36.50	6.45	Average	100	97	2	12930.00	56.29	88.20	-31.91	49.84	6.45	Peak	100	97	3	19395.00	41.08	54.00	-12.92	40.07	1.01	Average	100	195	4	19395.00	53.11	74.00	-20.89	52.10	1.01	Peak	100	195	5	25860.00	42.97	68.20	-25.23	35.56	7.41	Average	100	73	6	25860.00	55.59	88.20	-32.61	48.18	7.41	Peak	100	73
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12930.00	42.95	68.20	-25.25	36.50	6.45	Average	100	97																																																																
2	12930.00	56.29	88.20	-31.91	49.84	6.45	Peak	100	97																																																																
3	19395.00	41.08	54.00	-12.92	40.07	1.01	Average	100	195																																																																
4	19395.00	53.11	74.00	-20.89	52.10	1.01	Peak	100	195																																																																
5	25860.00	42.97	68.20	-25.23	35.56	7.41	Average	100	73																																																																
6	25860.00	55.59	88.20	-32.61	48.18	7.41	Peak	100	73																																																																




Modulation	ax HE80	Test Freq. (MHz)	6465																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12930.00</td><td>23.27</td><td>68.20</td><td>-44.93</td><td>16.82</td><td>6.45</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>2</td><td>12930.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>49.93</td><td>6.45</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>3</td><td>19395.00</td><td>41.27</td><td>54.00</td><td>-12.73</td><td>40.26</td><td>1.01</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>4</td><td>19395.00</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>52.35</td><td>1.01</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>5</td><td>25860.00</td><td>43.17</td><td>68.20</td><td>-25.03</td><td>35.76</td><td>7.41</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>25860.00</td><td>55.79</td><td>88.20</td><td>-32.41</td><td>48.38</td><td>7.41</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	23.27	68.20	-44.93	16.82	6.45	Average	100	76	2	12930.00	56.38	88.20	-31.82	49.93	6.45	Peak	100	76	3	19395.00	41.27	54.00	-12.73	40.26	1.01	Average	100	206	4	19395.00	53.36	74.00	-20.64	52.35	1.01	Peak	100	206	5	25860.00	43.17	68.20	-25.03	35.76	7.41	Average	100	84	6	25860.00	55.79	88.20	-32.41	48.38	7.41	Peak	100	84
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12930.00	23.27	68.20	-44.93	16.82	6.45	Average	100	76																																																																
2	12930.00	56.38	88.20	-31.82	49.93	6.45	Peak	100	76																																																																
3	19395.00	41.27	54.00	-12.73	40.26	1.01	Average	100	206																																																																
4	19395.00	53.36	74.00	-20.64	52.35	1.01	Peak	100	206																																																																
5	25860.00	43.17	68.20	-25.03	35.76	7.41	Average	100	84																																																																
6	25860.00	55.79	88.20	-32.41	48.38	7.41	Peak	100	84																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

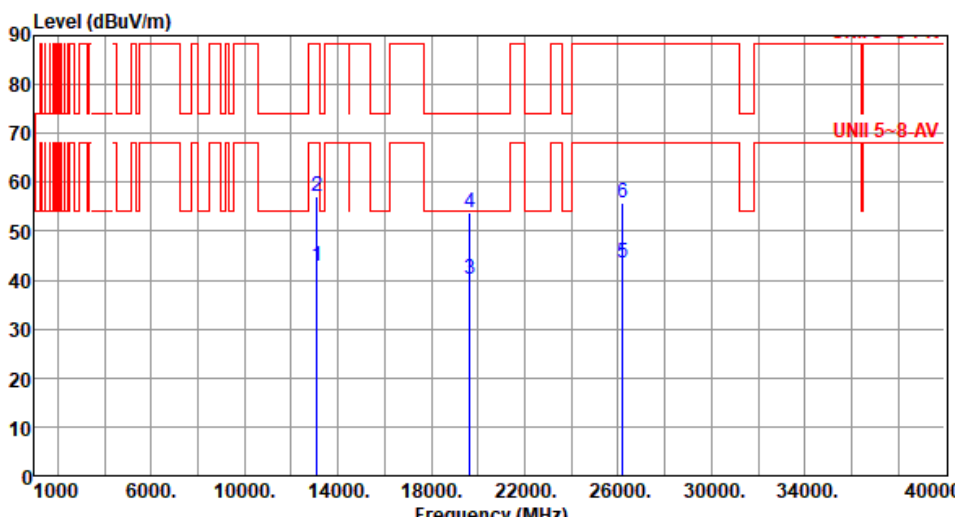


Modulation	ax HE80	Test Freq. (MHz)	6545																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																													
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13090.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>36.81</td><td>6.02</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>2</td><td>13090.00</td><td>56.98</td><td>88.20</td><td>-31.22</td><td>50.96</td><td>6.02</td><td>Peak</td><td>100</td><td>151</td></tr><tr><td>3</td><td>19635.00</td><td>40.06</td><td>54.00</td><td>-13.94</td><td>38.89</td><td>1.17</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>4</td><td>19635.00</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>52.77</td><td>1.17</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>5</td><td>26180.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>35.80</td><td>7.58</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>26180.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>48.25</td><td>7.58</td><td>Peak</td><td>100</td><td>57</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13090.00	42.83	68.20	-25.37	36.81	6.02	Average	100	151	2	13090.00	56.98	88.20	-31.22	50.96	6.02	Peak	100	151	3	19635.00	40.06	54.00	-13.94	38.89	1.17	Average	100	173	4	19635.00	53.94	74.00	-20.06	52.77	1.17	Peak	100	173	5	26180.00	43.38	68.20	-24.82	35.80	7.58	Average	100	57	6	26180.00	55.83	88.20	-32.37	48.25	7.58	Peak	100	57
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13090.00	42.83	68.20	-25.37	36.81	6.02	Average	100	151																																																																																				
2	13090.00	56.98	88.20	-31.22	50.96	6.02	Peak	100	151																																																																																				
3	19635.00	40.06	54.00	-13.94	38.89	1.17	Average	100	173																																																																																				
4	19635.00	53.94	74.00	-20.06	52.77	1.17	Peak	100	173																																																																																				
5	26180.00	43.38	68.20	-24.82	35.80	7.58	Average	100	57																																																																																				
6	26180.00	55.83	88.20	-32.37	48.25	7.58	Peak	100	57																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

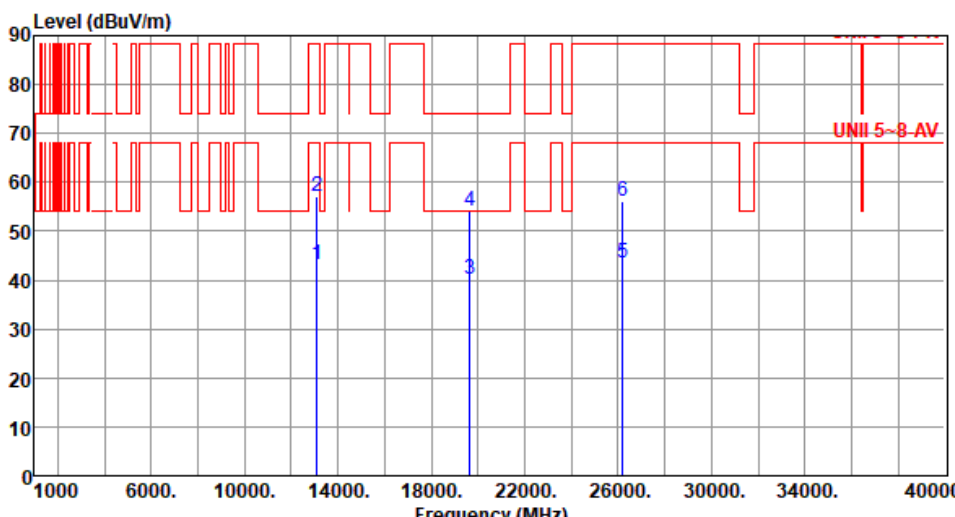

Modulation	ax HE80	Test Freq. (MHz)	6545																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																													
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>43.05</td><td>68.20</td><td>-25.15</td><td>37.03</td><td>6.02</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>2</td><td>13090.00</td><td>57.18</td><td>88.20</td><td>-31.02</td><td>51.16</td><td>6.02</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>3</td><td>19635.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>39.07</td><td>1.17</td><td>Average</td><td>100</td><td>166</td></tr><tr><td>4</td><td>19635.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>52.99</td><td>1.17</td><td>Peak</td><td>100</td><td>166</td></tr><tr><td>5</td><td>26180.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>35.94</td><td>7.58</td><td>Average</td><td>100</td><td>85</td></tr><tr><td>6</td><td>26180.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>48.46</td><td>7.58</td><td>Peak</td><td>100</td><td>85</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13090.00	43.05	68.20	-25.15	37.03	6.02	Average	100	63	2	13090.00	57.18	88.20	-31.02	51.16	6.02	Peak	100	63	3	19635.00	40.24	54.00	-13.76	39.07	1.17	Average	100	166	4	19635.00	54.16	74.00	-19.84	52.99	1.17	Peak	100	166	5	26180.00	43.52	68.20	-24.68	35.94	7.58	Average	100	85	6	26180.00	56.04	88.20	-32.16	48.46	7.58	Peak	100	85
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13090.00	43.05	68.20	-25.15	37.03	6.02	Average	100	63																																																																																				
2	13090.00	57.18	88.20	-31.02	51.16	6.02	Peak	100	63																																																																																				
3	19635.00	40.24	54.00	-13.76	39.07	1.17	Average	100	166																																																																																				
4	19635.00	54.16	74.00	-19.84	52.99	1.17	Peak	100	166																																																																																				
5	26180.00	43.52	68.20	-24.68	35.94	7.58	Average	100	85																																																																																				
6	26180.00	56.04	88.20	-32.16	48.46	7.58	Peak	100	85																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

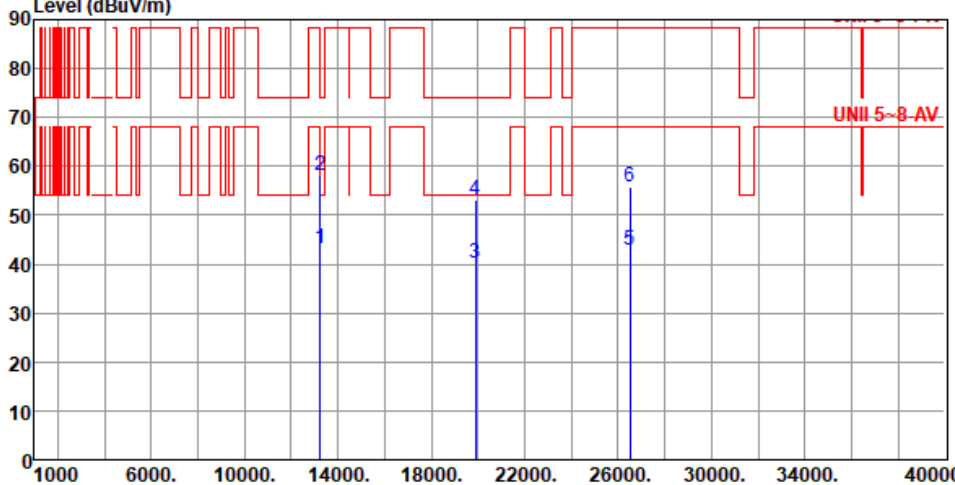

Modulation	ax HE80	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>37.44</td><td>5.84</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>2</td><td>13250.00</td><td>58.13</td><td>74.00</td><td>-15.87</td><td>52.29</td><td>5.84</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>3</td><td>19875.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>38.96</td><td>1.29</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>19875.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>51.93</td><td>1.29</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>26500.00</td><td>42.95</td><td>68.20</td><td>-25.25</td><td>34.84</td><td>8.11</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>6</td><td>26500.00</td><td>55.64</td><td>88.20</td><td>-32.56</td><td>47.53</td><td>8.11</td><td>Peak</td><td>100</td><td>134</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.28	54.00	-10.72	37.44	5.84	Average	100	41	2	13250.00	58.13	74.00	-15.87	52.29	5.84	Peak	100	41	3	19875.00	40.25	54.00	-13.75	38.96	1.29	Average	100	67	4	19875.00	53.22	74.00	-20.78	51.93	1.29	Peak	100	67	5	26500.00	42.95	68.20	-25.25	34.84	8.11	Average	100	134	6	26500.00	55.64	88.20	-32.56	47.53	8.11	Peak	100	134
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.28	54.00	-10.72	37.44	5.84	Average	100	41																																																																
2	13250.00	58.13	74.00	-15.87	52.29	5.84	Peak	100	41																																																																
3	19875.00	40.25	54.00	-13.75	38.96	1.29	Average	100	67																																																																
4	19875.00	53.22	74.00	-20.78	51.93	1.29	Peak	100	67																																																																
5	26500.00	42.95	68.20	-25.25	34.84	8.11	Average	100	134																																																																
6	26500.00	55.64	88.20	-32.56	47.53	8.11	Peak	100	134																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	ax HE80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>37.62</td><td>5.84</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>2</td><td>13250.00</td><td>58.36</td><td>74.00</td><td>-15.64</td><td>52.52</td><td>5.84</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>3</td><td>19875.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>39.13</td><td>1.29</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>4</td><td>19875.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>52.34</td><td>1.29</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>5</td><td>26500.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>35.21</td><td>8.11</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>26500.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>47.81</td><td>8.11</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.46	54.00	-10.54	37.62	5.84	Average	100	52	2	13250.00	58.36	74.00	-15.64	52.52	5.84	Peak	100	52	3	19875.00	40.42	54.00	-13.58	39.13	1.29	Average	100	78	4	19875.00	53.63	74.00	-20.37	52.34	1.29	Peak	100	78	5	26500.00	43.32	68.20	-24.88	35.21	8.11	Average	100	155	6	26500.00	55.92	88.20	-32.28	47.81	8.11	Peak	100	155
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.46	54.00	-10.54	37.62	5.84	Average	100	52																																																																
2	13250.00	58.36	74.00	-15.64	52.52	5.84	Peak	100	52																																																																
3	19875.00	40.42	54.00	-13.58	39.13	1.29	Average	100	78																																																																
4	19875.00	53.63	74.00	-20.37	52.34	1.29	Peak	100	78																																																																
5	26500.00	43.32	68.20	-24.88	35.21	8.11	Average	100	155																																																																
6	26500.00	55.92	88.20	-32.28	47.81	8.11	Peak	100	155																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE80		Test Freq. (MHz)		6705																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13410.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>37.55</td><td>6.21</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>2</td><td>13410.00</td><td>58.75</td><td>88.20</td><td>-29.45</td><td>52.54</td><td>6.21</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>3</td><td>20115.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>38.95</td><td>1.47</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>4</td><td>20115.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>52.12</td><td>1.47</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>5</td><td>26820.00</td><td>43.34</td><td>68.20</td><td>-24.86</td><td>35.21</td><td>8.13</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>6</td><td>26820.00</td><td>56.06</td><td>88.20</td><td>-32.14</td><td>47.93</td><td>8.13</td><td>Peak</td><td>100</td><td>112</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13410.00	43.76	68.20	-24.44	37.55	6.21	Average	100	128	2	13410.00	58.75	88.20	-29.45	52.54	6.21	Peak	100	128	3	20115.00	40.42	54.00	-13.58	38.95	1.47	Average	100	164	4	20115.00	53.59	74.00	-20.41	52.12	1.47	Peak	100	164	5	26820.00	43.34	68.20	-24.86	35.21	8.13	Average	100	112	6	26820.00	56.06	88.20	-32.14	47.93	8.13	Peak	100	112
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13410.00	43.76	68.20	-24.44	37.55	6.21	Average	100	128																																																																																										
2	13410.00	58.75	88.20	-29.45	52.54	6.21	Peak	100	128																																																																																										
3	20115.00	40.42	54.00	-13.58	38.95	1.47	Average	100	164																																																																																										
4	20115.00	53.59	74.00	-20.41	52.12	1.47	Peak	100	164																																																																																										
5	26820.00	43.34	68.20	-24.86	35.21	8.13	Average	100	112																																																																																										
6	26820.00	56.06	88.20	-32.14	47.93	8.13	Peak	100	112																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

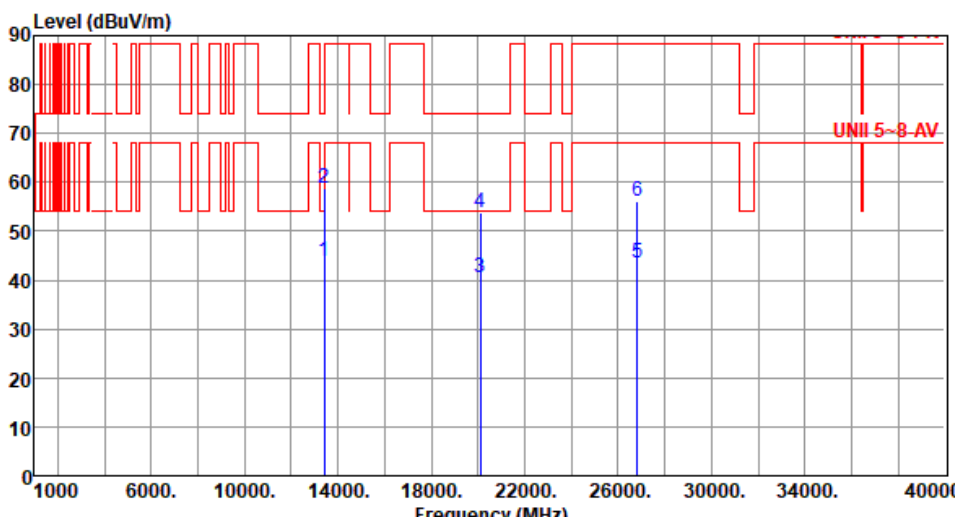

Modulation	ax HE80	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13410.00</td><td>43.97</td><td>68.20</td><td>-24.23</td><td>37.76</td><td>6.21</td><td>Average</td><td>100</td><td>86</td></tr><tr><td>2</td><td>13410.00</td><td>58.89</td><td>88.20</td><td>-29.31</td><td>52.68</td><td>6.21</td><td>Peak</td><td>100</td><td>86</td></tr><tr><td>3</td><td>20115.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>39.20</td><td>1.47</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>4</td><td>20115.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>52.31</td><td>1.47</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>5</td><td>26820.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>35.48</td><td>8.13</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>26820.00</td><td>56.25</td><td>88.20</td><td>-31.95</td><td>48.12</td><td>8.13</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	43.97	68.20	-24.23	37.76	6.21	Average	100	86	2	13410.00	58.89	88.20	-29.31	52.68	6.21	Peak	100	86	3	20115.00	40.67	54.00	-13.33	39.20	1.47	Average	100	177	4	20115.00	53.78	74.00	-20.22	52.31	1.47	Peak	100	177	5	26820.00	43.61	68.20	-24.59	35.48	8.13	Average	100	103	6	26820.00	56.25	88.20	-31.95	48.12	8.13	Peak	100	103
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13410.00	43.97	68.20	-24.23	37.76	6.21	Average	100	86																																																																
2	13410.00	58.89	88.20	-29.31	52.68	6.21	Peak	100	86																																																																
3	20115.00	40.67	54.00	-13.33	39.20	1.47	Average	100	177																																																																
4	20115.00	53.78	74.00	-20.22	52.31	1.47	Peak	100	177																																																																
5	26820.00	43.61	68.20	-24.59	35.48	8.13	Average	100	103																																																																
6	26820.00	56.25	88.20	-31.95	48.12	8.13	Peak	100	103																																																																




Modulation	ax HE80	Test Freq. (MHz)	6785																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>44.03</td><td>68.20</td><td>-24.17</td><td>37.82</td><td>6.21</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>2</td><td>13570.00</td><td>58.98</td><td>88.20</td><td>-29.22</td><td>52.77</td><td>6.21</td><td>Peak</td><td>100</td><td>57</td></tr><tr><td>3</td><td>20355.00</td><td>40.81</td><td>54.00</td><td>-13.19</td><td>39.08</td><td>1.73</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>4</td><td>20355.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>52.11</td><td>1.73</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>5</td><td>27140.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>35.72</td><td>7.94</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>6</td><td>27140.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>48.28</td><td>7.94</td><td>Peak</td><td>100</td><td>194</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	44.03	68.20	-24.17	37.82	6.21	Average	100	57	2	13570.00	58.98	88.20	-29.22	52.77	6.21	Peak	100	57	3	20355.00	40.81	54.00	-13.19	39.08	1.73	Average	100	145	4	20355.00	53.84	74.00	-20.16	52.11	1.73	Peak	100	145	5	27140.00	43.66	68.20	-24.54	35.72	7.94	Average	100	194	6	27140.00	56.22	88.20	-31.98	48.28	7.94	Peak	100	194
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	44.03	68.20	-24.17	37.82	6.21	Average	100	57																																																																
2	13570.00	58.98	88.20	-29.22	52.77	6.21	Peak	100	57																																																																
3	20355.00	40.81	54.00	-13.19	39.08	1.73	Average	100	145																																																																
4	20355.00	53.84	74.00	-20.16	52.11	1.73	Peak	100	145																																																																
5	27140.00	43.66	68.20	-24.54	35.72	7.94	Average	100	194																																																																
6	27140.00	56.22	88.20	-31.98	48.28	7.94	Peak	100	194																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) UNII 5-8-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>44.28</td><td>68.20</td><td>-23.92</td><td>38.07</td><td>6.21</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>13570.00</td><td>57.15</td><td>88.20</td><td>-31.05</td><td>50.94</td><td>6.21</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>20355.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>39.43</td><td>1.73</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>4</td><td>20355.00</td><td>54.14</td><td>74.00</td><td>-19.86</td><td>52.41</td><td>1.73</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>5</td><td>27140.00</td><td>43.89</td><td>68.20</td><td>-24.31</td><td>35.95</td><td>7.94</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>27140.00</td><td>56.58</td><td>88.20</td><td>-31.62</td><td>48.64</td><td>7.94</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13570.00	44.28	68.20	-23.92	38.07	6.21	Average	100	65	2	13570.00	57.15	88.20	-31.05	50.94	6.21	Peak	100	65	3	20355.00	41.16	54.00	-12.84	39.43	1.73	Average	100	136	4	20355.00	54.14	74.00	-19.86	52.41	1.73	Peak	100	136	5	27140.00	43.89	68.20	-24.31	35.95	7.94	Average	100	205	6	27140.00	56.58	88.20	-31.62	48.64	7.94	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13570.00	44.28	68.20	-23.92	38.07	6.21	Average	100	65																																																																
2	13570.00	57.15	88.20	-31.05	50.94	6.21	Peak	100	65																																																																
3	20355.00	41.16	54.00	-12.84	39.43	1.73	Average	100	136																																																																
4	20355.00	54.14	74.00	-19.86	52.41	1.73	Peak	100	136																																																																
5	27140.00	43.89	68.20	-24.31	35.95	7.94	Average	100	205																																																																
6	27140.00	56.58	88.20	-31.62	48.64	7.94	Peak	100	205																																																																

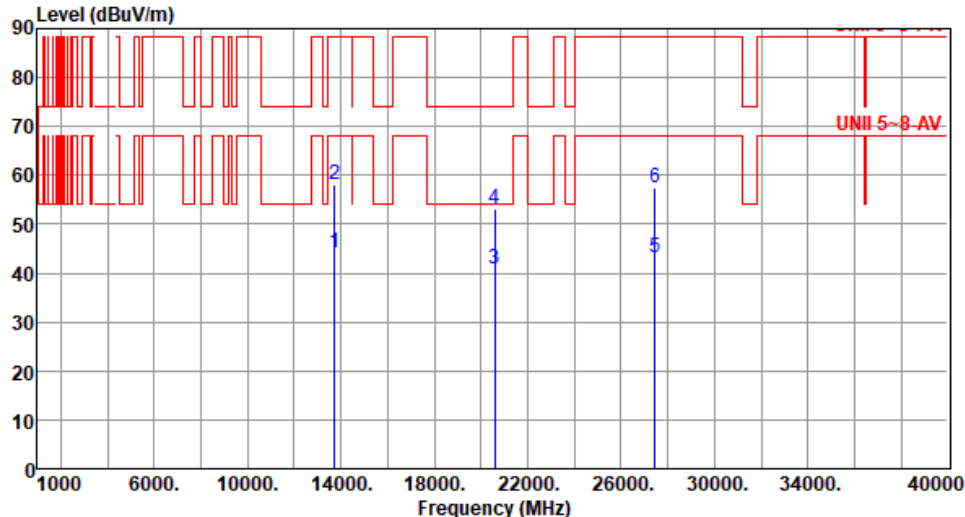

Modulation	ax HE80	Test Freq. (MHz)	6865						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	44.13	68.20	-24.07	37.88	6.25	Average	100	35
2	13730.00	58.09	88.20	-30.11	51.84	6.25	Peak	100	35
3	20595.00	40.71	54.00	-13.29	38.62	2.09	Average	100	72
4	20595.00	53.11	74.00	-20.89	51.02	2.09	Peak	100	72
5	27460.00	43.28	68.20	-24.92	35.34	7.94	Average	100	141
6	27460.00	57.32	88.20	-30.88	49.38	7.94	Peak	100	141

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	ax HE80	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13730.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>38.01</td><td>6.25</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>2</td><td>13730.00</td><td>58.27</td><td>88.20</td><td>-29.93</td><td>52.02</td><td>6.25</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>3</td><td>20595.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>38.83</td><td>2.09</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>20595.00</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>51.25</td><td>2.09</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>27460.00</td><td>44.36</td><td>68.20</td><td>-23.84</td><td>36.42</td><td>7.94</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>6</td><td>27460.00</td><td>57.49</td><td>88.20</td><td>-30.71</td><td>49.55</td><td>7.94</td><td>Peak</td><td>100</td><td>168</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	44.26	68.20	-23.94	38.01	6.25	Average	100	54	2	13730.00	58.27	88.20	-29.93	52.02	6.25	Peak	100	54	3	20595.00	40.92	54.00	-13.08	38.83	2.09	Average	100	84	4	20595.00	53.34	74.00	-20.66	51.25	2.09	Peak	100	84	5	27460.00	44.36	68.20	-23.84	36.42	7.94	Average	100	168	6	27460.00	57.49	88.20	-30.71	49.55	7.94	Peak	100	168
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	44.26	68.20	-23.94	38.01	6.25	Average	100	54																																																																
2	13730.00	58.27	88.20	-29.93	52.02	6.25	Peak	100	54																																																																
3	20595.00	40.92	54.00	-13.08	38.83	2.09	Average	100	84																																																																
4	20595.00	53.34	74.00	-20.66	51.25	2.09	Peak	100	84																																																																
5	27460.00	44.36	68.20	-23.84	36.42	7.94	Average	100	168																																																																
6	27460.00	57.49	88.20	-30.71	49.55	7.94	Peak	100	168																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6945																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13890.00</td><td>44.95</td><td>68.20</td><td>-23.25</td><td>38.39</td><td>6.56</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>2</td><td>13890.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>51.93</td><td>6.56</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>3</td><td>20835.00</td><td>41.07</td><td>54.00</td><td>-12.93</td><td>38.53</td><td>2.54</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>20835.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>50.47</td><td>2.54</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>27780.00</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>34.68</td><td>8.26</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>27780.00</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>48.79</td><td>8.26</td><td>Peak</td><td>100</td><td>63</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	44.95	68.20	-23.25	38.39	6.56	Average	100	64	2	13890.00	58.49	88.20	-29.71	51.93	6.56	Peak	100	64	3	20835.00	41.07	54.00	-12.93	38.53	2.54	Average	100	25	4	20835.00	53.01	74.00	-20.99	50.47	2.54	Peak	100	25	5	27780.00	42.94	68.20	-25.26	34.68	8.26	Average	100	63	6	27780.00	57.05	88.20	-31.15	48.79	8.26	Peak	100	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	44.95	68.20	-23.25	38.39	6.56	Average	100	64																																																																
2	13890.00	58.49	88.20	-29.71	51.93	6.56	Peak	100	64																																																																
3	20835.00	41.07	54.00	-12.93	38.53	2.54	Average	100	25																																																																
4	20835.00	53.01	74.00	-20.99	50.47	2.54	Peak	100	25																																																																
5	27780.00	42.94	68.20	-25.26	34.68	8.26	Average	100	63																																																																
6	27780.00	57.05	88.20	-31.15	48.79	8.26	Peak	100	63																																																																

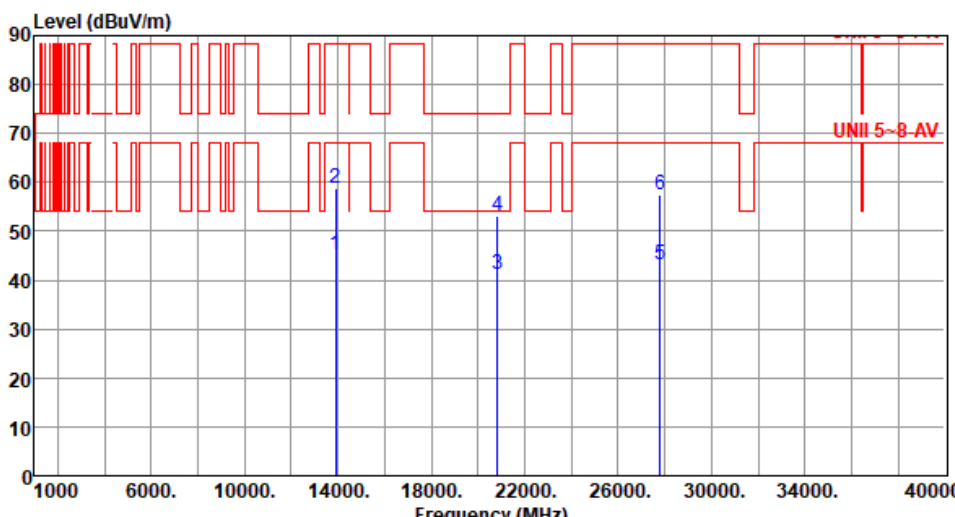


Modulation	ax HE80	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13890.00</td><td>45.15</td><td>68.20</td><td>-23.05</td><td>38.59</td><td>6.56</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>2</td><td>13890.00</td><td>58.72</td><td>88.20</td><td>-29.48</td><td>52.16</td><td>6.56</td><td>Peak</td><td>100</td><td>88</td></tr><tr><td>3</td><td>20835.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>38.64</td><td>2.54</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>20835.00</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>50.70</td><td>2.54</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>27780.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>34.90</td><td>8.26</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>6</td><td>27780.00</td><td>57.31</td><td>88.20</td><td>-30.89</td><td>49.05</td><td>8.26</td><td>Peak</td><td>100</td><td>136</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	45.15	68.20	-23.05	38.59	6.56	Average	100	88	2	13890.00	58.72	88.20	-29.48	52.16	6.56	Peak	100	88	3	20835.00	41.18	54.00	-12.82	38.64	2.54	Average	100	115	4	20835.00	53.24	74.00	-20.76	50.70	2.54	Peak	100	115	5	27780.00	43.16	68.20	-25.04	34.90	8.26	Average	100	136	6	27780.00	57.31	88.20	-30.89	49.05	8.26	Peak	100	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	45.15	68.20	-23.05	38.59	6.56	Average	100	88																																																																
2	13890.00	58.72	88.20	-29.48	52.16	6.56	Peak	100	88																																																																
3	20835.00	41.18	54.00	-12.82	38.64	2.54	Average	100	115																																																																
4	20835.00	53.24	74.00	-20.76	50.70	2.54	Peak	100	115																																																																
5	27780.00	43.16	68.20	-25.04	34.90	8.26	Average	100	136																																																																
6	27780.00	57.31	88.20	-30.89	49.05	8.26	Peak	100	136																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	ax HE80	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.67</td><td>68.20</td><td>-19.53</td><td>43.89</td><td>4.78</td><td>Average</td><td>128</td><td>8</td></tr><tr><td>2</td><td>7125.00</td><td>60.81</td><td>88.20</td><td>-27.39</td><td>56.03</td><td>4.78</td><td>Peak</td><td>128</td><td>8</td></tr><tr><td>3</td><td>14050.00</td><td>44.10</td><td>68.20</td><td>-24.10</td><td>37.24</td><td>6.86</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>4</td><td>14050.00</td><td>56.60</td><td>88.20</td><td>-31.60</td><td>49.74</td><td>6.86</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>5</td><td>21075.00</td><td>44.49</td><td>54.00</td><td>-9.51</td><td>41.43</td><td>3.06</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>6</td><td>21075.00</td><td>58.53</td><td>74.00</td><td>-15.47</td><td>55.47</td><td>3.06</td><td>Peak</td><td>100</td><td>152</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.67	68.20	-19.53	43.89	4.78	Average	128	8	2	7125.00	60.81	88.20	-27.39	56.03	4.78	Peak	128	8	3	14050.00	44.10	68.20	-24.10	37.24	6.86	Average	100	26	4	14050.00	56.60	88.20	-31.60	49.74	6.86	Peak	100	26	5	21075.00	44.49	54.00	-9.51	41.43	3.06	Average	100	152	6	21075.00	58.53	74.00	-15.47	55.47	3.06	Peak	100	152
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.67	68.20	-19.53	43.89	4.78	Average	128	8																																																																
2	7125.00	60.81	88.20	-27.39	56.03	4.78	Peak	128	8																																																																
3	14050.00	44.10	68.20	-24.10	37.24	6.86	Average	100	26																																																																
4	14050.00	56.60	88.20	-31.60	49.74	6.86	Peak	100	26																																																																
5	21075.00	44.49	54.00	-9.51	41.43	3.06	Average	100	152																																																																
6	21075.00	58.53	74.00	-15.47	55.47	3.06	Peak	100	152																																																																

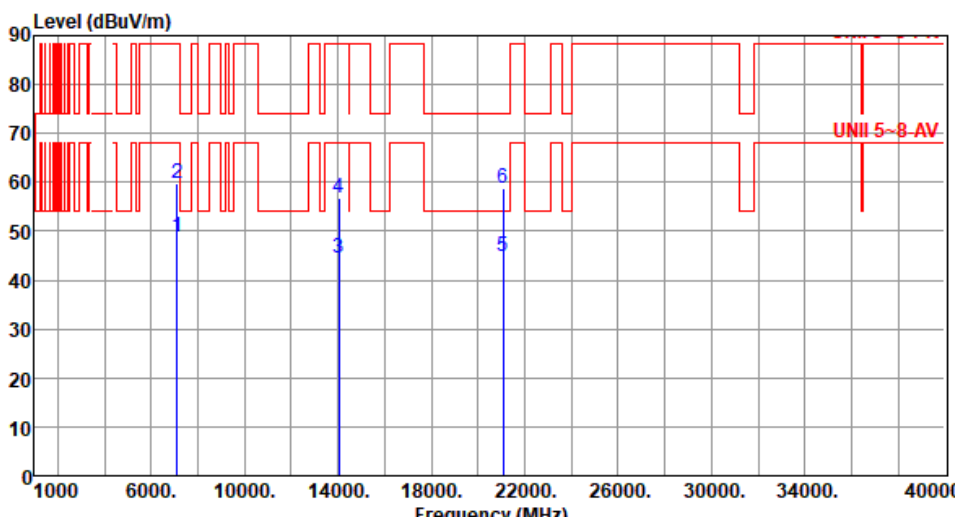

Modulation	ax HE80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>48.78</td><td>68.20</td><td>-19.42</td><td>44.00</td><td>4.78</td><td>Average</td><td>155</td><td>191</td></tr><tr><td>2</td><td>7125.00</td><td>59.87</td><td>88.20</td><td>-28.33</td><td>55.09</td><td>4.78</td><td>Peak</td><td>155</td><td>191</td></tr><tr><td>3</td><td>14050.00</td><td>44.39</td><td>68.20</td><td>-23.81</td><td>37.53</td><td>6.86</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>4</td><td>14050.00</td><td>56.83</td><td>88.20</td><td>-31.37</td><td>49.97</td><td>6.86</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>5</td><td>21075.00</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>41.70</td><td>3.06</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>6</td><td>21075.00</td><td>58.93</td><td>74.00</td><td>-15.07</td><td>55.87</td><td>3.06</td><td>Peak</td><td>100</td><td>143</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.78	68.20	-19.42	44.00	4.78	Average	155	191	2	7125.00	59.87	88.20	-28.33	55.09	4.78	Peak	155	191	3	14050.00	44.39	68.20	-23.81	37.53	6.86	Average	100	67	4	14050.00	56.83	88.20	-31.37	49.97	6.86	Peak	100	67	5	21075.00	44.76	54.00	-9.24	41.70	3.06	Average	100	143	6	21075.00	58.93	74.00	-15.07	55.87	3.06	Peak	100	143
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.78	68.20	-19.42	44.00	4.78	Average	155	191																																																																
2	7125.00	59.87	88.20	-28.33	55.09	4.78	Peak	155	191																																																																
3	14050.00	44.39	68.20	-23.81	37.53	6.86	Average	100	67																																																																
4	14050.00	56.83	88.20	-31.37	49.97	6.86	Peak	100	67																																																																
5	21075.00	44.76	54.00	-9.24	41.70	3.06	Average	100	143																																																																
6	21075.00	58.93	74.00	-15.07	55.87	3.06	Peak	100	143																																																																

Unwanted Emissions (Above 1GHz) for ax HE160

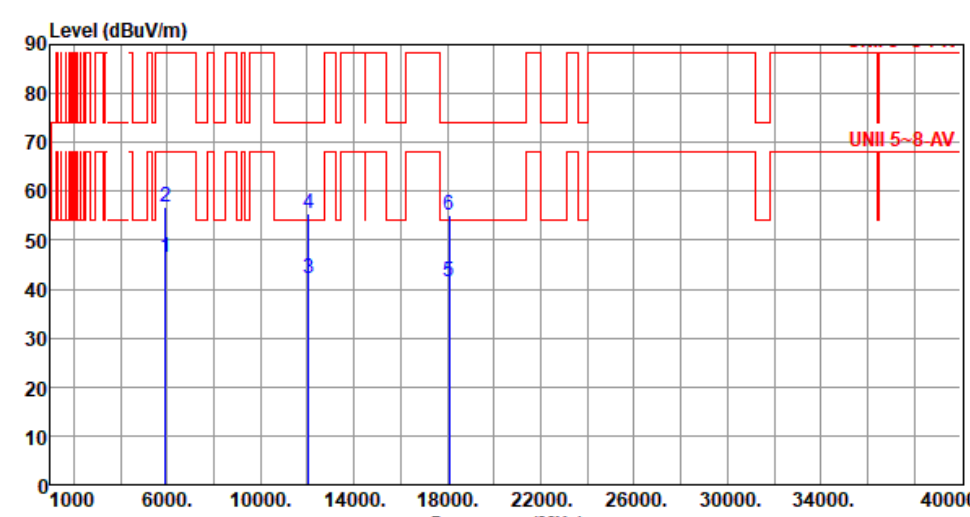Modulation	ax HE160	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>46.44</td><td>68.20</td><td>-21.76</td><td>45.25</td><td>1.19</td><td>Average</td><td>235</td><td>7</td></tr><tr><td>2</td><td>5925.00</td><td>56.89</td><td>88.20</td><td>-31.31</td><td>55.70</td><td>1.19</td><td>Peak</td><td>235</td><td>7</td></tr><tr><td>3</td><td>12050.00</td><td>42.22</td><td>54.00</td><td>-11.78</td><td>35.82</td><td>6.40</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>4</td><td>12050.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>48.99</td><td>6.40</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>5</td><td>18075.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>41.18</td><td>0.48</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>6</td><td>18075.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>54.55</td><td>0.48</td><td>Peak</td><td>100</td><td>27</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	46.44	68.20	-21.76	45.25	1.19	Average	235	7	2	5925.00	56.89	88.20	-31.31	55.70	1.19	Peak	235	7	3	12050.00	42.22	54.00	-11.78	35.82	6.40	Average	100	76	4	12050.00	55.39	74.00	-18.61	48.99	6.40	Peak	100	76	5	18075.00	41.66	54.00	-12.34	41.18	0.48	Average	100	27	6	18075.00	55.03	74.00	-18.97	54.55	0.48	Peak	100	27
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	46.44	68.20	-21.76	45.25	1.19	Average	235	7																																																																
2	5925.00	56.89	88.20	-31.31	55.70	1.19	Peak	235	7																																																																
3	12050.00	42.22	54.00	-11.78	35.82	6.40	Average	100	76																																																																
4	12050.00	55.39	74.00	-18.61	48.99	6.40	Peak	100	76																																																																
5	18075.00	41.66	54.00	-12.34	41.18	0.48	Average	100	27																																																																
6	18075.00	55.03	74.00	-18.97	54.55	0.48	Peak	100	27																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE160	Test Freq. (MHz)	6025																																																															
Polarization	Vertical																																																																	
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																		
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>52.20</td><td>68.20</td><td>-16.00</td><td>51.01</td><td>1.19</td><td>Average</td><td>160</td><td>111</td></tr><tr><td>2</td><td>63.83</td><td>88.20</td><td>-24.37</td><td>62.64</td><td>1.19</td><td>Peak</td><td>160</td><td>111</td></tr><tr><td>3</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>36.03</td><td>6.40</td><td>Average</td><td>100</td><td>163</td></tr><tr><td>4</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>49.08</td><td>6.40</td><td>Peak</td><td>100</td><td>163</td></tr><tr><td>5</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>41.20</td><td>0.48</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>54.75</td><td>0.48</td><td>Peak</td><td>100</td><td>172</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	52.20	68.20	-16.00	51.01	1.19	Average	160	111	2	63.83	88.20	-24.37	62.64	1.19	Peak	160	111	3	42.43	54.00	-11.57	36.03	6.40	Average	100	163	4	55.48	74.00	-18.52	49.08	6.40	Peak	100	163	5	41.68	54.00	-12.32	41.20	0.48	Average	100	172	6	55.23	74.00	-18.77	54.75	0.48	Peak	100	172
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																										
1	52.20	68.20	-16.00	51.01	1.19	Average	160	111																																																										
2	63.83	88.20	-24.37	62.64	1.19	Peak	160	111																																																										
3	42.43	54.00	-11.57	36.03	6.40	Average	100	163																																																										
4	55.48	74.00	-18.52	49.08	6.40	Peak	100	163																																																										
5	41.68	54.00	-12.32	41.20	0.48	Average	100	172																																																										
6	55.23	74.00	-18.77	54.75	0.48	Peak	100	172																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																		



Modulation	ax HE160	Test Freq. (MHz)	6185
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66			
Level (dBuV/m)			



Modulation	ax HE160	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12370.00</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>37.19</td><td>6.17</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>2</td><td>12370.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>47.02</td><td>6.17</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>3</td><td>18555.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>40.46</td><td>0.62</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>4</td><td>18555.00</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>52.65</td><td>0.62</td><td>Peak</td><td>100</td><td>95</td></tr><tr><td>5</td><td>24740.00</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>35.34</td><td>7.60</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>6</td><td>24740.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>48.88</td><td>7.60</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	43.36	54.00	-10.64	37.19	6.17	Average	100	137	2	12370.00	53.19	74.00	-20.81	47.02	6.17	Peak	100	137	3	18555.00	41.08	54.00	-12.92	40.46	0.62	Average	100	95	4	18555.00	53.27	74.00	-20.73	52.65	0.62	Peak	100	95	5	24740.00	42.94	68.20	-25.26	35.34	7.60	Average	100	64	6	24740.00	56.48	88.20	-31.72	48.88	7.60	Peak	100	64
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	43.36	54.00	-10.64	37.19	6.17	Average	100	137																																																																
2	12370.00	53.19	74.00	-20.81	47.02	6.17	Peak	100	137																																																																
3	18555.00	41.08	54.00	-12.92	40.46	0.62	Average	100	95																																																																
4	18555.00	53.27	74.00	-20.73	52.65	0.62	Peak	100	95																																																																
5	24740.00	42.94	68.20	-25.26	35.34	7.60	Average	100	64																																																																
6	24740.00	56.48	88.20	-31.72	48.88	7.60	Peak	100	64																																																																




Modulation	ax HE160	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12690.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>36.63</td><td>6.13</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>2</td><td>12690.00</td><td>56.59</td><td>74.00</td><td>-17.41</td><td>50.46</td><td>6.13</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>3</td><td>19035.00</td><td>39.16</td><td>54.00</td><td>-14.84</td><td>38.25</td><td>0.91</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>4</td><td>19035.00</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>51.95</td><td>0.91</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>5</td><td>25380.00</td><td>42.38</td><td>68.20</td><td>-25.82</td><td>34.95</td><td>7.43</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>6</td><td>25380.00</td><td>54.47</td><td>88.20</td><td>-33.73</td><td>47.04</td><td>7.43</td><td>Peak</td><td>100</td><td>148</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	42.76	54.00	-11.24	36.63	6.13	Average	100	43	2	12690.00	56.59	74.00	-17.41	50.46	6.13	Peak	100	43	3	19035.00	39.16	54.00	-14.84	38.25	0.91	Average	100	76	4	19035.00	52.86	74.00	-21.14	51.95	0.91	Peak	100	76	5	25380.00	42.38	68.20	-25.82	34.95	7.43	Average	100	148	6	25380.00	54.47	88.20	-33.73	47.04	7.43	Peak	100	148
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	42.76	54.00	-11.24	36.63	6.13	Average	100	43																																																																
2	12690.00	56.59	74.00	-17.41	50.46	6.13	Peak	100	43																																																																
3	19035.00	39.16	54.00	-14.84	38.25	0.91	Average	100	76																																																																
4	19035.00	52.86	74.00	-21.14	51.95	0.91	Peak	100	76																																																																
5	25380.00	42.38	68.20	-25.82	34.95	7.43	Average	100	148																																																																
6	25380.00	54.47	88.20	-33.73	47.04	7.43	Peak	100	148																																																																




Modulation	ax HE160	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12690.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>36.79</td><td>6.13</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>2</td><td>12690.00</td><td>56.85</td><td>74.00</td><td>-17.15</td><td>50.72</td><td>6.13</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>3</td><td>19035.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>38.50</td><td>0.91</td><td>Average</td><td>100</td><td>91</td></tr><tr><td>4</td><td>19035.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>52.31</td><td>0.91</td><td>Peak</td><td>100</td><td>91</td></tr><tr><td>5</td><td>25380.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>35.28</td><td>7.43</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>6</td><td>25380.00</td><td>54.72</td><td>88.20</td><td>-33.48</td><td>47.29</td><td>7.43</td><td>Peak</td><td>100</td><td>124</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12690.00	42.92	54.00	-11.08	36.79	6.13	Average	100	66	2	12690.00	56.85	74.00	-17.15	50.72	6.13	Peak	100	66	3	19035.00	39.41	54.00	-14.59	38.50	0.91	Average	100	91	4	19035.00	53.22	74.00	-20.78	52.31	0.91	Peak	100	91	5	25380.00	42.71	68.20	-25.49	35.28	7.43	Average	100	124	6	25380.00	54.72	88.20	-33.48	47.29	7.43	Peak	100	124
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12690.00	42.92	54.00	-11.08	36.79	6.13	Average	100	66																																																																
2	12690.00	56.85	74.00	-17.15	50.72	6.13	Peak	100	66																																																																
3	19035.00	39.41	54.00	-14.59	38.50	0.91	Average	100	91																																																																
4	19035.00	53.22	74.00	-20.78	52.31	0.91	Peak	100	91																																																																
5	25380.00	42.71	68.20	-25.49	35.28	7.43	Average	100	124																																																																
6	25380.00	54.72	88.20	-33.48	47.29	7.43	Peak	100	124																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

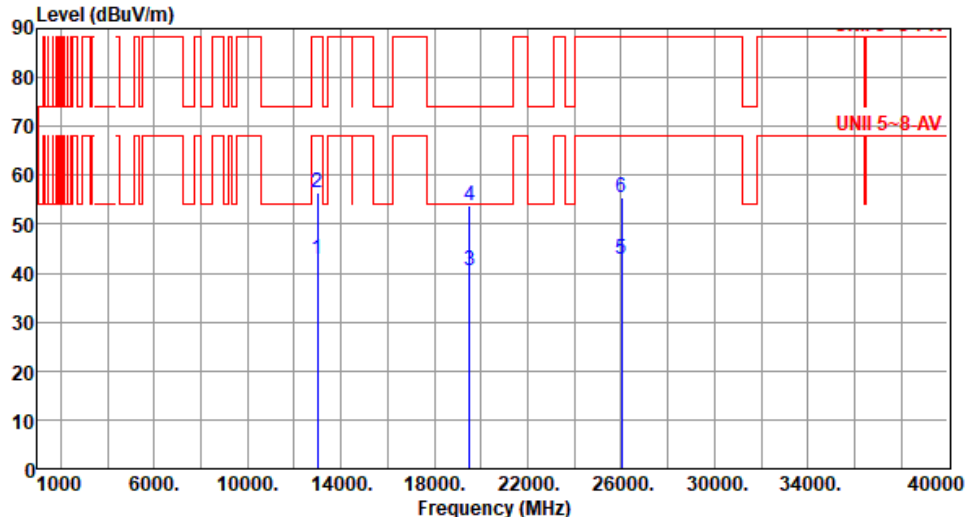


Modulation	ax HE160	Test Freq. (MHz)	6505						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13010.00	42.96	68.20	-25.24	36.53	6.43	Average	100	46
2	13010.00	56.34	88.20	-31.86	49.91	6.43	Peak	100	46
3	19515.00	40.53	54.00	-13.47	39.42	1.11	Average	100	57
4	19515.00	53.91	74.00	-20.09	52.80	1.11	Peak	100	57
5	26020.00	42.97	68.20	-25.23	35.51	7.46	Average	100	80
6	26020.00	55.32	88.20	-32.88	47.86	7.46	Peak	100	80

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

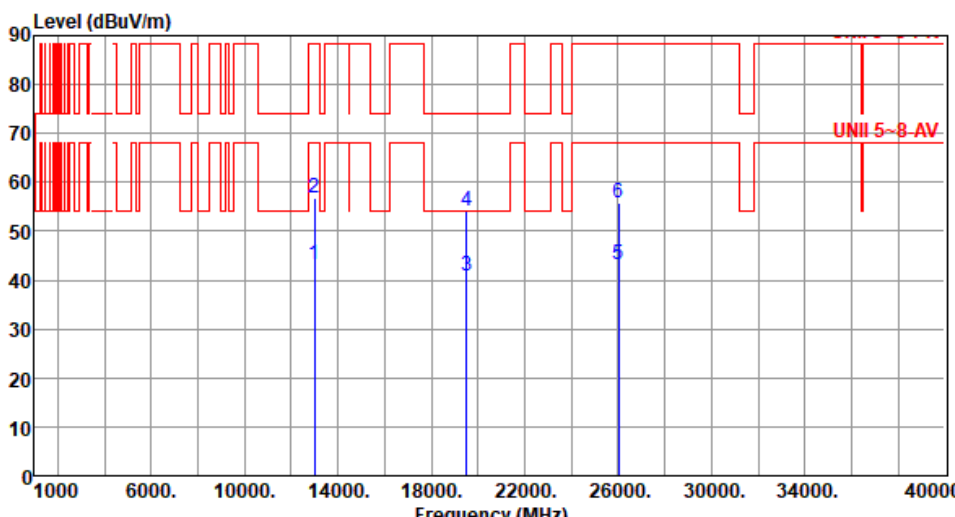

Modulation	ax HE160	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13010.00</td><td>43.21</td><td>68.20</td><td>-24.99</td><td>36.78</td><td>6.43</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>2</td><td>13010.00</td><td>56.72</td><td>88.20</td><td>-31.48</td><td>50.29</td><td>6.43</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>3</td><td>19515.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>39.66</td><td>1.11</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>4</td><td>19515.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.16</td><td>1.11</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>5</td><td>26020.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>35.79</td><td>7.46</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>26020.00</td><td>55.71</td><td>88.20</td><td>-32.49</td><td>48.25</td><td>7.46</td><td>Peak</td><td>100</td><td>145</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	43.21	68.20	-24.99	36.78	6.43	Average	100	63	2	13010.00	56.72	88.20	-31.48	50.29	6.43	Peak	100	63	3	19515.00	40.77	54.00	-13.23	39.66	1.11	Average	100	103	4	19515.00	54.27	74.00	-19.73	53.16	1.11	Peak	100	103	5	26020.00	43.25	68.20	-24.95	35.79	7.46	Average	100	145	6	26020.00	55.71	88.20	-32.49	48.25	7.46	Peak	100	145
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13010.00	43.21	68.20	-24.99	36.78	6.43	Average	100	63																																																																
2	13010.00	56.72	88.20	-31.48	50.29	6.43	Peak	100	63																																																																
3	19515.00	40.77	54.00	-13.23	39.66	1.11	Average	100	103																																																																
4	19515.00	54.27	74.00	-19.73	53.16	1.11	Peak	100	103																																																																
5	26020.00	43.25	68.20	-24.95	35.79	7.46	Average	100	145																																																																
6	26020.00	55.71	88.20	-32.49	48.25	7.46	Peak	100	145																																																																

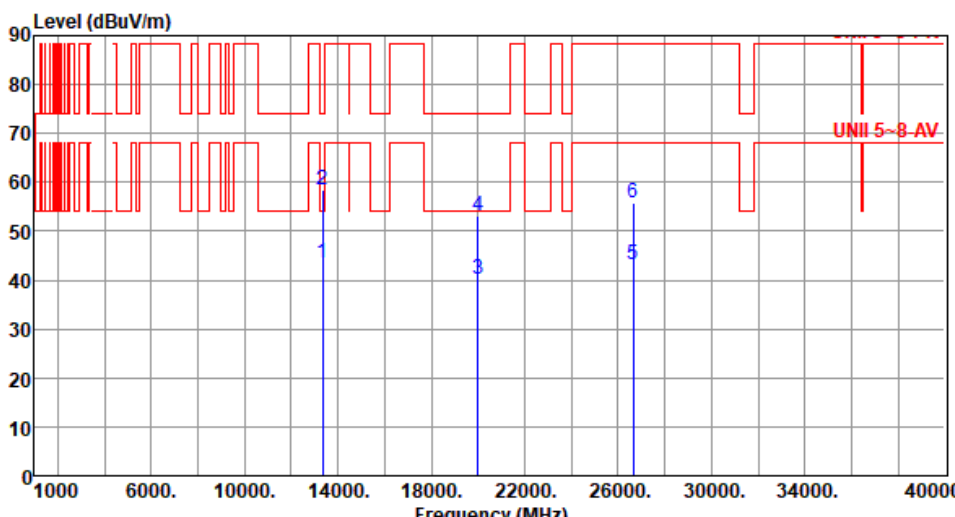


Modulation	ax HE160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13330.00</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>37.58</td><td>5.88</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>2</td><td>13330.00</td><td>58.29</td><td>74.00</td><td>-15.71</td><td>52.41</td><td>5.88</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>3</td><td>19995.00</td><td>40.19</td><td>54.00</td><td>-13.81</td><td>38.80</td><td>1.39</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>4</td><td>19995.00</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>51.73</td><td>1.39</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>5</td><td>26660.00</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>34.86</td><td>8.17</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>26660.00</td><td>55.65</td><td>88.20</td><td>-32.55</td><td>47.48</td><td>8.17</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	43.46	54.00	-10.54	37.58	5.88	Average	100	37	2	13330.00	58.29	74.00	-15.71	52.41	5.88	Peak	100	37	3	19995.00	40.19	54.00	-13.81	38.80	1.39	Average	100	89	4	19995.00	53.12	74.00	-20.88	51.73	1.39	Peak	100	89	5	26660.00	43.03	68.20	-25.17	34.86	8.17	Average	100	178	6	26660.00	55.65	88.20	-32.55	47.48	8.17	Peak	100	178
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	43.46	54.00	-10.54	37.58	5.88	Average	100	37																																																																
2	13330.00	58.29	74.00	-15.71	52.41	5.88	Peak	100	37																																																																
3	19995.00	40.19	54.00	-13.81	38.80	1.39	Average	100	89																																																																
4	19995.00	53.12	74.00	-20.88	51.73	1.39	Peak	100	89																																																																
5	26660.00	43.03	68.20	-25.17	34.86	8.17	Average	100	178																																																																
6	26660.00	55.65	88.20	-32.55	47.48	8.17	Peak	100	178																																																																



Modulation	ax HE160		Test Freq. (MHz)		6665																																																																																														
Polarization	Vertical																																																																																																		
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13330.00</td><td>43.71</td><td>54.00</td><td>-10.29</td><td>37.83</td><td>5.88</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>2</td><td>13330.00</td><td>58.74</td><td>74.00</td><td>-15.26</td><td>52.86</td><td>5.88</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>3</td><td>19995.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>39.07</td><td>1.39</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>19995.00</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>52.22</td><td>1.39</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>26660.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>35.12</td><td>8.17</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>6</td><td>26660.00</td><td>55.89</td><td>88.20</td><td>-32.31</td><td>47.72</td><td>8.17</td><td>Peak</td><td>100</td><td>195</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13330.00	43.71	54.00	-10.29	37.83	5.88	Average	100	69	2	13330.00	58.74	74.00	-15.26	52.86	5.88	Peak	100	69	3	19995.00	40.46	54.00	-13.54	39.07	1.39	Average	100	114	4	19995.00	53.61	74.00	-20.39	52.22	1.39	Peak	100	114	5	26660.00	43.29	68.20	-24.91	35.12	8.17	Average	100	195	6	26660.00	55.89	88.20	-32.31	47.72	8.17	Peak	100	195
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13330.00	43.71	54.00	-10.29	37.83	5.88	Average	100	69																																																																																										
2	13330.00	58.74	74.00	-15.26	52.86	5.88	Peak	100	69																																																																																										
3	19995.00	40.46	54.00	-13.54	39.07	1.39	Average	100	114																																																																																										
4	19995.00	53.61	74.00	-20.39	52.22	1.39	Peak	100	114																																																																																										
5	26660.00	43.29	68.20	-24.91	35.12	8.17	Average	100	195																																																																																										
6	26660.00	55.89	88.20	-32.31	47.72	8.17	Peak	100	195																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

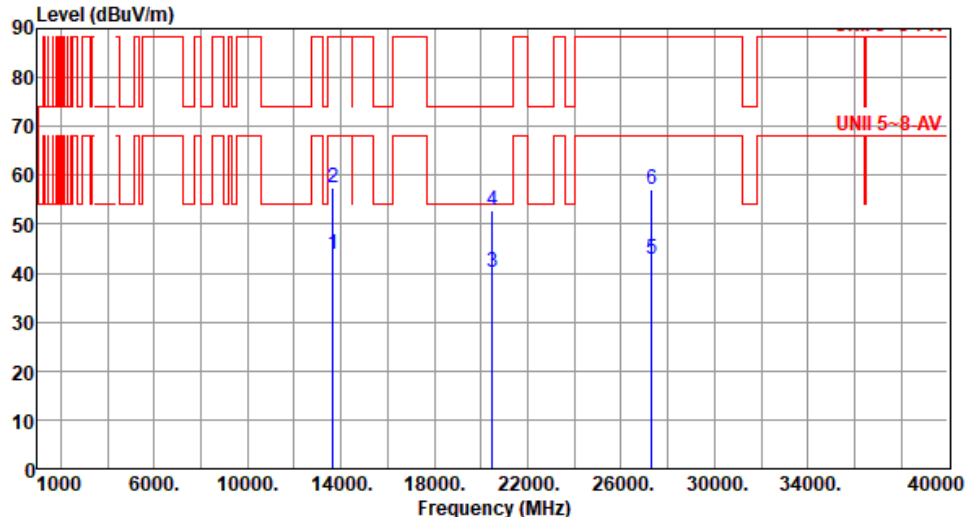

Modulation	ax HE160	Test Freq. (MHz)	6825						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	43.76	68.20	-24.44	37.52	6.24	Average	100	78
2	13650.00	57.59	88.20	-30.61	51.35	6.24	Peak	100	78
3	20475.00	40.26	54.00	-13.74	38.33	1.93	Average	100	102
4	20475.00	52.72	74.00	-21.28	50.79	1.93	Peak	100	102
5	27300.00	42.96	68.20	-25.24	35.00	7.96	Average	100	144
6	27300.00	56.98	88.20	-31.22	49.02	7.96	Peak	100	144
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	ax HE160	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13650.00</td><td>43.96</td><td>68.20</td><td>-24.24</td><td>37.72</td><td>6.24</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>2</td><td>13650.00</td><td>57.81</td><td>88.20</td><td>-30.39</td><td>51.57</td><td>6.24</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>3</td><td>20475.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>38.56</td><td>1.93</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>4</td><td>20475.00</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>51.03</td><td>1.93</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>5</td><td>27300.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>35.17</td><td>7.96</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>6</td><td>27300.00</td><td>57.19</td><td>88.20</td><td>-31.01</td><td>49.23</td><td>7.96</td><td>Peak</td><td>100</td><td>74</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13650.00	43.96	68.20	-24.24	37.72	6.24	Average	100	126	2	13650.00	57.81	88.20	-30.39	51.57	6.24	Peak	100	126	3	20475.00	40.49	54.00	-13.51	38.56	1.93	Average	100	116	4	20475.00	52.96	74.00	-21.04	51.03	1.93	Peak	100	116	5	27300.00	43.13	68.20	-25.07	35.17	7.96	Average	100	74	6	27300.00	57.19	88.20	-31.01	49.23	7.96	Peak	100	74
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13650.00	43.96	68.20	-24.24	37.72	6.24	Average	100	126																																																																
2	13650.00	57.81	88.20	-30.39	51.57	6.24	Peak	100	126																																																																
3	20475.00	40.49	54.00	-13.51	38.56	1.93	Average	100	116																																																																
4	20475.00	52.96	74.00	-21.04	51.03	1.93	Peak	100	116																																																																
5	27300.00	43.13	68.20	-25.07	35.17	7.96	Average	100	74																																																																
6	27300.00	57.19	88.20	-31.01	49.23	7.96	Peak	100	74																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE160	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>51.45</td><td>68.20</td><td>-16.75</td><td>46.67</td><td>4.78</td><td>Average</td><td>350</td><td>243</td></tr><tr><td>2</td><td>7125.00</td><td>61.84</td><td>88.20</td><td>-26.36</td><td>57.06</td><td>4.78</td><td>Peak</td><td>350</td><td>243</td></tr><tr><td>3</td><td>13970.00</td><td>45.46</td><td>68.20</td><td>-22.74</td><td>38.78</td><td>6.68</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>4</td><td>13970.00</td><td>58.13</td><td>88.20</td><td>-30.07</td><td>51.45</td><td>6.68</td><td>Peak</td><td>100</td><td>97</td></tr><tr><td>5</td><td>20955.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>37.36</td><td>2.85</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>6</td><td>20955.00</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>50.82</td><td>2.85</td><td>Peak</td><td>100</td><td>147</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	51.45	68.20	-16.75	46.67	4.78	Average	350	243	2	7125.00	61.84	88.20	-26.36	57.06	4.78	Peak	350	243	3	13970.00	45.46	68.20	-22.74	38.78	6.68	Average	100	97	4	13970.00	58.13	88.20	-30.07	51.45	6.68	Peak	100	97	5	20955.00	40.21	54.00	-13.79	37.36	2.85	Average	100	147	6	20955.00	53.67	74.00	-20.33	50.82	2.85	Peak	100	147
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	51.45	68.20	-16.75	46.67	4.78	Average	350	243																																																																
2	7125.00	61.84	88.20	-26.36	57.06	4.78	Peak	350	243																																																																
3	13970.00	45.46	68.20	-22.74	38.78	6.68	Average	100	97																																																																
4	13970.00	58.13	88.20	-30.07	51.45	6.68	Peak	100	97																																																																
5	20955.00	40.21	54.00	-13.79	37.36	2.85	Average	100	147																																																																
6	20955.00	53.67	74.00	-20.33	50.82	2.85	Peak	100	147																																																																

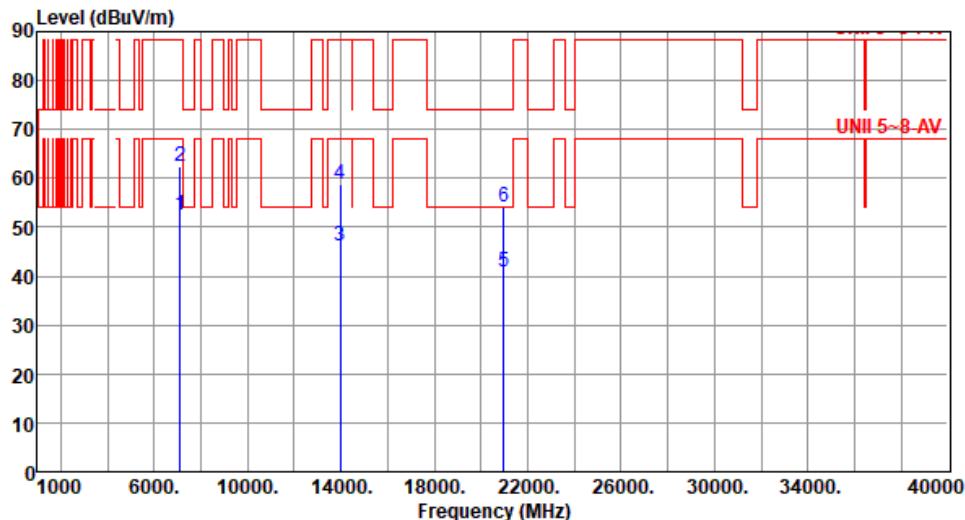

Modulation	ax HE160	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Paul Lin Temperature(°C):25 Humidity(%):66																																																																									
																																																																									
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>52.40</td><td>68.20</td><td>-15.80</td><td>47.62</td><td>4.78</td><td>Average</td><td>167</td><td>46</td></tr><tr><td>2</td><td>7125.00</td><td>62.34</td><td>88.20</td><td>-25.86</td><td>57.56</td><td>4.78</td><td>Peak</td><td>167</td><td>46</td></tr><tr><td>3</td><td>13970.00</td><td>46.02</td><td>68.20</td><td>-22.18</td><td>39.34</td><td>6.68</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>13970.00</td><td>58.81</td><td>88.20</td><td>-29.39</td><td>52.13</td><td>6.68</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>20955.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>38.11</td><td>2.85</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>6</td><td>20955.00</td><td>54.28</td><td>74.00</td><td>-19.72</td><td>51.43</td><td>2.85</td><td>Peak</td><td>100</td><td>32</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	52.40	68.20	-15.80	47.62	4.78	Average	167	46	2	7125.00	62.34	88.20	-25.86	57.56	4.78	Peak	167	46	3	13970.00	46.02	68.20	-22.18	39.34	6.68	Average	100	114	4	13970.00	58.81	88.20	-29.39	52.13	6.68	Peak	100	114	5	20955.00	40.96	54.00	-13.04	38.11	2.85	Average	100	32	6	20955.00	54.28	74.00	-19.72	51.43	2.85	Peak	100	32			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	7125.00	52.40	68.20	-15.80	47.62	4.78	Average	167	46																																																																
2	7125.00	62.34	88.20	-25.86	57.56	4.78	Peak	167	46																																																																
3	13970.00	46.02	68.20	-22.18	39.34	6.68	Average	100	114																																																																
4	13970.00	58.81	88.20	-29.39	52.13	6.68	Peak	100	114																																																																
5	20955.00	40.96	54.00	-13.04	38.11	2.85	Average	100	32																																																																
6	20955.00	54.28	74.00	-19.72	51.43	2.85	Peak	100	32																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Beamforming mode

Unwanted Emissions (Below 1GHz)


Modulation	ax HE160	Test Freq. (MHz)	6985
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):64			
Level (dBUV/m)			




Modulation	ax HE160		Test Freq. (MHz)		6985	
Polarization	Vertical					
Test By :Paul Lin Temperature(°C):25 Humidity(%):64						
Level (dBUV/m)						




Unwanted Emissions (Above 1GHz) for ax HE20

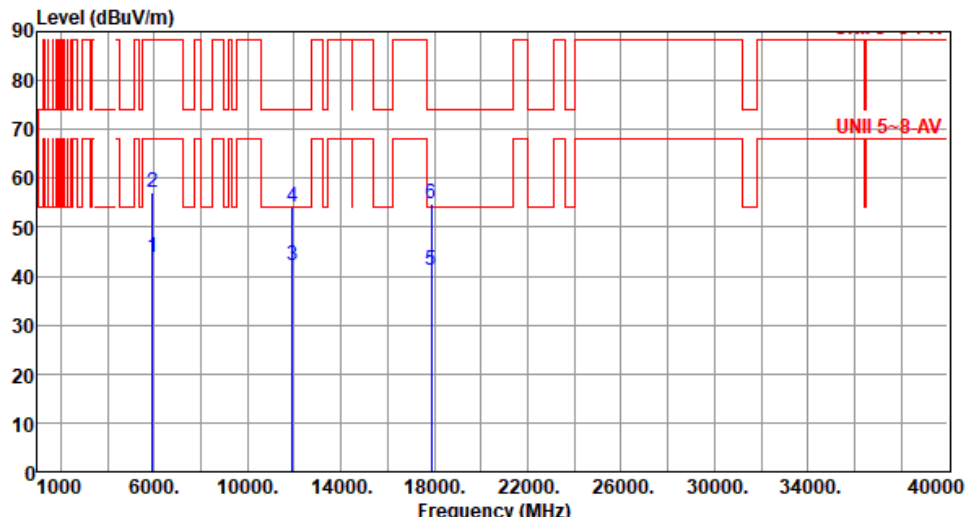Modulation	ax HE20	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.98</td><td>68.20</td><td>-24.22</td><td>42.79</td><td>1.19</td><td>Average</td><td>163</td><td>70</td></tr><tr><td>2</td><td>5925.00</td><td>57.04</td><td>88.20</td><td>-31.16</td><td>55.85</td><td>1.19</td><td>Peak</td><td>163</td><td>70</td></tr><tr><td>3</td><td>11910.00</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>36.02</td><td>6.11</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>11910.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>48.11</td><td>6.11</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>17865.00</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>31.56</td><td>9.61</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>17865.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>45.05</td><td>9.61</td><td>Peak</td><td>100</td><td>65</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.98	68.20	-24.22	42.79	1.19	Average	163	70	2	5925.00	57.04	88.20	-31.16	55.85	1.19	Peak	163	70	3	11910.00	42.13	54.00	-11.87	36.02	6.11	Average	100	50	4	11910.00	54.22	74.00	-19.78	48.11	6.11	Peak	100	50	5	17865.00	41.17	54.00	-12.83	31.56	9.61	Average	100	65	6	17865.00	54.66	74.00	-19.34	45.05	9.61	Peak	100	65
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	43.98	68.20	-24.22	42.79	1.19	Average	163	70																																																																
2	5925.00	57.04	88.20	-31.16	55.85	1.19	Peak	163	70																																																																
3	11910.00	42.13	54.00	-11.87	36.02	6.11	Average	100	50																																																																
4	11910.00	54.22	74.00	-19.78	48.11	6.11	Peak	100	50																																																																
5	17865.00	41.17	54.00	-12.83	31.56	9.61	Average	100	65																																																																
6	17865.00	54.66	74.00	-19.34	45.05	9.61	Peak	100	65																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

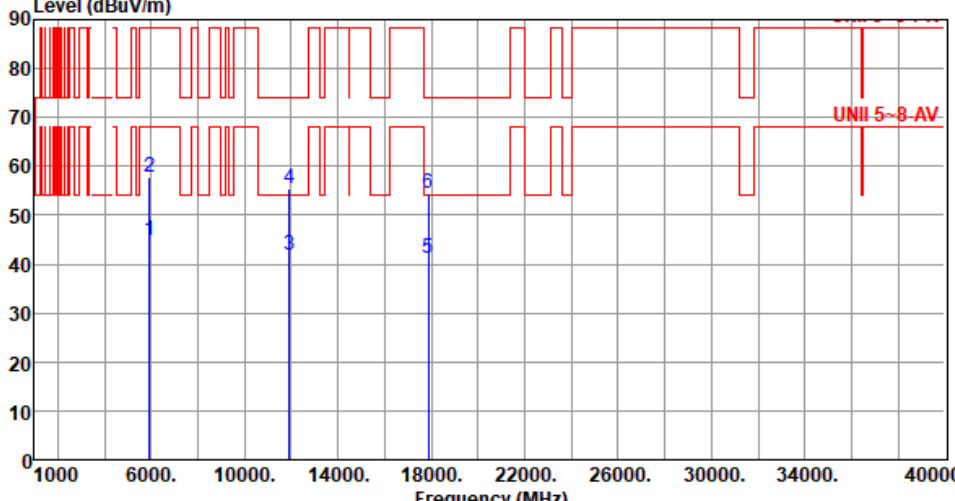


Modulation	ax HE20	Test Freq. (MHz)	5955																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBuV/m dBuV/m dB dBuV dB/m cm deg <table><tr><td>1</td><td>5925.00</td><td>44.77</td><td>68.20</td><td>-23.43</td><td>43.58</td><td>1.19</td><td>Average</td><td>163</td><td>67</td></tr><tr><td>2</td><td>5925.00</td><td>57.75</td><td>88.20</td><td>-30.45</td><td>56.56</td><td>1.19</td><td>Peak</td><td>163</td><td>67</td></tr><tr><td>3</td><td>11910.00</td><td>41.87</td><td>54.00</td><td>-12.13</td><td>35.76</td><td>6.11</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>11910.00</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>49.21</td><td>6.11</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>17865.00</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>31.67</td><td>9.61</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>17865.00</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>45.01</td><td>9.61</td><td>Peak</td><td>100</td><td>30</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	5925.00	44.77	68.20	-23.43	43.58	1.19	Average	163	67	2	5925.00	57.75	88.20	-30.45	56.56	1.19	Peak	163	67	3	11910.00	41.87	54.00	-12.13	35.76	6.11	Average	100	60	4	11910.00	55.32	74.00	-18.68	49.21	6.11	Peak	100	60	5	17865.00	41.28	54.00	-12.72	31.67	9.61	Average	100	30	6	17865.00	54.62	74.00	-19.38	45.01	9.61	Peak	100	30
1	5925.00	44.77	68.20	-23.43	43.58	1.19	Average	163	67																																																						
2	5925.00	57.75	88.20	-30.45	56.56	1.19	Peak	163	67																																																						
3	11910.00	41.87	54.00	-12.13	35.76	6.11	Average	100	60																																																						
4	11910.00	55.32	74.00	-18.68	49.21	6.11	Peak	100	60																																																						
5	17865.00	41.28	54.00	-12.72	31.67	9.61	Average	100	30																																																						
6	17865.00	54.62	74.00	-19.38	45.01	9.61	Peak	100	30																																																						

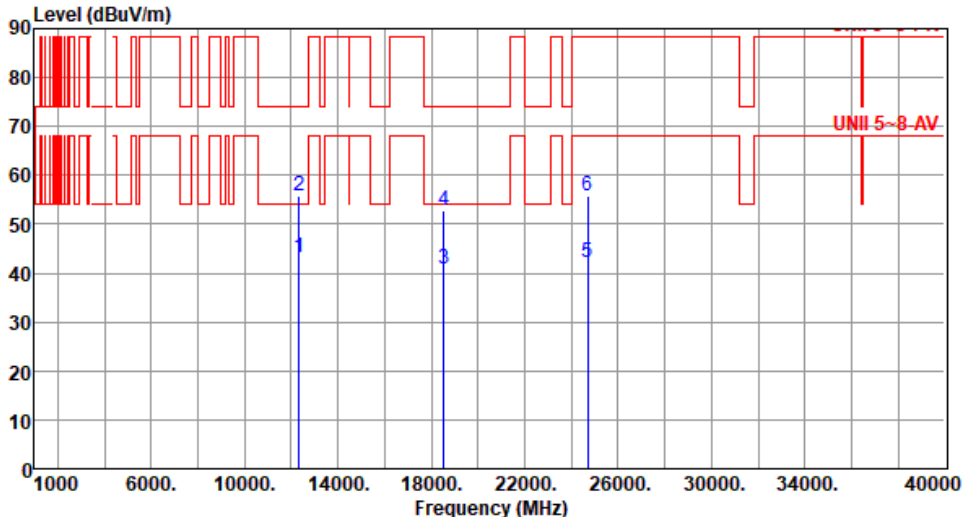


Modulation	ax HE20		Test Freq. (MHz)		6175																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12350.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>37.15</td><td>6.18</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>12350.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>49.68</td><td>6.18</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>18525.00</td><td>40.70</td><td>54.00</td><td>-13.30</td><td>40.10</td><td>0.60</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>4</td><td>18525.00</td><td>52.74</td><td>74.00</td><td>-21.26</td><td>52.14</td><td>0.60</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>5</td><td>24700.00</td><td>42.32</td><td>68.20</td><td>-25.88</td><td>34.75</td><td>7.57</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>24700.00</td><td>55.79</td><td>88.20</td><td>-32.41</td><td>48.22</td><td>7.57</td><td>Peak</td><td>100</td><td>79</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	43.33	54.00	-10.67	37.15	6.18	Average	100	50	2	12350.00	55.86	74.00	-18.14	49.68	6.18	Peak	100	50	3	18525.00	40.70	54.00	-13.30	40.10	0.60	Average	100	69	4	18525.00	52.74	74.00	-21.26	52.14	0.60	Peak	100	69	5	24700.00	42.32	68.20	-25.88	34.75	7.57	Average	100	79	6	24700.00	55.79	88.20	-32.41	48.22	7.57	Peak	100	79
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12350.00	43.33	54.00	-10.67	37.15	6.18	Average	100	50																																																																						
2	12350.00	55.86	74.00	-18.14	49.68	6.18	Peak	100	50																																																																						
3	18525.00	40.70	54.00	-13.30	40.10	0.60	Average	100	69																																																																						
4	18525.00	52.74	74.00	-21.26	52.14	0.60	Peak	100	69																																																																						
5	24700.00	42.32	68.20	-25.88	34.75	7.57	Average	100	79																																																																						
6	24700.00	55.79	88.20	-32.41	48.22	7.57	Peak	100	79																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

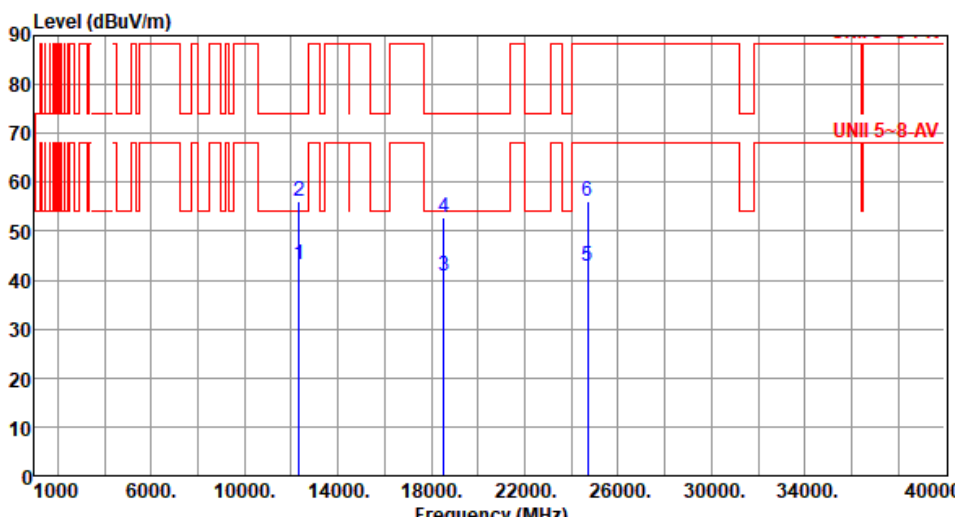

Modulation	ax HE20	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12350.00</td><td>43.20</td><td>54.00</td><td>-10.80</td><td>37.02</td><td>6.18</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>12350.00</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>50.05</td><td>6.18</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>18525.00</td><td>40.85</td><td>54.00</td><td>-13.15</td><td>40.25</td><td>0.60</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>4</td><td>18525.00</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>52.24</td><td>0.60</td><td>Peak</td><td>100</td><td>88</td></tr><tr><td>5</td><td>24700.00</td><td>42.70</td><td>68.20</td><td>-25.50</td><td>35.13</td><td>7.57</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>6</td><td>24700.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>48.42</td><td>7.57</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12350.00	43.20	54.00	-10.80	37.02	6.18	Average	100	105	2	12350.00	56.23	74.00	-17.77	50.05	6.18	Peak	100	105	3	18525.00	40.85	54.00	-13.15	40.25	0.60	Average	100	88	4	18525.00	52.84	74.00	-21.16	52.24	0.60	Peak	100	88	5	24700.00	42.70	68.20	-25.50	35.13	7.57	Average	100	116	6	24700.00	55.99	88.20	-32.21	48.42	7.57	Peak	100	116
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12350.00	43.20	54.00	-10.80	37.02	6.18	Average	100	105																																																																
2	12350.00	56.23	74.00	-17.77	50.05	6.18	Peak	100	105																																																																
3	18525.00	40.85	54.00	-13.15	40.25	0.60	Average	100	88																																																																
4	18525.00	52.84	74.00	-21.16	52.24	0.60	Peak	100	88																																																																
5	24700.00	42.70	68.20	-25.50	35.13	7.57	Average	100	116																																																																
6	24700.00	55.99	88.20	-32.21	48.42	7.57	Peak	100	116																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

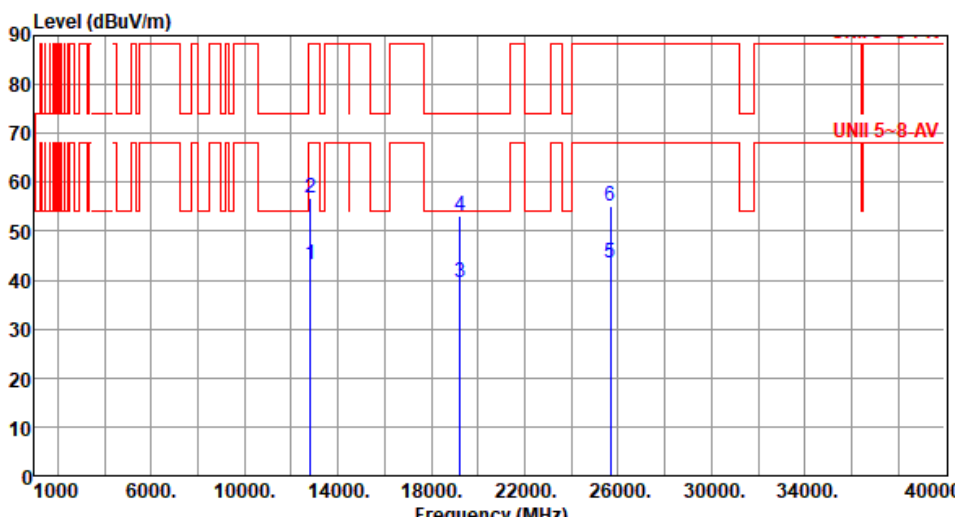

Modulation	ax HE20	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12830.00</td><td>43.08</td><td>68.20</td><td>-25.12</td><td>36.75</td><td>6.33</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>12830.00</td><td>56.89</td><td>88.20</td><td>-31.31</td><td>50.56</td><td>6.33</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>19245.00</td><td>39.46</td><td>54.00</td><td>-14.54</td><td>38.60</td><td>0.86</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>4</td><td>19245.00</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>52.32</td><td>0.86</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>5</td><td>25660.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>36.25</td><td>7.41</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>25660.00</td><td>54.99</td><td>88.20</td><td>-33.21</td><td>47.58</td><td>7.41</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	43.08	68.20	-25.12	36.75	6.33	Average	100	65	2	12830.00	56.89	88.20	-31.31	50.56	6.33	Peak	100	65	3	19245.00	39.46	54.00	-14.54	38.60	0.86	Average	100	46	4	19245.00	53.18	74.00	-20.82	52.32	0.86	Peak	100	46	5	25660.00	43.66	68.20	-24.54	36.25	7.41	Average	100	60	6	25660.00	54.99	88.20	-33.21	47.58	7.41	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	43.08	68.20	-25.12	36.75	6.33	Average	100	65																																																																
2	12830.00	56.89	88.20	-31.31	50.56	6.33	Peak	100	65																																																																
3	19245.00	39.46	54.00	-14.54	38.60	0.86	Average	100	46																																																																
4	19245.00	53.18	74.00	-20.82	52.32	0.86	Peak	100	46																																																																
5	25660.00	43.66	68.20	-24.54	36.25	7.41	Average	100	60																																																																
6	25660.00	54.99	88.20	-33.21	47.58	7.41	Peak	100	60																																																																



Modulation	ax HE20	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12830.00</td><td>43.08</td><td>68.20</td><td>-25.12</td><td>36.75</td><td>6.33</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>2</td><td>12830.00</td><td>56.92</td><td>88.20</td><td>-31.28</td><td>50.59</td><td>6.33</td><td>Peak</td><td>100</td><td>74</td></tr><tr><td>3</td><td>19245.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>38.27</td><td>0.86</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>4</td><td>19245.00</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>52.50</td><td>0.86</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>5</td><td>25660.00</td><td>42.66</td><td>68.20</td><td>-25.54</td><td>35.25</td><td>7.41</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>25660.00</td><td>54.65</td><td>88.20</td><td>-33.55</td><td>47.24</td><td>7.41</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12830.00	43.08	68.20	-25.12	36.75	6.33	Average	100	74	2	12830.00	56.92	88.20	-31.28	50.59	6.33	Peak	100	74	3	19245.00	39.13	54.00	-14.87	38.27	0.86	Average	100	130	4	19245.00	53.36	74.00	-20.64	52.50	0.86	Peak	100	130	5	25660.00	42.66	68.20	-25.54	35.25	7.41	Average	100	30	6	25660.00	54.65	88.20	-33.55	47.24	7.41	Peak	100	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12830.00	43.08	68.20	-25.12	36.75	6.33	Average	100	74																																																																
2	12830.00	56.92	88.20	-31.28	50.59	6.33	Peak	100	74																																																																
3	19245.00	39.13	54.00	-14.87	38.27	0.86	Average	100	130																																																																
4	19245.00	53.36	74.00	-20.64	52.50	0.86	Peak	100	130																																																																
5	25660.00	42.66	68.20	-25.54	35.25	7.41	Average	100	30																																																																
6	25660.00	54.65	88.20	-33.55	47.24	7.41	Peak	100	30																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	ax HE20	Test Freq. (MHz)	6435																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>36.42</td><td>6.39</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>12870.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>50.15</td><td>6.39</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>19305.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>39.33</td><td>0.92</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>19305.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>52.45</td><td>0.92</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>25740.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>35.59</td><td>7.39</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>25740.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>47.65</td><td>7.39</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.81	68.20	-25.39	36.42	6.39	Average	100	61	2	12870.00	56.54	88.20	-31.66	50.15	6.39	Peak	100	61	3	19305.00	40.25	54.00	-13.75	39.33	0.92	Average	100	80	4	19305.00	53.37	74.00	-20.63	52.45	0.92	Peak	100	80	5	25740.00	42.98	68.20	-25.22	35.59	7.39	Average	100	66	6	25740.00	55.04	88.20	-33.16	47.65	7.39	Peak	100	66
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12870.00	42.81	68.20	-25.39	36.42	6.39	Average	100	61																																																																
2	12870.00	56.54	88.20	-31.66	50.15	6.39	Peak	100	61																																																																
3	19305.00	40.25	54.00	-13.75	39.33	0.92	Average	100	80																																																																
4	19305.00	53.37	74.00	-20.63	52.45	0.92	Peak	100	80																																																																
5	25740.00	42.98	68.20	-25.22	35.59	7.39	Average	100	66																																																																
6	25740.00	55.04	88.20	-33.16	47.65	7.39	Peak	100	66																																																																



Modulation	ax HE20		Test Freq. (MHz)		6435																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu			Temperature(°C):25			Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12870.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>36.21</td><td>6.39</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>2</td><td>12870.00</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>50.15</td><td>6.39</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>3</td><td>19305.00</td><td>40.48</td><td>54.00</td><td>-13.52</td><td>39.56</td><td>0.92</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>19305.00</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>52.22</td><td>0.92</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>25740.00</td><td>42.97</td><td>68.20</td><td>-25.23</td><td>35.58</td><td>7.39</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>25740.00</td><td>55.04</td><td>88.20</td><td>-33.16</td><td>47.65</td><td>7.39</td><td>Peak</td><td>100</td><td>122</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12870.00	42.60	68.20	-25.60	36.21	6.39	Average	100	110	2	12870.00	56.54	88.20	-31.66	50.15	6.39	Peak	100	110	3	19305.00	40.48	54.00	-13.52	39.56	0.92	Average	100	30	4	19305.00	53.14	74.00	-20.86	52.22	0.92	Peak	100	30	5	25740.00	42.97	68.20	-25.23	35.58	7.39	Average	100	122	6	25740.00	55.04	88.20	-33.16	47.65	7.39	Peak	100	122
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12870.00	42.60	68.20	-25.60	36.21	6.39	Average	100	110																																																																						
2	12870.00	56.54	88.20	-31.66	50.15	6.39	Peak	100	110																																																																						
3	19305.00	40.48	54.00	-13.52	39.56	0.92	Average	100	30																																																																						
4	19305.00	53.14	74.00	-20.86	52.22	0.92	Peak	100	30																																																																						
5	25740.00	42.97	68.20	-25.23	35.58	7.39	Average	100	122																																																																						
6	25740.00	55.04	88.20	-33.16	47.65	7.39	Peak	100	122																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

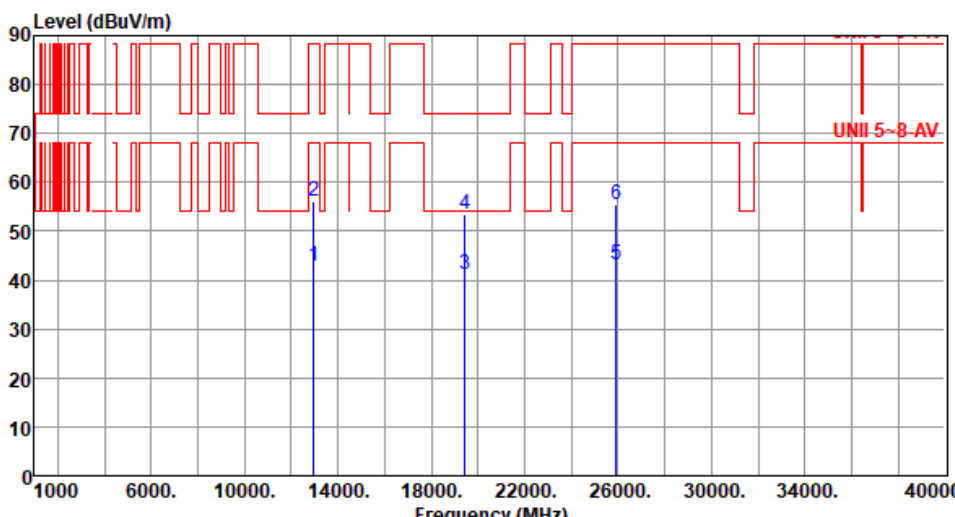

Modulation	ax HE20	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>36.42</td><td>6.46</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>12950.00</td><td>56.11</td><td>88.20</td><td>-32.09</td><td>49.65</td><td>6.46</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>19425.00</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>40.26</td><td>1.04</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>4</td><td>19425.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>52.36</td><td>1.04</td><td>Peak</td><td>100</td><td>162</td></tr><tr><td>5</td><td>25900.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>35.60</td><td>7.42</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>25900.00</td><td>55.58</td><td>88.20</td><td>-32.62</td><td>48.16</td><td>7.42</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12950.00	42.88	68.20	-25.32	36.42	6.46	Average	100	115	2	12950.00	56.11	88.20	-32.09	49.65	6.46	Peak	100	115	3	19425.00	41.30	54.00	-12.70	40.26	1.04	Average	100	162	4	19425.00	53.40	74.00	-20.60	52.36	1.04	Peak	100	162	5	25900.00	43.02	68.20	-25.18	35.60	7.42	Average	100	50	6	25900.00	55.58	88.20	-32.62	48.16	7.42	Peak	100	50
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12950.00	42.88	68.20	-25.32	36.42	6.46	Average	100	115																																																																
2	12950.00	56.11	88.20	-32.09	49.65	6.46	Peak	100	115																																																																
3	19425.00	41.30	54.00	-12.70	40.26	1.04	Average	100	162																																																																
4	19425.00	53.40	74.00	-20.60	52.36	1.04	Peak	100	162																																																																
5	25900.00	43.02	68.20	-25.18	35.60	7.42	Average	100	50																																																																
6	25900.00	55.58	88.20	-32.62	48.16	7.42	Peak	100	50																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	6475																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>12950.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>36.25</td><td>6.46</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>2</td><td>12950.00</td><td>56.12</td><td>88.20</td><td>-32.08</td><td>49.66</td><td>6.46</td><td>Peak</td><td>100</td><td>140</td></tr><tr><td>3</td><td>19425.00</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>40.33</td><td>1.04</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>4</td><td>19425.00</td><td>53.09</td><td>74.00</td><td>-20.91</td><td>52.05</td><td>1.04</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>5</td><td>25900.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>35.60</td><td>7.42</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>6</td><td>25900.00</td><td>55.48</td><td>88.20</td><td>-32.72</td><td>48.06</td><td>7.42</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12950.00	42.71	68.20	-25.49	36.25	6.46	Average	100	140	2	12950.00	56.12	88.20	-32.08	49.66	6.46	Peak	100	140	3	19425.00	41.37	54.00	-12.63	40.33	1.04	Average	100	121	4	19425.00	53.09	74.00	-20.91	52.05	1.04	Peak	100	121	5	25900.00	43.02	68.20	-25.18	35.60	7.42	Average	100	62	6	25900.00	55.48	88.20	-32.72	48.06	7.42	Peak	100	62
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	12950.00	42.71	68.20	-25.49	36.25	6.46	Average	100	140																																																																																				
2	12950.00	56.12	88.20	-32.08	49.66	6.46	Peak	100	140																																																																																				
3	19425.00	41.37	54.00	-12.63	40.33	1.04	Average	100	121																																																																																				
4	19425.00	53.09	74.00	-20.91	52.05	1.04	Peak	100	121																																																																																				
5	25900.00	43.02	68.20	-25.18	35.60	7.42	Average	100	62																																																																																				
6	25900.00	55.48	88.20	-32.72	48.06	7.42	Peak	100	62																																																																																				




Modulation	ax HE20	Test Freq. (MHz)	6515																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13030.00</td><td>42.92</td><td>68.20</td><td>-25.28</td><td>36.59</td><td>6.33</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>2</td><td>13030.00</td><td>56.58</td><td>88.20</td><td>-31.62</td><td>50.25</td><td>6.33</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>3</td><td>19545.00</td><td>40.61</td><td>54.00</td><td>-13.39</td><td>39.48</td><td>1.13</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>4</td><td>19545.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>52.45</td><td>1.13</td><td>Peak</td><td>100</td><td>75</td></tr><tr><td>5</td><td>26060.00</td><td>42.92</td><td>68.20</td><td>-25.28</td><td>35.43</td><td>7.49</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>6</td><td>26060.00</td><td>55.15</td><td>88.20</td><td>-33.05</td><td>47.66</td><td>7.49</td><td>Peak</td><td>100</td><td>136</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	42.92	68.20	-25.28	36.59	6.33	Average	100	54	2	13030.00	56.58	88.20	-31.62	50.25	6.33	Peak	100	54	3	19545.00	40.61	54.00	-13.39	39.48	1.13	Average	100	75	4	19545.00	53.58	74.00	-20.42	52.45	1.13	Peak	100	75	5	26060.00	42.92	68.20	-25.28	35.43	7.49	Average	100	136	6	26060.00	55.15	88.20	-33.05	47.66	7.49	Peak	100	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	42.92	68.20	-25.28	36.59	6.33	Average	100	54																																																																
2	13030.00	56.58	88.20	-31.62	50.25	6.33	Peak	100	54																																																																
3	19545.00	40.61	54.00	-13.39	39.48	1.13	Average	100	75																																																																
4	19545.00	53.58	74.00	-20.42	52.45	1.13	Peak	100	75																																																																
5	26060.00	42.92	68.20	-25.28	35.43	7.49	Average	100	136																																																																
6	26060.00	55.15	88.20	-33.05	47.66	7.49	Peak	100	136																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	6515																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13030.00</td><td>43.59</td><td>68.20</td><td>-24.61</td><td>37.26</td><td>6.33</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>2</td><td>13030.00</td><td>56.69</td><td>88.20</td><td>-31.51</td><td>50.36</td><td>6.33</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>3</td><td>19545.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>40.05</td><td>1.13</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>19545.00</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>52.76</td><td>1.13</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>26060.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>35.79</td><td>7.49</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>26060.00</td><td>54.71</td><td>88.20</td><td>-33.49</td><td>47.22</td><td>7.49</td><td>Peak</td><td>100</td><td>120</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13030.00	43.59	68.20	-24.61	37.26	6.33	Average	100	62	2	13030.00	56.69	88.20	-31.51	50.36	6.33	Peak	100	62	3	19545.00	41.18	54.00	-12.82	40.05	1.13	Average	100	25	4	19545.00	53.89	74.00	-20.11	52.76	1.13	Peak	100	25	5	26060.00	43.28	68.20	-24.92	35.79	7.49	Average	100	120	6	26060.00	54.71	88.20	-33.49	47.22	7.49	Peak	100	120
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13030.00	43.59	68.20	-24.61	37.26	6.33	Average	100	62																																																																
2	13030.00	56.69	88.20	-31.51	50.36	6.33	Peak	100	62																																																																
3	19545.00	41.18	54.00	-12.82	40.05	1.13	Average	100	25																																																																
4	19545.00	53.89	74.00	-20.11	52.76	1.13	Peak	100	25																																																																
5	26060.00	43.28	68.20	-24.92	35.79	7.49	Average	100	120																																																																
6	26060.00	54.71	88.20	-33.49	47.22	7.49	Peak	100	120																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

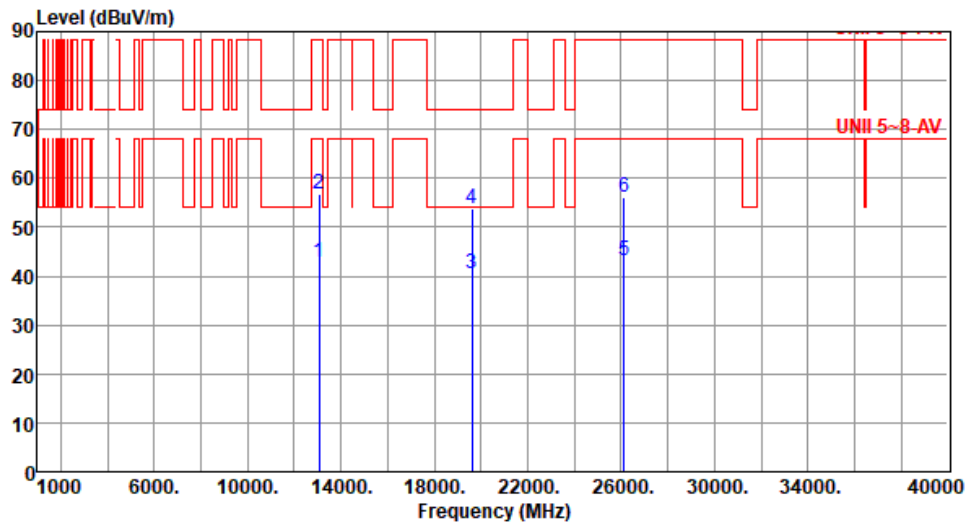


Modulation	ax HE20	Test Freq. (MHz)	6535																																																																																								
Polarization	Horizontal																																																																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																											
																																																																																											
	<table><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13070.00</td><td>42.77</td><td>68.20</td><td>-25.43</td><td>36.65</td><td>6.12</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>2</td><td>13070.00</td><td>56.71</td><td>88.20</td><td>-31.49</td><td>50.59</td><td>6.12</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>3</td><td>19605.00</td><td>40.41</td><td>54.00</td><td>-13.59</td><td>39.26</td><td>1.15</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>19605.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>52.69</td><td>1.15</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>26140.00</td><td>43.20</td><td>68.20</td><td>-25.00</td><td>35.65</td><td>7.55</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>6</td><td>26140.00</td><td>56.05</td><td>88.20</td><td>-32.15</td><td>48.50</td><td>7.55</td><td>Peak</td><td>100</td><td>88</td></tr></table>	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB/m		High	Table					dBuV			cm	deg	1	13070.00	42.77	68.20	-25.43	36.65	6.12	Average	100	40	2	13070.00	56.71	88.20	-31.49	50.59	6.12	Peak	100	40	3	19605.00	40.41	54.00	-13.59	39.26	1.15	Average	100	66	4	19605.00	53.84	74.00	-20.16	52.69	1.15	Peak	100	66	5	26140.00	43.20	68.20	-25.00	35.65	7.55	Average	100	88	6	26140.00	56.05	88.20	-32.15	48.50	7.55	Peak	100	88			
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																			
MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																			
				dBuV			cm	deg																																																																																			
1	13070.00	42.77	68.20	-25.43	36.65	6.12	Average	100	40																																																																																		
2	13070.00	56.71	88.20	-31.49	50.59	6.12	Peak	100	40																																																																																		
3	19605.00	40.41	54.00	-13.59	39.26	1.15	Average	100	66																																																																																		
4	19605.00	53.84	74.00	-20.16	52.69	1.15	Peak	100	66																																																																																		
5	26140.00	43.20	68.20	-25.00	35.65	7.55	Average	100	88																																																																																		
6	26140.00	56.05	88.20	-32.15	48.50	7.55	Peak	100	88																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																											




Modulation	ax HE20	Test Freq. (MHz)	6535																																																															
Polarization	Vertical																																																																	
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																		
Level (dBUV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>13070.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>37.25</td><td>6.12</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>13070.00</td><td>57.48</td><td>88.20</td><td>-30.72</td><td>51.36</td><td>6.12</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>19605.00</td><td>40.20</td><td>54.00</td><td>-13.80</td><td>39.05</td><td>1.15</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>19605.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>53.26</td><td>1.15</td><td>Peak</td><td>100</td><td>95</td></tr><tr><td>26140.00</td><td>43.80</td><td>68.20</td><td>-24.40</td><td>36.25</td><td>7.55</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>26140.00</td><td>55.80</td><td>88.20</td><td>-32.40</td><td>48.25</td><td>7.55</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table>				Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	13070.00	43.37	68.20	-24.83	37.25	6.12	Average	100	120	13070.00	57.48	88.20	-30.72	51.36	6.12	Peak	100	120	19605.00	40.20	54.00	-13.80	39.05	1.15	Average	100	95	19605.00	54.41	74.00	-19.59	53.26	1.15	Peak	100	95	26140.00	43.80	68.20	-24.40	36.25	7.55	Average	100	70	26140.00	55.80	88.20	-32.40	48.25	7.55	Peak	100	70
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																										
13070.00	43.37	68.20	-24.83	37.25	6.12	Average	100	120																																																										
13070.00	57.48	88.20	-30.72	51.36	6.12	Peak	100	120																																																										
19605.00	40.20	54.00	-13.80	39.05	1.15	Average	100	95																																																										
19605.00	54.41	74.00	-19.59	53.26	1.15	Peak	100	95																																																										
26140.00	43.80	68.20	-24.40	36.25	7.55	Average	100	70																																																										
26140.00	55.80	88.20	-32.40	48.25	7.55	Peak	100	70																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																		

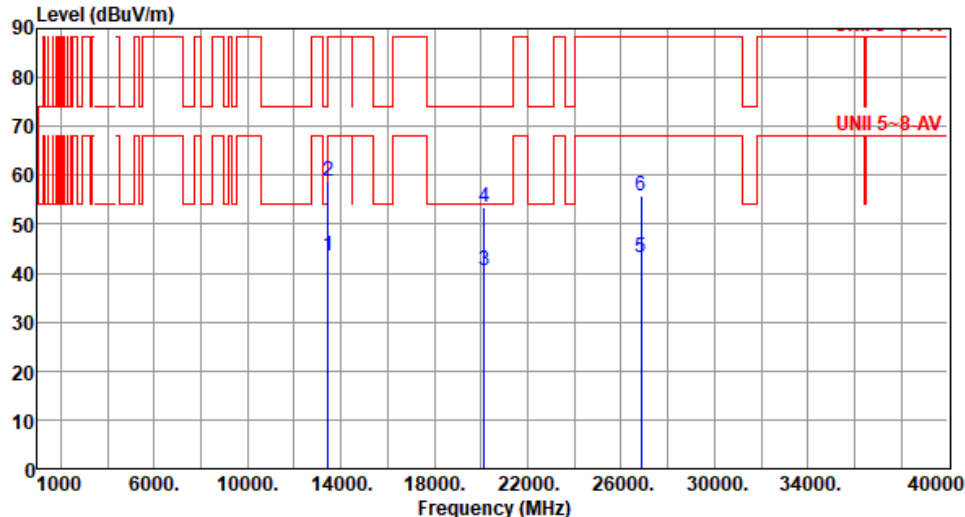

Modulation	ax HE20	Test Freq. (MHz)	6715																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>37.45</td><td>6.21</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>2</td><td>13430.00</td><td>58.86</td><td>88.20</td><td>-29.34</td><td>52.65</td><td>6.21</td><td>Peak</td><td>100</td><td>39</td></tr><tr><td>3</td><td>20145.00</td><td>40.65</td><td>54.00</td><td>-13.35</td><td>39.15</td><td>1.50</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>4</td><td>20145.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>52.02</td><td>1.50</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>5</td><td>26860.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>35.22</td><td>8.08</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>6</td><td>26860.00</td><td>55.73</td><td>88.20</td><td>-32.47</td><td>47.65</td><td>8.08</td><td>Peak</td><td>100</td><td>150</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	43.66	68.20	-24.54	37.45	6.21	Average	100	39	2	13430.00	58.86	88.20	-29.34	52.65	6.21	Peak	100	39	3	20145.00	40.65	54.00	-13.35	39.15	1.50	Average	100	79	4	20145.00	53.52	74.00	-20.48	52.02	1.50	Peak	100	79	5	26860.00	43.30	68.20	-24.90	35.22	8.08	Average	100	150	6	26860.00	55.73	88.20	-32.47	47.65	8.08	Peak	100	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	43.66	68.20	-24.54	37.45	6.21	Average	100	39																																																																
2	13430.00	58.86	88.20	-29.34	52.65	6.21	Peak	100	39																																																																
3	20145.00	40.65	54.00	-13.35	39.15	1.50	Average	100	79																																																																
4	20145.00	53.52	74.00	-20.48	52.02	1.50	Peak	100	79																																																																
5	26860.00	43.30	68.20	-24.90	35.22	8.08	Average	100	150																																																																
6	26860.00	55.73	88.20	-32.47	47.65	8.08	Peak	100	150																																																																

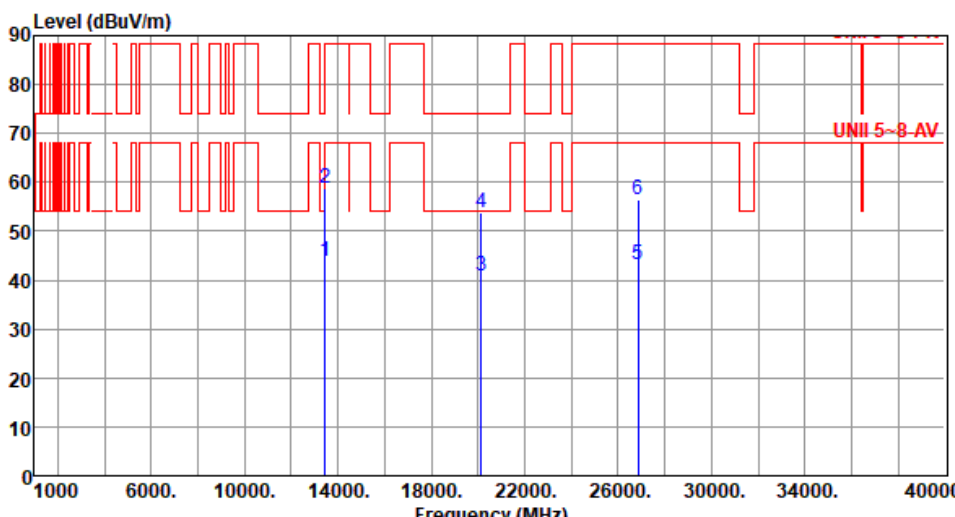

Modulation	ax HE20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13430.00</td><td>43.89</td><td>68.20</td><td>-24.31</td><td>37.68</td><td>6.21</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>2</td><td>13430.00</td><td>58.70</td><td>88.20</td><td>-29.50</td><td>52.49</td><td>6.21</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>3</td><td>20145.00</td><td>40.75</td><td>54.00</td><td>-13.25</td><td>39.25</td><td>1.50</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>20145.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>52.31</td><td>1.50</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>26860.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>35.25</td><td>8.08</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>6</td><td>26860.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>48.25</td><td>8.08</td><td>Peak</td><td>100</td><td>195</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13430.00	43.89	68.20	-24.31	37.68	6.21	Average	100	70	2	13430.00	58.70	88.20	-29.50	52.49	6.21	Peak	100	70	3	20145.00	40.75	54.00	-13.25	39.25	1.50	Average	100	102	4	20145.00	53.81	74.00	-20.19	52.31	1.50	Peak	100	102	5	26860.00	43.33	68.20	-24.87	35.25	8.08	Average	100	195	6	26860.00	56.33	88.20	-31.87	48.25	8.08	Peak	100	195
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13430.00	43.89	68.20	-24.31	37.68	6.21	Average	100	70																																																																
2	13430.00	58.70	88.20	-29.50	52.49	6.21	Peak	100	70																																																																
3	20145.00	40.75	54.00	-13.25	39.25	1.50	Average	100	102																																																																
4	20145.00	53.81	74.00	-20.19	52.31	1.50	Peak	100	102																																																																
5	26860.00	43.33	68.20	-24.87	35.25	8.08	Average	100	195																																																																
6	26860.00	56.33	88.20	-31.87	48.25	8.08	Peak	100	195																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13710.00</td><td>44.14</td><td>68.20</td><td>-24.06</td><td>37.89</td><td>6.25</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>2</td><td>13710.00</td><td>58.50</td><td>88.20</td><td>-29.70</td><td>52.25</td><td>6.25</td><td>Peak</td><td>100</td><td>52</td></tr><tr><td>3</td><td>20565.00</td><td>40.70</td><td>54.00</td><td>-13.30</td><td>38.64</td><td>2.06</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>4</td><td>20565.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>51.34</td><td>2.06</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>5</td><td>27420.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>35.42</td><td>7.94</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>6</td><td>27420.00</td><td>57.40</td><td>88.20</td><td>-30.80</td><td>49.46</td><td>7.94</td><td>Peak</td><td>100</td><td>102</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13710.00	44.14	68.20	-24.06	37.89	6.25	Average	100	52	2	13710.00	58.50	88.20	-29.70	52.25	6.25	Peak	100	52	3	20565.00	40.70	54.00	-13.30	38.64	2.06	Average	100	66	4	20565.00	53.40	74.00	-20.60	51.34	2.06	Peak	100	66	5	27420.00	43.36	68.20	-24.84	35.42	7.94	Average	100	102	6	27420.00	57.40	88.20	-30.80	49.46	7.94	Peak	100	102
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13710.00	44.14	68.20	-24.06	37.89	6.25	Average	100	52																																																																
2	13710.00	58.50	88.20	-29.70	52.25	6.25	Peak	100	52																																																																
3	20565.00	40.70	54.00	-13.30	38.64	2.06	Average	100	66																																																																
4	20565.00	53.40	74.00	-20.60	51.34	2.06	Peak	100	66																																																																
5	27420.00	43.36	68.20	-24.84	35.42	7.94	Average	100	102																																																																
6	27420.00	57.40	88.20	-30.80	49.46	7.94	Peak	100	102																																																																




Modulation	ax HE20	Test Freq. (MHz)	6855																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13710.00</td><td>44.28</td><td>68.20</td><td>-23.92</td><td>38.03</td><td>6.25</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>2</td><td>13710.00</td><td>58.20</td><td>88.20</td><td>-30.00</td><td>51.95</td><td>6.25</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>3</td><td>20565.00</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>39.24</td><td>2.06</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>4</td><td>20565.00</td><td>53.50</td><td>74.00</td><td>-20.50</td><td>51.44</td><td>2.06</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>5</td><td>27420.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>35.22</td><td>7.94</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>6</td><td>27420.00</td><td>57.06</td><td>88.20</td><td>-31.14</td><td>49.12</td><td>7.94</td><td>Peak</td><td>100</td><td>77</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13710.00	44.28	68.20	-23.92	38.03	6.25	Average	100	121	2	13710.00	58.20	88.20	-30.00	51.95	6.25	Peak	100	121	3	20565.00	41.30	54.00	-12.70	39.24	2.06	Average	100	45	4	20565.00	53.50	74.00	-20.50	51.44	2.06	Peak	100	45	5	27420.00	43.16	68.20	-25.04	35.22	7.94	Average	100	77	6	27420.00	57.06	88.20	-31.14	49.12	7.94	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13710.00	44.28	68.20	-23.92	38.03	6.25	Average	100	121																																																																
2	13710.00	58.20	88.20	-30.00	51.95	6.25	Peak	100	121																																																																
3	20565.00	41.30	54.00	-12.70	39.24	2.06	Average	100	45																																																																
4	20565.00	53.50	74.00	-20.50	51.44	2.06	Peak	100	45																																																																
5	27420.00	43.16	68.20	-25.04	35.22	7.94	Average	100	77																																																																
6	27420.00	57.06	88.20	-31.14	49.12	7.94	Peak	100	77																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	ax HE20		Test Freq. (MHz)		6875																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13750.00</td><td>45.02</td><td>68.20</td><td>-23.18</td><td>38.76</td><td>6.26</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>13750.00</td><td>58.31</td><td>88.20</td><td>-29.89</td><td>52.05</td><td>6.26</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>20625.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>39.22</td><td>2.14</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>4</td><td>20625.00</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>52.11</td><td>2.14</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>5</td><td>27500.00</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>35.16</td><td>7.93</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>6</td><td>27500.00</td><td>56.53</td><td>88.20</td><td>-31.67</td><td>48.60</td><td>7.93</td><td>Peak</td><td>100</td><td>138</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13750.00	45.02	68.20	-23.18	38.76	6.26	Average	100	61	2	13750.00	58.31	88.20	-29.89	52.05	6.26	Peak	100	61	3	20625.00	41.36	54.00	-12.64	39.22	2.14	Average	100	100	4	20625.00	54.25	74.00	-19.75	52.11	2.14	Peak	100	100	5	27500.00	43.09	68.20	-25.11	35.16	7.93	Average	100	138	6	27500.00	56.53	88.20	-31.67	48.60	7.93	Peak	100	138
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13750.00	45.02	68.20	-23.18	38.76	6.26	Average	100	61																																																																																										
2	13750.00	58.31	88.20	-29.89	52.05	6.26	Peak	100	61																																																																																										
3	20625.00	41.36	54.00	-12.64	39.22	2.14	Average	100	100																																																																																										
4	20625.00	54.25	74.00	-19.75	52.11	2.14	Peak	100	100																																																																																										
5	27500.00	43.09	68.20	-25.11	35.16	7.93	Average	100	138																																																																																										
6	27500.00	56.53	88.20	-31.67	48.60	7.93	Peak	100	138																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

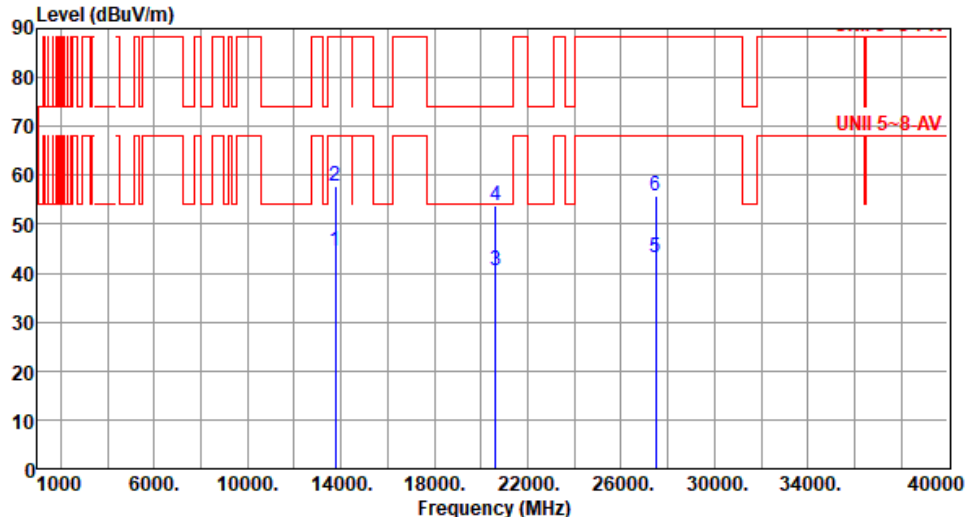

Modulation	ax HE20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13750.00	44.52	68.20	-23.68	38.26	6.26	Average	100	78
2	13750.00	57.91	88.20	-30.29	51.65	6.26	Peak	100	78
3	20625.00	40.63	54.00	-13.37	38.49	2.14	Average	100	40
4	20625.00	53.76	74.00	-20.24	51.62	2.14	Peak	100	40
5	27500.00	43.22	68.20	-24.98	35.29	7.93	Average	100	102
6	27500.00	55.69	88.20	-32.51	47.76	7.93	Peak	100	102
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

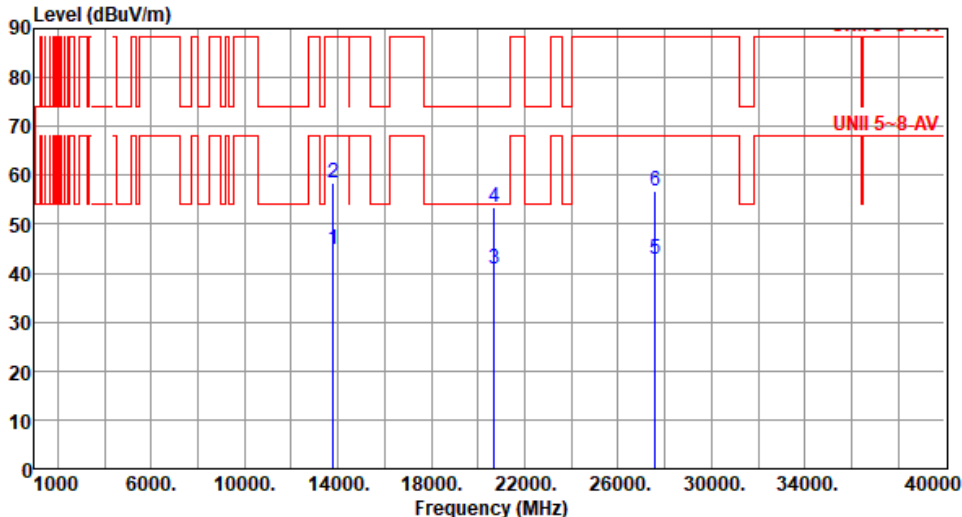

Modulation	ax HE20		Test Freq. (MHz)		6895																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13790.00</td><td>44.82</td><td>68.20</td><td>-23.38</td><td>38.55</td><td>6.27</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>13790.00</td><td>58.39</td><td>88.20</td><td>-29.81</td><td>52.12</td><td>6.27</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>20685.00</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>38.79</td><td>2.22</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>20685.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>51.15</td><td>2.22</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>27580.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>34.78</td><td>8.03</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>27580.00</td><td>56.79</td><td>88.20</td><td>-31.41</td><td>48.76</td><td>8.03</td><td>Peak</td><td>100</td><td>57</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13790.00	44.82	68.20	-23.38	38.55	6.27	Average	100	65	2	13790.00	58.39	88.20	-29.81	52.12	6.27	Peak	100	65	3	20685.00	41.01	54.00	-12.99	38.79	2.22	Average	100	25	4	20685.00	53.37	74.00	-20.63	51.15	2.22	Peak	100	25	5	27580.00	42.81	68.20	-25.39	34.78	8.03	Average	100	57	6	27580.00	56.79	88.20	-31.41	48.76	8.03	Peak	100	57
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13790.00	44.82	68.20	-23.38	38.55	6.27	Average	100	65																																																																																										
2	13790.00	58.39	88.20	-29.81	52.12	6.27	Peak	100	65																																																																																										
3	20685.00	41.01	54.00	-12.99	38.79	2.22	Average	100	25																																																																																										
4	20685.00	53.37	74.00	-20.63	51.15	2.22	Peak	100	25																																																																																										
5	27580.00	42.81	68.20	-25.39	34.78	8.03	Average	100	57																																																																																										
6	27580.00	56.79	88.20	-31.41	48.76	8.03	Peak	100	57																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	ax HE20	Test Freq. (MHz)	6895																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13790.00</td><td>44.81</td><td>68.20</td><td>-23.39</td><td>38.54</td><td>6.27</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>2</td><td>13790.00</td><td>58.53</td><td>88.20</td><td>-29.67</td><td>52.26</td><td>6.27</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>3</td><td>20685.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>39.11</td><td>2.22</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>20685.00</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>51.15</td><td>2.22</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>27580.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>34.64</td><td>8.03</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>6</td><td>27580.00</td><td>56.83</td><td>88.20</td><td>-31.37</td><td>48.80</td><td>8.03</td><td>Peak</td><td>100</td><td>125</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13790.00	44.81	68.20	-23.39	38.54	6.27	Average	100	59	2	13790.00	58.53	88.20	-29.67	52.26	6.27	Peak	100	59	3	20685.00	41.33	54.00	-12.67	39.11	2.22	Average	100	109	4	20685.00	53.37	74.00	-20.63	51.15	2.22	Peak	100	109	5	27580.00	42.67	68.20	-25.53	34.64	8.03	Average	100	125	6	27580.00	56.83	88.20	-31.37	48.80	8.03	Peak	100	125
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13790.00	44.81	68.20	-23.39	38.54	6.27	Average	100	59																																																																
2	13790.00	58.53	88.20	-29.67	52.26	6.27	Peak	100	59																																																																
3	20685.00	41.33	54.00	-12.67	39.11	2.22	Average	100	109																																																																
4	20685.00	53.37	74.00	-20.63	51.15	2.22	Peak	100	109																																																																
5	27580.00	42.67	68.20	-25.53	34.64	8.03	Average	100	125																																																																
6	27580.00	56.83	88.20	-31.37	48.80	8.03	Peak	100	125																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	ax HE20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>14030.00</td><td>45.59</td><td>68.20</td><td>-22.61</td><td>38.79</td><td>6.80</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>14030.00</td><td>58.93</td><td>88.20</td><td>-29.27</td><td>52.13</td><td>6.80</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>21045.00</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>38.66</td><td>3.02</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>4</td><td>21045.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>50.69</td><td>3.02</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>5</td><td>28060.00</td><td>44.81</td><td>68.20</td><td>-23.39</td><td>36.25</td><td>8.56</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>6</td><td>28060.00</td><td>58.58</td><td>88.20</td><td>-29.62</td><td>50.02</td><td>8.56</td><td>Peak</td><td>100</td><td>41</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	45.59	68.20	-22.61	38.79	6.80	Average	100	115	2	14030.00	58.93	88.20	-29.27	52.13	6.80	Peak	100	115	3	21045.00	41.68	54.00	-12.32	38.66	3.02	Average	100	59	4	21045.00	53.71	74.00	-20.29	50.69	3.02	Peak	100	59	5	28060.00	44.81	68.20	-23.39	36.25	8.56	Average	100	41	6	28060.00	58.58	88.20	-29.62	50.02	8.56	Peak	100	41
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	45.59	68.20	-22.61	38.79	6.80	Average	100	115																																																																
2	14030.00	58.93	88.20	-29.27	52.13	6.80	Peak	100	115																																																																
3	21045.00	41.68	54.00	-12.32	38.66	3.02	Average	100	59																																																																
4	21045.00	53.71	74.00	-20.29	50.69	3.02	Peak	100	59																																																																
5	28060.00	44.81	68.20	-23.39	36.25	8.56	Average	100	41																																																																
6	28060.00	58.58	88.20	-29.62	50.02	8.56	Peak	100	41																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) UNII 5-8-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>14030.00</td><td>46.03</td><td>68.20</td><td>-22.17</td><td>39.23</td><td>6.80</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>2</td><td>14030.00</td><td>58.69</td><td>88.20</td><td>-29.51</td><td>51.89</td><td>6.80</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>3</td><td>21045.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>37.69</td><td>3.02</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>21045.00</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>51.04</td><td>3.02</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>28060.00</td><td>44.81</td><td>68.20</td><td>-23.39</td><td>36.25</td><td>8.56</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>28060.00</td><td>58.81</td><td>88.20</td><td>-29.39</td><td>50.25</td><td>8.56</td><td>Peak</td><td>100</td><td>58</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14030.00	46.03	68.20	-22.17	39.23	6.80	Average	100	72	2	14030.00	58.69	88.20	-29.51	51.89	6.80	Peak	100	72	3	21045.00	40.71	54.00	-13.29	37.69	3.02	Average	100	102	4	21045.00	54.06	74.00	-19.94	51.04	3.02	Peak	100	102	5	28060.00	44.81	68.20	-23.39	36.25	8.56	Average	100	58	6	28060.00	58.81	88.20	-29.39	50.25	8.56	Peak	100	58
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14030.00	46.03	68.20	-22.17	39.23	6.80	Average	100	72																																																																
2	14030.00	58.69	88.20	-29.51	51.89	6.80	Peak	100	72																																																																
3	21045.00	40.71	54.00	-13.29	37.69	3.02	Average	100	102																																																																
4	21045.00	54.06	74.00	-19.94	51.04	3.02	Peak	100	102																																																																
5	28060.00	44.81	68.20	-23.39	36.25	8.56	Average	100	58																																																																
6	28060.00	58.81	88.20	-29.39	50.25	8.56	Peak	100	58																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

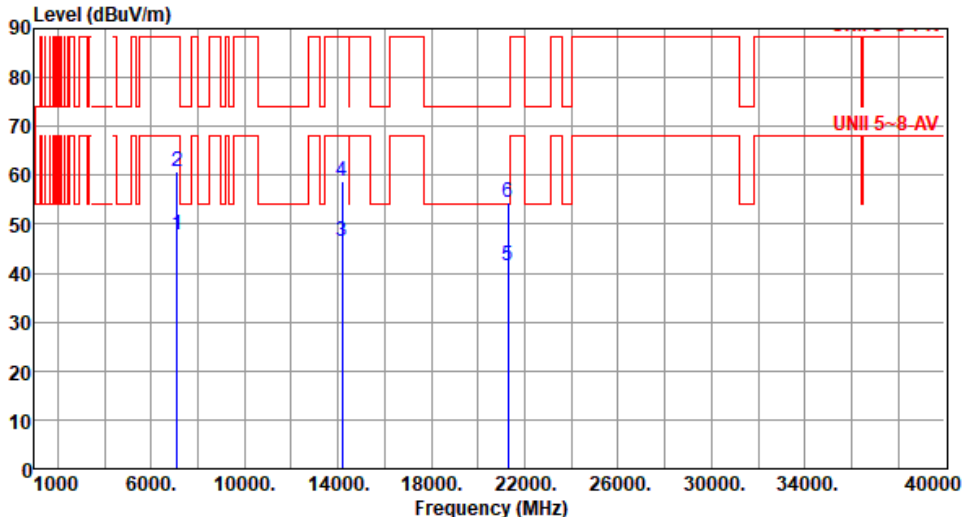

Modulation	ax HE20		Test Freq. (MHz)		7095																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.67</td><td>68.20</td><td>-20.53</td><td>42.89</td><td>4.78</td><td>Average</td><td>172</td><td>183</td></tr><tr><td>2</td><td>7125.00</td><td>60.67</td><td>88.20</td><td>-27.53</td><td>55.89</td><td>4.78</td><td>Peak</td><td>172</td><td>183</td></tr><tr><td>3</td><td>14190.00</td><td>46.36</td><td>68.20</td><td>-21.84</td><td>39.21</td><td>7.15</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>4</td><td>14190.00</td><td>58.80</td><td>88.20</td><td>-29.40</td><td>51.65</td><td>7.15</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>5</td><td>21285.00</td><td>41.59</td><td>54.00</td><td>-12.41</td><td>38.26</td><td>3.33</td><td>Average</td><td>100</td><td>75</td></tr><tr><td>6</td><td>21285.00</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>51.20</td><td>3.33</td><td>Peak</td><td>100</td><td>75</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.67	68.20	-20.53	42.89	4.78	Average	172	183	2	7125.00	60.67	88.20	-27.53	55.89	4.78	Peak	172	183	3	14190.00	46.36	68.20	-21.84	39.21	7.15	Average	100	79	4	14190.00	58.80	88.20	-29.40	51.65	7.15	Peak	100	79	5	21285.00	41.59	54.00	-12.41	38.26	3.33	Average	100	75	6	21285.00	54.53	74.00	-19.47	51.20	3.33	Peak	100	75
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7125.00	47.67	68.20	-20.53	42.89	4.78	Average	172	183																																																																						
2	7125.00	60.67	88.20	-27.53	55.89	4.78	Peak	172	183																																																																						
3	14190.00	46.36	68.20	-21.84	39.21	7.15	Average	100	79																																																																						
4	14190.00	58.80	88.20	-29.40	51.65	7.15	Peak	100	79																																																																						
5	21285.00	41.59	54.00	-12.41	38.26	3.33	Average	100	75																																																																						
6	21285.00	54.53	74.00	-19.47	51.20	3.33	Peak	100	75																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	ax HE20	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.93</td><td>68.20</td><td>-20.27</td><td>43.15</td><td>4.78</td><td>Average</td><td>165</td><td>42</td></tr><tr><td>2</td><td>7125.00</td><td>61.46</td><td>88.20</td><td>-26.74</td><td>56.68</td><td>4.78</td><td>Peak</td><td>165</td><td>42</td></tr><tr><td>3</td><td>14190.00</td><td>45.81</td><td>68.20</td><td>-22.39</td><td>38.66</td><td>7.15</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>14190.00</td><td>59.04</td><td>88.20</td><td>-29.16</td><td>51.89</td><td>7.15</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>21285.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>38.21</td><td>3.33</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>6</td><td>21285.00</td><td>54.59</td><td>74.00</td><td>-19.41</td><td>51.26</td><td>3.33</td><td>Peak</td><td>100</td><td>111</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.93	68.20	-20.27	43.15	4.78	Average	165	42	2	7125.00	61.46	88.20	-26.74	56.68	4.78	Peak	165	42	3	14190.00	45.81	68.20	-22.39	38.66	7.15	Average	100	90	4	14190.00	59.04	88.20	-29.16	51.89	7.15	Peak	100	90	5	21285.00	41.54	54.00	-12.46	38.21	3.33	Average	100	111	6	21285.00	54.59	74.00	-19.41	51.26	3.33	Peak	100	111
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.93	68.20	-20.27	43.15	4.78	Average	165	42																																																																
2	7125.00	61.46	88.20	-26.74	56.68	4.78	Peak	165	42																																																																
3	14190.00	45.81	68.20	-22.39	38.66	7.15	Average	100	90																																																																
4	14190.00	59.04	88.20	-29.16	51.89	7.15	Peak	100	90																																																																
5	21285.00	41.54	54.00	-12.46	38.21	3.33	Average	100	111																																																																
6	21285.00	54.59	74.00	-19.41	51.26	3.33	Peak	100	111																																																																



Modulation	ax HE20	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>61.80</td><td>68.20</td><td>-6.40</td><td>57.02</td><td>4.78</td><td>Average</td><td>176</td><td>285</td></tr><tr><td>2</td><td>7125.00</td><td>75.70</td><td>88.20</td><td>-12.50</td><td>70.92</td><td>4.78</td><td>Peak</td><td>176</td><td>285</td></tr><tr><td>3</td><td>14230.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>38.57</td><td>7.18</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>14230.00</td><td>60.75</td><td>88.20</td><td>-27.45</td><td>53.57</td><td>7.18</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>21345.00</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>37.76</td><td>3.40</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>6</td><td>21345.00</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>50.65</td><td>3.40</td><td>Peak</td><td>100</td><td>160</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	61.80	68.20	-6.40	57.02	4.78	Average	176	285	2	7125.00	75.70	88.20	-12.50	70.92	4.78	Peak	176	285	3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	90	4	14230.00	60.75	88.20	-27.45	53.57	7.18	Peak	100	90	5	21345.00	41.16	54.00	-12.84	37.76	3.40	Average	100	160	6	21345.00	54.05	74.00	-19.95	50.65	3.40	Peak	100	160
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	61.80	68.20	-6.40	57.02	4.78	Average	176	285																																																																
2	7125.00	75.70	88.20	-12.50	70.92	4.78	Peak	176	285																																																																
3	14230.00	45.75	68.20	-22.45	38.57	7.18	Average	100	90																																																																
4	14230.00	60.75	88.20	-27.45	53.57	7.18	Peak	100	90																																																																
5	21345.00	41.16	54.00	-12.84	37.76	3.40	Average	100	160																																																																
6	21345.00	54.05	74.00	-19.95	50.65	3.40	Peak	100	160																																																																

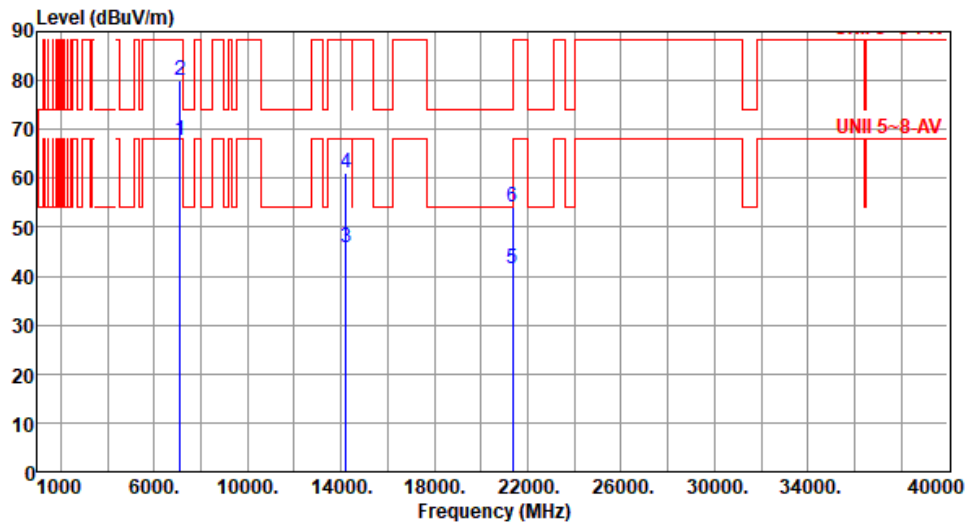

Modulation	ax HE20	Test Freq. (MHz)	7115																																																																							
Polarization	Vertical																																																																									
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>67.73</td><td>68.20</td><td>-0.47</td><td>62.95</td><td>4.78</td><td>Average</td><td>167</td><td>48</td></tr><tr><td>2</td><td>7125.00</td><td>80.00</td><td>88.20</td><td>-8.20</td><td>75.22</td><td>4.78</td><td>Peak</td><td>167</td><td>48</td></tr><tr><td>3</td><td>14230.00</td><td>45.85</td><td>68.20</td><td>-22.35</td><td>38.67</td><td>7.18</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>14230.00</td><td>61.21</td><td>88.20</td><td>-26.99</td><td>54.03</td><td>7.18</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>21345.00</td><td>41.51</td><td>54.00</td><td>-12.49</td><td>38.11</td><td>3.40</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>21345.00</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>50.85</td><td>3.40</td><td>Peak</td><td>100</td><td>105</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	67.73	68.20	-0.47	62.95	4.78	Average	167	48	2	7125.00	80.00	88.20	-8.20	75.22	4.78	Peak	167	48	3	14230.00	45.85	68.20	-22.35	38.67	7.18	Average	100	125	4	14230.00	61.21	88.20	-26.99	54.03	7.18	Peak	100	125	5	21345.00	41.51	54.00	-12.49	38.11	3.40	Average	100	105	6	21345.00	54.25	74.00	-19.75	50.85	3.40	Peak	100	105			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	7125.00	67.73	68.20	-0.47	62.95	4.78	Average	167	48																																																																	
2	7125.00	80.00	88.20	-8.20	75.22	4.78	Peak	167	48																																																																	
3	14230.00	45.85	68.20	-22.35	38.67	7.18	Average	100	125																																																																	
4	14230.00	61.21	88.20	-26.99	54.03	7.18	Peak	100	125																																																																	
5	21345.00	41.51	54.00	-12.49	38.11	3.40	Average	100	105																																																																	
6	21345.00	54.25	74.00	-19.75	50.85	3.40	Peak	100	105																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Unwanted Emissions (Above 1GHz) for ax HE40


Modulation	ax HE40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.54	68.20	-24.66	42.35	1.19	Average	165	66
2	5925.00	55.40	88.20	-32.80	54.21	1.19	Peak	165	66
3	11930.00	42.01	54.00	-11.99	35.89	6.12	Average	100	145
4	11930.00	54.43	74.00	-19.57	48.31	6.12	Peak	100	145
5	17895.00	41.32	54.00	-12.68	31.25	10.07	Average	100	150
6	17895.00	55.12	74.00	-18.88	45.05	10.07	Peak	100	150

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	ax HE40	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>45.52</td><td>68.20</td><td>-22.68</td><td>44.33</td><td>1.19</td><td>Average</td><td>163</td><td>65</td></tr><tr><td>2</td><td>5925.00</td><td>58.08</td><td>88.20</td><td>-30.12</td><td>56.89</td><td>1.19</td><td>Peak</td><td>163</td><td>65</td></tr><tr><td>3</td><td>11930.00</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>36.25</td><td>6.12</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>4</td><td>11930.00</td><td>54.54</td><td>74.00</td><td>-19.46</td><td>48.42</td><td>6.12</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>5</td><td>17895.00</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>31.31</td><td>10.07</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>6</td><td>17895.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>45.12</td><td>10.07</td><td>Peak</td><td>100</td><td>201</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.52	68.20	-22.68	44.33	1.19	Average	163	65	2	5925.00	58.08	88.20	-30.12	56.89	1.19	Peak	163	65	3	11930.00	42.37	54.00	-11.63	36.25	6.12	Average	100	89	4	11930.00	54.54	74.00	-19.46	48.42	6.12	Peak	100	89	5	17895.00	41.38	54.00	-12.62	31.31	10.07	Average	100	201	6	17895.00	55.19	74.00	-18.81	45.12	10.07	Peak	100	201
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.52	68.20	-22.68	44.33	1.19	Average	163	65																																																																
2	5925.00	58.08	88.20	-30.12	56.89	1.19	Peak	163	65																																																																
3	11930.00	42.37	54.00	-11.63	36.25	6.12	Average	100	89																																																																
4	11930.00	54.54	74.00	-19.46	48.42	6.12	Peak	100	89																																																																
5	17895.00	41.38	54.00	-12.62	31.31	10.07	Average	100	201																																																																
6	17895.00	55.19	74.00	-18.81	45.12	10.07	Peak	100	201																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

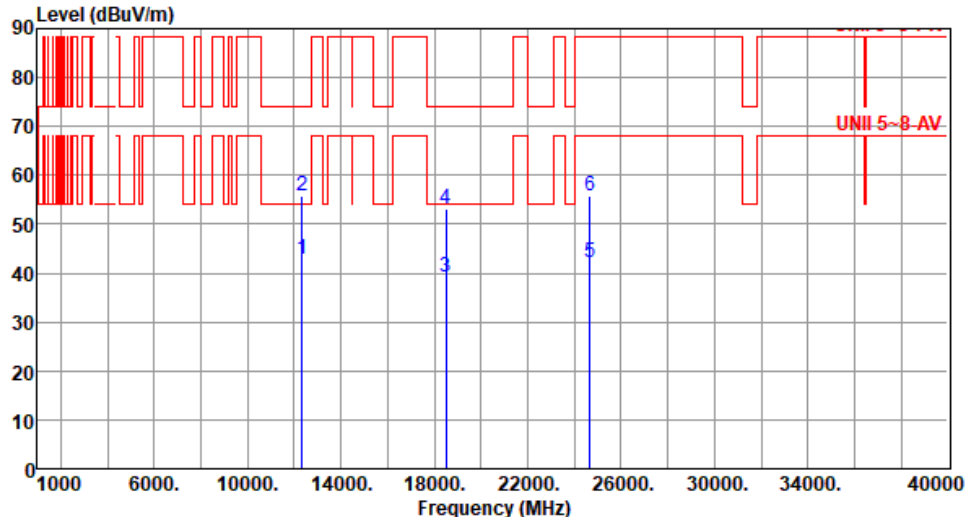

Modulation	ax HE40	Test Freq. (MHz)	6165																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12330.00</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>36.75</td><td>6.19</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>12330.00</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>49.65</td><td>6.19</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>18495.00</td><td>39.16</td><td>54.00</td><td>-14.84</td><td>38.58</td><td>0.58</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>18495.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>52.45</td><td>0.58</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>24660.00</td><td>42.32</td><td>68.20</td><td>-25.88</td><td>34.78</td><td>7.54</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>24660.00</td><td>55.74</td><td>88.20</td><td>-32.46</td><td>48.20</td><td>7.54</td><td>Peak</td><td>100</td><td>100</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12330.00	42.94	54.00	-11.06	36.75	6.19	Average	100	50	2	12330.00	55.84	74.00	-18.16	49.65	6.19	Peak	100	50	3	18495.00	39.16	54.00	-14.84	38.58	0.58	Average	100	60	4	18495.00	53.03	74.00	-20.97	52.45	0.58	Peak	100	60	5	24660.00	42.32	68.20	-25.88	34.78	7.54	Average	100	100	6	24660.00	55.74	88.20	-32.46	48.20	7.54	Peak	100	100
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12330.00	42.94	54.00	-11.06	36.75	6.19	Average	100	50																																																																
2	12330.00	55.84	74.00	-18.16	49.65	6.19	Peak	100	50																																																																
3	18495.00	39.16	54.00	-14.84	38.58	0.58	Average	100	60																																																																
4	18495.00	53.03	74.00	-20.97	52.45	0.58	Peak	100	60																																																																
5	24660.00	42.32	68.20	-25.88	34.78	7.54	Average	100	100																																																																
6	24660.00	55.74	88.20	-32.46	48.20	7.54	Peak	100	100																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

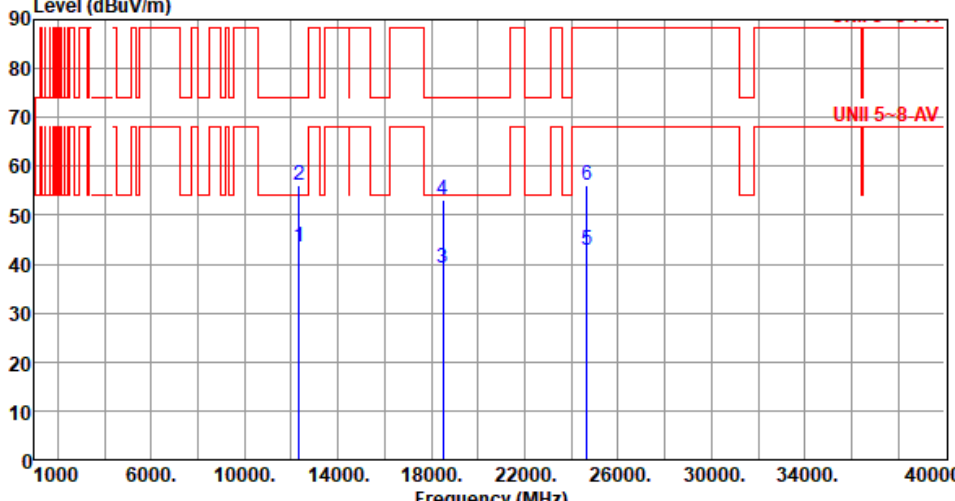

Modulation	ax HE40	Test Freq. (MHz)	6165						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12330.00	43.40	54.00	-10.60	37.21	6.19	Average	100	65
2	12330.00	56.08	74.00	-17.92	49.89	6.19	Peak	100	65
3	18495.00	39.25	54.00	-14.75	38.67	0.58	Average	100	79
4	18495.00	53.03	74.00	-20.97	52.45	0.58	Peak	100	79
5	24660.00	42.79	68.20	-25.41	35.25	7.54	Average	100	115
6	24660.00	56.18	88.20	-32.02	48.64	7.54	Peak	100	115
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	ax HE40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12810.00</td><td>43.53</td><td>68.20</td><td>-24.67</td><td>37.23</td><td>6.30</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>2</td><td>12810.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>50.65</td><td>6.30</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>3</td><td>19215.00</td><td>39.55</td><td>54.00</td><td>-14.45</td><td>38.67</td><td>0.88</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>4</td><td>19215.00</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>52.45</td><td>0.88</td><td>Peak</td><td>100</td><td>31</td></tr><tr><td>5</td><td>25620.00</td><td>43.10</td><td>68.20</td><td>-25.10</td><td>35.69</td><td>7.41</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>25620.00</td><td>54.87</td><td>88.20</td><td>-33.33</td><td>47.46</td><td>7.41</td><td>Peak</td><td>100</td><td>49</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	43.53	68.20	-24.67	37.23	6.30	Average	100	100	2	12810.00	56.95	88.20	-31.25	50.65	6.30	Peak	100	100	3	19215.00	39.55	54.00	-14.45	38.67	0.88	Average	100	31	4	19215.00	53.33	74.00	-20.67	52.45	0.88	Peak	100	31	5	25620.00	43.10	68.20	-25.10	35.69	7.41	Average	100	49	6	25620.00	54.87	88.20	-33.33	47.46	7.41	Peak	100	49
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12810.00	43.53	68.20	-24.67	37.23	6.30	Average	100	100																																																																
2	12810.00	56.95	88.20	-31.25	50.65	6.30	Peak	100	100																																																																
3	19215.00	39.55	54.00	-14.45	38.67	0.88	Average	100	31																																																																
4	19215.00	53.33	74.00	-20.67	52.45	0.88	Peak	100	31																																																																
5	25620.00	43.10	68.20	-25.10	35.69	7.41	Average	100	49																																																																
6	25620.00	54.87	88.20	-33.33	47.46	7.41	Peak	100	49																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE40		Test Freq. (MHz)		6405																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12810.00</td><td>43.56</td><td>68.20</td><td>-24.64</td><td>37.26</td><td>6.30</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>2</td><td>12810.00</td><td>57.56</td><td>88.20</td><td>-30.64</td><td>51.26</td><td>6.30</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>3</td><td>19215.00</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>39.27</td><td>0.88</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>4</td><td>19215.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>52.64</td><td>0.88</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>5</td><td>25620.00</td><td>43.20</td><td>68.20</td><td>-25.00</td><td>35.79</td><td>7.41</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>25620.00</td><td>55.06</td><td>88.20</td><td>-33.14</td><td>47.65</td><td>7.41</td><td>Peak</td><td>100</td><td>18</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12810.00	43.56	68.20	-24.64	37.26	6.30	Average	100	130	2	12810.00	57.56	88.20	-30.64	51.26	6.30	Peak	100	130	3	19215.00	40.15	54.00	-13.85	39.27	0.88	Average	100	46	4	19215.00	53.52	74.00	-20.48	52.64	0.88	Peak	100	46	5	25620.00	43.20	68.20	-25.00	35.79	7.41	Average	100	18	6	25620.00	55.06	88.20	-33.14	47.65	7.41	Peak	100	18
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12810.00	43.56	68.20	-24.64	37.26	6.30	Average	100	130																																																																						
2	12810.00	57.56	88.20	-30.64	51.26	6.30	Peak	100	130																																																																						
3	19215.00	40.15	54.00	-13.85	39.27	0.88	Average	100	46																																																																						
4	19215.00	53.52	74.00	-20.48	52.64	0.88	Peak	100	46																																																																						
5	25620.00	43.20	68.20	-25.00	35.79	7.41	Average	100	18																																																																						
6	25620.00	55.06	88.20	-33.14	47.65	7.41	Peak	100	18																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

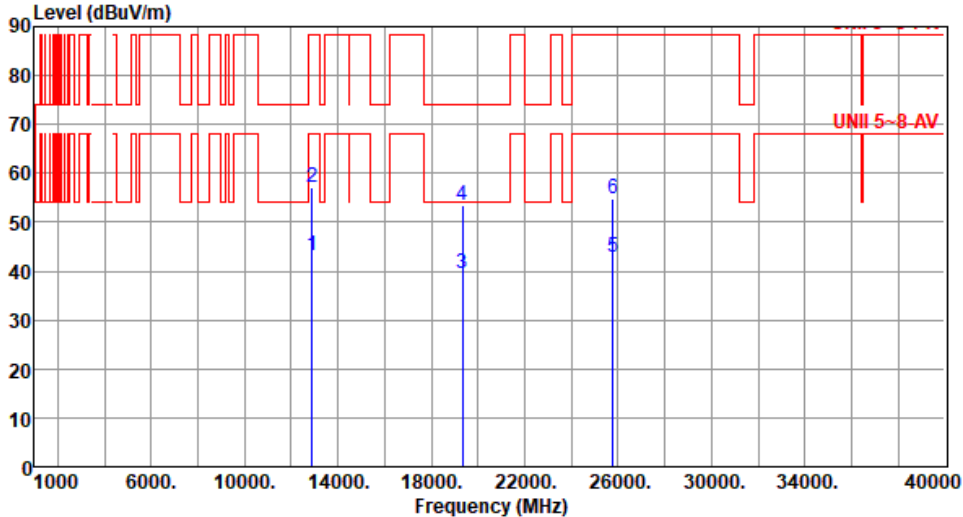


Modulation	ax HE40	Test Freq. (MHz)	6445																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12890.00</td><td>43.07</td><td>68.20</td><td>-25.13</td><td>36.65</td><td>6.42</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>2</td><td>12890.00</td><td>57.07</td><td>88.20</td><td>-31.13</td><td>50.65</td><td>6.42</td><td>Peak</td><td>100</td><td>92</td></tr><tr><td>3</td><td>19335.00</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>38.60</td><td>0.94</td><td>Average</td><td>100</td><td>131</td></tr><tr><td>4</td><td>19335.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>52.66</td><td>0.94</td><td>Peak</td><td>100</td><td>131</td></tr><tr><td>5</td><td>25780.00</td><td>42.82</td><td>68.20</td><td>-25.38</td><td>35.43</td><td>7.39</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>25780.00</td><td>54.82</td><td>88.20</td><td>-33.38</td><td>47.43</td><td>7.39</td><td>Peak</td><td>100</td><td>70</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	43.07	68.20	-25.13	36.65	6.42	Average	100	92	2	12890.00	57.07	88.20	-31.13	50.65	6.42	Peak	100	92	3	19335.00	39.54	54.00	-14.46	38.60	0.94	Average	100	131	4	19335.00	53.60	74.00	-20.40	52.66	0.94	Peak	100	131	5	25780.00	42.82	68.20	-25.38	35.43	7.39	Average	100	70	6	25780.00	54.82	88.20	-33.38	47.43	7.39	Peak	100	70
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	43.07	68.20	-25.13	36.65	6.42	Average	100	92																																																																
2	12890.00	57.07	88.20	-31.13	50.65	6.42	Peak	100	92																																																																
3	19335.00	39.54	54.00	-14.46	38.60	0.94	Average	100	131																																																																
4	19335.00	53.60	74.00	-20.40	52.66	0.94	Peak	100	131																																																																
5	25780.00	42.82	68.20	-25.38	35.43	7.39	Average	100	70																																																																
6	25780.00	54.82	88.20	-33.38	47.43	7.39	Peak	100	70																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	ax HE40	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12890.00</td><td>43.63</td><td>68.20</td><td>-24.57</td><td>37.21</td><td>6.42</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>12890.00</td><td>57.64</td><td>88.20</td><td>-30.56</td><td>51.22</td><td>6.42</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>19335.00</td><td>40.20</td><td>54.00</td><td>-13.80</td><td>39.26</td><td>0.94</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>19335.00</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>52.50</td><td>0.94</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>25780.00</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>35.49</td><td>7.39</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>6</td><td>25780.00</td><td>55.05</td><td>88.20</td><td>-33.15</td><td>47.66</td><td>7.39</td><td>Peak</td><td>100</td><td>195</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12890.00	43.63	68.20	-24.57	37.21	6.42	Average	100	77	2	12890.00	57.64	88.20	-30.56	51.22	6.42	Peak	100	77	3	19335.00	40.20	54.00	-13.80	39.26	0.94	Average	100	60	4	19335.00	53.44	74.00	-20.56	52.50	0.94	Peak	100	60	5	25780.00	42.88	68.20	-25.32	35.49	7.39	Average	100	195	6	25780.00	55.05	88.20	-33.15	47.66	7.39	Peak	100	195
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12890.00	43.63	68.20	-24.57	37.21	6.42	Average	100	77																																																																
2	12890.00	57.64	88.20	-30.56	51.22	6.42	Peak	100	77																																																																
3	19335.00	40.20	54.00	-13.80	39.26	0.94	Average	100	60																																																																
4	19335.00	53.44	74.00	-20.56	52.50	0.94	Peak	100	60																																																																
5	25780.00	42.88	68.20	-25.32	35.49	7.39	Average	100	195																																																																
6	25780.00	55.05	88.20	-33.15	47.66	7.39	Peak	100	195																																																																

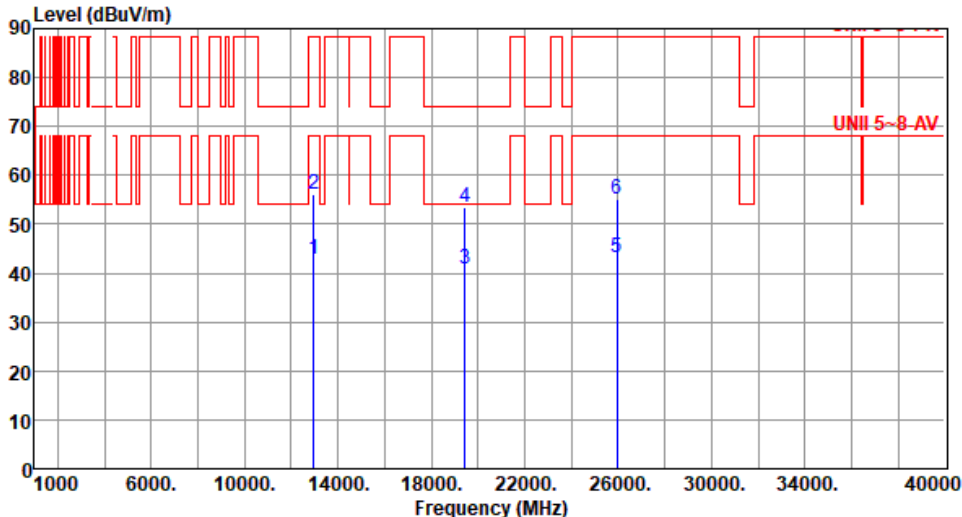

Modulation	ax HE40		Test Freq. (MHz)		6485																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12970.00</td><td>42.89</td><td>68.20</td><td>-25.31</td><td>36.42</td><td>6.47</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>12970.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>49.66</td><td>6.47</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>19455.00</td><td>40.86</td><td>54.00</td><td>-13.14</td><td>39.80</td><td>1.06</td><td>Average</td><td>100</td><td>180</td></tr><tr><td>4</td><td>19455.00</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>52.27</td><td>1.06</td><td>Peak</td><td>100</td><td>180</td></tr><tr><td>5</td><td>25940.00</td><td>43.05</td><td>68.20</td><td>-25.15</td><td>35.61</td><td>7.44</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>6</td><td>25940.00</td><td>55.03</td><td>88.20</td><td>-33.17</td><td>47.59</td><td>7.44</td><td>Peak</td><td>100</td><td>142</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	12970.00	42.89	68.20	-25.31	36.42	6.47	Average	100	115	2	12970.00	56.13	88.20	-32.07	49.66	6.47	Peak	100	115	3	19455.00	40.86	54.00	-13.14	39.80	1.06	Average	100	180	4	19455.00	53.33	74.00	-20.67	52.27	1.06	Peak	100	180	5	25940.00	43.05	68.20	-25.15	35.61	7.44	Average	100	142	6	25940.00	55.03	88.20	-33.17	47.59	7.44	Peak	100	142
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	12970.00	42.89	68.20	-25.31	36.42	6.47	Average	100	115																																																																																										
2	12970.00	56.13	88.20	-32.07	49.66	6.47	Peak	100	115																																																																																										
3	19455.00	40.86	54.00	-13.14	39.80	1.06	Average	100	180																																																																																										
4	19455.00	53.33	74.00	-20.67	52.27	1.06	Peak	100	180																																																																																										
5	25940.00	43.05	68.20	-25.15	35.61	7.44	Average	100	142																																																																																										
6	25940.00	55.03	88.20	-33.17	47.59	7.44	Peak	100	142																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	ax HE40	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12970.00</td><td>43.05</td><td>68.20</td><td>-25.15</td><td>36.58</td><td>6.47</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>12970.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>50.31</td><td>6.47</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>19455.00</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>40.37</td><td>1.06</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>4</td><td>19455.00</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>52.40</td><td>1.06</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>5</td><td>25940.00</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>35.65</td><td>7.44</td><td>Average</td><td>100</td><td>151</td></tr><tr><td>6</td><td>25940.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>48.15</td><td>7.44</td><td>Peak</td><td>100</td><td>151</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12970.00	43.05	68.20	-25.15	36.58	6.47	Average	100	105	2	12970.00	56.78	88.20	-31.42	50.31	6.47	Peak	100	105	3	19455.00	41.43	54.00	-12.57	40.37	1.06	Average	100	201	4	19455.00	53.46	74.00	-20.54	52.40	1.06	Peak	100	201	5	25940.00	43.09	68.20	-25.11	35.65	7.44	Average	100	151	6	25940.00	55.59	88.20	-32.61	48.15	7.44	Peak	100	151
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12970.00	43.05	68.20	-25.15	36.58	6.47	Average	100	105																																																																
2	12970.00	56.78	88.20	-31.42	50.31	6.47	Peak	100	105																																																																
3	19455.00	41.43	54.00	-12.57	40.37	1.06	Average	100	201																																																																
4	19455.00	53.46	74.00	-20.54	52.40	1.06	Peak	100	201																																																																
5	25940.00	43.09	68.20	-25.11	35.65	7.44	Average	100	151																																																																
6	25940.00	55.59	88.20	-32.61	48.15	7.44	Peak	100	151																																																																




Modulation	ax HE40	Test Freq. (MHz)	6525																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13050.00</td><td>42.84</td><td>68.20</td><td>-25.36</td><td>36.62</td><td>6.22</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>13050.00</td><td>56.68</td><td>88.20</td><td>-31.52</td><td>50.46</td><td>6.22</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>19575.00</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>39.46</td><td>1.13</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>4</td><td>19575.00</td><td>53.83</td><td>74.00</td><td>-20.17</td><td>52.70</td><td>1.13</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>5</td><td>26100.00</td><td>42.77</td><td>68.20</td><td>-25.43</td><td>35.24</td><td>7.53</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>6</td><td>26100.00</td><td>54.97</td><td>88.20</td><td>-33.23</td><td>47.44</td><td>7.53</td><td>Peak</td><td>100</td><td>130</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13050.00	42.84	68.20	-25.36	36.62	6.22	Average	100	50	2	13050.00	56.68	88.20	-31.52	50.46	6.22	Peak	100	50	3	19575.00	40.59	54.00	-13.41	39.46	1.13	Average	100	77	4	19575.00	53.83	74.00	-20.17	52.70	1.13	Peak	100	77	5	26100.00	42.77	68.20	-25.43	35.24	7.53	Average	100	130	6	26100.00	54.97	88.20	-33.23	47.44	7.53	Peak	100	130
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13050.00	42.84	68.20	-25.36	36.62	6.22	Average	100	50																																																																
2	13050.00	56.68	88.20	-31.52	50.46	6.22	Peak	100	50																																																																
3	19575.00	40.59	54.00	-13.41	39.46	1.13	Average	100	77																																																																
4	19575.00	53.83	74.00	-20.17	52.70	1.13	Peak	100	77																																																																
5	26100.00	42.77	68.20	-25.43	35.24	7.53	Average	100	130																																																																
6	26100.00	54.97	88.20	-33.23	47.44	7.53	Peak	100	130																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

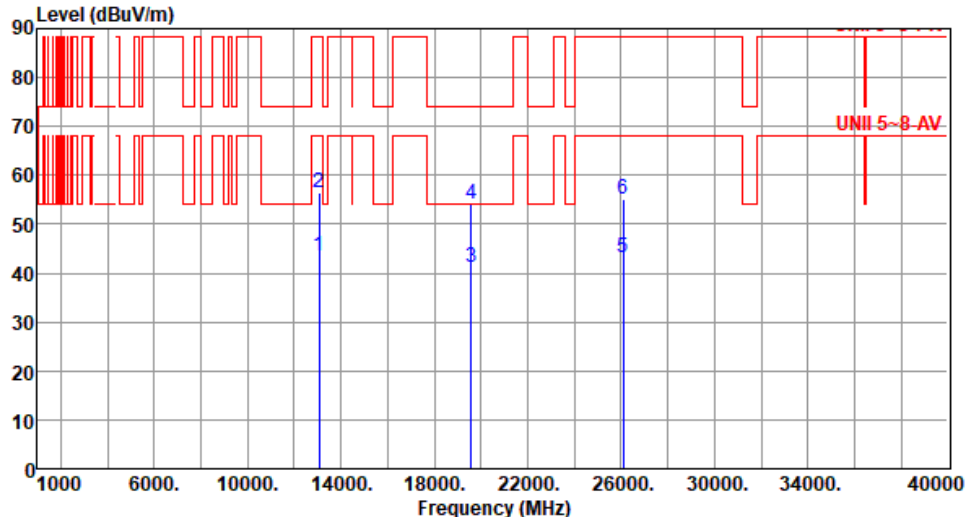


Modulation	ax HE40	Test Freq. (MHz)	6525						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13050.00	43.43	68.20	-24.77	37.21	6.22	Average	100	47
2	13050.00	56.61	88.20	-31.59	50.39	6.22	Peak	100	47
3	19575.00	41.29	54.00	-12.71	40.16	1.13	Average	100	88
4	19575.00	54.16	74.00	-19.84	53.03	1.13	Peak	100	88
5	26100.00	43.16	68.20	-25.04	35.63	7.53	Average	100	160
6	26100.00	55.27	88.20	-32.93	47.74	7.53	Peak	100	160

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

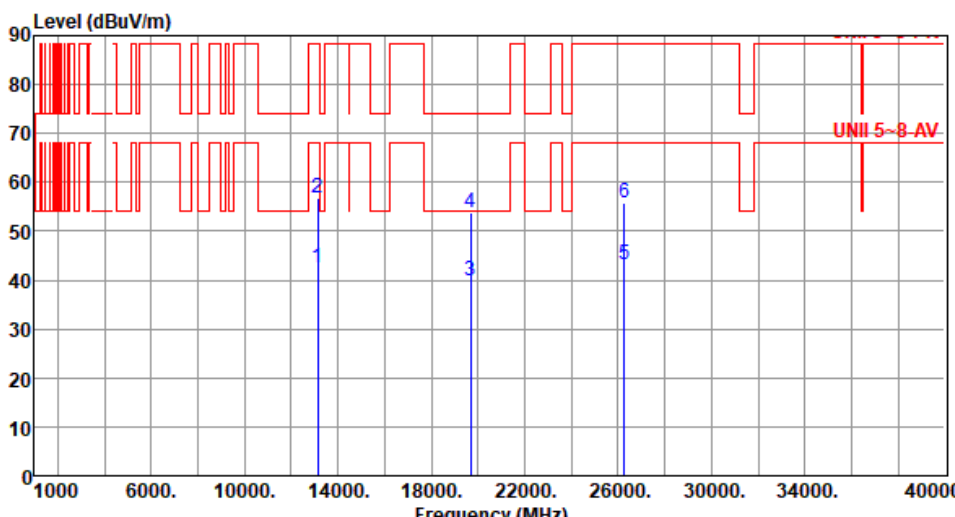


Modulation	ax HE40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.62</td><td>68.20</td><td>-25.58</td><td>36.66</td><td>5.96</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>13130.00</td><td>56.75</td><td>88.20</td><td>-31.45</td><td>50.79</td><td>5.96</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>19695.00</td><td>39.77</td><td>54.00</td><td>-14.23</td><td>38.59</td><td>1.18</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>4</td><td>19695.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>52.46</td><td>1.18</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>5</td><td>26260.00</td><td>43.11</td><td>68.20</td><td>-25.09</td><td>35.46</td><td>7.65</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>26260.00</td><td>55.70</td><td>88.20</td><td>-32.50</td><td>48.05</td><td>7.65</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.62	68.20	-25.58	36.66	5.96	Average	100	30	2	13130.00	56.75	88.20	-31.45	50.79	5.96	Peak	100	30	3	19695.00	39.77	54.00	-14.23	38.59	1.18	Average	100	62	4	19695.00	53.64	74.00	-20.36	52.46	1.18	Peak	100	62	5	26260.00	43.11	68.20	-25.09	35.46	7.65	Average	100	103	6	26260.00	55.70	88.20	-32.50	48.05	7.65	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.62	68.20	-25.58	36.66	5.96	Average	100	30																																																																
2	13130.00	56.75	88.20	-31.45	50.79	5.96	Peak	100	30																																																																
3	19695.00	39.77	54.00	-14.23	38.59	1.18	Average	100	62																																																																
4	19695.00	53.64	74.00	-20.36	52.46	1.18	Peak	100	62																																																																
5	26260.00	43.11	68.20	-25.09	35.46	7.65	Average	100	103																																																																
6	26260.00	55.70	88.20	-32.50	48.05	7.65	Peak	100	103																																																																

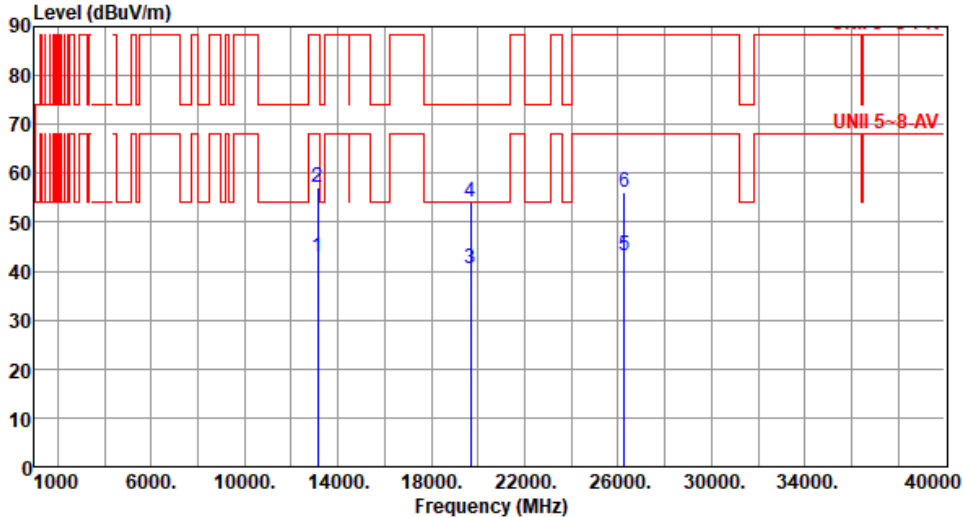


Modulation	ax HE40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13130.00</td><td>42.79</td><td>68.20</td><td>-25.41</td><td>36.83</td><td>5.96</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>2</td><td>13130.00</td><td>57.27</td><td>88.20</td><td>-30.93</td><td>51.31</td><td>5.96</td><td>Peak</td><td>100</td><td>103</td></tr><tr><td>3</td><td>19695.00</td><td>40.39</td><td>54.00</td><td>-13.61</td><td>39.21</td><td>1.18</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>4</td><td>19695.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>52.79</td><td>1.18</td><td>Peak</td><td>100</td><td>42</td></tr><tr><td>5</td><td>26260.00</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>35.67</td><td>7.65</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>6</td><td>26260.00</td><td>56.21</td><td>88.20</td><td>-31.99</td><td>48.56</td><td>7.65</td><td>Peak</td><td>100</td><td>129</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13130.00	42.79	68.20	-25.41	36.83	5.96	Average	100	103	2	13130.00	57.27	88.20	-30.93	51.31	5.96	Peak	100	103	3	19695.00	40.39	54.00	-13.61	39.21	1.18	Average	100	42	4	19695.00	53.97	74.00	-20.03	52.79	1.18	Peak	100	42	5	26260.00	43.32	68.20	-24.88	35.67	7.65	Average	100	129	6	26260.00	56.21	88.20	-31.99	48.56	7.65	Peak	100	129
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13130.00	42.79	68.20	-25.41	36.83	5.96	Average	100	103																																																																
2	13130.00	57.27	88.20	-30.93	51.31	5.96	Peak	100	103																																																																
3	19695.00	40.39	54.00	-13.61	39.21	1.18	Average	100	42																																																																
4	19695.00	53.97	74.00	-20.03	52.79	1.18	Peak	100	42																																																																
5	26260.00	43.32	68.20	-24.88	35.67	7.65	Average	100	129																																																																
6	26260.00	56.21	88.20	-31.99	48.56	7.65	Peak	100	129																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

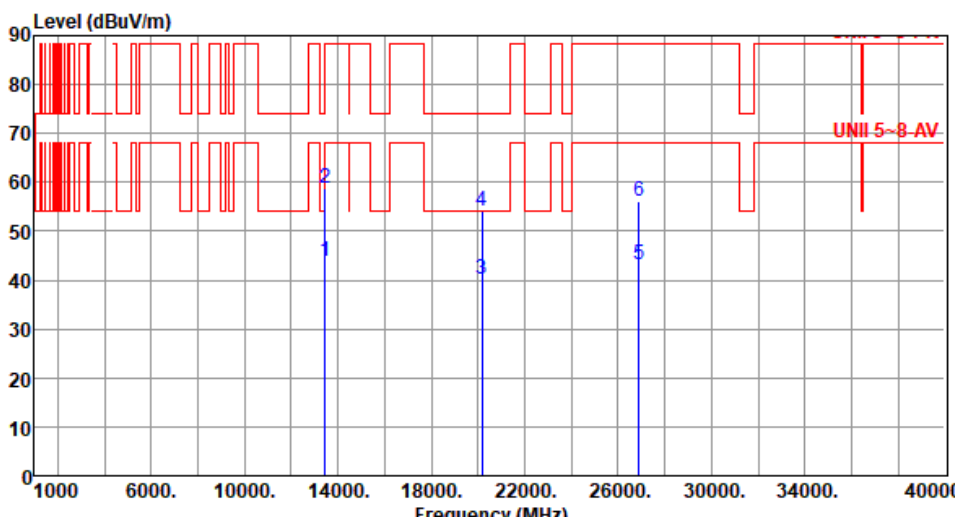

Modulation	ax HE40	Test Freq. (MHz)	6725						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13450.00	43.69	68.20	-24.51	37.49	6.20	Average	100	40
2	13450.00	58.67	88.20	-29.53	52.47	6.20	Peak	100	40
3	20175.00	40.33	54.00	-13.67	38.81	1.52	Average	100	90
4	20175.00	53.97	74.00	-20.03	52.45	1.52	Peak	100	90
5	26900.00	43.18	68.20	-25.02	35.15	8.03	Average	100	162
6	26900.00	56.29	88.20	-31.91	48.26	8.03	Peak	100	162
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

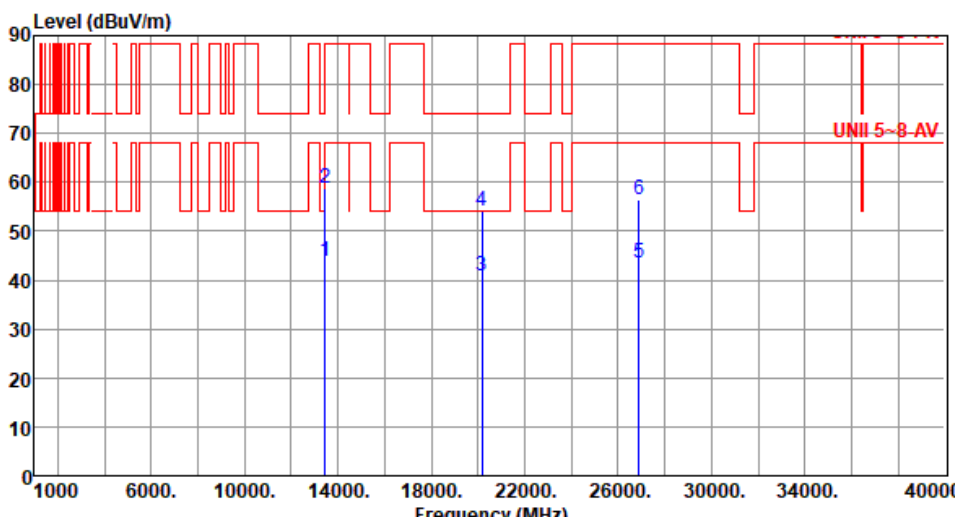

Modulation	ax HE40		Test Freq. (MHz)		6725				
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	13450.00	43.82	68.20	-24.38	37.62	6.20	Average	100	85
2	13450.00	58.85	88.20	-29.35	52.65	6.20	Peak	100	85
3	20175.00	40.80	54.00	-13.20	39.28	1.52	Average	100	142
4	20175.00	54.01	74.00	-19.99	52.49	1.52	Peak	100	142
5	26900.00	43.49	68.20	-24.71	35.46	8.03	Average	100	186
6	26900.00	56.48	88.20	-31.72	48.45	8.03	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE40		Test Freq. (MHz)		6845																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13690.00</td><td>43.91</td><td>68.20</td><td>-24.29</td><td>37.67</td><td>6.24</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>13690.00</td><td>57.90</td><td>88.20</td><td>-30.30</td><td>51.66</td><td>6.24</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>20535.00</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>38.45</td><td>2.01</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>4</td><td>20535.00</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>50.68</td><td>2.01</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>5</td><td>27380.00</td><td>43.16</td><td>68.20</td><td>-25.04</td><td>35.21</td><td>7.95</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>27380.00</td><td>57.55</td><td>88.20</td><td>-30.65</td><td>49.60</td><td>7.95</td><td>Peak</td><td>100</td><td>172</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13690.00	43.91	68.20	-24.29	37.67	6.24	Average	100	60	2	13690.00	57.90	88.20	-30.30	51.66	6.24	Peak	100	60	3	20535.00	40.46	54.00	-13.54	38.45	2.01	Average	100	49	4	20535.00	52.69	74.00	-21.31	50.68	2.01	Peak	100	49	5	27380.00	43.16	68.20	-25.04	35.21	7.95	Average	100	172	6	27380.00	57.55	88.20	-30.65	49.60	7.95	Peak	100	172
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13690.00	43.91	68.20	-24.29	37.67	6.24	Average	100	60																																																																						
2	13690.00	57.90	88.20	-30.30	51.66	6.24	Peak	100	60																																																																						
3	20535.00	40.46	54.00	-13.54	38.45	2.01	Average	100	49																																																																						
4	20535.00	52.69	74.00	-21.31	50.68	2.01	Peak	100	49																																																																						
5	27380.00	43.16	68.20	-25.04	35.21	7.95	Average	100	172																																																																						
6	27380.00	57.55	88.20	-30.65	49.60	7.95	Peak	100	172																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

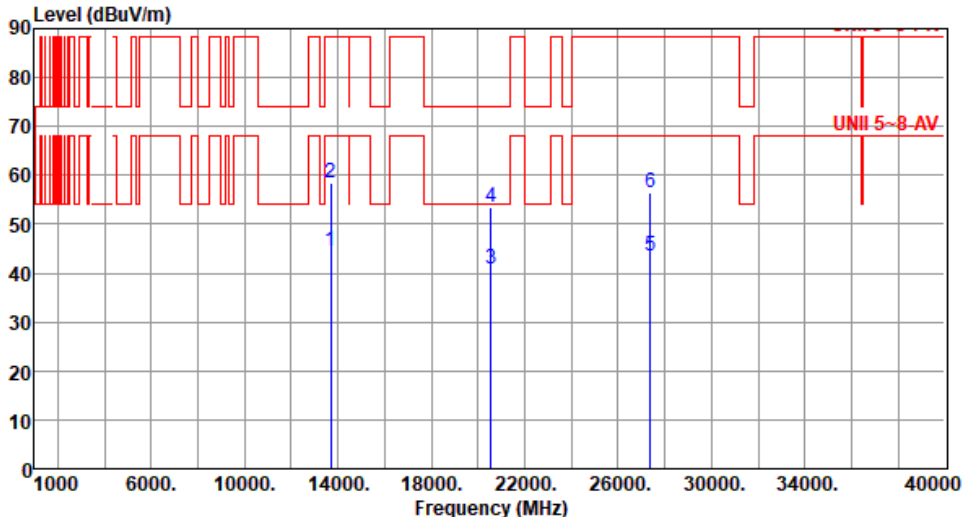


Modulation	ax HE40		Test Freq. (MHz)		6845																																																																																											
Polarization	Vertical																																																																																															
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13690.00</td><td>44.46</td><td>68.20</td><td>-23.74</td><td>38.22</td><td>6.24</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>2</td><td>13690.00</td><td>58.51</td><td>88.20</td><td>-29.69</td><td>52.27</td><td>6.24</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>3</td><td>20535.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>38.76</td><td>2.01</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>20535.00</td><td>53.32</td><td>74.00</td><td>-20.68</td><td>51.31</td><td>2.01</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>27380.00</td><td>43.60</td><td>68.20</td><td>-24.60</td><td>35.65</td><td>7.95</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>6</td><td>27380.00</td><td>56.60</td><td>88.20</td><td>-31.60</td><td>48.65</td><td>7.95</td><td>Peak</td><td>100</td><td>179</td></tr></table>								Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	13690.00	44.46	68.20	-23.74	38.22	6.24	Average	100	70	2	13690.00	58.51	88.20	-29.69	52.27	6.24	Peak	100	70	3	20535.00	40.77	54.00	-13.23	38.76	2.01	Average	100	114	4	20535.00	53.32	74.00	-20.68	51.31	2.01	Peak	100	114	5	27380.00	43.60	68.20	-24.60	35.65	7.95	Average	100	179	6	27380.00	56.60	88.20	-31.60	48.65	7.95	Peak	100	179
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																							
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																							
								cm	deg																																																																																							
1	13690.00	44.46	68.20	-23.74	38.22	6.24	Average	100	70																																																																																							
2	13690.00	58.51	88.20	-29.69	52.27	6.24	Peak	100	70																																																																																							
3	20535.00	40.77	54.00	-13.23	38.76	2.01	Average	100	114																																																																																							
4	20535.00	53.32	74.00	-20.68	51.31	2.01	Peak	100	114																																																																																							
5	27380.00	43.60	68.20	-24.60	35.65	7.95	Average	100	179																																																																																							
6	27380.00	56.60	88.20	-31.60	48.65	7.95	Peak	100	179																																																																																							
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																

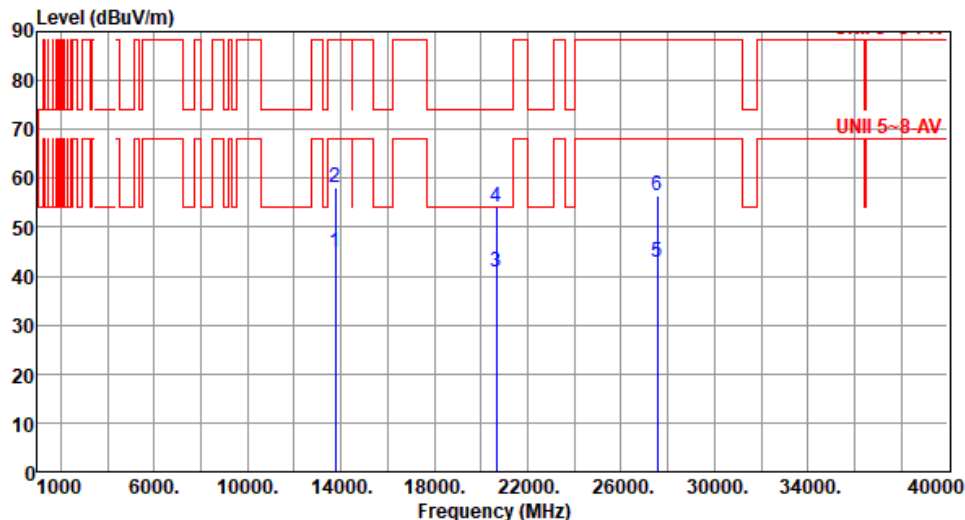

Modulation	ax HE40	Test Freq. (MHz)	6885						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13770.00	44.71	68.20	-23.49	38.44	6.27	Average	100	129
2	13770.00	58.15	88.20	-30.05	51.88	6.27	Peak	100	129
3	20655.00	40.83	54.00	-13.17	38.65	2.18	Average	100	112
4	20655.00	54.23	74.00	-19.77	52.05	2.18	Peak	100	112
5	27540.00	42.87	68.20	-25.33	34.89	7.98	Average	100	156
6	27540.00	56.44	88.20	-31.76	48.46	7.98	Peak	100	156
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

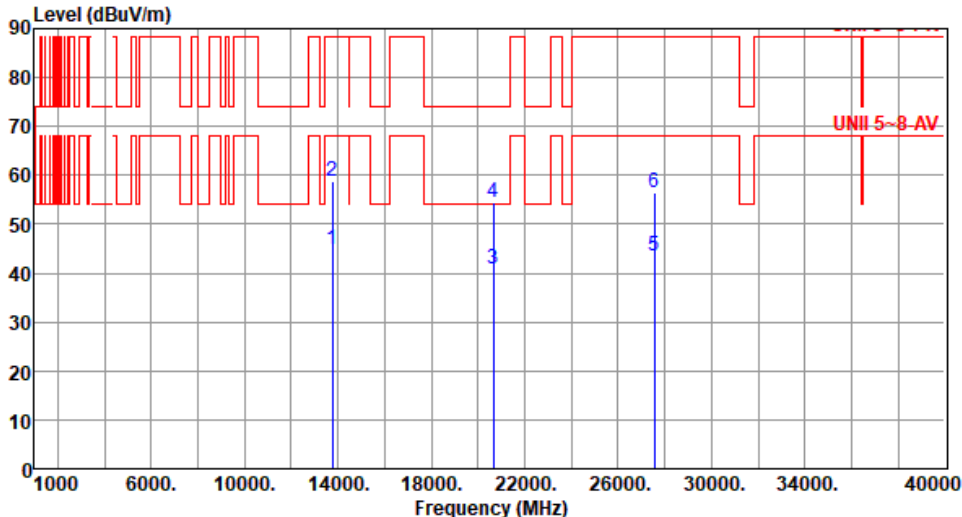

Modulation	ax HE40		Test Freq. (MHz)		6885																																																																										
Polarization	Vertical																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13770.00</td><td>44.92</td><td>68.20</td><td>-23.28</td><td>38.65</td><td>6.27</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>2</td><td>13770.00</td><td>58.82</td><td>88.20</td><td>-29.38</td><td>52.55</td><td>6.27</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>3</td><td>20655.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>38.64</td><td>2.18</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>20655.00</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>52.16</td><td>2.18</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>27540.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>35.39</td><td>7.98</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>6</td><td>27540.00</td><td>56.46</td><td>88.20</td><td>-31.74</td><td>48.48</td><td>7.98</td><td>Peak</td><td>100</td><td>161</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13770.00	44.92	68.20	-23.28	38.65	6.27	Average	100	148	2	13770.00	58.82	88.20	-29.38	52.55	6.27	Peak	100	148	3	20655.00	40.82	54.00	-13.18	38.64	2.18	Average	100	178	4	20655.00	54.34	74.00	-19.66	52.16	2.18	Peak	100	178	5	27540.00	43.37	68.20	-24.83	35.39	7.98	Average	100	161	6	27540.00	56.46	88.20	-31.74	48.48	7.98	Peak	100	161
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13770.00	44.92	68.20	-23.28	38.65	6.27	Average	100	148																																																																						
2	13770.00	58.82	88.20	-29.38	52.55	6.27	Peak	100	148																																																																						
3	20655.00	40.82	54.00	-13.18	38.64	2.18	Average	100	178																																																																						
4	20655.00	54.34	74.00	-19.66	52.16	2.18	Peak	100	178																																																																						
5	27540.00	43.37	68.20	-24.83	35.39	7.98	Average	100	161																																																																						
6	27540.00	56.46	88.20	-31.74	48.48	7.98	Peak	100	161																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	ax HE40	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13850.00</td><td>44.74</td><td>68.20</td><td>-23.46</td><td>38.31</td><td>6.43</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>2</td><td>13850.00</td><td>58.49</td><td>88.20</td><td>-29.71</td><td>52.06</td><td>6.43</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>3</td><td>20775.00</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>38.45</td><td>2.38</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>20775.00</td><td>52.87</td><td>74.00</td><td>-21.13</td><td>50.49</td><td>2.38</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>27700.00</td><td>46.72</td><td>68.20</td><td>-21.48</td><td>38.56</td><td>8.16</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>27700.00</td><td>56.73</td><td>88.20</td><td>-31.47</td><td>48.57</td><td>8.16</td><td>Peak</td><td>100</td><td>79</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13850.00	44.74	68.20	-23.46	38.31	6.43	Average	100	63	2	13850.00	58.49	88.20	-29.71	52.06	6.43	Peak	100	63	3	20775.00	40.83	54.00	-13.17	38.45	2.38	Average	100	30	4	20775.00	52.87	74.00	-21.13	50.49	2.38	Peak	100	30	5	27700.00	46.72	68.20	-21.48	38.56	8.16	Average	100	79	6	27700.00	56.73	88.20	-31.47	48.57	8.16	Peak	100	79
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13850.00	44.74	68.20	-23.46	38.31	6.43	Average	100	63																																																																
2	13850.00	58.49	88.20	-29.71	52.06	6.43	Peak	100	63																																																																
3	20775.00	40.83	54.00	-13.17	38.45	2.38	Average	100	30																																																																
4	20775.00	52.87	74.00	-21.13	50.49	2.38	Peak	100	30																																																																
5	27700.00	46.72	68.20	-21.48	38.56	8.16	Average	100	79																																																																
6	27700.00	56.73	88.20	-31.47	48.57	8.16	Peak	100	79																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	ax HE40		Test Freq. (MHz)		6925																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13850.00</td><td>44.89</td><td>68.20</td><td>-23.31</td><td>38.46</td><td>6.43</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>2</td><td>13850.00</td><td>58.92</td><td>88.20</td><td>-29.28</td><td>52.49</td><td>6.43</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>3</td><td>20775.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>38.70</td><td>2.38</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>20775.00</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>51.26</td><td>2.38</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>27700.00</td><td>43.28</td><td>68.20</td><td>-24.92</td><td>35.12</td><td>8.16</td><td>Average</td><td>100</td><td>146</td></tr><tr><td>6</td><td>27700.00</td><td>57.52</td><td>88.20</td><td>-30.68</td><td>49.36</td><td>8.16</td><td>Peak</td><td>100</td><td>146</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13850.00	44.89	68.20	-23.31	38.46	6.43	Average	100	101	2	13850.00	58.92	88.20	-29.28	52.49	6.43	Peak	100	101	3	20775.00	41.08	54.00	-12.92	38.70	2.38	Average	100	40	4	20775.00	53.64	74.00	-20.36	51.26	2.38	Peak	100	40	5	27700.00	43.28	68.20	-24.92	35.12	8.16	Average	100	146	6	27700.00	57.52	88.20	-30.68	49.36	8.16	Peak	100	146
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13850.00	44.89	68.20	-23.31	38.46	6.43	Average	100	101																																																																																										
2	13850.00	58.92	88.20	-29.28	52.49	6.43	Peak	100	101																																																																																										
3	20775.00	41.08	54.00	-12.92	38.70	2.38	Average	100	40																																																																																										
4	20775.00	53.64	74.00	-20.36	51.26	2.38	Peak	100	40																																																																																										
5	27700.00	43.28	68.20	-24.92	35.12	8.16	Average	100	146																																																																																										
6	27700.00	57.52	88.20	-30.68	49.36	8.16	Peak	100	146																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	7005																																																															
Polarization	Horizontal																																																																	
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																		
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>14010.00</td><td>45.54</td><td>68.20</td><td>-22.66</td><td>38.79</td><td>6.75</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>14010.00</td><td>58.40</td><td>88.20</td><td>-29.80</td><td>51.65</td><td>6.75</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>21015.00</td><td>41.55</td><td>54.00</td><td>-12.45</td><td>38.57</td><td>2.98</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>21015.00</td><td>53.87</td><td>74.00</td><td>-20.13</td><td>50.89</td><td>2.98</td><td>Peak</td><td>100</td><td>42</td></tr><tr><td>28020.00</td><td>44.74</td><td>68.20</td><td>-23.46</td><td>36.20</td><td>8.54</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>28020.00</td><td>58.68</td><td>88.20</td><td>-29.52</td><td>50.14</td><td>8.54</td><td>Peak</td><td>100</td><td>62</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	14010.00	45.54	68.20	-22.66	38.79	6.75	Average	100	20	14010.00	58.40	88.20	-29.80	51.65	6.75	Peak	100	20	21015.00	41.55	54.00	-12.45	38.57	2.98	Average	100	42	21015.00	53.87	74.00	-20.13	50.89	2.98	Peak	100	42	28020.00	44.74	68.20	-23.46	36.20	8.54	Average	100	62	28020.00	58.68	88.20	-29.52	50.14	8.54	Peak	100	62
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																										
14010.00	45.54	68.20	-22.66	38.79	6.75	Average	100	20																																																										
14010.00	58.40	88.20	-29.80	51.65	6.75	Peak	100	20																																																										
21015.00	41.55	54.00	-12.45	38.57	2.98	Average	100	42																																																										
21015.00	53.87	74.00	-20.13	50.89	2.98	Peak	100	42																																																										
28020.00	44.74	68.20	-23.46	36.20	8.54	Average	100	62																																																										
28020.00	58.68	88.20	-29.52	50.14	8.54	Peak	100	62																																																										

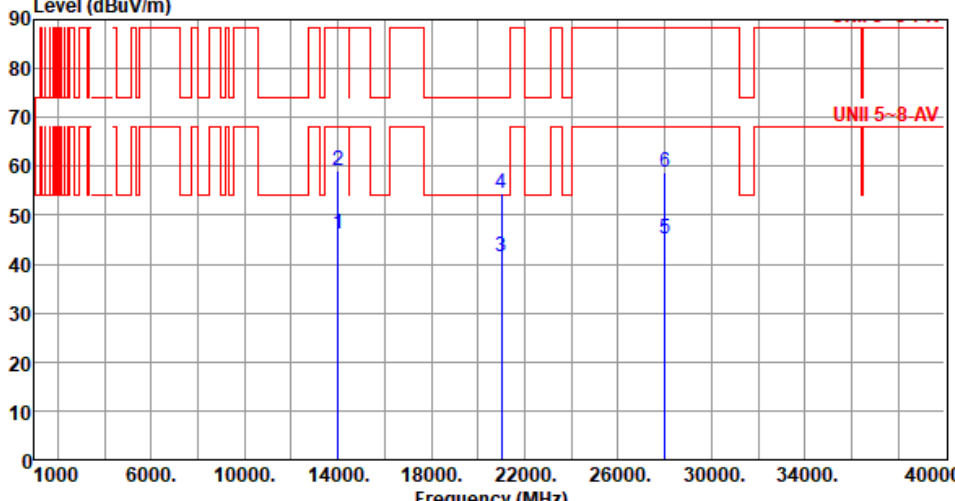


Modulation	ax HE40	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>14010.00</td><td>46.00</td><td>68.20</td><td>-22.20</td><td>39.25</td><td>6.75</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>2</td><td>14010.00</td><td>59.01</td><td>88.20</td><td>-29.19</td><td>52.26</td><td>6.75</td><td>Peak</td><td>100</td><td>42</td></tr><tr><td>3</td><td>21015.00</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>38.47</td><td>2.98</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>21015.00</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>51.32</td><td>2.98</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>28020.00</td><td>45.01</td><td>68.20</td><td>-23.19</td><td>36.47</td><td>8.54</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>6</td><td>28020.00</td><td>58.84</td><td>88.20</td><td>-29.36</td><td>50.30</td><td>8.54</td><td>Peak</td><td>100</td><td>71</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	14010.00	46.00	68.20	-22.20	39.25	6.75	Average	100	42	2	14010.00	59.01	88.20	-29.19	52.26	6.75	Peak	100	42	3	21015.00	41.45	54.00	-12.55	38.47	2.98	Average	100	40	4	21015.00	54.30	74.00	-19.70	51.32	2.98	Peak	100	40	5	28020.00	45.01	68.20	-23.19	36.47	8.54	Average	100	71	6	28020.00	58.84	88.20	-29.36	50.30	8.54	Peak	100	71
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	14010.00	46.00	68.20	-22.20	39.25	6.75	Average	100	42																																																																
2	14010.00	59.01	88.20	-29.19	52.26	6.75	Peak	100	42																																																																
3	21015.00	41.45	54.00	-12.55	38.47	2.98	Average	100	40																																																																
4	21015.00	54.30	74.00	-19.70	51.32	2.98	Peak	100	40																																																																
5	28020.00	45.01	68.20	-23.19	36.47	8.54	Average	100	71																																																																
6	28020.00	58.84	88.20	-29.36	50.30	8.54	Peak	100	71																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	ax HE40		Test Freq. (MHz)		7085																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>47.34</td><td>68.20</td><td>-20.86</td><td>42.56</td><td>4.78</td><td>Average</td><td>177</td><td>281</td></tr><tr><td>2</td><td>7125.00</td><td>60.23</td><td>88.20</td><td>-27.97</td><td>55.45</td><td>4.78</td><td>Peak</td><td>177</td><td>281</td></tr><tr><td>3</td><td>14170.00</td><td>45.57</td><td>68.20</td><td>-22.63</td><td>38.46</td><td>7.11</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>4</td><td>14170.00</td><td>60.79</td><td>88.20</td><td>-27.41</td><td>53.68</td><td>7.11</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>5</td><td>21255.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>38.02</td><td>3.29</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td>21255.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>50.97</td><td>3.29</td><td>Peak</td><td>100</td><td>105</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.34	68.20	-20.86	42.56	4.78	Average	177	281	2	7125.00	60.23	88.20	-27.97	55.45	4.78	Peak	177	281	3	14170.00	45.57	68.20	-22.63	38.46	7.11	Average	100	64	4	14170.00	60.79	88.20	-27.41	53.68	7.11	Peak	100	64	5	21255.00	41.31	54.00	-12.69	38.02	3.29	Average	100	105	6	21255.00	54.26	74.00	-19.74	50.97	3.29	Peak	100	105
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	7125.00	47.34	68.20	-20.86	42.56	4.78	Average	177	281																																																																						
2	7125.00	60.23	88.20	-27.97	55.45	4.78	Peak	177	281																																																																						
3	14170.00	45.57	68.20	-22.63	38.46	7.11	Average	100	64																																																																						
4	14170.00	60.79	88.20	-27.41	53.68	7.11	Peak	100	64																																																																						
5	21255.00	41.31	54.00	-12.69	38.02	3.29	Average	100	105																																																																						
6	21255.00	54.26	74.00	-19.74	50.97	3.29	Peak	100	105																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

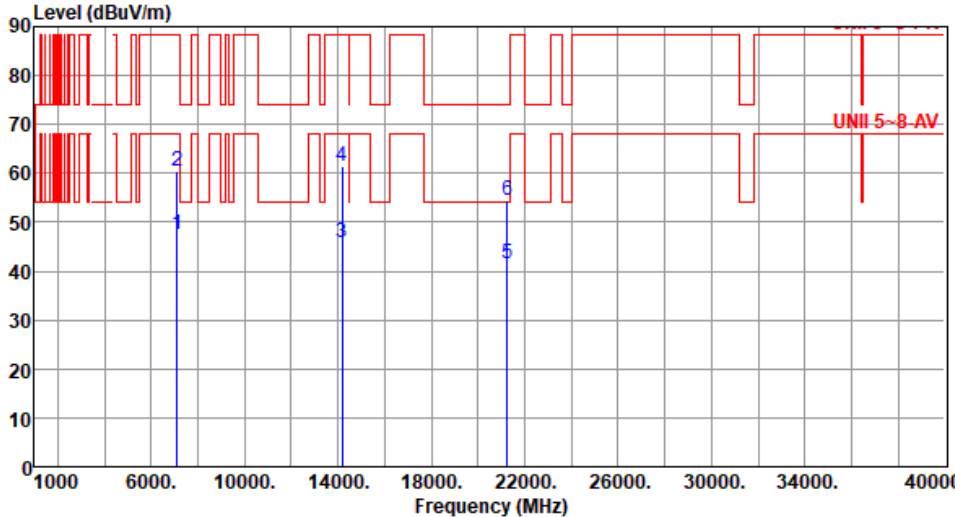


Modulation	ax HE40	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>47.43</td><td>68.20</td><td>-20.77</td><td>42.65</td><td>4.78</td><td>Average</td><td>163</td><td>45</td></tr><tr><td>2</td><td>7125.00</td><td>60.34</td><td>88.20</td><td>-27.86</td><td>55.56</td><td>4.78</td><td>Peak</td><td>163</td><td>45</td></tr><tr><td>3</td><td>14170.00</td><td>45.76</td><td>68.20</td><td>-22.44</td><td>38.65</td><td>7.11</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>4</td><td>14170.00</td><td>61.37</td><td>88.20</td><td>-26.83</td><td>54.26</td><td>7.11</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>5</td><td>21255.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>38.06</td><td>3.29</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>6</td><td>21255.00</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>51.26</td><td>3.29</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	47.43	68.20	-20.77	42.65	4.78	Average	163	45	2	7125.00	60.34	88.20	-27.86	55.56	4.78	Peak	163	45	3	14170.00	45.76	68.20	-22.44	38.65	7.11	Average	100	110	4	14170.00	61.37	88.20	-26.83	54.26	7.11	Peak	100	110	5	21255.00	41.35	54.00	-12.65	38.06	3.29	Average	100	169	6	21255.00	54.55	74.00	-19.45	51.26	3.29	Peak	100	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	47.43	68.20	-20.77	42.65	4.78	Average	163	45																																																																
2	7125.00	60.34	88.20	-27.86	55.56	4.78	Peak	163	45																																																																
3	14170.00	45.76	68.20	-22.44	38.65	7.11	Average	100	110																																																																
4	14170.00	61.37	88.20	-26.83	54.26	7.11	Peak	100	110																																																																
5	21255.00	41.35	54.00	-12.65	38.06	3.29	Average	100	169																																																																
6	21255.00	54.55	74.00	-19.45	51.26	3.29	Peak	100	169																																																																


Unwanted Emissions (Above 1GHz) for ax HE80

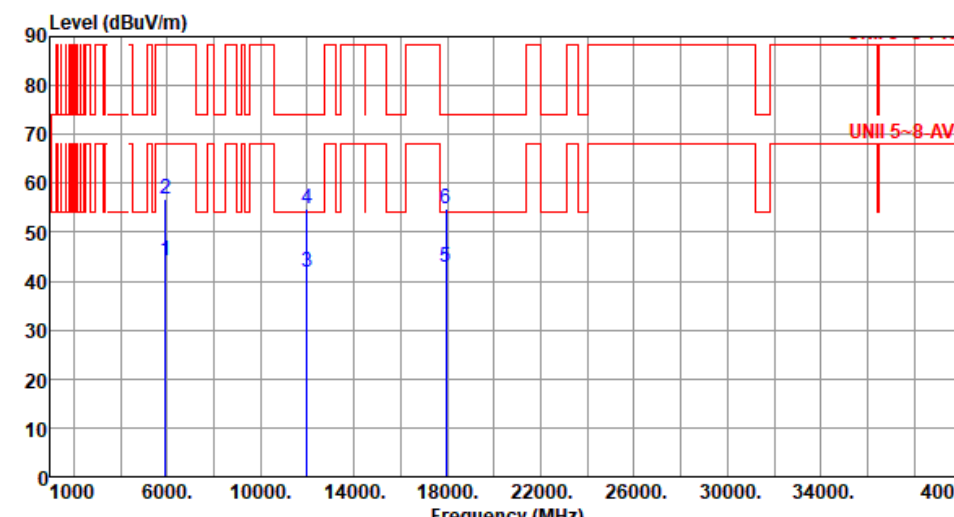Modulation	ax HE80	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>44.08</td><td>68.20</td><td>-24.12</td><td>42.89</td><td>1.19</td><td>Average</td><td>165</td><td>66</td></tr><tr><td>2</td><td>5925.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>55.59</td><td>1.19</td><td>Peak</td><td>165</td><td>66</td></tr><tr><td>3</td><td>11970.00</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>35.64</td><td>6.15</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>11970.00</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>48.55</td><td>6.15</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>17955.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>31.56</td><td>11.17</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>17955.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>43.61</td><td>11.17</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.08	68.20	-24.12	42.89	1.19	Average	165	66	2	5925.00	56.78	88.20	-31.42	55.59	1.19	Peak	165	66	3	11970.00	41.79	54.00	-12.21	35.64	6.15	Average	100	125	4	11970.00	54.70	74.00	-19.30	48.55	6.15	Peak	100	125	5	17955.00	42.73	54.00	-11.27	31.56	11.17	Average	100	30	6	17955.00	54.78	74.00	-19.22	43.61	11.17	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	44.08	68.20	-24.12	42.89	1.19	Average	165	66																																																																
2	5925.00	56.78	88.20	-31.42	55.59	1.19	Peak	165	66																																																																
3	11970.00	41.79	54.00	-12.21	35.64	6.15	Average	100	125																																																																
4	11970.00	54.70	74.00	-19.30	48.55	6.15	Peak	100	125																																																																
5	17955.00	42.73	54.00	-11.27	31.56	11.17	Average	100	30																																																																
6	17955.00	54.78	74.00	-19.22	43.61	11.17	Peak	100	30																																																																

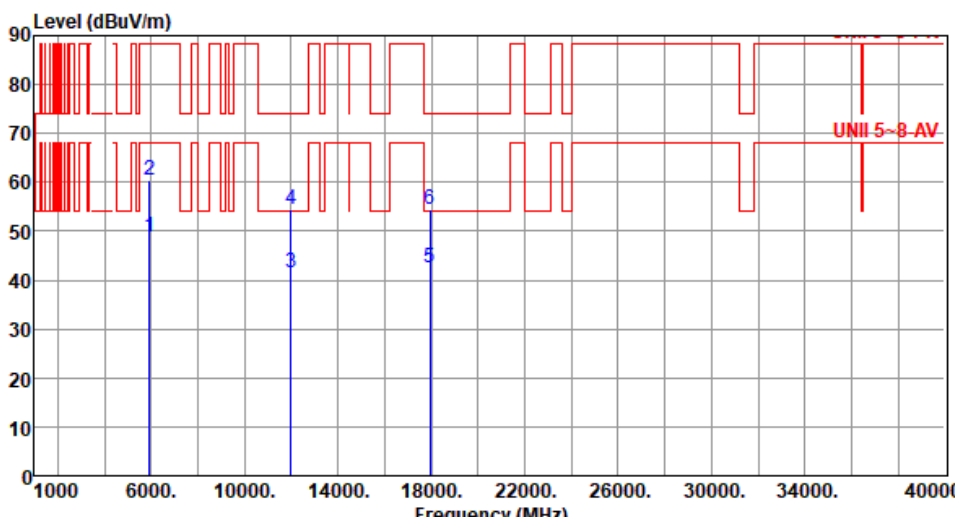

Modulation	ax HE80	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>48.94</td><td>68.20</td><td>-19.26</td><td>47.75</td><td>1.19</td><td>Average</td><td>165</td><td>70</td></tr><tr><td>2</td><td>5925.00</td><td>60.48</td><td>88.20</td><td>-27.72</td><td>59.29</td><td>1.19</td><td>Peak</td><td>165</td><td>70</td></tr><tr><td>3</td><td>11970.00</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>35.41</td><td>6.15</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>11970.00</td><td>54.60</td><td>74.00</td><td>-19.40</td><td>48.45</td><td>6.15</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>17955.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>31.23</td><td>11.17</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>17955.00</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>43.23</td><td>11.17</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	48.94	68.20	-19.26	47.75	1.19	Average	165	70	2	5925.00	60.48	88.20	-27.72	59.29	1.19	Peak	165	70	3	11970.00	41.56	54.00	-12.44	35.41	6.15	Average	100	60	4	11970.00	54.60	74.00	-19.40	48.45	6.15	Peak	100	60	5	17955.00	42.40	54.00	-11.60	31.23	11.17	Average	100	20	6	17955.00	54.40	74.00	-19.60	43.23	11.17	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	48.94	68.20	-19.26	47.75	1.19	Average	165	70																																																																
2	5925.00	60.48	88.20	-27.72	59.29	1.19	Peak	165	70																																																																
3	11970.00	41.56	54.00	-12.44	35.41	6.15	Average	100	60																																																																
4	11970.00	54.60	74.00	-19.40	48.45	6.15	Peak	100	60																																																																
5	17955.00	42.40	54.00	-11.60	31.23	11.17	Average	100	20																																																																
6	17955.00	54.40	74.00	-19.60	43.23	11.17	Peak	100	20																																																																

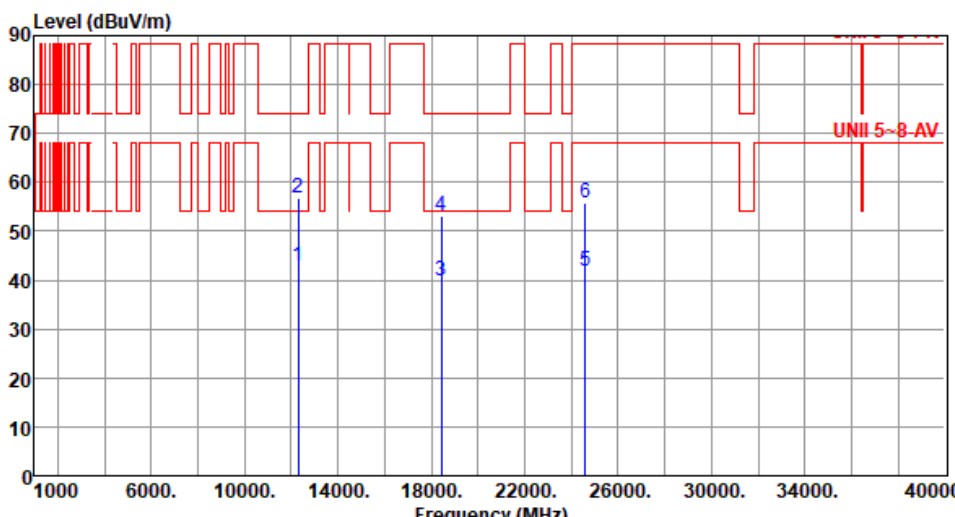

Modulation	ax HE80	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>36.80</td><td>6.20</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>12290.00</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>50.57</td><td>6.20</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>18435.00</td><td>39.82</td><td>54.00</td><td>-14.18</td><td>39.26</td><td>0.56</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>18435.00</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>52.57</td><td>0.56</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>24580.00</td><td>41.94</td><td>68.20</td><td>-26.26</td><td>34.49</td><td>7.45</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>24580.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>48.47</td><td>7.45</td><td>Peak</td><td>100</td><td>100</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	43.00	54.00	-11.00	36.80	6.20	Average	100	30	2	12290.00	56.77	74.00	-17.23	50.57	6.20	Peak	100	30	3	18435.00	39.82	54.00	-14.18	39.26	0.56	Average	100	60	4	18435.00	53.13	74.00	-20.87	52.57	0.56	Peak	100	60	5	24580.00	41.94	68.20	-26.26	34.49	7.45	Average	100	100	6	24580.00	55.92	88.20	-32.28	48.47	7.45	Peak	100	100
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	43.00	54.00	-11.00	36.80	6.20	Average	100	30																																																																
2	12290.00	56.77	74.00	-17.23	50.57	6.20	Peak	100	30																																																																
3	18435.00	39.82	54.00	-14.18	39.26	0.56	Average	100	60																																																																
4	18435.00	53.13	74.00	-20.87	52.57	0.56	Peak	100	60																																																																
5	24580.00	41.94	68.20	-26.26	34.49	7.45	Average	100	100																																																																
6	24580.00	55.92	88.20	-32.28	48.47	7.45	Peak	100	100																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12290.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>36.66</td><td>6.20</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>12290.00</td><td>56.67</td><td>74.00</td><td>-17.33</td><td>50.47</td><td>6.20</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>18435.00</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>39.14</td><td>0.56</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>18435.00</td><td>53.03</td><td>74.00</td><td>-20.97</td><td>52.47</td><td>0.56</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>24580.00</td><td>41.67</td><td>68.20</td><td>-26.53</td><td>34.22</td><td>7.45</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>24580.00</td><td>55.83</td><td>88.20</td><td>-32.37</td><td>48.38</td><td>7.45</td><td>Peak</td><td>100</td><td>120</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12290.00	42.86	54.00	-11.14	36.66	6.20	Average	100	20	2	12290.00	56.67	74.00	-17.33	50.47	6.20	Peak	100	20	3	18435.00	39.70	54.00	-14.30	39.14	0.56	Average	100	55	4	18435.00	53.03	74.00	-20.97	52.47	0.56	Peak	100	55	5	24580.00	41.67	68.20	-26.53	34.22	7.45	Average	100	120	6	24580.00	55.83	88.20	-32.37	48.38	7.45	Peak	100	120
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12290.00	42.86	54.00	-11.14	36.66	6.20	Average	100	20																																																																
2	12290.00	56.67	74.00	-17.33	50.47	6.20	Peak	100	20																																																																
3	18435.00	39.70	54.00	-14.30	39.14	0.56	Average	100	55																																																																
4	18435.00	53.03	74.00	-20.97	52.47	0.56	Peak	100	55																																																																
5	24580.00	41.67	68.20	-26.53	34.22	7.45	Average	100	120																																																																
6	24580.00	55.83	88.20	-32.37	48.38	7.45	Peak	100	120																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80		Test Freq. (MHz)		6385																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12770.00</td><td>42.73</td><td>68.20</td><td>-25.47</td><td>36.48</td><td>6.25</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>2</td><td>12770.00</td><td>57.12</td><td>88.20</td><td>-31.08</td><td>50.87</td><td>6.25</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>3</td><td>19155.00</td><td>39.20</td><td>54.00</td><td>-14.80</td><td>38.31</td><td>0.89</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>4</td><td>19155.00</td><td>52.35</td><td>74.00</td><td>-21.65</td><td>51.46</td><td>0.89</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>5</td><td>25540.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>35.24</td><td>7.43</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>25540.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>48.45</td><td>7.43</td><td>Peak</td><td>100</td><td>60</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.73	68.20	-25.47	36.48	6.25	Average	100	90	2	12770.00	57.12	88.20	-31.08	50.87	6.25	Peak	100	90	3	19155.00	39.20	54.00	-14.80	38.31	0.89	Average	100	70	4	19155.00	52.35	74.00	-21.65	51.46	0.89	Peak	100	70	5	25540.00	42.67	68.20	-25.53	35.24	7.43	Average	100	60	6	25540.00	55.88	88.20	-32.32	48.45	7.43	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12770.00	42.73	68.20	-25.47	36.48	6.25	Average	100	90																																																																						
2	12770.00	57.12	88.20	-31.08	50.87	6.25	Peak	100	90																																																																						
3	19155.00	39.20	54.00	-14.80	38.31	0.89	Average	100	70																																																																						
4	19155.00	52.35	74.00	-21.65	51.46	0.89	Peak	100	70																																																																						
5	25540.00	42.67	68.20	-25.53	35.24	7.43	Average	100	60																																																																						
6	25540.00	55.88	88.20	-32.32	48.45	7.43	Peak	100	60																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	ax HE80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12770.00</td><td>42.49</td><td>68.20</td><td>-25.71</td><td>36.24</td><td>6.25</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>2</td><td>12770.00</td><td>56.80</td><td>88.20</td><td>-31.40</td><td>50.55</td><td>6.25</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>3</td><td>19155.00</td><td>39.04</td><td>54.00</td><td>-14.96</td><td>38.15</td><td>0.89</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>4</td><td>19155.00</td><td>52.15</td><td>74.00</td><td>-21.85</td><td>51.26</td><td>0.89</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>5</td><td>25540.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>35.38</td><td>7.43</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>25540.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>48.19</td><td>7.43</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12770.00	42.49	68.20	-25.71	36.24	6.25	Average	100	80	2	12770.00	56.80	88.20	-31.40	50.55	6.25	Peak	100	80	3	19155.00	39.04	54.00	-14.96	38.15	0.89	Average	100	65	4	19155.00	52.15	74.00	-21.85	51.26	0.89	Peak	100	65	5	25540.00	42.81	68.20	-25.39	35.38	7.43	Average	100	50	6	25540.00	55.62	88.20	-32.58	48.19	7.43	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12770.00	42.49	68.20	-25.71	36.24	6.25	Average	100	80																																																																
2	12770.00	56.80	88.20	-31.40	50.55	6.25	Peak	100	80																																																																
3	19155.00	39.04	54.00	-14.96	38.15	0.89	Average	100	65																																																																
4	19155.00	52.15	74.00	-21.85	51.26	0.89	Peak	100	65																																																																
5	25540.00	42.81	68.20	-25.39	35.38	7.43	Average	100	50																																																																
6	25540.00	55.62	88.20	-32.58	48.19	7.43	Peak	100	50																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80		Test Freq. (MHz)		6465																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.76</td><td>68.20</td><td>-24.44</td><td>37.31</td><td>6.45</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>2</td><td>12930.00</td><td>57.10</td><td>88.20</td><td>-31.10</td><td>50.65</td><td>6.45</td><td>Peak</td><td>100</td><td>150</td></tr><tr><td>3</td><td>19395.00</td><td>40.32</td><td>54.00</td><td>-13.68</td><td>39.31</td><td>1.01</td><td>Average</td><td>100</td><td>140</td></tr><tr><td>4</td><td>19395.00</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>51.59</td><td>1.01</td><td>Peak</td><td>100</td><td>140</td></tr><tr><td>5</td><td>25860.00</td><td>42.68</td><td>68.20</td><td>-25.52</td><td>35.27</td><td>7.41</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>25860.00</td><td>54.73</td><td>88.20</td><td>-33.47</td><td>47.32</td><td>7.41</td><td>Peak</td><td>100</td><td>120</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12930.00	43.76	68.20	-24.44	37.31	6.45	Average	100	150	2	12930.00	57.10	88.20	-31.10	50.65	6.45	Peak	100	150	3	19395.00	40.32	54.00	-13.68	39.31	1.01	Average	100	140	4	19395.00	52.60	74.00	-21.40	51.59	1.01	Peak	100	140	5	25860.00	42.68	68.20	-25.52	35.27	7.41	Average	100	120	6	25860.00	54.73	88.20	-33.47	47.32	7.41	Peak	100	120
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	12930.00	43.76	68.20	-24.44	37.31	6.45	Average	100	150																																																																						
2	12930.00	57.10	88.20	-31.10	50.65	6.45	Peak	100	150																																																																						
3	19395.00	40.32	54.00	-13.68	39.31	1.01	Average	100	140																																																																						
4	19395.00	52.60	74.00	-21.40	51.59	1.01	Peak	100	140																																																																						
5	25860.00	42.68	68.20	-25.52	35.27	7.41	Average	100	120																																																																						
6	25860.00	54.73	88.20	-33.47	47.32	7.41	Peak	100	120																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

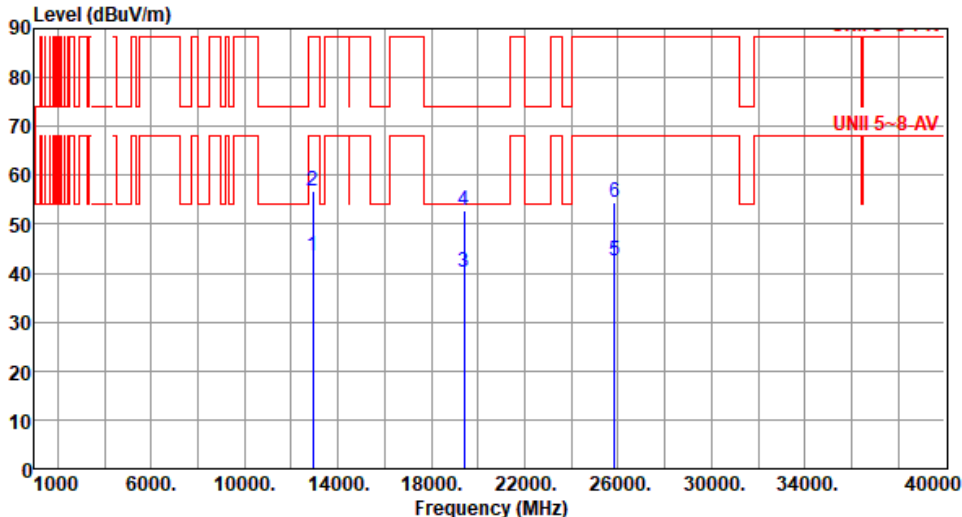

Modulation	ax HE80		Test Freq. (MHz)		6465																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>43.60</td><td>68.20</td><td>-24.60</td><td>37.15</td><td>6.45</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>2</td><td>12930.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>50.49</td><td>6.45</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>3</td><td>19395.00</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>39.23</td><td>1.01</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>4</td><td>19395.00</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>51.68</td><td>1.01</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>5</td><td>25860.00</td><td>42.54</td><td>68.20</td><td>-25.66</td><td>35.13</td><td>7.41</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>25860.00</td><td>54.57</td><td>88.20</td><td>-33.63</td><td>47.16</td><td>7.41</td><td>Peak</td><td>100</td><td>80</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	12930.00	43.60	68.20	-24.60	37.15	6.45	Average	100	100	2	12930.00	56.94	88.20	-31.26	50.49	6.45	Peak	100	100	3	19395.00	40.24	54.00	-13.76	39.23	1.01	Average	100	120	4	19395.00	52.69	74.00	-21.31	51.68	1.01	Peak	100	120	5	25860.00	42.54	68.20	-25.66	35.13	7.41	Average	100	80	6	25860.00	54.57	88.20	-33.63	47.16	7.41	Peak	100	80
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
					dBuV			cm	deg																																																																																										
1	12930.00	43.60	68.20	-24.60	37.15	6.45	Average	100	100																																																																																										
2	12930.00	56.94	88.20	-31.26	50.49	6.45	Peak	100	100																																																																																										
3	19395.00	40.24	54.00	-13.76	39.23	1.01	Average	100	120																																																																																										
4	19395.00	52.69	74.00	-21.31	51.68	1.01	Peak	100	120																																																																																										
5	25860.00	42.54	68.20	-25.66	35.13	7.41	Average	100	80																																																																																										
6	25860.00	54.57	88.20	-33.63	47.16	7.41	Peak	100	80																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			



Modulation	ax HE80	Test Freq. (MHz)	6545																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13090.00</td><td>42.60</td><td>68.20</td><td>-25.60</td><td>36.58</td><td>6.02</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>13090.00</td><td>56.48</td><td>88.20</td><td>-31.72</td><td>50.46</td><td>6.02</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>19635.00</td><td>39.61</td><td>54.00</td><td>-14.39</td><td>38.44</td><td>1.17</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>19635.00</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>51.88</td><td>1.17</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>26180.00</td><td>42.45</td><td>68.20</td><td>-25.75</td><td>34.87</td><td>7.58</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>26180.00</td><td>54.16</td><td>88.20</td><td>-34.04</td><td>46.58</td><td>7.58</td><td>Peak</td><td>100</td><td>162</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13090.00	42.60	68.20	-25.60	36.58	6.02	Average	100	30	2	13090.00	56.48	88.20	-31.72	50.46	6.02	Peak	100	30	3	19635.00	39.61	54.00	-14.39	38.44	1.17	Average	100	60	4	19635.00	53.05	74.00	-20.95	51.88	1.17	Peak	100	60	5	26180.00	42.45	68.20	-25.75	34.87	7.58	Average	100	162	6	26180.00	54.16	88.20	-34.04	46.58	7.58	Peak	100	162
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	13090.00	42.60	68.20	-25.60	36.58	6.02	Average	100	30																																																																																				
2	13090.00	56.48	88.20	-31.72	50.46	6.02	Peak	100	30																																																																																				
3	19635.00	39.61	54.00	-14.39	38.44	1.17	Average	100	60																																																																																				
4	19635.00	53.05	74.00	-20.95	51.88	1.17	Peak	100	60																																																																																				
5	26180.00	42.45	68.20	-25.75	34.87	7.58	Average	100	162																																																																																				
6	26180.00	54.16	88.20	-34.04	46.58	7.58	Peak	100	162																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													




Modulation	ax HE80		Test Freq. (MHz)		6545																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13090.00</td><td>42.44</td><td>68.20</td><td>-25.76</td><td>36.42</td><td>6.02</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>13090.00</td><td>56.33</td><td>88.20</td><td>-31.87</td><td>50.31</td><td>6.02</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>19635.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>38.58</td><td>1.17</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>19635.00</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>51.64</td><td>1.17</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>26180.00</td><td>42.53</td><td>68.20</td><td>-25.67</td><td>34.95</td><td>7.58</td><td>Average</td><td>100</td><td>170</td></tr><tr><td>6</td><td>26180.00</td><td>54.00</td><td>88.20</td><td>-34.20</td><td>46.42</td><td>7.58</td><td>Peak</td><td>100</td><td>170</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13090.00	42.44	68.20	-25.76	36.42	6.02	Average	100	20	2	13090.00	56.33	88.20	-31.87	50.31	6.02	Peak	100	20	3	19635.00	39.75	54.00	-14.25	38.58	1.17	Average	100	55	4	19635.00	52.81	74.00	-21.19	51.64	1.17	Peak	100	55	5	26180.00	42.53	68.20	-25.67	34.95	7.58	Average	100	170	6	26180.00	54.00	88.20	-34.20	46.42	7.58	Peak	100	170
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13090.00	42.44	68.20	-25.76	36.42	6.02	Average	100	20																																																																																										
2	13090.00	56.33	88.20	-31.87	50.31	6.02	Peak	100	20																																																																																										
3	19635.00	39.75	54.00	-14.25	38.58	1.17	Average	100	55																																																																																										
4	19635.00	52.81	74.00	-21.19	51.64	1.17	Peak	100	55																																																																																										
5	26180.00	42.53	68.20	-25.67	34.95	7.58	Average	100	170																																																																																										
6	26180.00	54.00	88.20	-34.20	46.42	7.58	Peak	100	170																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			



Modulation	ax HE80	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13250.00</td><td>43.49</td><td>54.00</td><td>-10.51</td><td>37.65</td><td>5.84</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>13250.00</td><td>56.26</td><td>74.00</td><td>-17.74</td><td>50.42</td><td>5.84</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>19875.00</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>38.65</td><td>1.29</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>19875.00</td><td>52.56</td><td>74.00</td><td>-21.44</td><td>51.27</td><td>1.29</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>26500.00</td><td>43.57</td><td>68.20</td><td>-24.63</td><td>35.46</td><td>8.11</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>26500.00</td><td>55.90</td><td>88.20</td><td>-32.30</td><td>47.79</td><td>8.11</td><td>Peak</td><td>100</td><td>80</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.49	54.00	-10.51	37.65	5.84	Average	100	249	2	13250.00	56.26	74.00	-17.74	50.42	5.84	Peak	100	249	3	19875.00	39.94	54.00	-14.06	38.65	1.29	Average	100	30	4	19875.00	52.56	74.00	-21.44	51.27	1.29	Peak	100	30	5	26500.00	43.57	68.20	-24.63	35.46	8.11	Average	100	80	6	26500.00	55.90	88.20	-32.30	47.79	8.11	Peak	100	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.49	54.00	-10.51	37.65	5.84	Average	100	249																																																																
2	13250.00	56.26	74.00	-17.74	50.42	5.84	Peak	100	249																																																																
3	19875.00	39.94	54.00	-14.06	38.65	1.29	Average	100	30																																																																
4	19875.00	52.56	74.00	-21.44	51.27	1.29	Peak	100	30																																																																
5	26500.00	43.57	68.20	-24.63	35.46	8.11	Average	100	80																																																																
6	26500.00	55.90	88.20	-32.30	47.79	8.11	Peak	100	80																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

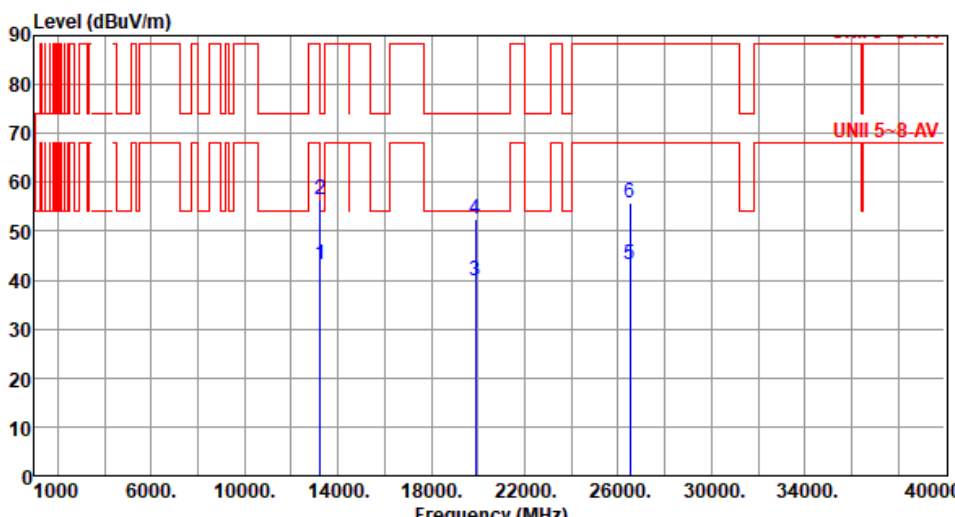

Modulation	ax HE80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>13250.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>37.49</td><td>5.84</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>2</td><td>13250.00</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>50.56</td><td>5.84</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>3</td><td>19875.00</td><td>39.78</td><td>54.00</td><td>-14.22</td><td>38.49</td><td>1.29</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>4</td><td>19875.00</td><td>52.61</td><td>74.00</td><td>-21.39</td><td>51.32</td><td>1.29</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>5</td><td>26500.00</td><td>43.33</td><td>68.20</td><td>-24.87</td><td>35.22</td><td>8.11</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>26500.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>47.56</td><td>8.11</td><td>Peak</td><td>100</td><td>120</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13250.00	43.33	54.00	-10.67	37.49	5.84	Average	100	200	2	13250.00	56.40	74.00	-17.60	50.56	5.84	Peak	100	200	3	19875.00	39.78	54.00	-14.22	38.49	1.29	Average	100	10	4	19875.00	52.61	74.00	-21.39	51.32	1.29	Peak	100	10	5	26500.00	43.33	68.20	-24.87	35.22	8.11	Average	100	120	6	26500.00	55.67	88.20	-32.53	47.56	8.11	Peak	100	120
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13250.00	43.33	54.00	-10.67	37.49	5.84	Average	100	200																																																																
2	13250.00	56.40	74.00	-17.60	50.56	5.84	Peak	100	200																																																																
3	19875.00	39.78	54.00	-14.22	38.49	1.29	Average	100	10																																																																
4	19875.00	52.61	74.00	-21.39	51.32	1.29	Peak	100	10																																																																
5	26500.00	43.33	68.20	-24.87	35.22	8.11	Average	100	120																																																																
6	26500.00	55.67	88.20	-32.53	47.56	8.11	Peak	100	120																																																																




Modulation	ax HE80		Test Freq. (MHz)		6705																																																																										
Polarization	Horizontal																																																																														
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																															
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13410.00</td><td>43.87</td><td>68.20</td><td>-24.33</td><td>37.66</td><td>6.21</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>13410.00</td><td>57.77</td><td>88.20</td><td>-30.43</td><td>51.56</td><td>6.21</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>20115.00</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>38.47</td><td>1.47</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>20115.00</td><td>51.67</td><td>74.00</td><td>-22.33</td><td>50.20</td><td>1.47</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>26820.00</td><td>42.78</td><td>68.20</td><td>-25.42</td><td>34.65</td><td>8.13</td><td>Average</td><td>100</td><td>340</td></tr><tr><td>6</td><td>26820.00</td><td>55.28</td><td>88.20</td><td>-32.92</td><td>47.15</td><td>8.13</td><td>Peak</td><td>100</td><td>340</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13410.00	43.87	68.20	-24.33	37.66	6.21	Average	100	50	2	13410.00	57.77	88.20	-30.43	51.56	6.21	Peak	100	50	3	20115.00	39.94	54.00	-14.06	38.47	1.47	Average	100	20	4	20115.00	51.67	74.00	-22.33	50.20	1.47	Peak	100	20	5	26820.00	42.78	68.20	-25.42	34.65	8.13	Average	100	340	6	26820.00	55.28	88.20	-32.92	47.15	8.13	Peak	100	340
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	13410.00	43.87	68.20	-24.33	37.66	6.21	Average	100	50																																																																						
2	13410.00	57.77	88.20	-30.43	51.56	6.21	Peak	100	50																																																																						
3	20115.00	39.94	54.00	-14.06	38.47	1.47	Average	100	20																																																																						
4	20115.00	51.67	74.00	-22.33	50.20	1.47	Peak	100	20																																																																						
5	26820.00	42.78	68.20	-25.42	34.65	8.13	Average	100	340																																																																						
6	26820.00	55.28	88.20	-32.92	47.15	8.13	Peak	100	340																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	ax HE80	Test Freq. (MHz)	6705						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13410.00	43.69	68.20	-24.51	37.48	6.21	Average	100	20
2	13410.00	57.64	88.20	-30.56	51.43	6.21	Peak	100	20
3	20115.00	39.77	54.00	-14.23	38.30	1.47	Average	100	60
4	20115.00	51.94	74.00	-22.06	50.47	1.47	Peak	100	60
5	26820.00	42.93	68.20	-25.27	34.80	8.13	Average	100	200
6	26820.00	55.48	88.20	-32.72	47.35	8.13	Peak	100	200
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

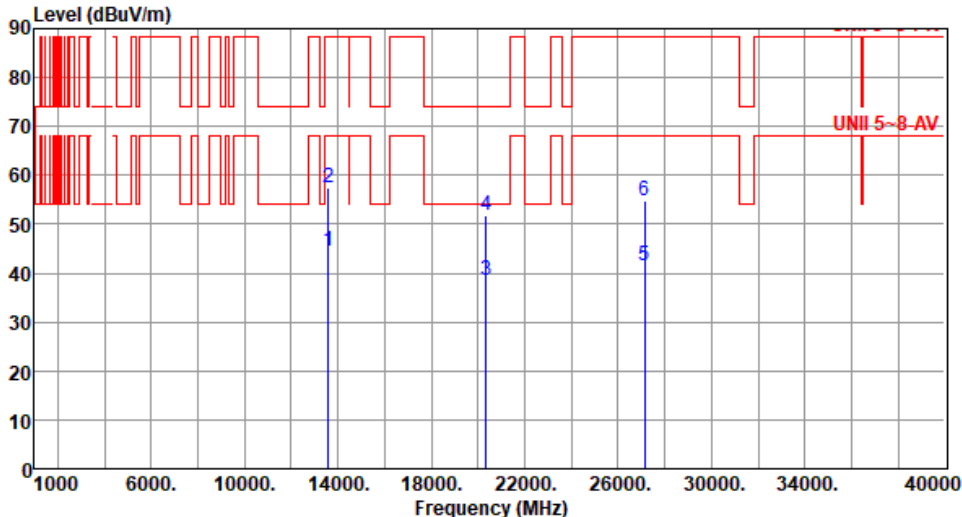

Modulation	ax HE80		Test Freq. (MHz)		6785																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13570.00</td><td>44.67</td><td>68.20</td><td>-23.53</td><td>38.46</td><td>6.21</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>2</td><td>13570.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>51.37</td><td>6.21</td><td>Peak</td><td>100</td><td>212</td></tr><tr><td>3</td><td>20355.00</td><td>38.40</td><td>54.00</td><td>-15.60</td><td>36.67</td><td>1.73</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>20355.00</td><td>51.89</td><td>74.00</td><td>-22.11</td><td>50.16</td><td>1.73</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>27140.00</td><td>41.63</td><td>68.20</td><td>-26.57</td><td>33.69</td><td>7.94</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>6</td><td>27140.00</td><td>54.82</td><td>88.20</td><td>-33.38</td><td>46.88</td><td>7.94</td><td>Peak</td><td>100</td><td>20</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	13570.00	44.67	68.20	-23.53	38.46	6.21	Average	100	212	2	13570.00	57.58	88.20	-30.62	51.37	6.21	Peak	100	212	3	20355.00	38.40	54.00	-15.60	36.67	1.73	Average	100	90	4	20355.00	51.89	74.00	-22.11	50.16	1.73	Peak	100	90	5	27140.00	41.63	68.20	-26.57	33.69	7.94	Average	100	20	6	27140.00	54.82	88.20	-33.38	46.88	7.94	Peak	100	20
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	13570.00	44.67	68.20	-23.53	38.46	6.21	Average	100	212																																																																																										
2	13570.00	57.58	88.20	-30.62	51.37	6.21	Peak	100	212																																																																																										
3	20355.00	38.40	54.00	-15.60	36.67	1.73	Average	100	90																																																																																										
4	20355.00	51.89	74.00	-22.11	50.16	1.73	Peak	100	90																																																																																										
5	27140.00	41.63	68.20	-26.57	33.69	7.94	Average	100	20																																																																																										
6	27140.00	54.82	88.20	-33.38	46.88	7.94	Peak	100	20																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

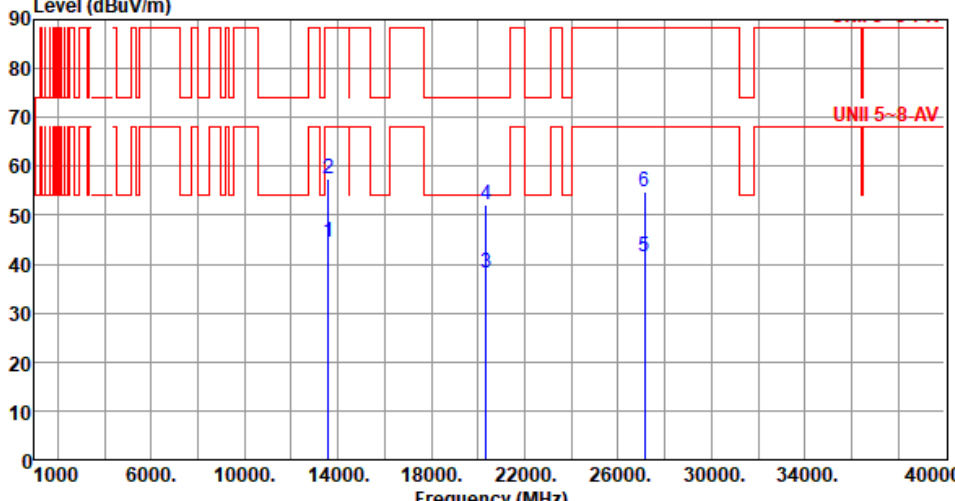

Modulation	ax HE80		Test Freq. (MHz)		6785																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13570.00</td><td>44.53</td><td>68.20</td><td>-23.67</td><td>38.32</td><td>6.21</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>2</td><td>13570.00</td><td>57.48</td><td>88.20</td><td>-30.72</td><td>51.27</td><td>6.21</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>3</td><td>20355.00</td><td>38.19</td><td>54.00</td><td>-15.81</td><td>36.46</td><td>1.73</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>20355.00</td><td>52.00</td><td>74.00</td><td>-22.00</td><td>50.27</td><td>1.73</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>27140.00</td><td>41.52</td><td>68.20</td><td>-26.68</td><td>33.58</td><td>7.94</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>27140.00</td><td>54.89</td><td>88.20</td><td>-33.31</td><td>46.95</td><td>7.94</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	13570.00	44.53	68.20	-23.67	38.32	6.21	Average	100	100	2	13570.00	57.48	88.20	-30.72	51.27	6.21	Peak	100	100	3	20355.00	38.19	54.00	-15.81	36.46	1.73	Average	100	80	4	20355.00	52.00	74.00	-22.00	50.27	1.73	Peak	100	80	5	27140.00	41.52	68.20	-26.68	33.58	7.94	Average	100	60	6	27140.00	54.89	88.20	-33.31	46.95	7.94	Peak	100	60
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	13570.00	44.53	68.20	-23.67	38.32	6.21	Average	100	100																																																																																										
2	13570.00	57.48	88.20	-30.72	51.27	6.21	Peak	100	100																																																																																										
3	20355.00	38.19	54.00	-15.81	36.46	1.73	Average	100	80																																																																																										
4	20355.00	52.00	74.00	-22.00	50.27	1.73	Peak	100	80																																																																																										
5	27140.00	41.52	68.20	-26.68	33.58	7.94	Average	100	60																																																																																										
6	27140.00	54.89	88.20	-33.31	46.95	7.94	Peak	100	60																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	ax HE80	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13730.00</td><td>44.51</td><td>68.20</td><td>-23.69</td><td>38.26</td><td>6.25</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>13730.00</td><td>57.72</td><td>88.20</td><td>-30.48</td><td>51.47</td><td>6.25</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>20595.00</td><td>38.34</td><td>54.00</td><td>-15.66</td><td>36.25</td><td>2.09</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>20595.00</td><td>52.40</td><td>74.00</td><td>-21.60</td><td>50.31</td><td>2.09</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>27460.00</td><td>41.39</td><td>68.20</td><td>-26.81</td><td>33.45</td><td>7.94</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>27460.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>47.45</td><td>7.94</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13730.00	44.51	68.20	-23.69	38.26	6.25	Average	100	60	2	13730.00	57.72	88.20	-30.48	51.47	6.25	Peak	100	60	3	20595.00	38.34	54.00	-15.66	36.25	2.09	Average	100	20	4	20595.00	52.40	74.00	-21.60	50.31	2.09	Peak	100	20	5	27460.00	41.39	68.20	-26.81	33.45	7.94	Average	100	30	6	27460.00	55.39	88.20	-32.81	47.45	7.94	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13730.00	44.51	68.20	-23.69	38.26	6.25	Average	100	60																																																																
2	13730.00	57.72	88.20	-30.48	51.47	6.25	Peak	100	60																																																																
3	20595.00	38.34	54.00	-15.66	36.25	2.09	Average	100	20																																																																
4	20595.00	52.40	74.00	-21.60	50.31	2.09	Peak	100	20																																																																
5	27460.00	41.39	68.20	-26.81	33.45	7.94	Average	100	30																																																																
6	27460.00	55.39	88.20	-32.81	47.45	7.94	Peak	100	30																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6865						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13730.00	44.65	68.20	-23.55	38.40	6.25	Average	100	45
2	13730.00	57.85	88.20	-30.35	51.60	6.25	Peak	100	45
3	20595.00	38.65	54.00	-15.35	36.56	2.09	Average	100	30
4	20595.00	52.67	74.00	-21.33	50.58	2.09	Peak	100	30
5	27460.00	41.62	68.20	-26.58	33.68	7.94	Average	100	90
6	27460.00	55.92	88.20	-32.28	47.98	7.94	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE80	Test Freq. (MHz)	6945																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13890.00</td><td>45.51</td><td>68.20</td><td>-22.69</td><td>38.95</td><td>6.56</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>2</td><td>13890.00</td><td>58.45</td><td>88.20</td><td>-29.75</td><td>51.89</td><td>6.56</td><td>Peak</td><td>100</td><td>212</td></tr><tr><td>3</td><td>20835.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>36.79</td><td>2.54</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>4</td><td>20835.00</td><td>50.99</td><td>74.00</td><td>-23.01</td><td>48.45</td><td>2.54</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>5</td><td>27780.00</td><td>45.81</td><td>68.20</td><td>-22.39</td><td>37.55</td><td>8.26</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>27780.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>47.66</td><td>8.26</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13890.00	45.51	68.20	-22.69	38.95	6.56	Average	100	212	2	13890.00	58.45	88.20	-29.75	51.89	6.56	Peak	100	212	3	20835.00	39.33	54.00	-14.67	36.79	2.54	Average	100	40	4	20835.00	50.99	74.00	-23.01	48.45	2.54	Peak	100	40	5	27780.00	45.81	68.20	-22.39	37.55	8.26	Average	100	60	6	27780.00	55.92	88.20	-32.28	47.66	8.26	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13890.00	45.51	68.20	-22.69	38.95	6.56	Average	100	212																																																																
2	13890.00	58.45	88.20	-29.75	51.89	6.56	Peak	100	212																																																																
3	20835.00	39.33	54.00	-14.67	36.79	2.54	Average	100	40																																																																
4	20835.00	50.99	74.00	-23.01	48.45	2.54	Peak	100	40																																																																
5	27780.00	45.81	68.20	-22.39	37.55	8.26	Average	100	60																																																																
6	27780.00	55.92	88.20	-32.28	47.66	8.26	Peak	100	60																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE80	Test Freq. (MHz)	6945						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13890.00	45.39	68.20	-22.81	38.83	6.56	Average	100	150
2	13890.00	58.21	88.20	-29.99	51.65	6.56	Peak	100	150
3	20835.00	39.20	54.00	-14.80	36.66	2.54	Average	100	25
4	20835.00	50.80	74.00	-23.20	48.26	2.54	Peak	100	25
5	27780.00	45.57	68.20	-22.63	37.31	8.26	Average	100	40
6	27780.00	55.72	88.20	-32.48	47.46	8.26	Peak	100	40
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

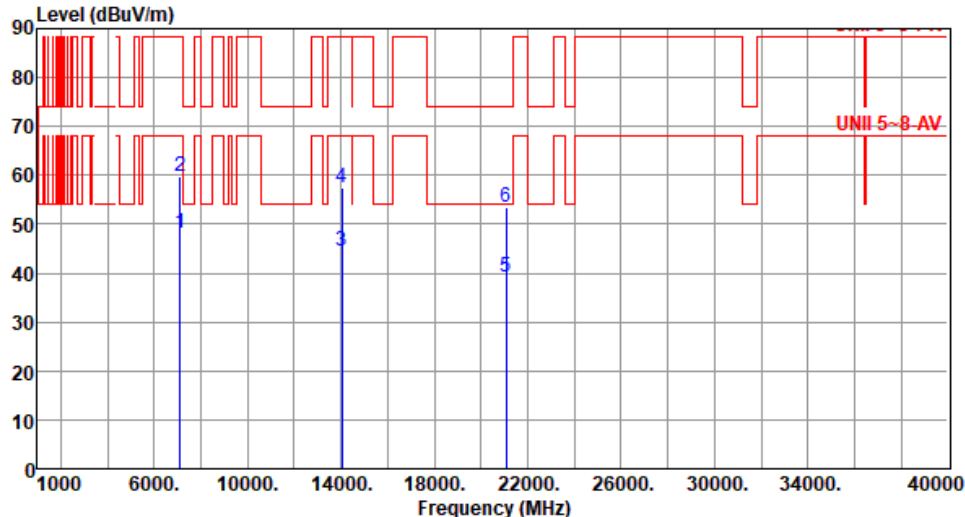


Modulation	ax HE80		Test Freq. (MHz)		7025																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.27</td><td>68.20</td><td>-19.93</td><td>43.49</td><td>4.78</td><td>Average</td><td>177</td><td>284</td></tr><tr><td>2</td><td>7125.00</td><td>59.90</td><td>88.20</td><td>-28.30</td><td>55.12</td><td>4.78</td><td>Peak</td><td>177</td><td>284</td></tr><tr><td>3</td><td>14050.00</td><td>44.48</td><td>68.20</td><td>-23.72</td><td>37.62</td><td>6.86</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>14050.00</td><td>57.32</td><td>88.20</td><td>-30.88</td><td>50.46</td><td>6.86</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>21075.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>36.25</td><td>3.06</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>21075.00</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>50.25</td><td>3.06</td><td>Peak</td><td>100</td><td>30</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	7125.00	48.27	68.20	-19.93	43.49	4.78	Average	177	284	2	7125.00	59.90	88.20	-28.30	55.12	4.78	Peak	177	284	3	14050.00	44.48	68.20	-23.72	37.62	6.86	Average	100	60	4	14050.00	57.32	88.20	-30.88	50.46	6.86	Peak	100	60	5	21075.00	39.31	54.00	-14.69	36.25	3.06	Average	100	30	6	21075.00	53.31	74.00	-20.69	50.25	3.06	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	7125.00	48.27	68.20	-19.93	43.49	4.78	Average	177	284																																																																																										
2	7125.00	59.90	88.20	-28.30	55.12	4.78	Peak	177	284																																																																																										
3	14050.00	44.48	68.20	-23.72	37.62	6.86	Average	100	60																																																																																										
4	14050.00	57.32	88.20	-30.88	50.46	6.86	Peak	100	60																																																																																										
5	21075.00	39.31	54.00	-14.69	36.25	3.06	Average	100	30																																																																																										
6	21075.00	53.31	74.00	-20.69	50.25	3.06	Peak	100	30																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	ax HE80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>7125.00</td><td>48.34</td><td>68.20</td><td>-19.86</td><td>43.56</td><td>4.78</td><td>Average</td><td>167</td><td>47</td></tr><tr><td>2</td><td>7125.00</td><td>60.04</td><td>88.20</td><td>-28.16</td><td>55.26</td><td>4.78</td><td>Peak</td><td>165</td><td>47</td></tr><tr><td>3</td><td>14050.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>37.46</td><td>6.86</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>14050.00</td><td>57.12</td><td>88.20</td><td>-31.08</td><td>50.26</td><td>6.86</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>21075.00</td><td>39.51</td><td>54.00</td><td>-14.49</td><td>36.45</td><td>3.06</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>6</td><td>21075.00</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>50.49</td><td>3.06</td><td>Peak</td><td>100</td><td>100</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	48.34	68.20	-19.86	43.56	4.78	Average	167	47	2	7125.00	60.04	88.20	-28.16	55.26	4.78	Peak	165	47	3	14050.00	44.32	68.20	-23.88	37.46	6.86	Average	100	50	4	14050.00	57.12	88.20	-31.08	50.26	6.86	Peak	100	50	5	21075.00	39.51	54.00	-14.49	36.45	3.06	Average	100	100	6	21075.00	53.55	74.00	-20.45	50.49	3.06	Peak	100	100
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	48.34	68.20	-19.86	43.56	4.78	Average	167	47																																																																
2	7125.00	60.04	88.20	-28.16	55.26	4.78	Peak	165	47																																																																
3	14050.00	44.32	68.20	-23.88	37.46	6.86	Average	100	50																																																																
4	14050.00	57.12	88.20	-31.08	50.26	6.86	Peak	100	50																																																																
5	21075.00	39.51	54.00	-14.49	36.45	3.06	Average	100	100																																																																
6	21075.00	53.55	74.00	-20.45	50.49	3.06	Peak	100	100																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Unwanted Emissions (Above 1GHz) for ax HE160

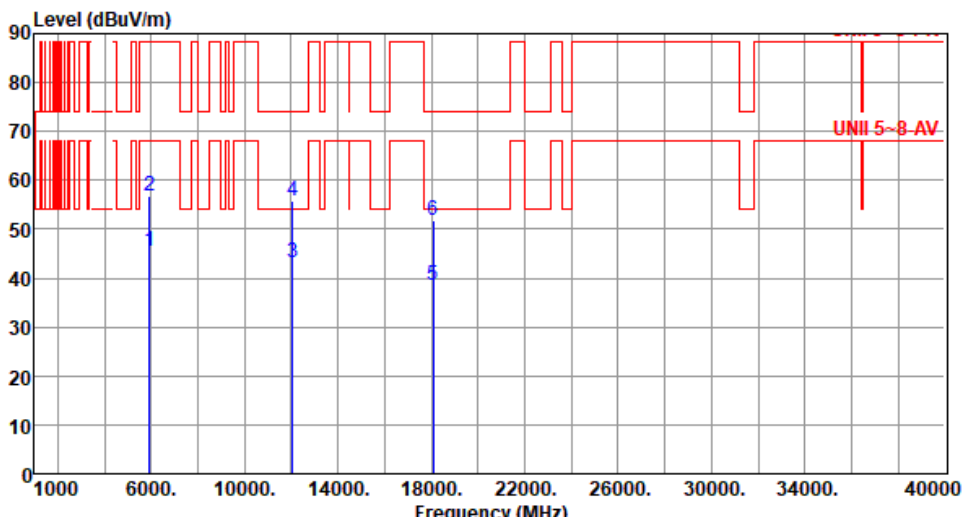Modulation	ax HE160	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>45.34</td><td>68.20</td><td>-22.86</td><td>44.15</td><td>1.19</td><td>Average</td><td>160</td><td>66</td></tr><tr><td>2</td><td>5925.00</td><td>56.84</td><td>88.20</td><td>-31.36</td><td>55.65</td><td>1.19</td><td>Peak</td><td>160</td><td>66</td></tr><tr><td>3</td><td>12050.00</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>36.89</td><td>6.40</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>4</td><td>12050.00</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>49.34</td><td>6.40</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>5</td><td>18075.00</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>38.19</td><td>0.48</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>18075.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>51.46</td><td>0.48</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	45.34	68.20	-22.86	44.15	1.19	Average	160	66	2	5925.00	56.84	88.20	-31.36	55.65	1.19	Peak	160	66	3	12050.00	43.29	54.00	-10.71	36.89	6.40	Average	100	100	4	12050.00	55.74	74.00	-18.26	49.34	6.40	Peak	100	100	5	18075.00	38.67	54.00	-15.33	38.19	0.48	Average	100	40	6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5925.00	45.34	68.20	-22.86	44.15	1.19	Average	160	66																																																																
2	5925.00	56.84	88.20	-31.36	55.65	1.19	Peak	160	66																																																																
3	12050.00	43.29	54.00	-10.71	36.89	6.40	Average	100	100																																																																
4	12050.00	55.74	74.00	-18.26	49.34	6.40	Peak	100	100																																																																
5	18075.00	38.67	54.00	-15.33	38.19	0.48	Average	100	40																																																																
6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	40																																																																




Modulation	ax HE160	Test Freq. (MHz)	6025						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	51.44	68.20	-16.76	50.25	1.19	Average	164	67
2	5925.00	62.98	88.20	-25.22	61.79	1.19	Peak	164	67
3	12050.00	43.65	54.00	-10.35	37.25	6.40	Average	100	50
4	12050.00	55.61	74.00	-18.39	49.21	6.40	Peak	100	50
5	18075.00	38.64	54.00	-15.36	38.16	0.48	Average	100	30
6	18075.00	51.94	74.00	-22.06	51.46	0.48	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	ax HE160	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>12370.00</td><td>43.44</td><td>54.00</td><td>-10.56</td><td>37.27</td><td>6.17</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>12370.00</td><td>56.74</td><td>74.00</td><td>-17.26</td><td>50.57</td><td>6.17</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>18555.00</td><td>39.18</td><td>54.00</td><td>-14.82</td><td>38.56</td><td>0.62</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>18555.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>51.56</td><td>0.62</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>24740.00</td><td>42.10</td><td>68.20</td><td>-26.10</td><td>34.50</td><td>7.60</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>24740.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>48.53</td><td>7.60</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	12370.00	43.44	54.00	-10.56	37.27	6.17	Average	100	60	2	12370.00	56.74	74.00	-17.26	50.57	6.17	Peak	100	60	3	18555.00	39.18	54.00	-14.82	38.56	0.62	Average	100	20	4	18555.00	52.18	74.00	-21.82	51.56	0.62	Peak	100	20	5	24740.00	42.10	68.20	-26.10	34.50	7.60	Average	100	60	6	24740.00	56.13	88.20	-32.07	48.53	7.60	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	12370.00	43.44	54.00	-10.56	37.27	6.17	Average	100	60																																																																
2	12370.00	56.74	74.00	-17.26	50.57	6.17	Peak	100	60																																																																
3	18555.00	39.18	54.00	-14.82	38.56	0.62	Average	100	20																																																																
4	18555.00	52.18	74.00	-21.82	51.56	0.62	Peak	100	20																																																																
5	24740.00	42.10	68.20	-26.10	34.50	7.60	Average	100	60																																																																
6	24740.00	56.13	88.20	-32.07	48.53	7.60	Peak	100	60																																																																

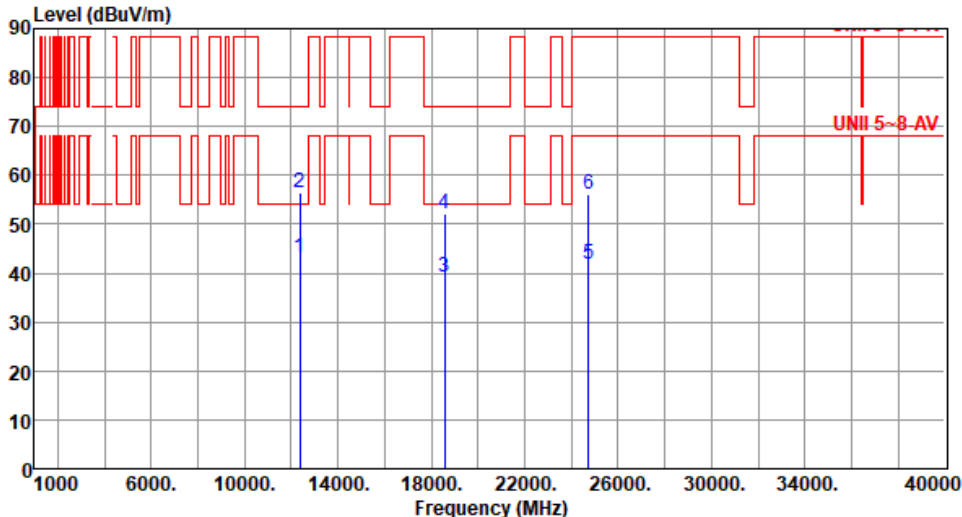


Modulation	ax HE160		Test Freq. (MHz)		6185																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12370.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>37.16</td><td>6.17</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>12370.00</td><td>56.60</td><td>74.00</td><td>-17.40</td><td>50.43</td><td>6.17</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>18555.00</td><td>39.08</td><td>54.00</td><td>-14.92</td><td>38.46</td><td>0.62</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>4</td><td>18555.00</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>51.42</td><td>0.62</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>5</td><td>24740.00</td><td>41.90</td><td>68.20</td><td>-26.30</td><td>34.30</td><td>7.60</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>24740.00</td><td>56.07</td><td>88.20</td><td>-32.13</td><td>48.47</td><td>7.60</td><td>Peak</td><td>100</td><td>55</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	12370.00	43.33	54.00	-10.67	37.16	6.17	Average	100	20	2	12370.00	56.60	74.00	-17.40	50.43	6.17	Peak	100	60	3	18555.00	39.08	54.00	-14.92	38.46	0.62	Average	100	30	4	18555.00	52.04	74.00	-21.96	51.42	0.62	Peak	100	30	5	24740.00	41.90	68.20	-26.30	34.30	7.60	Average	100	55	6	24740.00	56.07	88.20	-32.13	48.47	7.60	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	12370.00	43.33	54.00	-10.67	37.16	6.17	Average	100	20																																																																																										
2	12370.00	56.60	74.00	-17.40	50.43	6.17	Peak	100	60																																																																																										
3	18555.00	39.08	54.00	-14.92	38.46	0.62	Average	100	30																																																																																										
4	18555.00	52.04	74.00	-21.96	51.42	0.62	Peak	100	30																																																																																										
5	24740.00	41.90	68.20	-26.30	34.30	7.60	Average	100	55																																																																																										
6	24740.00	56.07	88.20	-32.13	48.47	7.60	Peak	100	55																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

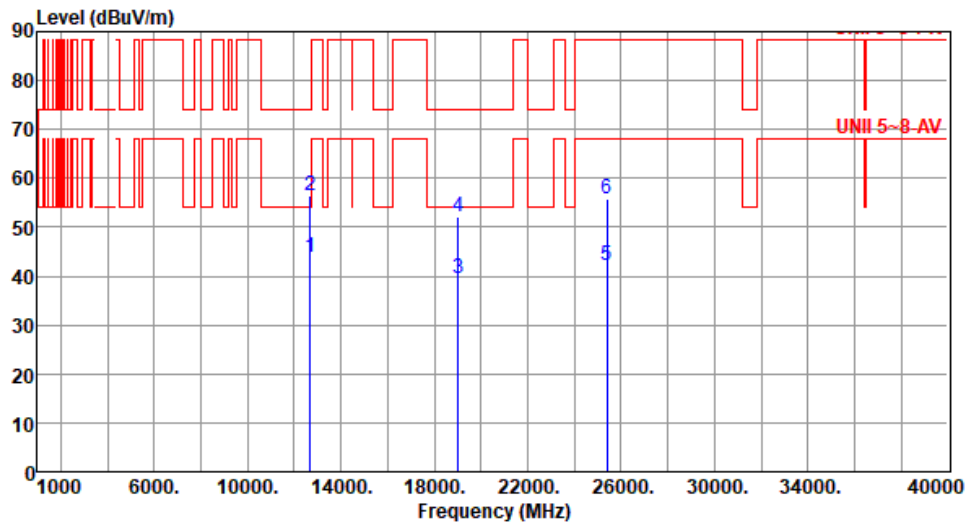


Modulation	ax HE160	Test Freq. (MHz)	6345						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	12690.00	43.75	54.00	-10.25	37.62	6.13	Average	100	50
2	12690.00	56.59	74.00	-17.41	50.46	6.13	Peak	100	50
3	19035.00	39.47	54.00	-14.53	38.56	0.91	Average	100	90
4	19035.00	52.30	74.00	-21.70	51.39	0.91	Peak	100	90
5	25380.00	42.02	68.20	-26.18	34.59	7.43	Average	100	40
6	25380.00	55.74	88.20	-32.46	48.31	7.43	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

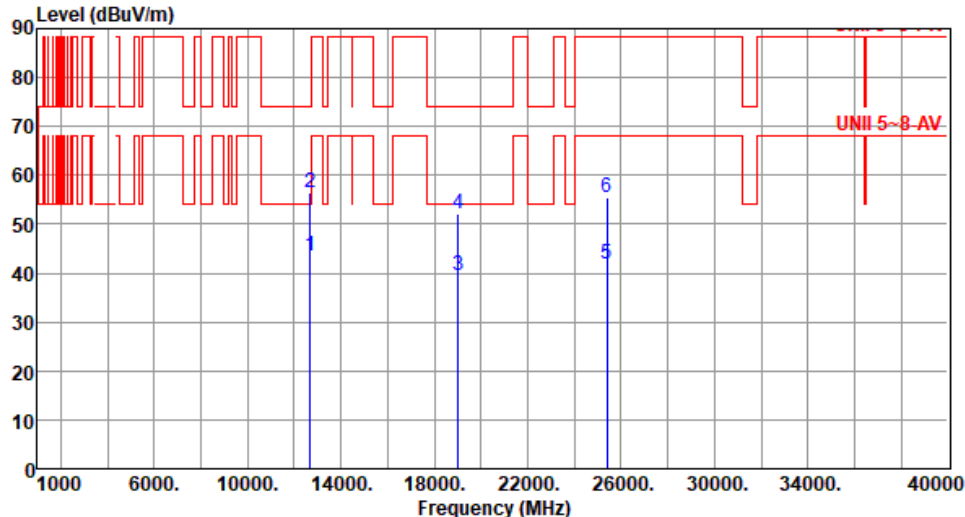


Modulation	ax HE160		Test Freq. (MHz)		6345																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12690.00</td><td>43.61</td><td>54.00</td><td>-10.39</td><td>37.48</td><td>6.13</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>2</td><td>12690.00</td><td>56.39</td><td>74.00</td><td>-17.61</td><td>50.26</td><td>6.13</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>3</td><td>19035.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>38.46</td><td>0.91</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>4</td><td>19035.00</td><td>52.17</td><td>74.00</td><td>-21.83</td><td>51.26</td><td>0.91</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>5</td><td>25380.00</td><td>41.92</td><td>68.20</td><td>-26.28</td><td>34.49</td><td>7.43</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>25380.00</td><td>55.58</td><td>88.20</td><td>-32.62</td><td>48.15</td><td>7.43</td><td>Peak</td><td>100</td><td>30</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	12690.00	43.61	54.00	-10.39	37.48	6.13	Average	100	40	2	12690.00	56.39	74.00	-17.61	50.26	6.13	Peak	100	40	3	19035.00	39.37	54.00	-14.63	38.46	0.91	Average	100	80	4	19035.00	52.17	74.00	-21.83	51.26	0.91	Peak	100	80	5	25380.00	41.92	68.20	-26.28	34.49	7.43	Average	100	30	6	25380.00	55.58	88.20	-32.62	48.15	7.43	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	12690.00	43.61	54.00	-10.39	37.48	6.13	Average	100	40																																																																																										
2	12690.00	56.39	74.00	-17.61	50.26	6.13	Peak	100	40																																																																																										
3	19035.00	39.37	54.00	-14.63	38.46	0.91	Average	100	80																																																																																										
4	19035.00	52.17	74.00	-21.83	51.26	0.91	Peak	100	80																																																																																										
5	25380.00	41.92	68.20	-26.28	34.49	7.43	Average	100	30																																																																																										
6	25380.00	55.58	88.20	-32.62	48.15	7.43	Peak	100	30																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

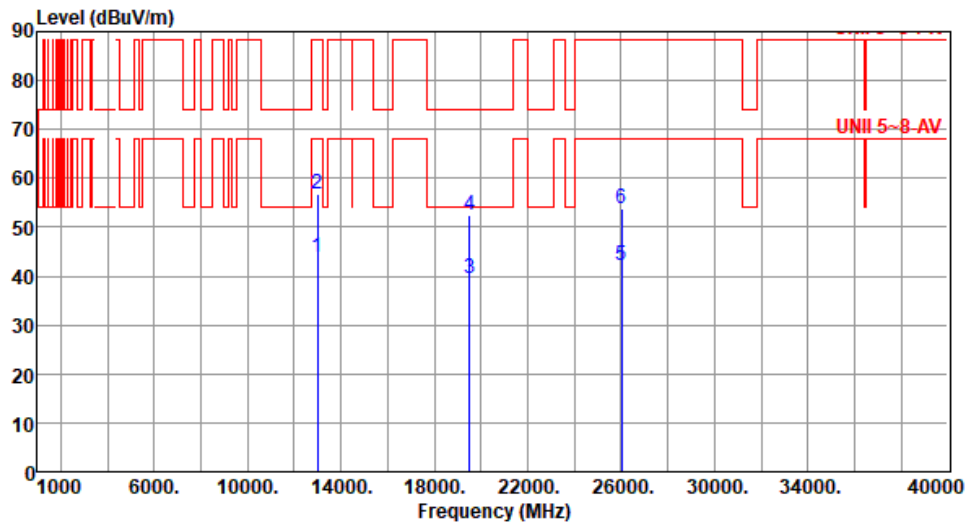

Modulation	ax HE160	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																									
																																																																									
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13010.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>37.42</td><td>6.43</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>2</td><td>13010.00</td><td>56.88</td><td>88.20</td><td>-31.32</td><td>50.45</td><td>6.43</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>3</td><td>19515.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>38.47</td><td>1.11</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>19515.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>51.47</td><td>1.11</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>26020.00</td><td>42.04</td><td>68.20</td><td>-26.16</td><td>34.58</td><td>7.46</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>6</td><td>26020.00</td><td>53.92</td><td>88.20</td><td>-34.28</td><td>46.46</td><td>7.46</td><td>Peak</td><td>100</td><td>80</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13010.00	43.85	68.20	-24.35	37.42	6.43	Average	100	20	2	13010.00	56.88	88.20	-31.32	50.45	6.43	Peak	100	20	3	19515.00	39.58	54.00	-14.42	38.47	1.11	Average	100	60	4	19515.00	52.58	74.00	-21.42	51.47	1.11	Peak	100	60	5	26020.00	42.04	68.20	-26.16	34.58	7.46	Average	100	80	6	26020.00	53.92	88.20	-34.28	46.46	7.46	Peak	100	80			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	13010.00	43.85	68.20	-24.35	37.42	6.43	Average	100	20																																																																
2	13010.00	56.88	88.20	-31.32	50.45	6.43	Peak	100	20																																																																
3	19515.00	39.58	54.00	-14.42	38.47	1.11	Average	100	60																																																																
4	19515.00	52.58	74.00	-21.42	51.47	1.11	Peak	100	60																																																																
5	26020.00	42.04	68.20	-26.16	34.58	7.46	Average	100	80																																																																
6	26020.00	53.92	88.20	-34.28	46.46	7.46	Peak	100	80																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

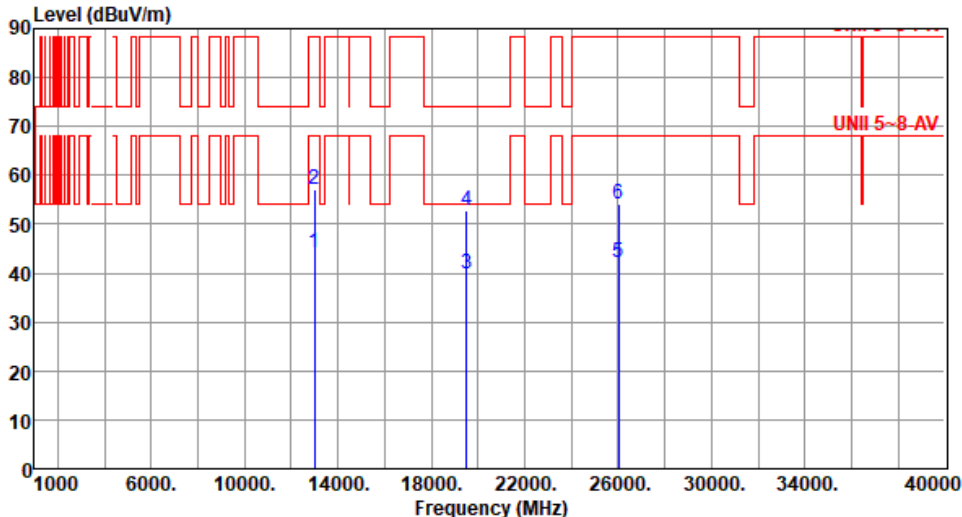

Modulation	ax HE160		Test Freq. (MHz)		6505																																																																																														
Polarization	Vertical																																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13010.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.59</td><td>6.43</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>2</td><td>13010.00</td><td>57.02</td><td>88.20</td><td>-31.18</td><td>50.59</td><td>6.43</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>3</td><td>19515.00</td><td>39.71</td><td>54.00</td><td>-14.29</td><td>38.60</td><td>1.11</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>4</td><td>19515.00</td><td>52.71</td><td>74.00</td><td>-21.29</td><td>51.60</td><td>1.11</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>5</td><td>26020.00</td><td>42.11</td><td>68.20</td><td>-26.09</td><td>34.65</td><td>7.46</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>6</td><td>26020.00</td><td>54.04</td><td>88.20</td><td>-34.16</td><td>46.58</td><td>7.46</td><td>Peak</td><td>100</td><td>120</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	13010.00	44.02	68.20	-24.18	37.59	6.43	Average	100	30	2	13010.00	57.02	88.20	-31.18	50.59	6.43	Peak	100	30	3	19515.00	39.71	54.00	-14.29	38.60	1.11	Average	100	50	4	19515.00	52.71	74.00	-21.29	51.60	1.11	Peak	100	50	5	26020.00	42.11	68.20	-26.09	34.65	7.46	Average	100	120	6	26020.00	54.04	88.20	-34.16	46.58	7.46	Peak	100	120
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	13010.00	44.02	68.20	-24.18	37.59	6.43	Average	100	30																																																																																										
2	13010.00	57.02	88.20	-31.18	50.59	6.43	Peak	100	30																																																																																										
3	19515.00	39.71	54.00	-14.29	38.60	1.11	Average	100	50																																																																																										
4	19515.00	52.71	74.00	-21.29	51.60	1.11	Peak	100	50																																																																																										
5	26020.00	42.11	68.20	-26.09	34.65	7.46	Average	100	120																																																																																										
6	26020.00	54.04	88.20	-34.16	46.58	7.46	Peak	100	120																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	ax HE160		Test Freq. (MHz)		6665				
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62									
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm Table deg 113330.0044.4454.00-9.5638.565.88Average100200 213330.0057.3474.00-16.6651.465.88Peak100200 319995.0039.0354.00-14.9737.641.39Average10060 419995.0052.9874.00-21.0251.591.39Peak10060 526660.0042.7368.20-25.4734.568.17Average10030 626660.0056.7388.20-31.4748.568.17Peak10030									
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	ax HE160	Test Freq. (MHz)	6665																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>13330.00</td><td>44.30</td><td>54.00</td><td>-9.70</td><td>38.42</td><td>5.88</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>2</td><td>13330.00</td><td>57.14</td><td>74.00</td><td>-16.86</td><td>51.26</td><td>5.88</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>3</td><td>19995.00</td><td>38.85</td><td>54.00</td><td>-15.15</td><td>37.46</td><td>1.39</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>19995.00</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>51.29</td><td>1.39</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>5</td><td>26660.00</td><td>42.85</td><td>68.20</td><td>-25.35</td><td>34.68</td><td>8.17</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>6</td><td>26660.00</td><td>56.85</td><td>88.20</td><td>-31.35</td><td>48.68</td><td>8.17</td><td>Peak</td><td>100</td><td>90</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	13330.00	44.30	54.00	-9.70	38.42	5.88	Average	100	50	2	13330.00	57.14	74.00	-16.86	51.26	5.88	Peak	100	50	3	19995.00	38.85	54.00	-15.15	37.46	1.39	Average	100	55	4	19995.00	52.68	74.00	-21.32	51.29	1.39	Peak	100	55	5	26660.00	42.85	68.20	-25.35	34.68	8.17	Average	100	90	6	26660.00	56.85	88.20	-31.35	48.68	8.17	Peak	100	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	13330.00	44.30	54.00	-9.70	38.42	5.88	Average	100	50																																																																
2	13330.00	57.14	74.00	-16.86	51.26	5.88	Peak	100	50																																																																
3	19995.00	38.85	54.00	-15.15	37.46	1.39	Average	100	55																																																																
4	19995.00	52.68	74.00	-21.32	51.29	1.39	Peak	100	55																																																																
5	26660.00	42.85	68.20	-25.35	34.68	8.17	Average	100	90																																																																
6	26660.00	56.85	88.20	-31.35	48.68	8.17	Peak	100	90																																																																

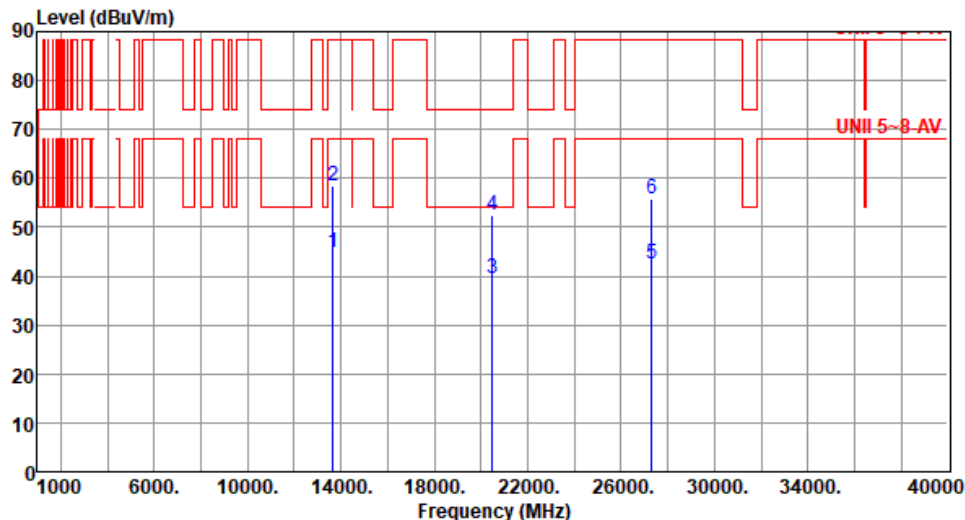

Modulation	ax HE160	Test Freq. (MHz)	6825						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.92	68.20	-23.28	38.68	6.24	Average	100	180
2	13650.00	58.49	88.20	-29.71	52.25	6.24	Peak	100	180
3	20475.00	39.60	54.00	-14.40	37.67	1.93	Average	100	90
4	20475.00	52.31	74.00	-21.69	50.38	1.93	Peak	100	90
5	27300.00	42.61	68.20	-25.59	34.65	7.96	Average	100	30
6	27300.00	55.64	88.20	-32.56	47.68	7.96	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

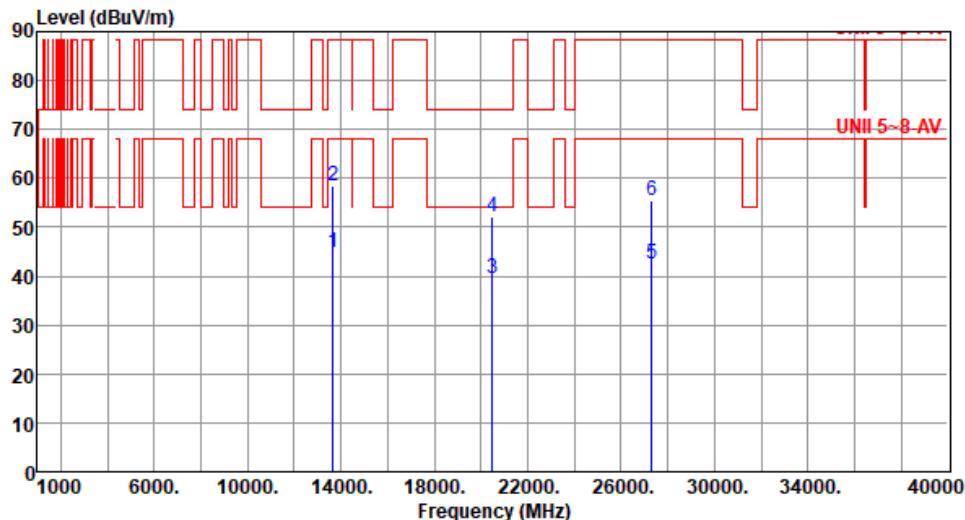

Modulation	ax HE160	Test Freq. (MHz)	6825						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	13650.00	44.72	68.20	-23.48	38.48	6.24	Average	100	70
2	13650.00	58.37	88.20	-29.83	52.13	6.24	Peak	100	70
3	20475.00	39.40	54.00	-14.60	37.47	1.93	Average	100	85
4	20475.00	52.17	74.00	-21.83	50.24	1.93	Peak	100	85
5	27300.00	42.55	68.20	-25.65	34.59	7.96	Average	100	10
6	27300.00	55.41	88.20	-32.79	47.45	7.96	Peak	100	10

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE160	Test Freq. (MHz)	6985																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>49.67</td><td>68.20</td><td>-18.53</td><td>44.89</td><td>4.78</td><td>Average</td><td>172</td><td>283</td></tr><tr><td>2</td><td>7125.00</td><td>60.90</td><td>88.20</td><td>-27.30</td><td>56.12</td><td>4.78</td><td>Peak</td><td>172</td><td>283</td></tr><tr><td>3</td><td>13970.00</td><td>45.93</td><td>68.20</td><td>-22.27</td><td>39.25</td><td>6.68</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>4</td><td>13970.00</td><td>58.10</td><td>88.20</td><td>-30.10</td><td>51.42</td><td>6.68</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>5</td><td>20955.00</td><td>39.60</td><td>54.00</td><td>-14.40</td><td>36.75</td><td>2.85</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>20955.00</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>50.15</td><td>2.85</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	49.67	68.20	-18.53	44.89	4.78	Average	172	283	2	7125.00	60.90	88.20	-27.30	56.12	4.78	Peak	172	283	3	13970.00	45.93	68.20	-22.27	39.25	6.68	Average	100	200	4	13970.00	58.10	88.20	-30.10	51.42	6.68	Peak	100	200	5	20955.00	39.60	54.00	-14.40	36.75	2.85	Average	100	40	6	20955.00	53.00	74.00	-21.00	50.15	2.85	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	49.67	68.20	-18.53	44.89	4.78	Average	172	283																																																																
2	7125.00	60.90	88.20	-27.30	56.12	4.78	Peak	172	283																																																																
3	13970.00	45.93	68.20	-22.27	39.25	6.68	Average	100	200																																																																
4	13970.00	58.10	88.20	-30.10	51.42	6.68	Peak	100	200																																																																
5	20955.00	39.60	54.00	-14.40	36.75	2.85	Average	100	40																																																																
6	20955.00	53.00	74.00	-21.00	50.15	2.85	Peak	100	40																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE160	Test Freq. (MHz)	6985																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>7125.00</td><td>50.99</td><td>68.20</td><td>-17.21</td><td>46.21</td><td>4.78</td><td>Average</td><td>162</td><td>49</td></tr><tr><td>2</td><td>7125.00</td><td>61.90</td><td>88.20</td><td>-26.30</td><td>57.12</td><td>4.78</td><td>Peak</td><td>162</td><td>49</td></tr><tr><td>3</td><td>13970.00</td><td>46.10</td><td>68.20</td><td>-22.10</td><td>39.42</td><td>6.68</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>13970.00</td><td>58.14</td><td>88.20</td><td>-30.06</td><td>51.46</td><td>6.68</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>5</td><td>20955.00</td><td>39.74</td><td>54.00</td><td>-14.26</td><td>36.89</td><td>2.85</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>20955.00</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>50.19</td><td>2.85</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	7125.00	50.99	68.20	-17.21	46.21	4.78	Average	162	49	2	7125.00	61.90	88.20	-26.30	57.12	4.78	Peak	162	49	3	13970.00	46.10	68.20	-22.10	39.42	6.68	Average	100	20	4	13970.00	58.14	88.20	-30.06	51.46	6.68	Peak	100	20	5	20955.00	39.74	54.00	-14.26	36.89	2.85	Average	100	60	6	20955.00	53.04	74.00	-20.96	50.19	2.85	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	7125.00	50.99	68.20	-17.21	46.21	4.78	Average	162	49																																																																
2	7125.00	61.90	88.20	-26.30	57.12	4.78	Peak	162	49																																																																
3	13970.00	46.10	68.20	-22.10	39.42	6.68	Average	100	20																																																																
4	13970.00	58.14	88.20	-30.06	51.46	6.68	Peak	100	20																																																																
5	20955.00	39.74	54.00	-14.26	36.89	2.85	Average	100	60																																																																
6	20955.00	53.04	74.00	-20.96	50.19	2.85	Peak	100	60																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

Non-beamforming mode
Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.4156G	-14.01	6.4468G	-61.28	-54.01	-7.27	1
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	6.4141G	-13.93	6.4605G	-61.39	-53.93	-7.46	1
802.11ax HEW40_Nss1,(MCS0)_4TX	Pass	6.4026G	-12.60	6.4936G	-59.17	-52.60	-6.57	1
802.11ax HEW80_Nss1,(MCS0)_4TX	Pass	5.97701G	-6.10	6.0262G	-32.86	-26.14	-6.72	4
802.11ax HEW160_Nss1,(MCS0)_4TX	Pass	6.33541G	-3.58	6.1002G	-50.17	-43.58	-6.59	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.4734G	-13.39	6.5053G	-61.01	-53.39	-7.62	1
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	6.4737G	-13.46	6.5067G	-61.05	-53.46	-7.59	1
802.11ax HEW40_Nss1,(MCS0)_4TX	Pass	6.4824G	-12.15	6.4194G	-59.50	-52.15	-7.35	1
802.11ax HEW80_Nss1,(MCS0)_4TX	Pass	6.4622G	-6.36	6.3422G	-53.92	-46.36	-7.56	1
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.8734G	-12.84	6.9201G	-60.60	-52.84	-7.76	3
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	6.5375G	-14.42	6.4978G	-61.22	-54.42	-6.80	1
802.11ax HEW40_Nss1,(MCS0)_4TX	Pass	6.7274G	-14.53	6.8236G	-59.88	-54.53	-5.35	1
802.11ax HEW80_Nss1,(MCS0)_4TX	Pass	6.87099G	-6.68	7.001G	-52.88	-46.68	-6.20	4
802.11ax HEW160_Nss1,(MCS0)_4TX	Pass	6.64902G	-3.55	7.001G	-49.70	-43.55	-6.15	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.1131G	-14.11	7.1646G	-60.69	-54.11	-6.58	1
802.11ax HEW20_Nss1,(MCS0)_4TX	Pass	7.1153G	-15.17	7.1632G	-60.59	-55.17	-5.42	1
802.11ax HEW40_Nss1,(MCS0)_4TX	Pass	7.0812G	-9.98	6.988G	-56.03	-49.98	-6.05	1
802.11ax HEW80_Nss1,(MCS0)_4TX	Pass	7.01701G	-5.13	6.983G	-31.32	-25.34	-5.98	3
802.11ax HEW160_Nss1,(MCS0)_4TX	Pass	6.96902G	-2.48	7.2434G	-49.15	-42.48	-6.67	4



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9556G	-14.42	5.9871G	-62.10	-54.42	-7.68	1
5955MHz	Pass	5.9556G	-13.36	5.986G	-61.95	-53.36	-8.59	2
5955MHz	Pass	5.9544G	-12.95	5.9855G	-61.91	-52.95	-8.96	3
5955MHz	Pass	5.9566G	-12.77	5.966G	-41.85	-32.77	-9.08	4
6175MHz	Pass	6.1744G	-13.79	6.2147G	-61.93	-53.79	-8.14	1
6175MHz	Pass	6.1763G	-12.60	6.2229G	-61.84	-52.60	-9.24	2
6175MHz	Pass	6.1737G	-12.53	6.2116G	-61.85	-52.53	-9.32	3
6175MHz	Pass	6.1744G	-12.89	6.2179G	-61.80	-52.89	-8.91	4
6415MHz	Pass	6.4156G	-14.01	6.4468G	-61.28	-54.01	-7.27	1
6415MHz	Pass	6.4175G	-12.36	6.459G	-61.22	-52.36	-8.86	2
6415MHz	Pass	6.4162G	-12.93	6.4571G	-61.18	-52.93	-8.25	3
6415MHz	Pass	6.4159G	-12.06	6.4504G	-61.41	-52.06	-9.35	4
6435MHz	Pass	6.4362G	-13.40	6.4839G	-61.26	-53.40	-7.86	1
6435MHz	Pass	6.4359G	-12.38	6.4733G	-61.26	-52.38	-8.88	2
6435MHz	Pass	6.4362G	-12.52	6.4794G	-61.24	-52.52	-8.72	3
6435MHz	Pass	6.4344G	-11.46	6.4707G	-61.18	-51.46	-9.72	4
6475MHz	Pass	6.4734G	-13.39	6.5053G	-61.01	-53.39	-7.62	1
6475MHz	Pass	6.4759G	-12.66	6.509G	-61.17	-52.66	-8.51	2
6475MHz	Pass	6.4756G	-12.49	6.5085G	-60.93	-52.49	-8.44	3
6475MHz	Pass	6.4737G	-11.56	6.5075G	-61.06	-51.56	-9.50	4
6515MHz	Pass	6.5137G	-13.24	6.4749G	-61.19	-53.24	-7.95	1
6515MHz	Pass	6.5166G	-12.09	6.4737G	-61.19	-52.09	-9.10	2
6515MHz	Pass	6.5159G	-12.36	6.4849G	-61.25	-52.36	-8.89	3
6515MHz	Pass	6.5156G	-12.33	6.4736G	-61.22	-52.33	-8.89	4
6535MHz	Pass	6.5328G	-13.45	6.5041G	-61.31	-53.45	-7.86	1
6535MHz	Pass	6.5359G	-12.05	6.5014G	-61.27	-52.05	-9.22	2
6535MHz	Pass	6.5356G	-12.61	6.5012G	-61.26	-52.61	-8.65	3
6535MHz	Pass	6.5356G	-12.34	6.5032G	-61.11	-52.34	-8.77	4
6715MHz	Pass	6.7134G	-12.29	6.754G	-62.13	-52.29	-9.84	1
6715MHz	Pass	6.7159G	-11.72	6.7612G	-62.16	-51.72	-10.44	2
6715MHz	Pass	6.7141G	-12.14	6.7564G	-62.20	-52.14	-10.06	3
6715MHz	Pass	6.7159G	-12.53	6.7533G	-62.20	-52.53	-9.67	4
6855MHz	Pass	6.8544G	-12.70	6.9021G	-60.66	-52.70	-7.96	1
6855MHz	Pass	6.8556G	-11.92	6.9042G	-60.67	-51.92	-8.75	2
6855MHz	Pass	6.8556G	-12.76	6.8975G	-60.78	-52.76	-8.02	3
6855MHz	Pass	6.8572G	-12.15	6.9008G	-60.77	-52.15	-8.62	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.8756G	-12.89	6.9111G	-60.68	-52.89	-7.79	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8759G	-12.17	6.9216G	-60.75	-52.17	-8.58	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8734G	-12.84	6.9201G	-60.60	-52.84	-7.76	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.8756G	-12.30	6.9236G	-60.47	-52.30	-8.17	4
6895MHz	Pass	6.8959G	-11.07	6.9386G	-60.34	-51.07	-9.27	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8962G	-10.32	6.933G	-60.38	-50.32	-10.06	2
6895MHz	Pass	6.8947G	-11.07	6.9373G	-60.31	-51.07	-9.24	3
6895MHz	Pass	6.8969G	-10.54	6.9372G	-60.30	-50.54	-9.76	4
7015MHz	Pass	7.0166G	-11.97	6.9813G	-60.22	-51.97	-8.25	1
7015MHz	Pass	7.0156G	-10.91	6.9849G	-60.02	-50.91	-9.11	2
7015MHz	Pass	7.0144G	-11.17	6.9848G	-59.99	-51.17	-8.82	3
7015MHz	Pass	7.0144G	-11.18	6.9803G	-60.14	-51.18	-8.96	4
7095MHz	Pass	7.0928G	-12.57	7.1379G	-60.85	-52.57	-8.28	1
7095MHz	Pass	7.0941G	-10.37	7.084G	-38.67	-30.37	-8.30	2
7095MHz	Pass	7.0928G	-11.00	7.084G	-39.79	-31.00	-8.79	3
7095MHz	Pass	7.0975G	-10.65	7.084G	-39.34	-30.65	-8.69	4
7115MHz	Pass	7.1131G	-14.11	7.1646G	-60.69	-54.11	-6.58	1
7115MHz	Pass	7.1137G	-11.99	7.1611G	-60.49	-51.99	-8.50	2
7115MHz	Pass	7.1134G	-12.53	7.1648G	-60.70	-52.53	-8.17	3
7115MHz	Pass	7.1137G	-12.13	7.1583G	-60.71	-52.13	-8.58	4
802.11ax HEW20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9572G	-14.36	5.9137G	-62.10	-54.36	-7.74	1
5955MHz	Pass	5.9537G	-13.46	5.966G	-41.25	-33.46	-7.79	2
5955MHz	Pass	5.9538G	-13.03	5.9661G	-41.23	-33.12	-8.11	3
5955MHz	Pass	5.9537G	-12.53	5.9663G	-41.12	-32.80	-8.32	4
6175MHz	Pass	6.1746G	-13.70	6.22G	-61.85	-53.70	-8.15	1
6175MHz	Pass	6.1734G	-12.39	6.2245G	-61.73	-52.39	-9.34	2
6175MHz	Pass	6.1757G	-12.55	6.2168G	-61.87	-52.55	-9.32	3
6175MHz	Pass	6.1742G	-13.03	6.2084G	-61.82	-53.03	-8.79	4
6415MHz	Pass	6.4141G	-13.93	6.4605G	-61.39	-53.93	-7.46	1
6415MHz	Pass	6.4133G	-12.39	6.4481G	-61.24	-52.39	-8.85	2
6415MHz	Pass	6.4137G	-12.83	6.4543G	-61.36	-52.83	-8.53	3
6415MHz	Pass	6.4164G	-12.27	6.454G	-61.29	-52.27	-9.02	4
6435MHz	Pass	6.4337G	-13.14	6.4845G	-61.20	-53.14	-8.06	1
6435MHz	Pass	6.436G	-12.52	6.4747G	-61.09	-52.52	-8.57	2
6435MHz	Pass	6.4337G	-12.36	6.4702G	-61.27	-52.36	-8.91	3
6435MHz	Pass	6.4338G	-11.45	6.4693G	-61.23	-51.45	-9.78	4
6475MHz	Pass	6.4737G	-13.46	6.5067G	-61.05	-53.46	-7.59	1
6475MHz	Pass	6.4728G	-12.64	6.5084G	-61.05	-52.64	-8.41	2
6475MHz	Pass	6.4737G	-12.54	6.5085G	-61.18	-52.54	-8.64	3
6475MHz	Pass	6.4738G	-11.78	6.508G	-61.09	-51.78	-9.31	4
6515MHz	Pass	6.5138G	-13.43	6.4787G	-61.25	-53.43	-7.82	1
6515MHz	Pass	6.5129G	-12.11	6.4779G	-61.18	-52.11	-9.07	2
6515MHz	Pass	6.5138G	-12.39	6.4839G	-61.20	-52.39	-8.81	3
6515MHz	Pass	6.5164G	-12.44	6.4783G	-61.25	-52.44	-8.81	4
6535MHz	Pass	6.5375G	-14.42	6.4978G	-61.22	-54.42	-6.80	1
6535MHz	Pass	6.5328G	-12.89	6.4945G	-61.13	-52.89	-8.24	2