


Test plot of Incumbent signal


BW: 20 MHz / Frequency : 6214 MHz




BW: 20 MHz / Frequency : 6454 MHz

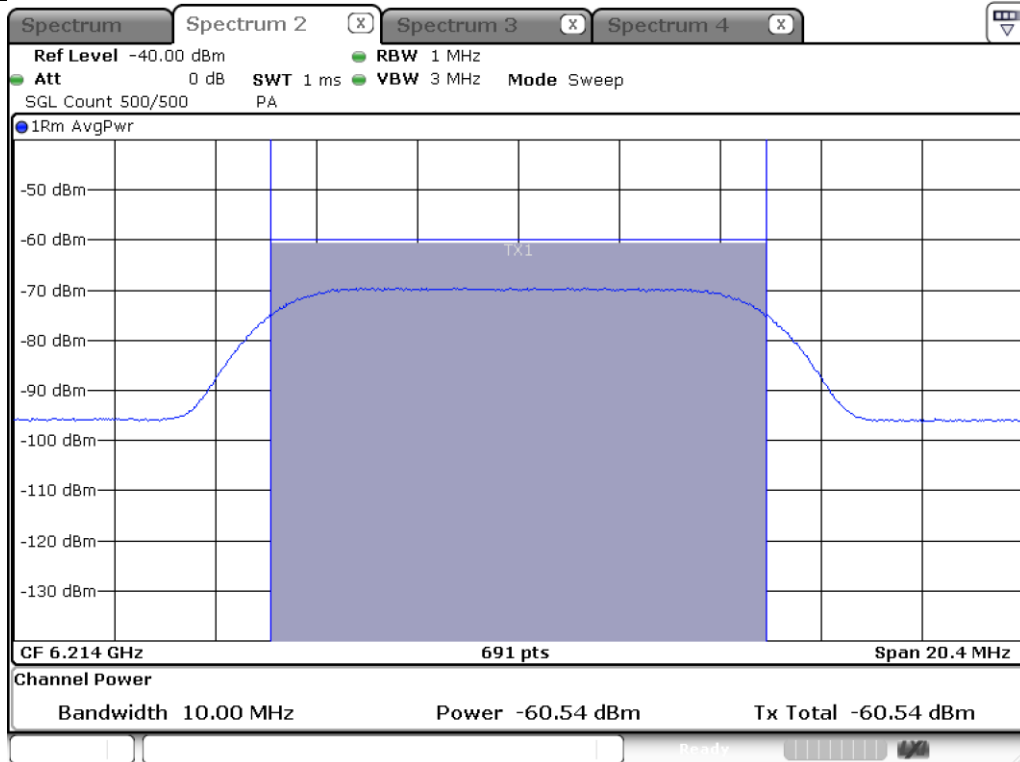


BW: 20 MHz / Frequency : 6694 MHz

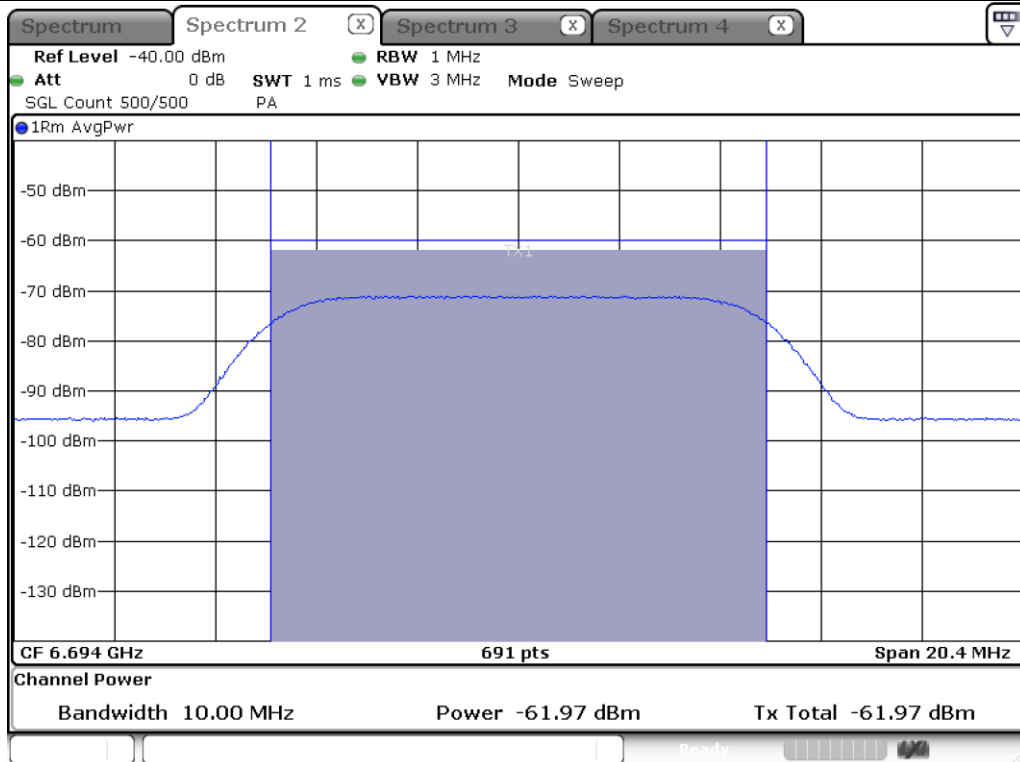

BW: 20 MHz / Frequency : 6994MHz

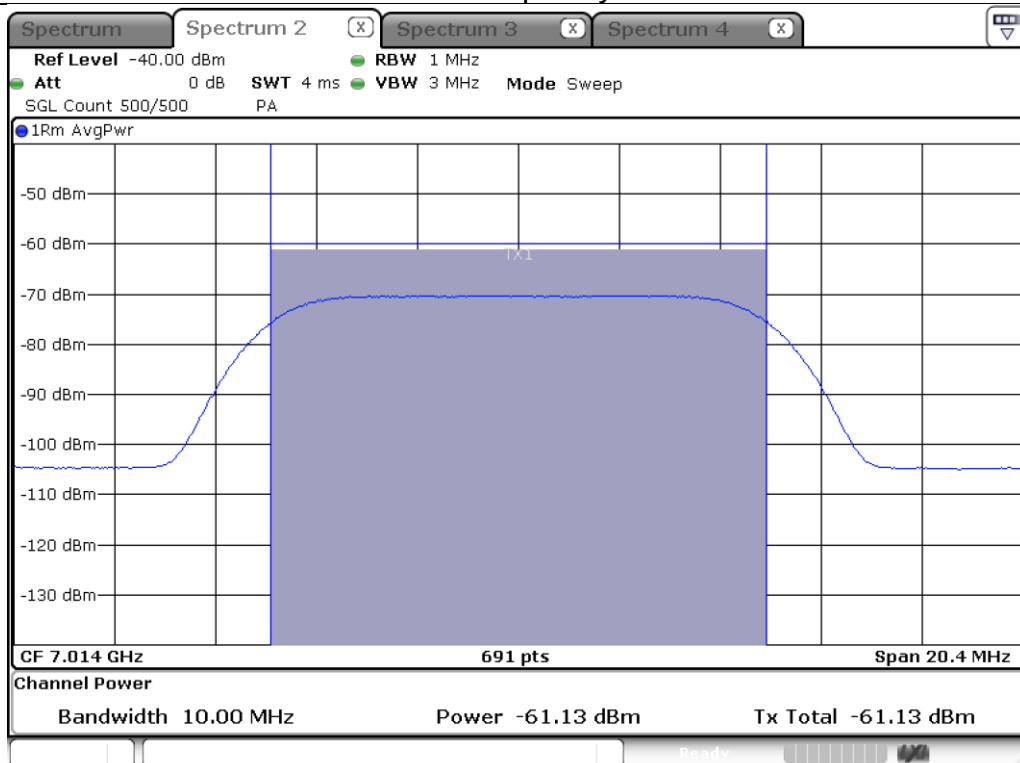


BW: 160 MHz / Frequency : 6110 MHz

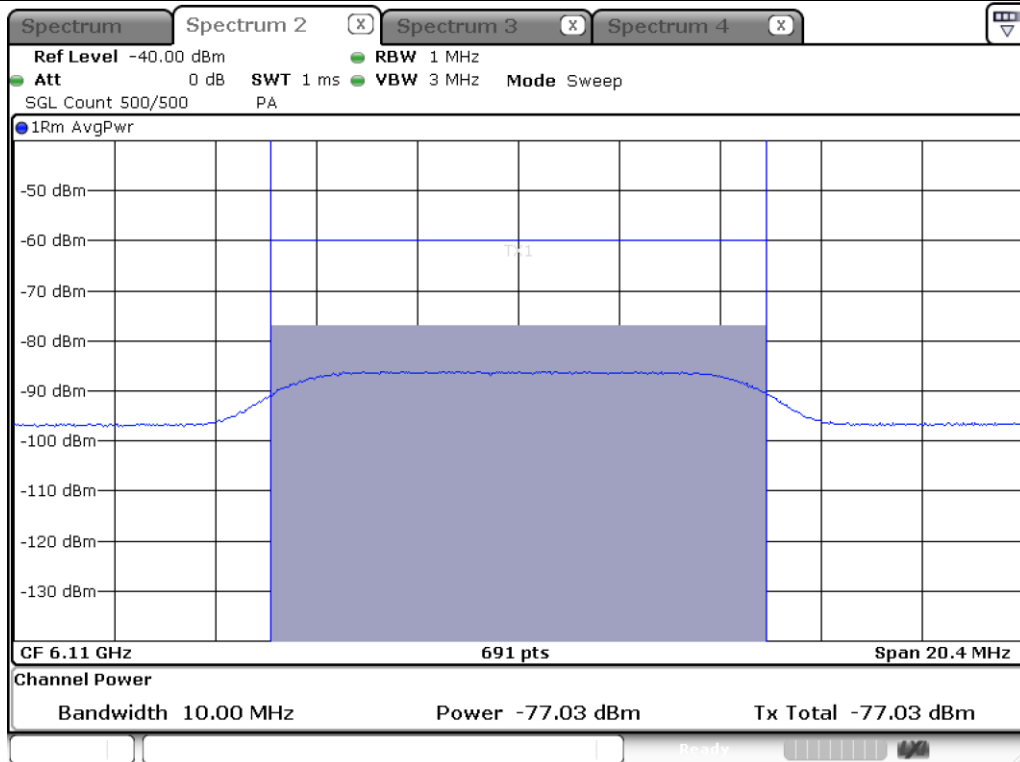


BW: 160 MHz / Frequency : 6180 MHz




BW: 160 MHz / Frequency : 6260 MHz

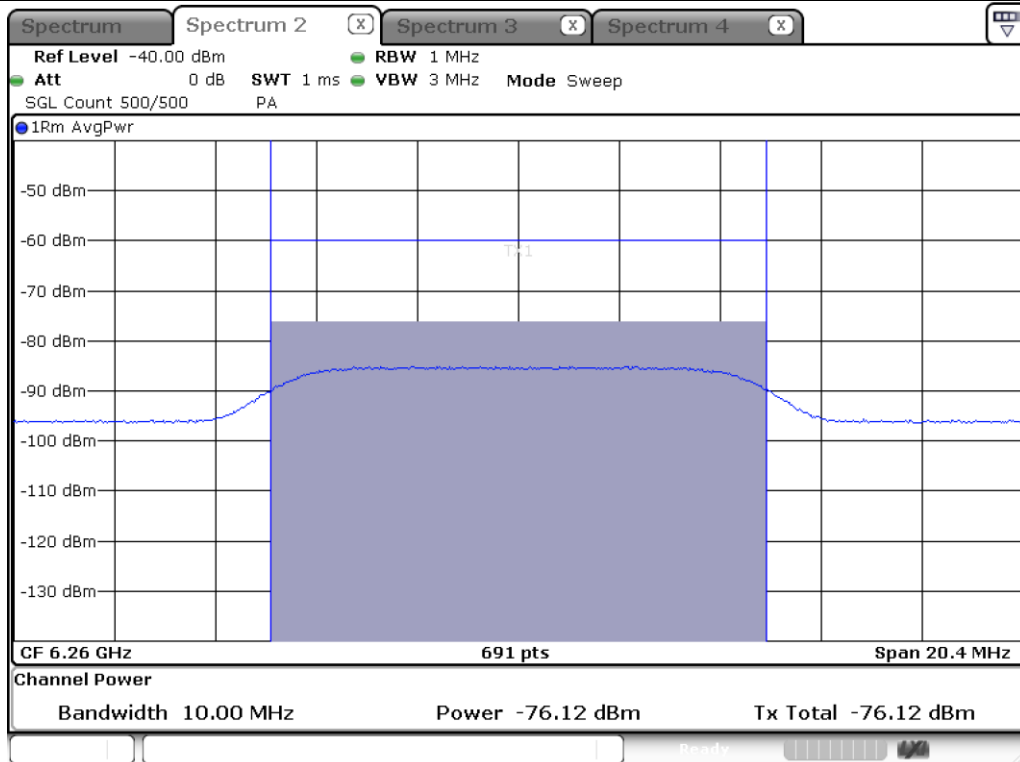


BW: 160 MHz / Frequency : 6430 MHz

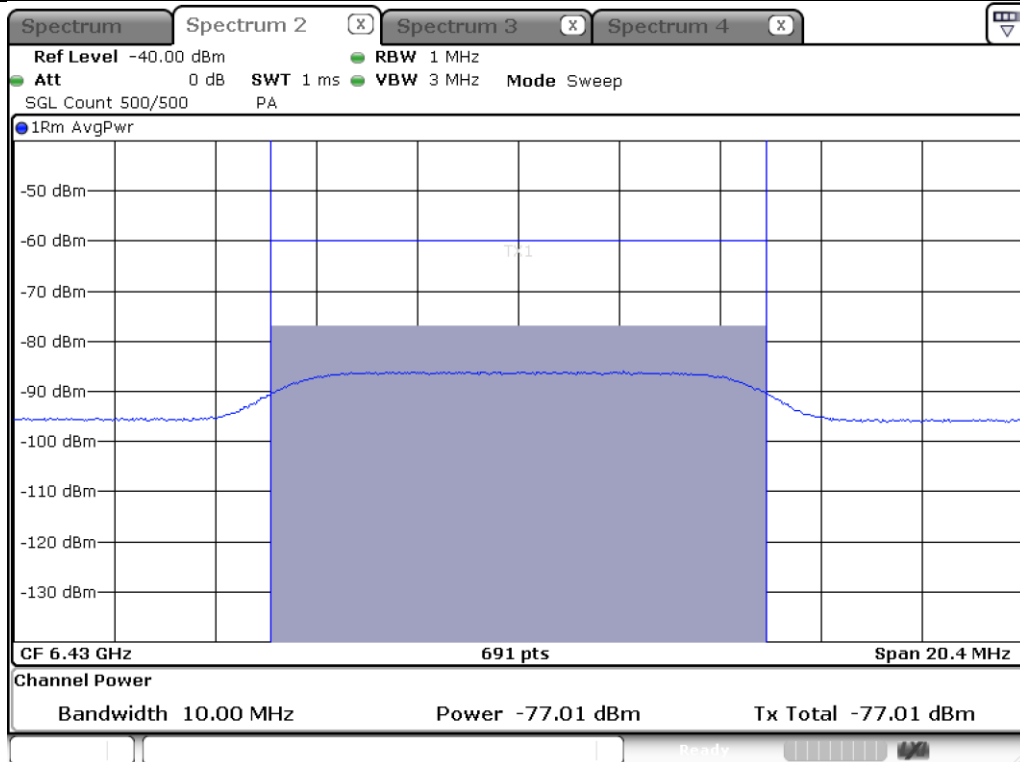


BW: 160 MHz / Frequency : 6500 MHz

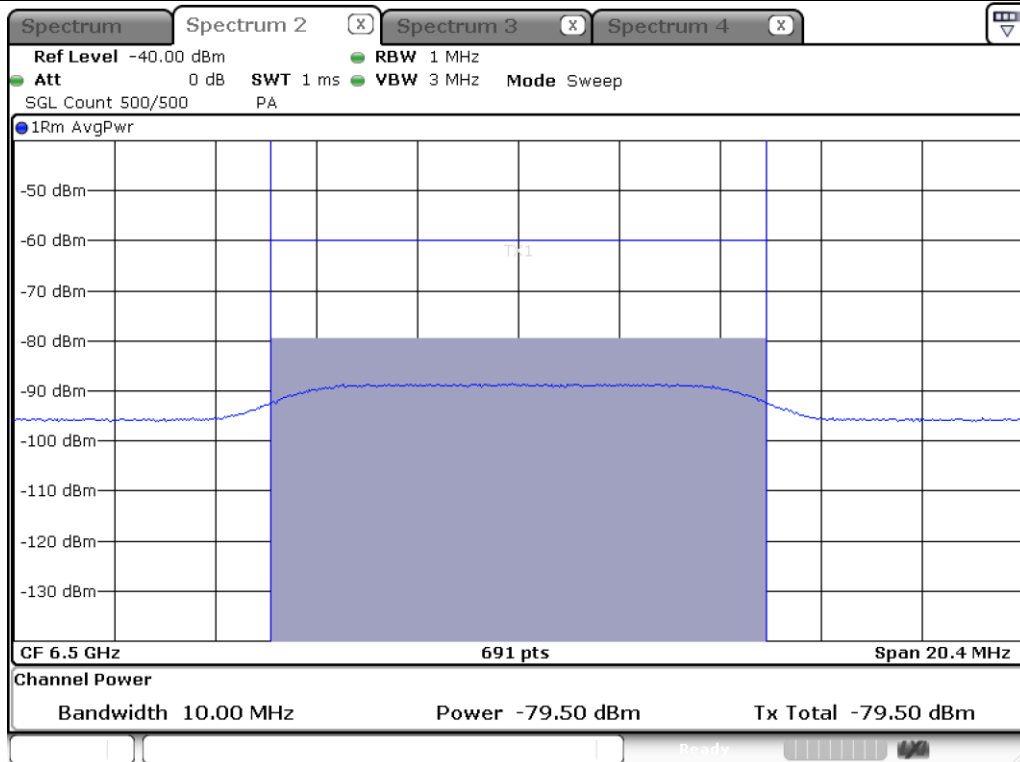


BW: 160 MHz / Frequency : 6580 MHz

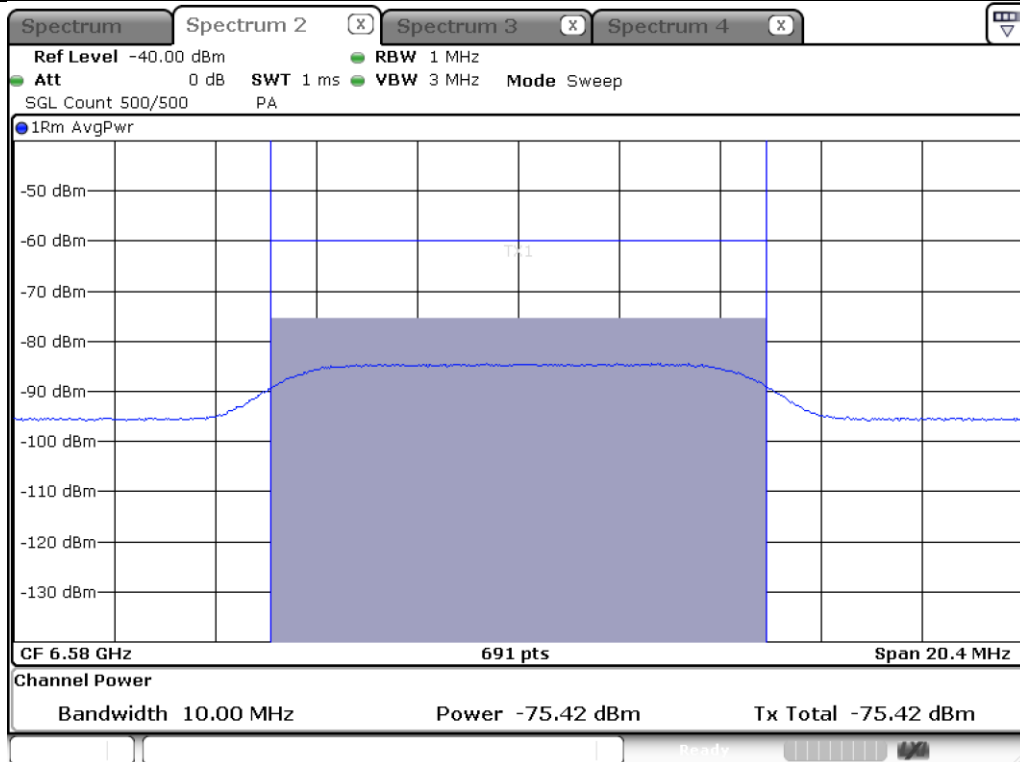


BW: 160 MHz / Frequency : 6590 MHz

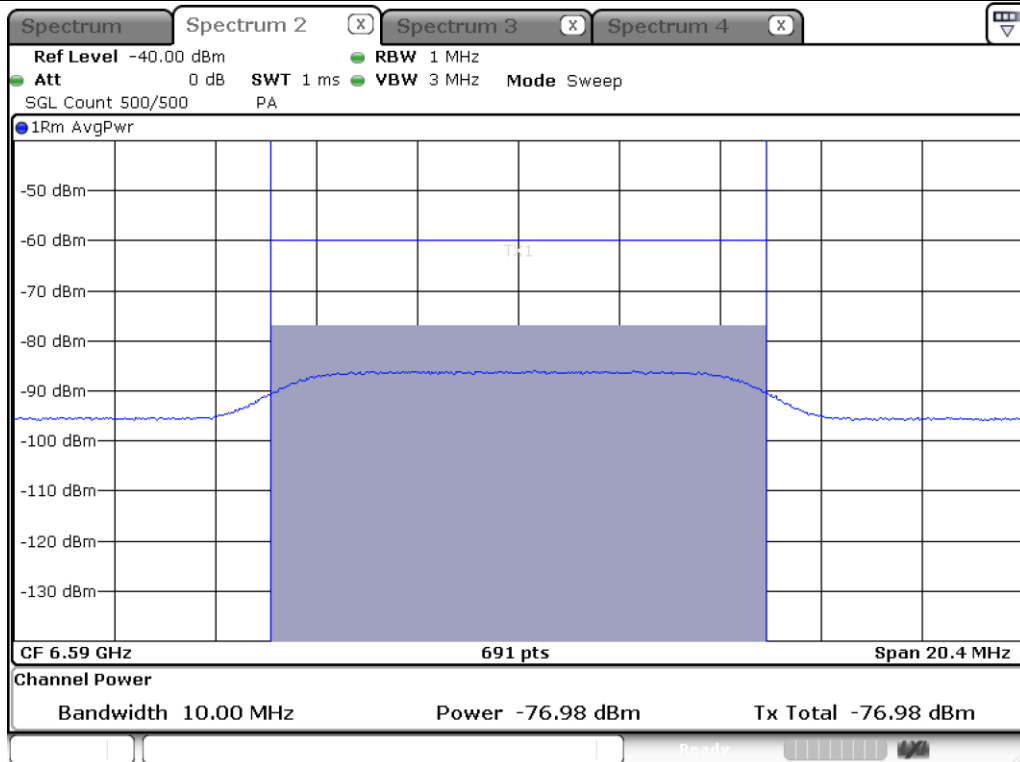


BW: 160 MHz / Frequency : 6660 MHz

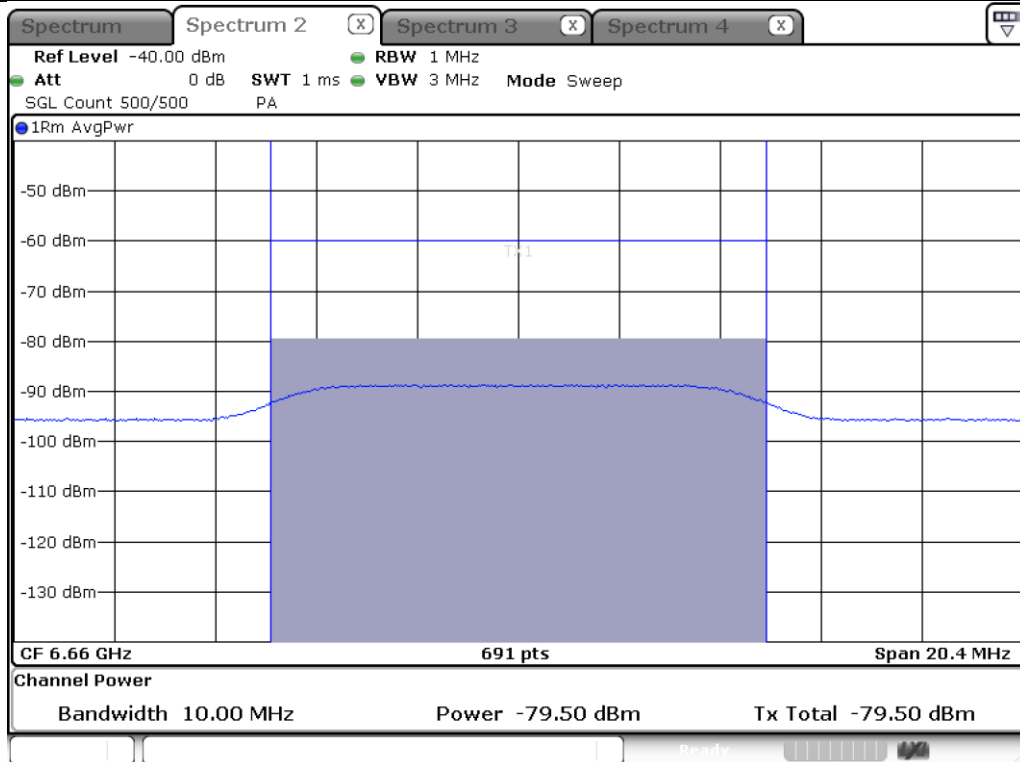


BW: 160 MHz / Frequency : 6740 MHz

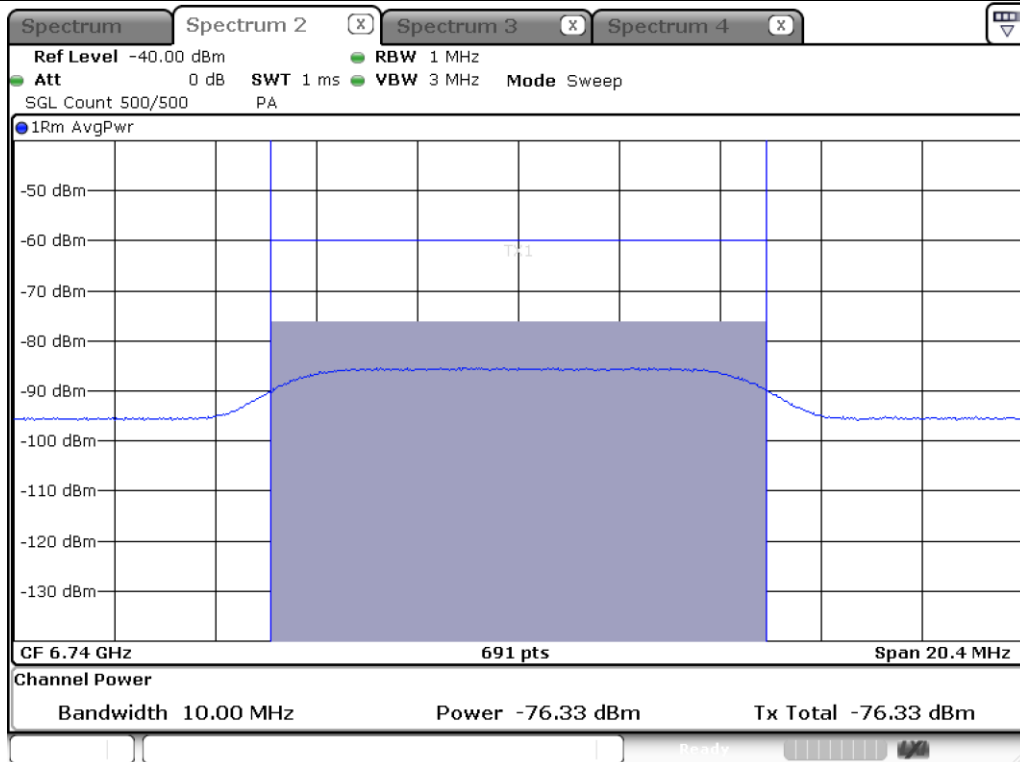


BW: 160 MHz / Frequency : 6910 MHz

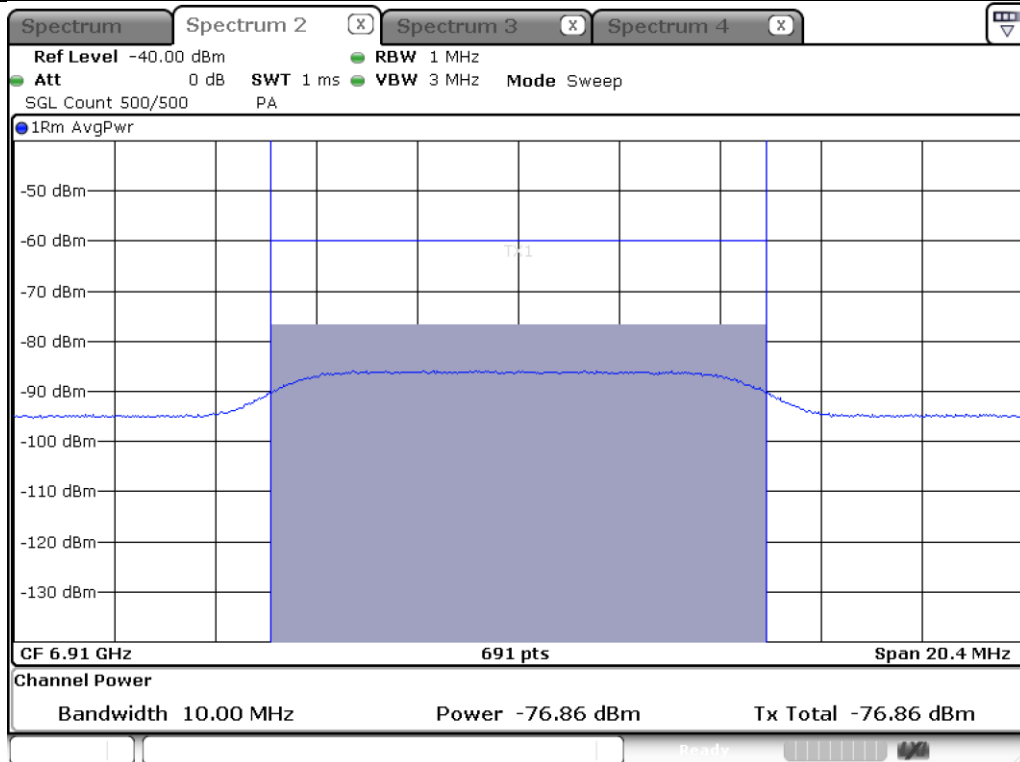


BW: 160 MHz / Frequency : 6980 MHz


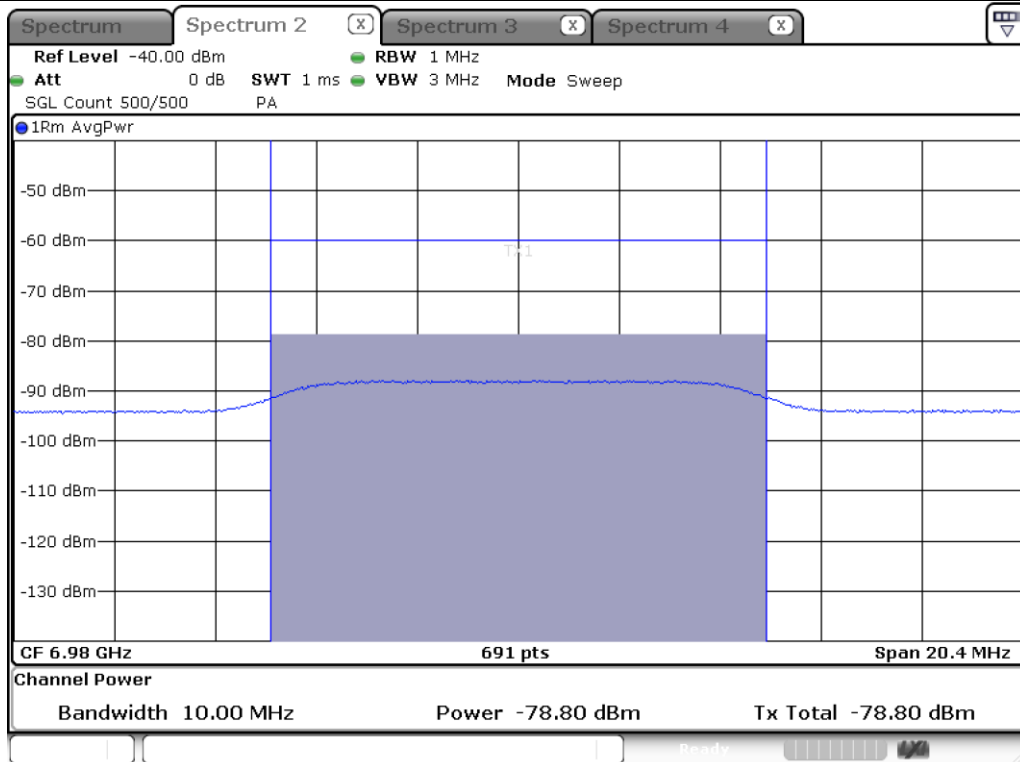


BW: 160 MHz / Frequency : 7060 MHz

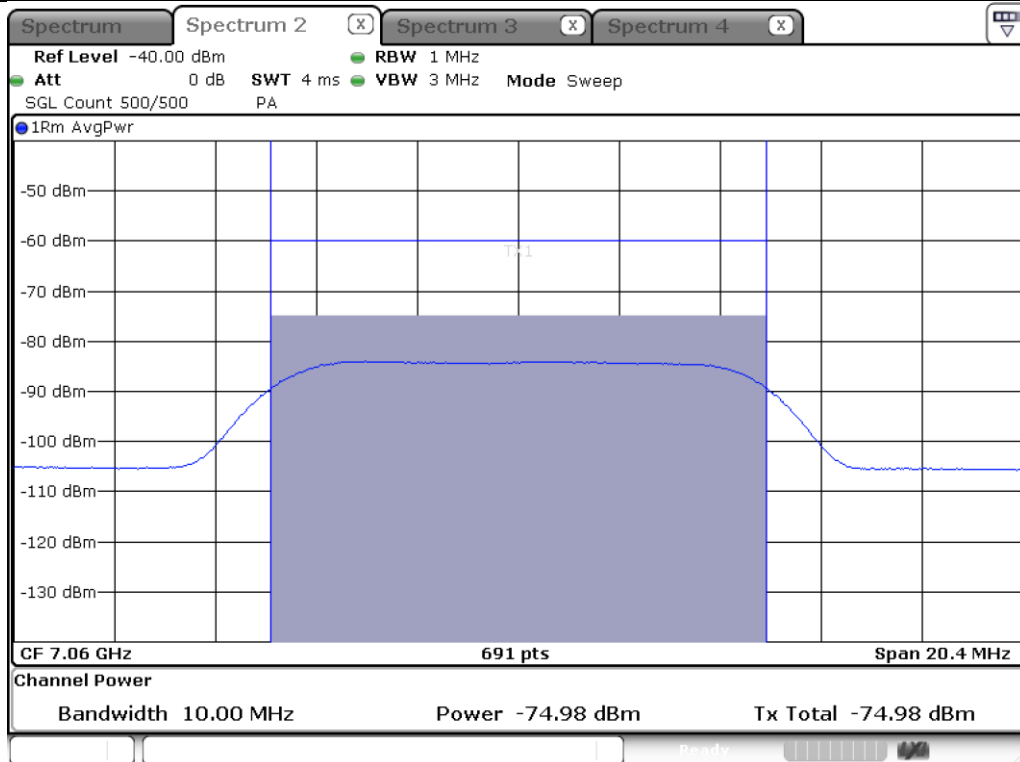


Test plot of Contention Based Protocol EUT Normal transmission

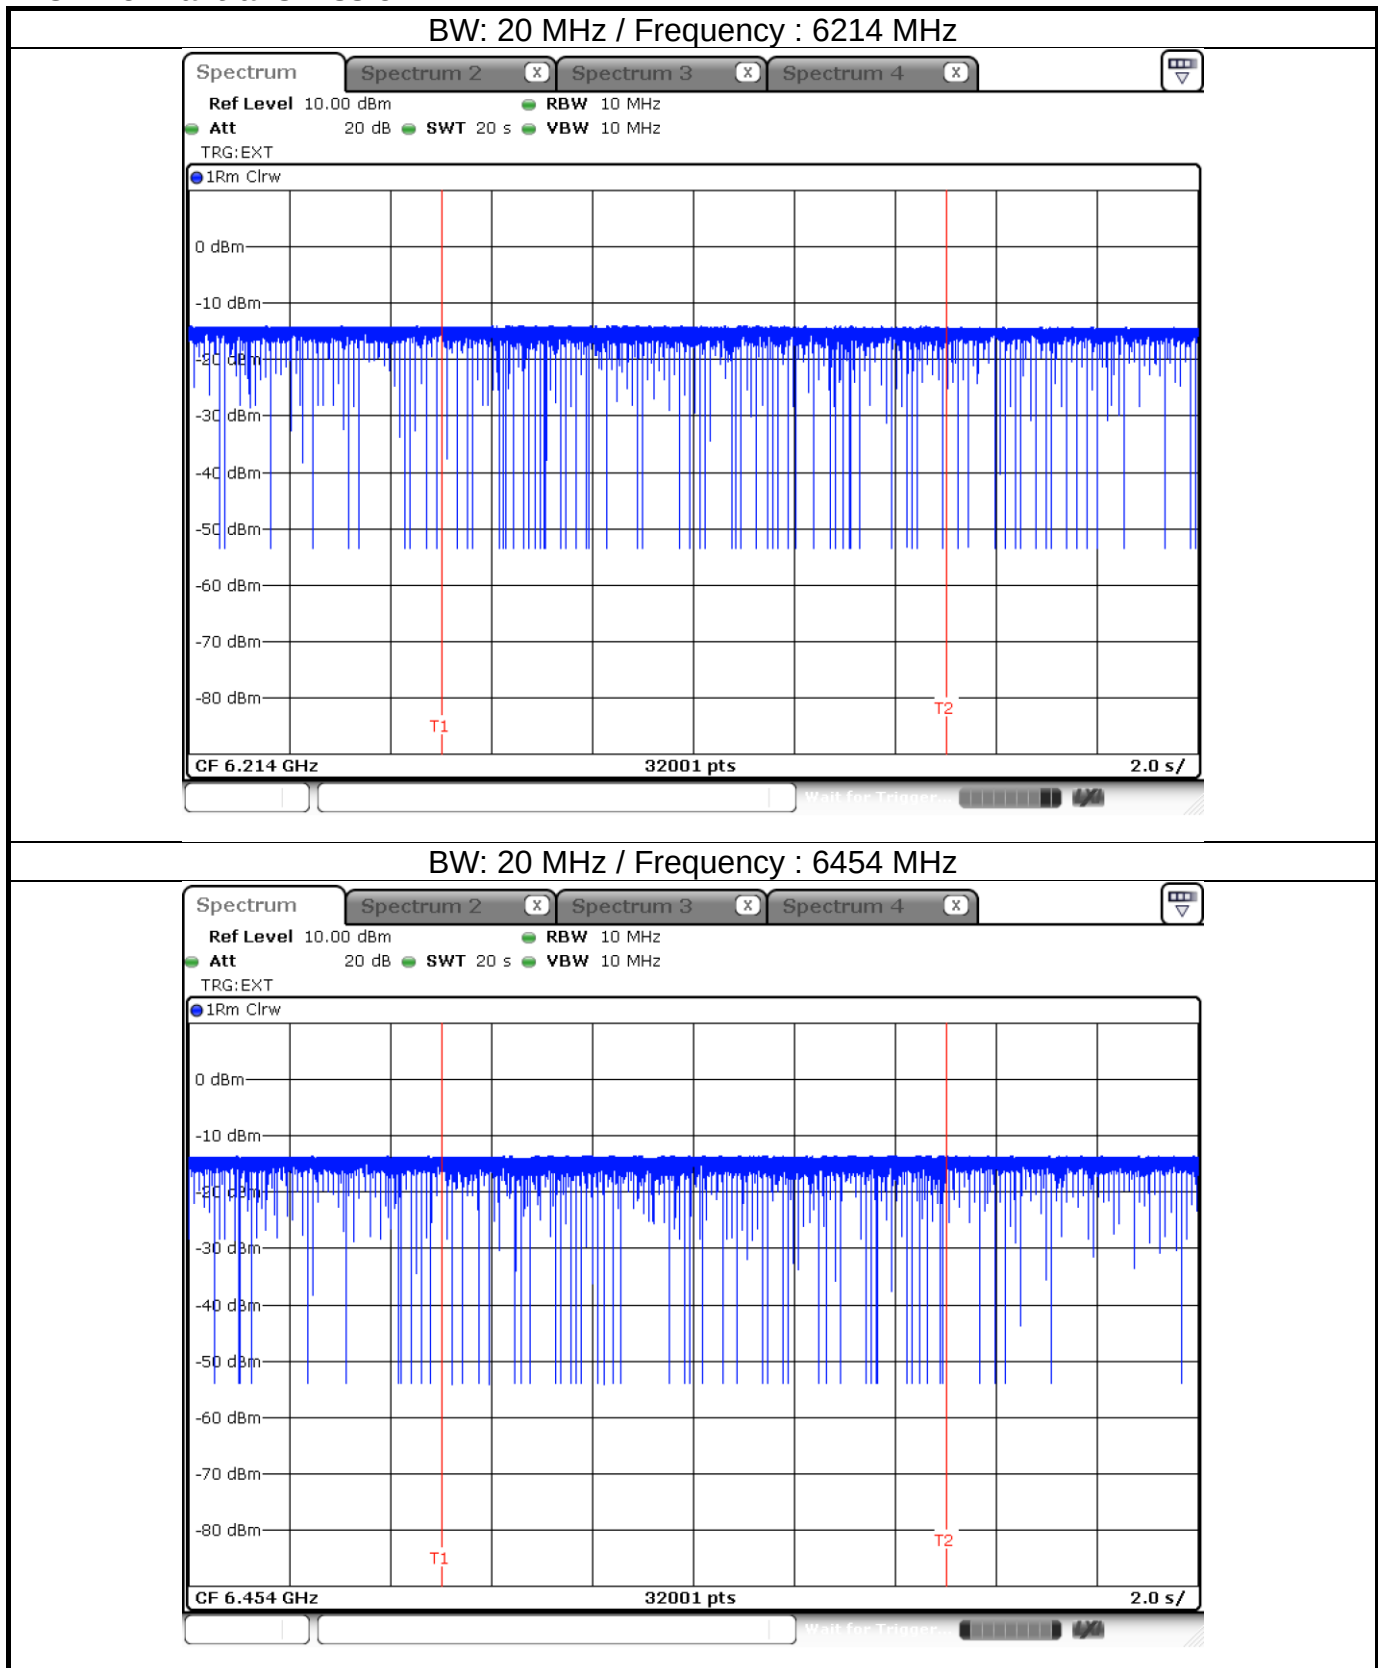


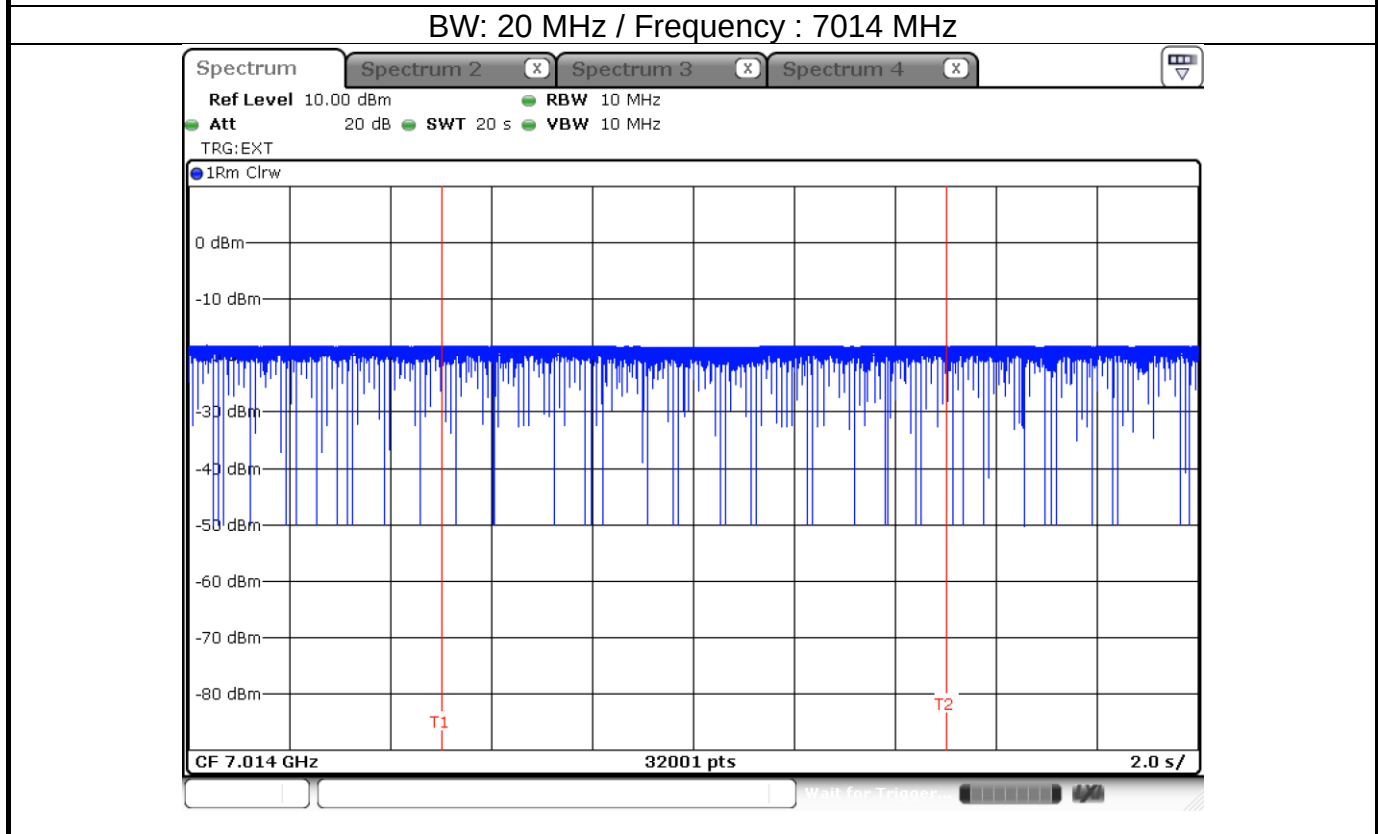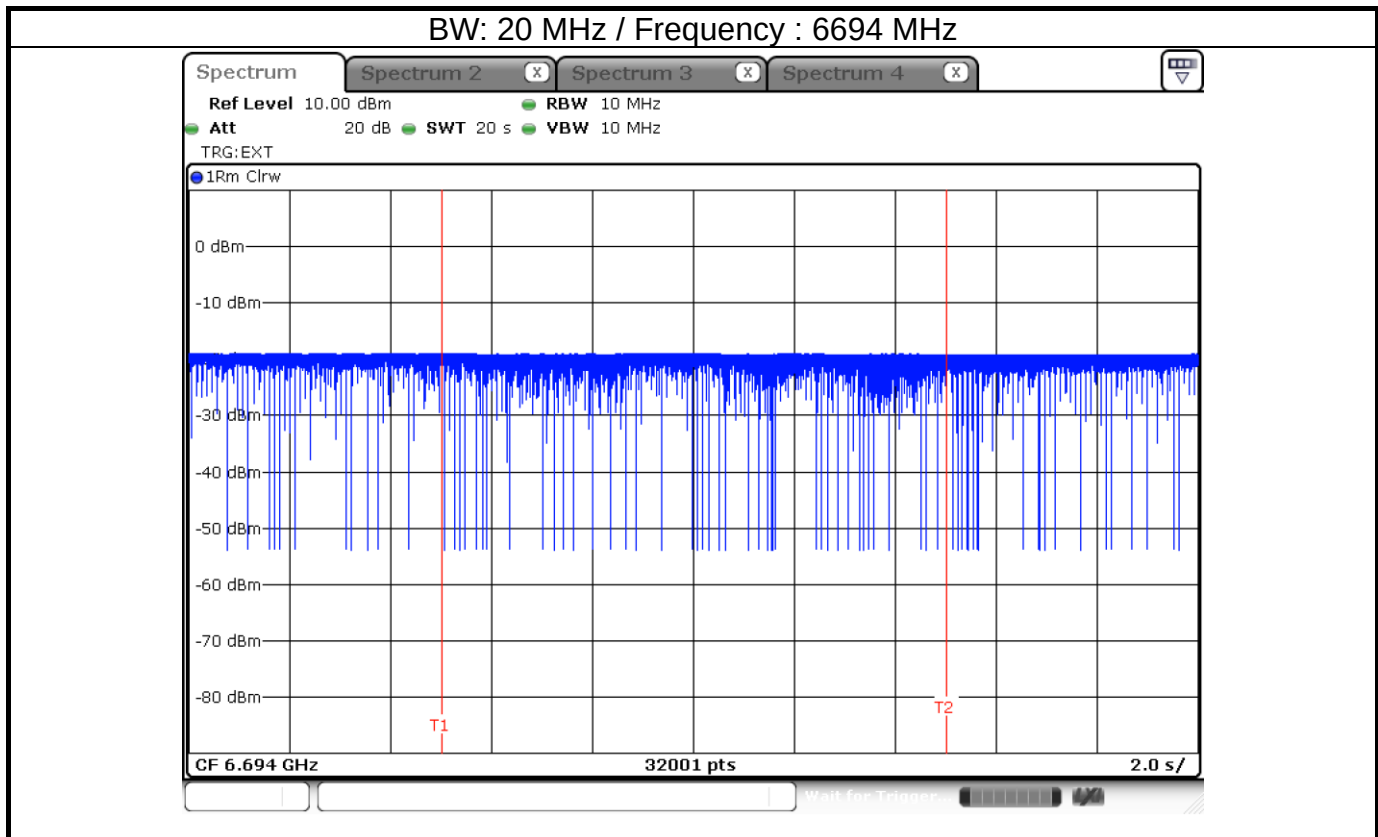


BW: 160 MHz / Frequency : 6260 MHz

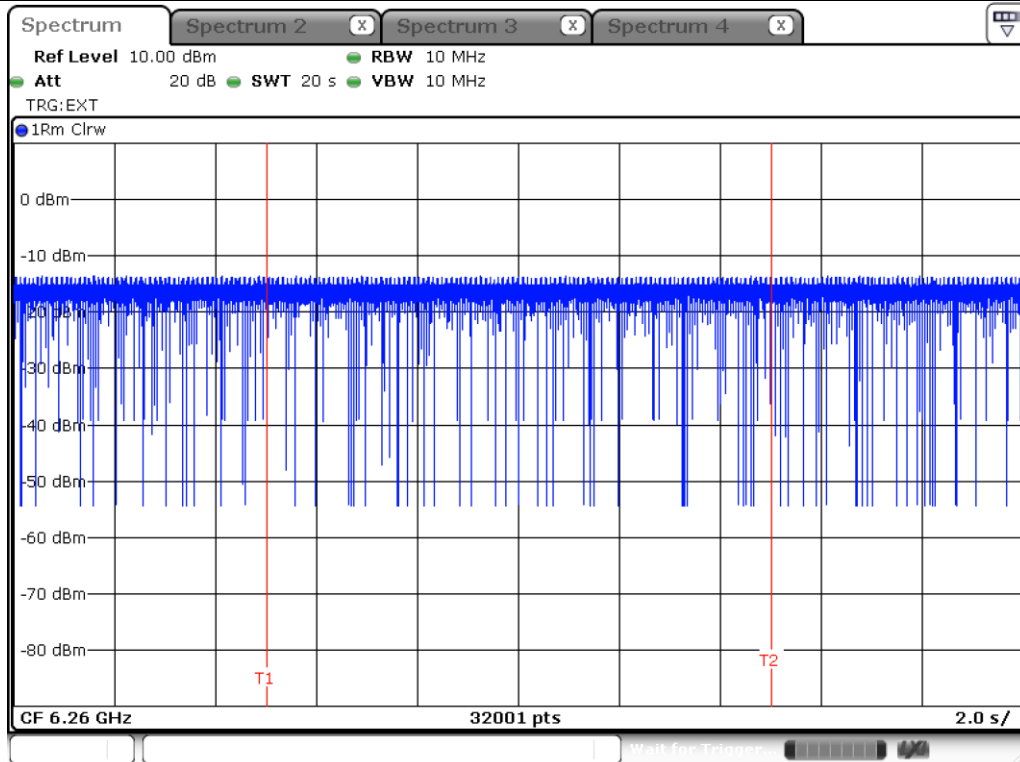


BW: 160 MHz / Frequency : 6580 MHz

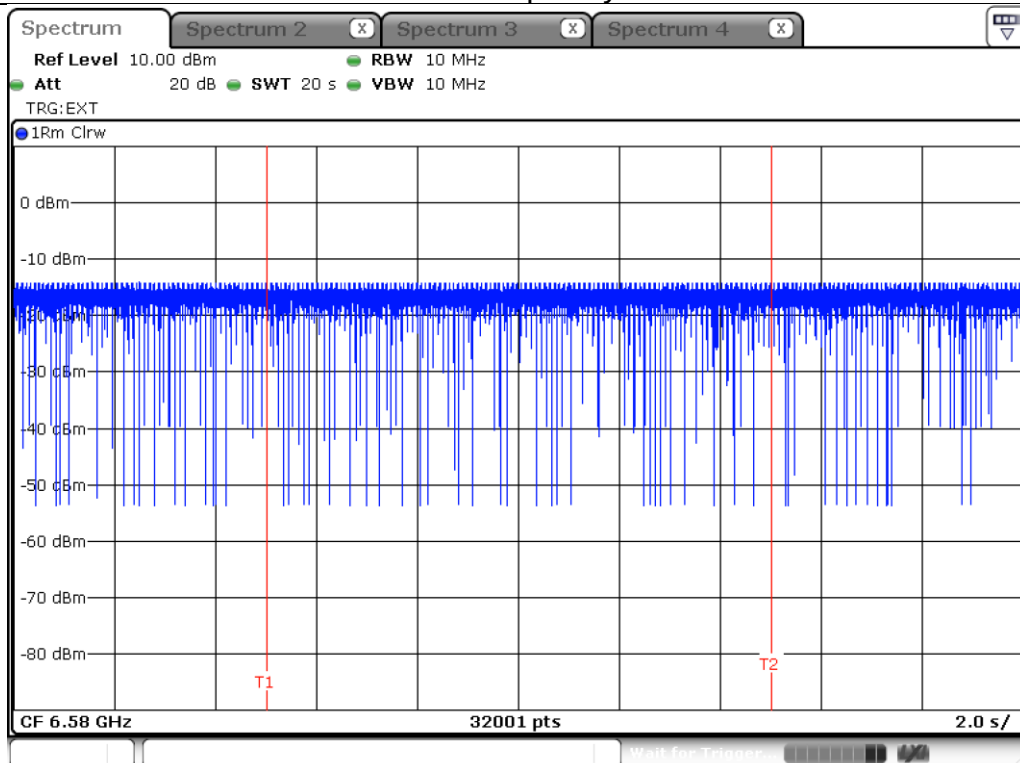


BW: 160 MHz / Frequency : 6740 MHz

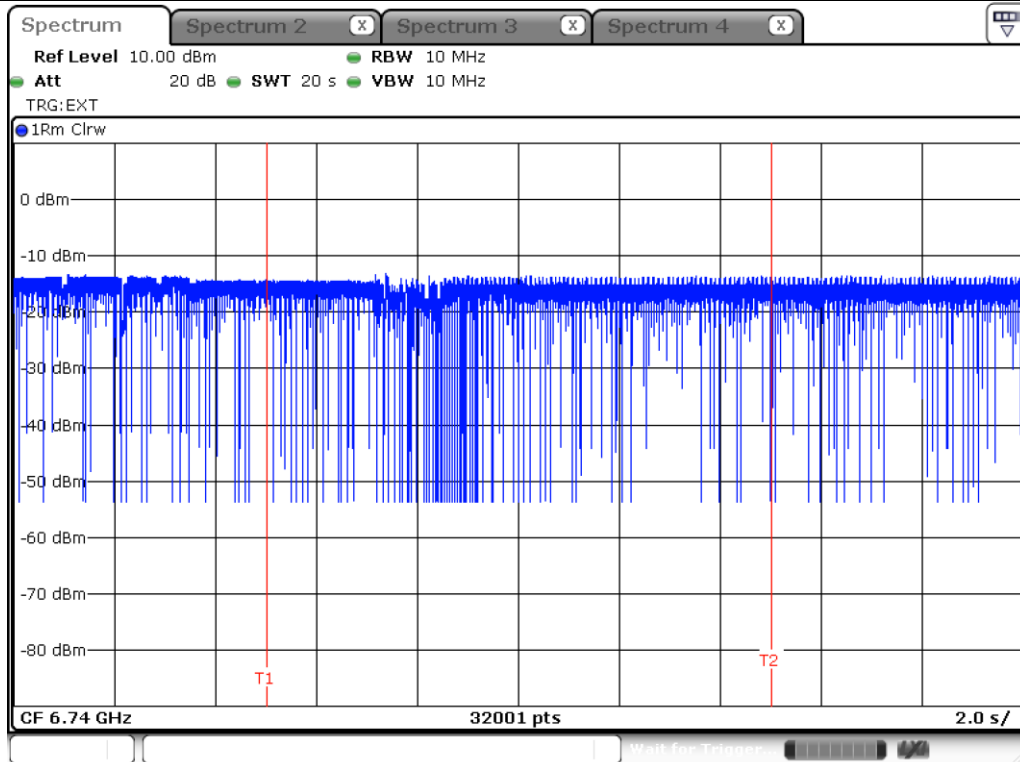


BW: 160 MHz / Frequency : 7060 MHz

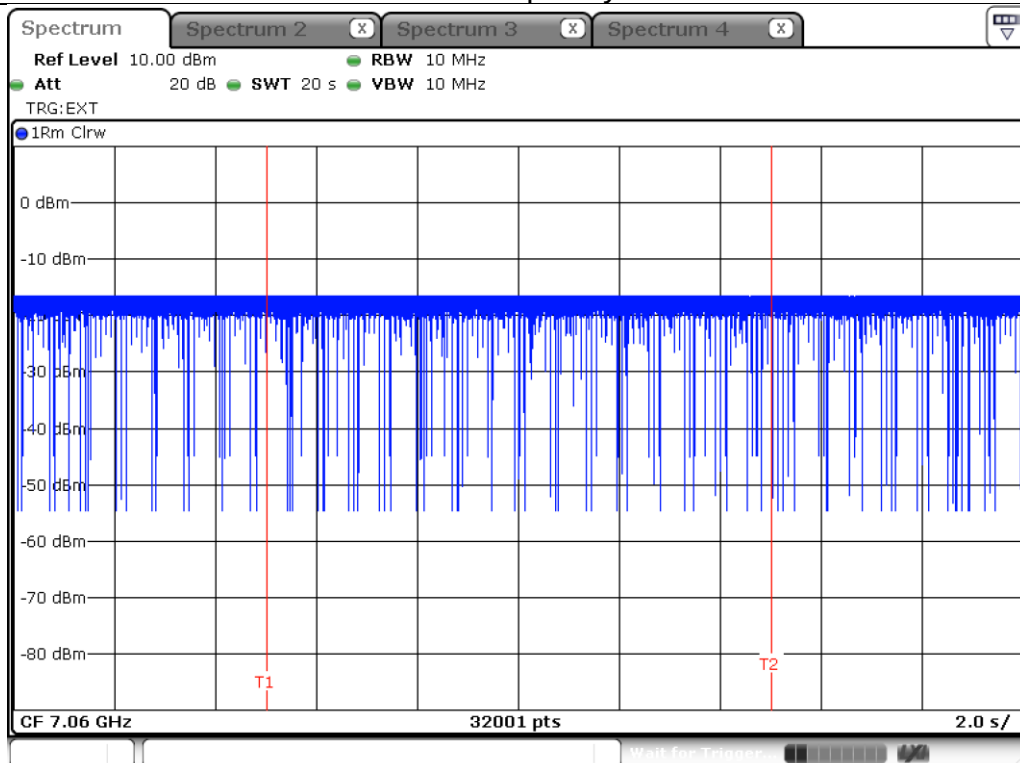


EUT Minimal transmission

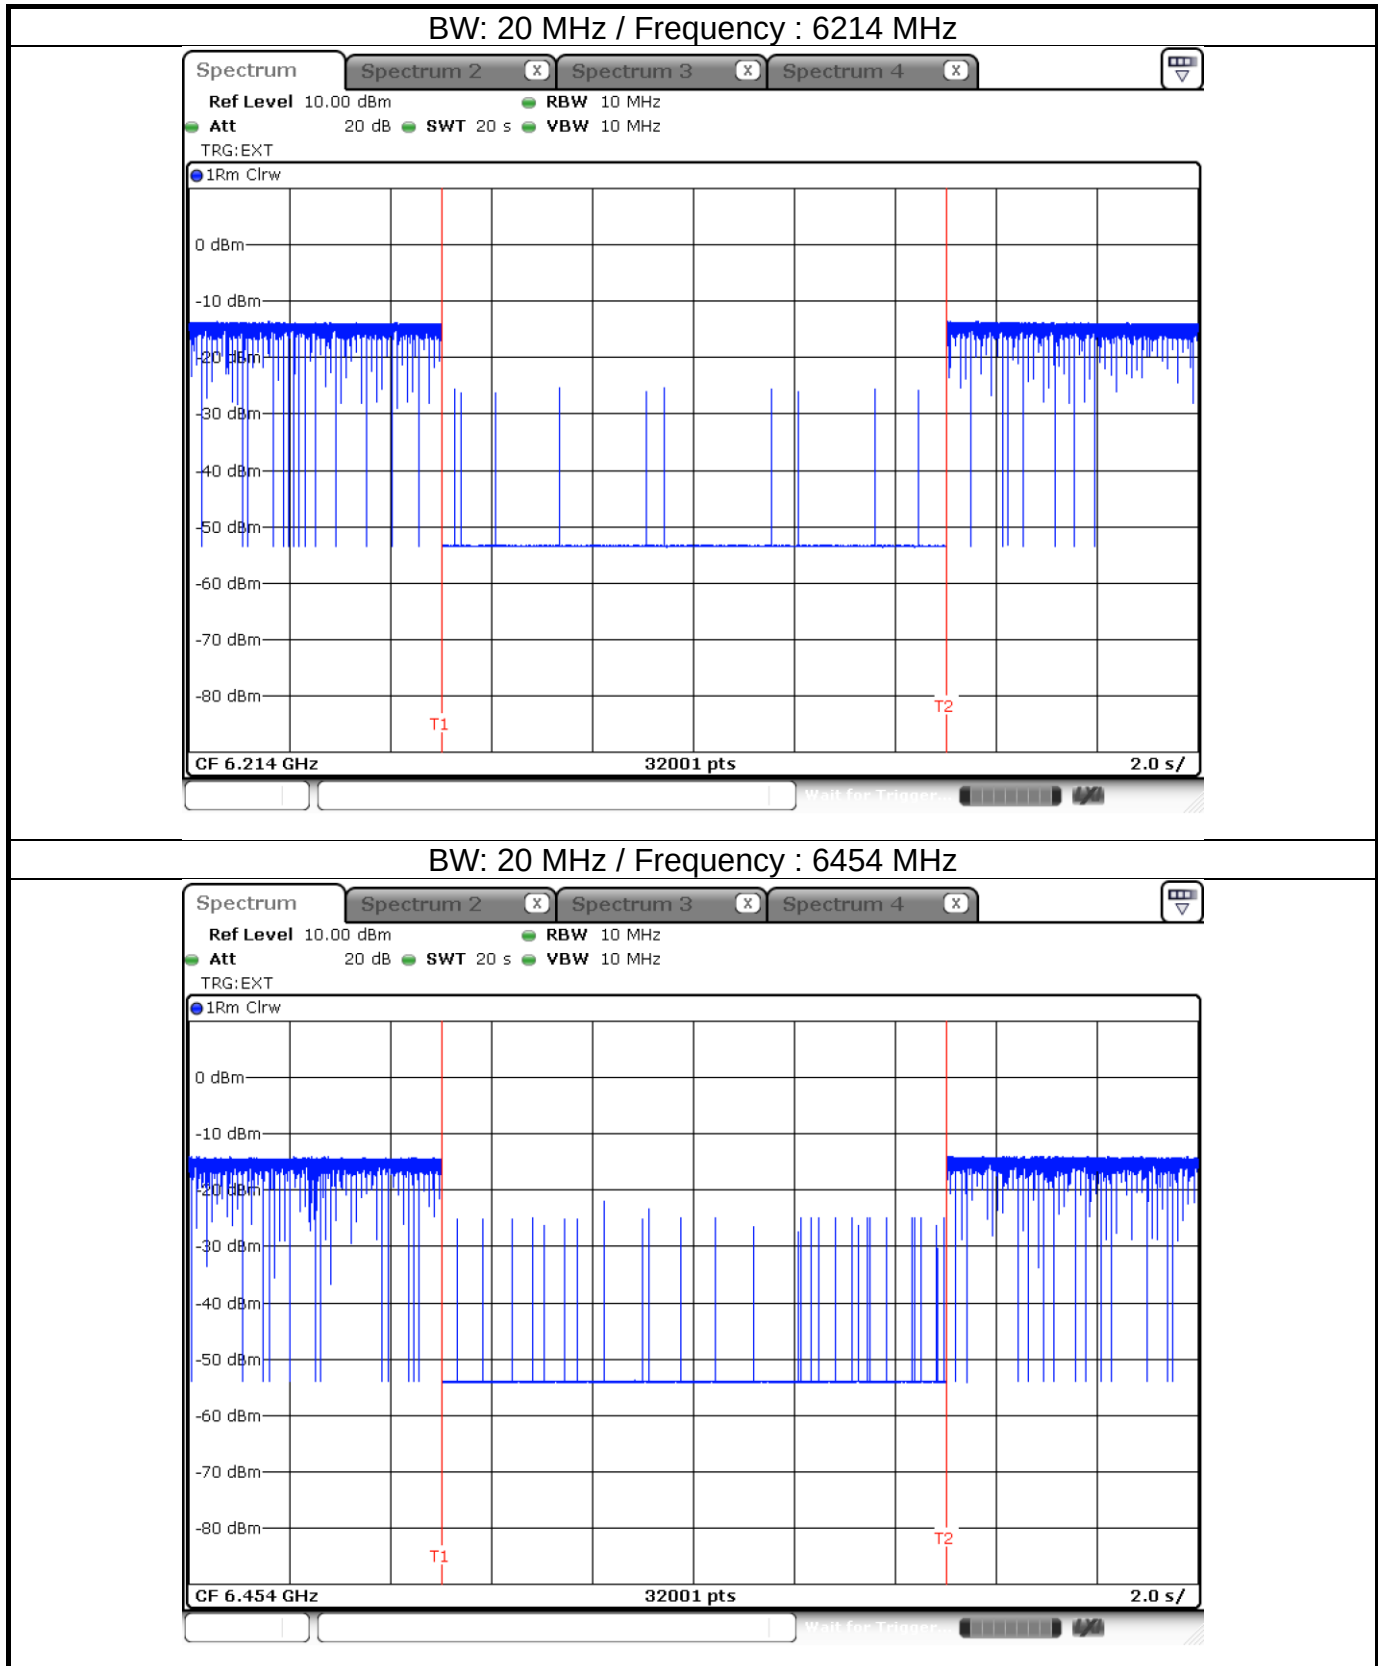


BW: 20 MHz / Frequency : 6694 MHz

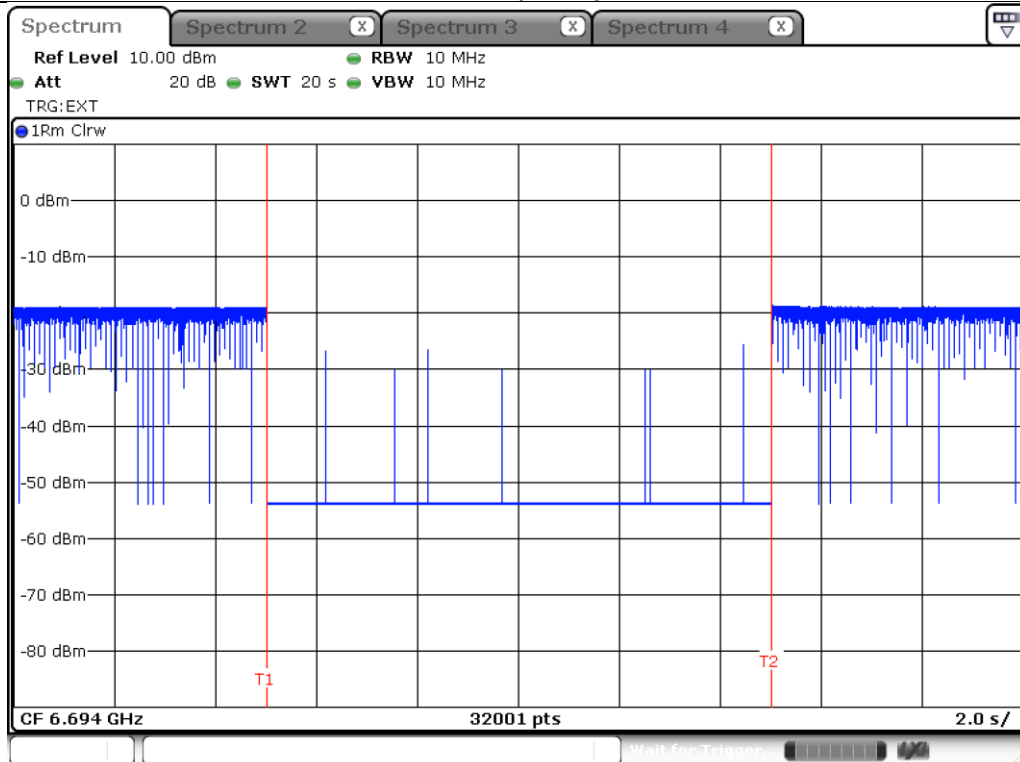


BW: 20 MHz / Frequency : 7014 MHz

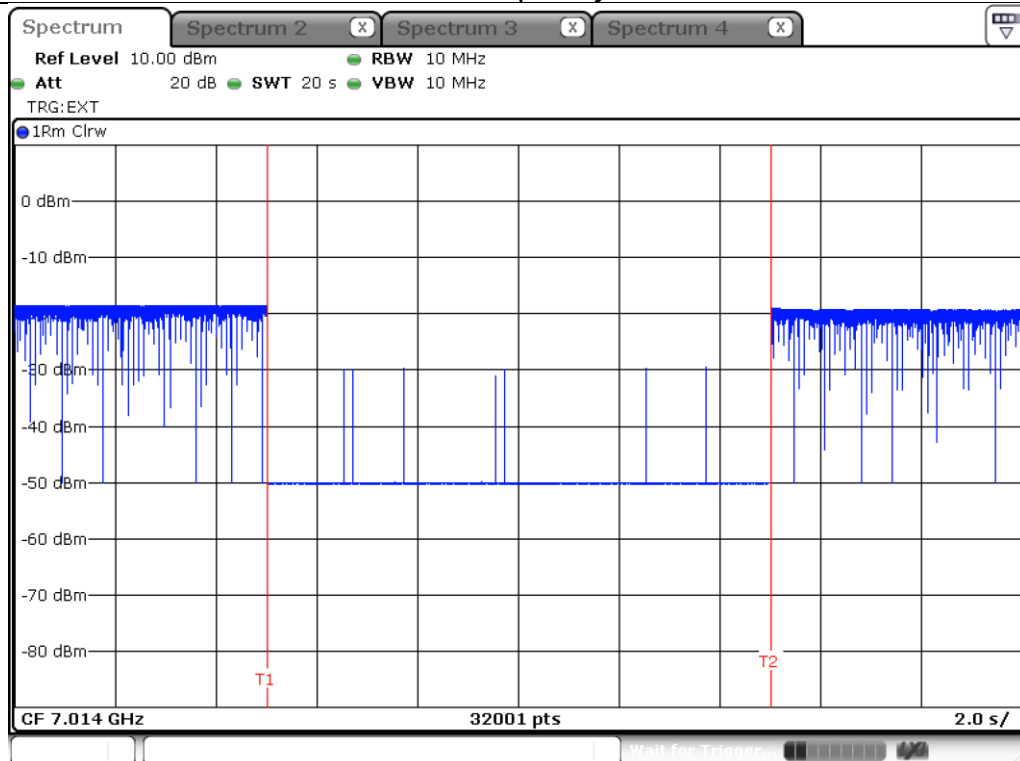


BW: 160 MHz / Frequency : 6260 MHz

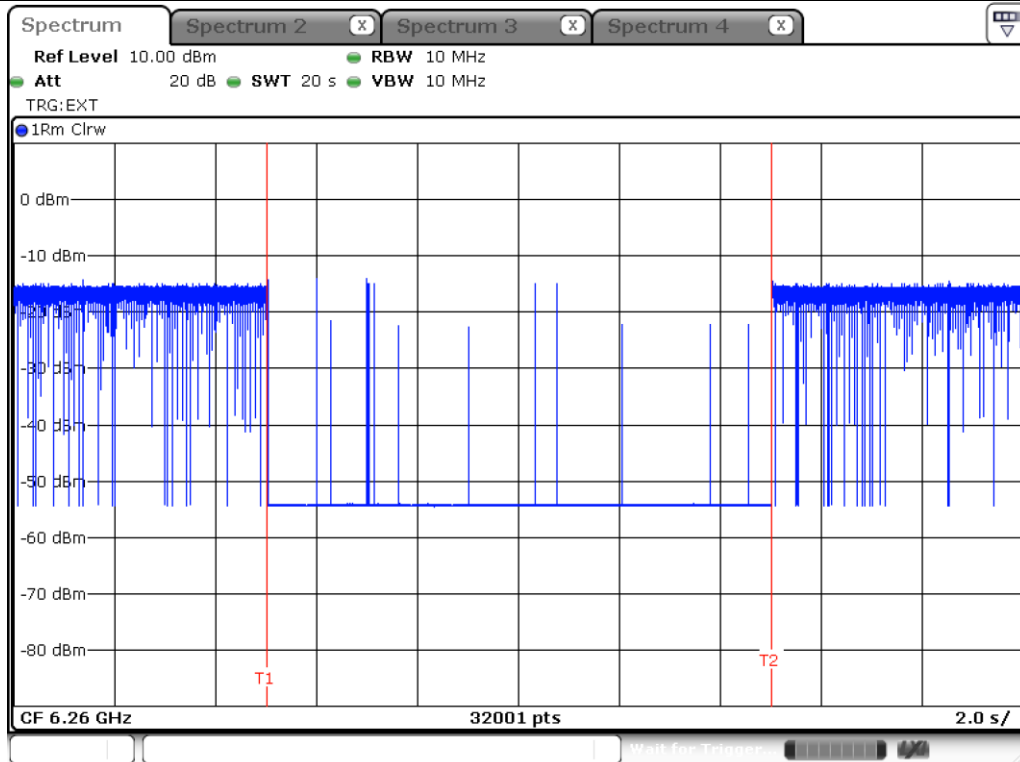


BW: 160 MHz / Frequency : 6580 MHz

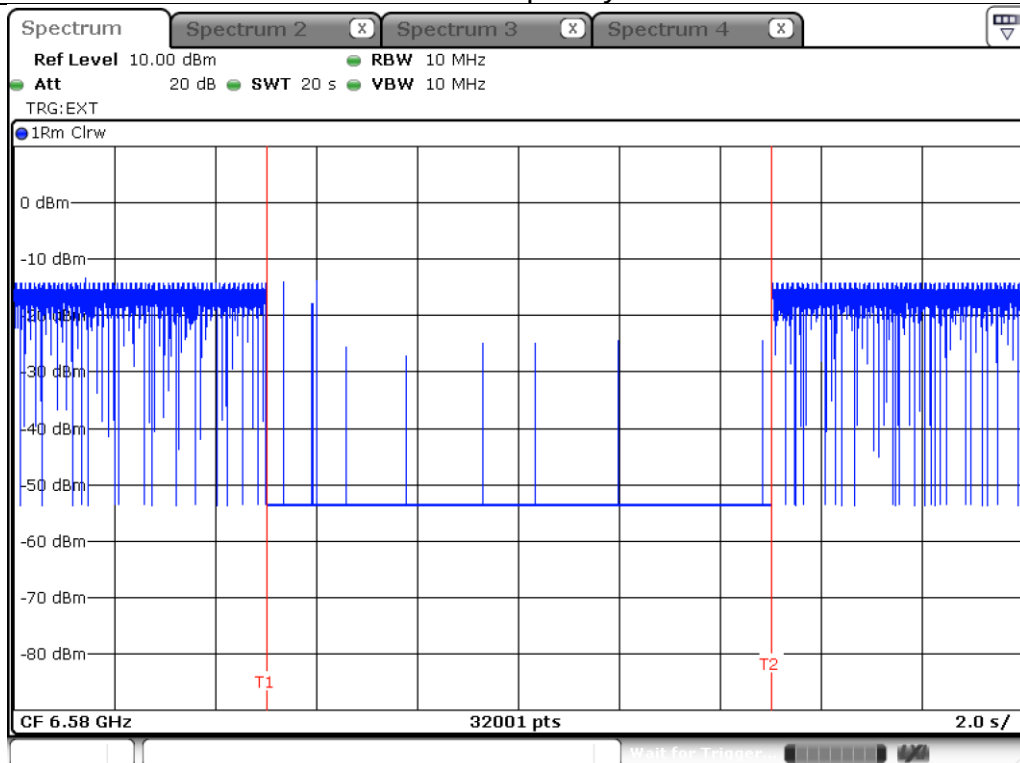



BW: 160 MHz / Frequency : 6740 MHz

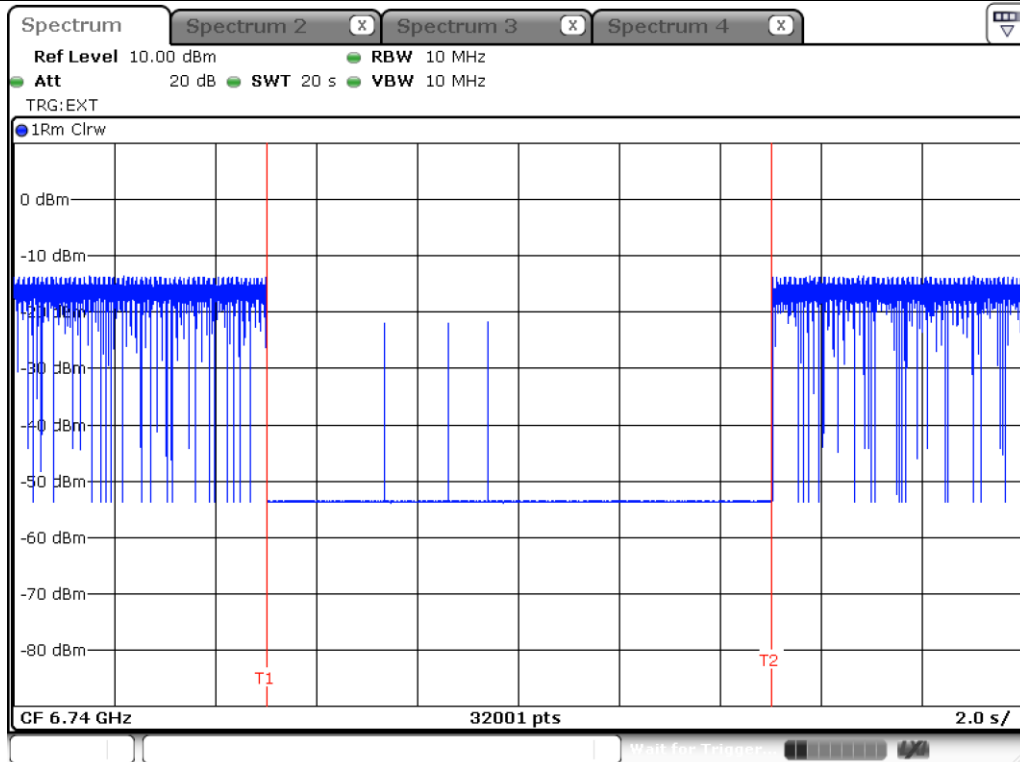


BW: 160 MHz / Frequency : 7060 MHz

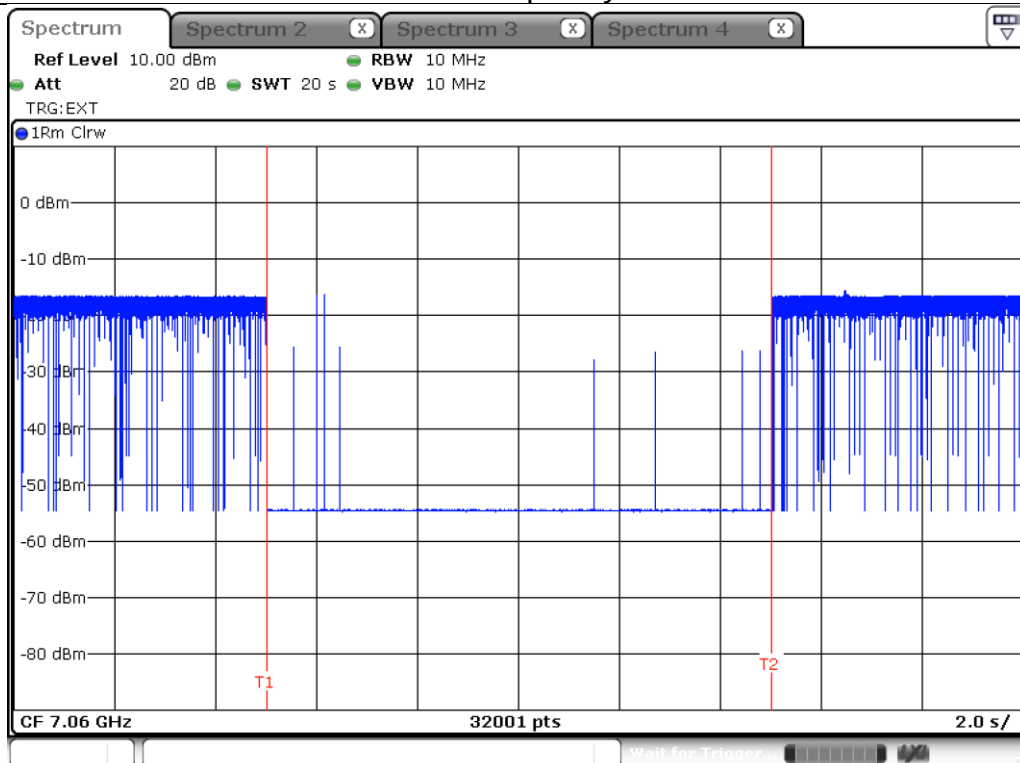



EUT ceased transmission

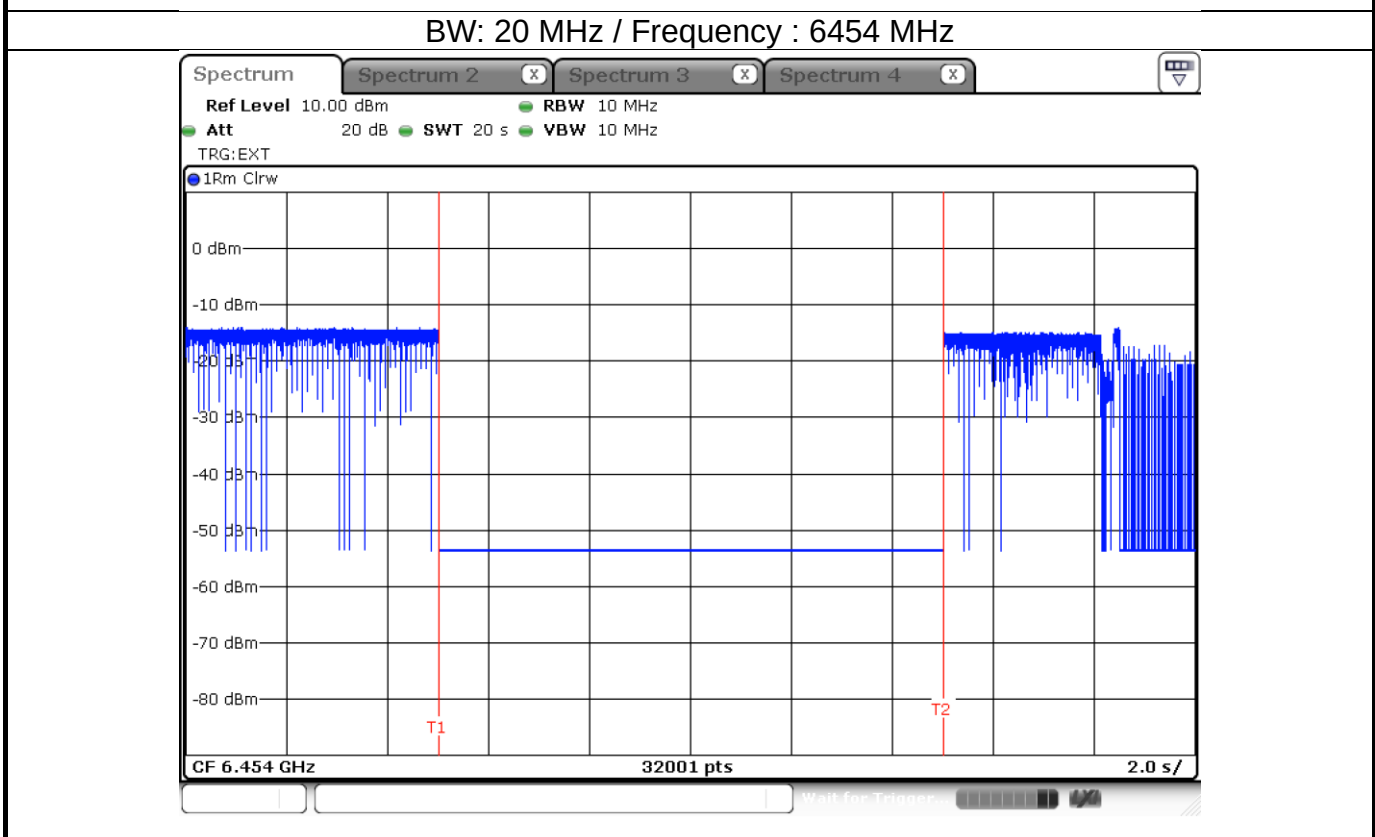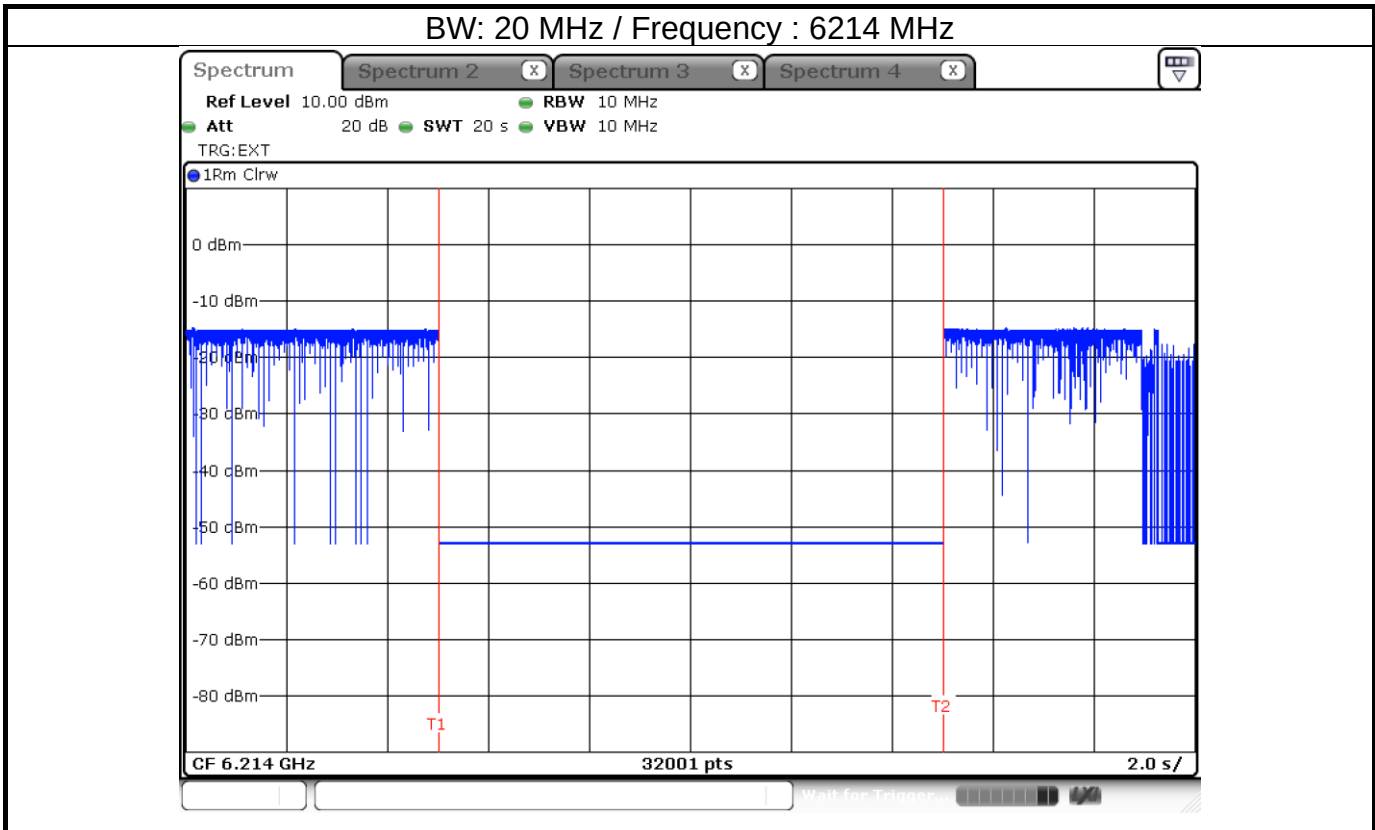


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

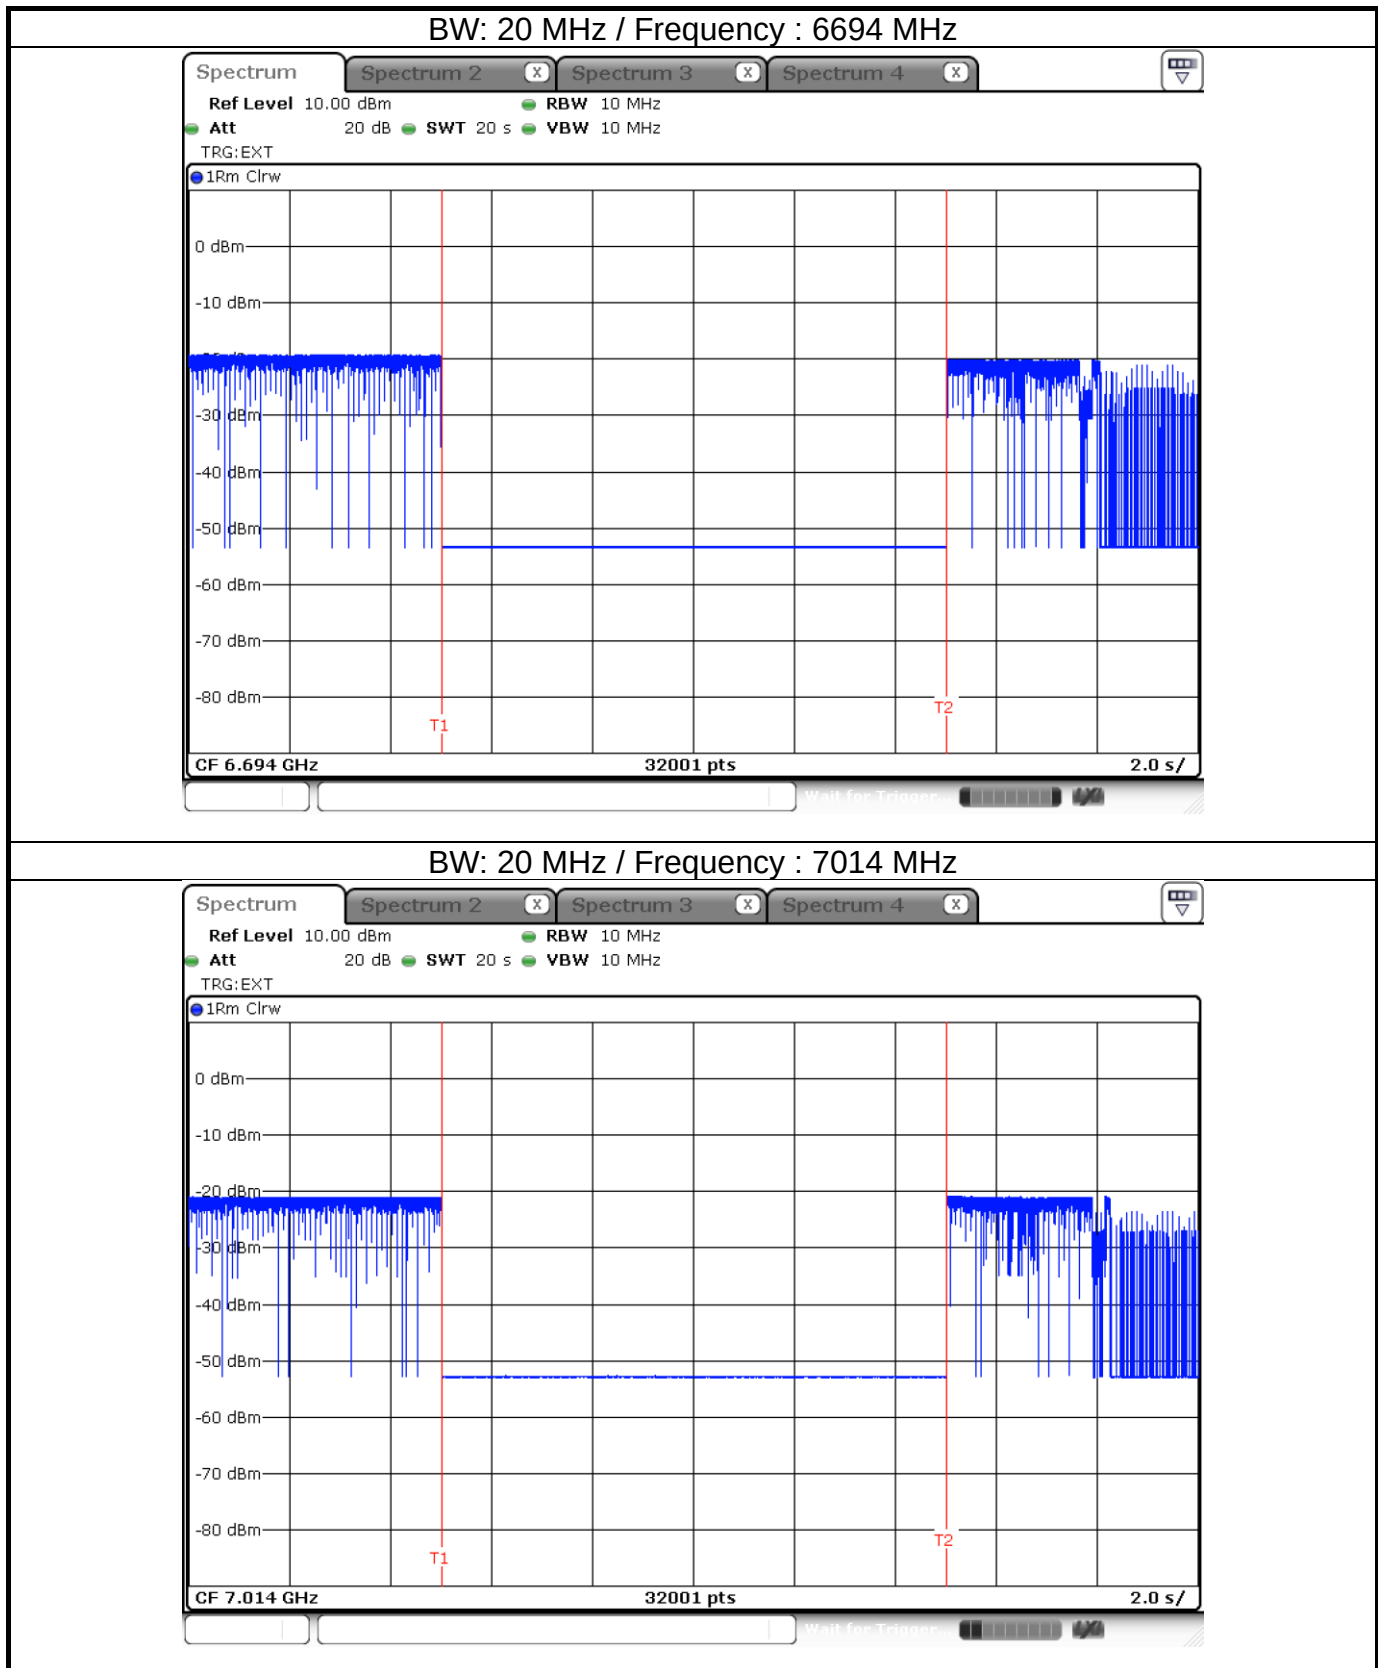


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

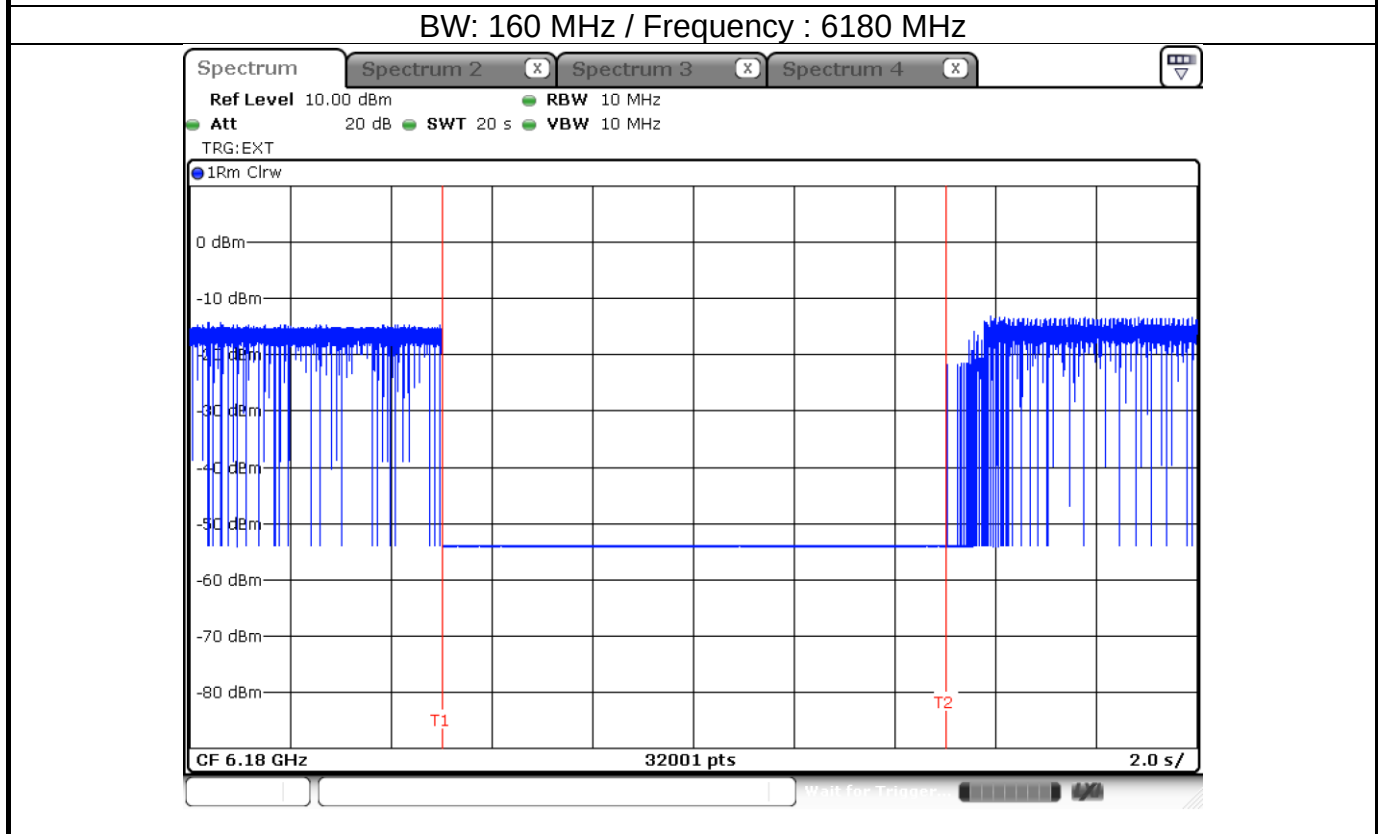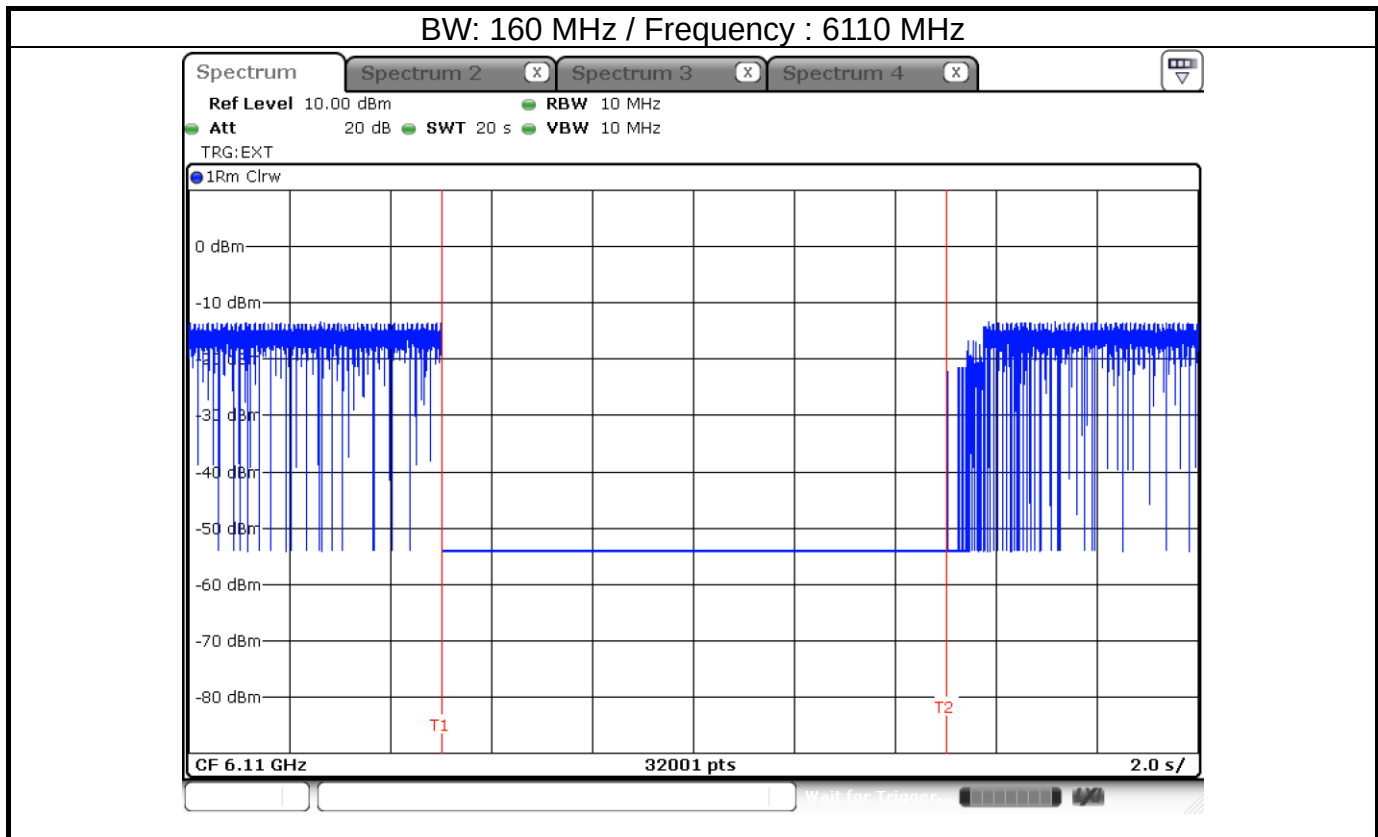


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

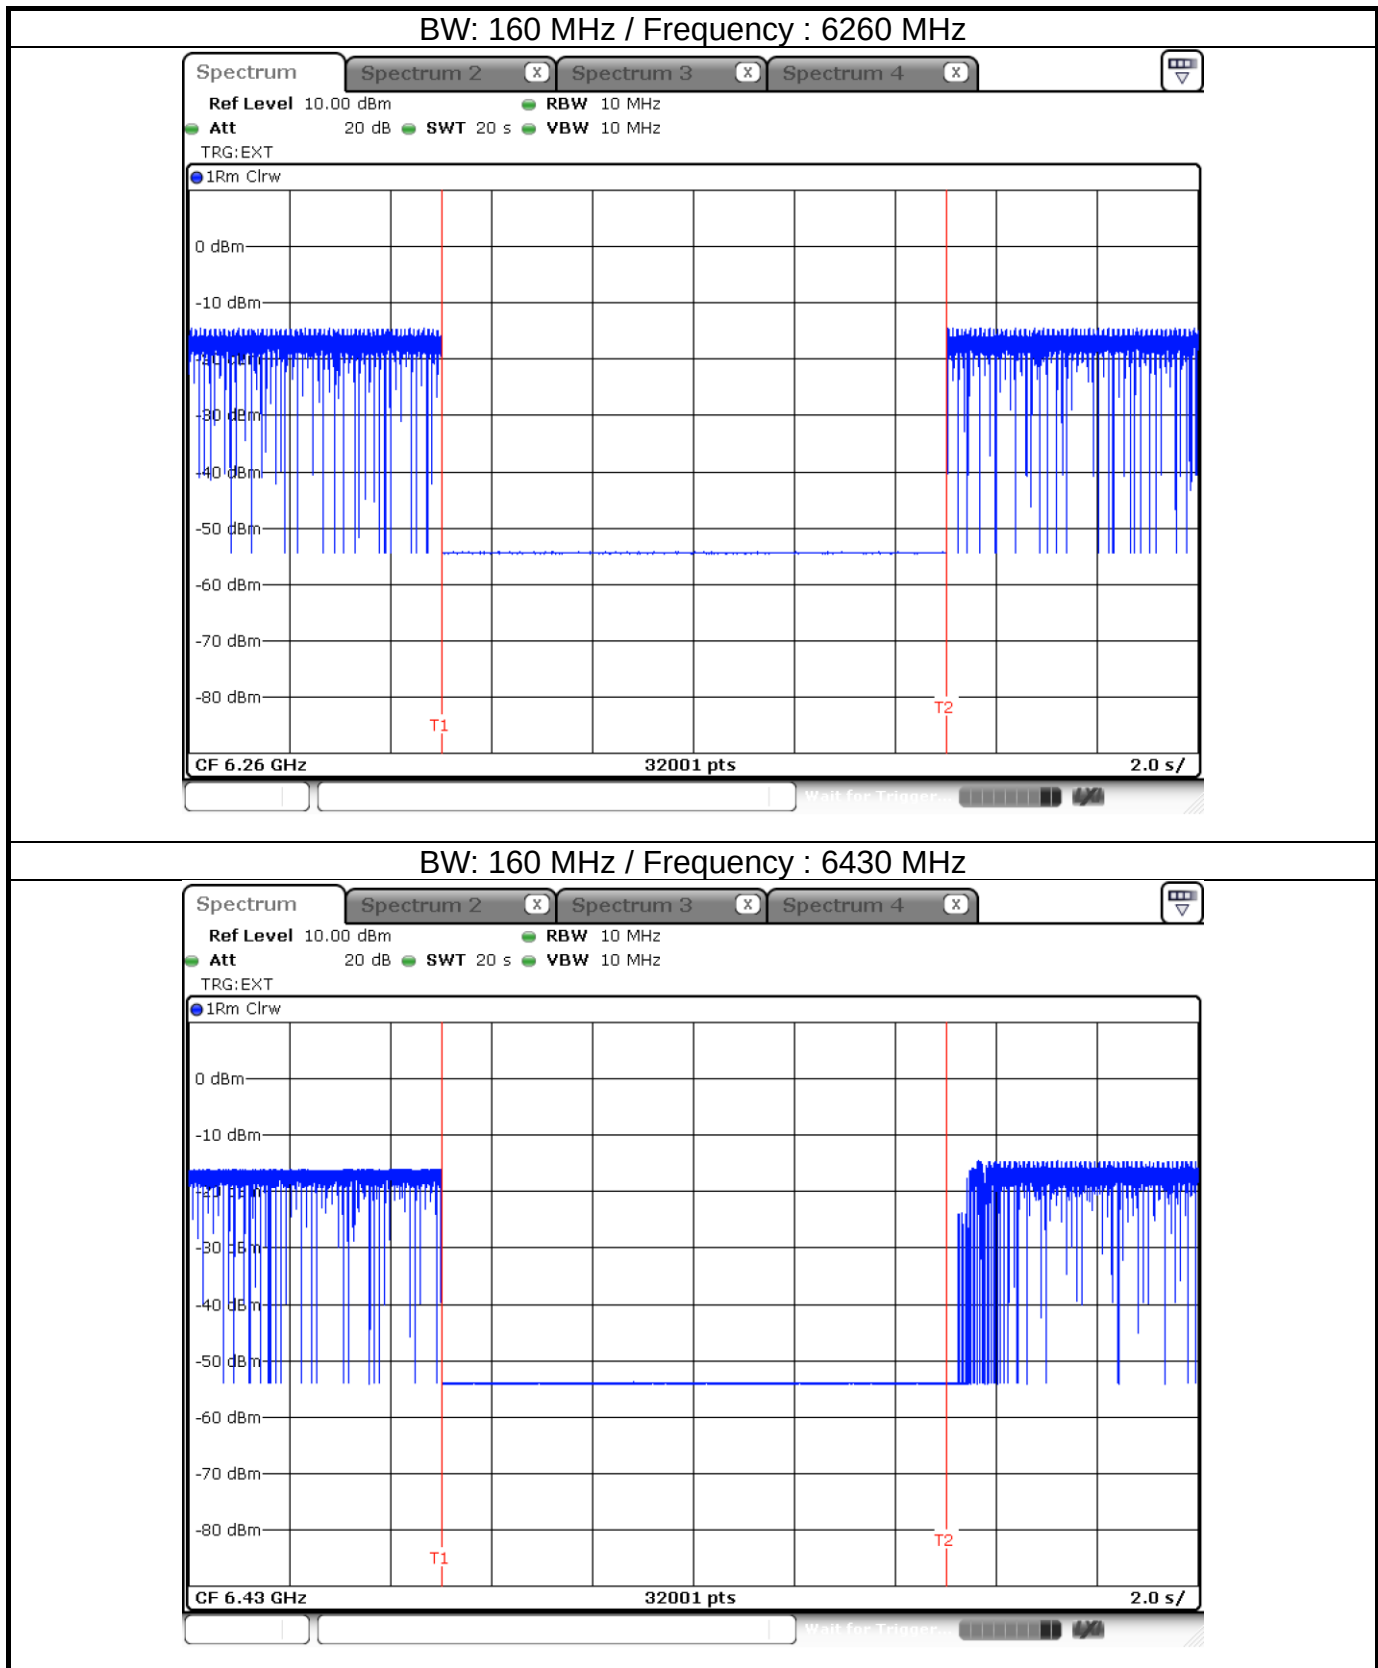


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

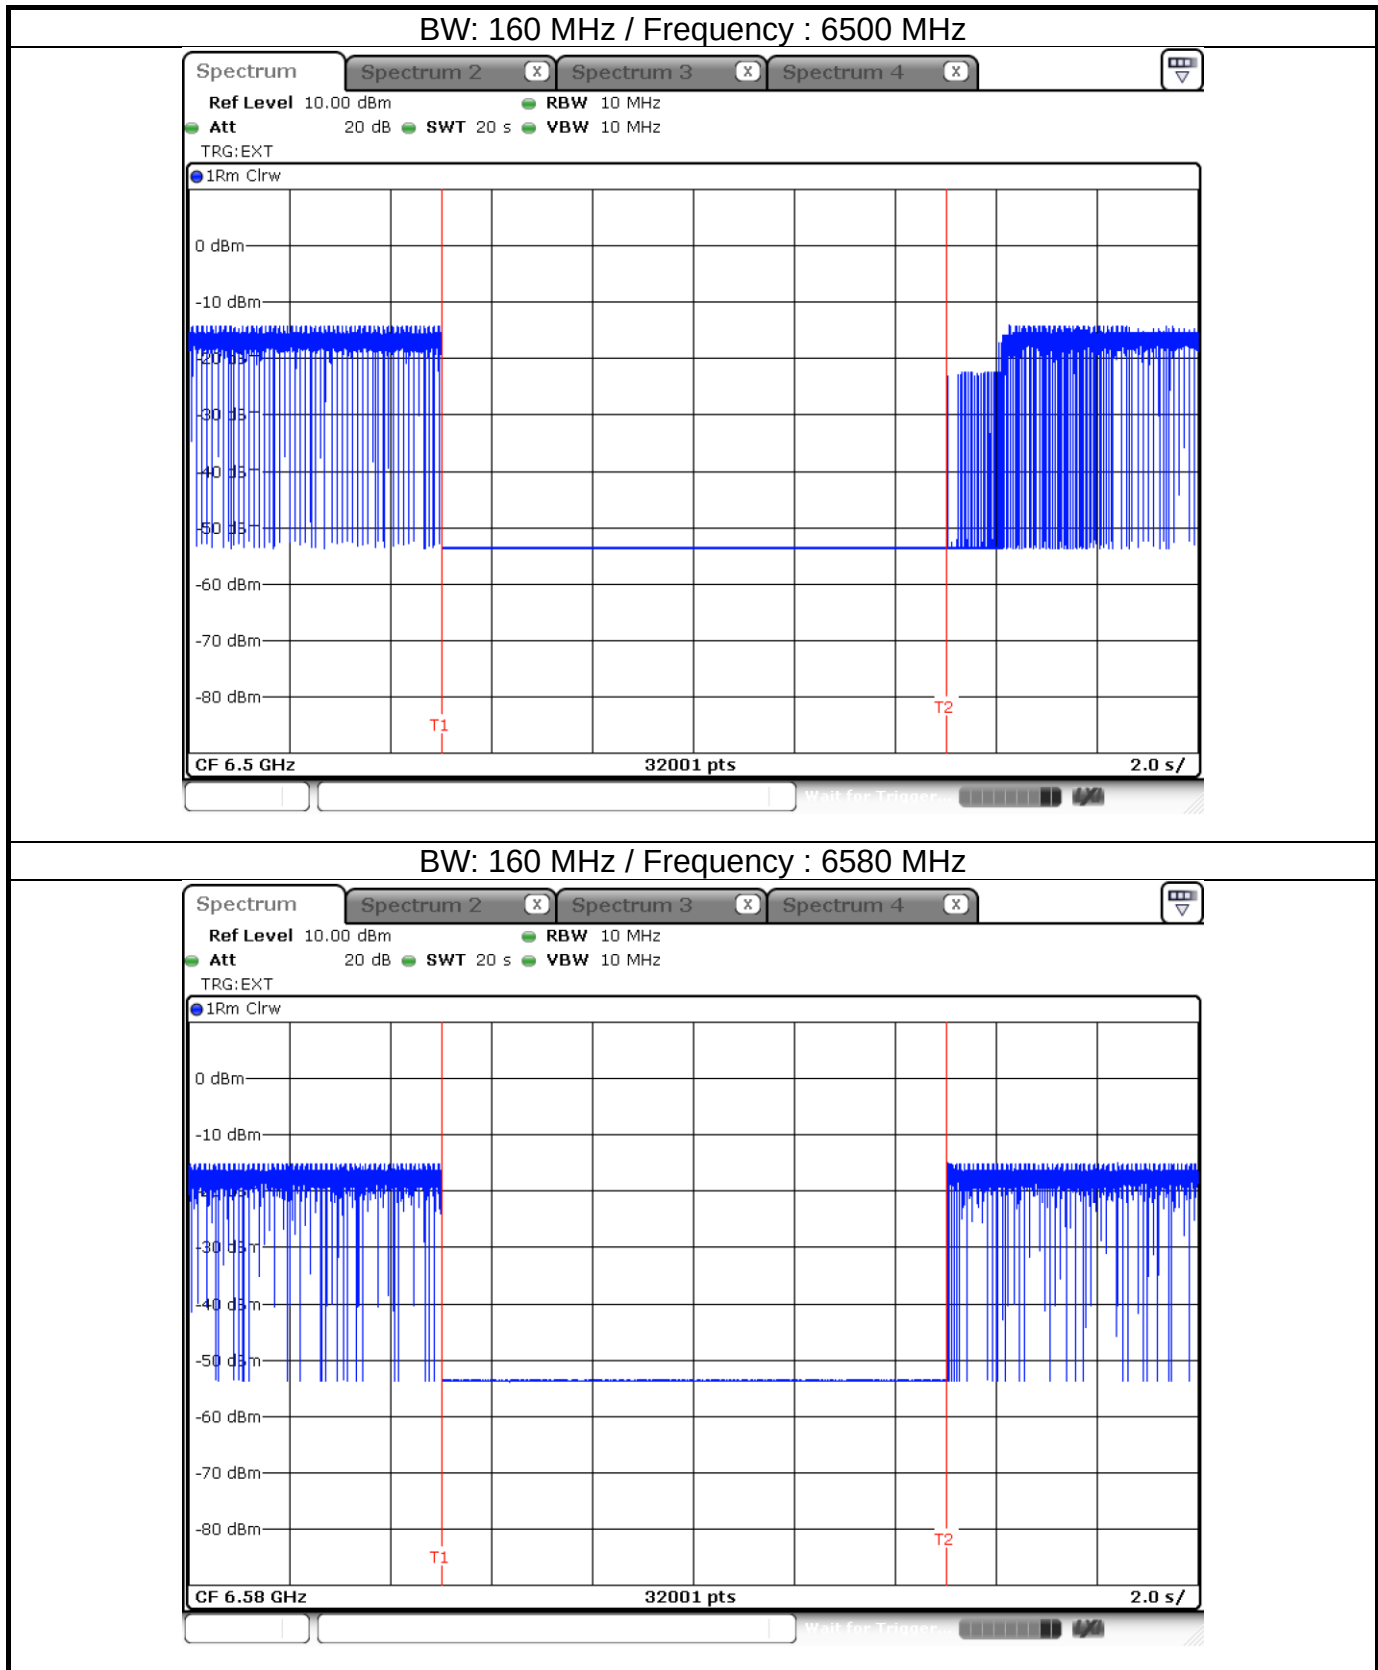


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

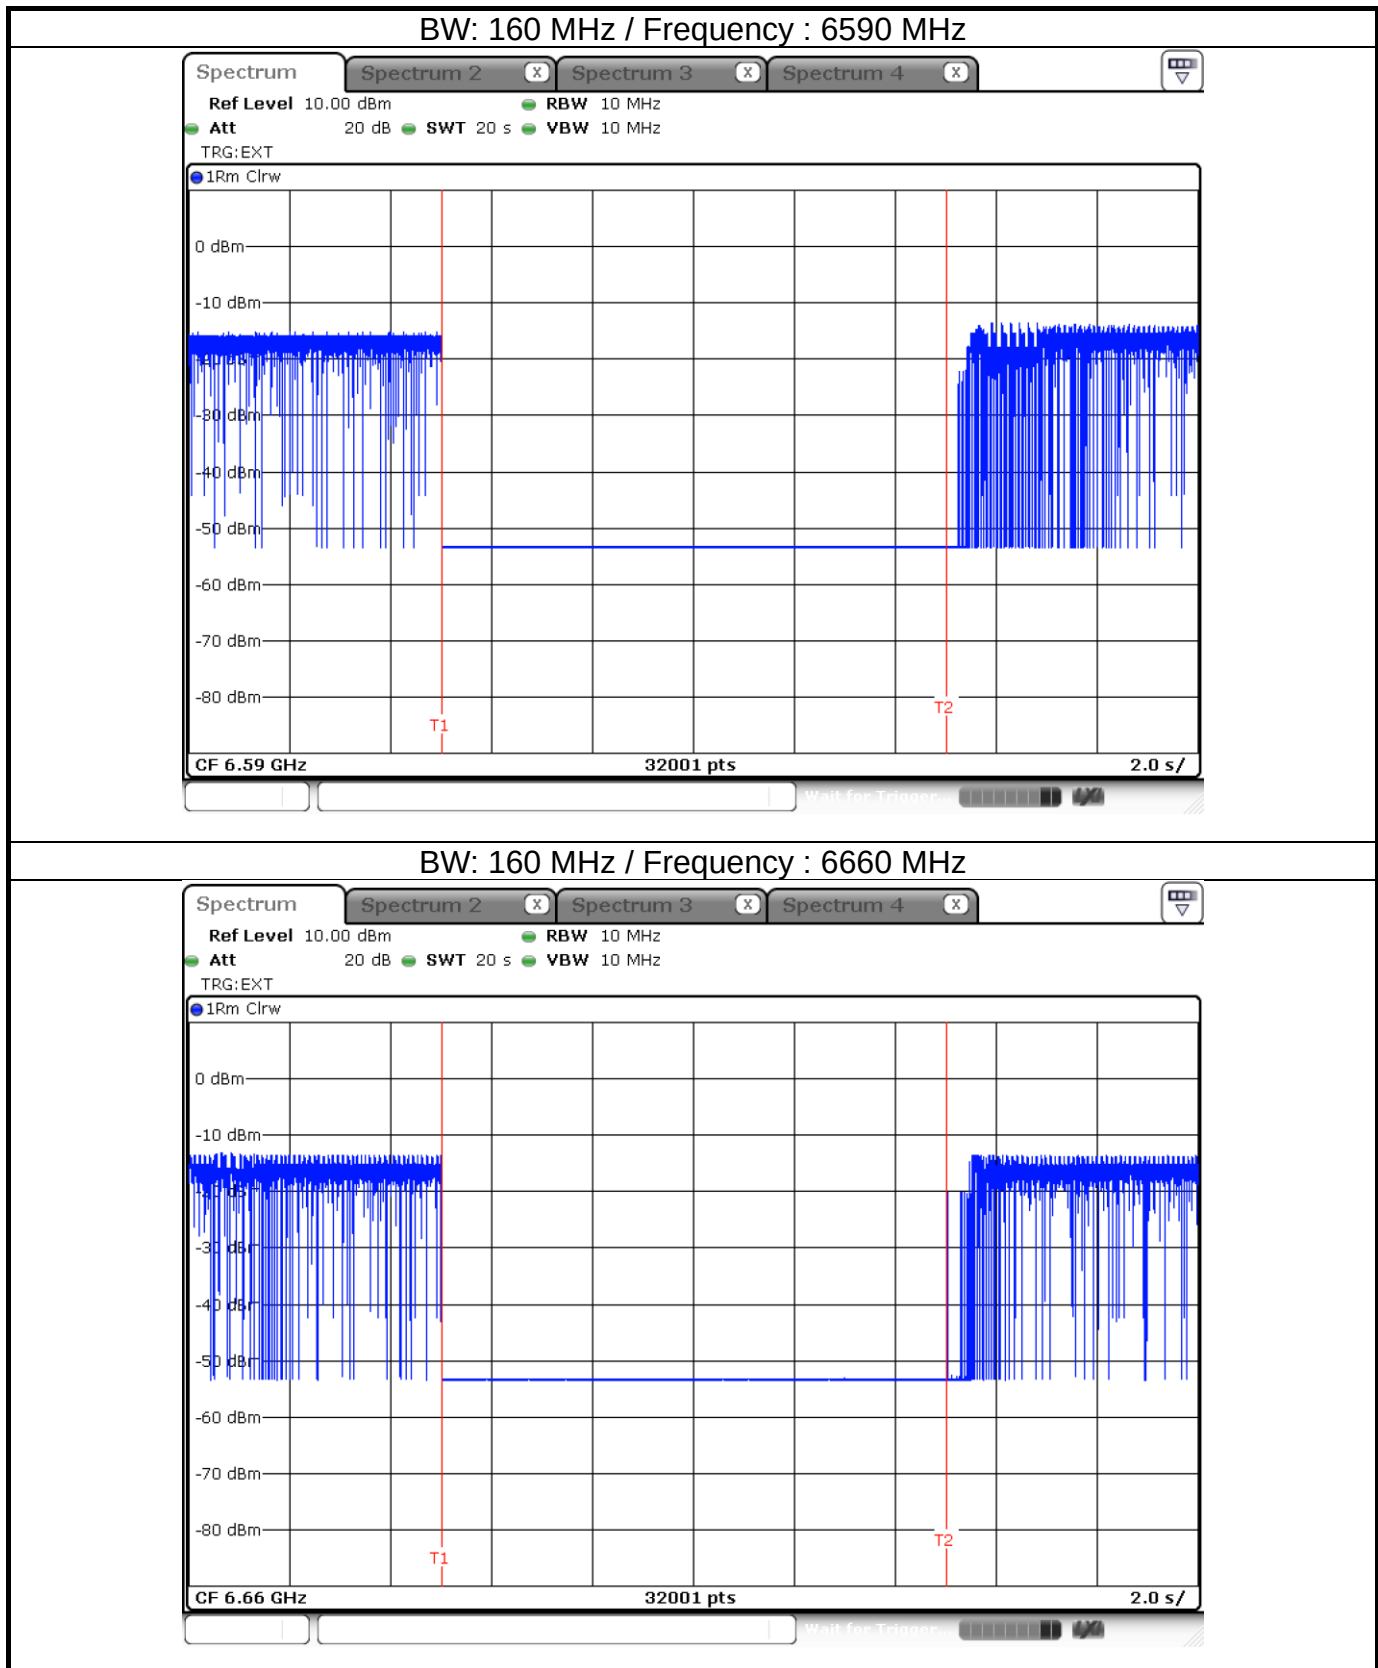

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

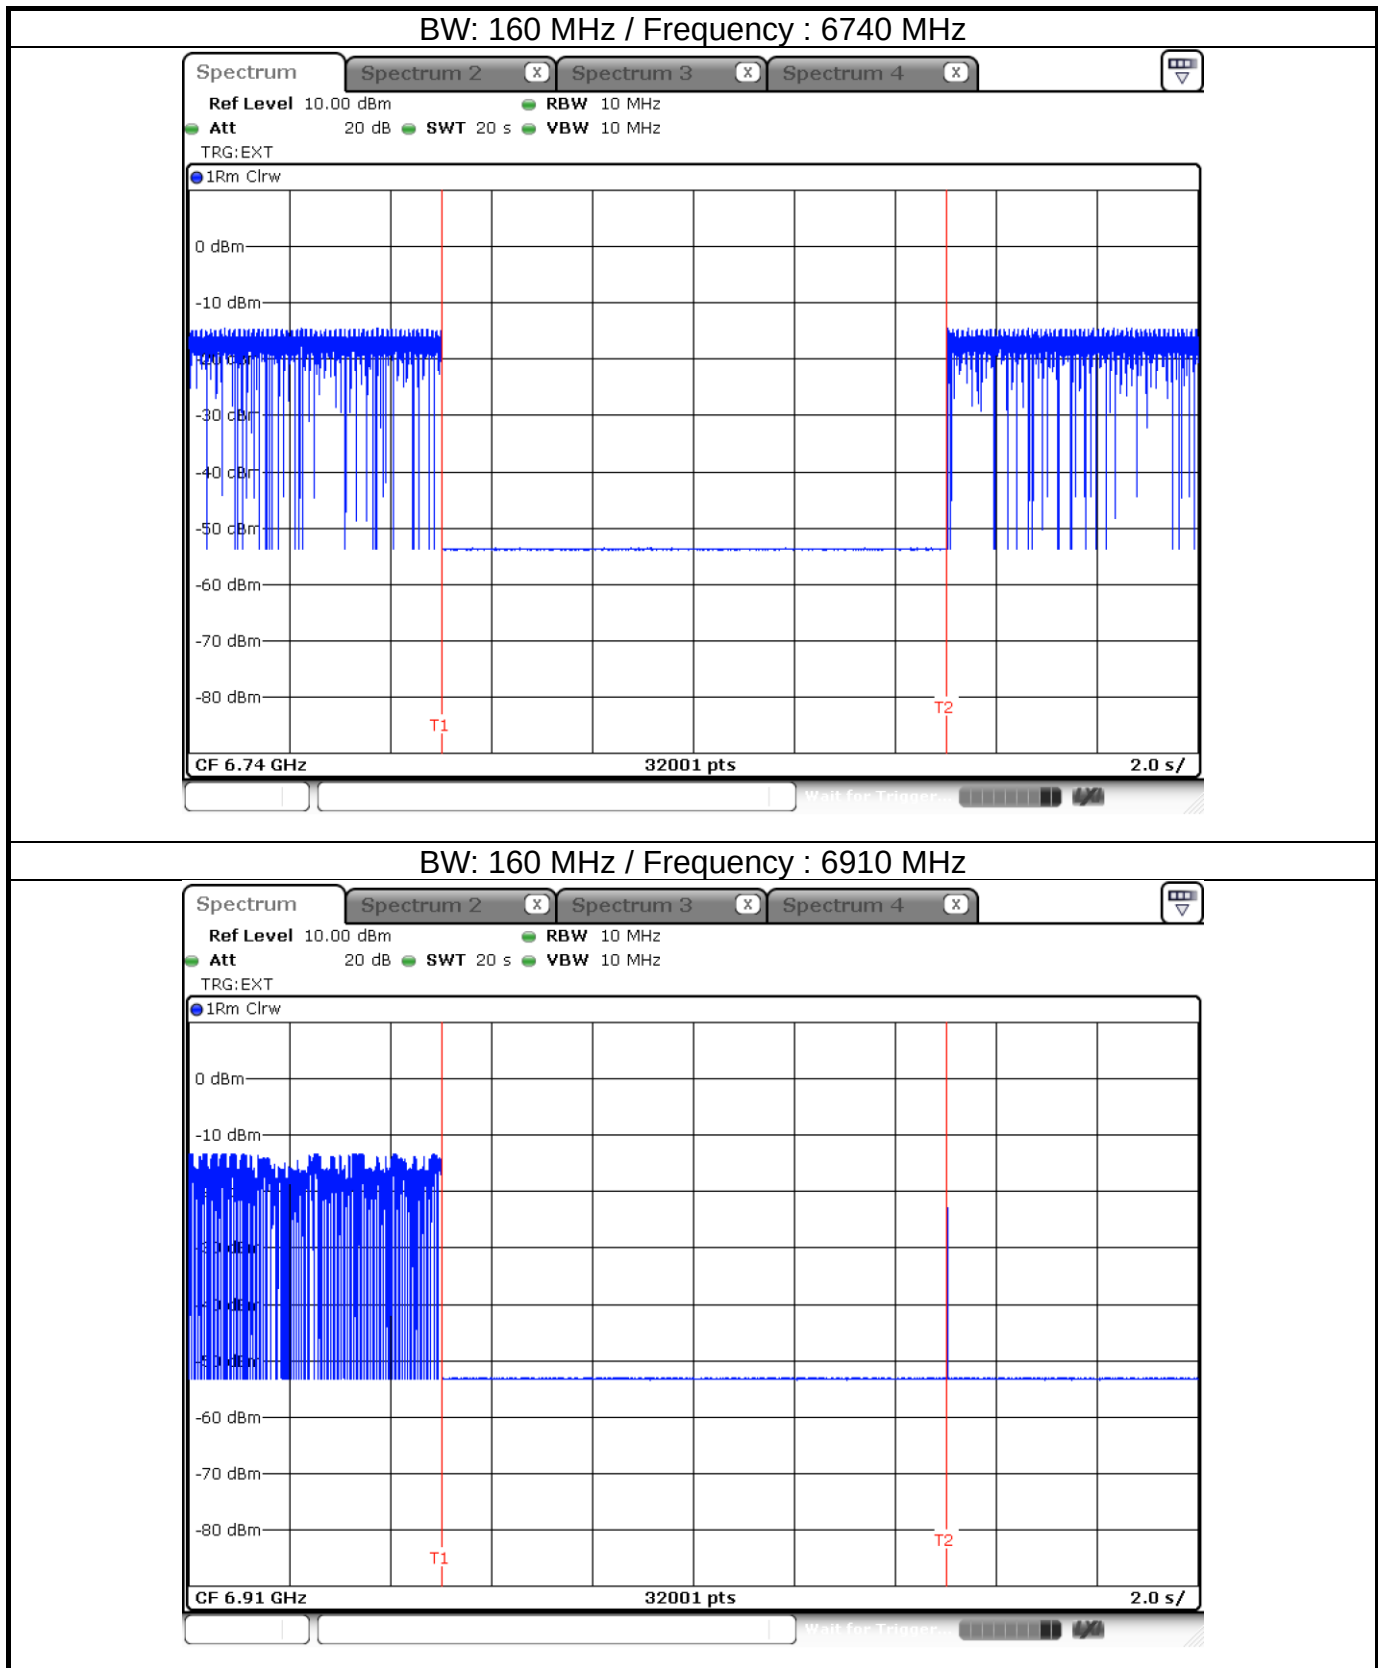

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

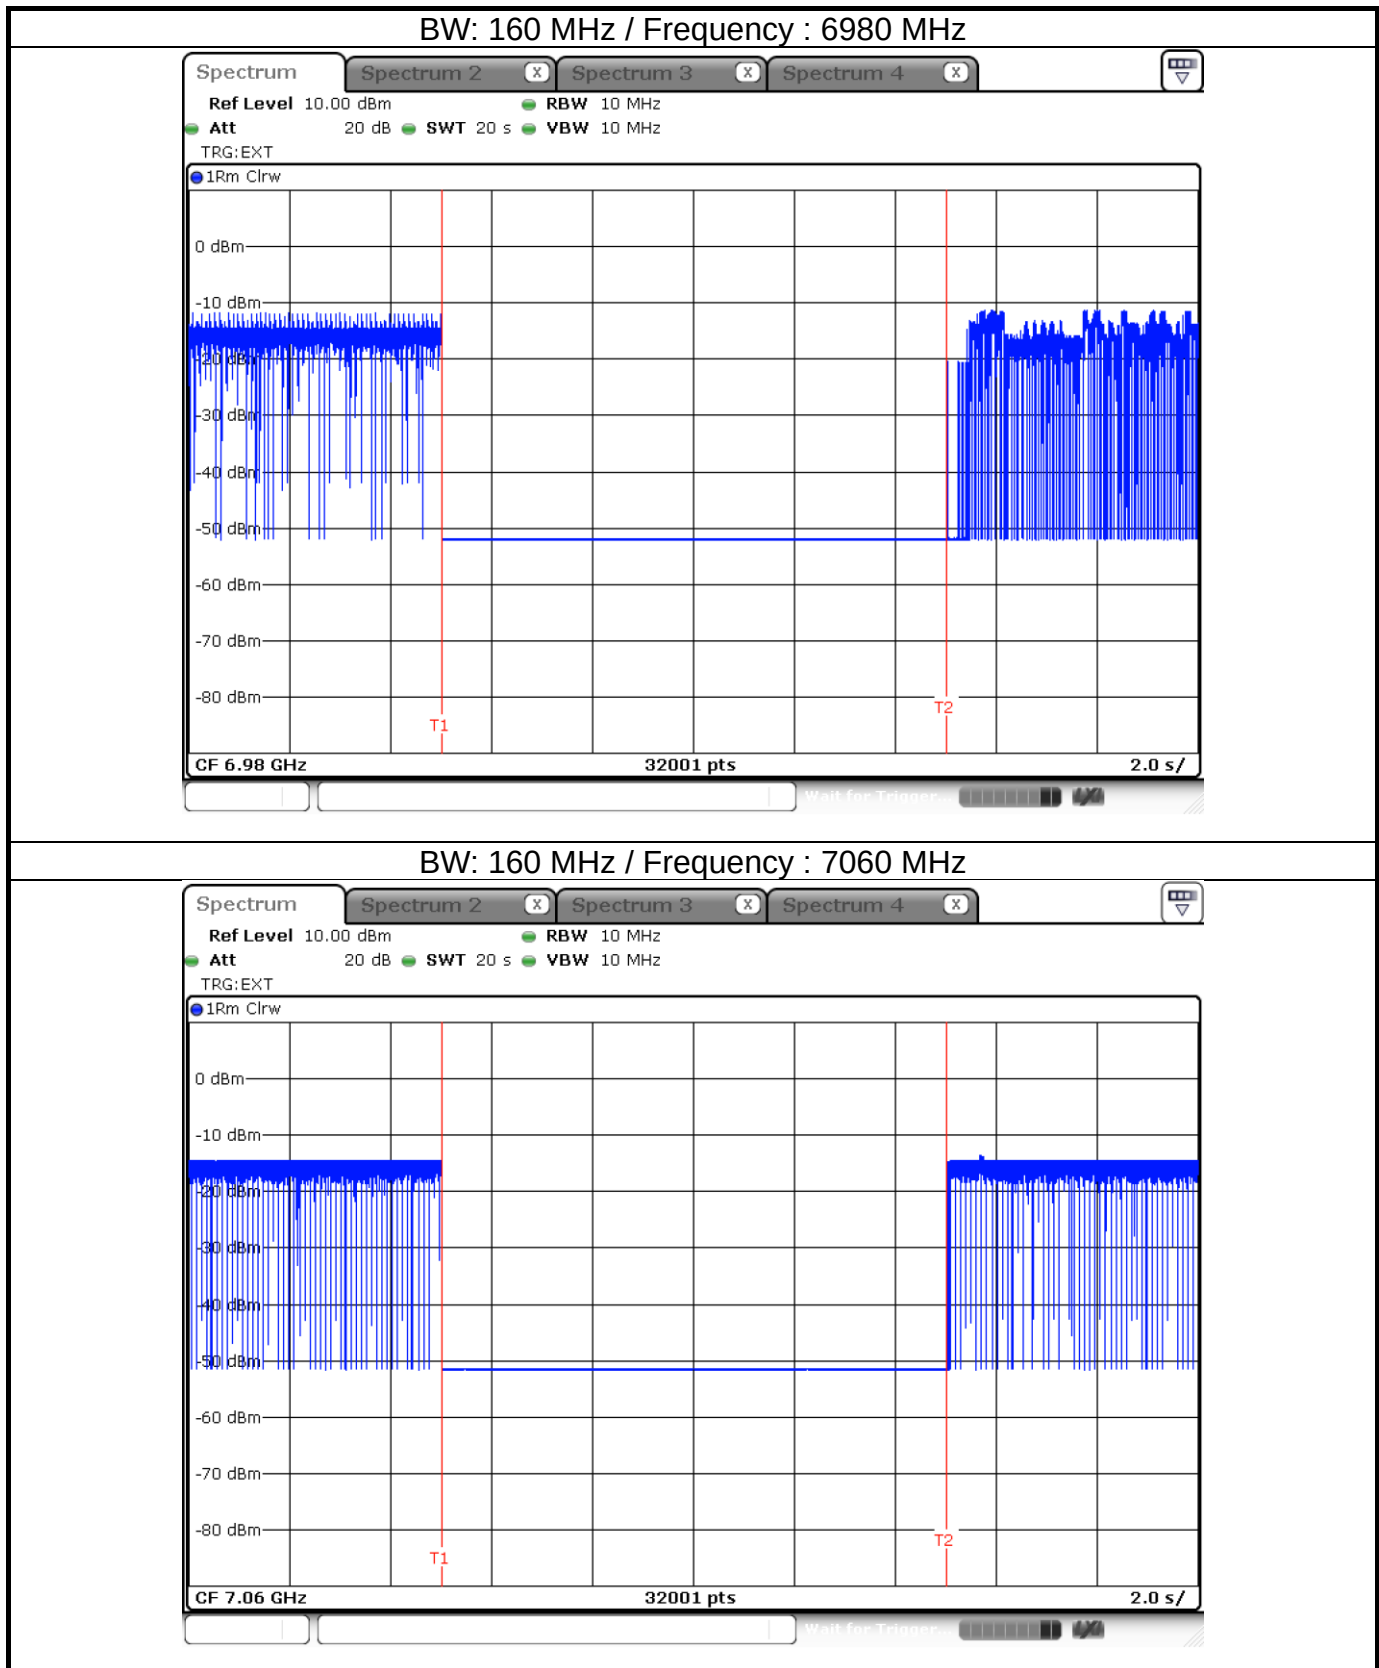

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Beamforming mode

Modulation Mode	ax HE160	Test Freq. (MHz)	6985
Power Phase	Line		

Test by : Joe Liao

Temperature: 24°C

Humidity: 62%

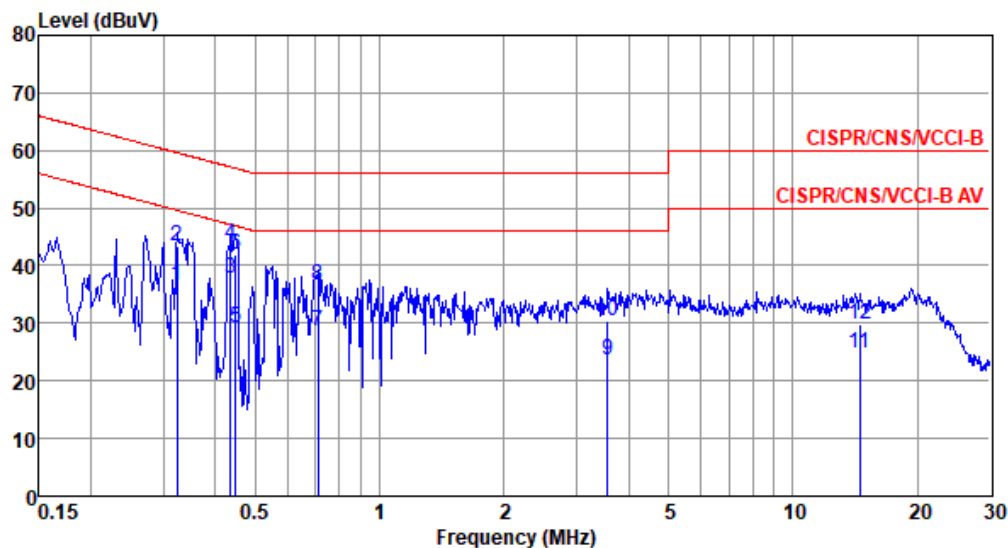


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.323	36.73	49.62	-12.89	26.78	9.62	0.06	0.27	Average
2	0.323	43.27	59.62	-16.35	33.32	9.62	0.06	0.27	QP
3*	0.435	37.81	47.15	-9.34	27.83	9.62	0.06	0.30	Average
4	0.435	43.57	57.15	-13.58	33.59	9.62	0.06	0.30	QP
5	0.449	29.12	46.89	-17.77	19.13	9.62	0.07	0.30	Average
6	0.449	41.89	56.89	-15.00	31.90	9.62	0.07	0.30	QP
7	0.708	28.74	46.00	-17.26	18.70	9.63	0.09	0.32	Average
8	0.708	36.52	56.00	-19.48	26.48	9.63	0.09	0.32	QP
9	3.565	23.61	46.00	-22.39	13.38	9.65	0.17	0.41	Average
10	3.565	30.35	56.00	-25.65	20.12	9.65	0.17	0.41	QP
11	14.517	24.80	50.00	-25.20	14.20	9.68	0.43	0.49	Average
12	14.517	29.76	60.00	-30.24	19.16	9.68	0.43	0.49	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

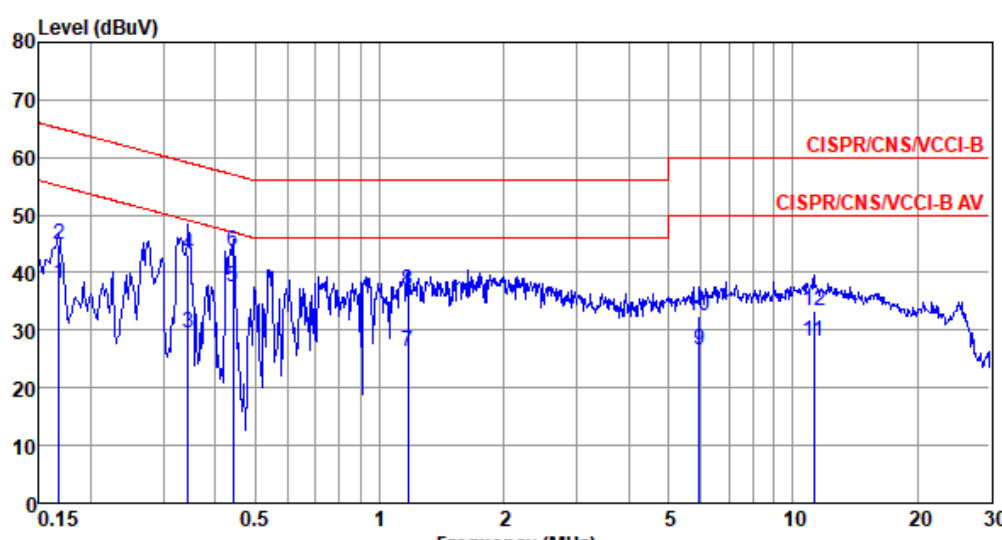

Modulation Mode	ax HE160	Test Freq. (MHz)	6985																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
Level (dBuV)  Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.168</td><td>38.05</td><td>55.08</td><td>-17.03</td><td>28.18</td><td>9.63</td><td>0.06</td><td>0.18</td><td>Average</td></tr><tr><td>2</td><td>0.168</td><td>44.86</td><td>65.08</td><td>-20.22</td><td>34.99</td><td>9.63</td><td>0.06</td><td>0.18</td><td>QP</td></tr><tr><td>3</td><td>0.345</td><td>29.64</td><td>49.09</td><td>-19.45</td><td>19.68</td><td>9.62</td><td>0.06</td><td>0.28</td><td>Average</td></tr><tr><td>4</td><td>0.345</td><td>43.10</td><td>59.09</td><td>-15.99</td><td>33.14</td><td>9.62</td><td>0.06</td><td>0.28</td><td>QP</td></tr><tr><td>5*</td><td>0.442</td><td>37.43</td><td>47.02</td><td>-9.59</td><td>27.44</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.442</td><td>43.64</td><td>57.02</td><td>-13.38</td><td>33.65</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>1.172</td><td>26.25</td><td>46.00</td><td>-19.75</td><td>16.17</td><td>9.63</td><td>0.11</td><td>0.34</td><td>Average</td></tr><tr><td>8</td><td>1.172</td><td>37.00</td><td>56.00</td><td>-19.00</td><td>26.92</td><td>9.63</td><td>0.11</td><td>0.34</td><td>QP</td></tr><tr><td>9</td><td>5.929</td><td>26.44</td><td>50.00</td><td>-23.56</td><td>16.07</td><td>9.68</td><td>0.26</td><td>0.43</td><td>Average</td></tr><tr><td>10</td><td>5.929</td><td>32.44</td><td>60.00</td><td>-27.56</td><td>22.07</td><td>9.68</td><td>0.26</td><td>0.43</td><td>QP</td></tr><tr><td>11</td><td>11.257</td><td>27.98</td><td>50.00</td><td>-22.02</td><td>17.42</td><td>9.73</td><td>0.38</td><td>0.45</td><td>Average</td></tr><tr><td>12</td><td>11.257</td><td>33.44</td><td>60.00</td><td>-26.56</td><td>22.88</td><td>9.73</td><td>0.38</td><td>0.45</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.168	38.05	55.08	-17.03	28.18	9.63	0.06	0.18	Average	2	0.168	44.86	65.08	-20.22	34.99	9.63	0.06	0.18	QP	3	0.345	29.64	49.09	-19.45	19.68	9.62	0.06	0.28	Average	4	0.345	43.10	59.09	-15.99	33.14	9.62	0.06	0.28	QP	5*	0.442	37.43	47.02	-9.59	27.44	9.62	0.07	0.30	Average	6	0.442	43.64	57.02	-13.38	33.65	9.62	0.07	0.30	QP	7	1.172	26.25	46.00	-19.75	16.17	9.63	0.11	0.34	Average	8	1.172	37.00	56.00	-19.00	26.92	9.63	0.11	0.34	QP	9	5.929	26.44	50.00	-23.56	16.07	9.68	0.26	0.43	Average	10	5.929	32.44	60.00	-27.56	22.07	9.68	0.26	0.43	QP	11	11.257	27.98	50.00	-22.02	17.42	9.73	0.38	0.45	Average	12	11.257	33.44	60.00	-26.56	22.88	9.73	0.38	0.45	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.168	38.05	55.08	-17.03	28.18	9.63	0.06	0.18	Average																																																																																																																												
2	0.168	44.86	65.08	-20.22	34.99	9.63	0.06	0.18	QP																																																																																																																												
3	0.345	29.64	49.09	-19.45	19.68	9.62	0.06	0.28	Average																																																																																																																												
4	0.345	43.10	59.09	-15.99	33.14	9.62	0.06	0.28	QP																																																																																																																												
5*	0.442	37.43	47.02	-9.59	27.44	9.62	0.07	0.30	Average																																																																																																																												
6	0.442	43.64	57.02	-13.38	33.65	9.62	0.07	0.30	QP																																																																																																																												
7	1.172	26.25	46.00	-19.75	16.17	9.63	0.11	0.34	Average																																																																																																																												
8	1.172	37.00	56.00	-19.00	26.92	9.63	0.11	0.34	QP																																																																																																																												
9	5.929	26.44	50.00	-23.56	16.07	9.68	0.26	0.43	Average																																																																																																																												
10	5.929	32.44	60.00	-27.56	22.07	9.68	0.26	0.43	QP																																																																																																																												
11	11.257	27.98	50.00	-22.02	17.42	9.73	0.38	0.45	Average																																																																																																																												
12	11.257	33.44	60.00	-26.56	22.88	9.73	0.38	0.45	QP																																																																																																																												

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Non-beamforming mode

Modulation Mode	ax HE160	Test Freq. (MHz)	6985																																																																																																																																		
Power Phase	Line																																																																																																																																				
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																					
<table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.270</td><td>37.94</td><td>51.12</td><td>-13.18</td><td>28.02</td><td>9.62</td><td>0.06</td><td>0.24</td><td>Average</td></tr><tr><td>2</td><td>0.270</td><td>44.48</td><td>61.12</td><td>-16.64</td><td>34.56</td><td>9.62</td><td>0.06</td><td>0.24</td><td>QP</td></tr><tr><td>3</td><td>0.339</td><td>32.08</td><td>49.22</td><td>-17.14</td><td>22.13</td><td>9.62</td><td>0.06</td><td>0.27</td><td>Average</td></tr><tr><td>4</td><td>0.339</td><td>42.43</td><td>59.22</td><td>-16.79</td><td>32.48</td><td>9.62</td><td>0.06</td><td>0.27</td><td>QP</td></tr><tr><td>5*</td><td>0.442</td><td>36.43</td><td>47.02</td><td>-10.59</td><td>26.44</td><td>9.62</td><td>0.07</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.442</td><td>43.29</td><td>57.02</td><td>-13.73</td><td>33.30</td><td>9.62</td><td>0.07</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>0.720</td><td>27.01</td><td>46.00</td><td>-18.99</td><td>16.97</td><td>9.63</td><td>0.09</td><td>0.32</td><td>Average</td></tr><tr><td>8</td><td>0.720</td><td>36.14</td><td>56.00</td><td>-19.86</td><td>26.10</td><td>9.63</td><td>0.09</td><td>0.32</td><td>QP</td></tr><tr><td>9</td><td>4.525</td><td>24.36</td><td>46.00</td><td>-21.64</td><td>14.08</td><td>9.66</td><td>0.20</td><td>0.42</td><td>Average</td></tr><tr><td>10</td><td>4.525</td><td>30.56</td><td>56.00</td><td>-25.44</td><td>20.28</td><td>9.66</td><td>0.20</td><td>0.42</td><td>QP</td></tr><tr><td>11</td><td>14.517</td><td>24.83</td><td>50.00</td><td>-25.17</td><td>14.23</td><td>9.68</td><td>0.43</td><td>0.49</td><td>Average</td></tr><tr><td>12</td><td>14.517</td><td>29.78</td><td>60.00</td><td>-30.22</td><td>19.18</td><td>9.68</td><td>0.43</td><td>0.49</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.270	37.94	51.12	-13.18	28.02	9.62	0.06	0.24	Average	2	0.270	44.48	61.12	-16.64	34.56	9.62	0.06	0.24	QP	3	0.339	32.08	49.22	-17.14	22.13	9.62	0.06	0.27	Average	4	0.339	42.43	59.22	-16.79	32.48	9.62	0.06	0.27	QP	5*	0.442	36.43	47.02	-10.59	26.44	9.62	0.07	0.30	Average	6	0.442	43.29	57.02	-13.73	33.30	9.62	0.07	0.30	QP	7	0.720	27.01	46.00	-18.99	16.97	9.63	0.09	0.32	Average	8	0.720	36.14	56.00	-19.86	26.10	9.63	0.09	0.32	QP	9	4.525	24.36	46.00	-21.64	14.08	9.66	0.20	0.42	Average	10	4.525	30.56	56.00	-25.44	20.28	9.66	0.20	0.42	QP	11	14.517	24.83	50.00	-25.17	14.23	9.68	0.43	0.49	Average	12	14.517	29.78	60.00	-30.22	19.18	9.68	0.43	0.49	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.270	37.94	51.12	-13.18	28.02	9.62	0.06	0.24	Average																																																																																																																												
2	0.270	44.48	61.12	-16.64	34.56	9.62	0.06	0.24	QP																																																																																																																												
3	0.339	32.08	49.22	-17.14	22.13	9.62	0.06	0.27	Average																																																																																																																												
4	0.339	42.43	59.22	-16.79	32.48	9.62	0.06	0.27	QP																																																																																																																												
5*	0.442	36.43	47.02	-10.59	26.44	9.62	0.07	0.30	Average																																																																																																																												
6	0.442	43.29	57.02	-13.73	33.30	9.62	0.07	0.30	QP																																																																																																																												
7	0.720	27.01	46.00	-18.99	16.97	9.63	0.09	0.32	Average																																																																																																																												
8	0.720	36.14	56.00	-19.86	26.10	9.63	0.09	0.32	QP																																																																																																																												
9	4.525	24.36	46.00	-21.64	14.08	9.66	0.20	0.42	Average																																																																																																																												
10	4.525	30.56	56.00	-25.44	20.28	9.66	0.20	0.42	QP																																																																																																																												
11	14.517	24.83	50.00	-25.17	14.23	9.68	0.43	0.49	Average																																																																																																																												
12	14.517	29.78	60.00	-30.22	19.18	9.68	0.43	0.49	QP																																																																																																																												
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																					



Modulation Mode	ax HE160	Test Freq. (MHz)	6985																																																																																																																																										
Power Phase	Neutral																																																																																																																																												
Test by : Joe Liao Temperature: 24°C Humidity: 62%																																																																																																																																													
<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV</th><th>dBuV</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.270</td><td>38.97</td><td>51.12</td><td>-12.15</td><td>29.04</td><td>9.63</td><td>0.06</td><td>0.24</td><td>Average</td></tr><tr><td>2</td><td>0.270</td><td>45.14</td><td>61.12</td><td>-15.98</td><td>35.21</td><td>9.63</td><td>0.06</td><td>0.24</td><td>QP</td></tr><tr><td>3</td><td>0.343</td><td>29.94</td><td>49.13</td><td>-19.19</td><td>19.98</td><td>9.62</td><td>0.06</td><td>0.28</td><td>Average</td></tr><tr><td>4</td><td>0.343</td><td>42.99</td><td>59.13</td><td>-16.14</td><td>33.03</td><td>9.62</td><td>0.06</td><td>0.28</td><td>QP</td></tr><tr><td>5*</td><td>0.433</td><td>37.00</td><td>47.20</td><td>-10.20</td><td>27.02</td><td>9.62</td><td>0.06</td><td>0.30</td><td>Average</td></tr><tr><td>6</td><td>0.433</td><td>43.56</td><td>57.20</td><td>-13.64</td><td>33.58</td><td>9.62</td><td>0.06</td><td>0.30</td><td>QP</td></tr><tr><td>7</td><td>0.953</td><td>22.39</td><td>46.00</td><td>-23.61</td><td>12.32</td><td>9.63</td><td>0.11</td><td>0.33</td><td>Average</td></tr><tr><td>8</td><td>0.953</td><td>35.72</td><td>56.00</td><td>-20.28</td><td>25.65</td><td>9.63</td><td>0.11</td><td>0.33</td><td>QP</td></tr><tr><td>9</td><td>2.237</td><td>26.32</td><td>46.00</td><td>-19.68</td><td>16.17</td><td>9.64</td><td>0.14</td><td>0.37</td><td>Average</td></tr><tr><td>10</td><td>2.237</td><td>34.76</td><td>56.00</td><td>-21.24</td><td>24.61</td><td>9.64</td><td>0.14</td><td>0.37</td><td>QP</td></tr><tr><td>11</td><td>7.687</td><td>26.56</td><td>50.00</td><td>-23.44</td><td>16.13</td><td>9.69</td><td>0.31</td><td>0.43</td><td>Average</td></tr><tr><td>12</td><td>7.687</td><td>32.14</td><td>60.00</td><td>-27.86</td><td>21.71</td><td>9.69</td><td>0.31</td><td>0.43</td><td>QP</td></tr></tbody></table>				Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark	MHz	dBuV	dBuV	Limit	Level	dB	loss	dB		1	0.270	38.97	51.12	-12.15	29.04	9.63	0.06	0.24	Average	2	0.270	45.14	61.12	-15.98	35.21	9.63	0.06	0.24	QP	3	0.343	29.94	49.13	-19.19	19.98	9.62	0.06	0.28	Average	4	0.343	42.99	59.13	-16.14	33.03	9.62	0.06	0.28	QP	5*	0.433	37.00	47.20	-10.20	27.02	9.62	0.06	0.30	Average	6	0.433	43.56	57.20	-13.64	33.58	9.62	0.06	0.30	QP	7	0.953	22.39	46.00	-23.61	12.32	9.63	0.11	0.33	Average	8	0.953	35.72	56.00	-20.28	25.65	9.63	0.11	0.33	QP	9	2.237	26.32	46.00	-19.68	16.17	9.64	0.14	0.37	Average	10	2.237	34.76	56.00	-21.24	24.61	9.64	0.14	0.37	QP	11	7.687	26.56	50.00	-23.44	16.13	9.69	0.31	0.43	Average	12	7.687	32.14	60.00	-27.86	21.71	9.69	0.31	0.43	QP
Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																					
MHz	dBuV	dBuV	Limit	Level	dB	loss	dB																																																																																																																																						
1	0.270	38.97	51.12	-12.15	29.04	9.63	0.06	0.24	Average																																																																																																																																				
2	0.270	45.14	61.12	-15.98	35.21	9.63	0.06	0.24	QP																																																																																																																																				
3	0.343	29.94	49.13	-19.19	19.98	9.62	0.06	0.28	Average																																																																																																																																				
4	0.343	42.99	59.13	-16.14	33.03	9.62	0.06	0.28	QP																																																																																																																																				
5*	0.433	37.00	47.20	-10.20	27.02	9.62	0.06	0.30	Average																																																																																																																																				
6	0.433	43.56	57.20	-13.64	33.58	9.62	0.06	0.30	QP																																																																																																																																				
7	0.953	22.39	46.00	-23.61	12.32	9.63	0.11	0.33	Average																																																																																																																																				
8	0.953	35.72	56.00	-20.28	25.65	9.63	0.11	0.33	QP																																																																																																																																				
9	2.237	26.32	46.00	-19.68	16.17	9.64	0.14	0.37	Average																																																																																																																																				
10	2.237	34.76	56.00	-21.24	24.61	9.64	0.14	0.37	QP																																																																																																																																				
11	7.687	26.56	50.00	-23.44	16.13	9.69	0.31	0.43	Average																																																																																																																																				
12	7.687	32.14	60.00	-27.86	21.71	9.69	0.31	0.43	QP																																																																																																																																				
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																													