

**Conducted Output Power(Average)****Appendix B**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6185MHz	Pass	4.79	15.94	15.87	15.68	15.75	21.83	Inf	26.62	30.00
6345MHz	Pass	4.79	15.62	15.77	15.62	15.31	21.60	Inf	26.39	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.32	15.32	15.62	15.61	15.22	21.47	Inf	26.79	30.00
6665MHz	Pass	5.32	15.35	15.22	15.49	15.3	21.36	Inf	26.68	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.32	15.42	15.47	15.37	15.16	21.38	Inf	26.70	30.00
6985MHz	Pass	5.27	15.31	14.97	15.58	15.53	21.37	Inf	26.64	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.79	12.71	12.67	13.47	13.32	19.08	Inf	23.87	30.00
6265MHz	Pass	4.79	13.17	12.84	13.56	13.18	19.22	Inf	24.01	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.32	16.92	16.38	16.41	15.92	22.44	Inf	27.76	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.32	15.52	15.84	16.17	15.65	21.82	Inf	27.14	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.32	15.86	16.27	15.77	15.81	21.95	Inf	27.27	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.32	13.41	13.42	13.35	13.42	19.42	Inf	24.74	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain refers to antenna report.

Non-beamforming mode
Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.03	4.76
802.11be EHT20_Nss1,(MCS0)_4TX	-0.01	4.78
802.11be EHT40_Nss1,(MCS0)_4TX	0.10	4.89
802.11be EHT80_Nss1,(MCS0)_4TX	0.11	4.90
802.11be EHT160_Nss1,(MCS0)_4TX	-0.00	4.79
802.11be EHT320_Nss1,(MCS0)_4TX	-5.15	-0.36
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	0.44	4.80
802.11be EHT20_Nss1,(MCS0)_4TX	0.39	4.75
802.11be EHT40_Nss1,(MCS0)_4TX	0.45	4.81
802.11be EHT80_Nss1,(MCS0)_4TX	0.24	4.60
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.55	4.77
802.11be EHT20_Nss1,(MCS0)_4TX	-0.45	4.87
802.11be EHT40_Nss1,(MCS0)_4TX	-0.43	4.89
802.11be EHT80_Nss1,(MCS0)_4TX	-0.46	4.86
802.11be EHT160_Nss1,(MCS0)_4TX	-0.48	4.84
802.11be EHT320_Nss1,(MCS0)_4TX	-1.53	3.79
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.46	4.81
802.11be EHT20_Nss1,(MCS0)_4TX	-0.53	4.74
802.11be EHT40_Nss1,(MCS0)_4TX	-0.39	4.88
802.11be EHT80_Nss1,(MCS0)_4TX	-0.48	4.79
802.11be EHT160_Nss1,(MCS0)_4TX	-0.55	4.72

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.790	-6.05	-5.57	-5.90	-5.36	-0.03	Inf	4.76	5.00
6175MHz	Pass	4.790	-6.30	-6.26	-5.19	-5.76	-0.03	Inf	4.76	5.00
6415MHz	Pass	4.790	-5.67	-5.89	-5.87	-6.82	-0.26	Inf	4.53	5.00
6435MHz	Pass	4.360	-5.36	-5.11	-5.58	-5.73	0.42	Inf	4.78	5.00
6475MHz	Pass	4.360	-6.46	-4.92	-5.36	-5.94	0.16	Inf	4.52	5.00
6515MHz	Pass	4.360	-5.52	-4.85	-5.24	-5.81	0.44	Inf	4.80	5.00
6535MHz	Pass	5.320	-5.70	-6.44	-6.33	-6.95	-0.57	Inf	4.75	5.00
6715MHz	Pass	5.320	-6.65	-5.93	-6.18	-6.45	-0.58	Inf	4.74	5.00
6855MHz	Pass	5.320	-8.06	-6.41	-5.92	-5.52	-0.60	Inf	4.72	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.320	-7.73	-6.73	-5.89	-5.31	-0.55	Inf	4.77	5.00
6895MHz	Pass	5.270	-7.42	-6.80	-6.07	-5.85	-0.67	Inf	4.60	5.00
7015MHz	Pass	5.270	-6.63	-5.72	-6.38	-6.25	-0.46	Inf	4.81	5.00
7095MHz	Pass	5.270	-6.36	-6.34	-6.60	-6.48	-0.67	Inf	4.60	5.00
7115MHz	Pass	5.270	-6.24	-6.19	-6.60	-6.68	-0.65	Inf	4.62	5.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.790	-6.27	-5.74	-5.55	-5.53	-0.09	Inf	4.70	5.00
6175MHz	Pass	4.790	-5.96	-5.94	-5.50	-5.75	-0.01	Inf	4.78	5.00
6415MHz	Pass	4.790	-5.59	-6.02	-6.03	-6.77	-0.29	Inf	4.50	5.00
6435MHz	Pass	4.360	-5.13	-5.43	-5.05	-5.93	0.39	Inf	4.75	5.00
6475MHz	Pass	4.360	-5.94	-5.07	-5.12	-5.62	0.38	Inf	4.74	5.00
6515MHz	Pass	4.360	-6.37	-5.60	-5.05	-5.90	0.15	Inf	4.51	5.00
6535MHz	Pass	5.320	-7.07	-6.17	-5.91	-6.53	-0.56	Inf	4.76	5.00
6715MHz	Pass	5.320	-6.49	-5.97	-6.33	-6.28	-0.45	Inf	4.87	5.00
6855MHz	Pass	5.320	-6.14	-6.07	-6.19	-7.38	-0.77	Inf	4.55	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.320	-5.94	-5.70	-6.46	-6.72	-0.47	Inf	4.85	5.00
6895MHz	Pass	5.270	-6.11	-5.88	-6.54	-6.77	-0.53	Inf	4.74	5.00
7015MHz	Pass	5.270	-6.37	-6.43	-5.82	-6.89	-0.57	Inf	4.70	5.00
7095MHz	Pass	5.270	-6.47	-6.29	-6.30	-6.45	-0.60	Inf	4.67	5.00
7115MHz	Pass	5.270	-6.15	-6.07	-6.60	-6.35	-0.54	Inf	4.73	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	4.790	-5.63	-5.37	-5.86	-5.86	0.10	Inf	4.89	5.00
6165MHz	Pass	4.790	-6.02	-5.59	-5.16	-5.81	0.09	Inf	4.88	5.00
6405MHz	Pass	4.790	-5.78	-5.80	-5.71	-6.58	-0.19	Inf	4.60	5.00
6445MHz	Pass	4.360	-5.96	-5.42	-4.88	-5.99	0.23	Inf	4.59	5.00
6485MHz	Pass	4.360	-5.40	-5.21	-4.63	-5.76	0.45	Inf	4.81	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.83	-6.15	-5.80	-6.33	-0.49	Inf	4.83	5.00
6565MHz	Pass	5.320	-7.00	-6.37	-6.03	-6.55	-0.68	Inf	4.64	5.00
6725MHz	Pass	5.320	-6.70	-6.34	-5.68	-6.42	-0.43	Inf	4.89	5.00
6845MHz	Pass	5.320	-5.95	-5.99	-6.09	-6.70	-0.45	Inf	4.87	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.30	-6.34	-6.58	-6.94	-0.78	Inf	4.54	5.00
6925MHz	Pass	5.270	-6.59	-6.23	-6.82	-6.21	-0.74	Inf	4.53	5.00
7005MHz	Pass	5.270	-6.54	-6.05	-5.45	-6.69	-0.40	Inf	4.87	5.00
7085MHz	Pass	5.270	-6.49	-6.05	-6.14	-6.01	-0.39	Inf	4.88	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	4.790	-5.89	-5.20	-6.16	-6.12	0.02	Inf	4.81	5.00
6145MHz	Pass	4.790	-5.81	-5.95	-5.10	-5.73	0.11	Inf	4.90	5.00
6385MHz	Pass	4.790	-6.03	-5.60	-5.32	-6.02	-0.06	Inf	4.73	5.00
6465MHz	Pass	4.360	-5.58	-5.55	-4.93	-6.04	0.24	Inf	4.60	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.42	-6.18	-6.19	-6.51	-0.46	Inf	4.86	5.00
6625MHz	Pass	5.320	-6.20	-6.04	-6.01	-6.60	-0.49	Inf	4.83	5.00
6705MHz	Pass	5.320	-6.32	-6.23	-6.38	-6.68	-0.71	Inf	4.61	5.00
6785MHz	Pass	5.320	-6.42	-6.18	-6.52	-6.56	-0.71	Inf	4.61	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.320	-5.60	-5.86	-6.43	-7.25	-0.65	Inf	4.67	5.00
6945MHz	Pass	5.270	-6.13	-6.45	-6.90	-6.51	-0.67	Inf	4.60	5.00
7025MHz	Pass	5.270	-6.47	-6.01	-5.82	-6.48	-0.48	Inf	4.79	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	4.790	-6.25	-5.79	-4.95	-6.19	-0.00	Inf	4.79	5.00
6185MHz	Pass	4.790	-5.66	-5.91	-5.93	-5.55	-0.14	Inf	4.65	5.00
6345MHz	Pass	4.790	-6.21	-5.71	-5.63	-6.23	-0.29	Inf	4.50	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.11	-6.21	-6.05	-6.34	-0.48	Inf	4.84	5.00
6665MHz	Pass	5.320	-6.28	-6.54	-6.18	-7.06	-0.62	Inf	4.70	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.31	-6.17	-6.51	-6.81	-0.56	Inf	4.76	5.00
6985MHz	Pass	5.270	-6.59	-6.14	-6.40	-6.33	-0.55	Inf	4.72	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.790	-10.86	-11.30	-11.56	-11.61	-5.69	Inf	-0.90	5.00
6265MHz	Pass	4.790	-10.71	-11.24	-10.84	-10.42	-5.15	Inf	-0.36	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.320	-7.84	-7.87	-7.72	-8.22	-2.13	Inf	3.19	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.320	-8.03	-7.98	-7.36	-7.56	-1.90	Inf	3.42	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.76	-7.37	-7.91	-6.94	-1.53	Inf	3.79	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.320	-9.00	-9.92	-9.97	-9.94	-4.03	Inf	1.29	5.00


DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


5955MHz

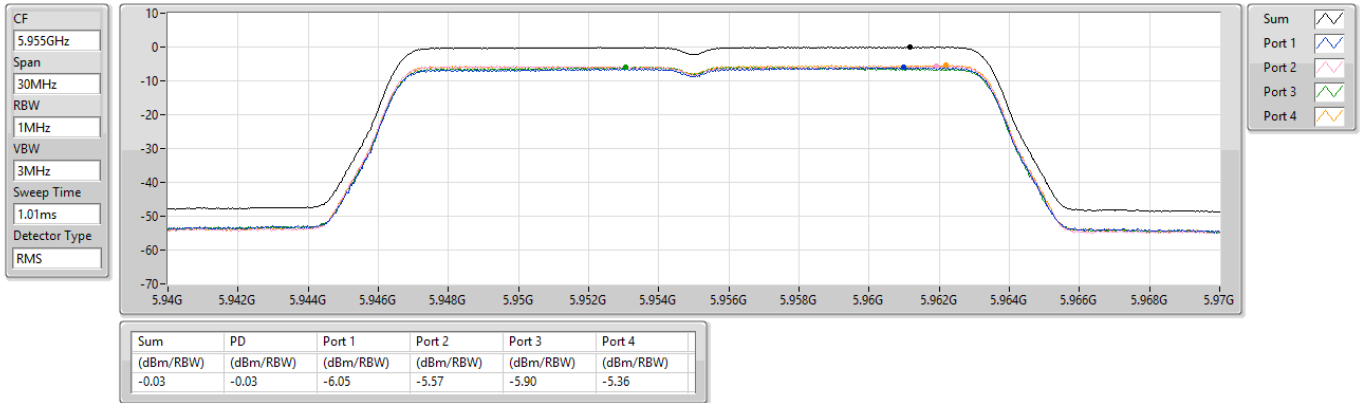

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6175MHz

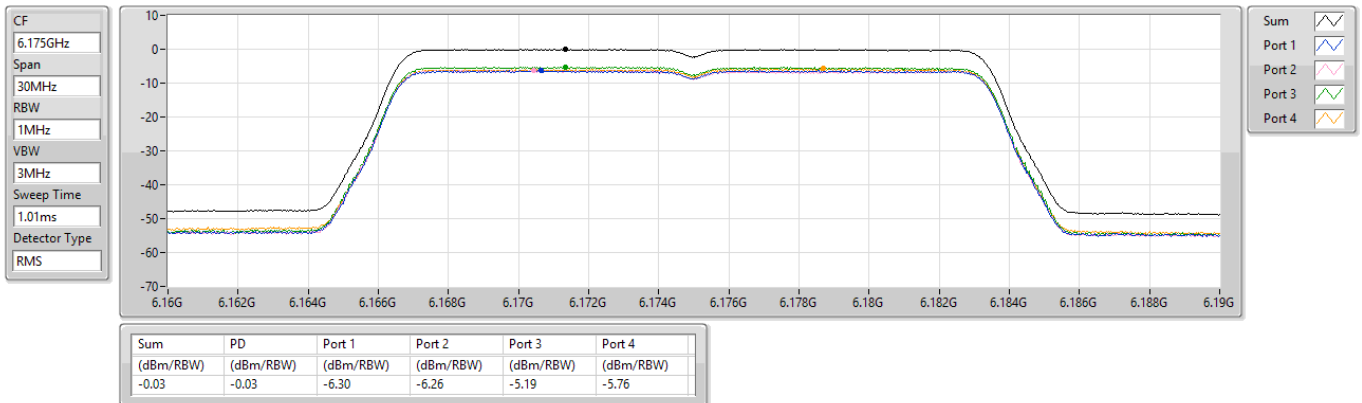


5.925-6.425GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6415MHz

CF
6.415GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

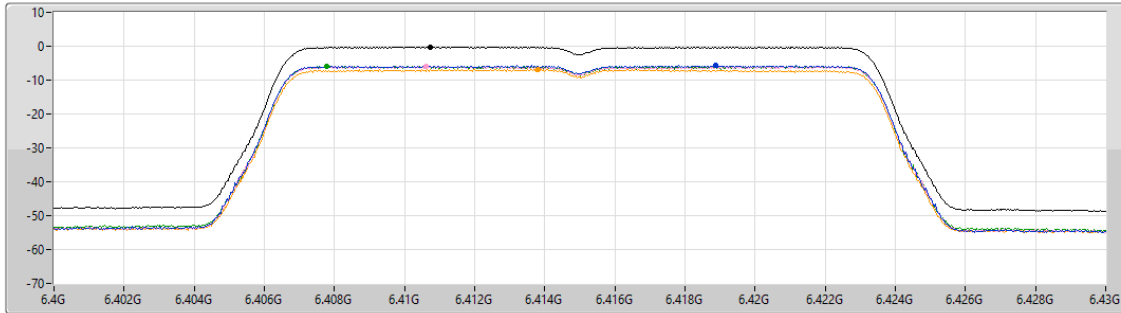

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.26	-0.26	-5.67	-5.89	-5.87	-6.82

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6435MHz

CF
6.435GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

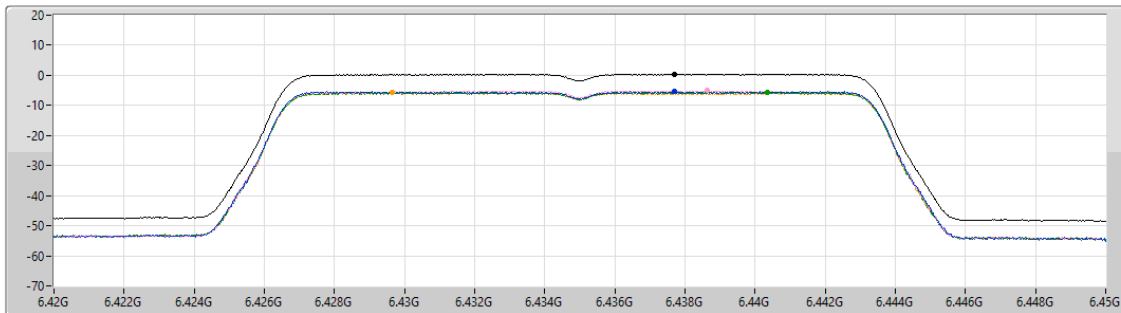


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.42	0.42	-5.36	-5.11	-5.58	-5.73

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6475MHz

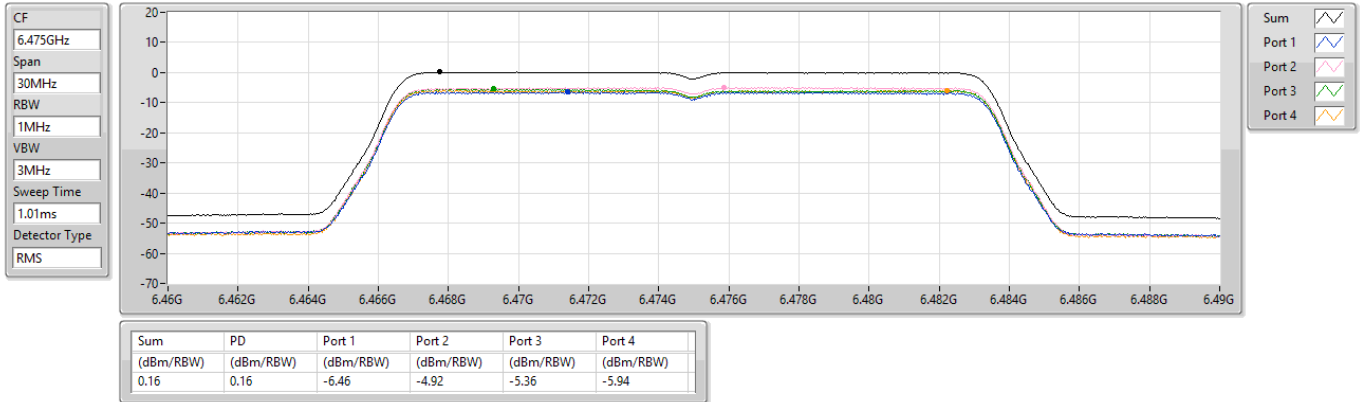

6.425-6.525GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6515MHz

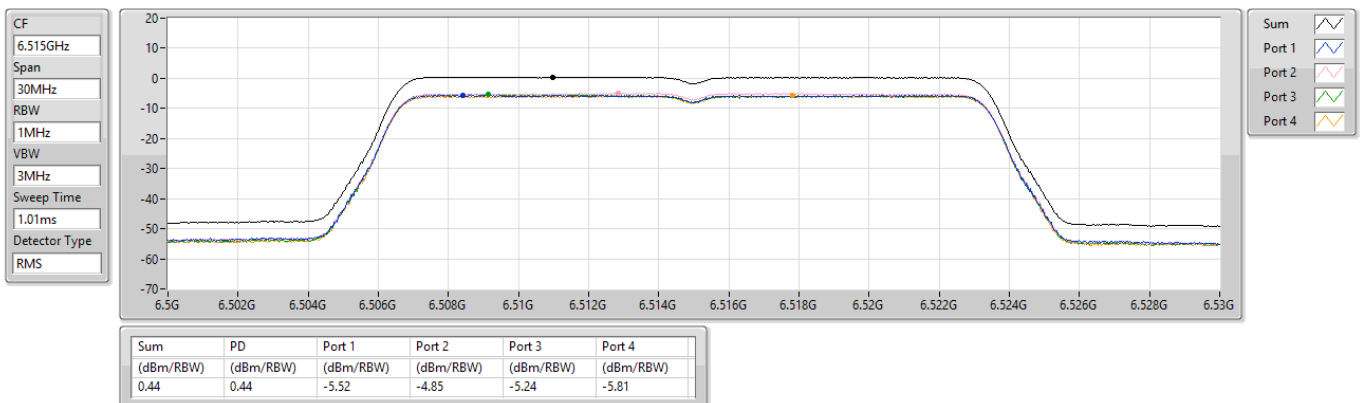


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6535MHz

CF
6.535GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

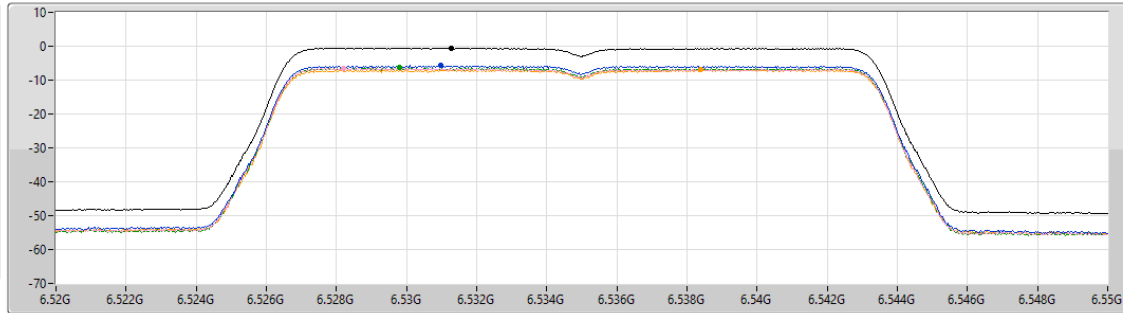

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.57	-0.57	-5.70	-6.44	-6.33	-6.95

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6715MHz

CF
6.715GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

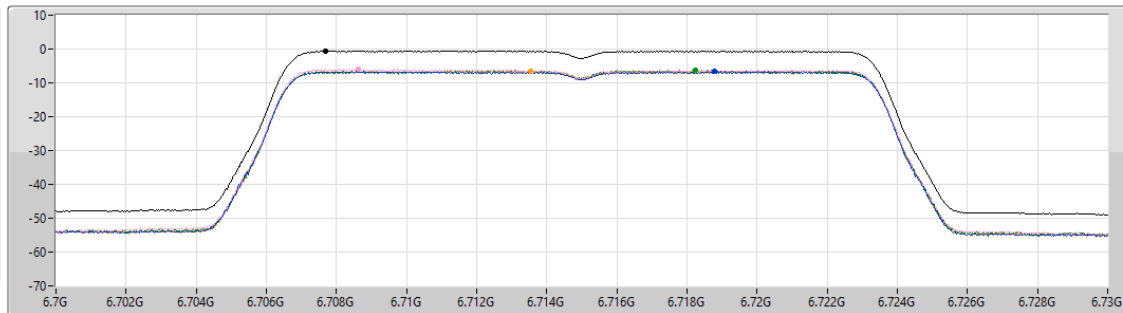

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.58	-0.58	-6.65	-5.93	-6.18	-6.45

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6855MHz

CF
6.855GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

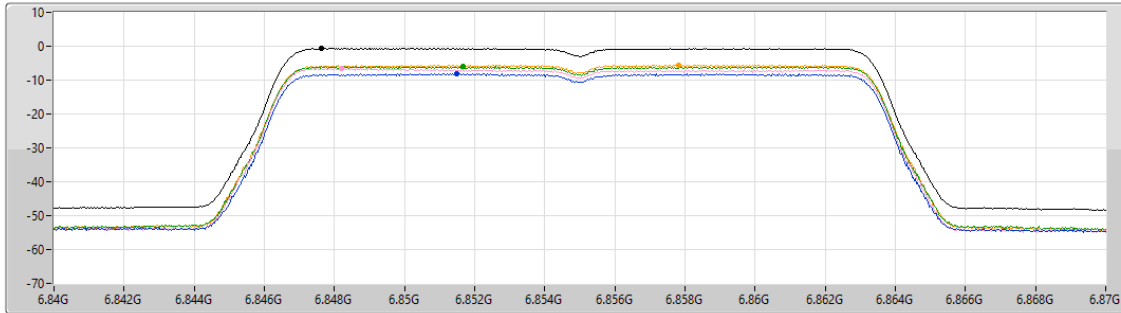

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.60	-0.60	-8.06	-6.41	-5.92	-5.52

6.525-6.875GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

6875MHz Straddle 6.525-6.875GHz

CF
6.875GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

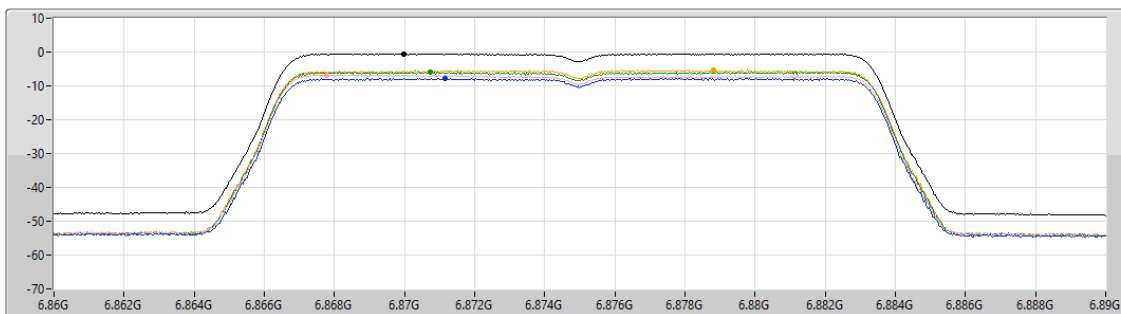


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.55	-0.55	-7.73	-6.73	-5.89	-5.31

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


6895MHz

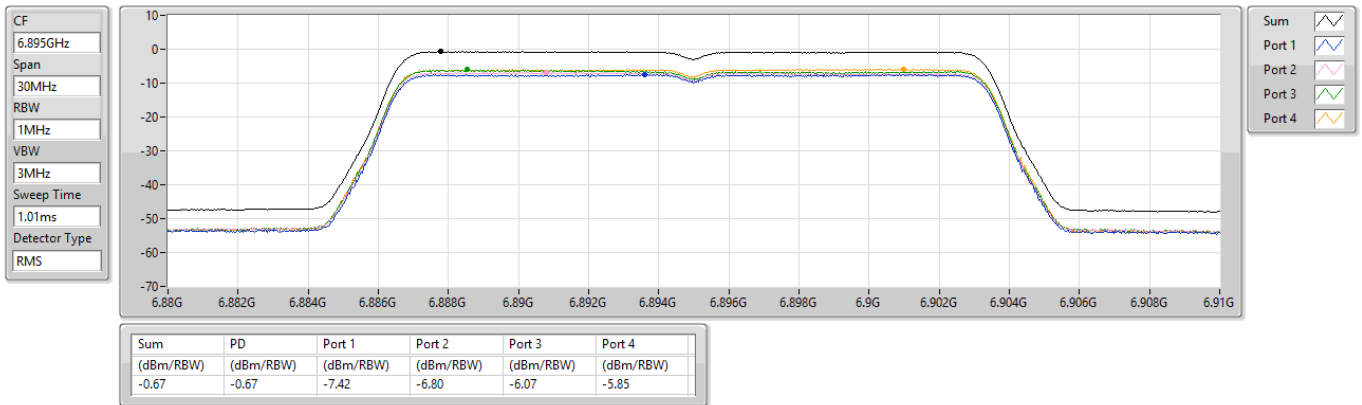

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7015MHz

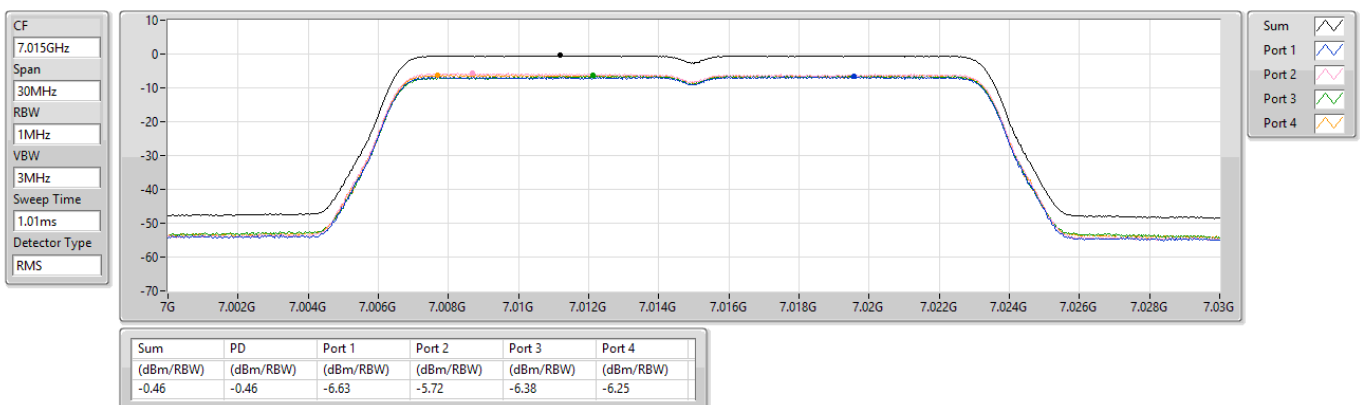

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7095MHz

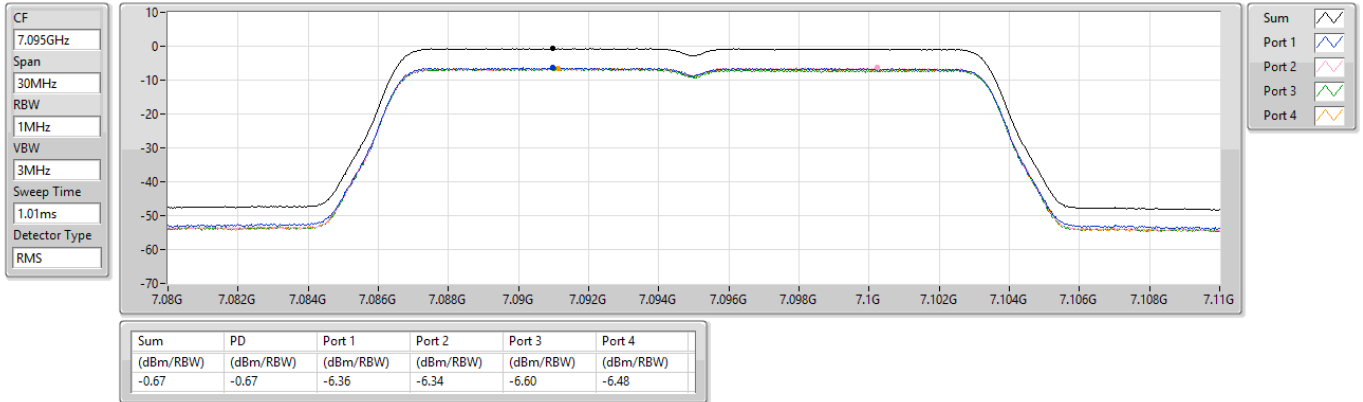

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_4TX

PSD


7115MHz

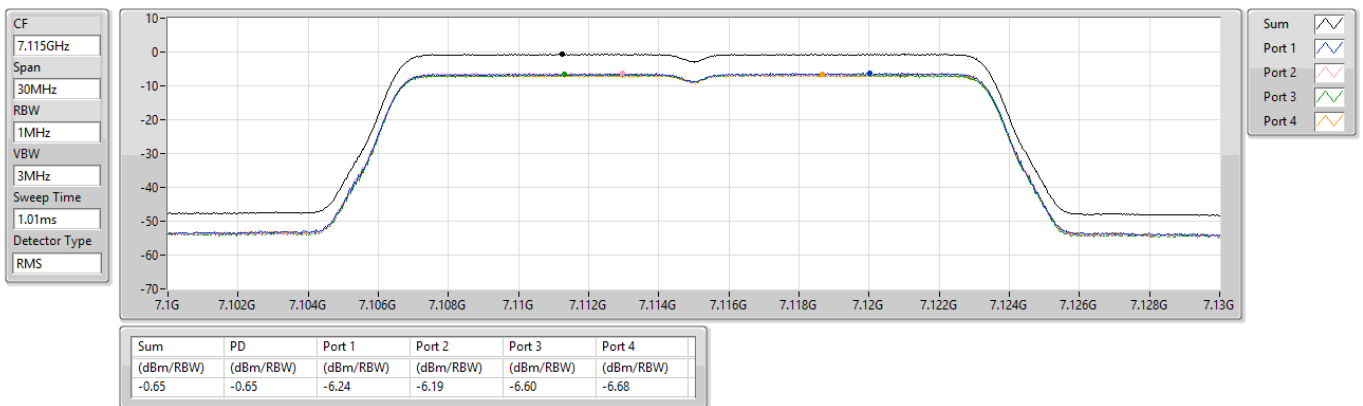

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


5955MHz

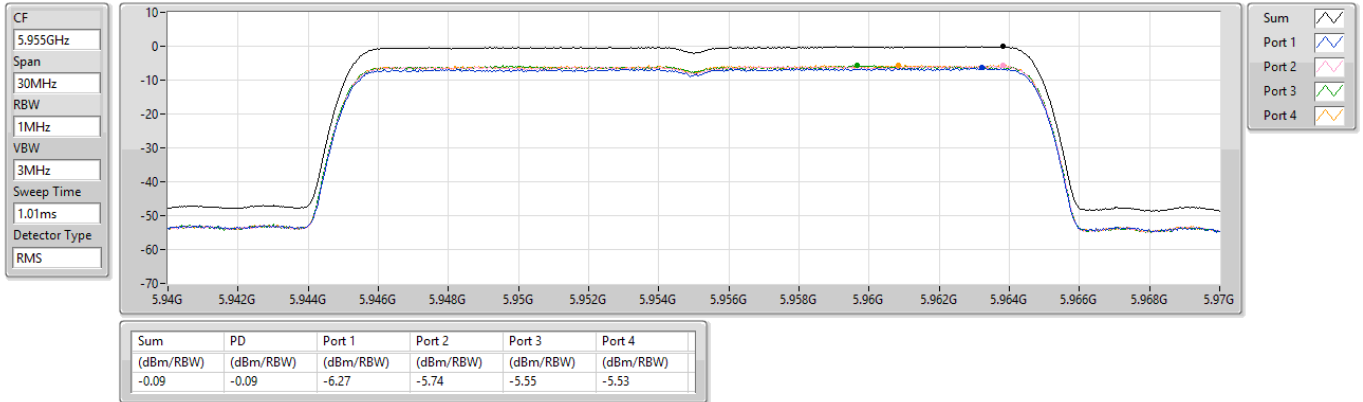

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6175MHz

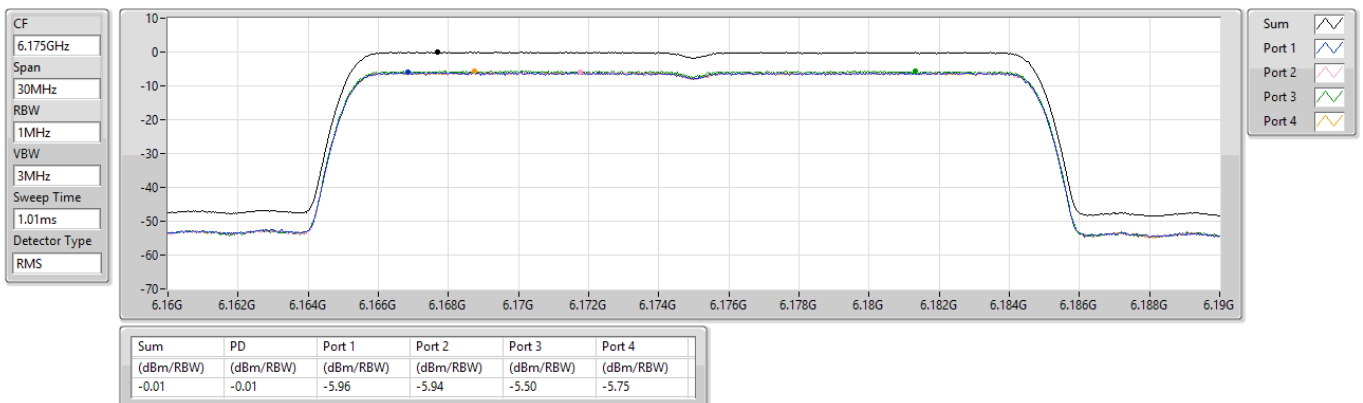

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6415MHz

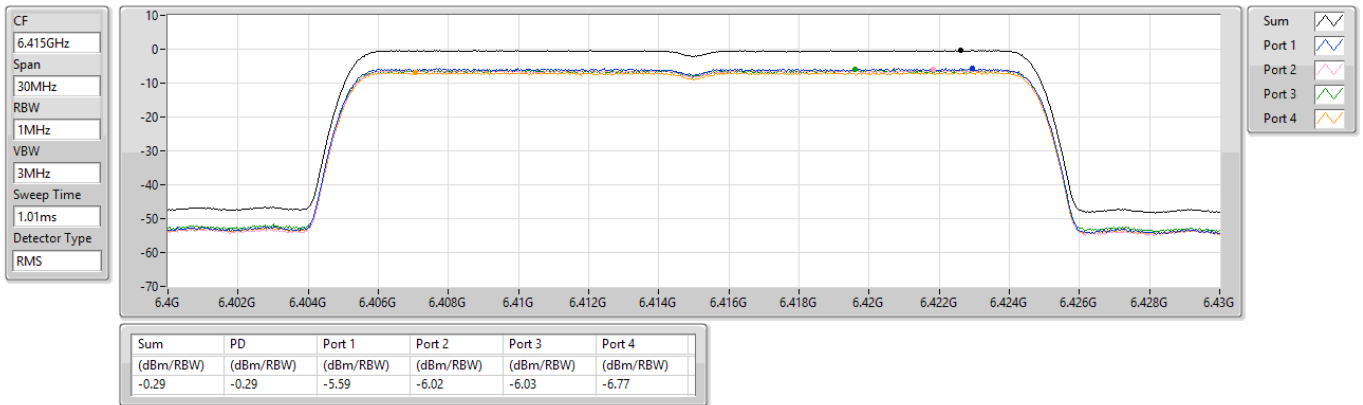

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6435MHz

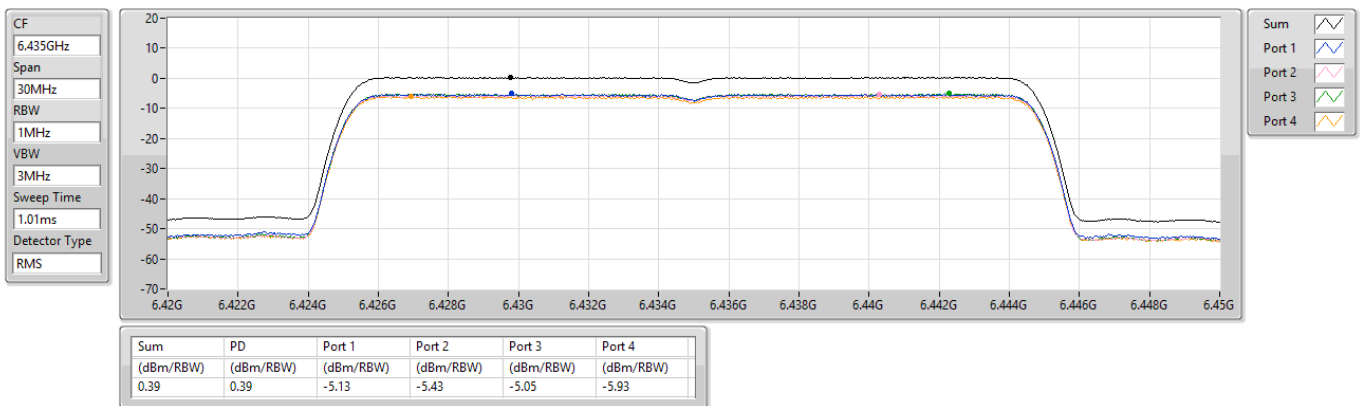

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6475MHz

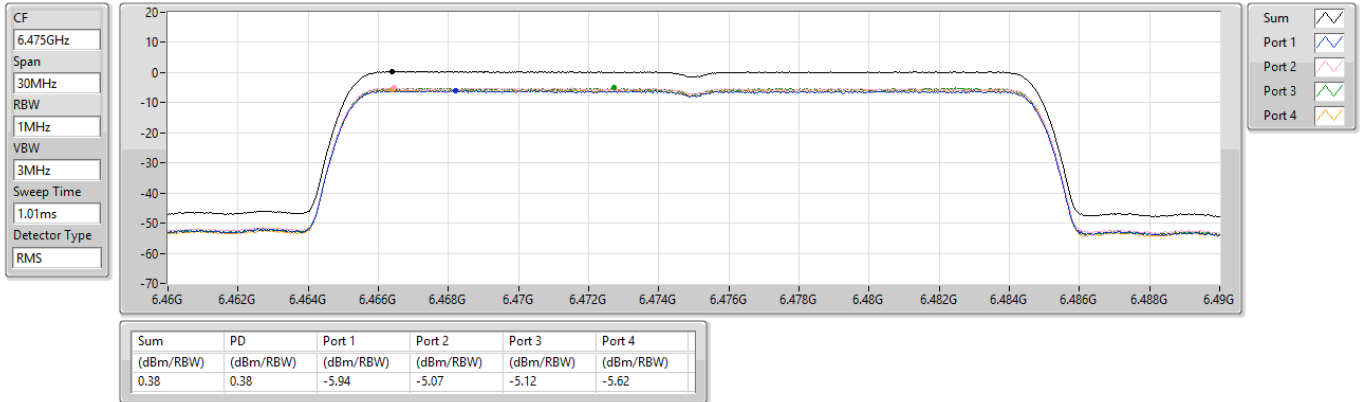

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6515MHz

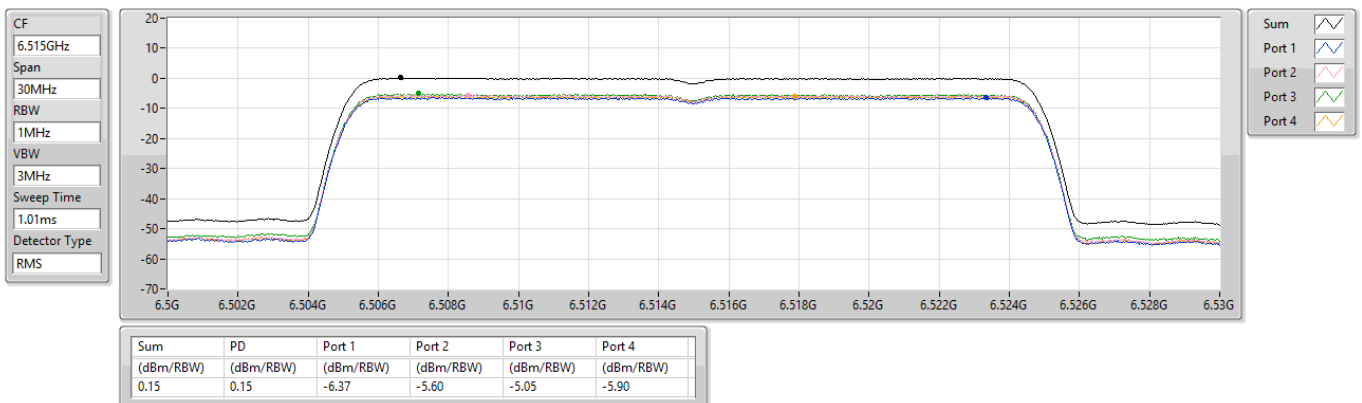


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6535MHz

CF
6.535GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

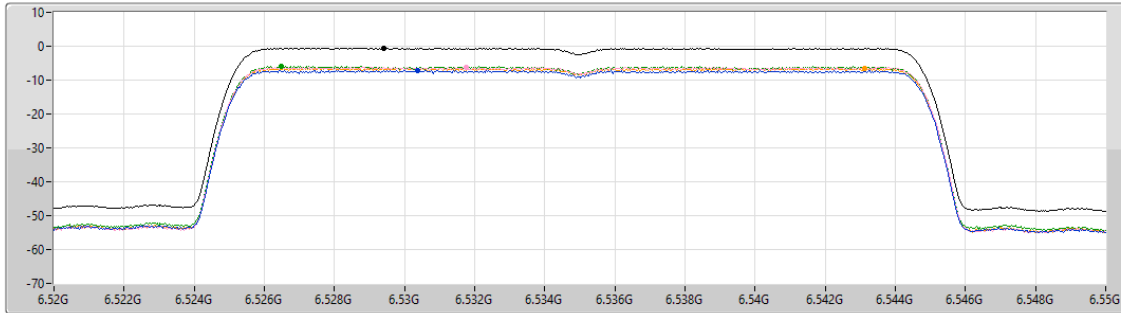

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.56	-0.56	-7.07	-6.17	-5.91	-6.53

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6715MHz

CF
6.715GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

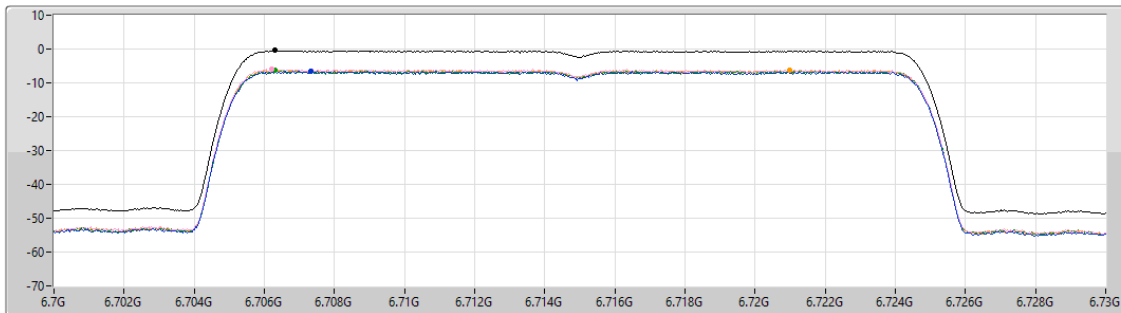


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.45	-0.45	-6.49	-5.97	-6.33	-6.28

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


6855MHz

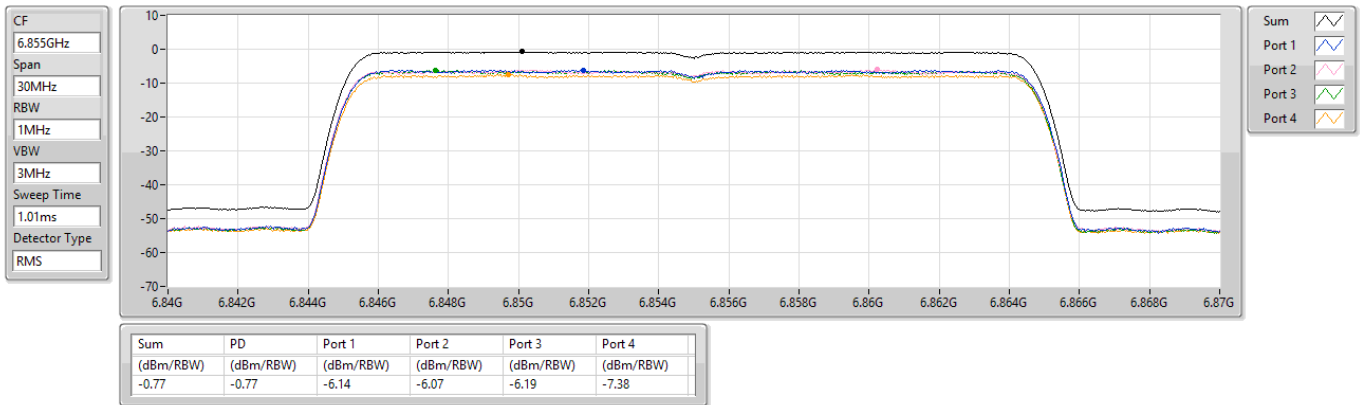

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6875MHz Straddle 6.525-6.875GHz

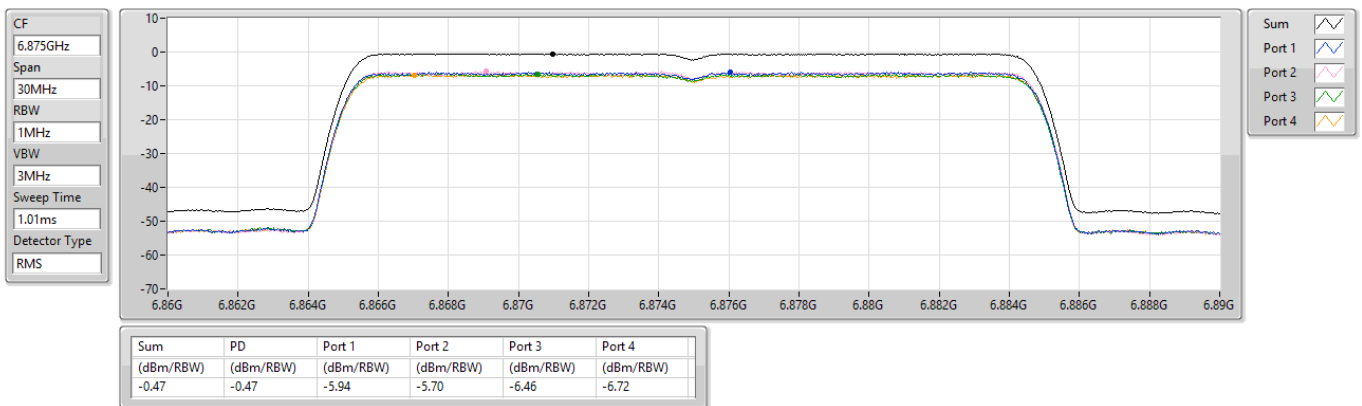


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6895MHz

CF
6.895GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

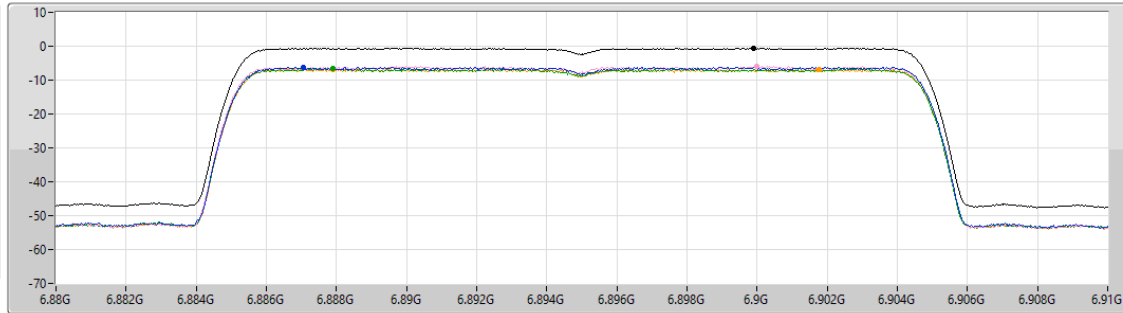

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.53	-0.53	-6.11	-5.88	-6.54	-6.77

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

7015MHz

CF
7.015GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

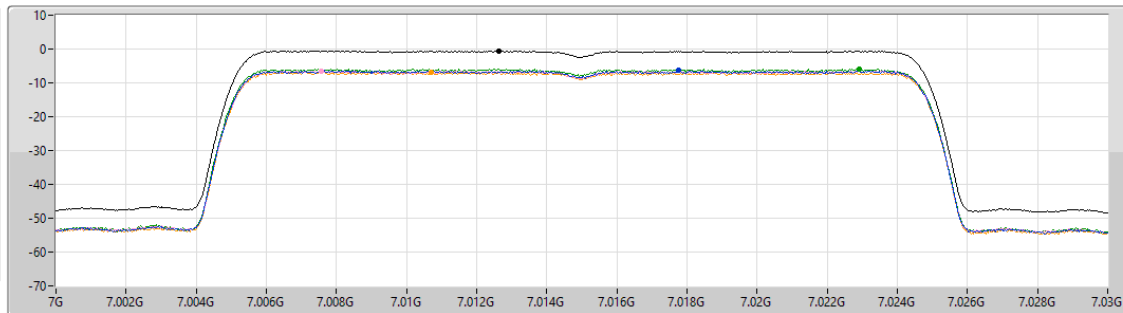


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.57	-0.57	-6.37	-6.43	-5.82	-6.89

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7095MHz

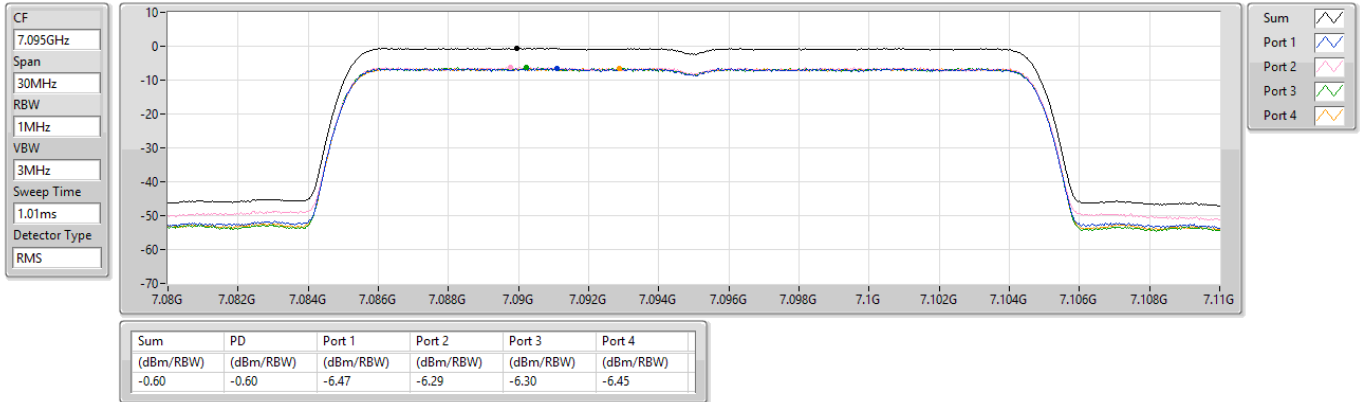

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD


7115MHz

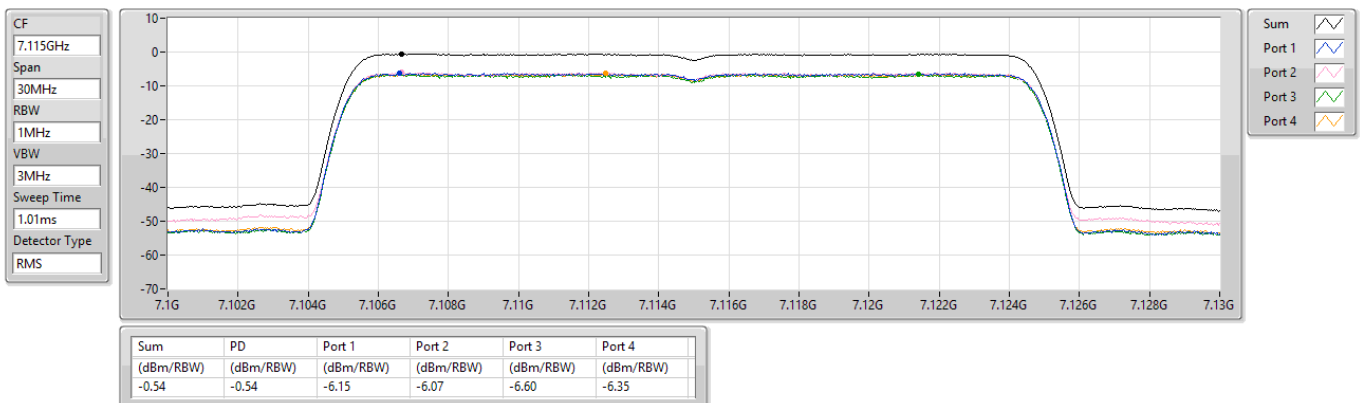

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


5965MHz

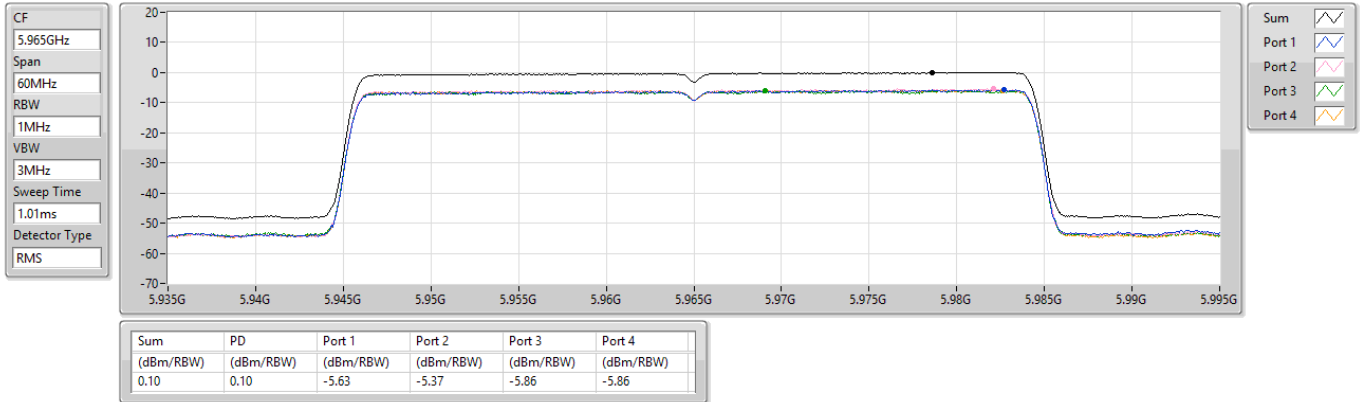

5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6165MHz

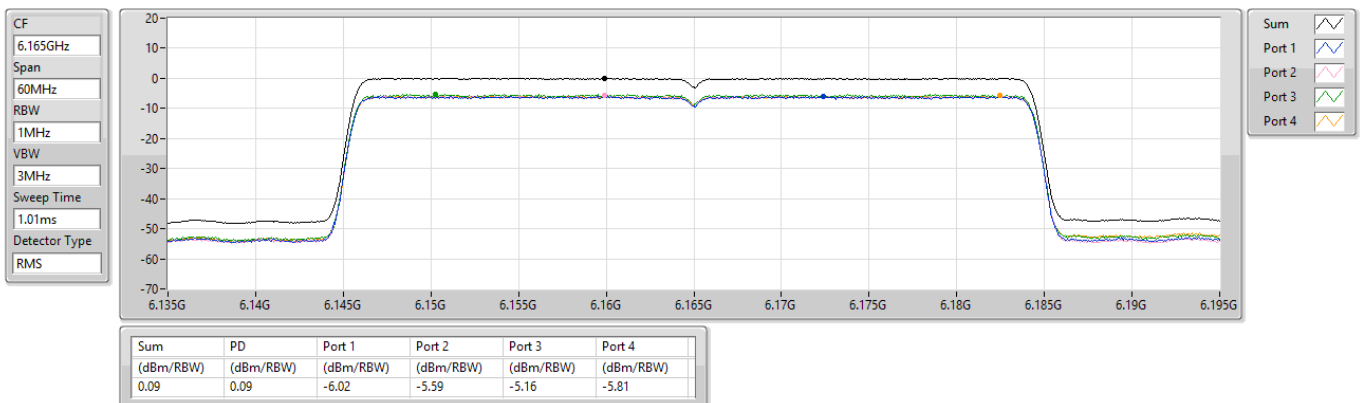


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6405MHz

CF
6.405GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

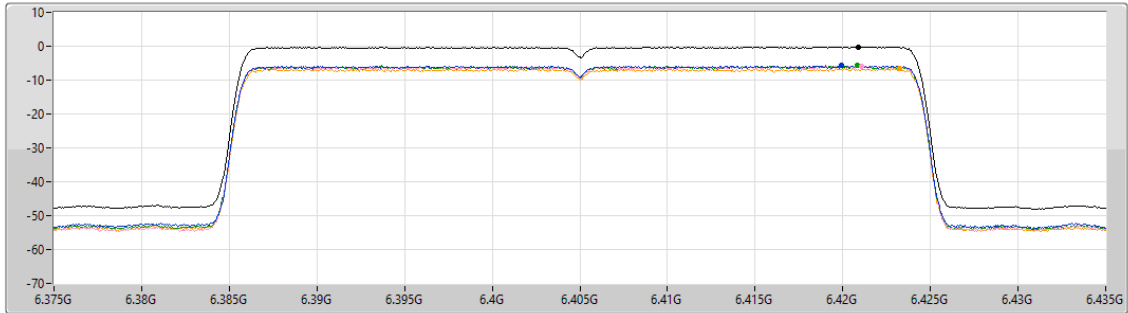


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.19	-0.19	-5.78	-5.80	-5.71	-6.58

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6445MHz

CF
6.445GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

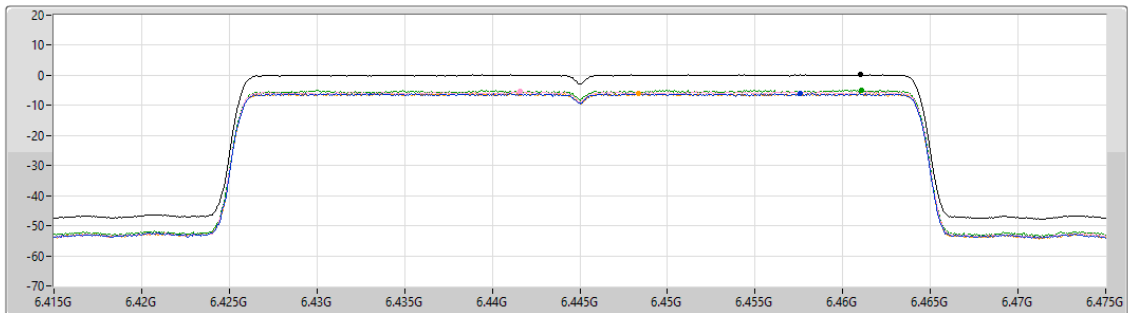


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.23	0.23	-5.96	-5.42	-4.88	-5.99

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6485MHz

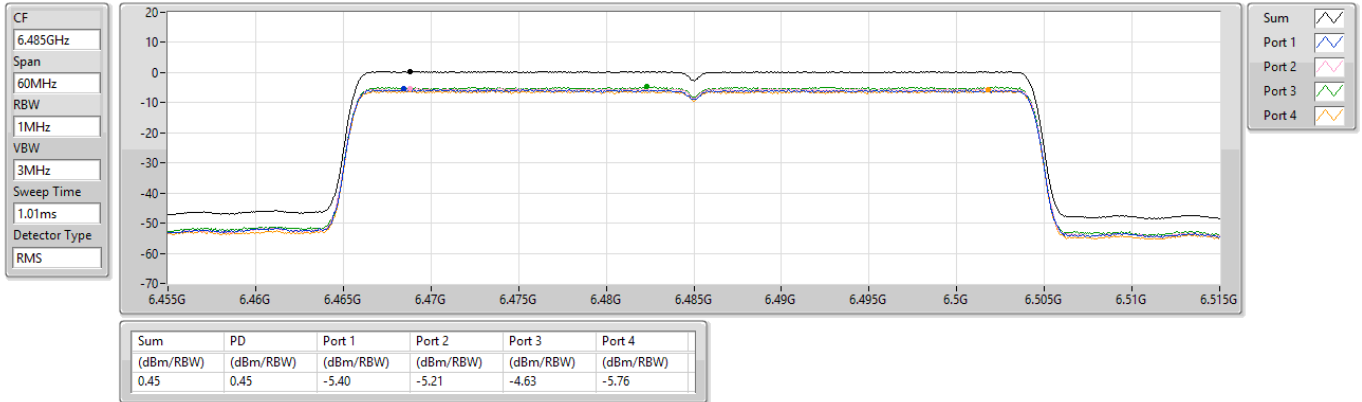

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6525MHz Straddle 6.525-6.875GHz

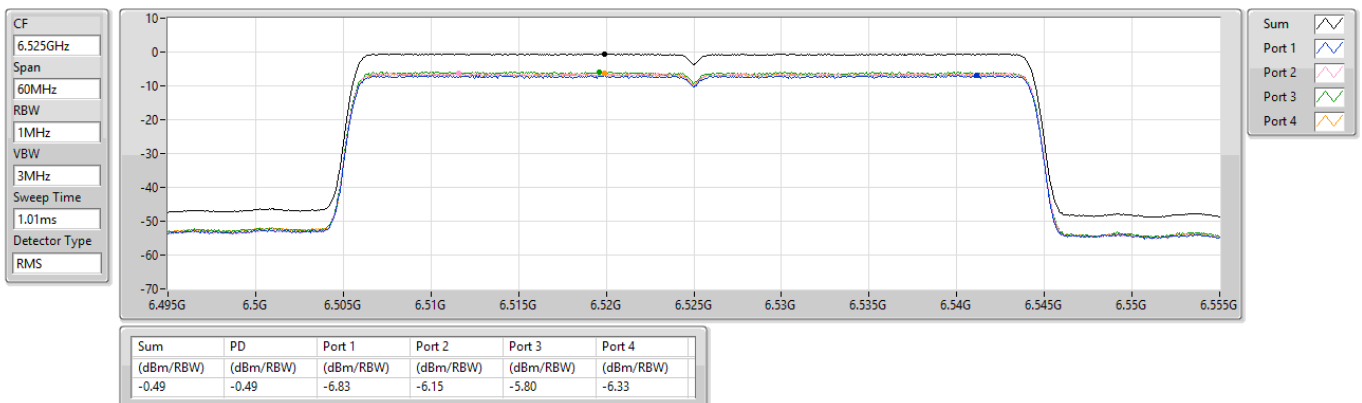

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6565MHz

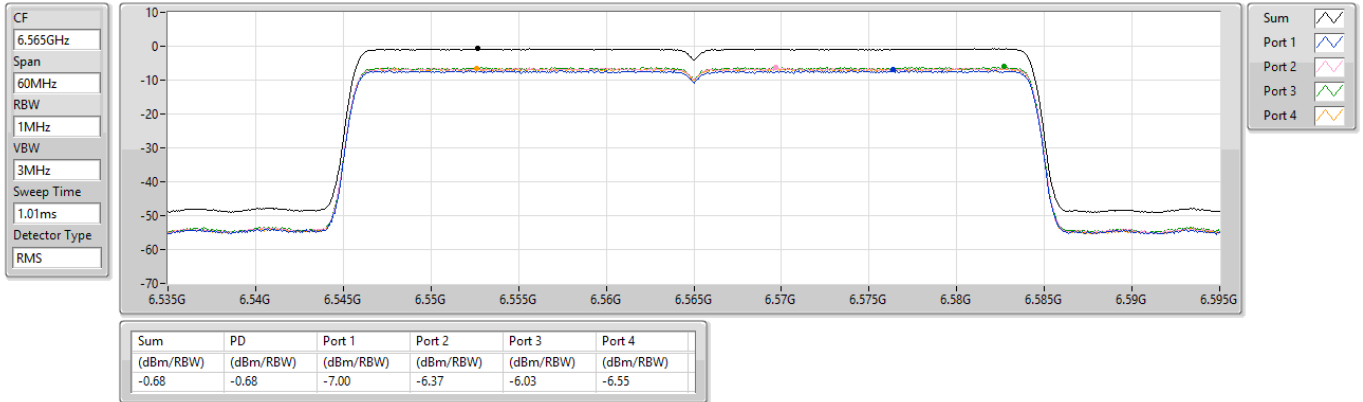

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6725MHz

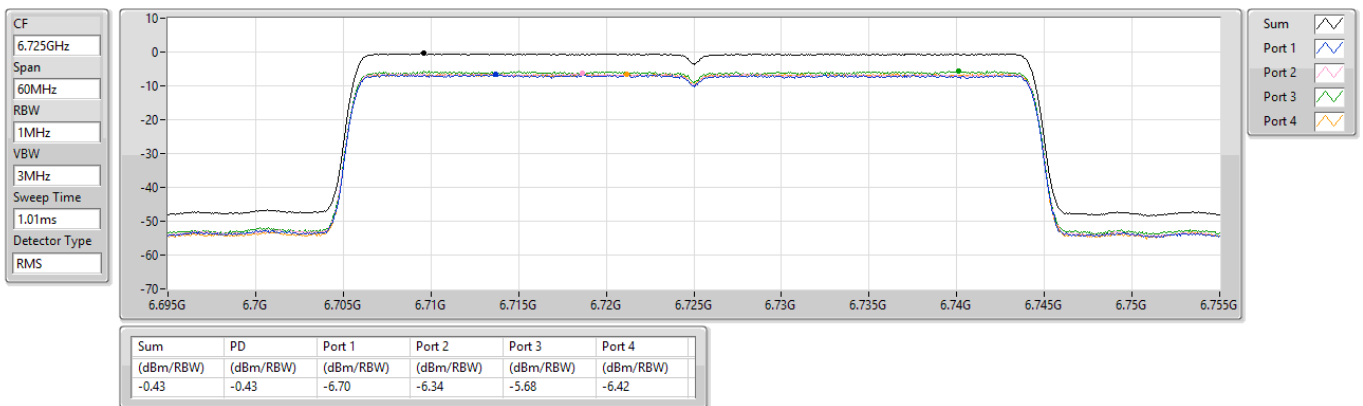

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6845MHz

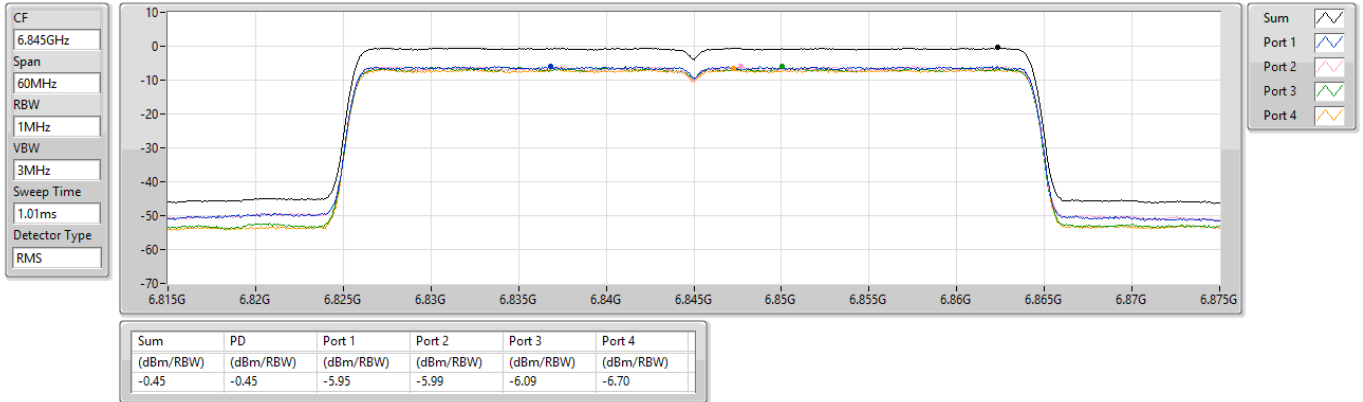

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6885MHz Straddle 6.525-6.875GHz

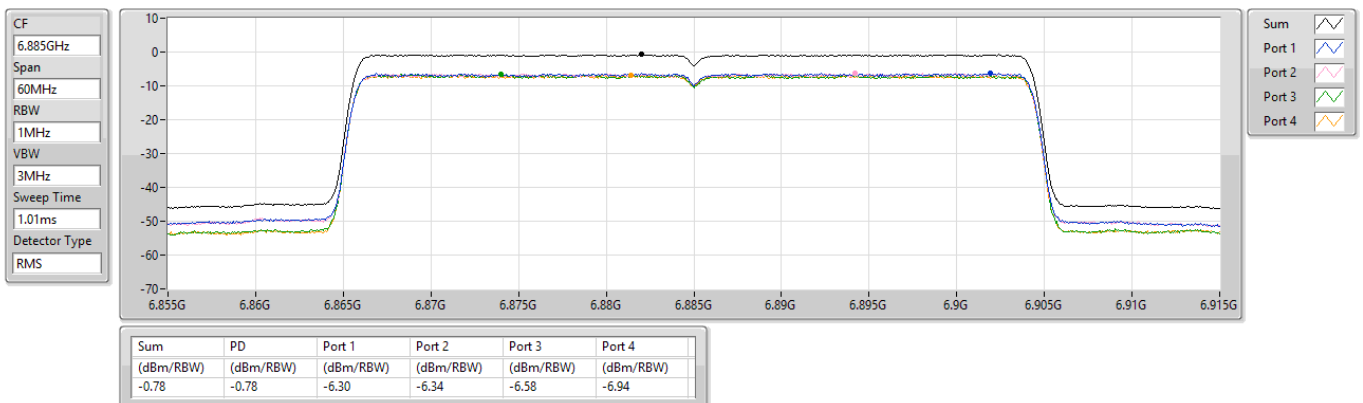

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


6925MHz

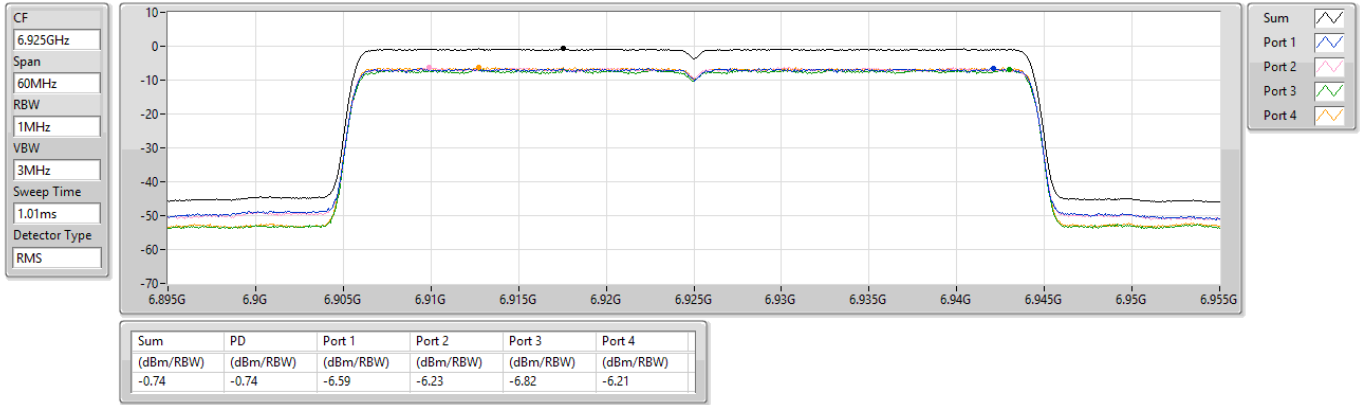

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7005MHz

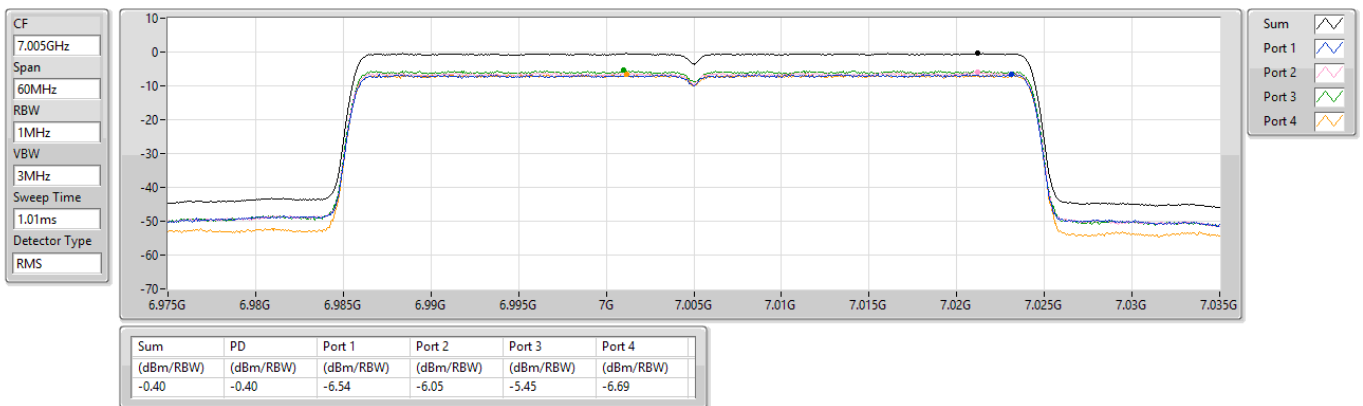

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD


7085MHz

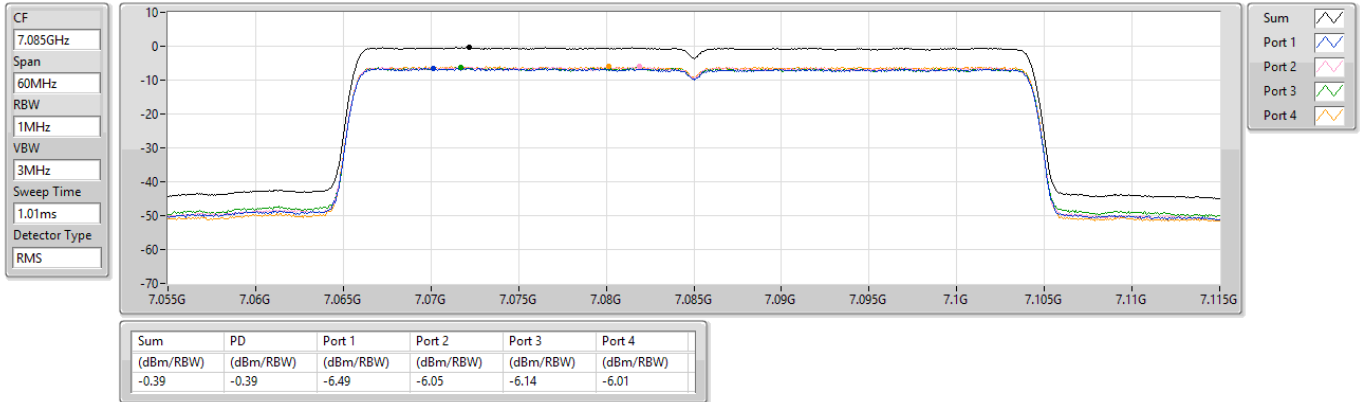

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5985MHz

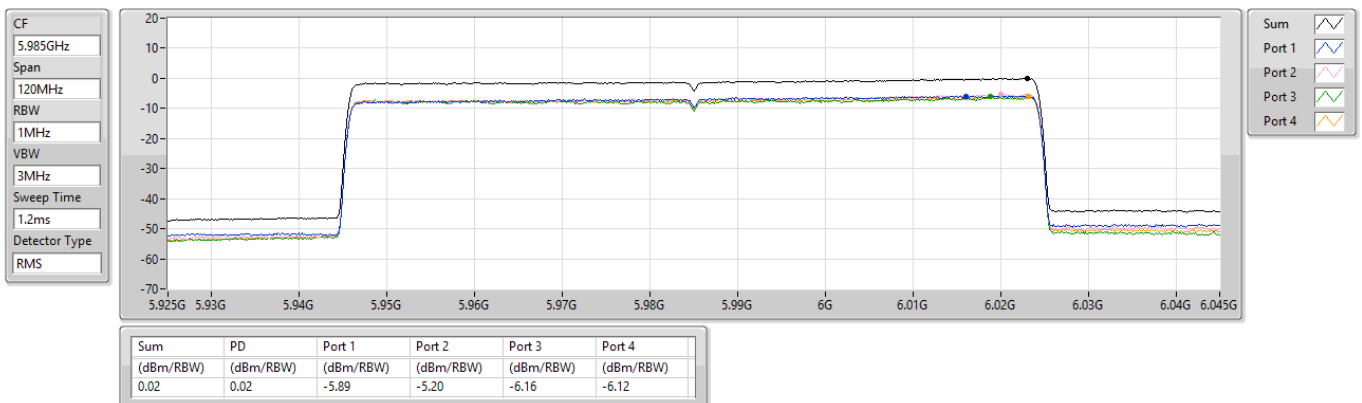


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6145MHz

CF
6.145GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

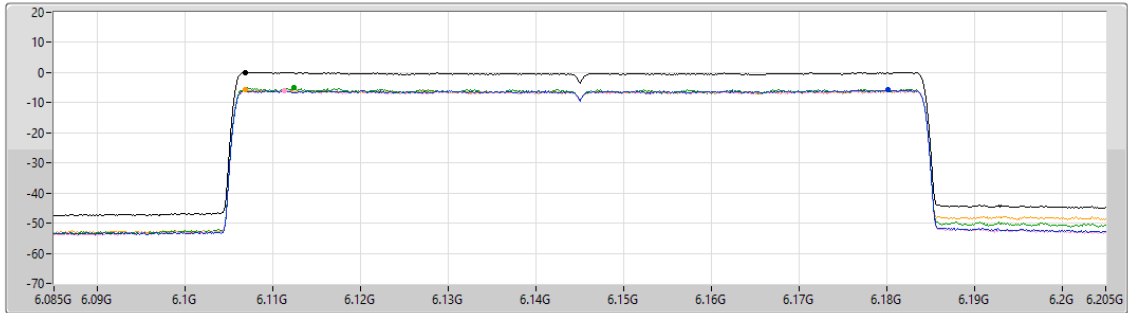

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.11	0.11	-5.81	-5.95	-5.10	-5.73

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6385MHz

CF
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

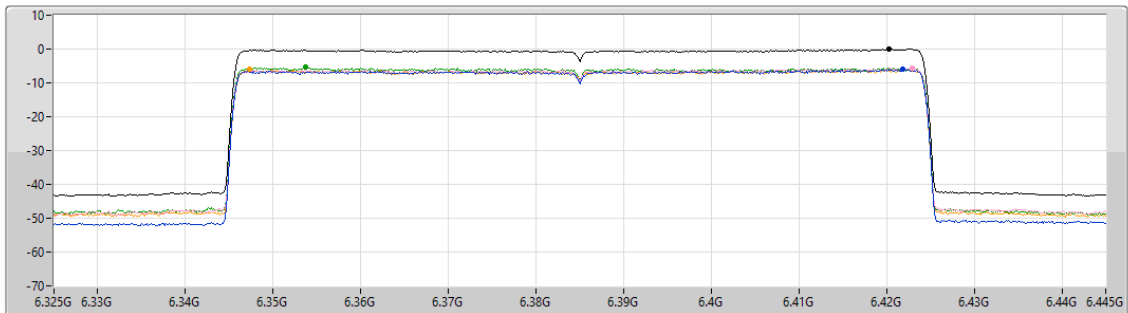

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.06	-0.06	-6.03	-5.60	-5.32	-6.02

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6465MHz

CF
6.465GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

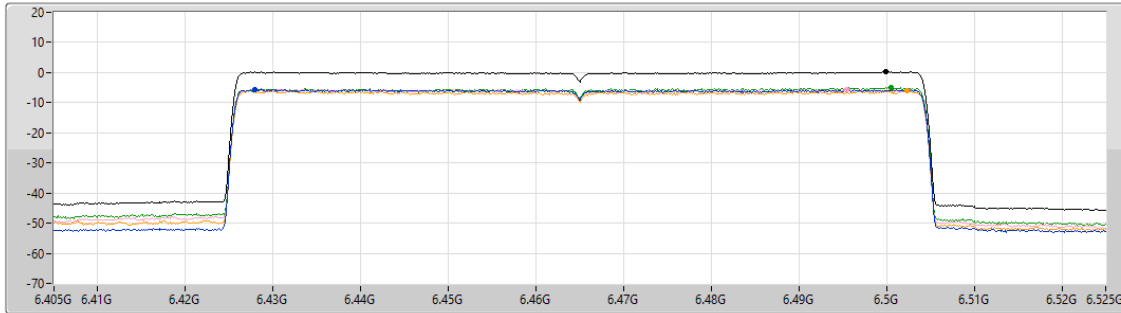

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
0.24	0.24	-5.58	-5.55	-4.93	-6.04

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6545MHz Straddle 6.525-6.875GHz

CF
6.545GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

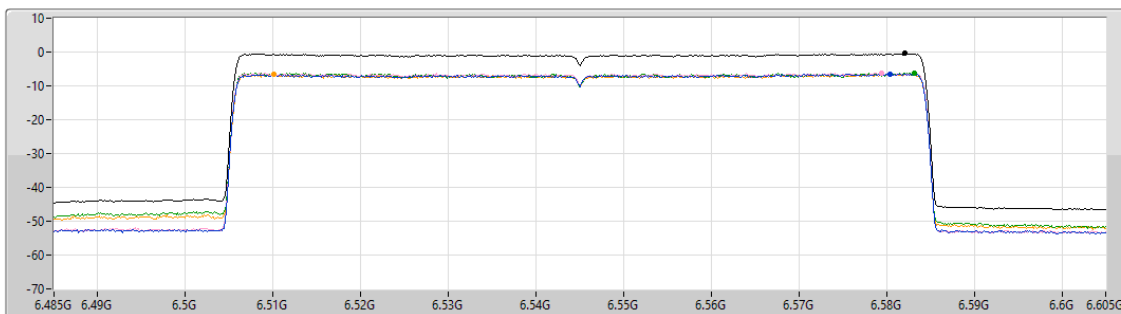


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.46	-0.46	-6.42	-6.18	-6.19	-6.51

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD


6625MHz

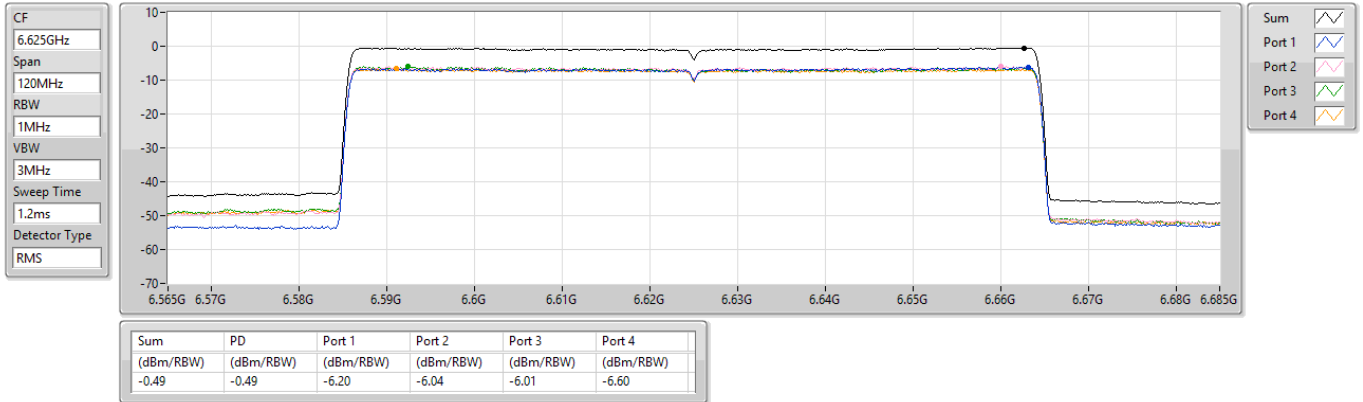

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6705MHz

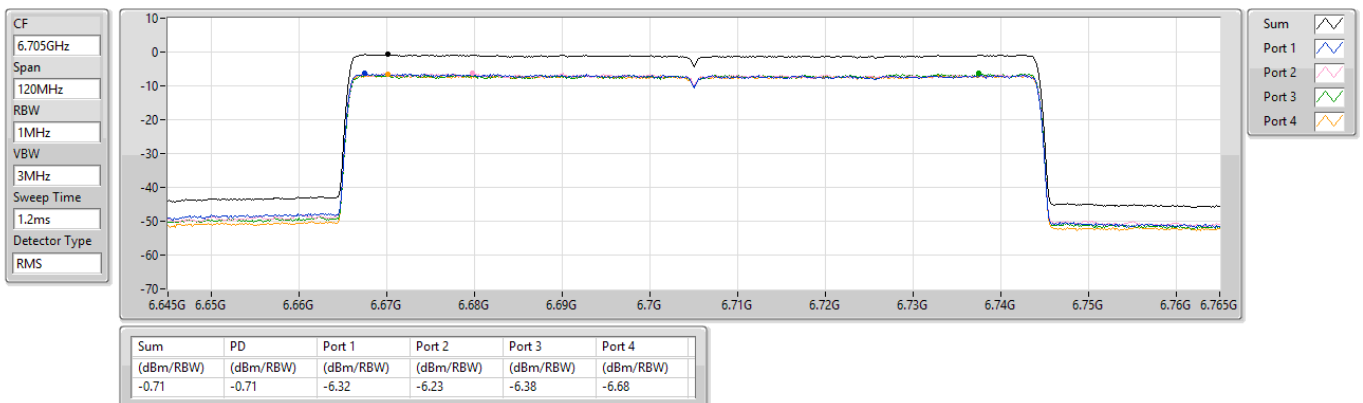


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6785MHz

CF
6.785GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

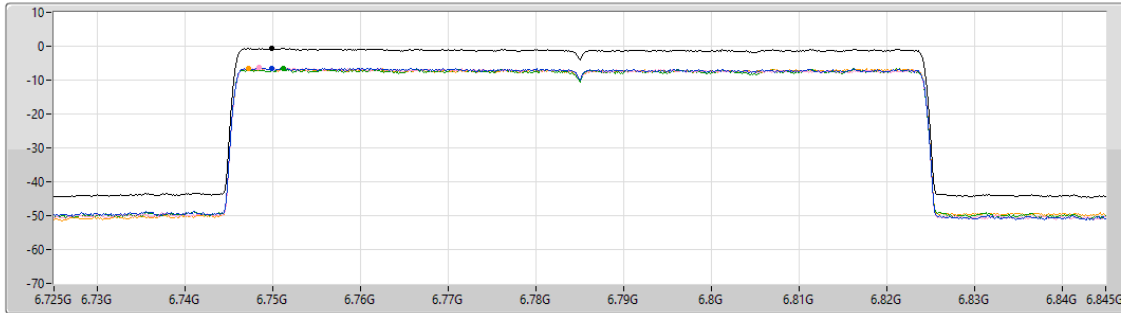

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.71	-0.71	-6.42	-6.18	-6.52	-6.56

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6865MHz Straddle 6.525-6.875GHz

CF
6.865GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

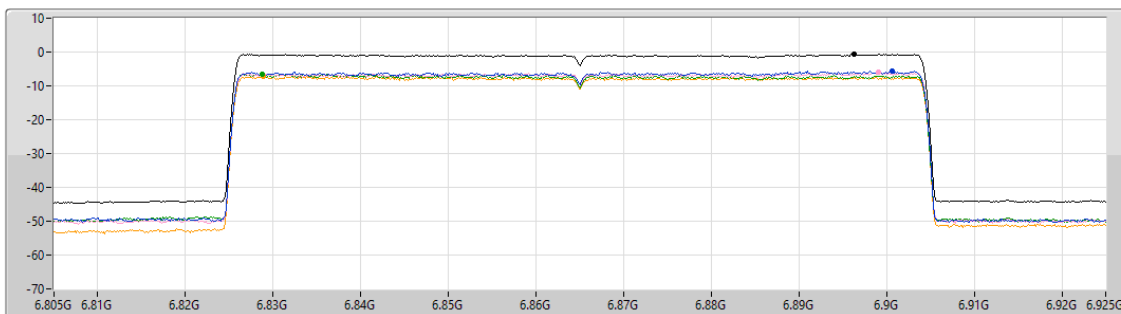

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.65	-0.65	-5.60	-5.86	-6.43	-7.25

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6945MHz

CF
6.945GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

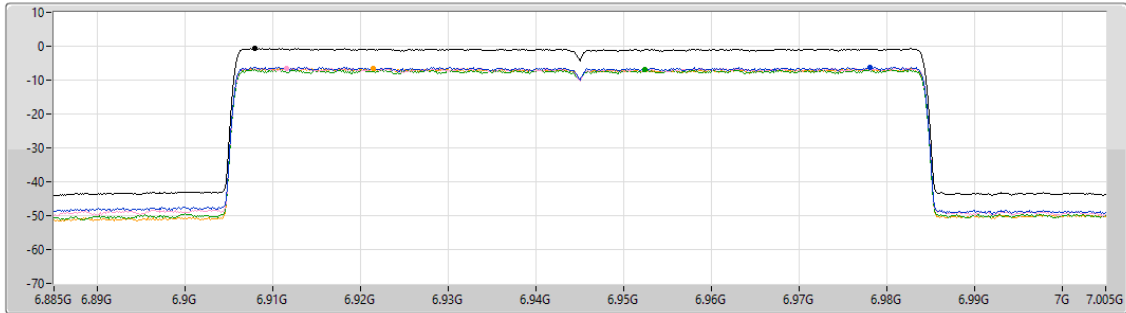

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.67	-0.67	-6.13	-6.45	-6.90	-6.51

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

7025MHz

CF
7.025GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

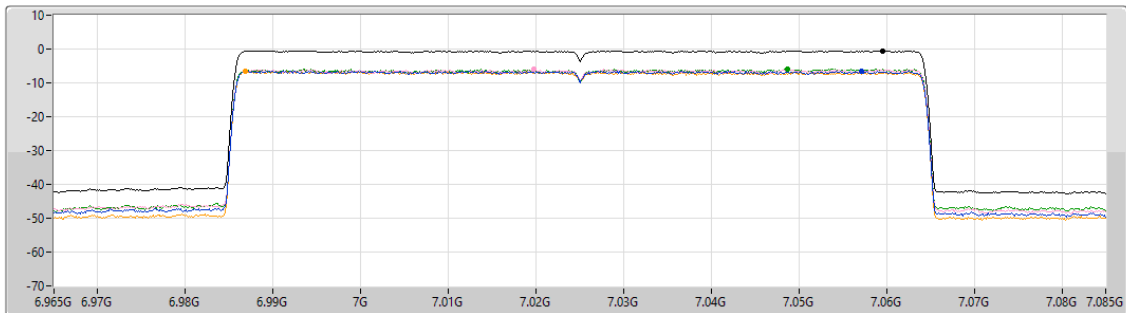

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.48	-0.48	-6.47	-6.01	-5.82	-6.48

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6025MHz

CF
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

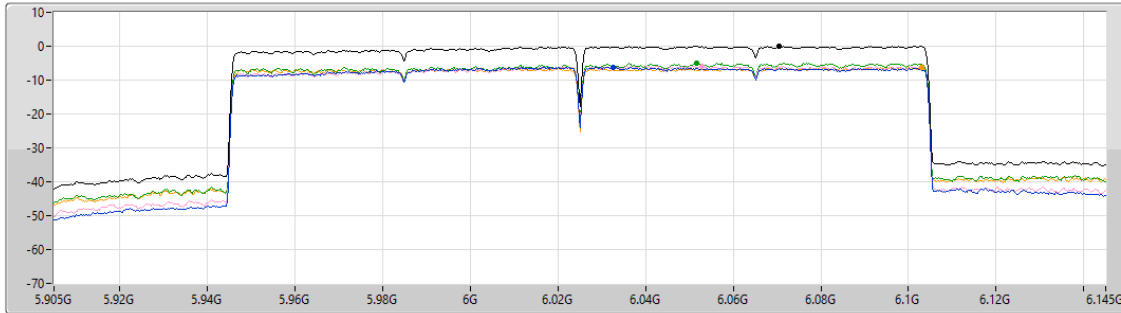

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)
-0.00	-0.00	-6.25	-5.79	-4.95	-6.19

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6185MHz

CF
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

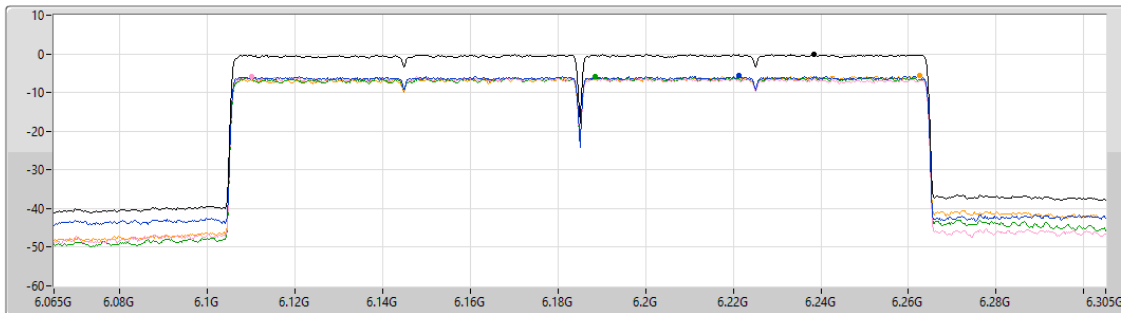

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)	(dBm/RTW)
-0.14	-0.14	-5.66	-5.91	-5.93	-5.55

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6345MHz

CF
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

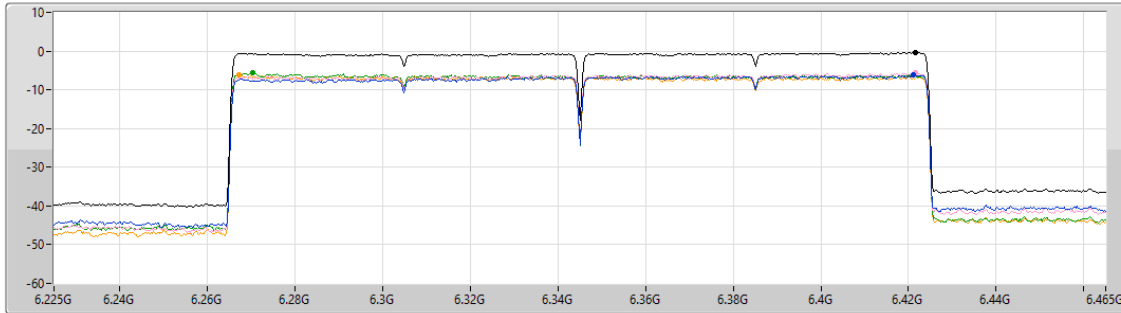

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.29	-0.29	-6.21	-5.71	-5.63	-6.23

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz Straddle 6.525-6.875GHz

CF
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

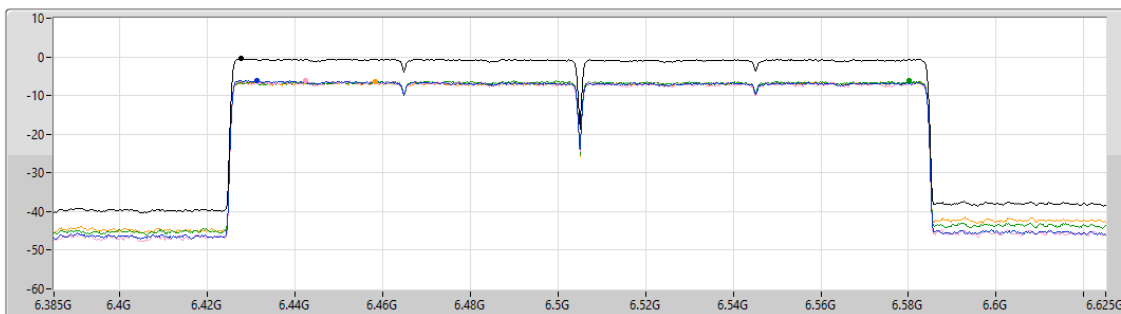

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.48	-0.48	-6.11	-6.21	-6.05	-6.34

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6665MHz

CF
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

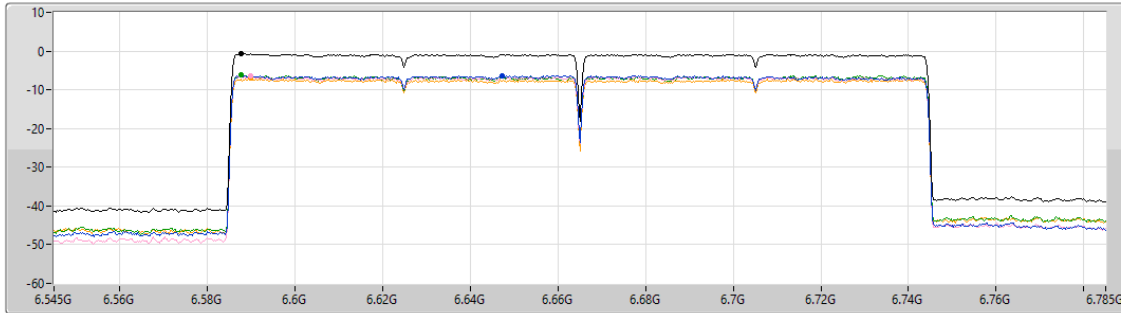

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.62	-0.62	-6.28	-6.54	-6.18	-7.06

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.525-6.875GHz

CF
6.825GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

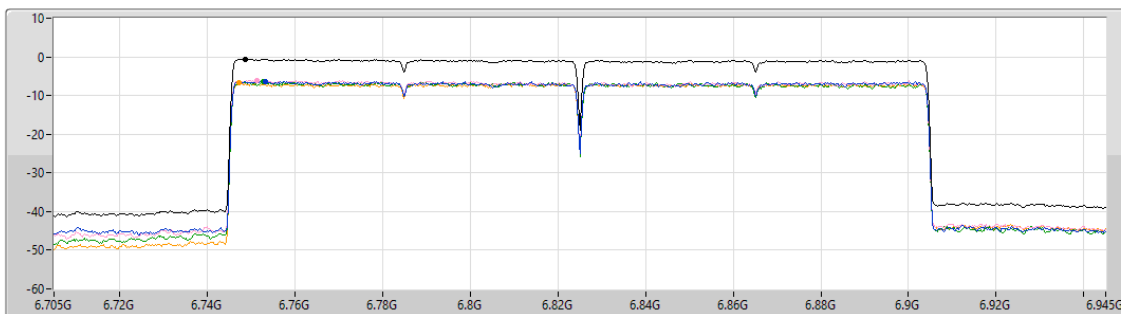

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.56	-0.56	-6.31	-6.17	-6.51	-6.81

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

CF
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

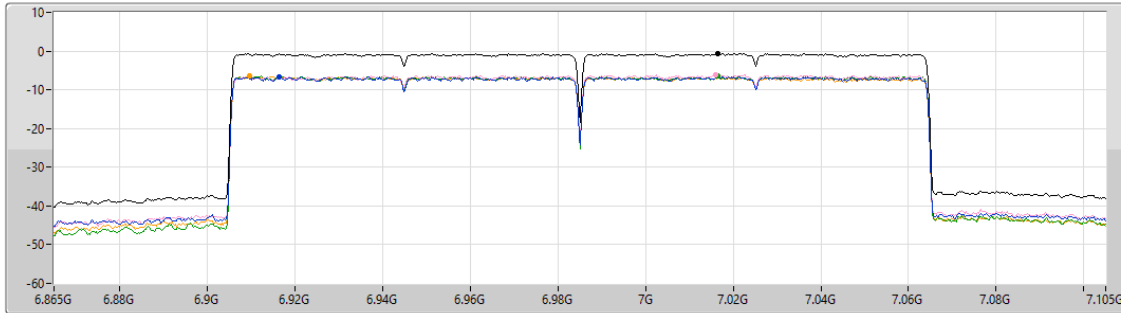

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.55	-0.55	-6.59	-6.14	-6.40	-6.33

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

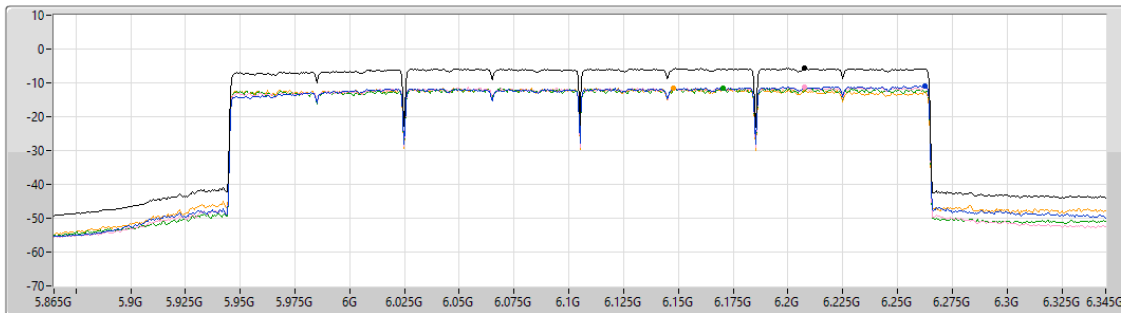

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.69	-5.69	-10.86	-11.30	-11.56	-11.61

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6265MHz

CF
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

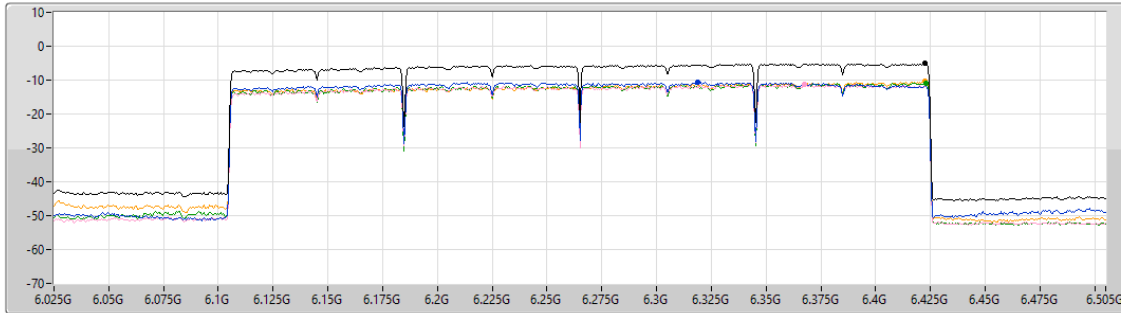

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.15	-5.15	-10.71	-11.24	-10.84	-10.42

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6425MHz Straddle 6.525-6.875GHz

CF
6.425GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

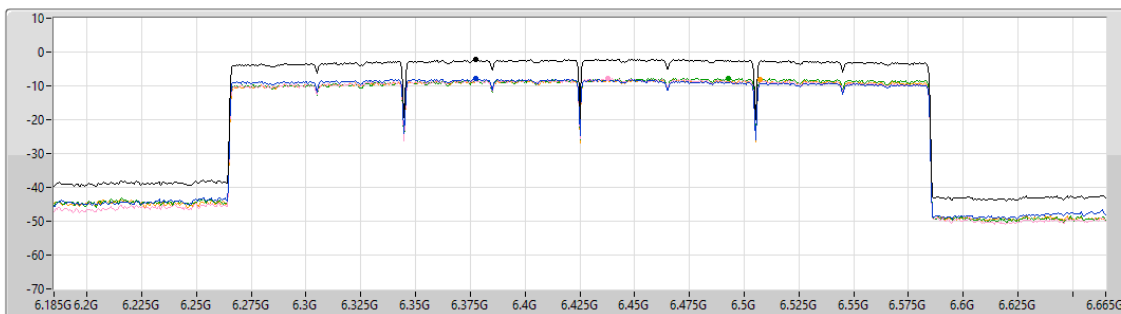


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.13	-2.13	-7.84	-7.87	-7.72	-8.22

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.525-6.875GHz

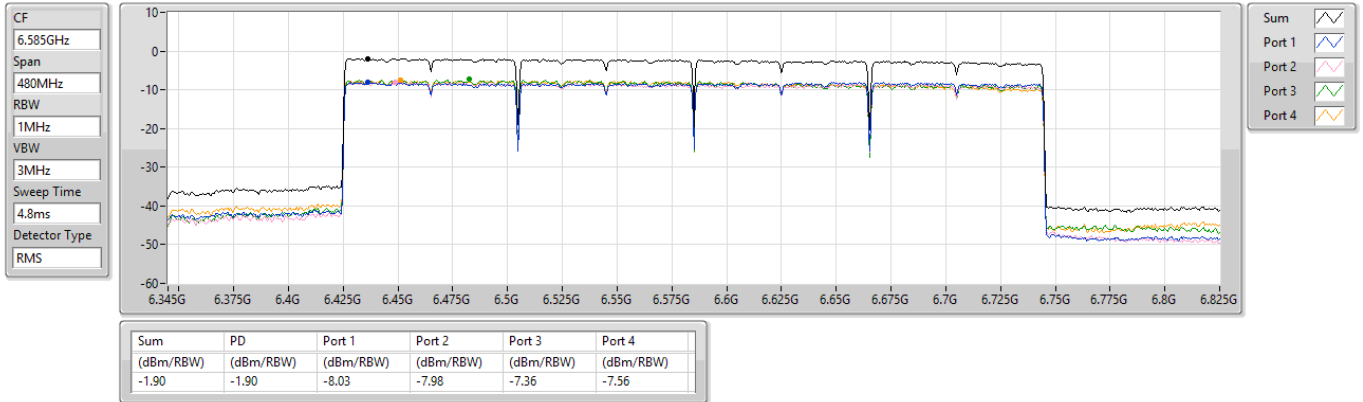

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD


6745MHz Straddle 6.525-6.875GHz

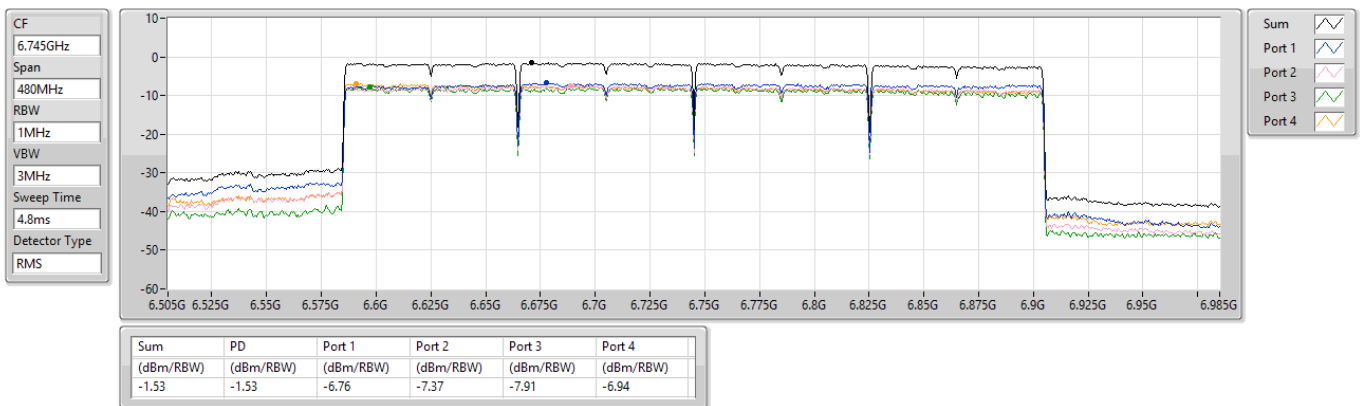

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6905MHz Straddle 6.525-6.875GHz

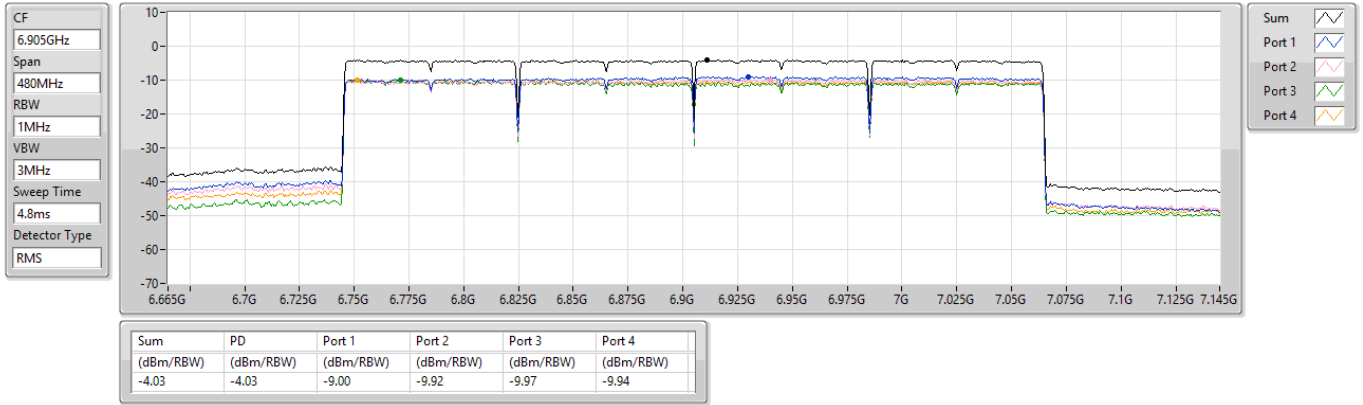

Beamforming mode
Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.05	4.74
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.02	4.77
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.06	4.73
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.13	4.66
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-5.46	-0.67
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.20	4.56
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.01	4.35
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.28	4.64
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.70	4.62
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.60	4.72
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.67	4.65
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.72	4.60
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-2.41	2.91
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.73	4.54
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.50	4.77
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.86	4.41
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.98	4.29

RBW = 1MHz



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.79	-6.11	-6.09	-5.95	-5.78	-0.34	Inf	4.45	5.00
6175MHz	Pass	4.79	-5.66	-6.54	-5.66	-5.27	-0.05	Inf	4.74	5.00
6415MHz	Pass	4.79	-5.94	-5.83	-6.48	-7.04	-0.51	Inf	4.28	5.00
6435MHz	Pass	4.36	-5.48	-5.58	-5.58	-5.85	0.20	Inf	4.56	5.00
6475MHz	Pass	4.36	-5.80	-5.62	-5.59	-6.42	0.02	Inf	4.38	5.00
6515MHz	Pass	4.36	-6.42	-5.92	-5.59	-6.36	-0.16	Inf	4.20	5.00
6535MHz	Pass	5.32	-6.72	-6.54	-5.95	-6.70	-0.70	Inf	4.62	5.00
6715MHz	Pass	5.32	-6.72	-6.39	-6.36	-6.68	-0.76	Inf	4.56	5.00
6855MHz	Pass	5.32	-6.45	-6.42	-6.71	-6.88	-0.89	Inf	4.43	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.12	-6.34	-6.40	-6.62	-0.71	Inf	4.61	5.00
6895MHz	Pass	5.27	-6.55	-6.33	-6.93	-7.05	-0.90	Inf	4.37	5.00
7015MHz	Pass	5.27	-6.13	-7.10	-6.97	-6.95	-0.93	Inf	4.34	5.00
7095MHz	Pass	5.27	-6.56	-6.36	-6.42	-6.99	-0.75	Inf	4.52	5.00
7115MHz	Pass	5.27	-6.36	-6.47	-6.38	-7.06	-0.73	Inf	4.54	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	4.79	-5.55	-6.02	-5.81	-5.89	-0.02	Inf	4.77	5.00
6165MHz	Pass	4.79	-5.94	-6.44	-5.93	-5.50	-0.17	Inf	4.62	5.00
6405MHz	Pass	4.79	-6.16	-5.80	-6.24	-6.95	-0.44	Inf	4.35	5.00
6445MHz	Pass	4.36	-5.48	-5.52	-5.83	-6.46	-0.01	Inf	4.35	5.00
6485MHz	Pass	4.36	-5.93	-5.53	-5.64	-6.41	-0.08	Inf	4.28	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.89	-6.64	-6.06	-6.84	-0.81	Inf	4.51	5.00
6565MHz	Pass	5.32	-6.60	-6.32	-5.86	-6.64	-0.60	Inf	4.72	5.00
6725MHz	Pass	5.32	-6.74	-6.75	-6.37	-6.54	-0.90	Inf	4.42	5.00
6845MHz	Pass	5.32	-6.29	-6.34	-6.39	-6.31	-0.61	Inf	4.71	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.38	-6.69	-6.67	-6.52	-0.91	Inf	4.41	5.00
6925MHz	Pass	5.27	-6.33	-6.44	-6.75	-6.70	-0.92	Inf	4.35	5.00
7005MHz	Pass	5.27	-5.50	-6.34	-7.08	-6.45	-0.50	Inf	4.77	5.00
7085MHz	Pass	5.27	-6.12	-5.95	-6.30	-6.69	-0.51	Inf	4.76	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	4.79	-5.71	-5.84	-6.31	-6.03	-0.06	Inf	4.73	5.00
6145MHz	Pass	4.79	-5.24	-6.07	-5.37	-5.63	-0.14	Inf	4.65	5.00
6385MHz	Pass	4.79	-6.27	-5.64	-6.06	-6.84	-0.41	Inf	4.38	5.00
6465MHz	Pass	4.36	-5.34	-5.52	-5.31	-5.92	0.28	Inf	4.64	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.81	-6.59	-5.99	-6.69	-0.68	Inf	4.64	5.00
6625MHz	Pass	5.32	-6.30	-6.59	-6.01	-6.42	-0.67	Inf	4.65	5.00
6705MHz	Pass	5.32	-6.71	-6.53	-6.62	-6.97	-0.88	Inf	4.44	5.00
6785MHz	Pass	5.32	-6.59	-6.71	-6.91	-6.59	-1.03	Inf	4.29	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.47	-6.42	-6.93	-6.67	-0.97	Inf	4.35	5.00
6945MHz	Pass	5.27	-6.39	-6.33	-6.87	-6.59	-0.86	Inf	4.41	5.00
7025MHz	Pass	5.27	-6.08	-6.79	-7.17	-6.67	-0.88	Inf	4.39	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6025MHz	Pass	4.79	-5.93	-5.99	-5.41	-6.44	-0.13	Inf	4.66	5.00
6185MHz	Pass	4.79	-5.94	-6.78	-5.66	-5.73	-0.24	Inf	4.55	5.00
6345MHz	Pass	4.79	-6.09	-6.25	-5.92	-6.80	-0.54	Inf	4.25	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.86	-6.75	-6.38	-6.87	-0.90	Inf	4.42	5.00
6665MHz	Pass	5.32	-6.67	-6.53	-6.29	-6.57	-0.72	Inf	4.60	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.58	-6.42	-6.54	-6.96	-0.88	Inf	4.44	5.00
6985MHz	Pass	5.27	-6.56	-6.81	-6.88	-6.79	-0.98	Inf	4.29	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.79	-10.92	-11.15	-11.12	-11.73	-5.57	Inf	-0.78	5.00
6265MHz	Pass	4.79	-11.61	-11.99	-11.01	-10.51	-5.46	Inf	-0.67	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.32	-8.16	-8.27	-8.09	-8.73	-2.41	Inf	2.91	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.32	-9.61	-9.09	-8.61	-8.79	-3.21	Inf	2.11	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.32	-8.63	-8.38	-8.83	-8.20	-2.96	Inf	2.36	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.32	-11.63	-11.22	-11.09	-11.99	-5.74	Inf	-0.42	5.00


DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density; Directional Gain refers to antenna report.

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


5955MHz

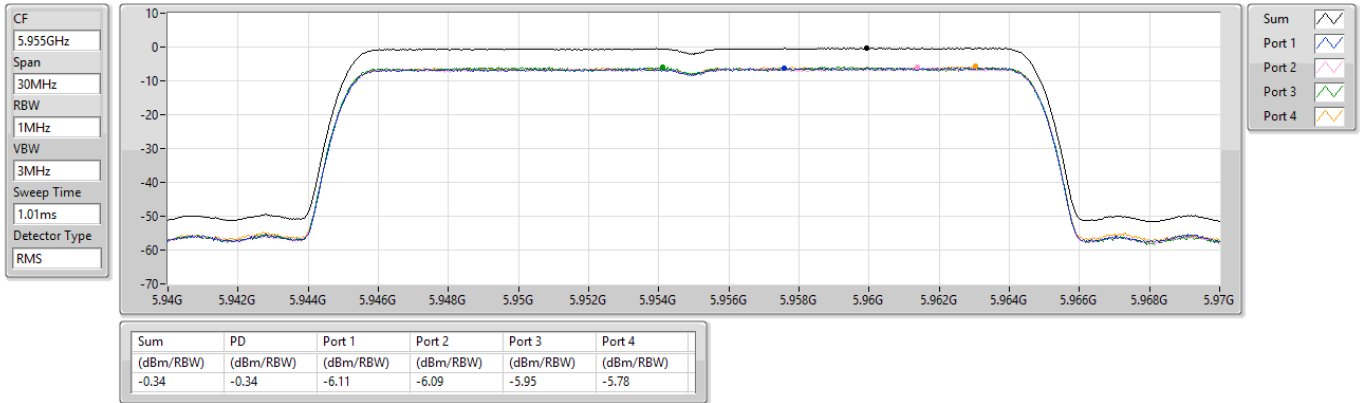

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6175MHz

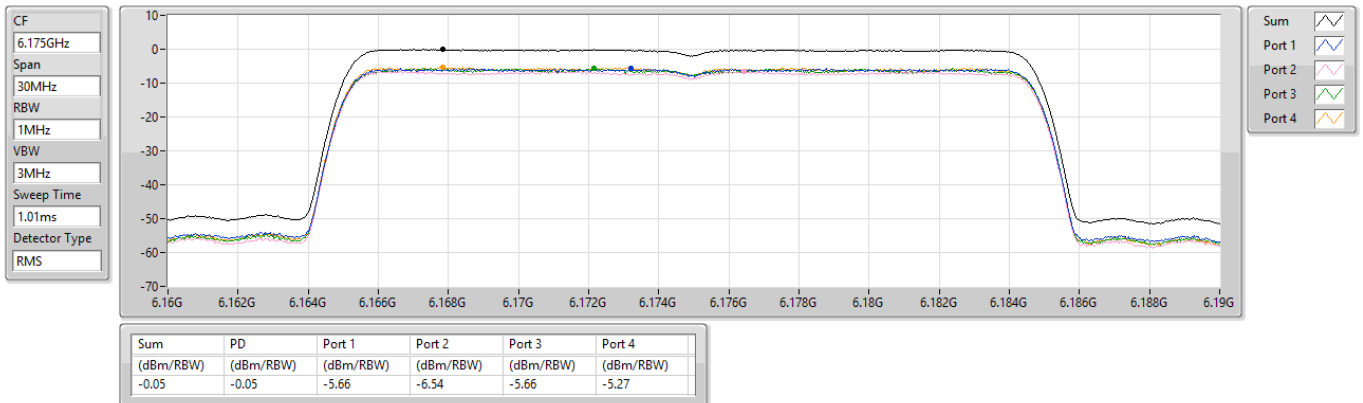

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6415MHz

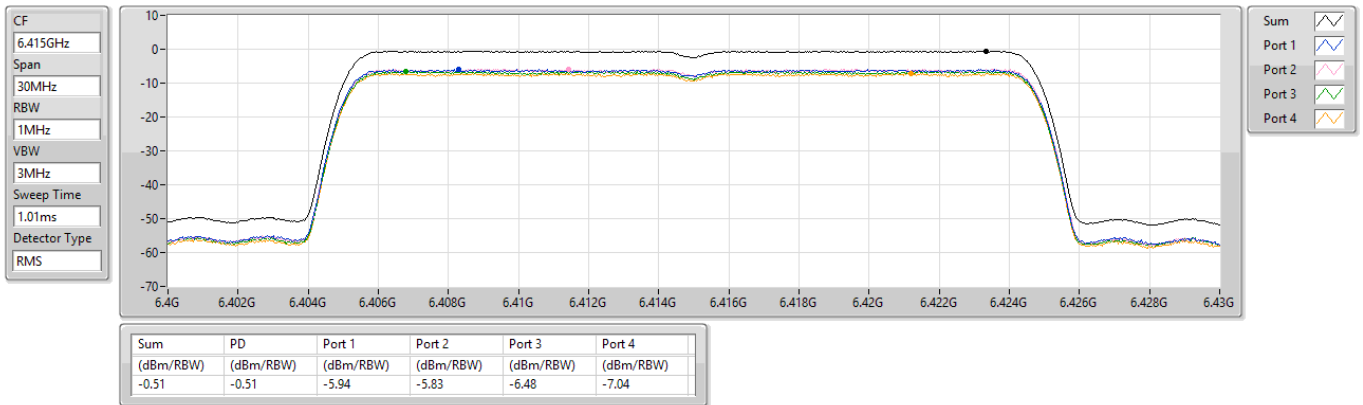

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6435MHz

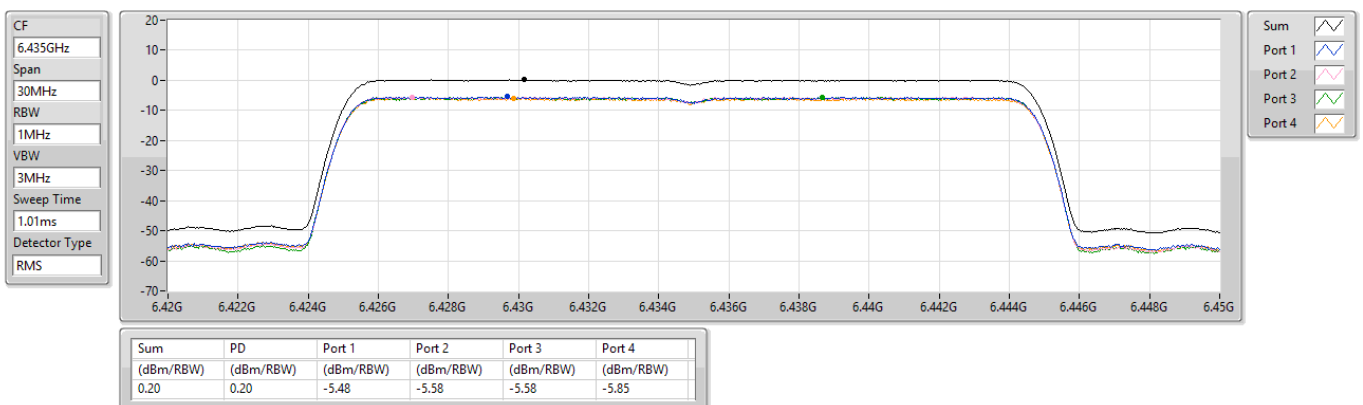

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6475MHz

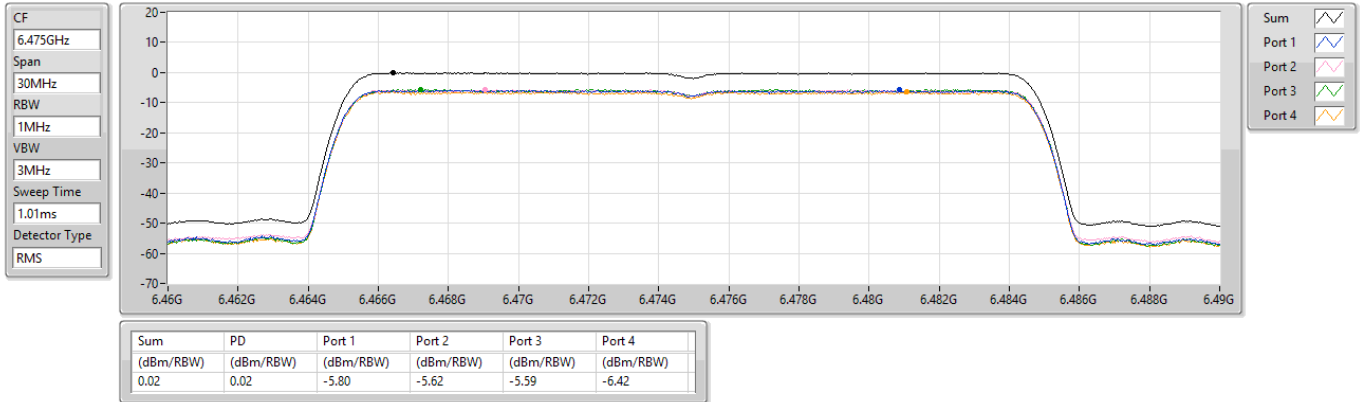

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6515MHz

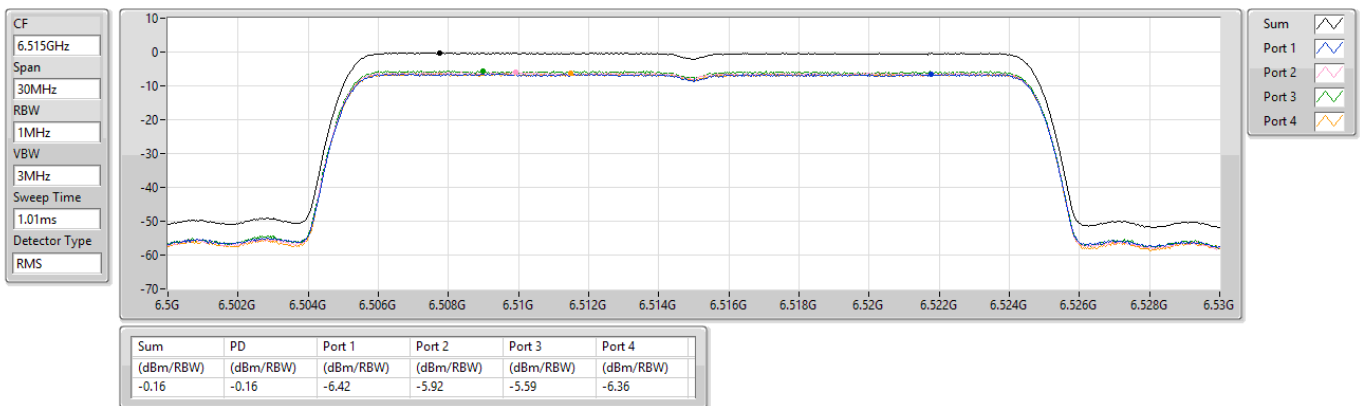

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6535MHz

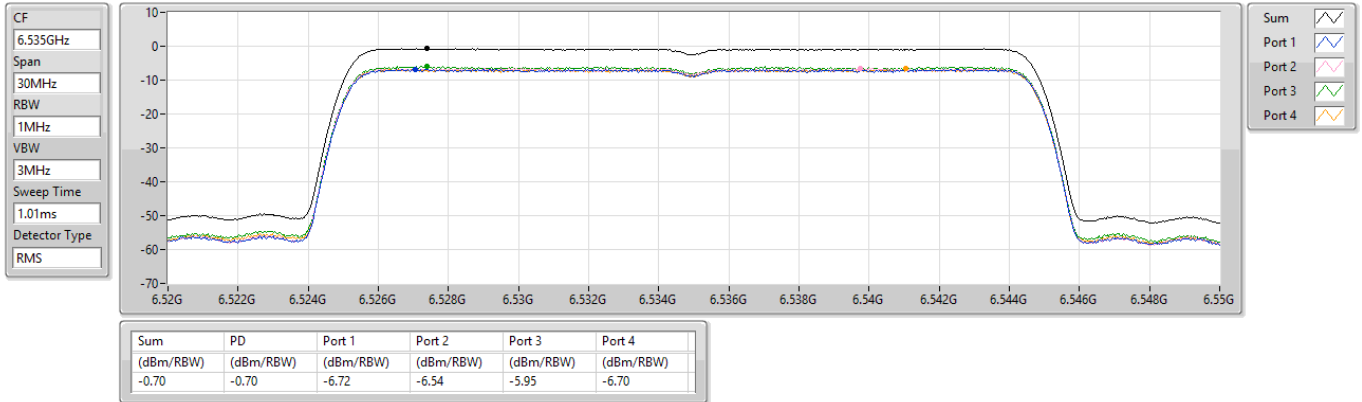

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6715MHz

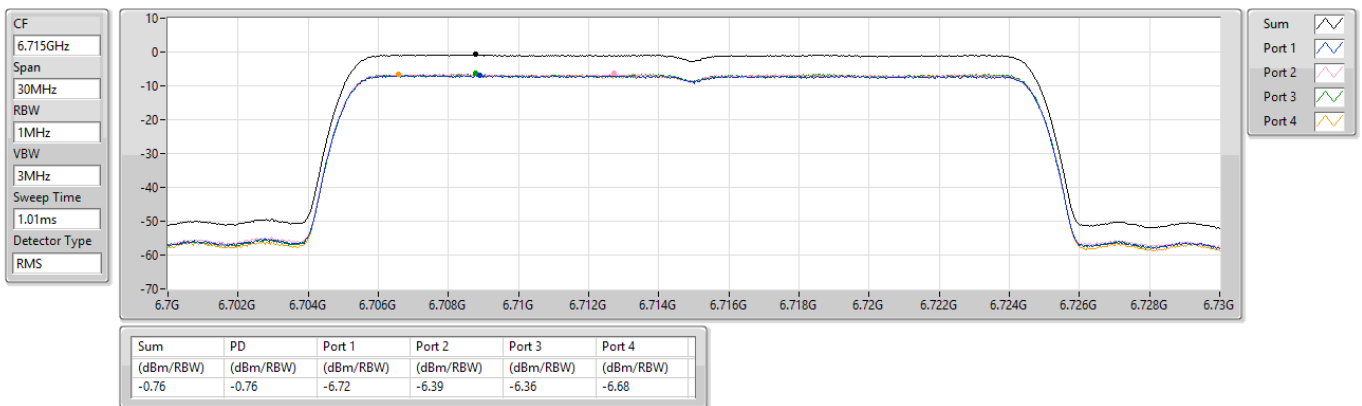

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


6855MHz

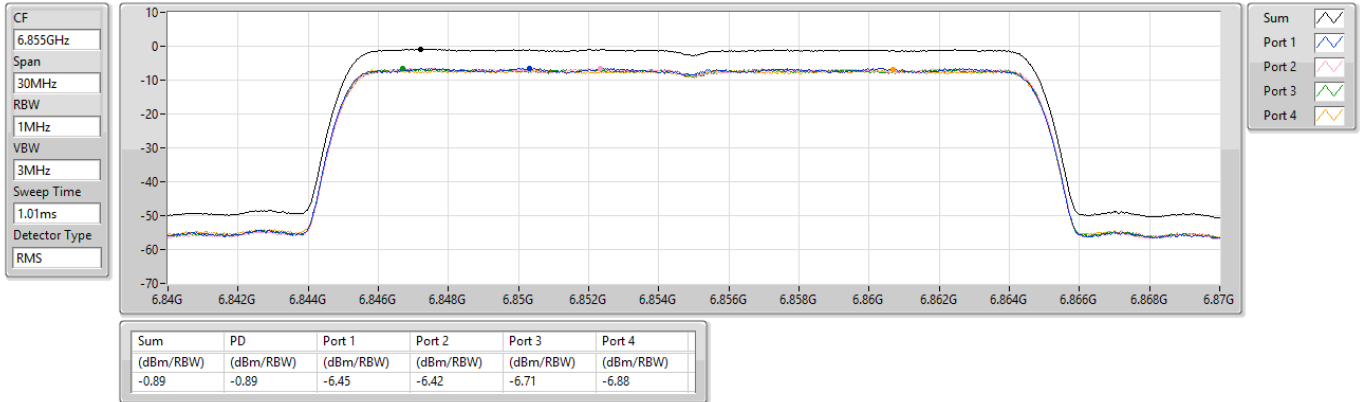

6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

6875MHz Straddle 6.525-6.875GHz

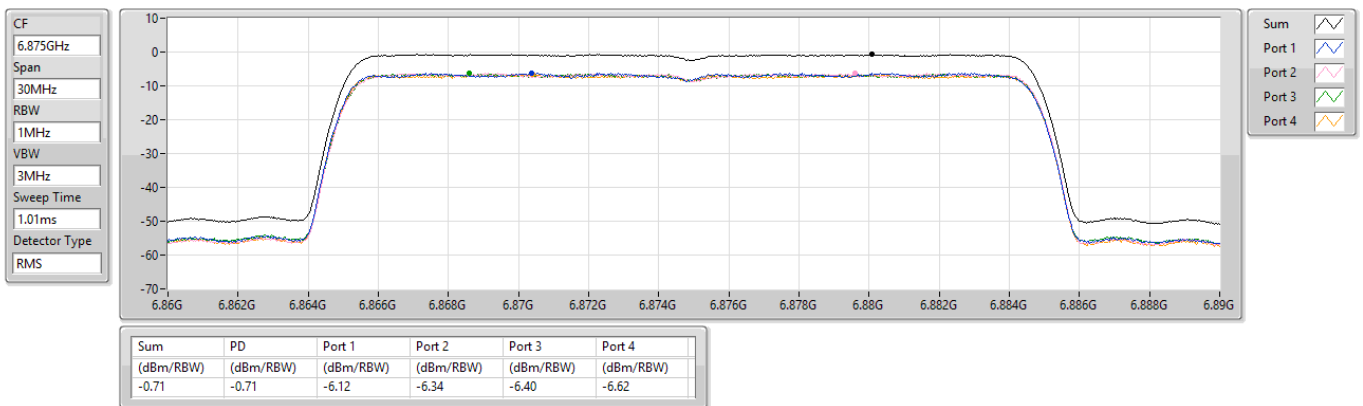


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

6895MHz

CF
6.895GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

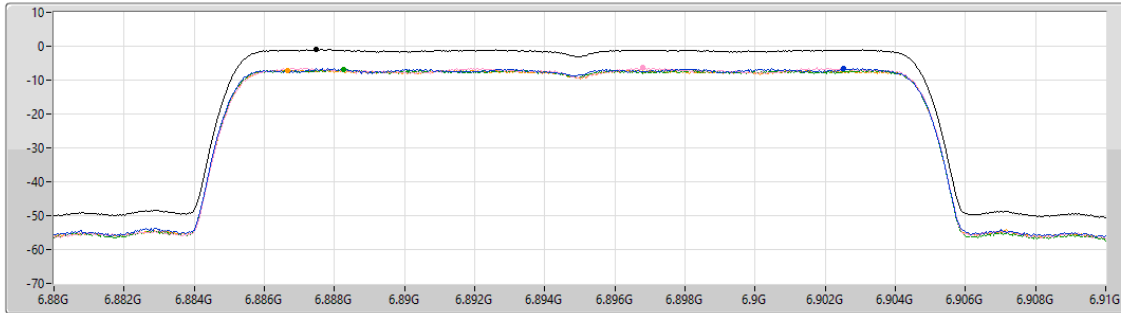

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.90	-0.90	-6.55	-6.33	-6.93	-7.05

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

7015MHz

CF
7.015GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

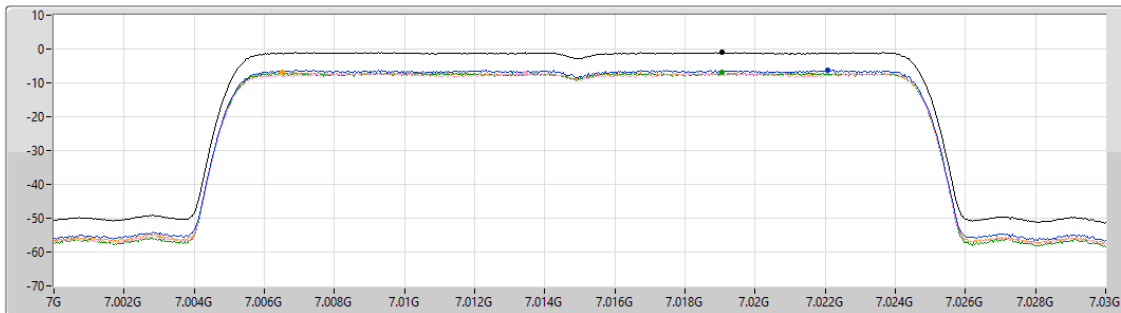


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.93	-0.93	-6.13	-7.10	-6.97	-6.95

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD


7095MHz

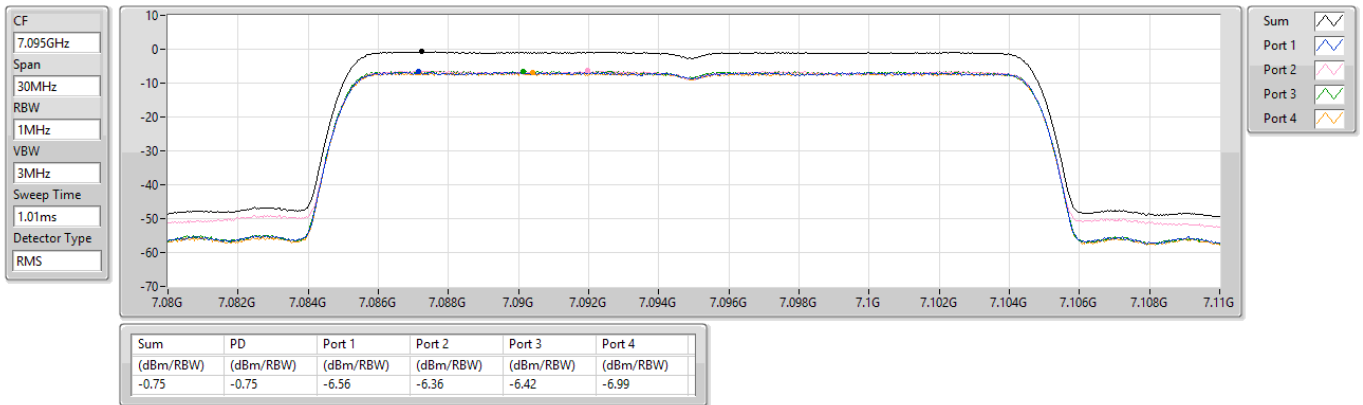

6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

PSD

7115MHz

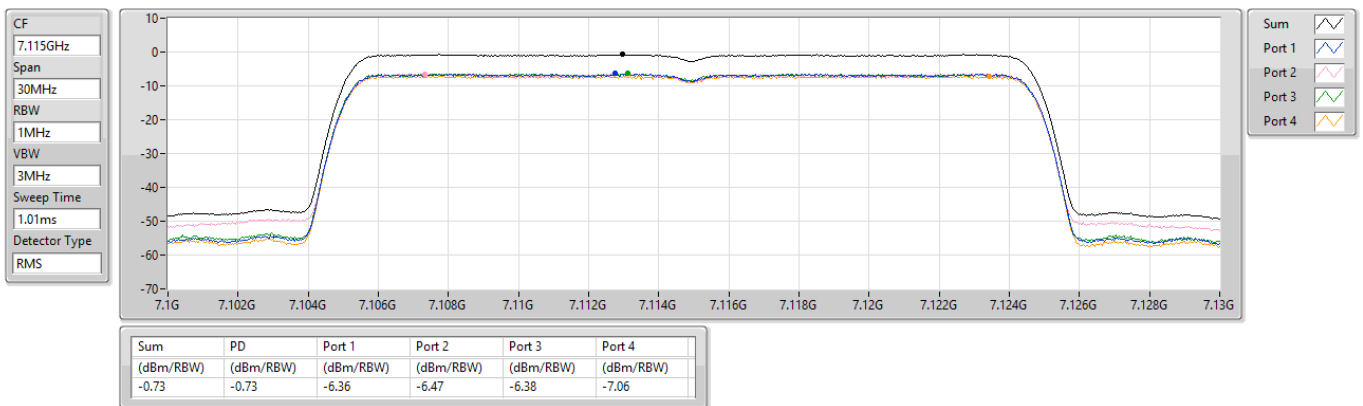


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

5965MHz

CF
5.965GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

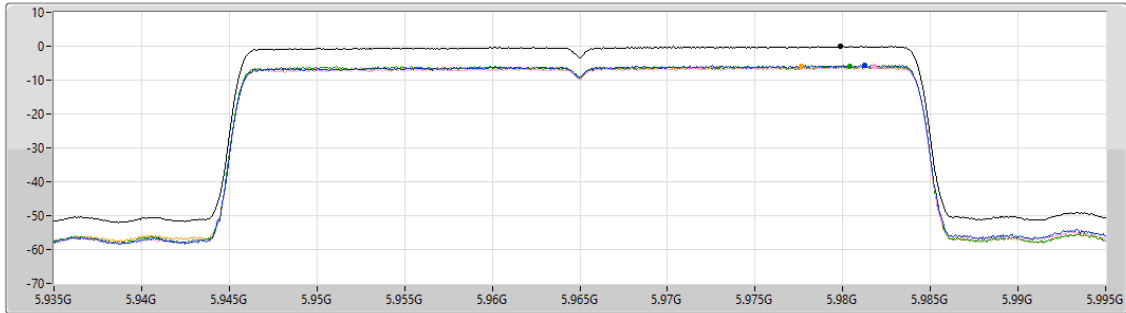

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.02	-0.02	-5.55	-6.02	-5.81	-5.89

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD

6165MHz

CF
6.165GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

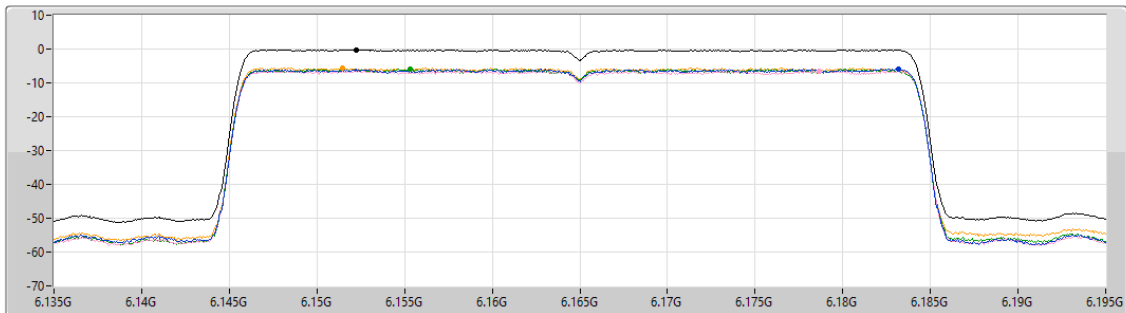


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.17	-0.17	-5.94	-6.44	-5.93	-5.50

5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6405MHz

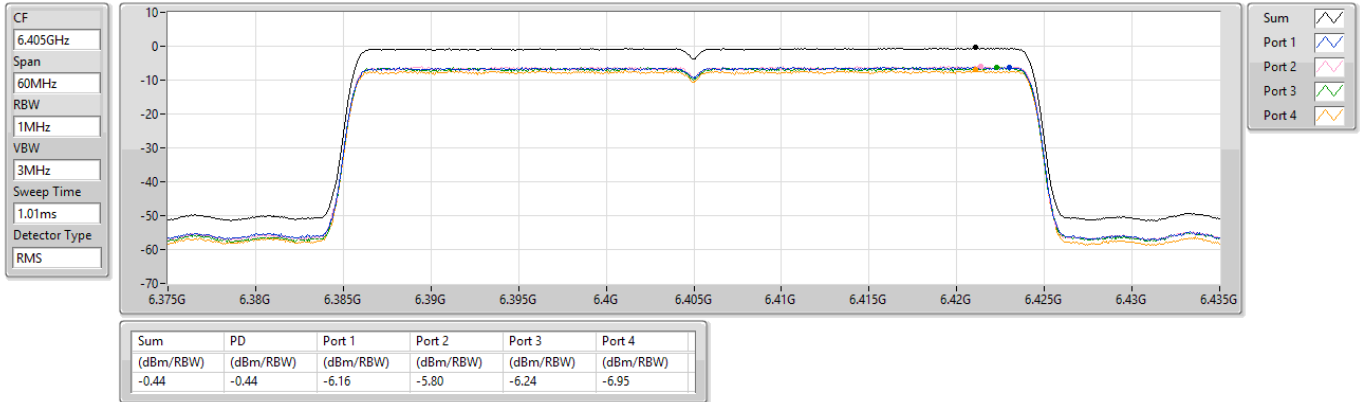

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6445MHz

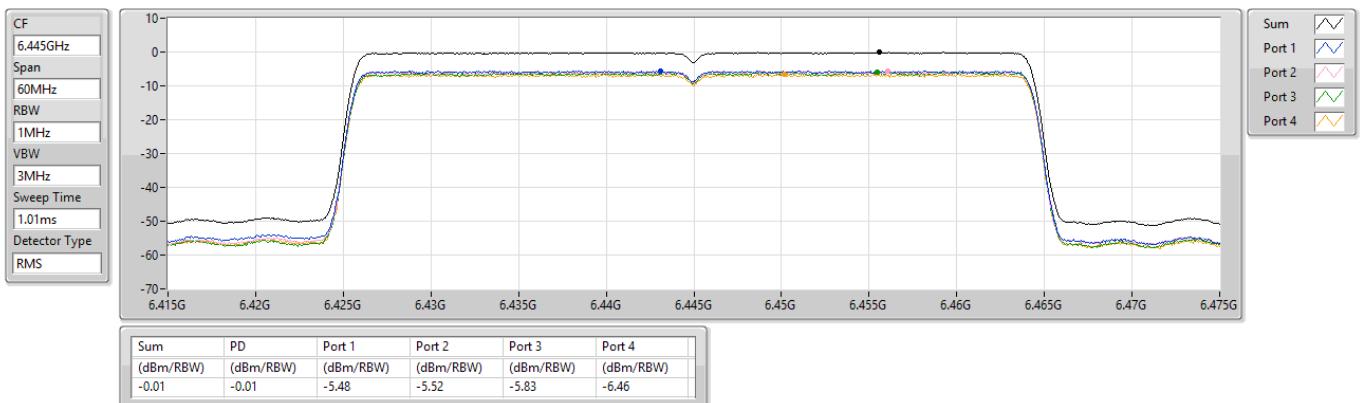

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6485MHz

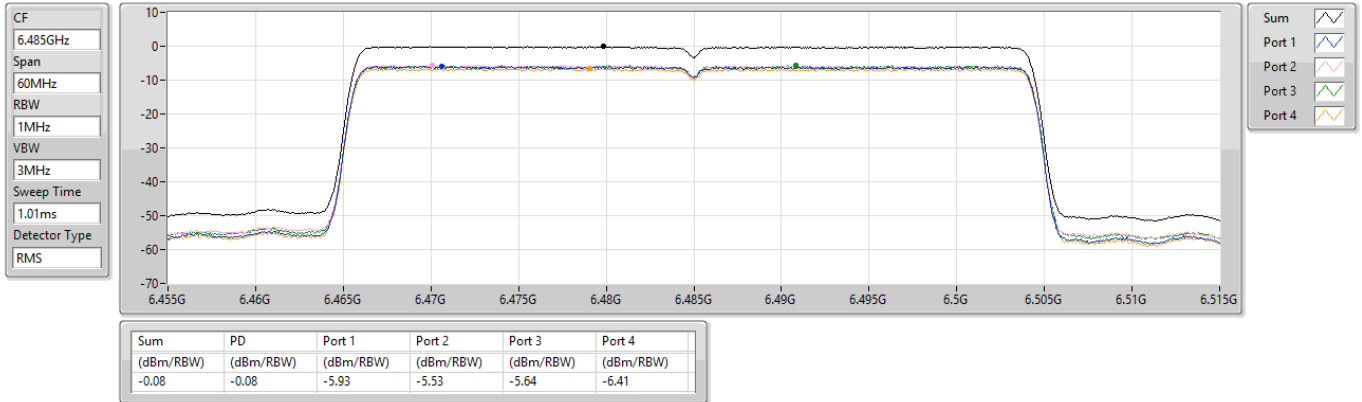

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6525MHz Straddle 6.525-6.875GHz

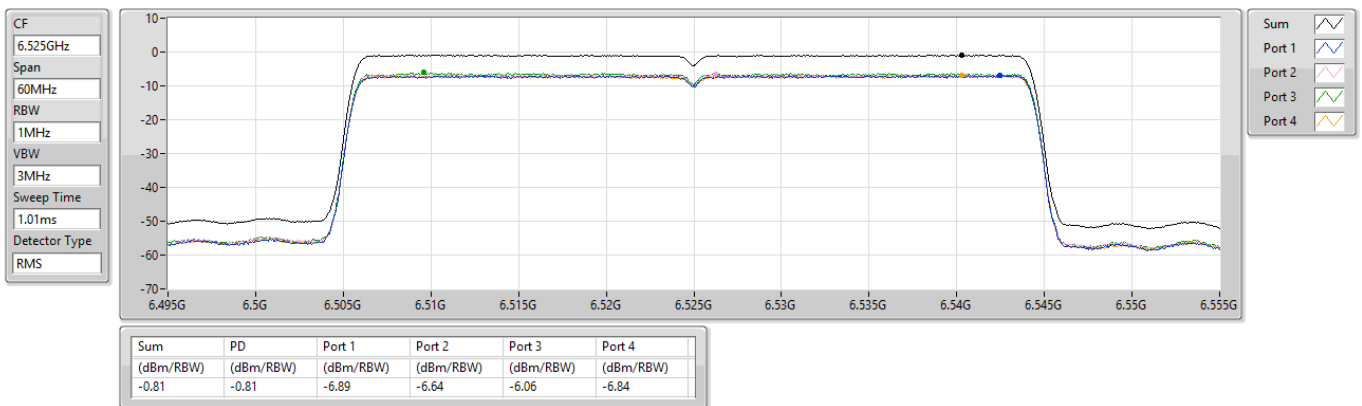

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6565MHz

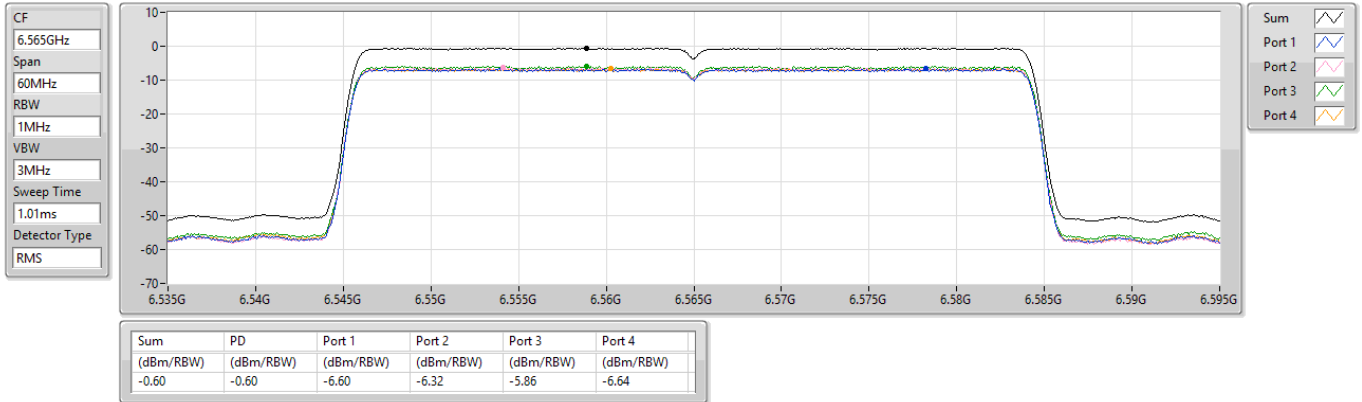

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6725MHz

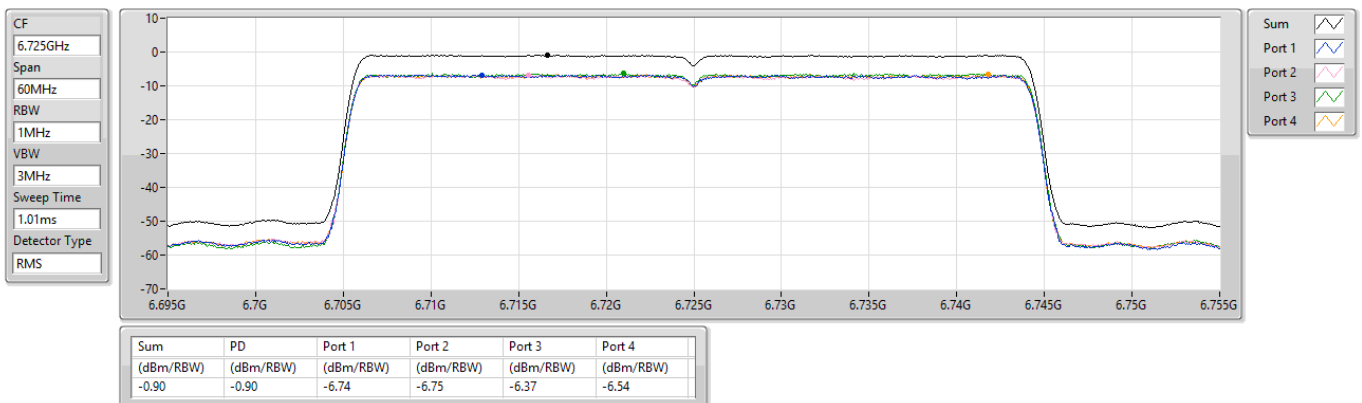

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6845MHz

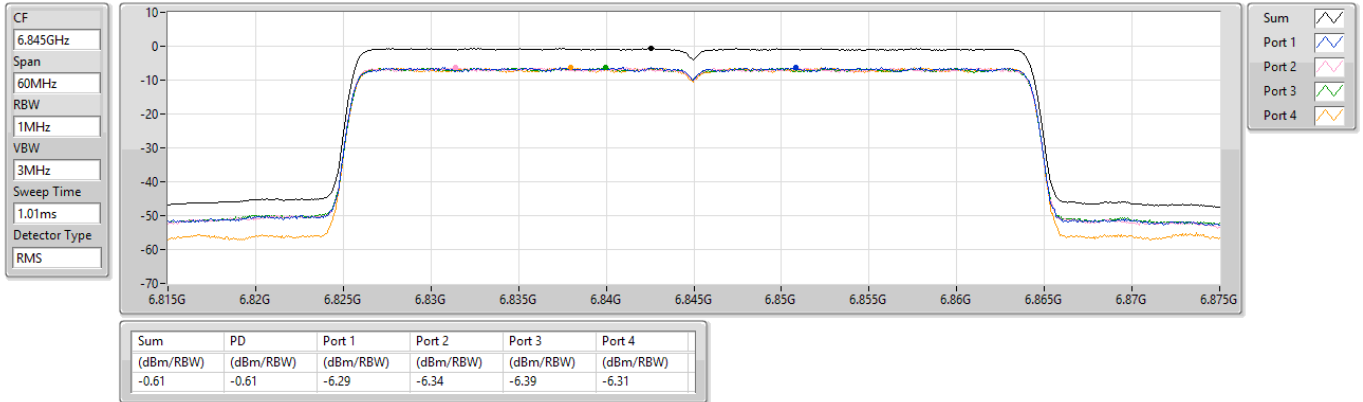

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6885MHz Straddle 6.525-6.875GHz

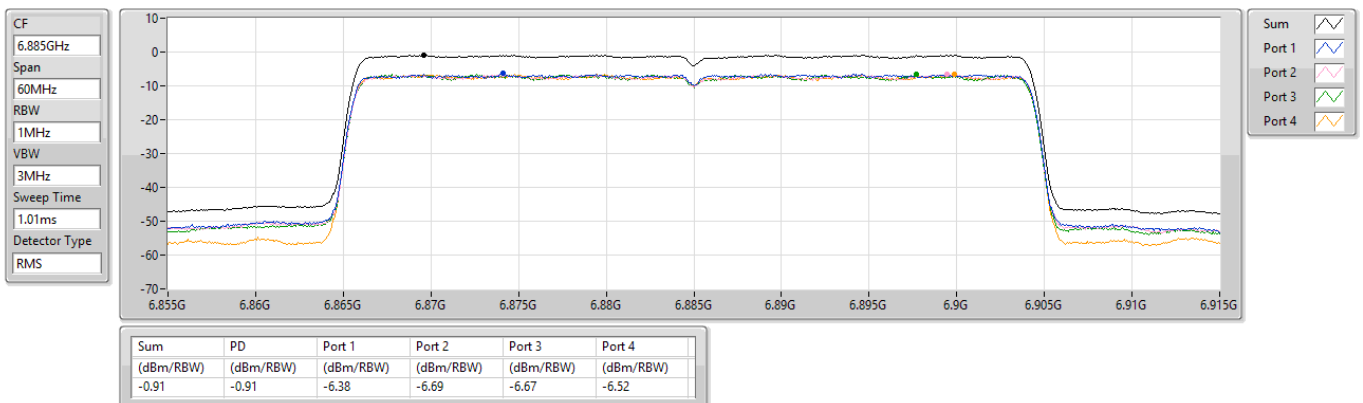

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


6925MHz

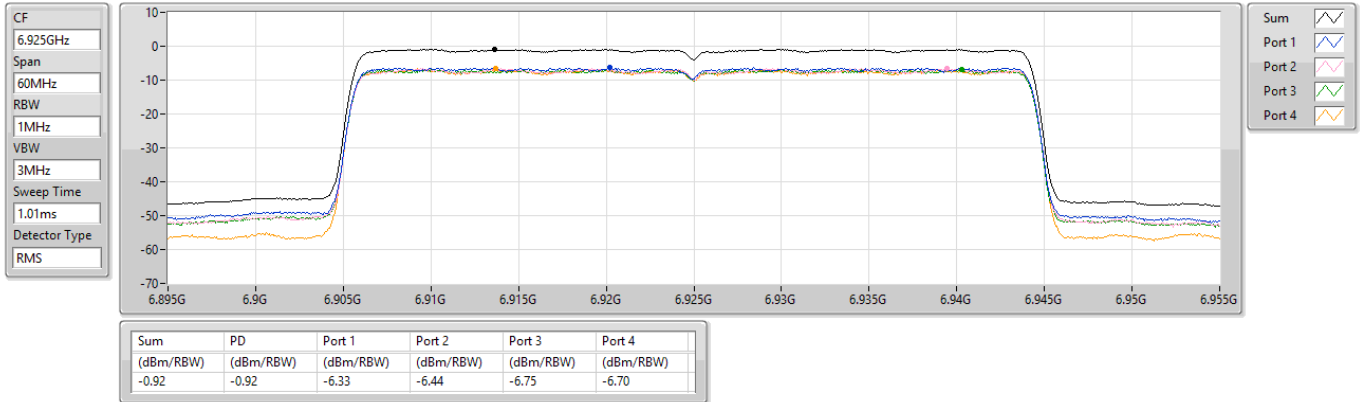

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


7005MHz

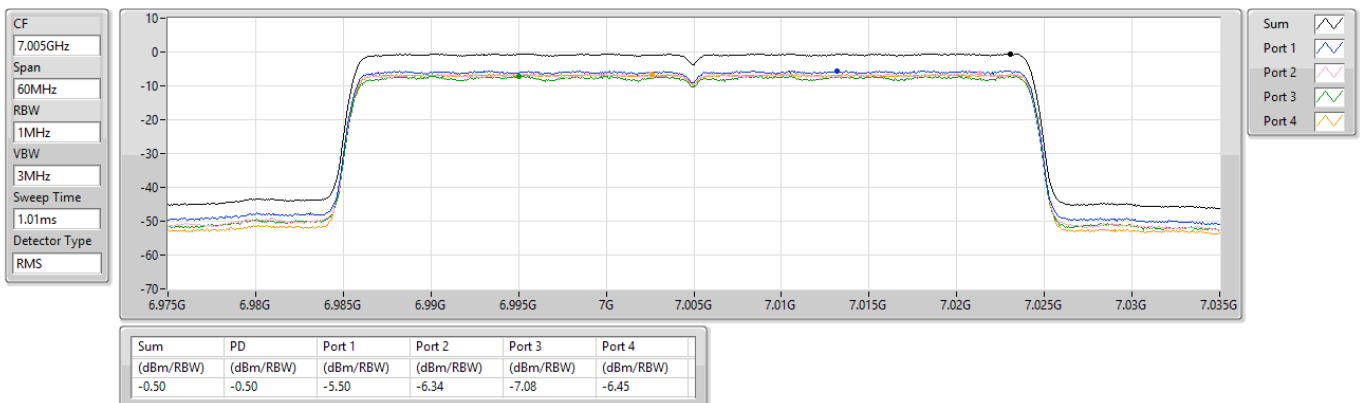

6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

PSD


7085MHz

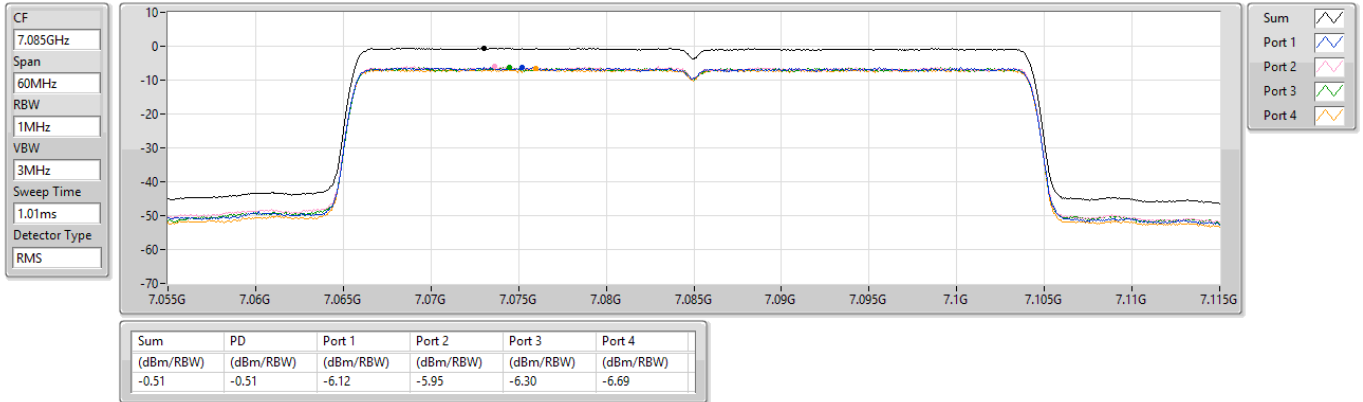

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD


5985MHz

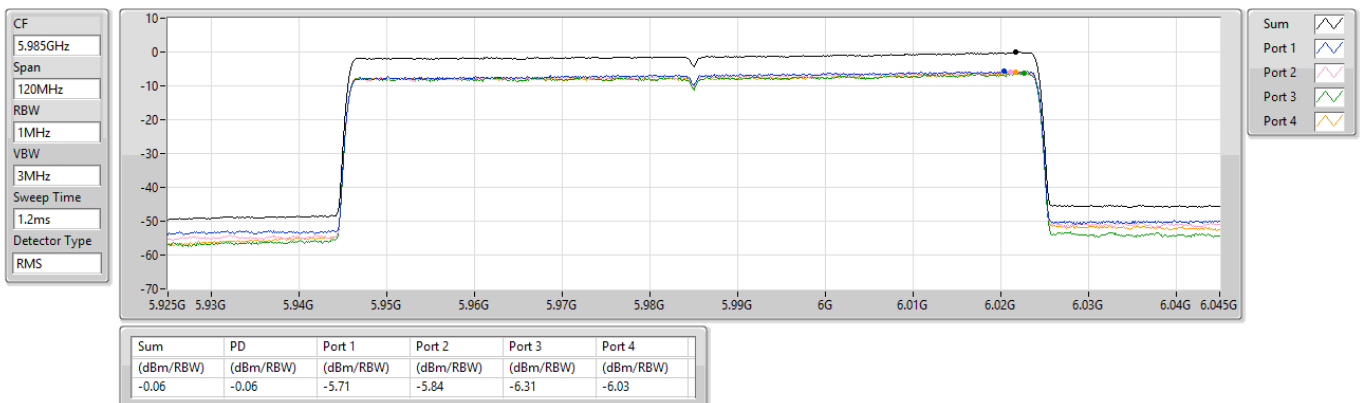

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD


6145MHz

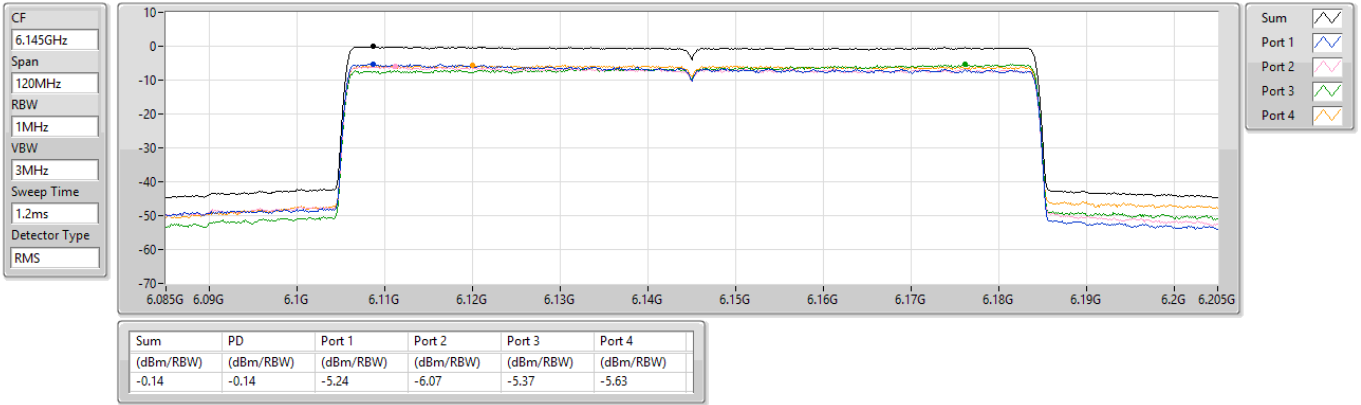

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

6385MHz

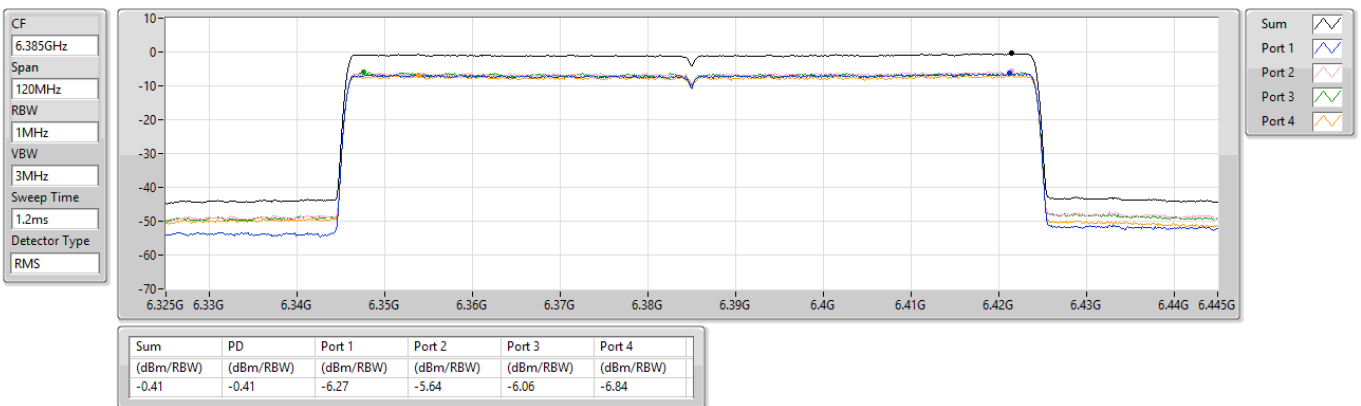


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

6465MHz

CF
6.465GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

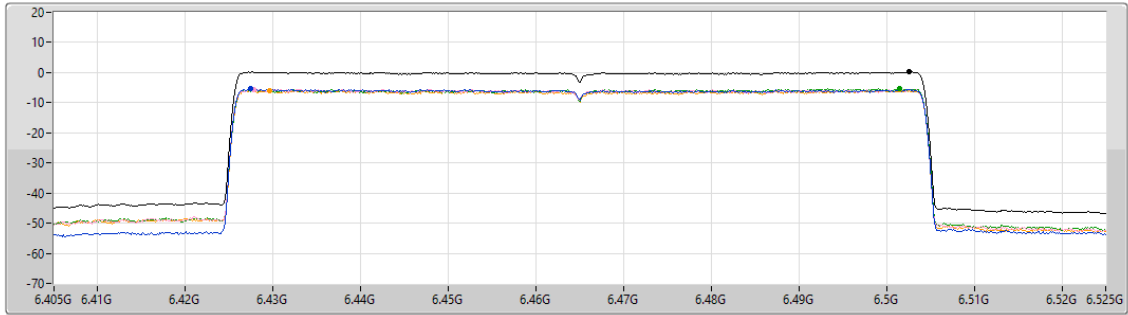

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.28	0.28	-5.34	-5.52	-5.31	-5.92

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

6545MHz Straddle 6.525-6.875GHz

CF
6.545GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

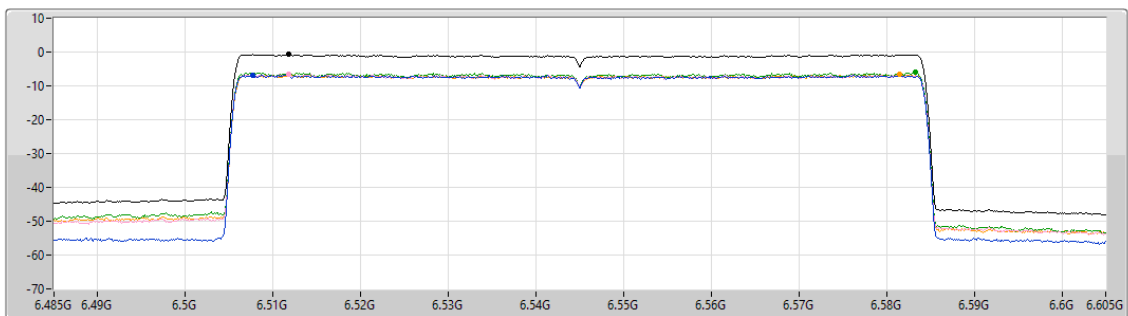


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.68	-0.68	-6.81	-6.59	-5.99	-6.69

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD


6625MHz

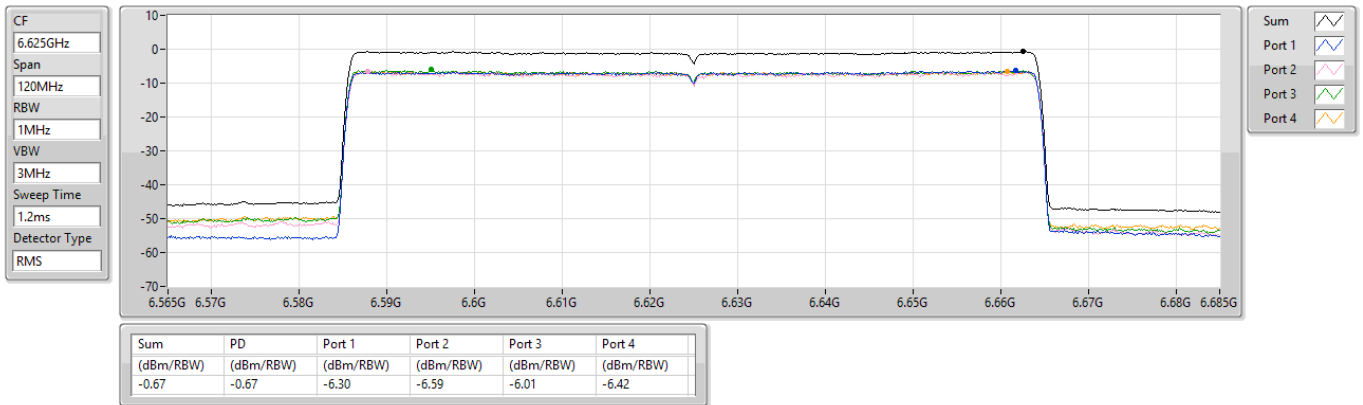

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD


6705MHz

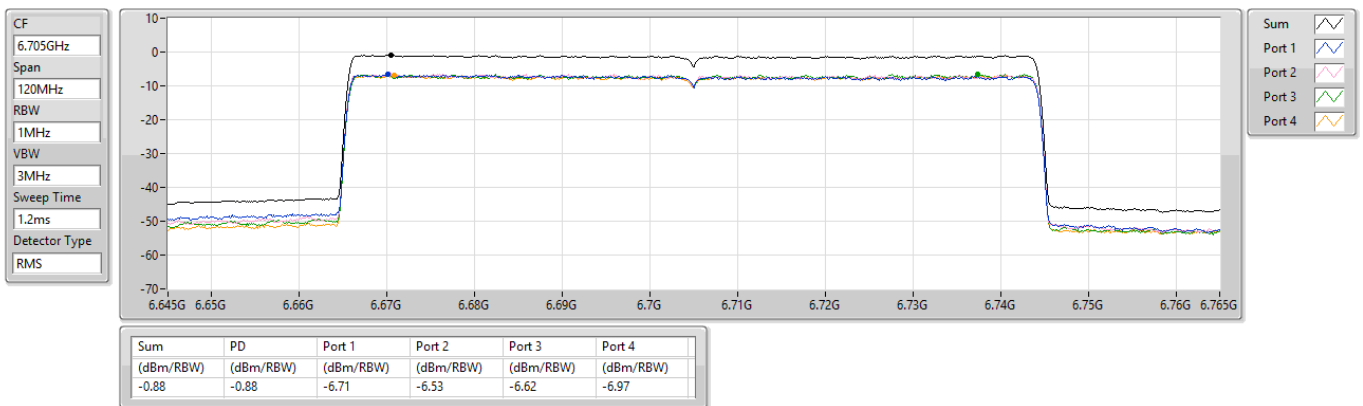

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD


6785MHz

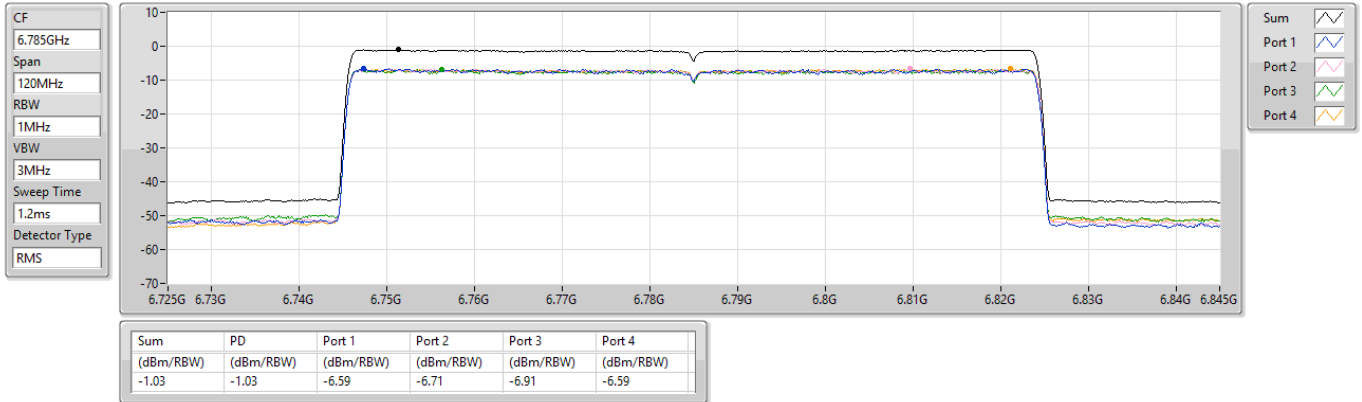

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

6865MHz Straddle 6.525-6.875GHz

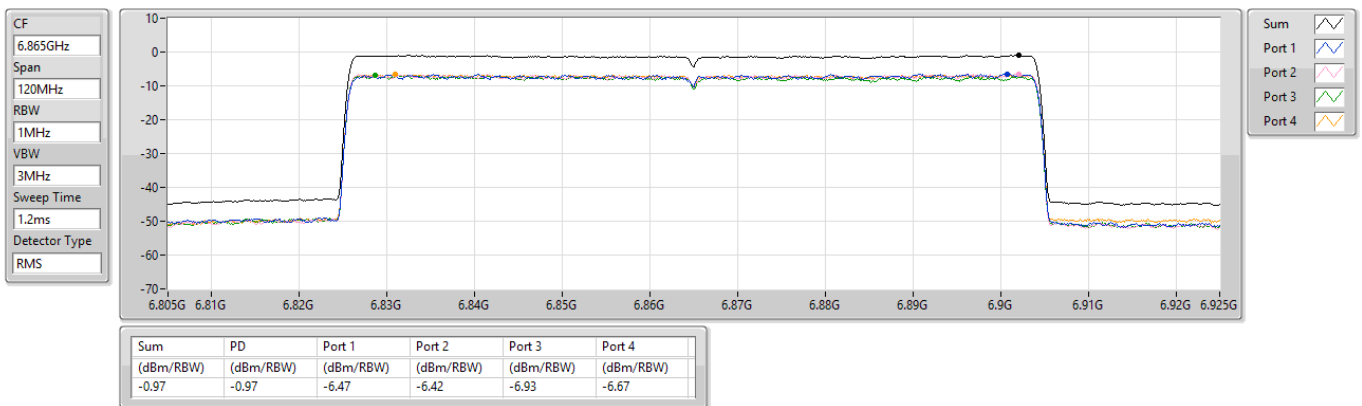


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

6945MHz

CF
6.945GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

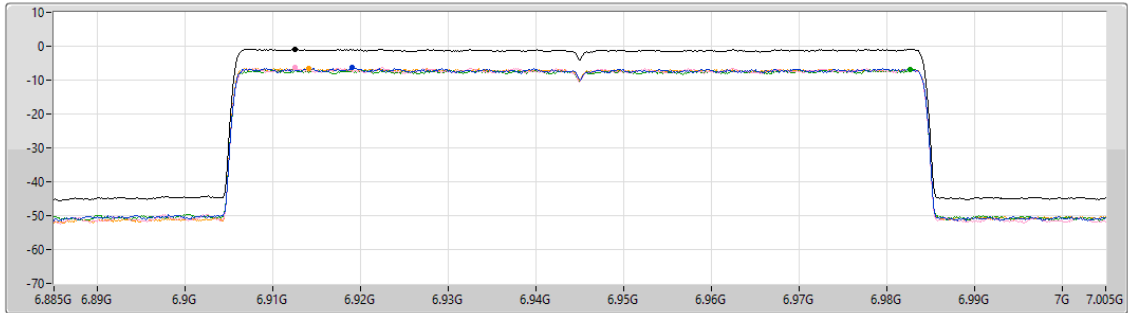

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.86	-0.86	-6.39	-6.33	-6.87	-6.59

6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

PSD

7025MHz

CF
7.025GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

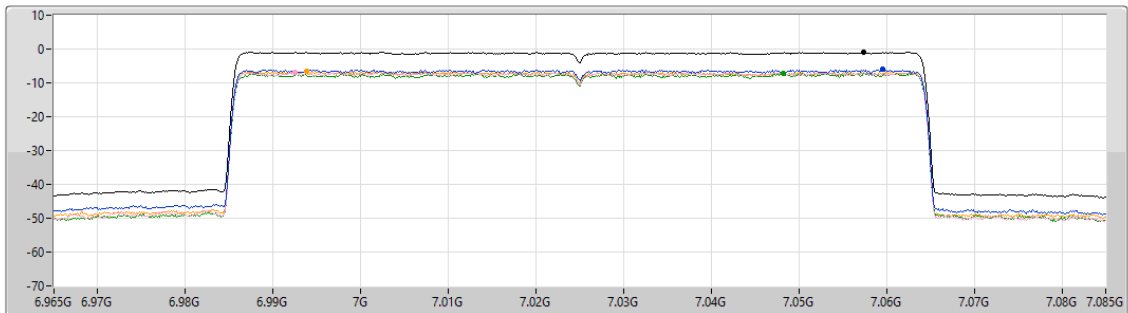

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.88	-0.88	-6.08	-6.79	-7.17	-6.67

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6025MHz

CF
6.025GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

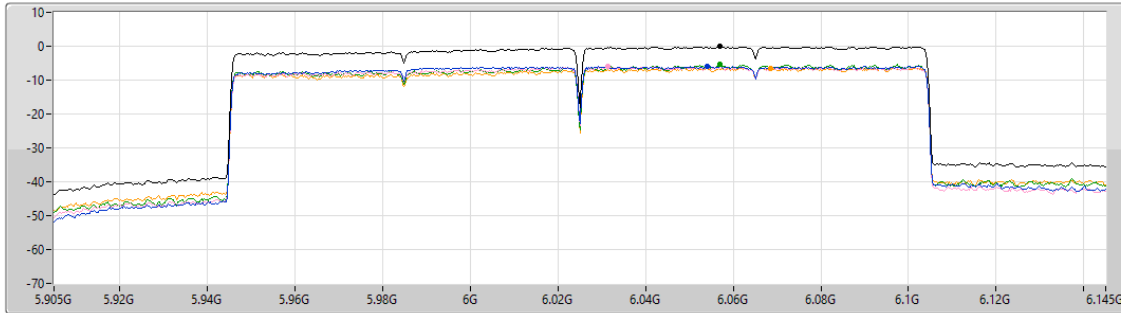

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.13	-0.13	-5.93	-5.99	-5.41	-6.44

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6185MHz

CF
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

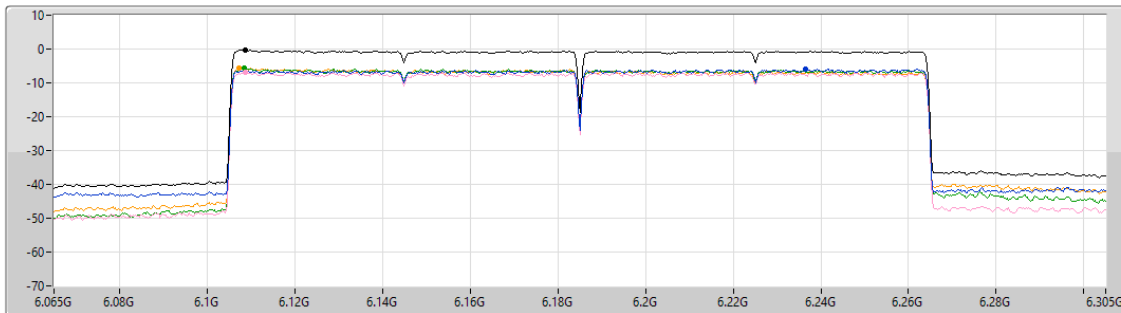

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.24	-0.24	-5.94	-6.78	-5.66	-5.73

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6345MHz

CF
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

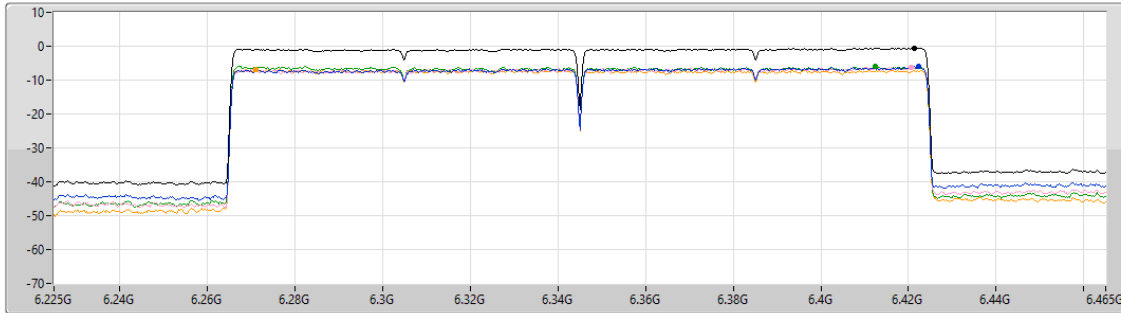

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.54	-0.54	-6.09	-6.25	-5.92	-6.80

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6505MHz Straddle 6.525-6.875GHz

CF
6.505GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

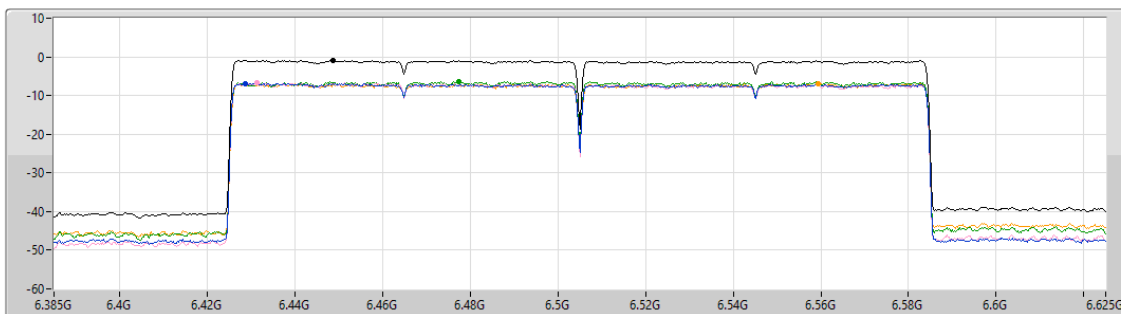

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.90	-0.90	-6.86	-6.75	-6.38	-6.87

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6665MHz

CF
6.665GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

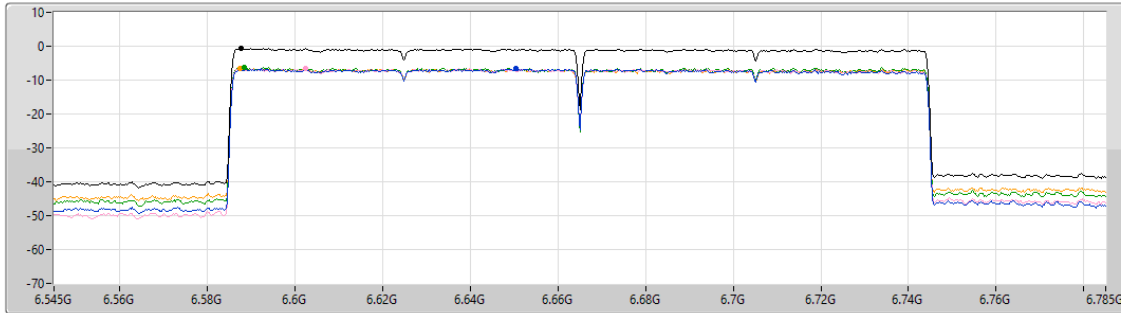

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.72	-0.72	-6.67	-6.53	-6.29	-6.57

6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6825MHz Straddle 6.525-6.875GHz

CF
6.825GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

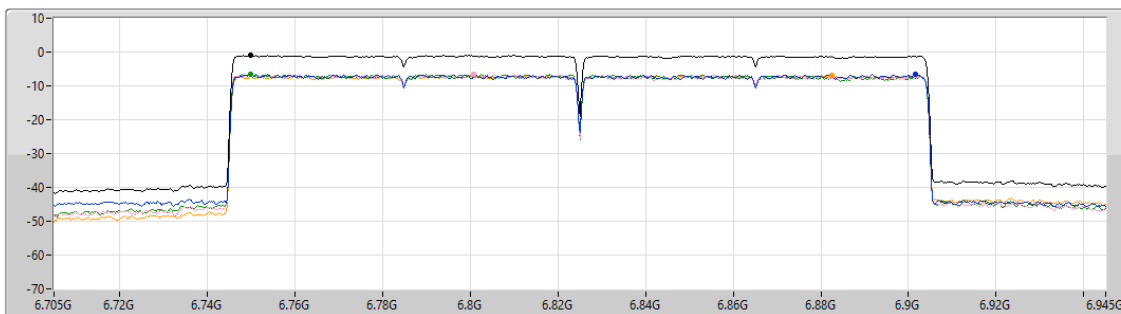

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.88	-0.88	-6.58	-6.42	-6.54	-6.96

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

PSD

6985MHz

CF
6.985GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

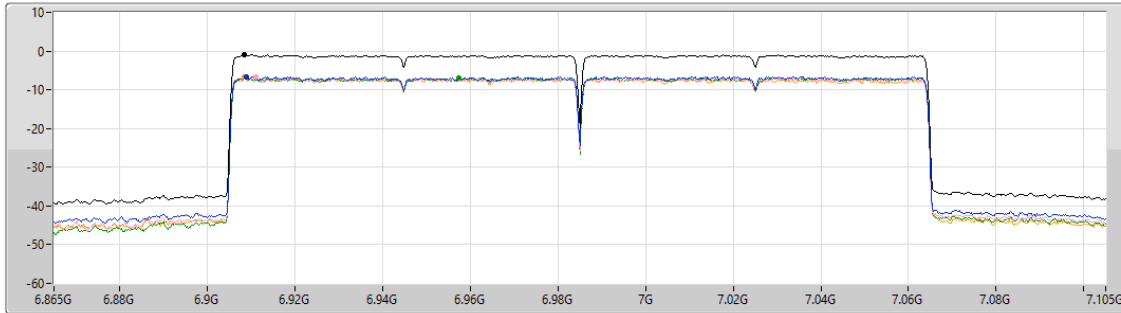


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.98	-0.98	-6.56	-6.81	-6.88	-6.79

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

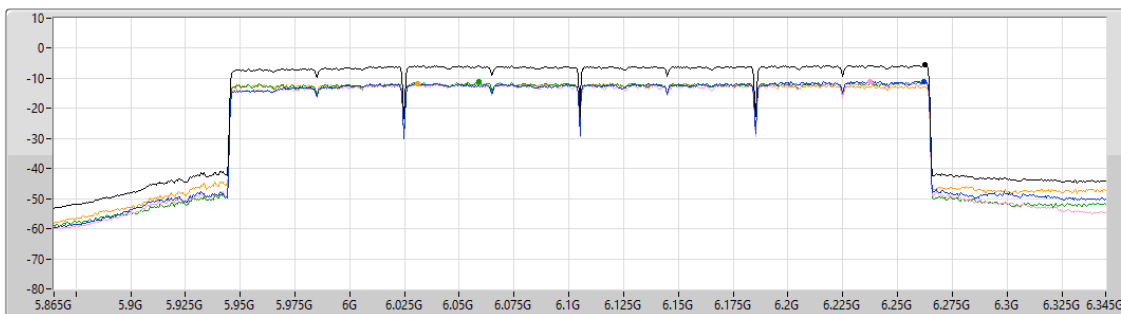


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.57	-5.57	-10.92	-11.15	-11.12	-11.73

5.925-6.425GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD

6265MHz

CF
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

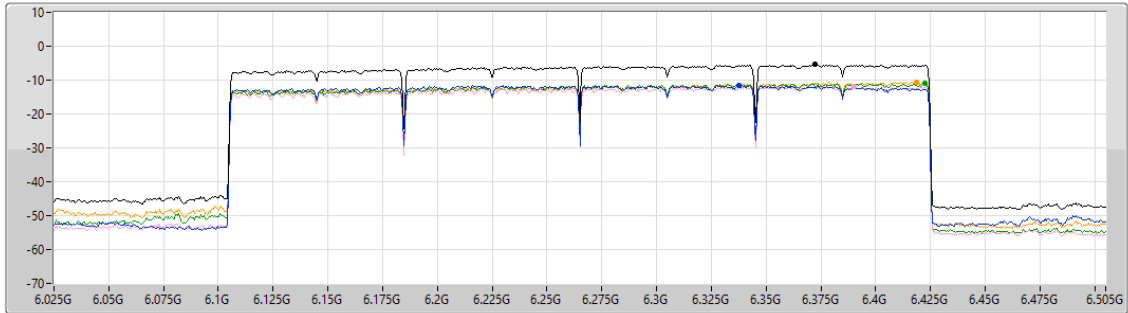

Sum
Port 1
Port 2
Port 3
Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.46	-5.46	-11.61	-11.99	-11.01	-10.51

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD

6425MHz Straddle 6.525-6.875GHz

CF
6.425GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

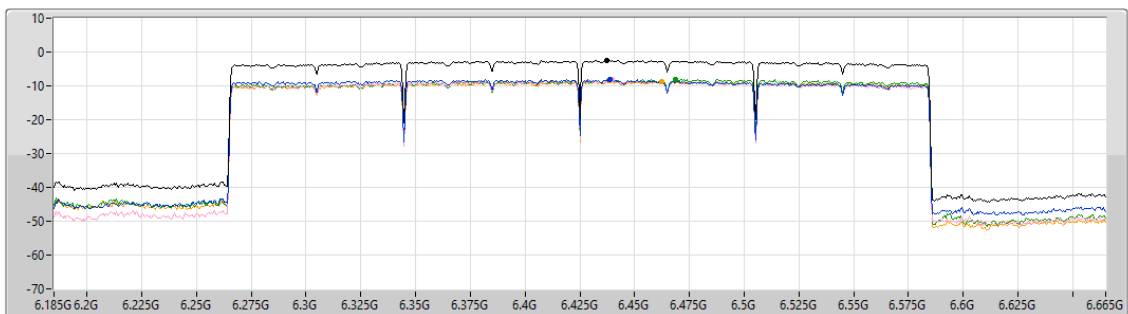


Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.41	-2.41	-8.16	-8.27	-8.09	-8.73

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD


6585MHz Straddle 6.525-6.875GHz

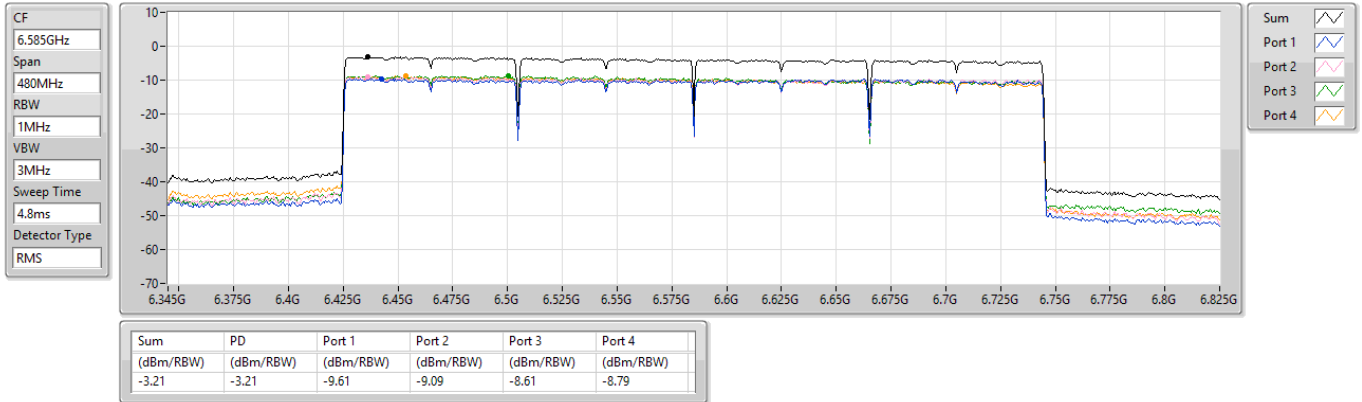

6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD

6745MHz Straddle 6.525-6.875GHz

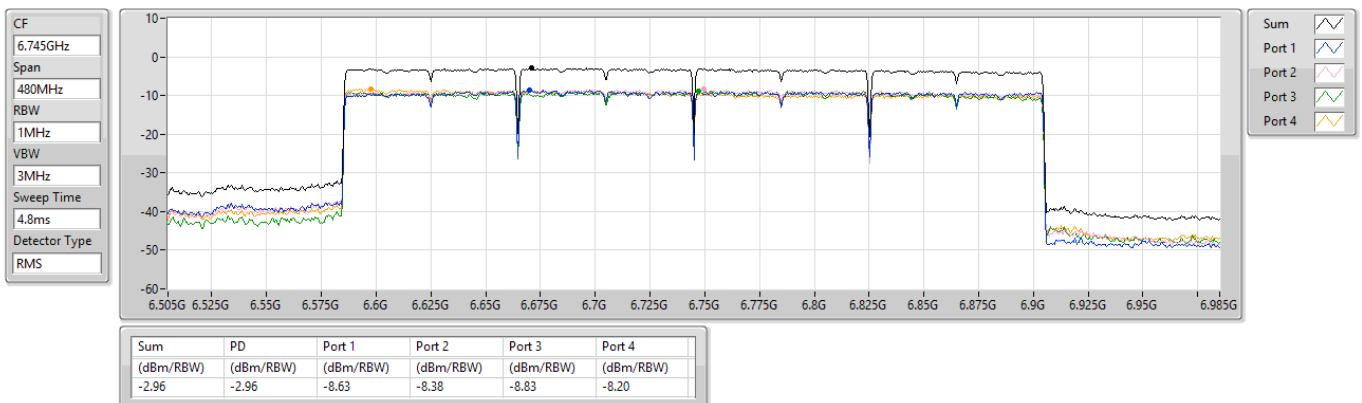




6.525-6.875GHz_802.11be EHT320-BF_Nss1,(MCS0)_4TX

PSD

6905MHz Straddle 6.525-6.875GHz

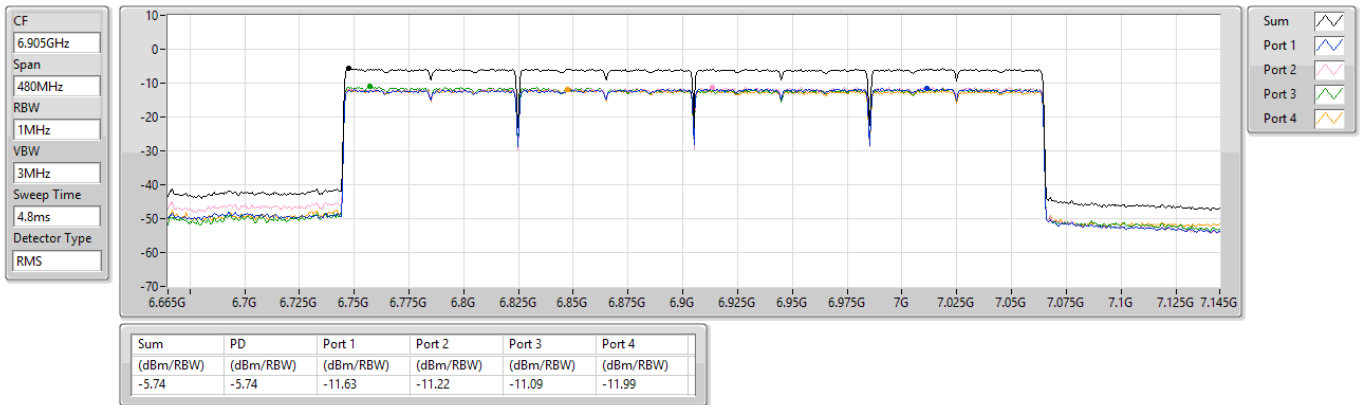

**Non-beamforming mode****Configuration 1: Model: SDG-8733****Unwanted Emissions (Below 1GHz)**

Modulation	be EHT320		Test Freq. (MHz)		6425	
Polarization	Horizontal					
Test By :Sean Yu Temperature(°C):25 Humidity(%):61						
Level (dBuV/m)						



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m) </			



Configuration 2: Model: SDG-8734


Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			

Unwanted Emissions (Above 1GHz) for 11a

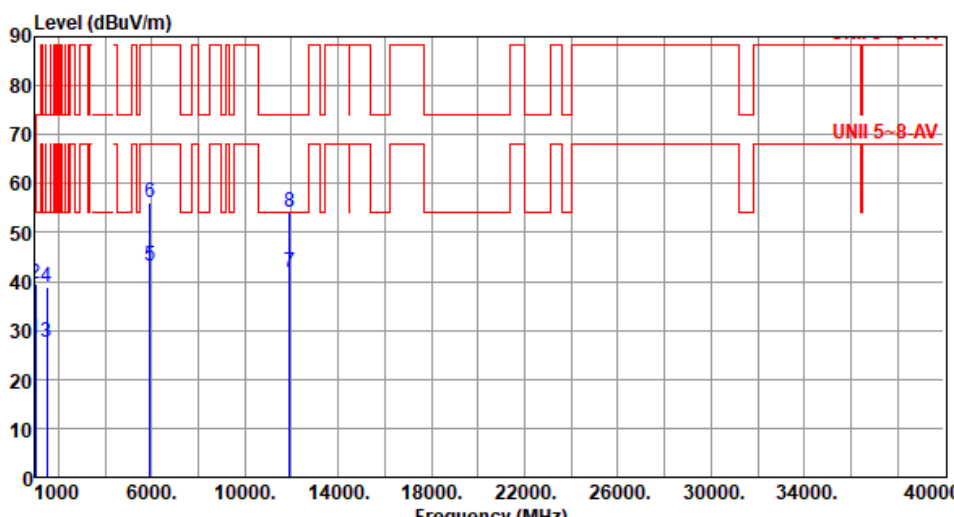Modulation	11a	Test Freq. (MHz)	5955																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>131</td><td>125</td></tr><tr><td>4</td><td>1500.00</td><td>38.72</td><td>74.00</td><td>-35.28</td><td>46.00</td><td>-7.28</td><td>Peak</td><td>131</td><td>125</td></tr><tr><td>5</td><td>5925.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>41.93</td><td>1.13</td><td>Average</td><td>247</td><td>51</td></tr><tr><td>6</td><td>5925.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>54.86</td><td>1.13</td><td>Peak</td><td>247</td><td>51</td></tr><tr><td>7</td><td>11910.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>35.67</td><td>6.09</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>8</td><td>11910.00</td><td>54.28</td><td>74.00</td><td>-19.72</td><td>48.19</td><td>6.09</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	125	4	1500.00	38.72	74.00	-35.28	46.00	-7.28	Peak	131	125	5	5925.00	43.06	68.20	-25.14	41.93	1.13	Average	247	51	6	5925.00	55.99	88.20	-32.21	54.86	1.13	Peak	247	51	7	11910.00	41.76	54.00	-12.24	35.67	6.09	Average	100	185	8	11910.00	54.28	74.00	-19.72	48.19	6.09	Peak	100	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251																																																																																				
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251																																																																																				
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	125																																																																																				
4	1500.00	38.72	74.00	-35.28	46.00	-7.28	Peak	131	125																																																																																				
5	5925.00	43.06	68.20	-25.14	41.93	1.13	Average	247	51																																																																																				
6	5925.00	55.99	88.20	-32.21	54.86	1.13	Peak	247	51																																																																																				
7	11910.00	41.76	54.00	-12.24	35.67	6.09	Average	100	185																																																																																				
8	11910.00	54.28	74.00	-19.72	48.19	6.09	Peak	100	185																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	11a	Test Freq. (MHz)	5955																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>35.89</td><td>-8.27</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>285</td></tr><tr><td>3</td><td>1500.00</td><td>29.62</td><td>54.00</td><td>-24.38</td><td>36.90</td><td>-7.28</td><td>Average</td><td>202</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>202</td><td>111</td></tr><tr><td>5</td><td>5925.00</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>41.96</td><td>1.13</td><td>Average</td><td>264</td><td>331</td></tr><tr><td>6</td><td>5925.00</td><td>55.41</td><td>88.20</td><td>-32.79</td><td>54.28</td><td>1.13</td><td>Peak</td><td>264</td><td>331</td></tr><tr><td>7</td><td>11910.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>35.68</td><td>6.09</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>8</td><td>11910.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>48.32</td><td>6.09</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	285	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	285	3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	202	111	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	111	5	5925.00	43.09	68.20	-25.11	41.96	1.13	Average	264	331	6	5925.00	55.41	88.20	-32.79	54.28	1.13	Peak	264	331	7	11910.00	41.77	54.00	-12.23	35.68	6.09	Average	100	176	8	11910.00	54.41	74.00	-19.59	48.32	6.09	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	285																																																																																				
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	285																																																																																				
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	202	111																																																																																				
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	111																																																																																				
5	5925.00	43.09	68.20	-25.11	41.96	1.13	Average	264	331																																																																																				
6	5925.00	55.41	88.20	-32.79	54.28	1.13	Peak	264	331																																																																																				
7	11910.00	41.77	54.00	-12.23	35.68	6.09	Average	100	176																																																																																				
8	11910.00	54.41	74.00	-19.59	48.32	6.09	Peak	100	176																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.35</td><td>54.00</td><td>-14.65</td><td>47.62</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.63</td><td>54.00</td><td>-26.37</td><td>34.91</td><td>-7.28</td><td>Average</td><td>129</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.82</td><td>74.00</td><td>-35.18</td><td>46.10</td><td>-7.28</td><td>Peak</td><td>129</td><td>123</td></tr><tr><td>5</td><td>12350.00</td><td>40.42</td><td>54.00</td><td>-13.58</td><td>34.59</td><td>5.83</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>6</td><td>12350.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>47.75</td><td>5.83</td><td>Peak</td><td>100</td><td>248</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251	2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	251	3	1500.00	27.63	54.00	-26.37	34.91	-7.28	Average	129	123	4	1500.00	38.82	74.00	-35.18	46.10	-7.28	Peak	129	123	5	12350.00	40.42	54.00	-13.58	34.59	5.83	Average	100	248	6	12350.00	53.58	74.00	-20.42	47.75	5.83	Peak	100	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251																																																																
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	251																																																																
3	1500.00	27.63	54.00	-26.37	34.91	-7.28	Average	129	123																																																																
4	1500.00	38.82	74.00	-35.18	46.10	-7.28	Peak	129	123																																																																
5	12350.00	40.42	54.00	-13.58	34.59	5.83	Average	100	248																																																																
6	12350.00	53.58	74.00	-20.42	47.75	5.83	Peak	100	248																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

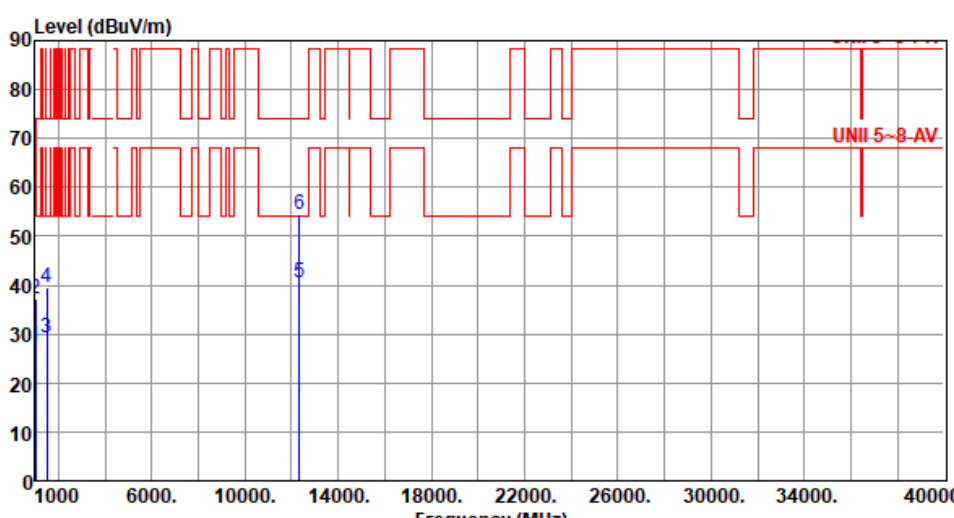


Modulation	11a	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>35.69</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.32</td><td>54.00</td><td>-16.68</td><td>45.59</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.32</td><td>54.00</td><td>-24.68</td><td>36.60</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.36</td><td>74.00</td><td>-34.64</td><td>46.64</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>12350.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>34.68</td><td>5.83</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>6</td><td>12350.00</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>48.74</td><td>5.83</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	286	2	1000.00	37.32	54.00	-16.68	45.59	-8.27	Peak	100	286	3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	202	113	4	1500.00	39.36	74.00	-34.64	46.64	-7.28	Peak	202	113	5	12350.00	40.51	54.00	-13.49	34.68	5.83	Average	100	208	6	12350.00	54.57	74.00	-19.43	48.74	5.83	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	286																																																																
2	1000.00	37.32	54.00	-16.68	45.59	-8.27	Peak	100	286																																																																
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	202	113																																																																
4	1500.00	39.36	74.00	-34.64	46.64	-7.28	Peak	202	113																																																																
5	12350.00	40.51	54.00	-13.49	34.68	5.83	Average	100	208																																																																
6	12350.00	54.57	74.00	-19.43	48.74	5.83	Peak	100	208																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

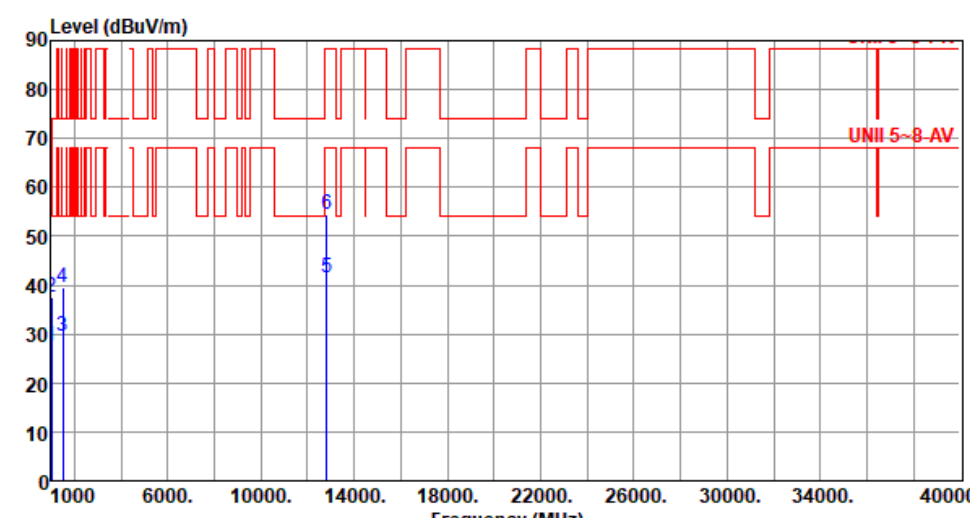


Modulation	11a	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	281
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	281
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	203	113
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	113
5	12830.00	41.38	68.20	-26.82	35.23	6.15	Average	100	279
6	12830.00	54.49	88.20	-33.71	48.34	6.15	Peak	100	279
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	251
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	251
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	132	125
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	132	125
5	12870.00	41.62	68.20	-26.58	35.55	6.07	Average	100	273
6	12870.00	54.38	88.20	-33.82	48.31	6.07	Peak	100	273
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

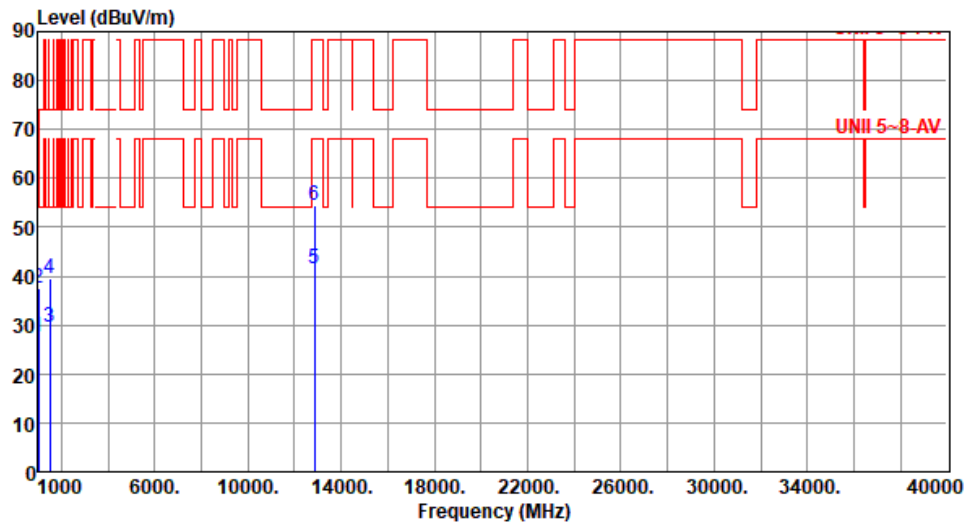

Modulation	11a	Test Freq. (MHz)	6435						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288
2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	288
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	105
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	105
5	12870.00	41.62	68.20	-26.58	35.55	6.07	Average	100	294
6	12870.00	54.51	88.20	-33.69	48.44	6.07	Peak	100	294
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.05</td><td>54.00</td><td>-25.95</td><td>36.32</td><td>-8.27</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1000.00</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>47.38</td><td>-8.27</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>1500.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>34.74</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>12950.00</td><td>41.13</td><td>68.20</td><td>-27.07</td><td>35.03</td><td>6.10</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>6</td><td>12950.00</td><td>54.37</td><td>88.20</td><td>-33.83</td><td>48.27</td><td>6.10</td><td>Peak</td><td>100</td><td>203</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.05	54.00	-25.95	36.32	-8.27	Average	100	253	2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	253	3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	131	122	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	122	5	12950.00	41.13	68.20	-27.07	35.03	6.10	Average	100	203	6	12950.00	54.37	88.20	-33.83	48.27	6.10	Peak	100	203
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.05	54.00	-25.95	36.32	-8.27	Average	100	253																																																																
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	253																																																																
3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	131	122																																																																
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	122																																																																
5	12950.00	41.13	68.20	-27.07	35.03	6.10	Average	100	203																																																																
6	12950.00	54.37	88.20	-33.83	48.27	6.10	Peak	100	203																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>35.89</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.61</td><td>54.00</td><td>-16.39</td><td>45.88</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.58</td><td>54.00</td><td>-24.42</td><td>36.86</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>12950.00</td><td>41.23</td><td>68.20</td><td>-26.97</td><td>35.13</td><td>6.10</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>6</td><td>12950.00</td><td>54.36</td><td>88.20</td><td>-33.84</td><td>48.26</td><td>6.10</td><td>Peak</td><td>100</td><td>248</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	286	2	1000.00	37.61	54.00	-16.39	45.88	-8.27	Peak	100	286	3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	111	5	12950.00	41.23	68.20	-26.97	35.13	6.10	Average	100	248	6	12950.00	54.36	88.20	-33.84	48.26	6.10	Peak	100	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	286																																																																
2	1000.00	37.61	54.00	-16.39	45.88	-8.27	Peak	100	286																																																																
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111																																																																
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	111																																																																
5	12950.00	41.23	68.20	-26.97	35.13	6.10	Average	100	248																																																																
6	12950.00	54.36	88.20	-33.84	48.26	6.10	Peak	100	248																																																																



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	6515						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	286
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	286
3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	203	115
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	115
5	13030.00	40.61	68.20	-27.59	34.60	6.01	Average	100	184
6	13030.00	54.33	88.20	-33.87	48.32	6.01	Peak	100	184

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>35.75</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>203</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>203</td><td>115</td></tr><tr><td>5</td><td>13070.00</td><td>41.42</td><td>68.20</td><td>-26.78</td><td>35.62</td><td>5.80</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>6</td><td>13070.00</td><td>53.98</td><td>88.20</td><td>-34.22</td><td>48.18</td><td>5.80</td><td>Peak</td><td>100</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	286	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	115	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	115	5	13070.00	41.42	68.20	-26.78	35.62	5.80	Average	100	123	6	13070.00	53.98	88.20	-34.22	48.18	5.80	Peak	100	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	286																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286																																																																
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	115																																																																
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	115																																																																
5	13070.00	41.42	68.20	-26.78	35.62	5.80	Average	100	123																																																																
6	13070.00	53.98	88.20	-34.22	48.18	5.80	Peak	100	123																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			




Modulation	11a	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>35.75</td><td>-8.27</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>1000.00</td><td>37.56</td><td>54.00</td><td>-16.44</td><td>45.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>1500.00</td><td>29.57</td><td>54.00</td><td>-24.43</td><td>36.85</td><td>-7.28</td><td>Average</td><td>203</td><td>114</td></tr><tr><td>4</td><td>1500.00</td><td>39.59</td><td>74.00</td><td>-34.41</td><td>46.87</td><td>-7.28</td><td>Peak</td><td>203</td><td>114</td></tr><tr><td>5</td><td>13430.00</td><td>41.55</td><td>68.20</td><td>-26.65</td><td>35.60</td><td>5.95</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>6</td><td>13430.00</td><td>55.58</td><td>88.20</td><td>-32.62</td><td>49.63</td><td>5.95</td><td>Peak</td><td>100</td><td>261</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288	2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	288	3	1500.00	29.57	54.00	-24.43	36.85	-7.28	Average	203	114	4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	114	5	13430.00	41.55	68.20	-26.65	35.60	5.95	Average	100	261	6	13430.00	55.58	88.20	-32.62	49.63	5.95	Peak	100	261
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288																																																																
2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	288																																																																
3	1500.00	29.57	54.00	-24.43	36.85	-7.28	Average	203	114																																																																
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	114																																																																
5	13430.00	41.55	68.20	-26.65	35.60	5.95	Average	100	261																																																																
6	13430.00	55.58	88.20	-32.62	49.63	5.95	Peak	100	261																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

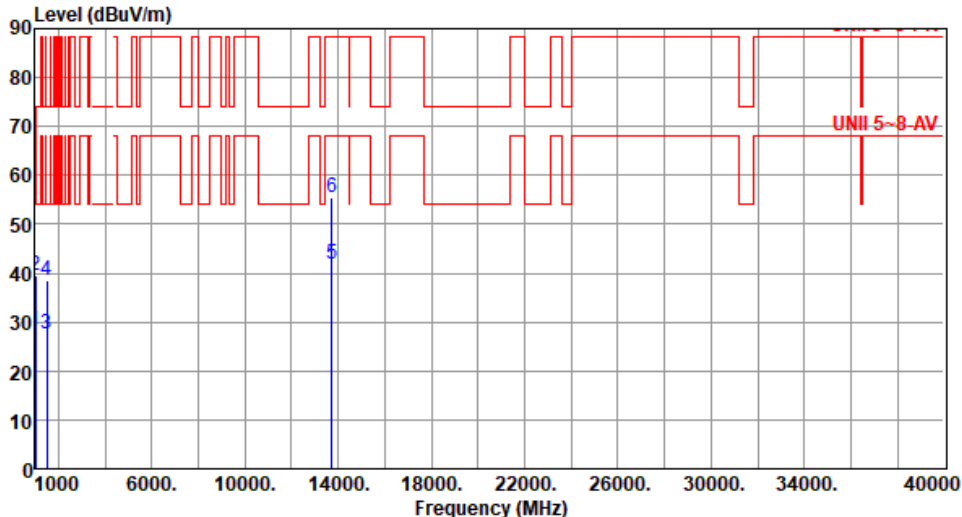

Modulation	11a	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>34.95</td><td>-7.28</td><td>Average</td><td>131</td><td>125</td></tr><tr><td>4</td><td>1500.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>45.80</td><td>-7.28</td><td>Peak</td><td>131</td><td>125</td></tr><tr><td>5</td><td>13710.00</td><td>41.76</td><td>68.20</td><td>-26.44</td><td>35.73</td><td>6.03</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>6</td><td>13710.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>49.56</td><td>6.03</td><td>Peak</td><td>100</td><td>277</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	250	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	250	3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	131	125	4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	131	125	5	13710.00	41.76	68.20	-26.44	35.73	6.03	Average	100	277	6	13710.00	55.59	88.20	-32.61	49.56	6.03	Peak	100	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	250																																																																
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	250																																																																
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	131	125																																																																
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	131	125																																																																
5	13710.00	41.76	68.20	-26.44	35.73	6.03	Average	100	277																																																																
6	13710.00	55.59	88.20	-32.61	49.56	6.03	Peak	100	277																																																																

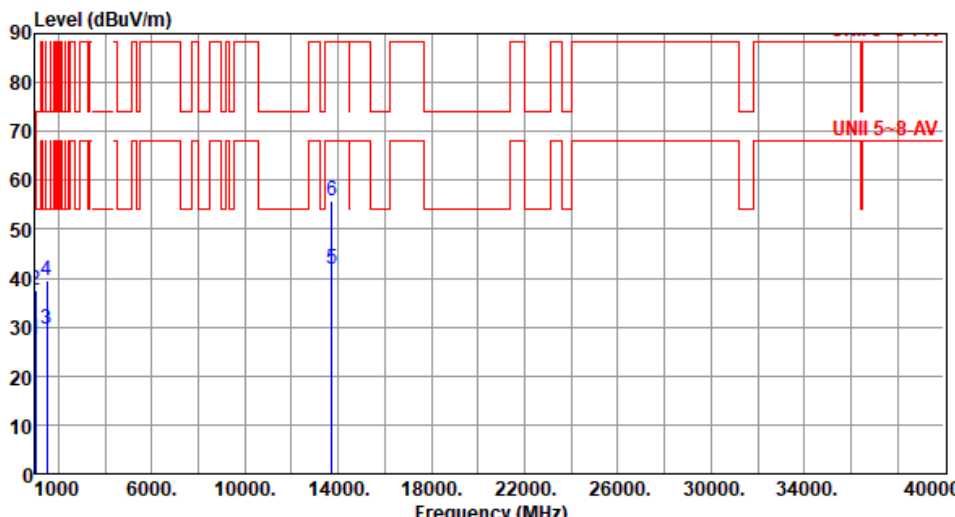

Modulation	11a	Test Freq. (MHz)	6855						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	286
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	286
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	114
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	114
5	13710.00	41.82	68.20	-26.38	35.79	6.03	Average	100	157
6	13710.00	55.73	88.20	-32.47	49.70	6.03	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.60</td><td>54.00</td><td>-26.40</td><td>34.88</td><td>-7.28</td><td>Average</td><td>128</td><td>125</td></tr><tr><td>4</td><td>1500.00</td><td>38.58</td><td>74.00</td><td>-35.42</td><td>45.86</td><td>-7.28</td><td>Peak</td><td>128</td><td>125</td></tr><tr><td>5</td><td>13750.00</td><td>41.76</td><td>68.20</td><td>-26.44</td><td>35.76</td><td>6.00</td><td>Average</td><td>100</td><td>274</td></tr><tr><td>6</td><td>13750.00</td><td>55.67</td><td>88.20</td><td>-32.53</td><td>49.67</td><td>6.00</td><td>Peak</td><td>100</td><td>274</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251	3	1500.00	27.60	54.00	-26.40	34.88	-7.28	Average	128	125	4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	128	125	5	13750.00	41.76	68.20	-26.44	35.76	6.00	Average	100	274	6	13750.00	55.67	88.20	-32.53	49.67	6.00	Peak	100	274
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251																																																																
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251																																																																
3	1500.00	27.60	54.00	-26.40	34.88	-7.28	Average	128	125																																																																
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	128	125																																																																
5	13750.00	41.76	68.20	-26.44	35.76	6.00	Average	100	274																																																																
6	13750.00	55.67	88.20	-32.53	49.67	6.00	Peak	100	274																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6875																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>35.73</td><td>-8.27</td><td>Average</td><td>100</td><td>289</td></tr><tr><td>2</td><td>1000.00</td><td>37.54</td><td>54.00</td><td>-16.46</td><td>45.81</td><td>-8.27</td><td>Peak</td><td>100</td><td>289</td></tr><tr><td>3</td><td>1500.00</td><td>29.62</td><td>54.00</td><td>-24.38</td><td>36.90</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.59</td><td>74.00</td><td>-34.41</td><td>46.87</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>13750.00</td><td>41.74</td><td>68.20</td><td>-26.46</td><td>35.74</td><td>6.00</td><td>Average</td><td>100</td><td>269</td></tr><tr><td>6</td><td>13750.00</td><td>56.12</td><td>88.20</td><td>-32.08</td><td>50.12</td><td>6.00</td><td>Peak</td><td>100</td><td>269</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	289	2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	289	3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	203	111	4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111	5	13750.00	41.74	68.20	-26.46	35.74	6.00	Average	100	269	6	13750.00	56.12	88.20	-32.08	50.12	6.00	Peak	100	269
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	289																																																																
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	289																																																																
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	203	111																																																																
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111																																																																
5	13750.00	41.74	68.20	-26.46	35.74	6.00	Average	100	269																																																																
6	13750.00	56.12	88.20	-32.08	50.12	6.00	Peak	100	269																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>126</td><td>124</td></tr><tr><td>4</td><td>1500.00</td><td>38.58</td><td>74.00</td><td>-35.42</td><td>45.86</td><td>-7.28</td><td>Peak</td><td>126</td><td>124</td></tr><tr><td>5</td><td>13790.00</td><td>41.76</td><td>68.20</td><td>-26.44</td><td>35.54</td><td>6.22</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>6</td><td>13790.00</td><td>56.72</td><td>88.20</td><td>-31.48</td><td>50.50</td><td>6.22</td><td>Peak</td><td>100</td><td>245</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	124	4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	126	124	5	13790.00	41.76	68.20	-26.44	35.54	6.22	Average	100	245	6	13790.00	56.72	88.20	-31.48	50.50	6.22	Peak	100	245
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246																																																																
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	124																																																																
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	126	124																																																																
5	13790.00	41.76	68.20	-26.44	35.54	6.22	Average	100	245																																																																
6	13790.00	56.72	88.20	-31.48	50.50	6.22	Peak	100	245																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	11a	Test Freq. (MHz)	6895																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>35.73</td><td>-8.27</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>2</td><td>1000.00</td><td>37.67</td><td>54.00</td><td>-16.33</td><td>45.94</td><td>-8.27</td><td>Peak</td><td>100</td><td>285</td></tr><tr><td>3</td><td>1500.00</td><td>29.58</td><td>54.00</td><td>-24.42</td><td>36.86</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>13790.00</td><td>41.72</td><td>68.20</td><td>-26.48</td><td>35.50</td><td>6.22</td><td>Average</td><td>100</td><td>169</td></tr><tr><td>6</td><td>13790.00</td><td>55.89</td><td>88.20</td><td>-32.31</td><td>49.67</td><td>6.22</td><td>Peak</td><td>100</td><td>169</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	285	2	1000.00	37.67	54.00	-16.33	45.94	-8.27	Peak	100	285	3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	111	5	13790.00	41.72	68.20	-26.48	35.50	6.22	Average	100	169	6	13790.00	55.89	88.20	-32.31	49.67	6.22	Peak	100	169
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	285																																																																
2	1000.00	37.67	54.00	-16.33	45.94	-8.27	Peak	100	285																																																																
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	111																																																																
5	13790.00	41.72	68.20	-26.48	35.50	6.22	Average	100	169																																																																
6	13790.00	55.89	88.20	-32.31	49.67	6.22	Peak	100	169																																																																



Modulation	11a	Test Freq. (MHz)	7015						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
								cm	deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	251
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	123
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	126	123
5	14030.00	43.24	68.20	-24.96	36.50	6.74	Average	100	160
6	14030.00	57.08	88.20	-31.12	50.34	6.74	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	11a	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.58</td><td>54.00</td><td>-26.42</td><td>35.85</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.54</td><td>54.00</td><td>-24.46</td><td>36.82</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.59</td><td>74.00</td><td>-34.41</td><td>46.87</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>14030.00</td><td>44.13</td><td>68.20</td><td>-24.07</td><td>37.39</td><td>6.74</td><td>Average</td><td>100</td><td>181</td></tr><tr><td>6</td><td>14030.00</td><td>57.34</td><td>88.20</td><td>-30.86</td><td>50.60</td><td>6.74</td><td>Peak</td><td>100</td><td>181</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.58	54.00	-26.42	35.85	-8.27	Average	100	286	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286	3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	203	111	4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111	5	14030.00	44.13	68.20	-24.07	37.39	6.74	Average	100	181	6	14030.00	57.34	88.20	-30.86	50.60	6.74	Peak	100	181
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.58	54.00	-26.42	35.85	-8.27	Average	100	286																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286																																																																
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	203	111																																																																
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111																																																																
5	14030.00	44.13	68.20	-24.07	37.39	6.74	Average	100	181																																																																
6	14030.00	57.34	88.20	-30.86	50.60	6.74	Peak	100	181																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>47.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>34.97</td><td>-7.28</td><td>Average</td><td>131</td><td>124</td></tr><tr><td>4</td><td>1500.00</td><td>38.87</td><td>74.00</td><td>-35.13</td><td>46.15</td><td>-7.28</td><td>Peak</td><td>131</td><td>124</td></tr><tr><td>5</td><td>14190.00</td><td>43.46</td><td>68.20</td><td>-24.74</td><td>36.56</td><td>6.90</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>6</td><td>14190.00</td><td>56.94</td><td>88.20</td><td>-31.26</td><td>50.04</td><td>6.90</td><td>Peak</td><td>100</td><td>288</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	245	2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245	3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	124	4	1500.00	38.87	74.00	-35.13	46.15	-7.28	Peak	131	124	5	14190.00	43.46	68.20	-24.74	36.56	6.90	Average	100	288	6	14190.00	56.94	88.20	-31.26	50.04	6.90	Peak	100	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	245																																																																
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245																																																																
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	124																																																																
4	1500.00	38.87	74.00	-35.13	46.15	-7.28	Peak	131	124																																																																
5	14190.00	43.46	68.20	-24.74	36.56	6.90	Average	100	288																																																																
6	14190.00	56.94	88.20	-31.26	50.04	6.90	Peak	100	288																																																																

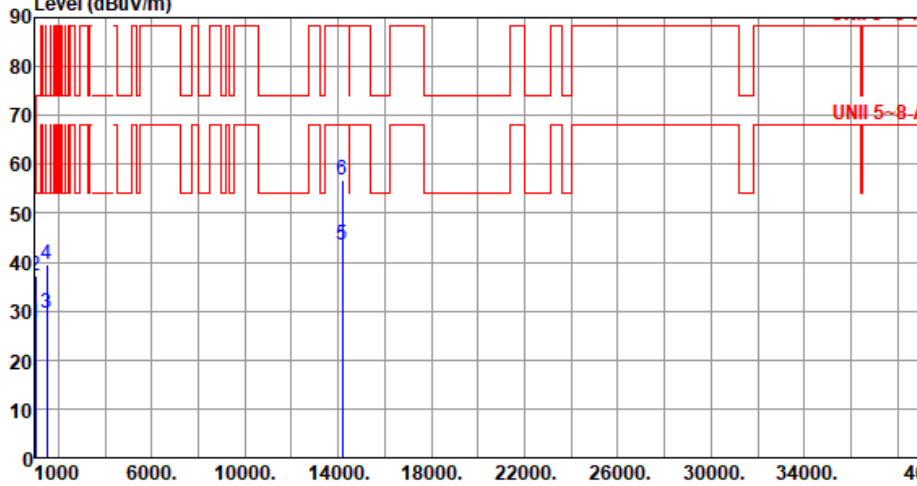

Modulation	11a	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288
2	1000.00	37.29	54.00	-16.71	45.56	-8.27	Peak	100	288
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	108
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	108
5	14190.00	43.42	68.20	-24.78	36.52	6.90	Average	100	219
6	14190.00	56.84	88.20	-31.36	49.94	6.90	Peak	100	219
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

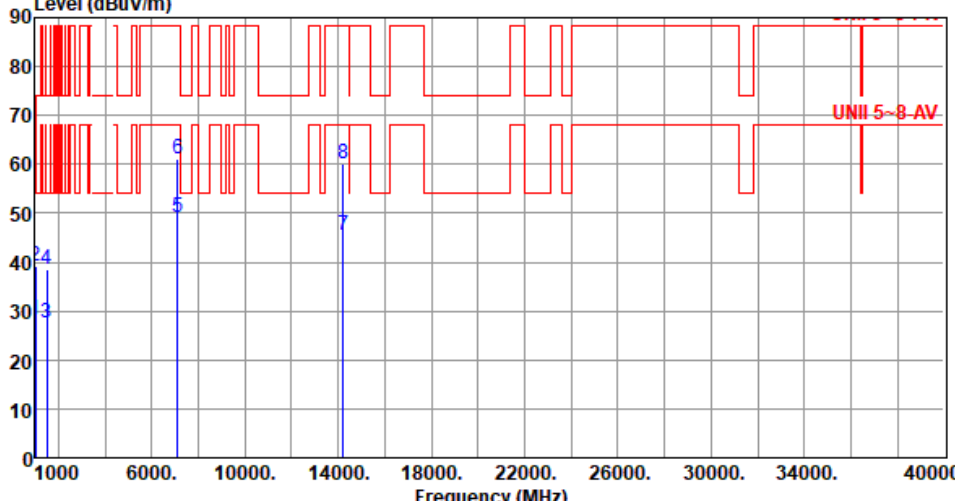

Modulation	11a	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.19	54.00	-25.81	36.46	-8.27	Average	100	252
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	252
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	125	119
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	119
5	7125.00	49.27	68.20	-18.93	44.41	4.86	Average	100	351
6	7125.00	61.16	88.20	-27.04	56.30	4.86	Peak	100	351
7	14230.00	45.60	68.20	-22.60	38.48	7.12	Average	100	177
8	14230.00	60.06	88.20	-28.14	52.94	7.12	Peak	100	177
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	11a	Test Freq. (MHz)	7115																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.51</td><td>54.00</td><td>-26.49</td><td>35.78</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.68</td><td>54.00</td><td>-24.32</td><td>36.96</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>7125.00</td><td>48.50</td><td>68.20</td><td>-19.70</td><td>43.64</td><td>4.86</td><td>Average</td><td>206</td><td>177</td></tr><tr><td>6</td><td>7125.00</td><td>60.80</td><td>88.20</td><td>-27.40</td><td>55.94</td><td>4.86</td><td>Peak</td><td>206</td><td>177</td></tr><tr><td>7</td><td>14230.00</td><td>45.91</td><td>68.20</td><td>-22.29</td><td>38.79</td><td>7.12</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>8</td><td>14230.00</td><td>60.24</td><td>88.20</td><td>-27.96</td><td>53.12</td><td>7.12</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.51	54.00	-26.49	35.78	-8.27	Average	100	278	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278	3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	111	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111	5	7125.00	48.50	68.20	-19.70	43.64	4.86	Average	206	177	6	7125.00	60.80	88.20	-27.40	55.94	4.86	Peak	206	177	7	14230.00	45.91	68.20	-22.29	38.79	7.12	Average	100	227	8	14230.00	60.24	88.20	-27.96	53.12	7.12	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.51	54.00	-26.49	35.78	-8.27	Average	100	278																																																																																				
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278																																																																																				
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	111																																																																																				
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111																																																																																				
5	7125.00	48.50	68.20	-19.70	43.64	4.86	Average	206	177																																																																																				
6	7125.00	60.80	88.20	-27.40	55.94	4.86	Peak	206	177																																																																																				
7	14230.00	45.91	68.20	-22.29	38.79	7.12	Average	100	227																																																																																				
8	14230.00	60.24	88.20	-27.96	53.12	7.12	Peak	100	227																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													


Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.30</td><td>54.00</td><td>-25.70</td><td>36.57</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>47.69</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>125</td><td>124</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>125</td><td>124</td></tr><tr><td>5</td><td>5925.00</td><td>43.07</td><td>68.20</td><td>-25.13</td><td>41.94</td><td>1.13</td><td>Average</td><td>141</td><td>341</td></tr><tr><td>6</td><td>5925.00</td><td>55.43</td><td>88.20</td><td>-32.77</td><td>54.30</td><td>1.13</td><td>Peak</td><td>141</td><td>341</td></tr><tr><td>7</td><td>11910.00</td><td>42.01</td><td>54.00</td><td>-11.99</td><td>35.92</td><td>6.09</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>8</td><td>11910.00</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>49.21</td><td>6.09</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.30	54.00	-25.70	36.57	-8.27	Average	100	251	2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	124	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	124	5	5925.00	43.07	68.20	-25.13	41.94	1.13	Average	141	341	6	5925.00	55.43	88.20	-32.77	54.30	1.13	Peak	141	341	7	11910.00	42.01	54.00	-11.99	35.92	6.09	Average	100	182	8	11910.00	55.30	74.00	-18.70	49.21	6.09	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.30	54.00	-25.70	36.57	-8.27	Average	100	251																																																																																				
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251																																																																																				
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	124																																																																																				
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	124																																																																																				
5	5925.00	43.07	68.20	-25.13	41.94	1.13	Average	141	341																																																																																				
6	5925.00	55.43	88.20	-32.77	54.30	1.13	Peak	141	341																																																																																				
7	11910.00	42.01	54.00	-11.99	35.92	6.09	Average	100	182																																																																																				
8	11910.00	55.30	74.00	-18.70	49.21	6.09	Peak	100	182																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.49</td><td>54.00</td><td>-26.51</td><td>35.76</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.58</td><td>54.00</td><td>-16.42</td><td>45.85</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.32</td><td>54.00</td><td>-24.68</td><td>36.60</td><td>-7.28</td><td>Average</td><td>203</td><td>107</td></tr><tr><td>4</td><td>1500.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>46.83</td><td>-7.28</td><td>Peak</td><td>203</td><td>107</td></tr><tr><td>5</td><td>5925.00</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>41.87</td><td>1.13</td><td>Average</td><td>226</td><td>262</td></tr><tr><td>6</td><td>5925.00</td><td>57.01</td><td>88.20</td><td>-31.19</td><td>55.88</td><td>1.13</td><td>Peak</td><td>226</td><td>262</td></tr><tr><td>7</td><td>11910.00</td><td>41.91</td><td>54.00</td><td>-12.09</td><td>35.82</td><td>6.09</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>8</td><td>11910.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>48.95</td><td>6.09</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.49	54.00	-26.51	35.76	-8.27	Average	100	286	2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	286	3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	203	107	4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	203	107	5	5925.00	43.00	68.20	-25.20	41.87	1.13	Average	226	262	6	5925.00	57.01	88.20	-31.19	55.88	1.13	Peak	226	262	7	11910.00	41.91	54.00	-12.09	35.82	6.09	Average	100	176	8	11910.00	55.04	74.00	-18.96	48.95	6.09	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.49	54.00	-26.51	35.76	-8.27	Average	100	286																																																																																				
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	286																																																																																				
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	203	107																																																																																				
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	203	107																																																																																				
5	5925.00	43.00	68.20	-25.20	41.87	1.13	Average	226	262																																																																																				
6	5925.00	57.01	88.20	-31.19	55.88	1.13	Peak	226	262																																																																																				
7	11910.00	41.91	54.00	-12.09	35.82	6.09	Average	100	176																																																																																				
8	11910.00	55.04	74.00	-18.96	48.95	6.09	Peak	100	176																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

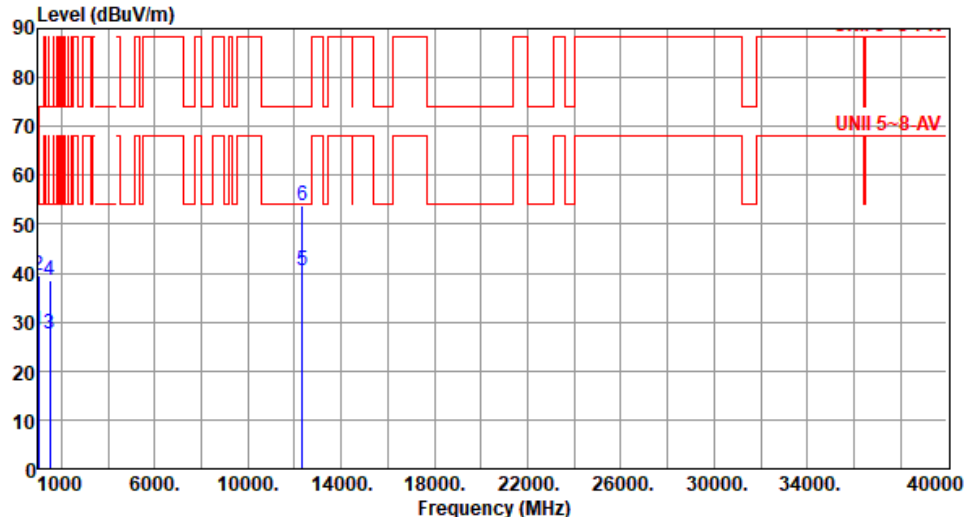

Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>47.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>125</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>45.80</td><td>-7.28</td><td>Peak</td><td>125</td><td>123</td></tr><tr><td>5</td><td>12350.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>34.52</td><td>5.83</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>12350.00</td><td>53.65</td><td>74.00</td><td>-20.35</td><td>47.82</td><td>5.83</td><td>Peak</td><td>100</td><td>251</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	243	2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	243	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	123	4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	125	123	5	12350.00	40.35	54.00	-13.65	34.52	5.83	Average	100	251	6	12350.00	53.65	74.00	-20.35	47.82	5.83	Peak	100	251
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	243																																																																
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	243																																																																
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	123																																																																
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	125	123																																																																
5	12350.00	40.35	54.00	-13.65	34.52	5.83	Average	100	251																																																																
6	12350.00	53.65	74.00	-20.35	47.82	5.83	Peak	100	251																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6175						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.55	54.00	-26.45	35.82	-8.27	Average	100	287
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	287
3	1500.00	29.53	54.00	-24.47	36.81	-7.28	Average	203	112
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	112
5	12350.00	40.40	54.00	-13.60	34.57	5.83	Average	100	176
6	12350.00	54.45	74.00	-19.55	48.62	5.83	Peak	100	176
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) UNII 5~8-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>1000.00</td><td>39.18</td><td>54.00</td><td>-14.82</td><td>47.45</td><td>-8.27</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>1500.00</td><td>27.52</td><td>54.00</td><td>-26.48</td><td>34.80</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>12830.00</td><td>41.27</td><td>68.20</td><td>-26.93</td><td>35.12</td><td>6.15</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>6</td><td>12830.00</td><td>54.36</td><td>88.20</td><td>-33.84</td><td>48.21</td><td>6.15</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	242	2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	242	3	1500.00	27.52	54.00	-26.48	34.80	-7.28	Average	126	122	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	122	5	12830.00	41.27	68.20	-26.93	35.12	6.15	Average	100	173	6	12830.00	54.36	88.20	-33.84	48.21	6.15	Peak	100	173
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	242																																																																
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	242																																																																
3	1500.00	27.52	54.00	-26.48	34.80	-7.28	Average	126	122																																																																
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	122																																																																
5	12830.00	41.27	68.20	-26.93	35.12	6.15	Average	100	173																																																																
6	12830.00	54.36	88.20	-33.84	48.21	6.15	Peak	100	173																																																																

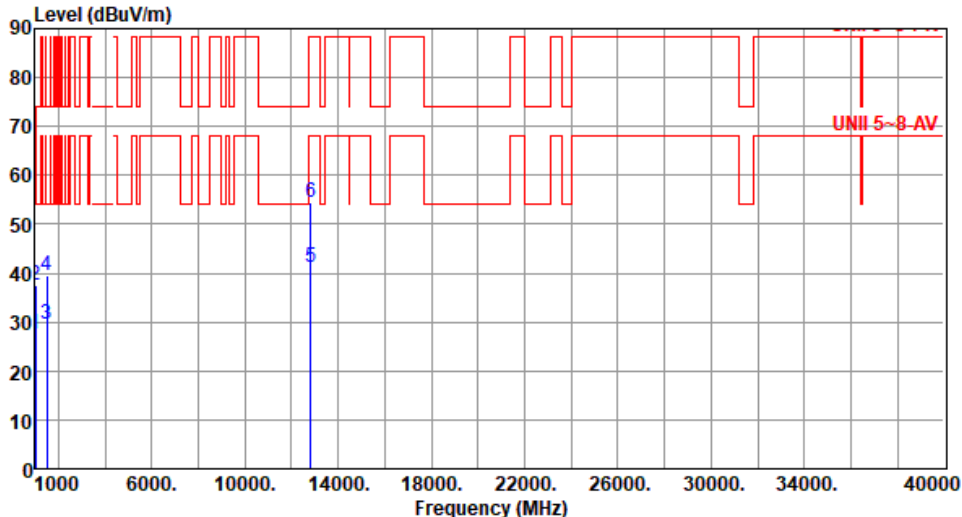

Modulation	be EHT20	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	286
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	199	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	199	113
5	12830.00	41.23	68.20	-26.97	35.08	6.15	Average	100	281
6	12830.00	54.42	88.20	-33.78	48.27	6.15	Peak	100	281


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

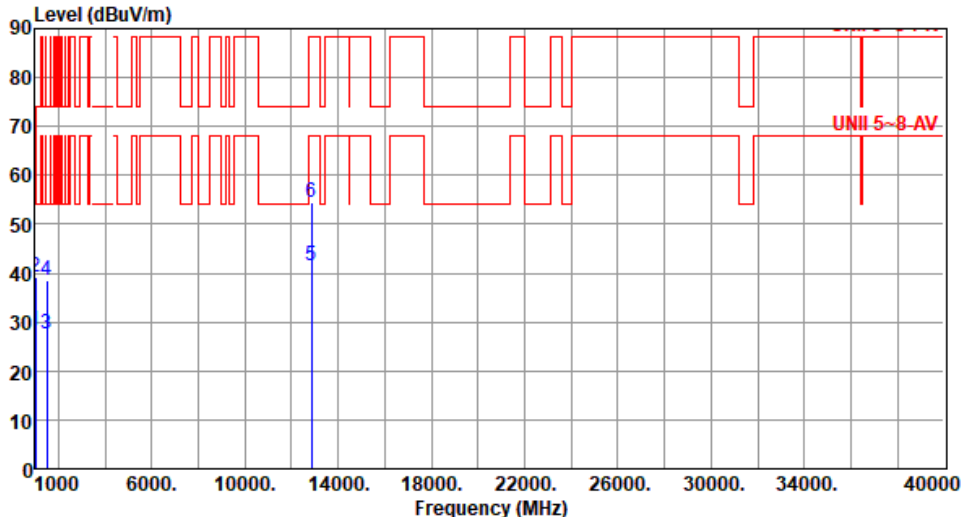

Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	252
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	252
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	129	122
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	129	122
5	12870.00	41.59	68.20	-26.61	35.52	6.07	Average	100	254
6	12870.00	54.51	88.20	-33.69	48.44	6.07	Peak	100	254


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

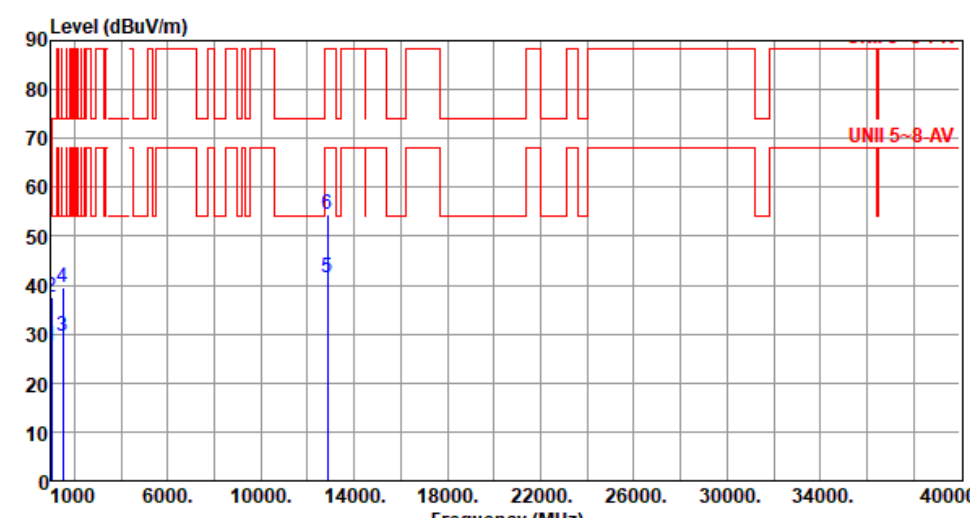


Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	285
2	1000.00	37.53	54.00	-16.47	45.80	-8.27	Peak	100	285
3	1500.00	29.44	54.00	-24.56	36.72	-7.28	Average	202	113
4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	202	113
5	12870.00	41.59	68.20	-26.61	35.52	6.07	Average	100	281
6	12870.00	54.37	88.20	-33.83	48.30	6.07	Peak	100	281

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

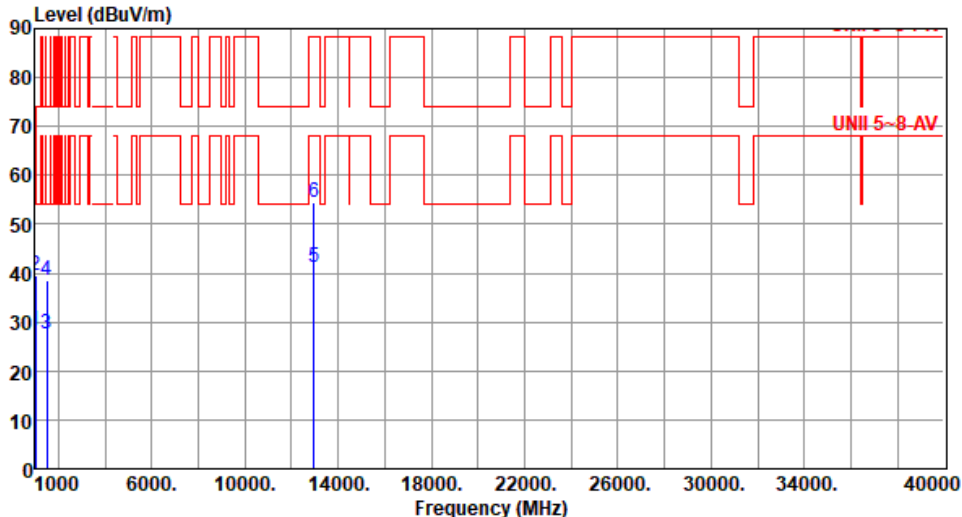

Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.18</td><td>54.00</td><td>-25.82</td><td>36.45</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>125</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.69</td><td>74.00</td><td>-35.31</td><td>45.97</td><td>-7.28</td><td>Peak</td><td>125</td><td>122</td></tr><tr><td>5</td><td>12950.00</td><td>41.21</td><td>68.20</td><td>-26.99</td><td>35.11</td><td>6.10</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>12950.00</td><td>54.33</td><td>88.20</td><td>-33.87</td><td>48.23</td><td>6.10</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.18	54.00	-25.82	36.45	-8.27	Average	100	246	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	246	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	122	4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	125	122	5	12950.00	41.21	68.20	-26.99	35.11	6.10	Average	100	178	6	12950.00	54.33	88.20	-33.87	48.23	6.10	Peak	100	178
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.18	54.00	-25.82	36.45	-8.27	Average	100	246																																																																
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	246																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	122																																																																
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	125	122																																																																
5	12950.00	41.21	68.20	-26.99	35.11	6.10	Average	100	178																																																																
6	12950.00	54.33	88.20	-33.87	48.23	6.10	Peak	100	178																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

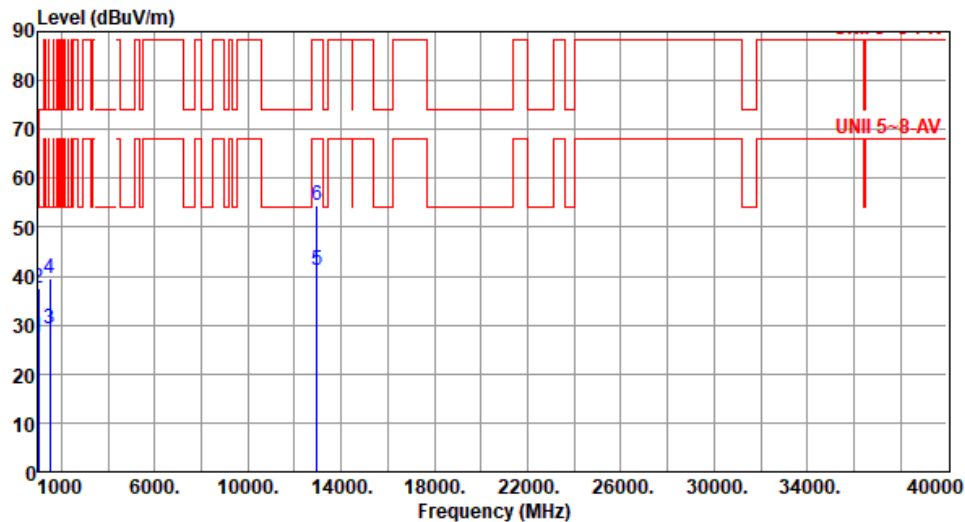


Modulation	be EHT20	Test Freq. (MHz)	6475																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>35.75</td><td>-8.27</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>285</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>12950.00</td><td>41.18</td><td>68.20</td><td>-27.02</td><td>35.08</td><td>6.10</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>12950.00</td><td>54.43</td><td>88.20</td><td>-33.77</td><td>48.33</td><td>6.10</td><td>Peak</td><td>100</td><td>251</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	285	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	111	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111	5	12950.00	41.18	68.20	-27.02	35.08	6.10	Average	100	251	6	12950.00	54.43	88.20	-33.77	48.33	6.10	Peak	100	251			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285																																																																	
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	285																																																																	
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	111																																																																	
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111																																																																	
5	12950.00	41.18	68.20	-27.02	35.08	6.10	Average	100	251																																																																	
6	12950.00	54.43	88.20	-33.77	48.33	6.10	Peak	100	251																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

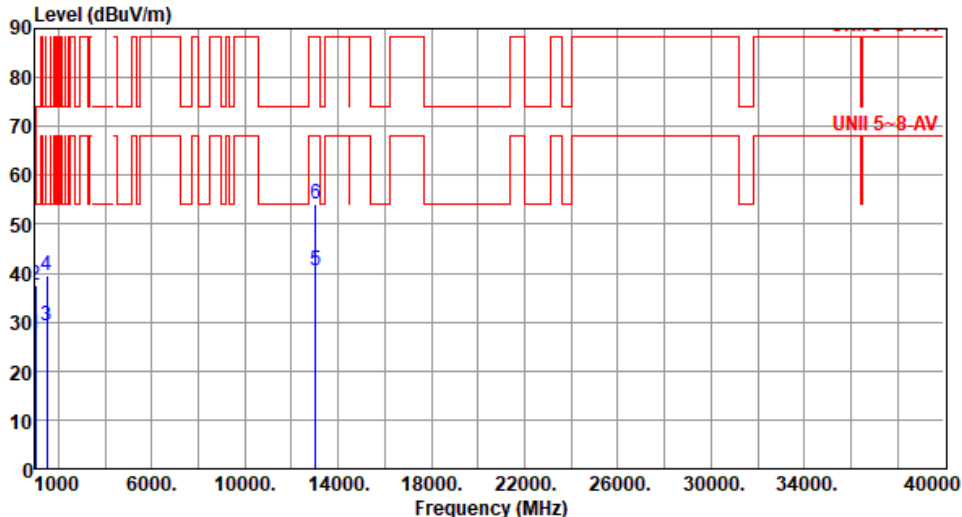

Modulation	be EHT20	Test Freq. (MHz)	6515						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	205	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113
5	13030.00	40.56	68.20	-27.64	34.55	6.01	Average	100	155
6	13030.00	54.27	88.20	-33.93	48.26	6.01	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT20	Test Freq. (MHz)	6535
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>35.91</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.54</td><td>54.00</td><td>-24.46</td><td>36.82</td><td>-7.28</td><td>Average</td><td>198</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.28</td><td>74.00</td><td>-34.72</td><td>46.56</td><td>-7.28</td><td>Peak</td><td>198</td><td>108</td></tr><tr><td>5</td><td>13070.00</td><td>41.36</td><td>68.20</td><td>-26.84</td><td>35.56</td><td>5.80</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>6</td><td>13070.00</td><td>53.95</td><td>88.20</td><td>-34.25</td><td>48.15</td><td>5.80</td><td>Peak</td><td>100</td><td>118</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	286	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	286	3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	198	108	4	1500.00	39.28	74.00	-34.72	46.56	-7.28	Peak	198	108	5	13070.00	41.36	68.20	-26.84	35.56	5.80	Average	100	118	6	13070.00	53.95	88.20	-34.25	48.15	5.80	Peak	100	118
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	286																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	286																																																																
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	198	108																																																																
4	1500.00	39.28	74.00	-34.72	46.56	-7.28	Peak	198	108																																																																
5	13070.00	41.36	68.20	-26.84	35.56	5.80	Average	100	118																																																																
6	13070.00	53.95	88.20	-34.25	48.15	5.80	Peak	100	118																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

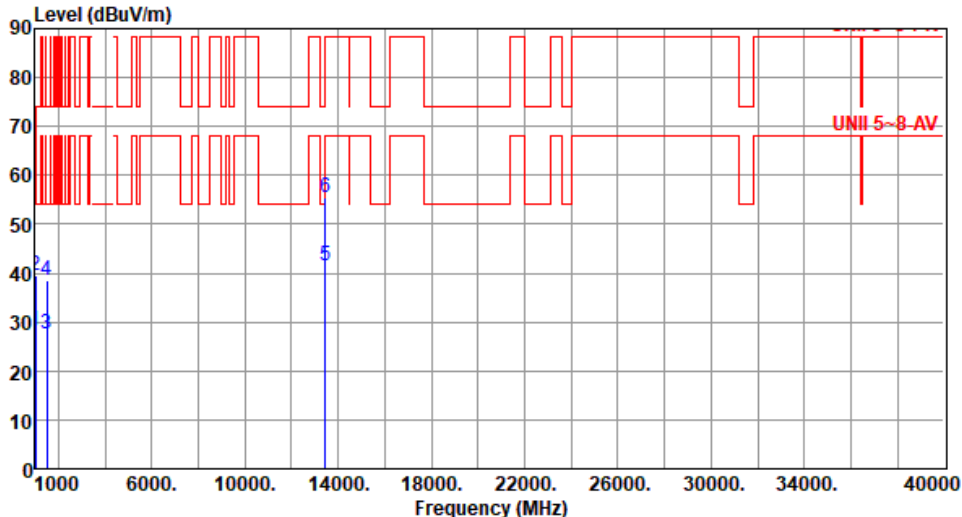

Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	253
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	253
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	120
4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	126	120
5	13430.00	41.63	68.20	-26.57	35.68	5.95	Average	100	251
6	13430.00	55.34	88.20	-32.86	49.39	5.95	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

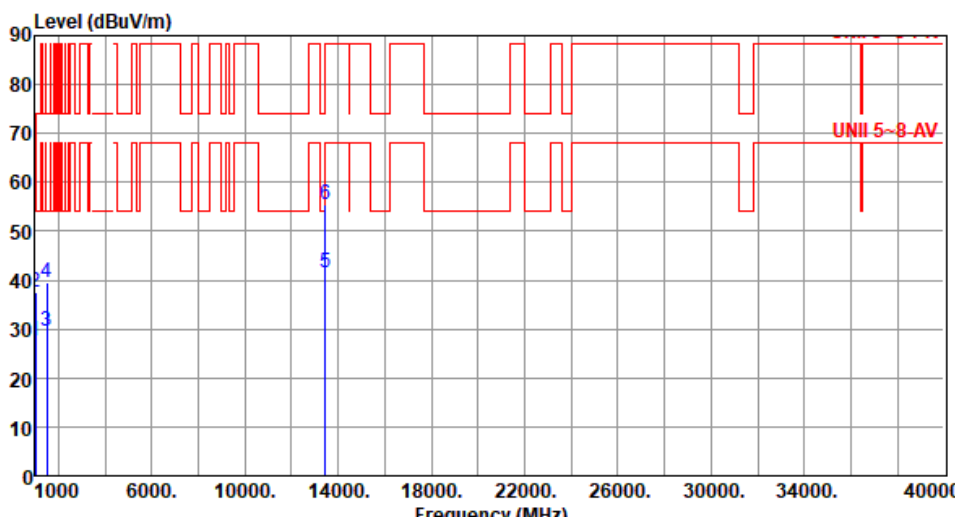


Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>35.69</td><td>-8.27</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>1000.00</td><td>37.49</td><td>54.00</td><td>-16.51</td><td>45.76</td><td>-8.27</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>1500.00</td><td>29.62</td><td>54.00</td><td>-24.38</td><td>36.90</td><td>-7.28</td><td>Average</td><td>205</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>205</td><td>113</td></tr><tr><td>5</td><td>13430.00</td><td>41.60</td><td>68.20</td><td>-26.60</td><td>35.65</td><td>5.95</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>6</td><td>13430.00</td><td>55.47</td><td>88.20</td><td>-32.73</td><td>49.52</td><td>5.95</td><td>Peak</td><td>100</td><td>257</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	288	2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	288	3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	205	113	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113	5	13430.00	41.60	68.20	-26.60	35.65	5.95	Average	100	257	6	13430.00	55.47	88.20	-32.73	49.52	5.95	Peak	100	257
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	288																																																																
2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	288																																																																
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	205	113																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113																																																																
5	13430.00	41.60	68.20	-26.60	35.65	5.95	Average	100	257																																																																
6	13430.00	55.47	88.20	-32.73	49.52	5.95	Peak	100	257																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.29</td><td>54.00</td><td>-25.71</td><td>36.56</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>47.69</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.88</td><td>74.00</td><td>-35.12</td><td>46.16</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>13710.00</td><td>41.89</td><td>68.20</td><td>-26.31</td><td>35.86</td><td>6.03</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>13710.00</td><td>55.61</td><td>88.20</td><td>-32.59</td><td>49.58</td><td>6.03</td><td>Peak</td><td>100</td><td>284</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	246	2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	246	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122	4	1500.00	38.88	74.00	-35.12	46.16	-7.28	Peak	131	122	5	13710.00	41.89	68.20	-26.31	35.86	6.03	Average	100	284	6	13710.00	55.61	88.20	-32.59	49.58	6.03	Peak	100	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	246																																																																
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	246																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122																																																																
4	1500.00	38.88	74.00	-35.12	46.16	-7.28	Peak	131	122																																																																
5	13710.00	41.89	68.20	-26.31	35.86	6.03	Average	100	284																																																																
6	13710.00	55.61	88.20	-32.59	49.58	6.03	Peak	100	284																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

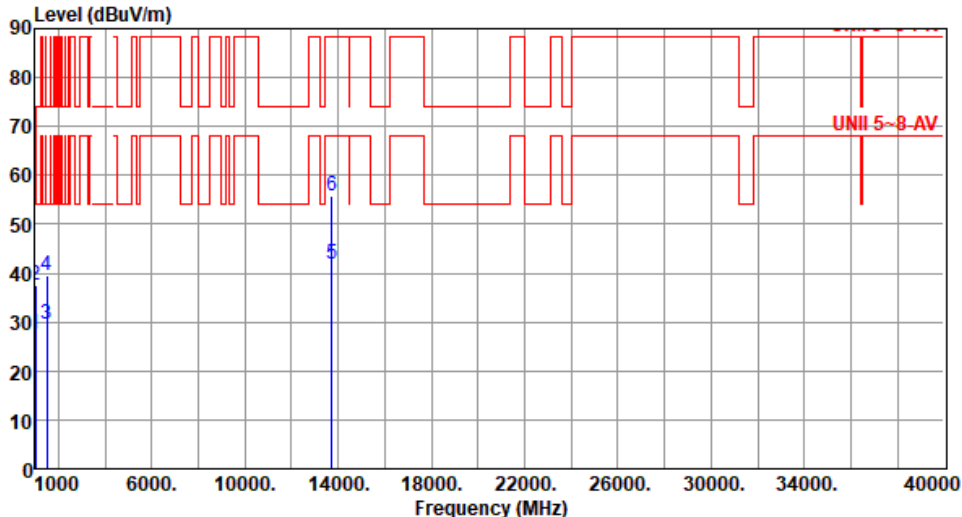

Modulation	be EHT20	Test Freq. (MHz)	6855						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	282
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	282
3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	203	111
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111
5	13710.00	41.85	68.20	-26.35	35.82	6.03	Average	100	164
6	13710.00	55.69	88.20	-32.51	49.66	6.03	Peak	100	164

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>34.76</td><td>-7.28</td><td>Average</td><td>126</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.55</td><td>74.00</td><td>-35.45</td><td>45.83</td><td>-7.28</td><td>Peak</td><td>126</td><td>118</td></tr><tr><td>5</td><td>13750.00</td><td>41.71</td><td>68.20</td><td>-26.49</td><td>35.71</td><td>6.00</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>6</td><td>13750.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>49.88</td><td>6.00</td><td>Peak</td><td>100</td><td>288</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	245	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	245	3	1500.00	27.48	54.00	-26.52	34.76	-7.28	Average	126	118	4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	126	118	5	13750.00	41.71	68.20	-26.49	35.71	6.00	Average	100	288	6	13750.00	55.88	88.20	-32.32	49.88	6.00	Peak	100	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	245																																																																
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	245																																																																
3	1500.00	27.48	54.00	-26.52	34.76	-7.28	Average	126	118																																																																
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	126	118																																																																
5	13750.00	41.71	68.20	-26.49	35.71	6.00	Average	100	288																																																																
6	13750.00	55.88	88.20	-32.32	49.88	6.00	Peak	100	288																																																																




Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.44</td><td>54.00</td><td>-26.56</td><td>35.71</td><td>-8.27</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>2</td><td>1000.00</td><td>37.21</td><td>54.00</td><td>-16.79</td><td>45.48</td><td>-8.27</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>3</td><td>1500.00</td><td>29.30</td><td>54.00</td><td>-24.70</td><td>36.58</td><td>-7.28</td><td>Average</td><td>205</td><td>107</td></tr><tr><td>4</td><td>1500.00</td><td>39.33</td><td>74.00</td><td>-34.67</td><td>46.61</td><td>-7.28</td><td>Peak</td><td>205</td><td>107</td></tr><tr><td>5</td><td>13750.00</td><td>41.89</td><td>68.20</td><td>-26.31</td><td>35.89</td><td>6.00</td><td>Average</td><td>100</td><td>280</td></tr><tr><td>6</td><td>13750.00</td><td>55.92</td><td>88.20</td><td>-32.28</td><td>49.92</td><td>6.00</td><td>Peak</td><td>100</td><td>280</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	281	2	1000.00	37.21	54.00	-16.79	45.48	-8.27	Peak	100	281	3	1500.00	29.30	54.00	-24.70	36.58	-7.28	Average	205	107	4	1500.00	39.33	74.00	-34.67	46.61	-7.28	Peak	205	107	5	13750.00	41.89	68.20	-26.31	35.89	6.00	Average	100	280	6	13750.00	55.92	88.20	-32.28	49.92	6.00	Peak	100	280
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	281																																																																
2	1000.00	37.21	54.00	-16.79	45.48	-8.27	Peak	100	281																																																																
3	1500.00	29.30	54.00	-24.70	36.58	-7.28	Average	205	107																																																																
4	1500.00	39.33	74.00	-34.67	46.61	-7.28	Peak	205	107																																																																
5	13750.00	41.89	68.20	-26.31	35.89	6.00	Average	100	280																																																																
6	13750.00	55.92	88.20	-32.28	49.92	6.00	Peak	100	280																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

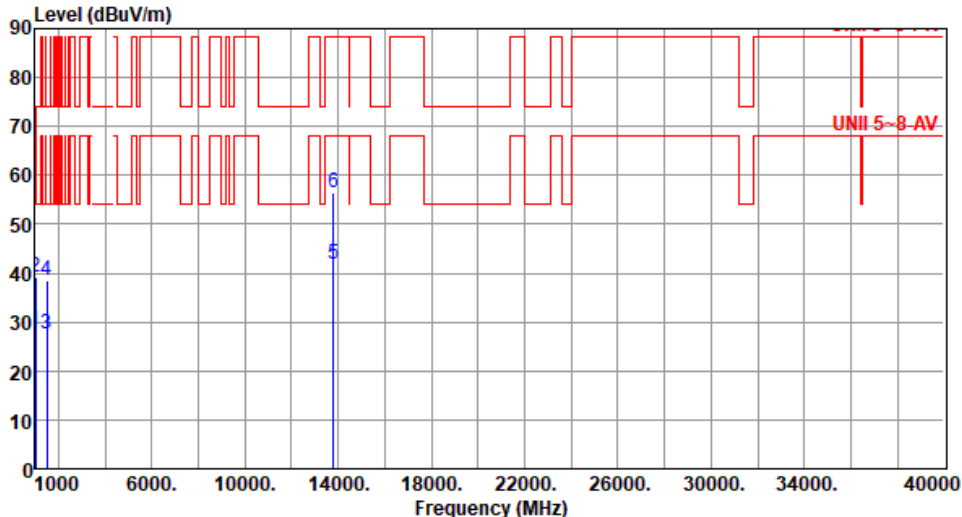


Modulation	be EHT20	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1000.00</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>47.38</td><td>-8.27</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>1500.00</td><td>27.71</td><td>54.00</td><td>-26.29</td><td>34.99</td><td>-7.28</td><td>Average</td><td>126</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.69</td><td>74.00</td><td>-35.31</td><td>45.97</td><td>-7.28</td><td>Peak</td><td>126</td><td>118</td></tr><tr><td>5</td><td>13790.00</td><td>41.80</td><td>68.20</td><td>-26.40</td><td>35.58</td><td>6.22</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>6</td><td>13790.00</td><td>56.55</td><td>88.20</td><td>-31.65</td><td>50.33</td><td>6.22</td><td>Peak</td><td>100</td><td>255</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	252	2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	252	3	1500.00	27.71	54.00	-26.29	34.99	-7.28	Average	126	118	4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	126	118	5	13790.00	41.80	68.20	-26.40	35.58	6.22	Average	100	255	6	13790.00	56.55	88.20	-31.65	50.33	6.22	Peak	100	255
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	252																																																																
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	252																																																																
3	1500.00	27.71	54.00	-26.29	34.99	-7.28	Average	126	118																																																																
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	126	118																																																																
5	13790.00	41.80	68.20	-26.40	35.58	6.22	Average	100	255																																																																
6	13790.00	56.55	88.20	-31.65	50.33	6.22	Peak	100	255																																																																

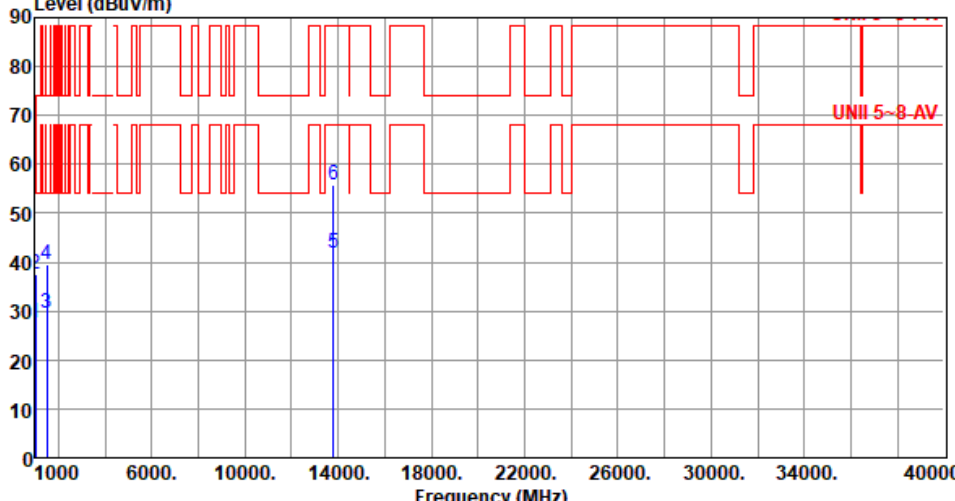


Modulation	be EHT20	Test Freq. (MHz)	6895																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>35.91</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.61</td><td>54.00</td><td>-24.39</td><td>36.89</td><td>-7.28</td><td>Average</td><td>203</td><td>107</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>203</td><td>107</td></tr><tr><td>5</td><td>13790.00</td><td>41.83</td><td>68.20</td><td>-26.37</td><td>35.61</td><td>6.22</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>6</td><td>13790.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>49.64</td><td>6.22</td><td>Peak</td><td>100</td><td>173</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	279	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279	3	1500.00	29.61	54.00	-24.39	36.89	-7.28	Average	203	107	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	107	5	13790.00	41.83	68.20	-26.37	35.61	6.22	Average	100	173	6	13790.00	55.86	88.20	-32.34	49.64	6.22	Peak	100	173
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	279																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279																																																																
3	1500.00	29.61	54.00	-24.39	36.89	-7.28	Average	203	107																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	107																																																																
5	13790.00	41.83	68.20	-26.37	35.61	6.22	Average	100	173																																																																
6	13790.00	55.86	88.20	-32.34	49.64	6.22	Peak	100	173																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

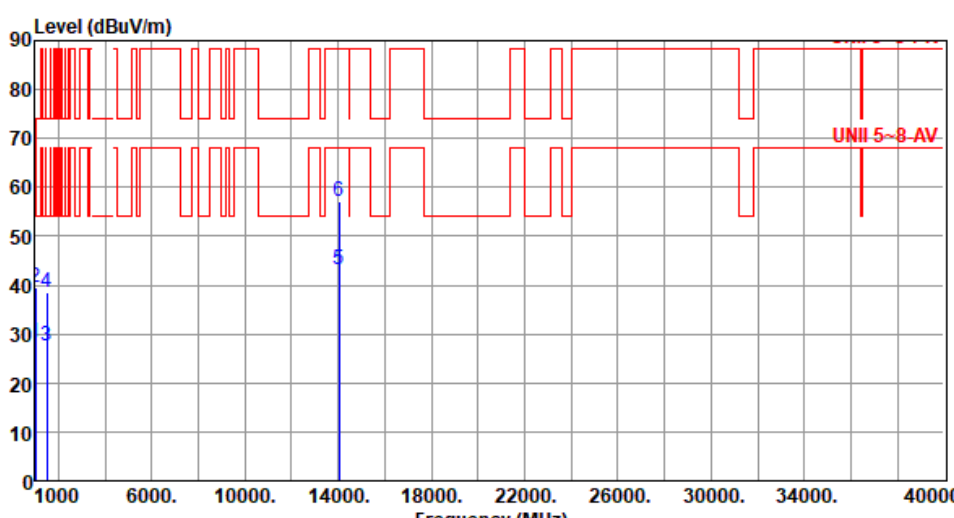

Modulation	be EHT20	Test Freq. (MHz)	7015						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	253
2	1000.00	39.55	54.00	-14.45	47.82	-8.27	Peak	100	253
3	1500.00	27.72	54.00	-26.28	35.00	-7.28	Average	131	125
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	125
5	14030.00	43.12	68.20	-25.08	36.38	6.74	Average	100	157
6	14030.00	57.01	88.20	-31.19	50.27	6.74	Peak	100	157

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

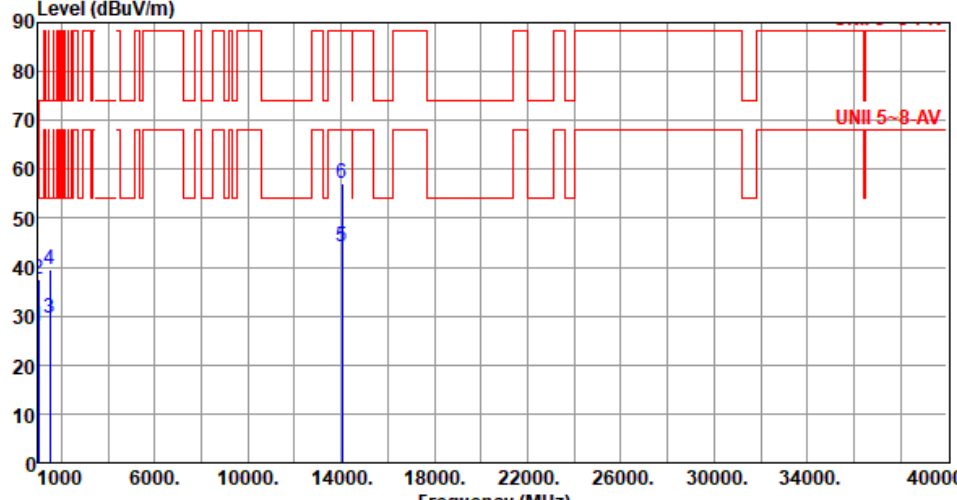


Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>36.05</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>45.96</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.50</td><td>54.00</td><td>-24.50</td><td>36.78</td><td>-7.28</td><td>Average</td><td>203</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>46.92</td><td>-7.28</td><td>Peak</td><td>203</td><td>115</td></tr><tr><td>5</td><td>14030.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.28</td><td>6.74</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td>14030.00</td><td>57.22</td><td>88.20</td><td>-30.98</td><td>50.48</td><td>6.74</td><td>Peak</td><td>100</td><td>176</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	282	2	1000.00	37.69	54.00	-16.31	45.96	-8.27	Peak	100	282	3	1500.00	29.50	54.00	-24.50	36.78	-7.28	Average	203	115	4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	115	5	14030.00	44.02	68.20	-24.18	37.28	6.74	Average	100	176	6	14030.00	57.22	88.20	-30.98	50.48	6.74	Peak	100	176
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	282																																																																
2	1000.00	37.69	54.00	-16.31	45.96	-8.27	Peak	100	282																																																																
3	1500.00	29.50	54.00	-24.50	36.78	-7.28	Average	203	115																																																																
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	115																																																																
5	14030.00	44.02	68.20	-24.18	37.28	6.74	Average	100	176																																																																
6	14030.00	57.22	88.20	-30.98	50.48	6.74	Peak	100	176																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.09</td><td>54.00</td><td>-14.91</td><td>47.36</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.44</td><td>54.00</td><td>-26.56</td><td>34.72</td><td>-7.28</td><td>Average</td><td>131</td><td>126</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>131</td><td>126</td></tr><tr><td>5</td><td>14190.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>36.50</td><td>6.90</td><td>Average</td><td>100</td><td>274</td></tr><tr><td>6</td><td>14190.00</td><td>56.78</td><td>88.20</td><td>-31.42</td><td>49.88</td><td>6.90</td><td>Peak</td><td>100</td><td>274</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	246	2	1000.00	39.09	54.00	-14.91	47.36	-8.27	Peak	100	246	3	1500.00	27.44	54.00	-26.56	34.72	-7.28	Average	131	126	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	126	5	14190.00	43.40	68.20	-24.80	36.50	6.90	Average	100	274	6	14190.00	56.78	88.20	-31.42	49.88	6.90	Peak	100	274
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	246																																																																
2	1000.00	39.09	54.00	-14.91	47.36	-8.27	Peak	100	246																																																																
3	1500.00	27.44	54.00	-26.56	34.72	-7.28	Average	131	126																																																																
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	126																																																																
5	14190.00	43.40	68.20	-24.80	36.50	6.90	Average	100	274																																																																
6	14190.00	56.78	88.20	-31.42	49.88	6.90	Peak	100	274																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

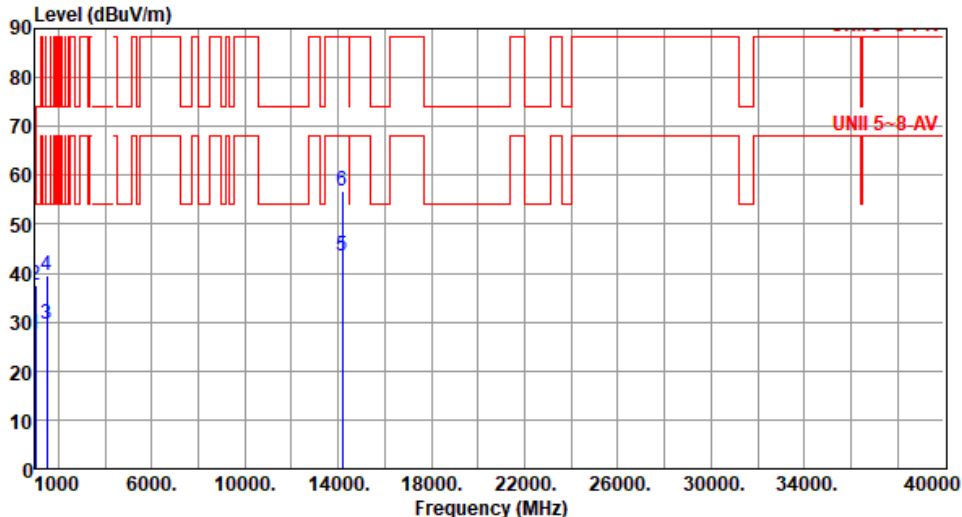


Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	107
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	107
5	14190.00	43.37	68.20	-24.83	36.47	6.90	Average	100	227
6	14190.00	56.72	88.20	-31.48	49.82	6.90	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

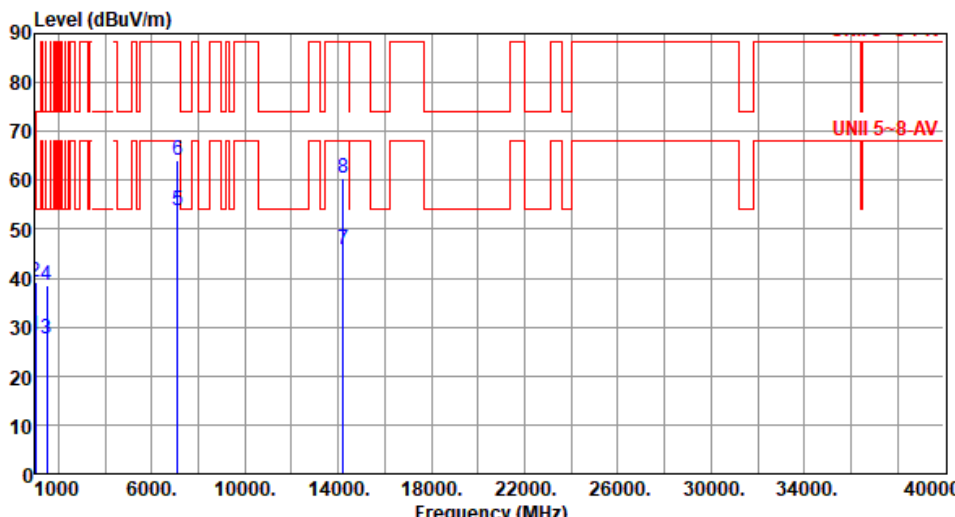


Modulation	be EHT20	Test Freq. (MHz)	7115																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>47.38</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>131</td><td>124</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>131</td><td>124</td></tr><tr><td>5</td><td>7125.00</td><td>53.70</td><td>68.20</td><td>-14.50</td><td>48.84</td><td>4.86</td><td>Average</td><td>122</td><td>358</td></tr><tr><td>6</td><td>7125.00</td><td>64.06</td><td>88.20</td><td>-24.14</td><td>59.20</td><td>4.86</td><td>Peak</td><td>122</td><td>358</td></tr><tr><td>7</td><td>14230.00</td><td>45.84</td><td>68.20</td><td>-22.36</td><td>38.72</td><td>7.12</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>8</td><td>14230.00</td><td>60.36</td><td>88.20</td><td>-27.84</td><td>53.24</td><td>7.12</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	245	2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	245	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	124	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	124	5	7125.00	53.70	68.20	-14.50	48.84	4.86	Average	122	358	6	7125.00	64.06	88.20	-24.14	59.20	4.86	Peak	122	358	7	14230.00	45.84	68.20	-22.36	38.72	7.12	Average	100	185	8	14230.00	60.36	88.20	-27.84	53.24	7.12	Peak	100	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	245																																																																																				
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	245																																																																																				
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	124																																																																																				
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	124																																																																																				
5	7125.00	53.70	68.20	-14.50	48.84	4.86	Average	122	358																																																																																				
6	7125.00	64.06	88.20	-24.14	59.20	4.86	Peak	122	358																																																																																				
7	14230.00	45.84	68.20	-22.36	38.72	7.12	Average	100	185																																																																																				
8	14230.00	60.36	88.20	-27.84	53.24	7.12	Peak	100	185																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

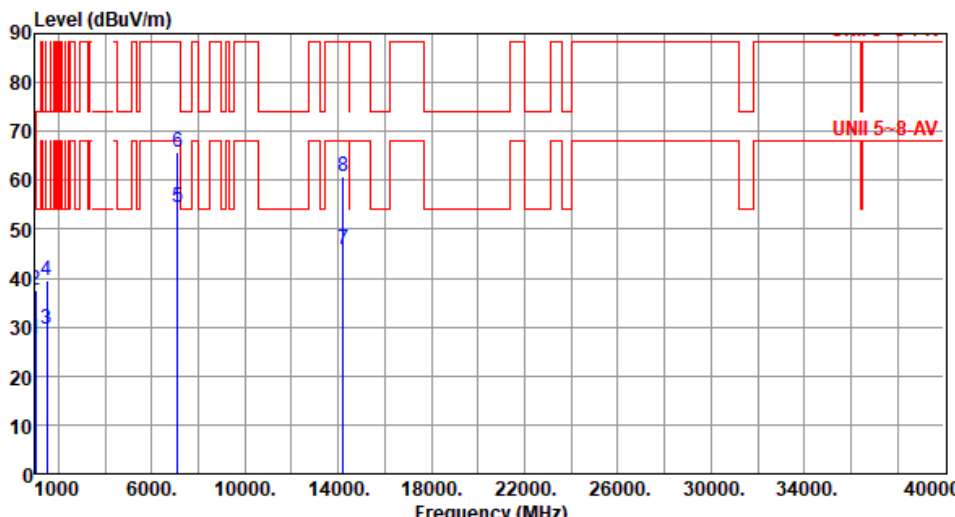


Modulation	be EHT20	Test Freq. (MHz)	7115						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.56	54.00	-24.44	36.84	-7.28	Average	202	108
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	202	108
5	7125.00	54.50	68.20	-13.70	49.64	4.86	Average	198	182
6	7125.00	65.82	88.20	-22.38	60.96	4.86	Peak	198	182
7	14230.00	45.69	68.20	-22.51	38.57	7.12	Average	100	285
8	14230.00	60.74	88.20	-27.46	53.62	7.12	Peak	100	285

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Unwanted Emissions (Above 1GHz) for be EHT40

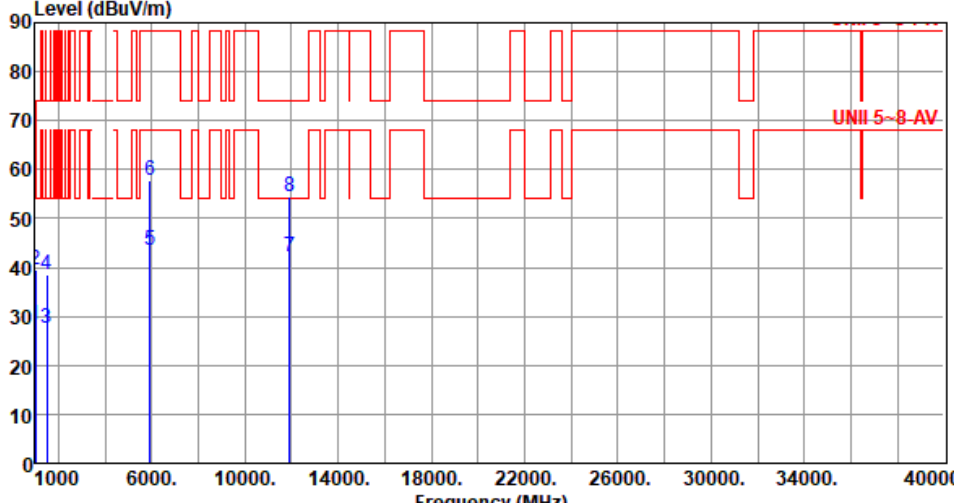Modulation	be EHT40	Test Freq. (MHz)	5965																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>5925.00</td><td>43.67</td><td>68.20</td><td>-24.53</td><td>42.54</td><td>1.13</td><td>Average</td><td>135</td><td>343</td></tr><tr><td>6</td><td>5925.00</td><td>57.79</td><td>88.20</td><td>-30.41</td><td>56.66</td><td>1.13</td><td>Peak</td><td>135</td><td>343</td></tr><tr><td>7</td><td>11930.00</td><td>42.21</td><td>54.00</td><td>-11.79</td><td>36.12</td><td>6.09</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>8</td><td>11930.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>48.37</td><td>6.09</td><td>Peak</td><td>100</td><td>121</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	122	5	5925.00	43.67	68.20	-24.53	42.54	1.13	Average	135	343	6	5925.00	57.79	88.20	-30.41	56.66	1.13	Peak	135	343	7	11930.00	42.21	54.00	-11.79	36.12	6.09	Average	100	121	8	11930.00	54.46	74.00	-19.54	48.37	6.09	Peak	100	121
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251																																																																																				
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251																																																																																				
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122																																																																																				
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	122																																																																																				
5	5925.00	43.67	68.20	-24.53	42.54	1.13	Average	135	343																																																																																				
6	5925.00	57.79	88.20	-30.41	56.66	1.13	Peak	135	343																																																																																				
7	11930.00	42.21	54.00	-11.79	36.12	6.09	Average	100	121																																																																																				
8	11930.00	54.46	74.00	-19.54	48.37	6.09	Peak	100	121																																																																																				

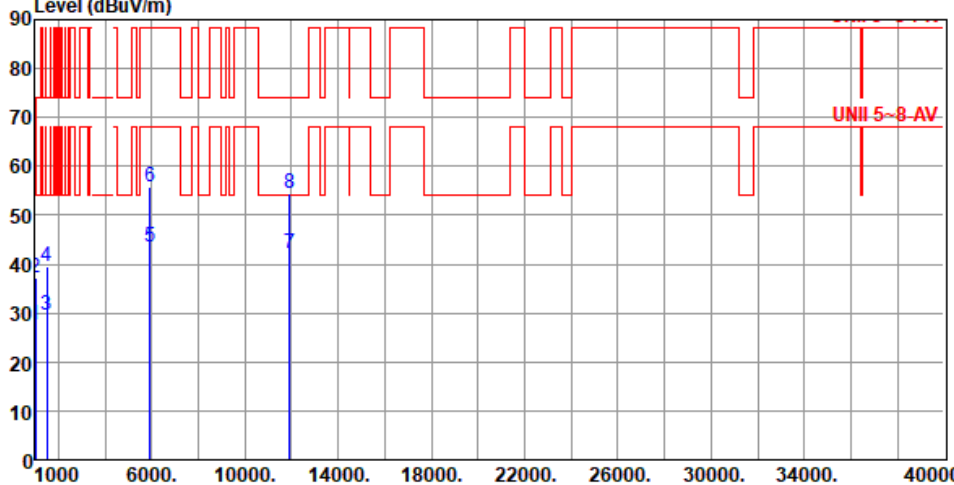


Modulation	be EHT40		Test Freq. (MHz)		5965																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>35.75</td><td>-8.27</td><td>Average</td><td>100</td><td>285</td></tr><tr><td>2</td><td>1000.00</td><td>37.33</td><td>54.00</td><td>-16.67</td><td>45.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>285</td></tr><tr><td>3</td><td>1500.00</td><td>29.55</td><td>54.00</td><td>-24.45</td><td>36.83</td><td>-7.28</td><td>Average</td><td>200</td><td>110</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>200</td><td>110</td></tr><tr><td>5</td><td>5925.00</td><td>43.54</td><td>68.20</td><td>-24.66</td><td>42.41</td><td>1.13</td><td>Average</td><td>163</td><td>272</td></tr><tr><td>6</td><td>5925.00</td><td>55.81</td><td>88.20</td><td>-32.39</td><td>54.68</td><td>1.13</td><td>Peak</td><td>163</td><td>272</td></tr><tr><td>7</td><td>11930.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>36.10</td><td>6.09</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>8</td><td>11930.00</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>48.29</td><td>6.09</td><td>Peak</td><td>100</td><td>284</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285	2	1000.00	37.33	54.00	-16.67	45.60	-8.27	Peak	100	285	3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	110	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	110	5	5925.00	43.54	68.20	-24.66	42.41	1.13	Average	163	272	6	5925.00	55.81	88.20	-32.39	54.68	1.13	Peak	163	272	7	11930.00	42.19	54.00	-11.81	36.10	6.09	Average	100	284	8	11930.00	54.38	74.00	-19.62	48.29	6.09	Peak	100	284
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285																																																																																																														
2	1000.00	37.33	54.00	-16.67	45.60	-8.27	Peak	100	285																																																																																																														
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	110																																																																																																														
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	110																																																																																																														
5	5925.00	43.54	68.20	-24.66	42.41	1.13	Average	163	272																																																																																																														
6	5925.00	55.81	88.20	-32.39	54.68	1.13	Peak	163	272																																																																																																														
7	11930.00	42.19	54.00	-11.81	36.10	6.09	Average	100	284																																																																																																														
8	11930.00	54.38	74.00	-19.62	48.29	6.09	Peak	100	284																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																							




Modulation	be EHT40	Test Freq. (MHz)	6165																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>47.85</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>12330.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>35.28</td><td>5.97</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>12330.00</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>48.67</td><td>5.97</td><td>Peak</td><td>100</td><td>221</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	245	2	1000.00	39.58	54.00	-14.42	47.85	-8.27	Peak	100	245	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	122	5	12330.00	41.25	54.00	-12.75	35.28	5.97	Average	100	221	6	12330.00	54.64	74.00	-19.36	48.67	5.97	Peak	100	221
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	245																																																																																				
2	1000.00	39.58	54.00	-14.42	47.85	-8.27	Peak	100	245																																																																																				
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122																																																																																				
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	122																																																																																				
5	12330.00	41.25	54.00	-12.75	35.28	5.97	Average	100	221																																																																																				
6	12330.00	54.64	74.00	-19.36	48.67	5.97	Peak	100	221																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

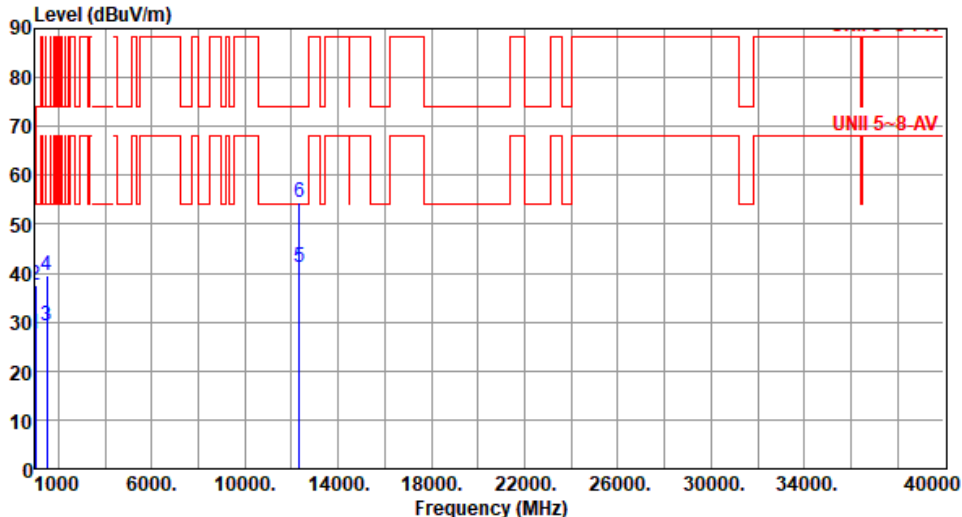

Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.44</td><td>54.00</td><td>-26.56</td><td>35.71</td><td>-8.27</td><td>Average</td><td>100</td><td>262</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>262</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>46.83</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>12330.00</td><td>41.13</td><td>54.00</td><td>-12.87</td><td>35.16</td><td>5.97</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>6</td><td>12330.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>48.38</td><td>5.97</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	262	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	262	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	113	4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	113	5	12330.00	41.13	54.00	-12.87	35.16	5.97	Average	100	176	6	12330.00	54.35	74.00	-19.65	48.38	5.97	Peak	100	176
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	262																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	262																																																																
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	113																																																																
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	113																																																																
5	12330.00	41.13	54.00	-12.87	35.16	5.97	Average	100	176																																																																
6	12330.00	54.35	74.00	-19.65	48.38	5.97	Peak	100	176																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

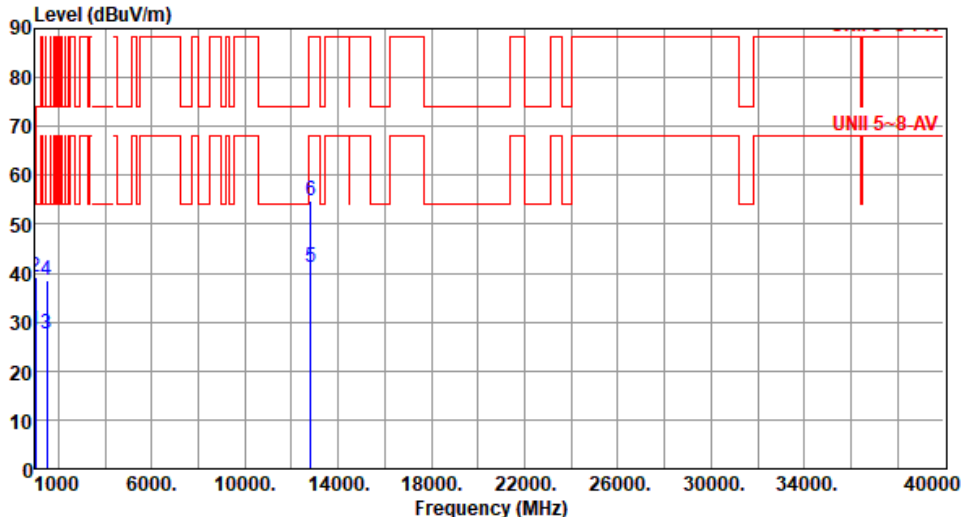

Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.29</td><td>54.00</td><td>-25.71</td><td>36.56</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.15</td><td>54.00</td><td>-14.85</td><td>47.42</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.51</td><td>54.00</td><td>-26.49</td><td>34.79</td><td>-7.28</td><td>Average</td><td>125</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.58</td><td>74.00</td><td>-35.42</td><td>45.86</td><td>-7.28</td><td>Peak</td><td>125</td><td>122</td></tr><tr><td>5</td><td>12810.00</td><td>41.24</td><td>68.20</td><td>-26.96</td><td>35.12</td><td>6.12</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>6</td><td>12810.00</td><td>54.71</td><td>88.20</td><td>-33.49</td><td>48.59</td><td>6.12</td><td>Peak</td><td>100</td><td>224</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	243	2	1000.00	39.15	54.00	-14.85	47.42	-8.27	Peak	100	243	3	1500.00	27.51	54.00	-26.49	34.79	-7.28	Average	125	122	4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	125	122	5	12810.00	41.24	68.20	-26.96	35.12	6.12	Average	100	224	6	12810.00	54.71	88.20	-33.49	48.59	6.12	Peak	100	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	243																																																																
2	1000.00	39.15	54.00	-14.85	47.42	-8.27	Peak	100	243																																																																
3	1500.00	27.51	54.00	-26.49	34.79	-7.28	Average	125	122																																																																
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	125	122																																																																
5	12810.00	41.24	68.20	-26.96	35.12	6.12	Average	100	224																																																																
6	12810.00	54.71	88.20	-33.49	48.59	6.12	Peak	100	224																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6405						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.59	54.00	-26.41	35.86	-8.27	Average	100	279
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	279
3	1500.00	29.41	54.00	-24.59	36.69	-7.28	Average	203	115
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	115
5	12810.00	41.39	68.20	-26.81	35.27	6.12	Average	100	181
6	12810.00	54.78	88.20	-33.42	48.66	6.12	Peak	100	181
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT40	Test Freq. (MHz)	6445																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.29</td><td>54.00</td><td>-25.71</td><td>36.56</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>47.69</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.78</td><td>74.00</td><td>-35.22</td><td>46.06</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>12890.00</td><td>42.16</td><td>68.20</td><td>-26.04</td><td>36.18</td><td>5.98</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>6</td><td>12890.00</td><td>55.50</td><td>88.20</td><td>-32.70</td><td>49.52</td><td>5.98</td><td>Peak</td><td>100</td><td>253</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251	2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	123	4	1500.00	38.78	74.00	-35.22	46.06	-7.28	Peak	126	123	5	12890.00	42.16	68.20	-26.04	36.18	5.98	Average	100	253	6	12890.00	55.50	88.20	-32.70	49.52	5.98	Peak	100	253
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251																																																																
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251																																																																
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	123																																																																
4	1500.00	38.78	74.00	-35.22	46.06	-7.28	Peak	126	123																																																																
5	12890.00	42.16	68.20	-26.04	36.18	5.98	Average	100	253																																																																
6	12890.00	55.50	88.20	-32.70	49.52	5.98	Peak	100	253																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	252
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	252
3	1500.00	27.36	54.00	-26.64	34.64	-7.28	Average	124	115
4	1500.00	38.28	74.00	-35.72	45.56	-7.28	Peak	124	115
5	12970.00	42.32	68.20	-25.88	36.20	6.12	Average	100	255
6	12970.00	55.56	88.20	-32.64	49.44	6.12	Peak	100	255
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

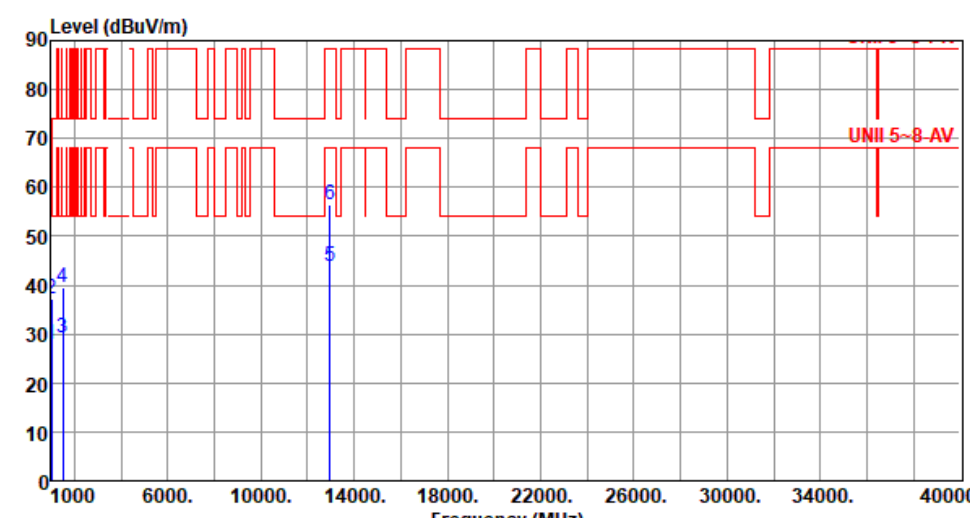


Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.89	54.00	-26.11	36.16	-8.27	Average	100	278
2	1000.00	37.29	54.00	-16.71	45.56	-8.27	Peak	100	278
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	205	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113
5	12970.00	43.71	68.20	-24.49	37.59	6.12	Average	142	240
6	12970.00	56.61	88.20	-31.59	50.49	6.12	Peak	142	240

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>125</td><td>121</td></tr><tr><td>4</td><td>1500.00</td><td>38.64</td><td>74.00</td><td>-35.36</td><td>45.92</td><td>-7.28</td><td>Peak</td><td>125</td><td>121</td></tr><tr><td>5</td><td>13050.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>36.41</td><td>5.90</td><td>Average</td><td>100</td><td>261</td></tr><tr><td>6</td><td>13050.00</td><td>55.58</td><td>88.20</td><td>-32.62</td><td>49.68</td><td>5.90</td><td>Peak</td><td>100</td><td>261</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	121	4	1500.00	38.64	74.00	-35.36	45.92	-7.28	Peak	125	121	5	13050.00	42.31	68.20	-25.89	36.41	5.90	Average	100	261	6	13050.00	55.58	88.20	-32.62	49.68	5.90	Peak	100	261
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246																																																																
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	121																																																																
4	1500.00	38.64	74.00	-35.36	45.92	-7.28	Peak	125	121																																																																
5	13050.00	42.31	68.20	-25.89	36.41	5.90	Average	100	261																																																																
6	13050.00	55.58	88.20	-32.62	49.68	5.90	Peak	100	261																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

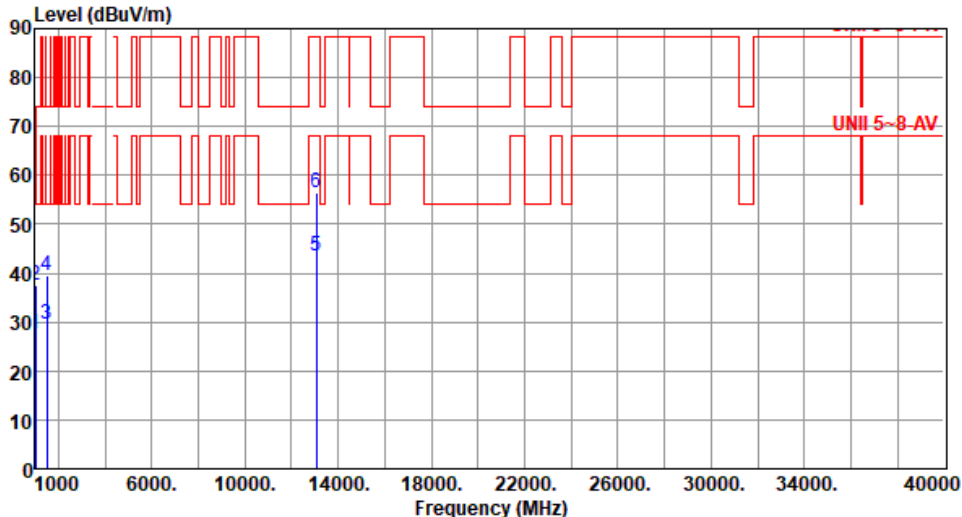

Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.43</td><td>54.00</td><td>-26.57</td><td>35.70</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.52</td><td>54.00</td><td>-16.48</td><td>45.79</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.55</td><td>54.00</td><td>-24.45</td><td>36.83</td><td>-7.28</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>4</td><td>1500.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>46.92</td><td>-7.28</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>5</td><td>13050.00</td><td>43.51</td><td>68.20</td><td>-24.69</td><td>37.61</td><td>5.90</td><td>Average</td><td>139</td><td>244</td></tr><tr><td>6</td><td>13050.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>50.57</td><td>5.90</td><td>Peak</td><td>139</td><td>244</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	279	2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	279	3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	100	288	4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	100	288	5	13050.00	43.51	68.20	-24.69	37.61	5.90	Average	139	244	6	13050.00	56.47	88.20	-31.73	50.57	5.90	Peak	139	244
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	279																																																																
2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	279																																																																
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	100	288																																																																
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	100	288																																																																
5	13050.00	43.51	68.20	-24.69	37.61	5.90	Average	139	244																																																																
6	13050.00	56.47	88.20	-31.73	50.57	5.90	Peak	139	244																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									