






Modulation	be EHT40		Test Freq. (MHz)		6565																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>125</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>125</td><td>123</td></tr><tr><td>5</td><td>13130.00</td><td>43.53</td><td>68.20</td><td>-24.67</td><td>37.75</td><td>5.78</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>6</td><td>13130.00</td><td>56.90</td><td>88.20</td><td>-31.30</td><td>51.12</td><td>5.78</td><td>Peak</td><td>100</td><td>101</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	252	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	252	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	123	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	125	123	5	13130.00	43.53	68.20	-24.67	37.75	5.78	Average	100	101	6	13130.00	56.90	88.20	-31.30	51.12	5.78	Peak	100	101
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	252																																																																																										
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	252																																																																																										
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	123																																																																																										
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	125	123																																																																																										
5	13130.00	43.53	68.20	-24.67	37.75	5.78	Average	100	101																																																																																										
6	13130.00	56.90	88.20	-31.30	51.12	5.78	Peak	100	101																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

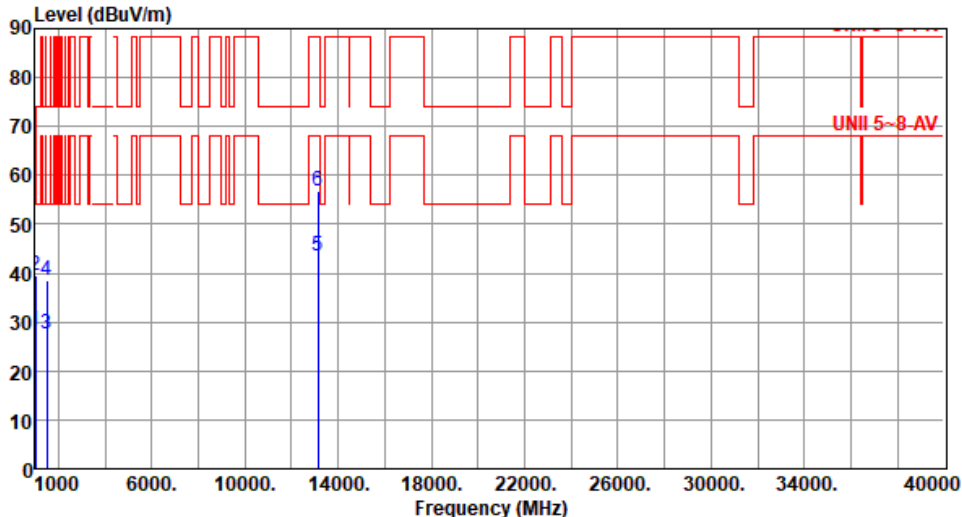

Modulation	be EHT40		Test Freq. (MHz)		6565																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>35.94</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.49</td><td>54.00</td><td>-16.51</td><td>45.76</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.69</td><td>54.00</td><td>-24.31</td><td>36.97</td><td>-7.28</td><td>Average</td><td>202</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>46.83</td><td>-7.28</td><td>Peak</td><td>202</td><td>108</td></tr><tr><td>5</td><td>13130.00</td><td>46.04</td><td>68.20</td><td>-22.16</td><td>40.26</td><td>5.78</td><td>Average</td><td>161</td><td>250</td></tr><tr><td>6</td><td>13130.00</td><td>58.67</td><td>88.20</td><td>-29.53</td><td>52.89</td><td>5.78</td><td>Peak</td><td>161</td><td>250</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	282	2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	282	3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	202	108	4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	108	5	13130.00	46.04	68.20	-22.16	40.26	5.78	Average	161	250	6	13130.00	58.67	88.20	-29.53	52.89	5.78	Peak	161	250
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	282																																																																																										
2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	282																																																																																										
3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	202	108																																																																																										
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	108																																																																																										
5	13130.00	46.04	68.20	-22.16	40.26	5.78	Average	161	250																																																																																										
6	13130.00	58.67	88.20	-29.53	52.89	5.78	Peak	161	250																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

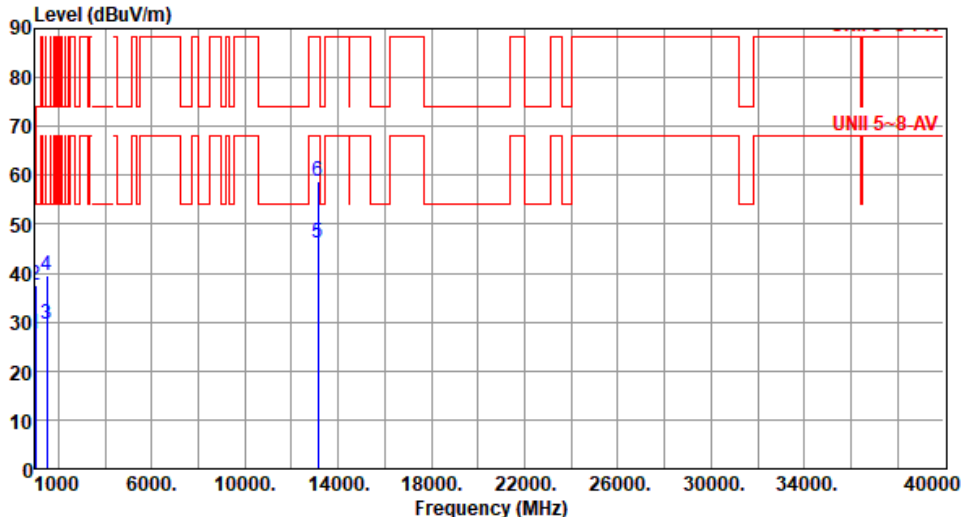


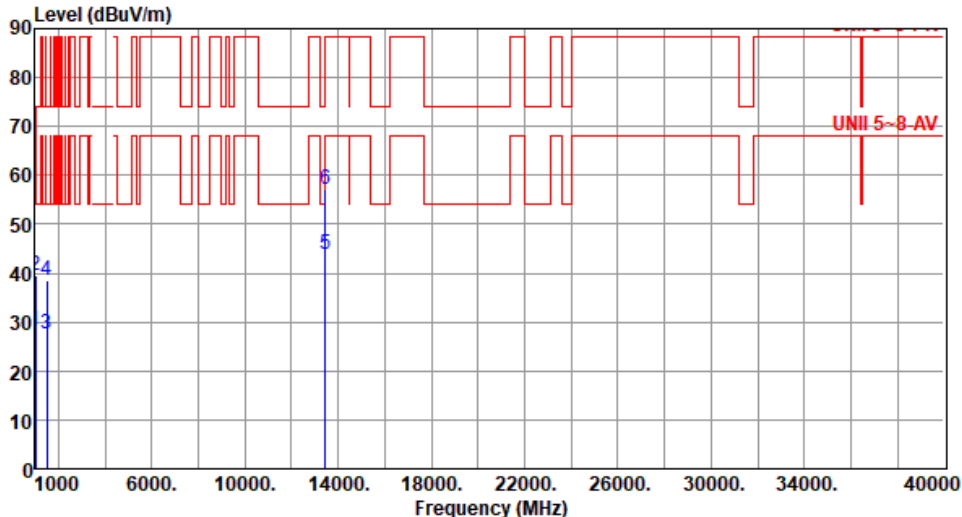Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.38</td><td>54.00</td><td>-25.62</td><td>36.65</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>47.69</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>34.76</td><td>-7.28</td><td>Average</td><td>122</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>122</td><td>118</td></tr><tr><td>5</td><td>13450.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>37.93</td><td>6.01</td><td>Average</td><td>100</td><td>98</td></tr><tr><td>6</td><td>13450.00</td><td>57.05</td><td>88.20</td><td>-31.15</td><td>51.04</td><td>6.01</td><td>Peak</td><td>100</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.38	54.00	-25.62	36.65	-8.27	Average	100	245	2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	245	3	1500.00	27.48	54.00	-26.52	34.76	-7.28	Average	122	118	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	122	118	5	13450.00	43.94	68.20	-24.26	37.93	6.01	Average	100	98	6	13450.00	57.05	88.20	-31.15	51.04	6.01	Peak	100	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.38	54.00	-25.62	36.65	-8.27	Average	100	245																																																																
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	245																																																																
3	1500.00	27.48	54.00	-26.52	34.76	-7.28	Average	122	118																																																																
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	122	118																																																																
5	13450.00	43.94	68.20	-24.26	37.93	6.01	Average	100	98																																																																
6	13450.00	57.05	88.20	-31.15	51.04	6.01	Peak	100	98																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.43</td><td>54.00</td><td>-26.57</td><td>35.70</td><td>-8.27</td><td>Average</td><td>100</td><td>280</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>280</td></tr><tr><td>3</td><td>1500.00</td><td>29.25</td><td>54.00</td><td>-24.75</td><td>36.53</td><td>-7.28</td><td>Average</td><td>204</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.48</td><td>74.00</td><td>-34.52</td><td>46.76</td><td>-7.28</td><td>Peak</td><td>204</td><td>113</td></tr><tr><td>5</td><td>13450.00</td><td>46.46</td><td>68.20</td><td>-21.74</td><td>40.45</td><td>6.01</td><td>Average</td><td>159</td><td>249</td></tr><tr><td>6</td><td>13450.00</td><td>59.27</td><td>88.20</td><td>-28.93</td><td>53.26</td><td>6.01</td><td>Peak</td><td>159</td><td>249</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	280	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	280	3	1500.00	29.25	54.00	-24.75	36.53	-7.28	Average	204	113	4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	204	113	5	13450.00	46.46	68.20	-21.74	40.45	6.01	Average	159	249	6	13450.00	59.27	88.20	-28.93	53.26	6.01	Peak	159	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	280																																																																
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	280																																																																
3	1500.00	29.25	54.00	-24.75	36.53	-7.28	Average	204	113																																																																
4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	204	113																																																																
5	13450.00	46.46	68.20	-21.74	40.45	6.01	Average	159	249																																																																
6	13450.00	59.27	88.20	-28.93	53.26	6.01	Peak	159	249																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

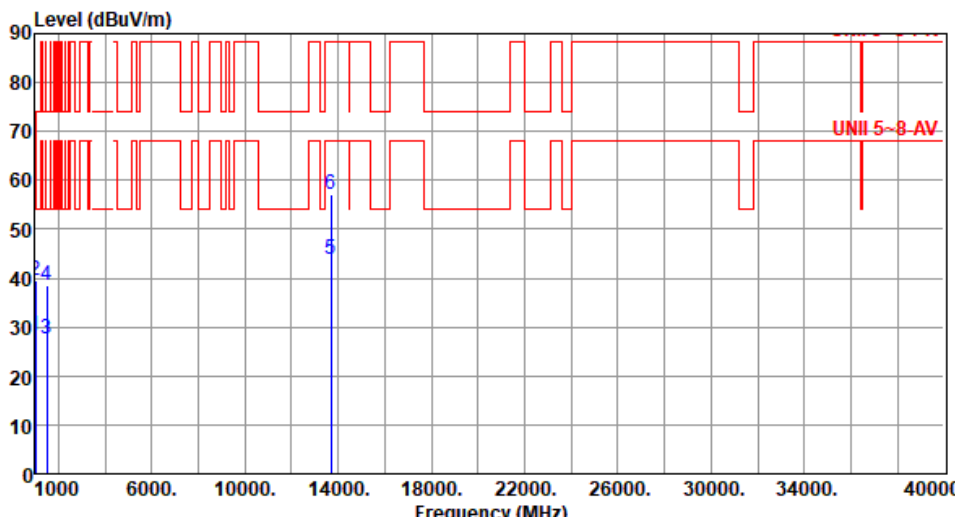

Modulation	be EHT40	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.43</td><td>54.00</td><td>-14.57</td><td>47.70</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>13690.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>37.82</td><td>6.00</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>6</td><td>13690.00</td><td>57.20</td><td>88.20</td><td>-31.00</td><td>51.20</td><td>6.00</td><td>Peak</td><td>100</td><td>97</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251	2	1000.00	39.43	54.00	-14.57	47.70	-8.27	Peak	100	251	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	126	122	5	13690.00	43.82	68.20	-24.38	37.82	6.00	Average	100	97	6	13690.00	57.20	88.20	-31.00	51.20	6.00	Peak	100	97
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251																																																																
2	1000.00	39.43	54.00	-14.57	47.70	-8.27	Peak	100	251																																																																
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122																																																																
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	126	122																																																																
5	13690.00	43.82	68.20	-24.38	37.82	6.00	Average	100	97																																																																
6	13690.00	57.20	88.20	-31.00	51.20	6.00	Peak	100	97																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6845																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.48</td><td>54.00</td><td>-26.52</td><td>35.75</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.29</td><td>54.00</td><td>-24.71</td><td>36.57</td><td>-7.28</td><td>Average</td><td>203</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>203</td><td>118</td></tr><tr><td>5</td><td>13690.00</td><td>46.37</td><td>68.20</td><td>-21.83</td><td>40.37</td><td>6.00</td><td>Average</td><td>158</td><td>244</td></tr><tr><td>6</td><td>13690.00</td><td>59.31</td><td>88.20</td><td>-28.89</td><td>53.31</td><td>6.00</td><td>Peak</td><td>158</td><td>244</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	279	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	279	3	1500.00	29.29	54.00	-24.71	36.57	-7.28	Average	203	118	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	118	5	13690.00	46.37	68.20	-21.83	40.37	6.00	Average	158	244	6	13690.00	59.31	88.20	-28.89	53.31	6.00	Peak	158	244
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	279																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	279																																																																
3	1500.00	29.29	54.00	-24.71	36.57	-7.28	Average	203	118																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	118																																																																
5	13690.00	46.37	68.20	-21.83	40.37	6.00	Average	158	244																																																																
6	13690.00	59.31	88.20	-28.89	53.31	6.00	Peak	158	244																																																																




Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.24</td><td>54.00</td><td>-25.76</td><td>36.51</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>34.97</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>13770.00</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>37.57</td><td>6.12</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>13770.00</td><td>57.29</td><td>88.20</td><td>-30.91</td><td>51.17</td><td>6.12</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	251	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251	3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	122	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	131	122	5	13770.00	43.69	68.20	-24.51	37.57	6.12	Average	100	103	6	13770.00	57.29	88.20	-30.91	51.17	6.12	Peak	100	103
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	251																																																																
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251																																																																
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	122																																																																
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	131	122																																																																
5	13770.00	43.69	68.20	-24.51	37.57	6.12	Average	100	103																																																																
6	13770.00	57.29	88.20	-30.91	51.17	6.12	Peak	100	103																																																																

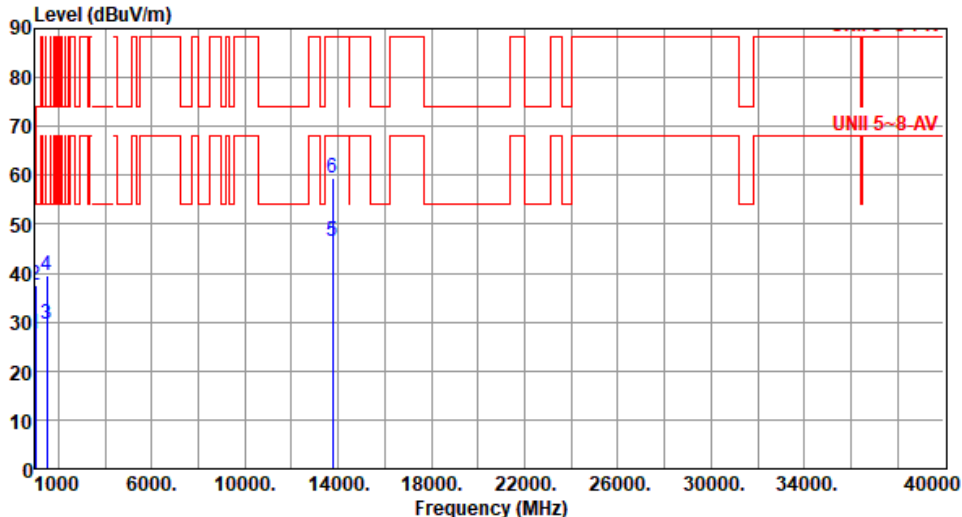


Modulation	be EHT40	Test Freq. (MHz)	6885						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	279
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	279
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	203	112
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	112
5	13770.00	46.59	68.20	-21.61	40.47	6.12	Average	159	247
6	13770.00	59.42	88.20	-28.78	53.30	6.12	Peak	159	247

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

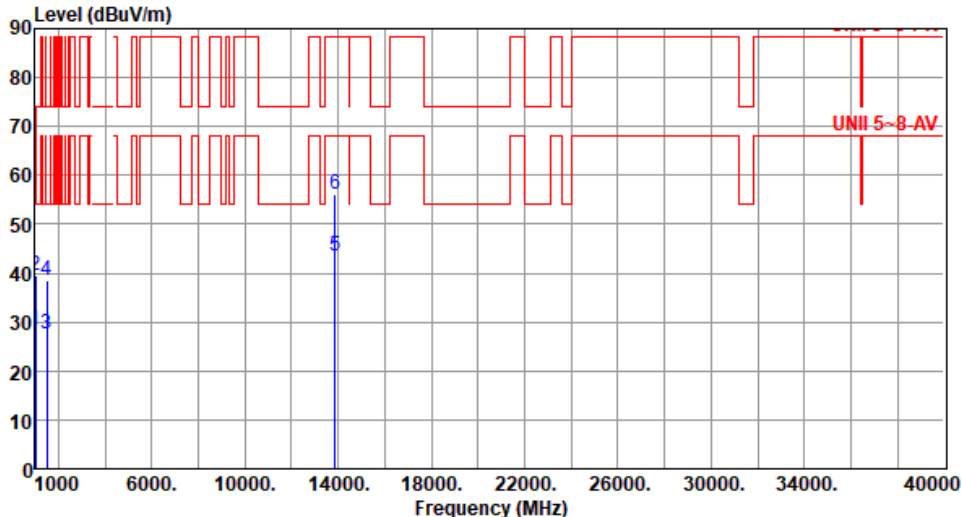


Modulation	be EHT40	Test Freq. (MHz)	6925																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>13850.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>37.33</td><td>6.05</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>6</td><td>13850.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>50.17</td><td>6.05</td><td>Peak</td><td>100</td><td>219</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	122	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	122	5	13850.00	43.38	68.20	-24.82	37.33	6.05	Average	100	219	6	13850.00	56.22	88.20	-31.98	50.17	6.05	Peak	100	219
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251																																																																
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251																																																																
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	122																																																																
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	122																																																																
5	13850.00	43.38	68.20	-24.82	37.33	6.05	Average	100	219																																																																
6	13850.00	56.22	88.20	-31.98	50.17	6.05	Peak	100	219																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

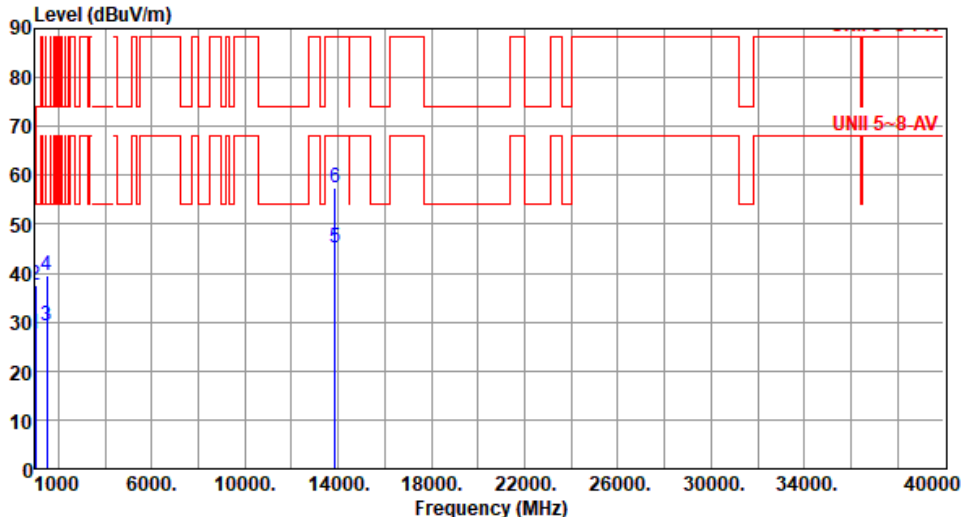


Modulation	be EHT40		Test Freq. (MHz)		6925																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>35.93</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.35</td><td>54.00</td><td>-24.65</td><td>36.63</td><td>-7.28</td><td>Average</td><td>202</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>202</td><td>115</td></tr><tr><td>5</td><td>13850.00</td><td>45.32</td><td>68.20</td><td>-22.88</td><td>39.27</td><td>6.05</td><td>Average</td><td>100</td><td>280</td></tr><tr><td>6</td><td>13850.00</td><td>57.34</td><td>88.20</td><td>-30.86</td><td>51.29</td><td>6.05</td><td>Peak</td><td>100</td><td>280</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	279	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279	3	1500.00	29.35	54.00	-24.65	36.63	-7.28	Average	202	115	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	115	5	13850.00	45.32	68.20	-22.88	39.27	6.05	Average	100	280	6	13850.00	57.34	88.20	-30.86	51.29	6.05	Peak	100	280
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	279																																																																						
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279																																																																						
3	1500.00	29.35	54.00	-24.65	36.63	-7.28	Average	202	115																																																																						
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	115																																																																						
5	13850.00	45.32	68.20	-22.88	39.27	6.05	Average	100	280																																																																						
6	13850.00	57.34	88.20	-30.86	51.29	6.05	Peak	100	280																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

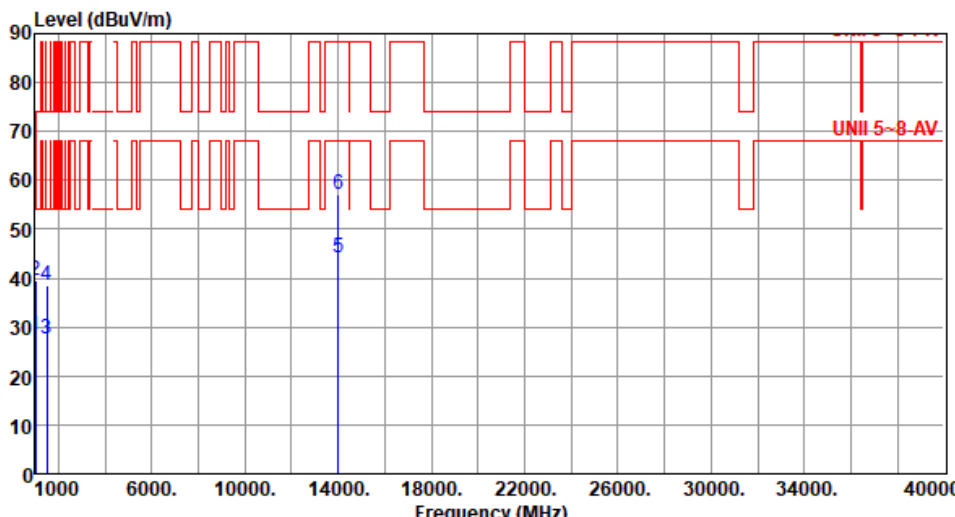

Modulation	be EHT40	Test Freq. (MHz)	7005																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.63</td><td>54.00</td><td>-26.37</td><td>34.91</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.50</td><td>74.00</td><td>-35.50</td><td>45.78</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>14010.00</td><td>44.25</td><td>68.20</td><td>-23.95</td><td>37.50</td><td>6.75</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>6</td><td>14010.00</td><td>56.98</td><td>88.20</td><td>-31.22</td><td>50.23</td><td>6.75</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	251	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251	3	1500.00	27.63	54.00	-26.37	34.91	-7.28	Average	126	123	4	1500.00	38.50	74.00	-35.50	45.78	-7.28	Peak	126	123	5	14010.00	44.25	68.20	-23.95	37.50	6.75	Average	100	222	6	14010.00	56.98	88.20	-31.22	50.23	6.75	Peak	100	222
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	251																																																																
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251																																																																
3	1500.00	27.63	54.00	-26.37	34.91	-7.28	Average	126	123																																																																
4	1500.00	38.50	74.00	-35.50	45.78	-7.28	Peak	126	123																																																																
5	14010.00	44.25	68.20	-23.95	37.50	6.75	Average	100	222																																																																
6	14010.00	56.98	88.20	-31.22	50.23	6.75	Peak	100	222																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

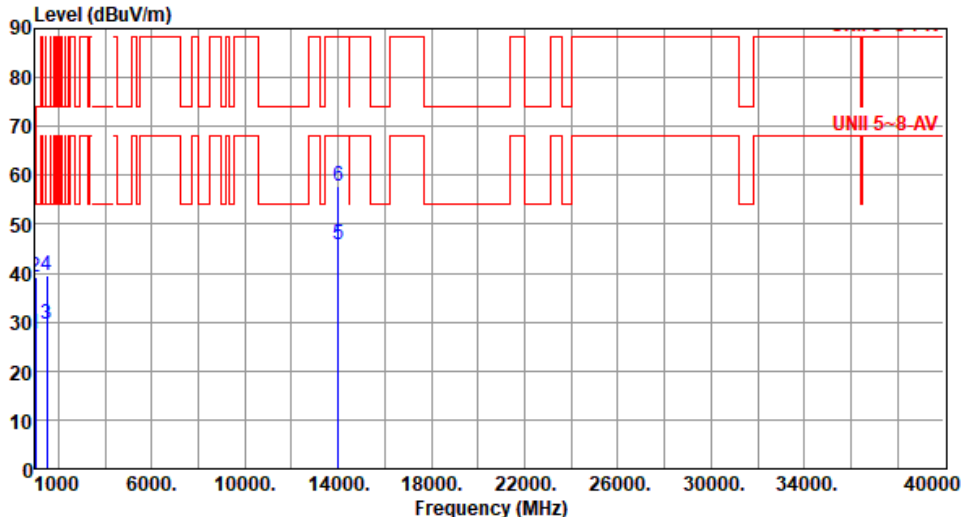

Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	285
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	285
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	202	113
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	202	113
5	14010.00	45.98	68.20	-22.22	39.23	6.75	Average	100	273
6	14010.00	57.77	88.20	-30.43	51.02	6.75	Peak	100	273

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>47.61</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>34.95</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.59</td><td>74.00</td><td>-35.41</td><td>45.87</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>7125.00</td><td>47.08</td><td>68.20</td><td>-21.12</td><td>42.22</td><td>4.86</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>7125.00</td><td>59.08</td><td>88.20</td><td>-29.12</td><td>54.22</td><td>4.86</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>7</td><td>14170.00</td><td>45.43</td><td>68.20</td><td>-22.77</td><td>38.64</td><td>6.79</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>8</td><td>14170.00</td><td>60.51</td><td>88.20</td><td>-27.69</td><td>53.72</td><td>6.79</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251	2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	251	3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	126	122	4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	126	122	5	7125.00	47.08	68.20	-21.12	42.22	4.86	Average	100	205	6	7125.00	59.08	88.20	-29.12	54.22	4.86	Peak	100	205	7	14170.00	45.43	68.20	-22.77	38.64	6.79	Average	100	182	8	14170.00	60.51	88.20	-27.69	53.72	6.79	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251																																																																																				
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	251																																																																																				
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	126	122																																																																																				
4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	126	122																																																																																				
5	7125.00	47.08	68.20	-21.12	42.22	4.86	Average	100	205																																																																																				
6	7125.00	59.08	88.20	-29.12	54.22	4.86	Peak	100	205																																																																																				
7	14170.00	45.43	68.20	-22.77	38.64	6.79	Average	100	182																																																																																				
8	14170.00	60.51	88.20	-27.69	53.72	6.79	Peak	100	182																																																																																				




Modulation	be EHT40	Test Freq. (MHz)	7085						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.53	54.00	-24.47	36.81	-7.28	Average	202	111
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	202	111
5	7125.00	49.03	68.20	-19.17	44.17	4.86	Average	190	139
6	7125.00	61.04	88.20	-27.16	56.18	4.86	Peak	190	139
7	14170.00	45.45	68.20	-22.75	38.66	6.79	Average	100	217
8	14170.00	60.21	88.20	-27.99	53.42	6.79	Peak	100	217
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.35</td><td>54.00</td><td>-25.65</td><td>36.62</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.73</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>5925.00</td><td>46.34</td><td>68.20</td><td>-21.86</td><td>45.21</td><td>1.13</td><td>Average</td><td>146</td><td>343</td></tr><tr><td>6</td><td>5925.00</td><td>66.69</td><td>88.20</td><td>-21.51</td><td>65.56</td><td>1.13</td><td>Peak</td><td>146</td><td>343</td></tr><tr><td>7</td><td>11970.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>36.57</td><td>6.17</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>8</td><td>11970.00</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>48.62</td><td>6.17</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.35	54.00	-25.65	36.62	-8.27	Average	100	250	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	250	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122	4	1500.00	38.45	74.00	-35.55	45.73	-7.28	Peak	126	122	5	5925.00	46.34	68.20	-21.86	45.21	1.13	Average	146	343	6	5925.00	66.69	88.20	-21.51	65.56	1.13	Peak	146	343	7	11970.00	42.74	54.00	-11.26	36.57	6.17	Average	100	182	8	11970.00	54.79	74.00	-19.21	48.62	6.17	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.35	54.00	-25.65	36.62	-8.27	Average	100	250																																																																																				
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	250																																																																																				
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122																																																																																				
4	1500.00	38.45	74.00	-35.55	45.73	-7.28	Peak	126	122																																																																																				
5	5925.00	46.34	68.20	-21.86	45.21	1.13	Average	146	343																																																																																				
6	5925.00	66.69	88.20	-21.51	65.56	1.13	Peak	146	343																																																																																				
7	11970.00	42.74	54.00	-11.26	36.57	6.17	Average	100	182																																																																																				
8	11970.00	54.79	74.00	-19.21	48.62	6.17	Peak	100	182																																																																																				

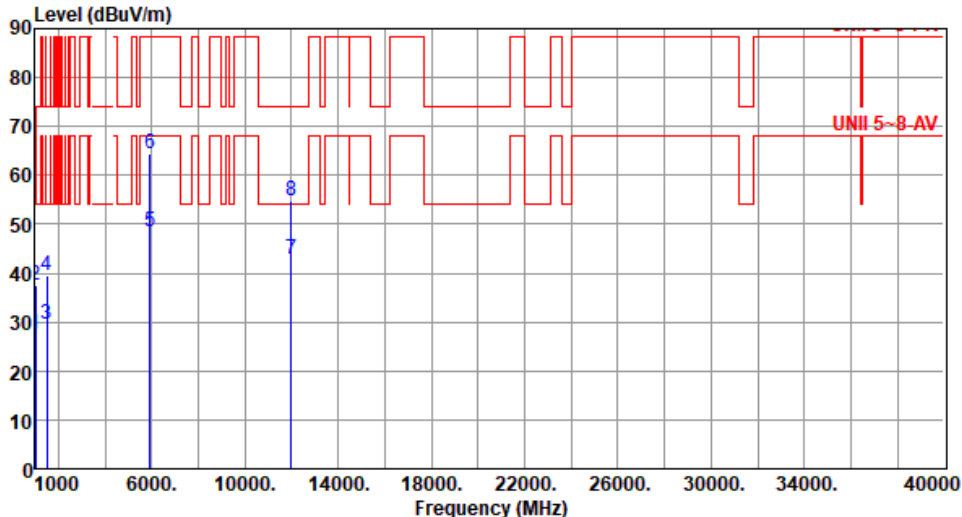

Modulation	be EHT80	Test Freq. (MHz)	5985						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	283
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	283
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	203	111
4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	111
5	5925.00	48.55	68.20	-19.65	47.42	1.13	Average	177	270
6	5925.00	64.56	88.20	-23.64	63.43	1.13	Peak	177	270
7	11970.00	42.88	54.00	-11.12	36.71	6.17	Average	100	288
8	11970.00	54.80	74.00	-19.20	48.63	6.17	Peak	100	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>47.91</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.75</td><td>54.00</td><td>-26.25</td><td>35.03</td><td>-7.28</td><td>Average</td><td>123</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>123</td><td>122</td></tr><tr><td>5</td><td>12290.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>36.50</td><td>6.19</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>6</td><td>12290.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>48.53</td><td>6.19</td><td>Peak</td><td>100</td><td>228</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	251	2	1000.00	39.64	54.00	-14.36	47.91	-8.27	Peak	100	251	3	1500.00	27.75	54.00	-26.25	35.03	-7.28	Average	123	122	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	123	122	5	12290.00	42.69	54.00	-11.31	36.50	6.19	Average	100	228	6	12290.00	54.72	74.00	-19.28	48.53	6.19	Peak	100	228
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	251																																																																
2	1000.00	39.64	54.00	-14.36	47.91	-8.27	Peak	100	251																																																																
3	1500.00	27.75	54.00	-26.25	35.03	-7.28	Average	123	122																																																																
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	123	122																																																																
5	12290.00	42.69	54.00	-11.31	36.50	6.19	Average	100	228																																																																
6	12290.00	54.72	74.00	-19.28	48.53	6.19	Peak	100	228																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6145						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	282
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	282
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	203	111
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	111
5	12290.00	42.94	54.00	-11.06	36.75	6.19	Average	100	287
6	12290.00	56.79	74.00	-17.21	50.60	6.19	Peak	100	287

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>47.74</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>131</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.77</td><td>74.00</td><td>-35.23</td><td>46.05</td><td>-7.28</td><td>Peak</td><td>131</td><td>123</td></tr><tr><td>5</td><td>12770.00</td><td>41.85</td><td>68.20</td><td>-26.35</td><td>35.96</td><td>5.89</td><td>Average</td><td>100</td><td>299</td></tr><tr><td>6</td><td>12770.00</td><td>55.44</td><td>88.20</td><td>-32.76</td><td>49.55</td><td>5.89</td><td>Peak</td><td>100</td><td>299</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251	2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	251	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	123	4	1500.00	38.77	74.00	-35.23	46.05	-7.28	Peak	131	123	5	12770.00	41.85	68.20	-26.35	35.96	5.89	Average	100	299	6	12770.00	55.44	88.20	-32.76	49.55	5.89	Peak	100	299
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251																																																																
2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	251																																																																
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	123																																																																
4	1500.00	38.77	74.00	-35.23	46.05	-7.28	Peak	131	123																																																																
5	12770.00	41.85	68.20	-26.35	35.96	5.89	Average	100	299																																																																
6	12770.00	55.44	88.20	-32.76	49.55	5.89	Peak	100	299																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6385						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	283
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	283
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	203	111
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111
5	12770.00	42.85	68.20	-25.35	36.96	5.89	Average	100	240
6	12770.00	56.25	88.20	-31.95	50.36	5.89	Peak	100	240
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.02</td><td>54.00</td><td>-25.98</td><td>36.29</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.05</td><td>54.00</td><td>-14.95</td><td>47.32</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.49</td><td>54.00</td><td>-26.51</td><td>34.77</td><td>-7.28</td><td>Average</td><td>123</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.37</td><td>74.00</td><td>-35.63</td><td>45.65</td><td>-7.28</td><td>Peak</td><td>123</td><td>120</td></tr><tr><td>5</td><td>12930.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>37.26</td><td>6.04</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td>12930.00</td><td>55.60</td><td>88.20</td><td>-32.60</td><td>49.56</td><td>6.04</td><td>Peak</td><td>100</td><td>258</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.02	54.00	-25.98	36.29	-8.27	Average	100	243	2	1000.00	39.05	54.00	-14.95	47.32	-8.27	Peak	100	243	3	1500.00	27.49	54.00	-26.51	34.77	-7.28	Average	123	120	4	1500.00	38.37	74.00	-35.63	45.65	-7.28	Peak	123	120	5	12930.00	43.30	68.20	-24.90	37.26	6.04	Average	100	258	6	12930.00	55.60	88.20	-32.60	49.56	6.04	Peak	100	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.02	54.00	-25.98	36.29	-8.27	Average	100	243																																																																
2	1000.00	39.05	54.00	-14.95	47.32	-8.27	Peak	100	243																																																																
3	1500.00	27.49	54.00	-26.51	34.77	-7.28	Average	123	120																																																																
4	1500.00	38.37	74.00	-35.63	45.65	-7.28	Peak	123	120																																																																
5	12930.00	43.30	68.20	-24.90	37.26	6.04	Average	100	258																																																																
6	12930.00	55.60	88.20	-32.60	49.56	6.04	Peak	100	258																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

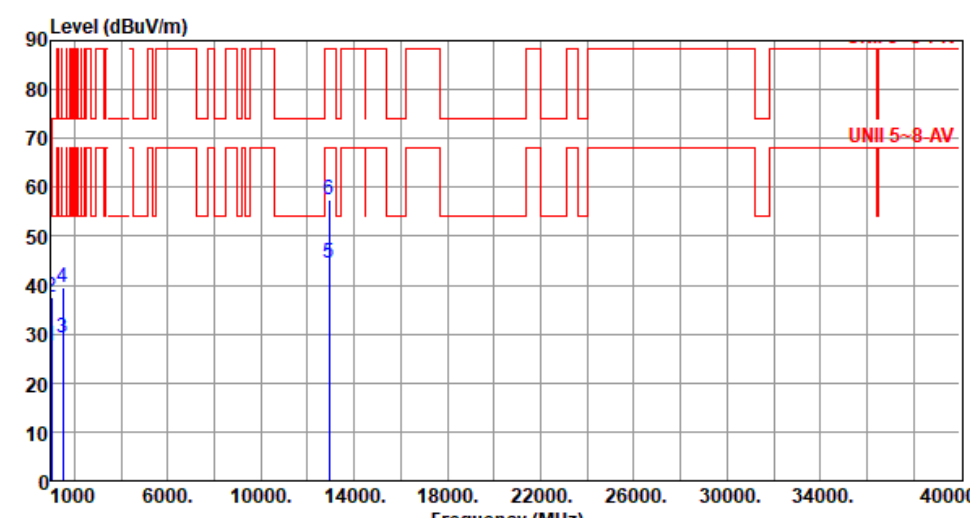

Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.47	54.00	-26.53	35.74	-8.27	Average	100	282
2	1000.00	37.38	54.00	-16.62	45.65	-8.27	Peak	100	282
3	1500.00	29.34	54.00	-24.66	36.62	-7.28	Average	200	113
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	200	113
5	12930.00	44.42	68.20	-23.78	38.38	6.04	Average	100	253
6	12930.00	57.61	88.20	-30.59	51.57	6.04	Peak	100	253

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.37</td><td>54.00</td><td>-25.63</td><td>36.64</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>47.61</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>35.06</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>37.69</td><td>74.00</td><td>-36.31</td><td>44.97</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>13090.00</td><td>41.66</td><td>68.20</td><td>-26.54</td><td>35.97</td><td>5.69</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>6</td><td>13090.00</td><td>54.73</td><td>88.20</td><td>-33.47</td><td>49.04</td><td>5.69</td><td>Peak</td><td>100</td><td>246</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	243	2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243	3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	126	123	4	1500.00	37.69	74.00	-36.31	44.97	-7.28	Peak	126	123	5	13090.00	41.66	68.20	-26.54	35.97	5.69	Average	100	246	6	13090.00	54.73	88.20	-33.47	49.04	5.69	Peak	100	246
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	243																																																																
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243																																																																
3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	126	123																																																																
4	1500.00	37.69	74.00	-36.31	44.97	-7.28	Peak	126	123																																																																
5	13090.00	41.66	68.20	-26.54	35.97	5.69	Average	100	246																																																																
6	13090.00	54.73	88.20	-33.47	49.04	5.69	Peak	100	246																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>35.93</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>203</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.43</td><td>74.00</td><td>-34.57</td><td>46.71</td><td>-7.28</td><td>Peak</td><td>203</td><td>108</td></tr><tr><td>5</td><td>13090.00</td><td>42.75</td><td>68.20</td><td>-25.45</td><td>37.06</td><td>5.69</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>6</td><td>13090.00</td><td>56.75</td><td>88.20</td><td>-31.45</td><td>51.06</td><td>5.69</td><td>Peak</td><td>100</td><td>213</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	278	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	108	4	1500.00	39.43	74.00	-34.57	46.71	-7.28	Peak	203	108	5	13090.00	42.75	68.20	-25.45	37.06	5.69	Average	100	213	6	13090.00	56.75	88.20	-31.45	51.06	5.69	Peak	100	213
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	278																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278																																																																
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	108																																																																
4	1500.00	39.43	74.00	-34.57	46.71	-7.28	Peak	203	108																																																																
5	13090.00	42.75	68.20	-25.45	37.06	5.69	Average	100	213																																																																
6	13090.00	56.75	88.20	-31.45	51.06	5.69	Peak	100	213																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

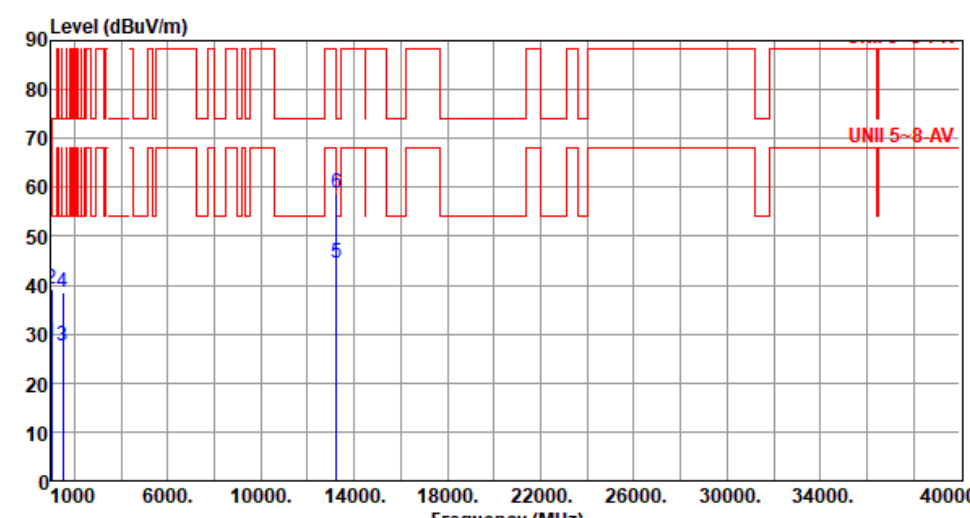


Modulation	be EHT80	Test Freq. (MHz)	6625						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	244
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	244
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	125	120
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	125	120
5	13250.00	44.52	54.00	-9.48	38.87	5.65	Average	100	249
6	13250.00	58.68	74.00	-15.32	53.03	5.65	Peak	100	249

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>36.05</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>202</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.47</td><td>74.00</td><td>-34.53</td><td>46.75</td><td>-7.28</td><td>Peak</td><td>202</td><td>111</td></tr><tr><td>5</td><td>13250.00</td><td>46.64</td><td>54.00</td><td>-7.36</td><td>40.99</td><td>5.65</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>13250.00</td><td>58.86</td><td>74.00</td><td>-15.14</td><td>53.21</td><td>5.65</td><td>Peak</td><td>100</td><td>251</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	279	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	111	4	1500.00	39.47	74.00	-34.53	46.75	-7.28	Peak	202	111	5	13250.00	46.64	54.00	-7.36	40.99	5.65	Average	100	251	6	13250.00	58.86	74.00	-15.14	53.21	5.65	Peak	100	251
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	279																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279																																																																
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	111																																																																
4	1500.00	39.47	74.00	-34.53	46.75	-7.28	Peak	202	111																																																																
5	13250.00	46.64	54.00	-7.36	40.99	5.65	Average	100	251																																																																
6	13250.00	58.86	74.00	-15.14	53.21	5.65	Peak	100	251																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

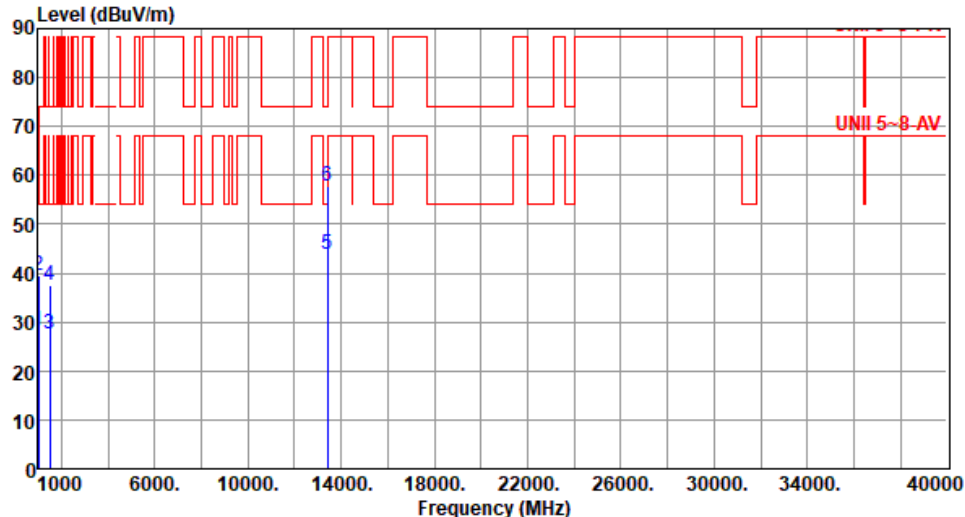

Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.36</td><td>54.00</td><td>-25.64</td><td>36.63</td><td>-8.27</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>3</td><td>1500.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>34.70</td><td>-7.28</td><td>Average</td><td>123</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>37.67</td><td>74.00</td><td>-36.33</td><td>44.95</td><td>-7.28</td><td>Peak</td><td>123</td><td>122</td></tr><tr><td>5</td><td>13410.00</td><td>43.99</td><td>68.20</td><td>-24.21</td><td>38.09</td><td>5.90</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>6</td><td>13410.00</td><td>57.64</td><td>88.20</td><td>-30.56</td><td>51.74</td><td>5.90</td><td>Peak</td><td>100</td><td>229</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	247	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	247	3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	123	122	4	1500.00	37.67	74.00	-36.33	44.95	-7.28	Peak	123	122	5	13410.00	43.99	68.20	-24.21	38.09	5.90	Average	100	229	6	13410.00	57.64	88.20	-30.56	51.74	5.90	Peak	100	229
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	247																																																																
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	247																																																																
3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	123	122																																																																
4	1500.00	37.67	74.00	-36.33	44.95	-7.28	Peak	123	122																																																																
5	13410.00	43.99	68.20	-24.21	38.09	5.90	Average	100	229																																																																
6	13410.00	57.64	88.20	-30.56	51.74	5.90	Peak	100	229																																																																



Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.43</td><td>54.00</td><td>-26.57</td><td>35.70</td><td>-8.27</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>2</td><td>1000.00</td><td>37.79</td><td>54.00</td><td>-16.21</td><td>46.06</td><td>-8.27</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>3</td><td>1500.00</td><td>29.34</td><td>54.00</td><td>-24.66</td><td>36.62</td><td>-7.28</td><td>Average</td><td>203</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.48</td><td>74.00</td><td>-34.52</td><td>46.76</td><td>-7.28</td><td>Peak</td><td>203</td><td>113</td></tr><tr><td>5</td><td>13410.00</td><td>44.99</td><td>68.20</td><td>-23.21</td><td>39.09</td><td>5.90</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>6</td><td>13410.00</td><td>58.15</td><td>88.20</td><td>-30.05</td><td>52.25</td><td>5.90</td><td>Peak</td><td>100</td><td>247</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	277	2	1000.00	37.79	54.00	-16.21	46.06	-8.27	Peak	100	277	3	1500.00	29.34	54.00	-24.66	36.62	-7.28	Average	203	113	4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	203	113	5	13410.00	44.99	68.20	-23.21	39.09	5.90	Average	100	247	6	13410.00	58.15	88.20	-30.05	52.25	5.90	Peak	100	247
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	277																																																																
2	1000.00	37.79	54.00	-16.21	46.06	-8.27	Peak	100	277																																																																
3	1500.00	29.34	54.00	-24.66	36.62	-7.28	Average	203	113																																																																
4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	203	113																																																																
5	13410.00	44.99	68.20	-23.21	39.09	5.90	Average	100	247																																																																
6	13410.00	58.15	88.20	-30.05	52.25	5.90	Peak	100	247																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.39</td><td>54.00</td><td>-25.61</td><td>36.66</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.61</td><td>54.00</td><td>-26.39</td><td>34.89</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>13570.00</td><td>46.45</td><td>68.20</td><td>-21.75</td><td>40.16</td><td>6.29</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>6</td><td>13570.00</td><td>57.78</td><td>88.20</td><td>-30.42</td><td>51.49</td><td>6.29</td><td>Peak</td><td>100</td><td>225</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	250	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	250	3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	126	123	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	123	5	13570.00	46.45	68.20	-21.75	40.16	6.29	Average	100	225	6	13570.00	57.78	88.20	-30.42	51.49	6.29	Peak	100	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	250																																																																
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	250																																																																
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	126	123																																																																
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	123																																																																
5	13570.00	46.45	68.20	-21.75	40.16	6.29	Average	100	225																																																																
6	13570.00	57.78	88.20	-30.42	51.49	6.29	Peak	100	225																																																																




Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	282
2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	282
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	113
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	113
5	13570.00	49.26	68.20	-18.94	42.97	6.29	Average	152	251
6	13570.00	61.43	88.20	-26.77	55.14	6.29	Peak	152	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.27</td><td>54.00</td><td>-25.73</td><td>36.54</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>47.58</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>34.95</td><td>-7.28</td><td>Average</td><td>125</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.76</td><td>-7.28</td><td>Peak</td><td>125</td><td>123</td></tr><tr><td>5</td><td>13730.00</td><td>46.15</td><td>68.20</td><td>-22.05</td><td>40.14</td><td>6.01</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>6</td><td>13730.00</td><td>58.23</td><td>88.20</td><td>-29.97</td><td>52.22</td><td>6.01</td><td>Peak</td><td>100</td><td>99</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	246	2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	246	3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	125	123	4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	123	5	13730.00	46.15	68.20	-22.05	40.14	6.01	Average	100	99	6	13730.00	58.23	88.20	-29.97	52.22	6.01	Peak	100	99
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	246																																																																
2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	246																																																																
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	125	123																																																																
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	123																																																																
5	13730.00	46.15	68.20	-22.05	40.14	6.01	Average	100	99																																																																
6	13730.00	58.23	88.20	-29.97	52.22	6.01	Peak	100	99																																																																

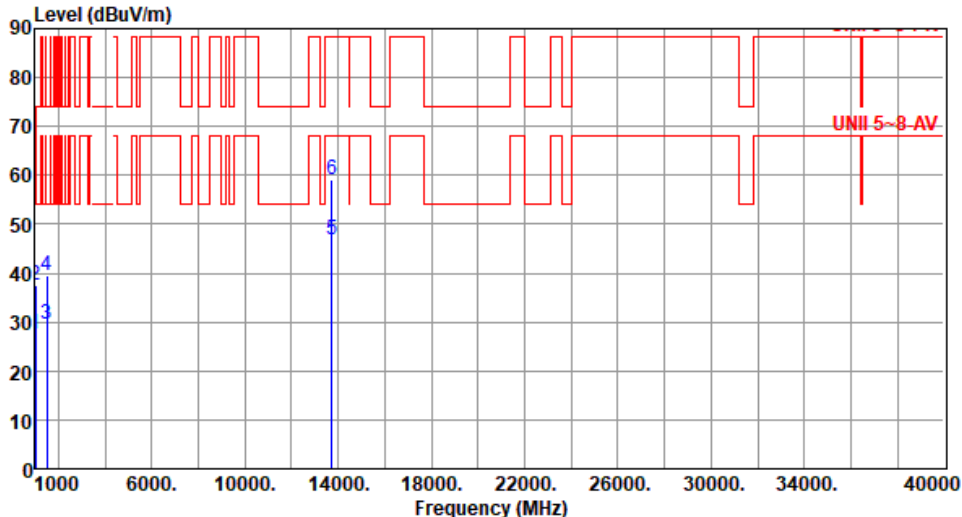


Modulation	be EHT80	Test Freq. (MHz)	6865						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	282
2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	282
3	1500.00	29.49	54.00	-24.51	36.77	-7.28	Average	200	108
4	1500.00	39.36	74.00	-34.64	46.64	-7.28	Peak	200	108
5	13730.00	46.73	68.20	-21.47	40.72	6.01	Average	105	253
6	13730.00	59.00	88.20	-29.20	52.99	6.01	Peak	105	253

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT80	Test Freq. (MHz)	6945																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.32</td><td>54.00</td><td>-25.68</td><td>36.59</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.32</td><td>54.00</td><td>-14.68</td><td>47.59</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>123</td><td>117</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>123</td><td>117</td></tr><tr><td>5</td><td>13890.00</td><td>46.21</td><td>68.20</td><td>-21.99</td><td>39.87</td><td>6.34</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>6</td><td>13890.00</td><td>58.26</td><td>88.20</td><td>-29.94</td><td>51.92</td><td>6.34</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.32	54.00	-25.68	36.59	-8.27	Average	100	246	2	1000.00	39.32	54.00	-14.68	47.59	-8.27	Peak	100	246	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	123	117	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	123	117	5	13890.00	46.21	68.20	-21.99	39.87	6.34	Average	100	223	6	13890.00	58.26	88.20	-29.94	51.92	6.34	Peak	100	223
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.32	54.00	-25.68	36.59	-8.27	Average	100	246																																																																
2	1000.00	39.32	54.00	-14.68	47.59	-8.27	Peak	100	246																																																																
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	123	117																																																																
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	123	117																																																																
5	13890.00	46.21	68.20	-21.99	39.87	6.34	Average	100	223																																																																
6	13890.00	58.26	88.20	-29.94	51.92	6.34	Peak	100	223																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

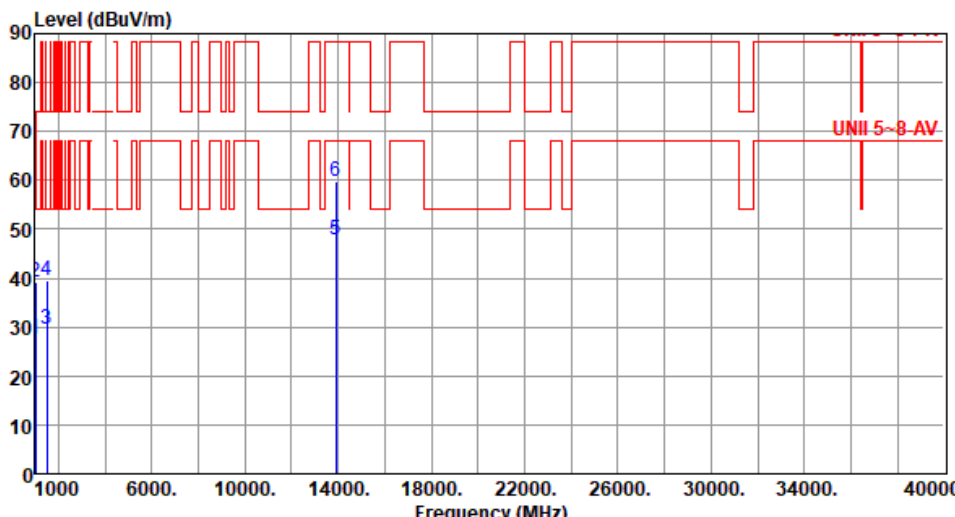


Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	277
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	277
3	1500.00	29.42	54.00	-24.58	36.70	-7.28	Average	203	112
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	203	112
5	13890.00	47.91	68.20	-20.29	41.57	6.34	Average	138	250
6	13890.00	59.80	88.20	-28.40	53.46	6.34	Peak	138	250

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

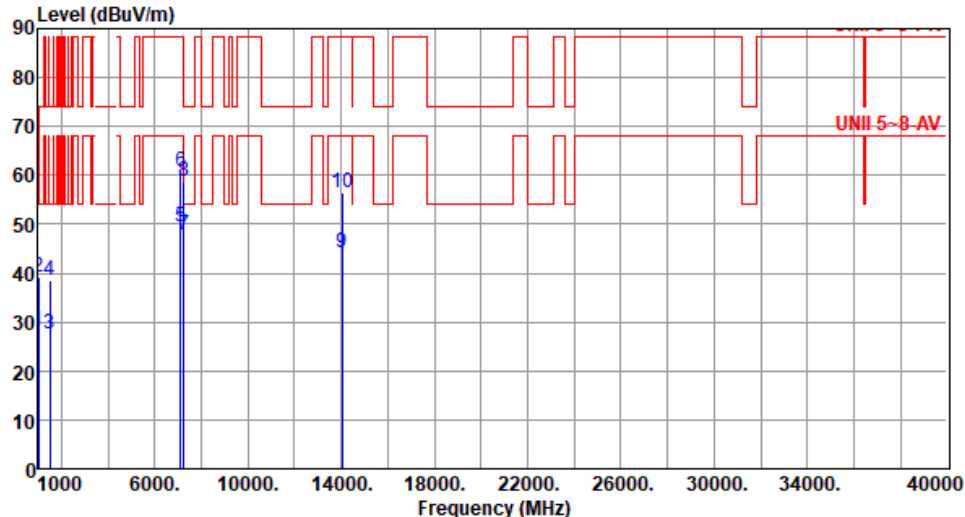


Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.24</td><td>54.00</td><td>-25.76</td><td>36.51</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>34.74</td><td>-7.28</td><td>Average</td><td>122</td><td>119</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>122</td><td>119</td></tr><tr><td>5</td><td>7125.00</td><td>49.50</td><td>68.20</td><td>-18.70</td><td>44.64</td><td>4.86</td><td>Average</td><td>150</td><td>144</td></tr><tr><td>6</td><td>7125.00</td><td>60.61</td><td>88.20</td><td>-27.59</td><td>55.75</td><td>4.86</td><td>Peak</td><td>150</td><td>144</td></tr><tr><td>7</td><td>7250.00</td><td>47.74</td><td>54.00</td><td>-6.26</td><td>42.53</td><td>5.21</td><td>Average</td><td>150</td><td>144</td></tr><tr><td>8</td><td>7250.00</td><td>58.90</td><td>74.00</td><td>-15.10</td><td>53.69</td><td>5.21</td><td>Peak</td><td>150</td><td>144</td></tr><tr><td>9</td><td>14050.00</td><td>44.29</td><td>68.20</td><td>-23.91</td><td>37.55</td><td>6.74</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>10</td><td>14050.00</td><td>56.57</td><td>88.20</td><td>-31.63</td><td>49.83</td><td>6.74</td><td>Peak</td><td>100</td><td>178</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	243	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	243	3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	122	119	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	122	119	5	7125.00	49.50	68.20	-18.70	44.64	4.86	Average	150	144	6	7125.00	60.61	88.20	-27.59	55.75	4.86	Peak	150	144	7	7250.00	47.74	54.00	-6.26	42.53	5.21	Average	150	144	8	7250.00	58.90	74.00	-15.10	53.69	5.21	Peak	150	144	9	14050.00	44.29	68.20	-23.91	37.55	6.74	Average	100	178	10	14050.00	56.57	88.20	-31.63	49.83	6.74	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	243																																																																																																								
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	243																																																																																																								
3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	122	119																																																																																																								
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	122	119																																																																																																								
5	7125.00	49.50	68.20	-18.70	44.64	4.86	Average	150	144																																																																																																								
6	7125.00	60.61	88.20	-27.59	55.75	4.86	Peak	150	144																																																																																																								
7	7250.00	47.74	54.00	-6.26	42.53	5.21	Average	150	144																																																																																																								
8	7250.00	58.90	74.00	-15.10	53.69	5.21	Peak	150	144																																																																																																								
9	14050.00	44.29	68.20	-23.91	37.55	6.74	Average	100	178																																																																																																								
10	14050.00	56.57	88.20	-31.63	49.83	6.74	Peak	100	178																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

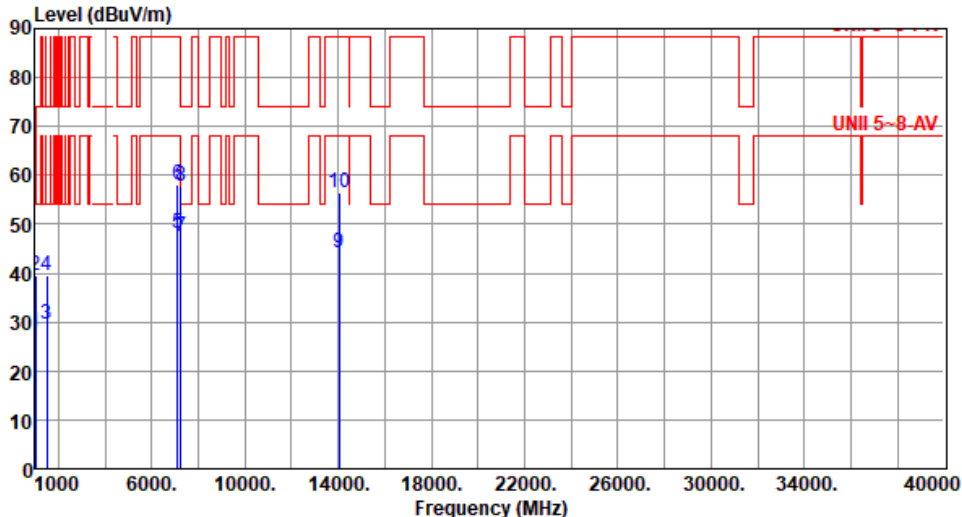

Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>36.15</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>39.67</td><td>54.00</td><td>-14.33</td><td>47.94</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.55</td><td>54.00</td><td>-24.45</td><td>36.83</td><td>-7.28</td><td>Average</td><td>199</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.66</td><td>74.00</td><td>-34.34</td><td>46.94</td><td>-7.28</td><td>Peak</td><td>199</td><td>113</td></tr><tr><td>5</td><td>7125.00</td><td>48.01</td><td>68.20</td><td>-20.19</td><td>43.15</td><td>4.86</td><td>Average</td><td>124</td><td>351</td></tr><tr><td>6</td><td>7125.00</td><td>58.03</td><td>88.20</td><td>-30.17</td><td>53.17</td><td>4.86</td><td>Peak</td><td>124</td><td>351</td></tr><tr><td>7</td><td>7250.00</td><td>47.64</td><td>54.00</td><td>-6.36</td><td>42.43</td><td>5.21</td><td>Average</td><td>124</td><td>351</td></tr><tr><td>8</td><td>7250.00</td><td>57.69</td><td>74.00</td><td>-16.31</td><td>52.48</td><td>5.21</td><td>Peak</td><td>124</td><td>351</td></tr><tr><td>9</td><td>14050.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>37.52</td><td>6.74</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>10</td><td>14050.00</td><td>56.50</td><td>88.20</td><td>-31.70</td><td>49.76</td><td>6.74</td><td>Peak</td><td>100</td><td>257</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279	2	1000.00	39.67	54.00	-14.33	47.94	-8.27	Peak	100	279	3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	199	113	4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	199	113	5	7125.00	48.01	68.20	-20.19	43.15	4.86	Average	124	351	6	7125.00	58.03	88.20	-30.17	53.17	4.86	Peak	124	351	7	7250.00	47.64	54.00	-6.36	42.43	5.21	Average	124	351	8	7250.00	57.69	74.00	-16.31	52.48	5.21	Peak	124	351	9	14050.00	44.26	68.20	-23.94	37.52	6.74	Average	100	257	10	14050.00	56.50	88.20	-31.70	49.76	6.74	Peak	100	257
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279																																																																																																								
2	1000.00	39.67	54.00	-14.33	47.94	-8.27	Peak	100	279																																																																																																								
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	199	113																																																																																																								
4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	199	113																																																																																																								
5	7125.00	48.01	68.20	-20.19	43.15	4.86	Average	124	351																																																																																																								
6	7125.00	58.03	88.20	-30.17	53.17	4.86	Peak	124	351																																																																																																								
7	7250.00	47.64	54.00	-6.36	42.43	5.21	Average	124	351																																																																																																								
8	7250.00	57.69	74.00	-16.31	52.48	5.21	Peak	124	351																																																																																																								
9	14050.00	44.26	68.20	-23.94	37.52	6.74	Average	100	257																																																																																																								
10	14050.00	56.50	88.20	-31.70	49.76	6.74	Peak	100	257																																																																																																								

Unwanted Emissions (Above 1GHz) for be EHT160

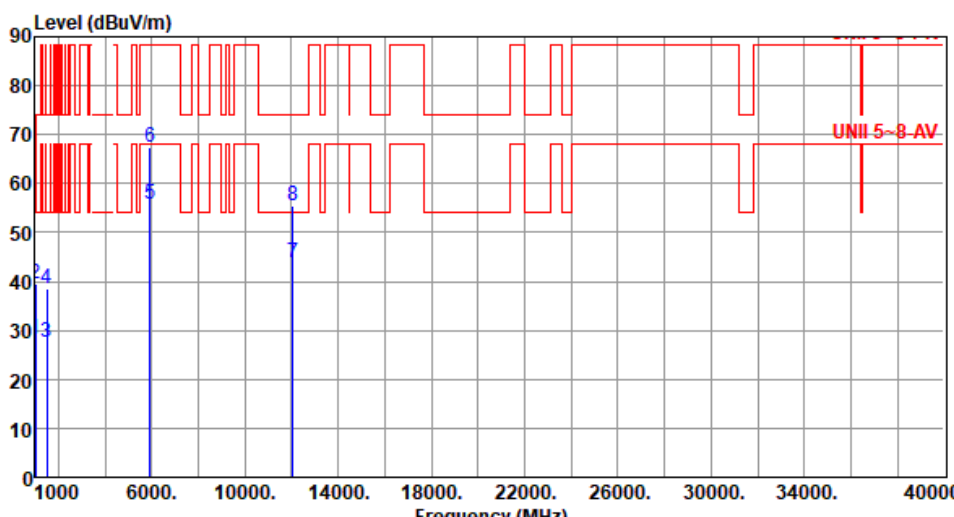Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>122</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>122</td><td>120</td></tr><tr><td>5</td><td>5925.00</td><td>55.78</td><td>68.20</td><td>-12.42</td><td>54.65</td><td>1.13</td><td>Average</td><td>134</td><td>348</td></tr><tr><td>6</td><td>5925.00</td><td>67.33</td><td>88.20</td><td>-20.87</td><td>66.20</td><td>1.13</td><td>Peak</td><td>134</td><td>348</td></tr><tr><td>7</td><td>12050.00</td><td>43.89</td><td>54.00</td><td>-10.11</td><td>37.64</td><td>6.25</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>8</td><td>12050.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>49.24</td><td>6.25</td><td>Peak</td><td>100</td><td>175</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	122	120	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	122	120	5	5925.00	55.78	68.20	-12.42	54.65	1.13	Average	134	348	6	5925.00	67.33	88.20	-20.87	66.20	1.13	Peak	134	348	7	12050.00	43.89	54.00	-10.11	37.64	6.25	Average	100	175	8	12050.00	55.49	74.00	-18.51	49.24	6.25	Peak	100	175
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251																																																																																				
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251																																																																																				
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	122	120																																																																																				
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	122	120																																																																																				
5	5925.00	55.78	68.20	-12.42	54.65	1.13	Average	134	348																																																																																				
6	5925.00	67.33	88.20	-20.87	66.20	1.13	Peak	134	348																																																																																				
7	12050.00	43.89	54.00	-10.11	37.64	6.25	Average	100	175																																																																																				
8	12050.00	55.49	74.00	-18.51	49.24	6.25	Peak	100	175																																																																																				




Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.79</td><td>54.00</td><td>-26.21</td><td>36.06</td><td>-8.27</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>2</td><td>1000.00</td><td>37.56</td><td>54.00</td><td>-16.44</td><td>45.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>3</td><td>1500.00</td><td>29.34</td><td>54.00</td><td>-24.66</td><td>36.62</td><td>-7.28</td><td>Average</td><td>205</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>205</td><td>115</td></tr><tr><td>5</td><td>5925.00</td><td>54.71</td><td>68.20</td><td>-13.49</td><td>53.58</td><td>1.13</td><td>Average</td><td>239</td><td>1</td></tr><tr><td>6</td><td>5925.00</td><td>70.39</td><td>88.20</td><td>-17.81</td><td>69.26</td><td>1.13</td><td>Peak</td><td>239</td><td>1</td></tr><tr><td>7</td><td>12050.00</td><td>45.34</td><td>54.00</td><td>-8.66</td><td>39.09</td><td>6.25</td><td>Average</td><td>221</td><td>259</td></tr><tr><td>8</td><td>12050.00</td><td>59.34</td><td>74.00</td><td>-14.66</td><td>53.09</td><td>6.25</td><td>Peak</td><td>221</td><td>259</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.79	54.00	-26.21	36.06	-8.27	Average	100	277	2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	277	3	1500.00	29.34	54.00	-24.66	36.62	-7.28	Average	205	115	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	205	115	5	5925.00	54.71	68.20	-13.49	53.58	1.13	Average	239	1	6	5925.00	70.39	88.20	-17.81	69.26	1.13	Peak	239	1	7	12050.00	45.34	54.00	-8.66	39.09	6.25	Average	221	259	8	12050.00	59.34	74.00	-14.66	53.09	6.25	Peak	221	259
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.79	54.00	-26.21	36.06	-8.27	Average	100	277																																																																																				
2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	277																																																																																				
3	1500.00	29.34	54.00	-24.66	36.62	-7.28	Average	205	115																																																																																				
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	205	115																																																																																				
5	5925.00	54.71	68.20	-13.49	53.58	1.13	Average	239	1																																																																																				
6	5925.00	70.39	88.20	-17.81	69.26	1.13	Peak	239	1																																																																																				
7	12050.00	45.34	54.00	-8.66	39.09	6.25	Average	221	259																																																																																				
8	12050.00	59.34	74.00	-14.66	53.09	6.25	Peak	221	259																																																																																				



Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.36</td><td>54.00</td><td>-25.64</td><td>36.63</td><td>-8.27</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1000.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>47.91</td><td>-8.27</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>1500.00</td><td>27.76</td><td>54.00</td><td>-26.24</td><td>35.04</td><td>-7.28</td><td>Average</td><td>126</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.95</td><td>74.00</td><td>-35.05</td><td>46.23</td><td>-7.28</td><td>Peak</td><td>126</td><td>120</td></tr><tr><td>5</td><td>12370.00</td><td>46.89</td><td>54.00</td><td>-7.11</td><td>41.19</td><td>5.70</td><td>Average</td><td>303</td><td>235</td></tr><tr><td>6</td><td>12370.00</td><td>63.53</td><td>74.00</td><td>-10.47</td><td>57.83</td><td>5.70</td><td>Peak</td><td>303</td><td>235</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	253	2	1000.00	39.64	54.00	-14.36	47.91	-8.27	Peak	100	253	3	1500.00	27.76	54.00	-26.24	35.04	-7.28	Average	126	120	4	1500.00	38.95	74.00	-35.05	46.23	-7.28	Peak	126	120	5	12370.00	46.89	54.00	-7.11	41.19	5.70	Average	303	235	6	12370.00	63.53	74.00	-10.47	57.83	5.70	Peak	303	235
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	253																																																																
2	1000.00	39.64	54.00	-14.36	47.91	-8.27	Peak	100	253																																																																
3	1500.00	27.76	54.00	-26.24	35.04	-7.28	Average	126	120																																																																
4	1500.00	38.95	74.00	-35.05	46.23	-7.28	Peak	126	120																																																																
5	12370.00	46.89	54.00	-7.11	41.19	5.70	Average	303	235																																																																
6	12370.00	63.53	74.00	-10.47	57.83	5.70	Peak	303	235																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

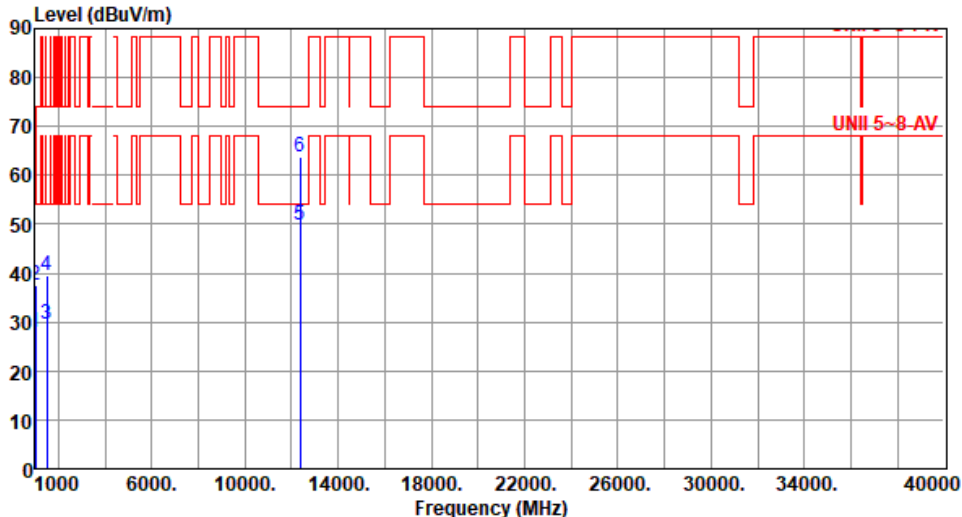

Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>36.15</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.62</td><td>54.00</td><td>-16.38</td><td>45.89</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.52</td><td>54.00</td><td>-24.48</td><td>36.80</td><td>-7.28</td><td>Average</td><td>203</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.67</td><td>74.00</td><td>-34.33</td><td>46.95</td><td>-7.28</td><td>Peak</td><td>203</td><td>113</td></tr><tr><td>5</td><td>12370.00</td><td>49.89</td><td>54.00</td><td>-4.11</td><td>44.19</td><td>5.70</td><td>Average</td><td>241</td><td>258</td></tr><tr><td>6</td><td>12370.00</td><td>63.73</td><td>74.00</td><td>-10.27</td><td>58.03</td><td>5.70</td><td>Peak</td><td>241</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279	2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	279	3	1500.00	29.52	54.00	-24.48	36.80	-7.28	Average	203	113	4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	113	5	12370.00	49.89	54.00	-4.11	44.19	5.70	Average	241	258	6	12370.00	63.73	74.00	-10.27	58.03	5.70	Peak	241	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279																																																																
2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	279																																																																
3	1500.00	29.52	54.00	-24.48	36.80	-7.28	Average	203	113																																																																
4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	113																																																																
5	12370.00	49.89	54.00	-4.11	44.19	5.70	Average	241	258																																																																
6	12370.00	63.73	74.00	-10.27	58.03	5.70	Peak	241	258																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.48</td><td>54.00</td><td>-25.52</td><td>36.75</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>47.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.81</td><td>54.00</td><td>-26.19</td><td>35.09</td><td>-7.28</td><td>Average</td><td>123</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.55</td><td>74.00</td><td>-35.45</td><td>45.83</td><td>-7.28</td><td>Peak</td><td>123</td><td>122</td></tr><tr><td>5</td><td>12690.00</td><td>47.53</td><td>54.00</td><td>-6.47</td><td>41.74</td><td>5.79</td><td>Average</td><td>176</td><td>244</td></tr><tr><td>6</td><td>12690.00</td><td>65.20</td><td>74.00</td><td>-8.80</td><td>59.41</td><td>5.79</td><td>Peak</td><td>176</td><td>244</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.48	54.00	-25.52	36.75	-8.27	Average	100	250	2	1000.00	39.56	54.00	-14.44	47.83	-8.27	Peak	100	250	3	1500.00	27.81	54.00	-26.19	35.09	-7.28	Average	123	122	4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	123	122	5	12690.00	47.53	54.00	-6.47	41.74	5.79	Average	176	244	6	12690.00	65.20	74.00	-8.80	59.41	5.79	Peak	176	244
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.48	54.00	-25.52	36.75	-8.27	Average	100	250																																																																
2	1000.00	39.56	54.00	-14.44	47.83	-8.27	Peak	100	250																																																																
3	1500.00	27.81	54.00	-26.19	35.09	-7.28	Average	123	122																																																																
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	123	122																																																																
5	12690.00	47.53	54.00	-6.47	41.74	5.79	Average	176	244																																																																
6	12690.00	65.20	74.00	-8.80	59.41	5.79	Peak	176	244																																																																




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.94</td><td>54.00</td><td>-26.06</td><td>36.21</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.80</td><td>54.00</td><td>-16.20</td><td>46.07</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.68</td><td>54.00</td><td>-24.32</td><td>36.96</td><td>-7.28</td><td>Average</td><td>202</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.66</td><td>74.00</td><td>-34.34</td><td>46.94</td><td>-7.28</td><td>Peak</td><td>202</td><td>111</td></tr><tr><td>5</td><td>12690.00</td><td>51.88</td><td>54.00</td><td>-2.12</td><td>46.09</td><td>5.79</td><td>Average</td><td>175</td><td>262</td></tr><tr><td>6</td><td>12690.00</td><td>67.33</td><td>74.00</td><td>-6.67</td><td>61.54</td><td>5.79</td><td>Peak</td><td>175</td><td>262</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.94	54.00	-26.06	36.21	-8.27	Average	100	278	2	1000.00	37.80	54.00	-16.20	46.07	-8.27	Peak	100	278	3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	202	111	4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	202	111	5	12690.00	51.88	54.00	-2.12	46.09	5.79	Average	175	262	6	12690.00	67.33	74.00	-6.67	61.54	5.79	Peak	175	262
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.94	54.00	-26.06	36.21	-8.27	Average	100	278																																																																
2	1000.00	37.80	54.00	-16.20	46.07	-8.27	Peak	100	278																																																																
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	202	111																																																																
4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	202	111																																																																
5	12690.00	51.88	54.00	-2.12	46.09	5.79	Average	175	262																																																																
6	12690.00	67.33	74.00	-6.67	61.54	5.79	Peak	175	262																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

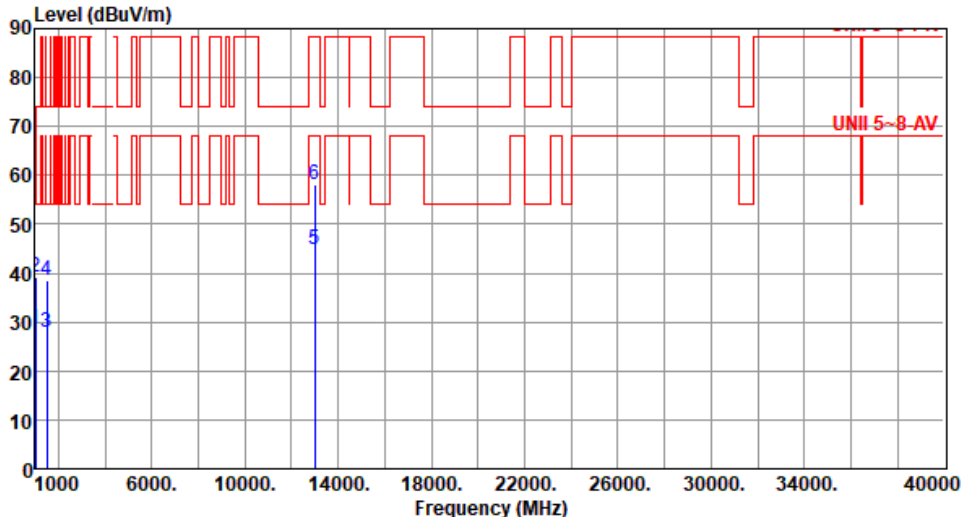


Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.49</td><td>54.00</td><td>-25.51</td><td>36.76</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.87</td><td>54.00</td><td>-26.13</td><td>35.15</td><td>-7.28</td><td>Average</td><td>120</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.41</td><td>74.00</td><td>-35.59</td><td>45.69</td><td>-7.28</td><td>Peak</td><td>120</td><td>122</td></tr><tr><td>5</td><td>13010.00</td><td>44.71</td><td>68.20</td><td>-23.49</td><td>38.60</td><td>6.11</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>6</td><td>13010.00</td><td>57.99</td><td>88.20</td><td>-30.21</td><td>51.88</td><td>6.11</td><td>Peak</td><td>100</td><td>202</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	251	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	251	3	1500.00	27.87	54.00	-26.13	35.15	-7.28	Average	120	122	4	1500.00	38.41	74.00	-35.59	45.69	-7.28	Peak	120	122	5	13010.00	44.71	68.20	-23.49	38.60	6.11	Average	100	202	6	13010.00	57.99	88.20	-30.21	51.88	6.11	Peak	100	202
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	251																																																																
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	251																																																																
3	1500.00	27.87	54.00	-26.13	35.15	-7.28	Average	120	122																																																																
4	1500.00	38.41	74.00	-35.59	45.69	-7.28	Peak	120	122																																																																
5	13010.00	44.71	68.20	-23.49	38.60	6.11	Average	100	202																																																																
6	13010.00	57.99	88.20	-30.21	51.88	6.11	Peak	100	202																																																																

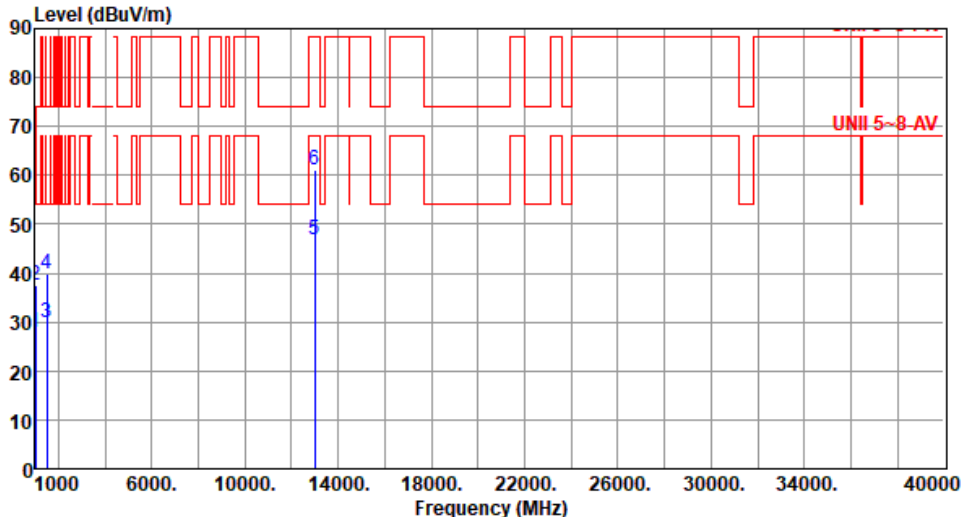

Modulation	be EHT160		Test Freq. (MHz)		6505																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																															
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>36.15</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.64</td><td>54.00</td><td>-16.36</td><td>45.91</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.79</td><td>54.00</td><td>-24.21</td><td>37.07</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.78</td><td>74.00</td><td>-34.22</td><td>47.06</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>13010.00</td><td>46.95</td><td>68.20</td><td>-21.25</td><td>40.84</td><td>6.11</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>6</td><td>13010.00</td><td>61.01</td><td>88.20</td><td>-27.19</td><td>54.90</td><td>6.11</td><td>Peak</td><td>100</td><td>238</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	282	2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	282	3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	202	113	4	1500.00	39.78	74.00	-34.22	47.06	-7.28	Peak	202	113	5	13010.00	46.95	68.20	-21.25	40.84	6.11	Average	100	238	6	13010.00	61.01	88.20	-27.19	54.90	6.11	Peak	100	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	282																																																																						
2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	282																																																																						
3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	202	113																																																																						
4	1500.00	39.78	74.00	-34.22	47.06	-7.28	Peak	202	113																																																																						
5	13010.00	46.95	68.20	-21.25	40.84	6.11	Average	100	238																																																																						
6	13010.00	61.01	88.20	-27.19	54.90	6.11	Peak	100	238																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

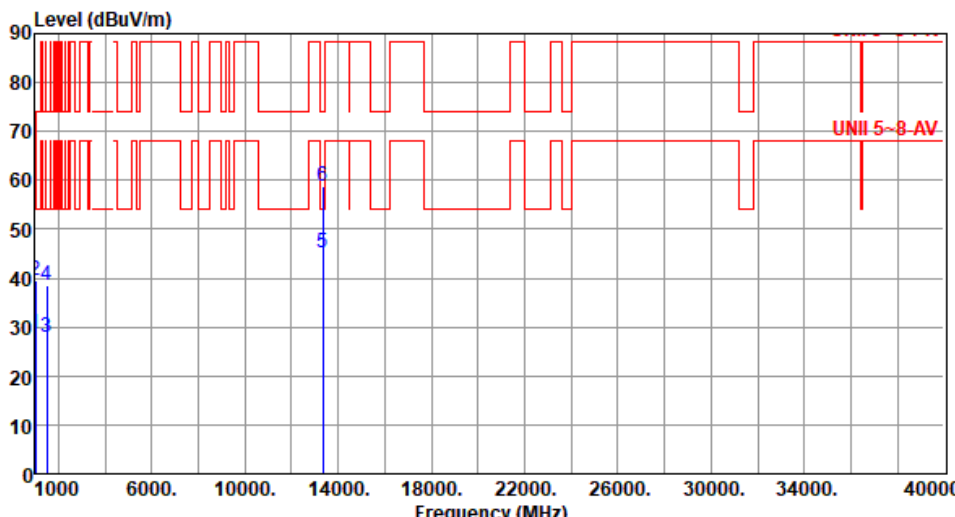


Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.55</td><td>54.00</td><td>-25.45</td><td>36.82</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>47.63</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.86</td><td>54.00</td><td>-26.14</td><td>35.14</td><td>-7.28</td><td>Average</td><td>126</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>126</td><td>120</td></tr><tr><td>5</td><td>13330.00</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>39.56</td><td>5.64</td><td>Average</td><td>100</td><td>229</td></tr><tr><td>6</td><td>13330.00</td><td>58.82</td><td>74.00</td><td>-15.18</td><td>53.18</td><td>5.64</td><td>Peak</td><td>100</td><td>229</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.55	54.00	-25.45	36.82	-8.27	Average	100	244	2	1000.00	39.36	54.00	-14.64	47.63	-8.27	Peak	100	244	3	1500.00	27.86	54.00	-26.14	35.14	-7.28	Average	126	120	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	120	5	13330.00	45.20	54.00	-8.80	39.56	5.64	Average	100	229	6	13330.00	58.82	74.00	-15.18	53.18	5.64	Peak	100	229
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.55	54.00	-25.45	36.82	-8.27	Average	100	244																																																																
2	1000.00	39.36	54.00	-14.64	47.63	-8.27	Peak	100	244																																																																
3	1500.00	27.86	54.00	-26.14	35.14	-7.28	Average	126	120																																																																
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	120																																																																
5	13330.00	45.20	54.00	-8.80	39.56	5.64	Average	100	229																																																																
6	13330.00	58.82	74.00	-15.18	53.18	5.64	Peak	100	229																																																																




Modulation	be EHT160	Test Freq. (MHz)	6665						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	278
2	1000.00	37.61	54.00	-16.39	45.88	-8.27	Peak	100	278
3	1500.00	29.52	54.00	-24.48	36.80	-7.28	Average	203	110
4	1500.00	39.68	74.00	-34.32	46.96	-7.28	Peak	203	110
5	13330.00	46.95	54.00	-7.05	41.31	5.64	Average	100	252
6	13330.00	60.86	74.00	-13.14	55.22	5.64	Peak	100	252
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

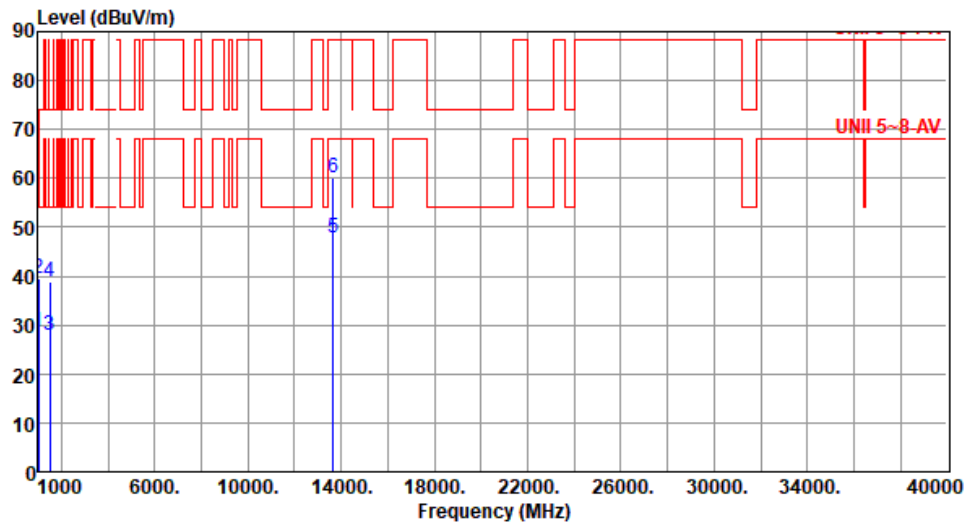

Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.48	54.00	-25.52	36.75	-8.27	Average	100	251
2	1000.00	39.58	54.00	-14.42	47.85	-8.27	Peak	100	251
3	1500.00	27.91	54.00	-26.09	35.19	-7.28	Average	122	123
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	122	123
5	13650.00	47.94	68.20	-20.26	42.08	5.86	Average	100	98
6	13650.00	60.13	88.20	-28.07	54.27	5.86	Peak	100	98
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

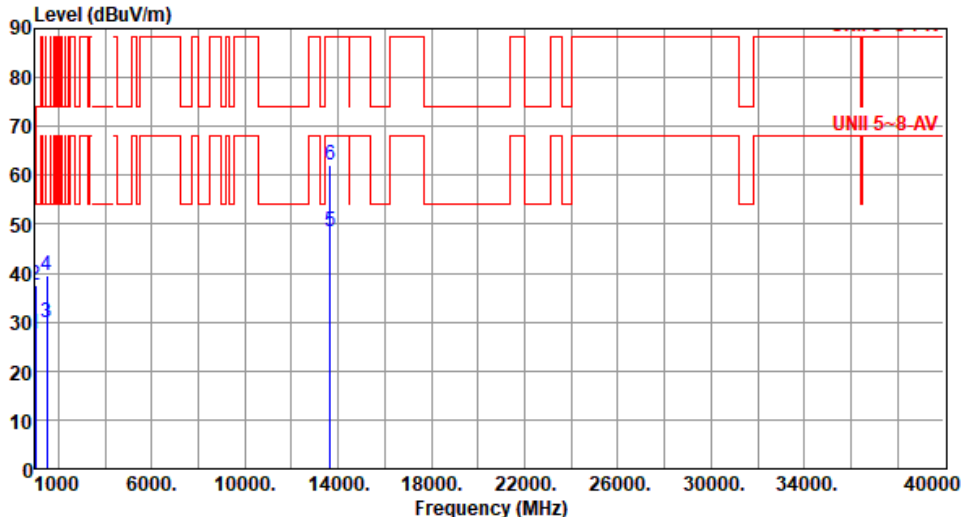


Modulation	be EHT160	Test Freq. (MHz)	6825																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.71</td><td>54.00</td><td>-26.29</td><td>35.98</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.79</td><td>54.00</td><td>-24.21</td><td>37.07</td><td>-7.28</td><td>Average</td><td>200</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.49</td><td>74.00</td><td>-34.51</td><td>46.77</td><td>-7.28</td><td>Peak</td><td>200</td><td>108</td></tr><tr><td>5</td><td>13650.00</td><td>48.50</td><td>68.20</td><td>-19.70</td><td>42.64</td><td>5.86</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>6</td><td>13650.00</td><td>62.09</td><td>88.20</td><td>-26.11</td><td>56.23</td><td>5.86</td><td>Peak</td><td>100</td><td>252</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.71	54.00	-26.29	35.98	-8.27	Average	100	282	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	282	3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	200	108	4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	200	108	5	13650.00	48.50	68.20	-19.70	42.64	5.86	Average	100	252	6	13650.00	62.09	88.20	-26.11	56.23	5.86	Peak	100	252
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.71	54.00	-26.29	35.98	-8.27	Average	100	282																																																																
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	282																																																																
3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	200	108																																																																
4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	200	108																																																																
5	13650.00	48.50	68.20	-19.70	42.64	5.86	Average	100	252																																																																
6	13650.00	62.09	88.20	-26.11	56.23	5.86	Peak	100	252																																																																



Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.64</td><td>54.00</td><td>-25.36</td><td>36.91</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>47.61</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.93</td><td>54.00</td><td>-26.07</td><td>35.21</td><td>-7.28</td><td>Average</td><td>123</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.63</td><td>74.00</td><td>-35.37</td><td>45.91</td><td>-7.28</td><td>Peak</td><td>123</td><td>120</td></tr><tr><td>5</td><td>7125.00</td><td>55.05</td><td>68.20</td><td>-13.15</td><td>50.19</td><td>4.86</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>6</td><td>7125.00</td><td>67.71</td><td>88.20</td><td>-20.49</td><td>62.85</td><td>4.86</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>7</td><td>7250.00</td><td>48.31</td><td>54.00</td><td>-5.69</td><td>43.10</td><td>5.21</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>8</td><td>7250.00</td><td>60.10</td><td>74.00</td><td>-13.90</td><td>54.89</td><td>5.21</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>9</td><td>13970.00</td><td>47.98</td><td>68.20</td><td>-20.22</td><td>41.32</td><td>6.66</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>10</td><td>13970.00</td><td>60.37</td><td>88.20</td><td>-27.83</td><td>53.71</td><td>6.66</td><td>Peak</td><td>100</td><td>226</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.64	54.00	-25.36	36.91	-8.27	Average	100	243	2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243	3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	123	120	4	1500.00	38.63	74.00	-35.37	45.91	-7.28	Peak	123	120	5	7125.00	55.05	68.20	-13.15	50.19	4.86	Average	100	197	6	7125.00	67.71	88.20	-20.49	62.85	4.86	Peak	100	197	7	7250.00	48.31	54.00	-5.69	43.10	5.21	Average	100	197	8	7250.00	60.10	74.00	-13.90	54.89	5.21	Peak	100	197	9	13970.00	47.98	68.20	-20.22	41.32	6.66	Average	100	226	10	13970.00	60.37	88.20	-27.83	53.71	6.66	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.64	54.00	-25.36	36.91	-8.27	Average	100	243																																																																																																								
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243																																																																																																								
3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	123	120																																																																																																								
4	1500.00	38.63	74.00	-35.37	45.91	-7.28	Peak	123	120																																																																																																								
5	7125.00	55.05	68.20	-13.15	50.19	4.86	Average	100	197																																																																																																								
6	7125.00	67.71	88.20	-20.49	62.85	4.86	Peak	100	197																																																																																																								
7	7250.00	48.31	54.00	-5.69	43.10	5.21	Average	100	197																																																																																																								
8	7250.00	60.10	74.00	-13.90	54.89	5.21	Peak	100	197																																																																																																								
9	13970.00	47.98	68.20	-20.22	41.32	6.66	Average	100	226																																																																																																								
10	13970.00	60.37	88.20	-27.83	53.71	6.66	Peak	100	226																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

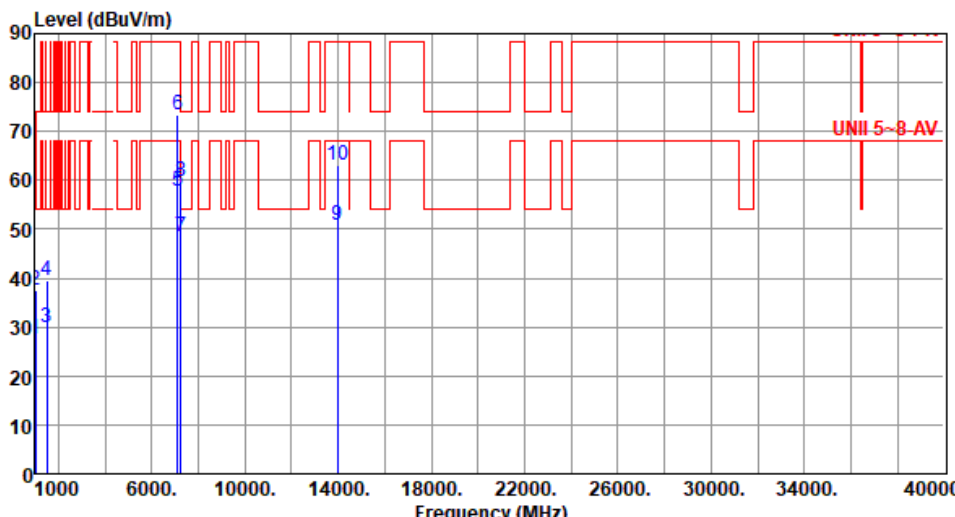


Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.49</td><td>54.00</td><td>-26.51</td><td>35.76</td><td>-8.27</td><td>Average</td><td>100</td><td>275</td></tr><tr><td>2</td><td>1000.00</td><td>37.58</td><td>54.00</td><td>-16.42</td><td>45.85</td><td>-8.27</td><td>Peak</td><td>100</td><td>275</td></tr><tr><td>3</td><td>1500.00</td><td>29.79</td><td>54.00</td><td>-24.21</td><td>37.07</td><td>-7.28</td><td>Average</td><td>202</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>46.83</td><td>-7.28</td><td>Peak</td><td>202</td><td>111</td></tr><tr><td>5</td><td>7125.00</td><td>57.90</td><td>68.20</td><td>-10.30</td><td>53.04</td><td>4.86</td><td>Average</td><td>160</td><td>239</td></tr><tr><td>6</td><td>7125.00</td><td>73.45</td><td>88.20</td><td>-14.75</td><td>68.59</td><td>4.86</td><td>Peak</td><td>160</td><td>239</td></tr><tr><td>7</td><td>7250.00</td><td>48.35</td><td>54.00</td><td>-5.65</td><td>43.14</td><td>5.21</td><td>Average</td><td>160</td><td>239</td></tr><tr><td>8</td><td>7250.00</td><td>59.62</td><td>74.00</td><td>-14.38</td><td>54.41</td><td>5.21</td><td>Peak</td><td>160</td><td>239</td></tr><tr><td>9</td><td>13970.00</td><td>50.88</td><td>68.20</td><td>-17.32</td><td>44.22</td><td>6.66</td><td>Average</td><td>205</td><td>247</td></tr><tr><td>10</td><td>13970.00</td><td>63.18</td><td>88.20</td><td>-25.02</td><td>56.52</td><td>6.66</td><td>Peak</td><td>205</td><td>247</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.49	54.00	-26.51	35.76	-8.27	Average	100	275	2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	275	3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	202	111	4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	111	5	7125.00	57.90	68.20	-10.30	53.04	4.86	Average	160	239	6	7125.00	73.45	88.20	-14.75	68.59	4.86	Peak	160	239	7	7250.00	48.35	54.00	-5.65	43.14	5.21	Average	160	239	8	7250.00	59.62	74.00	-14.38	54.41	5.21	Peak	160	239	9	13970.00	50.88	68.20	-17.32	44.22	6.66	Average	205	247	10	13970.00	63.18	88.20	-25.02	56.52	6.66	Peak	205	247
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	27.49	54.00	-26.51	35.76	-8.27	Average	100	275																																																																																																								
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	275																																																																																																								
3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	202	111																																																																																																								
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	111																																																																																																								
5	7125.00	57.90	68.20	-10.30	53.04	4.86	Average	160	239																																																																																																								
6	7125.00	73.45	88.20	-14.75	68.59	4.86	Peak	160	239																																																																																																								
7	7250.00	48.35	54.00	-5.65	43.14	5.21	Average	160	239																																																																																																								
8	7250.00	59.62	74.00	-14.38	54.41	5.21	Peak	160	239																																																																																																								
9	13970.00	50.88	68.20	-17.32	44.22	6.66	Average	205	247																																																																																																								
10	13970.00	63.18	88.20	-25.02	56.52	6.66	Peak	205	247																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	


Unwanted Emissions (Above 1GHz) for be EHT320

Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.45</td><td>54.00</td><td>-25.55</td><td>36.72</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>47.63</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>123</td><td>125</td></tr><tr><td>4</td><td>1500.00</td><td>38.77</td><td>74.00</td><td>-35.23</td><td>46.05</td><td>-7.28</td><td>Peak</td><td>123</td><td>125</td></tr><tr><td>5</td><td>5925.00</td><td>47.54</td><td>68.20</td><td>-20.66</td><td>46.41</td><td>1.13</td><td>Average</td><td>131</td><td>340</td></tr><tr><td>6</td><td>5925.00</td><td>59.01</td><td>88.20</td><td>-29.19</td><td>57.88</td><td>1.13</td><td>Peak</td><td>131</td><td>340</td></tr><tr><td>7</td><td>12210.00</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>36.43</td><td>6.42</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>8</td><td>12210.00</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>48.05</td><td>6.42</td><td>Peak</td><td>100</td><td>268</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.45	54.00	-25.55	36.72	-8.27	Average	100	251	2	1000.00	39.36	54.00	-14.64	47.63	-8.27	Peak	100	251	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	123	125	4	1500.00	38.77	74.00	-35.23	46.05	-7.28	Peak	123	125	5	5925.00	47.54	68.20	-20.66	46.41	1.13	Average	131	340	6	5925.00	59.01	88.20	-29.19	57.88	1.13	Peak	131	340	7	12210.00	42.85	54.00	-11.15	36.43	6.42	Average	100	268	8	12210.00	54.47	74.00	-19.53	48.05	6.42	Peak	100	268
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.45	54.00	-25.55	36.72	-8.27	Average	100	251																																																																																				
2	1000.00	39.36	54.00	-14.64	47.63	-8.27	Peak	100	251																																																																																				
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	123	125																																																																																				
4	1500.00	38.77	74.00	-35.23	46.05	-7.28	Peak	123	125																																																																																				
5	5925.00	47.54	68.20	-20.66	46.41	1.13	Average	131	340																																																																																				
6	5925.00	59.01	88.20	-29.19	57.88	1.13	Peak	131	340																																																																																				
7	12210.00	42.85	54.00	-11.15	36.43	6.42	Average	100	268																																																																																				
8	12210.00	54.47	74.00	-19.53	48.05	6.42	Peak	100	268																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

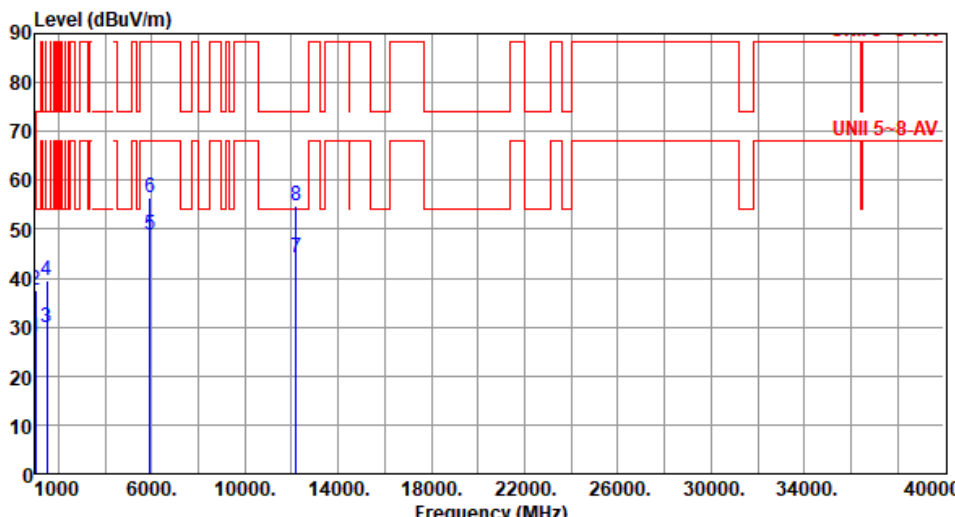


Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.84</td><td>54.00</td><td>-26.16</td><td>36.11</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.68</td><td>54.00</td><td>-16.32</td><td>45.95</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.85</td><td>54.00</td><td>-24.15</td><td>37.13</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.67</td><td>74.00</td><td>-34.33</td><td>46.95</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>5925.00</td><td>48.68</td><td>68.20</td><td>-19.52</td><td>47.55</td><td>1.13</td><td>Average</td><td>160</td><td>253</td></tr><tr><td>6</td><td>5925.00</td><td>56.35</td><td>88.20</td><td>-31.85</td><td>55.22</td><td>1.13</td><td>Peak</td><td>160</td><td>253</td></tr><tr><td>7</td><td>12210.00</td><td>44.10</td><td>54.00</td><td>-9.90</td><td>37.68</td><td>6.42</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>8</td><td>12210.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>48.40</td><td>6.42</td><td>Peak</td><td>100</td><td>248</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.84	54.00	-26.16	36.11	-8.27	Average	100	278	2	1000.00	37.68	54.00	-16.32	45.95	-8.27	Peak	100	278	3	1500.00	29.85	54.00	-24.15	37.13	-7.28	Average	203	111	4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	111	5	5925.00	48.68	68.20	-19.52	47.55	1.13	Average	160	253	6	5925.00	56.35	88.20	-31.85	55.22	1.13	Peak	160	253	7	12210.00	44.10	54.00	-9.90	37.68	6.42	Average	100	248	8	12210.00	54.82	74.00	-19.18	48.40	6.42	Peak	100	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.84	54.00	-26.16	36.11	-8.27	Average	100	278																																																																																				
2	1000.00	37.68	54.00	-16.32	45.95	-8.27	Peak	100	278																																																																																				
3	1500.00	29.85	54.00	-24.15	37.13	-7.28	Average	203	111																																																																																				
4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	111																																																																																				
5	5925.00	48.68	68.20	-19.52	47.55	1.13	Average	160	253																																																																																				
6	5925.00	56.35	88.20	-31.85	55.22	1.13	Peak	160	253																																																																																				
7	12210.00	44.10	54.00	-9.90	37.68	6.42	Average	100	248																																																																																				
8	12210.00	54.82	74.00	-19.18	48.40	6.42	Peak	100	248																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

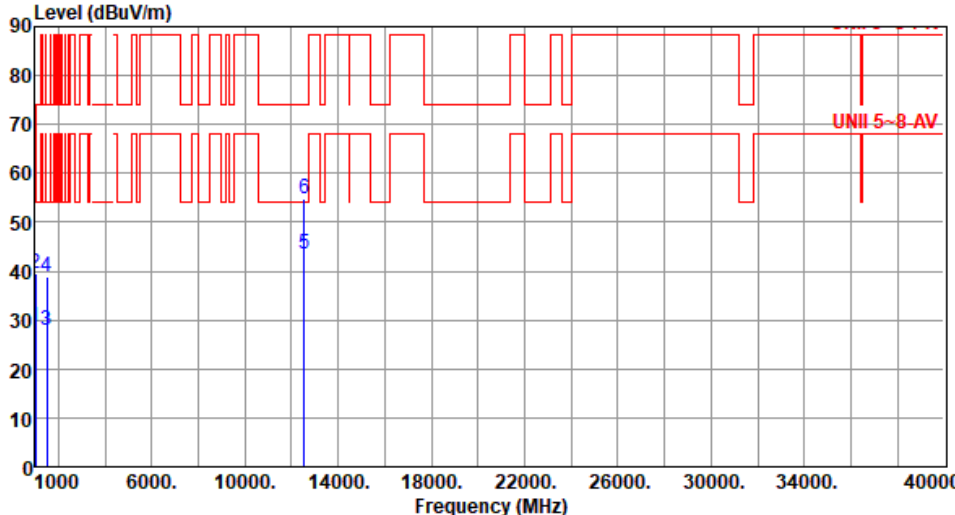

Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.69</td><td>54.00</td><td>-25.31</td><td>36.96</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>47.74</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>35.16</td><td>-7.28</td><td>Average</td><td>123</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.94</td><td>74.00</td><td>-35.06</td><td>46.22</td><td>-7.28</td><td>Peak</td><td>123</td><td>120</td></tr><tr><td>5</td><td>12530.00</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>37.87</td><td>5.71</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>6</td><td>12530.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>49.02</td><td>5.71</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.69	54.00	-25.31	36.96	-8.27	Average	100	246	2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	246	3	1500.00	27.88	54.00	-26.12	35.16	-7.28	Average	123	120	4	1500.00	38.94	74.00	-35.06	46.22	-7.28	Peak	123	120	5	12530.00	43.58	54.00	-10.42	37.87	5.71	Average	100	226	6	12530.00	54.73	74.00	-19.27	49.02	5.71	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.69	54.00	-25.31	36.96	-8.27	Average	100	246																																																																
2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	246																																																																
3	1500.00	27.88	54.00	-26.12	35.16	-7.28	Average	123	120																																																																
4	1500.00	38.94	74.00	-35.06	46.22	-7.28	Peak	123	120																																																																
5	12530.00	43.58	54.00	-10.42	37.87	5.71	Average	100	226																																																																
6	12530.00	54.73	74.00	-19.27	49.02	5.71	Peak	100	226																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

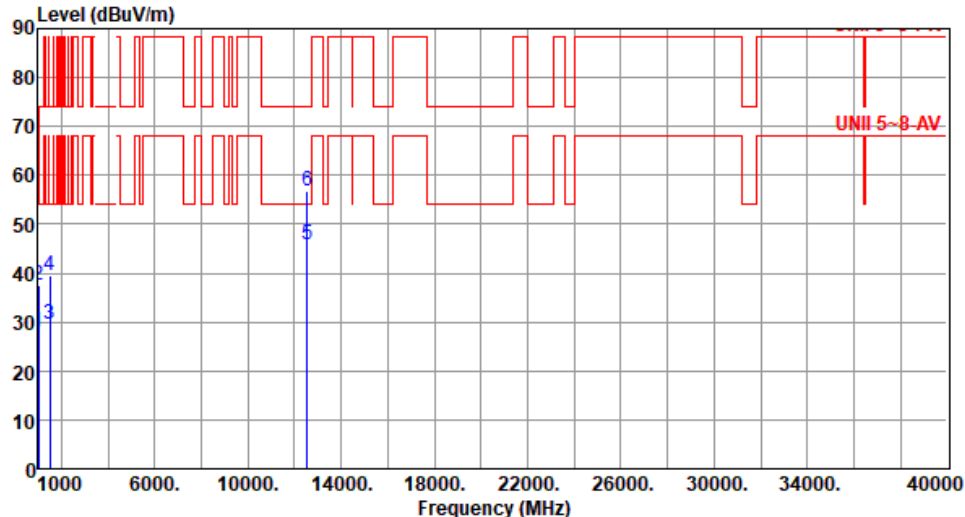


Modulation	be EHT320	Test Freq. (MHz)	6265						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.91	54.00	-26.09	36.18	-8.27	Average	100	282
2	1000.00	37.69	54.00	-16.31	45.96	-8.27	Peak	100	282
3	1500.00	29.64	54.00	-24.36	36.92	-7.28	Average	202	11
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	11
5	12530.00	45.71	54.00	-8.29	40.00	5.71	Average	100	247
6	12530.00	56.65	74.00	-17.35	50.94	5.71	Peak	100	247
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.59</td><td>54.00</td><td>-25.41</td><td>36.86</td><td>-8.27</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1000.00</td><td>39.47</td><td>54.00</td><td>-14.53</td><td>47.74</td><td>-8.27</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>1500.00</td><td>27.86</td><td>54.00</td><td>-26.14</td><td>35.14</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.95</td><td>74.00</td><td>-35.05</td><td>46.23</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>12850.00</td><td>48.23</td><td>68.20</td><td>-19.97</td><td>42.06</td><td>6.17</td><td>Average</td><td>100</td><td>230</td></tr><tr><td>6</td><td>12850.00</td><td>61.74</td><td>88.20</td><td>-26.46</td><td>55.57</td><td>6.17</td><td>Peak</td><td>100</td><td>230</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.59	54.00	-25.41	36.86	-8.27	Average	100	252	2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	252	3	1500.00	27.86	54.00	-26.14	35.14	-7.28	Average	126	122	4	1500.00	38.95	74.00	-35.05	46.23	-7.28	Peak	126	122	5	12850.00	48.23	68.20	-19.97	42.06	6.17	Average	100	230	6	12850.00	61.74	88.20	-26.46	55.57	6.17	Peak	100	230
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.59	54.00	-25.41	36.86	-8.27	Average	100	252																																																																
2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	252																																																																
3	1500.00	27.86	54.00	-26.14	35.14	-7.28	Average	126	122																																																																
4	1500.00	38.95	74.00	-35.05	46.23	-7.28	Peak	126	122																																																																
5	12850.00	48.23	68.20	-19.97	42.06	6.17	Average	100	230																																																																
6	12850.00	61.74	88.20	-26.46	55.57	6.17	Peak	100	230																																																																

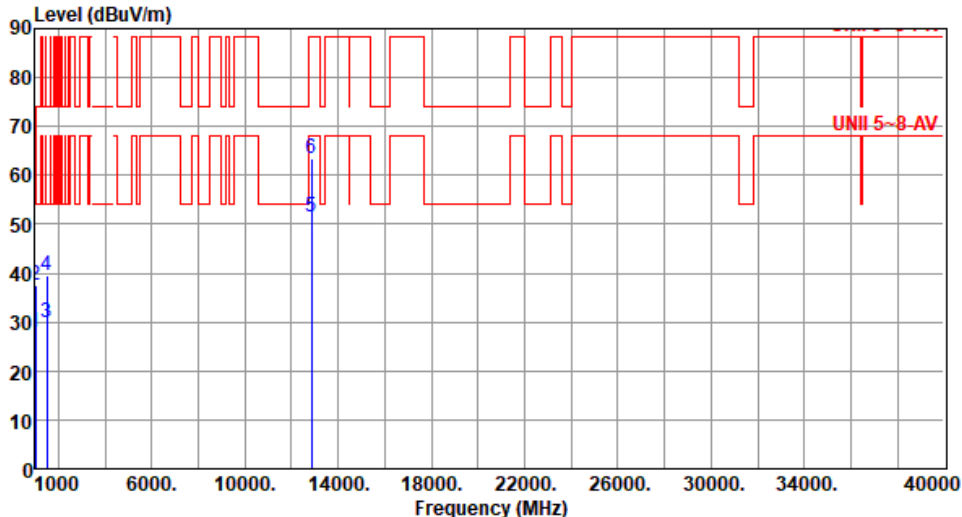


Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.93</td><td>54.00</td><td>-26.07</td><td>36.20</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.64</td><td>54.00</td><td>-16.36</td><td>45.91</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.87</td><td>54.00</td><td>-24.13</td><td>37.15</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.59</td><td>74.00</td><td>-34.41</td><td>46.87</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>12850.00</td><td>51.33</td><td>68.20</td><td>-16.87</td><td>45.16</td><td>6.17</td><td>Average</td><td>197</td><td>254</td></tr><tr><td>6</td><td>12850.00</td><td>63.53</td><td>88.20</td><td>-24.67</td><td>57.36</td><td>6.17</td><td>Peak</td><td>197</td><td>254</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.93	54.00	-26.07	36.20	-8.27	Average	100	282	2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	282	3	1500.00	29.87	54.00	-24.13	37.15	-7.28	Average	202	113	4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	202	113	5	12850.00	51.33	68.20	-16.87	45.16	6.17	Average	197	254	6	12850.00	63.53	88.20	-24.67	57.36	6.17	Peak	197	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.93	54.00	-26.07	36.20	-8.27	Average	100	282																																																																
2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	282																																																																
3	1500.00	29.87	54.00	-24.13	37.15	-7.28	Average	202	113																																																																
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	202	113																																																																
5	12850.00	51.33	68.20	-16.87	45.16	6.17	Average	197	254																																																																
6	12850.00	63.53	88.20	-24.67	57.36	6.17	Peak	197	254																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT320	Test Freq. (MHz)	6585						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.64	54.00	-25.36	36.91	-8.27	Average	100	251
2	1000.00	39.67	54.00	-14.33	47.94	-8.27	Peak	100	251
3	1500.00	27.89	54.00	-26.11	35.17	-7.28	Average	126	122
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	126	122
5	13170.00	49.00	68.20	-19.20	43.19	5.81	Average	100	241
6	13170.00	59.35	88.20	-28.85	53.54	5.81	Peak	100	241

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

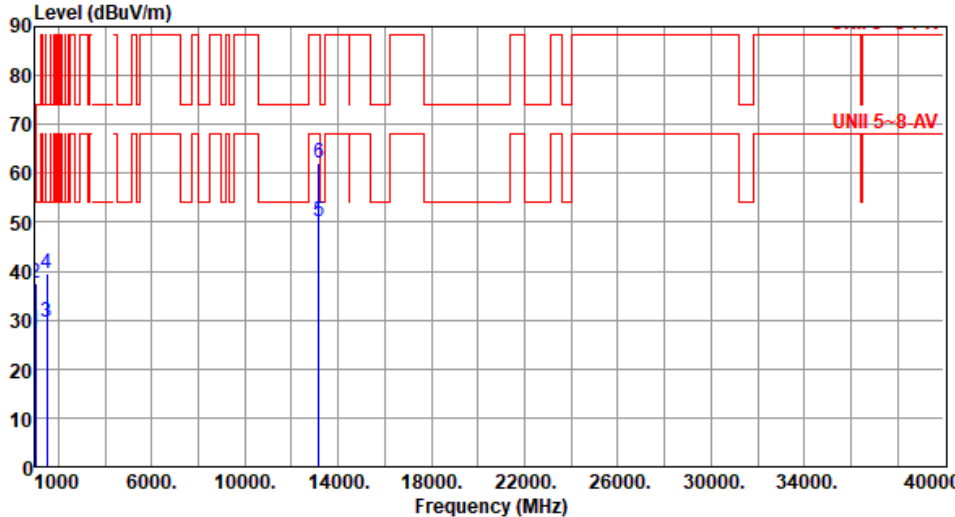

Modulation	be EHT320	Test Freq. (MHz)	6585																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.92</td><td>54.00</td><td>-26.08</td><td>36.19</td><td>-8.27</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>2</td><td>1000.00</td><td>37.58</td><td>54.00</td><td>-16.42</td><td>45.85</td><td>-8.27</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>3</td><td>1500.00</td><td>29.69</td><td>54.00</td><td>-24.31</td><td>36.97</td><td>-7.28</td><td>Average</td><td>203</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.66</td><td>74.00</td><td>-34.34</td><td>46.94</td><td>-7.28</td><td>Peak</td><td>203</td><td>111</td></tr><tr><td>5</td><td>13170.00</td><td>50.26</td><td>68.20</td><td>-17.94</td><td>44.45</td><td>5.81</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>6</td><td>13170.00</td><td>61.98</td><td>88.20</td><td>-26.22</td><td>56.17</td><td>5.81</td><td>Peak</td><td>100</td><td>242</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.92	54.00	-26.08	36.19	-8.27	Average	100	283	2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	283	3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	203	111	4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	203	111	5	13170.00	50.26	68.20	-17.94	44.45	5.81	Average	100	242	6	13170.00	61.98	88.20	-26.22	56.17	5.81	Peak	100	242
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.92	54.00	-26.08	36.19	-8.27	Average	100	283																																																																
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	283																																																																
3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	203	111																																																																
4	1500.00	39.66	74.00	-34.34	46.94	-7.28	Peak	203	111																																																																
5	13170.00	50.26	68.20	-17.94	44.45	5.81	Average	100	242																																																																
6	13170.00	61.98	88.20	-26.22	56.17	5.81	Peak	100	242																																																																

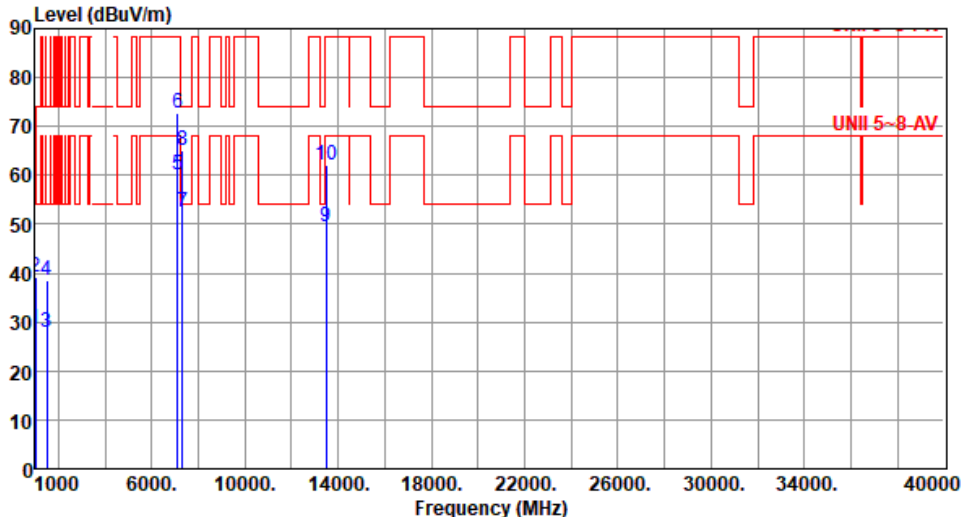


Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.49</td><td>54.00</td><td>-25.51</td><td>36.76</td><td>-8.27</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>1000.00</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>47.61</td><td>-8.27</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>1500.00</td><td>27.97</td><td>54.00</td><td>-26.03</td><td>35.25</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.39</td><td>74.00</td><td>-35.61</td><td>45.67</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>7125.00</td><td>60.07</td><td>68.20</td><td>-8.13</td><td>55.21</td><td>4.86</td><td>Average</td><td>159</td><td>353</td></tr><tr><td>6</td><td>7125.00</td><td>72.64</td><td>88.20</td><td>-15.56</td><td>67.78</td><td>4.86</td><td>Peak</td><td>159</td><td>353</td></tr><tr><td>7</td><td>7312.00</td><td>52.38</td><td>54.00</td><td>-1.62</td><td>47.22</td><td>5.16</td><td>Average</td><td>159</td><td>353</td></tr><tr><td>8</td><td>7312.00</td><td>65.01</td><td>74.00</td><td>-8.99</td><td>59.85</td><td>5.16</td><td>Peak</td><td>159</td><td>353</td></tr><tr><td>9</td><td>13490.00</td><td>49.40</td><td>68.20</td><td>-18.80</td><td>43.36</td><td>6.04</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>10</td><td>13490.00</td><td>62.13</td><td>88.20</td><td>-26.07</td><td>56.09</td><td>6.04</td><td>Peak</td><td>100</td><td>215</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	252	2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	252	3	1500.00	27.97	54.00	-26.03	35.25	-7.28	Average	126	122	4	1500.00	38.39	74.00	-35.61	45.67	-7.28	Peak	126	122	5	7125.00	60.07	68.20	-8.13	55.21	4.86	Average	159	353	6	7125.00	72.64	88.20	-15.56	67.78	4.86	Peak	159	353	7	7312.00	52.38	54.00	-1.62	47.22	5.16	Average	159	353	8	7312.00	65.01	74.00	-8.99	59.85	5.16	Peak	159	353	9	13490.00	49.40	68.20	-18.80	43.36	6.04	Average	100	215	10	13490.00	62.13	88.20	-26.07	56.09	6.04	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	252																																																																																																								
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	252																																																																																																								
3	1500.00	27.97	54.00	-26.03	35.25	-7.28	Average	126	122																																																																																																								
4	1500.00	38.39	74.00	-35.61	45.67	-7.28	Peak	126	122																																																																																																								
5	7125.00	60.07	68.20	-8.13	55.21	4.86	Average	159	353																																																																																																								
6	7125.00	72.64	88.20	-15.56	67.78	4.86	Peak	159	353																																																																																																								
7	7312.00	52.38	54.00	-1.62	47.22	5.16	Average	159	353																																																																																																								
8	7312.00	65.01	74.00	-8.99	59.85	5.16	Peak	159	353																																																																																																								
9	13490.00	49.40	68.20	-18.80	43.36	6.04	Average	100	215																																																																																																								
10	13490.00	62.13	88.20	-26.07	56.09	6.04	Peak	100	215																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.90</td><td>54.00</td><td>-26.10</td><td>36.17</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.85</td><td>54.00</td><td>-16.15</td><td>46.12</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.88</td><td>54.00</td><td>-24.12</td><td>37.16</td><td>-7.28</td><td>Average</td><td>203</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.53</td><td>74.00</td><td>-34.47</td><td>46.81</td><td>-7.28</td><td>Peak</td><td>203</td><td>115</td></tr><tr><td>5</td><td>7125.00</td><td>59.71</td><td>68.20</td><td>-8.49</td><td>54.85</td><td>4.86</td><td>Average</td><td>155</td><td>2</td></tr><tr><td>6</td><td>7125.00</td><td>69.91</td><td>88.20</td><td>-18.29</td><td>65.05</td><td>4.86</td><td>Peak</td><td>155</td><td>2</td></tr><tr><td>7</td><td>7312.00</td><td>52.02</td><td>54.00</td><td>-1.98</td><td>46.86</td><td>5.16</td><td>Average</td><td>155</td><td>2</td></tr><tr><td>8</td><td>7312.00</td><td>63.16</td><td>74.00</td><td>-10.84</td><td>58.00</td><td>5.16</td><td>Peak</td><td>155</td><td>2</td></tr><tr><td>9</td><td>13490.00</td><td>51.53</td><td>68.20</td><td>-16.67</td><td>45.49</td><td>6.04</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>10</td><td>13490.00</td><td>63.38</td><td>88.20</td><td>-24.82</td><td>57.34</td><td>6.04</td><td>Peak</td><td>100</td><td>240</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.90	54.00	-26.10	36.17	-8.27	Average	100	278	2	1000.00	37.85	54.00	-16.15	46.12	-8.27	Peak	100	278	3	1500.00	29.88	54.00	-24.12	37.16	-7.28	Average	203	115	4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	203	115	5	7125.00	59.71	68.20	-8.49	54.85	4.86	Average	155	2	6	7125.00	69.91	88.20	-18.29	65.05	4.86	Peak	155	2	7	7312.00	52.02	54.00	-1.98	46.86	5.16	Average	155	2	8	7312.00	63.16	74.00	-10.84	58.00	5.16	Peak	155	2	9	13490.00	51.53	68.20	-16.67	45.49	6.04	Average	100	240	10	13490.00	63.38	88.20	-24.82	57.34	6.04	Peak	100	240
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	27.90	54.00	-26.10	36.17	-8.27	Average	100	278																																																																																																								
2	1000.00	37.85	54.00	-16.15	46.12	-8.27	Peak	100	278																																																																																																								
3	1500.00	29.88	54.00	-24.12	37.16	-7.28	Average	203	115																																																																																																								
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	203	115																																																																																																								
5	7125.00	59.71	68.20	-8.49	54.85	4.86	Average	155	2																																																																																																								
6	7125.00	69.91	88.20	-18.29	65.05	4.86	Peak	155	2																																																																																																								
7	7312.00	52.02	54.00	-1.98	46.86	5.16	Average	155	2																																																																																																								
8	7312.00	63.16	74.00	-10.84	58.00	5.16	Peak	155	2																																																																																																								
9	13490.00	51.53	68.20	-16.67	45.49	6.04	Average	100	240																																																																																																								
10	13490.00	63.38	88.20	-24.82	57.34	6.04	Peak	100	240																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

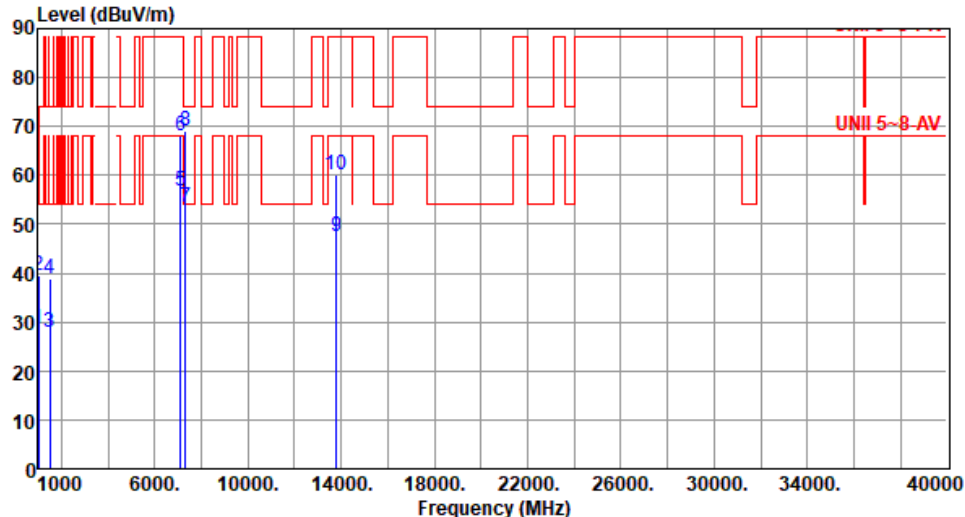

Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.40</td><td>54.00</td><td>-25.60</td><td>36.67</td><td>-8.27</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>1000.00</td><td>39.57</td><td>54.00</td><td>-14.43</td><td>47.84</td><td>-8.27</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>1500.00</td><td>27.93</td><td>54.00</td><td>-26.07</td><td>35.21</td><td>-7.28</td><td>Average</td><td>122</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>122</td><td>120</td></tr><tr><td>5</td><td>7125.00</td><td>56.78</td><td>68.20</td><td>-11.42</td><td>51.92</td><td>4.86</td><td>Average</td><td>146</td><td>352</td></tr><tr><td>6</td><td>7125.00</td><td>68.10</td><td>88.20</td><td>-20.10</td><td>63.24</td><td>4.86</td><td>Peak</td><td>146</td><td>352</td></tr><tr><td>7</td><td>7308.00</td><td>53.58</td><td>54.00</td><td>-0.42</td><td>48.43</td><td>5.15</td><td>Average</td><td>146</td><td>352</td></tr><tr><td>8</td><td>7308.00</td><td>69.22</td><td>74.00</td><td>-4.78</td><td>64.07</td><td>5.15</td><td>Peak</td><td>146</td><td>352</td></tr><tr><td>9</td><td>13810.00</td><td>47.51</td><td>68.20</td><td>-20.69</td><td>41.28</td><td>6.23</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>10</td><td>13810.00</td><td>60.17</td><td>88.20</td><td>-28.03</td><td>53.94</td><td>6.23</td><td>Peak</td><td>100</td><td>234</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.40	54.00	-25.60	36.67	-8.27	Average	100	242	2	1000.00	39.57	54.00	-14.43	47.84	-8.27	Peak	100	242	3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	122	120	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	122	120	5	7125.00	56.78	68.20	-11.42	51.92	4.86	Average	146	352	6	7125.00	68.10	88.20	-20.10	63.24	4.86	Peak	146	352	7	7308.00	53.58	54.00	-0.42	48.43	5.15	Average	146	352	8	7308.00	69.22	74.00	-4.78	64.07	5.15	Peak	146	352	9	13810.00	47.51	68.20	-20.69	41.28	6.23	Average	100	234	10	13810.00	60.17	88.20	-28.03	53.94	6.23	Peak	100	234
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.40	54.00	-25.60	36.67	-8.27	Average	100	242																																																																																																								
2	1000.00	39.57	54.00	-14.43	47.84	-8.27	Peak	100	242																																																																																																								
3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	122	120																																																																																																								
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	122	120																																																																																																								
5	7125.00	56.78	68.20	-11.42	51.92	4.86	Average	146	352																																																																																																								
6	7125.00	68.10	88.20	-20.10	63.24	4.86	Peak	146	352																																																																																																								
7	7308.00	53.58	54.00	-0.42	48.43	5.15	Average	146	352																																																																																																								
8	7308.00	69.22	74.00	-4.78	64.07	5.15	Peak	146	352																																																																																																								
9	13810.00	47.51	68.20	-20.69	41.28	6.23	Average	100	234																																																																																																								
10	13810.00	60.17	88.20	-28.03	53.94	6.23	Peak	100	234																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.12</td><td>54.00</td><td>-25.88</td><td>36.39</td><td>-8.27</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>3</td><td>1500.00</td><td>29.79</td><td>54.00</td><td>-24.21</td><td>37.07</td><td>-7.28</td><td>Average</td><td>200</td><td>110</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>200</td><td>110</td></tr><tr><td>5</td><td>7125.00</td><td>56.02</td><td>68.20</td><td>-12.18</td><td>51.16</td><td>4.86</td><td>Average</td><td>158</td><td>1</td></tr><tr><td>6</td><td>7125.00</td><td>66.66</td><td>88.20</td><td>-21.54</td><td>61.80</td><td>4.86</td><td>Peak</td><td>158</td><td>1</td></tr><tr><td>7</td><td>7308.00</td><td>52.29</td><td>54.00</td><td>-1.71</td><td>47.14</td><td>5.15</td><td>Average</td><td>158</td><td>1</td></tr><tr><td>8</td><td>7308.00</td><td>63.56</td><td>74.00</td><td>-10.44</td><td>58.41</td><td>5.15</td><td>Peak</td><td>158</td><td>1</td></tr><tr><td>9</td><td>13810.00</td><td>49.97</td><td>68.20</td><td>-18.23</td><td>43.74</td><td>6.23</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>10</td><td>13810.00</td><td>62.31</td><td>88.20</td><td>-25.89</td><td>56.08</td><td>6.23</td><td>Peak</td><td>100</td><td>243</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.12	54.00	-25.88	36.39	-8.27	Average	100	277	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	277	3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	200	110	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	110	5	7125.00	56.02	68.20	-12.18	51.16	4.86	Average	158	1	6	7125.00	66.66	88.20	-21.54	61.80	4.86	Peak	158	1	7	7308.00	52.29	54.00	-1.71	47.14	5.15	Average	158	1	8	7308.00	63.56	74.00	-10.44	58.41	5.15	Peak	158	1	9	13810.00	49.97	68.20	-18.23	43.74	6.23	Average	100	243	10	13810.00	62.31	88.20	-25.89	56.08	6.23	Peak	100	243
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.12	54.00	-25.88	36.39	-8.27	Average	100	277																																																																																																								
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	277																																																																																																								
3	1500.00	29.79	54.00	-24.21	37.07	-7.28	Average	200	110																																																																																																								
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	110																																																																																																								
5	7125.00	56.02	68.20	-12.18	51.16	4.86	Average	158	1																																																																																																								
6	7125.00	66.66	88.20	-21.54	61.80	4.86	Peak	158	1																																																																																																								
7	7308.00	52.29	54.00	-1.71	47.14	5.15	Average	158	1																																																																																																								
8	7308.00	63.56	74.00	-10.44	58.41	5.15	Peak	158	1																																																																																																								
9	13810.00	49.97	68.20	-18.23	43.74	6.23	Average	100	243																																																																																																								
10	13810.00	62.31	88.20	-25.89	56.08	6.23	Peak	100	243																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

**Beamforming mode****Configuration 1: Model: SDG-8733****Unwanted Emissions (Below 1GHz)**

Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):61			
Level (dBUV/m)			



Modulation	be EHT320		Test Freq. (MHz)		6425																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):25 Humidity(%):61																																																																															
The graph displays the emission level in dBuV/m on the y-axis (0 to 90) against frequency in MHz on the x-axis (30 to 1000). A red line represents the Class-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 250 MHz, and 50 dBuV/m from 250 to 1000 MHz. Six blue vertical lines indicate measured peaks at 51.34, 97.90, 143.49, 250.19, 308.39, and 475.23 MHz. The peak at 475.23 MHz is the highest, reaching approximately 34.48 dBuV/m. <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>51.34</td><td>37.06</td><td>40.00</td><td>-2.94</td><td>44.93</td><td>-7.87</td><td>QP</td><td>100</td><td>60</td></tr><tr><td>2</td><td>97.90</td><td>35.56</td><td>43.50</td><td>-7.94</td><td>49.10</td><td>-13.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>143.49</td><td>30.35</td><td>43.50</td><td>-13.15</td><td>39.34</td><td>-8.99</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>250.19</td><td>30.19</td><td>46.00</td><td>-15.81</td><td>40.14</td><td>-9.95</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>308.39</td><td>31.46</td><td>46.00</td><td>-14.54</td><td>39.25</td><td>-7.79</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>475.23</td><td>34.48</td><td>46.00</td><td>-11.52</td><td>38.06</td><td>-3.58</td><td>Peak</td><td>---</td><td>---</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	51.34	37.06	40.00	-2.94	44.93	-7.87	QP	100	60	2	97.90	35.56	43.50	-7.94	49.10	-13.54	Peak	---	---	3	143.49	30.35	43.50	-13.15	39.34	-8.99	Peak	---	---	4	250.19	30.19	46.00	-15.81	40.14	-9.95	Peak	---	---	5	308.39	31.46	46.00	-14.54	39.25	-7.79	Peak	---	---	6	475.23	34.48	46.00	-11.52	38.06	-3.58	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	51.34	37.06	40.00	-2.94	44.93	-7.87	QP	100	60																																																																						
2	97.90	35.56	43.50	-7.94	49.10	-13.54	Peak	---	---																																																																						
3	143.49	30.35	43.50	-13.15	39.34	-8.99	Peak	---	---																																																																						
4	250.19	30.19	46.00	-15.81	40.14	-9.95	Peak	---	---																																																																						
5	308.39	31.46	46.00	-14.54	39.25	-7.79	Peak	---	---																																																																						
6	475.23	34.48	46.00	-11.52	38.06	-3.58	Peak	---	---																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																															



Configuration 2: Model: SDG-8734

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):62			
Level (dBUV/m) </			


Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

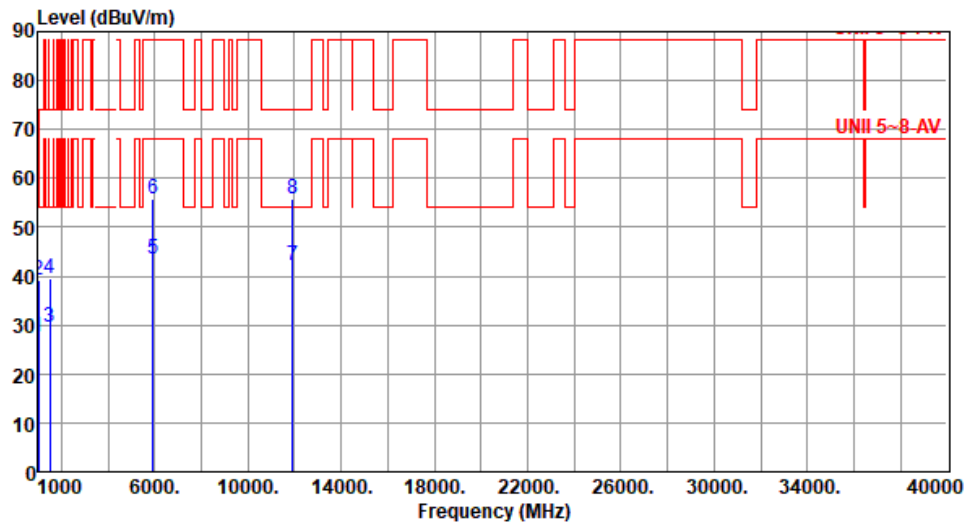

Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	278
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	278
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111
4	1500.00	39.46	74.00	-34.54	46.74	-7.28	Peak	203	111
5	5925.00	43.56	68.20	-24.64	42.43	1.13	Average	100	344
6	5925.00	55.86	88.20	-32.34	54.73	1.13	Peak	100	344
7	11910.00	42.05	54.00	-11.95	35.96	6.09	Average	100	226
8	11910.00	55.86	74.00	-18.14	49.77	6.09	Peak	100	226
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

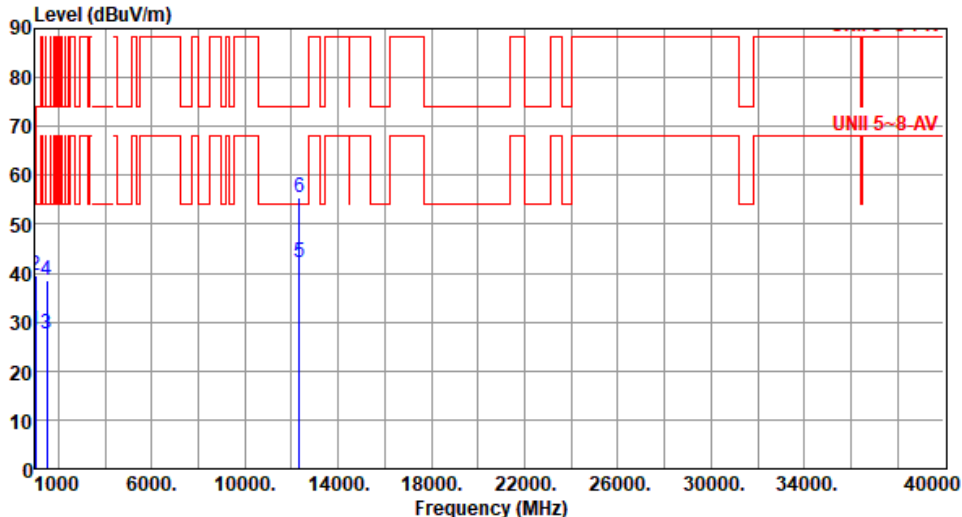

Modulation	be EHT20		Test Freq. (MHz)		6175																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>47.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>12350.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>36.36</td><td>5.83</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>6</td><td>12350.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>49.68</td><td>5.83</td><td>Peak</td><td>100</td><td>355</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	245	2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	123	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	123	5	12350.00	42.19	54.00	-11.81	36.36	5.83	Average	100	355	6	12350.00	55.51	74.00	-18.49	49.68	5.83	Peak	100	355
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	245																																																																																										
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245																																																																																										
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	123																																																																																										
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	123																																																																																										
5	12350.00	42.19	54.00	-11.81	36.36	5.83	Average	100	355																																																																																										
6	12350.00	55.51	74.00	-18.49	49.68	5.83	Peak	100	355																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>36.05</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.68</td><td>54.00</td><td>-16.32</td><td>45.95</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.33</td><td>54.00</td><td>-24.67</td><td>36.61</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>12350.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>36.41</td><td>5.83</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>6</td><td>12350.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>49.68</td><td>5.83</td><td>Peak</td><td>100</td><td>70</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	279	2	1000.00	37.68	54.00	-16.32	45.95	-8.27	Peak	100	279	3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	113	5	12350.00	42.24	54.00	-11.76	36.41	5.83	Average	100	70	6	12350.00	55.51	74.00	-18.49	49.68	5.83	Peak	100	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	279																																																																
2	1000.00	37.68	54.00	-16.32	45.95	-8.27	Peak	100	279																																																																
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	113																																																																
5	12350.00	42.24	54.00	-11.76	36.41	5.83	Average	100	70																																																																
6	12350.00	55.51	74.00	-18.49	49.68	5.83	Peak	100	70																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6415						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	243
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	243
3	1500.00	27.49	54.00	-26.51	34.77	-7.28	Average	126	118
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	118
5	12830.00	42.57	68.20	-25.63	36.42	6.15	Average	100	142
6	12830.00	55.37	88.20	-32.83	49.22	6.15	Peak	100	142
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

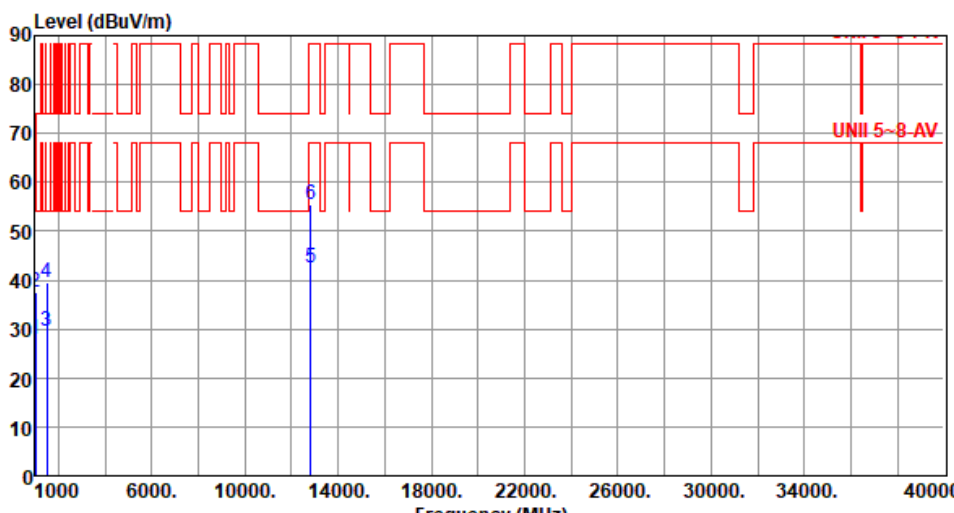

Modulation	be EHT20	Test Freq. (MHz)	6415						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.75	54.00	-26.25	36.02	-8.27	Average	100	279
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	113
5	12830.00	42.57	68.20	-25.63	36.42	6.15	Average	100	336
6	12830.00	55.35	88.20	-32.85	49.20	6.15	Peak	100	336

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

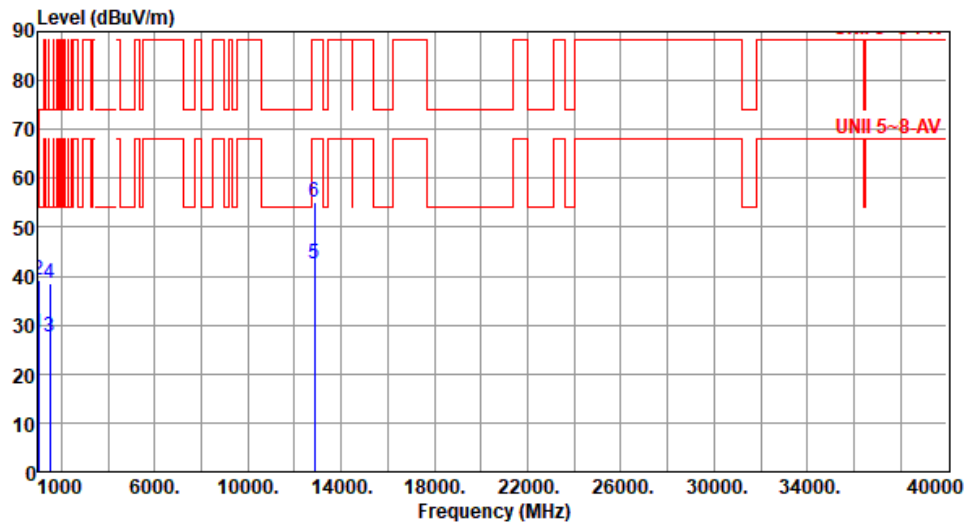


Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.18	54.00	-25.82	36.45	-8.27	Average	100	243
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	243
3	1500.00	27.49	54.00	-26.51	34.77	-7.28	Average	124	116
4	1500.00	38.47	74.00	-35.53	45.75	-7.28	Peak	124	116
5	12870.00	42.65	68.20	-25.55	36.58	6.07	Average	100	257
6	12870.00	55.15	88.20	-33.05	49.08	6.07	Peak	100	257
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			

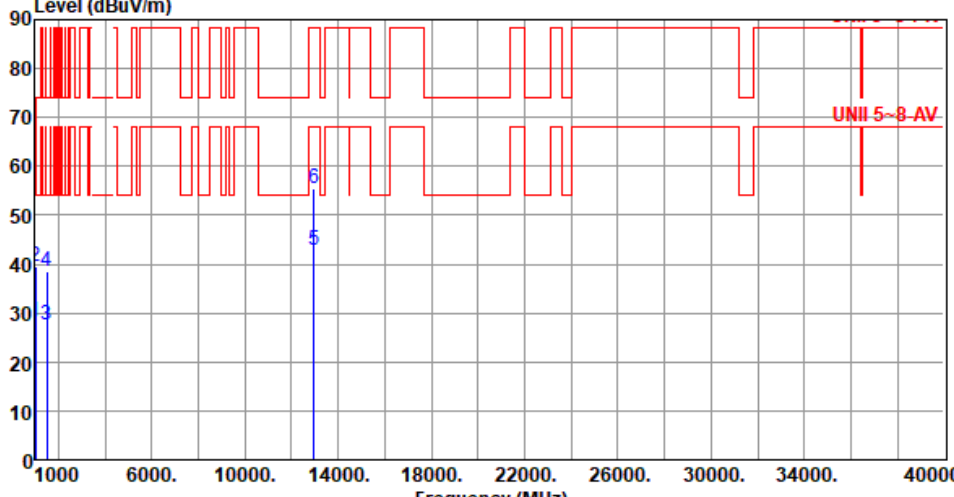

Modulation	be EHT20	Test Freq. (MHz)	6475						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	246
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	246
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	121	120
4	1500.00	38.47	74.00	-35.53	45.75	-7.28	Peak	121	120
5	12950.00	42.69	68.20	-25.51	36.59	6.10	Average	100	268
6	12950.00	55.37	88.20	-32.83	49.27	6.10	Peak	100	268
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20	Test Freq. (MHz)	6475						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	282
2	1000.00	37.50	54.00	-16.50	45.77	-8.27	Peak	100	282
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	202	115
4	1500.00	39.37	74.00	-34.63	46.65	-7.28	Peak	202	115
5	12950.00	42.72	68.20	-25.48	36.62	6.10	Average	100	266
6	12950.00	55.43	88.20	-32.77	49.33	6.10	Peak	100	266
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20		Test Freq. (MHz)		6515																																																																							
Polarization	Horizontal																																																																											
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																												
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.22</td><td>54.00</td><td>-25.78</td><td>36.49</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.61</td><td>54.00</td><td>-26.39</td><td>34.89</td><td>-7.28</td><td>Average</td><td>126</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>126</td><td>120</td></tr><tr><td>5</td><td>13030.00</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>37.05</td><td>6.01</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>6</td><td>13030.00</td><td>56.13</td><td>88.20</td><td>-32.07</td><td>50.12</td><td>6.01</td><td>Peak</td><td>100</td><td>17</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	244	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	244	3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	126	120	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	126	120	5	13030.00	43.06	68.20	-25.14	37.05	6.01	Average	100	17	6	13030.00	56.13	88.20	-32.07	50.12	6.01	Peak	100	17
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																			
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	244																																																																			
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	244																																																																			
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	126	120																																																																			
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	126	120																																																																			
5	13030.00	43.06	68.20	-25.14	37.05	6.01	Average	100	17																																																																			
6	13030.00	56.13	88.20	-32.07	50.12	6.01	Peak	100	17																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																												



Modulation	be EHT20	Test Freq. (MHz)	6515						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.64	54.00	-24.36	36.92	-7.28	Average	205	113
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	205	113
5	13030.00	43.21	68.20	-24.99	37.20	6.01	Average	100	321
6	13030.00	56.23	88.20	-31.97	50.22	6.01	Peak	100	321
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>47.79</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>35.06</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>13070.00</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>37.20</td><td>5.80</td><td>Average</td><td>100</td><td>329</td></tr><tr><td>6</td><td>13070.00</td><td>55.97</td><td>88.20</td><td>-32.23</td><td>50.17</td><td>5.80</td><td>Peak</td><td>100</td><td>329</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	244	2	1000.00	39.52	54.00	-14.48	47.79	-8.27	Peak	100	244	3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	131	122	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	131	122	5	13070.00	43.00	68.20	-25.20	37.20	5.80	Average	100	329	6	13070.00	55.97	88.20	-32.23	50.17	5.80	Peak	100	329
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	244																																																																
2	1000.00	39.52	54.00	-14.48	47.79	-8.27	Peak	100	244																																																																
3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	131	122																																																																
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	131	122																																																																
5	13070.00	43.00	68.20	-25.20	37.20	5.80	Average	100	329																																																																
6	13070.00	55.97	88.20	-32.23	50.17	5.80	Peak	100	329																																																																




Modulation	be EHT20	Test Freq. (MHz)	6535						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	288
2	1000.00	37.48	54.00	-16.52	45.75	-8.27	Peak	100	288
3	1500.00	29.26	54.00	-24.74	36.54	-7.28	Average	200	111
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	200	111
5	13070.00	42.88	68.20	-25.32	37.08	5.80	Average	100	337
6	13070.00	55.91	88.20	-32.29	50.11	5.80	Peak	100	337
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	243
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	243
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	123	120
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	123	120
5	13430.00	43.47	68.20	-24.73	37.52	5.95	Average	100	352
6	13430.00	56.65	88.20	-31.55	50.70	5.95	Peak	100	352
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

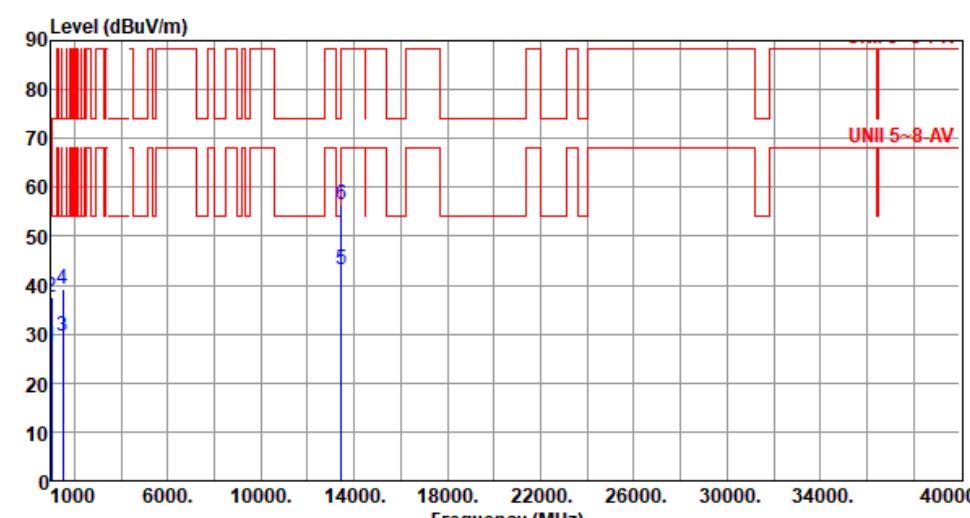

Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.71	54.00	-26.29	35.98	-8.27	Average	100	287
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	287
3	1500.00	29.53	54.00	-24.47	36.81	-7.28	Average	202	111
4	1500.00	39.34	74.00	-34.66	46.62	-7.28	Peak	202	111
5	13430.00	43.32	68.20	-24.88	37.37	5.95	Average	100	2
6	13430.00	56.43	88.20	-31.77	50.48	5.95	Peak	100	2

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

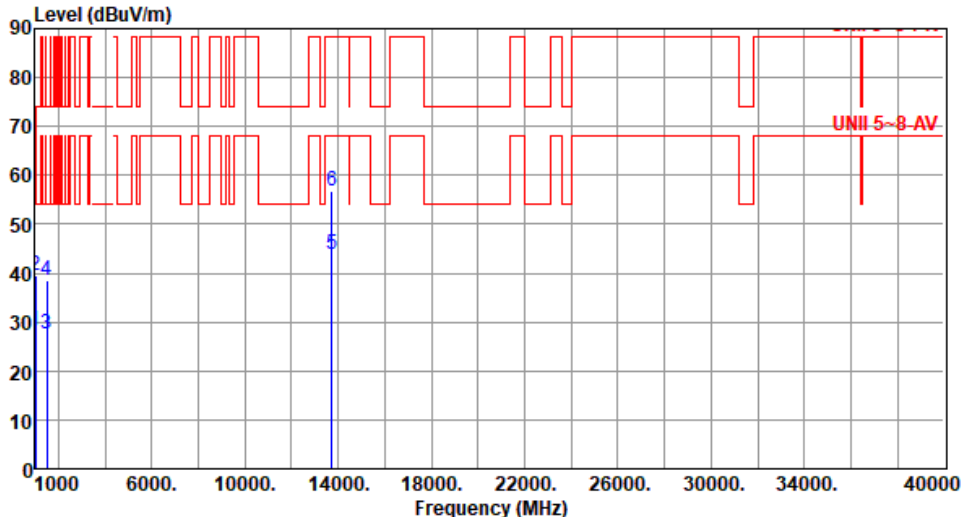


Modulation	be EHT20	Test Freq. (MHz)	6855						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.33	54.00	-25.67	36.60	-8.27	Average	100	251
2	1000.00	39.54	54.00	-14.46	47.81	-8.27	Peak	100	251
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	126	123
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	126	123
5	13710.00	43.88	68.20	-24.32	37.85	6.03	Average	100	285
6	13710.00	56.87	88.20	-31.33	50.84	6.03	Peak	100	285

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT20	Test Freq. (MHz)	6855						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	279
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	203	112
4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	203	112
5	13710.00	43.79	68.20	-24.41	37.76	6.03	Average	100	346
6	13710.00	56.92	88.20	-31.28	50.89	6.03	Peak	100	346
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

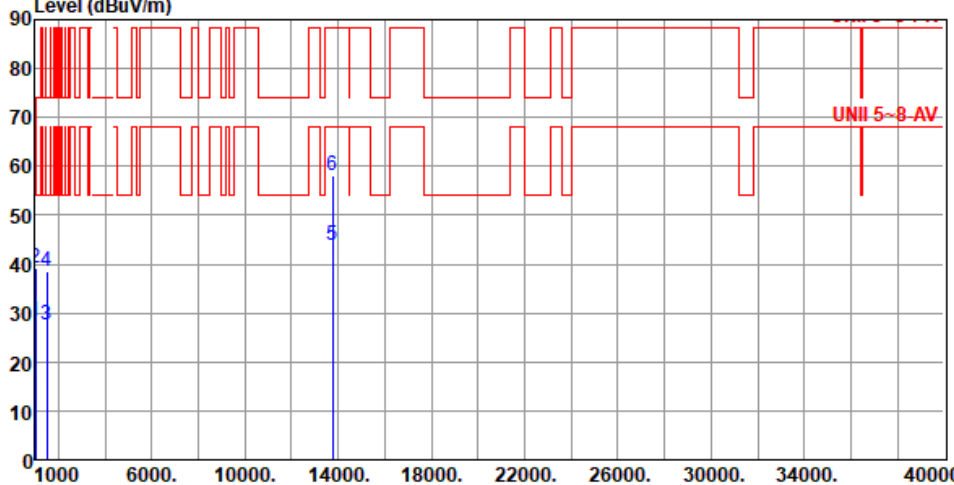


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251
2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	251
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	122
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	131	122
5	13750.00	43.78	68.20	-24.42	37.78	6.00	Average	100	318
6	13750.00	57.98	88.20	-30.22	51.98	6.00	Peak	100	318
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

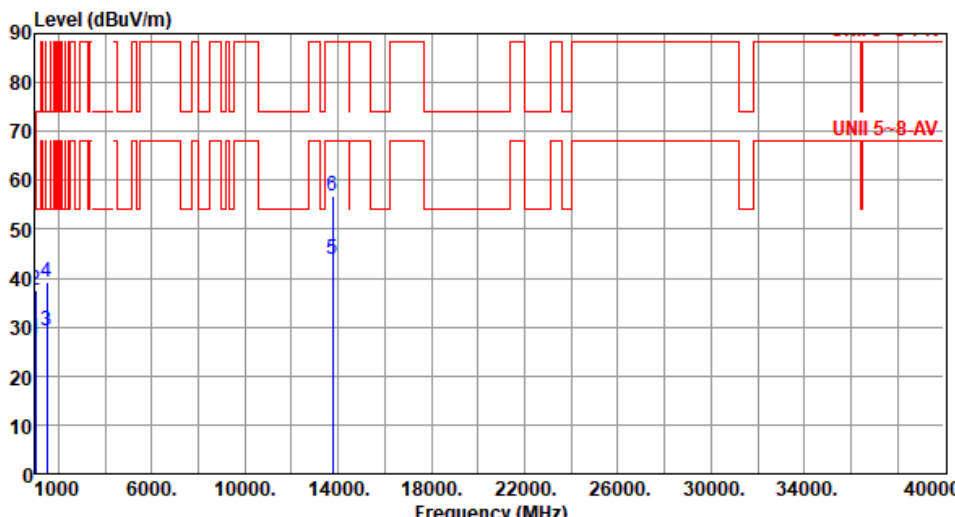


Modulation	be EHT20	Test Freq. (MHz)	6875																																																																							
Polarization	Vertical																																																																									
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>35.95</td><td>-8.27</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>2</td><td>1000.00</td><td>37.67</td><td>54.00</td><td>-16.33</td><td>45.94</td><td>-8.27</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>3</td><td>1500.00</td><td>29.28</td><td>54.00</td><td>-24.72</td><td>36.56</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>46.59</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>13750.00</td><td>43.80</td><td>68.20</td><td>-24.40</td><td>37.80</td><td>6.00</td><td>Average</td><td>100</td><td>298</td></tr><tr><td>6</td><td>13750.00</td><td>56.80</td><td>88.20</td><td>-31.40</td><td>50.80</td><td>6.00</td><td>Peak</td><td>100</td><td>298</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	283	2	1000.00	37.67	54.00	-16.33	45.94	-8.27	Peak	100	283	3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	202	113	4	1500.00	39.31	74.00	-34.69	46.59	-7.28	Peak	202	113	5	13750.00	43.80	68.20	-24.40	37.80	6.00	Average	100	298	6	13750.00	56.80	88.20	-31.40	50.80	6.00	Peak	100	298			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	283																																																																	
2	1000.00	37.67	54.00	-16.33	45.94	-8.27	Peak	100	283																																																																	
3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	202	113																																																																	
4	1500.00	39.31	74.00	-34.69	46.59	-7.28	Peak	202	113																																																																	
5	13750.00	43.80	68.20	-24.40	37.80	6.00	Average	100	298																																																																	
6	13750.00	56.80	88.20	-31.40	50.80	6.00	Peak	100	298																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

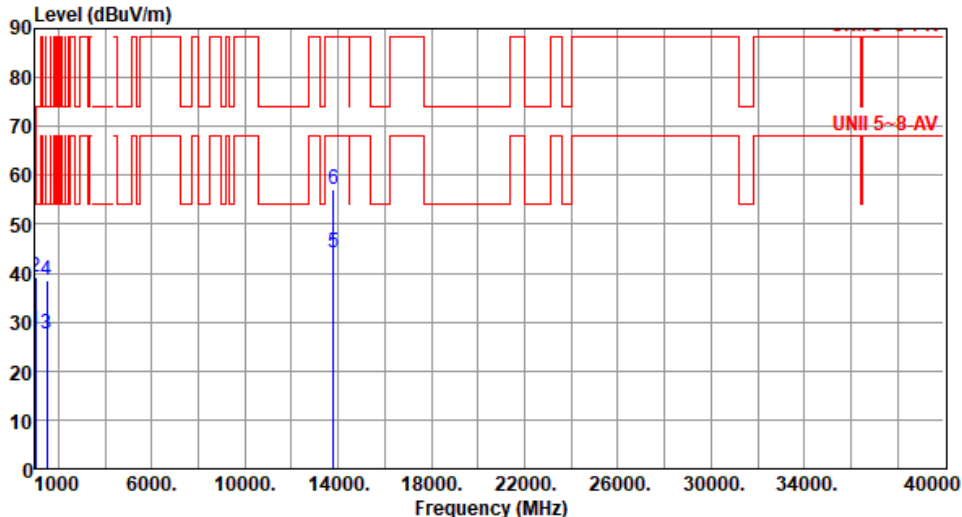


Modulation	be EHT20		Test Freq. (MHz)		6895																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.39</td><td>54.00</td><td>-25.61</td><td>36.66</td><td>-8.27</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>2</td><td>1000.00</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>47.38</td><td>-8.27</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>13790.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>37.80</td><td>6.22</td><td>Average</td><td>100</td><td>344</td></tr><tr><td>6</td><td>13790.00</td><td>57.04</td><td>88.20</td><td>-31.16</td><td>50.82</td><td>6.22</td><td>Peak</td><td>100</td><td>344</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	241	2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	241	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	122	5	13790.00	44.02	68.20	-24.18	37.80	6.22	Average	100	344	6	13790.00	57.04	88.20	-31.16	50.82	6.22	Peak	100	344
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	241																																																																						
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	241																																																																						
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122																																																																						
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	122																																																																						
5	13790.00	44.02	68.20	-24.18	37.80	6.22	Average	100	344																																																																						
6	13790.00	57.04	88.20	-31.16	50.82	6.22	Peak	100	344																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

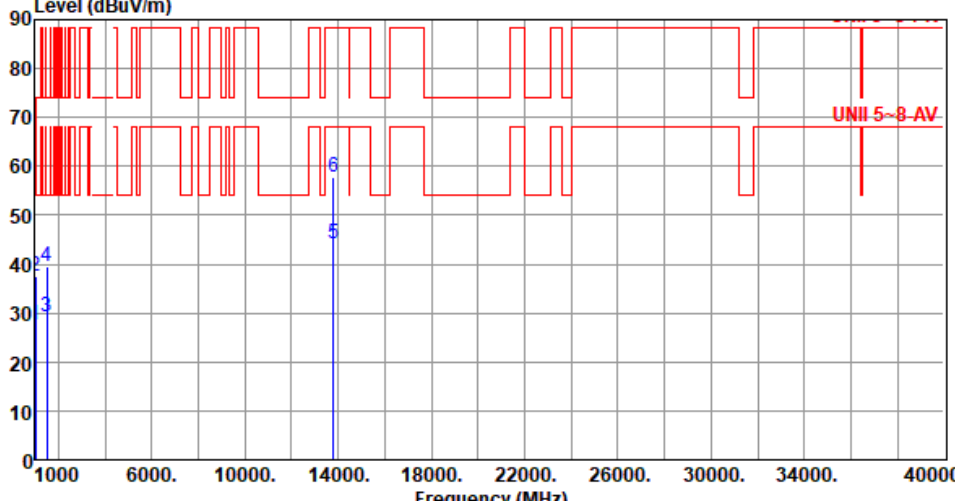

Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	277
2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	277
3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	203	115
4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	203	115
5	13790.00	44.06	68.20	-24.14	37.84	6.22	Average	100	23
6	13790.00	57.70	88.20	-30.50	51.48	6.22	Peak	100	23

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

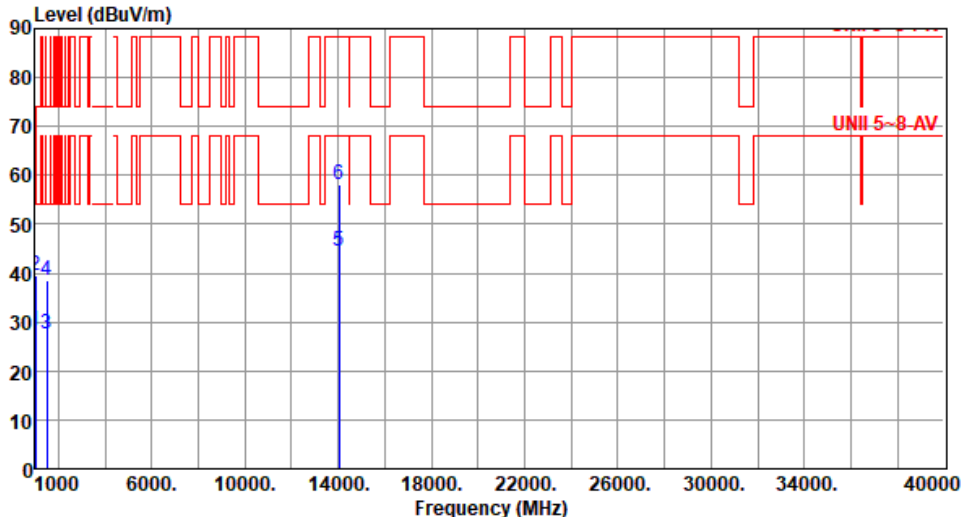

Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.37</td><td>54.00</td><td>-25.63</td><td>36.64</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.43</td><td>54.00</td><td>-14.57</td><td>47.70</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.59</td><td>74.00</td><td>-35.41</td><td>45.87</td><td>-7.28</td><td>Peak</td><td>131</td><td>120</td></tr><tr><td>5</td><td>14030.00</td><td>44.45</td><td>68.20</td><td>-23.75</td><td>37.71</td><td>6.74</td><td>Average</td><td>100</td><td>103</td></tr><tr><td>6</td><td>14030.00</td><td>58.27</td><td>88.20</td><td>-29.93</td><td>51.53</td><td>6.74</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	251	2	1000.00	39.43	54.00	-14.57	47.70	-8.27	Peak	100	251	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	120	4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	131	120	5	14030.00	44.45	68.20	-23.75	37.71	6.74	Average	100	103	6	14030.00	58.27	88.20	-29.93	51.53	6.74	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	251																																																																
2	1000.00	39.43	54.00	-14.57	47.70	-8.27	Peak	100	251																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	120																																																																
4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	131	120																																																																
5	14030.00	44.45	68.20	-23.75	37.71	6.74	Average	100	103																																																																
6	14030.00	58.27	88.20	-29.93	51.53	6.74	Peak	100	103																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.88</td><td>54.00</td><td>-26.12</td><td>36.15</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.37</td><td>54.00</td><td>-24.63</td><td>36.65</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>14030.00</td><td>44.45</td><td>68.20</td><td>-23.75</td><td>37.71</td><td>6.74</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>6</td><td>14030.00</td><td>58.42</td><td>88.20</td><td>-29.78</td><td>51.68</td><td>6.74</td><td>Peak</td><td>100</td><td>159</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	279	3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	200	113	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113	5	14030.00	44.45	68.20	-23.75	37.71	6.74	Average	100	159	6	14030.00	58.42	88.20	-29.78	51.68	6.74	Peak	100	159
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.88	54.00	-26.12	36.15	-8.27	Average	100	279																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	279																																																																
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	200	113																																																																
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113																																																																
5	14030.00	44.45	68.20	-23.75	37.71	6.74	Average	100	159																																																																
6	14030.00	58.42	88.20	-29.78	51.68	6.74	Peak	100	159																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	244
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	244
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	131	119
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	131	119
5	14190.00	45.48	68.20	-22.72	38.58	6.90	Average	100	268
6	14190.00	58.63	88.20	-29.57	51.73	6.90	Peak	100	268
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

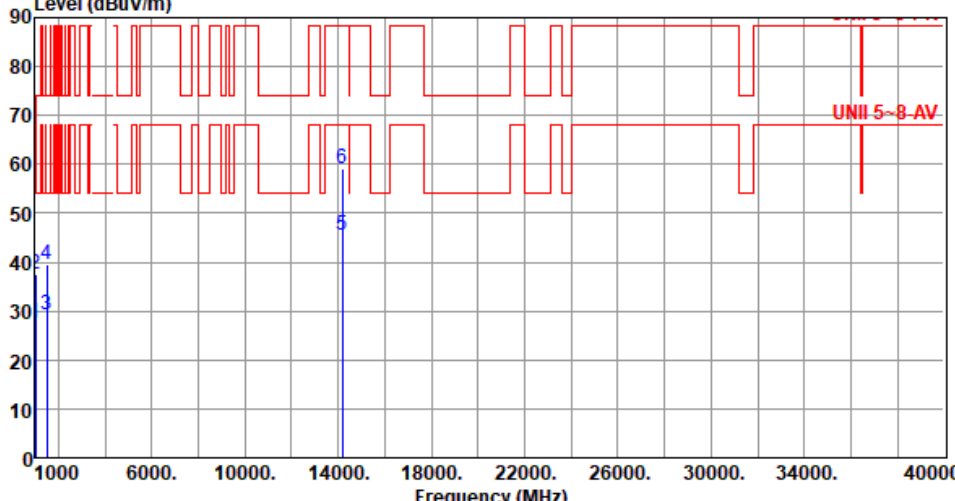


Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	287
2	1000.00	37.66	54.00	-16.34	45.93	-8.27	Peak	100	287
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	112
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	200	112
5	14190.00	45.61	68.20	-22.59	38.71	6.90	Average	100	56
6	14190.00	59.07	88.20	-29.13	52.17	6.90	Peak	100	56
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	244
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	244
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	120
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	120
5	7125.00	57.68	68.20	-10.52	52.82	4.86	Average	186	139
6	7125.00	69.66	88.20	-18.54	64.80	4.86	Peak	186	139
7	14230.00	45.61	68.20	-22.59	38.49	7.12	Average	100	225
8	14230.00	58.66	88.20	-29.54	51.54	7.12	Peak	100	225
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

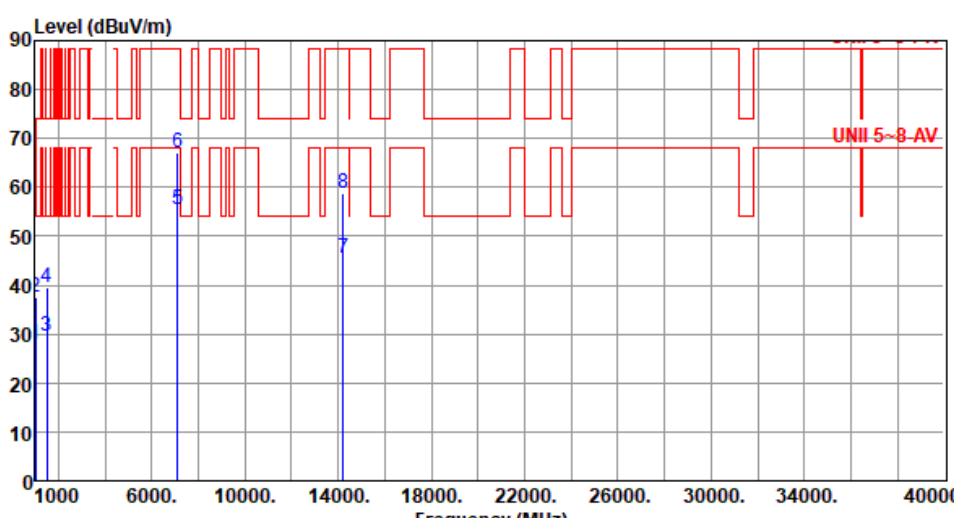

Modulation	be EHT20	Test Freq. (MHz)	7115						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.75	54.00	-26.25	36.02	-8.27	Average	100	277
2	1000.00	37.66	54.00	-16.34	45.93	-8.27	Peak	100	277
3	1500.00	29.63	54.00	-24.37	36.91	-7.28	Average	198	111
4	1500.00	39.48	74.00	-34.52	46.76	-7.28	Peak	198	111
5	7125.00	55.30	68.20	-12.90	50.44	4.86	Average	193	312
6	7125.00	67.18	88.20	-21.02	62.32	4.86	Peak	193	312
7	14230.00	45.61	68.20	-22.59	38.49	7.12	Average	100	266
8	14230.00	58.71	88.20	-29.49	51.59	7.12	Peak	100	266

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Unwanted Emissions (Above 1GHz) for be EHT40

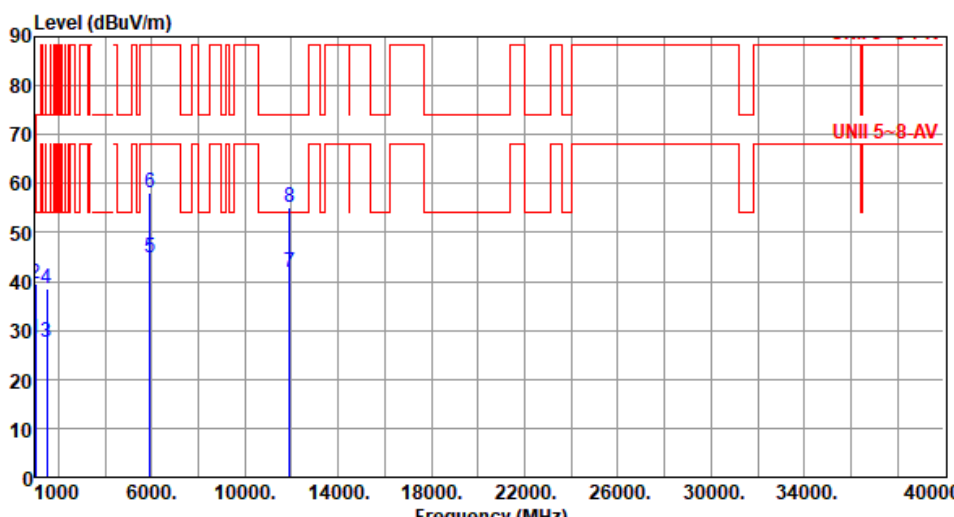
Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	242
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	242
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	123	122
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	123	122
5	5925.00	44.92	68.20	-23.28	43.79	1.13	Average	223	339
6	5925.00	58.26	88.20	-29.94	57.13	1.13	Peak	223	339
7	11930.00	42.01	54.00	-11.99	35.92	6.09	Average	100	256
8	11930.00	55.27	74.00	-18.73	49.18	6.09	Peak	100	256

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

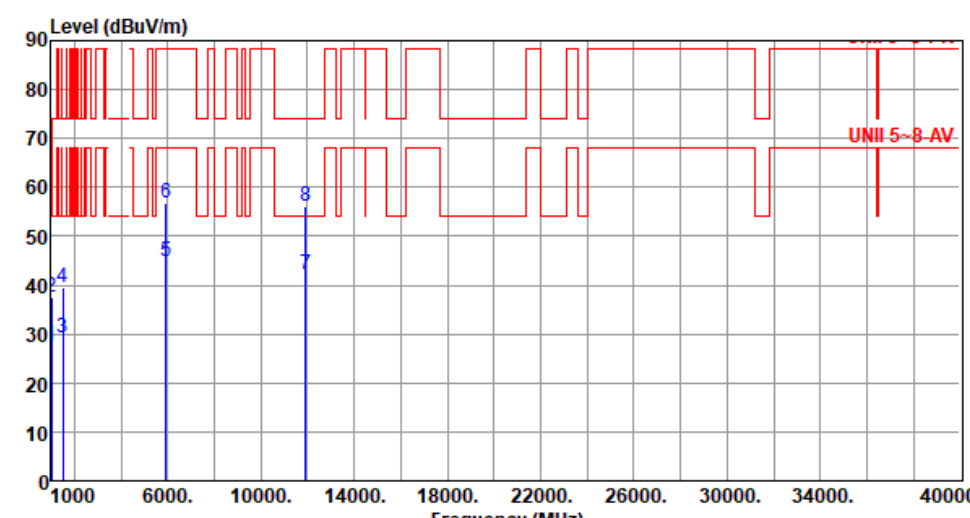

Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	278
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	111
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	111
5	5925.00	44.78	68.20	-23.42	43.65	1.13	Average	225	241
6	5925.00	56.89	88.20	-31.31	55.76	1.13	Peak	225	241
7	11930.00	42.19	54.00	-11.81	36.10	6.09	Average	100	274
8	11930.00	55.96	74.00	-18.04	49.87	6.09	Peak	100	274

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

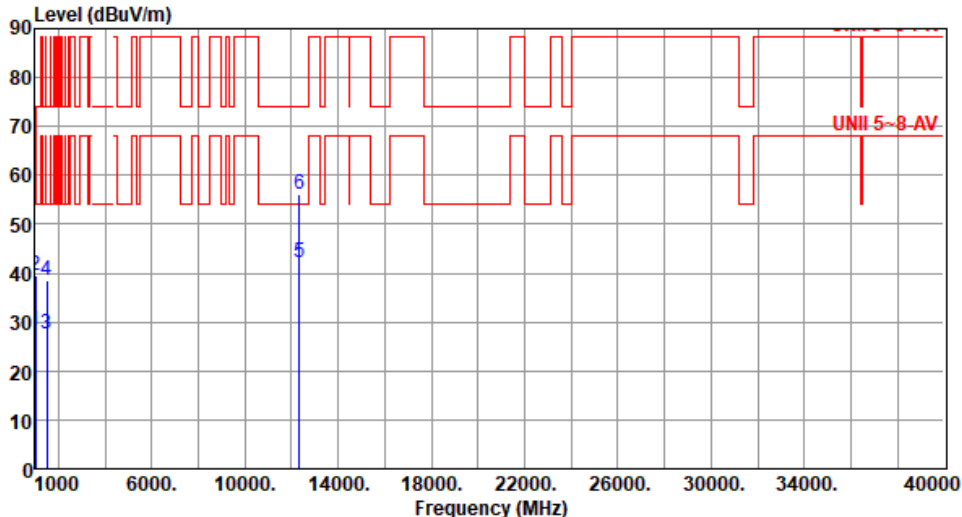

Modulation	be EHT40		Test Freq. (MHz)		6165																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																																																			
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.38</td><td>54.00</td><td>-14.62</td><td>47.65</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.69</td><td>74.00</td><td>-35.31</td><td>45.97</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>12330.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>36.28</td><td>5.97</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>6</td><td>12330.00</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>50.02</td><td>5.97</td><td>Peak</td><td>100</td><td>152</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	244	2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	244	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122	4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	131	122	5	12330.00	42.25	54.00	-11.75	36.28	5.97	Average	100	152	6	12330.00	55.99	74.00	-18.01	50.02	5.97	Peak	100	152
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	244																																																																																										
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	244																																																																																										
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122																																																																																										
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	131	122																																																																																										
5	12330.00	42.25	54.00	-11.75	36.28	5.97	Average	100	152																																																																																										
6	12330.00	55.99	74.00	-18.01	50.02	5.97	Peak	100	152																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			



Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.41</td><td>54.00</td><td>-26.59</td><td>35.68</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.64</td><td>54.00</td><td>-16.36</td><td>45.91</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.32</td><td>54.00</td><td>-24.68</td><td>36.60</td><td>-7.28</td><td>Average</td><td>200</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>200</td><td>111</td></tr><tr><td>5</td><td>12330.00</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>36.11</td><td>5.97</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>12330.00</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>50.23</td><td>5.97</td><td>Peak</td><td>100</td><td>155</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	278	2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	278	3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	200	111	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	111	5	12330.00	42.08	54.00	-11.92	36.11	5.97	Average	100	155	6	12330.00	56.20	74.00	-17.80	50.23	5.97	Peak	100	155
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	278																																																																
2	1000.00	37.64	54.00	-16.36	45.91	-8.27	Peak	100	278																																																																
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	200	111																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	111																																																																
5	12330.00	42.08	54.00	-11.92	36.11	5.97	Average	100	155																																																																
6	12330.00	56.20	74.00	-17.80	50.23	5.97	Peak	100	155																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.34</td><td>54.00</td><td>-14.66</td><td>47.61</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.54</td><td>74.00</td><td>-35.46</td><td>45.82</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>12810.00</td><td>42.31</td><td>68.20</td><td>-25.89</td><td>36.19</td><td>6.12</td><td>Average</td><td>100</td><td>308</td></tr><tr><td>6</td><td>12810.00</td><td>56.39</td><td>88.20</td><td>-31.81</td><td>50.27</td><td>6.12</td><td>Peak</td><td>100</td><td>308</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	243	2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	122	4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	131	122	5	12810.00	42.31	68.20	-25.89	36.19	6.12	Average	100	308	6	12810.00	56.39	88.20	-31.81	50.27	6.12	Peak	100	308
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	243																																																																
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	243																																																																
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	122																																																																
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	131	122																																																																
5	12810.00	42.31	68.20	-25.89	36.19	6.12	Average	100	308																																																																
6	12810.00	56.39	88.20	-31.81	50.27	6.12	Peak	100	308																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>35.89</td><td>-8.27</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>2</td><td>1000.00</td><td>37.49</td><td>54.00</td><td>-16.51</td><td>45.76</td><td>-8.27</td><td>Peak</td><td>100</td><td>277</td></tr><tr><td>3</td><td>1500.00</td><td>29.55</td><td>54.00</td><td>-24.45</td><td>36.83</td><td>-7.28</td><td>Average</td><td>200</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.49</td><td>74.00</td><td>-34.51</td><td>46.77</td><td>-7.28</td><td>Peak</td><td>200</td><td>108</td></tr><tr><td>5</td><td>12810.00</td><td>42.67</td><td>68.20</td><td>-25.53</td><td>36.55</td><td>6.12</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>6</td><td>12810.00</td><td>56.19</td><td>88.20</td><td>-32.01</td><td>50.07</td><td>6.12</td><td>Peak</td><td>100</td><td>317</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	277	2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	277	3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	108	4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	200	108	5	12810.00	42.67	68.20	-25.53	36.55	6.12	Average	100	317	6	12810.00	56.19	88.20	-32.01	50.07	6.12	Peak	100	317
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	277																																																																
2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	277																																																																
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	108																																																																
4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	200	108																																																																
5	12810.00	42.67	68.20	-25.53	36.55	6.12	Average	100	317																																																																
6	12810.00	56.19	88.20	-32.01	50.07	6.12	Peak	100	317																																																																

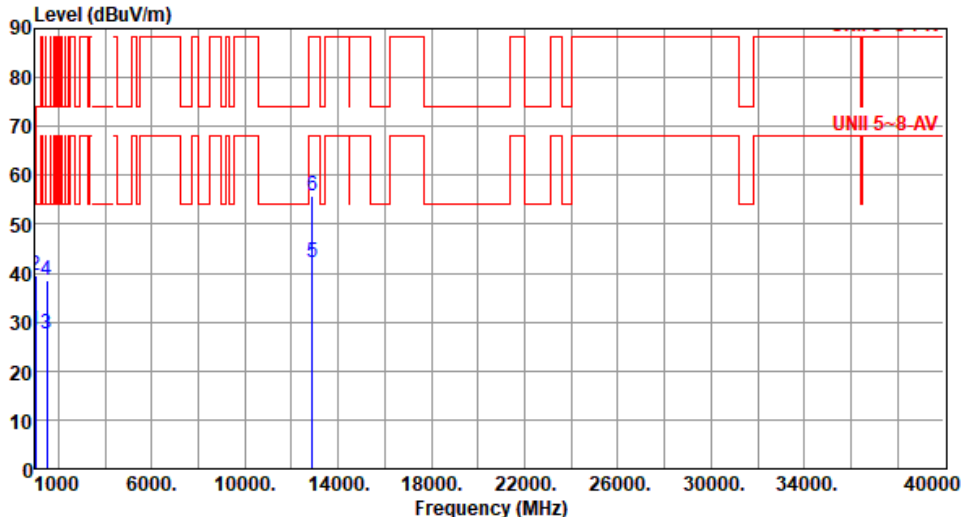

Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251
2	1000.00	39.43	54.00	-14.57	47.70	-8.27	Peak	100	251
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	122	120
4	1500.00	38.46	74.00	-35.54	45.74	-7.28	Peak	122	120
5	12890.00	42.21	68.20	-25.99	36.23	5.98	Average	100	201
6	12890.00	55.86	88.20	-32.34	49.88	5.98	Peak	100	201
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

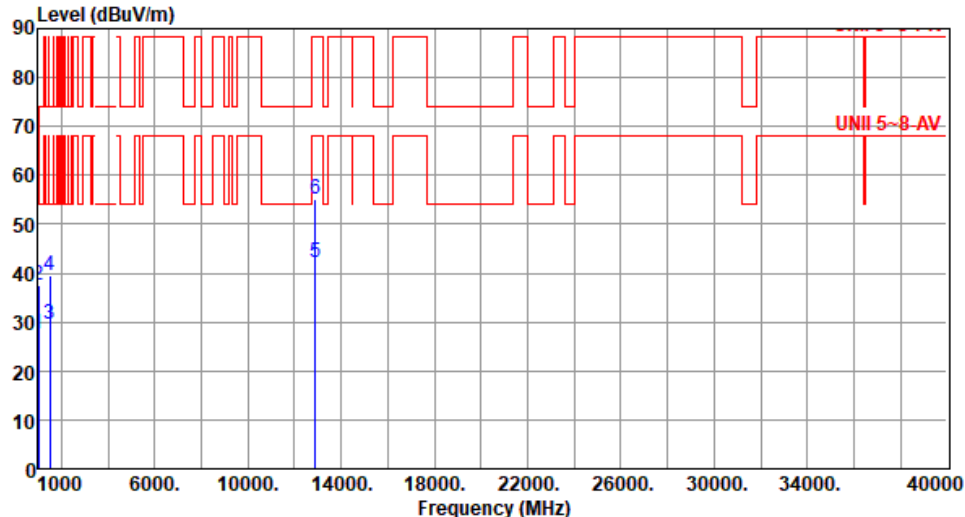


Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	279
2	1000.00	37.53	54.00	-16.47	45.80	-8.27	Peak	100	279
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	200	113
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	113
5	12890.00	42.25	68.20	-25.95	36.27	5.98	Average	100	276
6	12890.00	55.07	88.20	-33.13	49.09	5.98	Peak	100	276
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.24</td><td>54.00</td><td>-25.76</td><td>36.51</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>131</td><td>119</td></tr><tr><td>4</td><td>1500.00</td><td>37.79</td><td>74.00</td><td>-36.21</td><td>45.07</td><td>-7.28</td><td>Peak</td><td>131</td><td>119</td></tr><tr><td>5</td><td>12970.00</td><td>42.69</td><td>68.20</td><td>-25.51</td><td>36.57</td><td>6.12</td><td>Average</td><td>100</td><td>332</td></tr><tr><td>6</td><td>12970.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>50.26</td><td>6.12</td><td>Peak</td><td>100</td><td>332</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	245	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	245	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	119	4	1500.00	37.79	74.00	-36.21	45.07	-7.28	Peak	131	119	5	12970.00	42.69	68.20	-25.51	36.57	6.12	Average	100	332	6	12970.00	56.38	88.20	-31.82	50.26	6.12	Peak	100	332
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	245																																																																
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	245																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	119																																																																
4	1500.00	37.79	74.00	-36.21	45.07	-7.28	Peak	131	119																																																																
5	12970.00	42.69	68.20	-25.51	36.57	6.12	Average	100	332																																																																
6	12970.00	56.38	88.20	-31.82	50.26	6.12	Peak	100	332																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

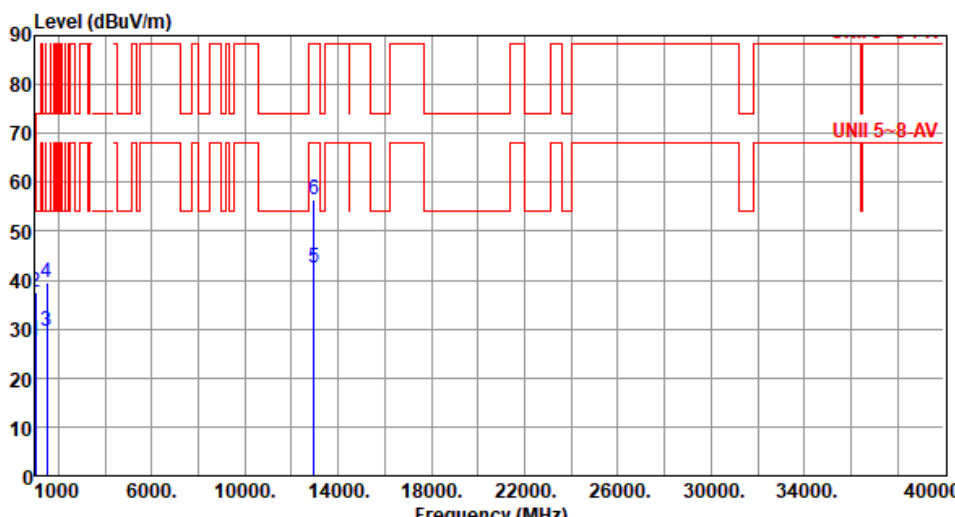


Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>35.94</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.51</td><td>54.00</td><td>-24.49</td><td>36.79</td><td>-7.28</td><td>Average</td><td>200</td><td>112</td></tr><tr><td>4</td><td>1500.00</td><td>39.57</td><td>74.00</td><td>-34.43</td><td>46.85</td><td>-7.28</td><td>Peak</td><td>200</td><td>112</td></tr><tr><td>5</td><td>12970.00</td><td>42.64</td><td>68.20</td><td>-25.56</td><td>36.52</td><td>6.12</td><td>Average</td><td>100</td><td>358</td></tr><tr><td>6</td><td>12970.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>50.26</td><td>6.12</td><td>Peak</td><td>100</td><td>358</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	279	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279	3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	200	112	4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	200	112	5	12970.00	42.64	68.20	-25.56	36.52	6.12	Average	100	358	6	12970.00	56.38	88.20	-31.82	50.26	6.12	Peak	100	358
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.67	54.00	-26.33	35.94	-8.27	Average	100	279																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279																																																																
3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	200	112																																																																
4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	200	112																																																																
5	12970.00	42.64	68.20	-25.56	36.52	6.12	Average	100	358																																																																
6	12970.00	56.38	88.20	-31.82	50.26	6.12	Peak	100	358																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40		Test Freq. (MHz)		6525																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee			Temperature(°C):25			Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>13050.00</td><td>42.37</td><td>68.20</td><td>-25.83</td><td>36.47</td><td>5.90</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>6</td><td>13050.00</td><td>56.30</td><td>88.20</td><td>-31.90</td><td>50.40</td><td>5.90</td><td>Peak</td><td>100</td><td>304</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	255	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	255	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	123	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	123	5	13050.00	42.37	68.20	-25.83	36.47	5.90	Average	100	304	6	13050.00	56.30	88.20	-31.90	50.40	5.90	Peak	100	304
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	255																																																																						
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	255																																																																						
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	123																																																																						
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	123																																																																						
5	13050.00	42.37	68.20	-25.83	36.47	5.90	Average	100	304																																																																						
6	13050.00	56.30	88.20	-31.90	50.40	5.90	Peak	100	304																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

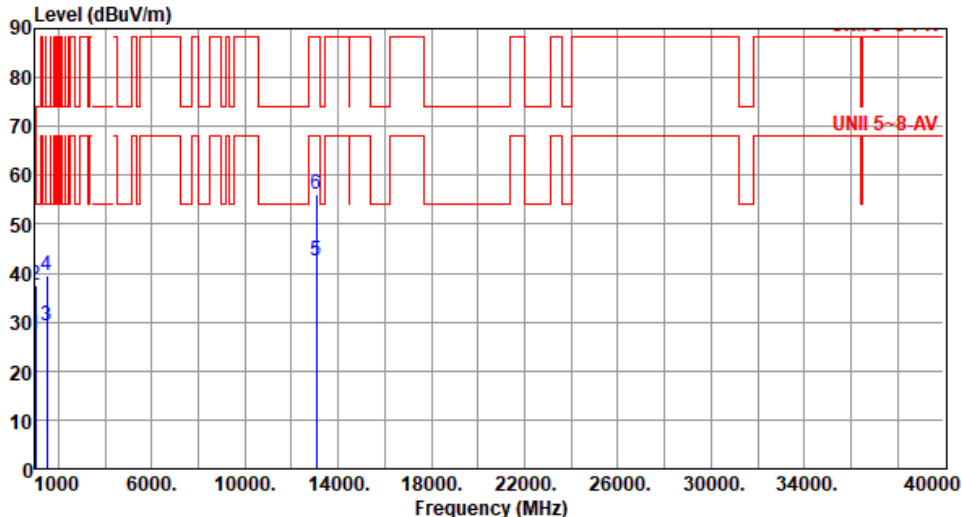


Modulation	be EHT40		Test Freq. (MHz)		6525																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>35.89</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.38</td><td>54.00</td><td>-24.62</td><td>36.66</td><td>-7.28</td><td>Average</td><td>198</td><td>106</td></tr><tr><td>4</td><td>1500.00</td><td>39.51</td><td>74.00</td><td>-34.49</td><td>46.79</td><td>-7.28</td><td>Peak</td><td>198</td><td>106</td></tr><tr><td>5</td><td>13050.00</td><td>42.39</td><td>68.20</td><td>-25.81</td><td>36.49</td><td>5.90</td><td>Average</td><td>100</td><td>327</td></tr><tr><td>6</td><td>13050.00</td><td>56.16</td><td>88.20</td><td>-32.04</td><td>50.26</td><td>5.90</td><td>Peak</td><td>100</td><td>327</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	278	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278	3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	198	106	4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	198	106	5	13050.00	42.39	68.20	-25.81	36.49	5.90	Average	100	327	6	13050.00	56.16	88.20	-32.04	50.26	5.90	Peak	100	327
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	278																																																																																										
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278																																																																																										
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	198	106																																																																																										
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	198	106																																																																																										
5	13050.00	42.39	68.20	-25.81	36.49	5.90	Average	100	327																																																																																										
6	13050.00	56.16	88.20	-32.04	50.26	5.90	Peak	100	327																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.36</td><td>54.00</td><td>-25.64</td><td>36.63</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>47.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>35.06</td><td>-7.28</td><td>Average</td><td>127</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.73</td><td>-7.28</td><td>Peak</td><td>127</td><td>122</td></tr><tr><td>5</td><td>13130.00</td><td>43.38</td><td>68.20</td><td>-24.82</td><td>37.60</td><td>5.78</td><td>Average</td><td>100</td><td>273</td></tr><tr><td>6</td><td>13130.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>51.80</td><td>5.78</td><td>Peak</td><td>100</td><td>273</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	251	2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	251	3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	127	122	4	1500.00	38.45	74.00	-35.55	45.73	-7.28	Peak	127	122	5	13130.00	43.38	68.20	-24.82	37.60	5.78	Average	100	273	6	13130.00	57.58	88.20	-30.62	51.80	5.78	Peak	100	273
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	251																																																																
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	251																																																																
3	1500.00	27.78	54.00	-26.22	35.06	-7.28	Average	127	122																																																																
4	1500.00	38.45	74.00	-35.55	45.73	-7.28	Peak	127	122																																																																
5	13130.00	43.38	68.20	-24.82	37.60	5.78	Average	100	273																																																																
6	13130.00	57.58	88.20	-30.62	51.80	5.78	Peak	100	273																																																																

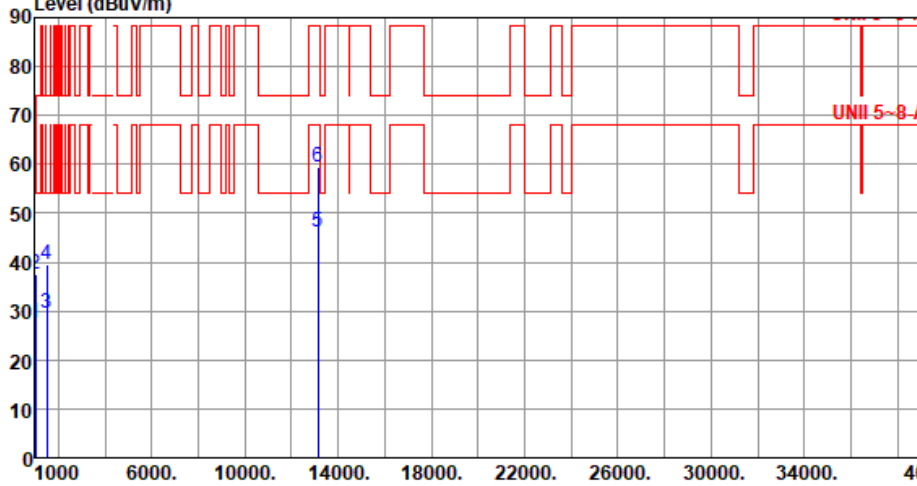

Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>35.69</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.58</td><td>54.00</td><td>-24.42</td><td>36.86</td><td>-7.28</td><td>Average</td><td>202</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.53</td><td>74.00</td><td>-34.47</td><td>46.81</td><td>-7.28</td><td>Peak</td><td>202</td><td>113</td></tr><tr><td>5</td><td>13130.00</td><td>46.28</td><td>68.20</td><td>-21.92</td><td>40.50</td><td>5.78</td><td>Average</td><td>275</td><td>275</td></tr><tr><td>6</td><td>13130.00</td><td>59.50</td><td>88.20</td><td>-28.70</td><td>53.72</td><td>5.78</td><td>Peak</td><td>275</td><td>275</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	279	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279	3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	113	4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	202	113	5	13130.00	46.28	68.20	-21.92	40.50	5.78	Average	275	275	6	13130.00	59.50	88.20	-28.70	53.72	5.78	Peak	275	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	279																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279																																																																
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	113																																																																
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	202	113																																																																
5	13130.00	46.28	68.20	-21.92	40.50	5.78	Average	275	275																																																																
6	13130.00	59.50	88.20	-28.70	53.72	5.78	Peak	275	275																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

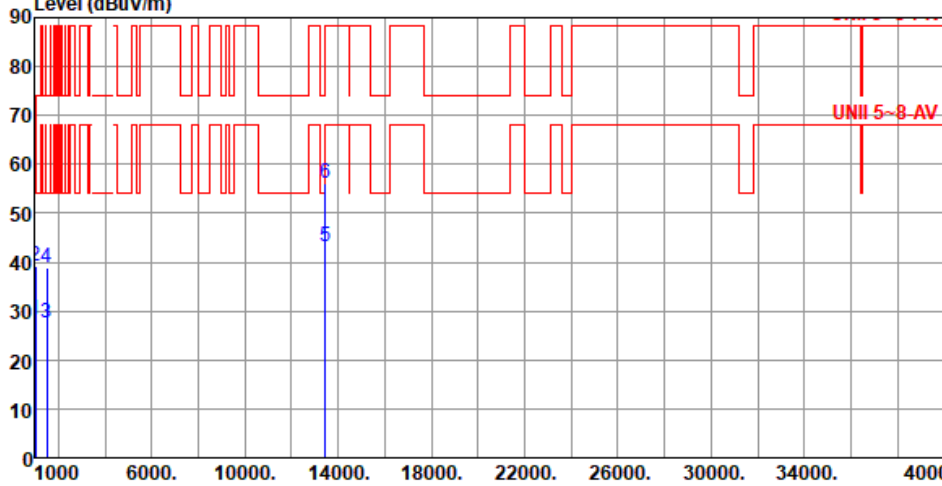

Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.31</td><td>54.00</td><td>-14.69</td><td>47.58</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>126</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>126</td><td>122</td></tr><tr><td>5</td><td>13450.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>37.26</td><td>6.01</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>13450.00</td><td>56.23</td><td>88.20</td><td>-31.97</td><td>50.22</td><td>6.01</td><td>Peak</td><td>100</td><td>177</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	250	2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	250	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	122	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	126	122	5	13450.00	43.27	68.20	-24.93	37.26	6.01	Average	100	177	6	13450.00	56.23	88.20	-31.97	50.22	6.01	Peak	100	177
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	250																																																																
2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	250																																																																
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	122																																																																
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	126	122																																																																
5	13450.00	43.27	68.20	-24.93	37.26	6.01	Average	100	177																																																																
6	13450.00	56.23	88.20	-31.97	50.22	6.01	Peak	100	177																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6725						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.52	54.00	-24.48	36.80	-7.28	Average	202	111
4	1500.00	39.61	74.00	-34.39	46.89	-7.28	Peak	202	111
5	13450.00	43.27	68.20	-24.93	37.26	6.01	Average	100	140
6	13450.00	56.10	88.20	-32.10	50.09	6.01	Peak	100	140
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	6845						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	277
2	1000.00	37.39	54.00	-16.61	45.66	-8.27	Peak	100	277
3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	200	111
4	1500.00	39.46	74.00	-34.54	46.74	-7.28	Peak	200	111
5	13690.00	43.85	68.20	-24.35	37.85	6.00	Average	100	154
6	13690.00	56.11	88.20	-32.09	50.11	6.00	Peak	100	154

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																									
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.15</td><td>54.00</td><td>-14.85</td><td>47.42</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>34.74</td><td>-7.28</td><td>Average</td><td>131</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.63</td><td>74.00</td><td>-35.37</td><td>45.91</td><td>-7.28</td><td>Peak</td><td>131</td><td>120</td></tr><tr><td>5</td><td>13770.00</td><td>44.03</td><td>68.20</td><td>-24.17</td><td>37.91</td><td>6.12</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>6</td><td>13770.00</td><td>56.40</td><td>88.20</td><td>-31.80</td><td>50.28</td><td>6.12</td><td>Peak</td><td>100</td><td>156</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	244	2	1000.00	39.15	54.00	-14.85	47.42	-8.27	Peak	100	244	3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	131	120	4	1500.00	38.63	74.00	-35.37	45.91	-7.28	Peak	131	120	5	13770.00	44.03	68.20	-24.17	37.91	6.12	Average	100	156	6	13770.00	56.40	88.20	-31.80	50.28	6.12	Peak	100	156
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	244																																																																
2	1000.00	39.15	54.00	-14.85	47.42	-8.27	Peak	100	244																																																																
3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	131	120																																																																
4	1500.00	38.63	74.00	-35.37	45.91	-7.28	Peak	131	120																																																																
5	13770.00	44.03	68.20	-24.17	37.91	6.12	Average	100	156																																																																
6	13770.00	56.40	88.20	-31.80	50.28	6.12	Peak	100	156																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40		Test Freq. (MHz)		6885																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):63																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>35.95</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.33</td><td>54.00</td><td>-24.67</td><td>36.61</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>13770.00</td><td>43.87</td><td>68.20</td><td>-24.33</td><td>37.75</td><td>6.12</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>13770.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>50.35</td><td>6.12</td><td>Peak</td><td>100</td><td>30</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279	3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	200	113	5	13770.00	43.87	68.20	-24.33	37.75	6.12	Average	100	30	6	13770.00	56.47	88.20	-31.73	50.35	6.12	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279																																																																						
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279																																																																						
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113																																																																						
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	200	113																																																																						
5	13770.00	43.87	68.20	-24.33	37.75	6.12	Average	100	30																																																																						
6	13770.00	56.47	88.20	-31.73	50.35	6.12	Peak	100	30																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

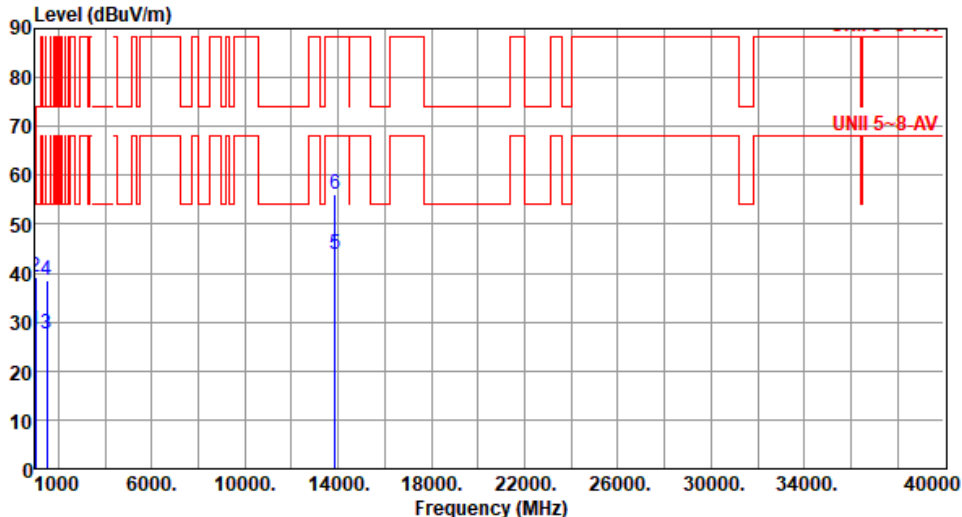

Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	255
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	255
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	126	122
4	1500.00	38.47	74.00	-35.53	45.75	-7.28	Peak	126	122
5	13850.00	43.99	68.20	-24.21	37.94	6.05	Average	100	137
6	13850.00	56.19	88.20	-32.01	50.14	6.05	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.66	54.00	-26.34	35.93	-8.27	Average	100	285
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	285
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	113
5	13850.00	43.91	68.20	-24.29	37.86	6.05	Average	100	306
6	13850.00	56.19	68.20	-12.01	50.14	6.05	Average	100	306

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	252
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	252
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	131	115
4	1500.00	38.29	74.00	-35.71	45.57	-7.28	Peak	131	115
5	14010.00	44.25	68.20	-23.95	37.50	6.75	Average	100	298
6	14010.00	58.34	88.20	-29.86	51.59	6.75	Peak	100	298
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

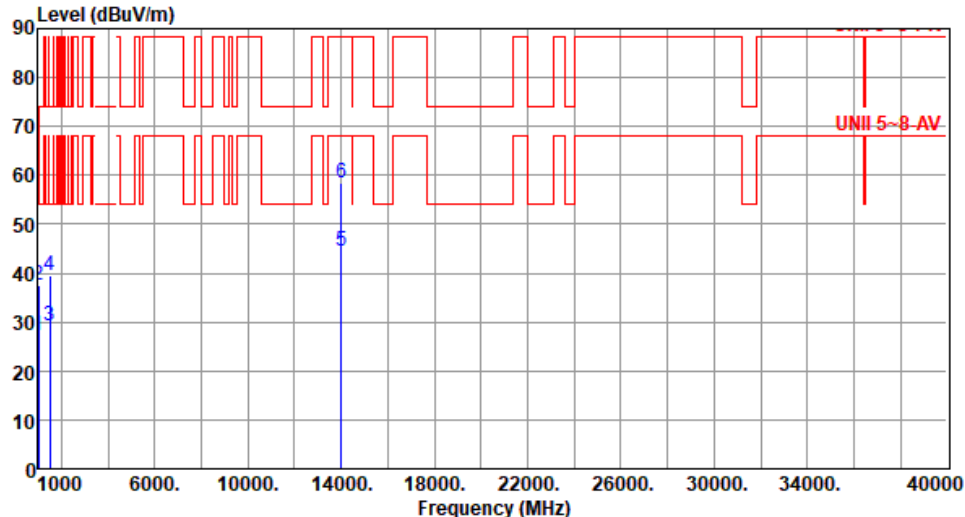

Modulation	be EHT40	Test Freq. (MHz)	7005						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.31	54.00	-26.69	35.58	-8.27	Average	100	279
2	1000.00	37.61	54.00	-16.39	45.88	-8.27	Peak	100	279
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	202	113
4	1500.00	39.39	74.00	-34.61	46.67	-7.28	Peak	202	113
5	14010.00	44.34	68.20	-23.86	37.59	6.75	Average	100	117
6	14010.00	58.42	88.20	-29.78	51.67	6.75	Peak	100	117

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

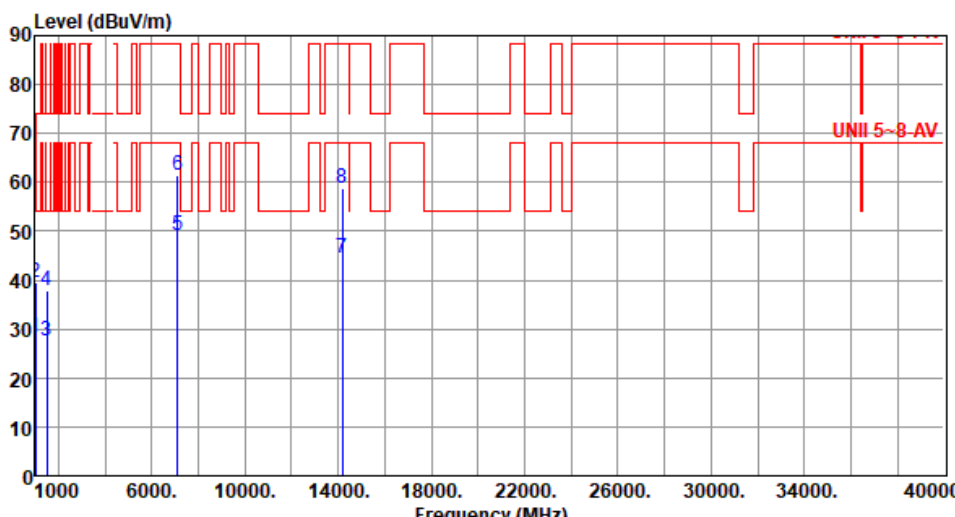


Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.24</td><td>54.00</td><td>-25.76</td><td>36.51</td><td>-8.27</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>250</td></tr><tr><td>3</td><td>1500.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>34.97</td><td>-7.28</td><td>Average</td><td>123</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>37.98</td><td>74.00</td><td>-36.02</td><td>45.26</td><td>-7.28</td><td>Peak</td><td>123</td><td>118</td></tr><tr><td>5</td><td>7125.00</td><td>49.20</td><td>68.20</td><td>-19.00</td><td>44.34</td><td>4.86</td><td>Average</td><td>188</td><td>350</td></tr><tr><td>6</td><td>7125.00</td><td>61.58</td><td>88.20</td><td>-26.62</td><td>56.72</td><td>4.86</td><td>Peak</td><td>188</td><td>350</td></tr><tr><td>7</td><td>14170.00</td><td>44.41</td><td>68.20</td><td>-23.79</td><td>37.62</td><td>6.79</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>8</td><td>14170.00</td><td>58.72</td><td>88.20</td><td>-29.48</td><td>51.93</td><td>6.79</td><td>Peak</td><td>100</td><td>254</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	250	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	250	3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	123	118	4	1500.00	37.98	74.00	-36.02	45.26	-7.28	Peak	123	118	5	7125.00	49.20	68.20	-19.00	44.34	4.86	Average	188	350	6	7125.00	61.58	88.20	-26.62	56.72	4.86	Peak	188	350	7	14170.00	44.41	68.20	-23.79	37.62	6.79	Average	100	254	8	14170.00	58.72	88.20	-29.48	51.93	6.79	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	250																																																																																				
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	250																																																																																				
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	123	118																																																																																				
4	1500.00	37.98	74.00	-36.02	45.26	-7.28	Peak	123	118																																																																																				
5	7125.00	49.20	68.20	-19.00	44.34	4.86	Average	188	350																																																																																				
6	7125.00	61.58	88.20	-26.62	56.72	4.86	Peak	188	350																																																																																				
7	14170.00	44.41	68.20	-23.79	37.62	6.79	Average	100	254																																																																																				
8	14170.00	58.72	88.20	-29.48	51.93	6.79	Peak	100	254																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	7085																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):63																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.44</td><td>54.00</td><td>-26.56</td><td>35.71</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.39</td><td>54.00</td><td>-16.61</td><td>45.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.51</td><td>54.00</td><td>-24.49</td><td>36.79</td><td>-7.28</td><td>Average</td><td>200</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.33</td><td>74.00</td><td>-34.67</td><td>46.61</td><td>-7.28</td><td>Peak</td><td>200</td><td>111</td></tr><tr><td>5</td><td>7125.00</td><td>48.29</td><td>68.20</td><td>-19.91</td><td>43.43</td><td>4.86</td><td>Average</td><td>164</td><td>8</td></tr><tr><td>6</td><td>7125.00</td><td>60.21</td><td>88.20</td><td>-27.99</td><td>55.35</td><td>4.86</td><td>Peak</td><td>164</td><td>8</td></tr><tr><td>7</td><td>14170.00</td><td>44.39</td><td>68.20</td><td>-23.81</td><td>37.60</td><td>6.79</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>8</td><td>14170.00</td><td>58.38</td><td>88.20</td><td>-29.82</td><td>51.59</td><td>6.79</td><td>Peak</td><td>100</td><td>309</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	282	2	1000.00	37.39	54.00	-16.61	45.66	-8.27	Peak	100	282	3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	200	111	4	1500.00	39.33	74.00	-34.67	46.61	-7.28	Peak	200	111	5	7125.00	48.29	68.20	-19.91	43.43	4.86	Average	164	8	6	7125.00	60.21	88.20	-27.99	55.35	4.86	Peak	164	8	7	14170.00	44.39	68.20	-23.81	37.60	6.79	Average	100	309	8	14170.00	58.38	88.20	-29.82	51.59	6.79	Peak	100	309
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	282																																																																																				
2	1000.00	37.39	54.00	-16.61	45.66	-8.27	Peak	100	282																																																																																				
3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	200	111																																																																																				
4	1500.00	39.33	74.00	-34.67	46.61	-7.28	Peak	200	111																																																																																				
5	7125.00	48.29	68.20	-19.91	43.43	4.86	Average	164	8																																																																																				
6	7125.00	60.21	88.20	-27.99	55.35	4.86	Peak	164	8																																																																																				
7	14170.00	44.39	68.20	-23.81	37.60	6.79	Average	100	309																																																																																				
8	14170.00	58.38	88.20	-29.82	51.59	6.79	Peak	100	309																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													


Unwanted Emissions (Above 1GHz) for be EHT80

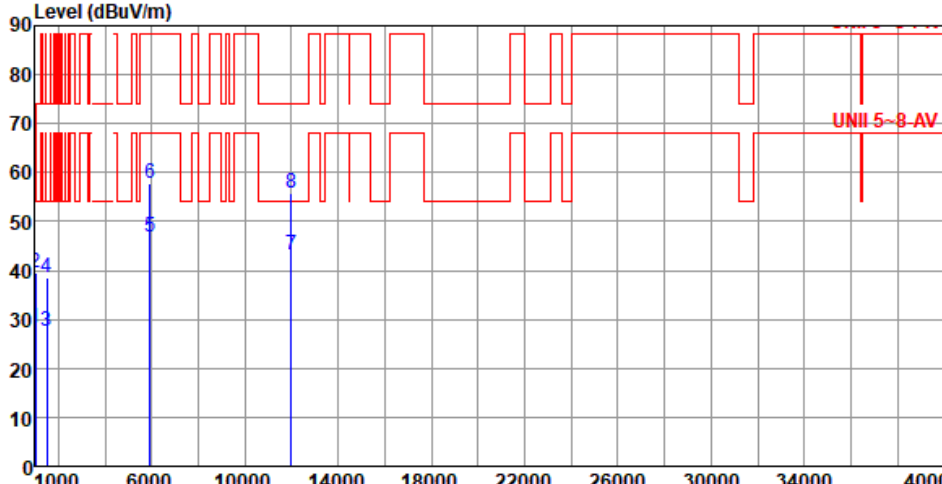Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>2</td><td>1000.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>47.68</td><td>-8.27</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>3</td><td>1500.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>34.90</td><td>-7.28</td><td>Average</td><td>131</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.69</td><td>74.00</td><td>-35.31</td><td>45.97</td><td>-7.28</td><td>Peak</td><td>131</td><td>120</td></tr><tr><td>5</td><td>5925.00</td><td>46.74</td><td>68.20</td><td>-21.46</td><td>45.61</td><td>1.13</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>6</td><td>5925.00</td><td>57.75</td><td>88.20</td><td>-30.45</td><td>56.62</td><td>1.13</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>7</td><td>11970.00</td><td>43.19</td><td>54.00</td><td>-10.81</td><td>37.02</td><td>6.17</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>8</td><td>11970.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>49.51</td><td>6.17</td><td>Peak</td><td>100</td><td>249</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	247	2	1000.00	39.41	54.00	-14.59	47.68	-8.27	Peak	100	247	3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	120	4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	131	120	5	5925.00	46.74	68.20	-21.46	45.61	1.13	Average	100	199	6	5925.00	57.75	88.20	-30.45	56.62	1.13	Peak	100	199	7	11970.00	43.19	54.00	-10.81	37.02	6.17	Average	100	249	8	11970.00	55.68	74.00	-18.32	49.51	6.17	Peak	100	249
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	247																																																																																				
2	1000.00	39.41	54.00	-14.59	47.68	-8.27	Peak	100	247																																																																																				
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	120																																																																																				
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	131	120																																																																																				
5	5925.00	46.74	68.20	-21.46	45.61	1.13	Average	100	199																																																																																				
6	5925.00	57.75	88.20	-30.45	56.62	1.13	Peak	100	199																																																																																				
7	11970.00	43.19	54.00	-10.81	37.02	6.17	Average	100	249																																																																																				
8	11970.00	55.68	74.00	-18.32	49.51	6.17	Peak	100	249																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	5985																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.79</td><td>54.00</td><td>-26.21</td><td>36.06</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.58</td><td>54.00</td><td>-24.42</td><td>36.86</td><td>-7.28</td><td>Average</td><td>200</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.53</td><td>74.00</td><td>-34.47</td><td>46.81</td><td>-7.28</td><td>Peak</td><td>200</td><td>111</td></tr><tr><td>5</td><td>5925.00</td><td>47.91</td><td>68.20</td><td>-20.29</td><td>46.78</td><td>1.13</td><td>Average</td><td>141</td><td>18</td></tr><tr><td>6</td><td>5925.00</td><td>59.15</td><td>88.20</td><td>-29.05</td><td>58.02</td><td>1.13</td><td>Peak</td><td>141</td><td>18</td></tr><tr><td>7</td><td>11970.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>37.07</td><td>6.17</td><td>Average</td><td>100</td><td>113</td></tr><tr><td>8</td><td>11970.00</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>49.40</td><td>6.17</td><td>Peak</td><td>100</td><td>113</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.79	54.00	-26.21	36.06	-8.27	Average	100	279	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279	3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	200	111	4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	111	5	5925.00	47.91	68.20	-20.29	46.78	1.13	Average	141	18	6	5925.00	59.15	88.20	-29.05	58.02	1.13	Peak	141	18	7	11970.00	43.24	54.00	-10.76	37.07	6.17	Average	100	113	8	11970.00	55.57	74.00	-18.43	49.40	6.17	Peak	100	113
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	27.79	54.00	-26.21	36.06	-8.27	Average	100	279																																																																																				
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279																																																																																				
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	200	111																																																																																				
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	111																																																																																				
5	5925.00	47.91	68.20	-20.29	46.78	1.13	Average	141	18																																																																																				
6	5925.00	59.15	88.20	-29.05	58.02	1.13	Peak	141	18																																																																																				
7	11970.00	43.24	54.00	-10.76	37.07	6.17	Average	100	113																																																																																				
8	11970.00	55.57	74.00	-18.43	49.40	6.17	Peak	100	113																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

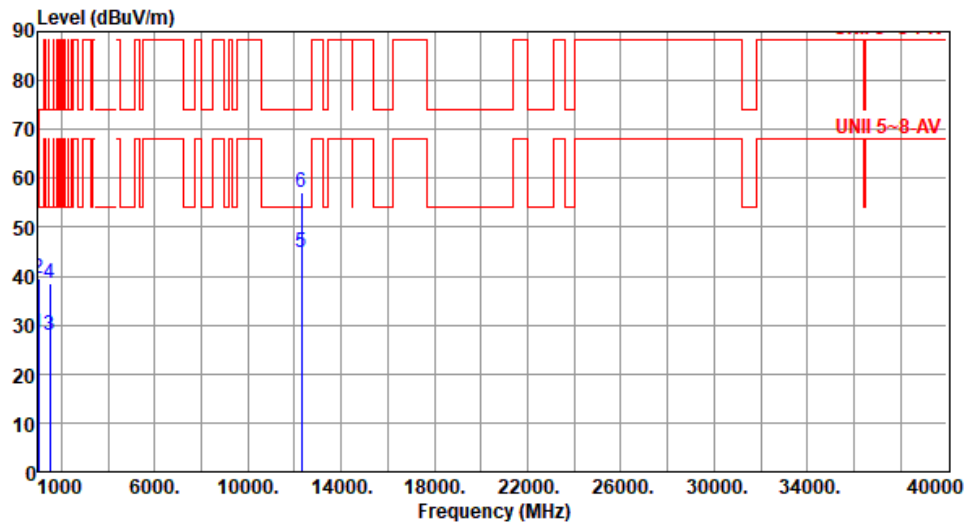

Modulation	be EHT80	Test Freq. (MHz)	6145																																																																							
Polarization	Horizontal																																																																									
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.39</td><td>54.00</td><td>-25.61</td><td>36.66</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.77</td><td>54.00</td><td>-26.23</td><td>35.05</td><td>-7.28</td><td>Average</td><td>126</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.51</td><td>74.00</td><td>-35.49</td><td>45.79</td><td>-7.28</td><td>Peak</td><td>126</td><td>118</td></tr><tr><td>5</td><td>12290.00</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>38.77</td><td>6.19</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>12290.00</td><td>57.12</td><td>74.00</td><td>-16.88</td><td>50.93</td><td>6.19</td><td>Peak</td><td>100</td><td>43</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	251	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251	3	1500.00	27.77	54.00	-26.23	35.05	-7.28	Average	126	118	4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	118	5	12290.00	44.96	54.00	-9.04	38.77	6.19	Average	100	43	6	12290.00	57.12	74.00	-16.88	50.93	6.19	Peak	100	43			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1000.00	28.39	54.00	-25.61	36.66	-8.27	Average	100	251																																																																	
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	251																																																																	
3	1500.00	27.77	54.00	-26.23	35.05	-7.28	Average	126	118																																																																	
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	126	118																																																																	
5	12290.00	44.96	54.00	-9.04	38.77	6.19	Average	100	43																																																																	
6	12290.00	57.12	74.00	-16.88	50.93	6.19	Peak	100	43																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										




Modulation	be EHT80	Test Freq. (MHz)	6145																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>35.96</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.31</td><td>54.00</td><td>-24.69</td><td>36.59</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.53</td><td>74.00</td><td>-34.47</td><td>46.81</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>12290.00</td><td>44.45</td><td>54.00</td><td>-9.55</td><td>38.26</td><td>6.19</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>6</td><td>12290.00</td><td>57.36</td><td>74.00</td><td>-16.64</td><td>51.17</td><td>6.19</td><td>Peak</td><td>100</td><td>256</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	278	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	278	3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	200	113	4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	113	5	12290.00	44.45	54.00	-9.55	38.26	6.19	Average	100	256	6	12290.00	57.36	74.00	-16.64	51.17	6.19	Peak	100	256
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	278																																																																
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	278																																																																
3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	200	113																																																																
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	113																																																																
5	12290.00	44.45	54.00	-9.55	38.26	6.19	Average	100	256																																																																
6	12290.00	57.36	74.00	-16.64	51.17	6.19	Peak	100	256																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6385						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	254
2	1000.00	39.21	54.00	-14.79	47.48	-8.27	Peak	100	254
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	128	122
4	1500.00	38.47	74.00	-35.53	45.75	-7.28	Peak	128	122
5	12770.00	44.86	68.20	-23.34	38.97	5.89	Average	100	54
6	12770.00	56.73	88.20	-31.47	50.84	5.89	Peak	100	54
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

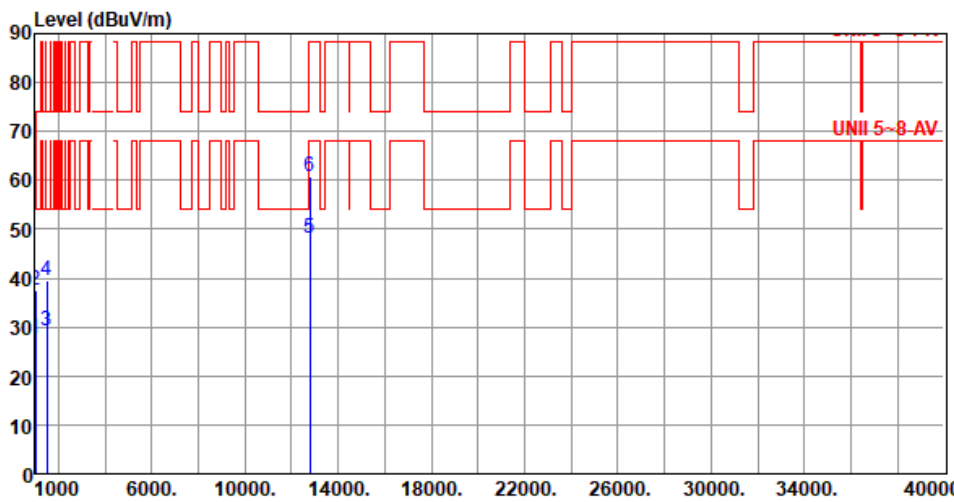


Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.46</td><td>54.00</td><td>-26.54</td><td>35.73</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.56</td><td>54.00</td><td>-16.44</td><td>45.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.37</td><td>54.00</td><td>-24.63</td><td>36.65</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>12770.00</td><td>48.20</td><td>68.20</td><td>-20.00</td><td>42.31</td><td>5.89</td><td>Average</td><td>177</td><td>257</td></tr><tr><td>6</td><td>12770.00</td><td>60.76</td><td>88.20</td><td>-27.44</td><td>54.87</td><td>5.89</td><td>Peak</td><td>177</td><td>257</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	282	2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	282	3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	200	113	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113	5	12770.00	48.20	68.20	-20.00	42.31	5.89	Average	177	257	6	12770.00	60.76	88.20	-27.44	54.87	5.89	Peak	177	257
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	282																																																																
2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	282																																																																
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	200	113																																																																
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113																																																																
5	12770.00	48.20	68.20	-20.00	42.31	5.89	Average	177	257																																																																
6	12770.00	60.76	88.20	-27.44	54.87	5.89	Peak	177	257																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

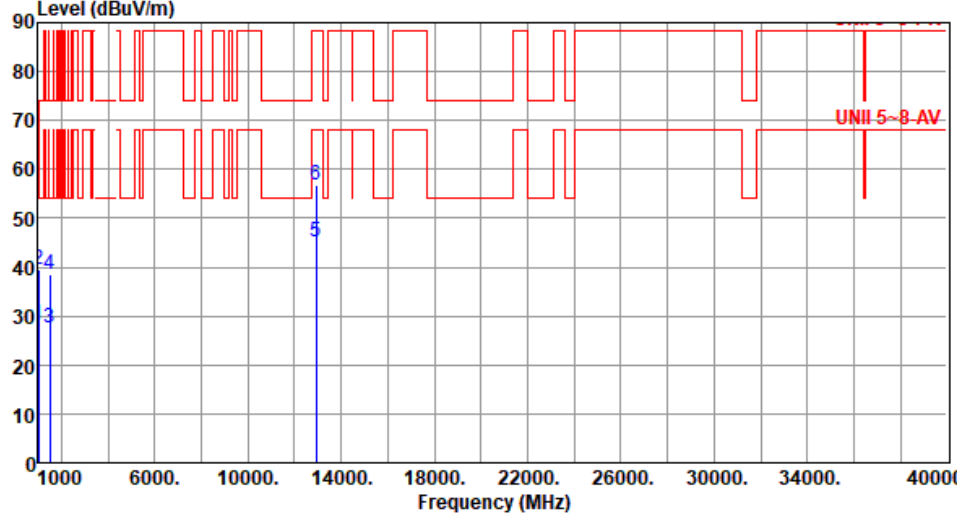

Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	243
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	243
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	120
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	120
5	12930.00	45.02	68.20	-23.18	38.98	6.04	Average	100	301
6	12930.00	56.79	88.20	-31.41	50.75	6.04	Peak	100	301
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

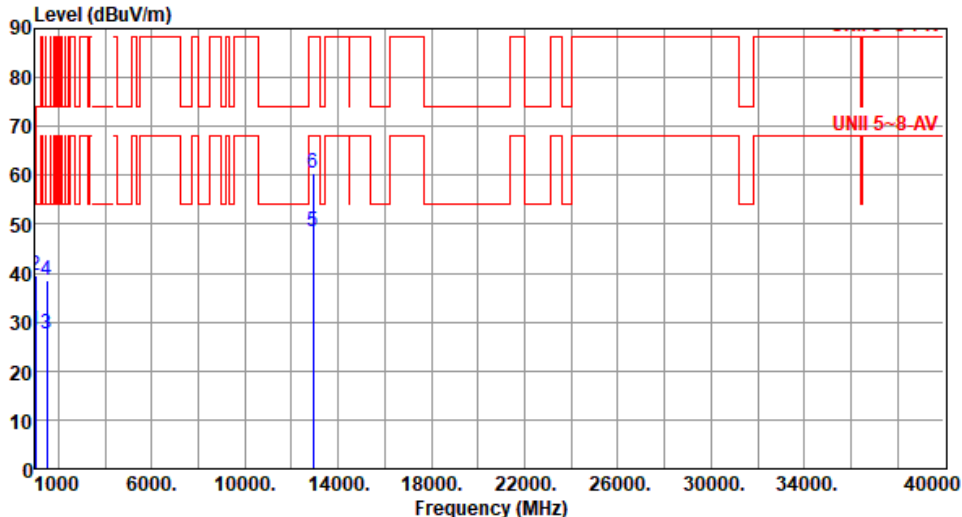


Modulation	be EHT80		Test Freq. (MHz)		6465																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.38</td><td>54.00</td><td>-25.62</td><td>36.65</td><td>-8.27</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>202</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.43</td><td>74.00</td><td>-35.57</td><td>45.71</td><td>-7.28</td><td>Peak</td><td>202</td><td>118</td></tr><tr><td>5</td><td>12930.00</td><td>48.64</td><td>68.20</td><td>-19.56</td><td>42.60</td><td>6.04</td><td>Average</td><td>292</td><td>277</td></tr><tr><td>6</td><td>12930.00</td><td>60.36</td><td>88.20</td><td>-27.84</td><td>54.32</td><td>6.04</td><td>Peak</td><td>292</td><td>277</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.38	54.00	-25.62	36.65	-8.27	Average	100	253	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	253	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	202	118	4	1500.00	38.43	74.00	-35.57	45.71	-7.28	Peak	202	118	5	12930.00	48.64	68.20	-19.56	42.60	6.04	Average	292	277	6	12930.00	60.36	88.20	-27.84	54.32	6.04	Peak	292	277
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	28.38	54.00	-25.62	36.65	-8.27	Average	100	253																																																																						
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	253																																																																						
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	202	118																																																																						
4	1500.00	38.43	74.00	-35.57	45.71	-7.28	Peak	202	118																																																																						
5	12930.00	48.64	68.20	-19.56	42.60	6.04	Average	292	277																																																																						
6	12930.00	60.36	88.20	-27.84	54.32	6.04	Peak	292	277																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.12	54.00	-25.88	36.39	-8.27	Average	100	244
2	1000.00	39.08	54.00	-14.92	47.35	-8.27	Peak	100	244
3	1500.00	27.34	54.00	-26.66	34.62	-7.28	Average	125	122
4	1500.00	38.47	74.00	-35.53	45.75	-7.28	Peak	125	122
5	13090.00	44.65	68.20	-23.55	38.96	5.69	Average	100	22
6	13090.00	57.54	88.20	-30.66	51.85	5.69	Peak	100	22


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

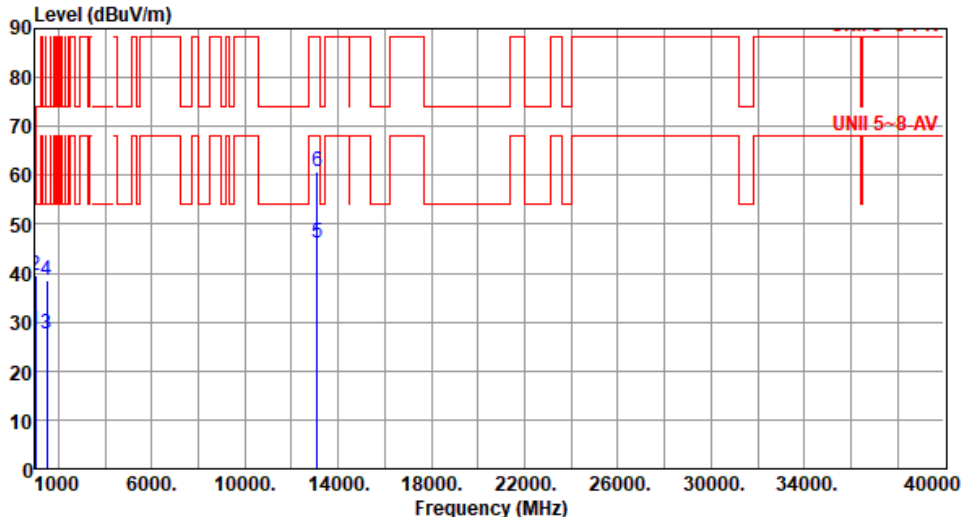

Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	244
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	244
3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	205	113
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	205	113
5	13090.00	46.28	68.20	-21.92	40.59	5.69	Average	176	238
6	13090.00	60.77	88.20	-27.43	55.08	5.69	Peak	176	238

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

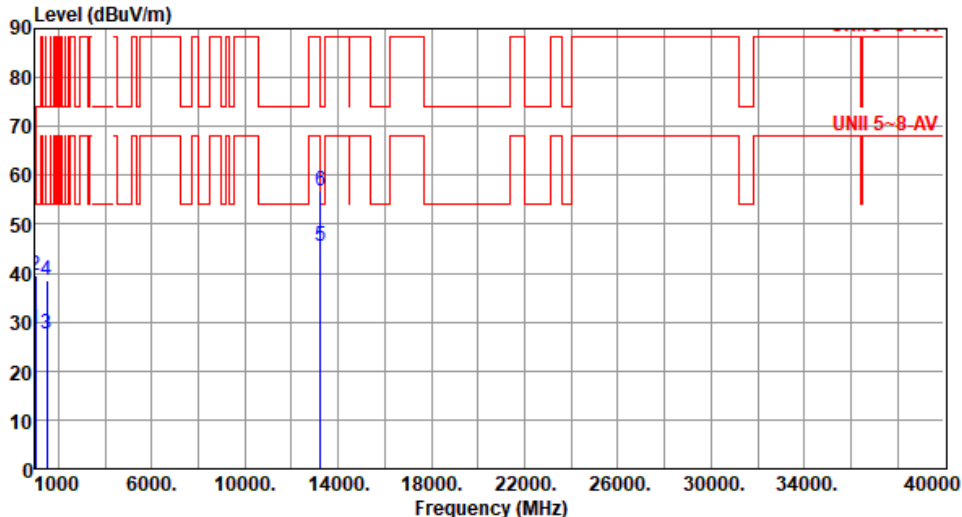

Modulation	be EHT80		Test Freq. (MHz)		6625																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.42</td><td>54.00</td><td>-25.58</td><td>36.69</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>47.75</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>131</td><td>122</td></tr><tr><td>4</td><td>1500.00</td><td>38.59</td><td>74.00</td><td>-35.41</td><td>45.87</td><td>-7.28</td><td>Peak</td><td>131</td><td>122</td></tr><tr><td>5</td><td>13250.00</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>39.99</td><td>5.65</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>6</td><td>13250.00</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>51.04</td><td>5.65</td><td>Peak</td><td>100</td><td>268</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	28.42	54.00	-25.58	36.69	-8.27	Average	100	246	2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	246	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	131	122	4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	131	122	5	13250.00	45.64	54.00	-8.36	39.99	5.65	Average	100	268	6	13250.00	56.69	74.00	-17.31	51.04	5.65	Peak	100	268
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1000.00	28.42	54.00	-25.58	36.69	-8.27	Average	100	246																																																																																										
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	246																																																																																										
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	131	122																																																																																										
4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	131	122																																																																																										
5	13250.00	45.64	54.00	-8.36	39.99	5.65	Average	100	268																																																																																										
6	13250.00	56.69	74.00	-17.31	51.04	5.65	Peak	100	268																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.24</td><td>54.00</td><td>-26.76</td><td>35.51</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.22</td><td>54.00</td><td>-24.78</td><td>36.50</td><td>-7.28</td><td>Average</td><td>201</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>201</td><td>111</td></tr><tr><td>5</td><td>13250.00</td><td>49.90</td><td>54.00</td><td>-4.10</td><td>44.25</td><td>5.65</td><td>Average</td><td>200</td><td>248</td></tr><tr><td>6</td><td>13250.00</td><td>63.03</td><td>74.00</td><td>-10.97</td><td>57.38</td><td>5.65</td><td>Peak</td><td>200</td><td>248</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.24	54.00	-26.76	35.51	-8.27	Average	100	279	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279	3	1500.00	29.22	54.00	-24.78	36.50	-7.28	Average	201	111	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	201	111	5	13250.00	49.90	54.00	-4.10	44.25	5.65	Average	200	248	6	13250.00	63.03	74.00	-10.97	57.38	5.65	Peak	200	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.24	54.00	-26.76	35.51	-8.27	Average	100	279																																																																
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279																																																																
3	1500.00	29.22	54.00	-24.78	36.50	-7.28	Average	201	111																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	201	111																																																																
5	13250.00	49.90	54.00	-4.10	44.25	5.65	Average	200	248																																																																
6	13250.00	63.03	74.00	-10.97	57.38	5.65	Peak	200	248																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6705																																																																							
Polarization	Horizontal																																																																									
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																										
Level (dBuV/m)																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.35</td><td>54.00</td><td>-25.65</td><td>36.62</td><td>-8.27</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>2</td><td>1000.00</td><td>39.57</td><td>54.00</td><td>-14.43</td><td>47.84</td><td>-8.27</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>3</td><td>1500.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>34.97</td><td>-7.28</td><td>Average</td><td>131</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>45.80</td><td>-7.28</td><td>Peak</td><td>131</td><td>118</td></tr><tr><td>5</td><td>13410.00</td><td>46.05</td><td>68.20</td><td>-22.15</td><td>40.15</td><td>5.90</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>6</td><td>13410.00</td><td>57.82</td><td>88.20</td><td>-30.38</td><td>51.92</td><td>5.90</td><td>Peak</td><td>100</td><td>211</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.35	54.00	-25.65	36.62	-8.27	Average	100	255	2	1000.00	39.57	54.00	-14.43	47.84	-8.27	Peak	100	255	3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	118	4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	131	118	5	13410.00	46.05	68.20	-22.15	40.15	5.90	Average	100	211	6	13410.00	57.82	88.20	-30.38	51.92	5.90	Peak	100	211			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1000.00	28.35	54.00	-25.65	36.62	-8.27	Average	100	255																																																																	
2	1000.00	39.57	54.00	-14.43	47.84	-8.27	Peak	100	255																																																																	
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	118																																																																	
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	131	118																																																																	
5	13410.00	46.05	68.20	-22.15	40.15	5.90	Average	100	211																																																																	
6	13410.00	57.82	88.20	-30.38	51.92	5.90	Peak	100	211																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										




Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.41</td><td>54.00</td><td>-26.59</td><td>35.68</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.52</td><td>54.00</td><td>-16.48</td><td>45.79</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.31</td><td>54.00</td><td>-24.69</td><td>36.59</td><td>-7.28</td><td>Average</td><td>198</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>46.92</td><td>-7.28</td><td>Peak</td><td>198</td><td>108</td></tr><tr><td>5</td><td>13410.00</td><td>47.21</td><td>68.20</td><td>-20.99</td><td>41.31</td><td>5.90</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>13410.00</td><td>61.59</td><td>88.20</td><td>-26.61</td><td>55.69</td><td>5.90</td><td>Peak</td><td>100</td><td>271</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	279	2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	279	3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	198	108	4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	198	108	5	13410.00	47.21	68.20	-20.99	41.31	5.90	Average	100	271	6	13410.00	61.59	88.20	-26.61	55.69	5.90	Peak	100	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	279																																																																
2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	279																																																																
3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	198	108																																																																
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	198	108																																																																
5	13410.00	47.21	68.20	-20.99	41.31	5.90	Average	100	271																																																																
6	13410.00	61.59	88.20	-26.61	55.69	5.90	Peak	100	271																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

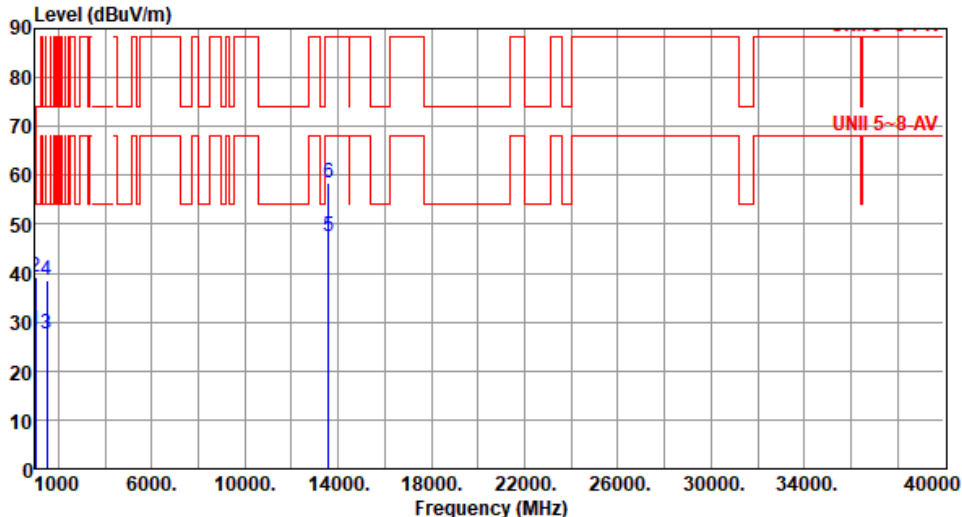

Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	245
2	1000.00	39.31	54.00	-14.69	47.58	-8.27	Peak	100	245
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	131	117
4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	131	117
5	13570.00	47.44	68.20	-20.76	41.15	6.29	Average	100	236
6	13570.00	58.61	88.20	-29.59	52.32	6.29	Peak	100	236

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

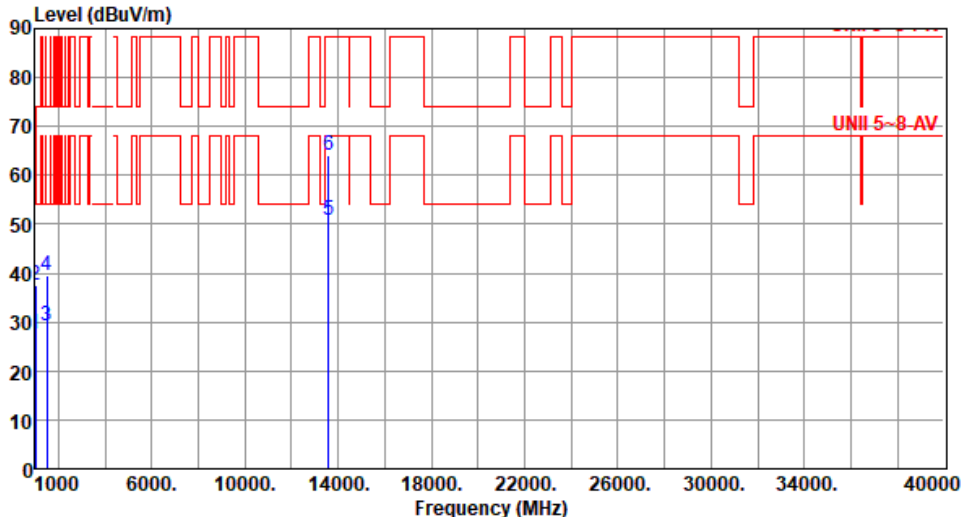

Modulation	be EHT80		Test Freq. (MHz)		6785																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.41</td><td>54.00</td><td>-26.59</td><td>35.68</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.56</td><td>54.00</td><td>-16.44</td><td>45.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.31</td><td>54.00</td><td>-24.69</td><td>36.59</td><td>-7.28</td><td>Average</td><td>198</td><td>108</td></tr><tr><td>4</td><td>1500.00</td><td>39.57</td><td>74.00</td><td>-34.43</td><td>46.85</td><td>-7.28</td><td>Peak</td><td>198</td><td>108</td></tr><tr><td>5</td><td>13570.00</td><td>50.65</td><td>68.20</td><td>-17.55</td><td>44.36</td><td>6.29</td><td>Average</td><td>253</td><td>254</td></tr><tr><td>6</td><td>13570.00</td><td>64.21</td><td>88.20</td><td>-23.99</td><td>57.92</td><td>6.29</td><td>Peak</td><td>253</td><td>254</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	279	2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	279	3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	198	108	4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	198	108	5	13570.00	50.65	68.20	-17.55	44.36	6.29	Average	253	254	6	13570.00	64.21	88.20	-23.99	57.92	6.29	Peak	253	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	27.41	54.00	-26.59	35.68	-8.27	Average	100	279																																																																						
2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	279																																																																						
3	1500.00	29.31	54.00	-24.69	36.59	-7.28	Average	198	108																																																																						
4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	198	108																																																																						
5	13570.00	50.65	68.20	-17.55	44.36	6.29	Average	253	254																																																																						
6	13570.00	64.21	88.20	-23.99	57.92	6.29	Peak	253	254																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.49</td><td>54.00</td><td>-25.51</td><td>36.76</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>47.60</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.79</td><td>54.00</td><td>-26.21</td><td>35.07</td><td>-7.28</td><td>Average</td><td>133</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>38.57</td><td>74.00</td><td>-35.43</td><td>45.85</td><td>-7.28</td><td>Peak</td><td>133</td><td>115</td></tr><tr><td>5</td><td>13730.00</td><td>47.47</td><td>68.20</td><td>-20.73</td><td>41.46</td><td>6.01</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>6</td><td>13730.00</td><td>62.32</td><td>88.20</td><td>-25.88</td><td>56.31</td><td>6.01</td><td>Peak</td><td>100</td><td>193</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	251	2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	251	3	1500.00	27.79	54.00	-26.21	35.07	-7.28	Average	133	115	4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	133	115	5	13730.00	47.47	68.20	-20.73	41.46	6.01	Average	100	193	6	13730.00	62.32	88.20	-25.88	56.31	6.01	Peak	100	193
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	251																																																																
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	251																																																																
3	1500.00	27.79	54.00	-26.21	35.07	-7.28	Average	133	115																																																																
4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	133	115																																																																
5	13730.00	47.47	68.20	-20.73	41.46	6.01	Average	100	193																																																																
6	13730.00	62.32	88.20	-25.88	56.31	6.01	Peak	100	193																																																																



Modulation	be EHT80		Test Freq. (MHz)		6865																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee			Temperature(°C):25			Humidity(%):62																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>35.96</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.68</td><td>54.00</td><td>-24.32</td><td>36.96</td><td>-7.28</td><td>Average</td><td>205</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.56</td><td>74.00</td><td>-34.44</td><td>46.84</td><td>-7.28</td><td>Peak</td><td>205</td><td>115</td></tr><tr><td>5</td><td>13730.00</td><td>50.57</td><td>68.20</td><td>-17.63</td><td>44.56</td><td>6.01</td><td>Average</td><td>175</td><td>250</td></tr><tr><td>6</td><td>13730.00</td><td>63.16</td><td>88.20</td><td>-25.04</td><td>57.15</td><td>6.01</td><td>Peak</td><td>175</td><td>250</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	279	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279	3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	205	115	4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	205	115	5	13730.00	50.57	68.20	-17.63	44.56	6.01	Average	175	250	6	13730.00	63.16	88.20	-25.04	57.15	6.01	Peak	175	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1000.00	27.69	54.00	-26.31	35.96	-8.27	Average	100	279																																																																						
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279																																																																						
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	205	115																																																																						
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	205	115																																																																						
5	13730.00	50.57	68.20	-17.63	44.56	6.01	Average	175	250																																																																						
6	13730.00	63.16	88.20	-25.04	57.15	6.01	Peak	175	250																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.62</td><td>54.00</td><td>-26.38</td><td>35.89</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.54</td><td>54.00</td><td>-16.46</td><td>45.81</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.61</td><td>54.00</td><td>-24.39</td><td>36.89</td><td>-7.28</td><td>Average</td><td>200</td><td>111</td></tr><tr><td>4</td><td>1500.00</td><td>39.54</td><td>74.00</td><td>-34.46</td><td>46.82</td><td>-7.28</td><td>Peak</td><td>200</td><td>111</td></tr><tr><td>5</td><td>13890.00</td><td>50.70</td><td>68.20</td><td>-17.50</td><td>44.36</td><td>6.34</td><td>Average</td><td>180</td><td>229</td></tr><tr><td>6</td><td>13890.00</td><td>62.51</td><td>88.20</td><td>-25.69</td><td>56.17</td><td>6.34</td><td>Peak</td><td>180</td><td>229</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	282	2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	282	3	1500.00	29.61	54.00	-24.39	36.89	-7.28	Average	200	111	4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	111	5	13890.00	50.70	68.20	-17.50	44.36	6.34	Average	180	229	6	13890.00	62.51	88.20	-25.69	56.17	6.34	Peak	180	229
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	282																																																																
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	282																																																																
3	1500.00	29.61	54.00	-24.39	36.89	-7.28	Average	200	111																																																																
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	111																																																																
5	13890.00	50.70	68.20	-17.50	44.36	6.34	Average	180	229																																																																
6	13890.00	62.51	88.20	-25.69	56.17	6.34	Peak	180	229																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.36</td><td>54.00</td><td>-25.64</td><td>36.63</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>122</td><td>116</td></tr><tr><td>4</td><td>1500.00</td><td>38.61</td><td>74.00</td><td>-35.39</td><td>45.89</td><td>-7.28</td><td>Peak</td><td>122</td><td>116</td></tr><tr><td>5</td><td>7125.00</td><td>52.04</td><td>68.20</td><td>-16.16</td><td>47.18</td><td>4.86</td><td>Average</td><td>147</td><td>358</td></tr><tr><td>6</td><td>7125.00</td><td>61.48</td><td>88.20</td><td>-26.72</td><td>56.62</td><td>4.86</td><td>Peak</td><td>147</td><td>358</td></tr><tr><td>7</td><td>7250.00</td><td>47.98</td><td>54.00</td><td>-6.02</td><td>42.77</td><td>5.21</td><td>Average</td><td>147</td><td>358</td></tr><tr><td>8</td><td>7250.00</td><td>57.49</td><td>74.00</td><td>-16.51</td><td>52.28</td><td>5.21</td><td>Peak</td><td>147</td><td>358</td></tr><tr><td>9</td><td>14050.00</td><td>47.06</td><td>68.20</td><td>-21.14</td><td>40.32</td><td>6.74</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>10</td><td>14050.00</td><td>59.67</td><td>88.20</td><td>-28.53</td><td>52.93</td><td>6.74</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	251	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	251	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	122	116	4	1500.00	38.61	74.00	-35.39	45.89	-7.28	Peak	122	116	5	7125.00	52.04	68.20	-16.16	47.18	4.86	Average	147	358	6	7125.00	61.48	88.20	-26.72	56.62	4.86	Peak	147	358	7	7250.00	47.98	54.00	-6.02	42.77	5.21	Average	147	358	8	7250.00	57.49	74.00	-16.51	52.28	5.21	Peak	147	358	9	14050.00	47.06	68.20	-21.14	40.32	6.74	Average	100	223	10	14050.00	59.67	88.20	-28.53	52.93	6.74	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	251																																																																																																								
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	251																																																																																																								
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	122	116																																																																																																								
4	1500.00	38.61	74.00	-35.39	45.89	-7.28	Peak	122	116																																																																																																								
5	7125.00	52.04	68.20	-16.16	47.18	4.86	Average	147	358																																																																																																								
6	7125.00	61.48	88.20	-26.72	56.62	4.86	Peak	147	358																																																																																																								
7	7250.00	47.98	54.00	-6.02	42.77	5.21	Average	147	358																																																																																																								
8	7250.00	57.49	74.00	-16.51	52.28	5.21	Peak	147	358																																																																																																								
9	14050.00	47.06	68.20	-21.14	40.32	6.74	Average	100	223																																																																																																								
10	14050.00	59.67	88.20	-28.53	52.93	6.74	Peak	100	223																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	be EHT80	Test Freq. (MHz)	7025																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>35.95</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.54</td><td>54.00</td><td>-16.46</td><td>45.81</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.55</td><td>54.00</td><td>-24.45</td><td>36.83</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.57</td><td>74.00</td><td>-34.43</td><td>46.85</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>7125.00</td><td>48.89</td><td>68.20</td><td>-19.31</td><td>44.03</td><td>4.86</td><td>Average</td><td>162</td><td>7</td></tr><tr><td>6</td><td>7125.00</td><td>59.35</td><td>88.20</td><td>-28.85</td><td>54.49</td><td>4.86</td><td>Peak</td><td>162</td><td>7</td></tr><tr><td>7</td><td>7250.00</td><td>47.65</td><td>54.00</td><td>-6.35</td><td>42.44</td><td>5.21</td><td>Average</td><td>162</td><td>7</td></tr><tr><td>8</td><td>7250.00</td><td>57.22</td><td>74.00</td><td>-16.78</td><td>52.01</td><td>5.21</td><td>Peak</td><td>162</td><td>7</td></tr><tr><td>9</td><td>14050.00</td><td>49.66</td><td>68.20</td><td>-18.54</td><td>42.92</td><td>6.74</td><td>Average</td><td>164</td><td>271</td></tr><tr><td>10</td><td>14050.00</td><td>61.18</td><td>88.20</td><td>-27.02</td><td>54.44</td><td>6.74</td><td>Peak</td><td>164</td><td>271</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279	2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	279	3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	113	4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	200	113	5	7125.00	48.89	68.20	-19.31	44.03	4.86	Average	162	7	6	7125.00	59.35	88.20	-28.85	54.49	4.86	Peak	162	7	7	7250.00	47.65	54.00	-6.35	42.44	5.21	Average	162	7	8	7250.00	57.22	74.00	-16.78	52.01	5.21	Peak	162	7	9	14050.00	49.66	68.20	-18.54	42.92	6.74	Average	164	271	10	14050.00	61.18	88.20	-27.02	54.44	6.74	Peak	164	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279																																																																																																								
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	279																																																																																																								
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	113																																																																																																								
4	1500.00	39.57	74.00	-34.43	46.85	-7.28	Peak	200	113																																																																																																								
5	7125.00	48.89	68.20	-19.31	44.03	4.86	Average	162	7																																																																																																								
6	7125.00	59.35	88.20	-28.85	54.49	4.86	Peak	162	7																																																																																																								
7	7250.00	47.65	54.00	-6.35	42.44	5.21	Average	162	7																																																																																																								
8	7250.00	57.22	74.00	-16.78	52.01	5.21	Peak	162	7																																																																																																								
9	14050.00	49.66	68.20	-18.54	42.92	6.74	Average	164	271																																																																																																								
10	14050.00	61.18	88.20	-27.02	54.44	6.74	Peak	164	271																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

Unwanted Emissions (Above 1GHz) for be EHT160

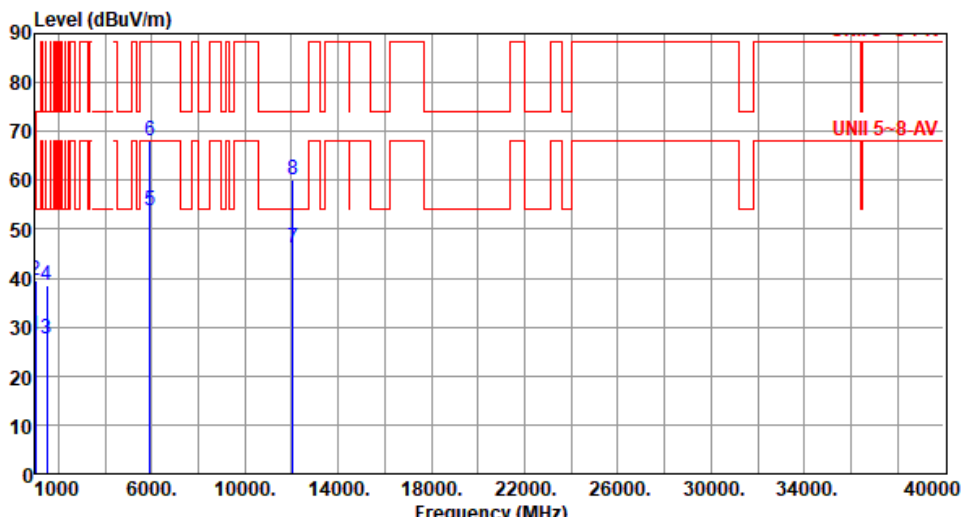Modulation	be EHT160	Test Freq. (MHz)	6025																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.31</td><td>54.00</td><td>-25.69</td><td>36.58</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.69</td><td>54.00</td><td>-26.31</td><td>34.97</td><td>-7.28</td><td>Average</td><td>123</td><td>116</td></tr><tr><td>4</td><td>1500.00</td><td>38.57</td><td>74.00</td><td>-35.43</td><td>45.85</td><td>-7.28</td><td>Peak</td><td>123</td><td>116</td></tr><tr><td>5</td><td>5925.00</td><td>53.83</td><td>68.20</td><td>-14.37</td><td>52.70</td><td>1.13</td><td>Average</td><td>228</td><td>5</td></tr><tr><td>6</td><td>5925.00</td><td>68.12</td><td>88.20</td><td>-20.08</td><td>66.99</td><td>1.13</td><td>Peak</td><td>228</td><td>5</td></tr><tr><td>7</td><td>12050.00</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>40.01</td><td>6.25</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>8</td><td>12050.00</td><td>60.23</td><td>74.00</td><td>-13.77</td><td>53.98</td><td>6.25</td><td>Peak</td><td>100</td><td>66</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	251	3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	123	116	4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	123	116	5	5925.00	53.83	68.20	-14.37	52.70	1.13	Average	228	5	6	5925.00	68.12	88.20	-20.08	66.99	1.13	Peak	228	5	7	12050.00	46.26	54.00	-7.74	40.01	6.25	Average	100	66	8	12050.00	60.23	74.00	-13.77	53.98	6.25	Peak	100	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251																																																																																				
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	251																																																																																				
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	123	116																																																																																				
4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	123	116																																																																																				
5	5925.00	53.83	68.20	-14.37	52.70	1.13	Average	228	5																																																																																				
6	5925.00	68.12	88.20	-20.08	66.99	1.13	Peak	228	5																																																																																				
7	12050.00	46.26	54.00	-7.74	40.01	6.25	Average	100	66																																																																																				
8	12050.00	60.23	74.00	-13.77	53.98	6.25	Peak	100	66																																																																																				



Modulation	be EHT160	Test Freq. (MHz)	6025						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.89	54.00	-26.11	36.16	-8.27	Average	100	277
2	1000.00	37.77	54.00	-16.23	46.04	-8.27	Peak	100	277
3	1500.00	29.65	54.00	-24.35	36.93	-7.28	Average	200	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	113
5	5925.00	55.09	68.20	-13.11	53.96	1.13	Average	150	265
6	5925.00	68.89	88.20	-19.31	67.76	1.13	Peak	150	265
7	12050.00	46.22	54.00	-7.78	39.97	6.25	Average	100	159
8	12050.00	61.09	74.00	-12.91	54.84	6.25	Peak	100	159
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.66</td><td>54.00</td><td>-26.34</td><td>34.94</td><td>-7.28</td><td>Average</td><td>127</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>127</td><td>118</td></tr><tr><td>5</td><td>12370.00</td><td>46.20</td><td>54.00</td><td>-7.80</td><td>40.50</td><td>5.70</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>12370.00</td><td>62.09</td><td>74.00</td><td>-11.91</td><td>56.39</td><td>5.70</td><td>Peak</td><td>100</td><td>38</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	251	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251	3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	127	118	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	127	118	5	12370.00	46.20	54.00	-7.80	40.50	5.70	Average	100	38	6	12370.00	62.09	74.00	-11.91	56.39	5.70	Peak	100	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	251																																																																
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251																																																																
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	127	118																																																																
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	127	118																																																																
5	12370.00	46.20	54.00	-7.80	40.50	5.70	Average	100	38																																																																
6	12370.00	62.09	74.00	-11.91	56.39	5.70	Peak	100	38																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6185						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.85	54.00	-26.15	36.12	-8.27	Average	100	278
2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	278
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	197	106
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	197	106
5	12370.00	46.28	54.00	-7.72	40.58	5.70	Average	100	265
6	12370.00	61.38	74.00	-12.62	55.68	5.70	Peak	100	265
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.25</td><td>54.00</td><td>-25.75</td><td>36.52</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.18</td><td>54.00</td><td>-14.82</td><td>47.45</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>34.70</td><td>-7.28</td><td>Average</td><td>123</td><td>121</td></tr><tr><td>4</td><td>1500.00</td><td>37.98</td><td>74.00</td><td>-36.02</td><td>45.26</td><td>-7.28</td><td>Peak</td><td>123</td><td>121</td></tr><tr><td>5</td><td>12690.00</td><td>47.11</td><td>54.00</td><td>-6.89</td><td>41.32</td><td>5.79</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>12690.00</td><td>63.07</td><td>74.00</td><td>-10.93</td><td>57.28</td><td>5.79</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	251	2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	251	3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	123	121	4	1500.00	37.98	74.00	-36.02	45.26	-7.28	Peak	123	121	5	12690.00	47.11	54.00	-6.89	41.32	5.79	Average	100	205	6	12690.00	63.07	74.00	-10.93	57.28	5.79	Peak	100	205
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	251																																																																
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	251																																																																
3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	123	121																																																																
4	1500.00	37.98	74.00	-36.02	45.26	-7.28	Peak	123	121																																																																
5	12690.00	47.11	54.00	-6.89	41.32	5.79	Average	100	205																																																																
6	12690.00	63.07	74.00	-10.93	57.28	5.79	Peak	100	205																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

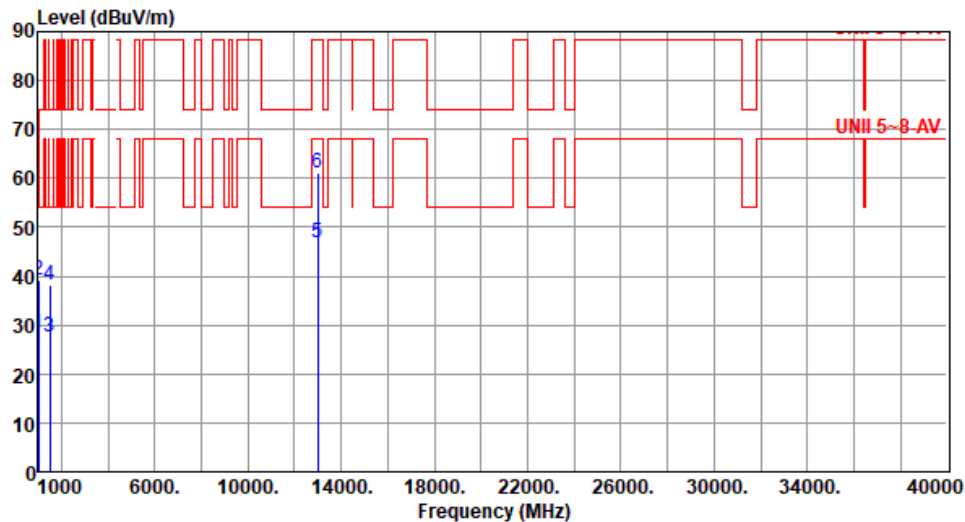

Modulation	be EHT160	Test Freq. (MHz)	6505																																																																							
Polarization	Horizontal																																																																									
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.21</td><td>54.00</td><td>-25.79</td><td>36.48</td><td>-8.27</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>1000.00</td><td>39.35</td><td>54.00</td><td>-14.65</td><td>47.62</td><td>-8.27</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>1500.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>34.96</td><td>-7.28</td><td>Average</td><td>126</td><td>123</td></tr><tr><td>4</td><td>1500.00</td><td>38.12</td><td>74.00</td><td>-35.88</td><td>45.40</td><td>-7.28</td><td>Peak</td><td>126</td><td>123</td></tr><tr><td>5</td><td>13010.00</td><td>46.72</td><td>68.20</td><td>-21.48</td><td>40.61</td><td>6.11</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>6</td><td>13010.00</td><td>61.12</td><td>88.20</td><td>-27.08</td><td>55.01</td><td>6.11</td><td>Peak</td><td>100</td><td>247</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	244	2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	244	3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	123	4	1500.00	38.12	74.00	-35.88	45.40	-7.28	Peak	126	123	5	13010.00	46.72	68.20	-21.48	40.61	6.11	Average	100	247	6	13010.00	61.12	88.20	-27.08	55.01	6.11	Peak	100	247			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	244																																																																	
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	244																																																																	
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	123																																																																	
4	1500.00	38.12	74.00	-35.88	45.40	-7.28	Peak	126	123																																																																	
5	13010.00	46.72	68.20	-21.48	40.61	6.11	Average	100	247																																																																	
6	13010.00	61.12	88.20	-27.08	55.01	6.11	Peak	100	247																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.81	54.00	-26.19	36.08	-8.27	Average	100	279
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	279
3	1500.00	29.67	54.00	-24.33	36.95	-7.28	Average	200	113
4	1500.00	39.53	74.00	-34.47	46.81	-7.28	Peak	200	113
5	13010.00	48.03	68.20	-20.17	41.92	6.11	Average	192	239
6	13010.00	63.47	88.20	-24.73	57.36	6.11	Peak	192	239
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>1500.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>34.95</td><td>-7.28</td><td>Average</td><td>127</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>38.59</td><td>74.00</td><td>-35.41</td><td>45.87</td><td>-7.28</td><td>Peak</td><td>127</td><td>118</td></tr><tr><td>5</td><td>13330.00</td><td>47.32</td><td>54.00</td><td>-6.68</td><td>41.68</td><td>5.64</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>6</td><td>13330.00</td><td>61.84</td><td>74.00</td><td>-12.16</td><td>56.20</td><td>5.64</td><td>Peak</td><td>100</td><td>193</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	253	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	253	3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	127	118	4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	127	118	5	13330.00	47.32	54.00	-6.68	41.68	5.64	Average	100	193	6	13330.00	61.84	74.00	-12.16	56.20	5.64	Peak	100	193
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	253																																																																
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	253																																																																
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	127	118																																																																
4	1500.00	38.59	74.00	-35.41	45.87	-7.28	Peak	127	118																																																																
5	13330.00	47.32	54.00	-6.68	41.68	5.64	Average	100	193																																																																
6	13330.00	61.84	74.00	-12.16	56.20	5.64	Peak	100	193																																																																



Modulation	be EHT160	Test Freq. (MHz)	6665						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.89	54.00	-26.11	36.16	-8.27	Average	100	279
2	1000.00	37.57	54.00	-16.43	45.84	-8.27	Peak	100	279
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	113
5	13330.00	50.92	54.00	-3.08	45.28	5.64	Average	205	250
6	13330.00	65.14	74.00	-8.86	59.50	5.64	Peak	205	250

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBUV/m)			



Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	278
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	197	106
4	1500.00	39.27	74.00	-34.73	46.55	-7.28	Peak	197	106
5	13650.00	52.23	68.20	-15.97	46.37	5.86	Average	169	270
6	13650.00	65.64	88.20	-22.56	59.78	5.86	Peak	169	270
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

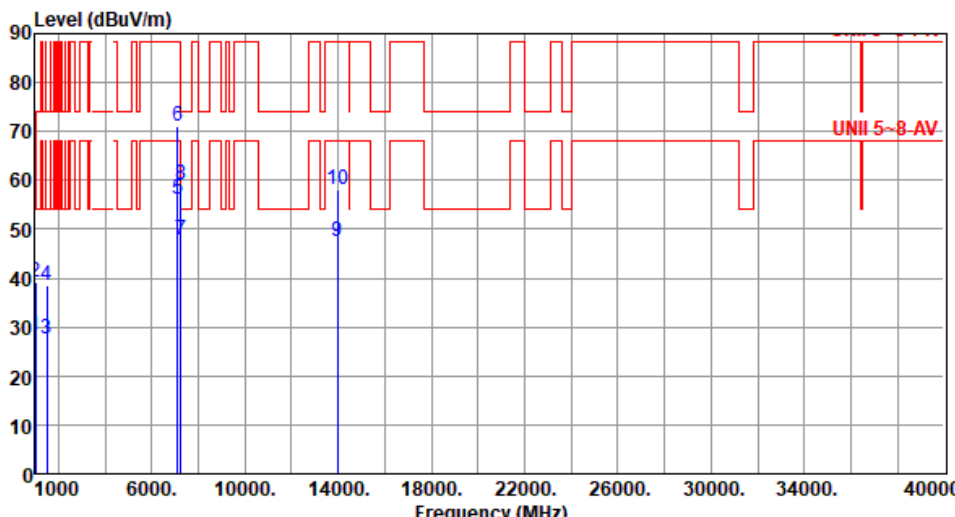


Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.34</td><td>54.00</td><td>-25.66</td><td>36.61</td><td>-8.27</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>2</td><td>1000.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>47.40</td><td>-8.27</td><td>Peak</td><td>100</td><td>240</td></tr><tr><td>3</td><td>1500.00</td><td>27.42</td><td>54.00</td><td>-26.58</td><td>34.70</td><td>-7.28</td><td>Average</td><td>120</td><td>117</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>120</td><td>117</td></tr><tr><td>5</td><td>7125.00</td><td>56.21</td><td>68.20</td><td>-11.99</td><td>51.35</td><td>4.86</td><td>Average</td><td>184</td><td>353</td></tr><tr><td>6</td><td>7125.00</td><td>71.16</td><td>88.20</td><td>-17.04</td><td>66.30</td><td>4.86</td><td>Peak</td><td>184</td><td>353</td></tr><tr><td>7</td><td>7250.00</td><td>47.89</td><td>54.00</td><td>-6.11</td><td>42.68</td><td>5.21</td><td>Average</td><td>184</td><td>353</td></tr><tr><td>8</td><td>7250.00</td><td>58.98</td><td>74.00</td><td>-15.02</td><td>53.77</td><td>5.21</td><td>Peak</td><td>184</td><td>353</td></tr><tr><td>9</td><td>13970.00</td><td>47.45</td><td>68.20</td><td>-20.75</td><td>40.79</td><td>6.66</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>10</td><td>13970.00</td><td>58.03</td><td>88.20</td><td>-30.17</td><td>51.37</td><td>6.66</td><td>Peak</td><td>100</td><td>202</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	240	2	1000.00	39.13	54.00	-14.87	47.40	-8.27	Peak	100	240	3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	120	117	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	120	117	5	7125.00	56.21	68.20	-11.99	51.35	4.86	Average	184	353	6	7125.00	71.16	88.20	-17.04	66.30	4.86	Peak	184	353	7	7250.00	47.89	54.00	-6.11	42.68	5.21	Average	184	353	8	7250.00	58.98	74.00	-15.02	53.77	5.21	Peak	184	353	9	13970.00	47.45	68.20	-20.75	40.79	6.66	Average	100	202	10	13970.00	58.03	88.20	-30.17	51.37	6.66	Peak	100	202
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	240																																																																																																								
2	1000.00	39.13	54.00	-14.87	47.40	-8.27	Peak	100	240																																																																																																								
3	1500.00	27.42	54.00	-26.58	34.70	-7.28	Average	120	117																																																																																																								
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	120	117																																																																																																								
5	7125.00	56.21	68.20	-11.99	51.35	4.86	Average	184	353																																																																																																								
6	7125.00	71.16	88.20	-17.04	66.30	4.86	Peak	184	353																																																																																																								
7	7250.00	47.89	54.00	-6.11	42.68	5.21	Average	184	353																																																																																																								
8	7250.00	58.98	74.00	-15.02	53.77	5.21	Peak	184	353																																																																																																								
9	13970.00	47.45	68.20	-20.75	40.79	6.66	Average	100	202																																																																																																								
10	13970.00	58.03	88.20	-30.17	51.37	6.66	Peak	100	202																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	




Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
The graph displays the emission level in dBuV/m across a frequency range from 1000 to 40000 MHz. The y-axis ranges from 0 to 90 dBuV/m. Several peaks are identified and numbered 1 through 10. A red horizontal line at approximately 68 dBuV/m is labeled 'UNII 5-8-AV', representing the emission limit for that frequency band.																																																																																																																	
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.68</td><td>54.00</td><td>-26.32</td><td>35.95</td><td>-8.27</td><td>Average</td><td>100</td><td>279</td></tr><tr><td>2</td><td>1000.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>45.78</td><td>-8.27</td><td>Peak</td><td>100</td><td>279</td></tr><tr><td>3</td><td>1500.00</td><td>29.69</td><td>54.00</td><td>-24.31</td><td>36.97</td><td>-7.28</td><td>Average</td><td>190</td><td>115</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>190</td><td>115</td></tr><tr><td>5</td><td>7125.00</td><td>54.55</td><td>68.20</td><td>-13.65</td><td>49.69</td><td>4.86</td><td>Average</td><td>188</td><td>208</td></tr><tr><td>6</td><td>7125.00</td><td>68.90</td><td>88.20</td><td>-19.30</td><td>64.04</td><td>4.86</td><td>Peak</td><td>188</td><td>208</td></tr><tr><td>7</td><td>7250.00</td><td>48.10</td><td>54.00</td><td>-5.90</td><td>42.89</td><td>5.21</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>7250.00</td><td>58.89</td><td>74.00</td><td>-15.11</td><td>53.68</td><td>5.21</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>9</td><td>13970.00</td><td>50.21</td><td>68.20</td><td>-17.99</td><td>43.55</td><td>6.66</td><td>Average</td><td>138</td><td>251</td></tr><tr><td>10</td><td>13970.00</td><td>63.19</td><td>88.20</td><td>-25.01</td><td>56.53</td><td>6.66</td><td>Peak</td><td>138</td><td>251</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279	2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279	3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	190	115	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	190	115	5	7125.00	54.55	68.20	-13.65	49.69	4.86	Average	188	208	6	7125.00	68.90	88.20	-19.30	64.04	4.86	Peak	188	208	7	7250.00	48.10	54.00	-5.90	42.89	5.21	Average	100	208	8	7250.00	58.89	74.00	-15.11	53.68	5.21	Peak	100	208	9	13970.00	50.21	68.20	-17.99	43.55	6.66	Average	138	251	10	13970.00	63.19	88.20	-25.01	56.53	6.66	Peak	138	251			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	279																																																																																																								
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	279																																																																																																								
3	1500.00	29.69	54.00	-24.31	36.97	-7.28	Average	190	115																																																																																																								
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	190	115																																																																																																								
5	7125.00	54.55	68.20	-13.65	49.69	4.86	Average	188	208																																																																																																								
6	7125.00	68.90	88.20	-19.30	64.04	4.86	Peak	188	208																																																																																																								
7	7250.00	48.10	54.00	-5.90	42.89	5.21	Average	100	208																																																																																																								
8	7250.00	58.89	74.00	-15.11	53.68	5.21	Peak	100	208																																																																																																								
9	13970.00	50.21	68.20	-17.99	43.55	6.66	Average	138	251																																																																																																								
10	13970.00	63.19	88.20	-25.01	56.53	6.66	Peak	138	251																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

Unwanted Emissions (Above 1GHz) for be EHT320

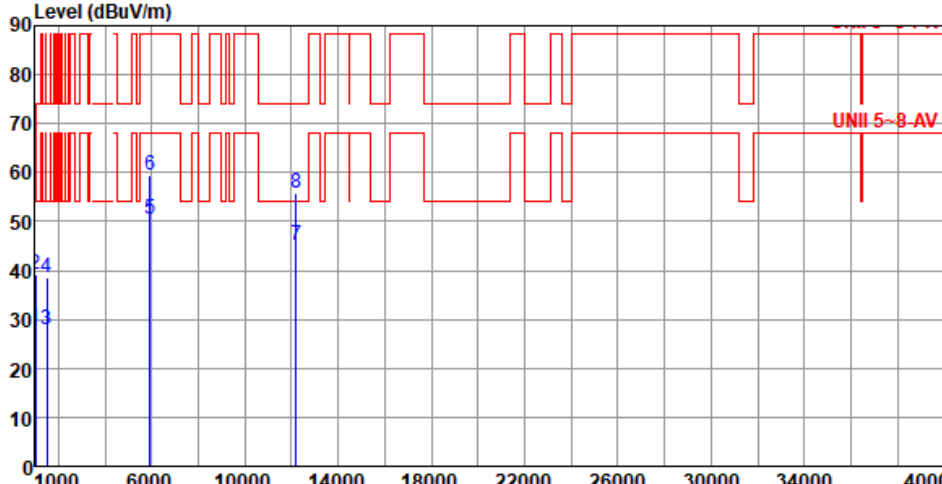Modulation	be EHT320	Test Freq. (MHz)	6105																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.27</td><td>54.00</td><td>-25.73</td><td>36.54</td><td>-8.27</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>2</td><td>1000.00</td><td>39.16</td><td>54.00</td><td>-14.84</td><td>47.43</td><td>-8.27</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>1500.00</td><td>27.98</td><td>54.00</td><td>-26.02</td><td>35.26</td><td>-7.28</td><td>Average</td><td>126</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.55</td><td>74.00</td><td>-35.45</td><td>45.83</td><td>-7.28</td><td>Peak</td><td>126</td><td>120</td></tr><tr><td>5</td><td>5925.00</td><td>50.46</td><td>68.20</td><td>-17.74</td><td>49.33</td><td>1.13</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>6</td><td>5925.00</td><td>59.46</td><td>88.20</td><td>-28.74</td><td>58.33</td><td>1.13</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>7</td><td>12210.00</td><td>45.10</td><td>54.00</td><td>-8.90</td><td>38.68</td><td>6.42</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>8</td><td>12210.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>49.24</td><td>6.42</td><td>Peak</td><td>100</td><td>218</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	242	2	1000.00	39.16	54.00	-14.84	47.43	-8.27	Peak	100	242	3	1500.00	27.98	54.00	-26.02	35.26	-7.28	Average	126	120	4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	126	120	5	5925.00	50.46	68.20	-17.74	49.33	1.13	Average	100	202	6	5925.00	59.46	88.20	-28.74	58.33	1.13	Peak	100	202	7	12210.00	45.10	54.00	-8.90	38.68	6.42	Average	100	218	8	12210.00	55.66	74.00	-18.34	49.24	6.42	Peak	100	218
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	242																																																																																				
2	1000.00	39.16	54.00	-14.84	47.43	-8.27	Peak	100	242																																																																																				
3	1500.00	27.98	54.00	-26.02	35.26	-7.28	Average	126	120																																																																																				
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	126	120																																																																																				
5	5925.00	50.46	68.20	-17.74	49.33	1.13	Average	100	202																																																																																				
6	5925.00	59.46	88.20	-28.74	58.33	1.13	Peak	100	202																																																																																				
7	12210.00	45.10	54.00	-8.90	38.68	6.42	Average	100	218																																																																																				
8	12210.00	55.66	74.00	-18.34	49.24	6.42	Peak	100	218																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

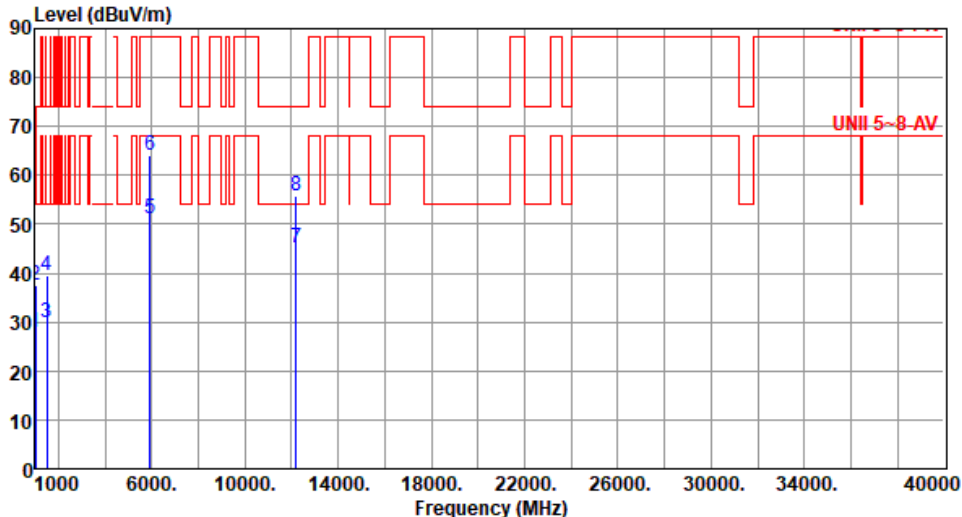

Modulation	be EHT320		Test Freq. (MHz)		6105																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.98</td><td>54.00</td><td>-26.02</td><td>36.25</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.86</td><td>54.00</td><td>-24.14</td><td>37.14</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.52</td><td>74.00</td><td>-34.48</td><td>46.80</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>5925.00</td><td>51.18</td><td>68.20</td><td>-17.02</td><td>50.05</td><td>1.13</td><td>Average</td><td>198</td><td>255</td></tr><tr><td>6</td><td>5925.00</td><td>64.05</td><td>88.20</td><td>-24.15</td><td>62.92</td><td>1.13</td><td>Peak</td><td>198</td><td>255</td></tr><tr><td>7</td><td>12210.00</td><td>45.13</td><td>54.00</td><td>-8.87</td><td>38.71</td><td>6.42</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>8</td><td>12210.00</td><td>55.79</td><td>74.00</td><td>-18.21</td><td>49.37</td><td>6.42</td><td>Peak</td><td>100</td><td>53</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1000.00	27.98	54.00	-26.02	36.25	-8.27	Average	100	278	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278	3	1500.00	29.86	54.00	-24.14	37.14	-7.28	Average	200	113	4	1500.00	39.52	74.00	-34.48	46.80	-7.28	Peak	200	113	5	5925.00	51.18	68.20	-17.02	50.05	1.13	Average	198	255	6	5925.00	64.05	88.20	-24.15	62.92	1.13	Peak	198	255	7	12210.00	45.13	54.00	-8.87	38.71	6.42	Average	100	53	8	12210.00	55.79	74.00	-18.21	49.37	6.42	Peak	100	53
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	1000.00	27.98	54.00	-26.02	36.25	-8.27	Average	100	278																																																																																																														
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278																																																																																																														
3	1500.00	29.86	54.00	-24.14	37.14	-7.28	Average	200	113																																																																																																														
4	1500.00	39.52	74.00	-34.48	46.80	-7.28	Peak	200	113																																																																																																														
5	5925.00	51.18	68.20	-17.02	50.05	1.13	Average	198	255																																																																																																														
6	5925.00	64.05	88.20	-24.15	62.92	1.13	Peak	198	255																																																																																																														
7	12210.00	45.13	54.00	-8.87	38.71	6.42	Average	100	53																																																																																																														
8	12210.00	55.79	74.00	-18.21	49.37	6.42	Peak	100	53																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																							



Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) UNII 5~8-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.49</td><td>54.00</td><td>-25.51</td><td>36.76</td><td>-8.27</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>1000.00</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>47.81</td><td>-8.27</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>1500.00</td><td>27.93</td><td>54.00</td><td>-26.07</td><td>35.21</td><td>-7.28</td><td>Average</td><td>126</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>45.80</td><td>-7.28</td><td>Peak</td><td>126</td><td>120</td></tr><tr><td>5</td><td>12530.00</td><td>46.42</td><td>54.00</td><td>-7.58</td><td>40.71</td><td>5.71</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>6</td><td>12530.00</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>50.52</td><td>5.71</td><td>Peak</td><td>100</td><td>221</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	243	2	1000.00	39.54	54.00	-14.46	47.81	-8.27	Peak	100	243	3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	126	120	4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	126	120	5	12530.00	46.42	54.00	-7.58	40.71	5.71	Average	100	221	6	12530.00	56.23	74.00	-17.77	50.52	5.71	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.49	54.00	-25.51	36.76	-8.27	Average	100	243																																																																
2	1000.00	39.54	54.00	-14.46	47.81	-8.27	Peak	100	243																																																																
3	1500.00	27.93	54.00	-26.07	35.21	-7.28	Average	126	120																																																																
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	126	120																																																																
5	12530.00	46.42	54.00	-7.58	40.71	5.71	Average	100	221																																																																
6	12530.00	56.23	74.00	-17.77	50.52	5.71	Peak	100	221																																																																




Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.87</td><td>54.00</td><td>-26.13</td><td>36.14</td><td>-8.27</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>2</td><td>1000.00</td><td>37.59</td><td>54.00</td><td>-16.41</td><td>45.86</td><td>-8.27</td><td>Peak</td><td>100</td><td>278</td></tr><tr><td>3</td><td>1500.00</td><td>29.95</td><td>54.00</td><td>-24.05</td><td>37.23</td><td>-7.28</td><td>Average</td><td>202</td><td>116</td></tr><tr><td>4</td><td>1500.00</td><td>39.64</td><td>74.00</td><td>-34.36</td><td>46.92</td><td>-7.28</td><td>Peak</td><td>202</td><td>116</td></tr><tr><td>5</td><td>12530.00</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>42.63</td><td>5.71</td><td>Average</td><td>150</td><td>259</td></tr><tr><td>6</td><td>12530.00</td><td>58.59</td><td>74.00</td><td>-15.41</td><td>52.88</td><td>5.71</td><td>Peak</td><td>150</td><td>259</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.87	54.00	-26.13	36.14	-8.27	Average	100	278	2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278	3	1500.00	29.95	54.00	-24.05	37.23	-7.28	Average	202	116	4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	202	116	5	12530.00	48.34	54.00	-5.66	42.63	5.71	Average	150	259	6	12530.00	58.59	74.00	-15.41	52.88	5.71	Peak	150	259
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	27.87	54.00	-26.13	36.14	-8.27	Average	100	278																																																																
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278																																																																
3	1500.00	29.95	54.00	-24.05	37.23	-7.28	Average	202	116																																																																
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	202	116																																																																
5	12530.00	48.34	54.00	-5.66	42.63	5.71	Average	150	259																																																																
6	12530.00	58.59	74.00	-15.41	52.88	5.71	Peak	150	259																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT320	Test Freq. (MHz)	6425																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>28.26</td><td>54.00</td><td>-25.74</td><td>36.53</td><td>-8.27</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>1000.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>47.64</td><td>-8.27</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>1500.00</td><td>27.64</td><td>54.00</td><td>-26.36</td><td>34.92</td><td>-7.28</td><td>Average</td><td>126</td><td>118</td></tr><tr><td>4</td><td>1500.00</td><td>37.51</td><td>74.00</td><td>-36.49</td><td>44.79</td><td>-7.28</td><td>Peak</td><td>126</td><td>118</td></tr><tr><td>5</td><td>12850.00</td><td>50.22</td><td>68.20</td><td>-17.98</td><td>44.05</td><td>6.17</td><td>Average</td><td>100</td><td>237</td></tr><tr><td>6</td><td>12850.00</td><td>61.89</td><td>88.20</td><td>-26.31</td><td>55.72</td><td>6.17</td><td>Peak</td><td>100</td><td>237</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	246	2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	246	3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	118	4	1500.00	37.51	74.00	-36.49	44.79	-7.28	Peak	126	118	5	12850.00	50.22	68.20	-17.98	44.05	6.17	Average	100	237	6	12850.00	61.89	88.20	-26.31	55.72	6.17	Peak	100	237
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	246																																																																
2	1000.00	39.37	54.00	-14.63	47.64	-8.27	Peak	100	246																																																																
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	118																																																																
4	1500.00	37.51	74.00	-36.49	44.79	-7.28	Peak	126	118																																																																
5	12850.00	50.22	68.20	-17.98	44.05	6.17	Average	100	237																																																																
6	12850.00	61.89	88.20	-26.31	55.72	6.17	Peak	100	237																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

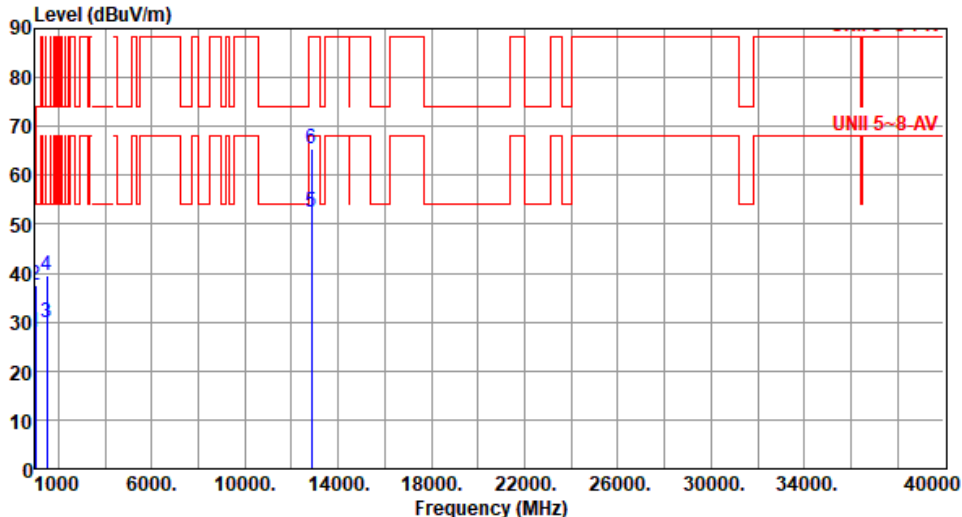


Modulation	be EHT320	Test Freq. (MHz)	6425																																																												
Polarization	Vertical																																																														
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																															
Level (dBUV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB reading dBuV dB/m cm deg <table><tr><td>1</td><td>1000.00</td><td>27.94</td><td>54.00</td><td>-26.06</td><td>36.21</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.78</td><td>54.00</td><td>-24.22</td><td>37.06</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>46.86</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>12850.00</td><td>52.46</td><td>68.20</td><td>-15.74</td><td>46.29</td><td>6.17</td><td>Average</td><td>112</td><td>238</td></tr><tr><td>6</td><td>12850.00</td><td>65.45</td><td>88.20</td><td>-22.75</td><td>59.28</td><td>6.17</td><td>Peak</td><td>112</td><td>238</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				1	1000.00	27.94	54.00	-26.06	36.21	-8.27	Average	100	286	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	286	3	1500.00	29.78	54.00	-24.22	37.06	-7.28	Average	200	113	4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113	5	12850.00	52.46	68.20	-15.74	46.29	6.17	Average	112	238	6	12850.00	65.45	88.20	-22.75	59.28	6.17	Peak	112	238
1	1000.00	27.94	54.00	-26.06	36.21	-8.27	Average	100	286																																																						
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	286																																																						
3	1500.00	29.78	54.00	-24.22	37.06	-7.28	Average	200	113																																																						
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	200	113																																																						
5	12850.00	52.46	68.20	-15.74	46.29	6.17	Average	112	238																																																						
6	12850.00	65.45	88.20	-22.75	59.28	6.17	Peak	112	238																																																						



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			

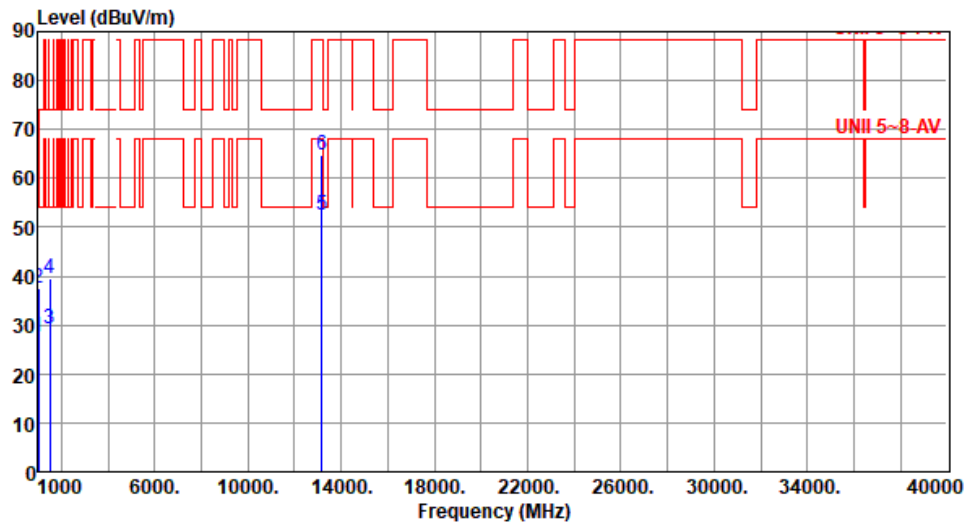

Modulation	be EHT320	Test Freq. (MHz)	6585						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	278
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	278
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	200	113
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	200	113
5	13170.00	52.34	68.20	-15.86	46.53	5.81	Average	133	273
6	13170.00	64.91	88.20	-23.29	59.10	5.81	Peak	133	273
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.37</td><td>54.00</td><td>-25.63</td><td>36.64</td><td>-8.27</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>1000.00</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>47.66</td><td>-8.27</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>1500.00</td><td>27.65</td><td>54.00</td><td>-26.35</td><td>34.93</td><td>-7.28</td><td>Average</td><td>123</td><td>117</td></tr><tr><td>4</td><td>1500.00</td><td>38.49</td><td>74.00</td><td>-35.51</td><td>45.77</td><td>-7.28</td><td>Peak</td><td>123</td><td>117</td></tr><tr><td>5</td><td>7125.00</td><td>60.53</td><td>68.20</td><td>-7.67</td><td>55.67</td><td>4.86</td><td>Average</td><td>143</td><td>353</td></tr><tr><td>6</td><td>7125.00</td><td>73.26</td><td>88.20</td><td>-14.94</td><td>68.40</td><td>4.86</td><td>Peak</td><td>143</td><td>353</td></tr><tr><td>7</td><td>7250.00</td><td>53.17</td><td>54.00</td><td>-0.83</td><td>47.96</td><td>5.21</td><td>Average</td><td>143</td><td>353</td></tr><tr><td>8</td><td>7250.00</td><td>64.18</td><td>74.00</td><td>-9.82</td><td>58.97</td><td>5.21</td><td>Peak</td><td>143</td><td>353</td></tr><tr><td>9</td><td>13490.00</td><td>45.40</td><td>68.20</td><td>-22.80</td><td>39.36</td><td>6.04</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>10</td><td>13490.00</td><td>57.32</td><td>88.20</td><td>-30.88</td><td>51.28</td><td>6.04</td><td>Peak</td><td>100</td><td>115</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	245	2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245	3	1500.00	27.65	54.00	-26.35	34.93	-7.28	Average	123	117	4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	123	117	5	7125.00	60.53	68.20	-7.67	55.67	4.86	Average	143	353	6	7125.00	73.26	88.20	-14.94	68.40	4.86	Peak	143	353	7	7250.00	53.17	54.00	-0.83	47.96	5.21	Average	143	353	8	7250.00	64.18	74.00	-9.82	58.97	5.21	Peak	143	353	9	13490.00	45.40	68.20	-22.80	39.36	6.04	Average	100	115	10	13490.00	57.32	88.20	-30.88	51.28	6.04	Peak	100	115
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.37	54.00	-25.63	36.64	-8.27	Average	100	245																																																																																																								
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245																																																																																																								
3	1500.00	27.65	54.00	-26.35	34.93	-7.28	Average	123	117																																																																																																								
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	123	117																																																																																																								
5	7125.00	60.53	68.20	-7.67	55.67	4.86	Average	143	353																																																																																																								
6	7125.00	73.26	88.20	-14.94	68.40	4.86	Peak	143	353																																																																																																								
7	7250.00	53.17	54.00	-0.83	47.96	5.21	Average	143	353																																																																																																								
8	7250.00	64.18	74.00	-9.82	58.97	5.21	Peak	143	353																																																																																																								
9	13490.00	45.40	68.20	-22.80	39.36	6.04	Average	100	115																																																																																																								
10	13490.00	57.32	88.20	-30.88	51.28	6.04	Peak	100	115																																																																																																								




Modulation	be EHT320	Test Freq. (MHz)	6745																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):25 Humidity(%):62																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>27.87</td><td>54.00</td><td>-26.13</td><td>36.14</td><td>-8.27</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1000.00</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>47.83</td><td>-8.27</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>1500.00</td><td>29.32</td><td>54.00</td><td>-24.68</td><td>36.60</td><td>-7.28</td><td>Average</td><td>200</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.51</td><td>74.00</td><td>-34.49</td><td>46.79</td><td>-7.28</td><td>Peak</td><td>200</td><td>113</td></tr><tr><td>5</td><td>7125.00</td><td>61.15</td><td>68.20</td><td>-7.05</td><td>56.29</td><td>4.86</td><td>Average</td><td>167</td><td>297</td></tr><tr><td>6</td><td>7125.00</td><td>73.91</td><td>88.20</td><td>-14.29</td><td>69.05</td><td>4.86</td><td>Peak</td><td>167</td><td>297</td></tr><tr><td>7</td><td>7250.00</td><td>53.06</td><td>54.00</td><td>-0.94</td><td>47.85</td><td>5.21</td><td>Average</td><td>167</td><td>297</td></tr><tr><td>8</td><td>7250.00</td><td>63.78</td><td>74.00</td><td>-10.22</td><td>58.57</td><td>5.21</td><td>Peak</td><td>167</td><td>297</td></tr><tr><td>9</td><td>13490.00</td><td>45.45</td><td>68.20</td><td>-22.75</td><td>39.41</td><td>6.04</td><td>Average</td><td>100</td><td>233</td></tr><tr><td>10</td><td>13490.00</td><td>57.43</td><td>88.20</td><td>-30.77</td><td>51.39</td><td>6.04</td><td>Peak</td><td>100</td><td>233</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.87	54.00	-26.13	36.14	-8.27	Average	100	286	2	1000.00	39.56	54.00	-14.44	47.83	-8.27	Peak	100	286	3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	200	113	4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	200	113	5	7125.00	61.15	68.20	-7.05	56.29	4.86	Average	167	297	6	7125.00	73.91	88.20	-14.29	69.05	4.86	Peak	167	297	7	7250.00	53.06	54.00	-0.94	47.85	5.21	Average	167	297	8	7250.00	63.78	74.00	-10.22	58.57	5.21	Peak	167	297	9	13490.00	45.45	68.20	-22.75	39.41	6.04	Average	100	233	10	13490.00	57.43	88.20	-30.77	51.39	6.04	Peak	100	233
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	27.87	54.00	-26.13	36.14	-8.27	Average	100	286																																																																																																								
2	1000.00	39.56	54.00	-14.44	47.83	-8.27	Peak	100	286																																																																																																								
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	200	113																																																																																																								
4	1500.00	39.51	74.00	-34.49	46.79	-7.28	Peak	200	113																																																																																																								
5	7125.00	61.15	68.20	-7.05	56.29	4.86	Average	167	297																																																																																																								
6	7125.00	73.91	88.20	-14.29	69.05	4.86	Peak	167	297																																																																																																								
7	7250.00	53.06	54.00	-0.94	47.85	5.21	Average	167	297																																																																																																								
8	7250.00	63.78	74.00	-10.22	58.57	5.21	Peak	167	297																																																																																																								
9	13490.00	45.45	68.20	-22.75	39.41	6.04	Average	100	233																																																																																																								
10	13490.00	57.43	88.20	-30.77	51.39	6.04	Peak	100	233																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

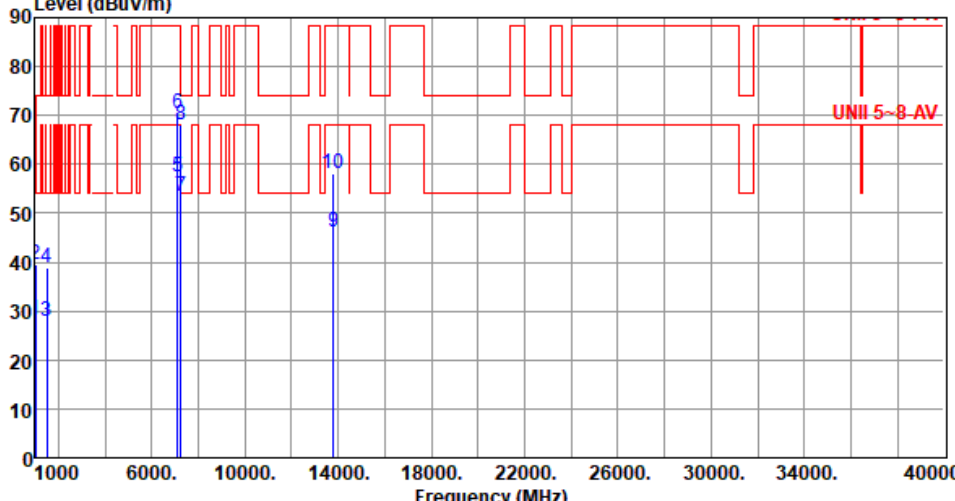

Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1000.00</td><td>28.29</td><td>54.00</td><td>-25.71</td><td>36.56</td><td>-8.27</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>1000.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>47.72</td><td>-8.27</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>1500.00</td><td>27.96</td><td>54.00</td><td>-26.04</td><td>35.24</td><td>-7.28</td><td>Average</td><td>123</td><td>120</td></tr><tr><td>4</td><td>1500.00</td><td>38.79</td><td>74.00</td><td>-35.21</td><td>46.07</td><td>-7.28</td><td>Peak</td><td>123</td><td>120</td></tr><tr><td>5</td><td>7125.00</td><td>57.39</td><td>68.20</td><td>-10.81</td><td>52.53</td><td>4.86</td><td>Average</td><td>130</td><td>343</td></tr><tr><td>6</td><td>7125.00</td><td>70.26</td><td>88.20</td><td>-17.94</td><td>65.40</td><td>4.86</td><td>Peak</td><td>130</td><td>343</td></tr><tr><td>7</td><td>7250.00</td><td>53.33</td><td>54.00</td><td>-0.67</td><td>48.12</td><td>5.21</td><td>Average</td><td>130</td><td>343</td></tr><tr><td>8</td><td>7250.00</td><td>68.15</td><td>74.00</td><td>-5.85</td><td>62.94</td><td>5.21</td><td>Peak</td><td>130</td><td>343</td></tr><tr><td>9</td><td>13810.00</td><td>46.10</td><td>68.20</td><td>-22.10</td><td>39.87</td><td>6.23</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>10</td><td>13810.00</td><td>58.23</td><td>88.20</td><td>-29.97</td><td>52.00</td><td>6.23</td><td>Peak</td><td>100</td><td>225</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251	2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251	3	1500.00	27.96	54.00	-26.04	35.24	-7.28	Average	123	120	4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	123	120	5	7125.00	57.39	68.20	-10.81	52.53	4.86	Average	130	343	6	7125.00	70.26	88.20	-17.94	65.40	4.86	Peak	130	343	7	7250.00	53.33	54.00	-0.67	48.12	5.21	Average	130	343	8	7250.00	68.15	74.00	-5.85	62.94	5.21	Peak	130	343	9	13810.00	46.10	68.20	-22.10	39.87	6.23	Average	100	225	10	13810.00	58.23	88.20	-29.97	52.00	6.23	Peak	100	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251																																																																																																								
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251																																																																																																								
3	1500.00	27.96	54.00	-26.04	35.24	-7.28	Average	123	120																																																																																																								
4	1500.00	38.79	74.00	-35.21	46.07	-7.28	Peak	123	120																																																																																																								
5	7125.00	57.39	68.20	-10.81	52.53	4.86	Average	130	343																																																																																																								
6	7125.00	70.26	88.20	-17.94	65.40	4.86	Peak	130	343																																																																																																								
7	7250.00	53.33	54.00	-0.67	48.12	5.21	Average	130	343																																																																																																								
8	7250.00	68.15	74.00	-5.85	62.94	5.21	Peak	130	343																																																																																																								
9	13810.00	46.10	68.20	-22.10	39.87	6.23	Average	100	225																																																																																																								
10	13810.00	58.23	88.20	-29.97	52.00	6.23	Peak	100	225																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

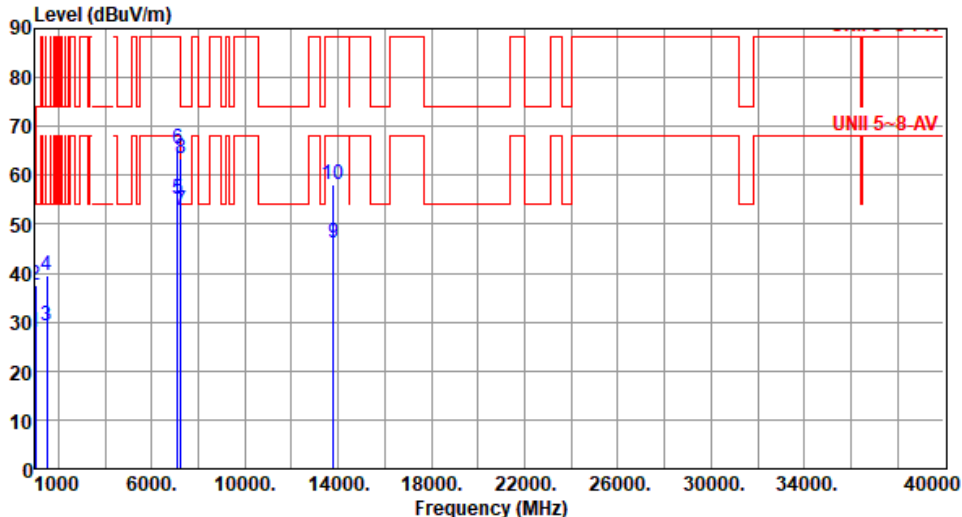

Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																																															
Polarization	Vertical																																																																																																																	
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																		
																																																																																																																		
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1000.00</td><td>27.78</td><td>54.00</td><td>-26.22</td><td>36.05</td><td>-8.27</td><td>Average</td><td>100</td><td>282</td></tr><tr><td>2</td><td>1000.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>45.82</td><td>-8.27</td><td>Peak</td><td>100</td><td>282</td></tr><tr><td>3</td><td>1500.00</td><td>29.37</td><td>54.00</td><td>-24.63</td><td>36.65</td><td>-7.28</td><td>Average</td><td>203</td><td>113</td></tr><tr><td>4</td><td>1500.00</td><td>39.67</td><td>74.00</td><td>-34.33</td><td>46.95</td><td>-7.28</td><td>Peak</td><td>203</td><td>113</td></tr><tr><td>5</td><td>7125.00</td><td>55.01</td><td>68.20</td><td>-13.19</td><td>50.15</td><td>4.86</td><td>Average</td><td>137</td><td>187</td></tr><tr><td>6</td><td>7125.00</td><td>65.34</td><td>88.20</td><td>-22.86</td><td>60.48</td><td>4.86</td><td>Peak</td><td>137</td><td>187</td></tr><tr><td>7</td><td>7250.00</td><td>52.78</td><td>54.00</td><td>-1.22</td><td>47.57</td><td>5.21</td><td>Average</td><td>137</td><td>187</td></tr><tr><td>8</td><td>7250.00</td><td>63.38</td><td>74.00</td><td>-10.62</td><td>58.17</td><td>5.21</td><td>Peak</td><td>137</td><td>187</td></tr><tr><td>9</td><td>13810.00</td><td>46.19</td><td>68.20</td><td>-22.01</td><td>39.96</td><td>6.23</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>10</td><td>13810.00</td><td>58.20</td><td>88.20</td><td>-30.00</td><td>51.97</td><td>6.23</td><td>Peak</td><td>100</td><td>334</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	282	2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	282	3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	203	113	4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	113	5	7125.00	55.01	68.20	-13.19	50.15	4.86	Average	137	187	6	7125.00	65.34	88.20	-22.86	60.48	4.86	Peak	137	187	7	7250.00	52.78	54.00	-1.22	47.57	5.21	Average	137	187	8	7250.00	63.38	74.00	-10.62	58.17	5.21	Peak	137	187	9	13810.00	46.19	68.20	-22.01	39.96	6.23	Average	100	334	10	13810.00	58.20	88.20	-30.00	51.97	6.23	Peak	100	334			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	282																																																																																																									
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	282																																																																																																									
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	203	113																																																																																																									
4	1500.00	39.67	74.00	-34.33	46.95	-7.28	Peak	203	113																																																																																																									
5	7125.00	55.01	68.20	-13.19	50.15	4.86	Average	137	187																																																																																																									
6	7125.00	65.34	88.20	-22.86	60.48	4.86	Peak	137	187																																																																																																									
7	7250.00	52.78	54.00	-1.22	47.57	5.21	Average	137	187																																																																																																									
8	7250.00	63.38	74.00	-10.62	58.17	5.21	Peak	137	187																																																																																																									
9	13810.00	46.19	68.20	-22.01	39.96	6.23	Average	100	334																																																																																																									
10	13810.00	58.20	88.20	-30.00	51.97	6.23	Peak	100	334																																																																																																									
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																		

Non-beamforming mode
Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.40751G	-12.51	6.4592G	-61.37	-52.51	-8.86	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.40661G	-12.67	6.3835G	-61.35	-52.67	-8.68	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.39001G	-8.56	6.502G	-57.41	-48.56	-8.85	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.42256G	-5.07	6.263G	-53.09	-45.07	-8.02	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.09933G	-0.88	6.2506G	-41.00	-38.17	-2.83	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.4121G	-2.31	6.8794G	-43.09	-42.31	-0.78	4
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.48059G	-11.51	6.5092G	-60.92	-51.51	-9.41	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.44249G	-11.79	6.4734G	-61.10	-51.79	-9.31	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.43381G	-7.92	6.505G	-57.16	-47.92	-9.24	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.49977G	-4.64	6.3446G	-53.39	-44.64	-8.75	4
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	6.88G	-11.76	6.9233G	-60.56	-51.76	-8.80	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.54249G	-12.24	6.505G	-60.93	-52.24	-8.69	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.87021G	-8.67	6.983G	-56.27	-48.67	-7.60	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.83023G	-5.50	6.989G	-53.00	-45.50	-7.50	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.59067G	-2.72	6.9098G	-49.07	-42.72	-6.35	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.5916G	-0.11	6.273G	-39.78	-38.94	-0.84	4
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	7.00871G	-12.01	6.9827G	-60.20	-52.01	-8.19	4
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	7.0125G	-12.74	6.9792G	-60.32	-52.74	-7.58	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	7.10158G	-8.39	7.0072G	-56.07	-48.39	-7.68	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.99263G	-5.27	7.2166G	-53.39	-45.27	-8.12	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	7.01057G	-1.48	6.777G	-42.59	-36.18	-6.41	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96029G	-11.19	5.9868G	-61.96	-51.19	-10.77	1
5955MHz	Pass	5.95G	-11.36	5.924G	-62.11	-51.36	-10.75	2
5955MHz	Pass	5.9572G	-10.90	5.9885G	-62.24	-50.90	-11.34	3
5955MHz	Pass	5.9575G	-10.96	5.9872G	-61.82	-50.96	-10.86	4
6175MHz	Pass	6.1728G	-11.40	6.2079G	-61.98	-51.40	-10.58	1
6175MHz	Pass	6.1775G	-11.68	6.2213G	-61.92	-51.68	-10.24	2
6175MHz	Pass	6.18G	-11.29	6.2084G	-61.95	-51.29	-10.66	3
6175MHz	Pass	6.1769G	-11.45	6.2059G	-61.91	-51.45	-10.46	4
6415MHz	Pass	6.4175G	-11.14	6.4456G	-61.41	-51.14	-10.27	1
6415MHz	Pass	6.4128G	-11.66	6.4547G	-61.45	-51.66	-9.79	2
6415MHz	Pass	6.40841G	-11.68	6.4506G	-61.47	-51.68	-9.79	3
6415MHz	Pass	6.40751G	-12.51	6.4592G	-61.37	-52.51	-8.86	4
6435MHz	Pass	6.44G	-11.02	6.4692G	-61.27	-51.02	-10.25	1
6435MHz	Pass	6.4306G	-11.10	6.4683G	-61.13	-51.10	-10.03	2
6435MHz	Pass	6.4362G	-10.96	6.4696G	-61.27	-50.96	-10.31	3
6435MHz	Pass	6.4325G	-11.68	6.4827G	-61.41	-51.68	-9.73	4
6475MHz	Pass	6.4775G	-10.82	6.5067G	-61.20	-50.82	-10.38	1
6475MHz	Pass	6.48249G	-10.76	6.5059G	-61.14	-50.76	-10.38	2
6475MHz	Pass	6.46751G	-10.52	6.5062G	-60.94	-50.52	-10.42	3
6475MHz	Pass	6.48059G	-11.51	6.5092G	-60.92	-51.51	-9.41	4
6515MHz	Pass	6.5187G	-10.97	6.4808G	-61.34	-50.97	-10.37	1
6515MHz	Pass	6.50781G	-10.92	6.4848G	-61.23	-50.92	-10.31	2
6515MHz	Pass	6.52249G	-10.40	6.4824G	-61.26	-50.40	-10.86	3
6515MHz	Pass	6.5125G	-10.99	6.4851G	-61.04	-50.87	-10.17	4
6535MHz	Pass	6.52811G	-12.21	6.5026G	-61.16	-52.21	-8.95	1
6535MHz	Pass	6.5375G	-11.90	6.5006G	-61.25	-51.90	-9.35	2
6535MHz	Pass	6.5375G	-11.50	6.5046G	-61.10	-51.50	-9.60	3
6535MHz	Pass	6.54249G	-12.05	6.4949G	-61.18	-52.05	-9.13	4
6715MHz	Pass	6.71G	-11.66	6.7561G	-62.17	-51.66	-10.51	1
6715MHz	Pass	6.7128G	-11.71	6.7609G	-62.24	-51.71	-10.53	2
6715MHz	Pass	6.7175G	-11.35	6.7459G	-62.23	-51.35	-10.88	3
6715MHz	Pass	6.7125G	-12.21	6.7539G	-62.11	-52.21	-9.90	4
6855MHz	Pass	6.8597G	-10.27	6.8902G	-60.74	-50.27	-10.47	1
6855MHz	Pass	6.84871G	-10.58	6.8922G	-60.71	-50.58	-10.13	2
6855MHz	Pass	6.8575G	-11.23	6.8871G	-60.72	-51.23	-9.49	3
6855MHz	Pass	6.8562G	-11.52	6.9032G	-60.77	-51.52	-9.25	4
6875MHz Straddle 6.525-6.875GHz	Pass	6.88119G	-10.55	6.9058G	-60.61	-50.55	-10.06	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8706G	-11.16	6.919G	-60.63	-51.16	-9.47	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8775G	-11.40	6.9194G	-60.61	-51.40	-9.21	3
6875MHz Straddle 6.525-6.875GHz	Pass	6.88G	-11.76	6.9233G	-60.56	-51.76	-8.80	4
6895MHz	Pass	6.9G	-10.51	6.9415G	-60.52	-50.51	-10.01	1

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.8912G	-10.99	6.9315G	-60.50	-50.99	-9.51	2
6895MHz	Pass	6.8975G	-11.55	6.9341G	-60.52	-51.55	-8.97	3
6895MHz	Pass	6.8931G	-11.71	6.9384G	-60.42	-51.71	-8.71	4
7015MHz	Pass	7.02189G	-11.54	6.9781G	-60.22	-51.54	-8.68	1
7015MHz	Pass	7.019G	-11.85	6.9801G	-60.23	-51.85	-8.38	2
7015MHz	Pass	7.02119G	-11.26	6.9819G	-60.18	-51.26	-8.92	3
7015MHz	Pass	7.00871G	-12.01	6.9827G	-60.20	-52.01	-8.19	4
7095MHz	Pass	7.1G	-11.75	7.131G	-60.93	-51.75	-9.18	1
7095MHz	Pass	7.10059G	-11.97	7.1422G	-61.02	-51.97	-9.05	2
7095MHz	Pass	7.08841G	-11.76	7.1371G	-60.99	-51.76	-9.23	3
7095MHz	Pass	7.0975G	-12.29	7.1418G	-61.02	-52.29	-8.73	4
7115MHz	Pass	7.12029G	-11.12	7.1582G	-60.75	-51.12	-9.63	1
7115MHz	Pass	7.1112G	-11.66	7.1628G	-60.72	-51.66	-9.06	2
7115MHz	Pass	7.12G	-11.47	7.1632G	-60.79	-51.47	-9.32	3
7115MHz	Pass	7.1175G	-12.11	7.1549G	-60.77	-52.11	-8.66	4
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.96299G	-11.70	5.9868G	-61.68	-51.70	-9.98	1
5955MHz	Pass	5.96139G	-11.72	5.9858G	-62.12	-51.72	-10.40	2
5955MHz	Pass	5.96009G	-11.42	5.9913G	-61.97	-51.42	-10.55	3
5955MHz	Pass	5.96289G	-11.47	5.9885G	-61.94	-51.47	-10.47	4
6175MHz	Pass	6.1714G	-11.67	6.2101G	-61.85	-51.67	-10.18	1
6175MHz	Pass	6.16871G	-11.93	6.2181G	-61.93	-51.93	-10.00	2
6175MHz	Pass	6.16891G	-11.10	6.2057G	-61.87	-51.10	-10.77	3
6175MHz	Pass	6.17G	-11.48	6.2146G	-61.77	-51.48	-10.29	4
6415MHz	Pass	6.4175G	-11.28	6.383G	-61.24	-51.28	-9.96	1
6415MHz	Pass	6.42409G	-11.66	6.4551G	-61.40	-51.66	-9.74	2
6415MHz	Pass	6.42249G	-11.77	6.461G	-61.31	-51.77	-9.54	3
6415MHz	Pass	6.40661G	-12.67	6.3835G	-61.35	-52.67	-8.68	4
6435MHz	Pass	6.42991G	-11.33	6.4749G	-61.36	-51.33	-10.03	1
6435MHz	Pass	6.42751G	-11.31	6.4002G	-61.36	-51.31	-10.05	2
6435MHz	Pass	6.44229G	-10.91	6.4661G	-61.13	-50.91	-10.22	3
6435MHz	Pass	6.44249G	-11.79	6.4734G	-61.10	-51.79	-9.31	4
6475MHz	Pass	6.46811G	-11.25	6.5099G	-61.19	-51.25	-9.94	1
6475MHz	Pass	6.46701G	-10.91	6.5059G	-61.12	-50.91	-10.21	2
6475MHz	Pass	6.48089G	-10.46	6.5094G	-61.12	-50.46	-10.66	3
6475MHz	Pass	6.48019G	-11.65	6.5072G	-61.07	-51.65	-9.42	4
6515MHz	Pass	6.5183G	-11.64	6.4798G	-61.20	-51.64	-9.56	1
6515MHz	Pass	6.50641G	-11.40	6.4849G	-61.22	-51.40	-9.82	2
6515MHz	Pass	6.50991G	-10.82	6.4766G	-61.20	-50.82	-10.38	3
6515MHz	Pass	6.5138G	-11.58	6.4763G	-60.99	-51.58	-9.41	4
6535MHz	Pass	6.52931G	-12.24	6.5044G	-61.16	-52.24	-8.92	1
6535MHz	Pass	6.52811G	-12.03	6.4973G	-61.19	-52.03	-9.16	2