





Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-65.04	-67.785	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-67.00	-69.99	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-66.11	-68.551	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-66.19	-68.838	V	V	V	V	V	V	V	V	V	V	100	90

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-66.26	-69.005	V	V	V	V	V	V	V	X	V	V	90	90
			6100	-67.1	-69.845	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-67.62	-70.365	V	V	V	V	V	V	V	V	V	V	100	90
	6 / 7	6585	6430	-69.01	-71.451	V	V	V	V	V	V	V	V	V	V	100	90
			6580	-68.65	-71.091	V	V	V	X	V	V	V	V	V	V	90	90
			6740	-67.96	-70.401	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-69.43	-71.871	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-69.15	-71.591	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-68.91	-71.351	V	V	V	V	V	V	V	V	V	V	100	90


Test plot of Incumbent signal

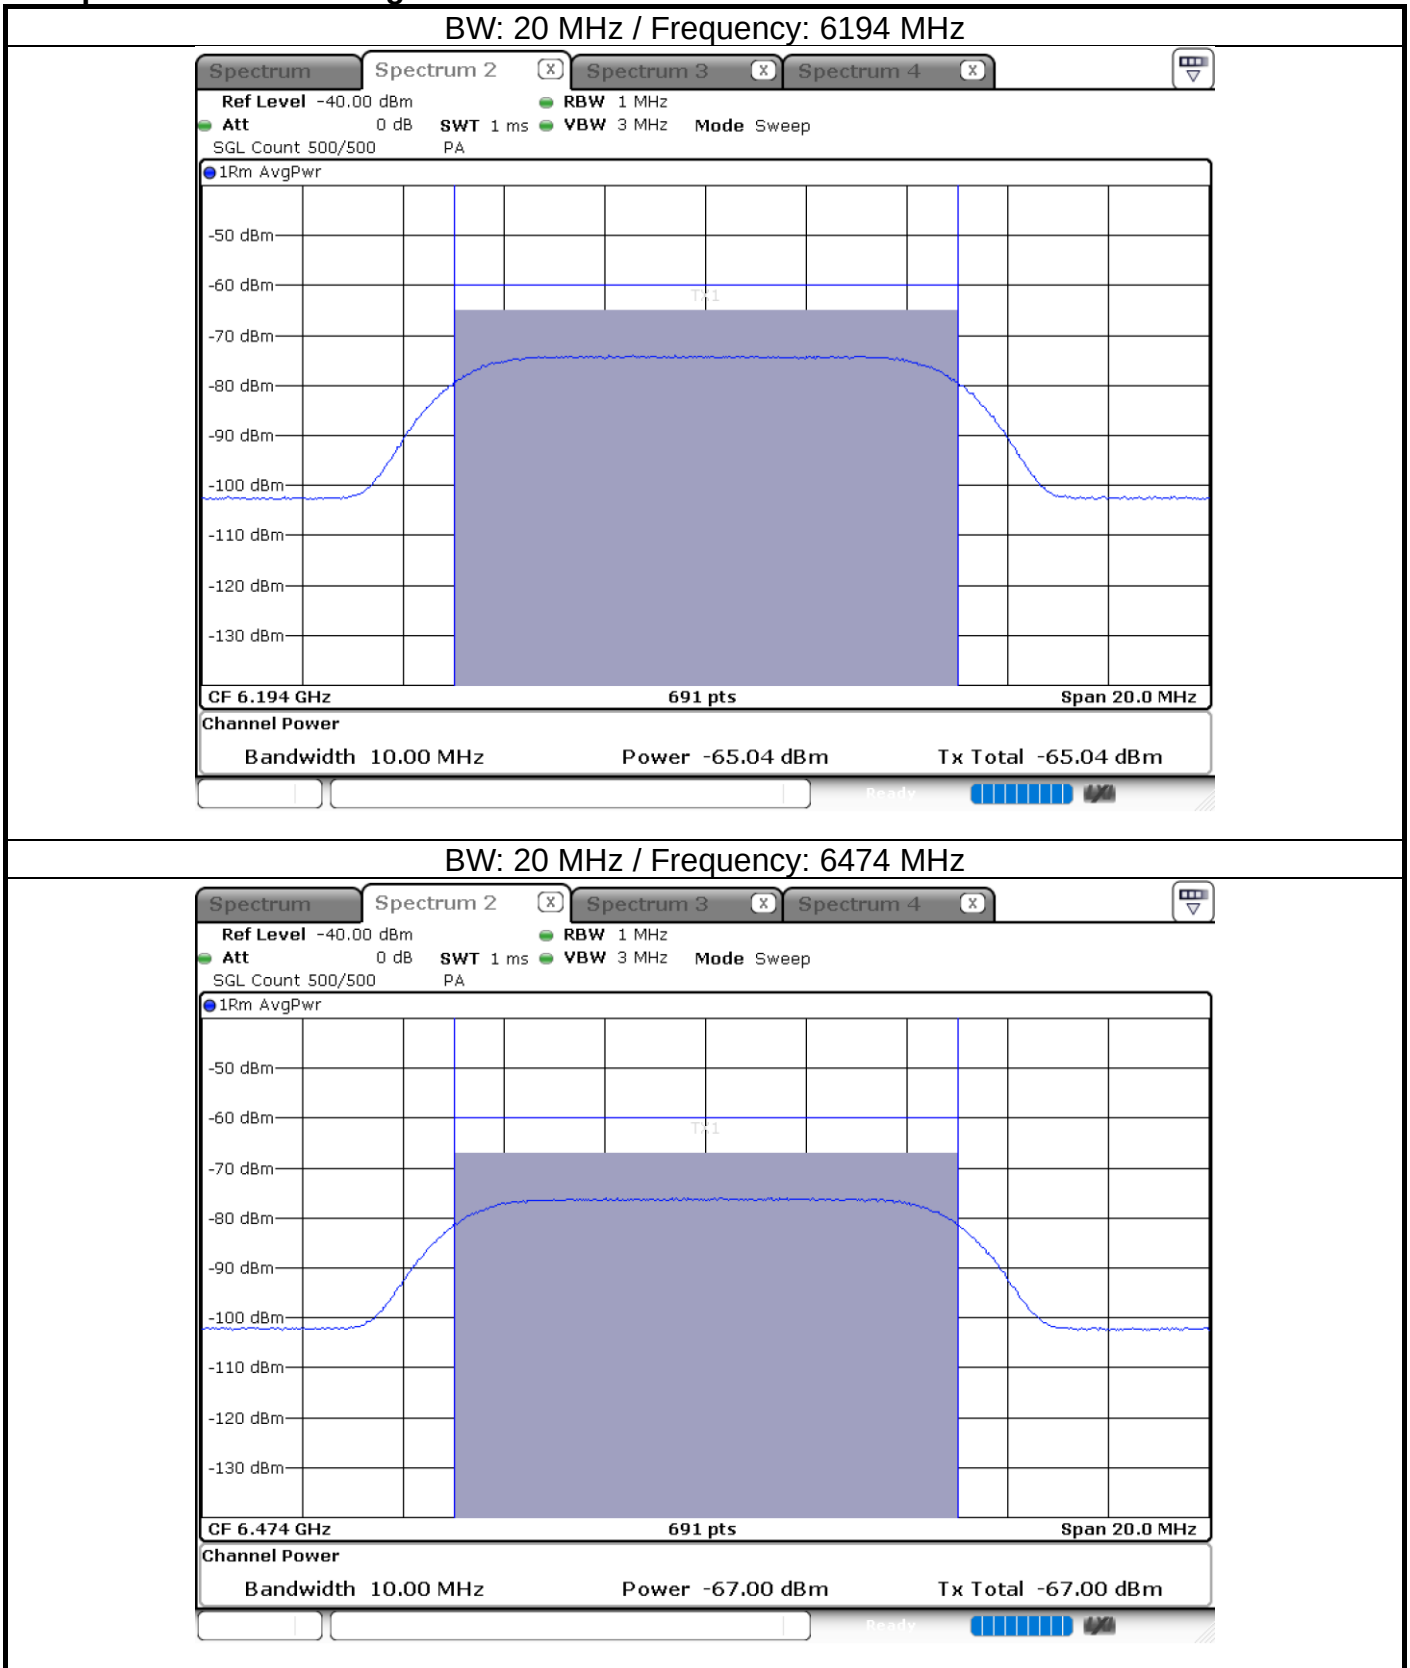

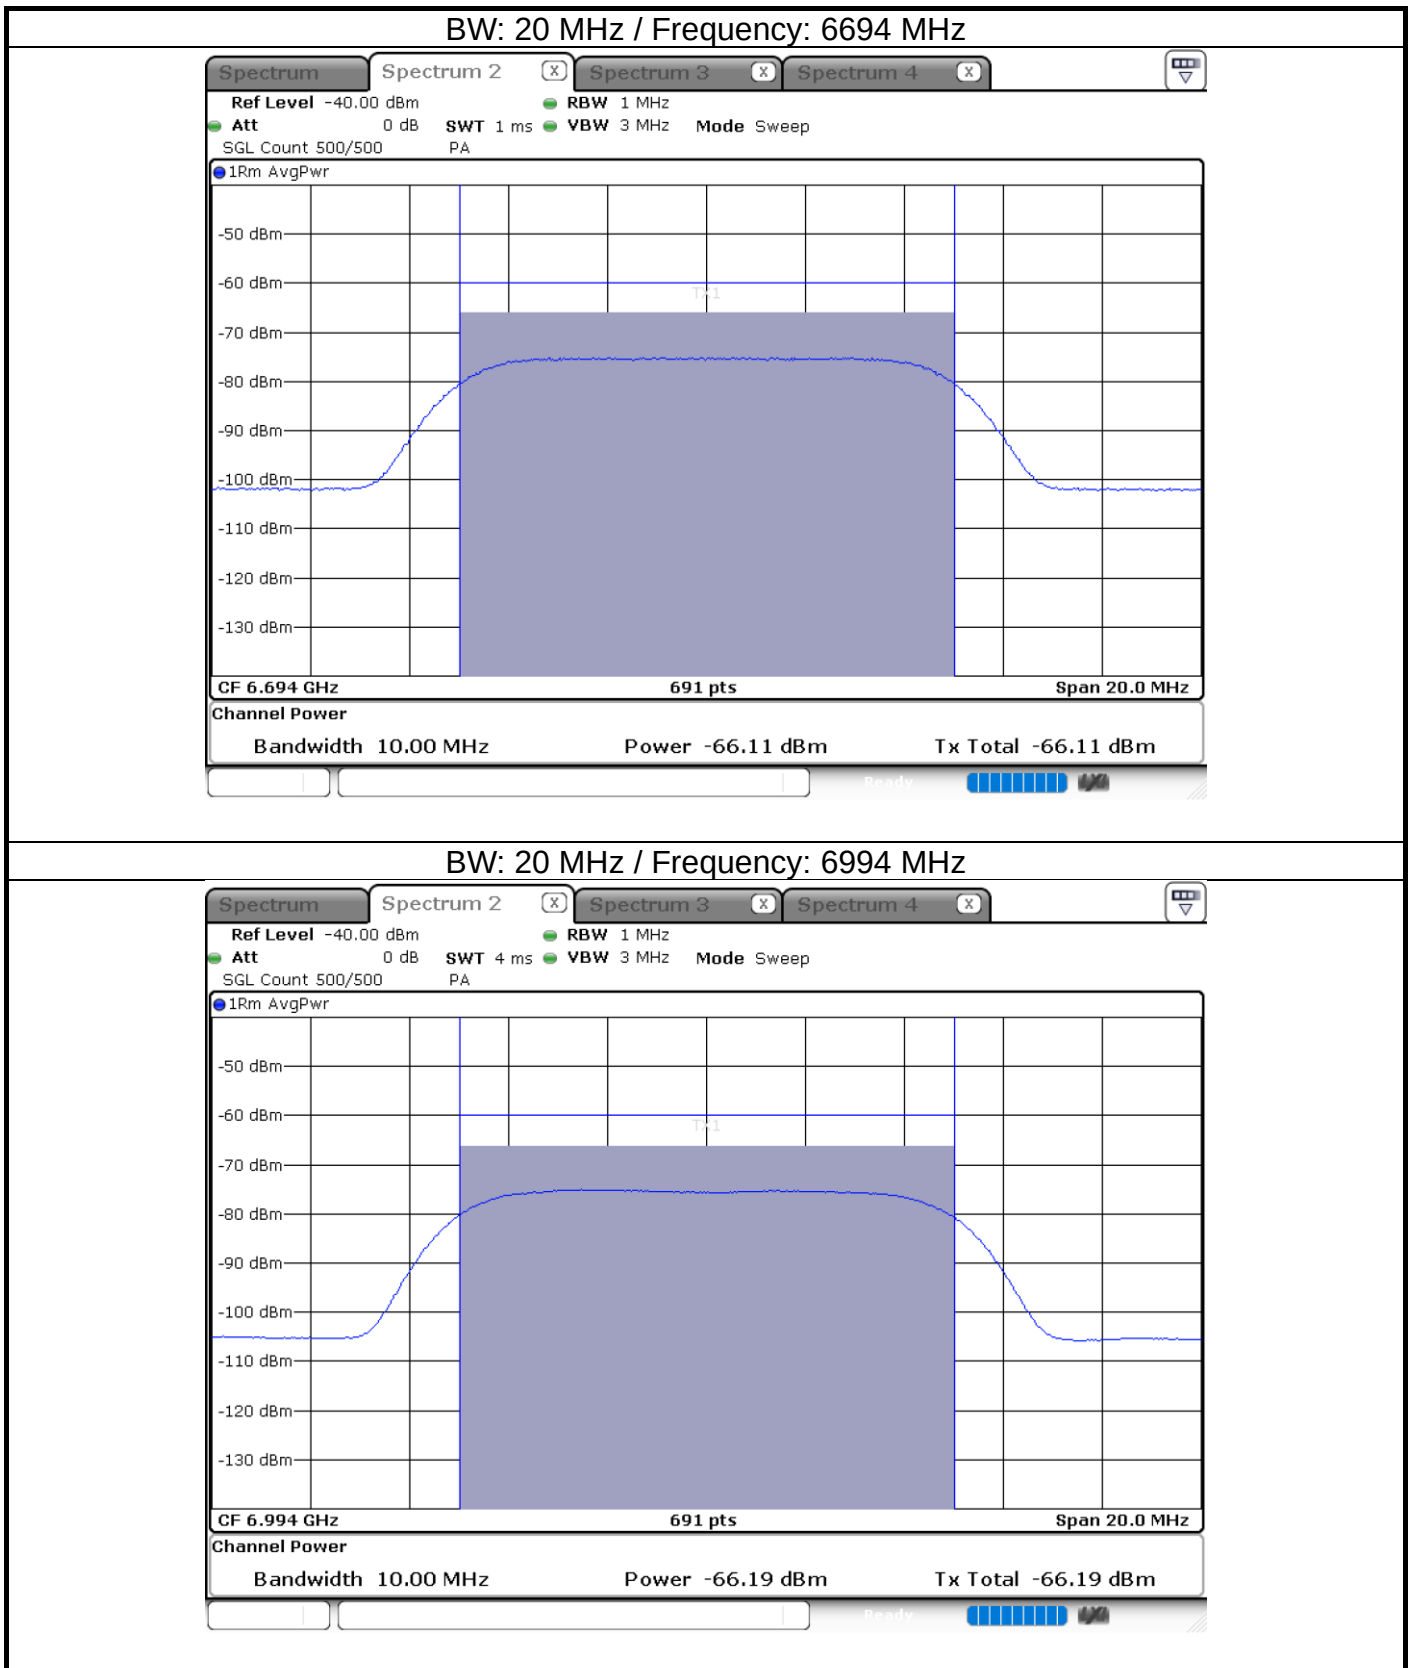


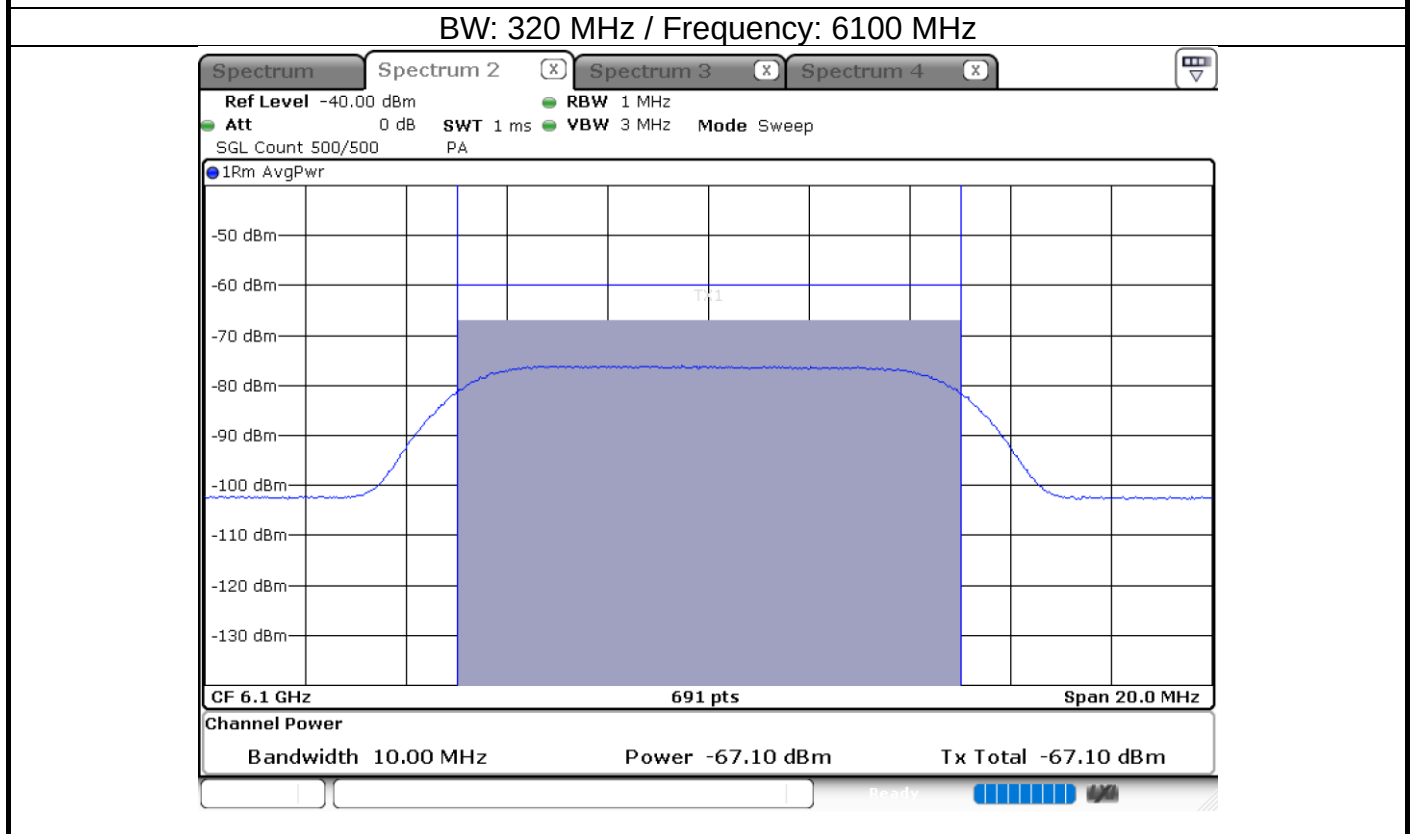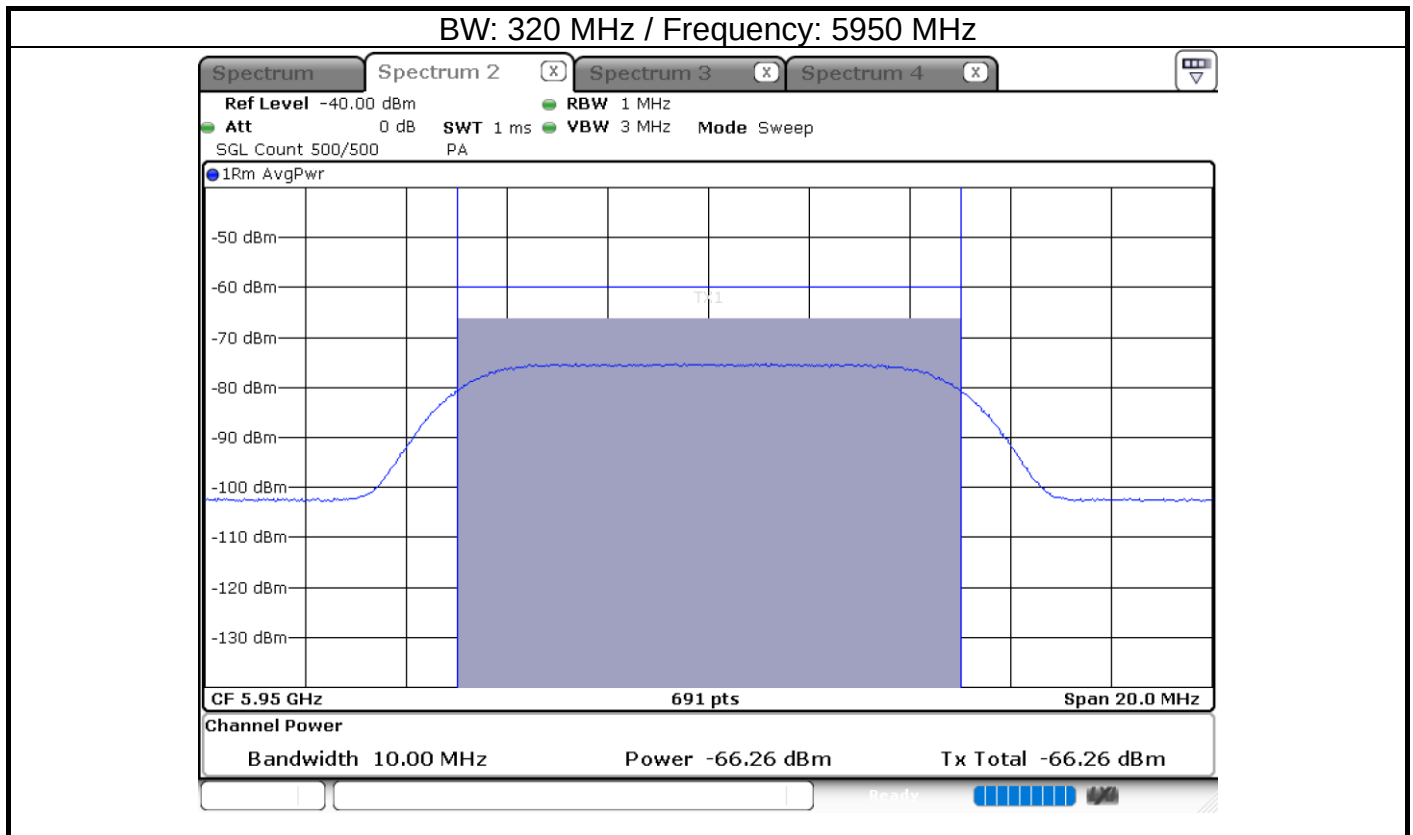


BW: 320 MHz / Frequency: 6260 MHz

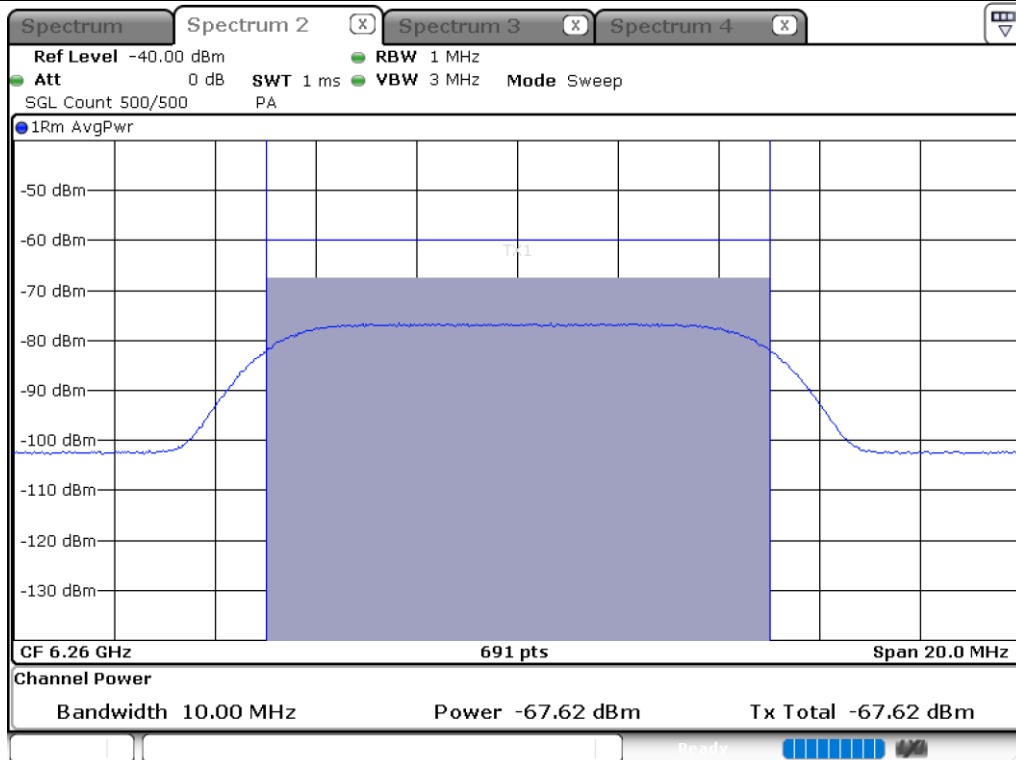


BW: 320 MHz / Frequency: 6430 MHz

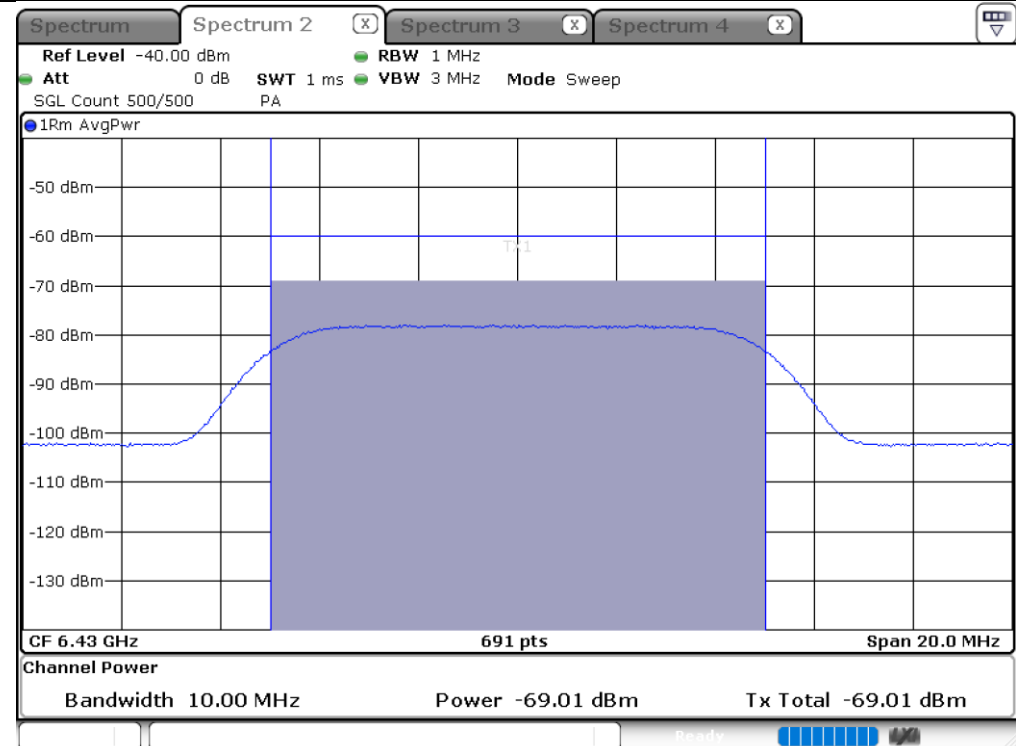


BW: 320 MHz / Frequency: 6580 MHz

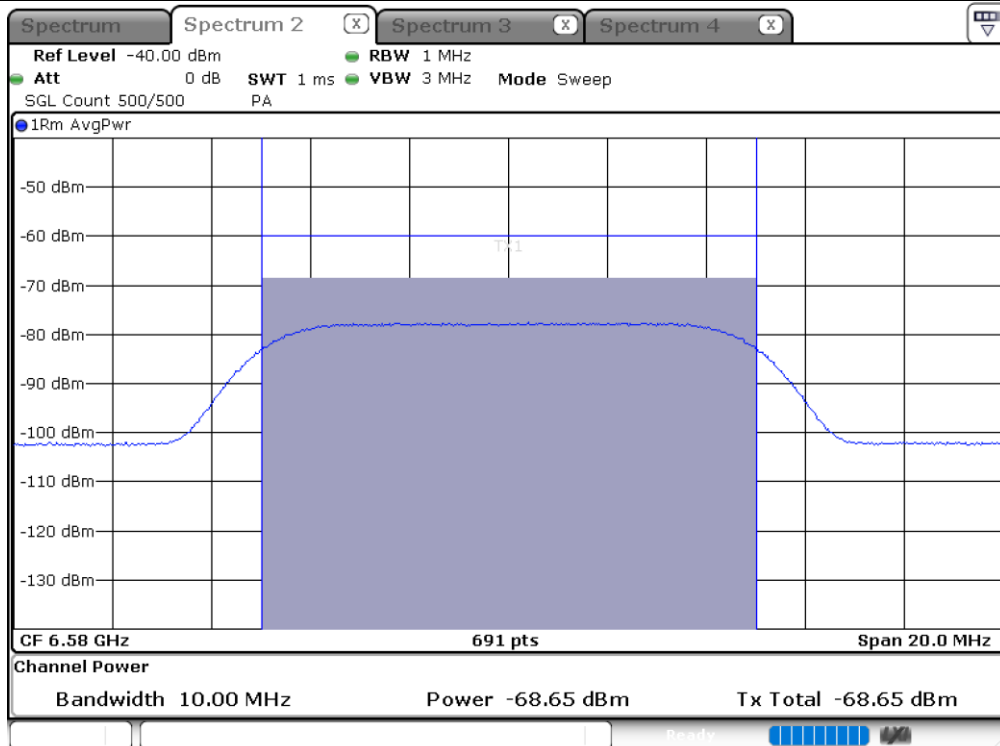


BW: 320 MHz / Frequency: 6740 MHz

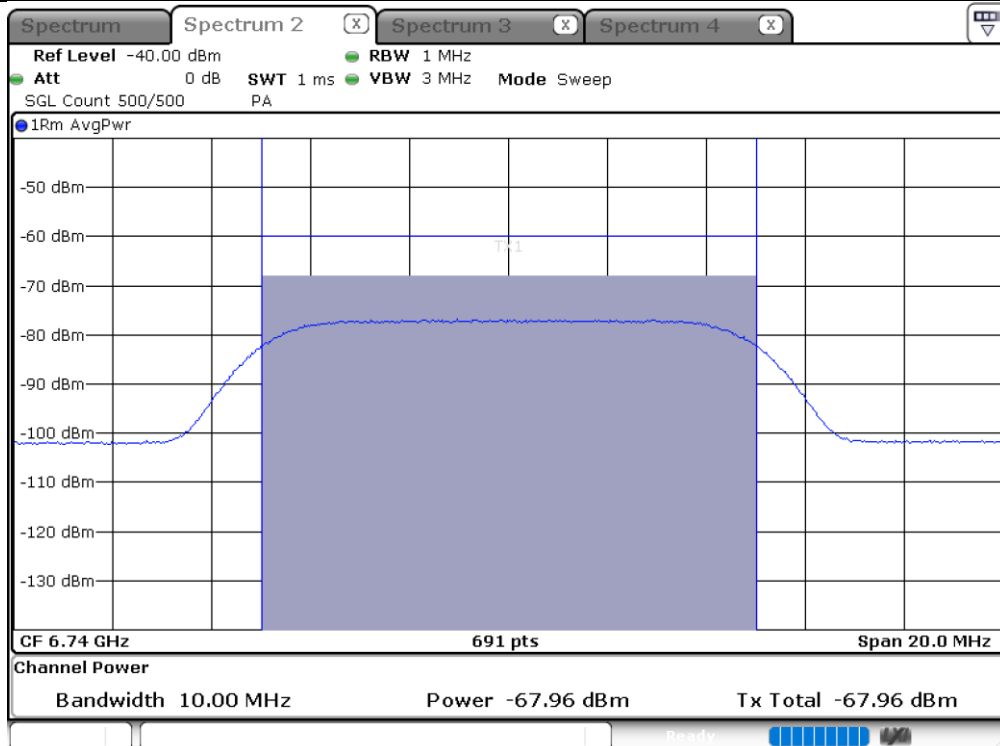


BW: 320 MHz / Frequency: 6750 MHz


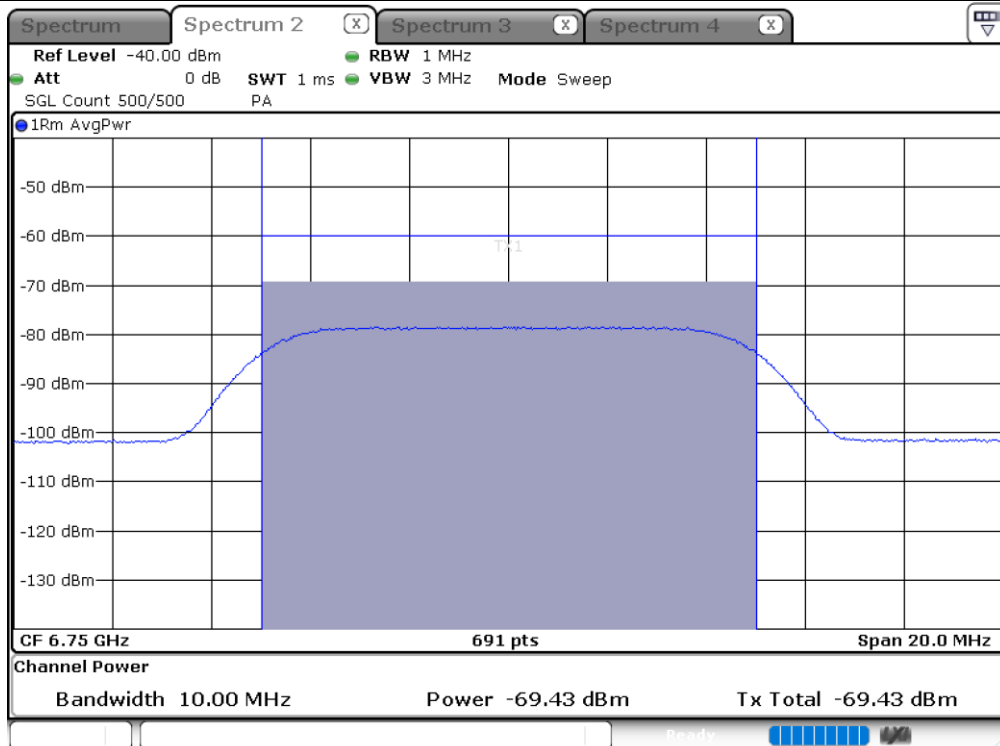



BW: 320 MHz / Frequency: 6900 MHz

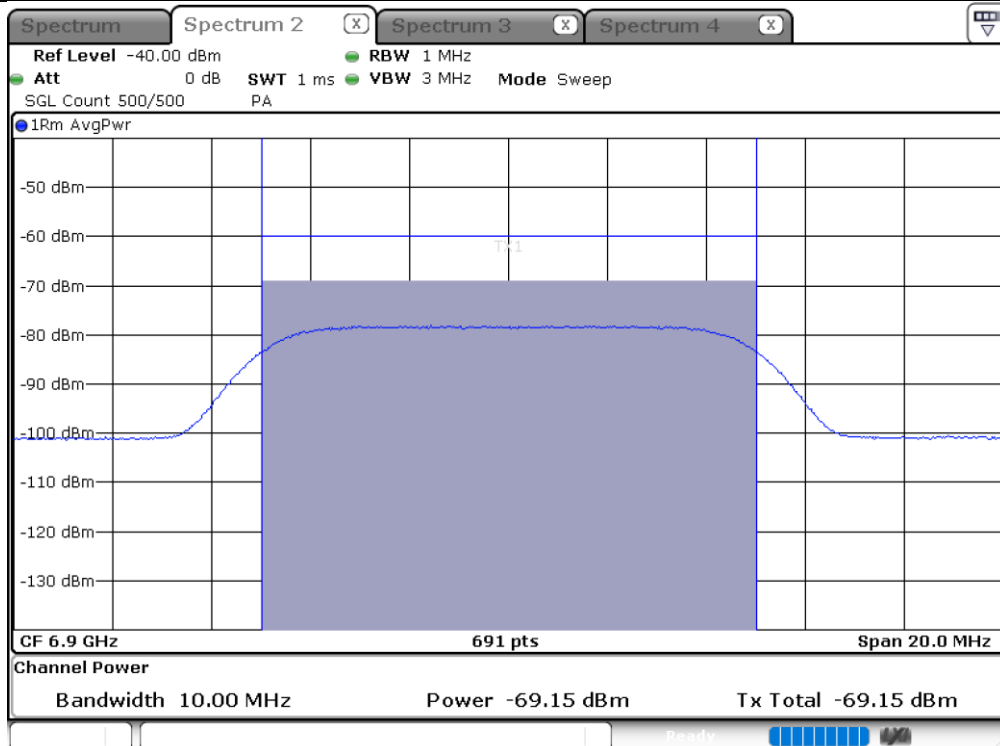


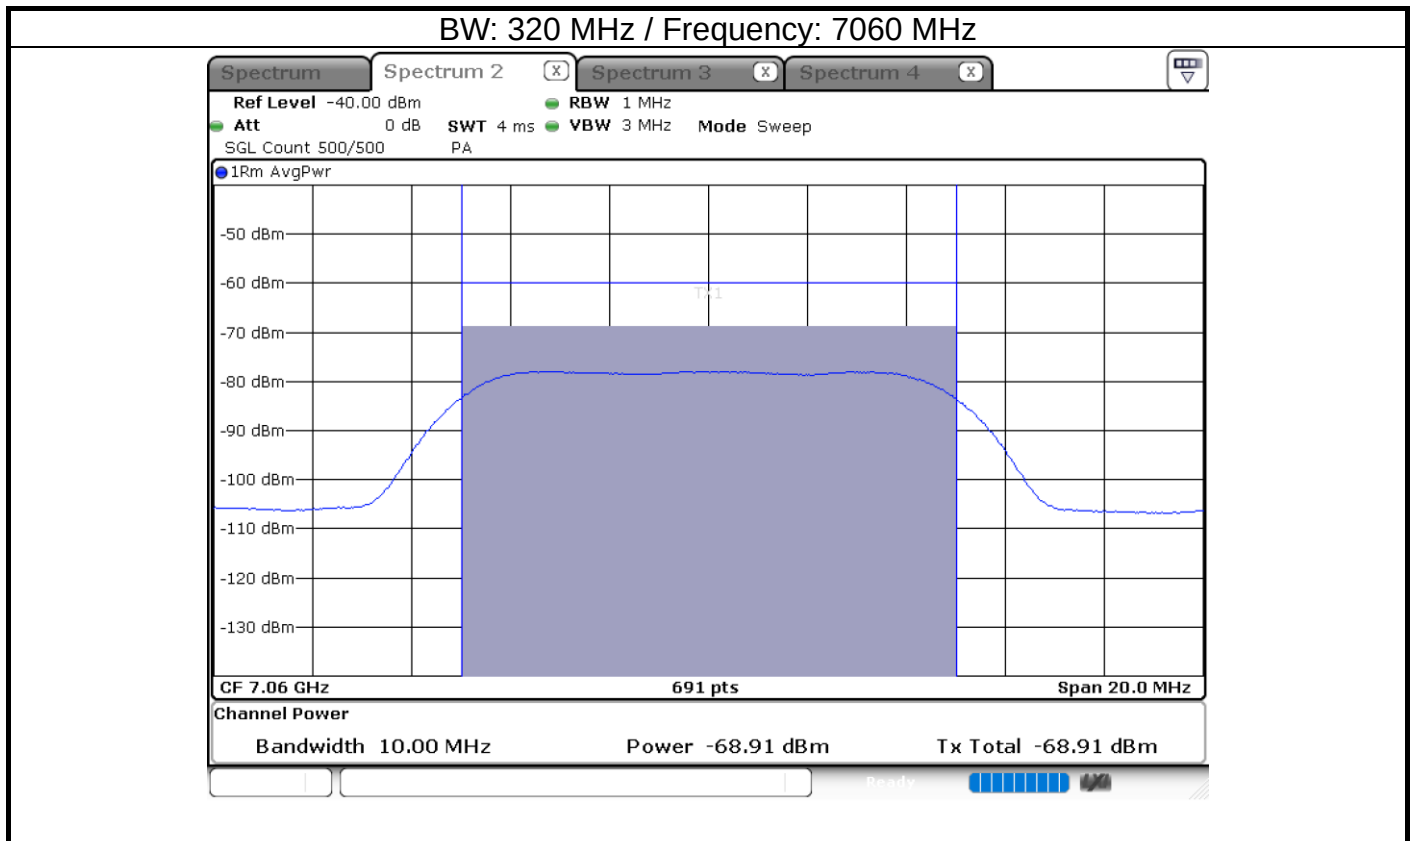


Test plot of Contention Based Protocol EUT Normal transmission

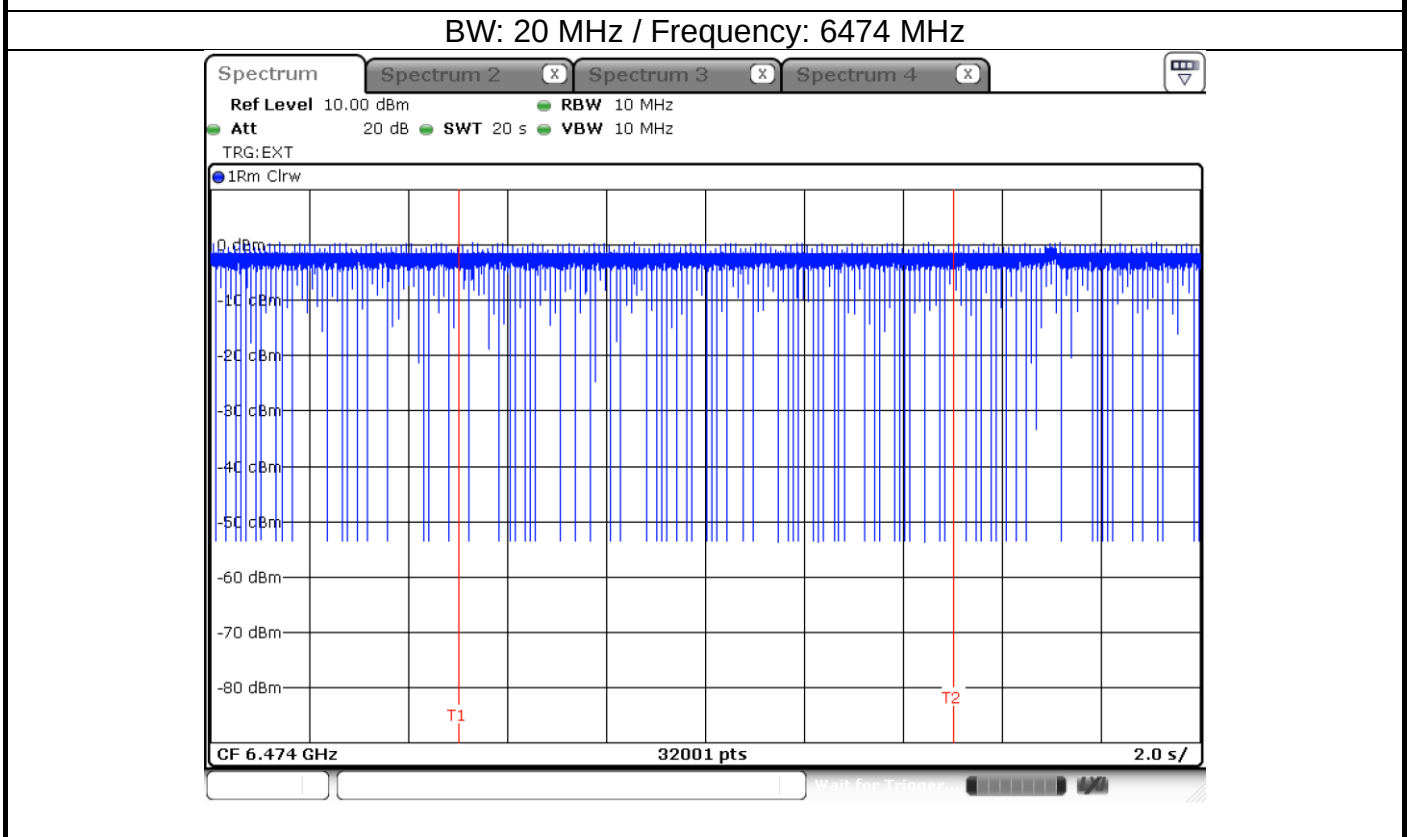
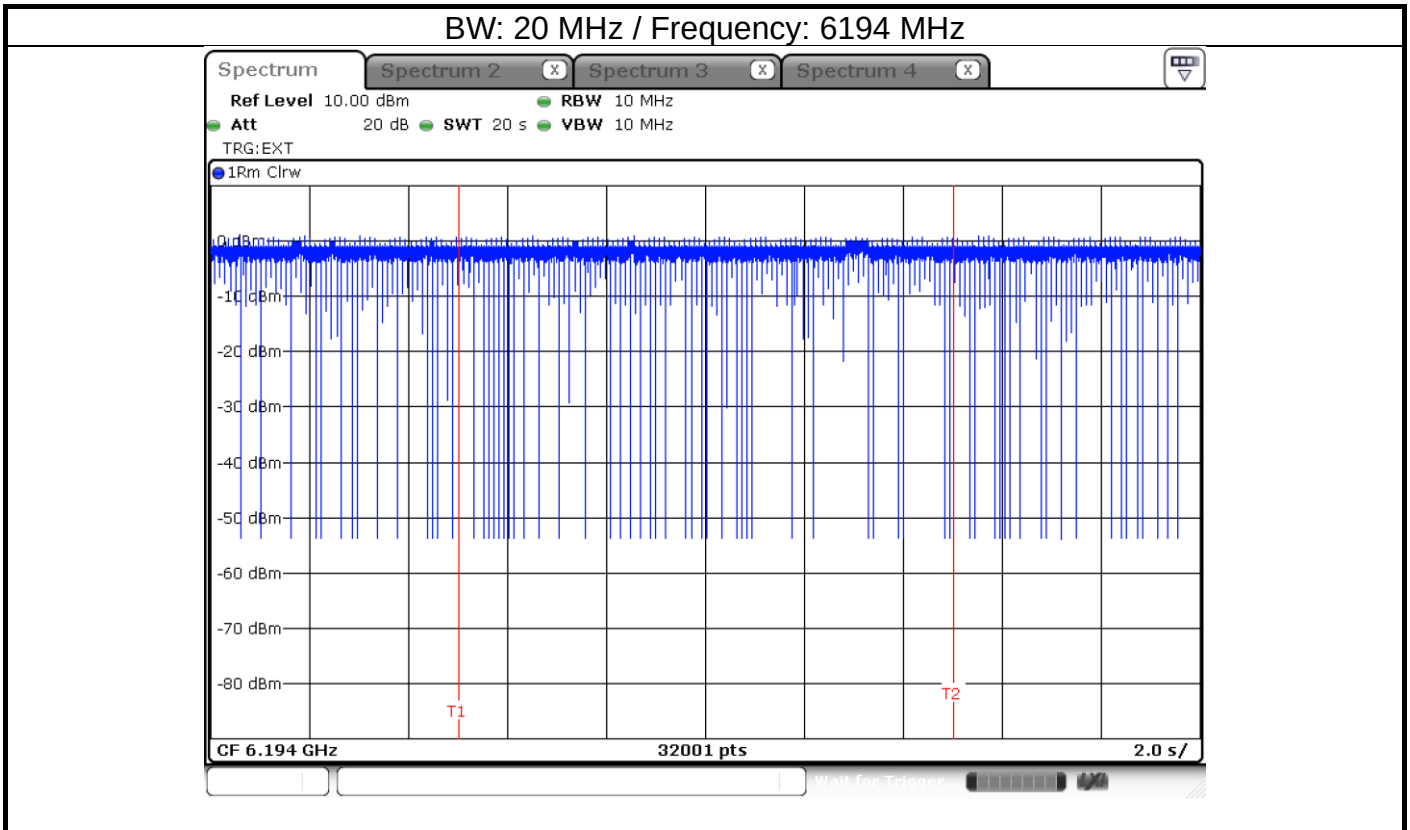


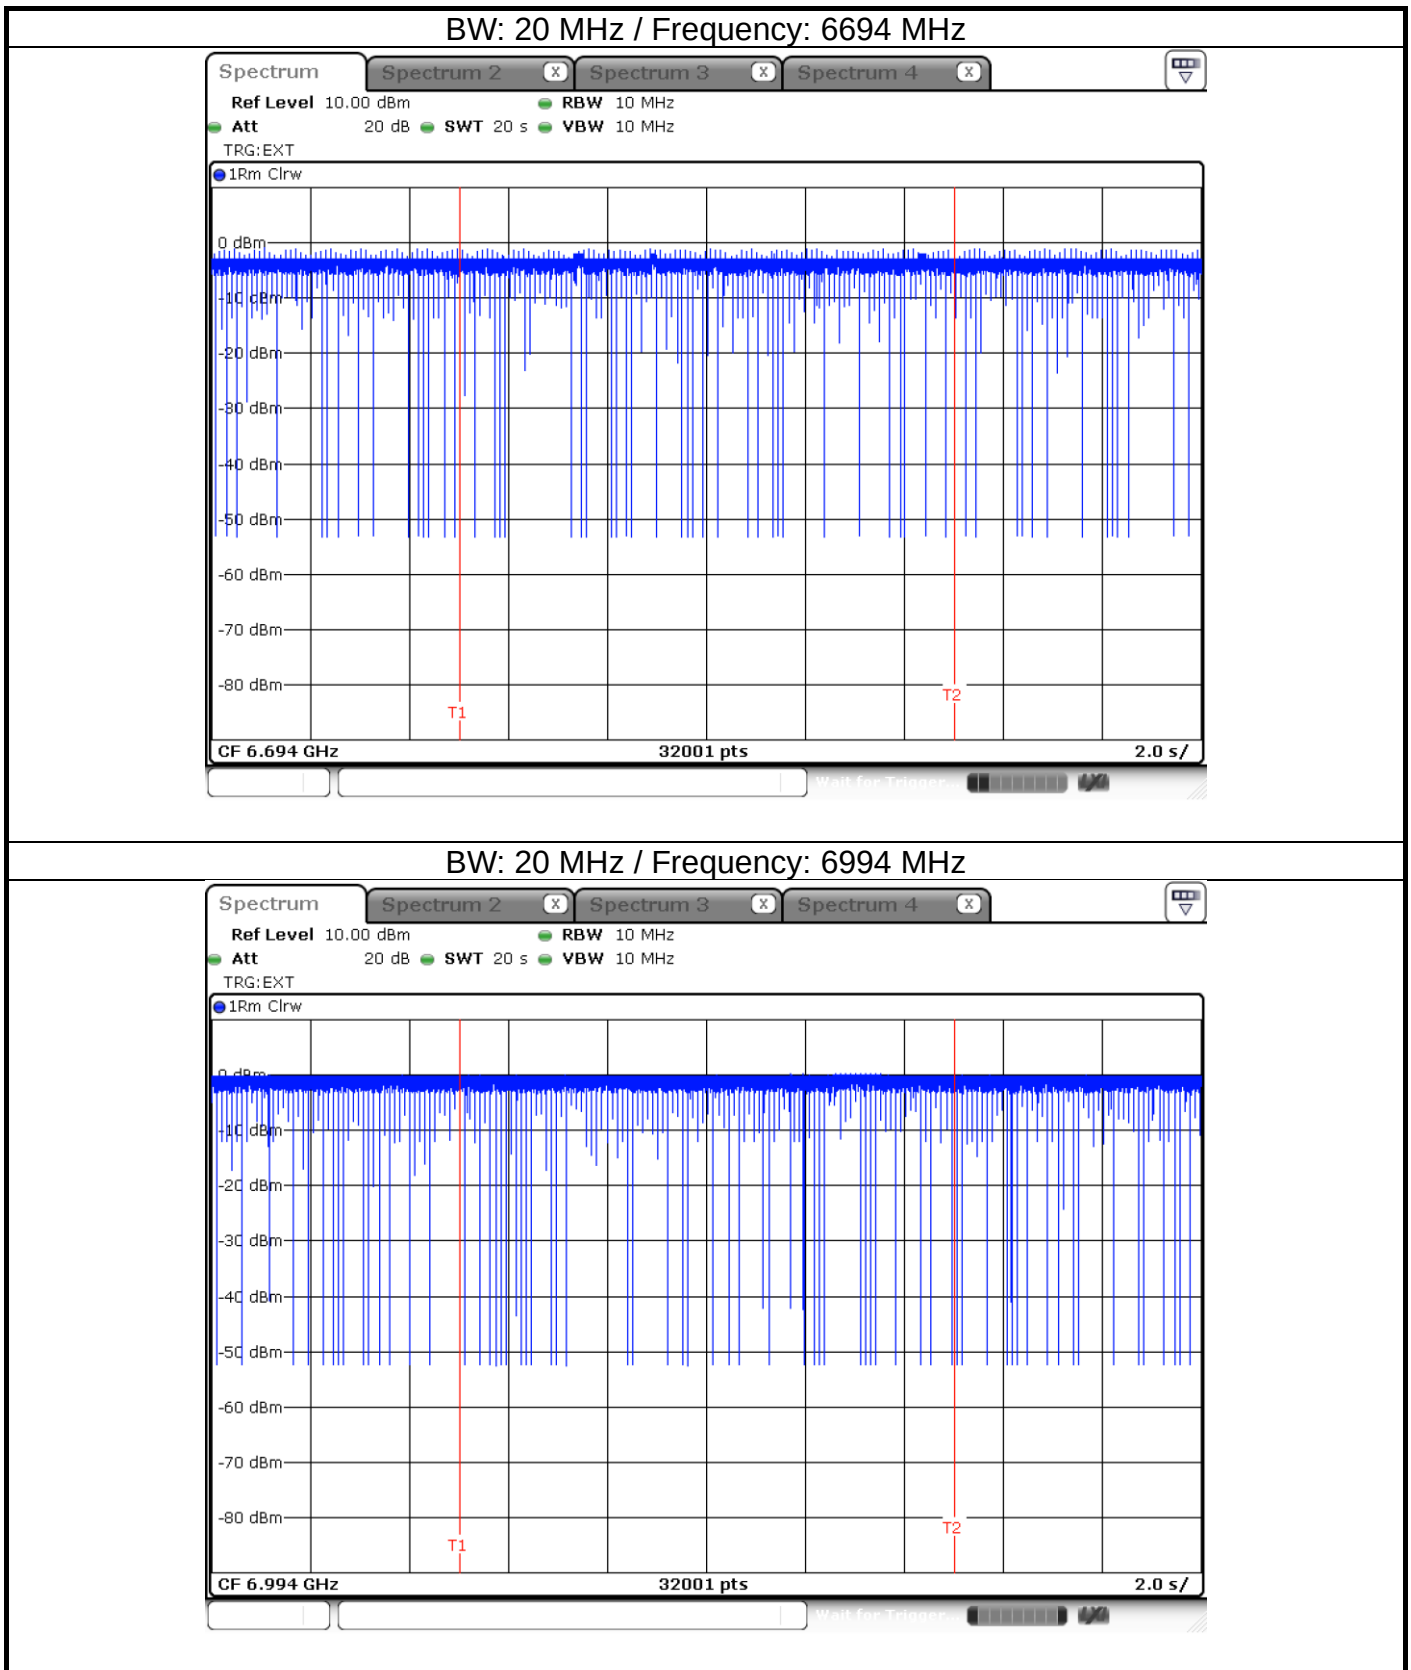


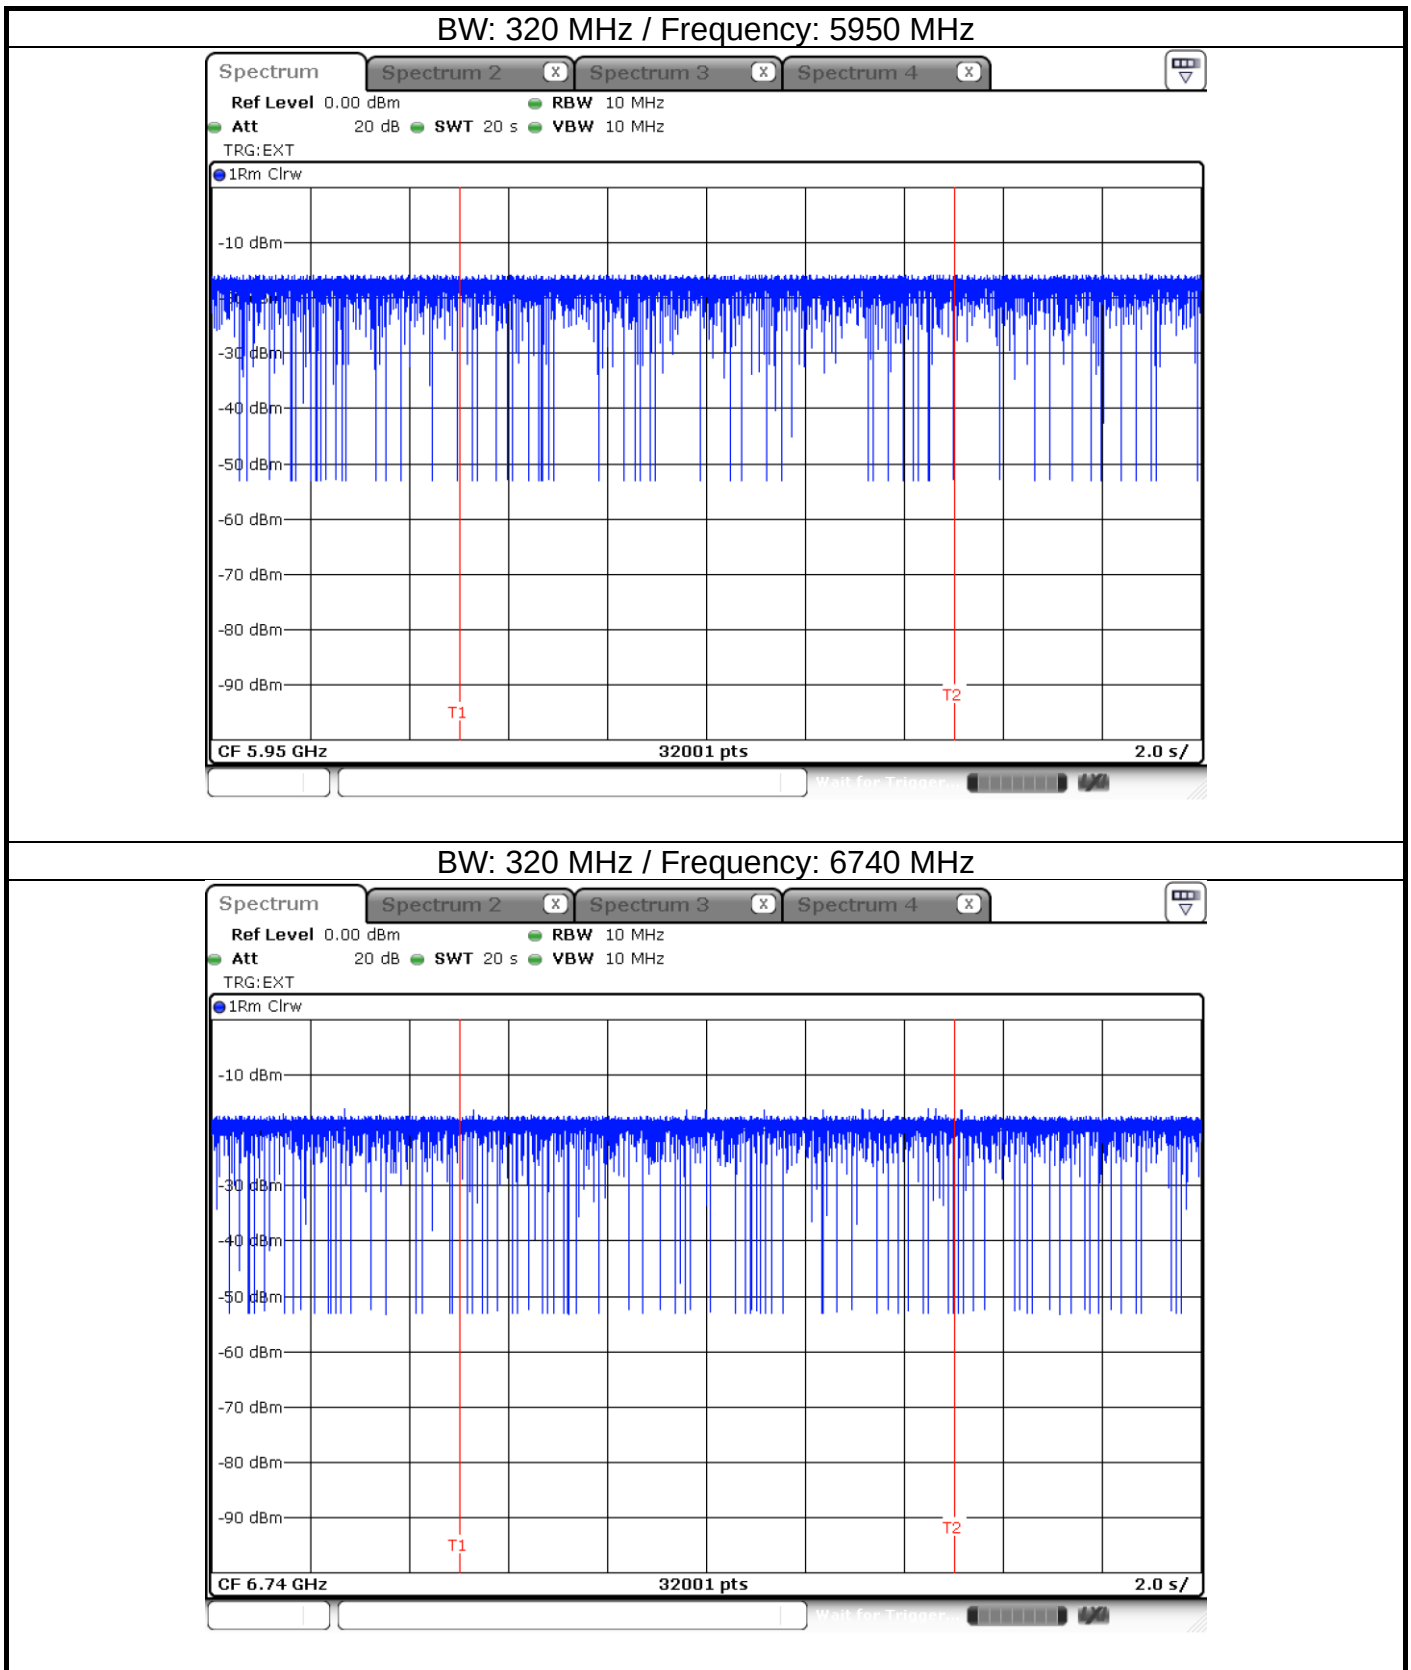


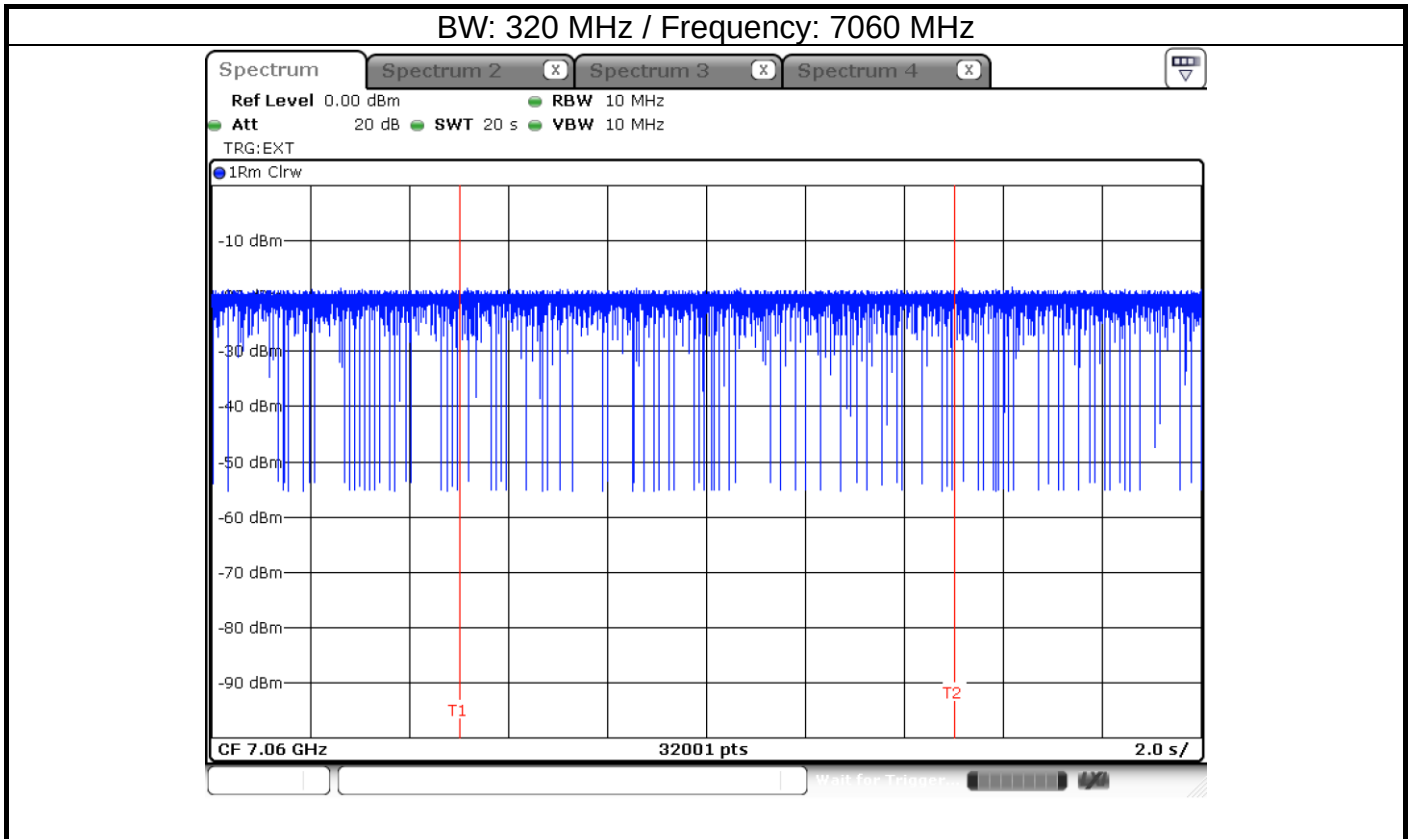


EUT Minimal transmission

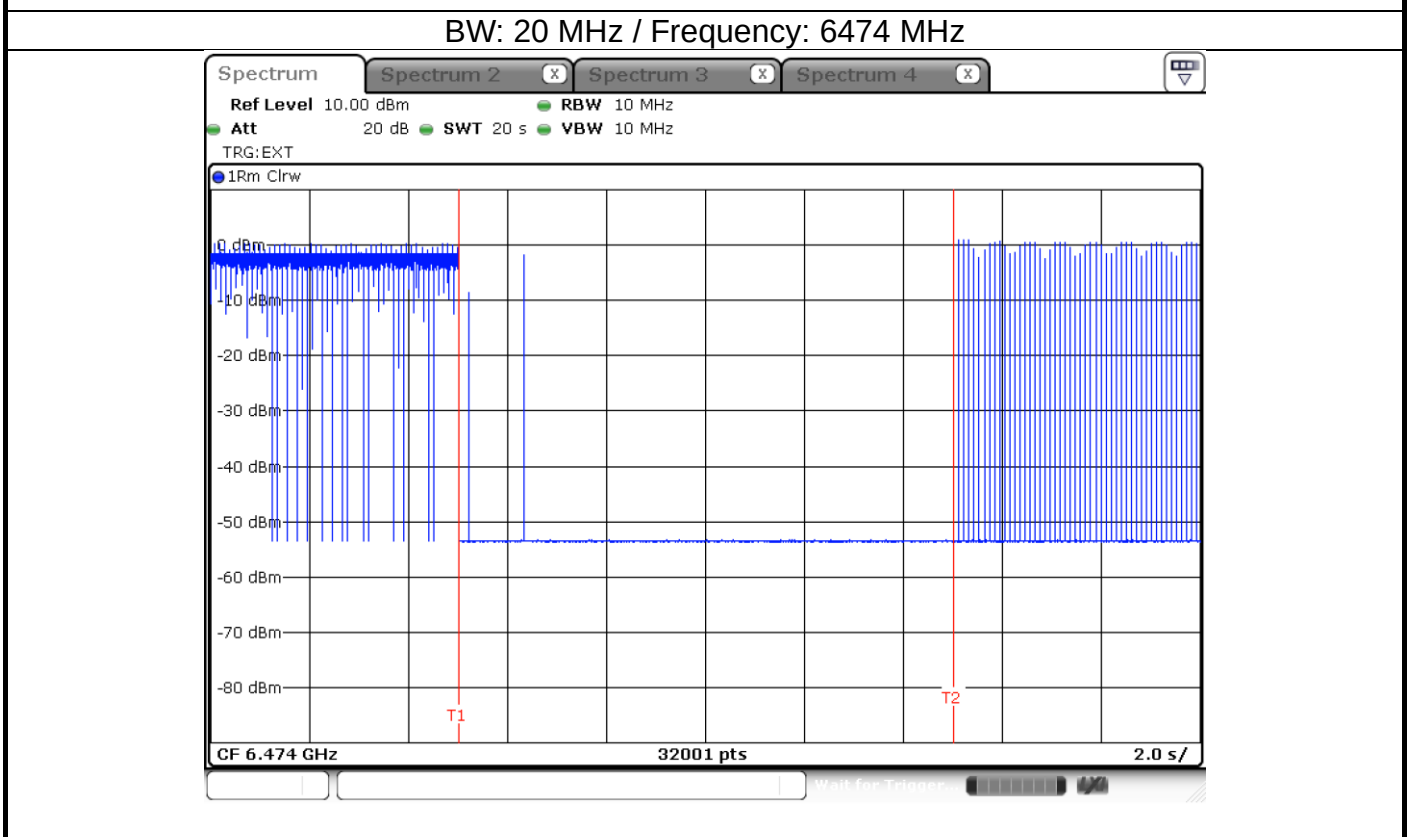
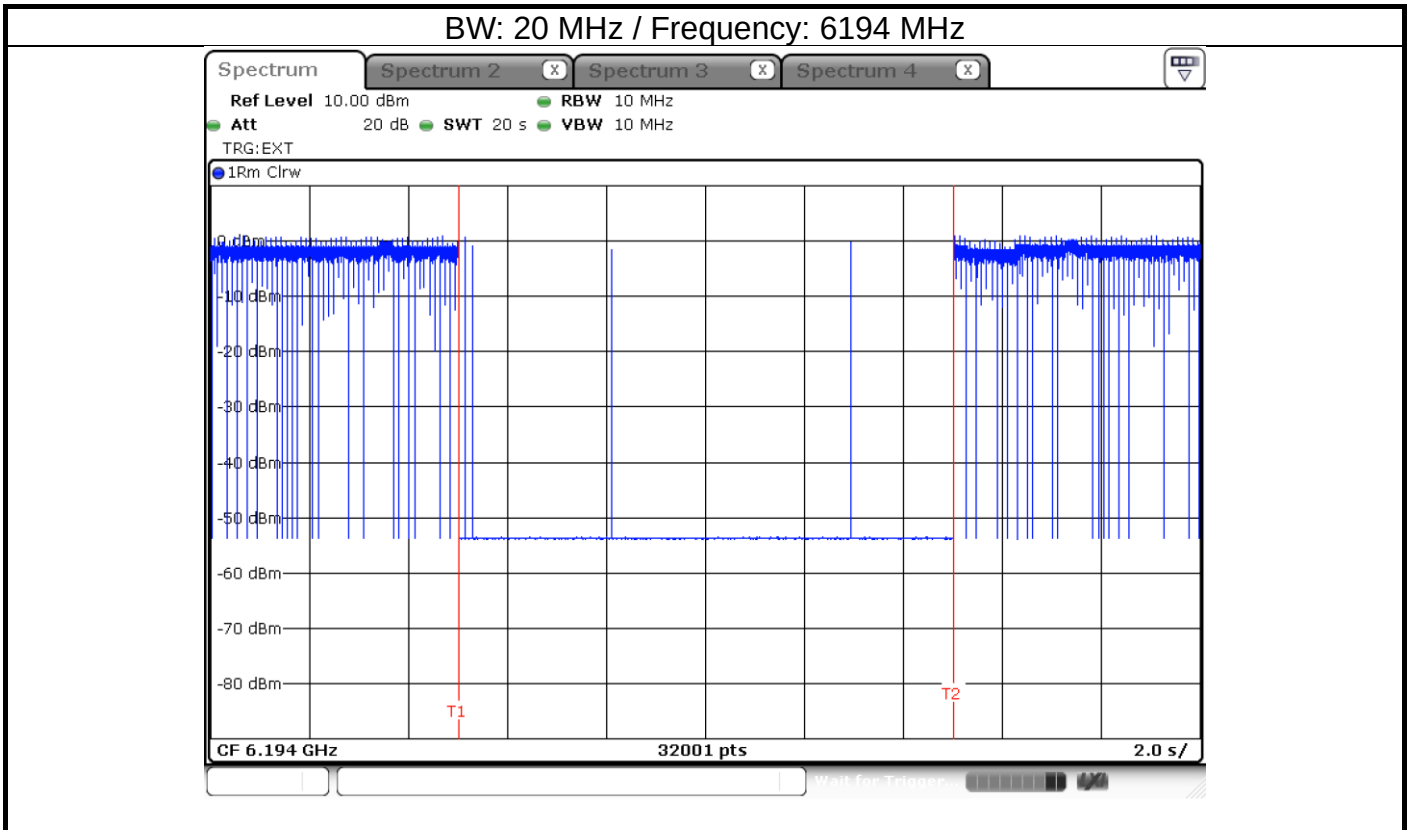


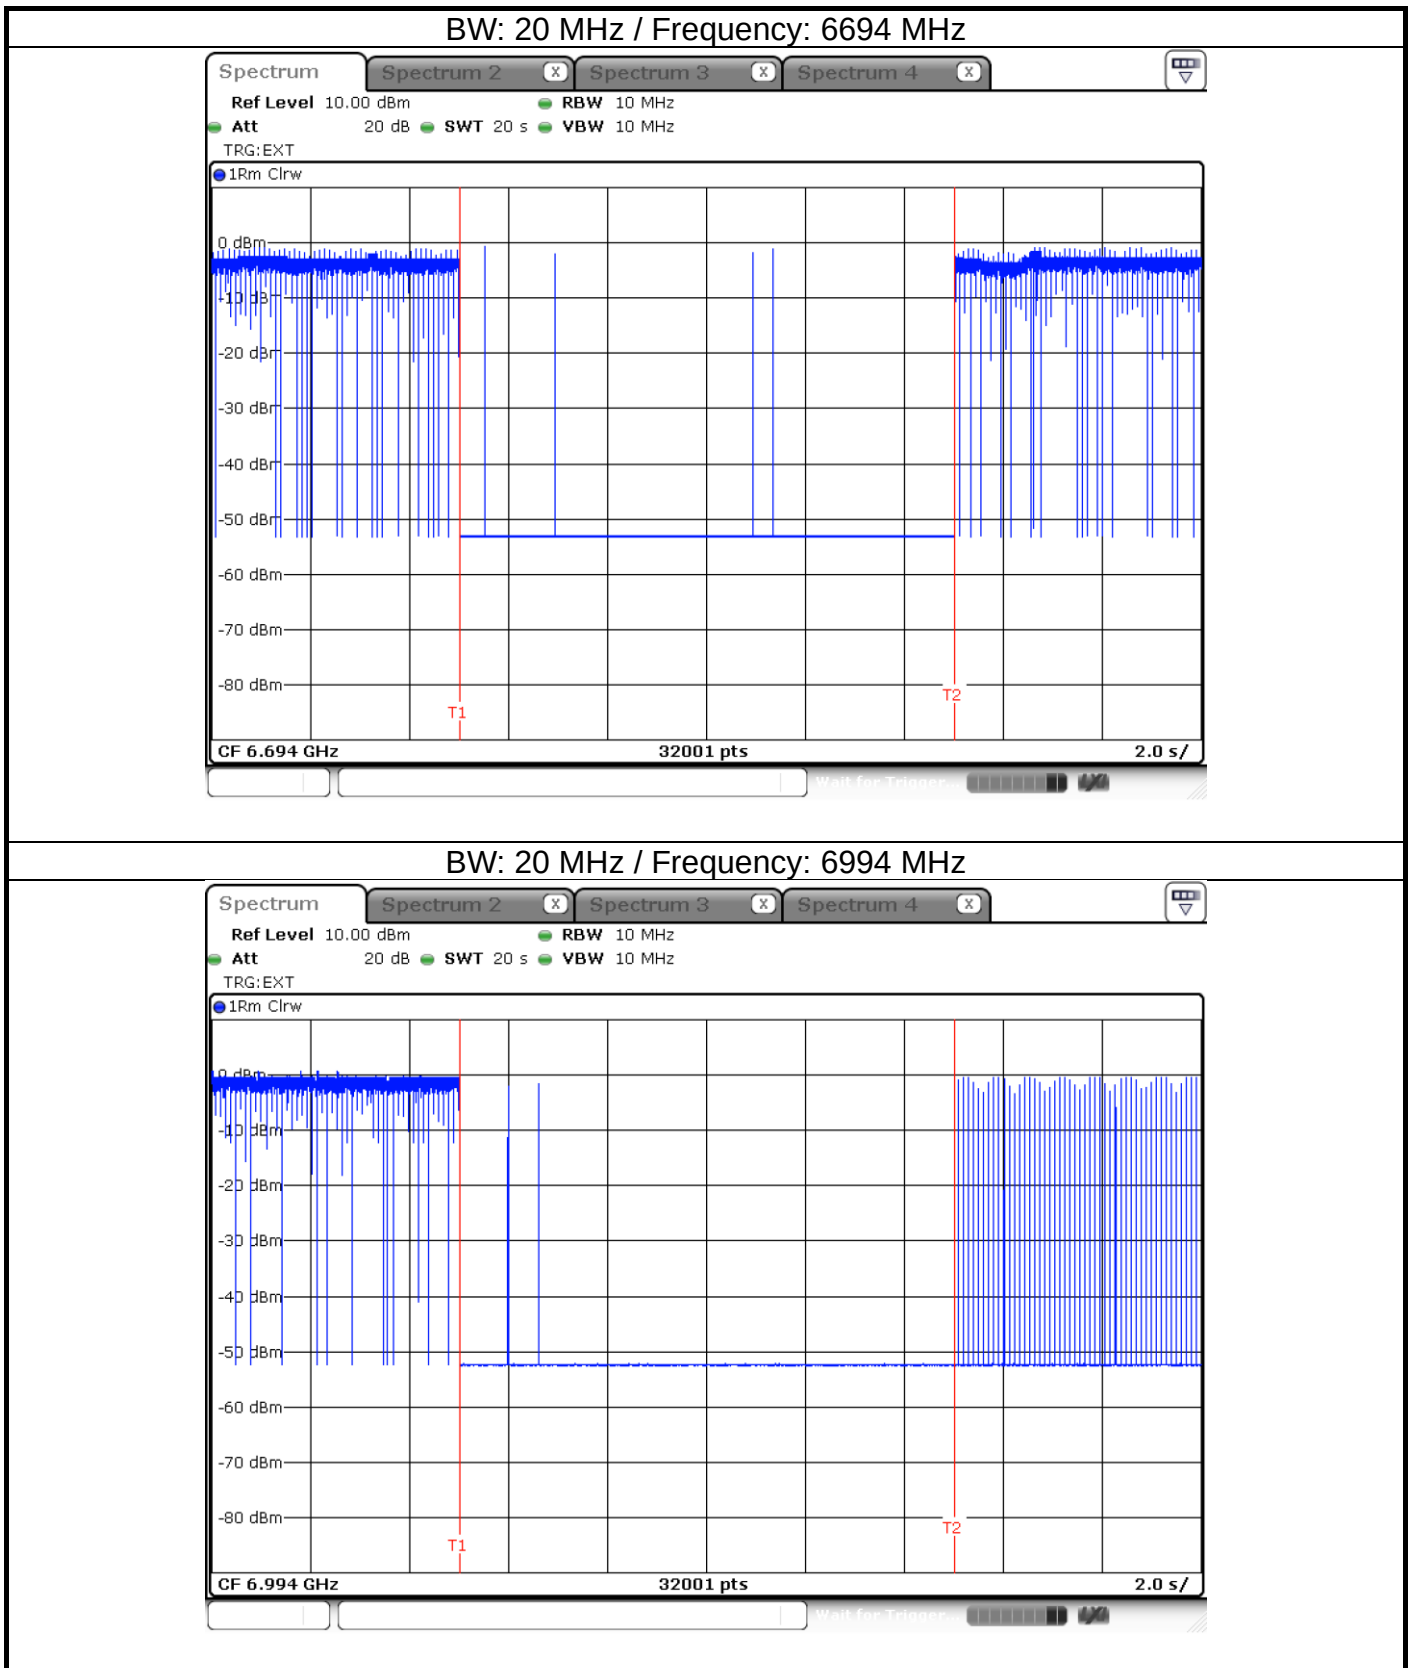

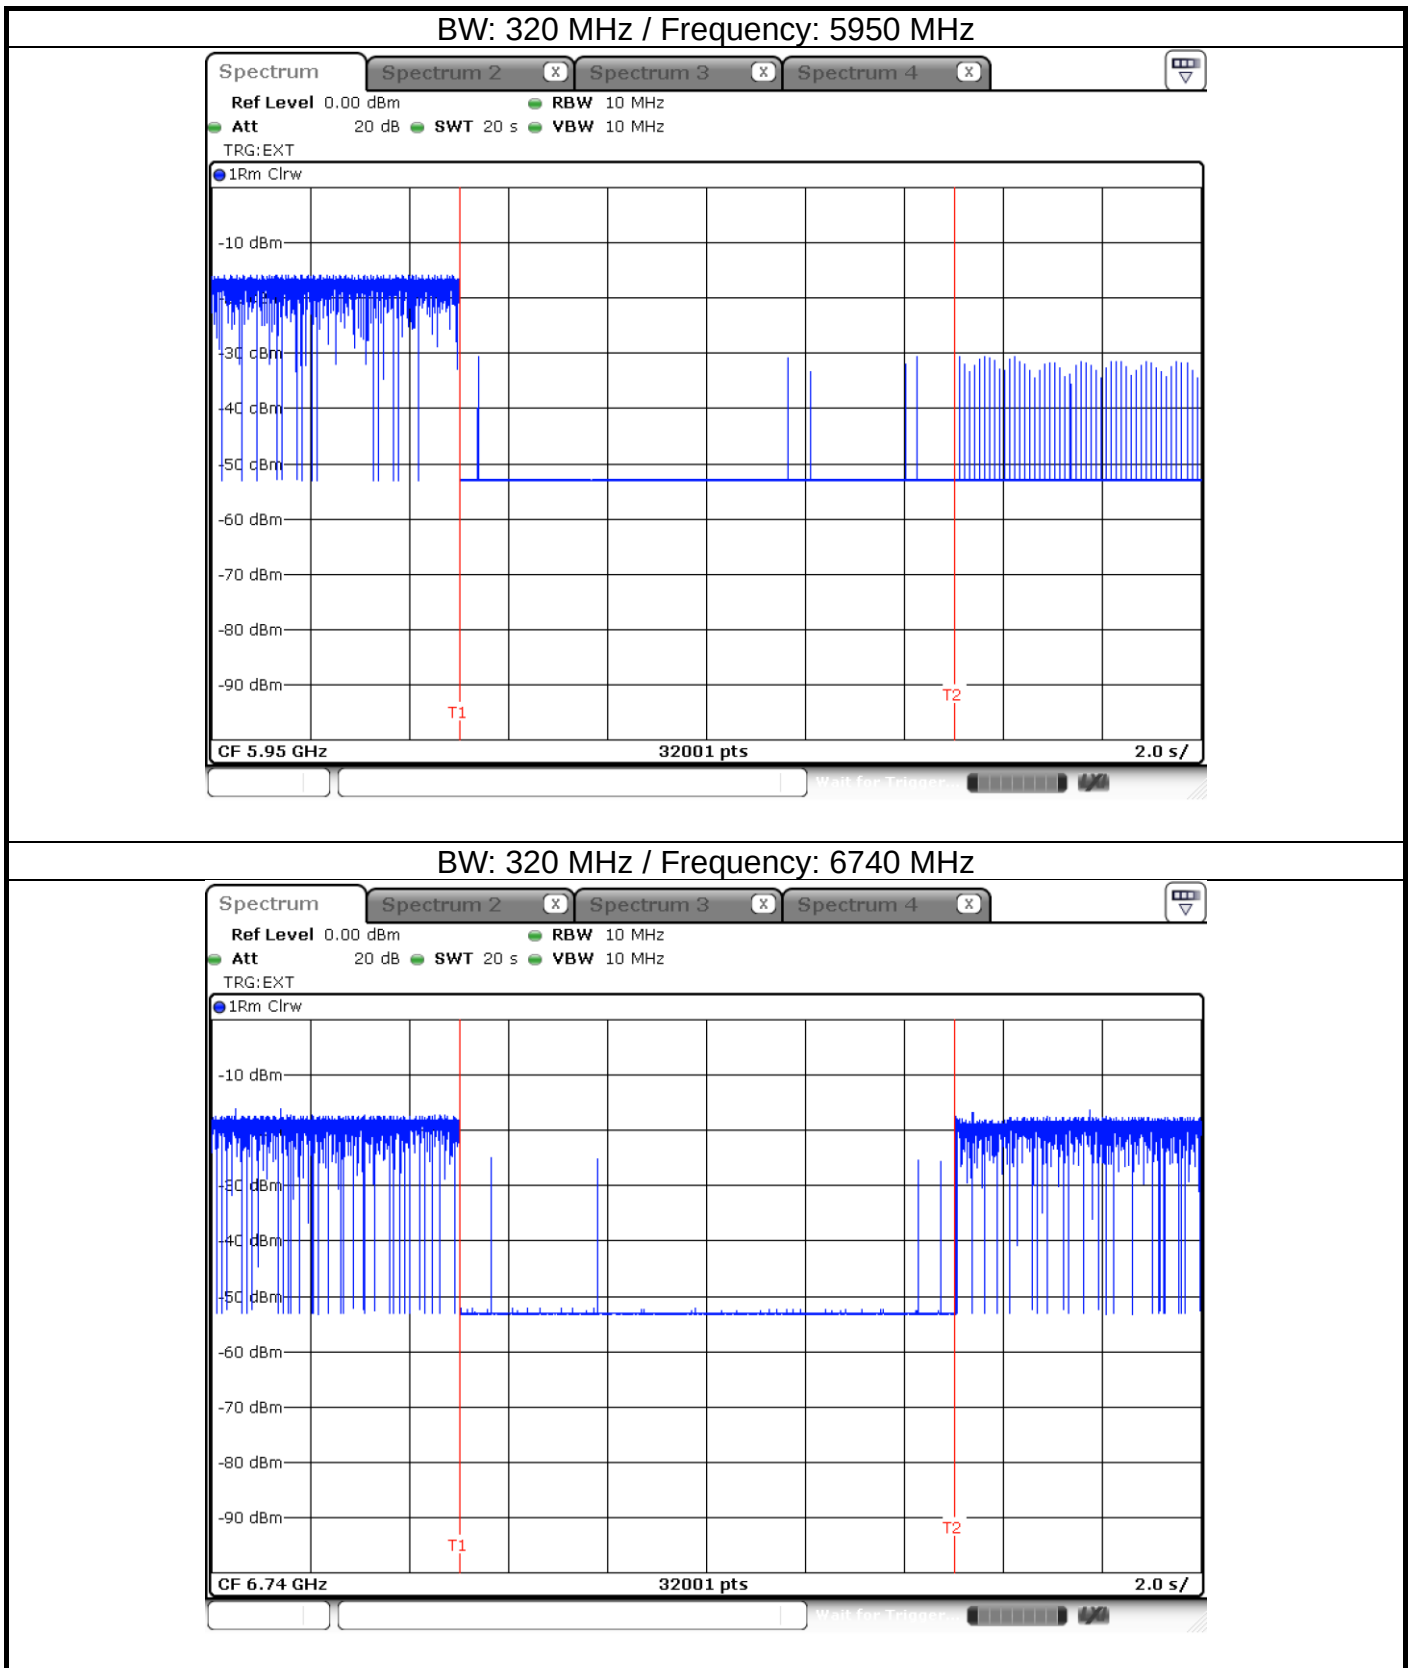


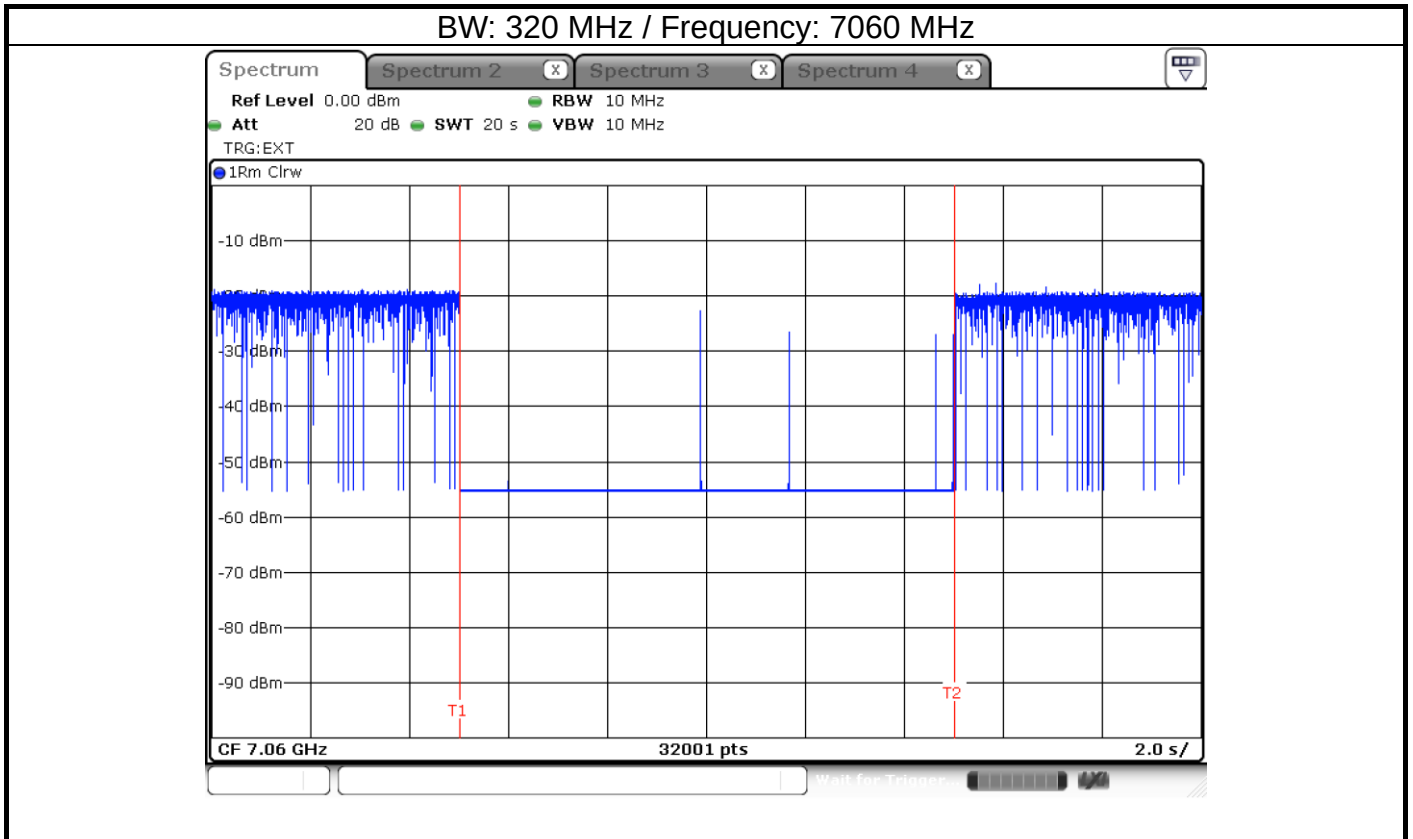


EUT ceased transmission

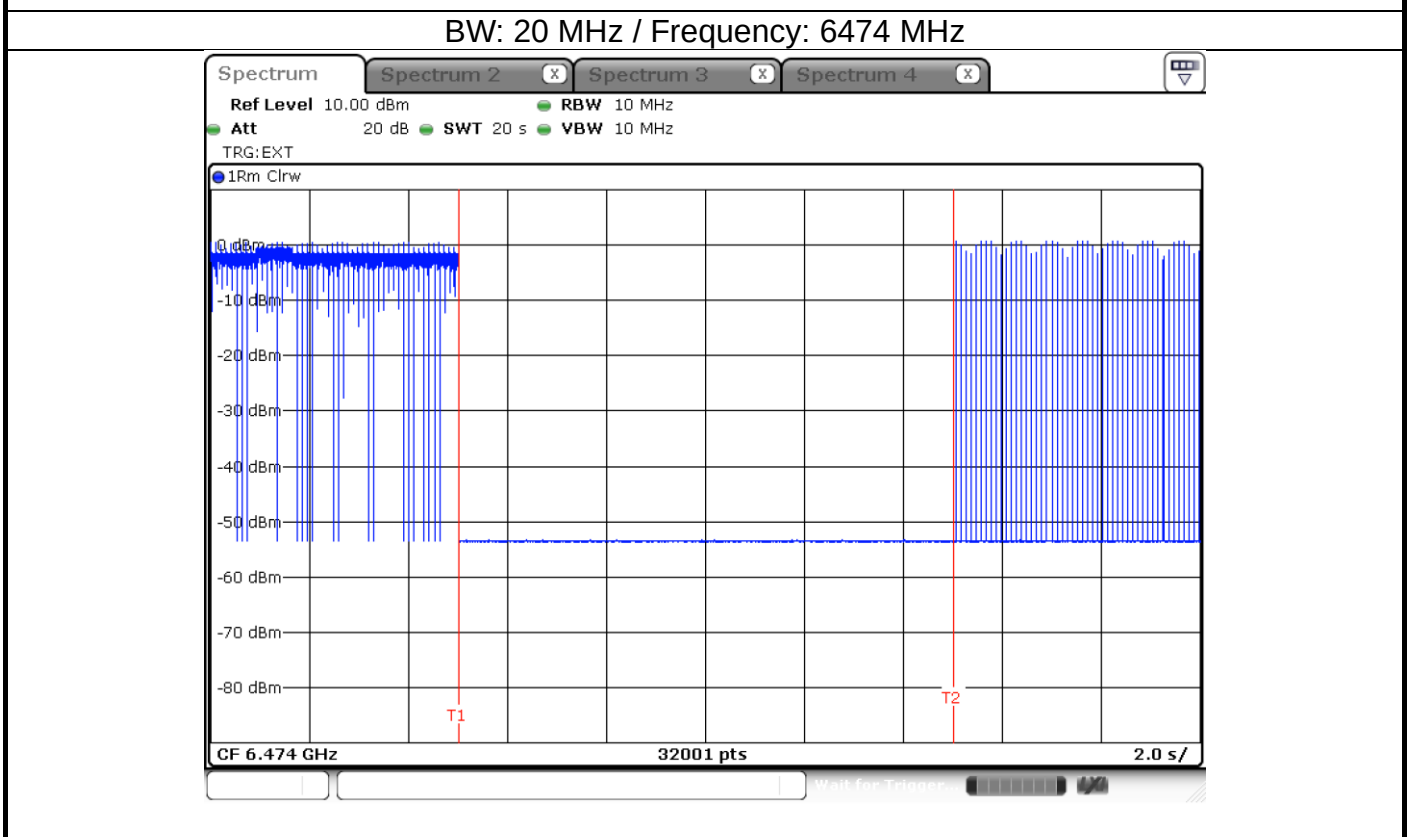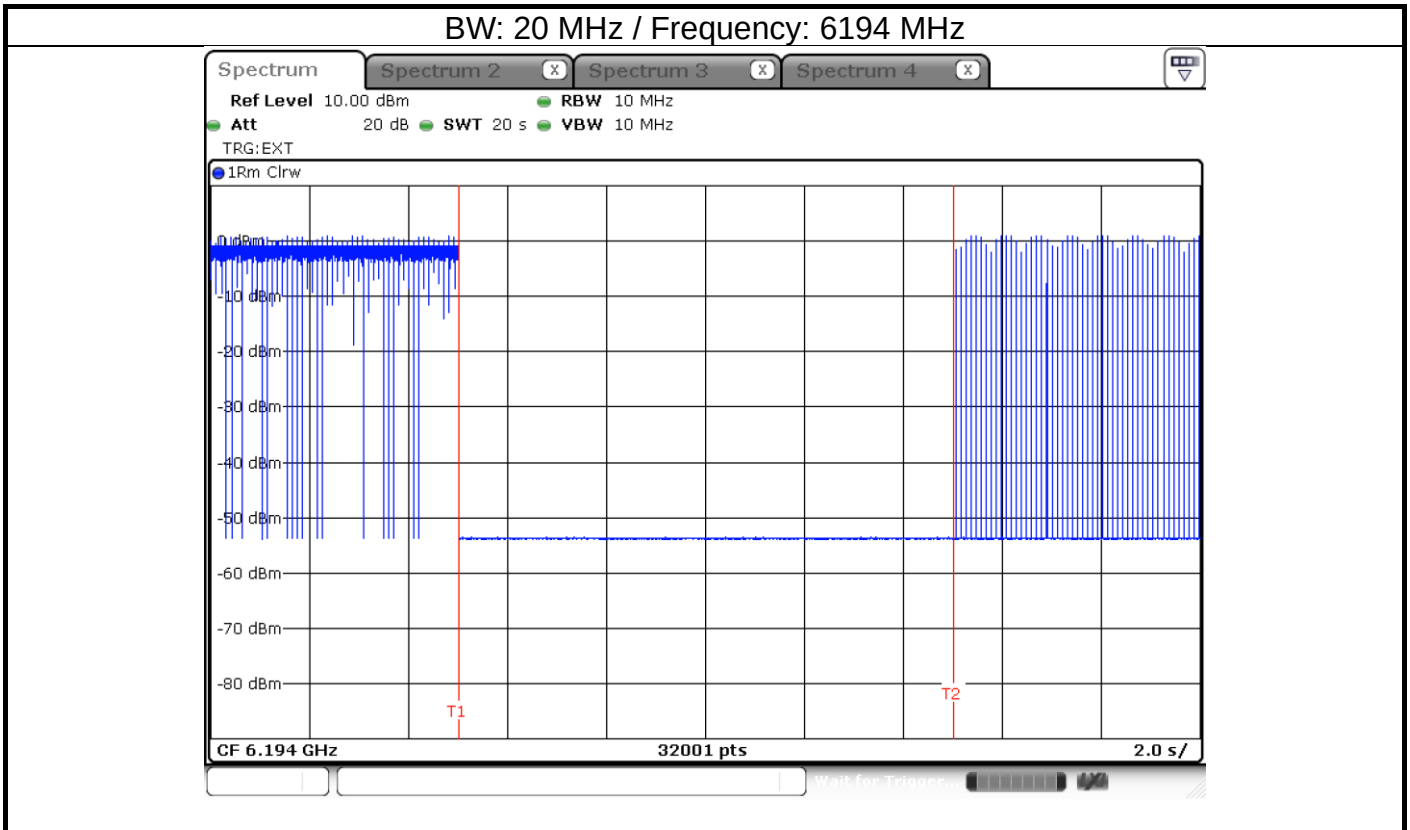


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

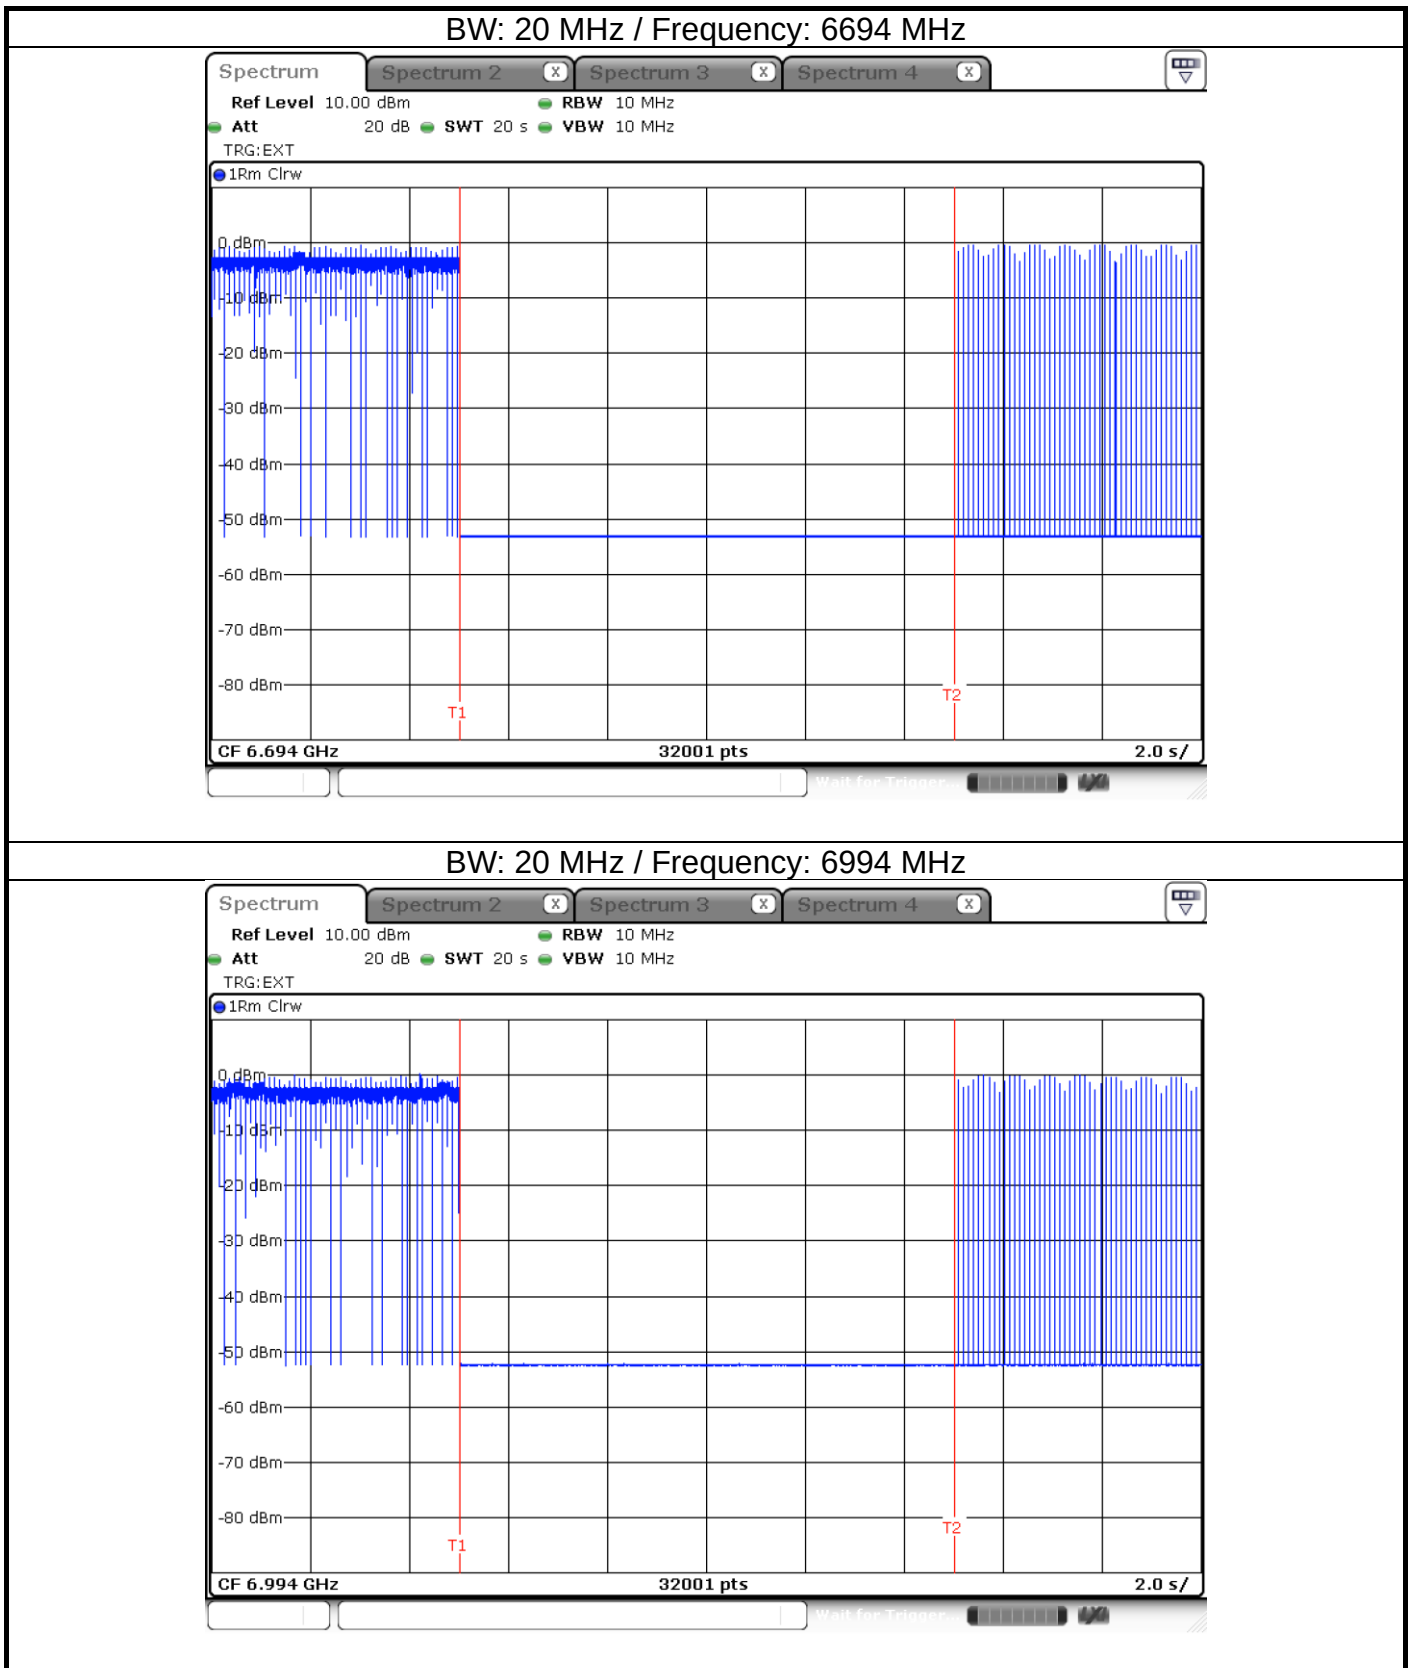


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

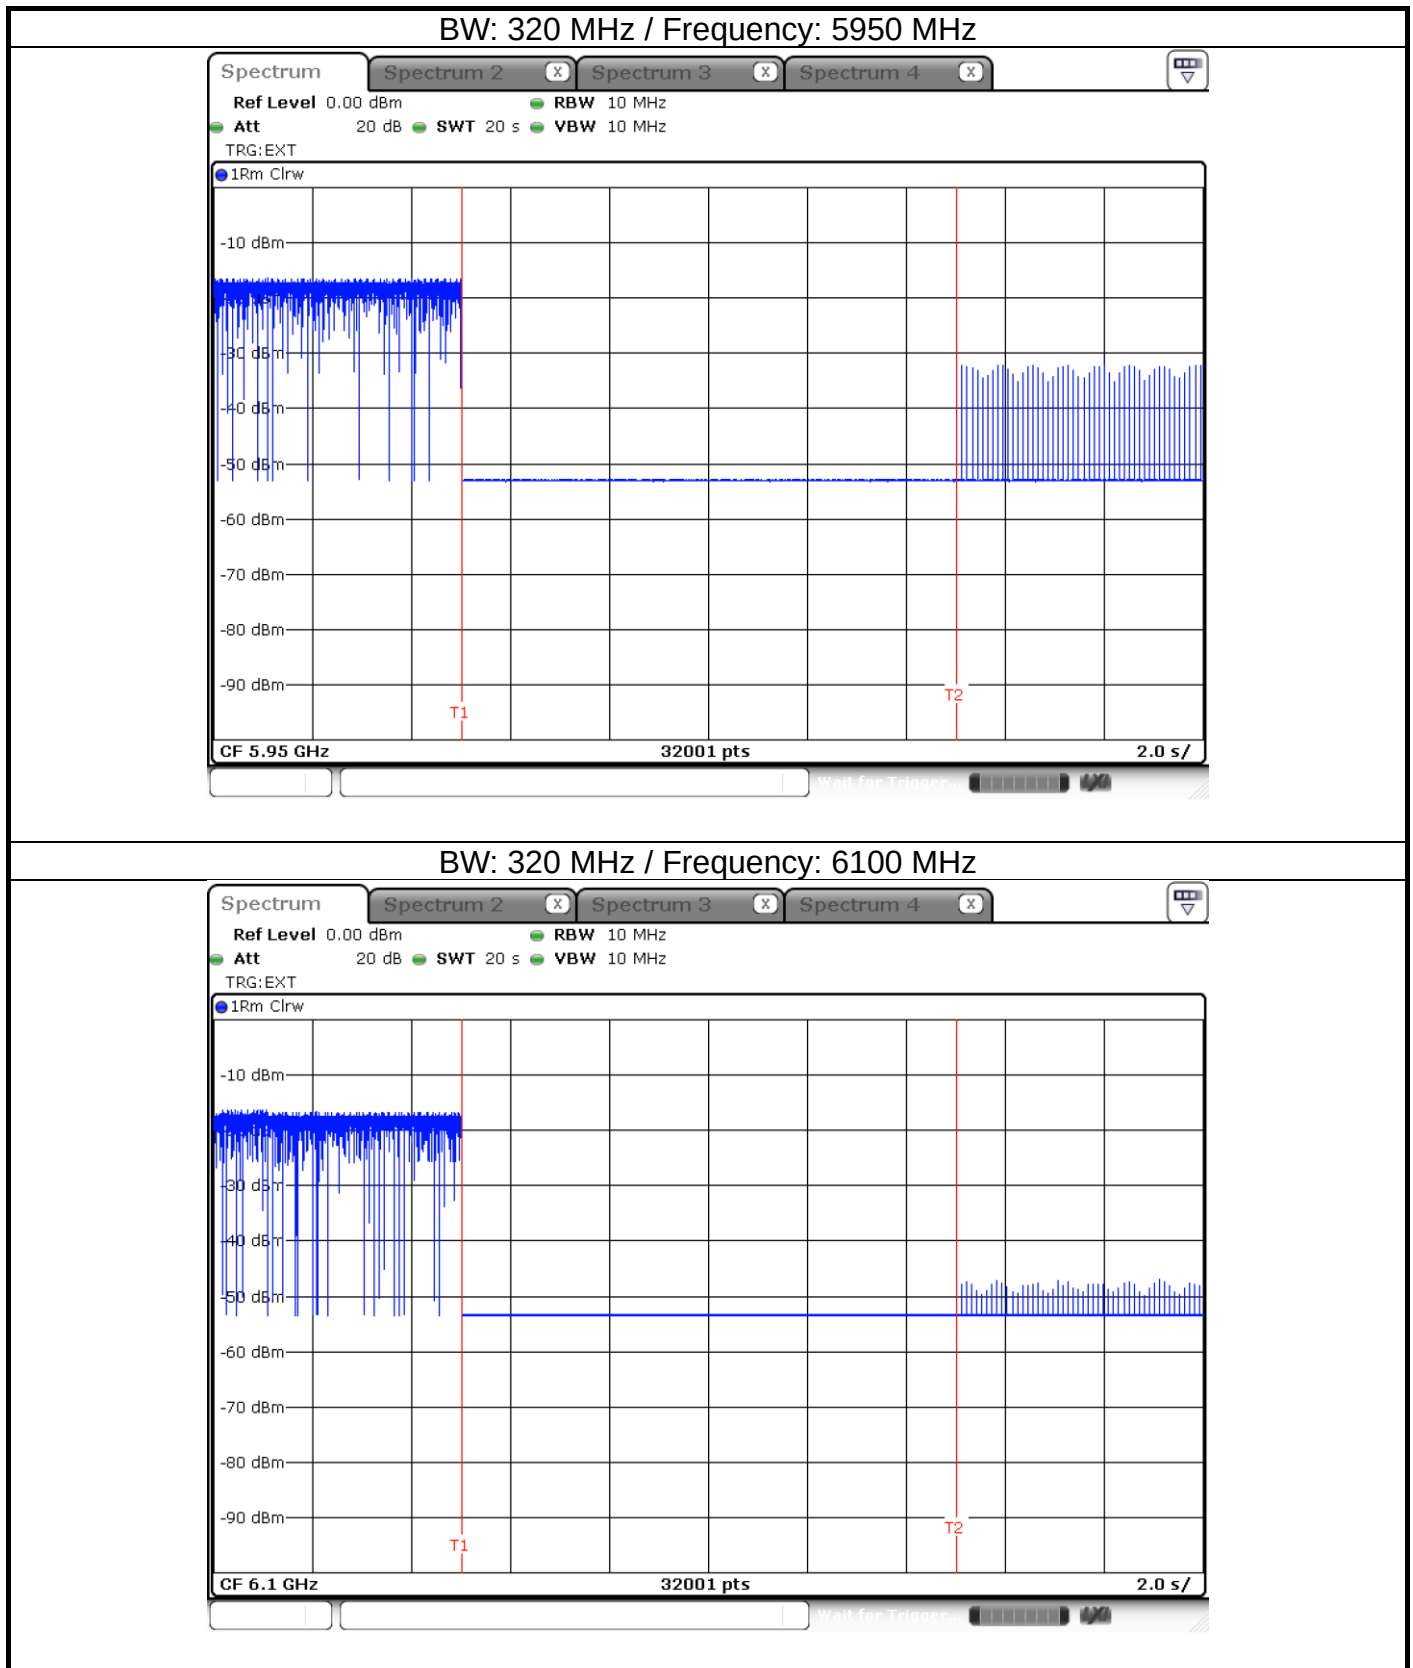


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

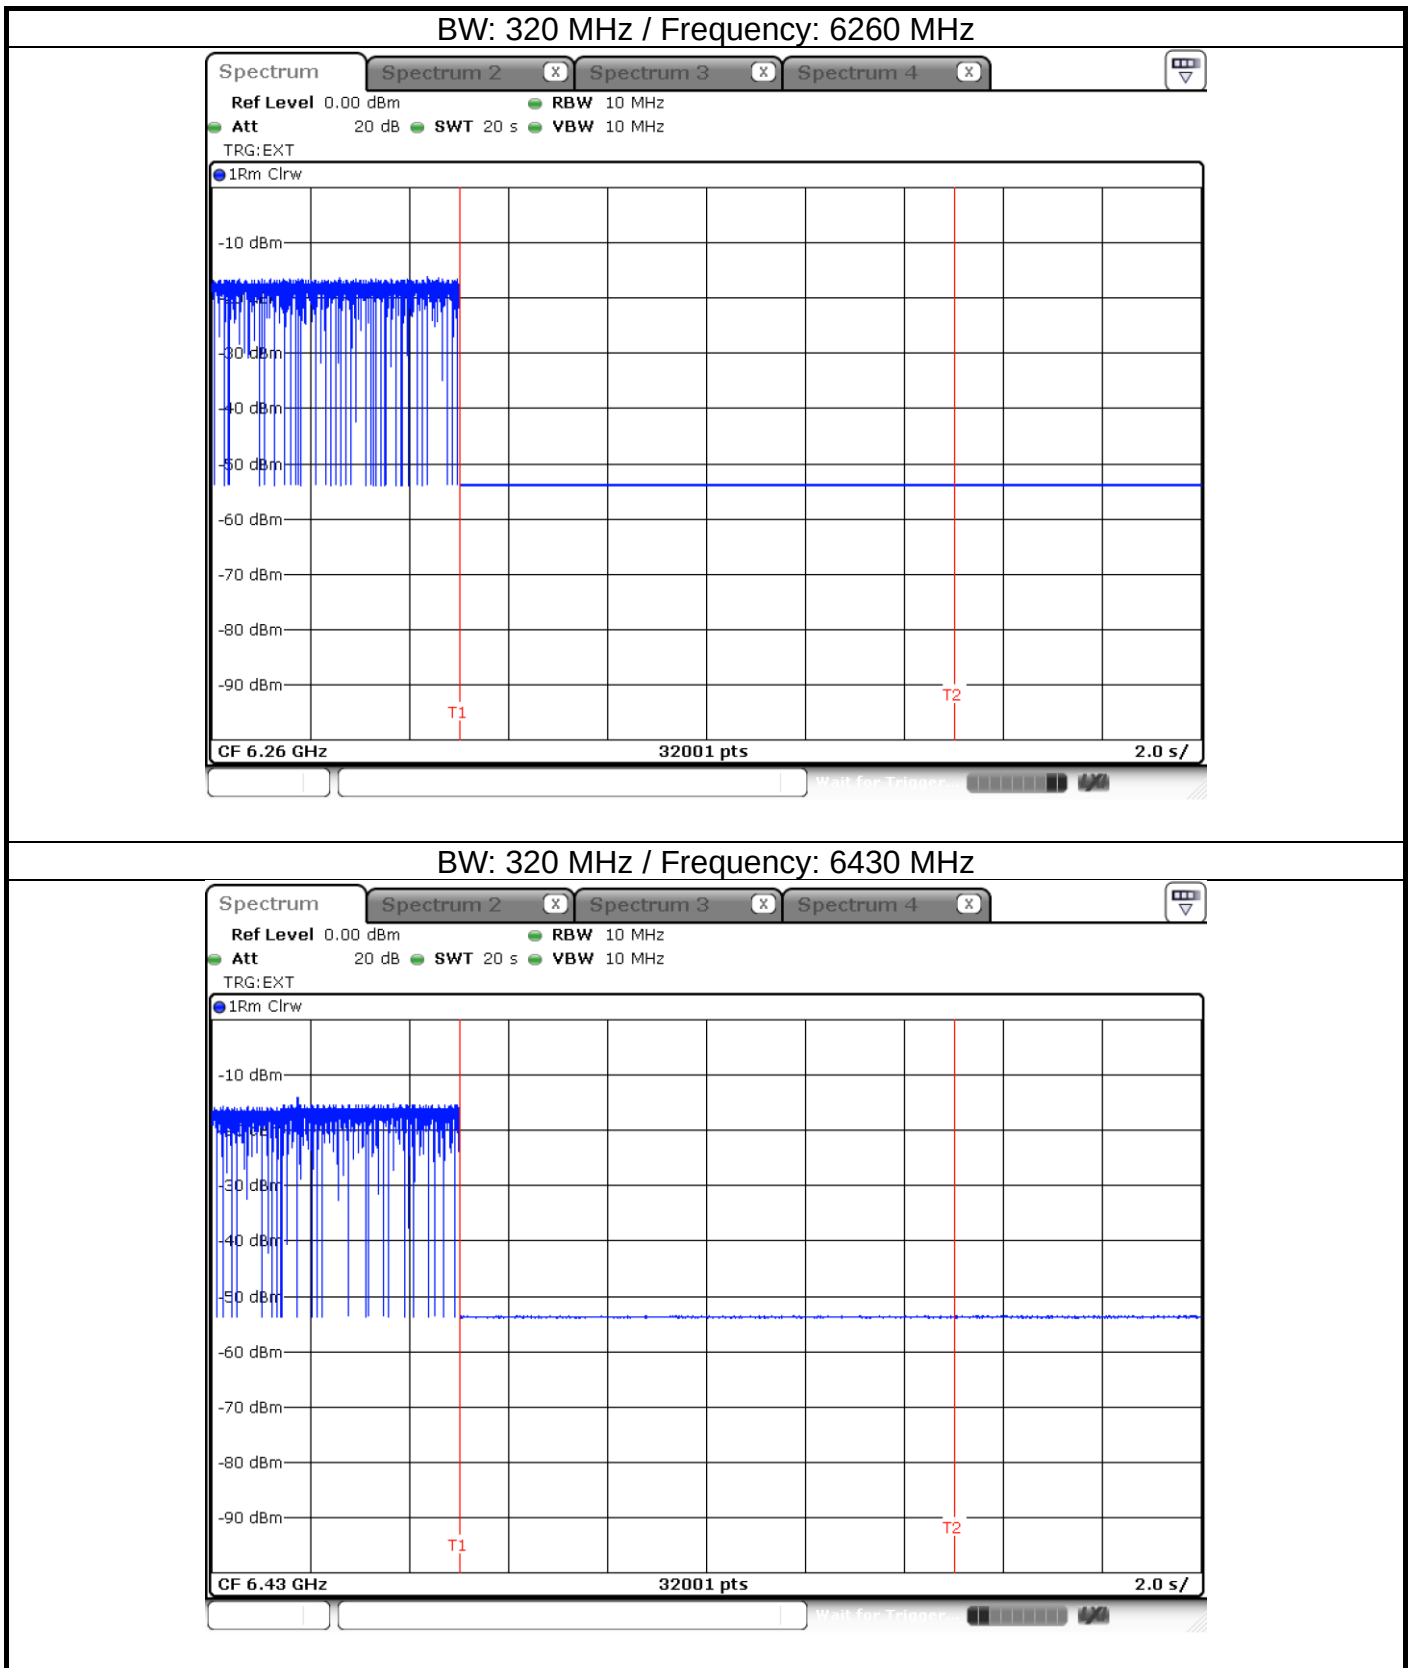


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

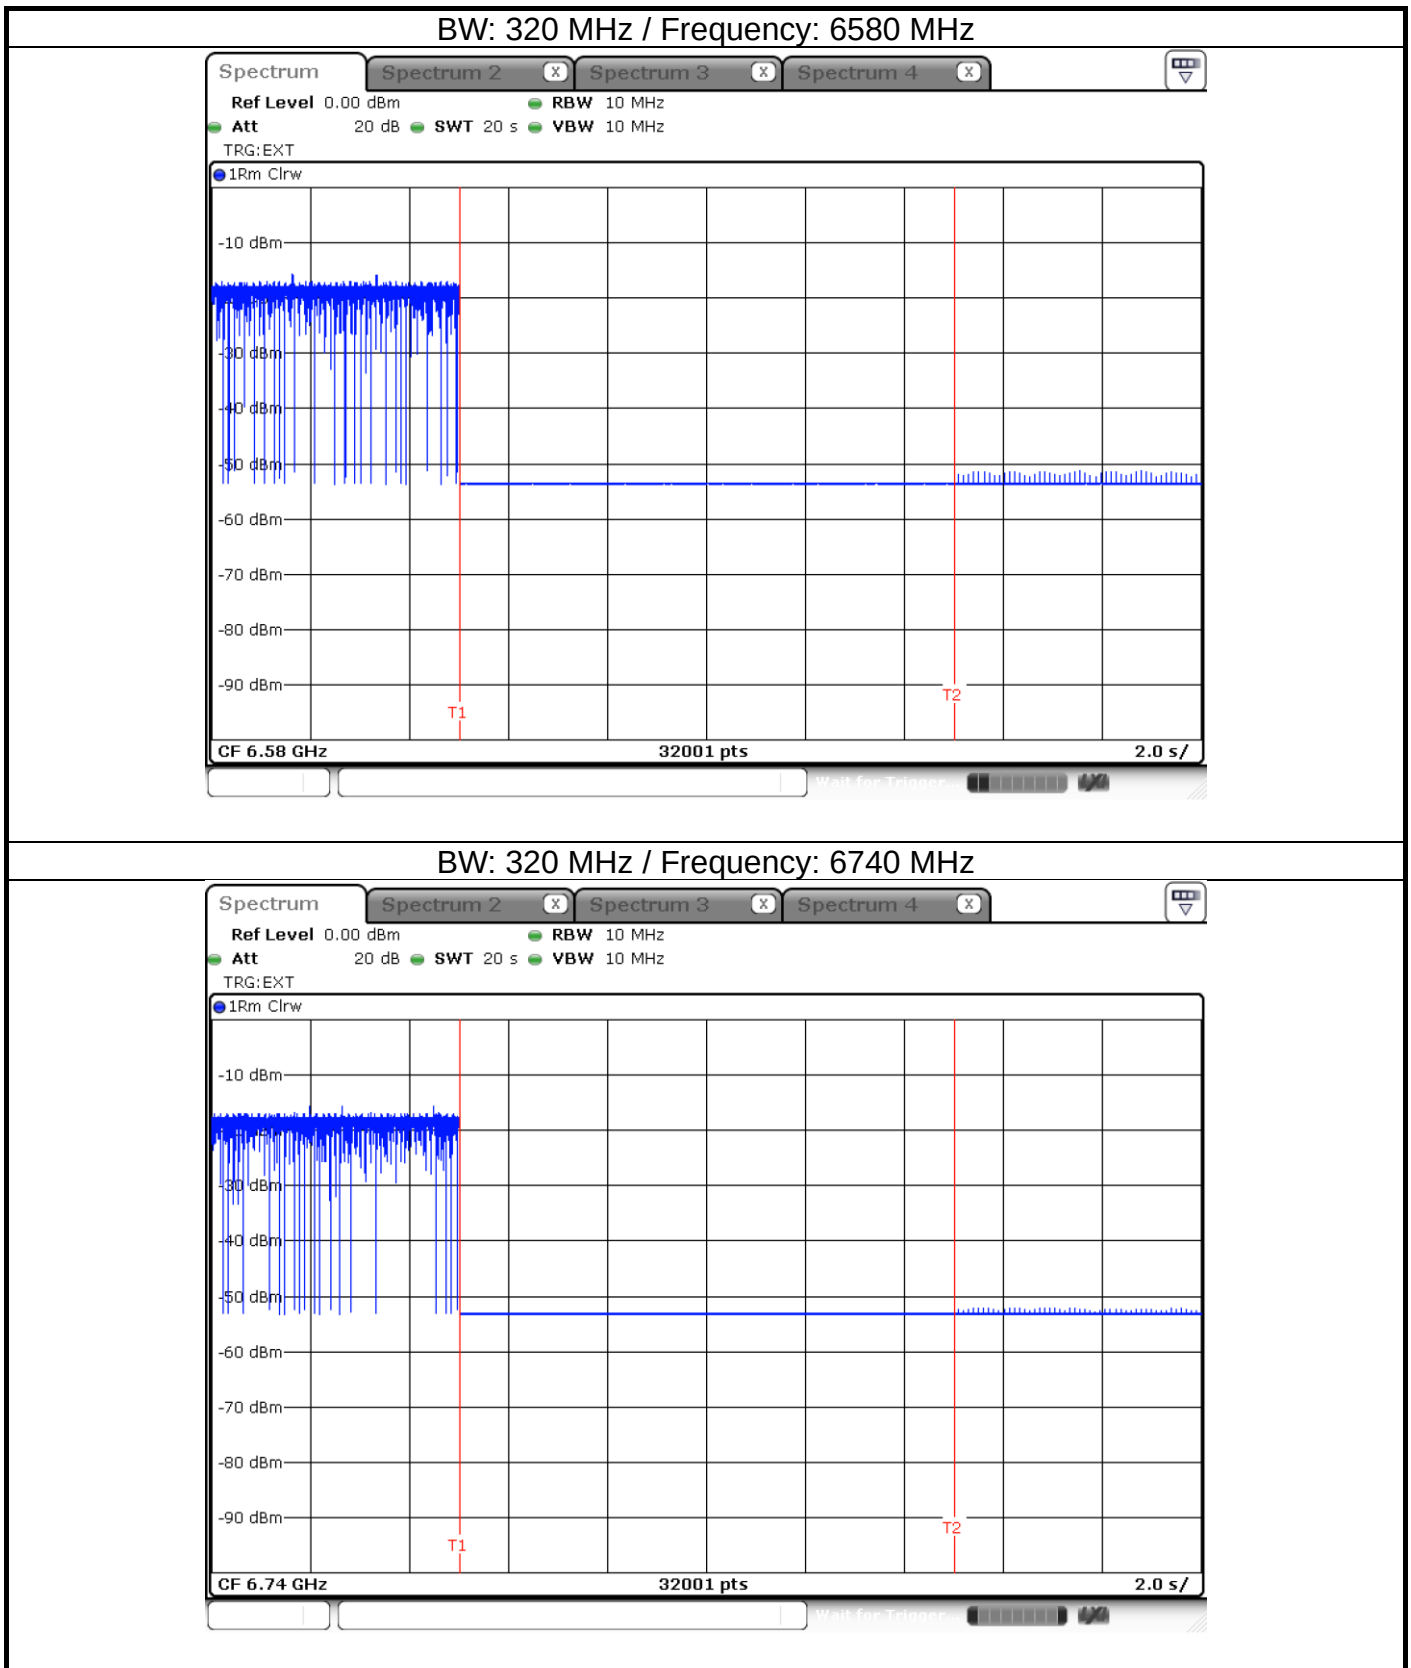

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

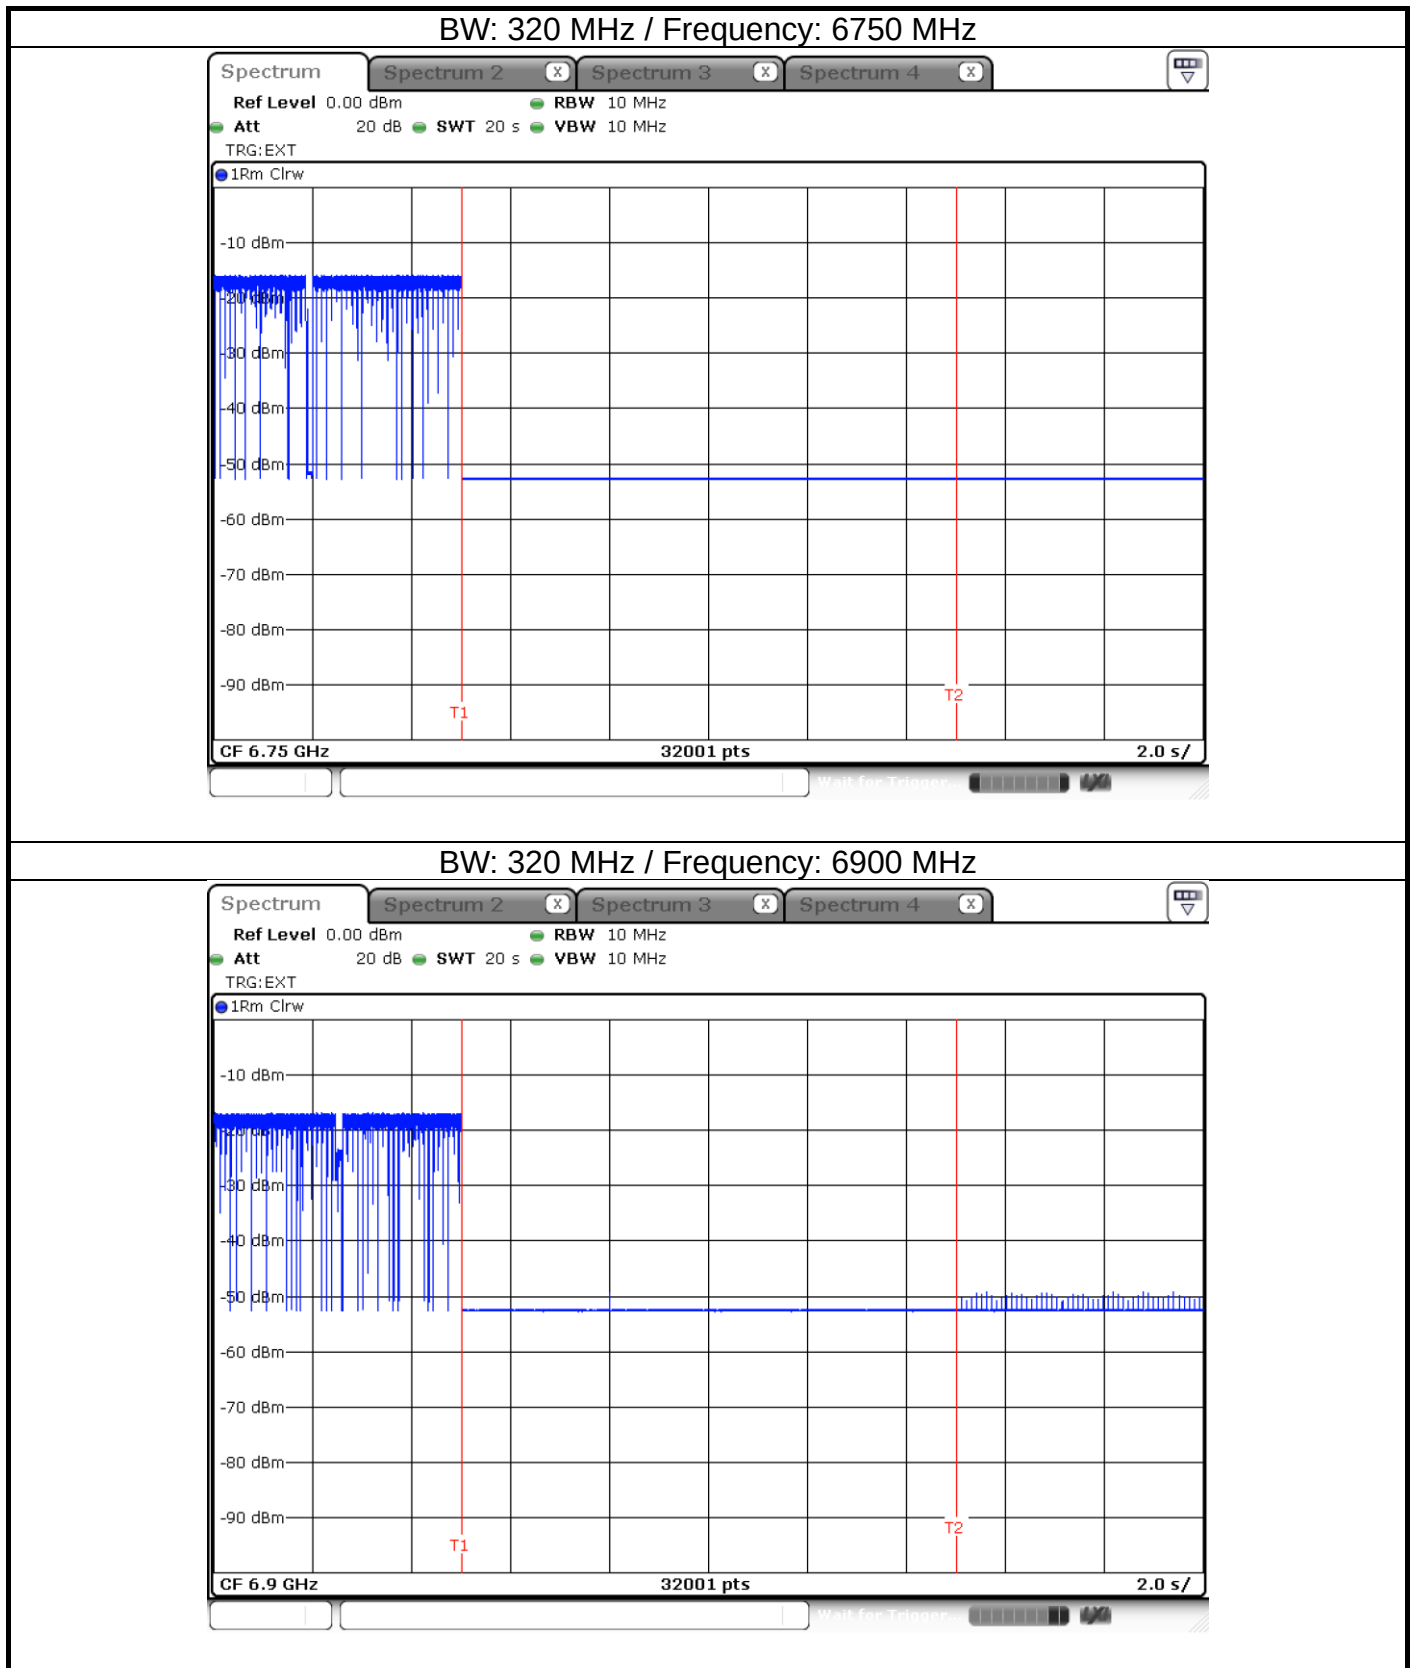

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

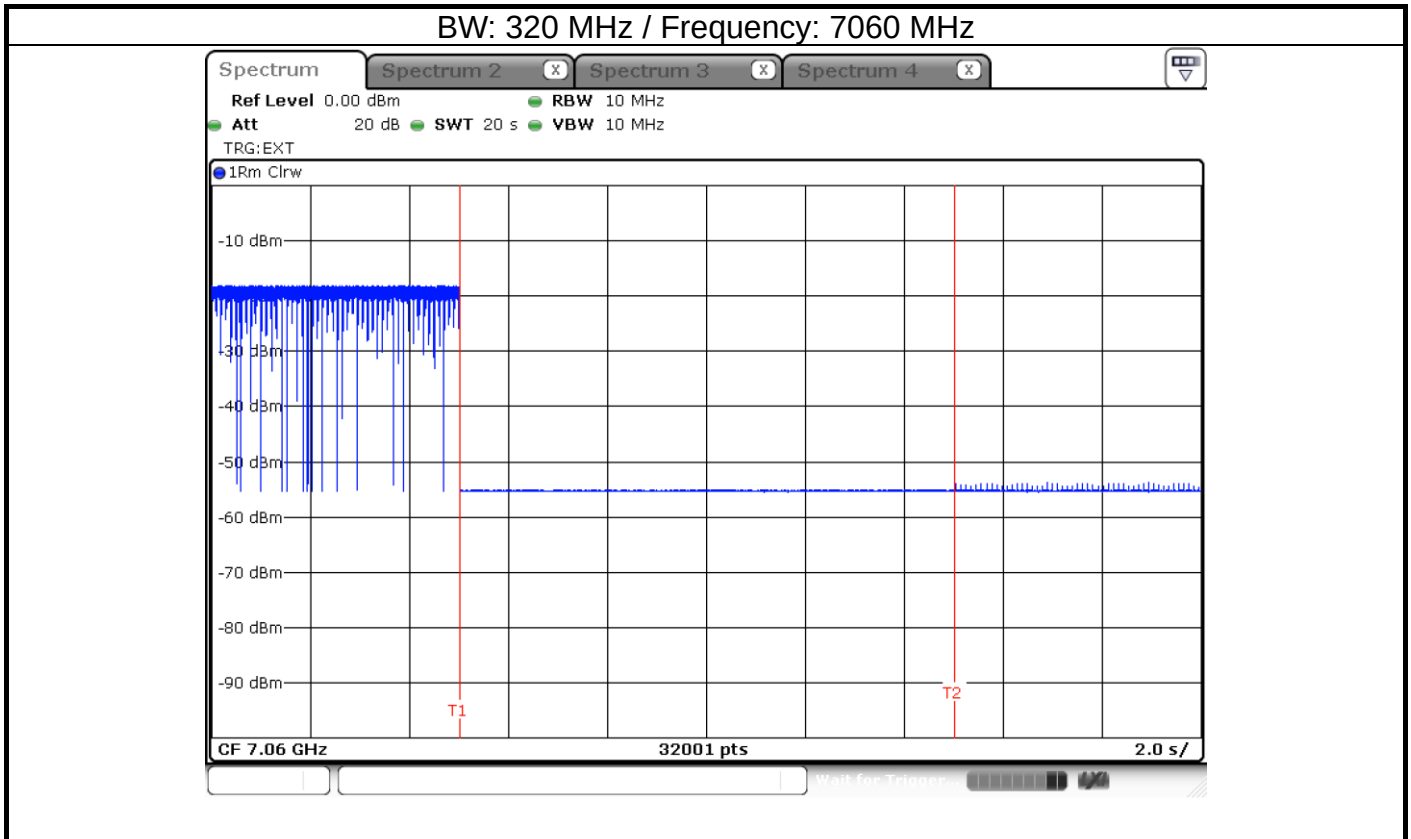

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.



Non-beamforming mode

Configuration 1: Model: SDG-8733

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV		dB		
1	0.156	23.59	55.69	-32.10	13.67	9.63	0.08	0.21	Average
2	0.156	35.74	65.69	-29.95	25.82	9.63	0.08	0.21	QP
3	0.273	35.24	51.03	-15.79	25.26	9.62	0.07	0.29	Average
4	0.273	40.78	61.03	-20.25	30.80	9.62	0.07	0.29	QP
5	0.339	26.63	49.22	-22.59	16.62	9.62	0.08	0.31	Average
6	0.339	38.96	59.22	-20.26	28.95	9.62	0.08	0.31	QP
7	0.461	22.62	46.67	-24.05	12.59	9.62	0.08	0.33	Average
8	0.461	39.08	56.67	-17.59	29.05	9.62	0.08	0.33	QP
9*	1.689	30.29	46.00	-15.71	20.17	9.63	0.11	0.38	Average
10	1.689	38.38	56.00	-17.62	28.26	9.63	0.11	0.38	QP
11	9.059	30.87	50.00	-19.13	20.40	9.69	0.33	0.45	Average
12	9.059	36.50	60.00	-23.50	26.03	9.69	0.33	0.45	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

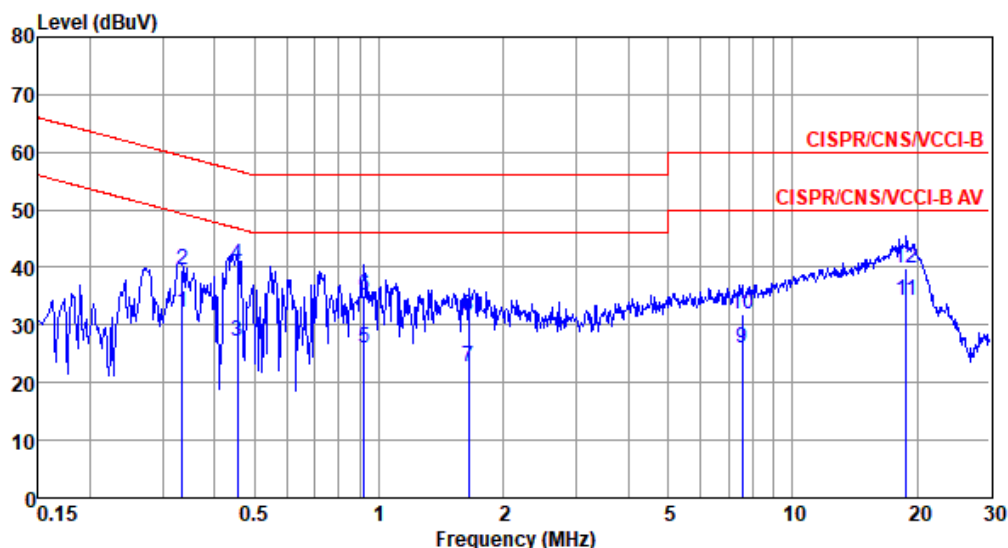

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV		dB		
1	0.334	32.14	49.35	-17.21	22.22	9.62	0.07	0.23	Average
2	0.334	39.62	59.35	-19.73	29.70	9.62	0.07	0.23	QP
3	0.454	27.03	46.80	-19.77	17.07	9.62	0.08	0.26	Average
4	0.454	40.33	56.80	-16.47	30.37	9.62	0.08	0.26	QP
5	0.918	25.94	46.00	-20.06	15.92	9.63	0.09	0.30	Average
6	0.918	35.11	56.00	-20.89	25.09	9.63	0.09	0.30	QP
7	1.645	22.85	46.00	-23.15	12.78	9.64	0.10	0.33	Average
8	1.645	31.70	56.00	-24.30	21.63	9.64	0.10	0.33	QP
9	7.566	25.94	50.00	-24.06	15.54	9.69	0.30	0.41	Average
10	7.566	31.81	60.00	-28.19	21.41	9.69	0.30	0.41	QP
11*	18.820	34.12	50.00	-15.88	23.26	9.79	0.50	0.57	Average
12	18.820	39.87	60.00	-20.13	29.01	9.79	0.50	0.57	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Configuration 2: Model: SDG-8734

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

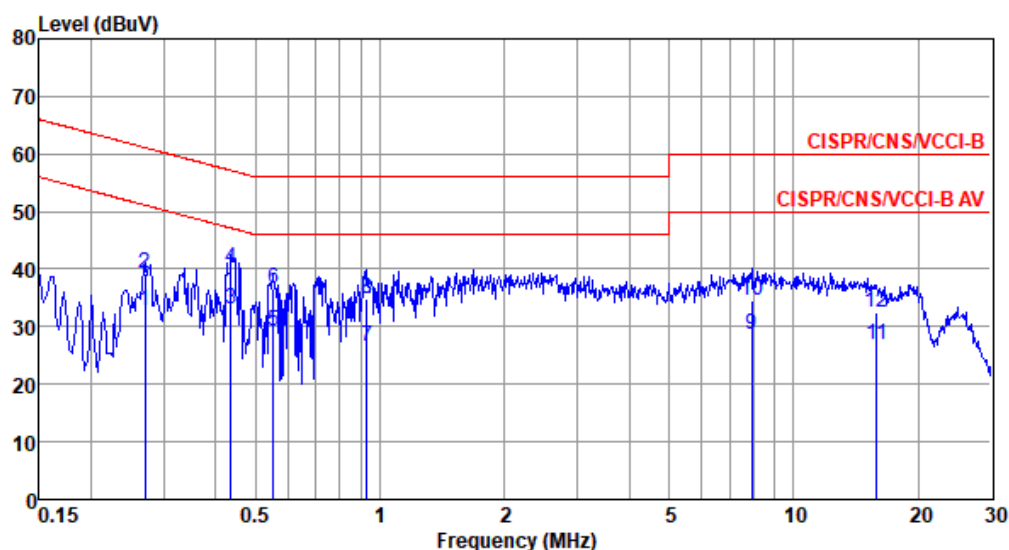

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.270	32.70	51.12	-18.42	22.73	9.62	0.07	0.28	Average
2	0.270	39.22	61.12	-21.90	29.25	9.62	0.07	0.28	QP
3*	0.435	33.14	47.15	-14.01	23.11	9.62	0.08	0.33	Average
4	0.435	40.02	57.15	-17.13	29.99	9.62	0.08	0.33	QP
5	0.552	29.31	46.00	-16.69	19.27	9.62	0.08	0.34	Average
6	0.552	36.69	56.00	-19.31	26.65	9.62	0.08	0.34	QP
7	0.928	26.67	46.00	-19.33	16.59	9.63	0.09	0.36	Average
8	0.928	34.90	56.00	-21.10	24.82	9.63	0.09	0.36	QP
9	7.935	28.78	50.00	-21.22	18.35	9.68	0.31	0.44	Average
10	7.935	34.48	60.00	-25.52	24.05	9.68	0.31	0.44	QP
11	15.885	26.84	50.00	-23.16	16.20	9.68	0.45	0.51	Average
12	15.885	32.45	60.00	-27.55	21.81	9.68	0.45	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

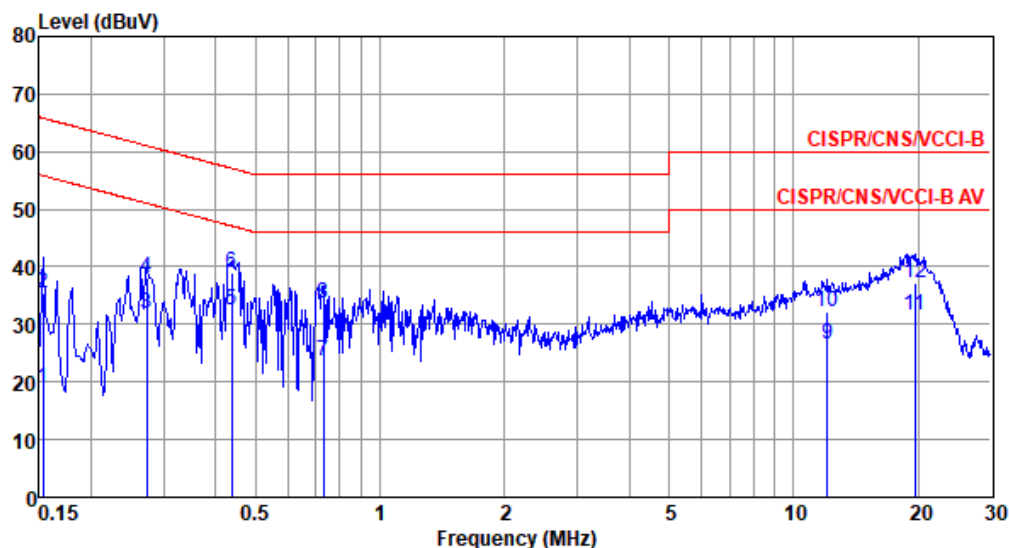

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	18.83	55.82	-36.99	9.00	9.63	0.08	0.12	Average
2	0.153	35.44	65.82	-30.38	25.61	9.63	0.08	0.12	QP
3	0.273	32.02	51.03	-19.01	22.11	9.63	0.07	0.21	Average
4	0.273	37.94	61.03	-23.09	28.03	9.63	0.07	0.21	QP
5*	0.437	32.33	47.11	-14.78	22.38	9.62	0.08	0.25	Average
6	0.437	39.10	57.11	-18.01	29.15	9.62	0.08	0.25	QP
7	0.731	23.61	46.00	-22.39	13.61	9.63	0.09	0.28	Average
8	0.731	33.59	56.00	-22.41	23.59	9.63	0.09	0.28	QP
9	12.060	26.49	50.00	-23.51	15.92	9.73	0.39	0.45	Average
10	12.060	32.07	60.00	-27.93	21.50	9.73	0.39	0.45	QP
11	19.635	31.68	50.00	-18.32	20.79	9.80	0.51	0.58	Average
12	19.635	37.23	60.00	-22.77	26.34	9.80	0.51	0.58	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Beamforming mode


Configuration 1: Model: SDG-8733

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

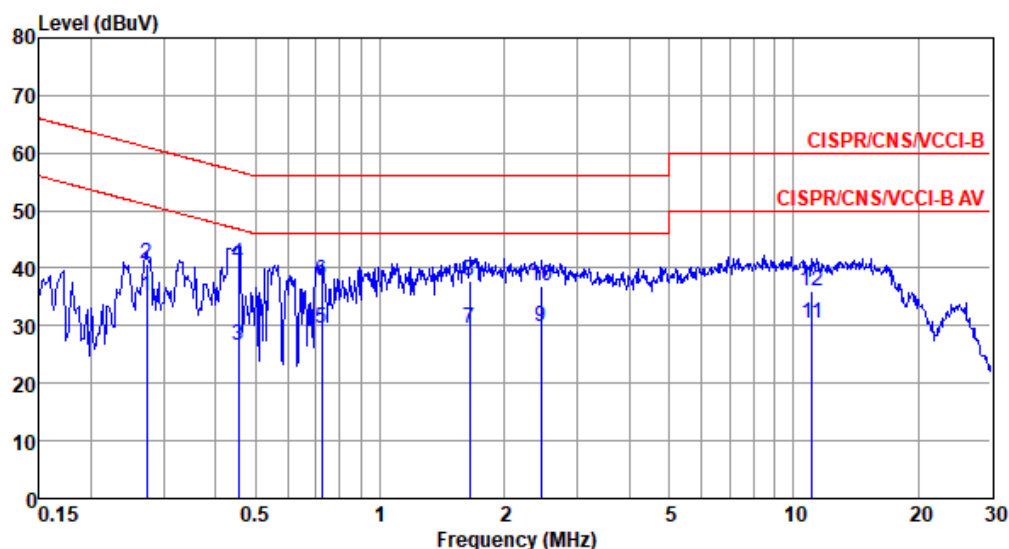

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1*	0.273	35.18	51.03	-15.85	25.20	9.62	0.07	0.29	Average
2	0.273	40.78	61.03	-20.25	30.80	9.62	0.07	0.29	QP
3	0.454	26.56	46.80	-20.24	16.53	9.62	0.08	0.33	Average
4	0.454	40.78	56.80	-16.02	30.75	9.62	0.08	0.33	QP
5	0.724	29.59	46.00	-16.41	19.52	9.63	0.09	0.35	Average
6	0.724	37.76	56.00	-18.24	27.69	9.63	0.09	0.35	QP
7	1.645	29.61	46.00	-16.39	19.51	9.63	0.10	0.37	Average
8	1.645	37.72	56.00	-18.28	27.62	9.63	0.10	0.37	QP
9	2.448	29.85	46.00	-16.15	19.69	9.64	0.13	0.39	Average
10	2.448	36.77	56.00	-19.23	26.61	9.64	0.13	0.39	QP
11	11.080	30.29	50.00	-19.71	19.77	9.69	0.37	0.46	Average
12	11.080	35.93	60.00	-24.07	25.41	9.69	0.37	0.46	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

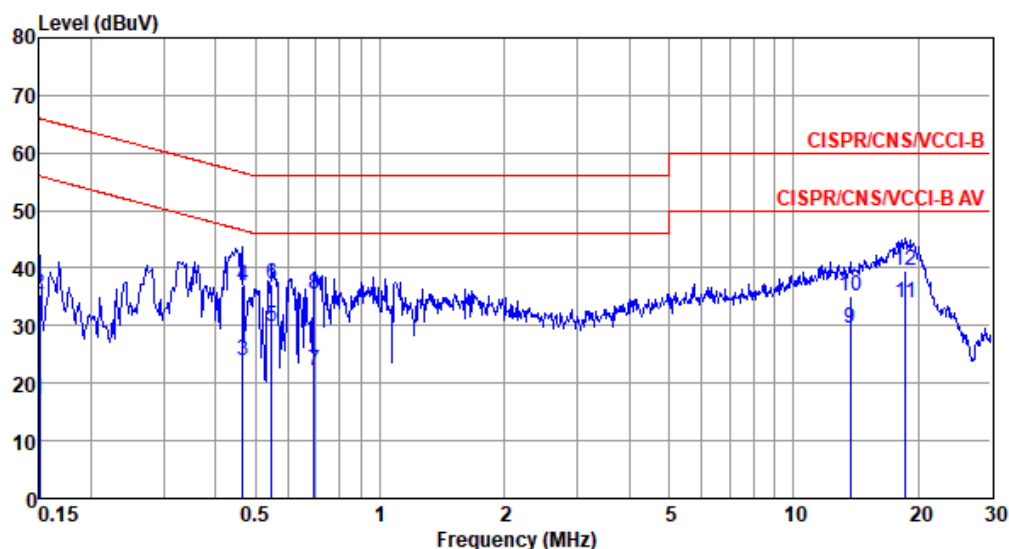

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	17.20	56.00	-38.80	7.37	9.63	0.08	0.12	Average
2	0.150	35.46	66.00	-30.54	25.63	9.63	0.08	0.12	QP
3	0.466	23.80	46.58	-22.78	13.84	9.62	0.08	0.26	Average
4	0.466	36.87	56.58	-19.71	26.91	9.62	0.08	0.26	QP
5	0.546	29.80	46.00	-16.20	19.83	9.62	0.08	0.27	Average
6	0.546	37.10	56.00	-18.90	27.13	9.62	0.08	0.27	QP
7	0.694	22.21	46.00	-23.79	12.21	9.63	0.09	0.28	Average
8	0.694	35.43	56.00	-20.57	25.43	9.63	0.09	0.28	QP
9	13.695	29.50	50.00	-20.50	18.86	9.75	0.42	0.47	Average
10	13.695	35.25	60.00	-24.75	24.61	9.75	0.42	0.47	QP
11*	18.622	34.06	50.00	-15.94	23.22	9.79	0.49	0.56	Average
12	18.622	39.63	60.00	-20.37	28.79	9.79	0.49	0.56	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Configuration 2: Model: SDG-8734

Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

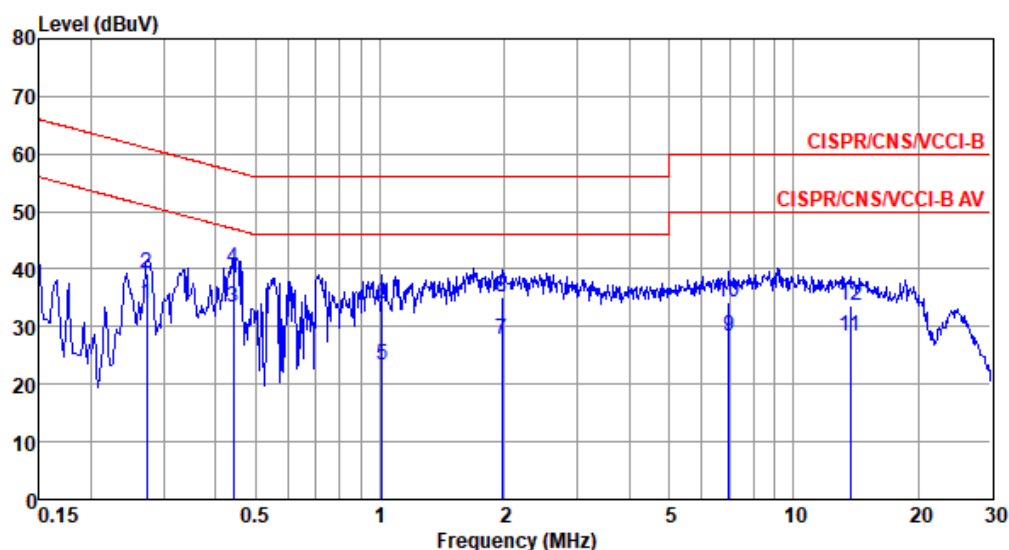

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.273	34.07	51.03	-16.96	24.09	9.62	0.07	0.29	Average
2	0.273	39.39	61.03	-21.64	29.41	9.62	0.07	0.29	QP
3*	0.442	33.32	47.02	-13.70	23.29	9.62	0.08	0.33	Average
4	0.442	40.18	57.02	-16.84	30.15	9.62	0.08	0.33	QP
5	1.010	23.21	46.00	-22.79	13.13	9.63	0.09	0.36	Average
6	1.010	34.01	56.00	-21.99	23.93	9.63	0.09	0.36	QP
7	1.970	27.61	46.00	-18.39	17.49	9.63	0.11	0.38	Average
8	1.970	35.07	56.00	-20.93	24.95	9.63	0.11	0.38	QP
9	6.988	28.29	50.00	-21.71	17.91	9.67	0.28	0.43	Average
10	6.988	34.30	60.00	-25.70	23.92	9.67	0.28	0.43	QP
11	13.695	28.22	50.00	-21.78	17.63	9.69	0.42	0.48	Average
12	13.695	33.72	60.00	-26.28	23.13	9.69	0.42	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6425
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

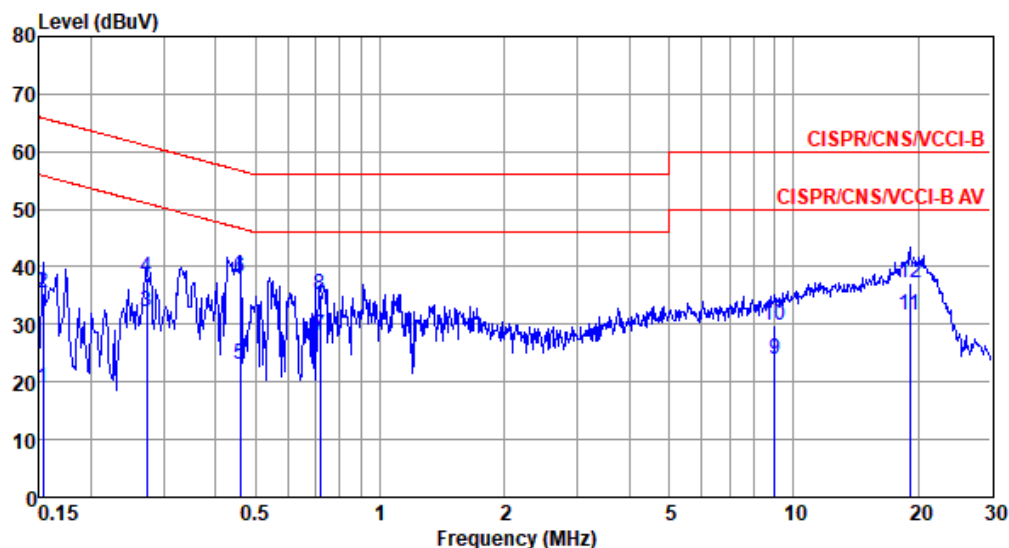

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	18.82	55.82	-37.00	8.99	9.63	0.08	0.12	Average
2	0.153	35.47	65.82	-30.35	25.64	9.63	0.08	0.12	QP
3	0.273	32.04	51.03	-18.99	22.13	9.63	0.07	0.21	Average
4	0.273	38.07	61.03	-22.96	28.16	9.63	0.07	0.21	QP
5	0.459	23.02	46.71	-23.69	13.06	9.62	0.08	0.26	Average
6	0.459	37.98	56.71	-18.73	28.02	9.62	0.08	0.26	QP
7*	0.716	27.90	46.00	-18.10	17.90	9.63	0.09	0.28	Average
8	0.716	34.99	56.00	-21.01	24.99	9.63	0.09	0.28	QP
9	9.011	23.78	50.00	-26.22	13.33	9.70	0.33	0.42	Average
10	9.011	29.68	60.00	-30.32	19.23	9.70	0.33	0.42	QP
11	19.122	31.60	50.00	-18.40	20.74	9.79	0.50	0.57	Average
12	19.122	37.07	60.00	-22.93	26.21	9.79	0.50	0.57	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).