



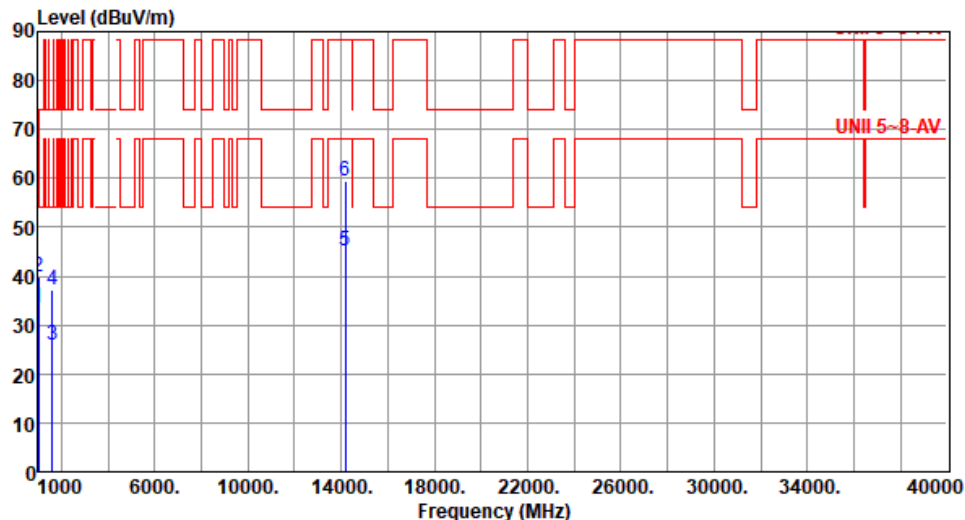

Modulation	11a	Test Freq. (MHz)	7095						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.48	54.00	-20.52	41.76	-8.28	Average	100	186
2	1001.00	40.01	74.00	-33.99	48.29	-8.28	Peak	100	186
3	1599.00	25.86	54.00	-28.14	33.17	-7.31	Average	100	317
4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	317
5	14190.00	45.24	68.20	-22.96	38.28	6.96	Average	100	72
6	14190.00	59.60	88.20	-28.60	52.64	6.96	Peak	100	72

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

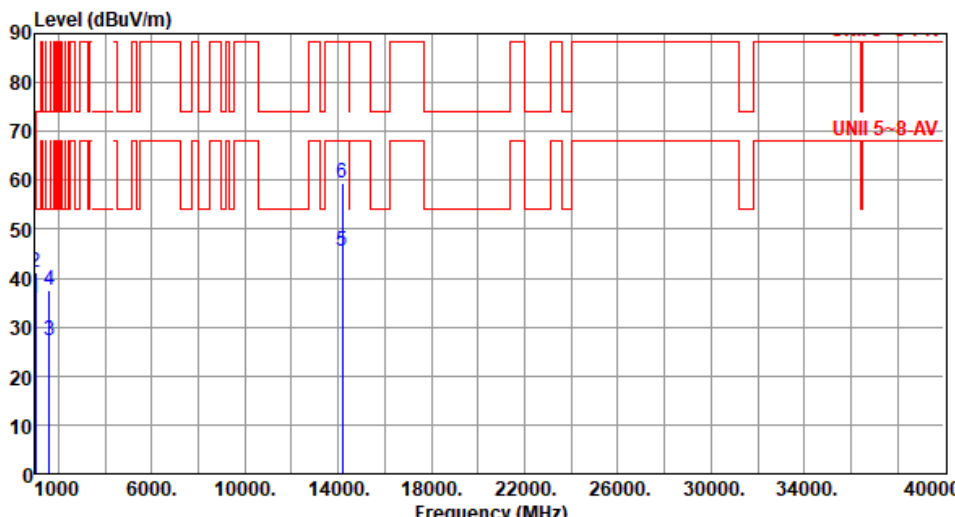


Modulation	11a	Test Freq. (MHz)	7095																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.74</td><td>54.00</td><td>-18.26</td><td>44.02</td><td>-8.28</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>2</td><td>1001.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>49.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>224</td></tr><tr><td>3</td><td>1599.00</td><td>27.08</td><td>54.00</td><td>-26.92</td><td>34.39</td><td>-7.31</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>4</td><td>1599.00</td><td>37.51</td><td>74.00</td><td>-36.49</td><td>44.82</td><td>-7.31</td><td>Peak</td><td>100</td><td>92</td></tr><tr><td>5</td><td>14190.00</td><td>45.48</td><td>68.20</td><td>-22.72</td><td>38.52</td><td>6.96</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>14190.00</td><td>59.41</td><td>88.20</td><td>-28.79</td><td>52.45</td><td>6.96</td><td>Peak</td><td>100</td><td>43</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.74	54.00	-18.26	44.02	-8.28	Average	100	224	2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	224	3	1599.00	27.08	54.00	-26.92	34.39	-7.31	Average	100	92	4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	92	5	14190.00	45.48	68.20	-22.72	38.52	6.96	Average	100	43	6	14190.00	59.41	88.20	-28.79	52.45	6.96	Peak	100	43
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.74	54.00	-18.26	44.02	-8.28	Average	100	224																																																																
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	224																																																																
3	1599.00	27.08	54.00	-26.92	34.39	-7.31	Average	100	92																																																																
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	92																																																																
5	14190.00	45.48	68.20	-22.72	38.52	6.96	Average	100	43																																																																
6	14190.00	59.41	88.20	-28.79	52.45	6.96	Peak	100	43																																																																



Modulation	11a	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>2</td><td>1599.00</td><td>37.31</td><td>74.00</td><td>-36.69</td><td>44.62</td><td>-7.31</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>3</td><td>7125.00</td><td>50.94</td><td>68.20</td><td>-17.26</td><td>46.01</td><td>4.93</td><td>Average</td><td>239</td><td>230</td></tr><tr><td>4</td><td>7125.00</td><td>69.66</td><td>88.20</td><td>-18.54</td><td>64.73</td><td>4.93</td><td>Peak</td><td>239</td><td>230</td></tr><tr><td>5</td><td>14230.00</td><td>46.45</td><td>68.20</td><td>-21.75</td><td>39.26</td><td>7.19</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>14230.00</td><td>60.04</td><td>88.20</td><td>-28.16</td><td>52.85</td><td>7.19</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	309	2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	309	3	7125.00	50.94	68.20	-17.26	46.01	4.93	Average	239	230	4	7125.00	69.66	88.20	-18.54	64.73	4.93	Peak	239	230	5	14230.00	46.45	68.20	-21.75	39.26	7.19	Average	100	48	6	14230.00	60.04	88.20	-28.16	52.85	7.19	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	309																																																																
2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	309																																																																
3	7125.00	50.94	68.20	-17.26	46.01	4.93	Average	239	230																																																																
4	7125.00	69.66	88.20	-18.54	64.73	4.93	Peak	239	230																																																																
5	14230.00	46.45	68.20	-21.75	39.26	7.19	Average	100	48																																																																
6	14230.00	60.04	88.20	-28.16	52.85	7.19	Peak	100	48																																																																

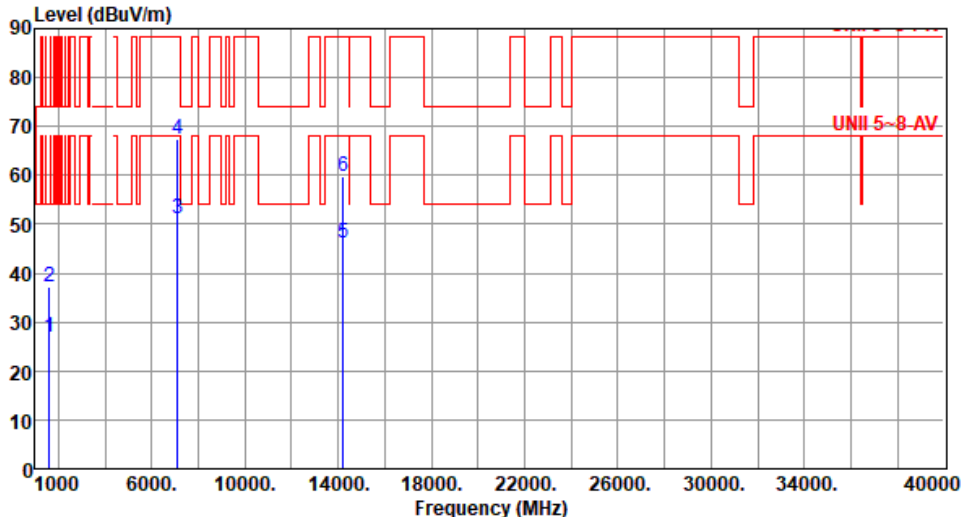

Modulation	11a	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.93</td><td>54.00</td><td>-27.07</td><td>34.24</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>2</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>3</td><td>7125.00</td><td>51.29</td><td>68.20</td><td>-16.91</td><td>46.36</td><td>4.93</td><td>Average</td><td>102</td><td>142</td></tr><tr><td>4</td><td>7125.00</td><td>67.55</td><td>88.20</td><td>-20.65</td><td>62.62</td><td>4.93</td><td>Peak</td><td>102</td><td>142</td></tr><tr><td>5</td><td>14230.00</td><td>46.32</td><td>68.20</td><td>-21.88</td><td>39.13</td><td>7.19</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>14230.00</td><td>59.80</td><td>88.20</td><td>-28.40</td><td>52.61</td><td>7.19</td><td>Peak</td><td>100</td><td>24</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	108	2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	108	3	7125.00	51.29	68.20	-16.91	46.36	4.93	Average	102	142	4	7125.00	67.55	88.20	-20.65	62.62	4.93	Peak	102	142	5	14230.00	46.32	68.20	-21.88	39.13	7.19	Average	100	24	6	14230.00	59.80	88.20	-28.40	52.61	7.19	Peak	100	24
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	108																																																																
2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	108																																																																
3	7125.00	51.29	68.20	-16.91	46.36	4.93	Average	102	142																																																																
4	7125.00	67.55	88.20	-20.65	62.62	4.93	Peak	102	142																																																																
5	14230.00	46.32	68.20	-21.88	39.13	7.19	Average	100	24																																																																
6	14230.00	59.80	88.20	-28.40	52.61	7.19	Peak	100	24																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5955																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																															
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg <table><tr><td>1</td><td>1599.00</td><td>26.83</td><td>54.00</td><td>-27.17</td><td>34.14</td><td>-7.31</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>2</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>99</td></tr><tr><td>3</td><td>5925.00</td><td>43.47</td><td>68.20</td><td>-24.73</td><td>42.33</td><td>1.14</td><td>Average</td><td>120</td><td>12</td></tr><tr><td>4</td><td>5925.00</td><td>55.96</td><td>88.20</td><td>-32.24</td><td>54.82</td><td>1.14</td><td>Peak</td><td>120</td><td>12</td></tr><tr><td>5</td><td>11910.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>36.62</td><td>6.12</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>11910.00</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>50.34</td><td>6.12</td><td>Peak</td><td>100</td><td>21</td></tr></table>				1	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	99	2	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	99	3	5925.00	43.47	68.20	-24.73	42.33	1.14	Average	120	12	4	5925.00	55.96	88.20	-32.24	54.82	1.14	Peak	120	12	5	11910.00	42.74	54.00	-11.26	36.62	6.12	Average	100	21	6	11910.00	56.46	74.00	-17.54	50.34	6.12	Peak	100	21
1	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	99																																																						
2	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	99																																																						
3	5925.00	43.47	68.20	-24.73	42.33	1.14	Average	120	12																																																						
4	5925.00	55.96	88.20	-32.24	54.82	1.14	Peak	120	12																																																						
5	11910.00	42.74	54.00	-11.26	36.62	6.12	Average	100	21																																																						
6	11910.00	56.46	74.00	-17.54	50.34	6.12	Peak	100	21																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															

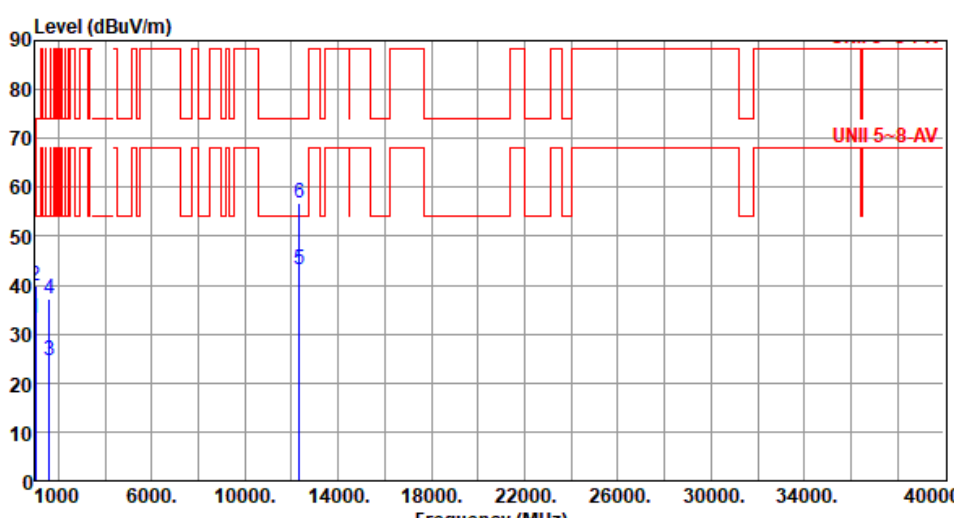

Modulation	be EHT20	Test Freq. (MHz)	6175						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.33	54.00	-20.67	41.61	-8.28	Average	100	194
2	1001.00	39.83	74.00	-34.17	48.11	-8.28	Peak	100	194
3	1599.00	24.70	54.00	-29.30	32.01	-7.31	Average	100	314
4	1599.00	37.12	74.00	-36.88	44.43	-7.31	Peak	100	314
5	12350.00	43.20	54.00	-10.80	36.63	6.57	Average	100	66
6	12350.00	56.86	74.00	-17.14	50.29	6.57	Peak	100	66

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

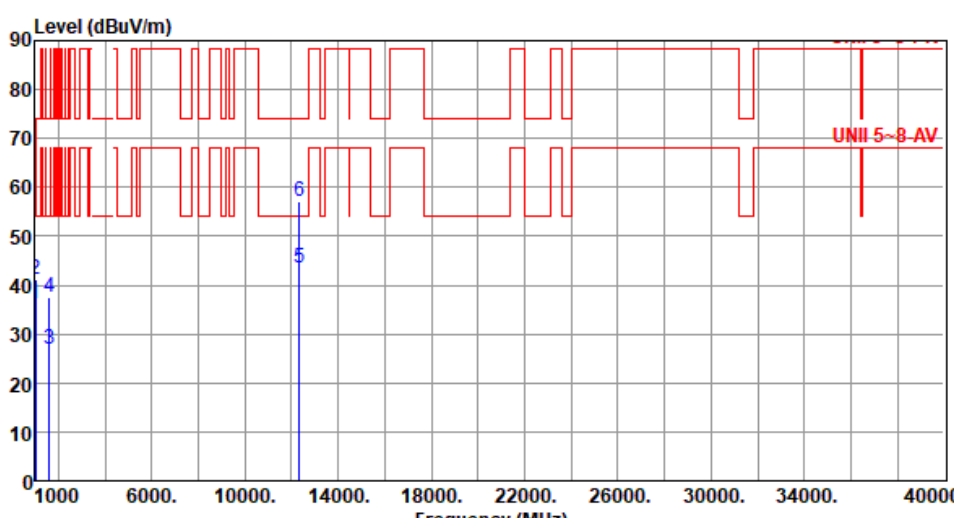


Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>36.09</td><td>54.00</td><td>-17.91</td><td>44.37</td><td>-8.28</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>2</td><td>1001.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>49.44</td><td>-8.28</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>3</td><td>1599.00</td><td>26.95</td><td>54.00</td><td>-27.05</td><td>34.26</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>4</td><td>1599.00</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>44.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>5</td><td>12350.00</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>36.90</td><td>6.57</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>6</td><td>12350.00</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>50.41</td><td>6.57</td><td>Peak</td><td>100</td><td>38</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	36.09	54.00	-17.91	44.37	-8.28	Average	100	214	2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	214	3	1599.00	26.95	54.00	-27.05	34.26	-7.31	Average	100	106	4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	106	5	12350.00	43.47	54.00	-10.53	36.90	6.57	Average	100	38	6	12350.00	56.98	74.00	-17.02	50.41	6.57	Peak	100	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	36.09	54.00	-17.91	44.37	-8.28	Average	100	214																																																																
2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	214																																																																
3	1599.00	26.95	54.00	-27.05	34.26	-7.31	Average	100	106																																																																
4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	106																																																																
5	12350.00	43.47	54.00	-10.53	36.90	6.57	Average	100	38																																																																
6	12350.00	56.98	74.00	-17.02	50.41	6.57	Peak	100	38																																																																




Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.32</td><td>54.00</td><td>-20.68</td><td>41.60</td><td>-8.28</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>2</td><td>1001.00</td><td>39.88</td><td>74.00</td><td>-34.12</td><td>48.16</td><td>-8.28</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>3</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>4</td><td>1599.00</td><td>37.38</td><td>74.00</td><td>-36.62</td><td>44.69</td><td>-7.31</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>5</td><td>12830.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>36.84</td><td>6.56</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>6</td><td>12830.00</td><td>57.90</td><td>88.20</td><td>-30.30</td><td>51.34</td><td>6.56</td><td>Peak</td><td>100</td><td>61</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.32	54.00	-20.68	41.60	-8.28	Average	100	200	2	1001.00	39.88	74.00	-34.12	48.16	-8.28	Peak	100	200	3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325	4	1599.00	37.38	74.00	-36.62	44.69	-7.31	Peak	100	325	5	12830.00	43.40	68.20	-24.80	36.84	6.56	Average	100	61	6	12830.00	57.90	88.20	-30.30	51.34	6.56	Peak	100	61
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.32	54.00	-20.68	41.60	-8.28	Average	100	200																																																																
2	1001.00	39.88	74.00	-34.12	48.16	-8.28	Peak	100	200																																																																
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325																																																																
4	1599.00	37.38	74.00	-36.62	44.69	-7.31	Peak	100	325																																																																
5	12830.00	43.40	68.20	-24.80	36.84	6.56	Average	100	61																																																																
6	12830.00	57.90	88.20	-30.30	51.34	6.56	Peak	100	61																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

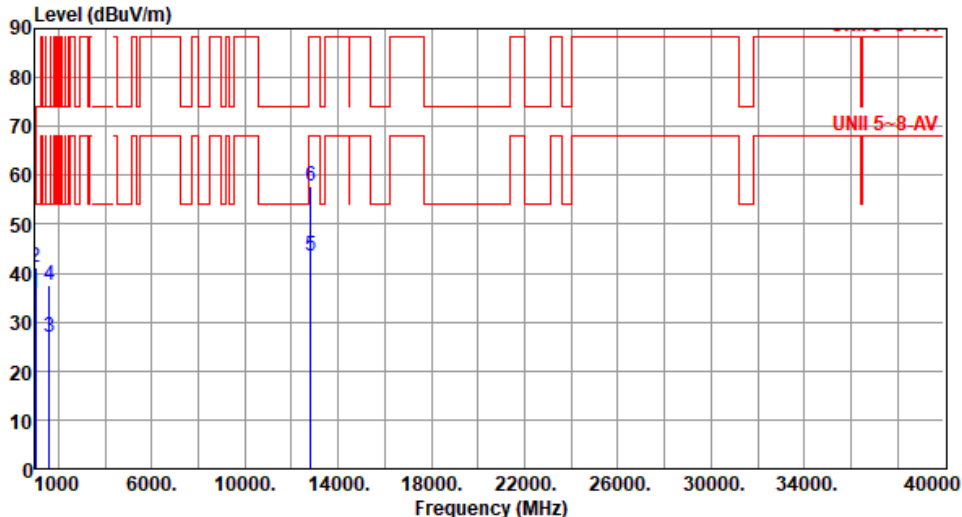

Modulation	be EHT20	Test Freq. (MHz)	6415																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.93</td><td>54.00</td><td>-18.07</td><td>44.21</td><td>-8.28</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>1001.00</td><td>41.11</td><td>74.00</td><td>-32.89</td><td>49.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>1599.00</td><td>26.97</td><td>54.00</td><td>-27.03</td><td>34.28</td><td>-7.31</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>1599.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.74</td><td>-7.31</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>12830.00</td><td>43.52</td><td>68.20</td><td>-24.68</td><td>36.96</td><td>6.56</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td>12830.00</td><td>57.93</td><td>88.20</td><td>-30.27</td><td>51.37</td><td>6.56</td><td>Peak</td><td>100</td><td>26</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.93	54.00	-18.07	44.21	-8.28	Average	100	211	2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	211	3	1599.00	26.97	54.00	-27.03	34.28	-7.31	Average	100	107	4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	107	5	12830.00	43.52	68.20	-24.68	36.96	6.56	Average	100	26	6	12830.00	57.93	88.20	-30.27	51.37	6.56	Peak	100	26
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.93	54.00	-18.07	44.21	-8.28	Average	100	211																																																																
2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	211																																																																
3	1599.00	26.97	54.00	-27.03	34.28	-7.31	Average	100	107																																																																
4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	107																																																																
5	12830.00	43.52	68.20	-24.68	36.96	6.56	Average	100	26																																																																
6	12830.00	57.93	88.20	-30.27	51.37	6.56	Peak	100	26																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

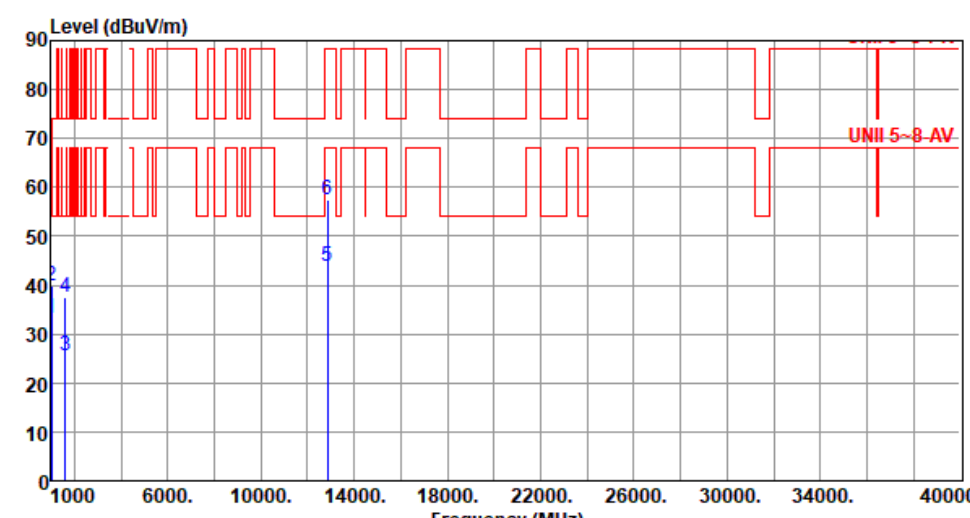


Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.24	54.00	-20.76	41.52	-8.28	Average	100	192
2	1001.00	39.99	74.00	-34.01	48.27	-8.28	Peak	100	192
3	1599.00	25.65	54.00	-28.35	32.96	-7.31	Average	100	320
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	320
5	12870.00	43.82	68.20	-24.38	37.41	6.41	Average	100	64
6	12870.00	57.37	88.20	-30.83	50.96	6.41	Peak	100	64
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20	Test Freq. (MHz)	6435																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.97</td><td>54.00</td><td>-18.03</td><td>44.25</td><td>-8.28</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>1001.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>49.50</td><td>-8.28</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>1599.00</td><td>26.89</td><td>54.00</td><td>-27.11</td><td>34.20</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>12870.00</td><td>43.90</td><td>68.20</td><td>-24.30</td><td>37.49</td><td>6.41</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>12870.00</td><td>57.40</td><td>88.20</td><td>-30.80</td><td>50.99</td><td>6.41</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.97	54.00	-18.03	44.25	-8.28	Average	100	219	2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	219	3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	109	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	109	5	12870.00	43.90	68.20	-24.30	37.49	6.41	Average	100	31	6	12870.00	57.40	88.20	-30.80	50.99	6.41	Peak	100	31
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.97	54.00	-18.03	44.25	-8.28	Average	100	219																																																																
2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	219																																																																
3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	109																																																																
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	109																																																																
5	12870.00	43.90	68.20	-24.30	37.49	6.41	Average	100	31																																																																
6	12870.00	57.40	88.20	-30.80	50.99	6.41	Peak	100	31																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

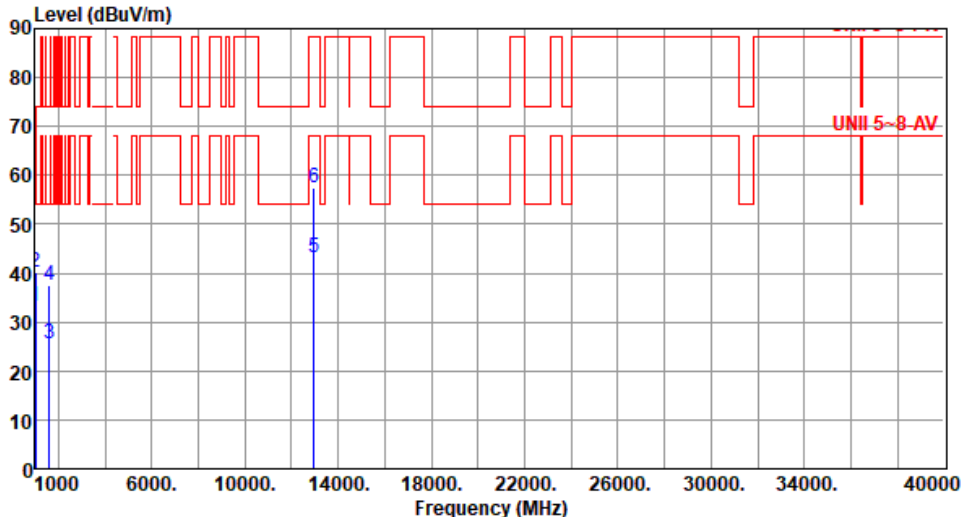

Modulation	be EHT20		Test Freq. (MHz)		6475																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.24</td><td>54.00</td><td>-20.76</td><td>41.52</td><td>-8.28</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1001.00</td><td>40.16</td><td>74.00</td><td>-33.84</td><td>48.44</td><td>-8.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>1599.00</td><td>25.69</td><td>54.00</td><td>-28.31</td><td>33.00</td><td>-7.31</td><td>Average</td><td>100</td><td>319</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>319</td></tr><tr><td>5</td><td>12950.00</td><td>43.24</td><td>68.20</td><td>-24.96</td><td>36.96</td><td>6.28</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>12950.00</td><td>57.46</td><td>88.20</td><td>-30.74</td><td>51.18</td><td>6.28</td><td>Peak</td><td>100</td><td>55</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.24	54.00	-20.76	41.52	-8.28	Average	100	208	2	1001.00	40.16	74.00	-33.84	48.44	-8.28	Peak	100	208	3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	319	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	319	5	12950.00	43.24	68.20	-24.96	36.96	6.28	Average	100	55	6	12950.00	57.46	88.20	-30.74	51.18	6.28	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.24	54.00	-20.76	41.52	-8.28	Average	100	208																																																																																										
2	1001.00	40.16	74.00	-33.84	48.44	-8.28	Peak	100	208																																																																																										
3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	319																																																																																										
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	319																																																																																										
5	12950.00	43.24	68.20	-24.96	36.96	6.28	Average	100	55																																																																																										
6	12950.00	57.46	88.20	-30.74	51.18	6.28	Peak	100	55																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

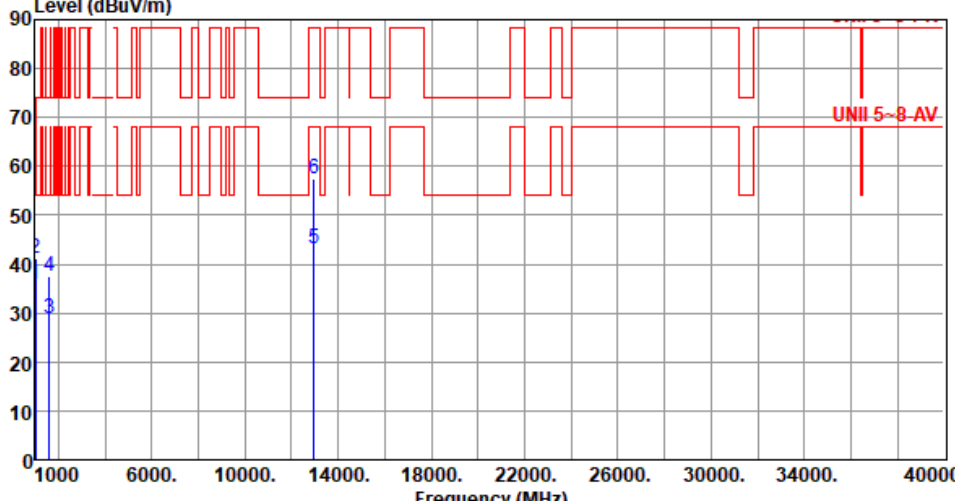


Modulation	be EHT20	Test Freq. (MHz)	6475																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.86</td><td>54.00</td><td>-18.14</td><td>44.14</td><td>-8.28</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>1001.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>49.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>1599.00</td><td>28.99</td><td>54.00</td><td>-25.01</td><td>36.30</td><td>-7.31</td><td>Average</td><td>100</td><td>121</td></tr><tr><td>4</td><td>1599.00</td><td>37.53</td><td>74.00</td><td>-36.47</td><td>44.84</td><td>-7.31</td><td>Peak</td><td>100</td><td>121</td></tr><tr><td>5</td><td>12950.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>36.94</td><td>6.28</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>12950.00</td><td>57.50</td><td>88.20</td><td>-30.70</td><td>51.22</td><td>6.28</td><td>Peak</td><td>100</td><td>23</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	223	2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	223	3	1599.00	28.99	54.00	-25.01	36.30	-7.31	Average	100	121	4	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	121	5	12950.00	43.22	68.20	-24.98	36.94	6.28	Average	100	23	6	12950.00	57.50	88.20	-30.70	51.22	6.28	Peak	100	23
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	223																																																																
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	223																																																																
3	1599.00	28.99	54.00	-25.01	36.30	-7.31	Average	100	121																																																																
4	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	121																																																																
5	12950.00	43.22	68.20	-24.98	36.94	6.28	Average	100	23																																																																
6	12950.00	57.50	88.20	-30.70	51.22	6.28	Peak	100	23																																																																



Modulation	be EHT20	Test Freq. (MHz)	6515																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>191</td></tr><tr><td>2</td><td>1001.00</td><td>39.83</td><td>74.00</td><td>-34.17</td><td>48.11</td><td>-8.28</td><td>Peak</td><td>100</td><td>191</td></tr><tr><td>3</td><td>1599.00</td><td>25.49</td><td>54.00</td><td>-28.51</td><td>32.80</td><td>-7.31</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>1599.00</td><td>37.29</td><td>74.00</td><td>-36.71</td><td>44.60</td><td>-7.31</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>5</td><td>13030.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>36.76</td><td>6.10</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>13030.00</td><td>56.46</td><td>88.20</td><td>-31.74</td><td>50.36</td><td>6.10</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	191	2	1001.00	39.83	74.00	-34.17	48.11	-8.28	Peak	100	191	3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	311	4	1599.00	37.29	74.00	-36.71	44.60	-7.31	Peak	100	311	5	13030.00	42.86	68.20	-25.34	36.76	6.10	Average	100	50	6	13030.00	56.46	88.20	-31.74	50.36	6.10	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	191																																																																
2	1001.00	39.83	74.00	-34.17	48.11	-8.28	Peak	100	191																																																																
3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	311																																																																
4	1599.00	37.29	74.00	-36.71	44.60	-7.31	Peak	100	311																																																																
5	13030.00	42.86	68.20	-25.34	36.76	6.10	Average	100	50																																																																
6	13030.00	56.46	88.20	-31.74	50.36	6.10	Peak	100	50																																																																

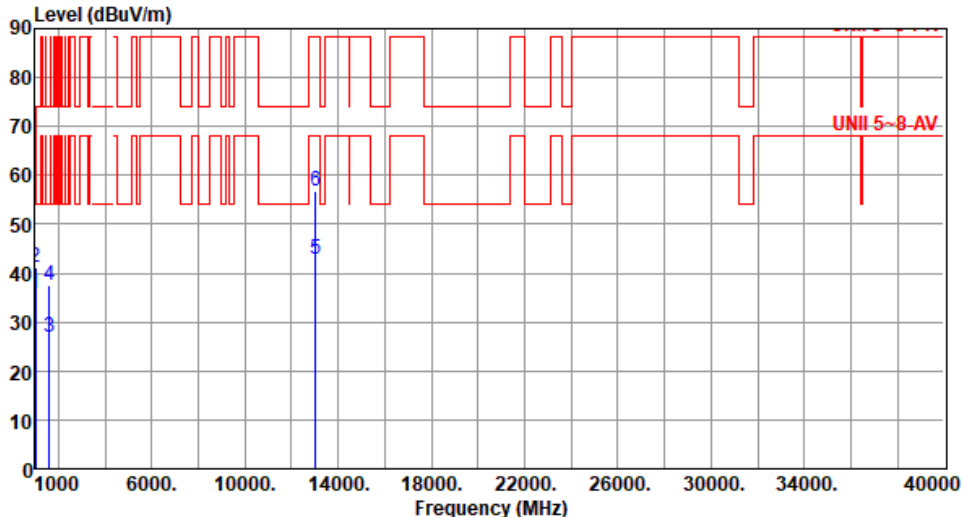

Modulation	be EHT20		Test Freq. (MHz)		6515																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.79</td><td>54.00</td><td>-18.21</td><td>44.07</td><td>-8.28</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>2</td><td>1001.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>49.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>3</td><td>1599.00</td><td>26.97</td><td>54.00</td><td>-27.03</td><td>34.28</td><td>-7.31</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>5</td><td>13030.00</td><td>42.98</td><td>68.20</td><td>-25.22</td><td>36.88</td><td>6.10</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>6</td><td>13030.00</td><td>56.86</td><td>88.20</td><td>-31.34</td><td>50.76</td><td>6.10</td><td>Peak</td><td>100</td><td>52</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	217	2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	217	3	1599.00	26.97	54.00	-27.03	34.28	-7.31	Average	100	111	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	111	5	13030.00	42.98	68.20	-25.22	36.88	6.10	Average	100	52	6	13030.00	56.86	88.20	-31.34	50.76	6.10	Peak	100	52
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	217																																																																																										
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	217																																																																																										
3	1599.00	26.97	54.00	-27.03	34.28	-7.31	Average	100	111																																																																																										
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	111																																																																																										
5	13030.00	42.98	68.20	-25.22	36.88	6.10	Average	100	52																																																																																										
6	13030.00	56.86	88.20	-31.34	50.76	6.10	Peak	100	52																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>2</td><td>1001.00</td><td>39.98</td><td>74.00</td><td>-34.02</td><td>48.26</td><td>-8.28</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>3</td><td>1599.00</td><td>25.67</td><td>54.00</td><td>-28.33</td><td>32.98</td><td>-7.31</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>4</td><td>1599.00</td><td>37.44</td><td>74.00</td><td>-36.56</td><td>44.75</td><td>-7.31</td><td>Peak</td><td>100</td><td>316</td></tr><tr><td>5</td><td>13070.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>37.41</td><td>5.89</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13070.00</td><td>57.52</td><td>88.20</td><td>-30.68</td><td>51.63</td><td>5.89</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	202	2	1001.00	39.98	74.00	-34.02	48.26	-8.28	Peak	100	202	3	1599.00	25.67	54.00	-28.33	32.98	-7.31	Average	100	316	4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	316	5	13070.00	43.30	68.20	-24.90	37.41	5.89	Average	100	22	6	13070.00	57.52	88.20	-30.68	51.63	5.89	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	202																																																																
2	1001.00	39.98	74.00	-34.02	48.26	-8.28	Peak	100	202																																																																
3	1599.00	25.67	54.00	-28.33	32.98	-7.31	Average	100	316																																																																
4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	316																																																																
5	13070.00	43.30	68.20	-24.90	37.41	5.89	Average	100	22																																																																
6	13070.00	57.52	88.20	-30.68	51.63	5.89	Peak	100	22																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.91</td><td>54.00</td><td>-18.09</td><td>44.19</td><td>-8.28</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1001.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>49.50</td><td>-8.28</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>1599.00</td><td>26.83</td><td>54.00</td><td>-27.17</td><td>34.14</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>44.80</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>13070.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>37.40</td><td>5.89</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>13070.00</td><td>57.61</td><td>88.20</td><td>-30.59</td><td>51.72</td><td>5.89</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.91	54.00	-18.09	44.19	-8.28	Average	100	204	2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	204	3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	108	4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	108	5	13070.00	43.29	68.20	-24.91	37.40	5.89	Average	100	31	6	13070.00	57.61	88.20	-30.59	51.72	5.89	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.91	54.00	-18.09	44.19	-8.28	Average	100	204																																																																
2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	204																																																																
3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	108																																																																
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	108																																																																
5	13070.00	43.29	68.20	-24.91	37.40	5.89	Average	100	31																																																																
6	13070.00	57.61	88.20	-30.59	51.72	5.89	Peak	100	31																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

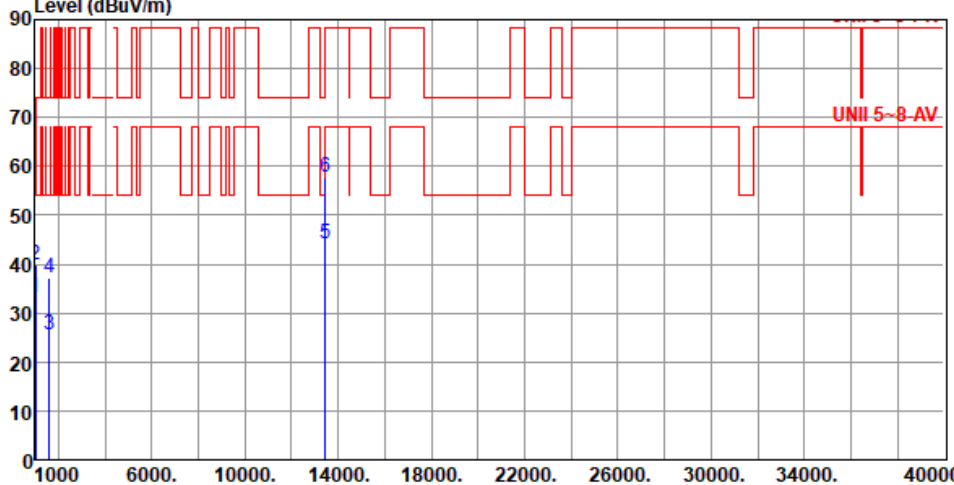


Modulation	be EHT20	Test Freq. (MHz)	6715						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.34	54.00	-20.66	41.62	-8.28	Average	100	191
2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	191
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	318
4	1599.00	37.29	74.00	-36.71	44.60	-7.31	Peak	100	318
5	13430.00	44.28	68.20	-23.92	38.25	6.03	Average	100	60
6	13430.00	57.72	88.20	-30.48	51.69	6.03	Peak	100	60
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

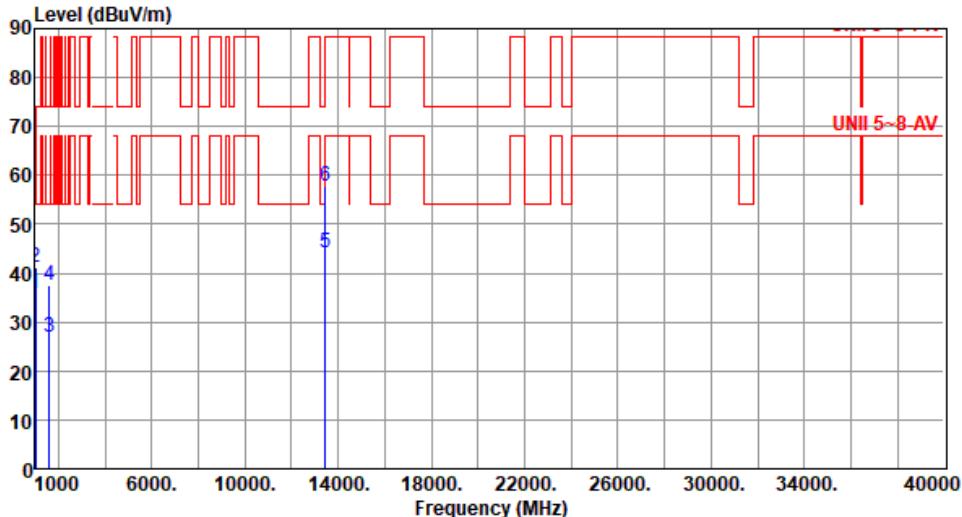


Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.92</td><td>54.00</td><td>-18.08</td><td>44.20</td><td>-8.28</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>1001.00</td><td>41.17</td><td>74.00</td><td>-32.83</td><td>49.45</td><td>-8.28</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>1599.00</td><td>26.88</td><td>54.00</td><td>-27.12</td><td>34.19</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>13430.00</td><td>44.20</td><td>68.20</td><td>-24.00</td><td>38.17</td><td>6.03</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>13430.00</td><td>57.88</td><td>88.20</td><td>-30.32</td><td>51.85</td><td>6.03</td><td>Peak</td><td>100</td><td>18</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	216	2	1001.00	41.17	74.00	-32.83	49.45	-8.28	Peak	100	216	3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	109	4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	109	5	13430.00	44.20	68.20	-24.00	38.17	6.03	Average	100	18	6	13430.00	57.88	88.20	-30.32	51.85	6.03	Peak	100	18
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	216																																																																
2	1001.00	41.17	74.00	-32.83	49.45	-8.28	Peak	100	216																																																																
3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	109																																																																
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	109																																																																
5	13430.00	44.20	68.20	-24.00	38.17	6.03	Average	100	18																																																																
6	13430.00	57.88	88.20	-30.32	51.85	6.03	Peak	100	18																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

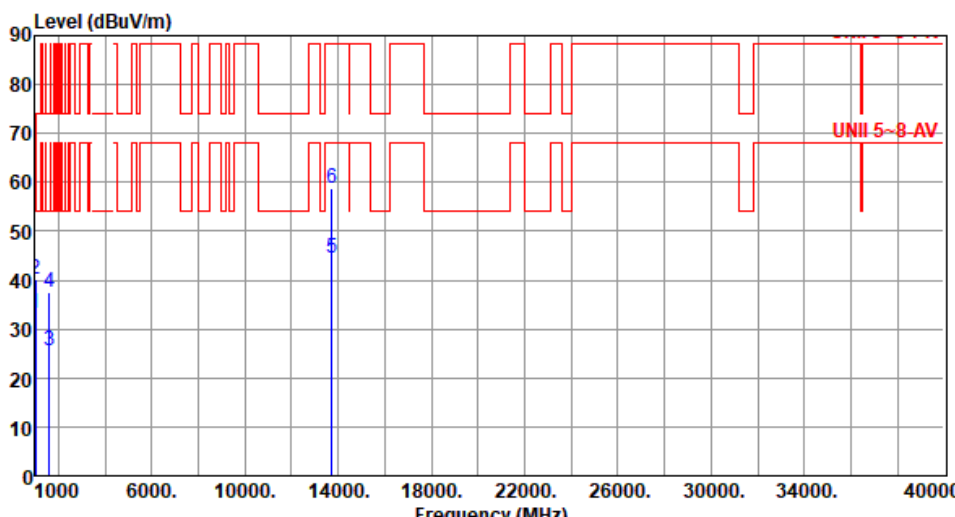


Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.36</td><td>54.00</td><td>-20.64</td><td>41.64</td><td>-8.28</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>2</td><td>1001.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>48.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>207</td></tr><tr><td>3</td><td>1599.00</td><td>25.69</td><td>54.00</td><td>-28.31</td><td>33.00</td><td>-7.31</td><td>Average</td><td>100</td><td>319</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>319</td></tr><tr><td>5</td><td>13710.00</td><td>44.46</td><td>68.20</td><td>-23.74</td><td>38.36</td><td>6.10</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>6</td><td>13710.00</td><td>58.74</td><td>88.20</td><td>-29.46</td><td>52.64</td><td>6.10</td><td>Peak</td><td>100</td><td>66</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.36	54.00	-20.64	41.64	-8.28	Average	100	207	2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	207	3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	319	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	319	5	13710.00	44.46	68.20	-23.74	38.36	6.10	Average	100	66	6	13710.00	58.74	88.20	-29.46	52.64	6.10	Peak	100	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.36	54.00	-20.64	41.64	-8.28	Average	100	207																																																																
2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	207																																																																
3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	319																																																																
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	319																																																																
5	13710.00	44.46	68.20	-23.74	38.36	6.10	Average	100	66																																																																
6	13710.00	58.74	88.20	-29.46	52.64	6.10	Peak	100	66																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

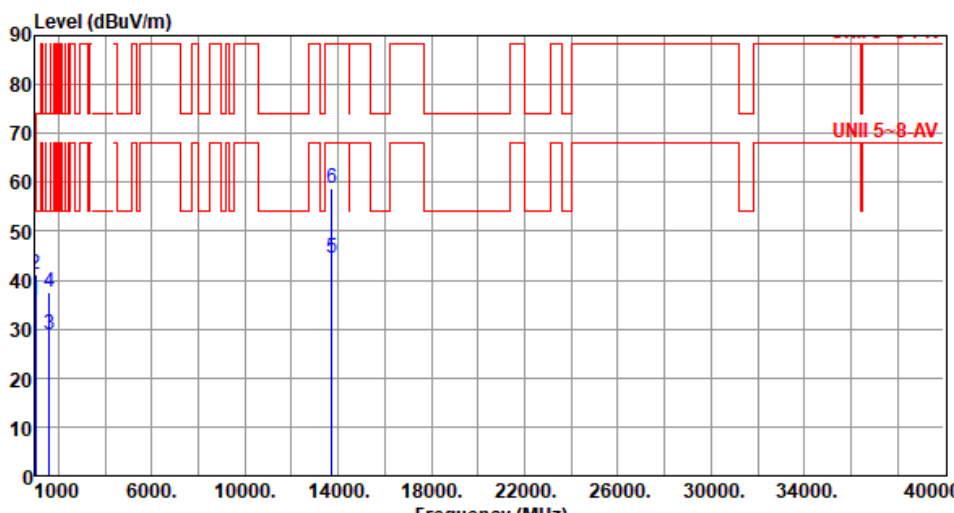


Modulation	be EHT20	Test Freq. (MHz)	6855						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	216
2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	216
3	1599.00	28.90	54.00	-25.10	36.21	-7.31	Average	100	113
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	113
5	13710.00	44.50	68.20	-23.70	38.40	6.10	Average	100	28
6	13710.00	58.67	88.20	-29.53	52.57	6.10	Peak	100	28

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

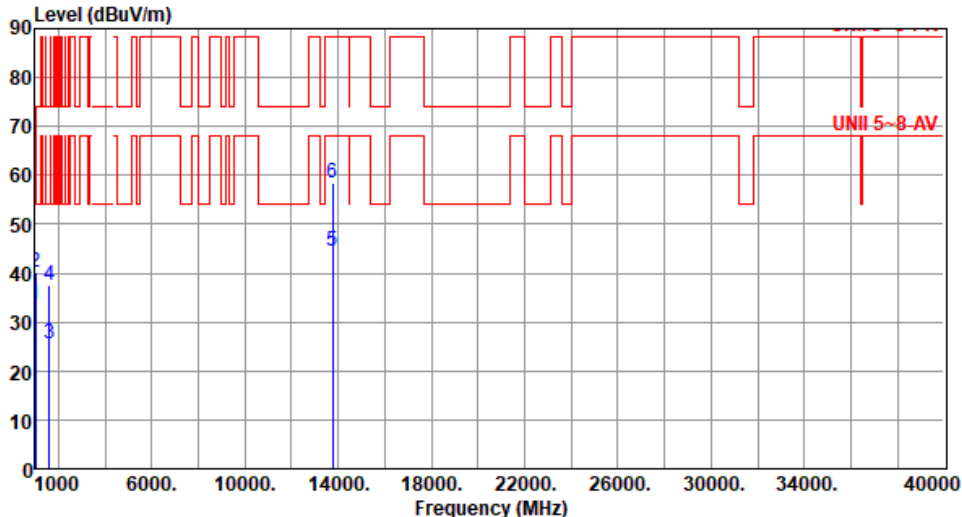

Modulation	be EHT20	Test Freq. (MHz)	6875																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.53</td><td>54.00</td><td>-20.47</td><td>41.81</td><td>-8.28</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1001.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>48.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>1599.00</td><td>25.46</td><td>54.00</td><td>-28.54</td><td>32.77</td><td>-7.31</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>13750.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>38.42</td><td>6.08</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>6</td><td>13750.00</td><td>58.37</td><td>88.20</td><td>-29.83</td><td>52.29</td><td>6.08</td><td>Peak</td><td>100</td><td>62</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	199	2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	199	3	1599.00	25.46	54.00	-28.54	32.77	-7.31	Average	100	315	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	315	5	13750.00	44.50	68.20	-23.70	38.42	6.08	Average	100	62	6	13750.00	58.37	88.20	-29.83	52.29	6.08	Peak	100	62
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	199																																																																
2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	199																																																																
3	1599.00	25.46	54.00	-28.54	32.77	-7.31	Average	100	315																																																																
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	315																																																																
5	13750.00	44.50	68.20	-23.70	38.42	6.08	Average	100	62																																																																
6	13750.00	58.37	88.20	-29.83	52.29	6.08	Peak	100	62																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

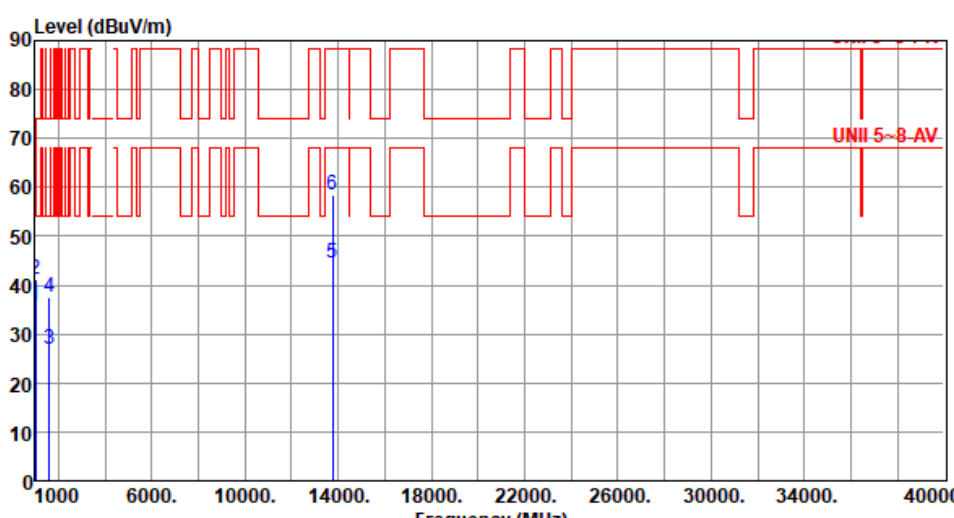


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.80	54.00	-18.20	44.08	-8.28	Average	100	215
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	215
3	1599.00	26.99	54.00	-27.01	34.30	-7.31	Average	100	117
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	117
5	13750.00	44.54	68.20	-23.66	38.46	6.08	Average	100	27
6	13750.00	58.51	88.20	-29.69	52.43	6.08	Peak	100	27
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT20	Test Freq. (MHz)	6895																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.52</td><td>54.00</td><td>-20.48</td><td>41.80</td><td>-8.28</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>2</td><td>1001.00</td><td>40.03</td><td>74.00</td><td>-33.97</td><td>48.31</td><td>-8.28</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>3</td><td>1599.00</td><td>25.74</td><td>54.00</td><td>-28.26</td><td>33.05</td><td>-7.31</td><td>Average</td><td>100</td><td>322</td></tr><tr><td>4</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>322</td></tr><tr><td>5</td><td>13790.00</td><td>44.58</td><td>68.20</td><td>-23.62</td><td>38.29</td><td>6.29</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>6</td><td>13790.00</td><td>58.77</td><td>88.20</td><td>-29.43</td><td>52.48</td><td>6.29</td><td>Peak</td><td>100</td><td>52</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	192	2	1001.00	40.03	74.00	-33.97	48.31	-8.28	Peak	100	192	3	1599.00	25.74	54.00	-28.26	33.05	-7.31	Average	100	322	4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	322	5	13790.00	44.58	68.20	-23.62	38.29	6.29	Average	100	52	6	13790.00	58.77	88.20	-29.43	52.48	6.29	Peak	100	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	192																																																																
2	1001.00	40.03	74.00	-33.97	48.31	-8.28	Peak	100	192																																																																
3	1599.00	25.74	54.00	-28.26	33.05	-7.31	Average	100	322																																																																
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	322																																																																
5	13790.00	44.58	68.20	-23.62	38.29	6.29	Average	100	52																																																																
6	13790.00	58.77	88.20	-29.43	52.48	6.29	Peak	100	52																																																																

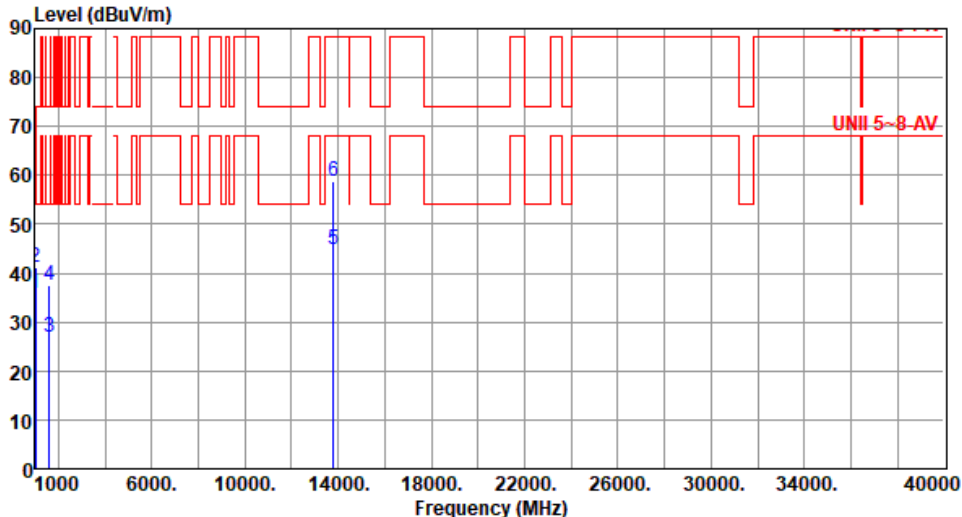


Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	208
2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	208
3	1599.00	26.80	54.00	-27.20	34.11	-7.31	Average	100	103
4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	103
5	13790.00	44.73	68.20	-23.47	38.44	6.29	Average	100	24
6	13790.00	58.85	88.20	-29.35	52.56	6.29	Peak	100	24
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

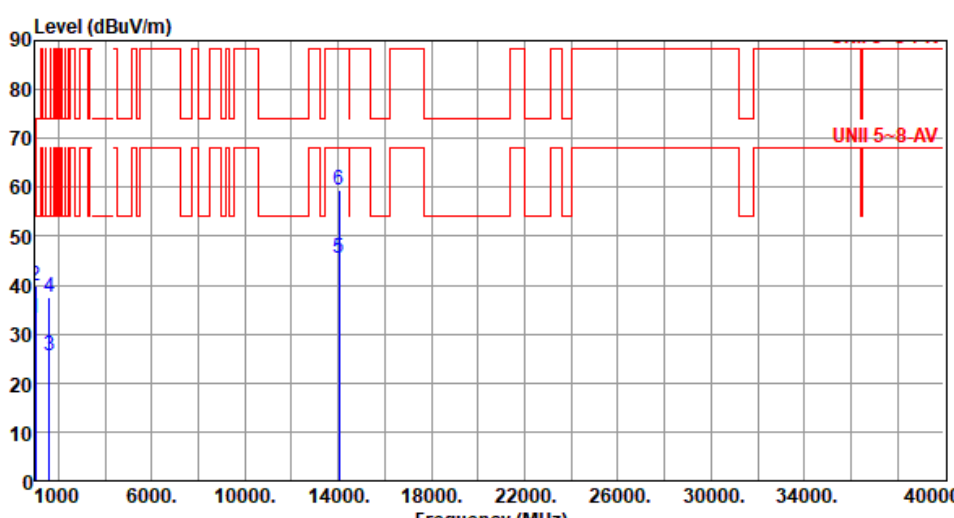


Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.35</td><td>54.00</td><td>-20.65</td><td>41.63</td><td>-8.28</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>2</td><td>1001.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>48.24</td><td>-8.28</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>3</td><td>1599.00</td><td>25.68</td><td>54.00</td><td>-28.32</td><td>32.99</td><td>-7.31</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>316</td></tr><tr><td>5</td><td>14030.00</td><td>45.61</td><td>68.20</td><td>-22.59</td><td>38.80</td><td>6.81</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>14030.00</td><td>59.43</td><td>88.20</td><td>-28.77</td><td>52.62</td><td>6.81</td><td>Peak</td><td>100</td><td>57</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	193	2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	193	3	1599.00	25.68	54.00	-28.32	32.99	-7.31	Average	100	316	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	316	5	14030.00	45.61	68.20	-22.59	38.80	6.81	Average	100	57	6	14030.00	59.43	88.20	-28.77	52.62	6.81	Peak	100	57
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	193																																																																
2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	193																																																																
3	1599.00	25.68	54.00	-28.32	32.99	-7.31	Average	100	316																																																																
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	316																																																																
5	14030.00	45.61	68.20	-22.59	38.80	6.81	Average	100	57																																																																
6	14030.00	59.43	88.20	-28.77	52.62	6.81	Peak	100	57																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

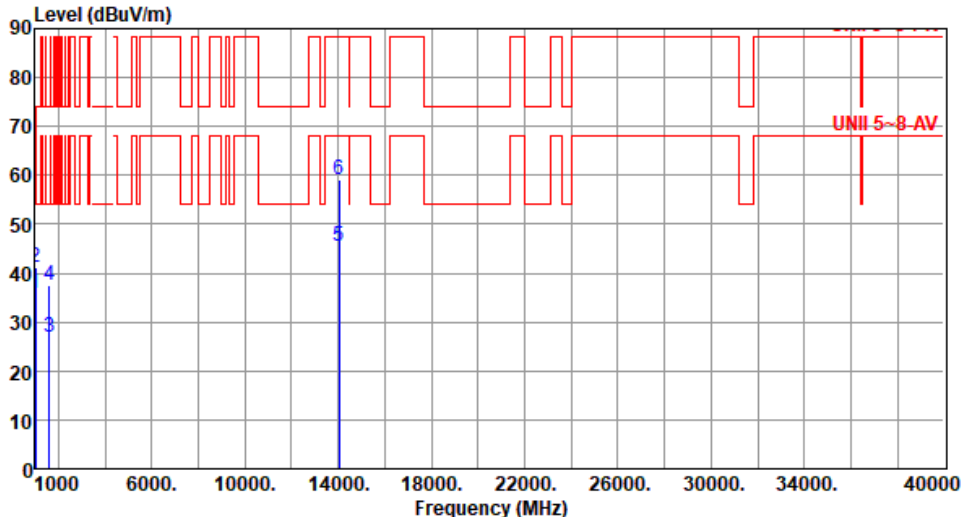

Modulation	be EHT20	Test Freq. (MHz)	7015						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.83	54.00	-18.17	44.11	-8.28	Average	100	217
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	217
3	1599.00	26.81	54.00	-27.19	34.12	-7.31	Average	100	112
4	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	112
5	14030.00	45.37	68.20	-22.83	38.56	6.81	Average	100	26
6	14030.00	59.05	88.20	-29.15	52.24	6.81	Peak	100	26


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

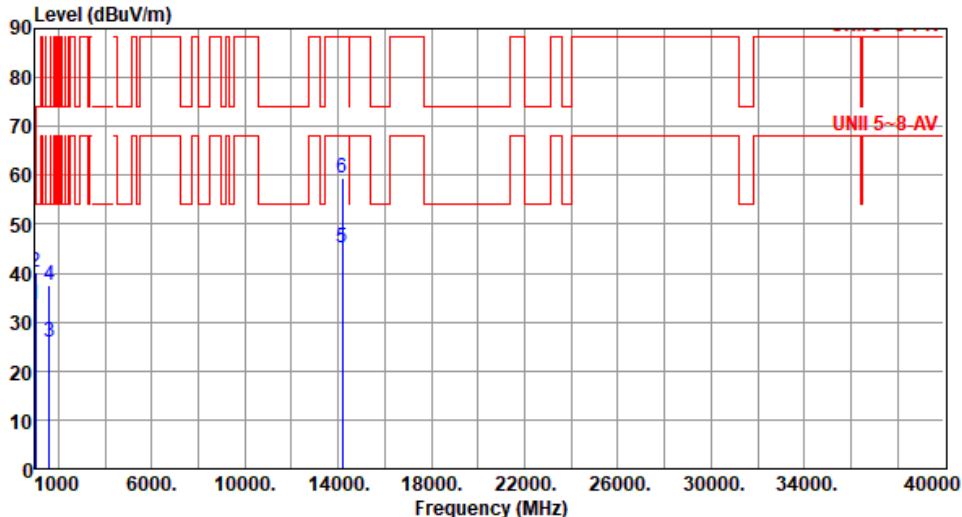

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.44	54.00	-20.56	41.72	-8.28	Average	100	192
2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	192
3	1599.00	25.74	54.00	-28.26	33.05	-7.31	Average	100	321
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	321
5	14190.00	45.27	68.20	-22.93	38.31	6.96	Average	100	53
6	14190.00	59.46	88.20	-28.74	52.50	6.96	Peak	100	53


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

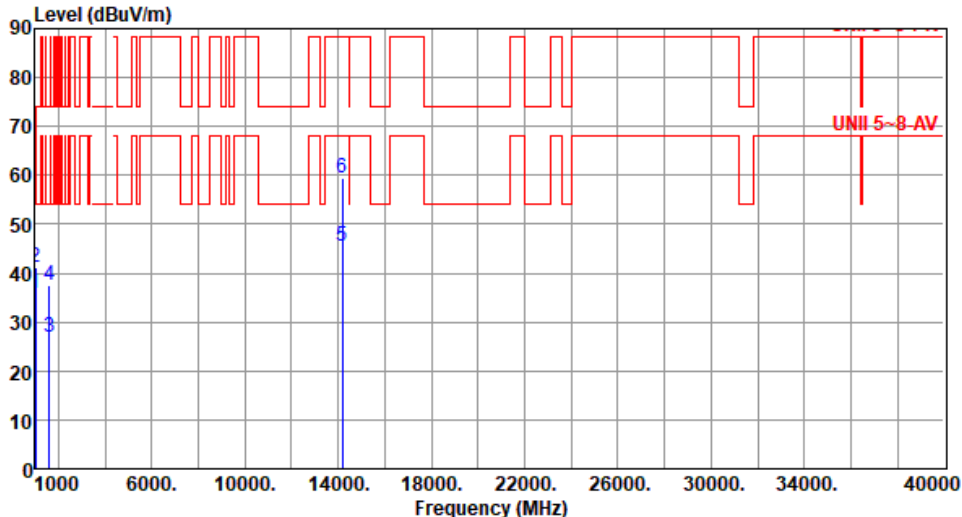

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.80	54.00	-18.20	44.08	-8.28	Average	100	219
2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	219
3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	87
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	87
5	14190.00	45.40	68.20	-22.80	38.44	6.96	Average	100	24
6	14190.00	59.56	88.20	-28.64	52.60	6.96	Peak	100	24

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

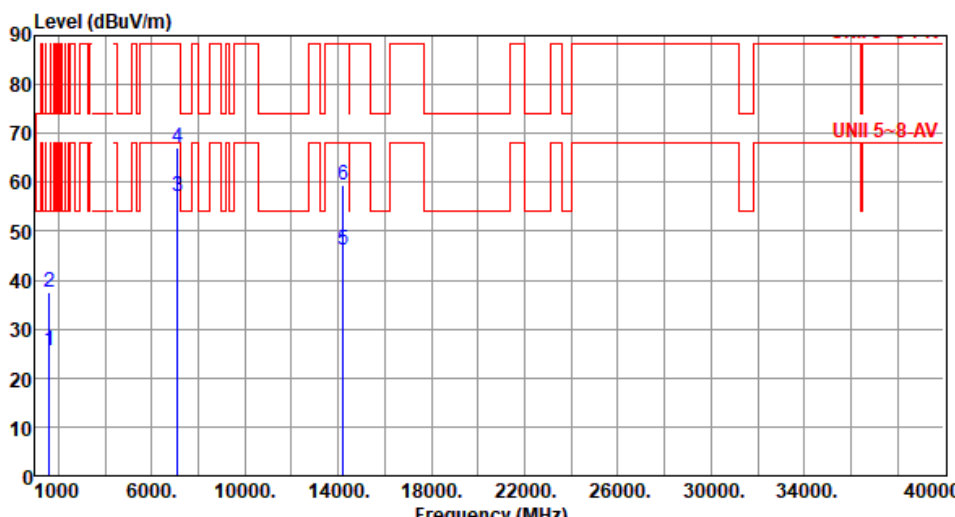

Modulation	be EHT20	Test Freq. (MHz)	7115																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.60</td><td>54.00</td><td>-28.40</td><td>32.91</td><td>-7.31</td><td>Average</td><td>100</td><td>307</td></tr><tr><td>2</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>307</td></tr><tr><td>3</td><td>7125.00</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>52.11</td><td>4.93</td><td>Average</td><td>223</td><td>198</td></tr><tr><td>4</td><td>7125.00</td><td>67.06</td><td>88.20</td><td>-21.14</td><td>62.13</td><td>4.93</td><td>Peak</td><td>223</td><td>198</td></tr><tr><td>5</td><td>14230.00</td><td>46.23</td><td>68.20</td><td>-21.97</td><td>39.04</td><td>7.19</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>6</td><td>14230.00</td><td>59.44</td><td>88.20</td><td>-28.76</td><td>52.25</td><td>7.19</td><td>Peak</td><td>100</td><td>72</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.60	54.00	-28.40	32.91	-7.31	Average	100	307	2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	307	3	7125.00	57.04	68.20	-11.16	52.11	4.93	Average	223	198	4	7125.00	67.06	88.20	-21.14	62.13	4.93	Peak	223	198	5	14230.00	46.23	68.20	-21.97	39.04	7.19	Average	100	72	6	14230.00	59.44	88.20	-28.76	52.25	7.19	Peak	100	72
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.60	54.00	-28.40	32.91	-7.31	Average	100	307																																																																
2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	307																																																																
3	7125.00	57.04	68.20	-11.16	52.11	4.93	Average	223	198																																																																
4	7125.00	67.06	88.20	-21.14	62.13	4.93	Peak	223	198																																																																
5	14230.00	46.23	68.20	-21.97	39.04	7.19	Average	100	72																																																																
6	14230.00	59.44	88.20	-28.76	52.25	7.19	Peak	100	72																																																																



Modulation	be EHT20	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) UNI 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.89</td><td>54.00</td><td>-27.11</td><td>34.20</td><td>-7.31</td><td>Average</td><td>100</td><td>113</td></tr><tr><td>2</td><td>1599.00</td><td>37.46</td><td>74.00</td><td>-36.54</td><td>44.77</td><td>-7.31</td><td>Peak</td><td>100</td><td>113</td></tr><tr><td>3</td><td>7125.00</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>52.11</td><td>4.93</td><td>Average</td><td>115</td><td>187</td></tr><tr><td>4</td><td>7125.00</td><td>69.49</td><td>88.20</td><td>-18.71</td><td>64.56</td><td>4.93</td><td>Peak</td><td>115</td><td>187</td></tr><tr><td>5</td><td>14230.00</td><td>46.29</td><td>68.20</td><td>-21.91</td><td>39.10</td><td>7.19</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>14230.00</td><td>59.45</td><td>88.20</td><td>-28.75</td><td>52.26</td><td>7.19</td><td>Peak</td><td>100</td><td>18</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	113	2	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	113	3	7125.00	57.04	68.20	-11.16	52.11	4.93	Average	115	187	4	7125.00	69.49	88.20	-18.71	64.56	4.93	Peak	115	187	5	14230.00	46.29	68.20	-21.91	39.10	7.19	Average	100	18	6	14230.00	59.45	88.20	-28.75	52.26	7.19	Peak	100	18
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	113																																																																
2	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	113																																																																
3	7125.00	57.04	68.20	-11.16	52.11	4.93	Average	115	187																																																																
4	7125.00	69.49	88.20	-18.71	64.56	4.93	Peak	115	187																																																																
5	14230.00	46.29	68.20	-21.91	39.10	7.19	Average	100	18																																																																
6	14230.00	59.45	88.20	-28.75	52.26	7.19	Peak	100	18																																																																




Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>2</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>3</td><td>5925.00</td><td>44.28</td><td>68.20</td><td>-23.92</td><td>43.14</td><td>1.14</td><td>Average</td><td>120</td><td>94</td></tr><tr><td>4</td><td>5925.00</td><td>56.45</td><td>88.20</td><td>-31.75</td><td>55.31</td><td>1.14</td><td>Peak</td><td>120</td><td>94</td></tr><tr><td>5</td><td>11930.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>36.60</td><td>6.12</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>11930.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>49.97</td><td>6.12</td><td>Peak</td><td>100</td><td>54</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325	2	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	325	3	5925.00	44.28	68.20	-23.92	43.14	1.14	Average	120	94	4	5925.00	56.45	88.20	-31.75	55.31	1.14	Peak	120	94	5	11930.00	42.72	54.00	-11.28	36.60	6.12	Average	100	54	6	11930.00	56.09	74.00	-17.91	49.97	6.12	Peak	100	54
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325																																																																
2	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	325																																																																
3	5925.00	44.28	68.20	-23.92	43.14	1.14	Average	120	94																																																																
4	5925.00	56.45	88.20	-31.75	55.31	1.14	Peak	120	94																																																																
5	11930.00	42.72	54.00	-11.28	36.60	6.12	Average	100	54																																																																
6	11930.00	56.09	74.00	-17.91	49.97	6.12	Peak	100	54																																																																




Modulation	be EHT40	Test Freq. (MHz)	5965																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.84</td><td>54.00</td><td>-27.16</td><td>34.15</td><td>-7.31</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>2</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>3</td><td>5925.00</td><td>44.91</td><td>68.20</td><td>-23.29</td><td>43.77</td><td>1.14</td><td>Average</td><td>116</td><td>9</td></tr><tr><td>4</td><td>5925.00</td><td>57.21</td><td>88.20</td><td>-30.99</td><td>56.07</td><td>1.14</td><td>Peak</td><td>116</td><td>9</td></tr><tr><td>5</td><td>11930.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>36.62</td><td>6.12</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>11930.00</td><td>56.29</td><td>74.00</td><td>-17.71</td><td>50.17</td><td>6.12</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	112	2	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	112	3	5925.00	44.91	68.20	-23.29	43.77	1.14	Average	116	9	4	5925.00	57.21	88.20	-30.99	56.07	1.14	Peak	116	9	5	11930.00	42.74	54.00	-11.26	36.62	6.12	Average	100	34	6	11930.00	56.29	74.00	-17.71	50.17	6.12	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	112																																																																
2	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	112																																																																
3	5925.00	44.91	68.20	-23.29	43.77	1.14	Average	116	9																																																																
4	5925.00	57.21	88.20	-30.99	56.07	1.14	Peak	116	9																																																																
5	11930.00	42.74	54.00	-11.26	36.62	6.12	Average	100	34																																																																
6	11930.00	56.29	74.00	-17.71	50.17	6.12	Peak	100	34																																																																

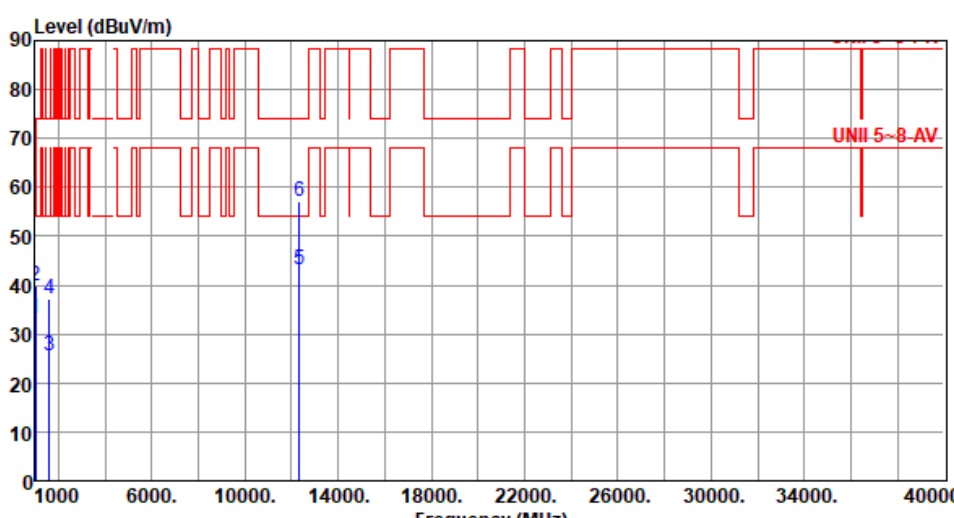

Modulation	be EHT40	Test Freq. (MHz)	6165						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.25	54.00	-20.75	41.53	-8.28	Average	100	192
2	1001.00	39.79	74.00	-34.21	48.07	-8.28	Peak	100	192
3	1599.00	25.43	54.00	-28.57	32.74	-7.31	Average	100	321
4	1599.00	37.23	74.00	-36.77	44.54	-7.31	Peak	100	321
5	12330.00	43.26	54.00	-10.74	36.59	6.67	Average	100	61
6	12330.00	56.97	74.00	-17.03	50.30	6.67	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

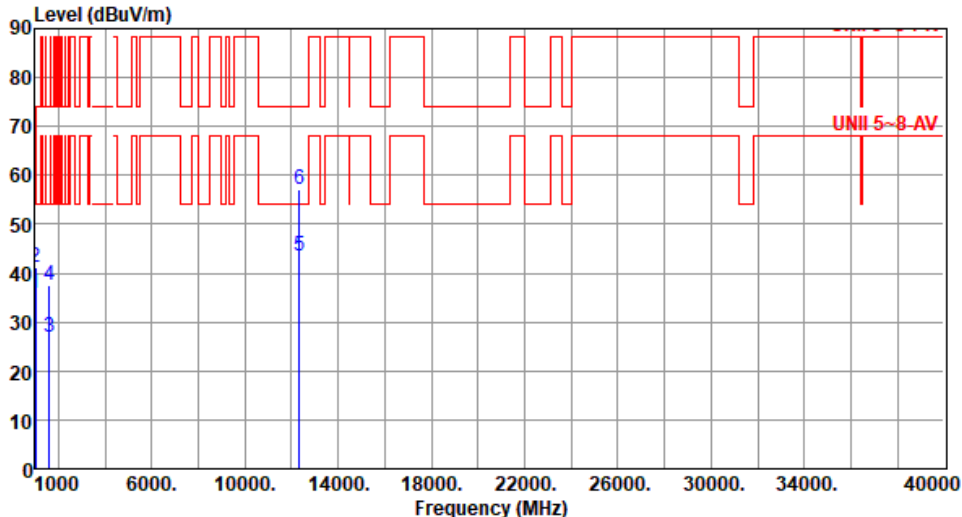


Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.98</td><td>54.00</td><td>-18.02</td><td>44.26</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>41.13</td><td>74.00</td><td>-32.87</td><td>49.41</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>26.90</td><td>54.00</td><td>-27.10</td><td>34.21</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>12330.00</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>36.80</td><td>6.67</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>6</td><td>12330.00</td><td>57.00</td><td>74.00</td><td>-17.00</td><td>50.33</td><td>6.67</td><td>Peak</td><td>100</td><td>41</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.98	54.00	-18.02	44.26	-8.28	Average	100	213	2	1001.00	41.13	74.00	-32.87	49.41	-8.28	Peak	100	213	3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	108	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108	5	12330.00	43.47	54.00	-10.53	36.80	6.67	Average	100	41	6	12330.00	57.00	74.00	-17.00	50.33	6.67	Peak	100	41
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.98	54.00	-18.02	44.26	-8.28	Average	100	213																																																																
2	1001.00	41.13	74.00	-32.87	49.41	-8.28	Peak	100	213																																																																
3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	108																																																																
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108																																																																
5	12330.00	43.47	54.00	-10.53	36.80	6.67	Average	100	41																																																																
6	12330.00	57.00	74.00	-17.00	50.33	6.67	Peak	100	41																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.30</td><td>54.00</td><td>-20.70</td><td>41.58</td><td>-8.28</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1001.00</td><td>39.85</td><td>74.00</td><td>-34.15</td><td>48.13</td><td>-8.28</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>1599.00</td><td>25.61</td><td>54.00</td><td>-28.39</td><td>32.92</td><td>-7.31</td><td>Average</td><td>100</td><td>324</td></tr><tr><td>4</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>324</td></tr><tr><td>5</td><td>12810.00</td><td>43.49</td><td>68.20</td><td>-24.71</td><td>36.92</td><td>6.57</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>12810.00</td><td>57.80</td><td>88.20</td><td>-30.40</td><td>51.23</td><td>6.57</td><td>Peak</td><td>100</td><td>63</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	199	2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	199	3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	324	4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	324	5	12810.00	43.49	68.20	-24.71	36.92	6.57	Average	100	63	6	12810.00	57.80	88.20	-30.40	51.23	6.57	Peak	100	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	199																																																																
2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	199																																																																
3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	324																																																																
4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	324																																																																
5	12810.00	43.49	68.20	-24.71	36.92	6.57	Average	100	63																																																																
6	12810.00	57.80	88.20	-30.40	51.23	6.57	Peak	100	63																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

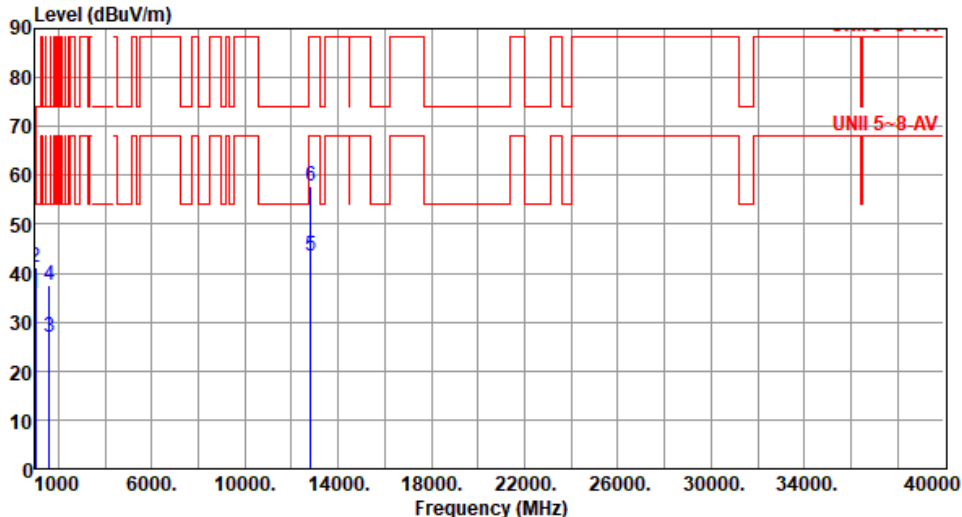

Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.88</td><td>54.00</td><td>-18.12</td><td>44.16</td><td>-8.28</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1001.00</td><td>41.06</td><td>74.00</td><td>-32.94</td><td>49.34</td><td>-8.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>1599.00</td><td>26.90</td><td>54.00</td><td>-27.10</td><td>34.21</td><td>-7.31</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>1599.00</td><td>37.38</td><td>74.00</td><td>-36.62</td><td>44.69</td><td>-7.31</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>5</td><td>12810.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>36.93</td><td>6.57</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>12810.00</td><td>57.86</td><td>88.20</td><td>-30.34</td><td>51.29</td><td>6.57</td><td>Peak</td><td>100</td><td>24</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	208	2	1001.00	41.06	74.00	-32.94	49.34	-8.28	Peak	100	208	3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	104	4	1599.00	37.38	74.00	-36.62	44.69	-7.31	Peak	100	104	5	12810.00	43.50	68.20	-24.70	36.93	6.57	Average	100	24	6	12810.00	57.86	88.20	-30.34	51.29	6.57	Peak	100	24
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	208																																																																
2	1001.00	41.06	74.00	-32.94	49.34	-8.28	Peak	100	208																																																																
3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	104																																																																
4	1599.00	37.38	74.00	-36.62	44.69	-7.31	Peak	100	104																																																																
5	12810.00	43.50	68.20	-24.70	36.93	6.57	Average	100	24																																																																
6	12810.00	57.86	88.20	-30.34	51.29	6.57	Peak	100	24																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	6445																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.89</td><td>54.00</td><td>-18.11</td><td>44.17</td><td>-8.28</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>2</td><td>1001.00</td><td>41.15</td><td>74.00</td><td>-32.85</td><td>49.43</td><td>-8.28</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>3</td><td>1599.00</td><td>26.83</td><td>54.00</td><td>-27.17</td><td>34.14</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>4</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>5</td><td>12890.00</td><td>43.73</td><td>68.20</td><td>-24.47</td><td>37.45</td><td>6.28</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>12890.00</td><td>57.25</td><td>88.20</td><td>-30.95</td><td>50.97</td><td>6.28</td><td>Peak</td><td>100</td><td>34</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	220	2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	220	3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	106	4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	106	5	12890.00	43.73	68.20	-24.47	37.45	6.28	Average	100	34	6	12890.00	57.25	88.20	-30.95	50.97	6.28	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	220																																																																
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	220																																																																
3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	106																																																																
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	106																																																																
5	12890.00	43.73	68.20	-24.47	37.45	6.28	Average	100	34																																																																
6	12890.00	57.25	88.20	-30.95	50.97	6.28	Peak	100	34																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

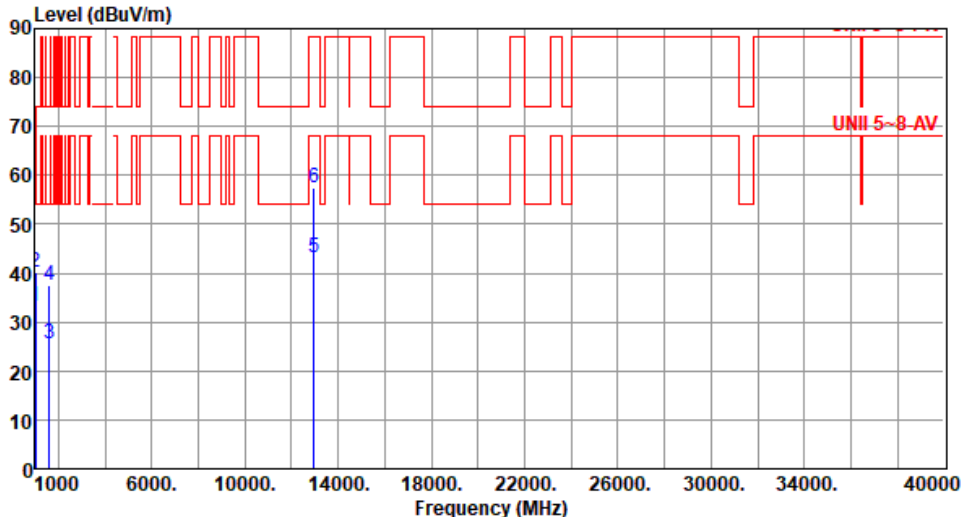

Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.21	54.00	-20.79	41.49	-8.28	Average	100	211
2	1001.00	40.12	74.00	-33.88	48.40	-8.28	Peak	100	211
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	317
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	317
5	12970.00	43.19	68.20	-25.01	36.92	6.27	Average	100	57
6	12970.00	57.37	88.20	-30.83	51.10	6.27	Peak	100	57

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6485						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	217
2	1001.00	41.23	74.00	-32.77	49.51	-8.28	Peak	100	217
3	1599.00	28.95	54.00	-25.05	36.26	-7.31	Average	100	113
4	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	113
5	12970.00	43.21	68.20	-24.99	36.94	6.27	Average	100	21
6	12970.00	57.44	88.20	-30.76	51.17	6.27	Peak	100	21
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT40	Test Freq. (MHz)	6525						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.45	54.00	-20.55	41.73	-8.28	Average	100	188
2	1001.00	39.75	74.00	-34.25	48.03	-8.28	Peak	100	188
3	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312
4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	312
5	13050.00	42.78	68.20	-25.42	36.79	5.99	Average	100	53
6	13050.00	56.41	88.20	-31.79	50.42	5.99	Peak	100	53
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>44.12</td><td>-8.28</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>2</td><td>1001.00</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>49.48</td><td>-8.28</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>3</td><td>1599.00</td><td>26.91</td><td>54.00</td><td>-27.09</td><td>34.22</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.44</td><td>74.00</td><td>-36.56</td><td>44.75</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>13050.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>36.84</td><td>5.99</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>6</td><td>13050.00</td><td>56.68</td><td>88.20</td><td>-31.52</td><td>50.69</td><td>5.99</td><td>Peak</td><td>100</td><td>49</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	214	2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	214	3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	108	4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	108	5	13050.00	42.83	68.20	-25.37	36.84	5.99	Average	100	49	6	13050.00	56.68	88.20	-31.52	50.69	5.99	Peak	100	49
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	214																																																																
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	214																																																																
3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	108																																																																
4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	108																																																																
5	13050.00	42.83	68.20	-25.37	36.84	5.99	Average	100	49																																																																
6	13050.00	56.68	88.20	-31.52	50.69	5.99	Peak	100	49																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

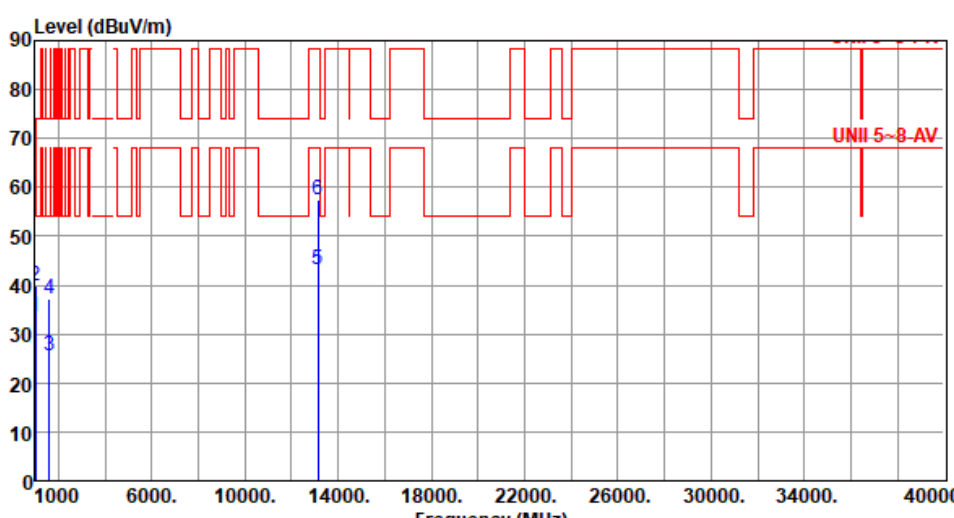


Modulation	be EHT40		Test Freq. (MHz)		6565																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.42</td><td>54.00</td><td>-20.58</td><td>41.70</td><td>-8.28</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1001.00</td><td>39.91</td><td>74.00</td><td>-34.09</td><td>48.19</td><td>-8.28</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>1599.00</td><td>37.35</td><td>74.00</td><td>-36.65</td><td>44.66</td><td>-7.31</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>13130.00</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>37.36</td><td>5.87</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>6</td><td>13130.00</td><td>57.49</td><td>88.20</td><td>-30.71</td><td>51.62</td><td>5.87</td><td>Peak</td><td>100</td><td>19</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	199	2	1001.00	39.91	74.00	-34.09	48.19	-8.28	Peak	100	199	3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	318	4	1599.00	37.35	74.00	-36.65	44.66	-7.31	Peak	100	318	5	13130.00	43.23	68.20	-24.97	37.36	5.87	Average	100	19	6	13130.00	57.49	88.20	-30.71	51.62	5.87	Peak	100	19
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	199																																																																						
2	1001.00	39.91	74.00	-34.09	48.19	-8.28	Peak	100	199																																																																						
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	318																																																																						
4	1599.00	37.35	74.00	-36.65	44.66	-7.31	Peak	100	318																																																																						
5	13130.00	43.23	68.20	-24.97	37.36	5.87	Average	100	19																																																																						
6	13130.00	57.49	88.20	-30.71	51.62	5.87	Peak	100	19																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.86</td><td>54.00</td><td>-18.14</td><td>44.14</td><td>-8.28</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>1001.00</td><td>41.10</td><td>74.00</td><td>-32.90</td><td>49.38</td><td>-8.28</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>1599.00</td><td>26.79</td><td>54.00</td><td>-27.21</td><td>34.10</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>4</td><td>1599.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.74</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>5</td><td>13130.00</td><td>43.22</td><td>68.20</td><td>-24.98</td><td>37.35</td><td>5.87</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>13130.00</td><td>57.54</td><td>88.20</td><td>-30.66</td><td>51.67</td><td>5.87</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	209	2	1001.00	41.10	74.00	-32.90	49.38	-8.28	Peak	100	209	3	1599.00	26.79	54.00	-27.21	34.10	-7.31	Average	100	106	4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	106	5	13130.00	43.22	68.20	-24.98	37.35	5.87	Average	100	29	6	13130.00	57.54	88.20	-30.66	51.67	5.87	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	209																																																																
2	1001.00	41.10	74.00	-32.90	49.38	-8.28	Peak	100	209																																																																
3	1599.00	26.79	54.00	-27.21	34.10	-7.31	Average	100	106																																																																
4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	106																																																																
5	13130.00	43.22	68.20	-24.98	37.35	5.87	Average	100	29																																																																
6	13130.00	57.54	88.20	-30.66	51.67	5.87	Peak	100	29																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

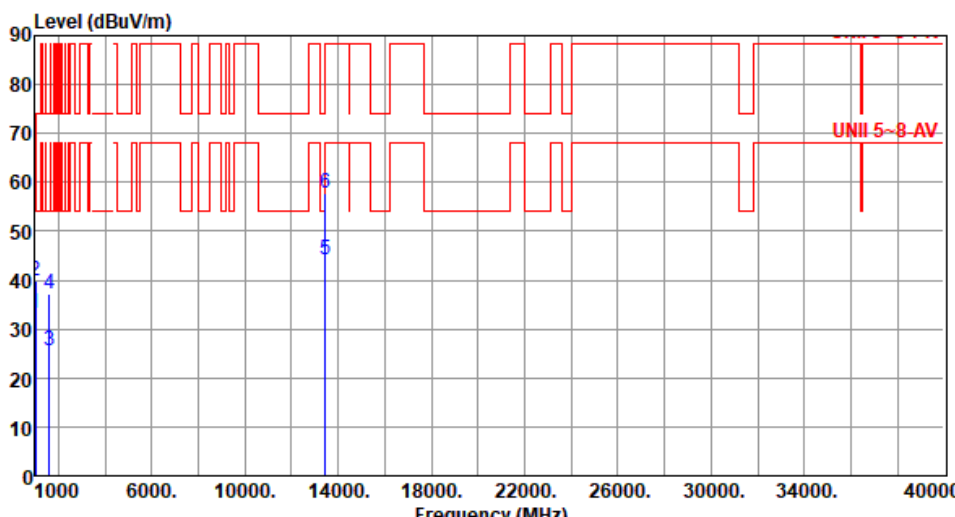

Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.29</td><td>54.00</td><td>-20.71</td><td>41.57</td><td>-8.28</td><td>Average</td><td>100</td><td>189</td></tr><tr><td>2</td><td>1001.00</td><td>39.82</td><td>74.00</td><td>-34.18</td><td>48.10</td><td>-8.28</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>3</td><td>1599.00</td><td>25.57</td><td>54.00</td><td>-28.43</td><td>32.88</td><td>-7.31</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>4</td><td>1599.00</td><td>37.24</td><td>74.00</td><td>-36.76</td><td>44.55</td><td>-7.31</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>5</td><td>13450.00</td><td>44.27</td><td>68.20</td><td>-23.93</td><td>38.18</td><td>6.09</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>13450.00</td><td>57.73</td><td>88.20</td><td>-30.47</td><td>51.64</td><td>6.09</td><td>Peak</td><td>100</td><td>56</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	189	2	1001.00	39.82	74.00	-34.18	48.10	-8.28	Peak	100	189	3	1599.00	25.57	54.00	-28.43	32.88	-7.31	Average	100	317	4	1599.00	37.24	74.00	-36.76	44.55	-7.31	Peak	100	317	5	13450.00	44.27	68.20	-23.93	38.18	6.09	Average	100	56	6	13450.00	57.73	88.20	-30.47	51.64	6.09	Peak	100	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	189																																																																
2	1001.00	39.82	74.00	-34.18	48.10	-8.28	Peak	100	189																																																																
3	1599.00	25.57	54.00	-28.43	32.88	-7.31	Average	100	317																																																																
4	1599.00	37.24	74.00	-36.76	44.55	-7.31	Peak	100	317																																																																
5	13450.00	44.27	68.20	-23.93	38.18	6.09	Average	100	56																																																																
6	13450.00	57.73	88.20	-30.47	51.64	6.09	Peak	100	56																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

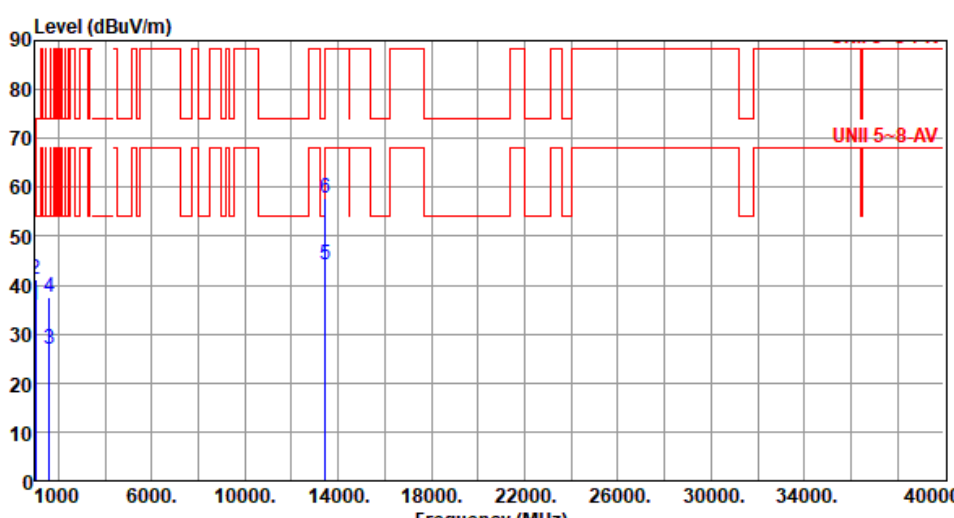


Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.89</td><td>54.00</td><td>-18.11</td><td>44.17</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>41.08</td><td>74.00</td><td>-32.92</td><td>49.36</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>26.84</td><td>54.00</td><td>-27.16</td><td>34.15</td><td>-7.31</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>13450.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>38.23</td><td>6.09</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>6</td><td>13450.00</td><td>57.84</td><td>88.20</td><td>-30.36</td><td>51.75</td><td>6.09</td><td>Peak</td><td>100</td><td>13</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	213	2	1001.00	41.08	74.00	-32.92	49.36	-8.28	Peak	100	213	3	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	107	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	107	5	13450.00	44.32	68.20	-23.88	38.23	6.09	Average	100	13	6	13450.00	57.84	88.20	-30.36	51.75	6.09	Peak	100	13
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	213																																																																
2	1001.00	41.08	74.00	-32.92	49.36	-8.28	Peak	100	213																																																																
3	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	107																																																																
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	107																																																																
5	13450.00	44.32	68.20	-23.88	38.23	6.09	Average	100	13																																																																
6	13450.00	57.84	88.20	-30.36	51.75	6.09	Peak	100	13																																																																




Modulation	be EHT40	Test Freq. (MHz)	6845						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	203
2	1001.00	40.07	74.00	-33.93	48.35	-8.28	Peak	100	203
3	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	316
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	316
5	13690.00	44.39	68.20	-23.81	38.32	6.07	Average	100	64
6	13690.00	58.67	88.20	-29.53	52.60	6.07	Peak	100	64
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

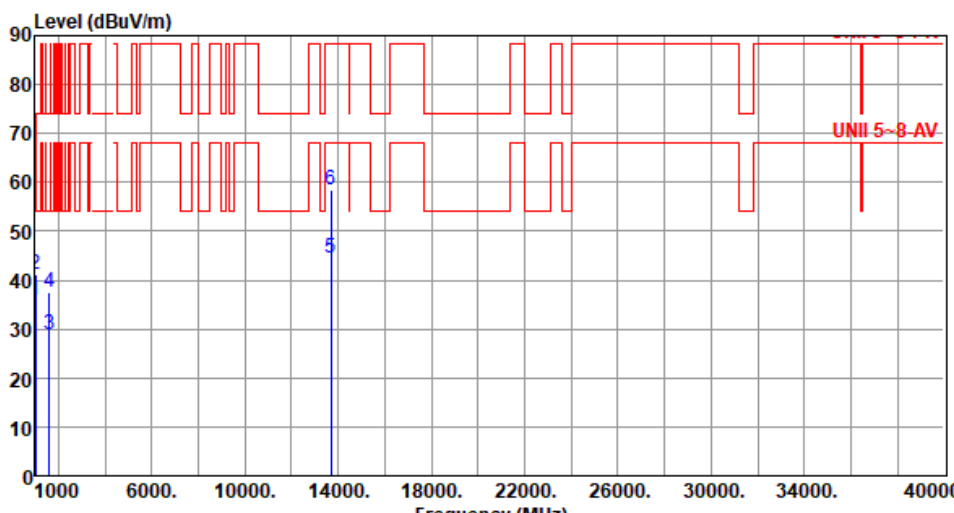

Modulation	be EHT40	Test Freq. (MHz)	6845						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.91	54.00	-18.09	44.19	-8.28	Average	100	218
2	1001.00	41.24	74.00	-32.76	49.52	-8.28	Peak	100	218
3	1599.00	28.94	54.00	-25.06	36.25	-7.31	Average	100	116
4	1599.00	37.52	74.00	-36.48	44.83	-7.31	Peak	100	116
5	13690.00	44.41	68.20	-23.79	38.34	6.07	Average	100	21
6	13690.00	58.56	88.20	-29.64	52.49	6.07	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

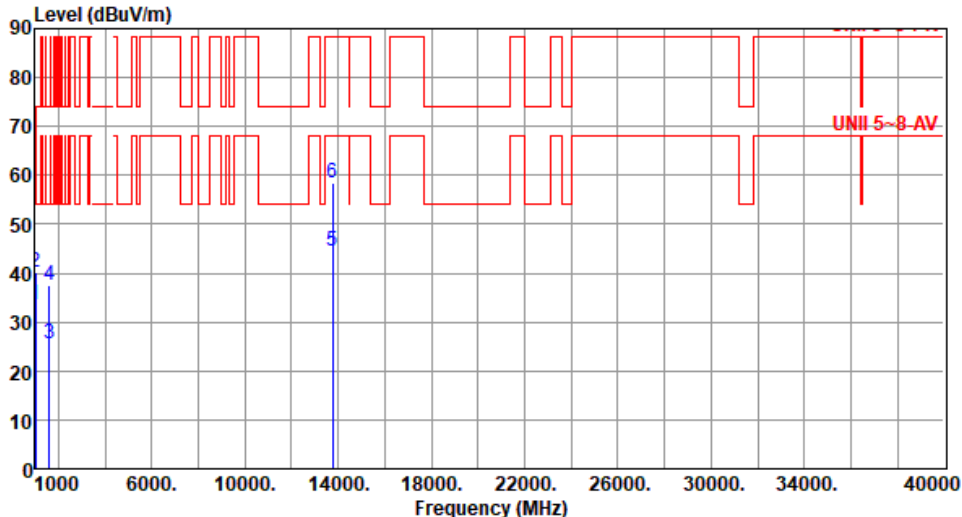

Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.42</td><td>54.00</td><td>-20.58</td><td>41.70</td><td>-8.28</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>2</td><td>1001.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>48.33</td><td>-8.28</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>3</td><td>1599.00</td><td>25.51</td><td>54.00</td><td>-28.49</td><td>32.82</td><td>-7.31</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>4</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>5</td><td>13770.00</td><td>44.56</td><td>68.20</td><td>-23.64</td><td>38.37</td><td>6.19</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>13770.00</td><td>58.32</td><td>88.20</td><td>-29.88</td><td>52.13</td><td>6.19</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	202	2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	202	3	1599.00	25.51	54.00	-28.49	32.82	-7.31	Average	100	317	4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	317	5	13770.00	44.56	68.20	-23.64	38.37	6.19	Average	100	68	6	13770.00	58.32	88.20	-29.88	52.13	6.19	Peak	100	68
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	202																																																																
2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	202																																																																
3	1599.00	25.51	54.00	-28.49	32.82	-7.31	Average	100	317																																																																
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	317																																																																
5	13770.00	44.56	68.20	-23.64	38.37	6.19	Average	100	68																																																																
6	13770.00	58.32	88.20	-29.88	52.13	6.19	Peak	100	68																																																																




Modulation	be EHT40	Test Freq. (MHz)	6885																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																													
Level (dBUV/m) <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>1001.00</td><td>35.86</td><td>54.00</td><td>-18.14</td><td>44.14</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>49.37</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>26.94</td><td>54.00</td><td>-27.06</td><td>34.25</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>13770.00</td><td>44.60</td><td>68.20</td><td>-23.60</td><td>38.41</td><td>6.19</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13770.00</td><td>58.42</td><td>88.20</td><td>-29.78</td><td>52.23</td><td>6.19</td><td>Peak</td><td>100</td><td>22</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	213	2	1001.00	41.09	74.00	-32.91	49.37	-8.28	Peak	100	213	3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	108	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108	5	13770.00	44.60	68.20	-23.60	38.41	6.19	Average	100	22	6	13770.00	58.42	88.20	-29.78	52.23	6.19	Peak	100	22
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	213																																																																																				
2	1001.00	41.09	74.00	-32.91	49.37	-8.28	Peak	100	213																																																																																				
3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	108																																																																																				
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108																																																																																				
5	13770.00	44.60	68.20	-23.60	38.41	6.19	Average	100	22																																																																																				
6	13770.00	58.42	88.20	-29.78	52.23	6.19	Peak	100	22																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.39	54.00	-20.61	41.67	-8.28	Average	100	194
2	1001.00	40.01	74.00	-33.99	48.29	-8.28	Peak	100	194
3	1599.00	25.68	54.00	-28.32	32.99	-7.31	Average	100	325
4	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	325
5	13850.00	44.36	68.20	-23.84	38.24	6.12	Average	100	49
6	13850.00	58.43	88.20	-29.77	52.31	6.12	Peak	100	49


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

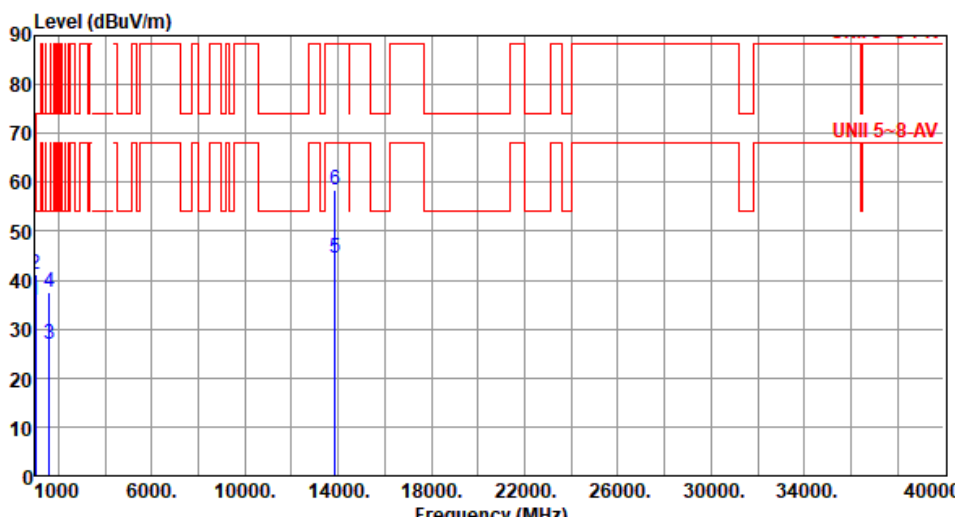

Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	1001.00	35.91	54.00	-18.09	44.19	-8.28	Average	100	209
2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	209
3	1599.00	26.86	54.00	-27.14	34.17	-7.31	Average	100	99
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	99
5	13850.00	44.48	68.20	-23.72	38.36	6.12	Average	100	20
6	13850.00	58.59	88.20	-29.61	52.47	6.12	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

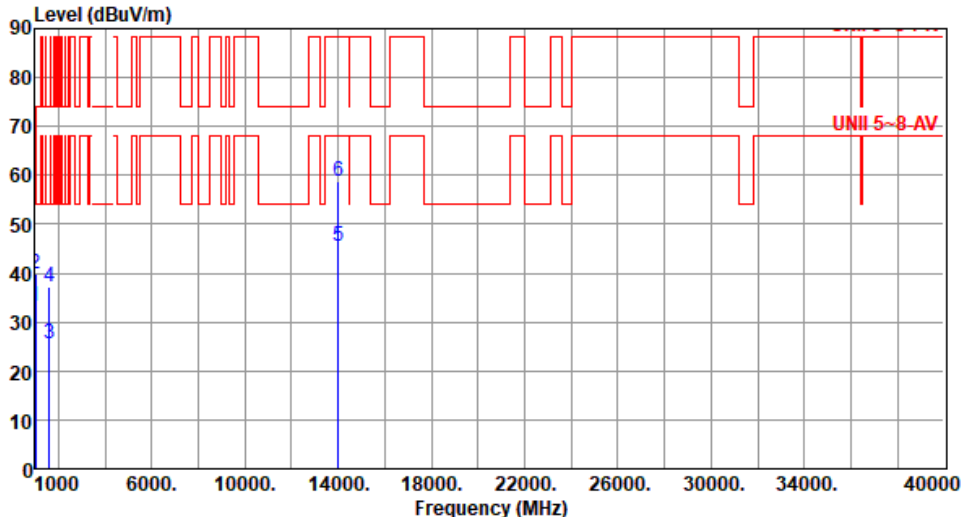


Modulation	be EHT40		Test Freq. (MHz)		7005																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.29</td><td>54.00</td><td>-20.71</td><td>41.57</td><td>-8.28</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>2</td><td>1001.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>48.22</td><td>-8.28</td><td>Peak</td><td>100</td><td>195</td></tr><tr><td>3</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>320</td></tr><tr><td>4</td><td>1599.00</td><td>37.35</td><td>74.00</td><td>-36.65</td><td>44.66</td><td>-7.31</td><td>Peak</td><td>100</td><td>320</td></tr><tr><td>5</td><td>14010.00</td><td>45.57</td><td>68.20</td><td>-22.63</td><td>38.75</td><td>6.82</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>14010.00</td><td>58.93</td><td>88.20</td><td>-29.27</td><td>52.11</td><td>6.82</td><td>Peak</td><td>100</td><td>58</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	195	2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	195	3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	320	4	1599.00	37.35	74.00	-36.65	44.66	-7.31	Peak	100	320	5	14010.00	45.57	68.20	-22.63	38.75	6.82	Average	100	58	6	14010.00	58.93	88.20	-29.27	52.11	6.82	Peak	100	58
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	195																																																																						
2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	195																																																																						
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	320																																																																						
4	1599.00	37.35	74.00	-36.65	44.66	-7.31	Peak	100	320																																																																						
5	14010.00	45.57	68.20	-22.63	38.75	6.82	Average	100	58																																																																						
6	14010.00	58.93	88.20	-29.27	52.11	6.82	Peak	100	58																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															




Modulation	be EHT40	Test Freq. (MHz)	7005																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m) UNII 5~8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.90</td><td>54.00</td><td>-18.10</td><td>44.18</td><td>-8.28</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>1001.00</td><td>41.11</td><td>74.00</td><td>-32.89</td><td>49.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>1599.00</td><td>26.84</td><td>54.00</td><td>-27.16</td><td>34.15</td><td>-7.31</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>4</td><td>1599.00</td><td>37.46</td><td>74.00</td><td>-36.54</td><td>44.77</td><td>-7.31</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>5</td><td>14010.00</td><td>45.46</td><td>68.20</td><td>-22.74</td><td>38.64</td><td>6.82</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>14010.00</td><td>58.93</td><td>88.20</td><td>-29.27</td><td>52.11</td><td>6.82</td><td>Peak</td><td>100</td><td>18</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.90	54.00	-18.10	44.18	-8.28	Average	100	218	2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	218	3	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	110	4	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	110	5	14010.00	45.46	68.20	-22.74	38.64	6.82	Average	100	18	6	14010.00	58.93	88.20	-29.27	52.11	6.82	Peak	100	18
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.90	54.00	-18.10	44.18	-8.28	Average	100	218																																																																
2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	218																																																																
3	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	110																																																																
4	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	110																																																																
5	14010.00	45.46	68.20	-22.74	38.64	6.82	Average	100	18																																																																
6	14010.00	58.93	88.20	-29.27	52.11	6.82	Peak	100	18																																																																

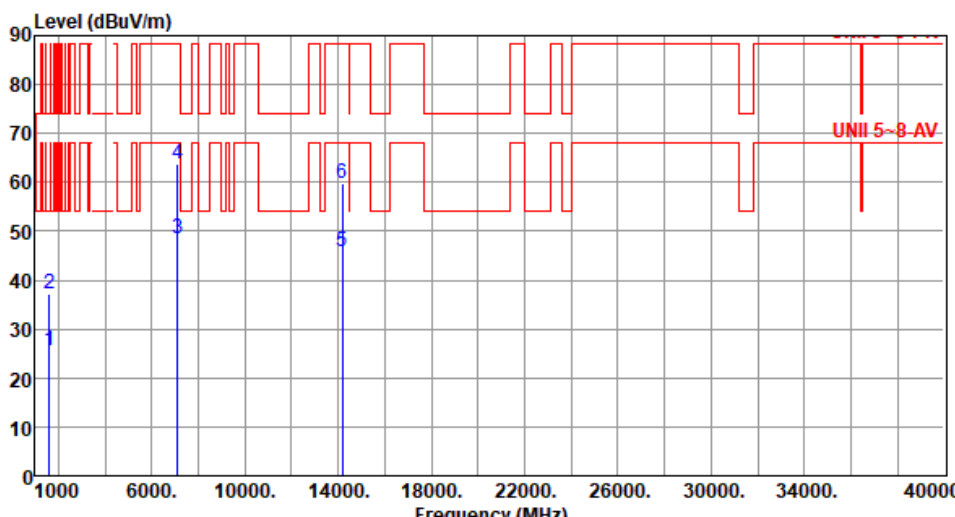

Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.60</td><td>54.00</td><td>-28.40</td><td>32.91</td><td>-7.31</td><td>Average</td><td>100</td><td>310</td></tr><tr><td>2</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>310</td></tr><tr><td>3</td><td>7125.00</td><td>48.46</td><td>68.20</td><td>-19.74</td><td>43.53</td><td>4.93</td><td>Average</td><td>201</td><td>203</td></tr><tr><td>4</td><td>7125.00</td><td>63.87</td><td>88.20</td><td>-24.33</td><td>58.94</td><td>4.93</td><td>Peak</td><td>201</td><td>203</td></tr><tr><td>5</td><td>14170.00</td><td>45.85</td><td>68.20</td><td>-22.35</td><td>38.99</td><td>6.86</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>14170.00</td><td>59.66</td><td>88.20</td><td>-28.54</td><td>52.80</td><td>6.86</td><td>Peak</td><td>100</td><td>63</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.60	54.00	-28.40	32.91	-7.31	Average	100	310	2	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	310	3	7125.00	48.46	68.20	-19.74	43.53	4.93	Average	201	203	4	7125.00	63.87	88.20	-24.33	58.94	4.93	Peak	201	203	5	14170.00	45.85	68.20	-22.35	38.99	6.86	Average	100	63	6	14170.00	59.66	88.20	-28.54	52.80	6.86	Peak	100	63
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.60	54.00	-28.40	32.91	-7.31	Average	100	310																																																																
2	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	310																																																																
3	7125.00	48.46	68.20	-19.74	43.53	4.93	Average	201	203																																																																
4	7125.00	63.87	88.20	-24.33	58.94	4.93	Peak	201	203																																																																
5	14170.00	45.85	68.20	-22.35	38.99	6.86	Average	100	63																																																																
6	14170.00	59.66	88.20	-28.54	52.80	6.86	Peak	100	63																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

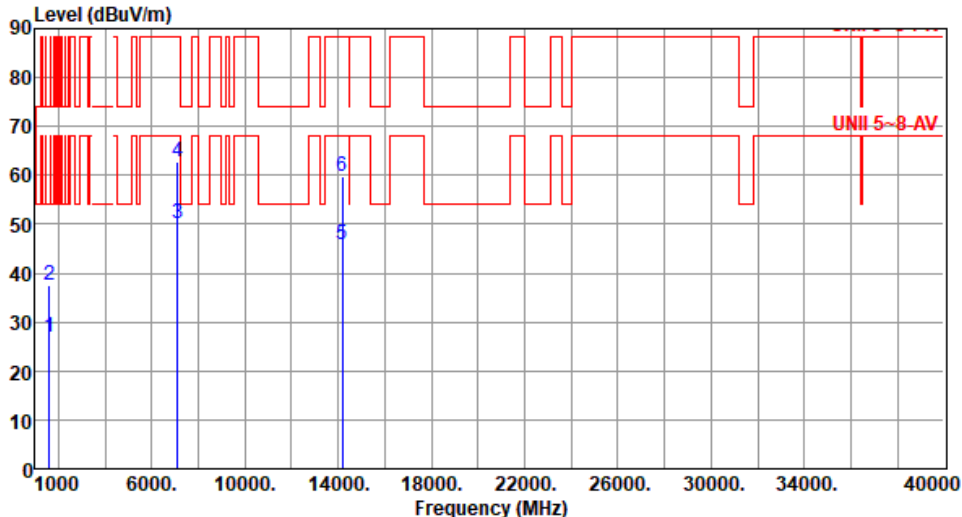

Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>26.91</td><td>54.00</td><td>-27.09</td><td>34.22</td><td>-7.31</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>2</td><td>1599.00</td><td>37.47</td><td>74.00</td><td>-36.53</td><td>44.78</td><td>-7.31</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>3</td><td>7125.00</td><td>50.25</td><td>68.20</td><td>-17.95</td><td>45.32</td><td>4.93</td><td>Average</td><td>100</td><td>142</td></tr><tr><td>4</td><td>7125.00</td><td>62.67</td><td>88.20</td><td>-25.53</td><td>57.74</td><td>4.93</td><td>Peak</td><td>100</td><td>142</td></tr><tr><td>5</td><td>14170.00</td><td>45.89</td><td>68.20</td><td>-22.31</td><td>39.03</td><td>6.86</td><td>Average</td><td>100</td><td>17</td></tr><tr><td>6</td><td>14170.00</td><td>59.69</td><td>88.20</td><td>-28.51</td><td>52.83</td><td>6.86</td><td>Peak</td><td>100</td><td>17</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	107	2	1599.00	37.47	74.00	-36.53	44.78	-7.31	Peak	100	107	3	7125.00	50.25	68.20	-17.95	45.32	4.93	Average	100	142	4	7125.00	62.67	88.20	-25.53	57.74	4.93	Peak	100	142	5	14170.00	45.89	68.20	-22.31	39.03	6.86	Average	100	17	6	14170.00	59.69	88.20	-28.51	52.83	6.86	Peak	100	17
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	107																																																																
2	1599.00	37.47	74.00	-36.53	44.78	-7.31	Peak	100	107																																																																
3	7125.00	50.25	68.20	-17.95	45.32	4.93	Average	100	142																																																																
4	7125.00	62.67	88.20	-25.53	57.74	4.93	Peak	100	142																																																																
5	14170.00	45.89	68.20	-22.31	39.03	6.86	Average	100	17																																																																
6	14170.00	59.69	88.20	-28.51	52.83	6.86	Peak	100	17																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

Unwanted Emissions (Above 1GHz) for be EHT80


Modulation	be EHT80	Test Freq. (MHz)	5985						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	321
2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	321
3	5925.00	49.65	68.20	-18.55	48.51	1.14	Average	113	97
4	5925.00	61.93	88.20	-26.27	60.79	1.14	Peak	113	97
5	11970.00	42.58	54.00	-11.42	36.38	6.20	Average	100	40
6	11970.00	56.39	74.00	-17.61	50.19	6.20	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	be EHT80	Test Freq. (MHz)	5985																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.91</td><td>54.00</td><td>-27.09</td><td>34.22</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>2</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>3</td><td>5925.00</td><td>52.48</td><td>68.20</td><td>-15.72</td><td>51.34</td><td>1.14</td><td>Average</td><td>116</td><td>11</td></tr><tr><td>4</td><td>5925.00</td><td>66.54</td><td>88.20</td><td>-21.66</td><td>65.40</td><td>1.14</td><td>Peak</td><td>116</td><td>11</td></tr><tr><td>5</td><td>11970.00</td><td>42.53</td><td>54.00</td><td>-11.47</td><td>36.33</td><td>6.20</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>6</td><td>11970.00</td><td>56.38</td><td>74.00</td><td>-17.62</td><td>50.18</td><td>6.20</td><td>Peak</td><td>100</td><td>16</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	106	2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	106	3	5925.00	52.48	68.20	-15.72	51.34	1.14	Average	116	11	4	5925.00	66.54	88.20	-21.66	65.40	1.14	Peak	116	11	5	11970.00	42.53	54.00	-11.47	36.33	6.20	Average	100	16	6	11970.00	56.38	74.00	-17.62	50.18	6.20	Peak	100	16
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	106																																																																
2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	106																																																																
3	5925.00	52.48	68.20	-15.72	51.34	1.14	Average	116	11																																																																
4	5925.00	66.54	88.20	-21.66	65.40	1.14	Peak	116	11																																																																
5	11970.00	42.53	54.00	-11.47	36.33	6.20	Average	100	16																																																																
6	11970.00	56.38	74.00	-17.62	50.18	6.20	Peak	100	16																																																																

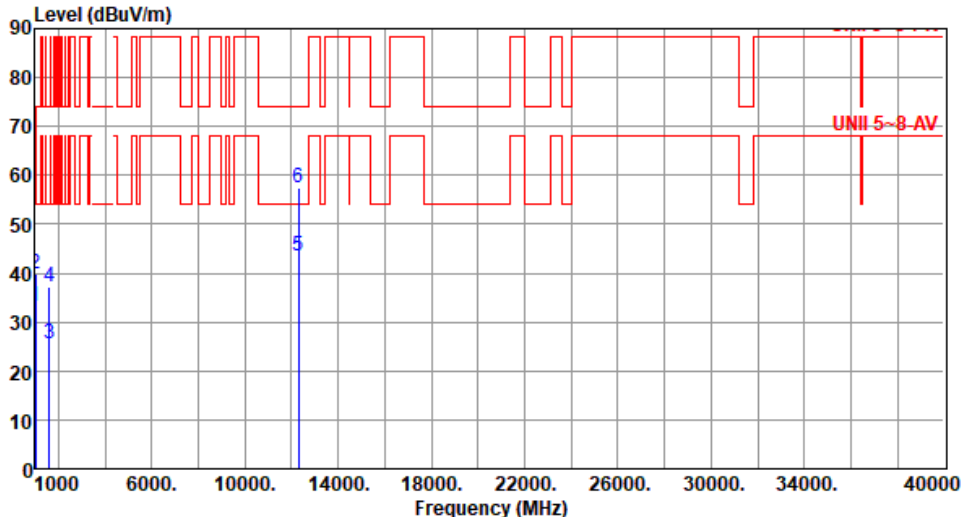


Modulation	be EHT80	Test Freq. (MHz)	6145																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.29</td><td>54.00</td><td>-20.71</td><td>41.57</td><td>-8.28</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>2</td><td>1001.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>48.22</td><td>-8.28</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>3</td><td>1599.00</td><td>25.69</td><td>54.00</td><td>-28.31</td><td>33.00</td><td>-7.31</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>1599.00</td><td>37.24</td><td>74.00</td><td>-36.76</td><td>44.55</td><td>-7.31</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>12290.00</td><td>43.40</td><td>54.00</td><td>-10.60</td><td>36.59</td><td>6.81</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>6</td><td>12290.00</td><td>57.59</td><td>74.00</td><td>-16.41</td><td>50.78</td><td>6.81</td><td>Peak</td><td>100</td><td>53</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	196	2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	196	3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	318	4	1599.00	37.24	74.00	-36.76	44.55	-7.31	Peak	100	318	5	12290.00	43.40	54.00	-10.60	36.59	6.81	Average	100	53	6	12290.00	57.59	74.00	-16.41	50.78	6.81	Peak	100	53
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.29	54.00	-20.71	41.57	-8.28	Average	100	196																																																																
2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	196																																																																
3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	318																																																																
4	1599.00	37.24	74.00	-36.76	44.55	-7.31	Peak	100	318																																																																
5	12290.00	43.40	54.00	-10.60	36.59	6.81	Average	100	53																																																																
6	12290.00	57.59	74.00	-16.41	50.78	6.81	Peak	100	53																																																																

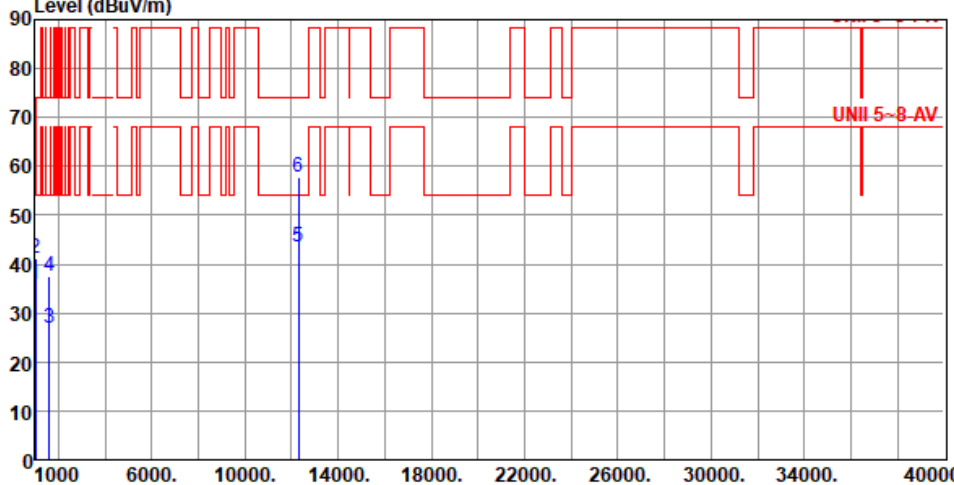


Modulation	be EHT80		Test Freq. (MHz)		6145																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																															
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.92</td><td>54.00</td><td>-18.08</td><td>44.20</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>41.12</td><td>74.00</td><td>-32.88</td><td>49.40</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>26.88</td><td>54.00</td><td>-27.12</td><td>34.19</td><td>-7.31</td><td>Average</td><td>100</td><td>113</td></tr><tr><td>4</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>113</td></tr><tr><td>5</td><td>12290.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>36.64</td><td>6.81</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>12290.00</td><td>57.70</td><td>74.00</td><td>-16.30</td><td>50.89</td><td>6.81</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	213	2	1001.00	41.12	74.00	-32.88	49.40	-8.28	Peak	100	213	3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	113	4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	113	5	12290.00	43.45	54.00	-10.55	36.64	6.81	Average	100	39	6	12290.00	57.70	74.00	-16.30	50.89	6.81	Peak	100	39
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	213																																																																						
2	1001.00	41.12	74.00	-32.88	49.40	-8.28	Peak	100	213																																																																						
3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	113																																																																						
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	113																																																																						
5	12290.00	43.45	54.00	-10.55	36.64	6.81	Average	100	39																																																																						
6	12290.00	57.70	74.00	-16.30	50.89	6.81	Peak	100	39																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

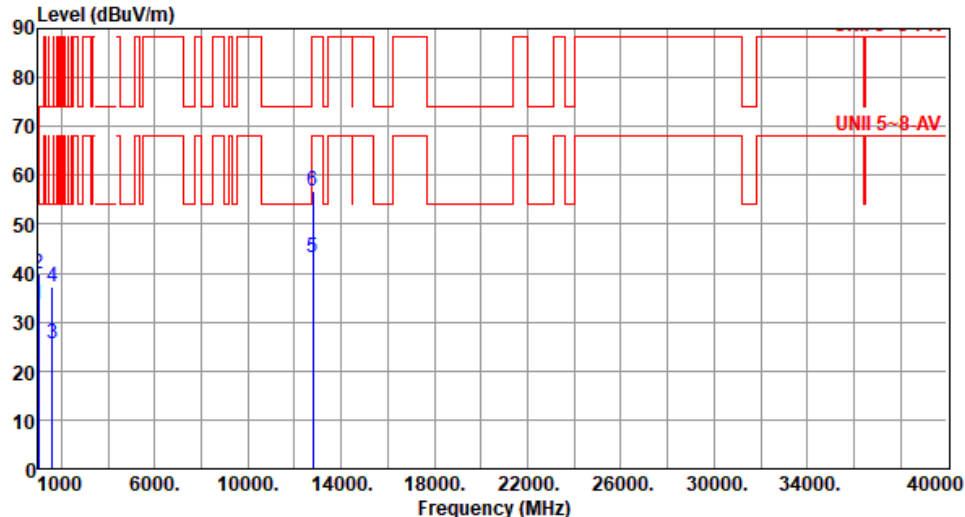

Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.40</td><td>54.00</td><td>-20.60</td><td>41.68</td><td>-8.28</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>2</td><td>1001.00</td><td>39.88</td><td>74.00</td><td>-34.12</td><td>48.16</td><td>-8.28</td><td>Peak</td><td>100</td><td>194</td></tr><tr><td>3</td><td>1599.00</td><td>25.62</td><td>54.00</td><td>-28.38</td><td>32.93</td><td>-7.31</td><td>Average</td><td>100</td><td>324</td></tr><tr><td>4</td><td>1599.00</td><td>37.33</td><td>74.00</td><td>-36.67</td><td>44.64</td><td>-7.31</td><td>Peak</td><td>100</td><td>324</td></tr><tr><td>5</td><td>12770.00</td><td>43.10</td><td>68.20</td><td>-25.10</td><td>36.69</td><td>6.41</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>12770.00</td><td>56.64</td><td>88.20</td><td>-31.56</td><td>50.23</td><td>6.41</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	194	2	1001.00	39.88	74.00	-34.12	48.16	-8.28	Peak	100	194	3	1599.00	25.62	54.00	-28.38	32.93	-7.31	Average	100	324	4	1599.00	37.33	74.00	-36.67	44.64	-7.31	Peak	100	324	5	12770.00	43.10	68.20	-25.10	36.69	6.41	Average	100	48	6	12770.00	56.64	88.20	-31.56	50.23	6.41	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	194																																																																
2	1001.00	39.88	74.00	-34.12	48.16	-8.28	Peak	100	194																																																																
3	1599.00	25.62	54.00	-28.38	32.93	-7.31	Average	100	324																																																																
4	1599.00	37.33	74.00	-36.67	44.64	-7.31	Peak	100	324																																																																
5	12770.00	43.10	68.20	-25.10	36.69	6.41	Average	100	48																																																																
6	12770.00	56.64	88.20	-31.56	50.23	6.41	Peak	100	48																																																																

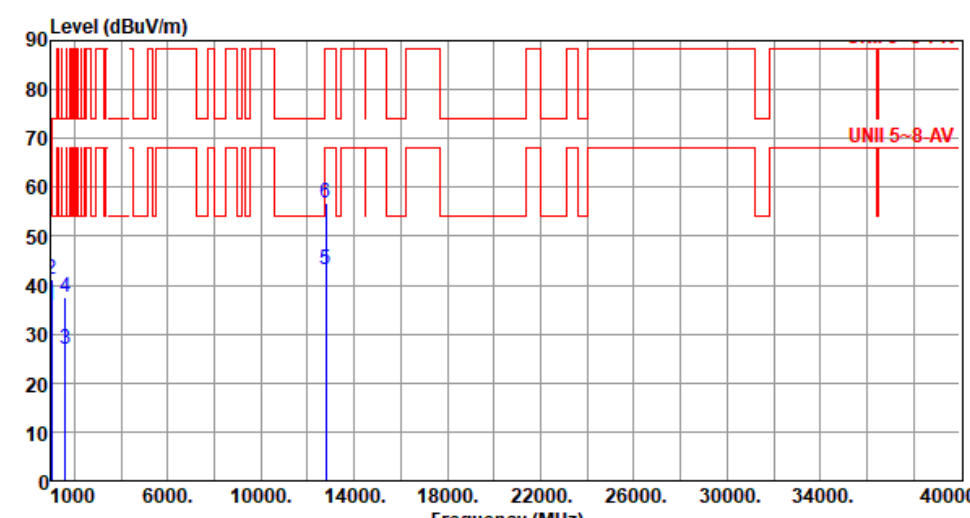


Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.88</td><td>54.00</td><td>-18.12</td><td>44.16</td><td>-8.28</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>2</td><td>1001.00</td><td>41.18</td><td>74.00</td><td>-32.82</td><td>49.46</td><td>-8.28</td><td>Peak</td><td>100</td><td>212</td></tr><tr><td>3</td><td>1599.00</td><td>26.81</td><td>54.00</td><td>-27.19</td><td>34.12</td><td>-7.31</td><td>Average</td><td>100</td><td>111</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>5</td><td>12770.00</td><td>43.17</td><td>68.20</td><td>-25.03</td><td>36.76</td><td>6.41</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>12770.00</td><td>56.70</td><td>88.20</td><td>-31.50</td><td>50.29</td><td>6.41</td><td>Peak</td><td>100</td><td>31</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	212	2	1001.00	41.18	74.00	-32.82	49.46	-8.28	Peak	100	212	3	1599.00	26.81	54.00	-27.19	34.12	-7.31	Average	100	111	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	111	5	12770.00	43.17	68.20	-25.03	36.76	6.41	Average	100	31	6	12770.00	56.70	88.20	-31.50	50.29	6.41	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	212																																																																
2	1001.00	41.18	74.00	-32.82	49.46	-8.28	Peak	100	212																																																																
3	1599.00	26.81	54.00	-27.19	34.12	-7.31	Average	100	111																																																																
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	111																																																																
5	12770.00	43.17	68.20	-25.03	36.76	6.41	Average	100	31																																																																
6	12770.00	56.70	88.20	-31.50	50.29	6.41	Peak	100	31																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.40</td><td>54.00</td><td>-20.60</td><td>41.68</td><td>-8.28</td><td>Average</td><td>100</td><td>198</td></tr><tr><td>2</td><td>1001.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>48.22</td><td>-8.28</td><td>Peak</td><td>100</td><td>198</td></tr><tr><td>3</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>4</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>5</td><td>12930.00</td><td>43.47</td><td>68.20</td><td>-24.73</td><td>37.21</td><td>6.26</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>6</td><td>12930.00</td><td>56.87</td><td>88.20</td><td>-31.33</td><td>50.61</td><td>6.26</td><td>Peak</td><td>100</td><td>58</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	198	2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	198	3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	321	4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	321	5	12930.00	43.47	68.20	-24.73	37.21	6.26	Average	100	58	6	12930.00	56.87	88.20	-31.33	50.61	6.26	Peak	100	58
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	198																																																																
2	1001.00	39.94	74.00	-34.06	48.22	-8.28	Peak	100	198																																																																
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	321																																																																
4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	321																																																																
5	12930.00	43.47	68.20	-24.73	37.21	6.26	Average	100	58																																																																
6	12930.00	56.87	88.20	-31.33	50.61	6.26	Peak	100	58																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

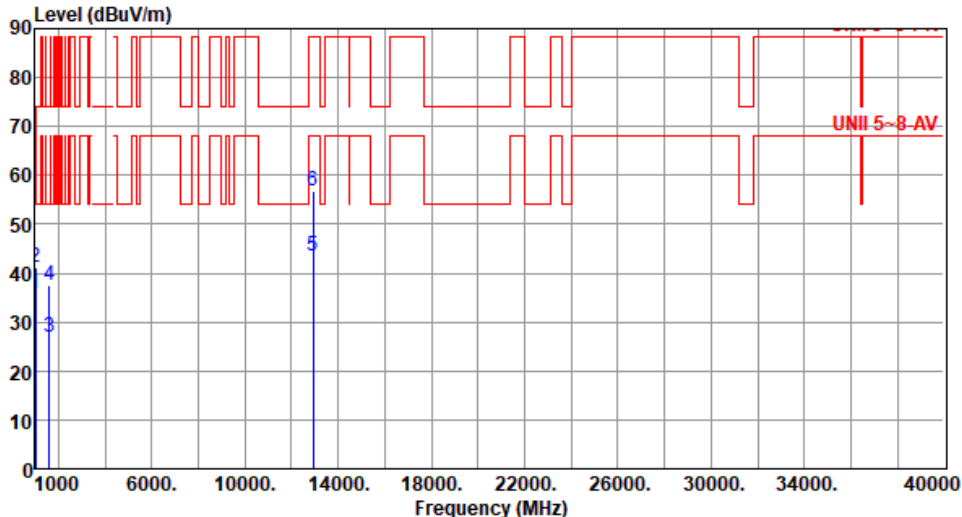


Modulation	be EHT80	Test Freq. (MHz)	6465																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.99</td><td>54.00</td><td>-18.01</td><td>44.27</td><td>-8.28</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>2</td><td>1001.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>49.47</td><td>-8.28</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>3</td><td>1599.00</td><td>26.91</td><td>54.00</td><td>-27.09</td><td>34.22</td><td>-7.31</td><td>Average</td><td>100</td><td>99</td></tr><tr><td>4</td><td>1599.00</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>44.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>99</td></tr><tr><td>5</td><td>12930.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>37.24</td><td>6.26</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td>12930.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.65</td><td>6.26</td><td>Peak</td><td>100</td><td>28</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.99	54.00	-18.01	44.27	-8.28	Average	100	220	2	1001.00	41.19	74.00	-32.81	49.47	-8.28	Peak	100	220	3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	99	4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	99	5	12930.00	43.50	68.20	-24.70	37.24	6.26	Average	100	28	6	12930.00	56.91	88.20	-31.29	50.65	6.26	Peak	100	28
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.99	54.00	-18.01	44.27	-8.28	Average	100	220																																																																
2	1001.00	41.19	74.00	-32.81	49.47	-8.28	Peak	100	220																																																																
3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	99																																																																
4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	99																																																																
5	12930.00	43.50	68.20	-24.70	37.24	6.26	Average	100	28																																																																
6	12930.00	56.91	88.20	-31.29	50.65	6.26	Peak	100	28																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

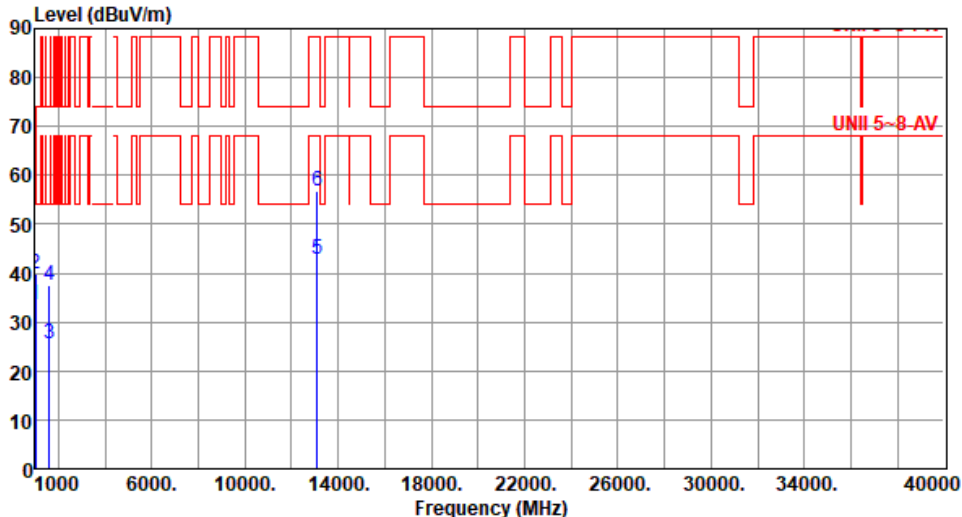


Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>2</td><td>1001.00</td><td>39.86</td><td>74.00</td><td>-34.14</td><td>48.14</td><td>-8.28</td><td>Peak</td><td>100</td><td>194</td></tr><tr><td>3</td><td>1599.00</td><td>25.68</td><td>54.00</td><td>-28.32</td><td>32.99</td><td>-7.31</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>1599.00</td><td>37.39</td><td>74.00</td><td>-36.61</td><td>44.70</td><td>-7.31</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>13090.00</td><td>42.91</td><td>68.20</td><td>-25.29</td><td>37.13</td><td>5.78</td><td>Average</td><td>100</td><td>57</td></tr><tr><td>6</td><td>13090.00</td><td>56.85</td><td>88.20</td><td>-31.35</td><td>51.07</td><td>5.78</td><td>Peak</td><td>100</td><td>57</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	194	2	1001.00	39.86	74.00	-34.14	48.14	-8.28	Peak	100	194	3	1599.00	25.68	54.00	-28.32	32.99	-7.31	Average	100	318	4	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	318	5	13090.00	42.91	68.20	-25.29	37.13	5.78	Average	100	57	6	13090.00	56.85	88.20	-31.35	51.07	5.78	Peak	100	57
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	194																																																																
2	1001.00	39.86	74.00	-34.14	48.14	-8.28	Peak	100	194																																																																
3	1599.00	25.68	54.00	-28.32	32.99	-7.31	Average	100	318																																																																
4	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	318																																																																
5	13090.00	42.91	68.20	-25.29	37.13	5.78	Average	100	57																																																																
6	13090.00	56.85	88.20	-31.35	51.07	5.78	Peak	100	57																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

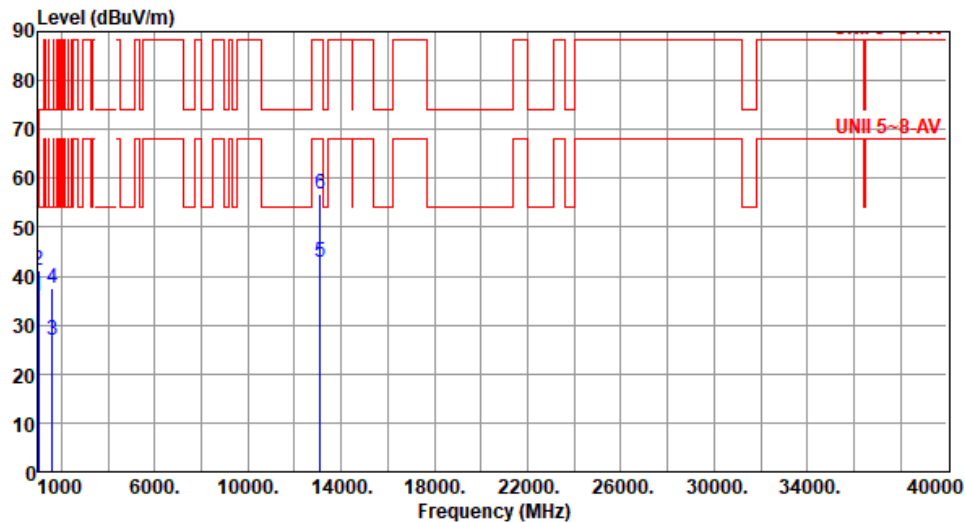


Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	217
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	217
3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	111
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	111
5	13090.00	42.98	68.20	-25.22	37.20	5.78	Average	100	31
6	13090.00	56.90	88.20	-31.30	51.12	5.78	Peak	100	31

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

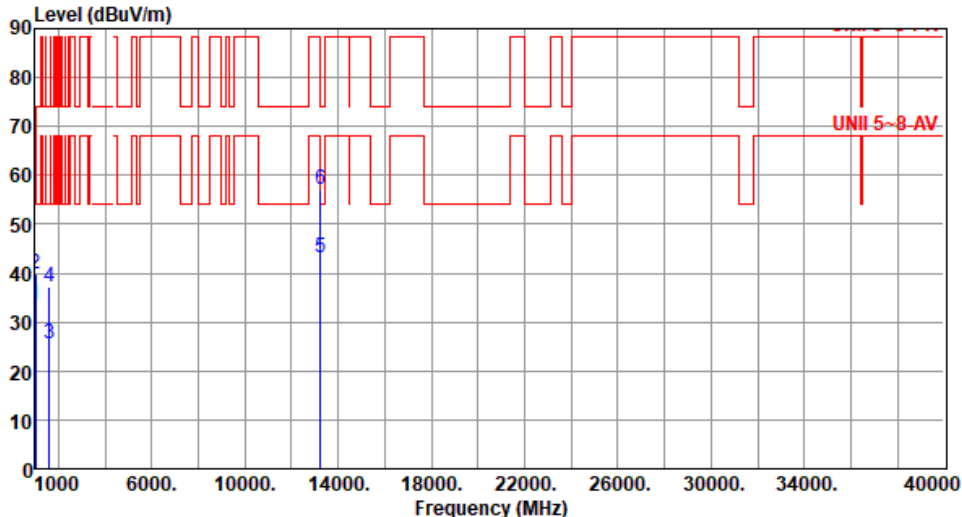

Modulation	be EHT80		Test Freq. (MHz)		6625																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.48</td><td>54.00</td><td>-20.52</td><td>41.76</td><td>-8.28</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1001.00</td><td>39.92</td><td>74.00</td><td>-34.08</td><td>48.20</td><td>-8.28</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>1599.00</td><td>25.52</td><td>54.00</td><td>-28.48</td><td>32.83</td><td>-7.31</td><td>Average</td><td>100</td><td>316</td></tr><tr><td>4</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>316</td></tr><tr><td>5</td><td>13250.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>37.54</td><td>5.74</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>13250.00</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>51.32</td><td>5.74</td><td>Peak</td><td>100</td><td>63</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.48	54.00	-20.52	41.76	-8.28	Average	100	199	2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	199	3	1599.00	25.52	54.00	-28.48	32.83	-7.31	Average	100	316	4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	316	5	13250.00	43.28	54.00	-10.72	37.54	5.74	Average	100	63	6	13250.00	57.06	74.00	-16.94	51.32	5.74	Peak	100	63
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.48	54.00	-20.52	41.76	-8.28	Average	100	199																																																																																										
2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	199																																																																																										
3	1599.00	25.52	54.00	-28.48	32.83	-7.31	Average	100	316																																																																																										
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	316																																																																																										
5	13250.00	43.28	54.00	-10.72	37.54	5.74	Average	100	63																																																																																										
6	13250.00	57.06	74.00	-16.94	51.32	5.74	Peak	100	63																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

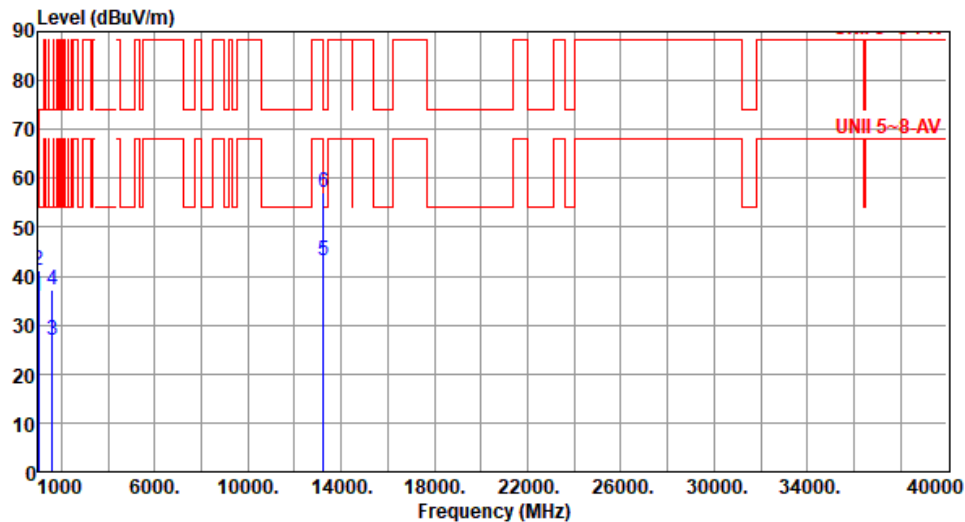


Modulation	be EHT80	Test Freq. (MHz)	6625																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.88</td><td>54.00</td><td>-18.12</td><td>44.16</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>41.12</td><td>74.00</td><td>-32.88</td><td>49.40</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>26.89</td><td>54.00</td><td>-27.11</td><td>34.20</td><td>-7.31</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>1599.00</td><td>37.32</td><td>74.00</td><td>-36.68</td><td>44.63</td><td>-7.31</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>13250.00</td><td>43.28</td><td>54.00</td><td>-10.72</td><td>37.54</td><td>5.74</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td>13250.00</td><td>57.12</td><td>74.00</td><td>-16.88</td><td>51.38</td><td>5.74</td><td>Peak</td><td>100</td><td>28</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	213	2	1001.00	41.12	74.00	-32.88	49.40	-8.28	Peak	100	213	3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	102	4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	102	5	13250.00	43.28	54.00	-10.72	37.54	5.74	Average	100	28	6	13250.00	57.12	74.00	-16.88	51.38	5.74	Peak	100	28			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	213																																																																	
2	1001.00	41.12	74.00	-32.88	49.40	-8.28	Peak	100	213																																																																	
3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	102																																																																	
4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	102																																																																	
5	13250.00	43.28	54.00	-10.72	37.54	5.74	Average	100	28																																																																	
6	13250.00	57.12	74.00	-16.88	51.38	5.74	Peak	100	28																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										




Modulation	be EHT80	Test Freq. (MHz)	6705																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.45</td><td>54.00</td><td>-20.55</td><td>41.73</td><td>-8.28</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>2</td><td>1001.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>48.24</td><td>-8.28</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>3</td><td>1599.00</td><td>25.61</td><td>54.00</td><td>-28.39</td><td>32.92</td><td>-7.31</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>4</td><td>1599.00</td><td>37.30</td><td>74.00</td><td>-36.70</td><td>44.61</td><td>-7.31</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>5</td><td>13410.00</td><td>44.05</td><td>68.20</td><td>-24.15</td><td>38.08</td><td>5.97</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>6</td><td>13410.00</td><td>57.70</td><td>88.20</td><td>-30.50</td><td>51.73</td><td>5.97</td><td>Peak</td><td>100</td><td>61</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.45	54.00	-20.55	41.73	-8.28	Average	100	201	2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	201	3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	309	4	1599.00	37.30	74.00	-36.70	44.61	-7.31	Peak	100	309	5	13410.00	44.05	68.20	-24.15	38.08	5.97	Average	100	61	6	13410.00	57.70	88.20	-30.50	51.73	5.97	Peak	100	61
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.45	54.00	-20.55	41.73	-8.28	Average	100	201																																																																
2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	201																																																																
3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	309																																																																
4	1599.00	37.30	74.00	-36.70	44.61	-7.31	Peak	100	309																																																																
5	13410.00	44.05	68.20	-24.15	38.08	5.97	Average	100	61																																																																
6	13410.00	57.70	88.20	-30.50	51.73	5.97	Peak	100	61																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

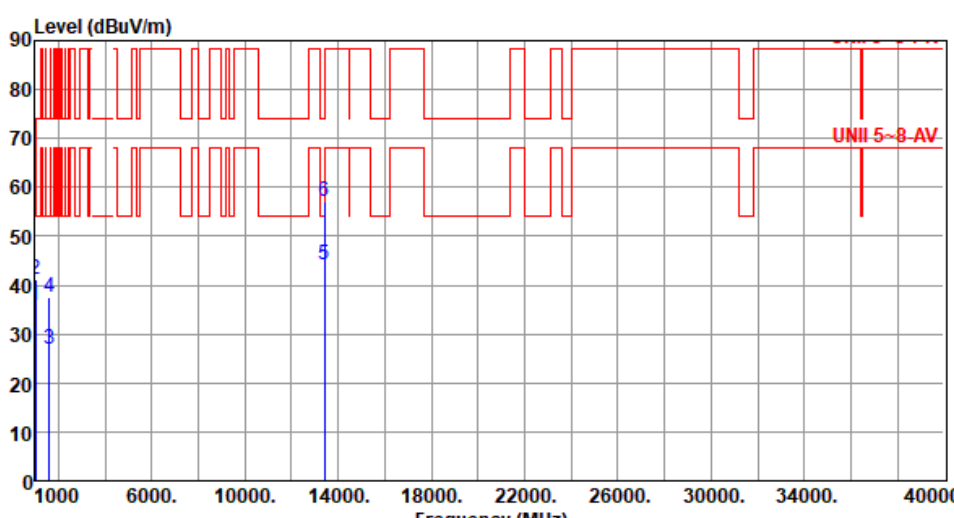

Modulation	be EHT80	Test Freq. (MHz)	6705						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.88	54.00	-18.12	44.16	-8.28	Average	100	204
2	1001.00	41.17	74.00	-32.83	49.45	-8.28	Peak	100	204
3	1599.00	26.79	54.00	-27.21	34.10	-7.31	Average	100	101
4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	101
5	13410.00	44.12	68.20	-24.08	38.15	5.97	Average	100	19
6	13410.00	57.21	88.20	-30.99	51.24	5.97	Peak	100	19
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

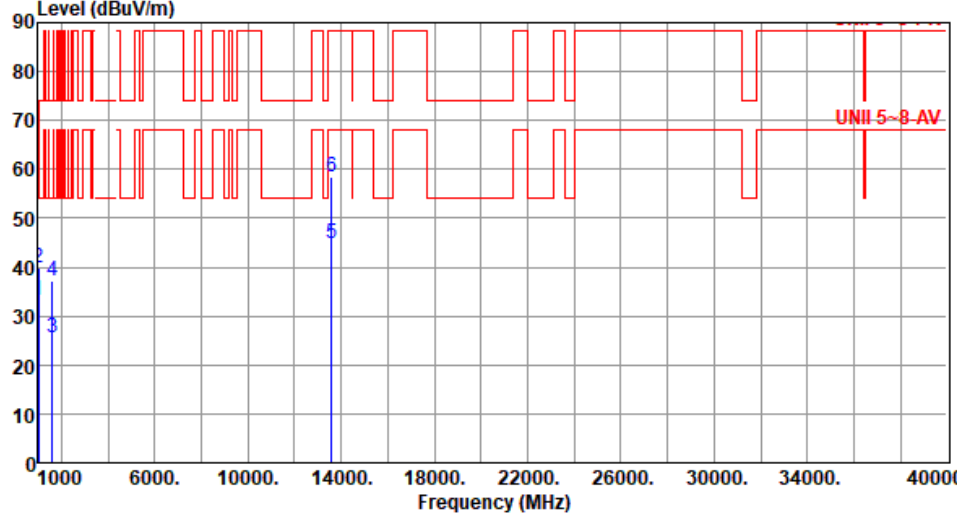

Modulation	be EHT80	Test Freq. (MHz)	6785						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.31	54.00	-20.69	41.59	-8.28	Average	100	186
2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	186
3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	318
4	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	318
5	13570.00	44.69	68.20	-23.51	38.33	6.36	Average	100	47
6	13570.00	58.61	88.20	-29.59	52.25	6.36	Peak	100	47
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.93</td><td>54.00</td><td>-18.07</td><td>44.21</td><td>-8.28</td><td>Average</td><td>100</td><td>210</td></tr><tr><td>2</td><td>1001.00</td><td>41.15</td><td>74.00</td><td>-32.85</td><td>49.43</td><td>-8.28</td><td>Peak</td><td>100</td><td>210</td></tr><tr><td>3</td><td>1599.00</td><td>26.88</td><td>54.00</td><td>-27.12</td><td>34.19</td><td>-7.31</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>1599.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>44.80</td><td>-7.31</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>13570.00</td><td>44.73</td><td>68.20</td><td>-23.47</td><td>38.37</td><td>6.36</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>6</td><td>13570.00</td><td>58.62</td><td>88.20</td><td>-29.58</td><td>52.26</td><td>6.36</td><td>Peak</td><td>100</td><td>40</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.93	54.00	-18.07	44.21	-8.28	Average	100	210	2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	210	3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	107	4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	107	5	13570.00	44.73	68.20	-23.47	38.37	6.36	Average	100	40	6	13570.00	58.62	88.20	-29.58	52.26	6.36	Peak	100	40
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.93	54.00	-18.07	44.21	-8.28	Average	100	210																																																																
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	210																																																																
3	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	107																																																																
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	107																																																																
5	13570.00	44.73	68.20	-23.47	38.37	6.36	Average	100	40																																																																
6	13570.00	58.62	88.20	-29.58	52.26	6.36	Peak	100	40																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6865																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.41</td><td>54.00</td><td>-20.59</td><td>41.69</td><td>-8.28</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>2</td><td>1001.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>48.33</td><td>-8.28</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>3</td><td>1599.00</td><td>25.66</td><td>54.00</td><td>-28.34</td><td>32.97</td><td>-7.31</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>5</td><td>13730.00</td><td>44.35</td><td>68.20</td><td>-23.85</td><td>38.27</td><td>6.08</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>13730.00</td><td>58.09</td><td>88.20</td><td>-30.11</td><td>52.01</td><td>6.08</td><td>Peak</td><td>100</td><td>54</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.41	54.00	-20.59	41.69	-8.28	Average	100	192	2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	192	3	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	311	4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	311	5	13730.00	44.35	68.20	-23.85	38.27	6.08	Average	100	54	6	13730.00	58.09	88.20	-30.11	52.01	6.08	Peak	100	54
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.41	54.00	-20.59	41.69	-8.28	Average	100	192																																																																
2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	192																																																																
3	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	311																																																																
4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	311																																																																
5	13730.00	44.35	68.20	-23.85	38.27	6.08	Average	100	54																																																																
6	13730.00	58.09	88.20	-30.11	52.01	6.08	Peak	100	54																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6865						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.87	54.00	-18.13	44.15	-8.28	Average	100	203
2	1001.00	41.28	74.00	-32.72	49.56	-8.28	Peak	100	203
3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	112
4	1599.00	37.47	74.00	-36.53	44.78	-7.31	Peak	100	112
5	13730.00	44.41	68.20	-23.79	38.33	6.08	Average	100	33
6	13730.00	58.16	88.20	-30.04	52.08	6.08	Peak	100	33

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.31	54.00	-20.69	41.59	-8.28	Average	100	202
2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	202
3	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312
4	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	312
5	13890.00	44.78	68.20	-23.42	38.37	6.41	Average	100	55
6	13890.00	58.74	88.20	-29.46	52.33	6.41	Peak	100	55
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

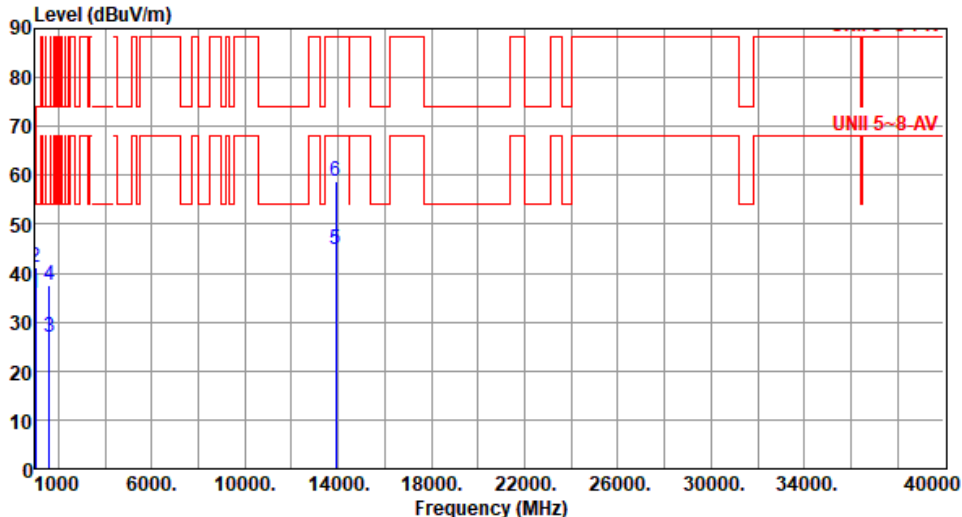


Modulation	be EHT80	Test Freq. (MHz)	6945																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>44.12</td><td>-8.28</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>1001.00</td><td>41.13</td><td>74.00</td><td>-32.87</td><td>49.41</td><td>-8.28</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>1599.00</td><td>26.83</td><td>54.00</td><td>-27.17</td><td>34.14</td><td>-7.31</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>1599.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>44.80</td><td>-7.31</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>13890.00</td><td>44.82</td><td>68.20</td><td>-23.38</td><td>38.41</td><td>6.41</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>13890.00</td><td>58.85</td><td>88.20</td><td>-29.35</td><td>52.44</td><td>6.41</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	216	2	1001.00	41.13	74.00	-32.87	49.41	-8.28	Peak	100	216	3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	114	4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	114	5	13890.00	44.82	68.20	-23.38	38.41	6.41	Average	100	29	6	13890.00	58.85	88.20	-29.35	52.44	6.41	Peak	100	29
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	216																																																																
2	1001.00	41.13	74.00	-32.87	49.41	-8.28	Peak	100	216																																																																
3	1599.00	26.83	54.00	-27.17	34.14	-7.31	Average	100	114																																																																
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	114																																																																
5	13890.00	44.82	68.20	-23.38	38.41	6.41	Average	100	29																																																																
6	13890.00	58.85	88.20	-29.35	52.44	6.41	Peak	100	29																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

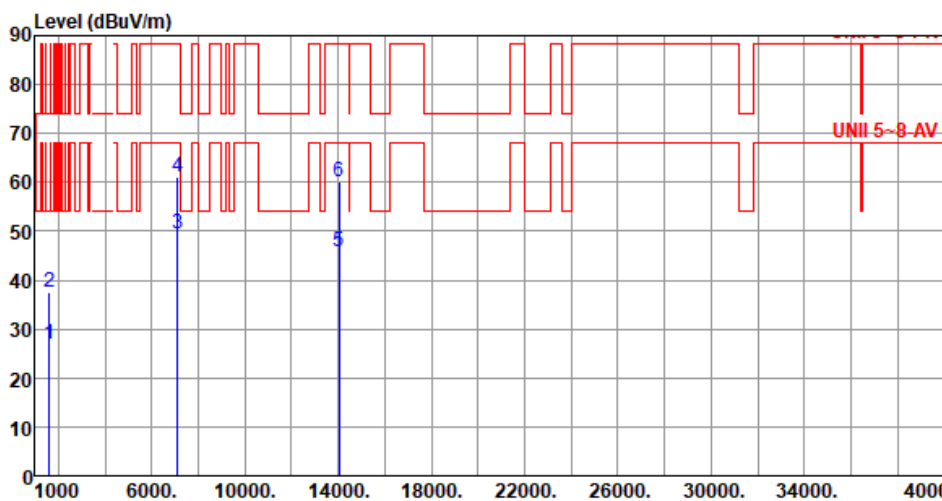


Modulation	be EHT80		Test Freq. (MHz)		7025																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>26.90</td><td>54.00</td><td>-27.10</td><td>34.21</td><td>-7.31</td><td>Average</td><td>100</td><td>307</td></tr><tr><td>2</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>307</td></tr><tr><td>3</td><td>7125.00</td><td>49.40</td><td>68.20</td><td>-18.80</td><td>44.47</td><td>4.93</td><td>Average</td><td>207</td><td>208</td></tr><tr><td>4</td><td>7125.00</td><td>61.03</td><td>88.20</td><td>-27.17</td><td>56.10</td><td>4.93</td><td>Peak</td><td>207</td><td>208</td></tr><tr><td>5</td><td>14050.00</td><td>45.94</td><td>68.20</td><td>-22.26</td><td>39.13</td><td>6.81</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>14050.00</td><td>59.99</td><td>88.20</td><td>-28.21</td><td>53.18</td><td>6.81</td><td>Peak</td><td>100</td><td>18</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	307	2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	307	3	7125.00	49.40	68.20	-18.80	44.47	4.93	Average	207	208	4	7125.00	61.03	88.20	-27.17	56.10	4.93	Peak	207	208	5	14050.00	45.94	68.20	-22.26	39.13	6.81	Average	100	18	6	14050.00	59.99	88.20	-28.21	53.18	6.81	Peak	100	18
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	307																																																																						
2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	307																																																																						
3	7125.00	49.40	68.20	-18.80	44.47	4.93	Average	207	208																																																																						
4	7125.00	61.03	88.20	-27.17	56.10	4.93	Peak	207	208																																																																						
5	14050.00	45.94	68.20	-22.26	39.13	6.81	Average	100	18																																																																						
6	14050.00	59.99	88.20	-28.21	53.18	6.81	Peak	100	18																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

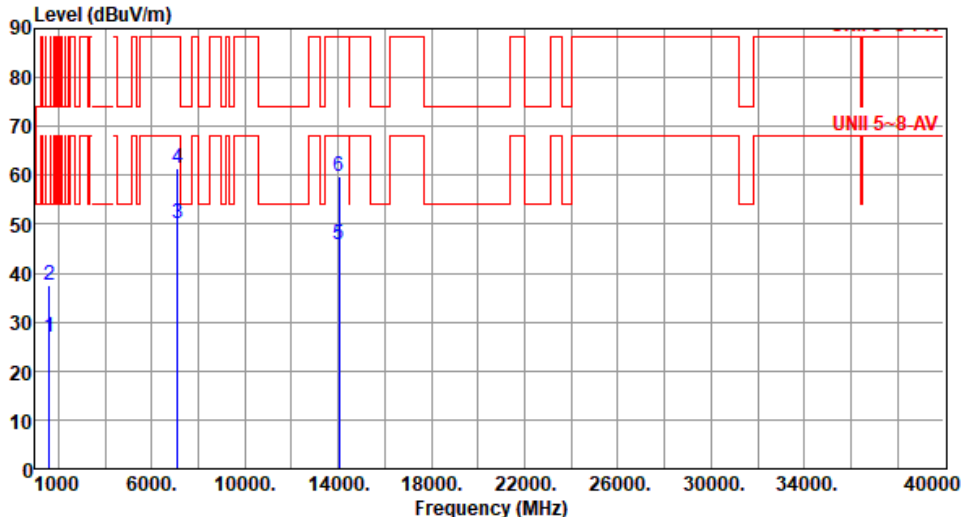

Modulation	be EHT80	Test Freq. (MHz)	7025						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	117
2	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	117
3	7125.00	50.03	68.20	-18.17	45.10	4.93	Average	100	150
4	7125.00	61.50	88.20	-26.70	56.57	4.93	Peak	100	150
5	14050.00	45.81	68.20	-22.39	39.00	6.81	Average	100	26
6	14050.00	59.86	88.20	-28.34	53.05	6.81	Peak	100	26

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Unwanted Emissions (Above 1GHz) for be EHT160

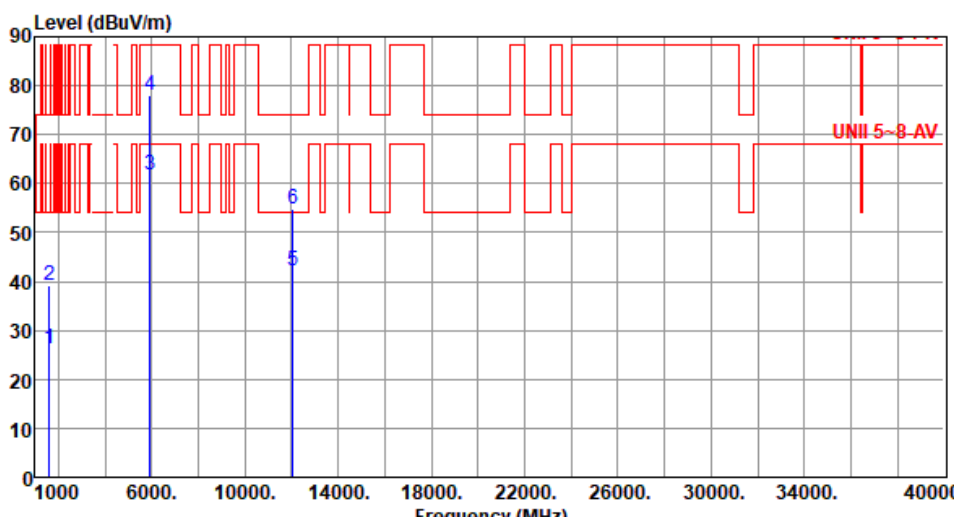Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.13</td><td>54.00</td><td>-27.87</td><td>33.44</td><td>-7.31</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>1599.00</td><td>39.13</td><td>74.00</td><td>-34.87</td><td>46.44</td><td>-7.31</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>5925.00</td><td>61.80</td><td>68.20</td><td>-6.40</td><td>60.66</td><td>1.14</td><td>Average</td><td>125</td><td>121</td></tr><tr><td>4</td><td>5925.00</td><td>77.91</td><td>88.20</td><td>-10.29</td><td>76.77</td><td>1.14</td><td>Peak</td><td>125</td><td>121</td></tr><tr><td>5</td><td>12050.00</td><td>42.22</td><td>54.00</td><td>-11.78</td><td>35.84</td><td>6.38</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>6</td><td>12050.00</td><td>54.71</td><td>74.00</td><td>-19.29</td><td>48.33</td><td>6.38</td><td>Peak</td><td>100</td><td>277</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.13	54.00	-27.87	33.44	-7.31	Average	100	288	2	1599.00	39.13	74.00	-34.87	46.44	-7.31	Peak	100	288	3	5925.00	61.80	68.20	-6.40	60.66	1.14	Average	125	121	4	5925.00	77.91	88.20	-10.29	76.77	1.14	Peak	125	121	5	12050.00	42.22	54.00	-11.78	35.84	6.38	Average	100	277	6	12050.00	54.71	74.00	-19.29	48.33	6.38	Peak	100	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.13	54.00	-27.87	33.44	-7.31	Average	100	288																																																																
2	1599.00	39.13	74.00	-34.87	46.44	-7.31	Peak	100	288																																																																
3	5925.00	61.80	68.20	-6.40	60.66	1.14	Average	125	121																																																																
4	5925.00	77.91	88.20	-10.29	76.77	1.14	Peak	125	121																																																																
5	12050.00	42.22	54.00	-11.78	35.84	6.38	Average	100	277																																																																
6	12050.00	54.71	74.00	-19.29	48.33	6.38	Peak	100	277																																																																




Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.13</td><td>54.00</td><td>-28.87</td><td>32.44</td><td>-7.31</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1599.00</td><td>37.80</td><td>74.00</td><td>-36.20</td><td>45.11</td><td>-7.31</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>5925.00</td><td>61.53</td><td>68.20</td><td>-6.67</td><td>60.39</td><td>1.14</td><td>Average</td><td>109</td><td>160</td></tr><tr><td>4</td><td>5925.00</td><td>75.52</td><td>88.20</td><td>-12.68</td><td>74.38</td><td>1.14</td><td>Peak</td><td>109</td><td>160</td></tr><tr><td>5</td><td>12050.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>35.86</td><td>6.38</td><td>Average</td><td>100</td><td>181</td></tr><tr><td>6</td><td>12050.00</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>48.13</td><td>6.38</td><td>Peak</td><td>100</td><td>181</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	208	2	1599.00	37.80	74.00	-36.20	45.11	-7.31	Peak	100	208	3	5925.00	61.53	68.20	-6.67	60.39	1.14	Average	109	160	4	5925.00	75.52	88.20	-12.68	74.38	1.14	Peak	109	160	5	12050.00	42.24	54.00	-11.76	35.86	6.38	Average	100	181	6	12050.00	54.51	74.00	-19.49	48.13	6.38	Peak	100	181
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	208																																																																
2	1599.00	37.80	74.00	-36.20	45.11	-7.31	Peak	100	208																																																																
3	5925.00	61.53	68.20	-6.67	60.39	1.14	Average	109	160																																																																
4	5925.00	75.52	88.20	-12.68	74.38	1.14	Peak	109	160																																																																
5	12050.00	42.24	54.00	-11.76	35.86	6.38	Average	100	181																																																																
6	12050.00	54.51	74.00	-19.49	48.13	6.38	Peak	100	181																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT160	Test Freq. (MHz)	6185																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.18</td><td>54.00</td><td>-28.82</td><td>32.49</td><td>-7.31</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1599.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.13</td><td>-7.31</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>5925.00</td><td>48.55</td><td>68.20</td><td>-19.65</td><td>47.41</td><td>1.14</td><td>Average</td><td>136</td><td>239</td></tr><tr><td>4</td><td>5925.00</td><td>60.00</td><td>88.20</td><td>-28.20</td><td>58.86</td><td>1.14</td><td>Peak</td><td>136</td><td>239</td></tr><tr><td>5</td><td>12370.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>36.27</td><td>6.48</td><td>Average</td><td>100</td><td>161</td></tr><tr><td>6</td><td>12370.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>48.13</td><td>6.48</td><td>Peak</td><td>100</td><td>161</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.18	54.00	-28.82	32.49	-7.31	Average	100	213	2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	213	3	5925.00	48.55	68.20	-19.65	47.41	1.14	Average	136	239	4	5925.00	60.00	88.20	-28.20	58.86	1.14	Peak	136	239	5	12370.00	42.75	54.00	-11.25	36.27	6.48	Average	100	161	6	12370.00	54.61	74.00	-19.39	48.13	6.48	Peak	100	161
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.18	54.00	-28.82	32.49	-7.31	Average	100	213																																																																
2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	213																																																																
3	5925.00	48.55	68.20	-19.65	47.41	1.14	Average	136	239																																																																
4	5925.00	60.00	88.20	-28.20	58.86	1.14	Peak	136	239																																																																
5	12370.00	42.75	54.00	-11.25	36.27	6.48	Average	100	161																																																																
6	12370.00	54.61	74.00	-19.39	48.13	6.48	Peak	100	161																																																																

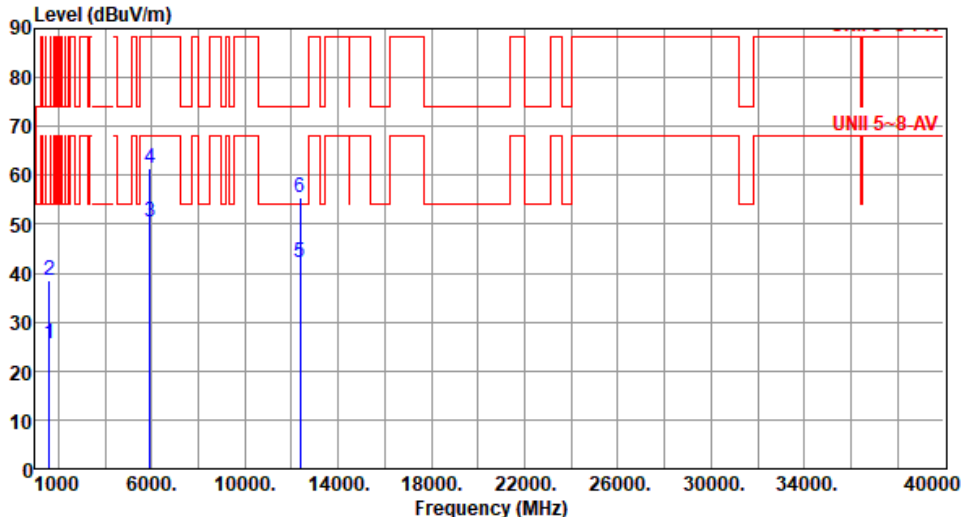


Modulation	be EHT160	Test Freq. (MHz)	6185						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	25.72	54.00	-28.28	33.03	-7.31	Average	100	277
2	1599.00	38.47	74.00	-35.53	45.78	-7.31	Peak	100	277
3	5925.00	50.41	68.20	-17.79	49.27	1.14	Average	128	358
4	5925.00	61.32	88.20	-26.88	60.18	1.14	Peak	128	358
5	12370.00	42.34	54.00	-11.66	35.86	6.48	Average	100	209
6	12370.00	55.59	74.00	-18.41	49.11	6.48	Peak	100	209

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

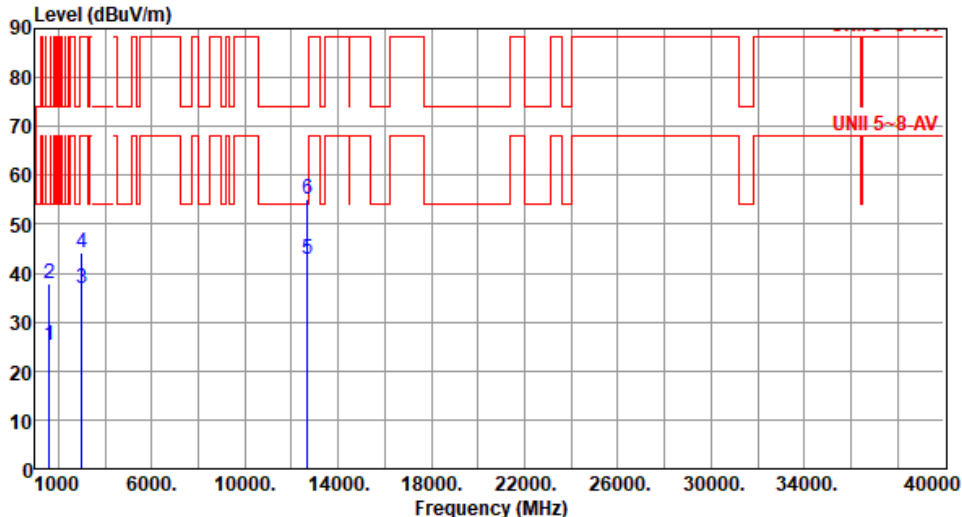


Modulation	be EHT160		Test Freq. (MHz)		6345																																																																										
Polarization	Horizontal																																																																														
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.15</td><td>54.00</td><td>-28.85</td><td>32.46</td><td>-7.31</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>2</td><td>1599.00</td><td>37.89</td><td>74.00</td><td>-36.11</td><td>45.20</td><td>-7.31</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>3</td><td>3000.00</td><td>36.80</td><td>68.20</td><td>-31.40</td><td>39.46</td><td>-2.66</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>4</td><td>3000.00</td><td>44.22</td><td>88.20</td><td>-43.98</td><td>46.88</td><td>-2.66</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>5</td><td>12690.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>36.34</td><td>6.47</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6</td><td>12690.00</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>48.73</td><td>6.47</td><td>Peak</td><td>100</td><td>122</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.15	54.00	-28.85	32.46	-7.31	Average	100	186	2	1599.00	37.89	74.00	-36.11	45.20	-7.31	Peak	100	186	3	3000.00	36.80	68.20	-31.40	39.46	-2.66	Average	100	81	4	3000.00	44.22	88.20	-43.98	46.88	-2.66	Peak	100	81	5	12690.00	42.81	54.00	-11.19	36.34	6.47	Average	100	122	6	12690.00	55.20	74.00	-18.80	48.73	6.47	Peak	100	122
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	25.15	54.00	-28.85	32.46	-7.31	Average	100	186																																																																						
2	1599.00	37.89	74.00	-36.11	45.20	-7.31	Peak	100	186																																																																						
3	3000.00	36.80	68.20	-31.40	39.46	-2.66	Average	100	81																																																																						
4	3000.00	44.22	88.20	-43.98	46.88	-2.66	Peak	100	81																																																																						
5	12690.00	42.81	54.00	-11.19	36.34	6.47	Average	100	122																																																																						
6	12690.00	55.20	74.00	-18.80	48.73	6.47	Peak	100	122																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

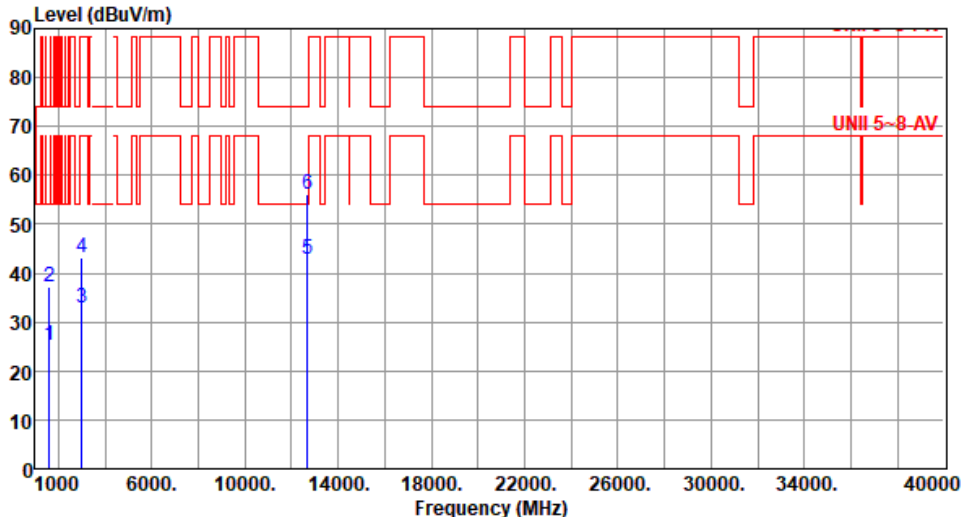

Modulation	be EHT160		Test Freq. (MHz)		6345																																																																										
Polarization	Vertical																																																																														
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.17</td><td>54.00</td><td>-28.83</td><td>32.48</td><td>-7.31</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>2</td><td>1599.00</td><td>37.28</td><td>74.00</td><td>-36.72</td><td>44.59</td><td>-7.31</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>3</td><td>3000.00</td><td>33.02</td><td>68.20</td><td>-35.18</td><td>35.68</td><td>-2.66</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>4</td><td>3000.00</td><td>43.22</td><td>88.20</td><td>-44.98</td><td>45.88</td><td>-2.66</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>5</td><td>12690.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>36.37</td><td>6.47</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>6</td><td>12690.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>49.81</td><td>6.47</td><td>Peak</td><td>100</td><td>228</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.17	54.00	-28.83	32.48	-7.31	Average	100	186	2	1599.00	37.28	74.00	-36.72	44.59	-7.31	Peak	100	186	3	3000.00	33.02	68.20	-35.18	35.68	-2.66	Average	100	122	4	3000.00	43.22	88.20	-44.98	45.88	-2.66	Peak	100	122	5	12690.00	42.84	54.00	-11.16	36.37	6.47	Average	100	228	6	12690.00	56.28	74.00	-17.72	49.81	6.47	Peak	100	228
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	25.17	54.00	-28.83	32.48	-7.31	Average	100	186																																																																						
2	1599.00	37.28	74.00	-36.72	44.59	-7.31	Peak	100	186																																																																						
3	3000.00	33.02	68.20	-35.18	35.68	-2.66	Average	100	122																																																																						
4	3000.00	43.22	88.20	-44.98	45.88	-2.66	Peak	100	122																																																																						
5	12690.00	42.84	54.00	-11.16	36.37	6.47	Average	100	228																																																																						
6	12690.00	56.28	74.00	-17.72	49.81	6.47	Peak	100	228																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

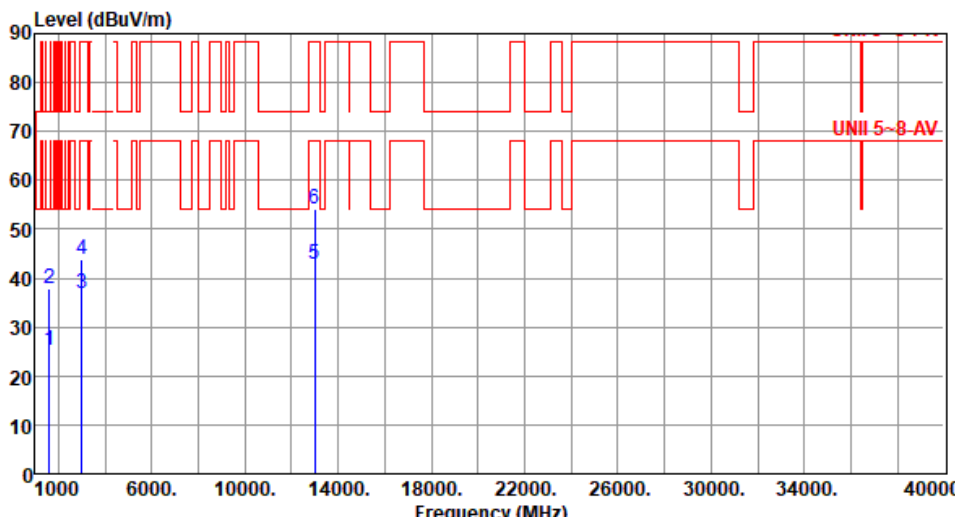


Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.13</td><td>54.00</td><td>-28.87</td><td>32.44</td><td>-7.31</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1599.00</td><td>37.87</td><td>74.00</td><td>-36.13</td><td>45.18</td><td>-7.31</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>3000.00</td><td>36.91</td><td>68.20</td><td>-31.29</td><td>39.57</td><td>-2.66</td><td>Average</td><td>100</td><td>73</td></tr><tr><td>4</td><td>3000.00</td><td>43.72</td><td>88.20</td><td>-44.48</td><td>46.38</td><td>-2.66</td><td>Peak</td><td>100</td><td>73</td></tr><tr><td>5</td><td>13010.00</td><td>42.73</td><td>68.20</td><td>-25.47</td><td>36.53</td><td>6.20</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>13010.00</td><td>54.15</td><td>88.20</td><td>-34.05</td><td>47.95</td><td>6.20</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	213	2	1599.00	37.87	74.00	-36.13	45.18	-7.31	Peak	100	213	3	3000.00	36.91	68.20	-31.29	39.57	-2.66	Average	100	73	4	3000.00	43.72	88.20	-44.48	46.38	-2.66	Peak	100	73	5	13010.00	42.73	68.20	-25.47	36.53	6.20	Average	100	108	6	13010.00	54.15	88.20	-34.05	47.95	6.20	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	213																																																																
2	1599.00	37.87	74.00	-36.13	45.18	-7.31	Peak	100	213																																																																
3	3000.00	36.91	68.20	-31.29	39.57	-2.66	Average	100	73																																																																
4	3000.00	43.72	88.20	-44.48	46.38	-2.66	Peak	100	73																																																																
5	13010.00	42.73	68.20	-25.47	36.53	6.20	Average	100	108																																																																
6	13010.00	54.15	88.20	-34.05	47.95	6.20	Peak	100	108																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.82</td><td>54.00</td><td>-28.18</td><td>33.13</td><td>-7.31</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>2</td><td>1599.00</td><td>38.80</td><td>74.00</td><td>-35.20</td><td>46.11</td><td>-7.31</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>3</td><td>3000.00</td><td>32.98</td><td>68.20</td><td>-35.22</td><td>35.64</td><td>-2.66</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>4</td><td>3000.00</td><td>42.67</td><td>88.20</td><td>-45.53</td><td>45.33</td><td>-2.66</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>5</td><td>13010.00</td><td>42.43</td><td>68.20</td><td>-25.77</td><td>36.23</td><td>6.20</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>6</td><td>13010.00</td><td>54.33</td><td>88.20</td><td>-33.87</td><td>48.13</td><td>6.20</td><td>Peak</td><td>100</td><td>152</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.82	54.00	-28.18	33.13	-7.31	Average	100	286	2	1599.00	38.80	74.00	-35.20	46.11	-7.31	Peak	100	286	3	3000.00	32.98	68.20	-35.22	35.64	-2.66	Average	100	127	4	3000.00	42.67	88.20	-45.53	45.33	-2.66	Peak	100	127	5	13010.00	42.43	68.20	-25.77	36.23	6.20	Average	100	152	6	13010.00	54.33	88.20	-33.87	48.13	6.20	Peak	100	152
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.82	54.00	-28.18	33.13	-7.31	Average	100	286																																																																
2	1599.00	38.80	74.00	-35.20	46.11	-7.31	Peak	100	286																																																																
3	3000.00	32.98	68.20	-35.22	35.64	-2.66	Average	100	127																																																																
4	3000.00	42.67	88.20	-45.53	45.33	-2.66	Peak	100	127																																																																
5	13010.00	42.43	68.20	-25.77	36.23	6.20	Average	100	152																																																																
6	13010.00	54.33	88.20	-33.87	48.13	6.20	Peak	100	152																																																																

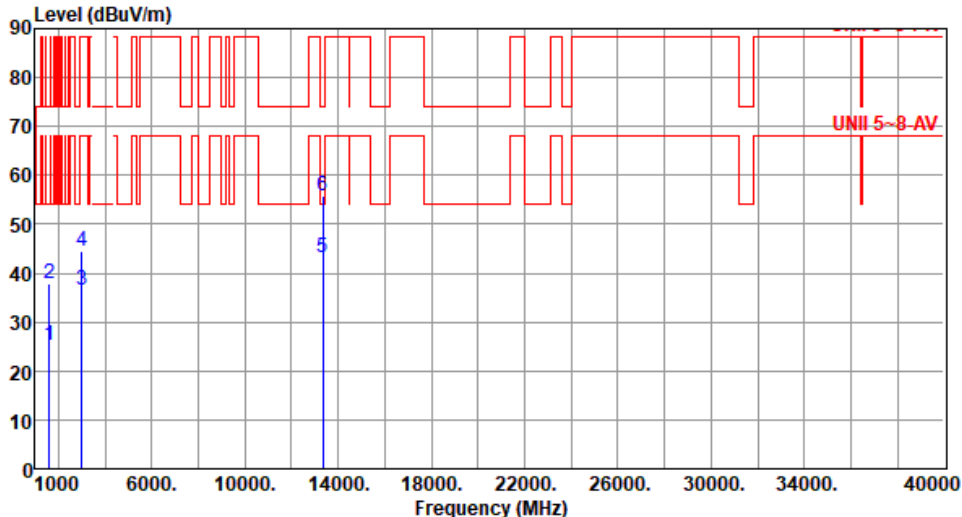


Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.35</td><td>54.00</td><td>-28.65</td><td>32.66</td><td>-7.31</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>2</td><td>1599.00</td><td>37.80</td><td>74.00</td><td>-36.20</td><td>45.11</td><td>-7.31</td><td>Peak</td><td>100</td><td>185</td></tr><tr><td>3</td><td>3000.00</td><td>36.63</td><td>68.20</td><td>-31.57</td><td>39.29</td><td>-2.66</td><td>Average</td><td>100</td><td>88</td></tr><tr><td>4</td><td>3000.00</td><td>44.49</td><td>88.20</td><td>-43.71</td><td>47.15</td><td>-2.66</td><td>Peak</td><td>100</td><td>88</td></tr><tr><td>5</td><td>13330.00</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>37.36</td><td>5.72</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>6</td><td>13330.00</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>49.97</td><td>5.72</td><td>Peak</td><td>100</td><td>216</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.35	54.00	-28.65	32.66	-7.31	Average	100	185	2	1599.00	37.80	74.00	-36.20	45.11	-7.31	Peak	100	185	3	3000.00	36.63	68.20	-31.57	39.29	-2.66	Average	100	88	4	3000.00	44.49	88.20	-43.71	47.15	-2.66	Peak	100	88	5	13330.00	43.08	54.00	-10.92	37.36	5.72	Average	100	216	6	13330.00	55.69	74.00	-18.31	49.97	5.72	Peak	100	216
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.35	54.00	-28.65	32.66	-7.31	Average	100	185																																																																
2	1599.00	37.80	74.00	-36.20	45.11	-7.31	Peak	100	185																																																																
3	3000.00	36.63	68.20	-31.57	39.29	-2.66	Average	100	88																																																																
4	3000.00	44.49	88.20	-43.71	47.15	-2.66	Peak	100	88																																																																
5	13330.00	43.08	54.00	-10.92	37.36	5.72	Average	100	216																																																																
6	13330.00	55.69	74.00	-18.31	49.97	5.72	Peak	100	216																																																																

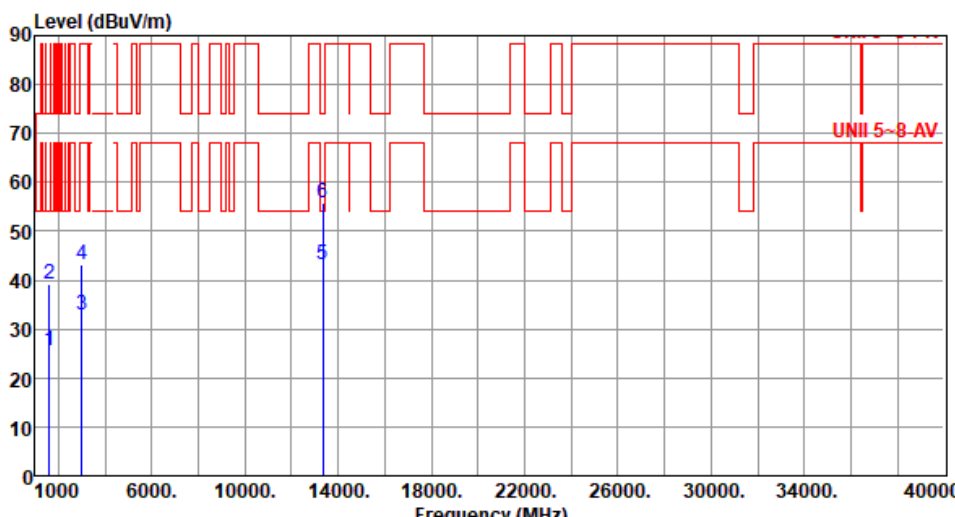


Modulation	be EHT160		Test Freq. (MHz)		6665																																																																																														
Polarization	Vertical																																																																																																		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.44</td><td>54.00</td><td>-28.56</td><td>32.75</td><td>-7.31</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>2</td><td>1599.00</td><td>39.20</td><td>74.00</td><td>-34.80</td><td>46.51</td><td>-7.31</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>3</td><td>3000.00</td><td>32.80</td><td>68.20</td><td>-35.40</td><td>35.46</td><td>-2.66</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>3000.00</td><td>43.02</td><td>88.20</td><td>-45.18</td><td>45.68</td><td>-2.66</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>13330.00</td><td>43.05</td><td>54.00</td><td>-10.95</td><td>37.33</td><td>5.72</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>13330.00</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>49.92</td><td>5.72</td><td>Peak</td><td>100</td><td>68</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1599.00	25.44	54.00	-28.56	32.75	-7.31	Average	100	321	2	1599.00	39.20	74.00	-34.80	46.51	-7.31	Peak	100	321	3	3000.00	32.80	68.20	-35.40	35.46	-2.66	Average	100	126	4	3000.00	43.02	88.20	-45.18	45.68	-2.66	Peak	100	126	5	13330.00	43.05	54.00	-10.95	37.33	5.72	Average	100	68	6	13330.00	55.64	74.00	-18.36	49.92	5.72	Peak	100	68
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1599.00	25.44	54.00	-28.56	32.75	-7.31	Average	100	321																																																																																										
2	1599.00	39.20	74.00	-34.80	46.51	-7.31	Peak	100	321																																																																																										
3	3000.00	32.80	68.20	-35.40	35.46	-2.66	Average	100	126																																																																																										
4	3000.00	43.02	88.20	-45.18	45.68	-2.66	Peak	100	126																																																																																										
5	13330.00	43.05	54.00	-10.95	37.33	5.72	Average	100	68																																																																																										
6	13330.00	55.64	74.00	-18.36	49.92	5.72	Peak	100	68																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

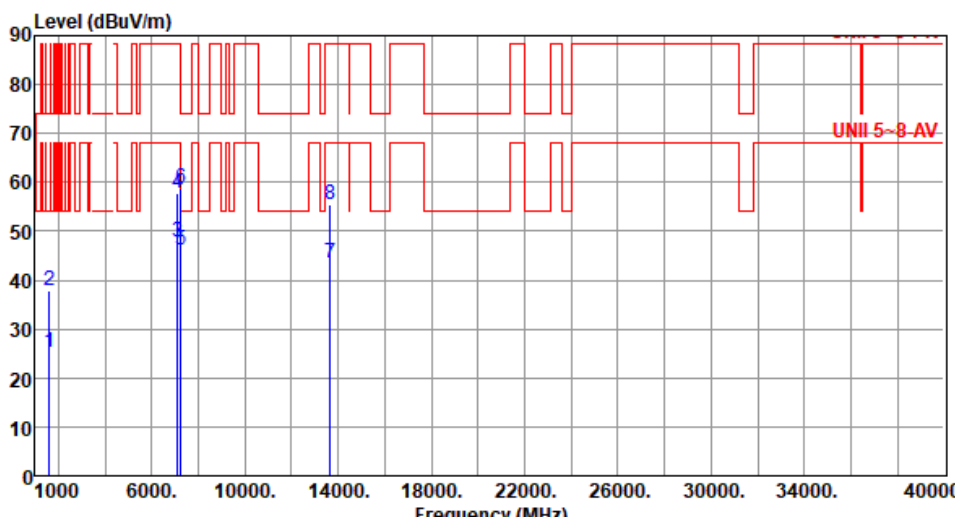


Modulation	be EHT160	Test Freq. (MHz)	6825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.20</td><td>54.00</td><td>-28.80</td><td>32.51</td><td>-7.31</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>2</td><td>1599.00</td><td>37.85</td><td>74.00</td><td>-36.15</td><td>45.16</td><td>-7.31</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>3</td><td>7125.00</td><td>47.87</td><td>68.20</td><td>-20.33</td><td>42.94</td><td>4.93</td><td>Average</td><td>222</td><td>241</td></tr><tr><td>4</td><td>7125.00</td><td>57.64</td><td>88.20</td><td>-30.56</td><td>52.71</td><td>4.93</td><td>Peak</td><td>222</td><td>241</td></tr><tr><td>5</td><td>7250.00</td><td>46.08</td><td>54.00</td><td>-7.92</td><td>40.80</td><td>5.28</td><td>Average</td><td>222</td><td>241</td></tr><tr><td>6</td><td>7250.00</td><td>58.69</td><td>74.00</td><td>-15.31</td><td>53.41</td><td>5.28</td><td>Peak</td><td>222</td><td>241</td></tr><tr><td>7</td><td>13650.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>37.57</td><td>5.93</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>8</td><td>13650.00</td><td>55.51</td><td>88.20</td><td>-32.69</td><td>49.58</td><td>5.93</td><td>Peak</td><td>100</td><td>138</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	217	2	1599.00	37.85	74.00	-36.15	45.16	-7.31	Peak	100	217	3	7125.00	47.87	68.20	-20.33	42.94	4.93	Average	222	241	4	7125.00	57.64	88.20	-30.56	52.71	4.93	Peak	222	241	5	7250.00	46.08	54.00	-7.92	40.80	5.28	Average	222	241	6	7250.00	58.69	74.00	-15.31	53.41	5.28	Peak	222	241	7	13650.00	43.50	68.20	-24.70	37.57	5.93	Average	100	138	8	13650.00	55.51	88.20	-32.69	49.58	5.93	Peak	100	138
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	217																																																																																				
2	1599.00	37.85	74.00	-36.15	45.16	-7.31	Peak	100	217																																																																																				
3	7125.00	47.87	68.20	-20.33	42.94	4.93	Average	222	241																																																																																				
4	7125.00	57.64	88.20	-30.56	52.71	4.93	Peak	222	241																																																																																				
5	7250.00	46.08	54.00	-7.92	40.80	5.28	Average	222	241																																																																																				
6	7250.00	58.69	74.00	-15.31	53.41	5.28	Peak	222	241																																																																																				
7	13650.00	43.50	68.20	-24.70	37.57	5.93	Average	100	138																																																																																				
8	13650.00	55.51	88.20	-32.69	49.58	5.93	Peak	100	138																																																																																				

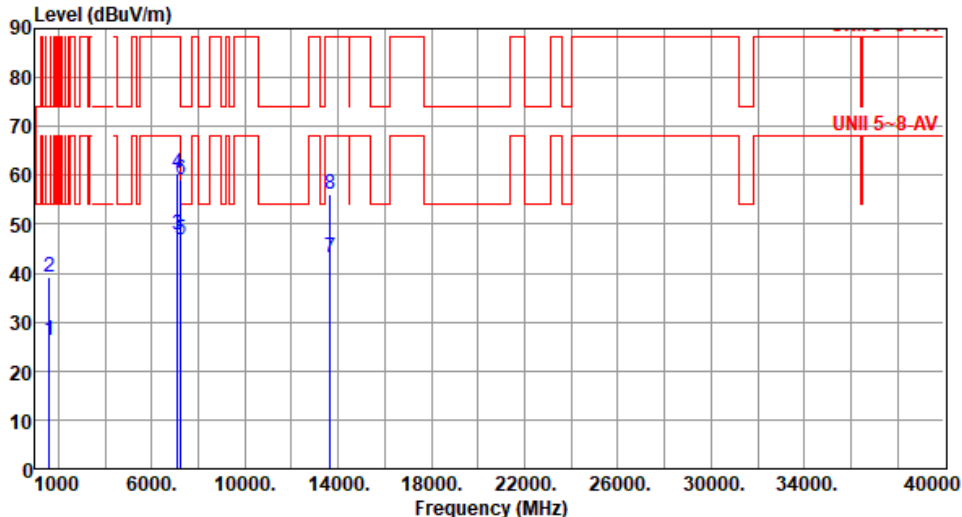


Modulation	be EHT160	Test Freq. (MHz)	6825																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.17</td><td>54.00</td><td>-27.83</td><td>33.48</td><td>-7.31</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>1599.00</td><td>39.17</td><td>74.00</td><td>-34.83</td><td>46.48</td><td>-7.31</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>7125.00</td><td>47.97</td><td>68.20</td><td>-20.23</td><td>43.04</td><td>4.93</td><td>Average</td><td>217</td><td>177</td></tr><tr><td>4</td><td>7125.00</td><td>60.42</td><td>88.20</td><td>-27.78</td><td>55.49</td><td>4.93</td><td>Peak</td><td>217</td><td>177</td></tr><tr><td>5</td><td>7250.00</td><td>46.97</td><td>54.00</td><td>-7.03</td><td>41.69</td><td>5.28</td><td>Average</td><td>217</td><td>177</td></tr><tr><td>6</td><td>7250.00</td><td>59.12</td><td>74.00</td><td>-14.88</td><td>53.84</td><td>5.28</td><td>Peak</td><td>217</td><td>177</td></tr><tr><td>7</td><td>13650.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>37.33</td><td>5.93</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>8</td><td>13650.00</td><td>56.06</td><td>88.20</td><td>-32.14</td><td>50.13</td><td>5.93</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.17	54.00	-27.83	33.48	-7.31	Average	100	223	2	1599.00	39.17	74.00	-34.83	46.48	-7.31	Peak	100	223	3	7125.00	47.97	68.20	-20.23	43.04	4.93	Average	217	177	4	7125.00	60.42	88.20	-27.78	55.49	4.93	Peak	217	177	5	7250.00	46.97	54.00	-7.03	41.69	5.28	Average	217	177	6	7250.00	59.12	74.00	-14.88	53.84	5.28	Peak	217	177	7	13650.00	43.26	68.20	-24.94	37.33	5.93	Average	100	185	8	13650.00	56.06	88.20	-32.14	50.13	5.93	Peak	100	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	26.17	54.00	-27.83	33.48	-7.31	Average	100	223																																																																																				
2	1599.00	39.17	74.00	-34.83	46.48	-7.31	Peak	100	223																																																																																				
3	7125.00	47.97	68.20	-20.23	43.04	4.93	Average	217	177																																																																																				
4	7125.00	60.42	88.20	-27.78	55.49	4.93	Peak	217	177																																																																																				
5	7250.00	46.97	54.00	-7.03	41.69	5.28	Average	217	177																																																																																				
6	7250.00	59.12	74.00	-14.88	53.84	5.28	Peak	217	177																																																																																				
7	13650.00	43.26	68.20	-24.94	37.33	5.93	Average	100	185																																																																																				
8	13650.00	56.06	88.20	-32.14	50.13	5.93	Peak	100	185																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

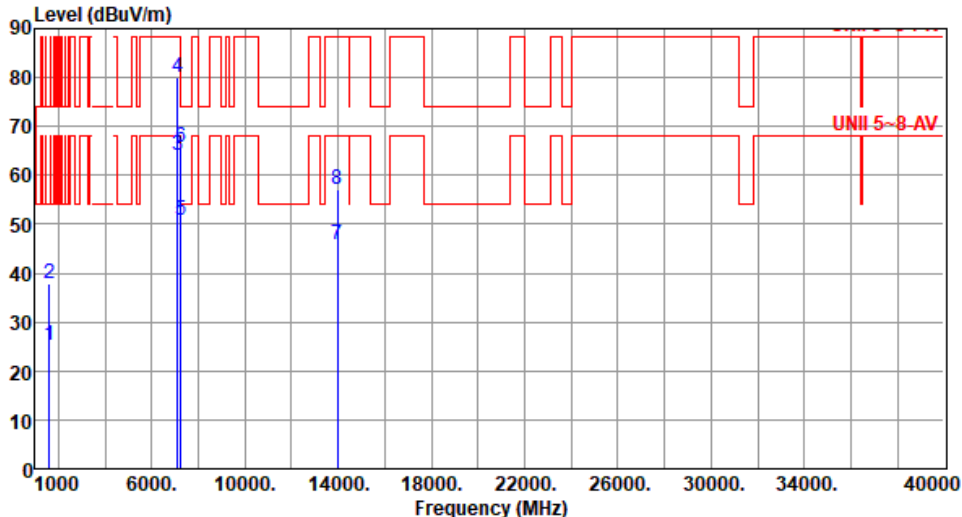


Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.13</td><td>54.00</td><td>-28.87</td><td>32.44</td><td>-7.31</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>1599.00</td><td>37.79</td><td>74.00</td><td>-36.21</td><td>45.10</td><td>-7.31</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>7125.00</td><td>64.22</td><td>68.20</td><td>-3.98</td><td>59.29</td><td>4.93</td><td>Average</td><td>221</td><td>224</td></tr><tr><td>4</td><td>7125.00</td><td>79.96</td><td>88.20</td><td>-8.24</td><td>75.03</td><td>4.93</td><td>Peak</td><td>221</td><td>224</td></tr><tr><td>5</td><td>7250.00</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>45.48</td><td>5.28</td><td>Average</td><td>221</td><td>224</td></tr><tr><td>6</td><td>7250.00</td><td>65.69</td><td>74.00</td><td>-8.31</td><td>60.41</td><td>5.28</td><td>Peak</td><td>221</td><td>224</td></tr><tr><td>7</td><td>13970.00</td><td>45.95</td><td>68.20</td><td>-22.25</td><td>39.22</td><td>6.73</td><td>Average</td><td>100</td><td>277</td></tr><tr><td>8</td><td>13970.00</td><td>57.09</td><td>88.20</td><td>-31.11</td><td>50.36</td><td>6.73</td><td>Peak</td><td>100</td><td>277</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	218	2	1599.00	37.79	74.00	-36.21	45.10	-7.31	Peak	100	218	3	7125.00	64.22	68.20	-3.98	59.29	4.93	Average	221	224	4	7125.00	79.96	88.20	-8.24	75.03	4.93	Peak	221	224	5	7250.00	50.76	54.00	-3.24	45.48	5.28	Average	221	224	6	7250.00	65.69	74.00	-8.31	60.41	5.28	Peak	221	224	7	13970.00	45.95	68.20	-22.25	39.22	6.73	Average	100	277	8	13970.00	57.09	88.20	-31.11	50.36	6.73	Peak	100	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	218																																																																																				
2	1599.00	37.79	74.00	-36.21	45.10	-7.31	Peak	100	218																																																																																				
3	7125.00	64.22	68.20	-3.98	59.29	4.93	Average	221	224																																																																																				
4	7125.00	79.96	88.20	-8.24	75.03	4.93	Peak	221	224																																																																																				
5	7250.00	50.76	54.00	-3.24	45.48	5.28	Average	221	224																																																																																				
6	7250.00	65.69	74.00	-8.31	60.41	5.28	Peak	221	224																																																																																				
7	13970.00	45.95	68.20	-22.25	39.22	6.73	Average	100	277																																																																																				
8	13970.00	57.09	88.20	-31.11	50.36	6.73	Peak	100	277																																																																																				

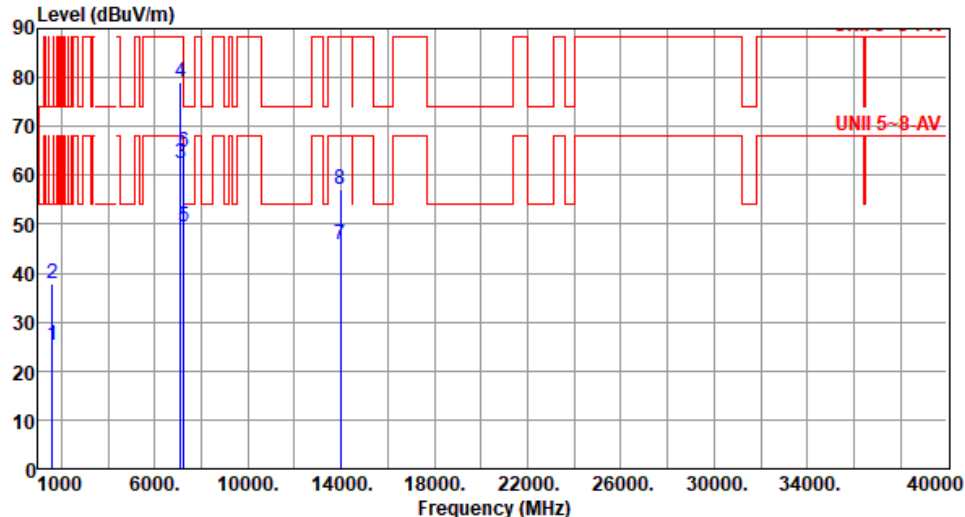


Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																										
Polarization	Vertical																																																																																												
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																													
																																																																																													
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.20</td><td>54.00</td><td>-28.80</td><td>32.51</td><td>-7.31</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1599.00</td><td>38.00</td><td>74.00</td><td>-36.00</td><td>45.31</td><td>-7.31</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>7125.00</td><td>62.34</td><td>68.20</td><td>-5.86</td><td>57.41</td><td>4.93</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>4</td><td>7125.00</td><td>78.95</td><td>88.20</td><td>-9.25</td><td>74.02</td><td>4.93</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>5</td><td>7250.00</td><td>49.56</td><td>54.00</td><td>-4.44</td><td>44.28</td><td>5.28</td><td>Average</td><td>100</td><td>143</td></tr><tr><td>6</td><td>7250.00</td><td>64.61</td><td>74.00</td><td>-9.39</td><td>59.33</td><td>5.28</td><td>Peak</td><td>100</td><td>143</td></tr><tr><td>7</td><td>13970.00</td><td>45.99</td><td>68.20</td><td>-22.21</td><td>39.26</td><td>6.73</td><td>Average</td><td>100</td><td>278</td></tr><tr><td>8</td><td>13970.00</td><td>57.10</td><td>88.20</td><td>-31.10</td><td>50.37</td><td>6.73</td><td>Peak</td><td>100</td><td>278</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	208	2	1599.00	38.00	74.00	-36.00	45.31	-7.31	Peak	100	208	3	7125.00	62.34	68.20	-5.86	57.41	4.93	Average	100	143	4	7125.00	78.95	88.20	-9.25	74.02	4.93	Peak	100	143	5	7250.00	49.56	54.00	-4.44	44.28	5.28	Average	100	143	6	7250.00	64.61	74.00	-9.39	59.33	5.28	Peak	100	143	7	13970.00	45.99	68.20	-22.21	39.26	6.73	Average	100	278	8	13970.00	57.10	88.20	-31.10	50.37	6.73	Peak	100	278		
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	208																																																																																				
2	1599.00	38.00	74.00	-36.00	45.31	-7.31	Peak	100	208																																																																																				
3	7125.00	62.34	68.20	-5.86	57.41	4.93	Average	100	143																																																																																				
4	7125.00	78.95	88.20	-9.25	74.02	4.93	Peak	100	143																																																																																				
5	7250.00	49.56	54.00	-4.44	44.28	5.28	Average	100	143																																																																																				
6	7250.00	64.61	74.00	-9.39	59.33	5.28	Peak	100	143																																																																																				
7	13970.00	45.99	68.20	-22.21	39.26	6.73	Average	100	278																																																																																				
8	13970.00	57.10	88.20	-31.10	50.37	6.73	Peak	100	278																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													


Unwanted Emissions (Above 1GHz) for be EHT320

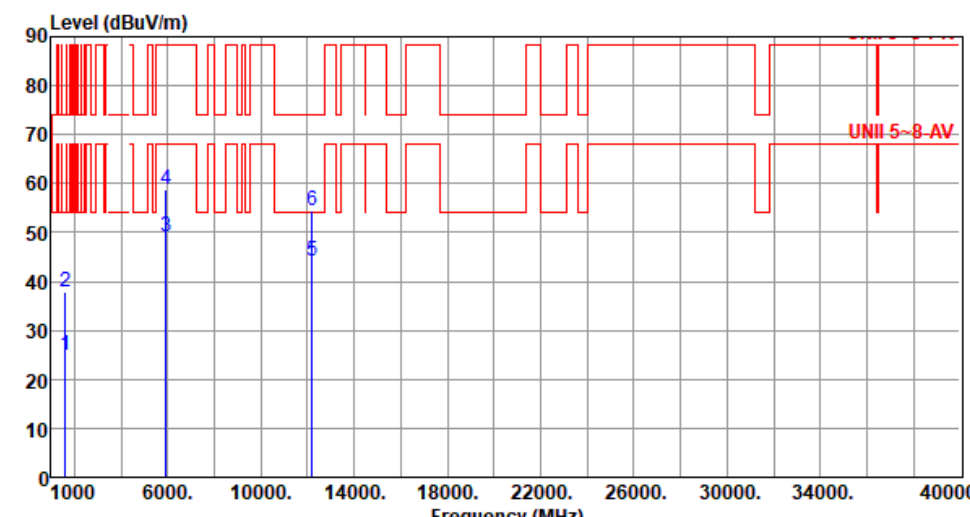Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.02</td><td>54.00</td><td>-28.98</td><td>32.33</td><td>-7.31</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>2</td><td>1599.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.13</td><td>-7.31</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>3</td><td>5925.00</td><td>48.99</td><td>68.20</td><td>-19.21</td><td>47.85</td><td>1.14</td><td>Average</td><td>152</td><td>125</td></tr><tr><td>4</td><td>5925.00</td><td>58.68</td><td>88.20</td><td>-29.52</td><td>57.54</td><td>1.14</td><td>Peak</td><td>152</td><td>125</td></tr><tr><td>5</td><td>12210.00</td><td>44.08</td><td>54.00</td><td>-9.92</td><td>37.21</td><td>6.87</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>6</td><td>12210.00</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>47.68</td><td>6.87</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.02	54.00	-28.98	32.33	-7.31	Average	100	203	2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	203	3	5925.00	48.99	68.20	-19.21	47.85	1.14	Average	152	125	4	5925.00	58.68	88.20	-29.52	57.54	1.14	Peak	152	125	5	12210.00	44.08	54.00	-9.92	37.21	6.87	Average	100	155	6	12210.00	54.55	74.00	-19.45	47.68	6.87	Peak	100	155
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.02	54.00	-28.98	32.33	-7.31	Average	100	203																																																																
2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	203																																																																
3	5925.00	48.99	68.20	-19.21	47.85	1.14	Average	152	125																																																																
4	5925.00	58.68	88.20	-29.52	57.54	1.14	Peak	152	125																																																																
5	12210.00	44.08	54.00	-9.92	37.21	6.87	Average	100	155																																																																
6	12210.00	54.55	74.00	-19.45	47.68	6.87	Peak	100	155																																																																

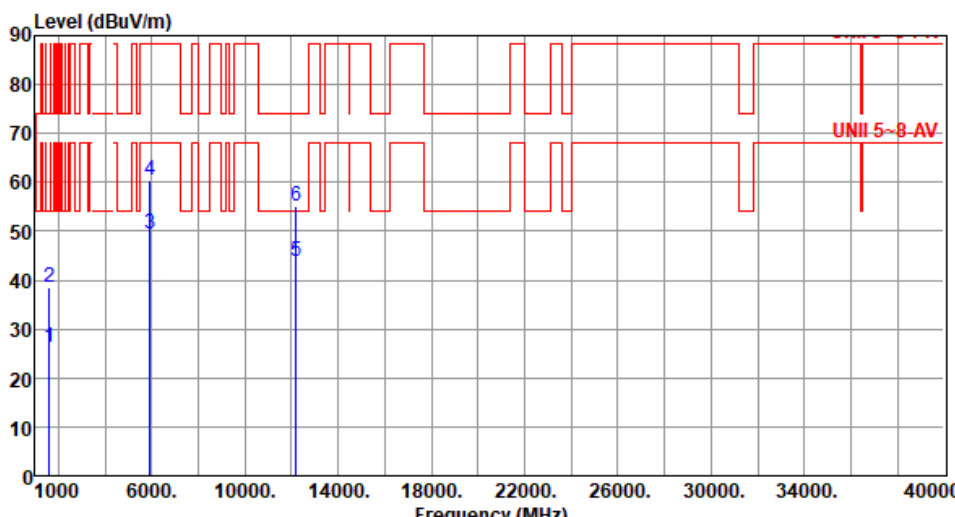


Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.15</td><td>54.00</td><td>-27.85</td><td>33.46</td><td>-7.31</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>2</td><td>1599.00</td><td>38.45</td><td>74.00</td><td>-35.55</td><td>45.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>3</td><td>5925.00</td><td>49.56</td><td>68.20</td><td>-18.64</td><td>48.42</td><td>1.14</td><td>Average</td><td>105</td><td>309</td></tr><tr><td>4</td><td>5925.00</td><td>60.47</td><td>88.20</td><td>-27.73</td><td>59.33</td><td>1.14</td><td>Peak</td><td>105</td><td>309</td></tr><tr><td>5</td><td>12210.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>37.11</td><td>6.87</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>6</td><td>12210.00</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>48.13</td><td>6.87</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.15	54.00	-27.85	33.46	-7.31	Average	100	288	2	1599.00	38.45	74.00	-35.55	45.76	-7.31	Peak	100	288	3	5925.00	49.56	68.20	-18.64	48.42	1.14	Average	105	309	4	5925.00	60.47	88.20	-27.73	59.33	1.14	Peak	105	309	5	12210.00	43.98	54.00	-10.02	37.11	6.87	Average	100	208	6	12210.00	55.00	74.00	-19.00	48.13	6.87	Peak	100	208
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.15	54.00	-27.85	33.46	-7.31	Average	100	288																																																																
2	1599.00	38.45	74.00	-35.55	45.76	-7.31	Peak	100	288																																																																
3	5925.00	49.56	68.20	-18.64	48.42	1.14	Average	105	309																																																																
4	5925.00	60.47	88.20	-27.73	59.33	1.14	Peak	105	309																																																																
5	12210.00	43.98	54.00	-10.02	37.11	6.87	Average	100	208																																																																
6	12210.00	55.00	74.00	-19.00	48.13	6.87	Peak	100	208																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

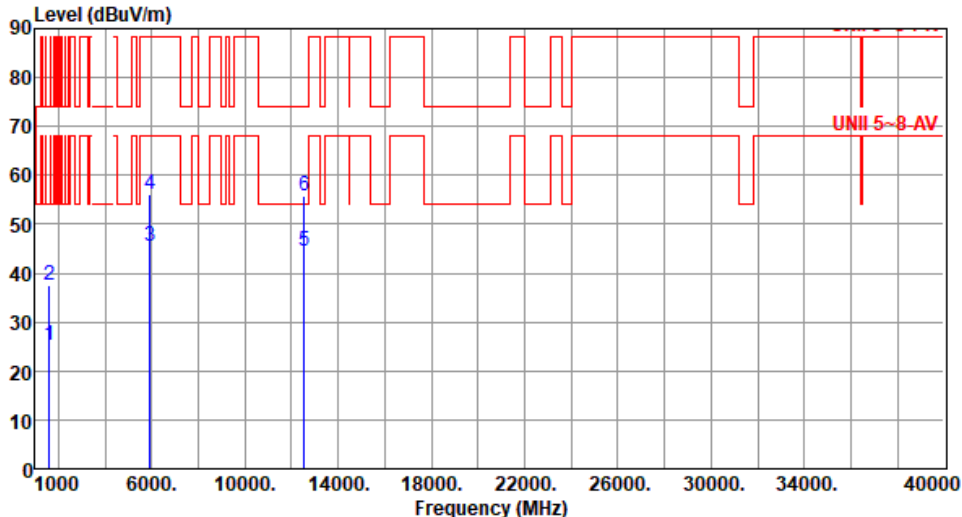

Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.13</td><td>54.00</td><td>-28.87</td><td>32.44</td><td>-7.31</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>2</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>3</td><td>5925.00</td><td>45.54</td><td>68.20</td><td>-22.66</td><td>44.40</td><td>1.14</td><td>Average</td><td>164</td><td>231</td></tr><tr><td>4</td><td>5925.00</td><td>56.09</td><td>88.20</td><td>-32.11</td><td>54.95</td><td>1.14</td><td>Peak</td><td>164</td><td>231</td></tr><tr><td>5</td><td>12530.00</td><td>44.47</td><td>54.00</td><td>-9.53</td><td>37.78</td><td>6.69</td><td>Average</td><td>100</td><td>160</td></tr><tr><td>6</td><td>12530.00</td><td>55.79</td><td>74.00</td><td>-18.21</td><td>49.10</td><td>6.69</td><td>Peak</td><td>100</td><td>160</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	197	2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	197	3	5925.00	45.54	68.20	-22.66	44.40	1.14	Average	164	231	4	5925.00	56.09	88.20	-32.11	54.95	1.14	Peak	164	231	5	12530.00	44.47	54.00	-9.53	37.78	6.69	Average	100	160	6	12530.00	55.79	74.00	-18.21	49.10	6.69	Peak	100	160
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.13	54.00	-28.87	32.44	-7.31	Average	100	197																																																																
2	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	197																																																																
3	5925.00	45.54	68.20	-22.66	44.40	1.14	Average	164	231																																																																
4	5925.00	56.09	88.20	-32.11	54.95	1.14	Peak	164	231																																																																
5	12530.00	44.47	54.00	-9.53	37.78	6.69	Average	100	160																																																																
6	12530.00	55.79	74.00	-18.21	49.10	6.69	Peak	100	160																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

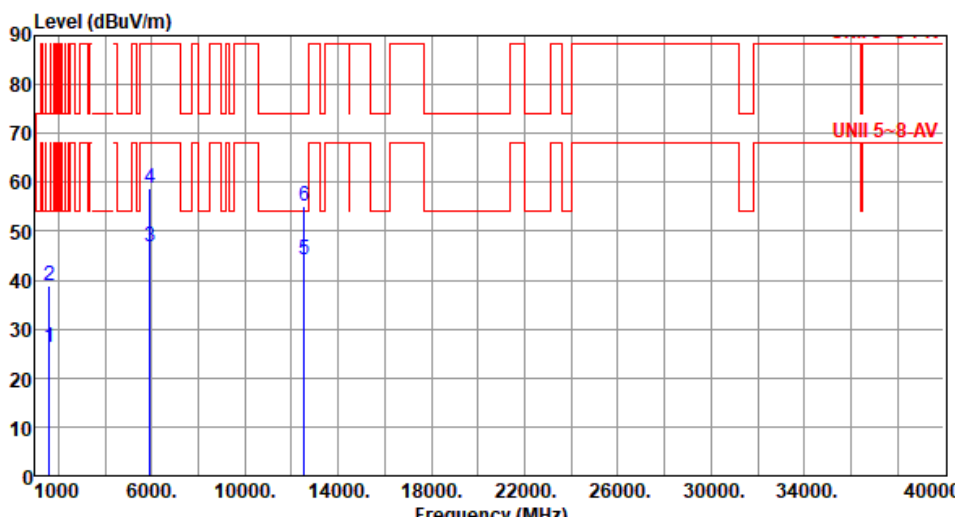


Modulation	be EHT320		Test Freq. (MHz)		6265																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>26.32</td><td>54.00</td><td>-27.68</td><td>33.63</td><td>-7.31</td><td>Average</td><td>100</td><td>301</td></tr><tr><td>2</td><td>1599.00</td><td>38.90</td><td>74.00</td><td>-35.10</td><td>46.21</td><td>-7.31</td><td>Peak</td><td>100</td><td>301</td></tr><tr><td>3</td><td>5925.00</td><td>46.94</td><td>68.20</td><td>-21.26</td><td>45.80</td><td>1.14</td><td>Average</td><td>100</td><td>10</td></tr><tr><td>4</td><td>5925.00</td><td>58.64</td><td>88.20</td><td>-29.56</td><td>57.50</td><td>1.14</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>5</td><td>12530.00</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>37.58</td><td>6.69</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>6</td><td>12530.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>48.34</td><td>6.69</td><td>Peak</td><td>100</td><td>309</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.32	54.00	-27.68	33.63	-7.31	Average	100	301	2	1599.00	38.90	74.00	-35.10	46.21	-7.31	Peak	100	301	3	5925.00	46.94	68.20	-21.26	45.80	1.14	Average	100	10	4	5925.00	58.64	88.20	-29.56	57.50	1.14	Peak	100	10	5	12530.00	44.27	54.00	-9.73	37.58	6.69	Average	100	309	6	12530.00	55.03	74.00	-18.97	48.34	6.69	Peak	100	309
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	26.32	54.00	-27.68	33.63	-7.31	Average	100	301																																																																						
2	1599.00	38.90	74.00	-35.10	46.21	-7.31	Peak	100	301																																																																						
3	5925.00	46.94	68.20	-21.26	45.80	1.14	Average	100	10																																																																						
4	5925.00	58.64	88.20	-29.56	57.50	1.14	Peak	100	10																																																																						
5	12530.00	44.27	54.00	-9.73	37.58	6.69	Average	100	309																																																																						
6	12530.00	55.03	74.00	-18.97	48.34	6.69	Peak	100	309																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

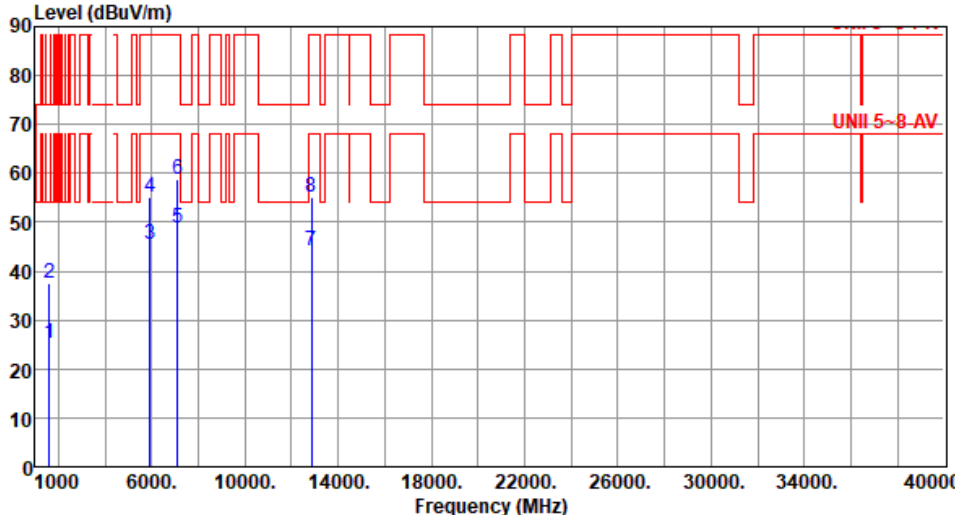


Modulation	be EHT320	Test Freq. (MHz)	6425																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.24</td><td>54.00</td><td>-28.76</td><td>32.55</td><td>-7.31</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1599.00</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>44.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>5925.00</td><td>45.40</td><td>68.20</td><td>-22.80</td><td>44.26</td><td>1.14</td><td>Average</td><td>216</td><td>228</td></tr><tr><td>4</td><td>5925.00</td><td>55.27</td><td>88.20</td><td>-32.93</td><td>54.13</td><td>1.14</td><td>Peak</td><td>216</td><td>228</td></tr><tr><td>5</td><td>7125.00</td><td>48.87</td><td>68.20</td><td>-19.33</td><td>43.94</td><td>4.93</td><td>Average</td><td>216</td><td>228</td></tr><tr><td>6</td><td>7125.00</td><td>58.65</td><td>88.20</td><td>-29.55</td><td>53.72</td><td>4.93</td><td>Peak</td><td>216</td><td>228</td></tr><tr><td>7</td><td>12850.00</td><td>44.32</td><td>68.20</td><td>-23.88</td><td>37.77</td><td>6.55</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>8</td><td>12850.00</td><td>55.12</td><td>88.20</td><td>-33.08</td><td>48.57</td><td>6.55</td><td>Peak</td><td>100</td><td>159</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.24	54.00	-28.76	32.55	-7.31	Average	100	199	2	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	199	3	5925.00	45.40	68.20	-22.80	44.26	1.14	Average	216	228	4	5925.00	55.27	88.20	-32.93	54.13	1.14	Peak	216	228	5	7125.00	48.87	68.20	-19.33	43.94	4.93	Average	216	228	6	7125.00	58.65	88.20	-29.55	53.72	4.93	Peak	216	228	7	12850.00	44.32	68.20	-23.88	37.77	6.55	Average	100	159	8	12850.00	55.12	88.20	-33.08	48.57	6.55	Peak	100	159
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.24	54.00	-28.76	32.55	-7.31	Average	100	199																																																																																				
2	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	199																																																																																				
3	5925.00	45.40	68.20	-22.80	44.26	1.14	Average	216	228																																																																																				
4	5925.00	55.27	88.20	-32.93	54.13	1.14	Peak	216	228																																																																																				
5	7125.00	48.87	68.20	-19.33	43.94	4.93	Average	216	228																																																																																				
6	7125.00	58.65	88.20	-29.55	53.72	4.93	Peak	216	228																																																																																				
7	12850.00	44.32	68.20	-23.88	37.77	6.55	Average	100	159																																																																																				
8	12850.00	55.12	88.20	-33.08	48.57	6.55	Peak	100	159																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

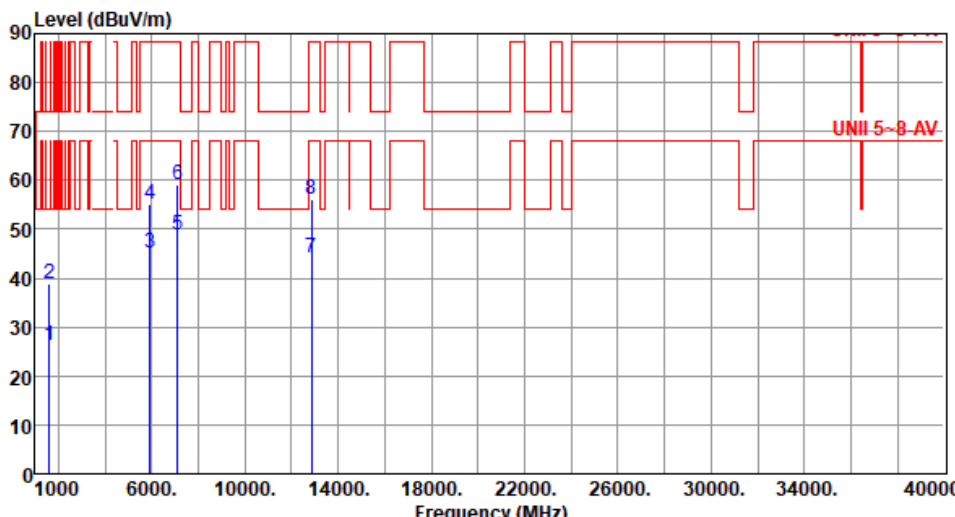


Modulation	be EHT320	Test Freq. (MHz)	6425																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.17</td><td>54.00</td><td>-27.83</td><td>33.48</td><td>-7.31</td><td>Average</td><td>100</td><td>303</td></tr><tr><td>2</td><td>1599.00</td><td>38.94</td><td>74.00</td><td>-35.06</td><td>46.25</td><td>-7.31</td><td>Peak</td><td>100</td><td>303</td></tr><tr><td>3</td><td>5925.00</td><td>45.08</td><td>68.20</td><td>-23.12</td><td>43.94</td><td>1.14</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>4</td><td>5925.00</td><td>55.00</td><td>88.20</td><td>-33.20</td><td>53.86</td><td>1.14</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>5</td><td>7125.00</td><td>48.69</td><td>68.20</td><td>-19.51</td><td>43.76</td><td>4.93</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>6</td><td>7125.00</td><td>59.14</td><td>88.20</td><td>-29.06</td><td>54.21</td><td>4.93</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>7</td><td>12850.00</td><td>44.12</td><td>68.20</td><td>-24.08</td><td>37.57</td><td>6.55</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>8</td><td>12850.00</td><td>56.04</td><td>88.20</td><td>-32.16</td><td>49.49</td><td>6.55</td><td>Peak</td><td>100</td><td>314</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.17	54.00	-27.83	33.48	-7.31	Average	100	303	2	1599.00	38.94	74.00	-35.06	46.25	-7.31	Peak	100	303	3	5925.00	45.08	68.20	-23.12	43.94	1.14	Average	100	141	4	5925.00	55.00	88.20	-33.20	53.86	1.14	Peak	100	141	5	7125.00	48.69	68.20	-19.51	43.76	4.93	Average	100	141	6	7125.00	59.14	88.20	-29.06	54.21	4.93	Peak	100	141	7	12850.00	44.12	68.20	-24.08	37.57	6.55	Average	100	314	8	12850.00	56.04	88.20	-32.16	49.49	6.55	Peak	100	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	26.17	54.00	-27.83	33.48	-7.31	Average	100	303																																																																																				
2	1599.00	38.94	74.00	-35.06	46.25	-7.31	Peak	100	303																																																																																				
3	5925.00	45.08	68.20	-23.12	43.94	1.14	Average	100	141																																																																																				
4	5925.00	55.00	88.20	-33.20	53.86	1.14	Peak	100	141																																																																																				
5	7125.00	48.69	68.20	-19.51	43.76	4.93	Average	100	141																																																																																				
6	7125.00	59.14	88.20	-29.06	54.21	4.93	Peak	100	141																																																																																				
7	12850.00	44.12	68.20	-24.08	37.57	6.55	Average	100	314																																																																																				
8	12850.00	56.04	88.20	-32.16	49.49	6.55	Peak	100	314																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

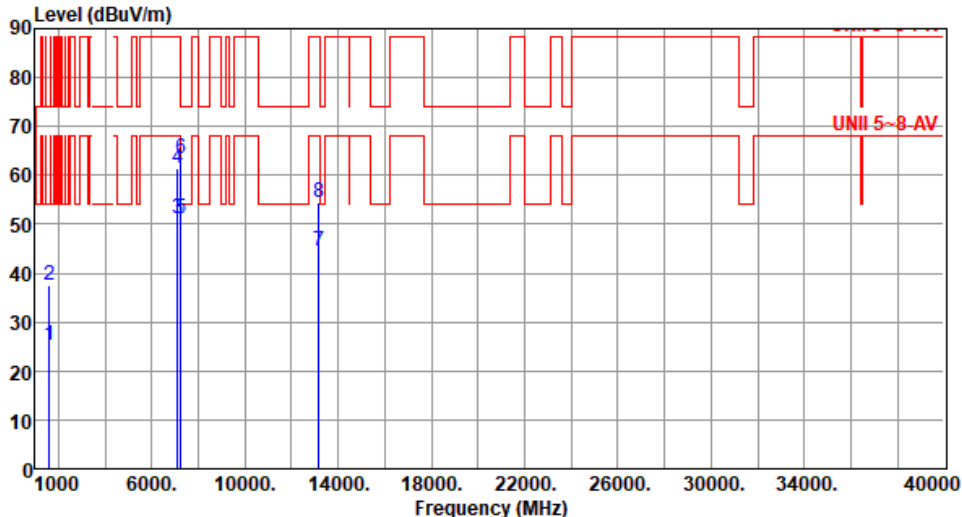


Modulation	be EHT320	Test Freq. (MHz)	6585																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.12</td><td>54.00</td><td>-28.88</td><td>32.43</td><td>-7.31</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1599.00</td><td>37.47</td><td>74.00</td><td>-36.53</td><td>44.78</td><td>-7.31</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>7125.00</td><td>51.16</td><td>68.20</td><td>-17.04</td><td>46.23</td><td>4.93</td><td>Average</td><td>219</td><td>226</td></tr><tr><td>4</td><td>7125.00</td><td>61.32</td><td>88.20</td><td>-26.88</td><td>56.39</td><td>4.93</td><td>Peak</td><td>219</td><td>226</td></tr><tr><td>5</td><td>7250.00</td><td>51.06</td><td>54.00</td><td>-2.94</td><td>45.78</td><td>5.28</td><td>Average</td><td>219</td><td>226</td></tr><tr><td>6</td><td>7250.00</td><td>63.28</td><td>74.00</td><td>-10.72</td><td>58.00</td><td>5.28</td><td>Peak</td><td>219</td><td>226</td></tr><tr><td>7</td><td>13170.00</td><td>44.39</td><td>68.20</td><td>-23.81</td><td>38.49</td><td>5.90</td><td>Average</td><td>100</td><td>7</td></tr><tr><td>8</td><td>13170.00</td><td>54.58</td><td>88.20</td><td>-33.62</td><td>48.68</td><td>5.90</td><td>Peak</td><td>100</td><td>7</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.12	54.00	-28.88	32.43	-7.31	Average	100	204	2	1599.00	37.47	74.00	-36.53	44.78	-7.31	Peak	100	204	3	7125.00	51.16	68.20	-17.04	46.23	4.93	Average	219	226	4	7125.00	61.32	88.20	-26.88	56.39	4.93	Peak	219	226	5	7250.00	51.06	54.00	-2.94	45.78	5.28	Average	219	226	6	7250.00	63.28	74.00	-10.72	58.00	5.28	Peak	219	226	7	13170.00	44.39	68.20	-23.81	38.49	5.90	Average	100	7	8	13170.00	54.58	88.20	-33.62	48.68	5.90	Peak	100	7
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.12	54.00	-28.88	32.43	-7.31	Average	100	204																																																																																				
2	1599.00	37.47	74.00	-36.53	44.78	-7.31	Peak	100	204																																																																																				
3	7125.00	51.16	68.20	-17.04	46.23	4.93	Average	219	226																																																																																				
4	7125.00	61.32	88.20	-26.88	56.39	4.93	Peak	219	226																																																																																				
5	7250.00	51.06	54.00	-2.94	45.78	5.28	Average	219	226																																																																																				
6	7250.00	63.28	74.00	-10.72	58.00	5.28	Peak	219	226																																																																																				
7	13170.00	44.39	68.20	-23.81	38.49	5.90	Average	100	7																																																																																				
8	13170.00	54.58	88.20	-33.62	48.68	5.90	Peak	100	7																																																																																				

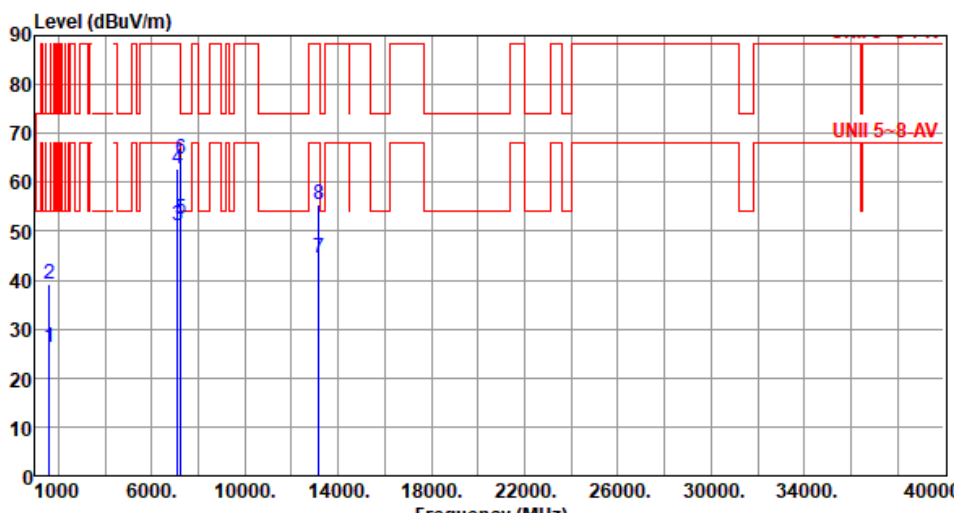


Modulation	be EHT320	Test Freq. (MHz)	6585						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	26.27	54.00	-27.73	33.58	-7.31	Average	100	295
2	1599.00	39.07	74.00	-34.93	46.38	-7.31	Peak	100	295
3	7125.00	51.31	68.20	-16.89	46.38	4.93	Average	100	137
4	7125.00	62.93	88.20	-25.27	58.00	4.93	Peak	100	137
5	7250.00	52.42	54.00	-1.58	47.14	5.28	Average	100	137
6	7250.00	64.71	74.00	-9.29	59.43	5.28	Peak	100	137
7	13170.00	44.46	68.20	-23.74	38.56	5.90	Average	100	271
8	13170.00	55.30	88.20	-32.90	49.40	5.90	Peak	100	271

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

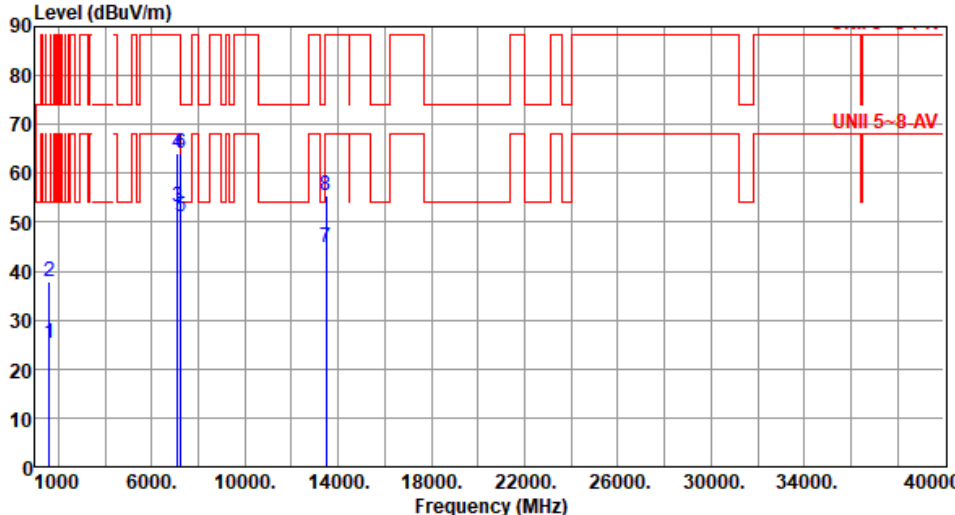

Modulation	be EHT320		Test Freq. (MHz)		6745																																																																																																																		
Polarization	Horizontal																																																																																																																						
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.20</td><td>54.00</td><td>-28.80</td><td>32.51</td><td>-7.31</td><td>Average</td><td>100</td><td>189</td></tr><tr><td>2</td><td>1599.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.13</td><td>-7.31</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>3</td><td>7125.00</td><td>53.06</td><td>68.20</td><td>-15.14</td><td>48.13</td><td>4.93</td><td>Average</td><td>225</td><td>179</td></tr><tr><td>4</td><td>7125.00</td><td>64.05</td><td>88.20</td><td>-24.15</td><td>59.12</td><td>4.93</td><td>Peak</td><td>225</td><td>179</td></tr><tr><td>5</td><td>7250.00</td><td>51.15</td><td>54.00</td><td>-2.85</td><td>45.87</td><td>5.28</td><td>Average</td><td>225</td><td>179</td></tr><tr><td>6</td><td>7250.00</td><td>63.94</td><td>74.00</td><td>-10.06</td><td>58.66</td><td>5.28</td><td>Peak</td><td>225</td><td>179</td></tr><tr><td>7</td><td>13490.00</td><td>44.88</td><td>68.20</td><td>-23.32</td><td>38.76</td><td>6.12</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>8</td><td>13490.00</td><td>55.62</td><td>88.20</td><td>-32.58</td><td>49.50</td><td>6.12</td><td>Peak</td><td>100</td><td>159</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	189	2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	189	3	7125.00	53.06	68.20	-15.14	48.13	4.93	Average	225	179	4	7125.00	64.05	88.20	-24.15	59.12	4.93	Peak	225	179	5	7250.00	51.15	54.00	-2.85	45.87	5.28	Average	225	179	6	7250.00	63.94	74.00	-10.06	58.66	5.28	Peak	225	179	7	13490.00	44.88	68.20	-23.32	38.76	6.12	Average	100	159	8	13490.00	55.62	88.20	-32.58	49.50	6.12	Peak	100	159
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																																														
1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	189																																																																																																														
2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	189																																																																																																														
3	7125.00	53.06	68.20	-15.14	48.13	4.93	Average	225	179																																																																																																														
4	7125.00	64.05	88.20	-24.15	59.12	4.93	Peak	225	179																																																																																																														
5	7250.00	51.15	54.00	-2.85	45.87	5.28	Average	225	179																																																																																																														
6	7250.00	63.94	74.00	-10.06	58.66	5.28	Peak	225	179																																																																																																														
7	13490.00	44.88	68.20	-23.32	38.76	6.12	Average	100	159																																																																																																														
8	13490.00	55.62	88.20	-32.58	49.50	6.12	Peak	100	159																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																							

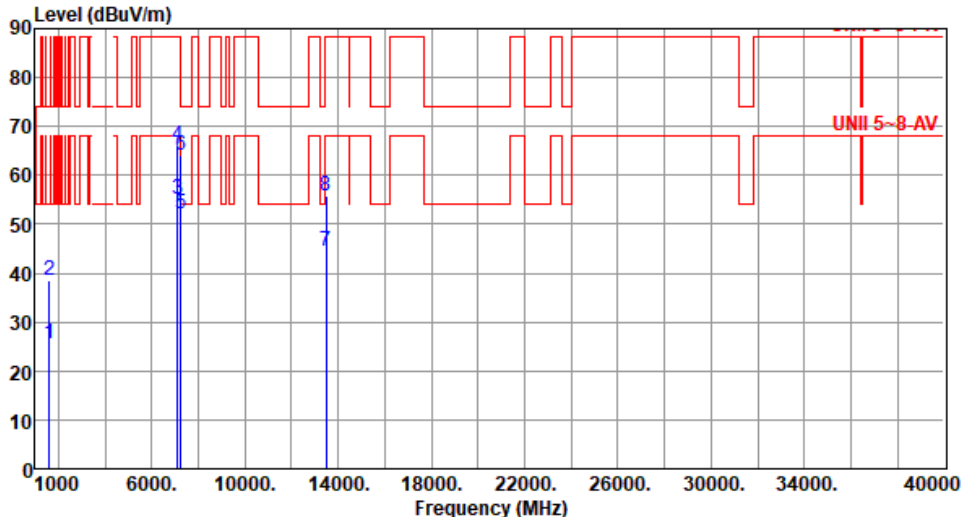


Modulation	be EHT320	Test Freq. (MHz)	6745						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	25.46	54.00	-28.54	32.77	-7.31	Average	100	203
2	1599.00	38.42	74.00	-35.58	45.73	-7.31	Peak	100	203
3	7125.00	55.17	68.20	-13.03	50.24	4.93	Average	118	44
4	7125.00	66.11	88.20	-22.09	61.18	4.93	Peak	118	44
5	7250.00	52.31	54.00	-1.69	47.03	5.28	Average	304	223
6	7250.00	64.10	74.00	-9.90	58.82	5.28	Peak	304	223
7	13490.00	44.62	68.20	-23.58	38.50	6.12	Average	100	117
8	13490.00	55.74	88.20	-32.46	49.62	6.12	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.21</td><td>54.00</td><td>-28.79</td><td>32.52</td><td>-7.31</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1599.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.13</td><td>-7.31</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>7125.00</td><td>56.07</td><td>68.20</td><td>-12.13</td><td>51.14</td><td>4.93</td><td>Average</td><td>171</td><td>189</td></tr><tr><td>4</td><td>7125.00</td><td>65.67</td><td>88.20</td><td>-22.53</td><td>60.74</td><td>4.93</td><td>Peak</td><td>171</td><td>189</td></tr><tr><td>5</td><td>7250.00</td><td>51.67</td><td>54.00</td><td>-2.33</td><td>46.39</td><td>5.28</td><td>Average</td><td>171</td><td>189</td></tr><tr><td>6</td><td>7250.00</td><td>62.71</td><td>74.00</td><td>-11.29</td><td>57.43</td><td>5.28</td><td>Peak</td><td>171</td><td>189</td></tr><tr><td>7</td><td>13810.00</td><td>45.02</td><td>68.20</td><td>-23.18</td><td>38.72</td><td>6.30</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>8</td><td>13810.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>49.58</td><td>6.30</td><td>Peak</td><td>100</td><td>116</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.21	54.00	-28.79	32.52	-7.31	Average	100	208	2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	208	3	7125.00	56.07	68.20	-12.13	51.14	4.93	Average	171	189	4	7125.00	65.67	88.20	-22.53	60.74	4.93	Peak	171	189	5	7250.00	51.67	54.00	-2.33	46.39	5.28	Average	171	189	6	7250.00	62.71	74.00	-11.29	57.43	5.28	Peak	171	189	7	13810.00	45.02	68.20	-23.18	38.72	6.30	Average	100	116	8	13810.00	55.88	88.20	-32.32	49.58	6.30	Peak	100	116
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.21	54.00	-28.79	32.52	-7.31	Average	100	208																																																																																				
2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	208																																																																																				
3	7125.00	56.07	68.20	-12.13	51.14	4.93	Average	171	189																																																																																				
4	7125.00	65.67	88.20	-22.53	60.74	4.93	Peak	171	189																																																																																				
5	7250.00	51.67	54.00	-2.33	46.39	5.28	Average	171	189																																																																																				
6	7250.00	62.71	74.00	-11.29	57.43	5.28	Peak	171	189																																																																																				
7	13810.00	45.02	68.20	-23.18	38.72	6.30	Average	100	116																																																																																				
8	13810.00	55.88	88.20	-32.32	49.58	6.30	Peak	100	116																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

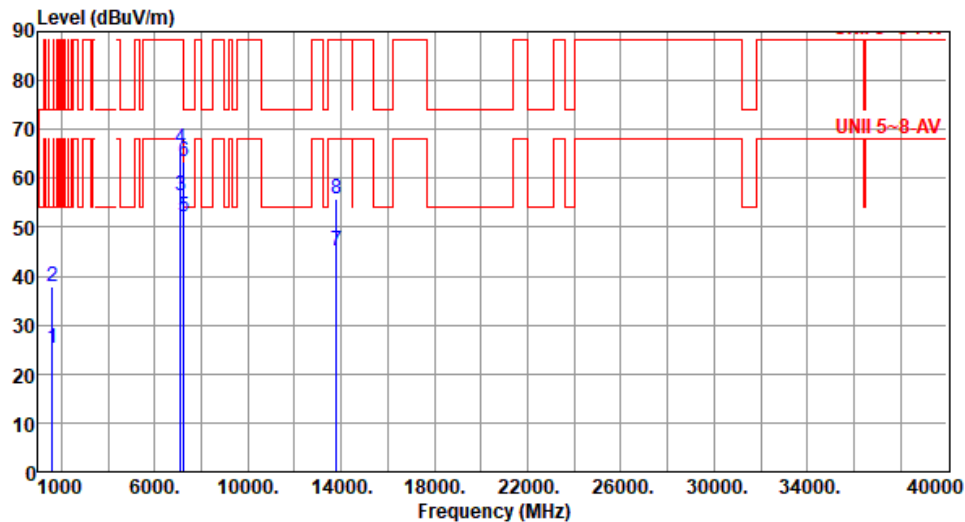

Modulation	be EHT320	Test Freq. (MHz)	6905																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																													
																																																																																													
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.20</td><td>54.00</td><td>-28.80</td><td>32.51</td><td>-7.31</td><td>Average</td><td>100</td><td>199</td></tr><tr><td>2</td><td>1599.00</td><td>37.82</td><td>74.00</td><td>-36.18</td><td>45.13</td><td>-7.31</td><td>Peak</td><td>100</td><td>199</td></tr><tr><td>3</td><td>7125.00</td><td>56.40</td><td>68.20</td><td>-11.80</td><td>51.47</td><td>4.93</td><td>Average</td><td>125</td><td>133</td></tr><tr><td>4</td><td>7125.00</td><td>66.16</td><td>88.20</td><td>-22.04</td><td>61.23</td><td>4.93</td><td>Peak</td><td>125</td><td>133</td></tr><tr><td>5</td><td>7250.00</td><td>52.06</td><td>54.00</td><td>-1.94</td><td>46.78</td><td>5.28</td><td>Average</td><td>203</td><td>225</td></tr><tr><td>6</td><td>7250.00</td><td>63.51</td><td>74.00</td><td>-10.49</td><td>58.23</td><td>5.28</td><td>Peak</td><td>203</td><td>225</td></tr><tr><td>7</td><td>13810.00</td><td>45.29</td><td>68.20</td><td>-22.91</td><td>38.99</td><td>6.30</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>8</td><td>13810.00</td><td>55.88</td><td>88.20</td><td>-32.32</td><td>49.58</td><td>6.30</td><td>Peak</td><td>100</td><td>183</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	199	2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	199	3	7125.00	56.40	68.20	-11.80	51.47	4.93	Average	125	133	4	7125.00	66.16	88.20	-22.04	61.23	4.93	Peak	125	133	5	7250.00	52.06	54.00	-1.94	46.78	5.28	Average	203	225	6	7250.00	63.51	74.00	-10.49	58.23	5.28	Peak	203	225	7	13810.00	45.29	68.20	-22.91	38.99	6.30	Average	100	183	8	13810.00	55.88	88.20	-32.32	49.58	6.30	Peak	100	183			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																					
1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	199																																																																																				
2	1599.00	37.82	74.00	-36.18	45.13	-7.31	Peak	100	199																																																																																				
3	7125.00	56.40	68.20	-11.80	51.47	4.93	Average	125	133																																																																																				
4	7125.00	66.16	88.20	-22.04	61.23	4.93	Peak	125	133																																																																																				
5	7250.00	52.06	54.00	-1.94	46.78	5.28	Average	203	225																																																																																				
6	7250.00	63.51	74.00	-10.49	58.23	5.28	Peak	203	225																																																																																				
7	13810.00	45.29	68.20	-22.91	38.99	6.30	Average	100	183																																																																																				
8	13810.00	55.88	88.20	-32.32	49.58	6.30	Peak	100	183																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

**Beamforming mode****Unwanted Emissions (Below 1GHz)**

Modulation	be EHT160		Test Freq. (MHz)		6665	
Polarization	Horizontal					
Test By :Sean Yu Temperature(°C):24 Humidity(%):64						
Level (dBUV/m)						



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			


Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5955																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>2</td><td>1599.00</td><td>37.44</td><td>74.00</td><td>-36.56</td><td>44.75</td><td>-7.31</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>3</td><td>5925.00</td><td>43.71</td><td>68.20</td><td>-24.49</td><td>42.57</td><td>1.14</td><td>Average</td><td>117</td><td>76</td></tr><tr><td>4</td><td>5925.00</td><td>55.91</td><td>88.20</td><td>-32.29</td><td>54.77</td><td>1.14</td><td>Peak</td><td>117</td><td>76</td></tr><tr><td>5</td><td>11910.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>36.61</td><td>6.12</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>11910.00</td><td>56.44</td><td>74.00</td><td>-17.56</td><td>50.32</td><td>6.12</td><td>Peak</td><td>100</td><td>54</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325	2	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	325	3	5925.00	43.71	68.20	-24.49	42.57	1.14	Average	117	76	4	5925.00	55.91	88.20	-32.29	54.77	1.14	Peak	117	76	5	11910.00	42.73	54.00	-11.27	36.61	6.12	Average	100	54	6	11910.00	56.44	74.00	-17.56	50.32	6.12	Peak	100	54
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	325																																																																
2	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	325																																																																
3	5925.00	43.71	68.20	-24.49	42.57	1.14	Average	117	76																																																																
4	5925.00	55.91	88.20	-32.29	54.77	1.14	Peak	117	76																																																																
5	11910.00	42.73	54.00	-11.27	36.61	6.12	Average	100	54																																																																
6	11910.00	56.44	74.00	-17.56	50.32	6.12	Peak	100	54																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20		Test Freq. (MHz)		5955																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.66</td><td>54.00</td><td>-28.34</td><td>32.97</td><td>-7.31</td><td>Average</td><td>100</td><td>101</td></tr><tr><td>2</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>101</td></tr><tr><td>3</td><td>5925.00</td><td>43.30</td><td>68.20</td><td>-24.90</td><td>42.16</td><td>1.14</td><td>Average</td><td>123</td><td>10</td></tr><tr><td>4</td><td>5925.00</td><td>56.25</td><td>88.20</td><td>-31.95</td><td>55.11</td><td>1.14</td><td>Peak</td><td>123</td><td>10</td></tr><tr><td>5</td><td>11910.00</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>36.61</td><td>6.12</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>11910.00</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>50.43</td><td>6.12</td><td>Peak</td><td>100</td><td>24</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	101	2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	101	3	5925.00	43.30	68.20	-24.90	42.16	1.14	Average	123	10	4	5925.00	56.25	88.20	-31.95	55.11	1.14	Peak	123	10	5	11910.00	42.73	54.00	-11.27	36.61	6.12	Average	100	24	6	11910.00	56.55	74.00	-17.45	50.43	6.12	Peak	100	24
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	101																																																																						
2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	101																																																																						
3	5925.00	43.30	68.20	-24.90	42.16	1.14	Average	123	10																																																																						
4	5925.00	56.25	88.20	-31.95	55.11	1.14	Peak	123	10																																																																						
5	11910.00	42.73	54.00	-11.27	36.61	6.12	Average	100	24																																																																						
6	11910.00	56.55	74.00	-17.45	50.43	6.12	Peak	100	24																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

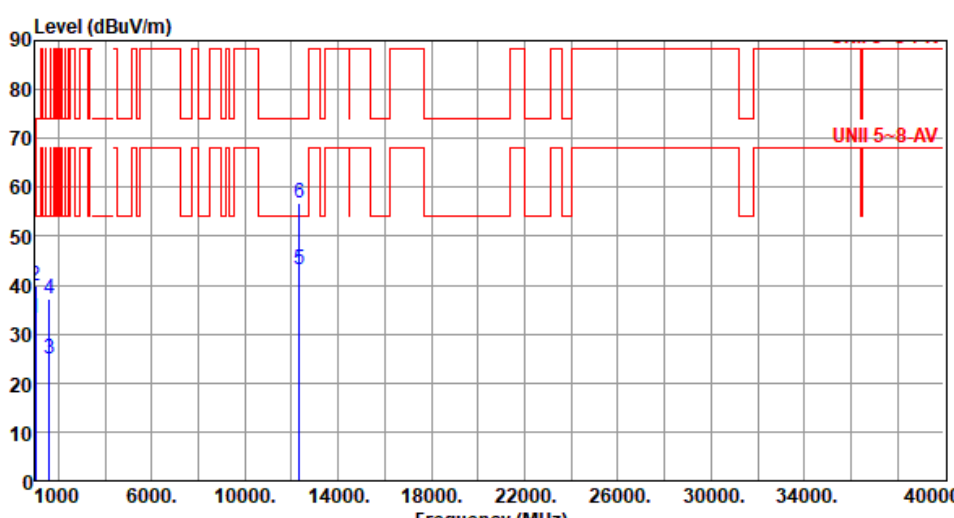


Modulation	be EHT20	Test Freq. (MHz)	6175																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.35</td><td>54.00</td><td>-20.65</td><td>41.63</td><td>-8.28</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>2</td><td>1001.00</td><td>39.85</td><td>74.00</td><td>-34.15</td><td>48.13</td><td>-8.28</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>3</td><td>1599.00</td><td>24.76</td><td>54.00</td><td>-29.24</td><td>32.07</td><td>-7.31</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>1599.00</td><td>37.20</td><td>74.00</td><td>-36.80</td><td>44.51</td><td>-7.31</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>12350.00</td><td>43.26</td><td>54.00</td><td>-10.74</td><td>36.69</td><td>6.57</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>6</td><td>12350.00</td><td>56.95</td><td>74.00</td><td>-17.05</td><td>50.38</td><td>6.57</td><td>Peak</td><td>100</td><td>69</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	196	2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	196	3	1599.00	24.76	54.00	-29.24	32.07	-7.31	Average	100	315	4	1599.00	37.20	74.00	-36.80	44.51	-7.31	Peak	100	315	5	12350.00	43.26	54.00	-10.74	36.69	6.57	Average	100	69	6	12350.00	56.95	74.00	-17.05	50.38	6.57	Peak	100	69
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	196																																																																
2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	196																																																																
3	1599.00	24.76	54.00	-29.24	32.07	-7.31	Average	100	315																																																																
4	1599.00	37.20	74.00	-36.80	44.51	-7.31	Peak	100	315																																																																
5	12350.00	43.26	54.00	-10.74	36.69	6.57	Average	100	69																																																																
6	12350.00	56.95	74.00	-17.05	50.38	6.57	Peak	100	69																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

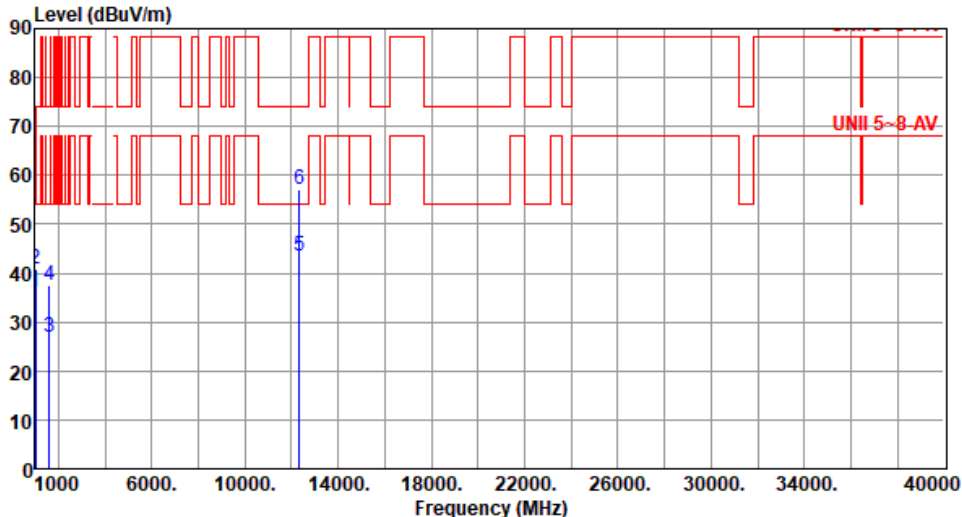


Modulation	be EHT20		Test Freq. (MHz)		6175																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>36.15</td><td>54.00</td><td>-17.85</td><td>44.43</td><td>-8.28</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>2</td><td>1001.00</td><td>40.95</td><td>74.00</td><td>-33.05</td><td>49.23</td><td>-8.28</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>3</td><td>1599.00</td><td>27.04</td><td>54.00</td><td>-26.96</td><td>34.35</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>1599.00</td><td>37.51</td><td>74.00</td><td>-36.49</td><td>44.82</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>12350.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>36.85</td><td>6.57</td><td>Average</td><td>100</td><td>42</td></tr><tr><td>6</td><td>12350.00</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>50.47</td><td>6.57</td><td>Peak</td><td>100</td><td>42</td></tr></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	36.15	54.00	-17.85	44.43	-8.28	Average	100	223	2	1001.00	40.95	74.00	-33.05	49.23	-8.28	Peak	100	223	3	1599.00	27.04	54.00	-26.96	34.35	-7.31	Average	100	109	4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	109	5	12350.00	43.42	54.00	-10.58	36.85	6.57	Average	100	42	6	12350.00	57.04	74.00	-16.96	50.47	6.57	Peak	100	42
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	36.15	54.00	-17.85	44.43	-8.28	Average	100	223																																																																						
2	1001.00	40.95	74.00	-33.05	49.23	-8.28	Peak	100	223																																																																						
3	1599.00	27.04	54.00	-26.96	34.35	-7.31	Average	100	109																																																																						
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	109																																																																						
5	12350.00	43.42	54.00	-10.58	36.85	6.57	Average	100	42																																																																						
6	12350.00	57.04	74.00	-16.96	50.47	6.57	Peak	100	42																																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																															

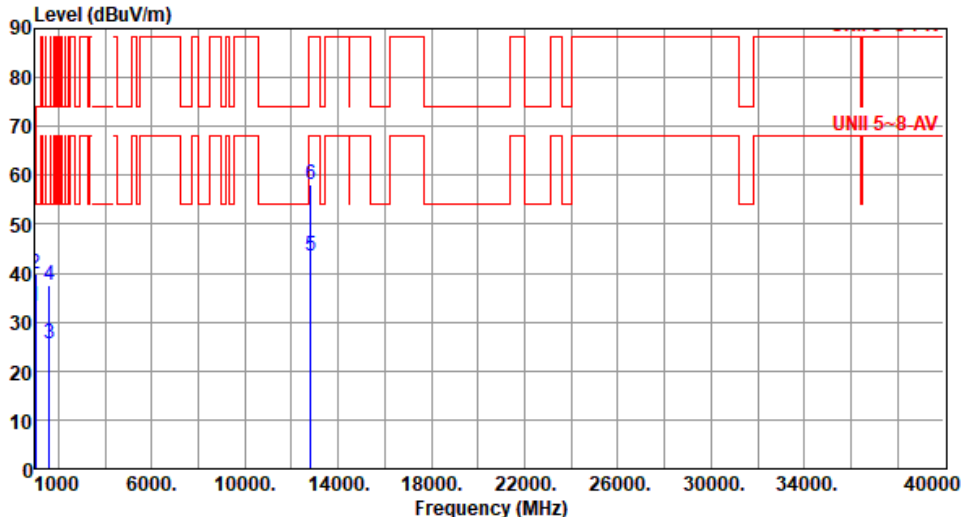


Modulation	be EHT20	Test Freq. (MHz)	6415																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg <table><tr><td>1</td><td>1001.00</td><td>33.27</td><td>54.00</td><td>-20.73</td><td>41.55</td><td>-8.28</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>2</td><td>1001.00</td><td>39.95</td><td>74.00</td><td>-34.05</td><td>48.23</td><td>-8.28</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>3</td><td>1599.00</td><td>25.65</td><td>54.00</td><td>-28.35</td><td>32.96</td><td>-7.31</td><td>Average</td><td>100</td><td>326</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>326</td></tr><tr><td>5</td><td>12830.00</td><td>43.45</td><td>68.20</td><td>-24.75</td><td>36.89</td><td>6.56</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>6</td><td>12830.00</td><td>57.99</td><td>88.20</td><td>-30.21</td><td>51.43</td><td>6.56</td><td>Peak</td><td>100</td><td>69</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	1001.00	33.27	54.00	-20.73	41.55	-8.28	Average	100	202	2	1001.00	39.95	74.00	-34.05	48.23	-8.28	Peak	100	202	3	1599.00	25.65	54.00	-28.35	32.96	-7.31	Average	100	326	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	326	5	12830.00	43.45	68.20	-24.75	36.89	6.56	Average	100	69	6	12830.00	57.99	88.20	-30.21	51.43	6.56	Peak	100	69
1	1001.00	33.27	54.00	-20.73	41.55	-8.28	Average	100	202																																																						
2	1001.00	39.95	74.00	-34.05	48.23	-8.28	Peak	100	202																																																						
3	1599.00	25.65	54.00	-28.35	32.96	-7.31	Average	100	326																																																						
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	326																																																						
5	12830.00	43.45	68.20	-24.75	36.89	6.56	Average	100	69																																																						
6	12830.00	57.99	88.20	-30.21	51.43	6.56	Peak	100	69																																																						

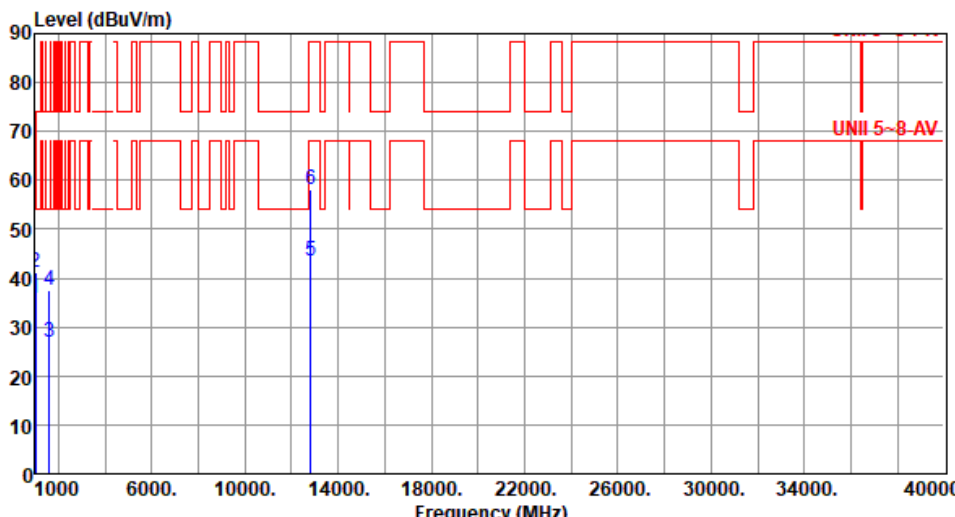


Modulation	be EHT20	Test Freq. (MHz)	6415																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>36.01</td><td>54.00</td><td>-17.99</td><td>44.29</td><td>-8.28</td><td>Average</td><td>100</td><td>212</td></tr><tr><td>2</td><td>1001.00</td><td>41.15</td><td>74.00</td><td>-32.85</td><td>49.43</td><td>-8.28</td><td>Peak</td><td>100</td><td>212</td></tr><tr><td>3</td><td>1599.00</td><td>27.05</td><td>54.00</td><td>-26.95</td><td>34.36</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>5</td><td>12830.00</td><td>43.48</td><td>68.20</td><td>-24.72</td><td>36.92</td><td>6.56</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>12830.00</td><td>57.96</td><td>88.20</td><td>-30.24</td><td>51.40</td><td>6.56</td><td>Peak</td><td>100</td><td>29</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	36.01	54.00	-17.99	44.29	-8.28	Average	100	212	2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	212	3	1599.00	27.05	54.00	-26.95	34.36	-7.31	Average	100	106	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	106	5	12830.00	43.48	68.20	-24.72	36.92	6.56	Average	100	29	6	12830.00	57.96	88.20	-30.24	51.40	6.56	Peak	100	29			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	36.01	54.00	-17.99	44.29	-8.28	Average	100	212																																																																	
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	212																																																																	
3	1599.00	27.05	54.00	-26.95	34.36	-7.31	Average	100	106																																																																	
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	106																																																																	
5	12830.00	43.48	68.20	-24.72	36.92	6.56	Average	100	29																																																																	
6	12830.00	57.96	88.20	-30.24	51.40	6.56	Peak	100	29																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

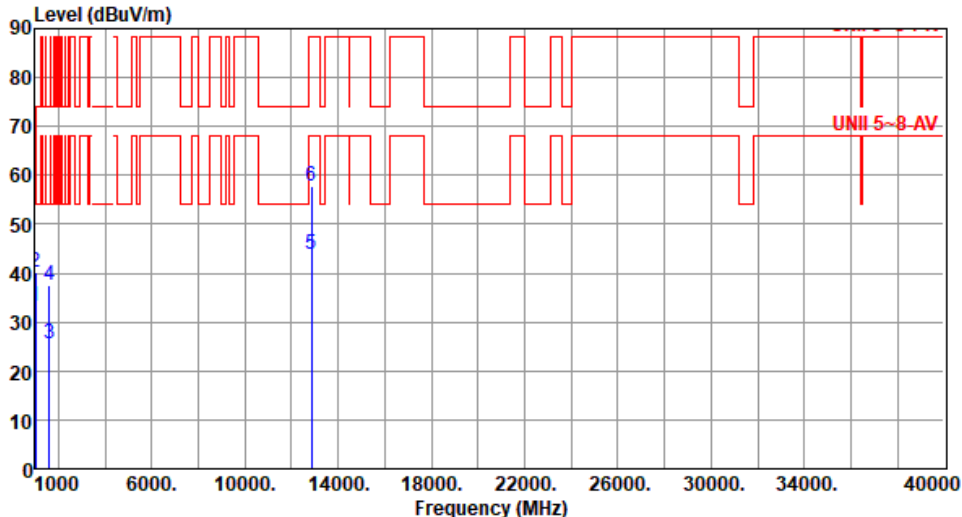


Modulation	be EHT20		Test Freq. (MHz)		6435																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.27</td><td>54.00</td><td>-20.73</td><td>41.55</td><td>-8.28</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>2</td><td>1001.00</td><td>40.08</td><td>74.00</td><td>-33.92</td><td>48.36</td><td>-8.28</td><td>Peak</td><td>100</td><td>195</td></tr><tr><td>3</td><td>1599.00</td><td>25.54</td><td>54.00</td><td>-28.46</td><td>32.85</td><td>-7.31</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>12870.00</td><td>43.96</td><td>68.20</td><td>-24.24</td><td>37.55</td><td>6.41</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>12870.00</td><td>57.63</td><td>88.20</td><td>-30.57</td><td>51.22</td><td>6.41</td><td>Peak</td><td>100</td><td>65</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.27	54.00	-20.73	41.55	-8.28	Average	100	195	2	1001.00	40.08	74.00	-33.92	48.36	-8.28	Peak	100	195	3	1599.00	25.54	54.00	-28.46	32.85	-7.31	Average	100	314	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	314	5	12870.00	43.96	68.20	-24.24	37.55	6.41	Average	100	65	6	12870.00	57.63	88.20	-30.57	51.22	6.41	Peak	100	65
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.27	54.00	-20.73	41.55	-8.28	Average	100	195																																																																																										
2	1001.00	40.08	74.00	-33.92	48.36	-8.28	Peak	100	195																																																																																										
3	1599.00	25.54	54.00	-28.46	32.85	-7.31	Average	100	314																																																																																										
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	314																																																																																										
5	12870.00	43.96	68.20	-24.24	37.55	6.41	Average	100	65																																																																																										
6	12870.00	57.63	88.20	-30.57	51.22	6.41	Peak	100	65																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

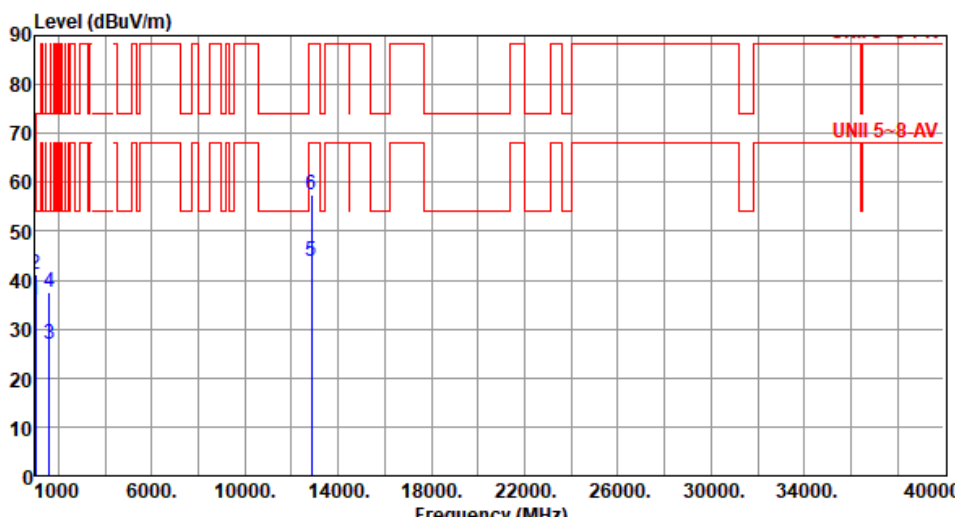


Modulation	be EHT20	Test Freq. (MHz)	6435						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	36.02	54.00	-17.98	44.30	-8.28	Average	100	230
2	1001.00	41.10	74.00	-32.90	49.38	-8.28	Peak	100	230
3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	112
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	112
5	12870.00	43.93	68.20	-24.27	37.52	6.41	Average	100	33
6	12870.00	57.35	88.20	-30.85	50.94	6.41	Peak	100	33
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

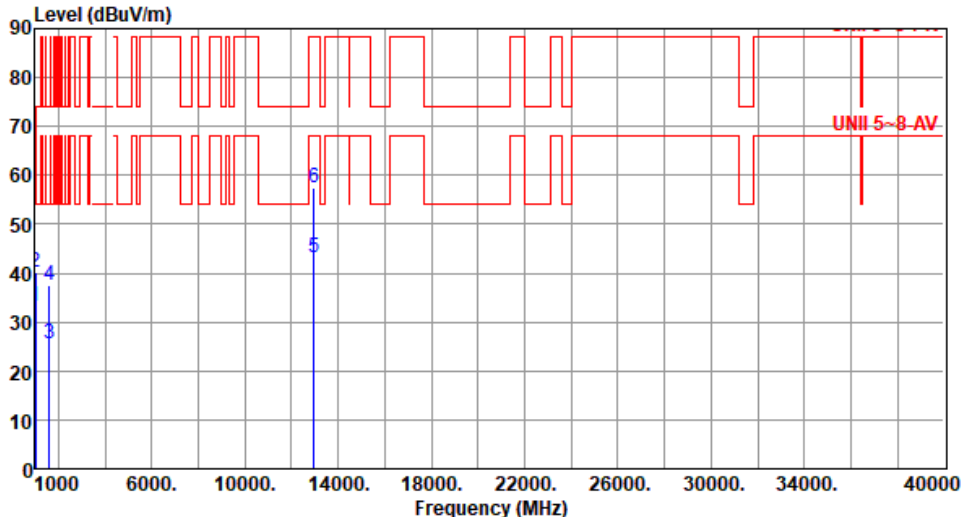

Modulation	be EHT20		Test Freq. (MHz)		6475																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.30</td><td>54.00</td><td>-20.70</td><td>41.58</td><td>-8.28</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1001.00</td><td>40.25</td><td>74.00</td><td>-33.75</td><td>48.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>1599.00</td><td>25.73</td><td>54.00</td><td>-28.27</td><td>33.04</td><td>-7.31</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>1599.00</td><td>37.60</td><td>74.00</td><td>-36.40</td><td>44.91</td><td>-7.31</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>12950.00</td><td>43.13</td><td>68.20</td><td>-25.07</td><td>36.85</td><td>6.28</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td>12950.00</td><td>57.50</td><td>88.20</td><td>-30.70</td><td>51.22</td><td>6.28</td><td>Peak</td><td>100</td><td>51</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	204	2	1001.00	40.25	74.00	-33.75	48.53	-8.28	Peak	100	204	3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	304	4	1599.00	37.60	74.00	-36.40	44.91	-7.31	Peak	100	304	5	12950.00	43.13	68.20	-25.07	36.85	6.28	Average	100	51	6	12950.00	57.50	88.20	-30.70	51.22	6.28	Peak	100	51
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	204																																																																																										
2	1001.00	40.25	74.00	-33.75	48.53	-8.28	Peak	100	204																																																																																										
3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	304																																																																																										
4	1599.00	37.60	74.00	-36.40	44.91	-7.31	Peak	100	304																																																																																										
5	12950.00	43.13	68.20	-25.07	36.85	6.28	Average	100	51																																																																																										
6	12950.00	57.50	88.20	-30.70	51.22	6.28	Peak	100	51																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			

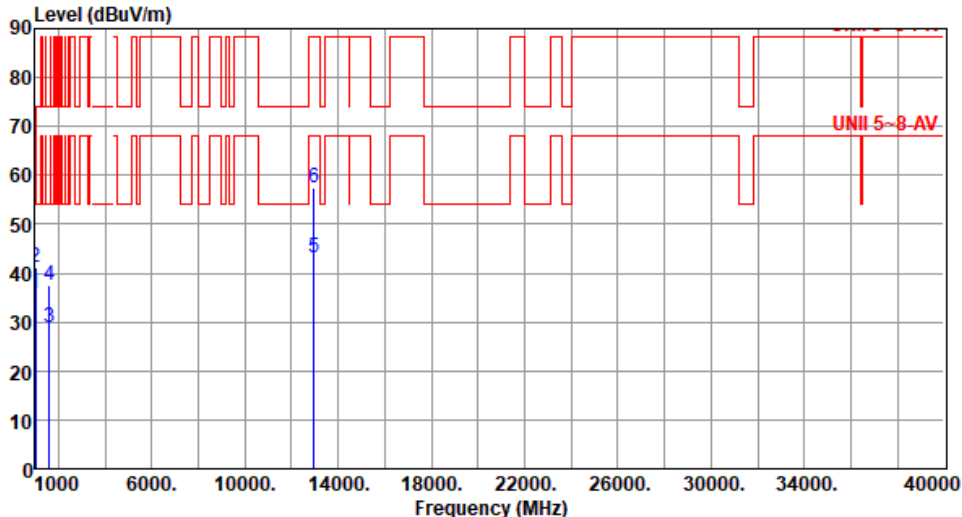

Modulation	be EHT20	Test Freq. (MHz)	6475						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.91	54.00	-18.09	44.19	-8.28	Average	100	228
2	1001.00	41.28	74.00	-32.72	49.56	-8.28	Peak	100	228
3	1599.00	29.03	54.00	-24.97	36.34	-7.31	Average	100	129
4	1599.00	37.62	74.00	-36.38	44.93	-7.31	Peak	100	129
5	12950.00	43.24	68.20	-24.96	36.96	6.28	Average	100	34
6	12950.00	57.58	88.20	-30.62	51.30	6.28	Peak	100	34
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT20		Test Freq. (MHz)		6515																																																																																	
Polarization	Horizontal																																																																																					
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																						
Level (dBuV/m) UNII 5-8-AV <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.52</td><td>54.00</td><td>-20.48</td><td>41.80</td><td>-8.28</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>2</td><td>1001.00</td><td>39.92</td><td>74.00</td><td>-34.08</td><td>48.20</td><td>-8.28</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>3</td><td>1599.00</td><td>25.54</td><td>54.00</td><td>-28.46</td><td>32.85</td><td>-7.31</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>13030.00</td><td>42.89</td><td>68.20</td><td>-25.31</td><td>36.79</td><td>6.10</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>6</td><td>13030.00</td><td>56.56</td><td>88.20</td><td>-31.64</td><td>50.46</td><td>6.10</td><td>Peak</td><td>100</td><td>52</td></tr></tbody></table>								Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m				1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	193	2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	193	3	1599.00	25.54	54.00	-28.46	32.85	-7.31	Average	100	314	4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	314	5	13030.00	42.89	68.20	-25.31	36.79	6.10	Average	100	52	6	13030.00	56.56	88.20	-31.64	50.46	6.10	Peak	100	52
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																
1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	193																																																																													
2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	193																																																																													
3	1599.00	25.54	54.00	-28.46	32.85	-7.31	Average	100	314																																																																													
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	314																																																																													
5	13030.00	42.89	68.20	-25.31	36.79	6.10	Average	100	52																																																																													
6	13030.00	56.56	88.20	-31.64	50.46	6.10	Peak	100	52																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																						



Modulation	be EHT20	Test Freq. (MHz)	6515																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>44.10</td><td>-8.28</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>1001.00</td><td>41.31</td><td>74.00</td><td>-32.69</td><td>49.59</td><td>-8.28</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>1599.00</td><td>27.00</td><td>54.00</td><td>-27.00</td><td>34.31</td><td>-7.31</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>5</td><td>13030.00</td><td>43.02</td><td>68.20</td><td>-25.18</td><td>36.92</td><td>6.10</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>13030.00</td><td>56.91</td><td>88.20</td><td>-31.29</td><td>50.81</td><td>6.10</td><td>Peak</td><td>100</td><td>59</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	218	2	1001.00	41.31	74.00	-32.69	49.59	-8.28	Peak	100	218	3	1599.00	27.00	54.00	-27.00	34.31	-7.31	Average	100	115	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	115	5	13030.00	43.02	68.20	-25.18	36.92	6.10	Average	100	59	6	13030.00	56.91	88.20	-31.29	50.81	6.10	Peak	100	59			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	218																																																																	
2	1001.00	41.31	74.00	-32.69	49.59	-8.28	Peak	100	218																																																																	
3	1599.00	27.00	54.00	-27.00	34.31	-7.31	Average	100	115																																																																	
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	115																																																																	
5	13030.00	43.02	68.20	-25.18	36.92	6.10	Average	100	59																																																																	
6	13030.00	56.91	88.20	-31.29	50.81	6.10	Peak	100	59																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.53</td><td>54.00</td><td>-20.47</td><td>41.81</td><td>-8.28</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>1001.00</td><td>40.07</td><td>74.00</td><td>-33.93</td><td>48.35</td><td>-8.28</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>1599.00</td><td>25.72</td><td>54.00</td><td>-28.28</td><td>33.03</td><td>-7.31</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>1599.00</td><td>37.50</td><td>74.00</td><td>-36.50</td><td>44.81</td><td>-7.31</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>13070.00</td><td>43.34</td><td>68.20</td><td>-24.86</td><td>37.45</td><td>5.89</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>13070.00</td><td>57.47</td><td>88.20</td><td>-30.73</td><td>51.58</td><td>5.89</td><td>Peak</td><td>100</td><td>24</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	209	2	1001.00	40.07	74.00	-33.93	48.35	-8.28	Peak	100	209	3	1599.00	25.72	54.00	-28.28	33.03	-7.31	Average	100	318	4	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	318	5	13070.00	43.34	68.20	-24.86	37.45	5.89	Average	100	24	6	13070.00	57.47	88.20	-30.73	51.58	5.89	Peak	100	24
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	209																																																																
2	1001.00	40.07	74.00	-33.93	48.35	-8.28	Peak	100	209																																																																
3	1599.00	25.72	54.00	-28.28	33.03	-7.31	Average	100	318																																																																
4	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	318																																																																
5	13070.00	43.34	68.20	-24.86	37.45	5.89	Average	100	24																																																																
6	13070.00	57.47	88.20	-30.73	51.58	5.89	Peak	100	24																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>44.12</td><td>-8.28</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>1001.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>49.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>1599.00</td><td>26.91</td><td>54.00</td><td>-27.09</td><td>34.22</td><td>-7.31</td><td>Average</td><td>100</td><td>104</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>104</td></tr><tr><td>5</td><td>13070.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>37.48</td><td>5.89</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>13070.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>51.77</td><td>5.89</td><td>Peak</td><td>100</td><td>39</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	209	2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	209	3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	104	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	104	5	13070.00	43.37	68.20	-24.83	37.48	5.89	Average	100	39	6	13070.00	57.66	88.20	-30.54	51.77	5.89	Peak	100	39			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	209																																																																	
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	209																																																																	
3	1599.00	26.91	54.00	-27.09	34.22	-7.31	Average	100	104																																																																	
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	104																																																																	
5	13070.00	43.37	68.20	-24.83	37.48	5.89	Average	100	39																																																																	
6	13070.00	57.66	88.20	-30.54	51.77	5.89	Peak	100	39																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	6715																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>44.10</td><td>-8.28</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>2</td><td>1001.00</td><td>41.24</td><td>74.00</td><td>-32.76</td><td>49.52</td><td>-8.28</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>3</td><td>1599.00</td><td>26.93</td><td>54.00</td><td>-27.07</td><td>34.24</td><td>-7.31</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>13430.00</td><td>44.29</td><td>68.20</td><td>-23.91</td><td>38.26</td><td>6.03</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13430.00</td><td>57.96</td><td>88.20</td><td>-30.24</td><td>51.93</td><td>6.03</td><td>Peak</td><td>100</td><td>22</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	220	2	1001.00	41.24	74.00	-32.76	49.52	-8.28	Peak	100	220	3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	114	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	114	5	13430.00	44.29	68.20	-23.91	38.26	6.03	Average	100	22	6	13430.00	57.96	88.20	-30.24	51.93	6.03	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	220																																																																
2	1001.00	41.24	74.00	-32.76	49.52	-8.28	Peak	100	220																																																																
3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	114																																																																
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	114																																																																
5	13430.00	44.29	68.20	-23.91	38.26	6.03	Average	100	22																																																																
6	13430.00	57.96	88.20	-30.24	51.93	6.03	Peak	100	22																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	6855																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1001.00</td><td>40.16</td><td>74.00</td><td>-33.84</td><td>48.44</td><td>-8.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>1599.00</td><td>25.77</td><td>54.00</td><td>-28.23</td><td>33.08</td><td>-7.31</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>4</td><td>1599.00</td><td>37.33</td><td>74.00</td><td>-36.67</td><td>44.64</td><td>-7.31</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>5</td><td>13710.00</td><td>44.50</td><td>68.20</td><td>-23.70</td><td>38.40</td><td>6.10</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>13710.00</td><td>58.76</td><td>88.20</td><td>-29.44</td><td>52.66</td><td>6.10</td><td>Peak</td><td>100</td><td>59</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	208	2	1001.00	40.16	74.00	-33.84	48.44	-8.28	Peak	100	208	3	1599.00	25.77	54.00	-28.23	33.08	-7.31	Average	100	312	4	1599.00	37.33	74.00	-36.67	44.64	-7.31	Peak	100	312	5	13710.00	44.50	68.20	-23.70	38.40	6.10	Average	100	59	6	13710.00	58.76	88.20	-29.44	52.66	6.10	Peak	100	59
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	208																																																																
2	1001.00	40.16	74.00	-33.84	48.44	-8.28	Peak	100	208																																																																
3	1599.00	25.77	54.00	-28.23	33.08	-7.31	Average	100	312																																																																
4	1599.00	37.33	74.00	-36.67	44.64	-7.31	Peak	100	312																																																																
5	13710.00	44.50	68.20	-23.70	38.40	6.10	Average	100	59																																																																
6	13710.00	58.76	88.20	-29.44	52.66	6.10	Peak	100	59																																																																

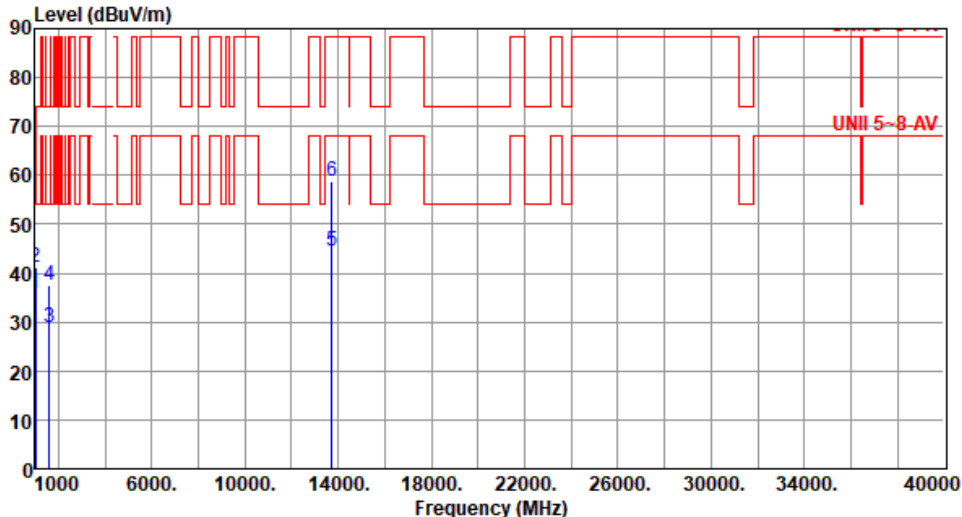

Modulation	be EHT20	Test Freq. (MHz)	6855						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	218
2	1001.00	41.29	74.00	-32.71	49.57	-8.28	Peak	100	218
3	1599.00	28.93	54.00	-25.07	36.24	-7.31	Average	100	116
4	1599.00	37.52	74.00	-36.48	44.83	-7.31	Peak	100	116
5	13710.00	44.59	68.20	-23.61	38.49	6.10	Average	100	35
6	13710.00	58.73	88.20	-29.47	52.63	6.10	Peak	100	35

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

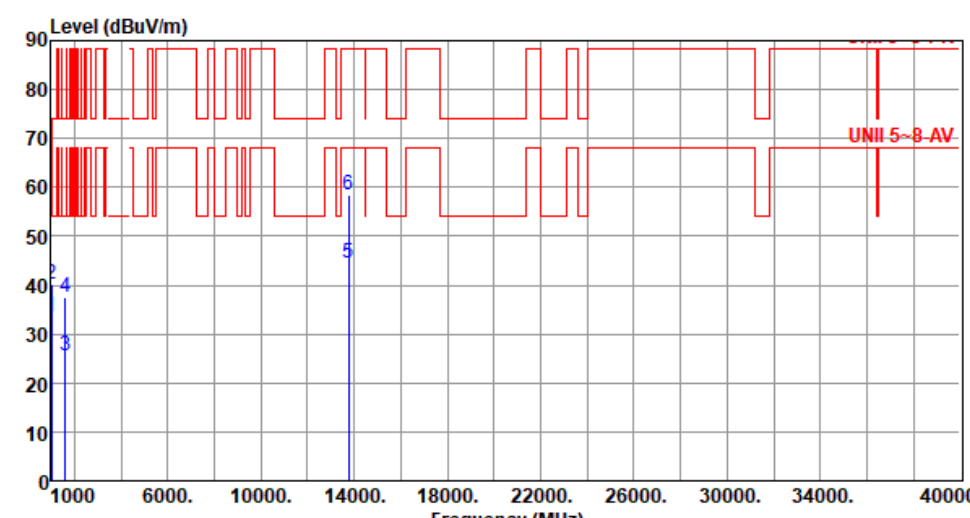


Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	202
2	1001.00	40.10	74.00	-33.90	48.38	-8.28	Peak	100	202
3	1599.00	25.41	54.00	-28.59	32.72	-7.31	Average	100	311
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	311
5	13750.00	44.61	68.20	-23.59	38.53	6.08	Average	100	70
6	13750.00	58.44	88.20	-29.76	52.36	6.08	Peak	100	70
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT20	Test Freq. (MHz)	6875						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.71	54.00	-18.29	43.99	-8.28	Average	100	216
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	216
3	1599.00	27.04	54.00	-26.96	34.35	-7.31	Average	100	116
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	116
5	13750.00	44.60	68.20	-23.60	38.52	6.08	Average	100	25
6	13750.00	58.57	88.20	-29.63	52.49	6.08	Peak	100	25
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

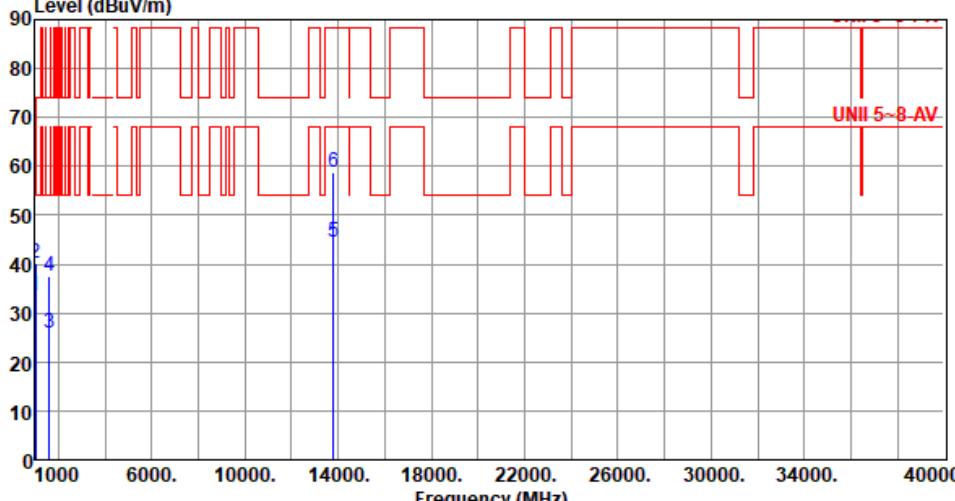


Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.58	54.00	-20.42	41.86	-8.28	Average	100	194
2	1001.00	40.08	74.00	-33.92	48.36	-8.28	Peak	100	194
3	1599.00	25.83	54.00	-28.17	33.14	-7.31	Average	100	314
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	314
5	13790.00	44.62	68.20	-23.58	38.33	6.29	Average	100	49
6	13790.00	58.82	88.20	-29.38	52.53	6.29	Peak	100	49
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT20	Test Freq. (MHz)	6895						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	204
2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	204
3	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	107
4	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	107
5	13790.00	44.78	68.20	-23.42	38.49	6.29	Average	100	30
6	13790.00	58.88	88.20	-29.32	52.59	6.29	Peak	100	30

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

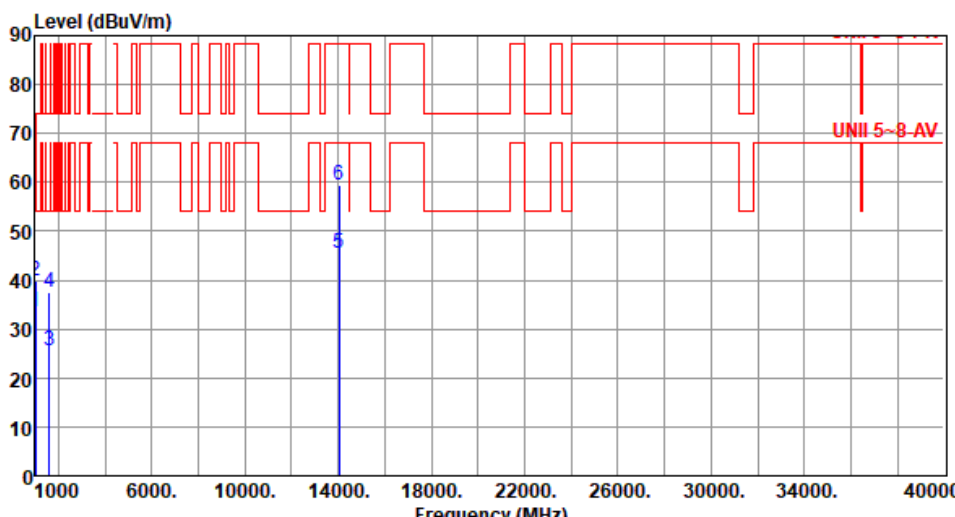

Modulation	be EHT20	Test Freq. (MHz)	7015																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.42</td><td>54.00</td><td>-20.58</td><td>41.70</td><td>-8.28</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>2</td><td>1001.00</td><td>39.95</td><td>74.00</td><td>-34.05</td><td>48.23</td><td>-8.28</td><td>Peak</td><td>100</td><td>194</td></tr><tr><td>3</td><td>1599.00</td><td>25.71</td><td>54.00</td><td>-28.29</td><td>33.02</td><td>-7.31</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>4</td><td>1599.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>44.80</td><td>-7.31</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>5</td><td>14030.00</td><td>45.58</td><td>68.20</td><td>-22.62</td><td>38.77</td><td>6.81</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>6</td><td>14030.00</td><td>59.48</td><td>88.20</td><td>-28.72</td><td>52.67</td><td>6.81</td><td>Peak</td><td>100</td><td>54</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	194	2	1001.00	39.95	74.00	-34.05	48.23	-8.28	Peak	100	194	3	1599.00	25.71	54.00	-28.29	33.02	-7.31	Average	100	312	4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	312	5	14030.00	45.58	68.20	-22.62	38.77	6.81	Average	100	54	6	14030.00	59.48	88.20	-28.72	52.67	6.81	Peak	100	54
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	194																																																																
2	1001.00	39.95	74.00	-34.05	48.23	-8.28	Peak	100	194																																																																
3	1599.00	25.71	54.00	-28.29	33.02	-7.31	Average	100	312																																																																
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	312																																																																
5	14030.00	45.58	68.20	-22.62	38.77	6.81	Average	100	54																																																																
6	14030.00	59.48	88.20	-28.72	52.67	6.81	Peak	100	54																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

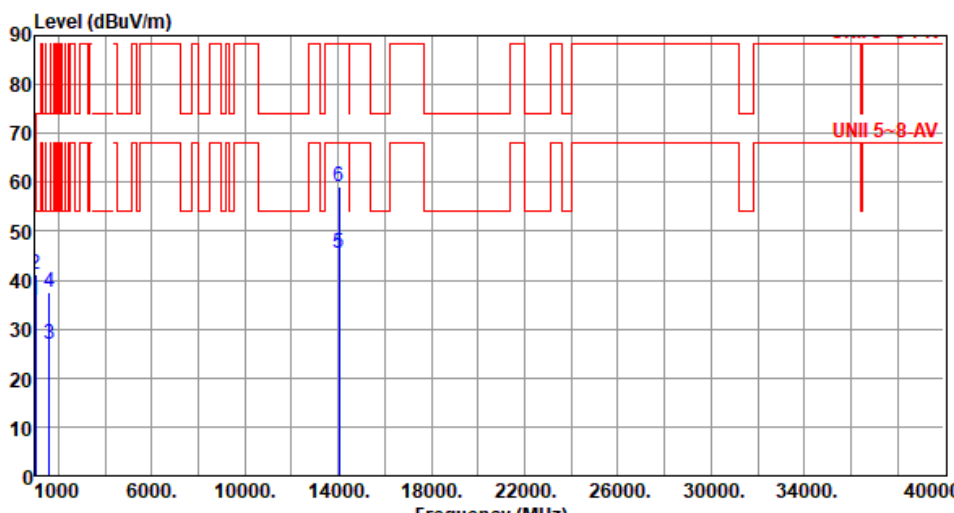

Modulation	be EHT20	Test Freq. (MHz)	7015						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	214
2	1001.00	41.26	74.00	-32.74	49.54	-8.28	Peak	100	214
3	1599.00	26.77	54.00	-27.23	34.08	-7.31	Average	100	117
4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	117
5	14030.00	45.44	68.20	-22.76	38.63	6.81	Average	100	28
6	14030.00	59.21	88.20	-28.99	52.40	6.81	Peak	100	28

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).




Modulation	be EHT20	Test Freq. (MHz)	7095																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.48</td><td>54.00</td><td>-20.52</td><td>41.76</td><td>-8.28</td><td>Average</td><td>100</td><td>196</td></tr><tr><td>2</td><td>1001.00</td><td>40.15</td><td>74.00</td><td>-33.85</td><td>48.43</td><td>-8.28</td><td>Peak</td><td>100</td><td>196</td></tr><tr><td>3</td><td>1599.00</td><td>25.83</td><td>54.00</td><td>-28.17</td><td>33.14</td><td>-7.31</td><td>Average</td><td>100</td><td>313</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>313</td></tr><tr><td>5</td><td>14190.00</td><td>45.21</td><td>68.20</td><td>-22.99</td><td>38.25</td><td>6.96</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>14190.00</td><td>59.50</td><td>88.20</td><td>-28.70</td><td>52.54</td><td>6.96</td><td>Peak</td><td>100</td><td>59</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.48	54.00	-20.52	41.76	-8.28	Average	100	196	2	1001.00	40.15	74.00	-33.85	48.43	-8.28	Peak	100	196	3	1599.00	25.83	54.00	-28.17	33.14	-7.31	Average	100	313	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	313	5	14190.00	45.21	68.20	-22.99	38.25	6.96	Average	100	59	6	14190.00	59.50	88.20	-28.70	52.54	6.96	Peak	100	59
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.48	54.00	-20.52	41.76	-8.28	Average	100	196																																																																
2	1001.00	40.15	74.00	-33.85	48.43	-8.28	Peak	100	196																																																																
3	1599.00	25.83	54.00	-28.17	33.14	-7.31	Average	100	313																																																																
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	313																																																																
5	14190.00	45.21	68.20	-22.99	38.25	6.96	Average	100	59																																																																
6	14190.00	59.50	88.20	-28.70	52.54	6.96	Peak	100	59																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBUV/m) </			

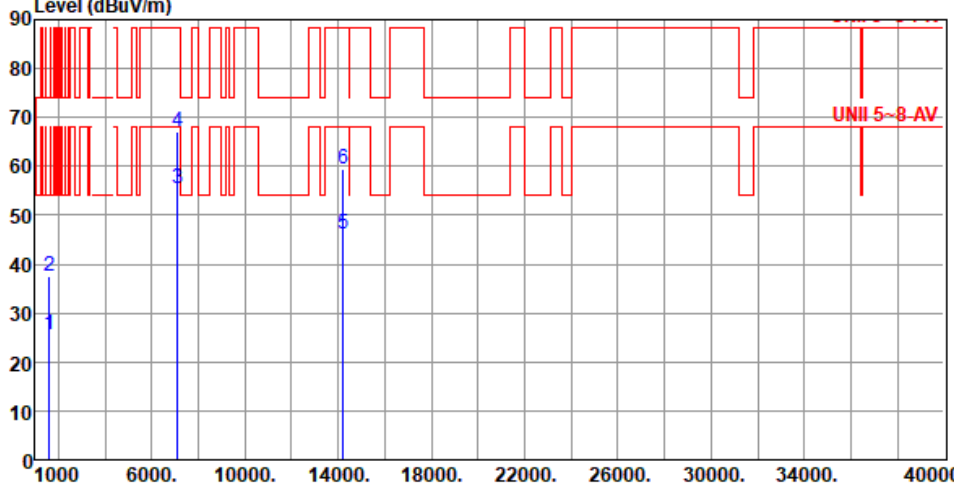

Modulation	be EHT20	Test Freq. (MHz)	7115						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	25.66	54.00	-28.34	32.97	-7.31	Average	100	304
2	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	304
3	7125.00	55.43	68.20	-12.77	50.50	4.93	Average	100	216
4	7125.00	67.13	88.20	-21.07	62.20	4.93	Peak	100	216
5	14230.00	46.20	68.20	-22.00	39.01	7.19	Average	100	78
6	14230.00	59.43	88.20	-28.77	52.24	7.19	Peak	100	78
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

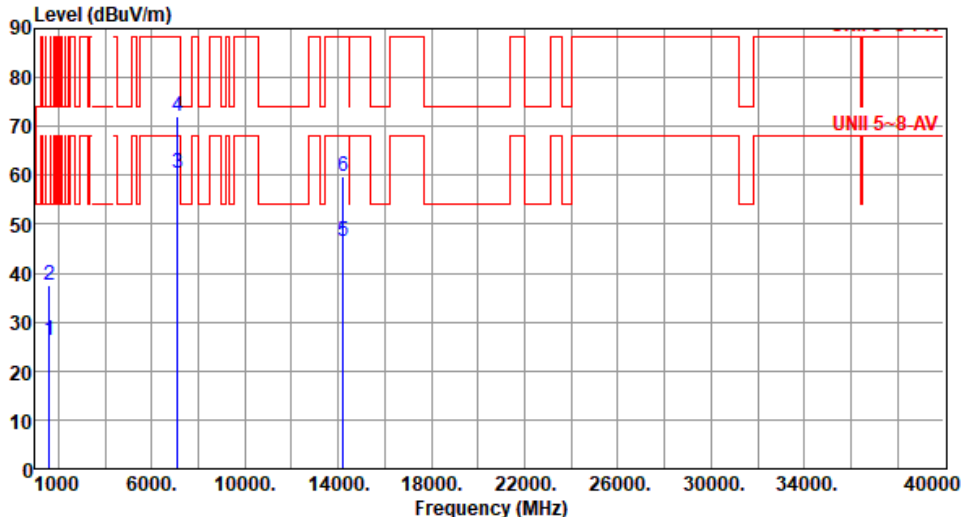


Modulation	be EHT20	Test Freq. (MHz)	7115																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.39</td><td>54.00</td><td>-27.61</td><td>33.70</td><td>-7.31</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>2</td><td>1599.00</td><td>37.53</td><td>74.00</td><td>-36.47</td><td>44.84</td><td>-7.31</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>3</td><td>7125.00</td><td>60.56</td><td>68.20</td><td>-7.64</td><td>55.63</td><td>4.93</td><td>Average</td><td>100</td><td>137</td></tr><tr><td>4</td><td>7125.00</td><td>72.09</td><td>88.20</td><td>-16.11</td><td>67.16</td><td>4.93</td><td>Peak</td><td>100</td><td>137</td></tr><tr><td>5</td><td>14230.00</td><td>46.38</td><td>68.20</td><td>-21.82</td><td>39.19</td><td>7.19</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>14230.00</td><td>59.63</td><td>88.20</td><td>-28.57</td><td>52.44</td><td>7.19</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.39	54.00	-27.61	33.70	-7.31	Average	100	120	2	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	120	3	7125.00	60.56	68.20	-7.64	55.63	4.93	Average	100	137	4	7125.00	72.09	88.20	-16.11	67.16	4.93	Peak	100	137	5	14230.00	46.38	68.20	-21.82	39.19	7.19	Average	100	22	6	14230.00	59.63	88.20	-28.57	52.44	7.19	Peak	100	22
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.39	54.00	-27.61	33.70	-7.31	Average	100	120																																																																
2	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	120																																																																
3	7125.00	60.56	68.20	-7.64	55.63	4.93	Average	100	137																																																																
4	7125.00	72.09	88.20	-16.11	67.16	4.93	Peak	100	137																																																																
5	14230.00	46.38	68.20	-21.82	39.19	7.19	Average	100	22																																																																
6	14230.00	59.63	88.20	-28.57	52.44	7.19	Peak	100	22																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									


Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

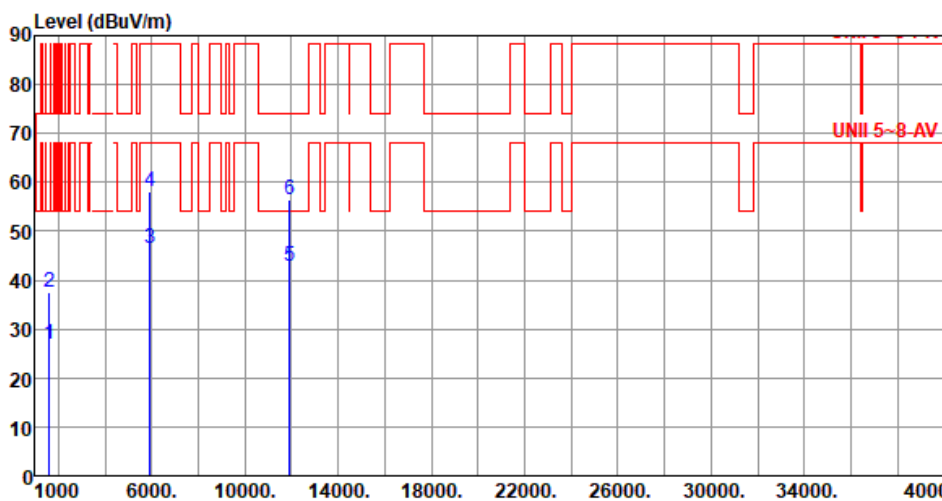

Modulation	be EHT40		Test Freq. (MHz)		5965																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.88</td><td>54.00</td><td>-27.12</td><td>34.19</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>2</td><td>1599.00</td><td>37.53</td><td>74.00</td><td>-36.47</td><td>44.84</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>3</td><td>5925.00</td><td>46.40</td><td>68.20</td><td>-21.80</td><td>45.26</td><td>1.14</td><td>Average</td><td>119</td><td>13</td></tr><tr><td>4</td><td>5925.00</td><td>58.27</td><td>88.20</td><td>-29.93</td><td>57.13</td><td>1.14</td><td>Peak</td><td>119</td><td>13</td></tr><tr><td>5</td><td>11930.00</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>36.67</td><td>6.12</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>11930.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>50.21</td><td>6.12</td><td>Peak</td><td>100</td><td>25</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	109	2	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	109	3	5925.00	46.40	68.20	-21.80	45.26	1.14	Average	119	13	4	5925.00	58.27	88.20	-29.93	57.13	1.14	Peak	119	13	5	11930.00	42.79	54.00	-11.21	36.67	6.12	Average	100	25	6	11930.00	56.33	74.00	-17.67	50.21	6.12	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	26.88	54.00	-27.12	34.19	-7.31	Average	100	109																																																																						
2	1599.00	37.53	74.00	-36.47	44.84	-7.31	Peak	100	109																																																																						
3	5925.00	46.40	68.20	-21.80	45.26	1.14	Average	119	13																																																																						
4	5925.00	58.27	88.20	-29.93	57.13	1.14	Peak	119	13																																																																						
5	11930.00	42.79	54.00	-11.21	36.67	6.12	Average	100	25																																																																						
6	11930.00	56.33	74.00	-17.67	50.21	6.12	Peak	100	25																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

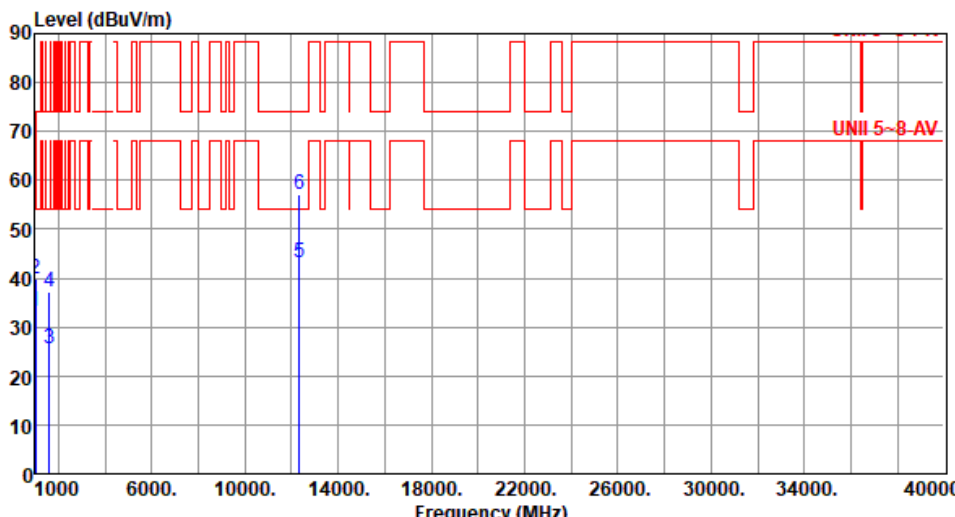

Modulation	be EHT40	Test Freq. (MHz)	6165																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.30</td><td>54.00</td><td>-20.70</td><td>41.58</td><td>-8.28</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>2</td><td>1001.00</td><td>39.84</td><td>74.00</td><td>-34.16</td><td>48.12</td><td>-8.28</td><td>Peak</td><td>100</td><td>194</td></tr><tr><td>3</td><td>1599.00</td><td>25.45</td><td>54.00</td><td>-28.55</td><td>32.76</td><td>-7.31</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>4</td><td>1599.00</td><td>37.27</td><td>74.00</td><td>-36.73</td><td>44.58</td><td>-7.31</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>5</td><td>12330.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>36.57</td><td>6.67</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>12330.00</td><td>57.06</td><td>74.00</td><td>-16.94</td><td>50.39</td><td>6.67</td><td>Peak</td><td>100</td><td>56</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	194	2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	194	3	1599.00	25.45	54.00	-28.55	32.76	-7.31	Average	100	318	4	1599.00	37.27	74.00	-36.73	44.58	-7.31	Peak	100	318	5	12330.00	43.24	54.00	-10.76	36.57	6.67	Average	100	56	6	12330.00	57.06	74.00	-16.94	50.39	6.67	Peak	100	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	194																																																																
2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	194																																																																
3	1599.00	25.45	54.00	-28.55	32.76	-7.31	Average	100	318																																																																
4	1599.00	37.27	74.00	-36.73	44.58	-7.31	Peak	100	318																																																																
5	12330.00	43.24	54.00	-10.76	36.57	6.67	Average	100	56																																																																
6	12330.00	57.06	74.00	-16.94	50.39	6.67	Peak	100	56																																																																



Modulation	be EHT40	Test Freq. (MHz)	6165						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	36.02	54.00	-17.98	44.30	-8.28	Average	100	219
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	219
3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	115
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	115
5	12330.00	43.42	54.00	-10.58	36.75	6.67	Average	100	43
6	12330.00	57.09	74.00	-16.91	50.42	6.67	Peak	100	43
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									




Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.25</td><td>54.00</td><td>-20.75</td><td>41.53</td><td>-8.28</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1001.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>48.24</td><td>-8.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>1599.00</td><td>25.63</td><td>54.00</td><td>-28.37</td><td>32.94</td><td>-7.31</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>4</td><td>1599.00</td><td>37.28</td><td>74.00</td><td>-36.72</td><td>44.59</td><td>-7.31</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>5</td><td>12810.00</td><td>43.53</td><td>68.20</td><td>-24.67</td><td>36.96</td><td>6.57</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>12810.00</td><td>57.87</td><td>88.20</td><td>-30.33</td><td>51.30</td><td>6.57</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.25	54.00	-20.75	41.53	-8.28	Average	100	208	2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	208	3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	317	4	1599.00	37.28	74.00	-36.72	44.59	-7.31	Peak	100	317	5	12810.00	43.53	68.20	-24.67	36.96	6.57	Average	100	65	6	12810.00	57.87	88.20	-30.33	51.30	6.57	Peak	100	65
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.25	54.00	-20.75	41.53	-8.28	Average	100	208																																																																
2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	208																																																																
3	1599.00	25.63	54.00	-28.37	32.94	-7.31	Average	100	317																																																																
4	1599.00	37.28	74.00	-36.72	44.59	-7.31	Peak	100	317																																																																
5	12810.00	43.53	68.20	-24.67	36.96	6.57	Average	100	65																																																																
6	12810.00	57.87	88.20	-30.33	51.30	6.57	Peak	100	65																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6405																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.97</td><td>54.00</td><td>-18.03</td><td>44.25</td><td>-8.28</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1001.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>49.47</td><td>-8.28</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>1599.00</td><td>26.98</td><td>54.00</td><td>-27.02</td><td>34.29</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>12810.00</td><td>43.56</td><td>68.20</td><td>-24.64</td><td>36.99</td><td>6.57</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>6</td><td>12810.00</td><td>57.94</td><td>88.20</td><td>-30.26</td><td>51.37</td><td>6.57</td><td>Peak</td><td>100</td><td>28</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.97	54.00	-18.03	44.25	-8.28	Average	100	204	2	1001.00	41.19	74.00	-32.81	49.47	-8.28	Peak	100	204	3	1599.00	26.98	54.00	-27.02	34.29	-7.31	Average	100	108	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108	5	12810.00	43.56	68.20	-24.64	36.99	6.57	Average	100	28	6	12810.00	57.94	88.20	-30.26	51.37	6.57	Peak	100	28
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.97	54.00	-18.03	44.25	-8.28	Average	100	204																																																																
2	1001.00	41.19	74.00	-32.81	49.47	-8.28	Peak	100	204																																																																
3	1599.00	26.98	54.00	-27.02	34.29	-7.31	Average	100	108																																																																
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	108																																																																
5	12810.00	43.56	68.20	-24.64	36.99	6.57	Average	100	28																																																																
6	12810.00	57.94	88.20	-30.26	51.37	6.57	Peak	100	28																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

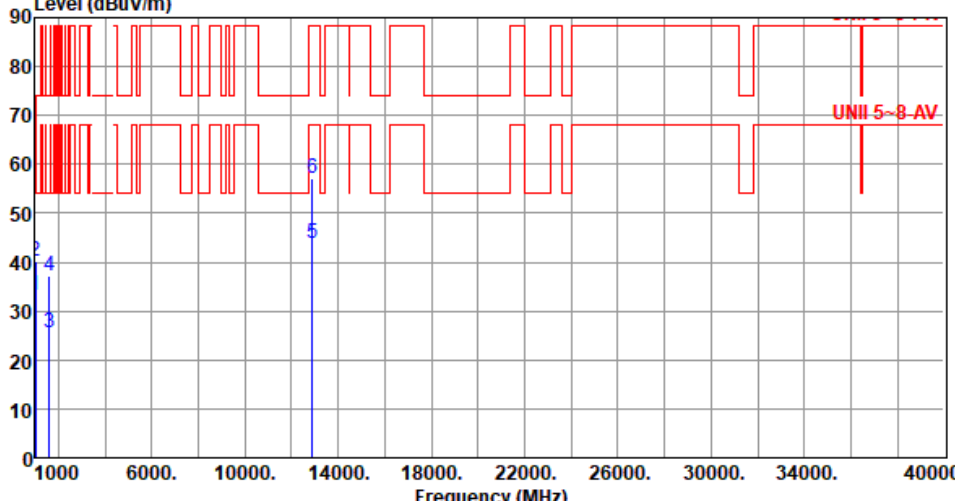


Modulation	be EHT40	Test Freq. (MHz)	6445																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.22</td><td>54.00</td><td>-20.78</td><td>41.50</td><td>-8.28</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>2</td><td>1001.00</td><td>40.08</td><td>74.00</td><td>-33.92</td><td>48.36</td><td>-8.28</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>3</td><td>1599.00</td><td>25.53</td><td>54.00</td><td>-28.47</td><td>32.84</td><td>-7.31</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>4</td><td>1599.00</td><td>37.22</td><td>74.00</td><td>-36.78</td><td>44.53</td><td>-7.31</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>5</td><td>12890.00</td><td>43.72</td><td>68.20</td><td>-24.48</td><td>37.44</td><td>6.28</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>6</td><td>12890.00</td><td>57.15</td><td>88.20</td><td>-31.05</td><td>50.87</td><td>6.28</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.22	54.00	-20.78	41.50	-8.28	Average	100	192	2	1001.00	40.08	74.00	-33.92	48.36	-8.28	Peak	100	192	3	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312	4	1599.00	37.22	74.00	-36.78	44.53	-7.31	Peak	100	312	5	12890.00	43.72	68.20	-24.48	37.44	6.28	Average	100	64	6	12890.00	57.15	88.20	-31.05	50.87	6.28	Peak	100	64
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.22	54.00	-20.78	41.50	-8.28	Average	100	192																																																																
2	1001.00	40.08	74.00	-33.92	48.36	-8.28	Peak	100	192																																																																
3	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312																																																																
4	1599.00	37.22	74.00	-36.78	44.53	-7.31	Peak	100	312																																																																
5	12890.00	43.72	68.20	-24.48	37.44	6.28	Average	100	64																																																																
6	12890.00	57.15	88.20	-31.05	50.87	6.28	Peak	100	64																																																																



Modulation	be EHT40	Test Freq. (MHz)	6445						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.77	54.00	-18.23	44.05	-8.28	Average	100	208
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	208
3	1599.00	26.79	54.00	-27.21	34.10	-7.31	Average	100	109
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	109
5	12890.00	43.80	68.20	-24.40	37.52	6.28	Average	100	38
6	12890.00	57.19	88.20	-31.01	50.91	6.28	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

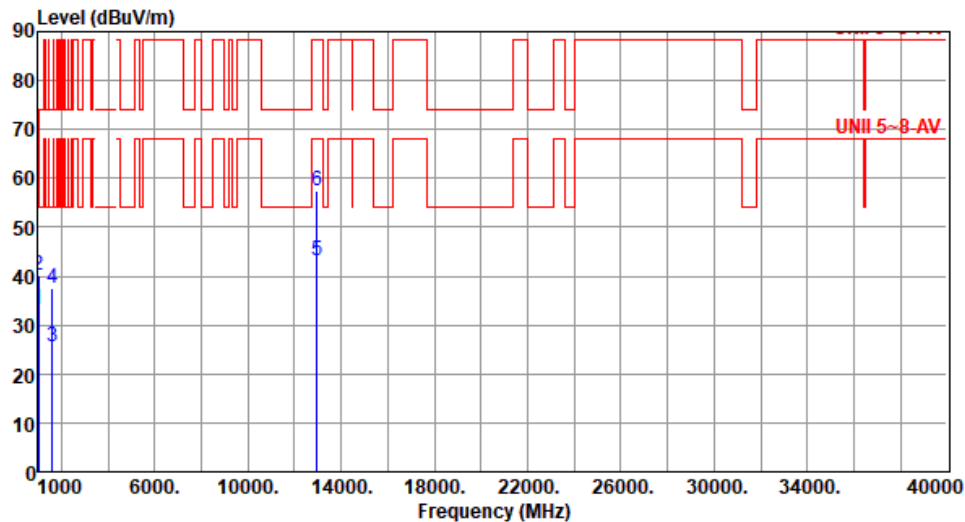


Modulation	be EHT40	Test Freq. (MHz)	6485																																																																							
Polarization	Horizontal																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.30</td><td>54.00</td><td>-20.70</td><td>41.58</td><td>-8.28</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>1001.00</td><td>40.21</td><td>74.00</td><td>-33.79</td><td>48.49</td><td>-8.28</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3</td><td>1599.00</td><td>25.69</td><td>54.00</td><td>-28.31</td><td>33.00</td><td>-7.31</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>12970.00</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>36.91</td><td>6.27</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>12970.00</td><td>57.47</td><td>88.20</td><td>-30.73</td><td>51.20</td><td>6.27</td><td>Peak</td><td>100</td><td>55</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	213	2	1001.00	40.21	74.00	-33.79	48.49	-8.28	Peak	100	213	3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	315	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	315	5	12970.00	43.18	68.20	-25.02	36.91	6.27	Average	100	55	6	12970.00	57.47	88.20	-30.73	51.20	6.27	Peak	100	55			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	33.30	54.00	-20.70	41.58	-8.28	Average	100	213																																																																	
2	1001.00	40.21	74.00	-33.79	48.49	-8.28	Peak	100	213																																																																	
3	1599.00	25.69	54.00	-28.31	33.00	-7.31	Average	100	315																																																																	
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	315																																																																	
5	12970.00	43.18	68.20	-25.02	36.91	6.27	Average	100	55																																																																	
6	12970.00	57.47	88.20	-30.73	51.20	6.27	Peak	100	55																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										



Modulation	be EHT40	Test Freq. (MHz)	6485																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.94</td><td>54.00</td><td>-18.06</td><td>44.22</td><td>-8.28</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>2</td><td>1001.00</td><td>41.30</td><td>74.00</td><td>-32.70</td><td>49.58</td><td>-8.28</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>3</td><td>1599.00</td><td>28.93</td><td>54.00</td><td>-25.07</td><td>36.24</td><td>-7.31</td><td>Average</td><td>100</td><td>119</td></tr><tr><td>4</td><td>1599.00</td><td>37.42</td><td>74.00</td><td>-36.58</td><td>44.73</td><td>-7.31</td><td>Peak</td><td>100</td><td>119</td></tr><tr><td>5</td><td>12970.00</td><td>43.25</td><td>68.20</td><td>-24.95</td><td>36.98</td><td>6.27</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>6</td><td>12970.00</td><td>57.39</td><td>88.20</td><td>-30.81</td><td>51.12</td><td>6.27</td><td>Peak</td><td>100</td><td>26</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.94	54.00	-18.06	44.22	-8.28	Average	100	214	2	1001.00	41.30	74.00	-32.70	49.58	-8.28	Peak	100	214	3	1599.00	28.93	54.00	-25.07	36.24	-7.31	Average	100	119	4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	119	5	12970.00	43.25	68.20	-24.95	36.98	6.27	Average	100	26	6	12970.00	57.39	88.20	-30.81	51.12	6.27	Peak	100	26
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.94	54.00	-18.06	44.22	-8.28	Average	100	214																																																																
2	1001.00	41.30	74.00	-32.70	49.58	-8.28	Peak	100	214																																																																
3	1599.00	28.93	54.00	-25.07	36.24	-7.31	Average	100	119																																																																
4	1599.00	37.42	74.00	-36.58	44.73	-7.31	Peak	100	119																																																																
5	12970.00	43.25	68.20	-24.95	36.98	6.27	Average	100	26																																																																
6	12970.00	57.39	88.20	-30.81	51.12	6.27	Peak	100	26																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

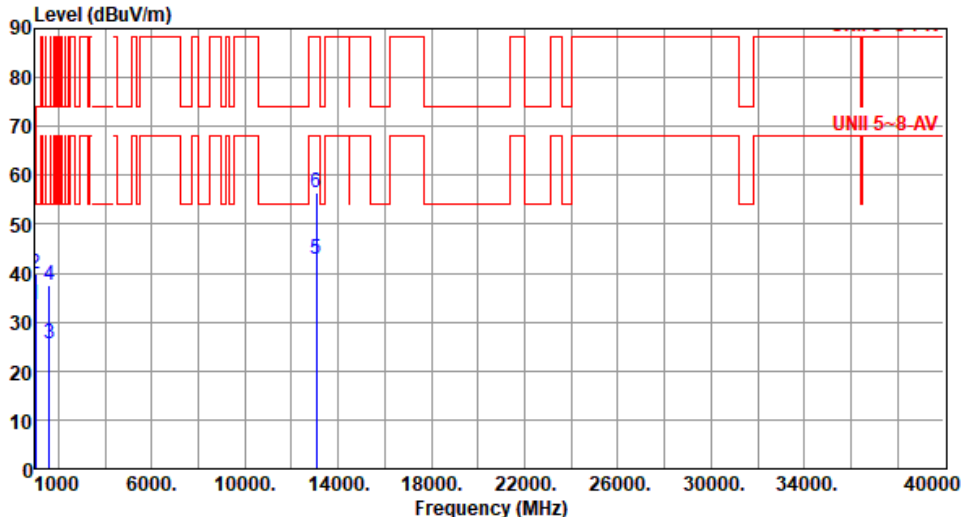

Modulation	be EHT40		Test Freq. (MHz)		6525																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>190</td></tr><tr><td>2</td><td>1001.00</td><td>39.77</td><td>74.00</td><td>-34.23</td><td>48.05</td><td>-8.28</td><td>Peak</td><td>100</td><td>190</td></tr><tr><td>3</td><td>1599.00</td><td>25.49</td><td>54.00</td><td>-28.51</td><td>32.80</td><td>-7.31</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>1599.00</td><td>37.37</td><td>74.00</td><td>-36.63</td><td>44.68</td><td>-7.31</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>13050.00</td><td>42.76</td><td>68.20</td><td>-25.44</td><td>36.77</td><td>5.99</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>6</td><td>13050.00</td><td>56.38</td><td>88.20</td><td>-31.82</td><td>50.39</td><td>5.99</td><td>Peak</td><td>100</td><td>55</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	190	2	1001.00	39.77	74.00	-34.23	48.05	-8.28	Peak	100	190	3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	314	4	1599.00	37.37	74.00	-36.63	44.68	-7.31	Peak	100	314	5	13050.00	42.76	68.20	-25.44	36.77	5.99	Average	100	55	6	13050.00	56.38	88.20	-31.82	50.39	5.99	Peak	100	55
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	190																																																																																										
2	1001.00	39.77	74.00	-34.23	48.05	-8.28	Peak	100	190																																																																																										
3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	314																																																																																										
4	1599.00	37.37	74.00	-36.63	44.68	-7.31	Peak	100	314																																																																																										
5	13050.00	42.76	68.20	-25.44	36.77	5.99	Average	100	55																																																																																										
6	13050.00	56.38	88.20	-31.82	50.39	5.99	Peak	100	55																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	be EHT40	Test Freq. (MHz)	6525																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.79</td><td>54.00</td><td>-18.21</td><td>44.07</td><td>-8.28</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>2</td><td>1001.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>49.53</td><td>-8.28</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>3</td><td>1599.00</td><td>26.96</td><td>54.00</td><td>-27.04</td><td>34.27</td><td>-7.31</td><td>Average</td><td>100</td><td>112</td></tr><tr><td>4</td><td>1599.00</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>44.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>112</td></tr><tr><td>5</td><td>13050.00</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>36.89</td><td>5.99</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>6</td><td>13050.00</td><td>56.72</td><td>88.20</td><td>-31.48</td><td>50.73</td><td>5.99</td><td>Peak</td><td>100</td><td>53</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	228	2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	228	3	1599.00	26.96	54.00	-27.04	34.27	-7.31	Average	100	112	4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	112	5	13050.00	42.88	68.20	-25.32	36.89	5.99	Average	100	53	6	13050.00	56.72	88.20	-31.48	50.73	5.99	Peak	100	53
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	228																																																																
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	228																																																																
3	1599.00	26.96	54.00	-27.04	34.27	-7.31	Average	100	112																																																																
4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	112																																																																
5	13050.00	42.88	68.20	-25.32	36.89	5.99	Average	100	53																																																																
6	13050.00	56.72	88.20	-31.48	50.73	5.99	Peak	100	53																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.49</td><td>54.00</td><td>-20.51</td><td>41.77</td><td>-8.28</td><td>Average</td><td>100</td><td>202</td></tr><tr><td>2</td><td>1001.00</td><td>39.84</td><td>74.00</td><td>-34.16</td><td>48.12</td><td>-8.28</td><td>Peak</td><td>100</td><td>202</td></tr><tr><td>3</td><td>1599.00</td><td>25.70</td><td>54.00</td><td>-28.30</td><td>33.01</td><td>-7.31</td><td>Average</td><td>100</td><td>315</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>315</td></tr><tr><td>5</td><td>13130.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>37.40</td><td>5.87</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13130.00</td><td>57.51</td><td>88.20</td><td>-30.69</td><td>51.64</td><td>5.87</td><td>Peak</td><td>100</td><td>22</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	202	2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	202	3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	315	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	315	5	13130.00	43.27	68.20	-24.93	37.40	5.87	Average	100	22	6	13130.00	57.51	88.20	-30.69	51.64	5.87	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.49	54.00	-20.51	41.77	-8.28	Average	100	202																																																																
2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	202																																																																
3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	315																																																																
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	315																																																																
5	13130.00	43.27	68.20	-24.93	37.40	5.87	Average	100	22																																																																
6	13130.00	57.51	88.20	-30.69	51.64	5.87	Peak	100	22																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

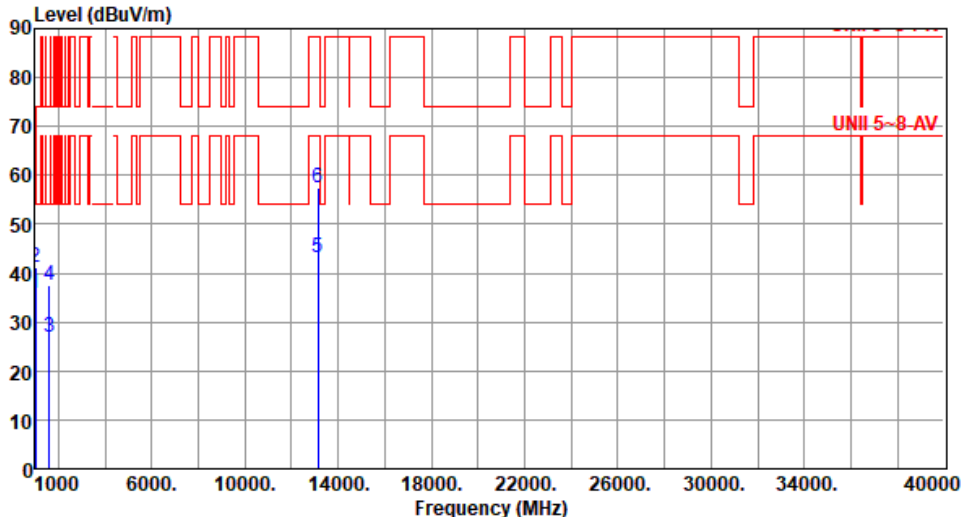


Modulation	be EHT40	Test Freq. (MHz)	6565																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.81</td><td>54.00</td><td>-18.19</td><td>44.09</td><td>-8.28</td><td>Average</td><td>100</td><td>230</td></tr><tr><td>2</td><td>1001.00</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>49.48</td><td>-8.28</td><td>Peak</td><td>100</td><td>230</td></tr><tr><td>3</td><td>1599.00</td><td>26.82</td><td>54.00</td><td>-27.18</td><td>34.13</td><td>-7.31</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>1599.00</td><td>37.49</td><td>74.00</td><td>-36.51</td><td>44.80</td><td>-7.31</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>13130.00</td><td>43.27</td><td>68.20</td><td>-24.93</td><td>37.40</td><td>5.87</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>6</td><td>13130.00</td><td>57.56</td><td>88.20</td><td>-30.64</td><td>51.69</td><td>5.87</td><td>Peak</td><td>100</td><td>31</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.81	54.00	-18.19	44.09	-8.28	Average	100	230	2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	230	3	1599.00	26.82	54.00	-27.18	34.13	-7.31	Average	100	108	4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	108	5	13130.00	43.27	68.20	-24.93	37.40	5.87	Average	100	31	6	13130.00	57.56	88.20	-30.64	51.69	5.87	Peak	100	31
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.81	54.00	-18.19	44.09	-8.28	Average	100	230																																																																
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	230																																																																
3	1599.00	26.82	54.00	-27.18	34.13	-7.31	Average	100	108																																																																
4	1599.00	37.49	74.00	-36.51	44.80	-7.31	Peak	100	108																																																																
5	13130.00	43.27	68.20	-24.93	37.40	5.87	Average	100	31																																																																
6	13130.00	57.56	88.20	-30.64	51.69	5.87	Peak	100	31																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			

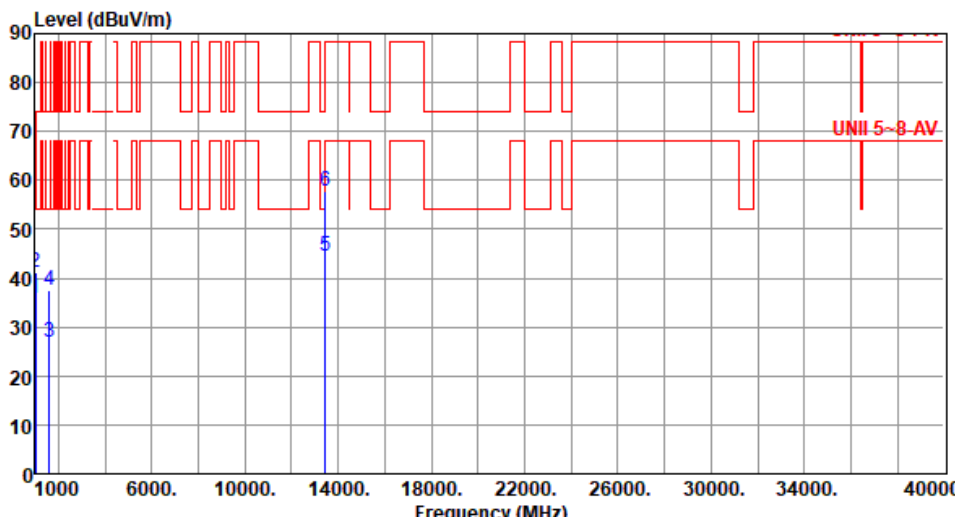

Modulation	be EHT40	Test Freq. (MHz)	6725																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.85</td><td>54.00</td><td>-18.15</td><td>44.13</td><td>-8.28</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>2</td><td>1001.00</td><td>41.11</td><td>74.00</td><td>-32.89</td><td>49.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>216</td></tr><tr><td>3</td><td>1599.00</td><td>26.89</td><td>54.00</td><td>-27.11</td><td>34.20</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>1599.00</td><td>37.44</td><td>74.00</td><td>-36.56</td><td>44.75</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>13450.00</td><td>44.39</td><td>68.20</td><td>-23.81</td><td>38.30</td><td>6.09</td><td>Average</td><td>100</td><td>18</td></tr><tr><td>6</td><td>13450.00</td><td>57.80</td><td>88.20</td><td>-30.40</td><td>51.71</td><td>6.09</td><td>Peak</td><td>100</td><td>18</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.85	54.00	-18.15	44.13	-8.28	Average	100	216	2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	216	3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	109	4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	109	5	13450.00	44.39	68.20	-23.81	38.30	6.09	Average	100	18	6	13450.00	57.80	88.20	-30.40	51.71	6.09	Peak	100	18
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.85	54.00	-18.15	44.13	-8.28	Average	100	216																																																																
2	1001.00	41.11	74.00	-32.89	49.39	-8.28	Peak	100	216																																																																
3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	109																																																																
4	1599.00	37.44	74.00	-36.56	44.75	-7.31	Peak	100	109																																																																
5	13450.00	44.39	68.20	-23.81	38.30	6.09	Average	100	18																																																																
6	13450.00	57.80	88.20	-30.40	51.71	6.09	Peak	100	18																																																																

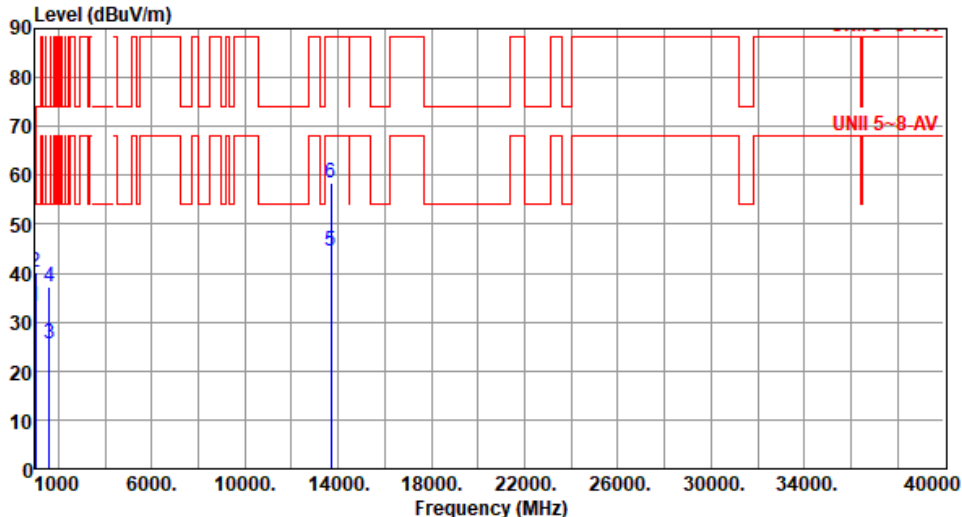

Modulation	be EHT40	Test Freq. (MHz)	6845																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.24</td><td>54.00</td><td>-20.76</td><td>41.52</td><td>-8.28</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>1001.00</td><td>40.13</td><td>74.00</td><td>-33.87</td><td>48.41</td><td>-8.28</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>1599.00</td><td>25.73</td><td>54.00</td><td>-28.27</td><td>33.04</td><td>-7.31</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>1599.00</td><td>37.32</td><td>74.00</td><td>-36.68</td><td>44.63</td><td>-7.31</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>13690.00</td><td>44.47</td><td>68.20</td><td>-23.73</td><td>38.40</td><td>6.07</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>6</td><td>13690.00</td><td>58.51</td><td>88.20</td><td>-29.69</td><td>52.44</td><td>6.07</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.24	54.00	-20.76	41.52	-8.28	Average	100	219	2	1001.00	40.13	74.00	-33.87	48.41	-8.28	Peak	100	219	3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	304	4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	304	5	13690.00	44.47	68.20	-23.73	38.40	6.07	Average	100	68	6	13690.00	58.51	88.20	-29.69	52.44	6.07	Peak	100	68
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.24	54.00	-20.76	41.52	-8.28	Average	100	219																																																																
2	1001.00	40.13	74.00	-33.87	48.41	-8.28	Peak	100	219																																																																
3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	304																																																																
4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	304																																																																
5	13690.00	44.47	68.20	-23.73	38.40	6.07	Average	100	68																																																																
6	13690.00	58.51	88.20	-29.69	52.44	6.07	Peak	100	68																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT40	Test Freq. (MHz)	6845																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>44.10</td><td>-8.28</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>2</td><td>1001.00</td><td>41.33</td><td>74.00</td><td>-32.67</td><td>49.61</td><td>-8.28</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>3</td><td>1599.00</td><td>28.99</td><td>54.00</td><td>-25.01</td><td>36.30</td><td>-7.31</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>5</td><td>13690.00</td><td>44.49</td><td>68.20</td><td>-23.71</td><td>38.42</td><td>6.07</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>6</td><td>13690.00</td><td>58.63</td><td>88.20</td><td>-29.57</td><td>52.56</td><td>6.07</td><td>Peak</td><td>100</td><td>23</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	215	2	1001.00	41.33	74.00	-32.67	49.61	-8.28	Peak	100	215	3	1599.00	28.99	54.00	-25.01	36.30	-7.31	Average	100	114	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	114	5	13690.00	44.49	68.20	-23.71	38.42	6.07	Average	100	23	6	13690.00	58.63	88.20	-29.57	52.56	6.07	Peak	100	23
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	215																																																																
2	1001.00	41.33	74.00	-32.67	49.61	-8.28	Peak	100	215																																																																
3	1599.00	28.99	54.00	-25.01	36.30	-7.31	Average	100	114																																																																
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	114																																																																
5	13690.00	44.49	68.20	-23.71	38.42	6.07	Average	100	23																																																																
6	13690.00	58.63	88.20	-29.57	52.56	6.07	Peak	100	23																																																																




Modulation	be EHT40	Test Freq. (MHz)	6885						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.51	54.00	-20.49	41.79	-8.28	Average	100	205
2	1001.00	40.12	74.00	-33.88	48.40	-8.28	Peak	100	205
3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	320
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	320
5	13770.00	44.58	68.20	-23.62	38.39	6.19	Average	100	64
6	13770.00	58.39	88.20	-29.81	52.20	6.19	Peak	100	64
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

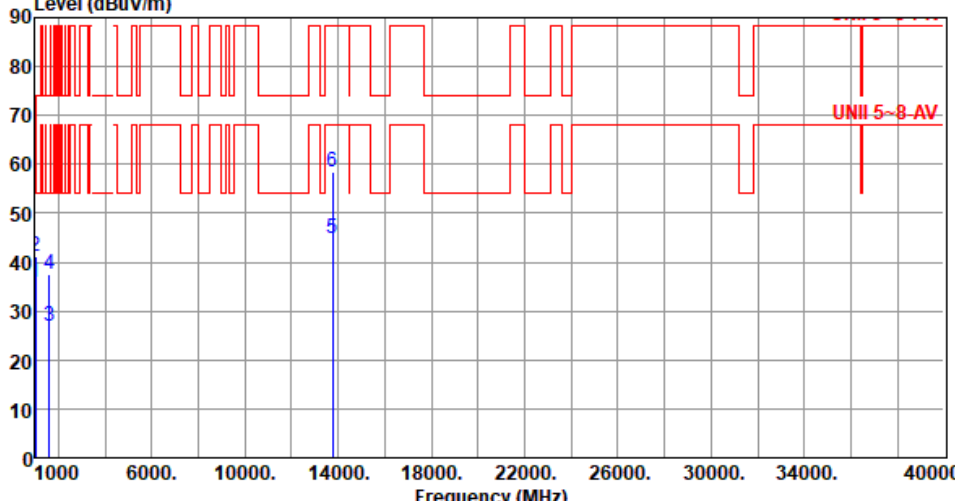


Modulation	be EHT40	Test Freq. (MHz)	6885																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.79</td><td>54.00</td><td>-18.21</td><td>44.07</td><td>-8.28</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>1001.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>49.44</td><td>-8.28</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>1599.00</td><td>27.01</td><td>54.00</td><td>-26.99</td><td>34.32</td><td>-7.31</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>4</td><td>1599.00</td><td>37.54</td><td>74.00</td><td>-36.46</td><td>44.85</td><td>-7.31</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>5</td><td>13770.00</td><td>44.73</td><td>68.20</td><td>-23.47</td><td>38.54</td><td>6.19</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>6</td><td>13770.00</td><td>58.48</td><td>88.20</td><td>-29.72</td><td>52.29</td><td>6.19</td><td>Peak</td><td>100</td><td>25</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	219	2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	219	3	1599.00	27.01	54.00	-26.99	34.32	-7.31	Average	100	102	4	1599.00	37.54	74.00	-36.46	44.85	-7.31	Peak	100	102	5	13770.00	44.73	68.20	-23.47	38.54	6.19	Average	100	25	6	13770.00	58.48	88.20	-29.72	52.29	6.19	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.79	54.00	-18.21	44.07	-8.28	Average	100	219																																																																
2	1001.00	41.16	74.00	-32.84	49.44	-8.28	Peak	100	219																																																																
3	1599.00	27.01	54.00	-26.99	34.32	-7.31	Average	100	102																																																																
4	1599.00	37.54	74.00	-36.46	44.85	-7.31	Peak	100	102																																																																
5	13770.00	44.73	68.20	-23.47	38.54	6.19	Average	100	25																																																																
6	13770.00	58.48	88.20	-29.72	52.29	6.19	Peak	100	25																																																																

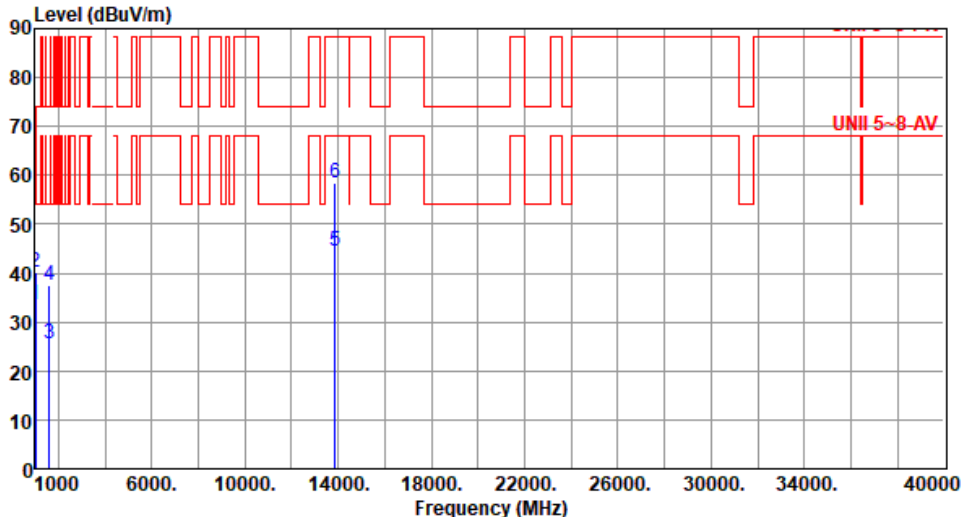


Modulation	be EHT40	Test Freq. (MHz)	6925						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.41	54.00	-20.59	41.69	-8.28	Average	100	192
2	1001.00	40.02	74.00	-33.98	48.30	-8.28	Peak	100	192
3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	328
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	328
5	13850.00	44.45	68.20	-23.75	38.33	6.12	Average	100	53
6	13850.00	58.48	88.20	-29.72	52.36	6.12	Peak	100	53
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

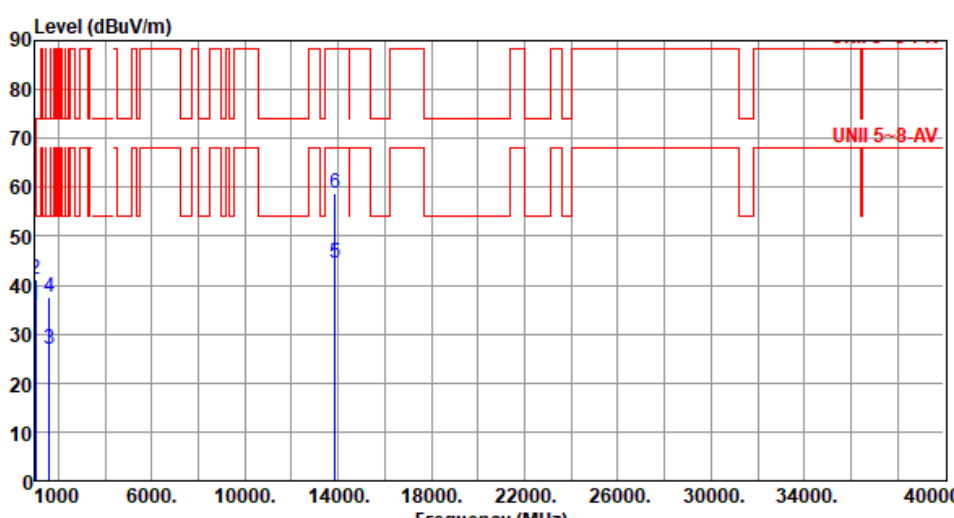

Modulation	be EHT40		Test Freq. (MHz)		6925																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>44.10</td><td>-8.28</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>1001.00</td><td>41.17</td><td>74.00</td><td>-32.83</td><td>49.45</td><td>-8.28</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>1599.00</td><td>26.93</td><td>54.00</td><td>-27.07</td><td>34.24</td><td>-7.31</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>1599.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.74</td><td>-7.31</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>13850.00</td><td>44.55</td><td>68.20</td><td>-23.65</td><td>38.43</td><td>6.12</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>6</td><td>13850.00</td><td>58.65</td><td>88.20</td><td>-29.55</td><td>52.53</td><td>6.12</td><td>Peak</td><td>100</td><td>22</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	211	2	1001.00	41.17	74.00	-32.83	49.45	-8.28	Peak	100	211	3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	105	4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	105	5	13850.00	44.55	68.20	-23.65	38.43	6.12	Average	100	22	6	13850.00	58.65	88.20	-29.55	52.53	6.12	Peak	100	22
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	211																																																																						
2	1001.00	41.17	74.00	-32.83	49.45	-8.28	Peak	100	211																																																																						
3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	105																																																																						
4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	105																																																																						
5	13850.00	44.55	68.20	-23.65	38.43	6.12	Average	100	22																																																																						
6	13850.00	58.65	88.20	-29.55	52.53	6.12	Peak	100	22																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

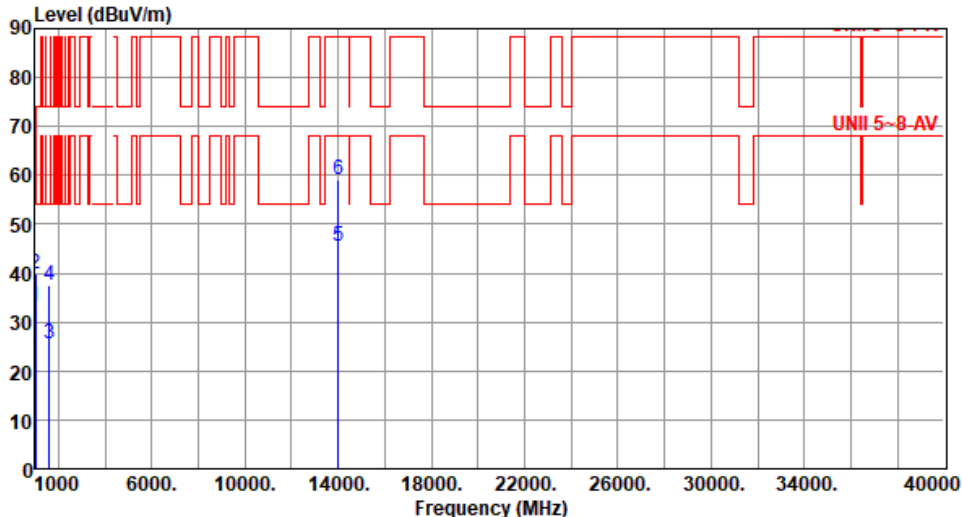

Modulation	be EHT40		Test Freq. (MHz)		7005																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.35</td><td>54.00</td><td>-20.65</td><td>41.63</td><td>-8.28</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1001.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>48.24</td><td>-8.28</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>1599.00</td><td>25.70</td><td>54.00</td><td>-28.30</td><td>33.01</td><td>-7.31</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>4</td><td>1599.00</td><td>37.39</td><td>74.00</td><td>-36.61</td><td>44.70</td><td>-7.31</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>5</td><td>14010.00</td><td>45.61</td><td>68.20</td><td>-22.59</td><td>38.79</td><td>6.82</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>14010.00</td><td>59.01</td><td>88.20</td><td>-29.19</td><td>52.19</td><td>6.82</td><td>Peak</td><td>100</td><td>63</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	204	2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	204	3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	325	4	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	325	5	14010.00	45.61	68.20	-22.59	38.79	6.82	Average	100	63	6	14010.00	59.01	88.20	-29.19	52.19	6.82	Peak	100	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	204																																																																						
2	1001.00	39.96	74.00	-34.04	48.24	-8.28	Peak	100	204																																																																						
3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	325																																																																						
4	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	325																																																																						
5	14010.00	45.61	68.20	-22.59	38.79	6.82	Average	100	63																																																																						
6	14010.00	59.01	88.20	-29.19	52.19	6.82	Peak	100	63																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	be EHT40		Test Freq. (MHz)		7005				
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	222
2	1001.00	41.15	74.00	-32.85	49.43	-8.28	Peak	100	222
3	1599.00	26.89	54.00	-27.11	34.20	-7.31	Average	100	113
4	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	113
5	14010.00	45.54	68.20	-22.66	38.72	6.82	Average	100	22
6	14010.00	59.11	88.20	-29.09	52.29	6.82	Peak	100	22
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT40	Test Freq. (MHz)	7085																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.53</td><td>54.00</td><td>-28.47</td><td>32.84</td><td>-7.31</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>2</td><td>1599.00</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>44.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>3</td><td>7125.00</td><td>48.62</td><td>68.20</td><td>-19.58</td><td>43.69</td><td>4.93</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>4</td><td>7125.00</td><td>63.80</td><td>88.20</td><td>-24.40</td><td>58.87</td><td>4.93</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>5</td><td>14170.00</td><td>45.86</td><td>68.20</td><td>-22.34</td><td>39.00</td><td>6.86</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>14170.00</td><td>59.73</td><td>88.20</td><td>-28.47</td><td>52.87</td><td>6.86</td><td>Peak</td><td>100</td><td>56</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312	2	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	312	3	7125.00	48.62	68.20	-19.58	43.69	4.93	Average	100	213	4	7125.00	63.80	88.20	-24.40	58.87	4.93	Peak	100	213	5	14170.00	45.86	68.20	-22.34	39.00	6.86	Average	100	56	6	14170.00	59.73	88.20	-28.47	52.87	6.86	Peak	100	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.53	54.00	-28.47	32.84	-7.31	Average	100	312																																																																
2	1599.00	37.48	74.00	-36.52	44.79	-7.31	Peak	100	312																																																																
3	7125.00	48.62	68.20	-19.58	43.69	4.93	Average	100	213																																																																
4	7125.00	63.80	88.20	-24.40	58.87	4.93	Peak	100	213																																																																
5	14170.00	45.86	68.20	-22.34	39.00	6.86	Average	100	56																																																																
6	14170.00	59.73	88.20	-28.47	52.87	6.86	Peak	100	56																																																																

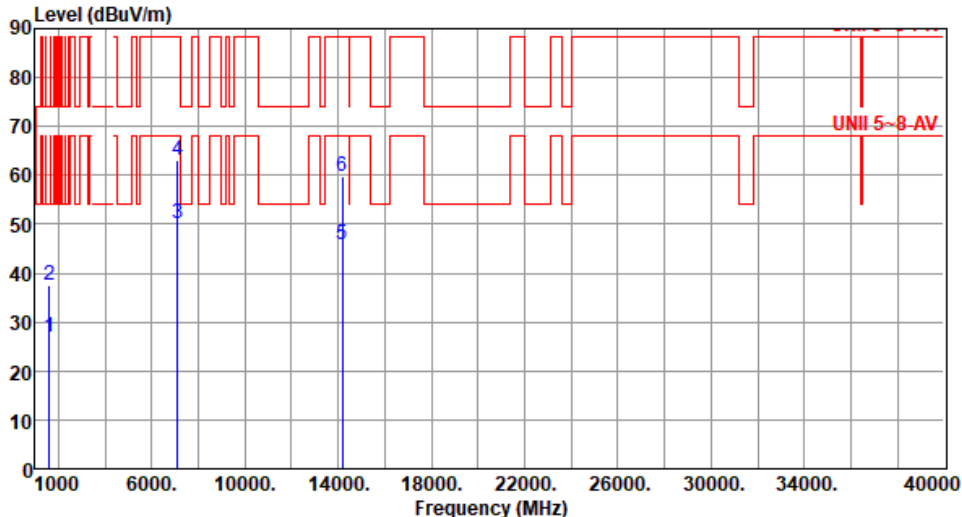

Modulation	be EHT40	Test Freq. (MHz)	7085						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	114
2	1599.00	37.58	74.00	-36.42	44.89	-7.31	Peak	100	114
3	7125.00	50.13	68.20	-18.07	45.20	4.93	Average	100	133
4	7125.00	63.16	88.20	-25.04	58.23	4.93	Peak	100	133
5	14170.00	45.93	68.20	-22.27	39.07	6.86	Average	100	23
6	14170.00	59.73	88.20	-28.47	52.87	6.86	Peak	100	23

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.55</td><td>54.00</td><td>-28.45</td><td>32.86</td><td>-7.31</td><td>Average</td><td>100</td><td>320</td></tr><tr><td>2</td><td>1599.00</td><td>37.39</td><td>74.00</td><td>-36.61</td><td>44.70</td><td>-7.31</td><td>Peak</td><td>100</td><td>320</td></tr><tr><td>3</td><td>5925.00</td><td>55.37</td><td>68.20</td><td>-12.83</td><td>54.23</td><td>1.14</td><td>Average</td><td>118</td><td>81</td></tr><tr><td>4</td><td>5925.00</td><td>66.37</td><td>88.20</td><td>-21.83</td><td>65.23</td><td>1.14</td><td>Peak</td><td>118</td><td>81</td></tr><tr><td>5</td><td>11970.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>36.35</td><td>6.20</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>11970.00</td><td>56.45</td><td>74.00</td><td>-17.55</td><td>50.25</td><td>6.20</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.55	54.00	-28.45	32.86	-7.31	Average	100	320	2	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	320	3	5925.00	55.37	68.20	-12.83	54.23	1.14	Average	118	81	4	5925.00	66.37	88.20	-21.83	65.23	1.14	Peak	118	81	5	11970.00	42.55	54.00	-11.45	36.35	6.20	Average	100	39	6	11970.00	56.45	74.00	-17.55	50.25	6.20	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.55	54.00	-28.45	32.86	-7.31	Average	100	320																																																																
2	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	320																																																																
3	5925.00	55.37	68.20	-12.83	54.23	1.14	Average	118	81																																																																
4	5925.00	66.37	88.20	-21.83	65.23	1.14	Peak	118	81																																																																
5	11970.00	42.55	54.00	-11.45	36.35	6.20	Average	100	39																																																																
6	11970.00	56.45	74.00	-17.55	50.25	6.20	Peak	100	39																																																																




Modulation	be EHT80		Test Freq. (MHz)		5985																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>26.85</td><td>54.00</td><td>-27.15</td><td>34.16</td><td>-7.31</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>2</td><td>1599.00</td><td>37.34</td><td>74.00</td><td>-36.66</td><td>44.65</td><td>-7.31</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>3</td><td>5925.00</td><td>58.82</td><td>68.20</td><td>-9.38</td><td>57.68</td><td>1.14</td><td>Average</td><td>121</td><td>13</td></tr><tr><td>4</td><td>5925.00</td><td>73.27</td><td>88.20</td><td>-14.93</td><td>72.13</td><td>1.14</td><td>Peak</td><td>121</td><td>13</td></tr><tr><td>5</td><td>11970.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>36.35</td><td>6.20</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>11970.00</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>50.23</td><td>6.20</td><td>Peak</td><td>100</td><td>21</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	105	2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	105	3	5925.00	58.82	68.20	-9.38	57.68	1.14	Average	121	13	4	5925.00	73.27	88.20	-14.93	72.13	1.14	Peak	121	13	5	11970.00	42.55	54.00	-11.45	36.35	6.20	Average	100	21	6	11970.00	56.43	74.00	-17.57	50.23	6.20	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	105																																																																						
2	1599.00	37.34	74.00	-36.66	44.65	-7.31	Peak	100	105																																																																						
3	5925.00	58.82	68.20	-9.38	57.68	1.14	Average	121	13																																																																						
4	5925.00	73.27	88.20	-14.93	72.13	1.14	Peak	121	13																																																																						
5	11970.00	42.55	54.00	-11.45	36.35	6.20	Average	100	21																																																																						
6	11970.00	56.43	74.00	-17.57	50.23	6.20	Peak	100	21																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT80	Test Freq. (MHz)	6145
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66			
Level (dBuV/m) </			

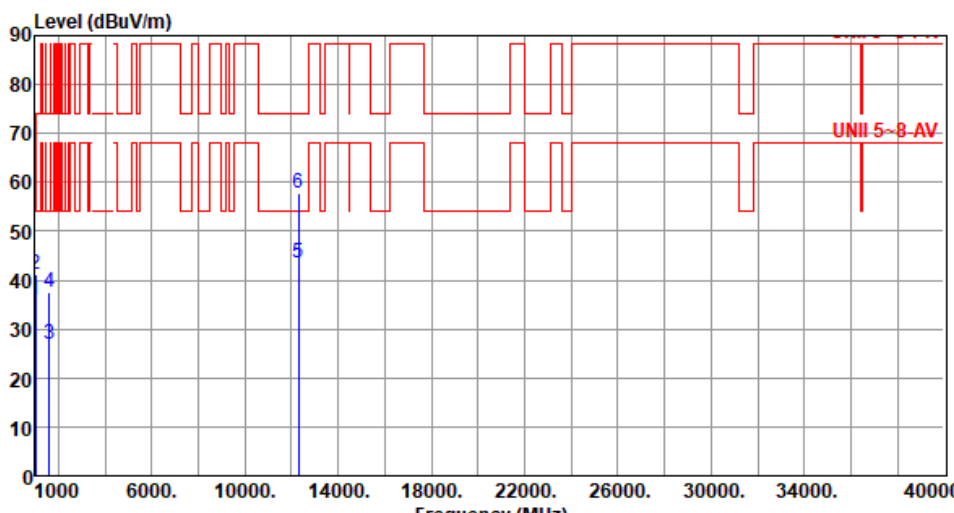

Modulation	be EHT80	Test Freq. (MHz)	6145						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	216
2	1001.00	41.25	74.00	-32.75	49.53	-8.28	Peak	100	216
3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	118
4	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	118
5	12290.00	43.50	54.00	-10.50	36.69	6.81	Average	100	44
6	12290.00	57.82	74.00	-16.18	51.01	6.81	Peak	100	44

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.53</td><td>54.00</td><td>-20.47</td><td>41.81</td><td>-8.28</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>2</td><td>1001.00</td><td>39.75</td><td>74.00</td><td>-34.25</td><td>48.03</td><td>-8.28</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>3</td><td>1599.00</td><td>25.70</td><td>54.00</td><td>-28.30</td><td>33.01</td><td>-7.31</td><td>Average</td><td>100</td><td>328</td></tr><tr><td>4</td><td>1599.00</td><td>37.45</td><td>74.00</td><td>-36.55</td><td>44.76</td><td>-7.31</td><td>Peak</td><td>100</td><td>328</td></tr><tr><td>5</td><td>12770.00</td><td>43.12</td><td>68.20</td><td>-25.08</td><td>36.71</td><td>6.41</td><td>Average</td><td>100</td><td>51</td></tr><tr><td>6</td><td>12770.00</td><td>56.81</td><td>88.20</td><td>-31.39</td><td>50.40</td><td>6.41</td><td>Peak</td><td>100</td><td>51</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	193	2	1001.00	39.75	74.00	-34.25	48.03	-8.28	Peak	100	193	3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	328	4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	328	5	12770.00	43.12	68.20	-25.08	36.71	6.41	Average	100	51	6	12770.00	56.81	88.20	-31.39	50.40	6.41	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.53	54.00	-20.47	41.81	-8.28	Average	100	193																																																																
2	1001.00	39.75	74.00	-34.25	48.03	-8.28	Peak	100	193																																																																
3	1599.00	25.70	54.00	-28.30	33.01	-7.31	Average	100	328																																																																
4	1599.00	37.45	74.00	-36.55	44.76	-7.31	Peak	100	328																																																																
5	12770.00	43.12	68.20	-25.08	36.71	6.41	Average	100	51																																																																
6	12770.00	56.81	88.20	-31.39	50.40	6.41	Peak	100	51																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	6385																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>44.12</td><td>-8.28</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>2</td><td>1001.00</td><td>41.29</td><td>74.00</td><td>-32.71</td><td>49.57</td><td>-8.28</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>3</td><td>1599.00</td><td>26.77</td><td>54.00</td><td>-27.23</td><td>34.08</td><td>-7.31</td><td>Average</td><td>100</td><td>107</td></tr><tr><td>4</td><td>1599.00</td><td>37.32</td><td>74.00</td><td>-36.68</td><td>44.63</td><td>-7.31</td><td>Peak</td><td>100</td><td>107</td></tr><tr><td>5</td><td>12770.00</td><td>43.29</td><td>68.20</td><td>-24.91</td><td>36.88</td><td>6.41</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>6</td><td>12770.00</td><td>56.80</td><td>88.20</td><td>-31.40</td><td>50.39</td><td>6.41</td><td>Peak</td><td>100</td><td>29</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	220	2	1001.00	41.29	74.00	-32.71	49.57	-8.28	Peak	100	220	3	1599.00	26.77	54.00	-27.23	34.08	-7.31	Average	100	107	4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	107	5	12770.00	43.29	68.20	-24.91	36.88	6.41	Average	100	29	6	12770.00	56.80	88.20	-31.40	50.39	6.41	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	220																																																																
2	1001.00	41.29	74.00	-32.71	49.57	-8.28	Peak	100	220																																																																
3	1599.00	26.77	54.00	-27.23	34.08	-7.31	Average	100	107																																																																
4	1599.00	37.32	74.00	-36.68	44.63	-7.31	Peak	100	107																																																																
5	12770.00	43.29	68.20	-24.91	36.88	6.41	Average	100	29																																																																
6	12770.00	56.80	88.20	-31.40	50.39	6.41	Peak	100	29																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80	Test Freq. (MHz)	6465						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	33.42	54.00	-20.58	41.70	-8.28	Average	100	199
2	1001.00	39.86	74.00	-34.14	48.14	-8.28	Peak	100	199
3	1599.00	25.74	54.00	-28.26	33.05	-7.31	Average	100	317
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	317
5	12930.00	43.50	68.20	-24.70	37.24	6.26	Average	100	54
6	12930.00	56.79	88.20	-31.41	50.53	6.26	Peak	100	54

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

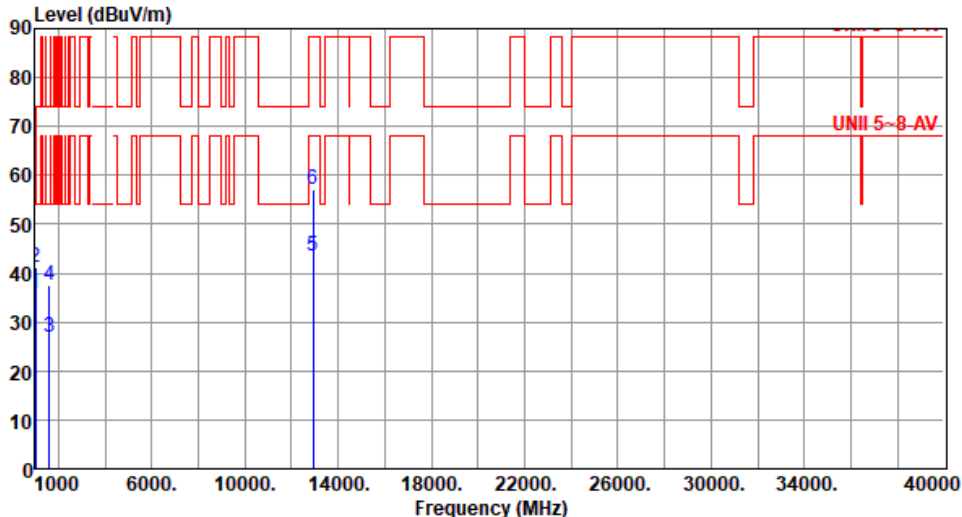


Modulation	be EHT80		Test Freq. (MHz)		6465																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.85</td><td>54.00</td><td>-18.15</td><td>44.13</td><td>-8.28</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>1001.00</td><td>41.23</td><td>74.00</td><td>-32.77</td><td>49.51</td><td>-8.28</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>1599.00</td><td>26.85</td><td>54.00</td><td>-27.15</td><td>34.16</td><td>-7.31</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>106</td></tr><tr><td>5</td><td>12930.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>37.29</td><td>6.26</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>6</td><td>12930.00</td><td>56.97</td><td>88.20</td><td>-31.23</td><td>50.71</td><td>6.26</td><td>Peak</td><td>100</td><td>37</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	35.85	54.00	-18.15	44.13	-8.28	Average	100	211	2	1001.00	41.23	74.00	-32.77	49.51	-8.28	Peak	100	211	3	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	106	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	106	5	12930.00	43.55	68.20	-24.65	37.29	6.26	Average	100	37	6	12930.00	56.97	88.20	-31.23	50.71	6.26	Peak	100	37
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	35.85	54.00	-18.15	44.13	-8.28	Average	100	211																																																																																										
2	1001.00	41.23	74.00	-32.77	49.51	-8.28	Peak	100	211																																																																																										
3	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	106																																																																																										
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	106																																																																																										
5	12930.00	43.55	68.20	-24.65	37.29	6.26	Average	100	37																																																																																										
6	12930.00	56.97	88.20	-31.23	50.71	6.26	Peak	100	37																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT80	Test Freq. (MHz)	6545																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.52</td><td>54.00</td><td>-20.48</td><td>41.80</td><td>-8.28</td><td>Average</td><td>100</td><td>195</td></tr><tr><td>2</td><td>1001.00</td><td>39.81</td><td>74.00</td><td>-34.19</td><td>48.09</td><td>-8.28</td><td>Peak</td><td>100</td><td>195</td></tr><tr><td>3</td><td>1599.00</td><td>25.73</td><td>54.00</td><td>-28.27</td><td>33.04</td><td>-7.31</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>1599.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.74</td><td>-7.31</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>13090.00</td><td>42.95</td><td>68.20</td><td>-25.25</td><td>37.17</td><td>5.78</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>13090.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>51.17</td><td>5.78</td><td>Peak</td><td>100</td><td>63</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	195	2	1001.00	39.81	74.00	-34.19	48.09	-8.28	Peak	100	195	3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	314	4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	314	5	13090.00	42.95	68.20	-25.25	37.17	5.78	Average	100	63	6	13090.00	56.95	88.20	-31.25	51.17	5.78	Peak	100	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	195																																																																
2	1001.00	39.81	74.00	-34.19	48.09	-8.28	Peak	100	195																																																																
3	1599.00	25.73	54.00	-28.27	33.04	-7.31	Average	100	314																																																																
4	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	314																																																																
5	13090.00	42.95	68.20	-25.25	37.17	5.78	Average	100	63																																																																
6	13090.00	56.95	88.20	-31.25	51.17	5.78	Peak	100	63																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

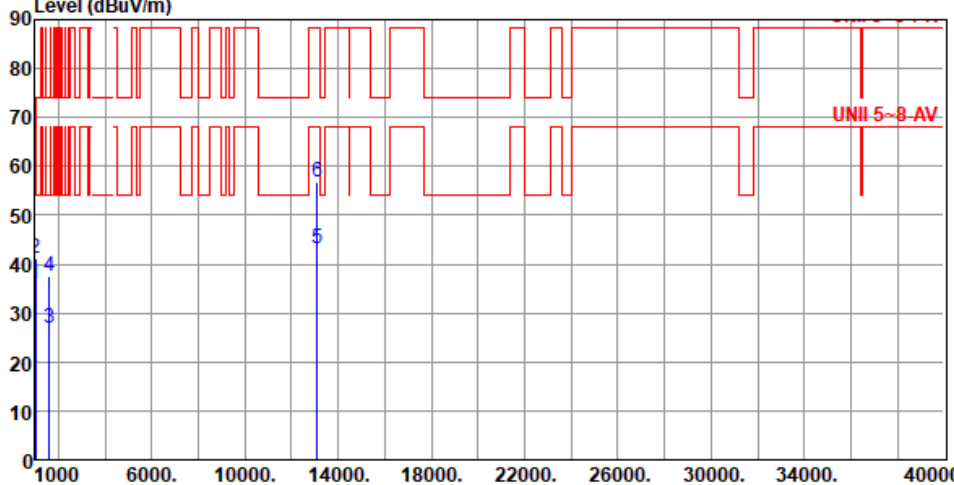


Modulation	be EHT80	Test Freq. (MHz)	6545						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.92	54.00	-18.08	44.20	-8.28	Average	100	222
2	1001.00	41.27	74.00	-32.73	49.55	-8.28	Peak	100	222
3	1599.00	26.75	54.00	-27.25	34.06	-7.31	Average	100	118
4	1599.00	37.54	74.00	-36.46	44.85	-7.31	Peak	100	118
5	13090.00	43.05	68.20	-25.15	37.27	5.78	Average	100	49
6	13090.00	56.83	88.20	-31.37	51.05	5.78	Peak	100	49
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

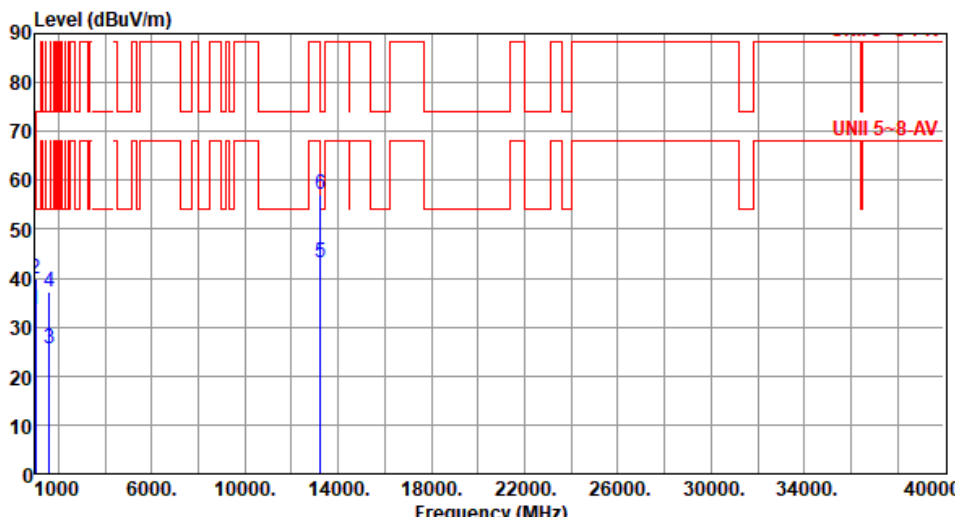

Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.52</td><td>54.00</td><td>-20.48</td><td>41.80</td><td>-8.28</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>2</td><td>1001.00</td><td>39.84</td><td>74.00</td><td>-34.16</td><td>48.12</td><td>-8.28</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>3</td><td>1599.00</td><td>25.49</td><td>54.00</td><td>-28.51</td><td>32.80</td><td>-7.31</td><td>Average</td><td>100</td><td>311</td></tr><tr><td>4</td><td>1599.00</td><td>37.31</td><td>74.00</td><td>-36.69</td><td>44.62</td><td>-7.31</td><td>Peak</td><td>100</td><td>311</td></tr><tr><td>5</td><td>13250.00</td><td>43.30</td><td>54.00</td><td>-10.70</td><td>37.56</td><td>5.74</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>13250.00</td><td>57.13</td><td>74.00</td><td>-16.87</td><td>51.39</td><td>5.74</td><td>Peak</td><td>100</td><td>65</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	201	2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	201	3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	311	4	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	311	5	13250.00	43.30	54.00	-10.70	37.56	5.74	Average	100	65	6	13250.00	57.13	74.00	-16.87	51.39	5.74	Peak	100	65
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.52	54.00	-20.48	41.80	-8.28	Average	100	201																																																																
2	1001.00	39.84	74.00	-34.16	48.12	-8.28	Peak	100	201																																																																
3	1599.00	25.49	54.00	-28.51	32.80	-7.31	Average	100	311																																																																
4	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	311																																																																
5	13250.00	43.30	54.00	-10.70	37.56	5.74	Average	100	65																																																																
6	13250.00	57.13	74.00	-16.87	51.39	5.74	Peak	100	65																																																																

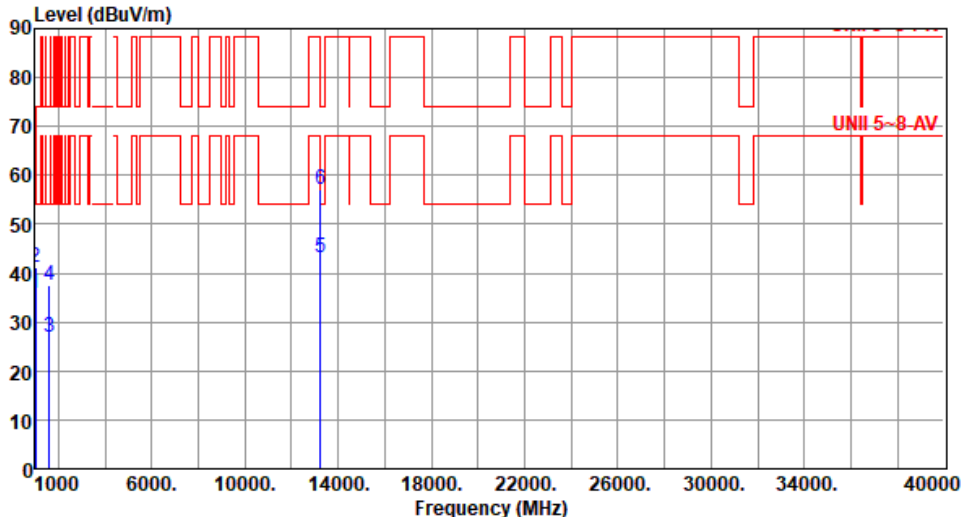

Modulation	be EHT80	Test Freq. (MHz)	6625																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.82</td><td>54.00</td><td>-18.18</td><td>44.10</td><td>-8.28</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>1001.00</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>49.48</td><td>-8.28</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>1599.00</td><td>26.85</td><td>54.00</td><td>-27.15</td><td>34.16</td><td>-7.31</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>4</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>5</td><td>13250.00</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>37.48</td><td>5.74</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>6</td><td>13250.00</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>51.43</td><td>5.74</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	209	2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	209	3	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	105	4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	105	5	13250.00	43.22	54.00	-10.78	37.48	5.74	Average	100	39	6	13250.00	57.17	74.00	-16.83	51.43	5.74	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.82	54.00	-18.18	44.10	-8.28	Average	100	209																																																																
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	209																																																																
3	1599.00	26.85	54.00	-27.15	34.16	-7.31	Average	100	105																																																																
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	105																																																																
5	13250.00	43.22	54.00	-10.78	37.48	5.74	Average	100	39																																																																
6	13250.00	57.17	74.00	-16.83	51.43	5.74	Peak	100	39																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT80		Test Freq. (MHz)		6705																																																																										
Polarization	Horizontal																																																																														
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.55</td><td>54.00</td><td>-20.45</td><td>41.83</td><td>-8.28</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>2</td><td>1001.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>48.33</td><td>-8.28</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>3</td><td>1599.00</td><td>25.58</td><td>54.00</td><td>-28.42</td><td>32.89</td><td>-7.31</td><td>Average</td><td>100</td><td>305</td></tr><tr><td>4</td><td>1599.00</td><td>37.55</td><td>74.00</td><td>-36.45</td><td>44.86</td><td>-7.31</td><td>Peak</td><td>100</td><td>305</td></tr><tr><td>5</td><td>13410.00</td><td>44.12</td><td>68.20</td><td>-24.08</td><td>38.15</td><td>5.97</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>6</td><td>13410.00</td><td>57.67</td><td>88.20</td><td>-30.53</td><td>51.70</td><td>5.97</td><td>Peak</td><td>100</td><td>52</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.55	54.00	-20.45	41.83	-8.28	Average	100	204	2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	204	3	1599.00	25.58	54.00	-28.42	32.89	-7.31	Average	100	305	4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	305	5	13410.00	44.12	68.20	-24.08	38.15	5.97	Average	100	52	6	13410.00	57.67	88.20	-30.53	51.70	5.97	Peak	100	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	1001.00	33.55	54.00	-20.45	41.83	-8.28	Average	100	204																																																																						
2	1001.00	40.05	74.00	-33.95	48.33	-8.28	Peak	100	204																																																																						
3	1599.00	25.58	54.00	-28.42	32.89	-7.31	Average	100	305																																																																						
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	305																																																																						
5	13410.00	44.12	68.20	-24.08	38.15	5.97	Average	100	52																																																																						
6	13410.00	57.67	88.20	-30.53	51.70	5.97	Peak	100	52																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															




Modulation	be EHT80	Test Freq. (MHz)	6705						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.89	54.00	-18.11	44.17	-8.28	Average	100	212
2	1001.00	41.20	74.00	-32.80	49.48	-8.28	Peak	100	212
3	1599.00	26.82	54.00	-27.18	34.13	-7.31	Average	100	109
4	1599.00	37.52	74.00	-36.48	44.83	-7.31	Peak	100	109
5	13410.00	44.19	68.20	-24.01	38.22	5.97	Average	100	24
6	13410.00	57.27	88.20	-30.93	51.30	5.97	Peak	100	24
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT80	Test Freq. (MHz)	6785																																																																							
Polarization	Horizontal																																																																									
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																										
Level (dBuV/m)																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.35</td><td>54.00</td><td>-20.65</td><td>41.63</td><td>-8.28</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>2</td><td>1001.00</td><td>39.99</td><td>74.00</td><td>-34.01</td><td>48.27</td><td>-8.28</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>3</td><td>1599.00</td><td>25.55</td><td>54.00</td><td>-28.45</td><td>32.86</td><td>-7.31</td><td>Average</td><td>100</td><td>313</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>313</td></tr><tr><td>5</td><td>13570.00</td><td>44.72</td><td>68.20</td><td>-23.48</td><td>38.36</td><td>6.36</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>6</td><td>13570.00</td><td>58.66</td><td>88.20</td><td>-29.54</td><td>52.30</td><td>6.36</td><td>Peak</td><td>100</td><td>50</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	182	2	1001.00	39.99	74.00	-34.01	48.27	-8.28	Peak	100	182	3	1599.00	25.55	54.00	-28.45	32.86	-7.31	Average	100	313	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	313	5	13570.00	44.72	68.20	-23.48	38.36	6.36	Average	100	50	6	13570.00	58.66	88.20	-29.54	52.30	6.36	Peak	100	50			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	182																																																																	
2	1001.00	39.99	74.00	-34.01	48.27	-8.28	Peak	100	182																																																																	
3	1599.00	25.55	54.00	-28.45	32.86	-7.31	Average	100	313																																																																	
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	313																																																																	
5	13570.00	44.72	68.20	-23.48	38.36	6.36	Average	100	50																																																																	
6	13570.00	58.66	88.20	-29.54	52.30	6.36	Peak	100	50																																																																	
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																										

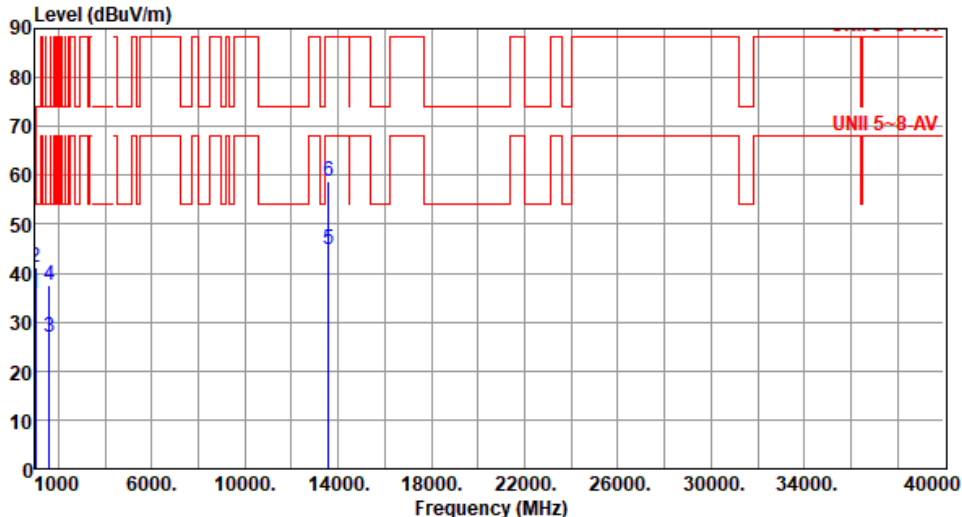

Modulation	be EHT80		Test Freq. (MHz)		6785																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.81</td><td>54.00</td><td>-18.19</td><td>44.09</td><td>-8.28</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>2</td><td>1001.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>49.50</td><td>-8.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>3</td><td>1599.00</td><td>26.93</td><td>54.00</td><td>-27.07</td><td>34.24</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>4</td><td>1599.00</td><td>37.58</td><td>74.00</td><td>-36.42</td><td>44.89</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>5</td><td>13570.00</td><td>44.78</td><td>68.20</td><td>-23.42</td><td>38.42</td><td>6.36</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>6</td><td>13570.00</td><td>58.69</td><td>88.20</td><td>-29.51</td><td>52.33</td><td>6.36</td><td>Peak</td><td>100</td><td>43</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	35.81	54.00	-18.19	44.09	-8.28	Average	100	208	2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	208	3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	109	4	1599.00	37.58	74.00	-36.42	44.89	-7.31	Peak	100	109	5	13570.00	44.78	68.20	-23.42	38.42	6.36	Average	100	43	6	13570.00	58.69	88.20	-29.51	52.33	6.36	Peak	100	43
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	35.81	54.00	-18.19	44.09	-8.28	Average	100	208																																																																																										
2	1001.00	41.22	74.00	-32.78	49.50	-8.28	Peak	100	208																																																																																										
3	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	109																																																																																										
4	1599.00	37.58	74.00	-36.42	44.89	-7.31	Peak	100	109																																																																																										
5	13570.00	44.78	68.20	-23.42	38.42	6.36	Average	100	43																																																																																										
6	13570.00	58.69	88.20	-29.51	52.33	6.36	Peak	100	43																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			




Modulation	be EHT80	Test Freq. (MHz)	6865																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.47</td><td>54.00</td><td>-20.53</td><td>41.75</td><td>-8.28</td><td>Average</td><td>100</td><td>197</td></tr><tr><td>2</td><td>1001.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>48.39</td><td>-8.28</td><td>Peak</td><td>100</td><td>197</td></tr><tr><td>3</td><td>1599.00</td><td>25.71</td><td>54.00</td><td>-28.29</td><td>33.02</td><td>-7.31</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>1599.00</td><td>37.40</td><td>74.00</td><td>-36.60</td><td>44.71</td><td>-7.31</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>13730.00</td><td>44.39</td><td>68.20</td><td>-23.81</td><td>38.31</td><td>6.08</td><td>Average</td><td>100</td><td>48</td></tr><tr><td>6</td><td>13730.00</td><td>58.12</td><td>88.20</td><td>-30.08</td><td>52.04</td><td>6.08</td><td>Peak</td><td>100</td><td>48</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.47	54.00	-20.53	41.75	-8.28	Average	100	197	2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	197	3	1599.00	25.71	54.00	-28.29	33.02	-7.31	Average	100	314	4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	314	5	13730.00	44.39	68.20	-23.81	38.31	6.08	Average	100	48	6	13730.00	58.12	88.20	-30.08	52.04	6.08	Peak	100	48
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	1001.00	33.47	54.00	-20.53	41.75	-8.28	Average	100	197																																																																																				
2	1001.00	40.11	74.00	-33.89	48.39	-8.28	Peak	100	197																																																																																				
3	1599.00	25.71	54.00	-28.29	33.02	-7.31	Average	100	314																																																																																				
4	1599.00	37.40	74.00	-36.60	44.71	-7.31	Peak	100	314																																																																																				
5	13730.00	44.39	68.20	-23.81	38.31	6.08	Average	100	48																																																																																				
6	13730.00	58.12	88.20	-30.08	52.04	6.08	Peak	100	48																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT80	Test Freq. (MHz)	6865																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																									
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1001.00</td><td>35.84</td><td>54.00</td><td>-18.16</td><td>44.12</td><td>-8.28</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>2</td><td>1001.00</td><td>41.33</td><td>74.00</td><td>-32.67</td><td>49.61</td><td>-8.28</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>3</td><td>1599.00</td><td>26.95</td><td>54.00</td><td>-27.05</td><td>34.26</td><td>-7.31</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>4</td><td>1599.00</td><td>37.51</td><td>74.00</td><td>-36.49</td><td>44.82</td><td>-7.31</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>5</td><td>13730.00</td><td>44.52</td><td>68.20</td><td>-23.68</td><td>38.44</td><td>6.08</td><td>Average</td><td>100</td><td>37</td></tr><tr><td>6</td><td>13730.00</td><td>58.25</td><td>88.20</td><td>-29.95</td><td>52.17</td><td>6.08</td><td>Peak</td><td>100</td><td>37</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	206	2	1001.00	41.33	74.00	-32.67	49.61	-8.28	Peak	100	206	3	1599.00	26.95	54.00	-27.05	34.26	-7.31	Average	100	118	4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	118	5	13730.00	44.52	68.20	-23.68	38.44	6.08	Average	100	37	6	13730.00	58.25	88.20	-29.95	52.17	6.08	Peak	100	37
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	35.84	54.00	-18.16	44.12	-8.28	Average	100	206																																																																
2	1001.00	41.33	74.00	-32.67	49.61	-8.28	Peak	100	206																																																																
3	1599.00	26.95	54.00	-27.05	34.26	-7.31	Average	100	118																																																																
4	1599.00	37.51	74.00	-36.49	44.82	-7.31	Peak	100	118																																																																
5	13730.00	44.52	68.20	-23.68	38.44	6.08	Average	100	37																																																																
6	13730.00	58.25	88.20	-29.95	52.17	6.08	Peak	100	37																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

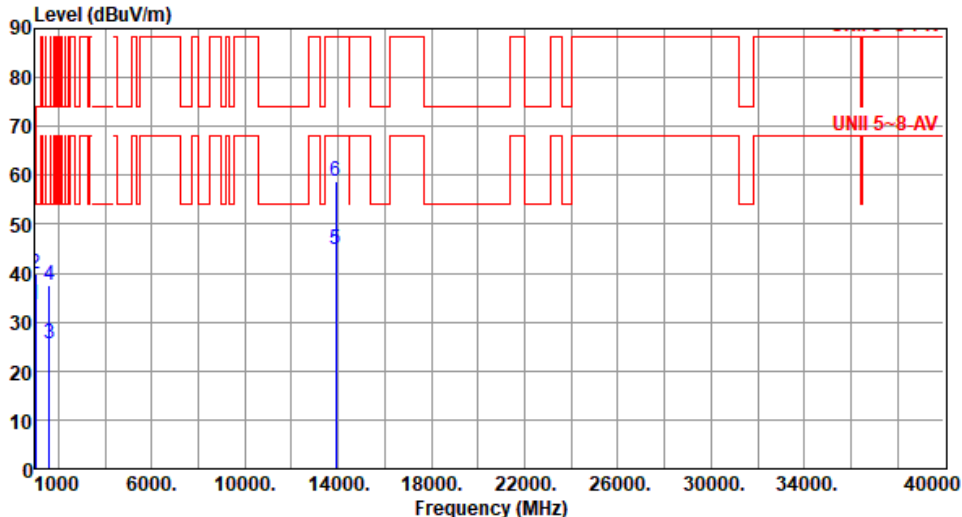

Modulation	be EHT80		Test Freq. (MHz)		6945																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):23 Humidity(%):66																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1001.00</td><td>33.40</td><td>54.00</td><td>-20.60</td><td>41.68</td><td>-8.28</td><td>Average</td><td>100</td><td>198</td></tr><tr><td>2</td><td>1001.00</td><td>39.92</td><td>74.00</td><td>-34.08</td><td>48.20</td><td>-8.28</td><td>Peak</td><td>100</td><td>198</td></tr><tr><td>3</td><td>1599.00</td><td>25.44</td><td>54.00</td><td>-28.56</td><td>32.75</td><td>-7.31</td><td>Average</td><td>100</td><td>304</td></tr><tr><td>4</td><td>1599.00</td><td>37.50</td><td>74.00</td><td>-36.50</td><td>44.81</td><td>-7.31</td><td>Peak</td><td>100</td><td>304</td></tr><tr><td>5</td><td>13890.00</td><td>44.82</td><td>68.20</td><td>-23.38</td><td>38.41</td><td>6.41</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>6</td><td>13890.00</td><td>58.81</td><td>88.20</td><td>-29.39</td><td>52.40</td><td>6.41</td><td>Peak</td><td>100</td><td>53</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	198	2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	198	3	1599.00	25.44	54.00	-28.56	32.75	-7.31	Average	100	304	4	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	304	5	13890.00	44.82	68.20	-23.38	38.41	6.41	Average	100	53	6	13890.00	58.81	88.20	-29.39	52.40	6.41	Peak	100	53
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m			dBuV			cm	deg																																																																																										
1	1001.00	33.40	54.00	-20.60	41.68	-8.28	Average	100	198																																																																																										
2	1001.00	39.92	74.00	-34.08	48.20	-8.28	Peak	100	198																																																																																										
3	1599.00	25.44	54.00	-28.56	32.75	-7.31	Average	100	304																																																																																										
4	1599.00	37.50	74.00	-36.50	44.81	-7.31	Peak	100	304																																																																																										
5	13890.00	44.82	68.20	-23.38	38.41	6.41	Average	100	53																																																																																										
6	13890.00	58.81	88.20	-29.39	52.40	6.41	Peak	100	53																																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																			



Modulation	be EHT80	Test Freq. (MHz)	6945						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):66									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1001.00	35.86	54.00	-18.14	44.14	-8.28	Average	100	210
2	1001.00	41.23	74.00	-32.77	49.51	-8.28	Peak	100	210
3	1599.00	26.90	54.00	-27.10	34.21	-7.31	Average	100	119
4	1599.00	37.55	74.00	-36.45	44.86	-7.31	Peak	100	119
5	13890.00	44.87	68.20	-23.33	38.46	6.41	Average	100	35
6	13890.00	59.00	88.20	-29.20	52.59	6.41	Peak	100	35
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>26.84</td><td>54.00</td><td>-27.16</td><td>34.15</td><td>-7.31</td><td>Average</td><td>100</td><td>309</td></tr><tr><td>2</td><td>1599.00</td><td>37.46</td><td>74.00</td><td>-36.54</td><td>44.77</td><td>-7.31</td><td>Peak</td><td>100</td><td>309</td></tr><tr><td>3</td><td>7125.00</td><td>55.17</td><td>68.20</td><td>-13.03</td><td>50.24</td><td>4.93</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>4</td><td>7125.00</td><td>66.78</td><td>88.20</td><td>-21.42</td><td>61.85</td><td>4.93</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>5</td><td>14050.00</td><td>45.99</td><td>68.20</td><td>-22.21</td><td>39.18</td><td>6.81</td><td>Average</td><td>100</td><td>24</td></tr><tr><td>6</td><td>14050.00</td><td>59.93</td><td>88.20</td><td>-28.27</td><td>53.12</td><td>6.81</td><td>Peak</td><td>100</td><td>24</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	309	2	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	309	3	7125.00	55.17	68.20	-13.03	50.24	4.93	Average	100	220	4	7125.00	66.78	88.20	-21.42	61.85	4.93	Peak	100	220	5	14050.00	45.99	68.20	-22.21	39.18	6.81	Average	100	24	6	14050.00	59.93	88.20	-28.27	53.12	6.81	Peak	100	24
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.84	54.00	-27.16	34.15	-7.31	Average	100	309																																																																
2	1599.00	37.46	74.00	-36.54	44.77	-7.31	Peak	100	309																																																																
3	7125.00	55.17	68.20	-13.03	50.24	4.93	Average	100	220																																																																
4	7125.00	66.78	88.20	-21.42	61.85	4.93	Peak	100	220																																																																
5	14050.00	45.99	68.20	-22.21	39.18	6.81	Average	100	24																																																																
6	14050.00	59.93	88.20	-28.27	53.12	6.81	Peak	100	24																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									




Modulation	be EHT80	Test Freq. (MHz)	7025																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.93</td><td>54.00</td><td>-27.07</td><td>34.24</td><td>-7.31</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>2</td><td>1599.00</td><td>37.43</td><td>74.00</td><td>-36.57</td><td>44.74</td><td>-7.31</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>3</td><td>7125.00</td><td>58.60</td><td>68.20</td><td>-9.60</td><td>53.67</td><td>4.93</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>4</td><td>7125.00</td><td>69.23</td><td>88.20</td><td>-18.97</td><td>64.30</td><td>4.93</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>5</td><td>14050.00</td><td>45.86</td><td>68.20</td><td>-22.34</td><td>39.05</td><td>6.81</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>6</td><td>14050.00</td><td>59.84</td><td>88.20</td><td>-28.36</td><td>53.03</td><td>6.81</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	115	2	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	115	3	7125.00	58.60	68.20	-9.60	53.67	4.93	Average	100	136	4	7125.00	69.23	88.20	-18.97	64.30	4.93	Peak	100	136	5	14050.00	45.86	68.20	-22.34	39.05	6.81	Average	100	34	6	14050.00	59.84	88.20	-28.36	53.03	6.81	Peak	100	34
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.93	54.00	-27.07	34.24	-7.31	Average	100	115																																																																
2	1599.00	37.43	74.00	-36.57	44.74	-7.31	Peak	100	115																																																																
3	7125.00	58.60	68.20	-9.60	53.67	4.93	Average	100	136																																																																
4	7125.00	69.23	88.20	-18.97	64.30	4.93	Peak	100	136																																																																
5	14050.00	45.86	68.20	-22.34	39.05	6.81	Average	100	34																																																																
6	14050.00	59.84	88.20	-28.36	53.03	6.81	Peak	100	34																																																																

Unwanted Emissions (Above 1GHz) for be EHT160


Modulation	be EHT160	Test Freq. (MHz)	6025																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>26.22</td><td>54.00</td><td>-27.78</td><td>33.53</td><td>-7.31</td><td>Average</td><td>100</td><td>297</td></tr><tr><td>2</td><td>1599.00</td><td>39.27</td><td>74.00</td><td>-34.73</td><td>46.58</td><td>-7.31</td><td>Peak</td><td>100</td><td>297</td></tr><tr><td>3</td><td>5925.00</td><td>60.99</td><td>68.20</td><td>-7.21</td><td>59.85</td><td>1.14</td><td>Average</td><td>146</td><td>47</td></tr><tr><td>4</td><td>5925.00</td><td>77.75</td><td>88.20</td><td>-10.45</td><td>76.61</td><td>1.14</td><td>Peak</td><td>146</td><td>47</td></tr><tr><td>5</td><td>12050.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>36.00</td><td>6.38</td><td>Average</td><td>100</td><td>275</td></tr><tr><td>6</td><td>12050.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>48.44</td><td>6.38</td><td>Peak</td><td>100</td><td>275</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	26.22	54.00	-27.78	33.53	-7.31	Average	100	297	2	1599.00	39.27	74.00	-34.73	46.58	-7.31	Peak	100	297	3	5925.00	60.99	68.20	-7.21	59.85	1.14	Average	146	47	4	5925.00	77.75	88.20	-10.45	76.61	1.14	Peak	146	47	5	12050.00	42.38	54.00	-11.62	36.00	6.38	Average	100	275	6	12050.00	54.82	74.00	-19.18	48.44	6.38	Peak	100	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	26.22	54.00	-27.78	33.53	-7.31	Average	100	297																																																																
2	1599.00	39.27	74.00	-34.73	46.58	-7.31	Peak	100	297																																																																
3	5925.00	60.99	68.20	-7.21	59.85	1.14	Average	146	47																																																																
4	5925.00	77.75	88.20	-10.45	76.61	1.14	Peak	146	47																																																																
5	12050.00	42.38	54.00	-11.62	36.00	6.38	Average	100	275																																																																
6	12050.00	54.82	74.00	-19.18	48.44	6.38	Peak	100	275																																																																

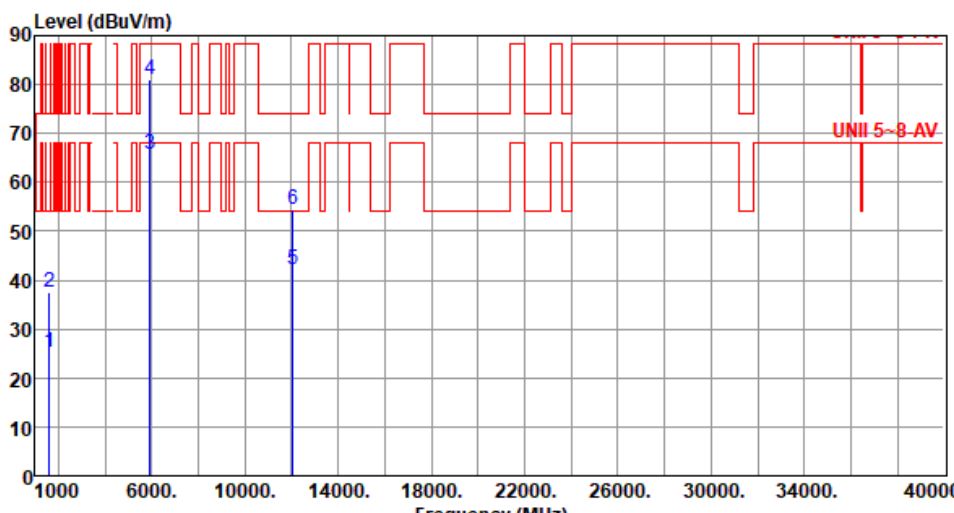

Modulation	be EHT160	Test Freq. (MHz)	6025						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	25.22	54.00	-28.78	32.53	-7.31	Average	100	204
2	1599.00	37.63	74.00	-36.37	44.94	-7.31	Peak	100	204
3	5925.00	65.82	68.20	-2.38	64.68	1.14	Average	106	1
4	5925.00	80.97	88.20	-7.23	79.83	1.14	Peak	106	1
5	12050.00	42.33	54.00	-11.67	35.95	6.38	Average	100	177
6	12050.00	54.63	74.00	-19.37	48.25	6.38	Peak	100	177

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

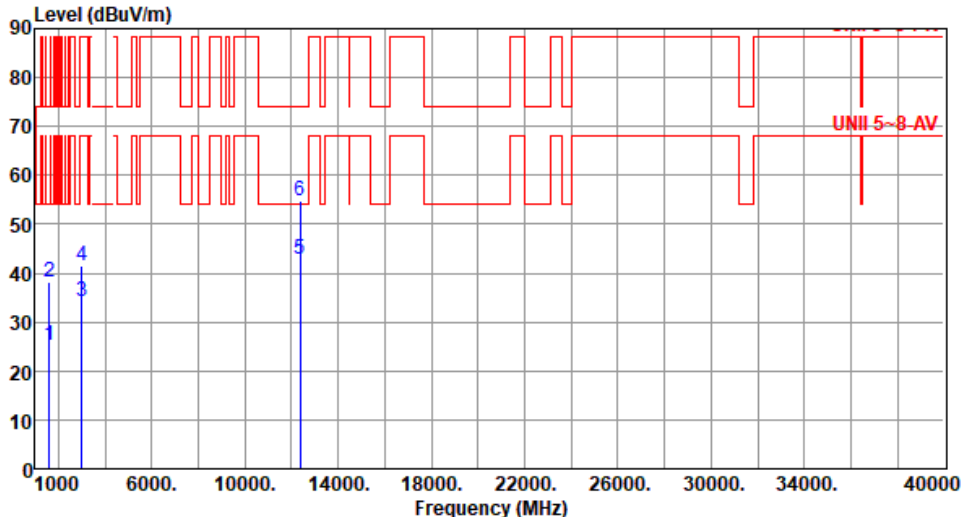


Modulation	be EHT160		Test Freq. (MHz)		6185																																																																																														
Polarization	Horizontal																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																			
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.22</td><td>54.00</td><td>-28.78</td><td>32.53</td><td>-7.31</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>2</td><td>1599.00</td><td>38.08</td><td>74.00</td><td>-35.92</td><td>45.39</td><td>-7.31</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>3</td><td>3000.00</td><td>34.25</td><td>68.20</td><td>-33.95</td><td>36.91</td><td>-2.66</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>4</td><td>3000.00</td><td>41.59</td><td>88.20</td><td>-46.61</td><td>44.25</td><td>-2.66</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>5</td><td>12370.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>36.40</td><td>6.48</td><td>Average</td><td>100</td><td>162</td></tr><tr><td>6</td><td>12370.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>48.29</td><td>6.48</td><td>Peak</td><td>100</td><td>162</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1599.00	25.22	54.00	-28.78	32.53	-7.31	Average	100	221	2	1599.00	38.08	74.00	-35.92	45.39	-7.31	Peak	100	221	3	3000.00	34.25	68.20	-33.95	36.91	-2.66	Average	100	84	4	3000.00	41.59	88.20	-46.61	44.25	-2.66	Peak	100	84	5	12370.00	42.88	54.00	-11.12	36.40	6.48	Average	100	162	6	12370.00	54.77	74.00	-19.23	48.29	6.48	Peak	100	162
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1599.00	25.22	54.00	-28.78	32.53	-7.31	Average	100	221																																																																																										
2	1599.00	38.08	74.00	-35.92	45.39	-7.31	Peak	100	221																																																																																										
3	3000.00	34.25	68.20	-33.95	36.91	-2.66	Average	100	84																																																																																										
4	3000.00	41.59	88.20	-46.61	44.25	-2.66	Peak	100	84																																																																																										
5	12370.00	42.88	54.00	-11.12	36.40	6.48	Average	100	162																																																																																										
6	12370.00	54.77	74.00	-19.23	48.29	6.48	Peak	100	162																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			




Modulation	be EHT160		Test Freq. (MHz)		6185																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																			
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.81</td><td>54.00</td><td>-28.19</td><td>33.12</td><td>-7.31</td><td>Average</td><td>100</td><td>273</td></tr><tr><td>2</td><td>1599.00</td><td>38.48</td><td>74.00</td><td>-35.52</td><td>45.79</td><td>-7.31</td><td>Peak</td><td>100</td><td>273</td></tr><tr><td>3</td><td>3000.00</td><td>33.15</td><td>68.20</td><td>-35.05</td><td>35.81</td><td>-2.66</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>4</td><td>3000.00</td><td>43.29</td><td>88.20</td><td>-44.91</td><td>45.95</td><td>-2.66</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>5</td><td>12370.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>35.75</td><td>6.48</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>6</td><td>12370.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>49.08</td><td>6.48</td><td>Peak</td><td>100</td><td>207</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	1599.00	25.81	54.00	-28.19	33.12	-7.31	Average	100	273	2	1599.00	38.48	74.00	-35.52	45.79	-7.31	Peak	100	273	3	3000.00	33.15	68.20	-35.05	35.81	-2.66	Average	100	123	4	3000.00	43.29	88.20	-44.91	45.95	-2.66	Peak	100	123	5	12370.00	42.23	54.00	-11.77	35.75	6.48	Average	100	207	6	12370.00	55.56	74.00	-18.44	49.08	6.48	Peak	100	207
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
								cm	deg																																																																																										
1	1599.00	25.81	54.00	-28.19	33.12	-7.31	Average	100	273																																																																																										
2	1599.00	38.48	74.00	-35.52	45.79	-7.31	Peak	100	273																																																																																										
3	3000.00	33.15	68.20	-35.05	35.81	-2.66	Average	100	123																																																																																										
4	3000.00	43.29	88.20	-44.91	45.95	-2.66	Peak	100	123																																																																																										
5	12370.00	42.23	54.00	-11.77	35.75	6.48	Average	100	207																																																																																										
6	12370.00	55.56	74.00	-18.44	49.08	6.48	Peak	100	207																																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																			

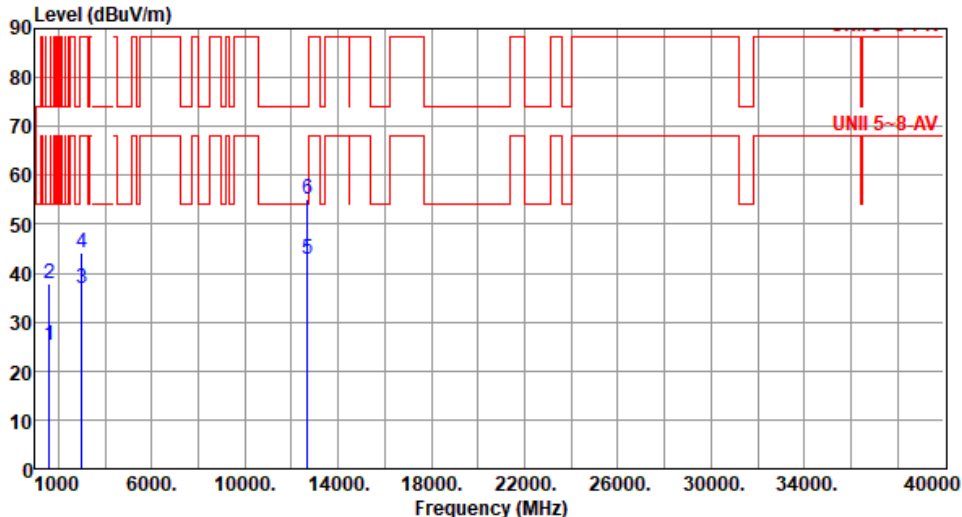


Modulation	be EHT160	Test Freq. (MHz)	6345																																																												
Polarization	Horizontal																																																														
Test By :Allen Lee Temperature(°C):26 Humidity(%):63																																																															
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dBuV dB/m cm Table deg <table><tr><td>1</td><td>1599.00</td><td>25.30</td><td>54.00</td><td>-28.70</td><td>32.61</td><td>-7.31</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>2</td><td>1599.00</td><td>37.99</td><td>74.00</td><td>-36.01</td><td>45.30</td><td>-7.31</td><td>Peak</td><td>100</td><td>192</td></tr><tr><td>3</td><td>3000.00</td><td>36.83</td><td>68.20</td><td>-31.37</td><td>39.49</td><td>-2.66</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>4</td><td>3000.00</td><td>44.17</td><td>88.20</td><td>-44.03</td><td>46.83</td><td>-2.66</td><td>Peak</td><td>100</td><td>83</td></tr><tr><td>5</td><td>12690.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>36.40</td><td>6.47</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>6</td><td>12690.00</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>48.80</td><td>6.47</td><td>Peak</td><td>100</td><td>124</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).				1	1599.00	25.30	54.00	-28.70	32.61	-7.31	Average	100	192	2	1599.00	37.99	74.00	-36.01	45.30	-7.31	Peak	100	192	3	3000.00	36.83	68.20	-31.37	39.49	-2.66	Average	100	83	4	3000.00	44.17	88.20	-44.03	46.83	-2.66	Peak	100	83	5	12690.00	42.87	54.00	-11.13	36.40	6.47	Average	100	124	6	12690.00	55.27	74.00	-18.73	48.80	6.47	Peak	100	124
1	1599.00	25.30	54.00	-28.70	32.61	-7.31	Average	100	192																																																						
2	1599.00	37.99	74.00	-36.01	45.30	-7.31	Peak	100	192																																																						
3	3000.00	36.83	68.20	-31.37	39.49	-2.66	Average	100	83																																																						
4	3000.00	44.17	88.20	-44.03	46.83	-2.66	Peak	100	83																																																						
5	12690.00	42.87	54.00	-11.13	36.40	6.47	Average	100	124																																																						
6	12690.00	55.27	74.00	-18.73	48.80	6.47	Peak	100	124																																																						

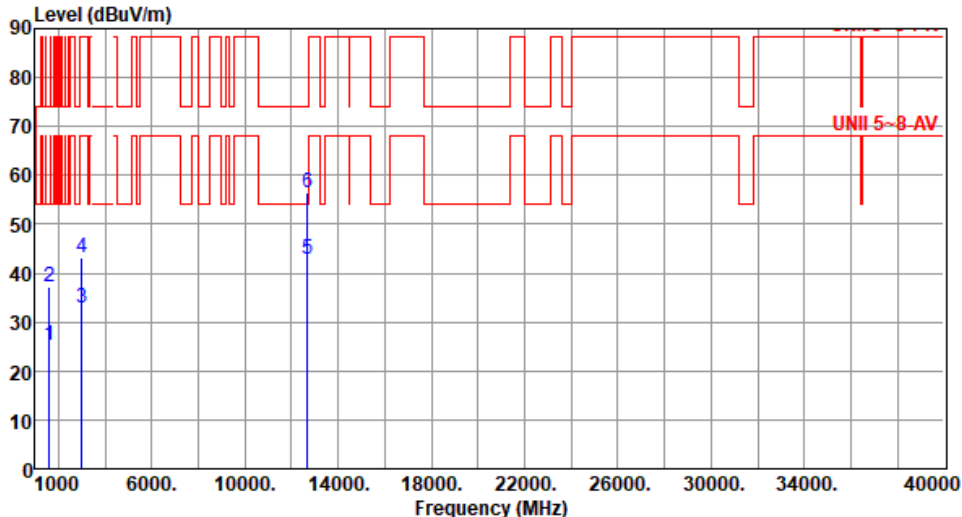

Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.20</td><td>54.00</td><td>-28.80</td><td>32.51</td><td>-7.31</td><td>Average</td><td>100</td><td>189</td></tr><tr><td>2</td><td>1599.00</td><td>37.31</td><td>74.00</td><td>-36.69</td><td>44.62</td><td>-7.31</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>3</td><td>3000.00</td><td>33.00</td><td>68.20</td><td>-35.20</td><td>35.66</td><td>-2.66</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>4</td><td>3000.00</td><td>43.31</td><td>88.20</td><td>-44.89</td><td>45.97</td><td>-2.66</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>5</td><td>12690.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>36.40</td><td>6.47</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>6</td><td>12690.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>49.85</td><td>6.47</td><td>Peak</td><td>100</td><td>231</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	189	2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	189	3	3000.00	33.00	68.20	-35.20	35.66	-2.66	Average	100	125	4	3000.00	43.31	88.20	-44.89	45.97	-2.66	Peak	100	125	5	12690.00	42.87	54.00	-11.13	36.40	6.47	Average	100	231	6	12690.00	56.32	74.00	-17.68	49.85	6.47	Peak	100	231
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.20	54.00	-28.80	32.51	-7.31	Average	100	189																																																																
2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	189																																																																
3	3000.00	33.00	68.20	-35.20	35.66	-2.66	Average	100	125																																																																
4	3000.00	43.31	88.20	-44.89	45.97	-2.66	Peak	100	125																																																																
5	12690.00	42.87	54.00	-11.13	36.40	6.47	Average	100	231																																																																
6	12690.00	56.32	74.00	-17.68	49.85	6.47	Peak	100	231																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									

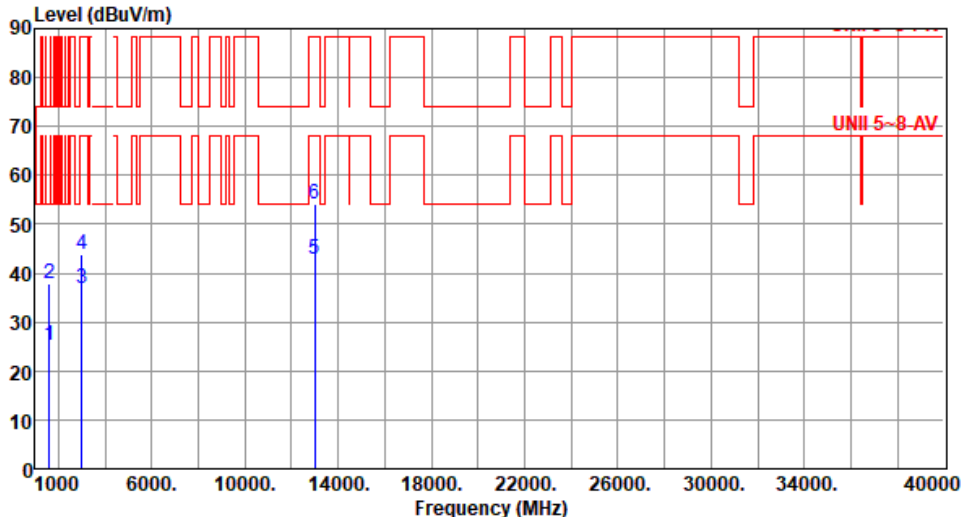

Modulation	be EHT160	Test Freq. (MHz)	6505																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.17</td><td>54.00</td><td>-28.83</td><td>32.48</td><td>-7.31</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>1599.00</td><td>37.96</td><td>74.00</td><td>-36.04</td><td>45.27</td><td>-7.31</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>3000.00</td><td>37.02</td><td>68.20</td><td>-31.18</td><td>39.68</td><td>-2.66</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>4</td><td>3000.00</td><td>43.81</td><td>88.20</td><td>-44.39</td><td>46.47</td><td>-2.66</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>5</td><td>13010.00</td><td>42.83</td><td>68.20</td><td>-25.37</td><td>36.63</td><td>6.20</td><td>Average</td><td>100</td><td>106</td></tr><tr><td>6</td><td>13010.00</td><td>54.09</td><td>88.20</td><td>-34.11</td><td>47.89</td><td>6.20</td><td>Peak</td><td>100</td><td>106</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.17	54.00	-28.83	32.48	-7.31	Average	100	218	2	1599.00	37.96	74.00	-36.04	45.27	-7.31	Peak	100	218	3	3000.00	37.02	68.20	-31.18	39.68	-2.66	Average	100	78	4	3000.00	43.81	88.20	-44.39	46.47	-2.66	Peak	100	78	5	13010.00	42.83	68.20	-25.37	36.63	6.20	Average	100	106	6	13010.00	54.09	88.20	-34.11	47.89	6.20	Peak	100	106
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.17	54.00	-28.83	32.48	-7.31	Average	100	218																																																																
2	1599.00	37.96	74.00	-36.04	45.27	-7.31	Peak	100	218																																																																
3	3000.00	37.02	68.20	-31.18	39.68	-2.66	Average	100	78																																																																
4	3000.00	43.81	88.20	-44.39	46.47	-2.66	Peak	100	78																																																																
5	13010.00	42.83	68.20	-25.37	36.63	6.20	Average	100	106																																																																
6	13010.00	54.09	88.20	-34.11	47.89	6.20	Peak	100	106																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT160	Test Freq. (MHz)	6505						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	26.09	54.00	-27.91	33.40	-7.31	Average	100	285
2	1599.00	38.85	74.00	-35.15	46.16	-7.31	Peak	100	285
3	3000.00	33.04	68.20	-35.16	35.70	-2.66	Average	100	126
4	3000.00	42.76	88.20	-45.44	45.42	-2.66	Peak	100	126
5	13010.00	42.50	68.20	-25.70	36.30	6.20	Average	100	155
6	13010.00	54.40	88.20	-33.80	48.20	6.20	Peak	100	155
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																						
Polarization	Horizontal																																																																								
Test By :Allen Lee Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.39</td><td>54.00</td><td>-28.61</td><td>32.70</td><td>-7.31</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>2</td><td>1599.00</td><td>37.85</td><td>74.00</td><td>-36.15</td><td>45.16</td><td>-7.31</td><td>Peak</td><td>100</td><td>187</td></tr><tr><td>3</td><td>3000.00</td><td>36.65</td><td>68.20</td><td>-31.55</td><td>39.31</td><td>-2.66</td><td>Average</td><td>100</td><td>91</td></tr><tr><td>4</td><td>3000.00</td><td>44.60</td><td>88.20</td><td>-43.60</td><td>47.26</td><td>-2.66</td><td>Peak</td><td>100</td><td>91</td></tr><tr><td>5</td><td>13330.00</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>37.39</td><td>5.72</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>6</td><td>13330.00</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>49.91</td><td>5.72</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.39	54.00	-28.61	32.70	-7.31	Average	100	187	2	1599.00	37.85	74.00	-36.15	45.16	-7.31	Peak	100	187	3	3000.00	36.65	68.20	-31.55	39.31	-2.66	Average	100	91	4	3000.00	44.60	88.20	-43.60	47.26	-2.66	Peak	100	91	5	13330.00	43.11	54.00	-10.89	37.39	5.72	Average	100	214	6	13330.00	55.63	74.00	-18.37	49.91	5.72	Peak	100	214
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.39	54.00	-28.61	32.70	-7.31	Average	100	187																																																																
2	1599.00	37.85	74.00	-36.15	45.16	-7.31	Peak	100	187																																																																
3	3000.00	36.65	68.20	-31.55	39.31	-2.66	Average	100	91																																																																
4	3000.00	44.60	88.20	-43.60	47.26	-2.66	Peak	100	91																																																																
5	13330.00	43.11	54.00	-10.89	37.39	5.72	Average	100	214																																																																
6	13330.00	55.63	74.00	-18.37	49.91	5.72	Peak	100	214																																																																



Modulation	be EHT160	Test Freq. (MHz)	6665																																																																							
Polarization	Vertical																																																																									
Test By :Allen Lee Temperature(°C):26 Humidity(%):63																																																																										
Level (dBUV/m)																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>1599.00</td><td>25.43</td><td>54.00</td><td>-28.57</td><td>32.74</td><td>-7.31</td><td>Average</td><td>100</td><td>317</td></tr><tr><td>2</td><td>1599.00</td><td>39.24</td><td>74.00</td><td>-34.76</td><td>46.55</td><td>-7.31</td><td>Peak</td><td>100</td><td>317</td></tr><tr><td>3</td><td>3000.00</td><td>32.86</td><td>68.20</td><td>-35.34</td><td>35.52</td><td>-2.66</td><td>Average</td><td>100</td><td>129</td></tr><tr><td>4</td><td>3000.00</td><td>43.04</td><td>88.20</td><td>-45.16</td><td>45.70</td><td>-2.66</td><td>Peak</td><td>100</td><td>129</td></tr><tr><td>5</td><td>13330.00</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>37.39</td><td>5.72</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>6</td><td>13330.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>49.98</td><td>5.72</td><td>Peak</td><td>100</td><td>72</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.43	54.00	-28.57	32.74	-7.31	Average	100	317	2	1599.00	39.24	74.00	-34.76	46.55	-7.31	Peak	100	317	3	3000.00	32.86	68.20	-35.34	35.52	-2.66	Average	100	129	4	3000.00	43.04	88.20	-45.16	45.70	-2.66	Peak	100	129	5	13330.00	43.11	54.00	-10.89	37.39	5.72	Average	100	72	6	13330.00	55.70	74.00	-18.30	49.98	5.72	Peak	100	72			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	1599.00	25.43	54.00	-28.57	32.74	-7.31	Average	100	317																																																																	
2	1599.00	39.24	74.00	-34.76	46.55	-7.31	Peak	100	317																																																																	
3	3000.00	32.86	68.20	-35.34	35.52	-2.66	Average	100	129																																																																	
4	3000.00	43.04	88.20	-45.16	45.70	-2.66	Peak	100	129																																																																	
5	13330.00	43.11	54.00	-10.89	37.39	5.72	Average	100	72																																																																	
6	13330.00	55.70	74.00	-18.30	49.98	5.72	Peak	100	72																																																																	
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																										




Modulation	be EHT160	Test Freq. (MHz)	6825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.39</td><td>54.00</td><td>-28.61</td><td>32.70</td><td>-7.31</td><td>Average</td><td>100</td><td>219</td></tr><tr><td>2</td><td>1599.00</td><td>37.88</td><td>74.00</td><td>-36.12</td><td>45.19</td><td>-7.31</td><td>Peak</td><td>100</td><td>219</td></tr><tr><td>3</td><td>7125.00</td><td>48.85</td><td>68.20</td><td>-19.35</td><td>43.92</td><td>4.93</td><td>Average</td><td>139</td><td>208</td></tr><tr><td>4</td><td>7125.00</td><td>59.07</td><td>88.20</td><td>-29.13</td><td>54.14</td><td>4.93</td><td>Peak</td><td>139</td><td>208</td></tr><tr><td>5</td><td>7250.00</td><td>46.15</td><td>54.00</td><td>-7.85</td><td>40.87</td><td>5.28</td><td>Average</td><td>139</td><td>208</td></tr><tr><td>6</td><td>7250.00</td><td>58.94</td><td>74.00</td><td>-15.06</td><td>53.66</td><td>5.28</td><td>Peak</td><td>139</td><td>208</td></tr><tr><td>7</td><td>13650.00</td><td>43.61</td><td>68.20</td><td>-24.59</td><td>37.68</td><td>5.93</td><td>Average</td><td>100</td><td>139</td></tr><tr><td>8</td><td>13650.00</td><td>55.59</td><td>88.20</td><td>-32.61</td><td>49.66</td><td>5.93</td><td>Peak</td><td>100</td><td>139</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.39	54.00	-28.61	32.70	-7.31	Average	100	219	2	1599.00	37.88	74.00	-36.12	45.19	-7.31	Peak	100	219	3	7125.00	48.85	68.20	-19.35	43.92	4.93	Average	139	208	4	7125.00	59.07	88.20	-29.13	54.14	4.93	Peak	139	208	5	7250.00	46.15	54.00	-7.85	40.87	5.28	Average	139	208	6	7250.00	58.94	74.00	-15.06	53.66	5.28	Peak	139	208	7	13650.00	43.61	68.20	-24.59	37.68	5.93	Average	100	139	8	13650.00	55.59	88.20	-32.61	49.66	5.93	Peak	100	139
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.39	54.00	-28.61	32.70	-7.31	Average	100	219																																																																																				
2	1599.00	37.88	74.00	-36.12	45.19	-7.31	Peak	100	219																																																																																				
3	7125.00	48.85	68.20	-19.35	43.92	4.93	Average	139	208																																																																																				
4	7125.00	59.07	88.20	-29.13	54.14	4.93	Peak	139	208																																																																																				
5	7250.00	46.15	54.00	-7.85	40.87	5.28	Average	139	208																																																																																				
6	7250.00	58.94	74.00	-15.06	53.66	5.28	Peak	139	208																																																																																				
7	13650.00	43.61	68.20	-24.59	37.68	5.93	Average	100	139																																																																																				
8	13650.00	55.59	88.20	-32.61	49.66	5.93	Peak	100	139																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT160	Test Freq. (MHz)	6825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1599.00	26.23	54.00	-27.77	33.54	-7.31	Average	100	244
2	1599.00	39.25	74.00	-34.75	46.56	-7.31	Peak	100	244
3	7125.00	50.79	68.20	-17.41	45.86	4.93	Average	100	133
4	7125.00	63.21	88.20	-24.99	58.28	4.93	Peak	100	133
5	7250.00	46.62	54.00	-7.38	41.34	5.28	Average	100	133
6	7250.00	58.44	74.00	-15.56	53.16	5.28	Peak	100	133
7	13650.00	43.29	68.20	-24.91	37.36	5.93	Average	100	184
8	13650.00	56.17	88.20	-32.03	50.24	5.93	Peak	100	184
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

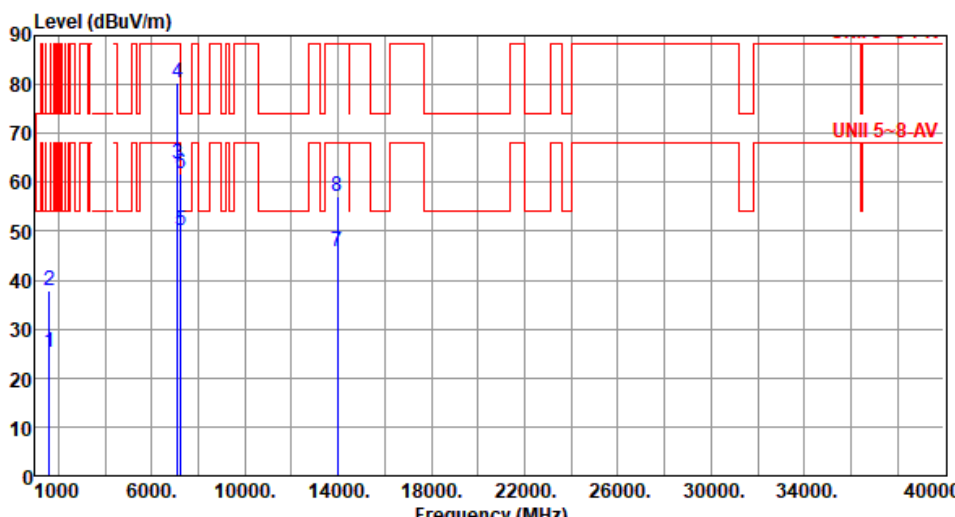


Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.24</td><td>54.00</td><td>-28.76</td><td>32.55</td><td>-7.31</td><td>Average</td><td>100</td><td>209</td></tr><tr><td>2</td><td>1599.00</td><td>37.84</td><td>74.00</td><td>-36.16</td><td>45.15</td><td>-7.31</td><td>Peak</td><td>100</td><td>209</td></tr><tr><td>3</td><td>7125.00</td><td>63.88</td><td>68.20</td><td>-4.32</td><td>58.95</td><td>4.93</td><td>Average</td><td>149</td><td>210</td></tr><tr><td>4</td><td>7125.00</td><td>80.31</td><td>88.20</td><td>-7.89</td><td>75.38</td><td>4.93</td><td>Peak</td><td>149</td><td>210</td></tr><tr><td>5</td><td>7250.00</td><td>50.28</td><td>54.00</td><td>-3.72</td><td>45.00</td><td>5.28</td><td>Average</td><td>149</td><td>210</td></tr><tr><td>6</td><td>7250.00</td><td>61.63</td><td>74.00</td><td>-12.37</td><td>56.35</td><td>5.28</td><td>Peak</td><td>149</td><td>210</td></tr><tr><td>7</td><td>13970.00</td><td>45.96</td><td>68.20</td><td>-22.24</td><td>39.23</td><td>6.73</td><td>Average</td><td>100</td><td>272</td></tr><tr><td>8</td><td>13970.00</td><td>57.14</td><td>88.20</td><td>-31.06</td><td>50.41</td><td>6.73</td><td>Peak</td><td>100</td><td>272</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.24	54.00	-28.76	32.55	-7.31	Average	100	209	2	1599.00	37.84	74.00	-36.16	45.15	-7.31	Peak	100	209	3	7125.00	63.88	68.20	-4.32	58.95	4.93	Average	149	210	4	7125.00	80.31	88.20	-7.89	75.38	4.93	Peak	149	210	5	7250.00	50.28	54.00	-3.72	45.00	5.28	Average	149	210	6	7250.00	61.63	74.00	-12.37	56.35	5.28	Peak	149	210	7	13970.00	45.96	68.20	-22.24	39.23	6.73	Average	100	272	8	13970.00	57.14	88.20	-31.06	50.41	6.73	Peak	100	272
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.24	54.00	-28.76	32.55	-7.31	Average	100	209																																																																																				
2	1599.00	37.84	74.00	-36.16	45.15	-7.31	Peak	100	209																																																																																				
3	7125.00	63.88	68.20	-4.32	58.95	4.93	Average	149	210																																																																																				
4	7125.00	80.31	88.20	-7.89	75.38	4.93	Peak	149	210																																																																																				
5	7250.00	50.28	54.00	-3.72	45.00	5.28	Average	149	210																																																																																				
6	7250.00	61.63	74.00	-12.37	56.35	5.28	Peak	149	210																																																																																				
7	13970.00	45.96	68.20	-22.24	39.23	6.73	Average	100	272																																																																																				
8	13970.00	57.14	88.20	-31.06	50.41	6.73	Peak	100	272																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	be EHT160	Test Freq. (MHz)	6985																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.30</td><td>54.00</td><td>-28.70</td><td>32.61</td><td>-7.31</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>2</td><td>1599.00</td><td>38.16</td><td>74.00</td><td>-35.84</td><td>45.47</td><td>-7.31</td><td>Peak</td><td>100</td><td>201</td></tr><tr><td>3</td><td>7125.00</td><td>65.25</td><td>68.20</td><td>-2.95</td><td>60.32</td><td>4.93</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>4</td><td>7125.00</td><td>82.20</td><td>88.20</td><td>-6.00</td><td>77.27</td><td>4.93</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>5</td><td>7125.00</td><td>66.48</td><td>88.20</td><td>-21.72</td><td>61.55</td><td>4.93</td><td>Peak</td><td>100</td><td>136</td></tr><tr><td>6</td><td>7250.00</td><td>52.94</td><td>54.00</td><td>-1.06</td><td>47.66</td><td>5.28</td><td>Average</td><td>100</td><td>136</td></tr><tr><td>7</td><td>13970.00</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>39.25</td><td>6.73</td><td>Average</td><td>100</td><td>275</td></tr><tr><td>8</td><td>13970.00</td><td>57.19</td><td>88.20</td><td>-31.01</td><td>50.46</td><td>6.73</td><td>Peak</td><td>100</td><td>275</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.30	54.00	-28.70	32.61	-7.31	Average	100	201	2	1599.00	38.16	74.00	-35.84	45.47	-7.31	Peak	100	201	3	7125.00	65.25	68.20	-2.95	60.32	4.93	Average	100	136	4	7125.00	82.20	88.20	-6.00	77.27	4.93	Peak	100	136	5	7125.00	66.48	88.20	-21.72	61.55	4.93	Peak	100	136	6	7250.00	52.94	54.00	-1.06	47.66	5.28	Average	100	136	7	13970.00	45.98	68.20	-22.22	39.25	6.73	Average	100	275	8	13970.00	57.19	88.20	-31.01	50.46	6.73	Peak	100	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	1599.00	25.30	54.00	-28.70	32.61	-7.31	Average	100	201																																																																																				
2	1599.00	38.16	74.00	-35.84	45.47	-7.31	Peak	100	201																																																																																				
3	7125.00	65.25	68.20	-2.95	60.32	4.93	Average	100	136																																																																																				
4	7125.00	82.20	88.20	-6.00	77.27	4.93	Peak	100	136																																																																																				
5	7125.00	66.48	88.20	-21.72	61.55	4.93	Peak	100	136																																																																																				
6	7250.00	52.94	54.00	-1.06	47.66	5.28	Average	100	136																																																																																				
7	13970.00	45.98	68.20	-22.22	39.25	6.73	Average	100	275																																																																																				
8	13970.00	57.19	88.20	-31.01	50.46	6.73	Peak	100	275																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT320

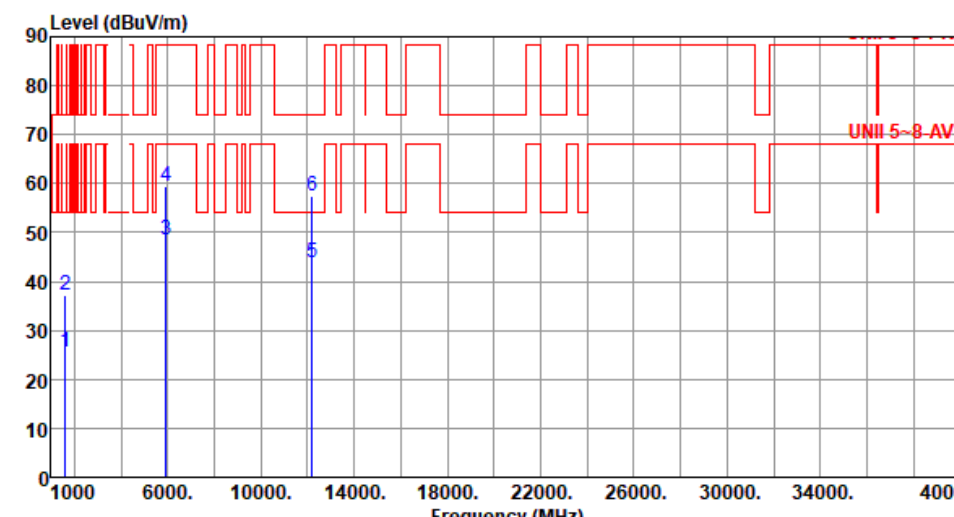Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>25.64</td><td>54.00</td><td>-28.36</td><td>32.95</td><td>-7.31</td><td>Average</td><td>100</td><td>312</td></tr><tr><td>2</td><td>1599.00</td><td>37.31</td><td>74.00</td><td>-36.69</td><td>44.62</td><td>-7.31</td><td>Peak</td><td>100</td><td>312</td></tr><tr><td>3</td><td>5925.00</td><td>48.43</td><td>68.20</td><td>-19.77</td><td>47.29</td><td>1.14</td><td>Average</td><td>135</td><td>242</td></tr><tr><td>4</td><td>5925.00</td><td>59.37</td><td>88.20</td><td>-28.83</td><td>58.23</td><td>1.14</td><td>Peak</td><td>135</td><td>242</td></tr><tr><td>5</td><td>12210.00</td><td>43.73</td><td>54.00</td><td>-10.27</td><td>36.86</td><td>6.87</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>6</td><td>12210.00</td><td>57.35</td><td>74.00</td><td>-16.65</td><td>50.48</td><td>6.87</td><td>Peak</td><td>100</td><td>59</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	25.64	54.00	-28.36	32.95	-7.31	Average	100	312	2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	312	3	5925.00	48.43	68.20	-19.77	47.29	1.14	Average	135	242	4	5925.00	59.37	88.20	-28.83	58.23	1.14	Peak	135	242	5	12210.00	43.73	54.00	-10.27	36.86	6.87	Average	100	59	6	12210.00	57.35	74.00	-16.65	50.48	6.87	Peak	100	59
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	25.64	54.00	-28.36	32.95	-7.31	Average	100	312																																																																
2	1599.00	37.31	74.00	-36.69	44.62	-7.31	Peak	100	312																																																																
3	5925.00	48.43	68.20	-19.77	47.29	1.14	Average	135	242																																																																
4	5925.00	59.37	88.20	-28.83	58.23	1.14	Peak	135	242																																																																
5	12210.00	43.73	54.00	-10.27	36.86	6.87	Average	100	59																																																																
6	12210.00	57.35	74.00	-16.65	50.48	6.87	Peak	100	59																																																																



Modulation	be EHT320	Test Freq. (MHz)	6105																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1599.00</td><td>27.67</td><td>54.00</td><td>-26.33</td><td>34.98</td><td>-7.31</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>2</td><td>1599.00</td><td>37.39</td><td>74.00</td><td>-36.61</td><td>44.70</td><td>-7.31</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>3</td><td>5925.00</td><td>52.47</td><td>68.20</td><td>-15.73</td><td>51.33</td><td>1.14</td><td>Average</td><td>100</td><td>1</td></tr><tr><td>4</td><td>5925.00</td><td>65.04</td><td>88.20</td><td>-23.16</td><td>63.90</td><td>1.14</td><td>Peak</td><td>100</td><td>1</td></tr><tr><td>5</td><td>12210.00</td><td>43.71</td><td>54.00</td><td>-10.29</td><td>36.84</td><td>6.87</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>12210.00</td><td>57.46</td><td>74.00</td><td>-16.54</td><td>50.59</td><td>6.87</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1599.00	27.67	54.00	-26.33	34.98	-7.31	Average	100	109	2	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	109	3	5925.00	52.47	68.20	-15.73	51.33	1.14	Average	100	1	4	5925.00	65.04	88.20	-23.16	63.90	1.14	Peak	100	1	5	12210.00	43.71	54.00	-10.29	36.84	6.87	Average	100	30	6	12210.00	57.46	74.00	-16.54	50.59	6.87	Peak	100	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1599.00	27.67	54.00	-26.33	34.98	-7.31	Average	100	109																																																																
2	1599.00	37.39	74.00	-36.61	44.70	-7.31	Peak	100	109																																																																
3	5925.00	52.47	68.20	-15.73	51.33	1.14	Average	100	1																																																																
4	5925.00	65.04	88.20	-23.16	63.90	1.14	Peak	100	1																																																																
5	12210.00	43.71	54.00	-10.29	36.84	6.87	Average	100	30																																																																
6	12210.00	57.46	74.00	-16.54	50.59	6.87	Peak	100	30																																																																



Modulation	be EHT320	Test Freq. (MHz)	6265																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>33.35</td><td>54.00</td><td>-20.65</td><td>41.63</td><td>-8.28</td><td>Average</td><td>100</td><td>193</td></tr><tr><td>2</td><td>1001.00</td><td>39.85</td><td>74.00</td><td>-34.15</td><td>48.13</td><td>-8.28</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>3</td><td>1599.00</td><td>25.61</td><td>54.00</td><td>-28.39</td><td>32.92</td><td>-7.31</td><td>Average</td><td>100</td><td>321</td></tr><tr><td>4</td><td>1599.00</td><td>37.36</td><td>74.00</td><td>-36.64</td><td>44.67</td><td>-7.31</td><td>Peak</td><td>100</td><td>321</td></tr><tr><td>5</td><td>12530.00</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>37.00</td><td>6.69</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>6</td><td>12530.00</td><td>57.51</td><td>74.00</td><td>-16.49</td><td>50.82</td><td>6.69</td><td>Peak</td><td>100</td><td>67</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	193	2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	193	3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	321	4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	321	5	12530.00	43.69	54.00	-10.31	37.00	6.69	Average	100	67	6	12530.00	57.51	74.00	-16.49	50.82	6.69	Peak	100	67
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	1001.00	33.35	54.00	-20.65	41.63	-8.28	Average	100	193																																																																
2	1001.00	39.85	74.00	-34.15	48.13	-8.28	Peak	100	193																																																																
3	1599.00	25.61	54.00	-28.39	32.92	-7.31	Average	100	321																																																																
4	1599.00	37.36	74.00	-36.64	44.67	-7.31	Peak	100	321																																																																
5	12530.00	43.69	54.00	-10.31	37.00	6.69	Average	100	67																																																																
6	12530.00	57.51	74.00	-16.49	50.82	6.69	Peak	100	67																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	be EHT320	Test Freq. (MHz)	6265																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1001.00</td><td>35.87</td><td>54.00</td><td>-18.13</td><td>44.15</td><td>-8.28</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>2</td><td>1001.00</td><td>41.29</td><td>74.00</td><td>-32.71</td><td>49.57</td><td>-8.28</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>3</td><td>1599.00</td><td>26.94</td><td>54.00</td><td>-27.06</td><td>34.25</td><td>-7.31</td><td>Average</td><td>100</td><td>110</td></tr><tr><td>4</td><td>1599.00</td><td>37.41</td><td>74.00</td><td>-36.59</td><td>44.72</td><td>-7.31</td><td>Peak</td><td>100</td><td>110</td></tr><tr><td>5</td><td>12530.00</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>37.03</td><td>6.69</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>6</td><td>12530.00</td><td>57.58</td><td>74.00</td><td>-16.42</td><td>50.89</td><td>6.69</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	1001.00	35.87	54.00	-18.13	44.15	-8.28	Average	100	218	2	1001.00	41.29	74.00	-32.71	49.57	-8.28	Peak	100	218	3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	110	4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	110	5	12530.00	43.72	54.00	-10.28	37.03	6.69	Average	100	21	6	12530.00	57.58	74.00	-16.42	50.89	6.69	Peak	100	21
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1	1001.00	35.87	54.00	-18.13	44.15	-8.28	Average	100	218																																																																																				
2	1001.00	41.29	74.00	-32.71	49.57	-8.28	Peak	100	218																																																																																				
3	1599.00	26.94	54.00	-27.06	34.25	-7.31	Average	100	110																																																																																				
4	1599.00	37.41	74.00	-36.59	44.72	-7.31	Peak	100	110																																																																																				
5	12530.00	43.72	54.00	-10.28	37.03	6.69	Average	100	21																																																																																				
6	12530.00	57.58	74.00	-16.42	50.89	6.69	Peak	100	21																																																																																				