



Modulation	ax HE20	Test Freq. (MHz)	5300																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																																	
Level (dBUV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>43.97</td><td>54.00</td><td>-10.03</td><td>43.63</td><td>0.34</td><td>Average</td><td>183</td><td>91</td></tr><tr><td>2</td><td>5150.00</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>56.12</td><td>0.34</td><td>Peak</td><td>183</td><td>91</td></tr><tr><td>3</td><td>5350.00</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>45.33</td><td>-0.25</td><td>Average</td><td>183</td><td>91</td></tr><tr><td>4</td><td>5350.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>55.84</td><td>-0.25</td><td>Peak</td><td>183</td><td>91</td></tr><tr><td>5</td><td>10600.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>34.47</td><td>7.58</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>6</td><td>10600.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>47.75</td><td>7.58</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>7</td><td>15900.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>38.33</td><td>4.35</td><td>Average</td><td>100</td><td>222</td></tr><tr><td>8</td><td>15900.00</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>51.38</td><td>4.35</td><td>Peak</td><td>100</td><td>222</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	5150.00	43.97	54.00	-10.03	43.63	0.34	Average	183	91	2	5150.00	56.46	74.00	-17.54	56.12	0.34	Peak	183	91	3	5350.00	45.08	54.00	-8.92	45.33	-0.25	Average	183	91	4	5350.00	55.59	74.00	-18.41	55.84	-0.25	Peak	183	91	5	10600.00	42.05	54.00	-11.95	34.47	7.58	Average	100	147	6	10600.00	55.33	74.00	-18.67	47.75	7.58	Peak	100	147	7	15900.00	42.68	54.00	-11.32	38.33	4.35	Average	100	222	8	15900.00	55.73	74.00	-18.27	51.38	4.35	Peak	100	222
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBUV/m			dBuV			cm	deg																																																																																																								
1	5150.00	43.97	54.00	-10.03	43.63	0.34	Average	183	91																																																																																																								
2	5150.00	56.46	74.00	-17.54	56.12	0.34	Peak	183	91																																																																																																								
3	5350.00	45.08	54.00	-8.92	45.33	-0.25	Average	183	91																																																																																																								
4	5350.00	55.59	74.00	-18.41	55.84	-0.25	Peak	183	91																																																																																																								
5	10600.00	42.05	54.00	-11.95	34.47	7.58	Average	100	147																																																																																																								
6	10600.00	55.33	74.00	-18.67	47.75	7.58	Peak	100	147																																																																																																								
7	15900.00	42.68	54.00	-11.32	38.33	4.35	Average	100	222																																																																																																								
8	15900.00	55.73	74.00	-18.27	51.38	4.35	Peak	100	222																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																	



Modulation	ax HE20	Test Freq. (MHz)	5300
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5320
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	5500																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>44.96</td><td>0.39</td><td>Average</td><td>234</td><td>150</td></tr><tr><td>2</td><td>5460.00</td><td>58.33</td><td>74.00</td><td>-15.67</td><td>57.94</td><td>0.39</td><td>Peak</td><td>234</td><td>150</td></tr><tr><td>3</td><td>5470.00</td><td>62.07</td><td>68.20</td><td>-6.13</td><td>61.68</td><td>0.39</td><td>Peak</td><td>234</td><td>150</td></tr><tr><td>4</td><td>11000.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>35.33</td><td>7.58</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>5</td><td>11000.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>48.94</td><td>7.58</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>6</td><td>16500.00</td><td>57.99</td><td>68.20</td><td>-10.21</td><td>51.49</td><td>6.50</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.35	54.00	-8.65	44.96	0.39	Average	234	150	2	5460.00	58.33	74.00	-15.67	57.94	0.39	Peak	234	150	3	5470.00	62.07	68.20	-6.13	61.68	0.39	Peak	234	150	4	11000.00	42.91	54.00	-11.09	35.33	7.58	Average	100	286	5	11000.00	56.52	74.00	-17.48	48.94	7.58	Peak	100	286	6	16500.00	57.99	68.20	-10.21	51.49	6.50	Peak	100	185
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5460.00	45.35	54.00	-8.65	44.96	0.39	Average	234	150																																																																
2	5460.00	58.33	74.00	-15.67	57.94	0.39	Peak	234	150																																																																
3	5470.00	62.07	68.20	-6.13	61.68	0.39	Peak	234	150																																																																
4	11000.00	42.91	54.00	-11.09	35.33	7.58	Average	100	286																																																																
5	11000.00	56.52	74.00	-17.48	48.94	7.58	Peak	100	286																																																																
6	16500.00	57.99	68.20	-10.21	51.49	6.50	Peak	100	185																																																																



Modulation	ax HE20	Test Freq. (MHz)	5580																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>43.26</td><td>0.39</td><td>Average</td><td>233</td><td>77</td></tr><tr><td>2</td><td>5460.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>54.64</td><td>0.39</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>3</td><td>5470.00</td><td>56.25</td><td>68.20</td><td>-11.95</td><td>55.86</td><td>0.39</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>4</td><td>5725.00</td><td>55.18</td><td>68.20</td><td>-13.02</td><td>54.59</td><td>0.59</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>5</td><td>11160.00</td><td>49.07</td><td>54.00</td><td>-4.93</td><td>42.11</td><td>6.96</td><td>Average</td><td>100</td><td>83</td></tr><tr><td>6</td><td>11160.00</td><td>64.60</td><td>74.00</td><td>-9.40</td><td>57.64</td><td>6.96</td><td>Peak</td><td>100</td><td>83</td></tr><tr><td>7</td><td>16740.00</td><td>59.04</td><td>68.20</td><td>-9.16</td><td>51.62</td><td>7.42</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.65	54.00	-10.35	43.26	0.39	Average	233	77	2	5460.00	55.03	74.00	-18.97	54.64	0.39	Peak	233	77	3	5470.00	56.25	68.20	-11.95	55.86	0.39	Peak	233	77	4	5725.00	55.18	68.20	-13.02	54.59	0.59	Peak	233	77	5	11160.00	49.07	54.00	-4.93	42.11	6.96	Average	100	83	6	11160.00	64.60	74.00	-9.40	57.64	6.96	Peak	100	83	7	16740.00	59.04	68.20	-9.16	51.62	7.42	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	43.65	54.00	-10.35	43.26	0.39	Average	233	77																																																																										
2	5460.00	55.03	74.00	-18.97	54.64	0.39	Peak	233	77																																																																										
3	5470.00	56.25	68.20	-11.95	55.86	0.39	Peak	233	77																																																																										
4	5725.00	55.18	68.20	-13.02	54.59	0.59	Peak	233	77																																																																										
5	11160.00	49.07	54.00	-4.93	42.11	6.96	Average	100	83																																																																										
6	11160.00	64.60	74.00	-9.40	57.64	6.96	Peak	100	83																																																																										
7	16740.00	59.04	68.20	-9.16	51.62	7.42	Peak	100	223																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE20	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	5700																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>65.94</td><td>68.20</td><td>-2.26</td><td>65.35</td><td>0.59</td><td>Peak</td><td>197</td><td>281</td></tr><tr><td>2</td><td>11400.00</td><td>46.54</td><td>54.00</td><td>-7.46</td><td>39.31</td><td>7.23</td><td>Average</td><td>148</td><td>239</td></tr><tr><td>3</td><td>11400.00</td><td>58.75</td><td>74.00</td><td>-15.25</td><td>51.52</td><td>7.23</td><td>Peak</td><td>148</td><td>239</td></tr><tr><td>4</td><td>17100.00</td><td>59.37</td><td>68.20</td><td>-8.83</td><td>52.47</td><td>6.90</td><td>Peak</td><td>100</td><td>158</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	65.94	68.20	-2.26	65.35	0.59	Peak	197	281	2	11400.00	46.54	54.00	-7.46	39.31	7.23	Average	148	239	3	11400.00	58.75	74.00	-15.25	51.52	7.23	Peak	148	239	4	17100.00	59.37	68.20	-8.83	52.47	6.90	Peak	100	158
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	65.94	68.20	-2.26	65.35	0.59	Peak	197	281																																												
2	11400.00	46.54	54.00	-7.46	39.31	7.23	Average	148	239																																												
3	11400.00	58.75	74.00	-15.25	51.52	7.23	Peak	148	239																																												
4	17100.00	59.37	68.20	-8.83	52.47	6.90	Peak	100	158																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	ax HE20	Test Freq. (MHz)	5700																																																		
Polarization	Vertical																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>67.80</td><td>68.20</td><td>-0.40</td><td>67.21</td><td>0.59</td><td>Peak</td><td>242</td><td>1</td></tr><tr><td>2</td><td>11400.00</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>36.57</td><td>7.23</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>3</td><td>11400.00</td><td>56.80</td><td>74.00</td><td>-17.20</td><td>49.57</td><td>7.23</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>4</td><td>17100.00</td><td>60.01</td><td>68.20</td><td>-8.19</td><td>53.11</td><td>6.90</td><td>Peak</td><td>100</td><td>188</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	67.80	68.20	-0.40	67.21	0.59	Peak	242	1	2	11400.00	43.80	54.00	-10.20	36.57	7.23	Average	100	286	3	11400.00	56.80	74.00	-17.20	49.57	7.23	Peak	100	286	4	17100.00	60.01	68.20	-8.19	53.11	6.90	Peak	100	188
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	67.80	68.20	-0.40	67.21	0.59	Peak	242	1																																												
2	11400.00	43.80	54.00	-10.20	36.57	7.23	Average	100	286																																												
3	11400.00	56.80	74.00	-17.20	49.57	7.23	Peak	100	286																																												
4	17100.00	60.01	68.20	-8.19	53.11	6.90	Peak	100	188																																												




Modulation	ax HE20	Test Freq. (MHz)	5720																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>42.51</td><td>0.39</td><td>Average</td><td>168</td><td>254</td></tr><tr><td>2</td><td>5460.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.26</td><td>0.39</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>3</td><td>5470.00</td><td>55.25</td><td>68.20</td><td>-12.95</td><td>54.86</td><td>0.39</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>4</td><td>5850.00</td><td>55.85</td><td>68.20</td><td>-12.35</td><td>54.88</td><td>0.97</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>5</td><td>11440.00</td><td>44.47</td><td>54.00</td><td>-9.53</td><td>37.26</td><td>7.21</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>11440.00</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>50.46</td><td>7.21</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>7</td><td>17160.00</td><td>59.40</td><td>68.20</td><td>-8.80</td><td>52.85</td><td>6.55</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.90	54.00	-11.10	42.51	0.39	Average	168	254	2	5460.00	54.65	74.00	-19.35	54.26	0.39	Peak	168	254	3	5470.00	55.25	68.20	-12.95	54.86	0.39	Peak	168	254	4	5850.00	55.85	68.20	-12.35	54.88	0.97	Peak	168	254	5	11440.00	44.47	54.00	-9.53	37.26	7.21	Average	100	108	6	11440.00	57.67	74.00	-16.33	50.46	7.21	Peak	100	108	7	17160.00	59.40	68.20	-8.80	52.85	6.55	Peak	100	116
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	42.90	54.00	-11.10	42.51	0.39	Average	168	254																																																																										
2	5460.00	54.65	74.00	-19.35	54.26	0.39	Peak	168	254																																																																										
3	5470.00	55.25	68.20	-12.95	54.86	0.39	Peak	168	254																																																																										
4	5850.00	55.85	68.20	-12.35	54.88	0.97	Peak	168	254																																																																										
5	11440.00	44.47	54.00	-9.53	37.26	7.21	Average	100	108																																																																										
6	11440.00	57.67	74.00	-16.33	50.46	7.21	Peak	100	108																																																																										
7	17160.00	59.40	68.20	-8.80	52.85	6.55	Peak	100	116																																																																										




Modulation	ax HE20	Test Freq. (MHz)	5720																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>42.57</td><td>0.39</td><td>Average</td><td>233</td><td>31</td></tr><tr><td>2</td><td>5460.00</td><td>55.87</td><td>74.00</td><td>-18.13</td><td>55.48</td><td>0.39</td><td>Peak</td><td>233</td><td>31</td></tr><tr><td>3</td><td>5470.00</td><td>57.23</td><td>68.20</td><td>-10.97</td><td>56.84</td><td>0.39</td><td>Peak</td><td>233</td><td>31</td></tr><tr><td>4</td><td>5850.00</td><td>55.91</td><td>68.20</td><td>-12.29</td><td>54.94</td><td>0.97</td><td>Peak</td><td>233</td><td>31</td></tr><tr><td>5</td><td>11440.00</td><td>45.76</td><td>54.00</td><td>-8.24</td><td>38.55</td><td>7.21</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td>11440.00</td><td>58.58</td><td>74.00</td><td>-15.42</td><td>51.37</td><td>7.21</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>7</td><td>17160.00</td><td>59.58</td><td>68.20</td><td>-8.62</td><td>53.03</td><td>6.55</td><td>Peak</td><td>100</td><td>186</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.96	54.00	-11.04	42.57	0.39	Average	233	31	2	5460.00	55.87	74.00	-18.13	55.48	0.39	Peak	233	31	3	5470.00	57.23	68.20	-10.97	56.84	0.39	Peak	233	31	4	5850.00	55.91	68.20	-12.29	54.94	0.97	Peak	233	31	5	11440.00	45.76	54.00	-8.24	38.55	7.21	Average	100	258	6	11440.00	58.58	74.00	-15.42	51.37	7.21	Peak	100	258	7	17160.00	59.58	68.20	-8.62	53.03	6.55	Peak	100	186
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	42.96	54.00	-11.04	42.57	0.39	Average	233	31																																																																										
2	5460.00	55.87	74.00	-18.13	55.48	0.39	Peak	233	31																																																																										
3	5470.00	57.23	68.20	-10.97	56.84	0.39	Peak	233	31																																																																										
4	5850.00	55.91	68.20	-12.29	54.94	0.97	Peak	233	31																																																																										
5	11440.00	45.76	54.00	-8.24	38.55	7.21	Average	100	258																																																																										
6	11440.00	58.58	74.00	-15.42	51.37	7.21	Peak	100	258																																																																										
7	17160.00	59.58	68.20	-8.62	53.03	6.55	Peak	100	186																																																																										

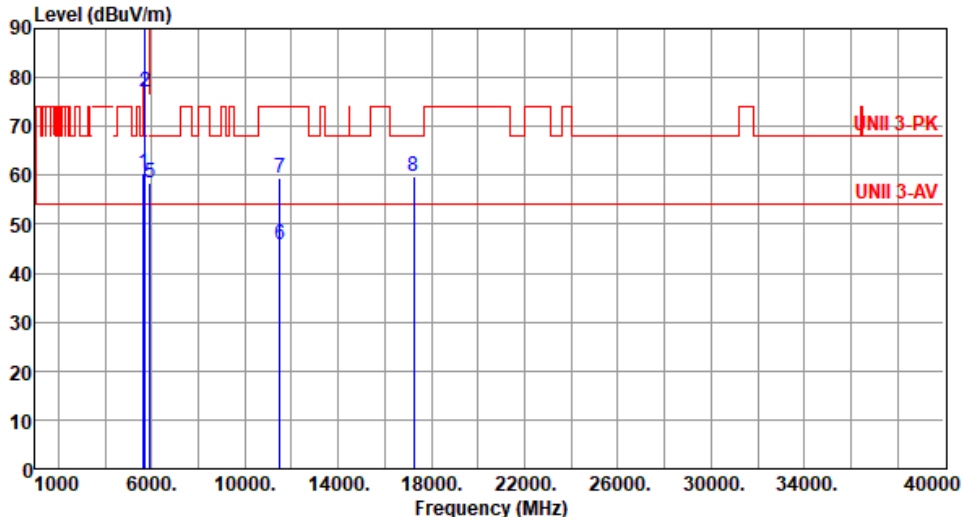


Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>60.29</td><td>68.20</td><td>-7.91</td><td>60.07</td><td>0.22</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>2</td><td>5700.00</td><td>76.97</td><td>105.20</td><td>-28.23</td><td>76.43</td><td>0.54</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>3</td><td>5720.00</td><td>96.20</td><td>110.80</td><td>-14.60</td><td>95.62</td><td>0.58</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>4</td><td>5725.00</td><td>99.79</td><td>122.20</td><td>-22.41</td><td>99.20</td><td>0.59</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>5</td><td>5925.00</td><td>58.37</td><td>68.20</td><td>-9.83</td><td>57.23</td><td>1.14</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>6</td><td>11490.00</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>38.55</td><td>7.35</td><td>Average</td><td>158</td><td>249</td></tr><tr><td>7</td><td>11490.00</td><td>59.29</td><td>74.00</td><td>-14.71</td><td>51.94</td><td>7.35</td><td>Peak</td><td>158</td><td>249</td></tr><tr><td>8</td><td>17235.00</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>52.85</td><td>6.77</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.29	68.20	-7.91	60.07	0.22	Peak	241	57	2	5700.00	76.97	105.20	-28.23	76.43	0.54	Peak	241	57	3	5720.00	96.20	110.80	-14.60	95.62	0.58	Peak	241	57	4	5725.00	99.79	122.20	-22.41	99.20	0.59	Peak	241	57	5	5925.00	58.37	68.20	-9.83	57.23	1.14	Peak	241	57	6	11490.00	45.90	54.00	-8.10	38.55	7.35	Average	158	249	7	11490.00	59.29	74.00	-14.71	51.94	7.35	Peak	158	249	8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	222
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	60.29	68.20	-7.91	60.07	0.22	Peak	241	57																																																																																				
2	5700.00	76.97	105.20	-28.23	76.43	0.54	Peak	241	57																																																																																				
3	5720.00	96.20	110.80	-14.60	95.62	0.58	Peak	241	57																																																																																				
4	5725.00	99.79	122.20	-22.41	99.20	0.59	Peak	241	57																																																																																				
5	5925.00	58.37	68.20	-9.83	57.23	1.14	Peak	241	57																																																																																				
6	11490.00	45.90	54.00	-8.10	38.55	7.35	Average	158	249																																																																																				
7	11490.00	59.29	74.00	-14.71	51.94	7.35	Peak	158	249																																																																																				
8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	222																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

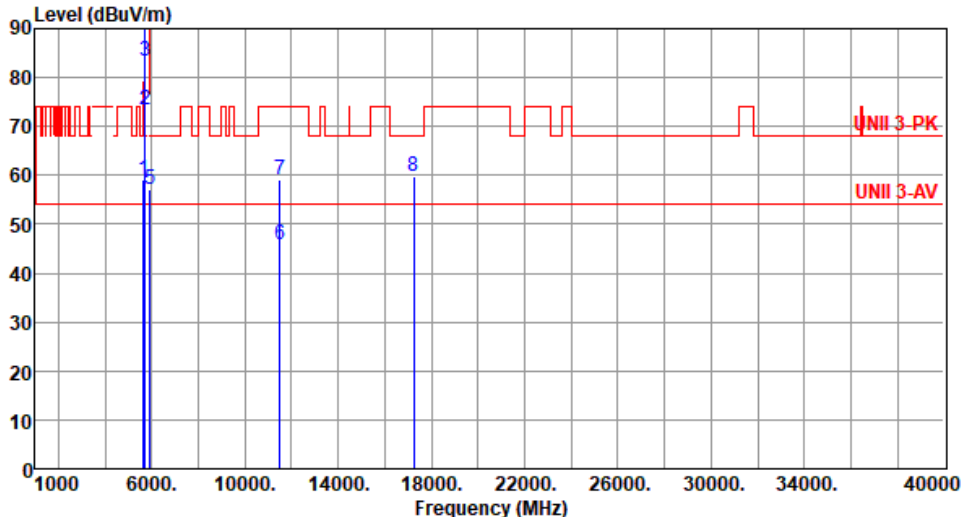



Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>59.04</td><td>0.22</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>2</td><td>5700.00</td><td>73.55</td><td>105.20</td><td>-31.65</td><td>73.01</td><td>0.54</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>3</td><td>5720.00</td><td>83.21</td><td>110.80</td><td>-27.59</td><td>82.63</td><td>0.58</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>4</td><td>5725.00</td><td>89.96</td><td>122.20</td><td>-32.24</td><td>89.37</td><td>0.59</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>5</td><td>5925.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>56.13</td><td>1.14</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>6</td><td>11490.00</td><td>45.81</td><td>54.00</td><td>-8.19</td><td>38.46</td><td>7.35</td><td>Average</td><td>233</td><td>258</td></tr><tr><td>7</td><td>11490.00</td><td>59.11</td><td>74.00</td><td>-14.89</td><td>51.76</td><td>7.35</td><td>Peak</td><td>233</td><td>258</td></tr><tr><td>8</td><td>17235.00</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>52.85</td><td>6.77</td><td>Peak</td><td>100</td><td>179</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.26	68.20	-8.94	59.04	0.22	Peak	206	12	2	5700.00	73.55	105.20	-31.65	73.01	0.54	Peak	206	12	3	5720.00	83.21	110.80	-27.59	82.63	0.58	Peak	206	12	4	5725.00	89.96	122.20	-32.24	89.37	0.59	Peak	206	12	5	5925.00	57.27	68.20	-10.93	56.13	1.14	Peak	206	12	6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	233	258	7	11490.00	59.11	74.00	-14.89	51.76	7.35	Peak	233	258	8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	179
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	59.26	68.20	-8.94	59.04	0.22	Peak	206	12																																																																																				
2	5700.00	73.55	105.20	-31.65	73.01	0.54	Peak	206	12																																																																																				
3	5720.00	83.21	110.80	-27.59	82.63	0.58	Peak	206	12																																																																																				
4	5725.00	89.96	122.20	-32.24	89.37	0.59	Peak	206	12																																																																																				
5	5925.00	57.27	68.20	-10.93	56.13	1.14	Peak	206	12																																																																																				
6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	233	258																																																																																				
7	11490.00	59.11	74.00	-14.89	51.76	7.35	Peak	233	258																																																																																				
8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	179																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

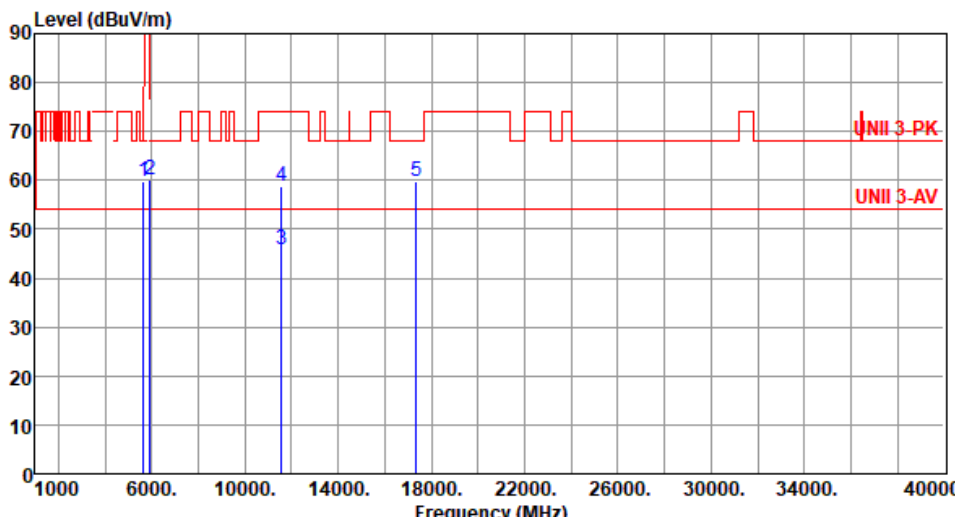


Modulation	ax HE20	Test Freq. (MHz)	5785						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.86	68.20	-8.34	59.64	0.22	Peak	234	82
2	5925.00	60.25	68.20	-7.95	59.11	1.14	Peak	234	82
3	11570.00	45.83	54.00	-8.17	38.57	7.26	Average	100	220
4	11570.00	58.94	74.00	-15.06	51.68	7.26	Peak	100	220
5	17355.00	59.81	68.20	-8.39	52.85	6.96	Peak	100	205
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

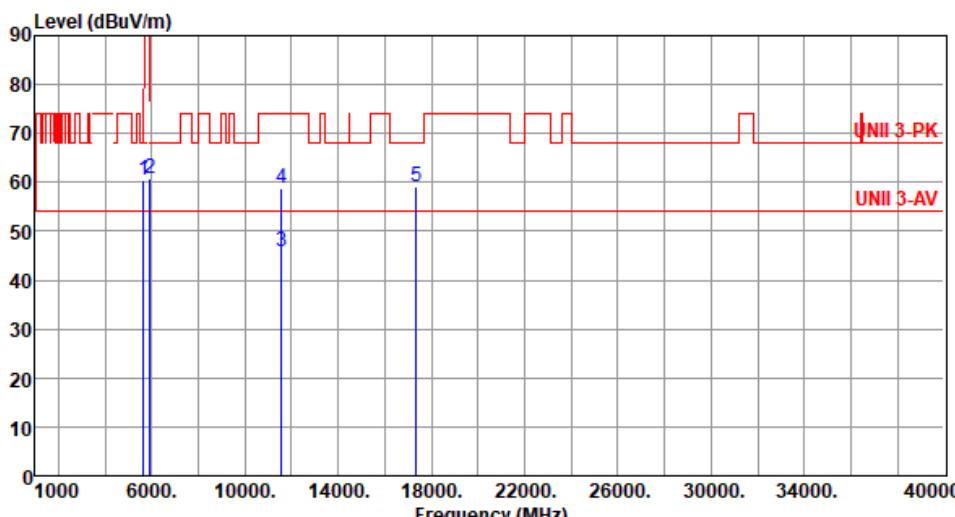


Modulation	ax HE20	Test Freq. (MHz)	5785																																																													
Polarization	Vertical																																																															
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																
																																																																
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>60.36</td><td>68.20</td><td>-7.84</td><td>60.14</td><td>0.22</td><td>Peak</td><td>248</td><td>21</td></tr><tr><td>2</td><td>5925.00</td><td>60.71</td><td>68.20</td><td>-7.49</td><td>59.57</td><td>1.14</td><td>Peak</td><td>248</td><td>21</td></tr><tr><td>3</td><td>11570.00</td><td>45.92</td><td>54.00</td><td>-8.08</td><td>38.66</td><td>7.26</td><td>Average</td><td>155</td><td>234</td></tr><tr><td>4</td><td>11570.00</td><td>58.64</td><td>74.00</td><td>-15.36</td><td>51.38</td><td>7.26</td><td>Peak</td><td>155</td><td>234</td></tr><tr><td>5</td><td>17355.00</td><td>59.22</td><td>68.20</td><td>-8.98</td><td>52.26</td><td>6.96</td><td>Peak</td><td>100</td><td>108</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.36	68.20	-7.84	60.14	0.22	Peak	248	21	2	5925.00	60.71	68.20	-7.49	59.57	1.14	Peak	248	21	3	11570.00	45.92	54.00	-8.08	38.66	7.26	Average	155	234	4	11570.00	58.64	74.00	-15.36	51.38	7.26	Peak	155	234	5	17355.00	59.22	68.20	-8.98	52.26	6.96	Peak	100	108			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																							
1	5650.00	60.36	68.20	-7.84	60.14	0.22	Peak	248	21																																																							
2	5925.00	60.71	68.20	-7.49	59.57	1.14	Peak	248	21																																																							
3	11570.00	45.92	54.00	-8.08	38.66	7.26	Average	155	234																																																							
4	11570.00	58.64	74.00	-15.36	51.38	7.26	Peak	155	234																																																							
5	17355.00	59.22	68.20	-8.98	52.26	6.96	Peak	100	108																																																							
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																

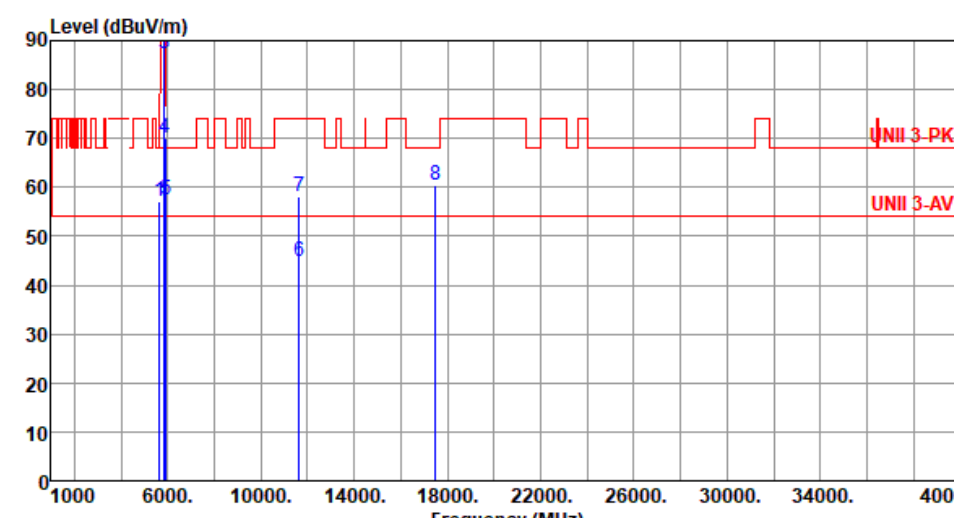Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.07</td><td>68.20</td><td>-11.13</td><td>56.85</td><td>0.22</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>2</td><td>5850.00</td><td>91.23</td><td>122.20</td><td>-30.97</td><td>90.26</td><td>0.97</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>3</td><td>5855.00</td><td>87.44</td><td>110.80</td><td>-23.36</td><td>86.45</td><td>0.99</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>4</td><td>5875.00</td><td>69.97</td><td>105.20</td><td>-35.23</td><td>68.95</td><td>1.02</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>5</td><td>5925.00</td><td>57.57</td><td>68.20</td><td>-10.63</td><td>56.43</td><td>1.14</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>6</td><td>11650.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>38.27</td><td>6.66</td><td>Average</td><td>150</td><td>211</td></tr><tr><td>7</td><td>11650.00</td><td>58.24</td><td>74.00</td><td>-15.76</td><td>51.58</td><td>6.66</td><td>Peak</td><td>150</td><td>211</td></tr><tr><td>8</td><td>17475.00</td><td>60.31</td><td>68.20</td><td>-7.89</td><td>52.86</td><td>7.45</td><td>Peak</td><td>100</td><td>106</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.07	68.20	-11.13	56.85	0.22	Peak	233	77	2	5850.00	91.23	122.20	-30.97	90.26	0.97	Peak	233	77	3	5855.00	87.44	110.80	-23.36	86.45	0.99	Peak	233	77	4	5875.00	69.97	105.20	-35.23	68.95	1.02	Peak	233	77	5	5925.00	57.57	68.20	-10.63	56.43	1.14	Peak	233	77	6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	150	211	7	11650.00	58.24	74.00	-15.76	51.58	6.66	Peak	150	211	8	17475.00	60.31	68.20	-7.89	52.86	7.45	Peak	100	106
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	57.07	68.20	-11.13	56.85	0.22	Peak	233	77																																																																																				
2	5850.00	91.23	122.20	-30.97	90.26	0.97	Peak	233	77																																																																																				
3	5855.00	87.44	110.80	-23.36	86.45	0.99	Peak	233	77																																																																																				
4	5875.00	69.97	105.20	-35.23	68.95	1.02	Peak	233	77																																																																																				
5	5925.00	57.57	68.20	-10.63	56.43	1.14	Peak	233	77																																																																																				
6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	150	211																																																																																				
7	11650.00	58.24	74.00	-15.76	51.58	6.66	Peak	150	211																																																																																				
8	17475.00	60.31	68.20	-7.89	52.86	7.45	Peak	100	106																																																																																				

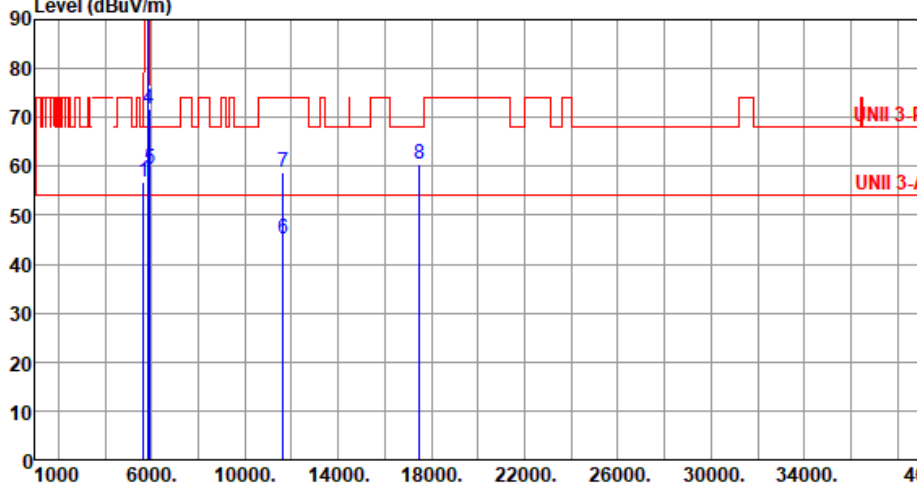


Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>56.71</td><td>68.20</td><td>-11.49</td><td>56.49</td><td>0.22</td><td>Peak</td><td>213</td><td>26</td></tr><tr><td>2</td><td>5850.00</td><td>94.10</td><td>122.20</td><td>-28.10</td><td>93.13</td><td>0.97</td><td>Peak</td><td>213</td><td>26</td></tr><tr><td>3</td><td>5855.00</td><td>91.11</td><td>110.80</td><td>-19.69</td><td>90.12</td><td>0.99</td><td>Peak</td><td>213</td><td>26</td></tr><tr><td>4</td><td>5875.00</td><td>71.89</td><td>105.20</td><td>-33.31</td><td>70.87</td><td>1.02</td><td>Peak</td><td>213</td><td>26</td></tr><tr><td>5</td><td>5925.00</td><td>59.60</td><td>68.20</td><td>-8.60</td><td>58.46</td><td>1.14</td><td>Peak</td><td>213</td><td>26</td></tr><tr><td>6</td><td>11650.00</td><td>45.09</td><td>54.00</td><td>-8.91</td><td>38.43</td><td>6.66</td><td>Average</td><td>220</td><td>251</td></tr><tr><td>7</td><td>11650.00</td><td>58.80</td><td>74.00</td><td>-15.20</td><td>52.14</td><td>6.66</td><td>Peak</td><td>220</td><td>251</td></tr><tr><td>8</td><td>17475.00</td><td>60.33</td><td>68.20</td><td>-7.87</td><td>52.88</td><td>7.45</td><td>Peak</td><td>100</td><td>188</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	56.71	68.20	-11.49	56.49	0.22	Peak	213	26	2	5850.00	94.10	122.20	-28.10	93.13	0.97	Peak	213	26	3	5855.00	91.11	110.80	-19.69	90.12	0.99	Peak	213	26	4	5875.00	71.89	105.20	-33.31	70.87	1.02	Peak	213	26	5	5925.00	59.60	68.20	-8.60	58.46	1.14	Peak	213	26	6	11650.00	45.09	54.00	-8.91	38.43	6.66	Average	220	251	7	11650.00	58.80	74.00	-15.20	52.14	6.66	Peak	220	251	8	17475.00	60.33	68.20	-7.87	52.88	7.45	Peak	100	188
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	56.71	68.20	-11.49	56.49	0.22	Peak	213	26																																																																																				
2	5850.00	94.10	122.20	-28.10	93.13	0.97	Peak	213	26																																																																																				
3	5855.00	91.11	110.80	-19.69	90.12	0.99	Peak	213	26																																																																																				
4	5875.00	71.89	105.20	-33.31	70.87	1.02	Peak	213	26																																																																																				
5	5925.00	59.60	68.20	-8.60	58.46	1.14	Peak	213	26																																																																																				
6	11650.00	45.09	54.00	-8.91	38.43	6.66	Average	220	251																																																																																				
7	11650.00	58.80	74.00	-15.20	52.14	6.66	Peak	220	251																																																																																				
8	17475.00	60.33	68.20	-7.87	52.88	7.45	Peak	100	188																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

Unwanted Emissions (Above 1GHz) for ax HE40

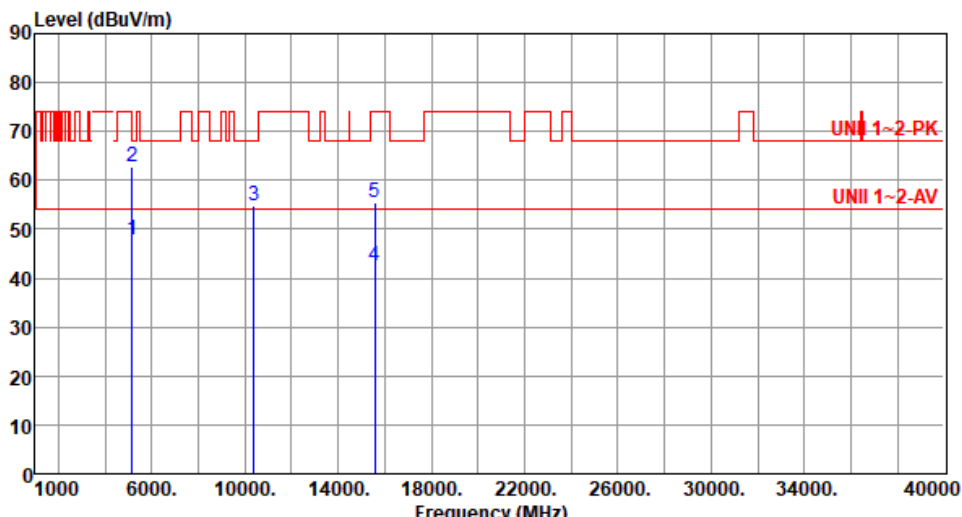Modulation	ax HE40	Test Freq. (MHz)	5190																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>47.56</td><td>0.34</td><td>Average</td><td>238</td><td>76</td></tr><tr><td>2</td><td>5150.00</td><td>62.65</td><td>74.00</td><td>-11.35</td><td>62.31</td><td>0.34</td><td>Peak</td><td>238</td><td>76</td></tr><tr><td>3</td><td>10380.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>47.56</td><td>7.39</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>4</td><td>15570.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>38.51</td><td>3.97</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>5</td><td>15570.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>51.56</td><td>3.97</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	238	76	2	5150.00	62.65	74.00	-11.35	62.31	0.34	Peak	238	76	3	10380.00	54.95	68.20	-13.25	47.56	7.39	Peak	100	126	4	15570.00	42.48	54.00	-11.52	38.51	3.97	Average	100	214	5	15570.00	55.53	74.00	-18.47	51.56	3.97	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	238	76																																																						
2	5150.00	62.65	74.00	-11.35	62.31	0.34	Peak	238	76																																																						
3	10380.00	54.95	68.20	-13.25	47.56	7.39	Peak	100	126																																																						
4	15570.00	42.48	54.00	-11.52	38.51	3.97	Average	100	214																																																						
5	15570.00	55.53	74.00	-18.47	51.56	3.97	Peak	100	214																																																						

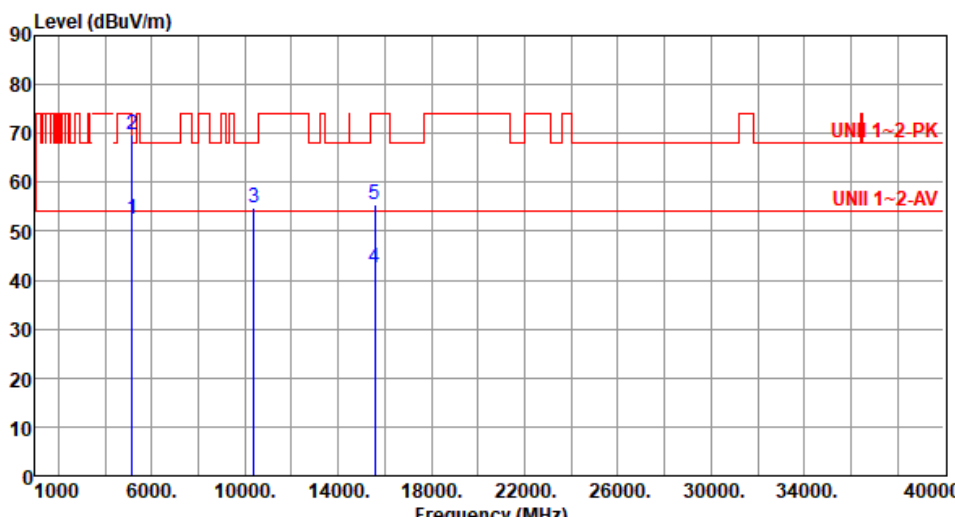

Modulation	ax HE40	Test Freq. (MHz)	5190																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.52</td><td>54.00</td><td>-1.48</td><td>52.18</td><td>0.34</td><td>Average</td><td>191</td><td>359</td></tr><tr><td>2</td><td>5150.00</td><td>69.75</td><td>74.00</td><td>-4.25</td><td>69.41</td><td>0.34</td><td>Peak</td><td>191</td><td>359</td></tr><tr><td>3</td><td>10380.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>47.46</td><td>7.39</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>4</td><td>15570.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>38.46</td><td>3.97</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>5</td><td>15570.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>51.38</td><td>3.97</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.52	54.00	-1.48	52.18	0.34	Average	191	359	2	5150.00	69.75	74.00	-4.25	69.41	0.34	Peak	191	359	3	10380.00	54.85	68.20	-13.35	47.46	7.39	Peak	100	155	4	15570.00	42.43	54.00	-11.57	38.46	3.97	Average	100	223	5	15570.00	55.35	74.00	-18.65	51.38	3.97	Peak	100	223
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	52.52	54.00	-1.48	52.18	0.34	Average	191	359																																																						
2	5150.00	69.75	74.00	-4.25	69.41	0.34	Peak	191	359																																																						
3	10380.00	54.85	68.20	-13.35	47.46	7.39	Peak	100	155																																																						
4	15570.00	42.43	54.00	-11.57	38.46	3.97	Average	100	223																																																						
5	15570.00	55.35	74.00	-18.65	51.38	3.97	Peak	100	223																																																						



Modulation	ax HE40	Test Freq. (MHz)	5230																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) 1 2 3 4 5 6 7 UNII 1~2-PK UNII 1~2-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>47.66</td><td>54.00</td><td>-6.34</td><td>47.32</td><td>0.34</td><td>Average</td><td>137</td><td>11</td></tr><tr><td>2</td><td>5150.00</td><td>64.76</td><td>74.00</td><td>-9.24</td><td>64.42</td><td>0.34</td><td>Peak</td><td>137</td><td>11</td></tr><tr><td>3</td><td>5350.00</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>43.64</td><td>-0.25</td><td>Average</td><td>137</td><td>11</td></tr><tr><td>4</td><td>5350.00</td><td>56.59</td><td>74.00</td><td>-17.41</td><td>56.84</td><td>-0.25</td><td>Peak</td><td>137</td><td>11</td></tr><tr><td>5</td><td>10460.00</td><td>55.76</td><td>68.20</td><td>-12.44</td><td>48.43</td><td>7.33</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>6</td><td>15690.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>38.51</td><td>4.18</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>7</td><td>15690.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>51.23</td><td>4.18</td><td>Peak</td><td>100</td><td>227</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	47.66	54.00	-6.34	47.32	0.34	Average	137	11	2	5150.00	64.76	74.00	-9.24	64.42	0.34	Peak	137	11	3	5350.00	43.39	54.00	-10.61	43.64	-0.25	Average	137	11	4	5350.00	56.59	74.00	-17.41	56.84	-0.25	Peak	137	11	5	10460.00	55.76	68.20	-12.44	48.43	7.33	Peak	100	231	6	15690.00	42.69	54.00	-11.31	38.51	4.18	Average	100	227	7	15690.00	55.41	74.00	-18.59	51.23	4.18	Peak	100	227
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1	5150.00	47.66	54.00	-6.34	47.32	0.34	Average	137	11																																																																																														
2	5150.00	64.76	74.00	-9.24	64.42	0.34	Peak	137	11																																																																																														
3	5350.00	43.39	54.00	-10.61	43.64	-0.25	Average	137	11																																																																																														
4	5350.00	56.59	74.00	-17.41	56.84	-0.25	Peak	137	11																																																																																														
5	10460.00	55.76	68.20	-12.44	48.43	7.33	Peak	100	231																																																																																														
6	15690.00	42.69	54.00	-11.31	38.51	4.18	Average	100	227																																																																																														
7	15690.00	55.41	74.00	-18.59	51.23	4.18	Peak	100	227																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							



Modulation	ax HE40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5270																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.31</td><td>54.00</td><td>-8.69</td><td>44.97</td><td>0.34</td><td>Average</td><td>202</td><td>234</td></tr><tr><td>2</td><td>5150.00</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>57.50</td><td>0.34</td><td>Peak</td><td>202</td><td>234</td></tr><tr><td>3</td><td>5350.00</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>51.12</td><td>-0.25</td><td>Average</td><td>202</td><td>234</td></tr><tr><td>4</td><td>5350.00</td><td>65.95</td><td>74.00</td><td>-8.05</td><td>66.20</td><td>-0.25</td><td>Peak</td><td>202</td><td>234</td></tr><tr><td>5</td><td>10540.00</td><td>54.81</td><td>68.20</td><td>-13.39</td><td>47.68</td><td>7.13</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>6</td><td>15810.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>38.66</td><td>3.82</td><td>Average</td><td>100</td><td>192</td></tr><tr><td>7</td><td>15810.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>51.46</td><td>3.82</td><td>Peak</td><td>100</td><td>192</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.31	54.00	-8.69	44.97	0.34	Average	202	234	2	5150.00	57.84	74.00	-16.16	57.50	0.34	Peak	202	234	3	5350.00	50.87	54.00	-3.13	51.12	-0.25	Average	202	234	4	5350.00	65.95	74.00	-8.05	66.20	-0.25	Peak	202	234	5	10540.00	54.81	68.20	-13.39	47.68	7.13	Peak	100	32	6	15810.00	42.48	54.00	-11.52	38.66	3.82	Average	100	192	7	15810.00	55.28	74.00	-18.72	51.46	3.82	Peak	100	192
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.31	54.00	-8.69	44.97	0.34	Average	202	234																																																																										
2	5150.00	57.84	74.00	-16.16	57.50	0.34	Peak	202	234																																																																										
3	5350.00	50.87	54.00	-3.13	51.12	-0.25	Average	202	234																																																																										
4	5350.00	65.95	74.00	-8.05	66.20	-0.25	Peak	202	234																																																																										
5	10540.00	54.81	68.20	-13.39	47.68	7.13	Peak	100	32																																																																										
6	15810.00	42.48	54.00	-11.52	38.66	3.82	Average	100	192																																																																										
7	15810.00	55.28	74.00	-18.72	51.46	3.82	Peak	100	192																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			




Modulation	ax HE40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5310																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>49.59</td><td>54.00</td><td>-4.41</td><td>49.84</td><td>-0.25</td><td>Average</td><td>174</td><td>20</td></tr><tr><td>2</td><td>5350.00</td><td>69.70</td><td>74.00</td><td>-4.30</td><td>69.95</td><td>-0.25</td><td>Peak</td><td>174</td><td>20</td></tr><tr><td>3</td><td>10620.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>34.24</td><td>7.61</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>4</td><td>10620.00</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>47.46</td><td>7.61</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>5</td><td>15930.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>38.48</td><td>4.33</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>6</td><td>15930.00</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>51.55</td><td>4.33</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	49.59	54.00	-4.41	49.84	-0.25	Average	174	20	2	5350.00	69.70	74.00	-4.30	69.95	-0.25	Peak	174	20	3	10620.00	41.85	54.00	-12.15	34.24	7.61	Average	100	128	4	10620.00	55.07	74.00	-18.93	47.46	7.61	Peak	100	128	5	15930.00	42.81	54.00	-11.19	38.48	4.33	Average	100	227	6	15930.00	55.88	74.00	-18.12	51.55	4.33	Peak	100	227
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	49.59	54.00	-4.41	49.84	-0.25	Average	174	20																																																																
2	5350.00	69.70	74.00	-4.30	69.95	-0.25	Peak	174	20																																																																
3	10620.00	41.85	54.00	-12.15	34.24	7.61	Average	100	128																																																																
4	10620.00	55.07	74.00	-18.93	47.46	7.61	Peak	100	128																																																																
5	15930.00	42.81	54.00	-11.19	38.48	4.33	Average	100	227																																																																
6	15930.00	55.88	74.00	-18.12	51.55	4.33	Peak	100	227																																																																

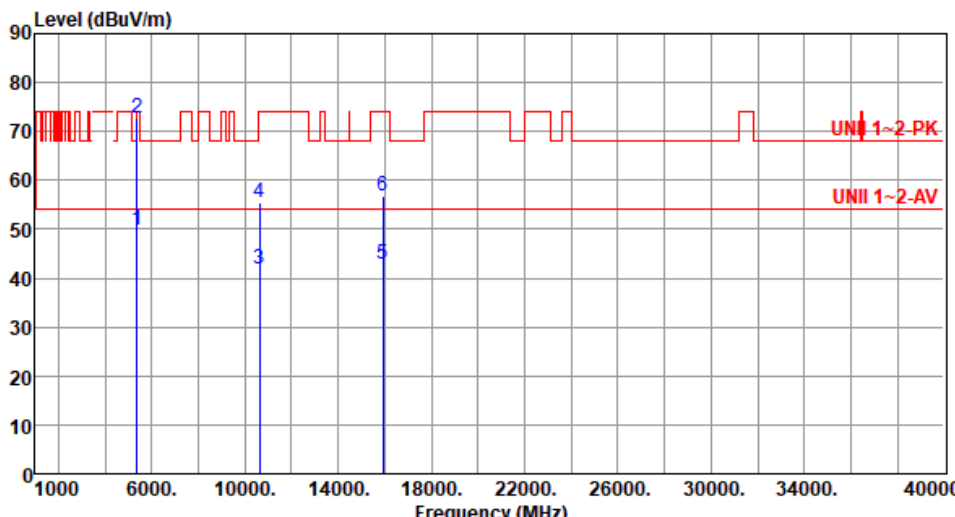

Modulation	ax HE40	Test Freq. (MHz)	5310																																																																							
Polarization	Vertical																																																																									
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																										
																																																																										
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5350.00</td><td>49.76</td><td>54.00</td><td>-4.24</td><td>50.01</td><td>-0.25</td><td>Average</td><td>236</td><td>1</td></tr><tr><td>2</td><td>5350.00</td><td>72.57</td><td>74.00</td><td>-1.43</td><td>72.82</td><td>-0.25</td><td>Peak</td><td>236</td><td>1</td></tr><tr><td>3</td><td>10620.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>34.21</td><td>7.61</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>4</td><td>10620.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>47.86</td><td>7.61</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>5</td><td>15930.00</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>38.44</td><td>4.33</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>6</td><td>15930.00</td><td>56.81</td><td>74.00</td><td>-17.19</td><td>52.48</td><td>4.33</td><td>Peak</td><td>100</td><td>247</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	49.76	54.00	-4.24	50.01	-0.25	Average	236	1	2	5350.00	72.57	74.00	-1.43	72.82	-0.25	Peak	236	1	3	10620.00	41.82	54.00	-12.18	34.21	7.61	Average	100	108	4	10620.00	55.47	74.00	-18.53	47.86	7.61	Peak	100	108	5	15930.00	42.77	54.00	-11.23	38.44	4.33	Average	100	247	6	15930.00	56.81	74.00	-17.19	52.48	4.33	Peak	100	247			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																	
1	5350.00	49.76	54.00	-4.24	50.01	-0.25	Average	236	1																																																																	
2	5350.00	72.57	74.00	-1.43	72.82	-0.25	Peak	236	1																																																																	
3	10620.00	41.82	54.00	-12.18	34.21	7.61	Average	100	108																																																																	
4	10620.00	55.47	74.00	-18.53	47.86	7.61	Peak	100	108																																																																	
5	15930.00	42.77	54.00	-11.23	38.44	4.33	Average	100	247																																																																	
6	15930.00	56.81	74.00	-17.19	52.48	4.33	Peak	100	247																																																																	
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																										



Modulation	ax HE40	Test Freq. (MHz)	5510
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5590																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.23</td><td>54.00</td><td>-7.77</td><td>45.84</td><td>0.39</td><td>Average</td><td>171</td><td>165</td></tr><tr><td>2</td><td>5460.00</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>54.86</td><td>0.39</td><td>Peak</td><td>171</td><td>165</td></tr><tr><td>3</td><td>5470.00</td><td>58.25</td><td>68.20</td><td>-9.95</td><td>57.86</td><td>0.39</td><td>Peak</td><td>171</td><td>165</td></tr><tr><td>4</td><td>5725.00</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>57.13</td><td>0.59</td><td>Peak</td><td>171</td><td>165</td></tr><tr><td>5</td><td>11180.00</td><td>44.09</td><td>54.00</td><td>-9.91</td><td>37.26</td><td>6.83</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>6</td><td>11180.00</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>50.84</td><td>6.83</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>7</td><td>16770.00</td><td>60.26</td><td>68.20</td><td>-7.94</td><td>52.89</td><td>7.37</td><td>Peak</td><td>100</td><td>200</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.23	54.00	-7.77	45.84	0.39	Average	171	165	2	5460.00	55.25	74.00	-18.75	54.86	0.39	Peak	171	165	3	5470.00	58.25	68.20	-9.95	57.86	0.39	Peak	171	165	4	5725.00	57.72	68.20	-10.48	57.13	0.59	Peak	171	165	5	11180.00	44.09	54.00	-9.91	37.26	6.83	Average	100	243	6	11180.00	57.67	74.00	-16.33	50.84	6.83	Peak	100	243	7	16770.00	60.26	68.20	-7.94	52.89	7.37	Peak	100	200
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	46.23	54.00	-7.77	45.84	0.39	Average	171	165																																																																										
2	5460.00	55.25	74.00	-18.75	54.86	0.39	Peak	171	165																																																																										
3	5470.00	58.25	68.20	-9.95	57.86	0.39	Peak	171	165																																																																										
4	5725.00	57.72	68.20	-10.48	57.13	0.59	Peak	171	165																																																																										
5	11180.00	44.09	54.00	-9.91	37.26	6.83	Average	100	243																																																																										
6	11180.00	57.67	74.00	-16.33	50.84	6.83	Peak	100	243																																																																										
7	16770.00	60.26	68.20	-7.94	52.89	7.37	Peak	100	200																																																																										



Modulation	ax HE40	Test Freq. (MHz)	5670																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>66.17</td><td>68.20</td><td>-2.03</td><td>65.58</td><td>0.59</td><td>Peak</td><td>161</td><td>43</td></tr><tr><td>2</td><td>11340.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>35.86</td><td>7.09</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>3</td><td>11340.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>48.94</td><td>7.09</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>4</td><td>17010.00</td><td>60.00</td><td>68.20</td><td>-8.20</td><td>52.76</td><td>7.24</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	66.17	68.20	-2.03	65.58	0.59	Peak	161	43	2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	188	3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	188	4	17010.00	60.00	68.20	-8.20	52.76	7.24	Peak	100	205
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	66.17	68.20	-2.03	65.58	0.59	Peak	161	43																																												
2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	188																																												
3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	188																																												
4	17010.00	60.00	68.20	-8.20	52.76	7.24	Peak	100	205																																												



Modulation	ax HE40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			




Modulation	ax HE40	Test Freq. (MHz)	5710																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																																							
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>44.51</td><td>0.39</td><td>Average</td><td>248</td><td>23</td></tr><tr><td>2</td><td>5460.00</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>54.84</td><td>0.39</td><td>Peak</td><td>248</td><td>23</td></tr><tr><td>3</td><td>5470.00</td><td>55.52</td><td>68.20</td><td>-12.68</td><td>55.13</td><td>0.39</td><td>Peak</td><td>248</td><td>23</td></tr><tr><td>4</td><td>5850.00</td><td>59.10</td><td>68.20</td><td>-9.10</td><td>58.13</td><td>0.97</td><td>Peak</td><td>248</td><td>23</td></tr><tr><td>5</td><td>11420.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.62</td><td>7.22</td><td>Average</td><td>100</td><td>13</td></tr><tr><td>6</td><td>11420.00</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>48.62</td><td>7.22</td><td>Peak</td><td>100</td><td>13</td></tr><tr><td>7</td><td>17130.00</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>53.53</td><td>6.69</td><td>Peak</td><td>100</td><td>102</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	44.90	54.00	-9.10	44.51	0.39	Average	248	23	2	5460.00	55.23	74.00	-18.77	54.84	0.39	Peak	248	23	3	5470.00	55.52	68.20	-12.68	55.13	0.39	Peak	248	23	4	5850.00	59.10	68.20	-9.10	58.13	0.97	Peak	248	23	5	11420.00	42.84	54.00	-11.16	35.62	7.22	Average	100	13	6	11420.00	55.84	74.00	-18.16	48.62	7.22	Peak	100	13	7	17130.00	60.22	68.20	-7.98	53.53	6.69	Peak	100	102
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1	5460.00	44.90	54.00	-9.10	44.51	0.39	Average	248	23																																																																																														
2	5460.00	55.23	74.00	-18.77	54.84	0.39	Peak	248	23																																																																																														
3	5470.00	55.52	68.20	-12.68	55.13	0.39	Peak	248	23																																																																																														
4	5850.00	59.10	68.20	-9.10	58.13	0.97	Peak	248	23																																																																																														
5	11420.00	42.84	54.00	-11.16	35.62	7.22	Average	100	13																																																																																														
6	11420.00	55.84	74.00	-18.16	48.62	7.22	Peak	100	13																																																																																														
7	17130.00	60.22	68.20	-7.98	53.53	6.69	Peak	100	102																																																																																														




Modulation	ax HE40	Test Freq. (MHz)	5710																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>45.26</td><td>0.39</td><td>Average</td><td>203</td><td>211</td></tr><tr><td>2</td><td>5460.00</td><td>56.93</td><td>74.00</td><td>-17.07</td><td>56.54</td><td>0.39</td><td>Peak</td><td>203</td><td>211</td></tr><tr><td>3</td><td>5470.00</td><td>58.01</td><td>68.20</td><td>-10.19</td><td>57.62</td><td>0.39</td><td>Peak</td><td>203</td><td>211</td></tr><tr><td>4</td><td>5850.00</td><td>59.96</td><td>68.20</td><td>-8.24</td><td>58.99</td><td>0.97</td><td>Peak</td><td>203</td><td>211</td></tr><tr><td>5</td><td>11420.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>35.38</td><td>7.22</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>6</td><td>11420.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>48.86</td><td>7.22</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>7</td><td>17130.00</td><td>59.80</td><td>68.20</td><td>-8.40</td><td>53.11</td><td>6.69</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.65	54.00	-8.35	45.26	0.39	Average	203	211	2	5460.00	56.93	74.00	-17.07	56.54	0.39	Peak	203	211	3	5470.00	58.01	68.20	-10.19	57.62	0.39	Peak	203	211	4	5850.00	59.96	68.20	-8.24	58.99	0.97	Peak	203	211	5	11420.00	42.60	54.00	-11.40	35.38	7.22	Average	100	256	6	11420.00	56.08	74.00	-17.92	48.86	7.22	Peak	100	256	7	17130.00	59.80	68.20	-8.40	53.11	6.69	Peak	100	226
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	45.65	54.00	-8.35	45.26	0.39	Average	203	211																																																																										
2	5460.00	56.93	74.00	-17.07	56.54	0.39	Peak	203	211																																																																										
3	5470.00	58.01	68.20	-10.19	57.62	0.39	Peak	203	211																																																																										
4	5850.00	59.96	68.20	-8.24	58.99	0.97	Peak	203	211																																																																										
5	11420.00	42.60	54.00	-11.40	35.38	7.22	Average	100	256																																																																										
6	11420.00	56.08	74.00	-17.92	48.86	7.22	Peak	100	256																																																																										
7	17130.00	59.80	68.20	-8.40	53.11	6.69	Peak	100	226																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			

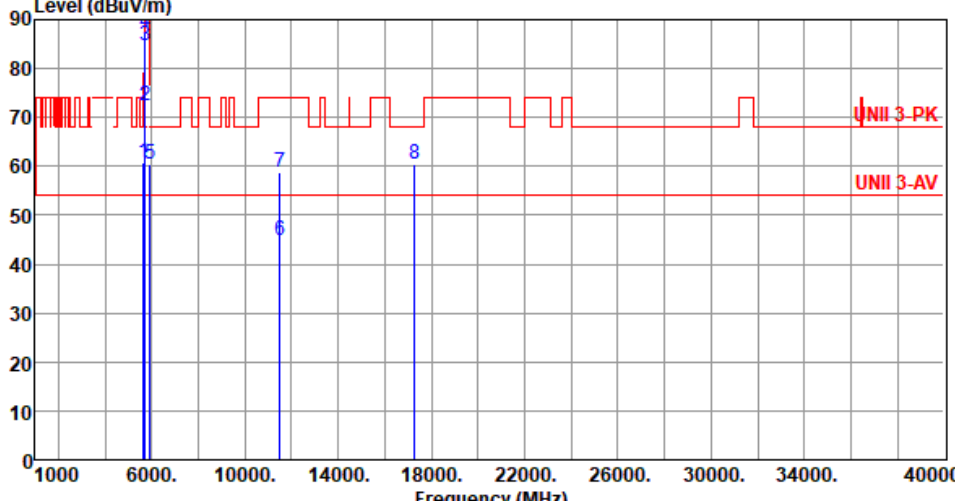

Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>60.82</td><td>68.20</td><td>-7.38</td><td>60.60</td><td>0.22</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>2</td><td>5700.00</td><td>72.37</td><td>105.20</td><td>-32.83</td><td>71.83</td><td>0.54</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>3</td><td>5720.00</td><td>84.70</td><td>110.80</td><td>-26.10</td><td>84.12</td><td>0.58</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>4</td><td>5725.00</td><td>87.46</td><td>122.20</td><td>-34.74</td><td>86.87</td><td>0.59</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>5</td><td>5925.00</td><td>60.57</td><td>68.20</td><td>-7.63</td><td>59.43</td><td>1.14</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>6</td><td>11510.00</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>37.51</td><td>7.39</td><td>Average</td><td>153</td><td>208</td></tr><tr><td>7</td><td>11510.00</td><td>58.65</td><td>74.00</td><td>-15.35</td><td>51.26</td><td>7.39</td><td>Peak</td><td>153</td><td>208</td></tr><tr><td>8</td><td>17265.00</td><td>60.28</td><td>68.20</td><td>-7.92</td><td>53.46</td><td>6.82</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.82	68.20	-7.38	60.60	0.22	Peak	180	67	2	5700.00	72.37	105.20	-32.83	71.83	0.54	Peak	180	67	3	5720.00	84.70	110.80	-26.10	84.12	0.58	Peak	180	67	4	5725.00	87.46	122.20	-34.74	86.87	0.59	Peak	180	67	5	5925.00	60.57	68.20	-7.63	59.43	1.14	Peak	180	67	6	11510.00	44.90	54.00	-9.10	37.51	7.39	Average	153	208	7	11510.00	58.65	74.00	-15.35	51.26	7.39	Peak	153	208	8	17265.00	60.28	68.20	-7.92	53.46	6.82	Peak	100	105
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	60.82	68.20	-7.38	60.60	0.22	Peak	180	67																																																																																				
2	5700.00	72.37	105.20	-32.83	71.83	0.54	Peak	180	67																																																																																				
3	5720.00	84.70	110.80	-26.10	84.12	0.58	Peak	180	67																																																																																				
4	5725.00	87.46	122.20	-34.74	86.87	0.59	Peak	180	67																																																																																				
5	5925.00	60.57	68.20	-7.63	59.43	1.14	Peak	180	67																																																																																				
6	11510.00	44.90	54.00	-9.10	37.51	7.39	Average	153	208																																																																																				
7	11510.00	58.65	74.00	-15.35	51.26	7.39	Peak	153	208																																																																																				
8	17265.00	60.28	68.20	-7.92	53.46	6.82	Peak	100	105																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

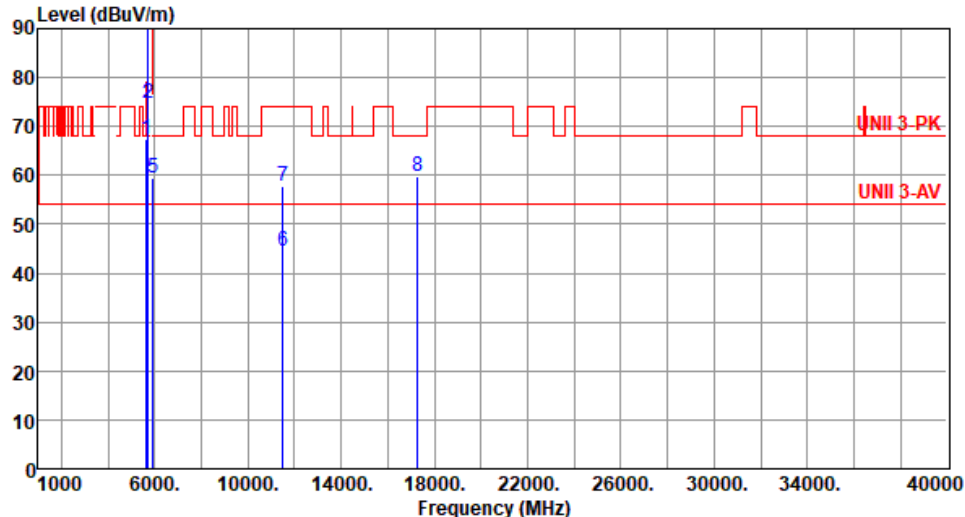


Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>67.46</td><td>68.20</td><td>-0.74</td><td>67.24</td><td>0.22</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>2</td><td>5700.00</td><td>74.84</td><td>105.20</td><td>-30.36</td><td>74.30</td><td>0.54</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>3</td><td>5720.00</td><td>88.92</td><td>110.80</td><td>-21.88</td><td>88.34</td><td>0.58</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>4</td><td>5725.00</td><td>91.94</td><td>122.20</td><td>-30.26</td><td>91.35</td><td>0.59</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>5</td><td>5925.00</td><td>59.45</td><td>68.20</td><td>-8.75</td><td>58.31</td><td>1.14</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>6</td><td>11510.00</td><td>44.55</td><td>54.00</td><td>-9.45</td><td>37.16</td><td>7.39</td><td>Average</td><td>203</td><td>288</td></tr><tr><td>7</td><td>11510.00</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>50.46</td><td>7.39</td><td>Peak</td><td>203</td><td>288</td></tr><tr><td>8</td><td>17265.00</td><td>59.66</td><td>68.20</td><td>-8.54</td><td>52.84</td><td>6.82</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.46	68.20	-0.74	67.24	0.22	Peak	230	234	2	5700.00	74.84	105.20	-30.36	74.30	0.54	Peak	230	234	3	5720.00	88.92	110.80	-21.88	88.34	0.58	Peak	230	234	4	5725.00	91.94	122.20	-30.26	91.35	0.59	Peak	230	234	5	5925.00	59.45	68.20	-8.75	58.31	1.14	Peak	230	234	6	11510.00	44.55	54.00	-9.45	37.16	7.39	Average	203	288	7	11510.00	57.85	74.00	-16.15	50.46	7.39	Peak	203	288	8	17265.00	59.66	68.20	-8.54	52.84	6.82	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	67.46	68.20	-0.74	67.24	0.22	Peak	230	234																																																																																				
2	5700.00	74.84	105.20	-30.36	74.30	0.54	Peak	230	234																																																																																				
3	5720.00	88.92	110.80	-21.88	88.34	0.58	Peak	230	234																																																																																				
4	5725.00	91.94	122.20	-30.26	91.35	0.59	Peak	230	234																																																																																				
5	5925.00	59.45	68.20	-8.75	58.31	1.14	Peak	230	234																																																																																				
6	11510.00	44.55	54.00	-9.45	37.16	7.39	Average	203	288																																																																																				
7	11510.00	57.85	74.00	-16.15	50.46	7.39	Peak	203	288																																																																																				
8	17265.00	59.66	68.20	-8.54	52.84	6.82	Peak	100	103																																																																																				



Modulation	ax HE40	Test Freq. (MHz)	5795																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>59.42</td><td>68.20</td><td>-8.78</td><td>59.20</td><td>0.22</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>2</td><td>5850.00</td><td>77.10</td><td>122.20</td><td>-45.10</td><td>76.13</td><td>0.97</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>3</td><td>5855.00</td><td>75.63</td><td>110.80</td><td>-35.17</td><td>74.64</td><td>0.99</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>4</td><td>5875.00</td><td>68.62</td><td>105.20</td><td>-36.58</td><td>67.60</td><td>1.02</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>5</td><td>5925.00</td><td>59.40</td><td>68.20</td><td>-8.80</td><td>58.26</td><td>1.14</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>6</td><td>11590.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>35.62</td><td>7.14</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>7</td><td>11590.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>48.99</td><td>7.14</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>8</td><td>17385.00</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>53.12</td><td>7.10</td><td>Peak</td><td>100</td><td>102</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.42	68.20	-8.78	59.20	0.22	Peak	135	241	2	5850.00	77.10	122.20	-45.10	76.13	0.97	Peak	135	241	3	5855.00	75.63	110.80	-35.17	74.64	0.99	Peak	135	241	4	5875.00	68.62	105.20	-36.58	67.60	1.02	Peak	135	241	5	5925.00	59.40	68.20	-8.80	58.26	1.14	Peak	135	241	6	11590.00	42.76	54.00	-11.24	35.62	7.14	Average	100	148	7	11590.00	56.13	74.00	-17.87	48.99	7.14	Peak	100	148	8	17385.00	60.22	68.20	-7.98	53.12	7.10	Peak	100	102
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	59.42	68.20	-8.78	59.20	0.22	Peak	135	241																																																																																				
2	5850.00	77.10	122.20	-45.10	76.13	0.97	Peak	135	241																																																																																				
3	5855.00	75.63	110.80	-35.17	74.64	0.99	Peak	135	241																																																																																				
4	5875.00	68.62	105.20	-36.58	67.60	1.02	Peak	135	241																																																																																				
5	5925.00	59.40	68.20	-8.80	58.26	1.14	Peak	135	241																																																																																				
6	11590.00	42.76	54.00	-11.24	35.62	7.14	Average	100	148																																																																																				
7	11590.00	56.13	74.00	-17.87	48.99	7.14	Peak	100	148																																																																																				
8	17385.00	60.22	68.20	-7.98	53.12	7.10	Peak	100	102																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

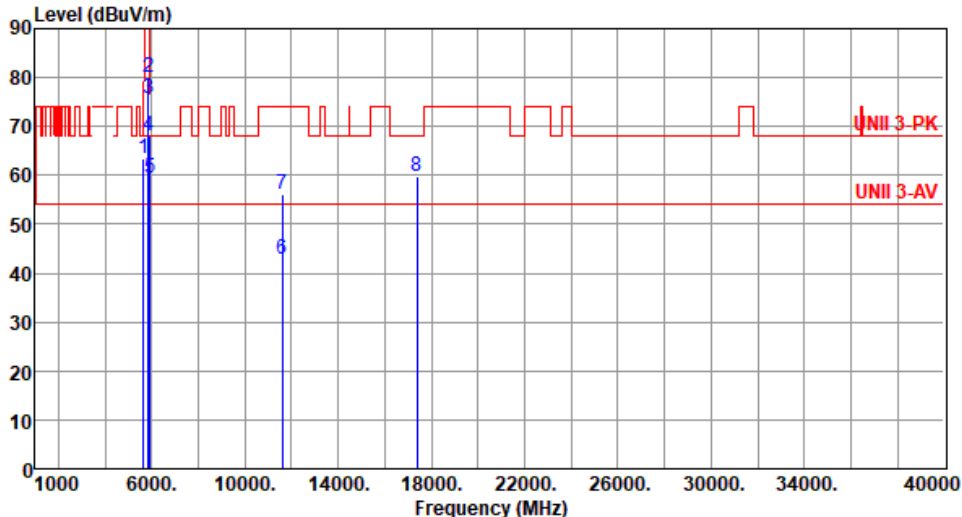

Modulation	ax HE40	Test Freq. (MHz)	5795																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>63.56</td><td>68.20</td><td>-4.64</td><td>63.34</td><td>0.22</td><td>Peak</td><td>241</td><td>18</td></tr><tr><td>2</td><td>5850.00</td><td>79.92</td><td>122.20</td><td>-42.28</td><td>78.95</td><td>0.97</td><td>Peak</td><td>241</td><td>18</td></tr><tr><td>3</td><td>5855.00</td><td>75.84</td><td>110.80</td><td>-34.96</td><td>74.85</td><td>0.99</td><td>Peak</td><td>241</td><td>18</td></tr><tr><td>4</td><td>5875.00</td><td>68.18</td><td>105.20</td><td>-37.02</td><td>67.16</td><td>1.02</td><td>Peak</td><td>241</td><td>18</td></tr><tr><td>5</td><td>5925.00</td><td>59.46</td><td>68.20</td><td>-8.74</td><td>58.32</td><td>1.14</td><td>Peak</td><td>241</td><td>18</td></tr><tr><td>6</td><td>11590.00</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>35.66</td><td>7.14</td><td>Average</td><td>100</td><td>102</td></tr><tr><td>7</td><td>11590.00</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>49.13</td><td>7.14</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>8</td><td>17385.00</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>52.84</td><td>7.10</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	63.56	68.20	-4.64	63.34	0.22	Peak	241	18	2	5850.00	79.92	122.20	-42.28	78.95	0.97	Peak	241	18	3	5855.00	75.84	110.80	-34.96	74.85	0.99	Peak	241	18	4	5875.00	68.18	105.20	-37.02	67.16	1.02	Peak	241	18	5	5925.00	59.46	68.20	-8.74	58.32	1.14	Peak	241	18	6	11590.00	42.80	54.00	-11.20	35.66	7.14	Average	100	102	7	11590.00	56.27	74.00	-17.73	49.13	7.14	Peak	100	102	8	17385.00	59.94	68.20	-8.26	52.84	7.10	Peak	100	116
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	63.56	68.20	-4.64	63.34	0.22	Peak	241	18																																																																																				
2	5850.00	79.92	122.20	-42.28	78.95	0.97	Peak	241	18																																																																																				
3	5855.00	75.84	110.80	-34.96	74.85	0.99	Peak	241	18																																																																																				
4	5875.00	68.18	105.20	-37.02	67.16	1.02	Peak	241	18																																																																																				
5	5925.00	59.46	68.20	-8.74	58.32	1.14	Peak	241	18																																																																																				
6	11590.00	42.80	54.00	-11.20	35.66	7.14	Average	100	102																																																																																				
7	11590.00	56.27	74.00	-17.73	49.13	7.14	Peak	100	102																																																																																				
8	17385.00	59.94	68.20	-8.26	52.84	7.10	Peak	100	116																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

Unwanted Emissions (Above 1GHz) for ax HE80

Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE80	Test Freq. (MHz)	5290																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.11</td><td>54.00</td><td>-9.89</td><td>43.77</td><td>0.34</td><td>Average</td><td>173</td><td>32</td></tr><tr><td>2</td><td>5150.00</td><td>56.74</td><td>74.00</td><td>-17.26</td><td>56.40</td><td>0.34</td><td>Peak</td><td>173</td><td>32</td></tr><tr><td>3</td><td>5350.00</td><td>51.11</td><td>54.00</td><td>-2.89</td><td>51.36</td><td>-0.25</td><td>Average</td><td>173</td><td>32</td></tr><tr><td>4</td><td>5350.00</td><td>63.93</td><td>74.00</td><td>-10.07</td><td>64.18</td><td>-0.25</td><td>Peak</td><td>173</td><td>32</td></tr><tr><td>5</td><td>10580.00</td><td>54.93</td><td>68.20</td><td>-13.27</td><td>47.54</td><td>7.39</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>6</td><td>15870.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>38.55</td><td>4.06</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>7</td><td>15870.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>51.46</td><td>4.06</td><td>Peak</td><td>100</td><td>156</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.11	54.00	-9.89	43.77	0.34	Average	173	32	2	5150.00	56.74	74.00	-17.26	56.40	0.34	Peak	173	32	3	5350.00	51.11	54.00	-2.89	51.36	-0.25	Average	173	32	4	5350.00	63.93	74.00	-10.07	64.18	-0.25	Peak	173	32	5	10580.00	54.93	68.20	-13.27	47.54	7.39	Peak	100	217	6	15870.00	42.61	54.00	-11.39	38.55	4.06	Average	100	156	7	15870.00	55.52	74.00	-18.48	51.46	4.06	Peak	100	156
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	44.11	54.00	-9.89	43.77	0.34	Average	173	32																																																																										
2	5150.00	56.74	74.00	-17.26	56.40	0.34	Peak	173	32																																																																										
3	5350.00	51.11	54.00	-2.89	51.36	-0.25	Average	173	32																																																																										
4	5350.00	63.93	74.00	-10.07	64.18	-0.25	Peak	173	32																																																																										
5	10580.00	54.93	68.20	-13.27	47.54	7.39	Peak	100	217																																																																										
6	15870.00	42.61	54.00	-11.39	38.55	4.06	Average	100	156																																																																										
7	15870.00	55.52	74.00	-18.48	51.46	4.06	Peak	100	156																																																																										




Modulation	ax HE80	Test Freq. (MHz)	5290						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.76	54.00	-9.24	44.42	0.34	Average	209	223
2	5150.00	56.46	74.00	-17.54	56.12	0.34	Peak	209	223
3	5350.00	52.69	54.00	-1.31	52.94	-0.25	Average	209	223
4	5350.00	66.93	74.00	-7.07	67.18	-0.25	Peak	209	223
5	10580.00	55.62	68.20	-12.58	48.23	7.39	Peak	100	147
6	15870.00	42.79	54.00	-11.21	38.73	4.06	Average	100	241
7	15870.00	55.54	74.00	-18.46	51.48	4.06	Peak	100	241

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	ax HE80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			

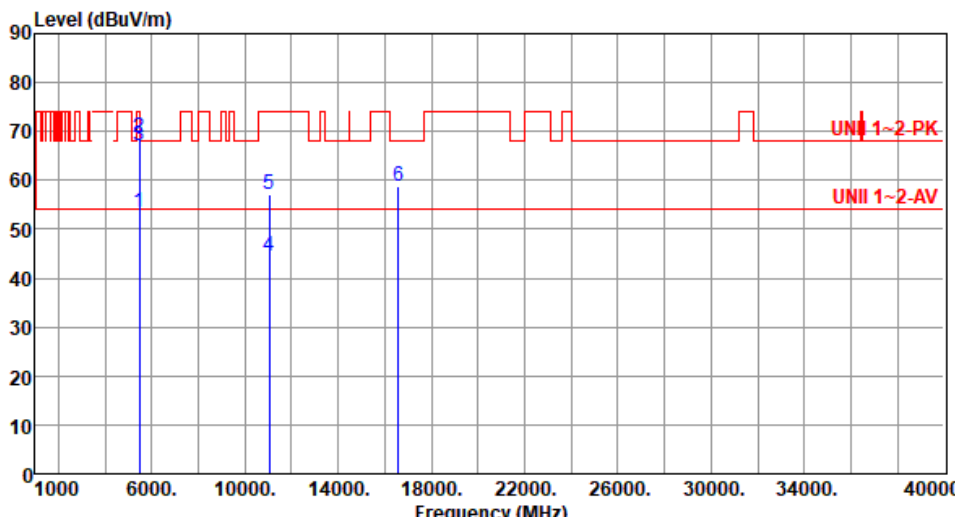

Modulation	ax HE80	Test Freq. (MHz)	5530						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	53.60	54.00	-0.40	53.21	0.39	Average	190	3
2	5460.00	68.68	74.00	-5.32	68.29	0.39	Peak	190	3
3	5470.00	67.10	68.20	-1.10	66.71	0.39	Peak	190	3
4	11060.00	44.36	54.00	-9.64	36.84	7.52	Average	100	88
5	11060.00	57.18	74.00	-16.82	49.66	7.52	Peak	100	88
6	16590.00	58.69	68.20	-9.51	52.31	6.38	Peak	100	223
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

Modulation	ax HE80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE80		Test Freq. (MHz)		5610				
Polarization	Vertical								
Test By :Sean Yu			Temperature(°C):26			Humidity(%):63			
Level (dBuV/m) </									




Modulation	ax HE80	Test Freq. (MHz)	5690																																																																															
Polarization	Horizontal																																																																																	
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																		
Level (dBuV/m) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>43.88</td><td>0.39</td><td>Average</td><td>141</td><td>40</td></tr><tr><td>2</td><td>5460.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>55.64</td><td>0.39</td><td>Peak</td><td>141</td><td>40</td></tr><tr><td>3</td><td>5470.00</td><td>56.46</td><td>68.20</td><td>-11.74</td><td>56.07</td><td>0.39</td><td>Peak</td><td>141</td><td>40</td></tr><tr><td>4</td><td>5850.00</td><td>62.51</td><td>68.20</td><td>-5.69</td><td>61.54</td><td>0.97</td><td>Peak</td><td>141</td><td>40</td></tr><tr><td>5</td><td>11380.00</td><td>43.42</td><td>54.00</td><td>-10.58</td><td>36.22</td><td>7.20</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>6</td><td>11380.00</td><td>57.36</td><td>74.00</td><td>-16.64</td><td>50.16</td><td>7.20</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>7</td><td>17070.00</td><td>59.93</td><td>68.20</td><td>-8.27</td><td>52.75</td><td>7.18</td><td>Peak</td><td>100</td><td>284</td></tr></tbody></table>				Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.27	54.00	-9.73	43.88	0.39	Average	141	40	2	5460.00	56.03	74.00	-17.97	55.64	0.39	Peak	141	40	3	5470.00	56.46	68.20	-11.74	56.07	0.39	Peak	141	40	4	5850.00	62.51	68.20	-5.69	61.54	0.97	Peak	141	40	5	11380.00	43.42	54.00	-10.58	36.22	7.20	Average	100	123	6	11380.00	57.36	74.00	-16.64	50.16	7.20	Peak	100	123	7	17070.00	59.93	68.20	-8.27	52.75	7.18	Peak	100	284
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	44.27	54.00	-9.73	43.88	0.39	Average	141	40																																																																									
2	5460.00	56.03	74.00	-17.97	55.64	0.39	Peak	141	40																																																																									
3	5470.00	56.46	68.20	-11.74	56.07	0.39	Peak	141	40																																																																									
4	5850.00	62.51	68.20	-5.69	61.54	0.97	Peak	141	40																																																																									
5	11380.00	43.42	54.00	-10.58	36.22	7.20	Average	100	123																																																																									
6	11380.00	57.36	74.00	-16.64	50.16	7.20	Peak	100	123																																																																									
7	17070.00	59.93	68.20	-8.27	52.75	7.18	Peak	100	284																																																																									
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																		




Modulation	ax HE80	Test Freq. (MHz)	5690																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>44.40</td><td>0.39</td><td>Average</td><td>237</td><td>157</td></tr><tr><td>2</td><td>5460.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>56.24</td><td>0.39</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>3</td><td>5470.00</td><td>59.49</td><td>68.20</td><td>-8.71</td><td>59.10</td><td>0.39</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>4</td><td>5850.00</td><td>63.53</td><td>68.20</td><td>-4.67</td><td>62.56</td><td>0.97</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>5</td><td>11380.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>35.46</td><td>7.20</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>11380.00</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>49.23</td><td>7.20</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>7</td><td>17070.00</td><td>60.37</td><td>68.20</td><td>-7.83</td><td>53.19</td><td>7.18</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.79	54.00	-9.21	44.40	0.39	Average	237	157	2	5460.00	56.63	74.00	-17.37	56.24	0.39	Peak	237	157	3	5470.00	59.49	68.20	-8.71	59.10	0.39	Peak	237	157	4	5850.00	63.53	68.20	-4.67	62.56	0.97	Peak	237	157	5	11380.00	42.66	54.00	-11.34	35.46	7.20	Average	100	188	6	11380.00	56.43	74.00	-17.57	49.23	7.20	Peak	100	188	7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	203
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	44.79	54.00	-9.21	44.40	0.39	Average	237	157																																																																										
2	5460.00	56.63	74.00	-17.37	56.24	0.39	Peak	237	157																																																																										
3	5470.00	59.49	68.20	-8.71	59.10	0.39	Peak	237	157																																																																										
4	5850.00	63.53	68.20	-4.67	62.56	0.97	Peak	237	157																																																																										
5	11380.00	42.66	54.00	-11.34	35.46	7.20	Average	100	188																																																																										
6	11380.00	56.43	74.00	-17.57	49.23	7.20	Peak	100	188																																																																										
7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	203																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

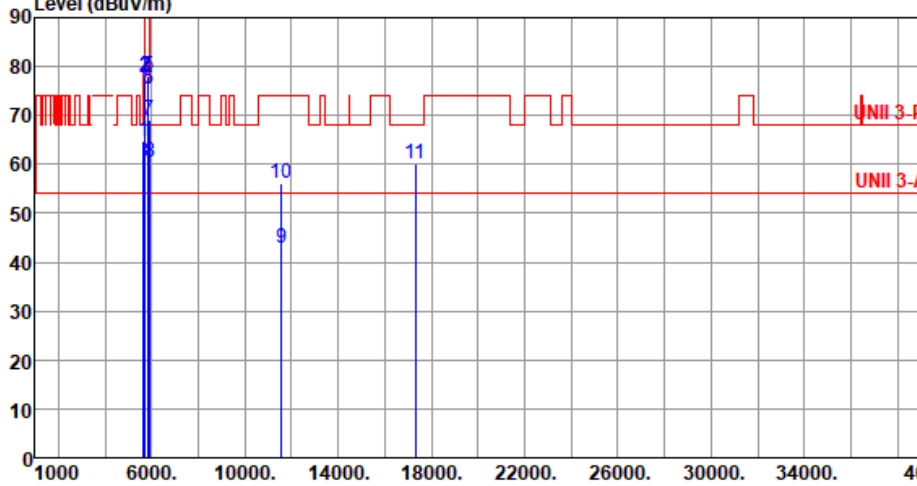


Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>64.75</td><td>68.20</td><td>-3.45</td><td>64.53</td><td>0.22</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>2</td><td>5700.00</td><td>77.91</td><td>105.20</td><td>-27.29</td><td>77.37</td><td>0.54</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>3</td><td>5720.00</td><td>77.77</td><td>110.80</td><td>-33.03</td><td>77.19</td><td>0.58</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>4</td><td>5725.00</td><td>76.88</td><td>122.20</td><td>-45.32</td><td>76.29</td><td>0.59</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>5</td><td>5850.00</td><td>77.96</td><td>122.20</td><td>-44.24</td><td>76.99</td><td>0.97</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>6</td><td>5855.00</td><td>75.22</td><td>110.80</td><td>-35.58</td><td>74.23</td><td>0.99</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>7</td><td>5875.00</td><td>69.20</td><td>105.20</td><td>-36.00</td><td>68.18</td><td>1.02</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>8</td><td>5925.00</td><td>60.40</td><td>68.20</td><td>-7.80</td><td>59.26</td><td>1.14</td><td>Peak</td><td>181</td><td>284</td></tr><tr><td>9</td><td>11550.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>35.57</td><td>7.38</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>10</td><td>11550.00</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>48.76</td><td>7.38</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>11</td><td>17325.00</td><td>60.12</td><td>68.20</td><td>-8.08</td><td>53.26</td><td>6.86</td><td>Peak</td><td>100</td><td>240</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	64.75	68.20	-3.45	64.53	0.22	Peak	181	284	2	5700.00	77.91	105.20	-27.29	77.37	0.54	Peak	181	284	3	5720.00	77.77	110.80	-33.03	77.19	0.58	Peak	181	284	4	5725.00	76.88	122.20	-45.32	76.29	0.59	Peak	181	284	5	5850.00	77.96	122.20	-44.24	76.99	0.97	Peak	181	284	6	5855.00	75.22	110.80	-35.58	74.23	0.99	Peak	181	284	7	5875.00	69.20	105.20	-36.00	68.18	1.02	Peak	181	284	8	5925.00	60.40	68.20	-7.80	59.26	1.14	Peak	181	284	9	11550.00	42.95	54.00	-11.05	35.57	7.38	Average	100	251	10	11550.00	56.14	74.00	-17.86	48.76	7.38	Peak	100	251	11	17325.00	60.12	68.20	-8.08	53.26	6.86	Peak	100	240
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	64.75	68.20	-3.45	64.53	0.22	Peak	181	284																																																																																																																		
2	5700.00	77.91	105.20	-27.29	77.37	0.54	Peak	181	284																																																																																																																		
3	5720.00	77.77	110.80	-33.03	77.19	0.58	Peak	181	284																																																																																																																		
4	5725.00	76.88	122.20	-45.32	76.29	0.59	Peak	181	284																																																																																																																		
5	5850.00	77.96	122.20	-44.24	76.99	0.97	Peak	181	284																																																																																																																		
6	5855.00	75.22	110.80	-35.58	74.23	0.99	Peak	181	284																																																																																																																		
7	5875.00	69.20	105.20	-36.00	68.18	1.02	Peak	181	284																																																																																																																		
8	5925.00	60.40	68.20	-7.80	59.26	1.14	Peak	181	284																																																																																																																		
9	11550.00	42.95	54.00	-11.05	35.57	7.38	Average	100	251																																																																																																																		
10	11550.00	56.14	74.00	-17.86	48.76	7.38	Peak	100	251																																																																																																																		
11	17325.00	60.12	68.20	-8.08	53.26	6.86	Peak	100	240																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																											

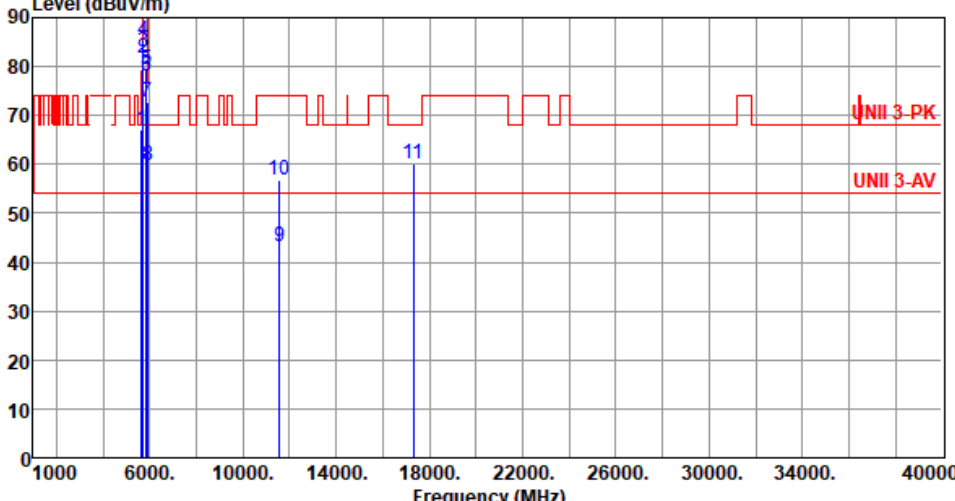


Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																											
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>67.08</td><td>68.20</td><td>-1.12</td><td>66.86</td><td>0.22</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>2</td><td>5700.00</td><td>81.54</td><td>105.20</td><td>-23.66</td><td>81.00</td><td>0.54</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>3</td><td>5720.00</td><td>83.05</td><td>110.80</td><td>-27.75</td><td>82.47</td><td>0.58</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>4</td><td>5725.00</td><td>85.21</td><td>122.20</td><td>-36.99</td><td>84.62</td><td>0.59</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>5</td><td>5850.00</td><td>79.45</td><td>122.20</td><td>-42.75</td><td>78.48</td><td>0.97</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>6</td><td>5855.00</td><td>77.94</td><td>110.80</td><td>-32.86</td><td>76.95</td><td>0.99</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>7</td><td>5875.00</td><td>72.76</td><td>105.20</td><td>-32.44</td><td>71.74</td><td>1.02</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>8</td><td>5925.00</td><td>59.85</td><td>68.20</td><td>-8.35</td><td>58.71</td><td>1.14</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>9</td><td>11550.00</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>35.64</td><td>7.38</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>10</td><td>11550.00</td><td>56.71</td><td>74.00</td><td>-17.29</td><td>49.33</td><td>7.38</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>11</td><td>17325.00</td><td>60.08</td><td>68.20</td><td>-8.12</td><td>53.22</td><td>6.86</td><td>Peak</td><td>100</td><td>110</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.08	68.20	-1.12	66.86	0.22	Peak	237	145	2	5700.00	81.54	105.20	-23.66	81.00	0.54	Peak	237	145	3	5720.00	83.05	110.80	-27.75	82.47	0.58	Peak	237	145	4	5725.00	85.21	122.20	-36.99	84.62	0.59	Peak	237	145	5	5850.00	79.45	122.20	-42.75	78.48	0.97	Peak	237	145	6	5855.00	77.94	110.80	-32.86	76.95	0.99	Peak	237	145	7	5875.00	72.76	105.20	-32.44	71.74	1.02	Peak	237	145	8	5925.00	59.85	68.20	-8.35	58.71	1.14	Peak	237	145	9	11550.00	43.02	54.00	-10.98	35.64	7.38	Average	100	148	10	11550.00	56.71	74.00	-17.29	49.33	7.38	Peak	100	148	11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	110
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	67.08	68.20	-1.12	66.86	0.22	Peak	237	145																																																																																																																		
2	5700.00	81.54	105.20	-23.66	81.00	0.54	Peak	237	145																																																																																																																		
3	5720.00	83.05	110.80	-27.75	82.47	0.58	Peak	237	145																																																																																																																		
4	5725.00	85.21	122.20	-36.99	84.62	0.59	Peak	237	145																																																																																																																		
5	5850.00	79.45	122.20	-42.75	78.48	0.97	Peak	237	145																																																																																																																		
6	5855.00	77.94	110.80	-32.86	76.95	0.99	Peak	237	145																																																																																																																		
7	5875.00	72.76	105.20	-32.44	71.74	1.02	Peak	237	145																																																																																																																		
8	5925.00	59.85	68.20	-8.35	58.71	1.14	Peak	237	145																																																																																																																		
9	11550.00	43.02	54.00	-10.98	35.64	7.38	Average	100	148																																																																																																																		
10	11550.00	56.71	74.00	-17.29	49.33	7.38	Peak	100	148																																																																																																																		
11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	110																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																											

Unwanted Emissions (Above 1GHz) for ax HE160

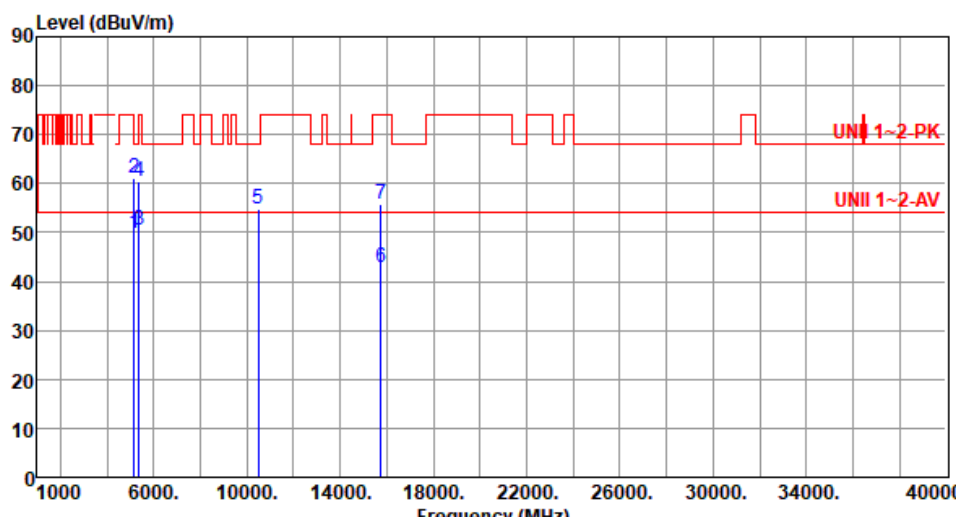Modulation	ax HE160	Test Freq. (MHz)	5250																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>49.75</td><td>54.00</td><td>-4.25</td><td>49.41</td><td>0.34</td><td>Average</td><td>129</td><td>17</td></tr><tr><td>2</td><td>5150.00</td><td>61.01</td><td>74.00</td><td>-12.99</td><td>60.67</td><td>0.34</td><td>Peak</td><td>129</td><td>17</td></tr><tr><td>3</td><td>5350.00</td><td>50.41</td><td>54.00</td><td>-3.59</td><td>50.66</td><td>-0.25</td><td>Average</td><td>129</td><td>17</td></tr><tr><td>4</td><td>5350.00</td><td>60.42</td><td>74.00</td><td>-13.58</td><td>60.67</td><td>-0.25</td><td>Peak</td><td>129</td><td>17</td></tr><tr><td>5</td><td>10500.00</td><td>54.91</td><td>68.20</td><td>-13.29</td><td>47.68</td><td>7.23</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>6</td><td>15750.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>38.46</td><td>4.23</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>7</td><td>15750.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>51.53</td><td>4.23</td><td>Peak</td><td>100</td><td>158</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	49.75	54.00	-4.25	49.41	0.34	Average	129	17	2	5150.00	61.01	74.00	-12.99	60.67	0.34	Peak	129	17	3	5350.00	50.41	54.00	-3.59	50.66	-0.25	Average	129	17	4	5350.00	60.42	74.00	-13.58	60.67	-0.25	Peak	129	17	5	10500.00	54.91	68.20	-13.29	47.68	7.23	Peak	100	128	6	15750.00	42.69	54.00	-11.31	38.46	4.23	Average	100	158	7	15750.00	55.76	74.00	-18.24	51.53	4.23	Peak	100	158
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	49.75	54.00	-4.25	49.41	0.34	Average	129	17																																																																										
2	5150.00	61.01	74.00	-12.99	60.67	0.34	Peak	129	17																																																																										
3	5350.00	50.41	54.00	-3.59	50.66	-0.25	Average	129	17																																																																										
4	5350.00	60.42	74.00	-13.58	60.67	-0.25	Peak	129	17																																																																										
5	10500.00	54.91	68.20	-13.29	47.68	7.23	Peak	100	128																																																																										
6	15750.00	42.69	54.00	-11.31	38.46	4.23	Average	100	158																																																																										
7	15750.00	55.76	74.00	-18.24	51.53	4.23	Peak	100	158																																																																										

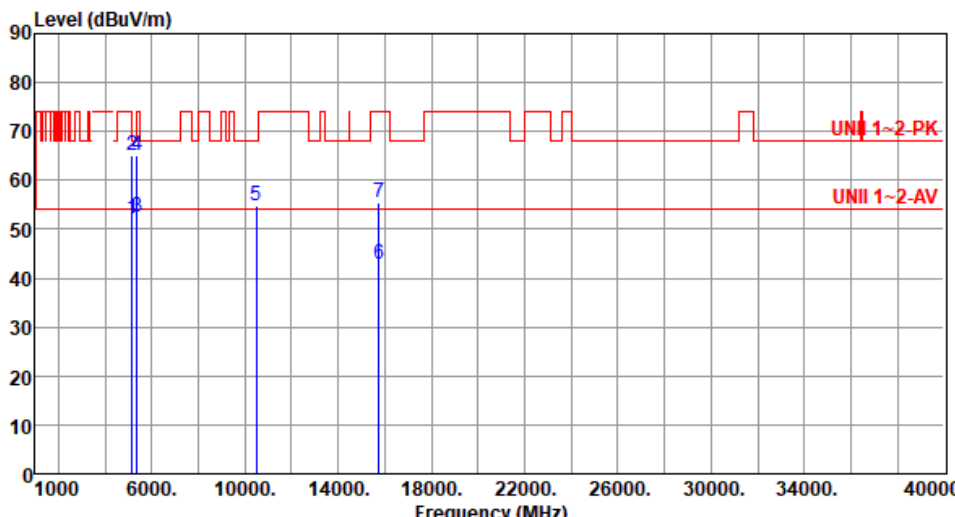

Modulation	ax HE160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.27	54.00	-1.73	51.93	0.34	Average	233	1
2	5150.00	64.93	74.00	-9.07	64.59	0.34	Peak	233	1
3	5350.00	52.39	54.00	-1.61	52.64	-0.25	Average	233	1
4	5350.00	65.17	74.00	-8.83	65.42	-0.25	Peak	233	1
5	10500.00	54.75	68.20	-13.45	47.52	7.23	Peak	100	123
6	15750.00	42.72	54.00	-11.28	38.49	4.23	Average	100	258
7	15750.00	55.55	74.00	-18.45	51.32	4.23	Peak	100	258
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) <			



Modulation	ax HE160	Test Freq. (MHz)	5570																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>52.60</td><td>54.00</td><td>-1.40</td><td>52.21</td><td>0.39</td><td>Average</td><td>251</td><td>9</td></tr><tr><td>2</td><td>5460.00</td><td>66.18</td><td>74.00</td><td>-7.82</td><td>65.79</td><td>0.39</td><td>Peak</td><td>251</td><td>9</td></tr><tr><td>3</td><td>5470.00</td><td>66.80</td><td>68.20</td><td>-1.40</td><td>66.41</td><td>0.39</td><td>Peak</td><td>251</td><td>9</td></tr><tr><td>4</td><td>5725.00</td><td>64.69</td><td>68.20</td><td>-3.51</td><td>64.10</td><td>0.59</td><td>Peak</td><td>251</td><td>9</td></tr><tr><td>5</td><td>11140.00</td><td>41.95</td><td>54.00</td><td>-12.05</td><td>34.87</td><td>7.08</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td>11140.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>47.87</td><td>7.08</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>7</td><td>16710.00</td><td>60.03</td><td>68.20</td><td>-8.17</td><td>52.56</td><td>7.47</td><td>Peak</td><td>100</td><td>116</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	52.60	54.00	-1.40	52.21	0.39	Average	251	9	2	5460.00	66.18	74.00	-7.82	65.79	0.39	Peak	251	9	3	5470.00	66.80	68.20	-1.40	66.41	0.39	Peak	251	9	4	5725.00	64.69	68.20	-3.51	64.10	0.59	Peak	251	9	5	11140.00	41.95	54.00	-12.05	34.87	7.08	Average	100	258	6	11140.00	54.95	74.00	-19.05	47.87	7.08	Peak	100	258	7	16710.00	60.03	68.20	-8.17	52.56	7.47	Peak	100	116
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	52.60	54.00	-1.40	52.21	0.39	Average	251	9																																																																										
2	5460.00	66.18	74.00	-7.82	65.79	0.39	Peak	251	9																																																																										
3	5470.00	66.80	68.20	-1.40	66.41	0.39	Peak	251	9																																																																										
4	5725.00	64.69	68.20	-3.51	64.10	0.59	Peak	251	9																																																																										
5	11140.00	41.95	54.00	-12.05	34.87	7.08	Average	100	258																																																																										
6	11140.00	54.95	74.00	-19.05	47.87	7.08	Peak	100	258																																																																										
7	16710.00	60.03	68.20	-8.17	52.56	7.47	Peak	100	116																																																																										



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.45	1.89	-0.40	-1.01
T20°C Vmin	8.42	5.68	2.63	1.87
T40°C Vnom	-9.15	-9.83	-10.50	-10.72
T30°C Vnom	-1.36	-2.85	-4.11	-4.48
T20°C Vnom	4.38	1.89	-0.43	-1.04
T10°C Vnom	8.42	5.73	2.66	1.94
T0°C Vnom	13.49	10.31	6.44	5.58
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	5.86	3.08	0.13	-0.77
T20°C Vmin	8.74	5.43	2.77	1.94
T40°C Vnom	-9.33	-9.89	-10.50	-10.72
T30°C Vnom	-0.73	-2.73	-4.34	-4.84
T20°C Vnom	5.79	3.05	0.06	-0.80
T10°C Vnom	8.83	5.50	2.78	2.02
T0°C Vnom	12.38	9.15	6.40	5.48
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	


Non-beamforming mode

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

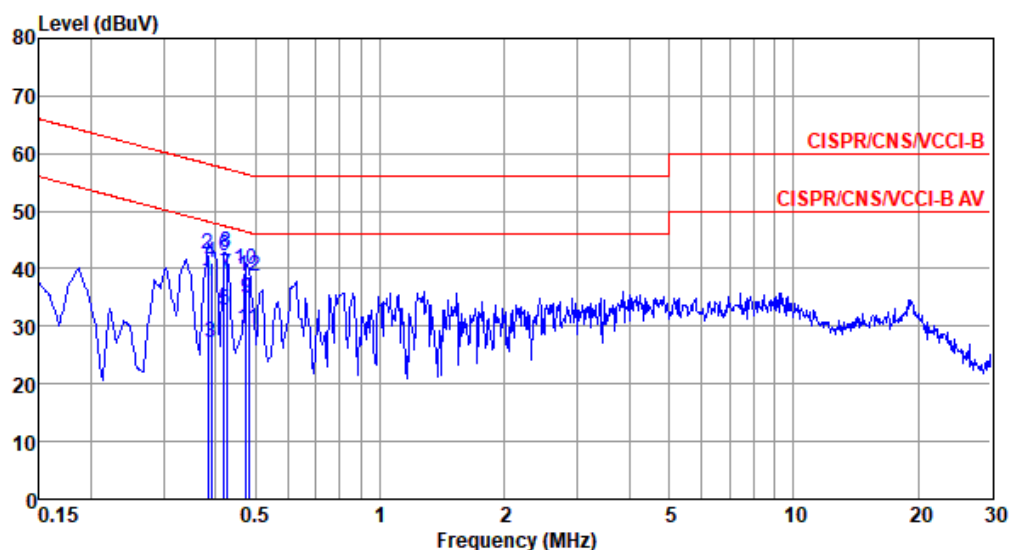

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.383	37.80	48.21	-10.41	27.75	9.64	0.09	0.32	Average
2	0.383	42.52	58.21	-15.69	32.47	9.64	0.09	0.32	QP
3	0.391	27.20	48.03	-20.83	17.15	9.64	0.09	0.32	Average
4	0.391	40.95	58.03	-17.08	30.90	9.64	0.09	0.32	QP
5	0.419	32.79	47.46	-14.67	22.74	9.64	0.09	0.32	Average
6	0.419	42.21	57.46	-15.25	32.16	9.64	0.09	0.32	QP
7*	0.426	39.04	47.33	-8.29	28.98	9.64	0.09	0.33	Average
8	0.426	42.73	57.33	-14.60	32.67	9.64	0.09	0.33	QP
9	0.474	34.72	46.45	-11.73	24.66	9.64	0.09	0.33	Average
10	0.474	39.75	56.45	-16.70	29.69	9.64	0.09	0.33	QP
11	0.481	29.60	46.32	-16.72	19.53	9.64	0.09	0.34	Average
12	0.481	38.75	56.32	-17.57	28.68	9.64	0.09	0.34	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C


Humidity: 64%

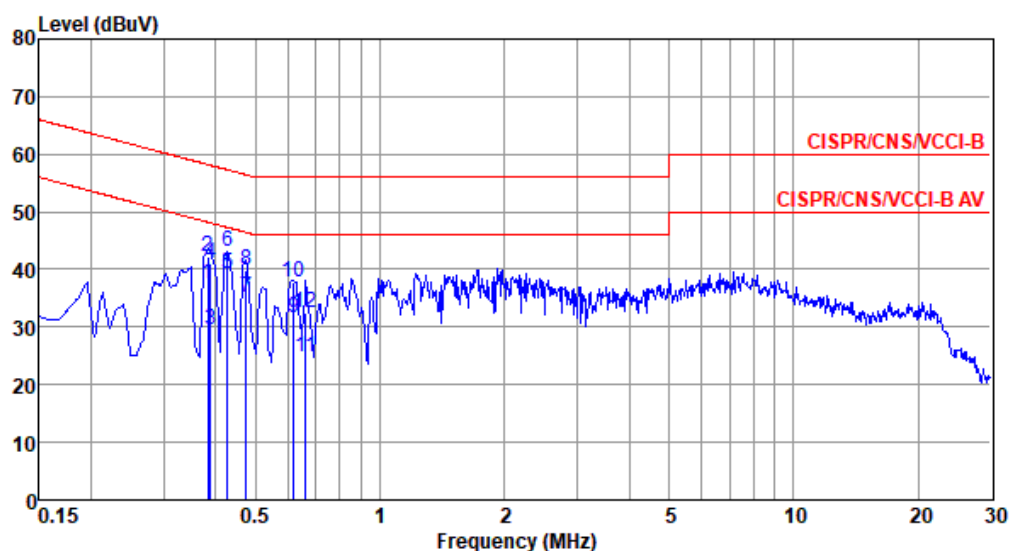

	Freq MHz	Level dBuV	Limit dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.383	37.45	48.21	-10.76	27.46	9.64	0.09	0.26	Average
2	0.383	42.23	58.21	-15.98	32.24	9.64	0.09	0.26	QP
3	0.389	29.49	48.08	-18.59	19.50	9.64	0.09	0.26	Average
4	0.389	41.15	58.08	-16.93	31.16	9.64	0.09	0.26	QP
5*	0.428	39.34	47.29	-7.95	29.34	9.64	0.09	0.27	Average
6	0.428	43.16	57.29	-14.13	33.16	9.64	0.09	0.27	QP
7	0.474	35.12	46.45	-11.33	25.11	9.64	0.09	0.28	Average
8	0.474	39.74	56.45	-16.71	29.73	9.64	0.09	0.28	QP
9	0.617	31.69	46.00	-14.31	21.66	9.64	0.09	0.30	Average
10	0.617	37.88	56.00	-18.12	27.85	9.64	0.09	0.30	QP
11	0.661	24.74	46.00	-21.26	14.68	9.65	0.10	0.31	Average
12	0.661	32.46	56.00	-23.54	22.40	9.65	0.10	0.31	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).

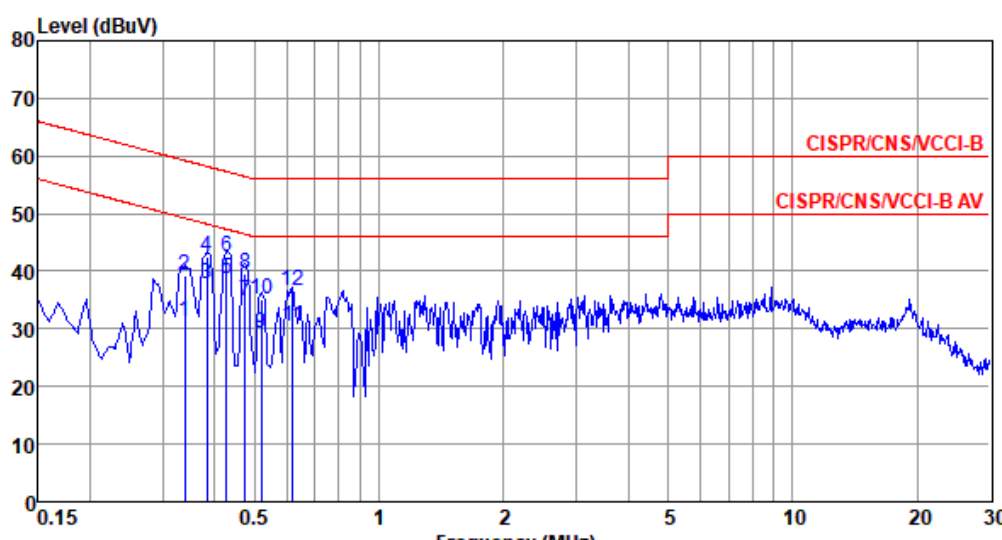Modulation Mode	11a	Test Freq. (MHz)	5745						
Power Phase	Line								
Test by : Akun Chung Temperature: 24°C Humidity: 64%									
Level (dBUV)  Frequency (MHz)									
	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.339	31.33	49.22	-17.89	21.29	9.64	0.09	0.31	Average
2	0.339	39.25	59.22	-19.97	29.21	9.64	0.09	0.31	QP
3	0.383	37.76	48.21	-10.45	27.71	9.64	0.09	0.32	Average
4	0.383	42.54	58.21	-15.67	32.49	9.64	0.09	0.32	QP
5*	0.428	38.62	47.29	-8.67	28.56	9.64	0.09	0.33	Average
6	0.428	42.58	57.29	-14.71	32.52	9.64	0.09	0.33	QP
7	0.474	34.76	46.45	-11.69	24.70	9.64	0.09	0.33	Average
8	0.474	39.48	56.45	-16.97	29.42	9.64	0.09	0.33	QP
9	0.518	29.23	46.00	-16.77	19.16	9.64	0.09	0.34	Average
10	0.518	35.01	56.00	-20.99	24.94	9.64	0.09	0.34	QP
11	0.617	30.34	46.00	-15.66	20.25	9.64	0.09	0.36	Average
12	0.617	36.65	56.00	-19.35	26.56	9.64	0.09	0.36	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

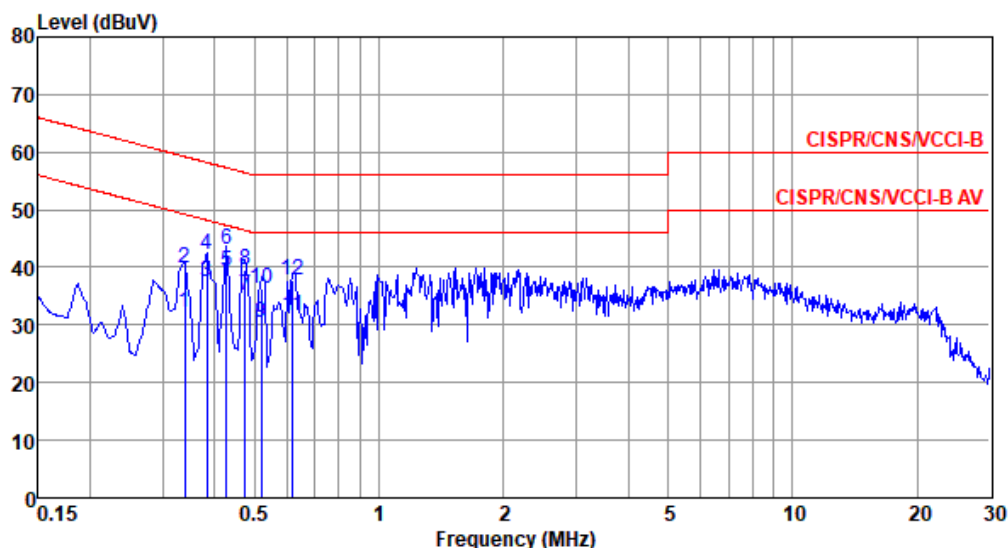

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.339	32.05	49.22	-17.17	22.07	9.64	0.09	0.25	Average
2	0.339	39.76	59.22	-19.46	29.78	9.64	0.09	0.25	QP
3	0.383	37.48	48.21	-10.73	27.49	9.64	0.09	0.26	Average
4	0.383	42.26	58.21	-15.95	32.27	9.64	0.09	0.26	QP
5*	0.428	39.32	47.29	-7.97	29.32	9.64	0.09	0.27	Average
6	0.428	43.22	57.29	-14.07	33.22	9.64	0.09	0.27	QP
7	0.474	35.15	46.45	-11.30	25.14	9.64	0.09	0.28	Average
8	0.474	39.65	56.45	-16.80	29.64	9.64	0.09	0.28	QP
9	0.518	30.48	46.00	-15.52	20.46	9.64	0.09	0.29	Average
10	0.518	36.39	56.00	-19.61	26.37	9.64	0.09	0.29	QP
11	0.617	31.61	46.00	-14.39	21.58	9.64	0.09	0.30	Average
12	0.617	37.87	56.00	-18.13	27.84	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Beamforming mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

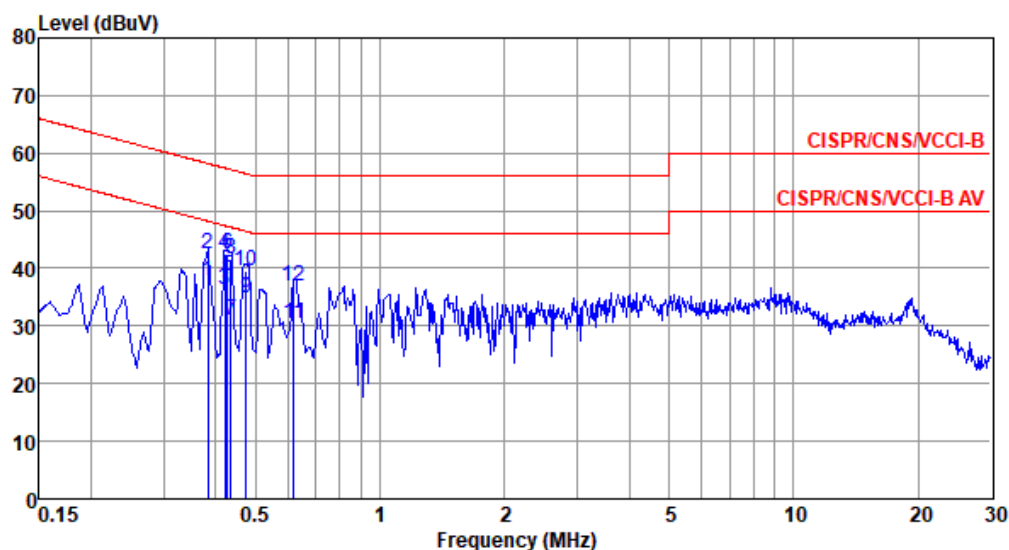

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.383	37.72	48.21	-10.49	27.67	9.64	0.09	0.32	Average
2	0.383	42.47	58.21	-15.74	32.42	9.64	0.09	0.32	QP
3	0.421	36.43	47.42	-10.99	26.38	9.64	0.09	0.32	Average
4	0.421	42.64	57.42	-14.78	32.59	9.64	0.09	0.32	QP
5*	0.428	38.64	47.29	-8.65	28.58	9.64	0.09	0.33	Average
6	0.428	42.51	57.29	-14.78	32.45	9.64	0.09	0.33	QP
7	0.435	30.93	47.15	-16.22	20.87	9.64	0.09	0.33	Average
8	0.435	41.52	57.15	-15.63	31.46	9.64	0.09	0.33	QP
9	0.474	34.83	46.45	-11.62	24.77	9.64	0.09	0.33	Average
10	0.474	39.62	56.45	-16.83	29.56	9.64	0.09	0.33	QP
11	0.617	30.39	46.00	-15.61	20.30	9.64	0.09	0.36	Average
12	0.617	36.76	56.00	-19.24	26.67	9.64	0.09	0.36	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

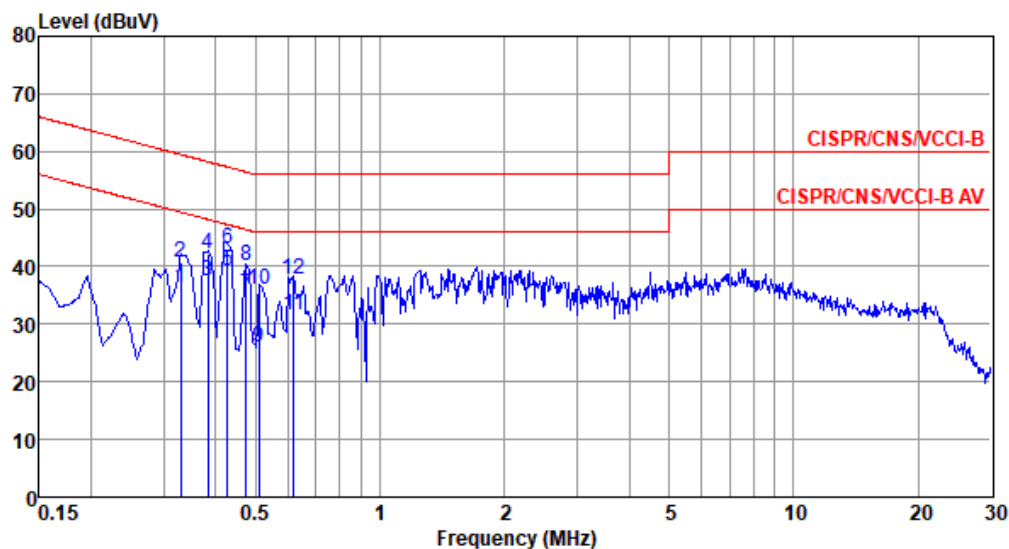

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.330	36.30	49.44	-13.14	26.33	9.64	0.09	0.24	Average
2	0.330	40.82	59.44	-18.62	30.85	9.64	0.09	0.24	QP
3	0.383	37.53	48.21	-10.68	27.54	9.64	0.09	0.26	Average
4	0.383	42.32	58.21	-15.89	32.33	9.64	0.09	0.26	QP
5*	0.428	39.29	47.29	-8.00	29.29	9.64	0.09	0.27	Average
6	0.428	43.24	57.29	-14.05	33.24	9.64	0.09	0.27	QP
7	0.474	35.12	46.45	-11.33	25.11	9.64	0.09	0.28	Average
8	0.474	40.07	56.45	-16.38	30.06	9.64	0.09	0.28	QP
9	0.510	26.00	46.00	-20.00	15.99	9.64	0.09	0.28	Average
10	0.510	35.93	56.00	-20.07	25.92	9.64	0.09	0.28	QP
11	0.617	31.67	46.00	-14.33	21.64	9.64	0.09	0.30	Average
12	0.617	37.76	56.00	-18.24	27.73	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

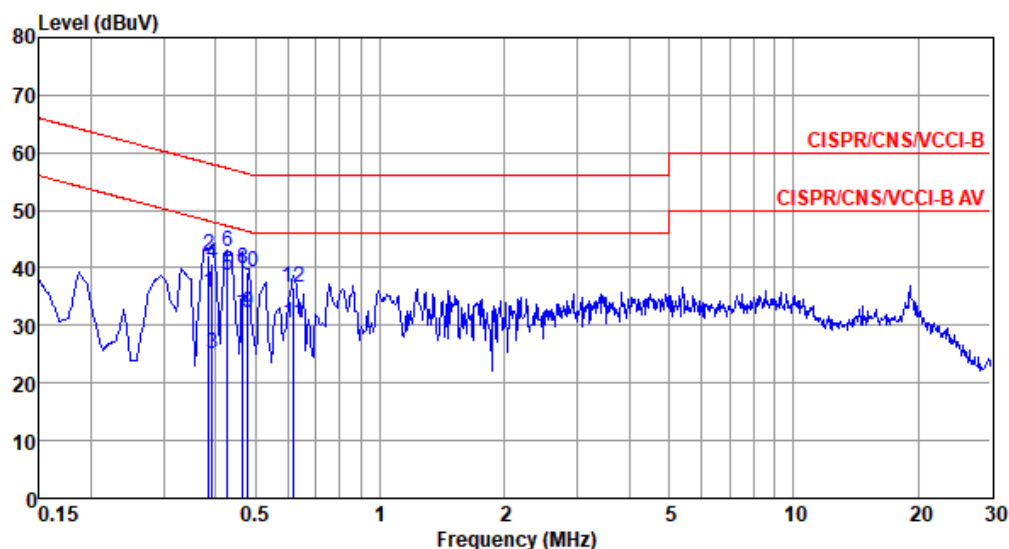

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.385	35.60	48.17	-12.57	25.55	9.64	0.09	0.32	Average
2	0.385	42.14	58.17	-16.03	32.09	9.64	0.09	0.32	QP
3	0.393	25.09	47.99	-22.90	15.04	9.64	0.09	0.32	Average
4	0.393	40.67	57.99	-17.32	30.62	9.64	0.09	0.32	QP
5*	0.428	38.63	47.29	-8.66	28.57	9.64	0.09	0.33	Average
6	0.428	42.69	57.29	-14.60	32.63	9.64	0.09	0.33	QP
7	0.466	31.54	46.58	-15.04	21.48	9.64	0.09	0.33	Average
8	0.466	39.80	56.58	-16.78	29.74	9.64	0.09	0.33	QP
9	0.479	32.29	46.36	-14.07	22.22	9.64	0.09	0.34	Average
10	0.479	39.27	56.36	-17.09	29.20	9.64	0.09	0.34	QP
11	0.617	30.45	46.00	-15.55	20.36	9.64	0.09	0.36	Average
12	0.617	36.68	56.00	-19.32	26.59	9.64	0.09	0.36	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

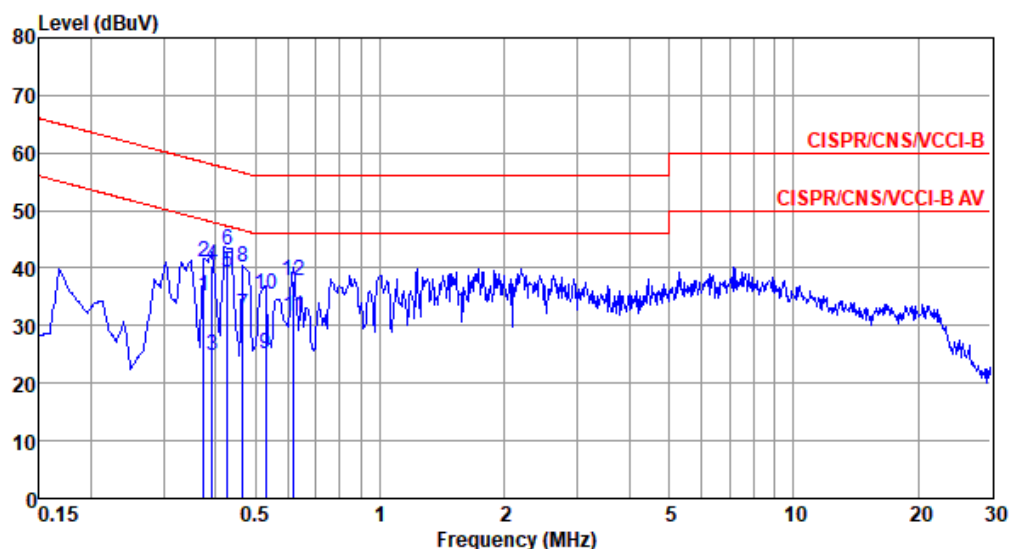

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.375	35.23	48.39	-13.16	25.25	9.64	0.09	0.25	Average
2	0.375	41.08	58.39	-17.31	31.10	9.64	0.09	0.25	QP
3	0.393	24.94	47.99	-23.05	14.95	9.64	0.09	0.26	Average
4	0.393	40.54	57.99	-17.45	30.55	9.64	0.09	0.26	QP
5*	0.428	39.30	47.29	-7.99	29.30	9.64	0.09	0.27	Average
6	0.428	43.22	57.29	-14.07	33.22	9.64	0.09	0.27	QP
7	0.466	31.83	46.58	-14.75	21.82	9.64	0.09	0.28	Average
8	0.466	40.16	56.58	-16.42	30.15	9.64	0.09	0.28	QP
9	0.529	25.05	46.00	-20.95	15.03	9.64	0.09	0.29	Average
10	0.529	35.33	56.00	-20.67	25.31	9.64	0.09	0.29	QP
11	0.617	31.69	46.00	-14.31	21.66	9.64	0.09	0.30	Average
12	0.617	37.83	56.00	-18.17	27.80	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).