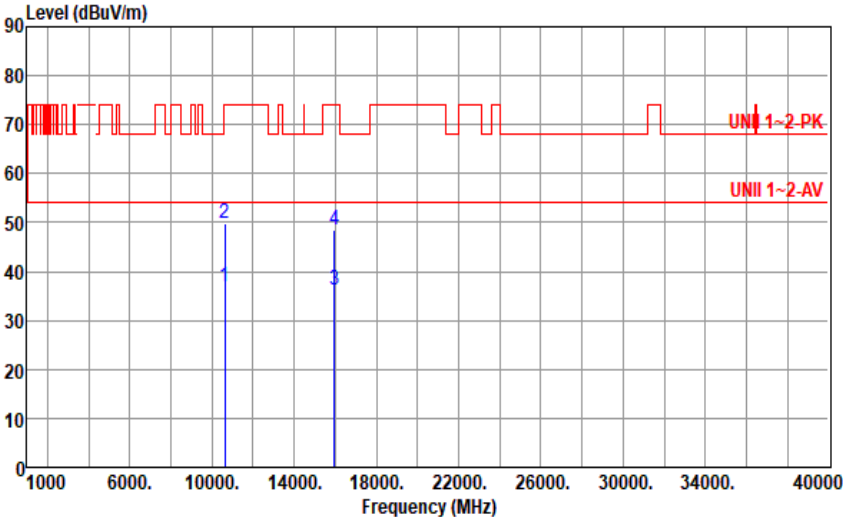
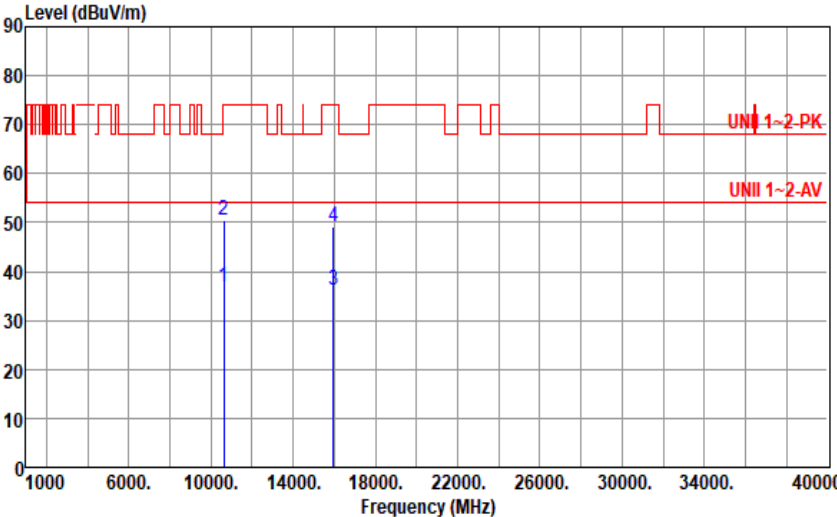


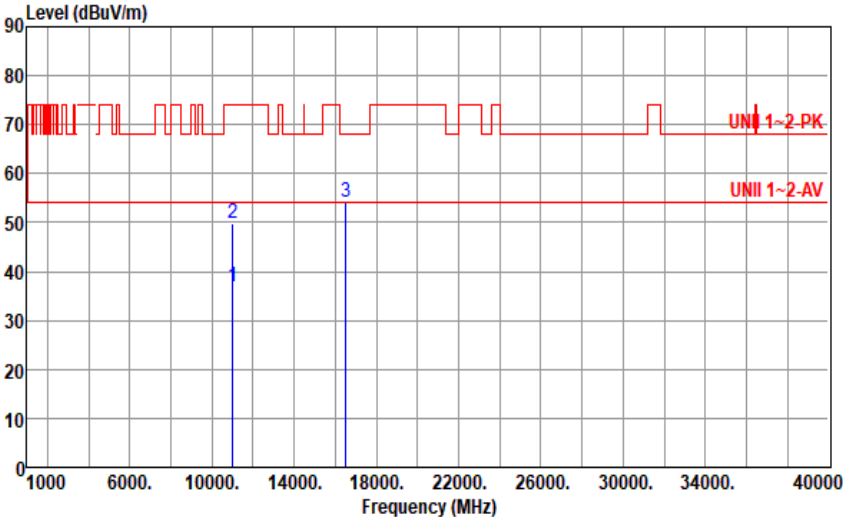


Modulation	be EHT20	Test Freq. (MHz)	5320																																																																						
Polarization	Horizontal																																																																								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>36.72</td><td>54.00</td><td>-17.28</td><td>27.39</td><td>9.33</td><td>Average</td><td>313</td><td>297</td></tr><tr><td>2</td><td>10640.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>40.59</td><td>9.33</td><td>Peak</td><td>313</td><td>297</td></tr><tr><td>3</td><td>15960.00</td><td>36.04</td><td>54.00</td><td>-17.96</td><td>29.79</td><td>6.25</td><td>Average</td><td>148</td><td>150</td></tr><tr><td>4</td><td>15960.00</td><td>48.35</td><td>74.00</td><td>-25.65</td><td>42.10</td><td>6.25</td><td>Peak</td><td>148</td><td>150</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10640.00	36.72	54.00	-17.28	27.39	9.33	Average	313	297	2	10640.00	49.92	74.00	-24.08	40.59	9.33	Peak	313	297	3	15960.00	36.04	54.00	-17.96	29.79	6.25	Average	148	150	4	15960.00	48.35	74.00	-25.65	42.10	6.25	Peak	148	150
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																
		dBUV/m			dBuV			cm	deg																																																																
1	10640.00	36.72	54.00	-17.28	27.39	9.33	Average	313	297																																																																
2	10640.00	49.92	74.00	-24.08	40.59	9.33	Peak	313	297																																																																
3	15960.00	36.04	54.00	-17.96	29.79	6.25	Average	148	150																																																																
4	15960.00	48.35	74.00	-25.65	42.10	6.25	Peak	148	150																																																																



Modulation	be EHT20	Test Freq. (MHz)	5320																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>36.71</td><td>54.00</td><td>-17.29</td><td>27.38</td><td>9.33</td><td>Average</td><td>194</td><td>296</td></tr><tr><td>2</td><td>10640.00</td><td>50.46</td><td>74.00</td><td>-23.54</td><td>41.13</td><td>9.33</td><td>Peak</td><td>194</td><td>296</td></tr><tr><td>3</td><td>15960.00</td><td>36.09</td><td>54.00</td><td>-17.91</td><td>29.84</td><td>6.25</td><td>Average</td><td>313</td><td>125</td></tr><tr><td>4</td><td>15960.00</td><td>49.26</td><td>74.00</td><td>-24.74</td><td>43.01</td><td>6.25</td><td>Peak</td><td>313</td><td>125</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10640.00	36.71	54.00	-17.29	27.38	9.33	Average	194	296	2	10640.00	50.46	74.00	-23.54	41.13	9.33	Peak	194	296	3	15960.00	36.09	54.00	-17.91	29.84	6.25	Average	313	125	4	15960.00	49.26	74.00	-24.74	43.01	6.25	Peak	313	125
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																
		dBUV/m			dBuV			cm	deg																																																																
1	10640.00	36.71	54.00	-17.29	27.38	9.33	Average	194	296																																																																
2	10640.00	50.46	74.00	-23.54	41.13	9.33	Peak	194	296																																																																
3	15960.00	36.09	54.00	-17.91	29.84	6.25	Average	313	125																																																																
4	15960.00	49.26	74.00	-24.74	43.01	6.25	Peak	313	125																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									



Modulation	be EHT20	Test Freq. (MHz)	5500																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>36.86</td><td>54.00</td><td>-17.14</td><td>27.16</td><td>9.70</td><td>Average</td><td>123</td><td>346</td></tr><tr><td>2</td><td>11000.00</td><td>49.78</td><td>74.00</td><td>-24.22</td><td>40.08</td><td>9.70</td><td>Peak</td><td>123</td><td>346</td></tr><tr><td>3</td><td>16500.00</td><td>54.22</td><td>68.20</td><td>-13.98</td><td>46.88</td><td>7.34</td><td>Peak</td><td>182</td><td>69</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11000.00	36.86	54.00	-17.14	27.16	9.70	Average	123	346	2	11000.00	49.78	74.00	-24.22	40.08	9.70	Peak	123	346	3	16500.00	54.22	68.20	-13.98	46.88	7.34	Peak	182	69
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	11000.00	36.86	54.00	-17.14	27.16	9.70	Average	123	346																																																						
2	11000.00	49.78	74.00	-24.22	40.08	9.70	Peak	123	346																																																						
3	16500.00	54.22	68.20	-13.98	46.88	7.34	Peak	182	69																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Modulation	be EHT20		Test Freq. (MHz)		5500				
Polarization	Vertical								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m High Table									



Modulation	be EHT20		Test Freq. (MHz)		5580																																																																
Polarization	Horizontal																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11160.00</td><td>36.26</td><td>54.00</td><td>-17.74</td><td>27.14</td><td>9.12</td><td>Average</td><td>112</td><td>335</td></tr><tr><td>2</td><td>11160.00</td><td>49.05</td><td>74.00</td><td>-24.95</td><td>39.93</td><td>9.12</td><td>Peak</td><td>112</td><td>335</td></tr><tr><td>3</td><td>16740.00</td><td>54.52</td><td>68.20</td><td>-13.68</td><td>46.93</td><td>7.59</td><td>Peak</td><td>179</td><td>51</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	11160.00	36.26	54.00	-17.74	27.14	9.12	Average	112	335	2	11160.00	49.05	74.00	-24.95	39.93	9.12	Peak	112	335	3	16740.00	54.52	68.20	-13.68	46.93	7.59	Peak	179	51
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																												
		dBuV/m			dBuV			cm	deg																																																												
1	11160.00	36.26	54.00	-17.74	27.14	9.12	Average	112	335																																																												
2	11160.00	49.05	74.00	-24.95	39.93	9.12	Peak	112	335																																																												
3	16740.00	54.52	68.20	-13.68	46.93	7.59	Peak	179	51																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																					



Modulation	be EHT20	Test Freq. (MHz)	5580																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>36.67</td><td>54.00</td><td>-17.33</td><td>27.55</td><td>9.12</td><td>Average</td><td>200</td><td>1</td></tr><tr><td>2</td><td>11160.00</td><td>50.09</td><td>74.00</td><td>-23.91</td><td>40.97</td><td>9.12</td><td>Peak</td><td>200</td><td>1</td></tr><tr><td>3</td><td>16740.00</td><td>54.88</td><td>68.20</td><td>-13.32</td><td>47.29</td><td>7.59</td><td>Peak</td><td>210</td><td>338</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11160.00	36.67	54.00	-17.33	27.55	9.12	Average	200	1	2	11160.00	50.09	74.00	-23.91	40.97	9.12	Peak	200	1	3	16740.00	54.88	68.20	-13.32	47.29	7.59	Peak	210	338
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11160.00	36.67	54.00	-17.33	27.55	9.12	Average	200	1																																		
2	11160.00	50.09	74.00	-23.91	40.97	9.12	Peak	200	1																																		
3	16740.00	54.88	68.20	-13.32	47.29	7.59	Peak	210	338																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBUV/m dBUV/m dB reading dB/m High Table			



Modulation	be EHT20		Test Freq. (MHz)		5700																																																						
Polarization	Vertical																																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>37.71</td><td>54.00</td><td>-16.29</td><td>28.62</td><td>9.09</td><td>Average</td><td>108</td><td>357</td></tr><tr><td>2</td><td>11400.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>39.62</td><td>9.09</td><td>Peak</td><td>108</td><td>357</td></tr><tr><td>3</td><td>17100.00</td><td>49.20</td><td>68.20</td><td>-19.00</td><td>42.05</td><td>7.15</td><td>Peak</td><td>105</td><td>303</td></tr></table>											Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	11400.00	37.71	54.00	-16.29	28.62	9.09	Average	108	357	2	11400.00	48.71	74.00	-25.29	39.62	9.09	Peak	108	357	3	17100.00	49.20	68.20	-19.00	42.05	7.15	Peak	105	303
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																		
1	11400.00	37.71	54.00	-16.29	28.62	9.09	Average	108	357																																																		
2	11400.00	48.71	74.00	-25.29	39.62	9.09	Peak	108	357																																																		
3	17100.00	49.20	68.20	-19.00	42.05	7.15	Peak	105	303																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																											



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

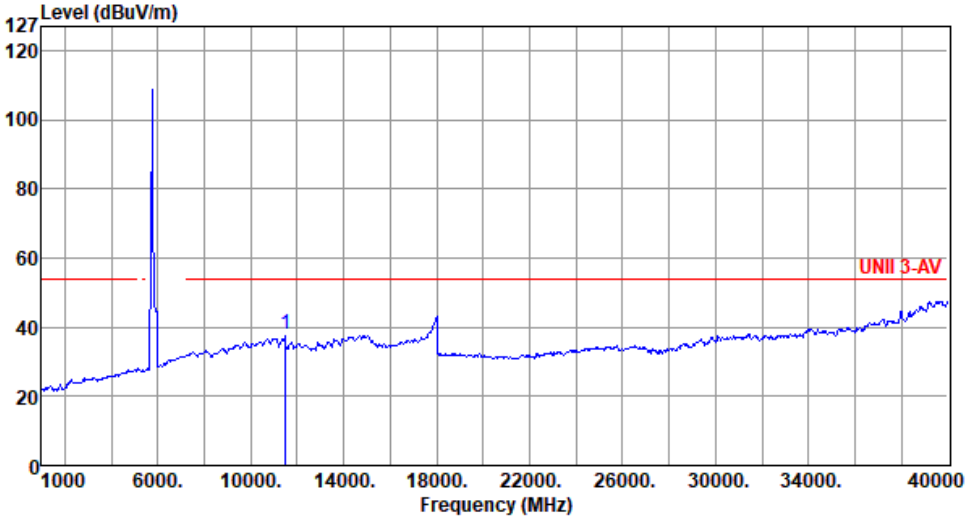


Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBUV/m dBUV/m dB dBUV dB/m cm deg 1 11440.00 39.18 54.00 -14.82 30.03 9.15 Average 325 3 2 11440.00 52.84 74.00 -21.16 43.69 9.15 Peak 325 3 3 17160.00 54.37 68.20 -13.83 47.36 7.01 Peak 292 332 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

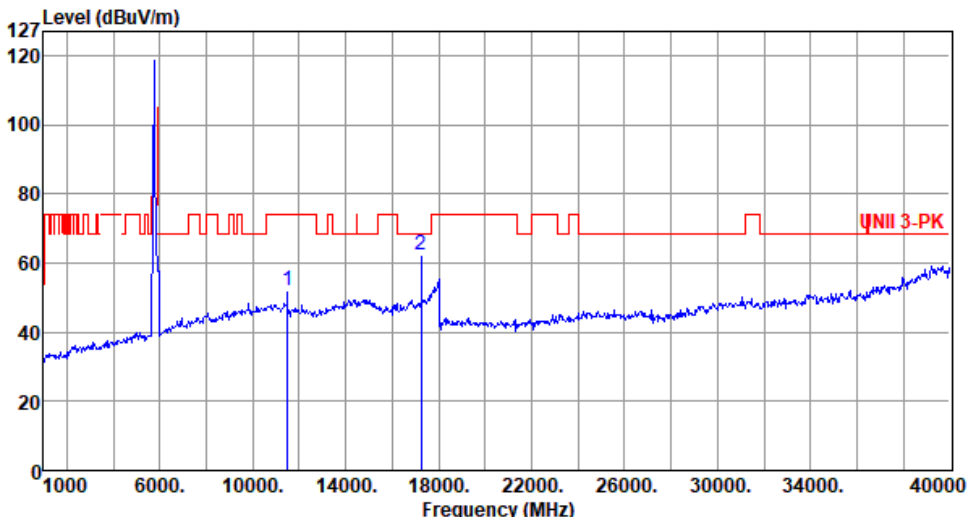


Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>45.81</td><td>9.23</td><td>Peak</td><td>137</td><td>168</td></tr><tr><td>2</td><td>17235.00</td><td>67.20</td><td>68.20</td><td>-1.00</td><td>59.92</td><td>7.28</td><td>Peak</td><td>137</td><td>168</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	55.04	74.00	-18.96	45.81	9.23	Peak	137	168	2	17235.00	67.20	68.20	-1.00	59.92	7.28	Peak	137	168
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11490.00	55.04	74.00	-18.96	45.81	9.23	Peak	137	168																								
2	17235.00	67.20	68.20	-1.00	59.92	7.28	Peak	137	168																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	

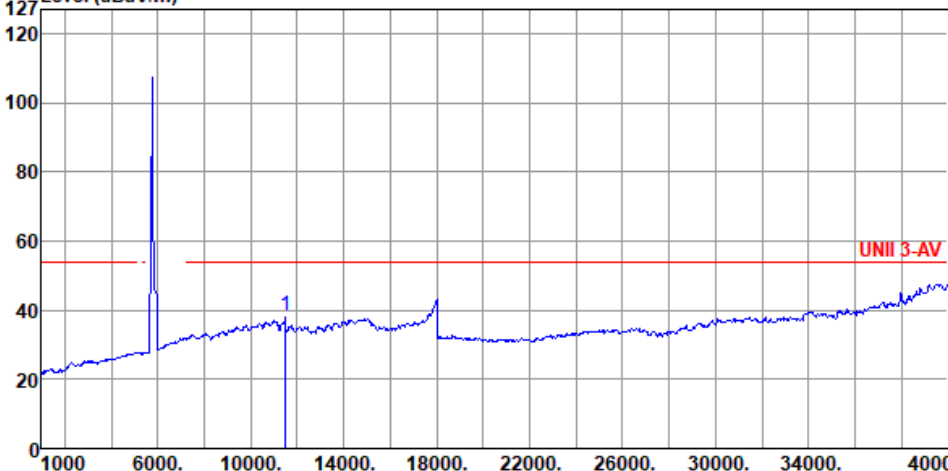


Modulation	be EHT20	Test Freq. (MHz)	5745																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>38.15</td><td>54.00</td><td>-15.85</td><td>28.92</td><td>9.23</td><td>Average</td><td>137</td><td>168</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	38.15	54.00	-15.85	28.92	9.23	Average	137	168
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	11490.00	38.15	54.00	-15.85	28.92	9.23	Average	137	168														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>52.11</td><td>74.00</td><td>-21.89</td><td>42.88</td><td>9.23</td><td>Peak</td><td>191</td><td>58</td></tr><tr><td>2</td><td>17235.00</td><td>62.48</td><td>68.20</td><td>-5.72</td><td>55.20</td><td>7.28</td><td>Peak</td><td>297</td><td>356</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	52.11	74.00	-21.89	42.88	9.23	Peak	191	58	2	17235.00	62.48	68.20	-5.72	55.20	7.28	Peak	297	356
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11490.00	52.11	74.00	-21.89	42.88	9.23	Peak	191	58																								
2	17235.00	62.48	68.20	-5.72	55.20	7.28	Peak	297	356																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	

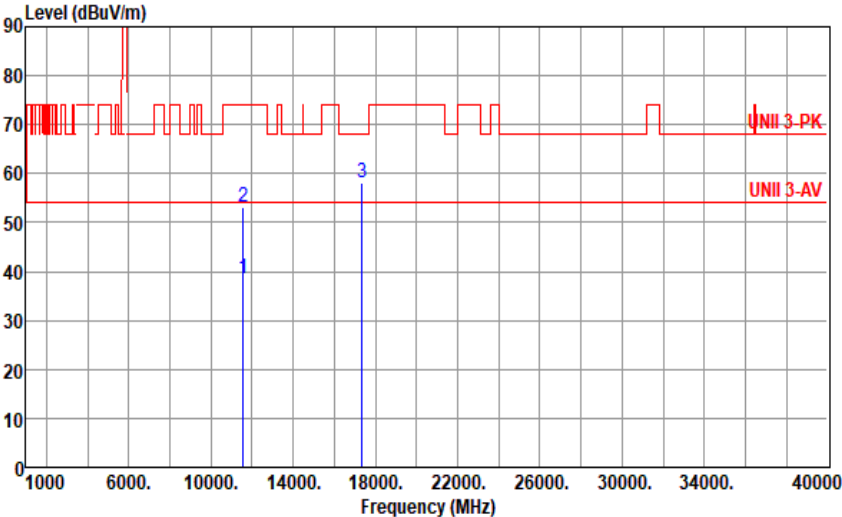


Modulation	be EHT20	Test Freq. (MHz)	5745																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m)  Frequency (MHz)																							
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>29.38</td><td>9.23</td><td>Average</td><td>191</td><td>58</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	38.61	54.00	-15.39	29.38	9.23	Average	191	58
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	11490.00	38.61	54.00	-15.39	29.38	9.23	Average	191	58														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Modulation	be EHT20	Test Freq. (MHz)	5785																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11570.00</td><td>38.15</td><td>54.00</td><td>-15.85</td><td>29.09</td><td>9.06</td><td>Average</td><td>133</td><td>168</td></tr><tr><td>2</td><td>11570.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>43.01</td><td>9.06</td><td>Peak</td><td>133</td><td>168</td></tr><tr><td>3</td><td>17355.00</td><td>66.37</td><td>68.20</td><td>-1.83</td><td>58.69</td><td>7.68</td><td>Peak</td><td>180</td><td>131</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	38.15	54.00	-15.85	29.09	9.06	Average	133	168	2	11570.00	52.07	74.00	-21.93	43.01	9.06	Peak	133	168	3	17355.00	66.37	68.20	-1.83	58.69	7.68	Peak	180	131
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	38.15	54.00	-15.85	29.09	9.06	Average	133	168																																		
2	11570.00	52.07	74.00	-21.93	43.01	9.06	Peak	133	168																																		
3	17355.00	66.37	68.20	-1.83	58.69	7.68	Peak	180	131																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

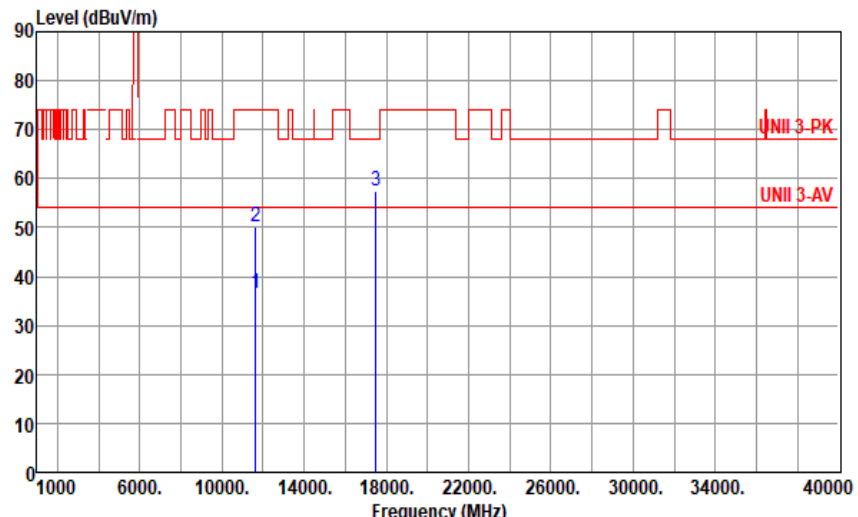


Modulation	be EHT20	Test Freq. (MHz)	5785																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>38.41</td><td>54.00</td><td>-15.59</td><td>29.35</td><td>9.06</td><td>Average</td><td>311</td><td>21</td></tr><tr><td>2</td><td>11570.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>44.16</td><td>9.06</td><td>Peak</td><td>311</td><td>21</td></tr><tr><td>3</td><td>17355.00</td><td>58.02</td><td>68.20</td><td>-10.18</td><td>50.34</td><td>7.68</td><td>Peak</td><td>310</td><td>90</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	38.41	54.00	-15.59	29.35	9.06	Average	311	21	2	11570.00	53.22	74.00	-20.78	44.16	9.06	Peak	311	21	3	17355.00	58.02	68.20	-10.18	50.34	7.68	Peak	310	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	38.41	54.00	-15.59	29.35	9.06	Average	311	21																																		
2	11570.00	53.22	74.00	-20.78	44.16	9.06	Peak	311	21																																		
3	17355.00	58.02	68.20	-10.18	50.34	7.68	Peak	310	90																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5825																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11650.00</td><td>36.60</td><td>54.00</td><td>-17.40</td><td>27.94</td><td>8.66</td><td>Average</td><td>126</td><td>165</td></tr><tr><td>2</td><td>11650.00</td><td>51.29</td><td>74.00</td><td>-22.71</td><td>42.63</td><td>8.66</td><td>Peak</td><td>126</td><td>165</td></tr><tr><td>3</td><td>17475.00</td><td>65.95</td><td>68.20</td><td>-2.25</td><td>57.75</td><td>8.20</td><td>Peak</td><td>178</td><td>131</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	36.60	54.00	-17.40	27.94	8.66	Average	126	165	2	11650.00	51.29	74.00	-22.71	42.63	8.66	Peak	126	165	3	17475.00	65.95	68.20	-2.25	57.75	8.20	Peak	178	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11650.00	36.60	54.00	-17.40	27.94	8.66	Average	126	165																																		
2	11650.00	51.29	74.00	-22.71	42.63	8.66	Peak	126	165																																		
3	17475.00	65.95	68.20	-2.25	57.75	8.20	Peak	178	131																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20		Test Freq. (MHz)		5825																																																																
Polarization	Vertical																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11650.00</td><td>36.63</td><td>54.00</td><td>-17.37</td><td>27.97</td><td>8.66</td><td>Average</td><td>285</td><td>168</td></tr><tr><td>2</td><td>11650.00</td><td>50.15</td><td>74.00</td><td>-23.85</td><td>41.49</td><td>8.66</td><td>Peak</td><td>285</td><td>168</td></tr><tr><td>3</td><td>17475.00</td><td>57.54</td><td>68.20</td><td>-10.66</td><td>49.34</td><td>8.20</td><td>Peak</td><td>312</td><td>234</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11650.00	36.63	54.00	-17.37	27.97	8.66	Average	285	168	2	11650.00	50.15	74.00	-23.85	41.49	8.66	Peak	285	168	3	17475.00	57.54	68.20	-10.66	49.34	8.20	Peak	312	234
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																												
		dBUV/m			dBuV			cm	deg																																																												
1	11650.00	36.63	54.00	-17.37	27.97	8.66	Average	285	168																																																												
2	11650.00	50.15	74.00	-23.85	41.49	8.66	Peak	285	168																																																												
3	17475.00	57.54	68.20	-10.66	49.34	8.20	Peak	312	234																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																					



Modulation	be EHT40		Test Freq. (MHz)		5190				
Polarization	Horizontal								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62									
<									



Modulation	be EHT40		Test Freq. (MHz)		5190				
Polarization	Vertical								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62									



Modulation	be EHT40	Test Freq. (MHz)	5230																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10460.00</td><td>53.44</td><td>68.20</td><td>-14.76</td><td>44.29</td><td>9.15</td><td>Peak</td><td>318</td><td>336</td></tr><tr><td>2</td><td>15690.00</td><td>36.44</td><td>54.00</td><td>-17.56</td><td>30.19</td><td>6.25</td><td>Average</td><td>141</td><td>52</td></tr><tr><td>3</td><td>15690.00</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>47.53</td><td>6.25</td><td>Peak</td><td>141</td><td>52</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10460.00	53.44	68.20	-14.76	44.29	9.15	Peak	318	336	2	15690.00	36.44	54.00	-17.56	30.19	6.25	Average	141	52	3	15690.00	53.78	74.00	-20.22	47.53	6.25	Peak	141	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10460.00	53.44	68.20	-14.76	44.29	9.15	Peak	318	336																																		
2	15690.00	36.44	54.00	-17.56	30.19	6.25	Average	141	52																																		
3	15690.00	53.78	74.00	-20.22	47.53	6.25	Peak	141	52																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5230																																																												
Polarization	Vertical																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>56.33</td><td>68.20</td><td>-11.87</td><td>47.18</td><td>9.15</td><td>Peak</td><td>199</td><td>304</td></tr><tr><td>2</td><td>15690.00</td><td>38.42</td><td>54.00</td><td>-15.58</td><td>32.17</td><td>6.25</td><td>Average</td><td>313</td><td>315</td></tr><tr><td>3</td><td>15690.00</td><td>57.14</td><td>74.00</td><td>-16.86</td><td>50.89</td><td>6.25</td><td>Peak</td><td>313</td><td>315</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10460.00	56.33	68.20	-11.87	47.18	9.15	Peak	199	304	2	15690.00	38.42	54.00	-15.58	32.17	6.25	Average	313	315	3	15690.00	57.14	74.00	-16.86	50.89	6.25	Peak	313	315
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	10460.00	56.33	68.20	-11.87	47.18	9.15	Peak	199	304																																																						
2	15690.00	38.42	54.00	-15.58	32.17	6.25	Average	313	315																																																						
3	15690.00	57.14	74.00	-16.86	50.89	6.25	Peak	313	315																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Modulation	be EHT40		Test Freq. (MHz)		5270																																												
Polarization	Horizontal																																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10540.00</td><td>49.23</td><td>68.20</td><td>-18.97</td><td>40.07</td><td>9.16</td><td>Peak</td><td>318</td><td>287</td></tr><tr><td>2</td><td>15810.00</td><td>35.38</td><td>54.00</td><td>-18.62</td><td>29.42</td><td>5.96</td><td>Average</td><td>143</td><td>98</td></tr><tr><td>3</td><td>15810.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>41.63</td><td>5.96</td><td>Peak</td><td>143</td><td>98</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10540.00	49.23	68.20	-18.97	40.07	9.16	Peak	318	287	2	15810.00	35.38	54.00	-18.62	29.42	5.96	Average	143	98	3	15810.00	47.59	74.00	-26.41	41.63	5.96	Peak	143	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																								
1	10540.00	49.23	68.20	-18.97	40.07	9.16	Peak	318	287																																								
2	15810.00	35.38	54.00	-18.62	29.42	5.96	Average	143	98																																								
3	15810.00	47.59	74.00	-26.41	41.63	5.96	Peak	143	98																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																	

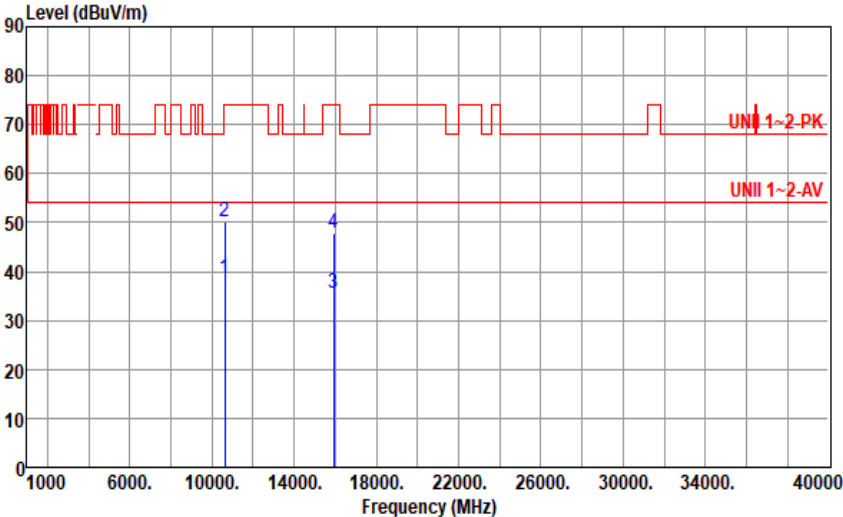


Modulation	be EHT40	Test Freq. (MHz)	5270																																																												
Polarization	Vertical																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10540.00</td><td>50.09</td><td>68.20</td><td>-18.11</td><td>40.93</td><td>9.16</td><td>Peak</td><td>173</td><td>292</td></tr><tr><td>2</td><td>15810.00</td><td>35.30</td><td>54.00</td><td>-18.70</td><td>29.34</td><td>5.96</td><td>Average</td><td>313</td><td>129</td></tr><tr><td>3</td><td>15810.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>41.88</td><td>5.96</td><td>Peak</td><td>313</td><td>129</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10540.00	50.09	68.20	-18.11	40.93	9.16	Peak	173	292	2	15810.00	35.30	54.00	-18.70	29.34	5.96	Average	313	129	3	15810.00	47.84	74.00	-26.16	41.88	5.96	Peak	313	129
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	10540.00	50.09	68.20	-18.11	40.93	9.16	Peak	173	292																																																						
2	15810.00	35.30	54.00	-18.70	29.34	5.96	Average	313	129																																																						
3	15810.00	47.84	74.00	-26.16	41.88	5.96	Peak	313	129																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																						
Polarization	Vertical																																																																								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10620.00</td><td>38.60</td><td>54.00</td><td>-15.40</td><td>29.31</td><td>9.29</td><td>Average</td><td>170</td><td>303</td></tr><tr><td>2</td><td>10620.00</td><td>50.05</td><td>74.00</td><td>-23.95</td><td>40.76</td><td>9.29</td><td>Peak</td><td>170</td><td>303</td></tr><tr><td>3</td><td>15930.00</td><td>35.46</td><td>54.00</td><td>-18.54</td><td>29.12</td><td>6.34</td><td>Average</td><td>299</td><td>148</td></tr><tr><td>4</td><td>15930.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>41.54</td><td>6.34</td><td>Peak</td><td>299</td><td>148</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10620.00	38.60	54.00	-15.40	29.31	9.29	Average	170	303	2	10620.00	50.05	74.00	-23.95	40.76	9.29	Peak	170	303	3	15930.00	35.46	54.00	-18.54	29.12	6.34	Average	299	148	4	15930.00	47.88	74.00	-26.12	41.54	6.34	Peak	299	148
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																
		dBUV/m			dBuV			cm	deg																																																																
1	10620.00	38.60	54.00	-15.40	29.31	9.29	Average	170	303																																																																
2	10620.00	50.05	74.00	-23.95	40.76	9.29	Peak	170	303																																																																
3	15930.00	35.46	54.00	-18.54	29.12	6.34	Average	299	148																																																																
4	15930.00	47.88	74.00	-26.12	41.54	6.34	Peak	299	148																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

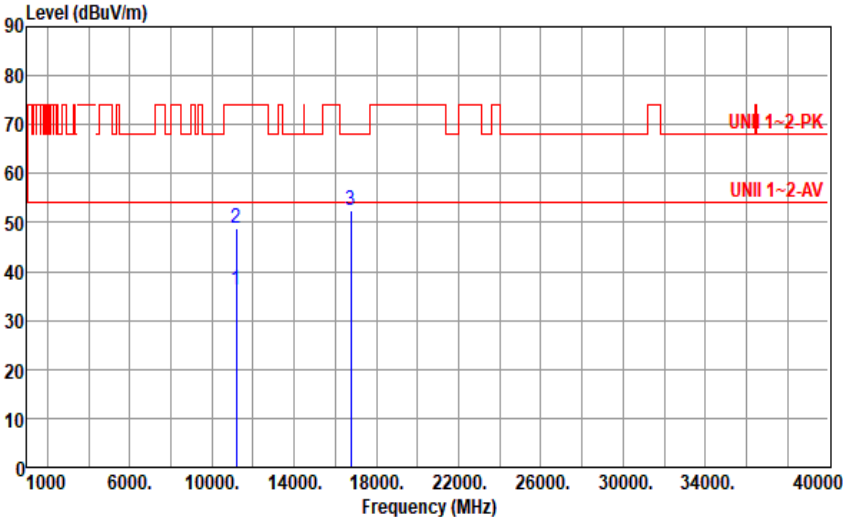


Modulation	be EHT40		Test Freq. (MHz)		5510																																																																
Polarization	Horizontal																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>36.59</td><td>54.00</td><td>-17.41</td><td>26.94</td><td>9.65</td><td>Average</td><td>127</td><td>332</td></tr><tr><td>2</td><td>11020.00</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>39.45</td><td>9.65</td><td>Peak</td><td>127</td><td>332</td></tr><tr><td>3</td><td>16530.00</td><td>51.89</td><td>68.20</td><td>-16.31</td><td>44.52</td><td>7.37</td><td>Peak</td><td>193</td><td>72</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11020.00	36.59	54.00	-17.41	26.94	9.65	Average	127	332	2	11020.00	49.10	74.00	-24.90	39.45	9.65	Peak	127	332	3	16530.00	51.89	68.20	-16.31	44.52	7.37	Peak	193	72
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																												
		dBUV/m			dBuV			cm	deg																																																												
1	11020.00	36.59	54.00	-17.41	26.94	9.65	Average	127	332																																																												
2	11020.00	49.10	74.00	-24.90	39.45	9.65	Peak	127	332																																																												
3	16530.00	51.89	68.20	-16.31	44.52	7.37	Peak	193	72																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																					



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table MHz dBUV/m dBUV/m dB dBUV dB/m cm deg 1 11020.00 37.05 54.00 -16.95 27.40 9.65 Average 207 30 2 11020.00 50.24 74.00 -23.76 40.59 9.65 Peak 207 30 3 16530.00 51.94 68.20 -16.26 44.57 7.37 Peak 231 338 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			

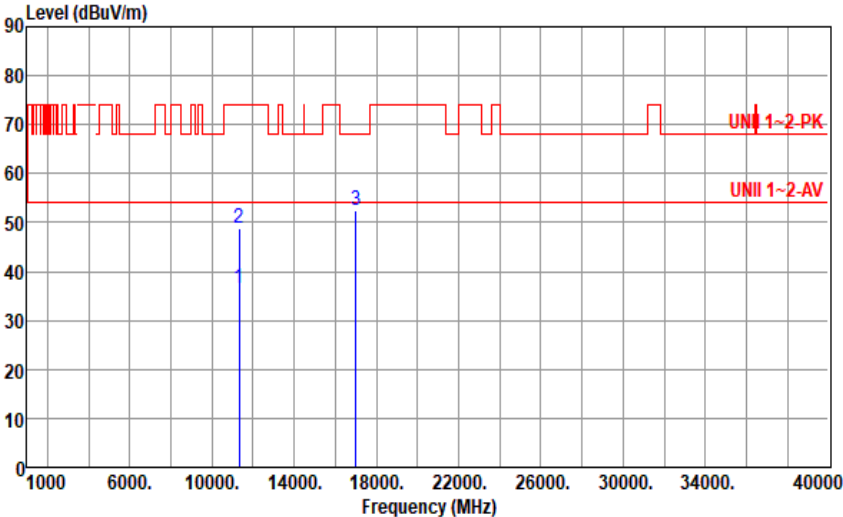


Modulation	be EHT40	Test Freq. (MHz)	5590																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11180.00</td><td>36.29</td><td>54.00</td><td>-17.71</td><td>27.19</td><td>9.10</td><td>Average</td><td>114</td><td>322</td></tr><tr><td>2</td><td>11180.00</td><td>48.83</td><td>74.00</td><td>-25.17</td><td>39.73</td><td>9.10</td><td>Peak</td><td>114</td><td>322</td></tr><tr><td>3</td><td>16770.00</td><td>52.34</td><td>68.20</td><td>-15.86</td><td>44.78</td><td>7.56</td><td>Peak</td><td>188</td><td>61</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	11180.00	36.29	54.00	-17.71	27.19	9.10	Average	114	322	2	11180.00	48.83	74.00	-25.17	39.73	9.10	Peak	114	322	3	16770.00	52.34	68.20	-15.86	44.78	7.56	Peak	188	61
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	11180.00	36.29	54.00	-17.71	27.19	9.10	Average	114	322																																												
2	11180.00	48.83	74.00	-25.17	39.73	9.10	Peak	114	322																																												
3	16770.00	52.34	68.20	-15.86	44.78	7.56	Peak	188	61																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11180.00</td><td>36.47</td><td>54.00</td><td>-17.53</td><td>27.37</td><td>9.10</td><td>Average</td><td>197</td><td>22</td></tr><tr><td>2</td><td>11180.00</td><td>49.89</td><td>74.00</td><td>-24.11</td><td>40.79</td><td>9.10</td><td>Peak</td><td>197</td><td>22</td></tr><tr><td>3</td><td>16770.00</td><td>52.53</td><td>68.20</td><td>-15.67</td><td>44.97</td><td>7.56</td><td>Peak</td><td>218</td><td>329</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	36.47	54.00	-17.53	27.37	9.10	Average	197	22	2	11180.00	49.89	74.00	-24.11	40.79	9.10	Peak	197	22	3	16770.00	52.53	68.20	-15.67	44.97	7.56	Peak	218	329
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11180.00	36.47	54.00	-17.53	27.37	9.10	Average	197	22																																		
2	11180.00	49.89	74.00	-24.11	40.79	9.10	Peak	197	22																																		
3	16770.00	52.53	68.20	-15.67	44.97	7.56	Peak	218	329																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5670																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11340.00</td><td>36.59</td><td>54.00</td><td>-17.41</td><td>27.49</td><td>9.10</td><td>Average</td><td>126</td><td>302</td></tr><tr><td>2</td><td>11340.00</td><td>48.91</td><td>74.00</td><td>-25.09</td><td>39.81</td><td>9.10</td><td>Peak</td><td>126</td><td>302</td></tr><tr><td>3</td><td>17010.00</td><td>52.52</td><td>68.20</td><td>-15.68</td><td>44.92</td><td>7.60</td><td>Peak</td><td>199</td><td>56</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	11340.00	36.59	54.00	-17.41	27.49	9.10	Average	126	302	2	11340.00	48.91	74.00	-25.09	39.81	9.10	Peak	126	302	3	17010.00	52.52	68.20	-15.68	44.92	7.60	Peak	199	56
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	11340.00	36.59	54.00	-17.41	27.49	9.10	Average	126	302																																																						
2	11340.00	48.91	74.00	-25.09	39.81	9.10	Peak	126	302																																																						
3	17010.00	52.52	68.20	-15.68	44.92	7.60	Peak	199	56																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11340.00</td><td>36.57</td><td>54.00</td><td>-17.43</td><td>27.47</td><td>9.10</td><td>Average</td><td>208</td><td>34</td></tr><tr><td>2</td><td>11340.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>40.84</td><td>9.10</td><td>Peak</td><td>208</td><td>34</td></tr><tr><td>3</td><td>17010.00</td><td>52.78</td><td>68.20</td><td>-15.42</td><td>45.18</td><td>7.60</td><td>Peak</td><td>225</td><td>306</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	36.57	54.00	-17.43	27.47	9.10	Average	208	34	2	11340.00	49.94	74.00	-24.06	40.84	9.10	Peak	208	34	3	17010.00	52.78	68.20	-15.42	45.18	7.60	Peak	225	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11340.00	36.57	54.00	-17.43	27.47	9.10	Average	208	34																																		
2	11340.00	49.94	74.00	-24.06	40.84	9.10	Peak	208	34																																		
3	17010.00	52.78	68.20	-15.42	45.18	7.60	Peak	225	306																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

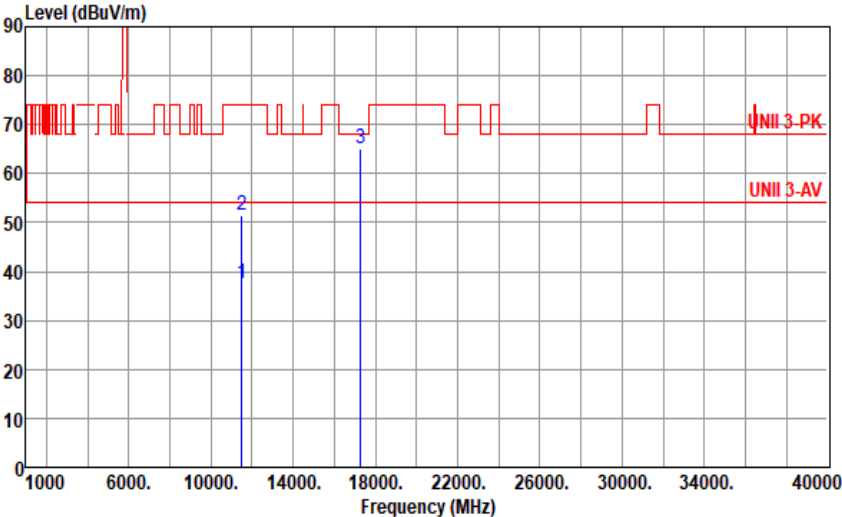


Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m High Table			



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBUV/m dBUV/m dB reading dB/m High Table			



Modulation	be EHT40	Test Freq. (MHz)	5755																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>37.65</td><td>54.00</td><td>-16.35</td><td>28.43</td><td>9.22</td><td>Average</td><td>148</td><td>189</td></tr><tr><td>2</td><td>11510.00</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>42.12</td><td>9.22</td><td>Peak</td><td>148</td><td>189</td></tr><tr><td>3</td><td>17265.00</td><td>65.24</td><td>68.20</td><td>-2.96</td><td>57.90</td><td>7.34</td><td>Peak</td><td>194</td><td>143</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11510.00	37.65	54.00	-16.35	28.43	9.22	Average	148	189	2	11510.00	51.34	74.00	-22.66	42.12	9.22	Peak	148	189	3	17265.00	65.24	68.20	-2.96	57.90	7.34	Peak	194	143
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	11510.00	37.65	54.00	-16.35	28.43	9.22	Average	148	189																																																						
2	11510.00	51.34	74.00	-22.66	42.12	9.22	Peak	148	189																																																						
3	17265.00	65.24	68.20	-2.96	57.90	7.34	Peak	194	143																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Modulation	be EHT40		Test Freq. (MHz)		5755																																																																
Polarization	Vertical																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>37.88</td><td>54.00</td><td>-16.12</td><td>28.66</td><td>9.22</td><td>Average</td><td>301</td><td>38</td></tr><tr><td>2</td><td>11510.00</td><td>52.45</td><td>74.00</td><td>-21.55</td><td>43.23</td><td>9.22</td><td>Peak</td><td>301</td><td>38</td></tr><tr><td>3</td><td>17265.00</td><td>57.06</td><td>68.20</td><td>-11.14</td><td>49.72</td><td>7.34</td><td>Peak</td><td>326</td><td>108</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11510.00	37.88	54.00	-16.12	28.66	9.22	Average	301	38	2	11510.00	52.45	74.00	-21.55	43.23	9.22	Peak	301	38	3	17265.00	57.06	68.20	-11.14	49.72	7.34	Peak	326	108
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																												
		dBUV/m			dBuV			cm	deg																																																												
1	11510.00	37.88	54.00	-16.12	28.66	9.22	Average	301	38																																																												
2	11510.00	52.45	74.00	-21.55	43.23	9.22	Peak	301	38																																																												
3	17265.00	57.06	68.20	-11.14	49.72	7.34	Peak	326	108																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																					



Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11590.00</td><td>37.55</td><td>54.00</td><td>-16.45</td><td>28.56</td><td>8.99</td><td>Average</td><td>156</td><td>213</td></tr><tr><td>2</td><td>11590.00</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>42.23</td><td>8.99</td><td>Peak</td><td>156</td><td>213</td></tr><tr><td>3</td><td>17385.00</td><td>65.84</td><td>68.20</td><td>-2.36</td><td>57.96</td><td>7.88</td><td>Peak</td><td>179</td><td>150</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	37.55	54.00	-16.45	28.56	8.99	Average	156	213	2	11590.00	51.22	74.00	-22.78	42.23	8.99	Peak	156	213	3	17385.00	65.84	68.20	-2.36	57.96	7.88	Peak	179	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	37.55	54.00	-16.45	28.56	8.99	Average	156	213																																		
2	11590.00	51.22	74.00	-22.78	42.23	8.99	Peak	156	213																																		
3	17385.00	65.84	68.20	-2.36	57.96	7.88	Peak	179	150																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11590.00</td><td>37.69</td><td>54.00</td><td>-16.31</td><td>28.70</td><td>8.99</td><td>Average</td><td>308</td><td>46</td></tr><tr><td>2</td><td>11590.00</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>43.35</td><td>8.99</td><td>Peak</td><td>308</td><td>46</td></tr><tr><td>3</td><td>17385.00</td><td>57.71</td><td>68.20</td><td>-10.49</td><td>49.83</td><td>7.88</td><td>Peak</td><td>312</td><td>131</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	37.69	54.00	-16.31	28.70	8.99	Average	308	46	2	11590.00	52.34	74.00	-21.66	43.35	8.99	Peak	308	46	3	17385.00	57.71	68.20	-10.49	49.83	7.88	Peak	312	131
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	37.69	54.00	-16.31	28.70	8.99	Average	308	46																																		
2	11590.00	52.34	74.00	-21.66	43.35	8.99	Peak	308	46																																		
3	17385.00	57.71	68.20	-10.49	49.83	7.88	Peak	312	131																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

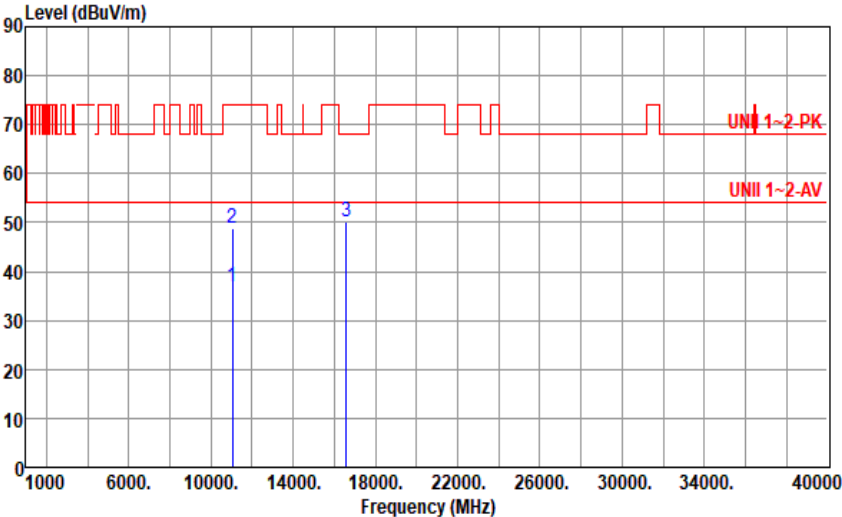


Modulation	be EHT80	Test Freq. (MHz)	5290																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>50.11</td><td>68.20</td><td>-18.09</td><td>40.91</td><td>9.20</td><td>Peak</td><td>148</td><td>303</td></tr><tr><td>2</td><td>15790.00</td><td>35.78</td><td>54.00</td><td>-18.22</td><td>29.77</td><td>6.01</td><td>Average</td><td>202</td><td>288</td></tr><tr><td>3</td><td>15790.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>41.52</td><td>6.01</td><td>Peak</td><td>202</td><td>288</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10580.00	50.11	68.20	-18.09	40.91	9.20	Peak	148	303	2	15790.00	35.78	54.00	-18.22	29.77	6.01	Average	202	288	3	15790.00	47.53	74.00	-26.47	41.52	6.01	Peak	202	288
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	10580.00	50.11	68.20	-18.09	40.91	9.20	Peak	148	303																																																						
2	15790.00	35.78	54.00	-18.22	29.77	6.01	Average	202	288																																																						
3	15790.00	47.53	74.00	-26.47	41.52	6.01	Peak	202	288																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															

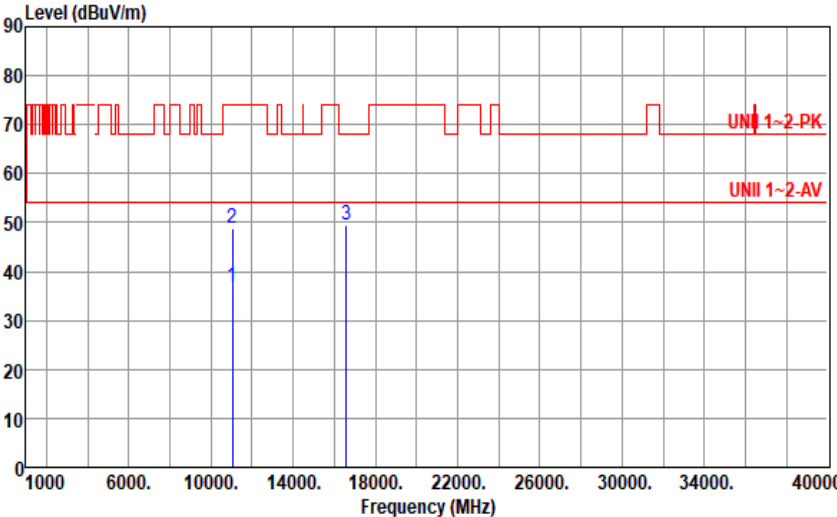


Modulation	be EHT80		Test Freq. (MHz)		5290																																												
Polarization	Vertical																																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10580.00</td><td>49.45</td><td>68.20</td><td>-18.75</td><td>40.25</td><td>9.20</td><td>Peak</td><td>143</td><td>236</td></tr><tr><td>2</td><td>15790.00</td><td>35.81</td><td>54.00</td><td>-18.19</td><td>29.80</td><td>6.01</td><td>Average</td><td>106</td><td>357</td></tr><tr><td>3</td><td>15790.00</td><td>46.35</td><td>74.00</td><td>-27.65</td><td>40.34</td><td>6.01</td><td>Peak</td><td>106</td><td>357</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10580.00	49.45	68.20	-18.75	40.25	9.20	Peak	143	236	2	15790.00	35.81	54.00	-18.19	29.80	6.01	Average	106	357	3	15790.00	46.35	74.00	-27.65	40.34	6.01	Peak	106	357
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																								
1	10580.00	49.45	68.20	-18.75	40.25	9.20	Peak	143	236																																								
2	15790.00	35.81	54.00	-18.19	29.80	6.01	Average	106	357																																								
3	15790.00	46.35	74.00	-27.65	40.34	6.01	Peak	106	357																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																	



Modulation	be EHT80	Test Freq. (MHz)	5530																																																												
Polarization	Horizontal																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11060.00</td><td>36.86</td><td>54.00</td><td>-17.14</td><td>27.33</td><td>9.53</td><td>Average</td><td>136</td><td>282</td></tr><tr><td>2</td><td>11060.00</td><td>48.81</td><td>74.00</td><td>-25.19</td><td>39.28</td><td>9.53</td><td>Peak</td><td>136</td><td>282</td></tr><tr><td>3</td><td>16590.00</td><td>50.05</td><td>68.20</td><td>-18.15</td><td>42.62</td><td>7.43</td><td>Peak</td><td>208</td><td>131</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	11060.00	36.86	54.00	-17.14	27.33	9.53	Average	136	282	2	11060.00	48.81	74.00	-25.19	39.28	9.53	Peak	136	282	3	16590.00	50.05	68.20	-18.15	42.62	7.43	Peak	208	131
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
								cm	deg																																																						
1	11060.00	36.86	54.00	-17.14	27.33	9.53	Average	136	282																																																						
2	11060.00	48.81	74.00	-25.19	39.28	9.53	Peak	136	282																																																						
3	16590.00	50.05	68.20	-18.15	42.62	7.43	Peak	208	131																																																						

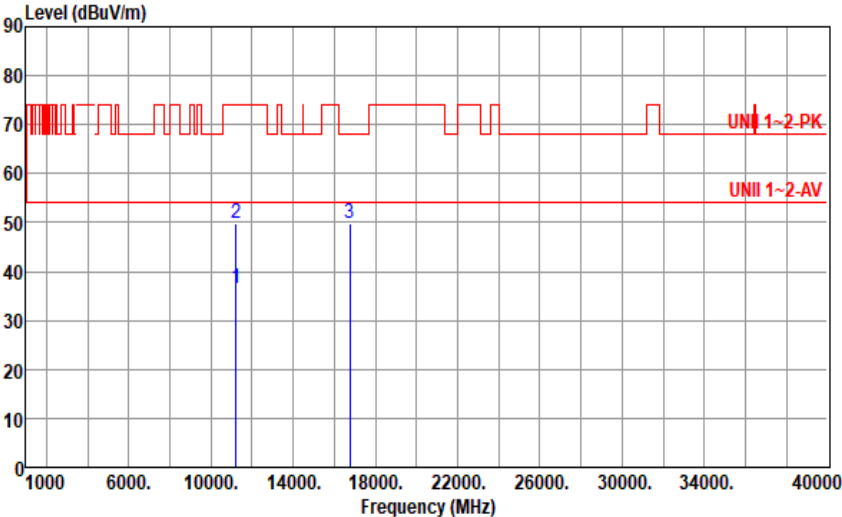


Modulation	be EHT80	Test Freq. (MHz)	5530																																																												
Polarization	Vertical																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11060.00</td><td>36.73</td><td>54.00</td><td>-17.27</td><td>27.20</td><td>9.53</td><td>Average</td><td>244</td><td>359</td></tr><tr><td>2</td><td>11060.00</td><td>48.94</td><td>74.00</td><td>-25.06</td><td>39.41</td><td>9.53</td><td>Peak</td><td>244</td><td>359</td></tr><tr><td>3</td><td>16590.00</td><td>49.64</td><td>68.20</td><td>-18.56</td><td>42.21</td><td>7.43</td><td>Peak</td><td>210</td><td>313</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	11060.00	36.73	54.00	-17.27	27.20	9.53	Average	244	359	2	11060.00	48.94	74.00	-25.06	39.41	9.53	Peak	244	359	3	16590.00	49.64	68.20	-18.56	42.21	7.43	Peak	210	313
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	11060.00	36.73	54.00	-17.27	27.20	9.53	Average	244	359																																																						
2	11060.00	48.94	74.00	-25.06	39.41	9.53	Peak	244	359																																																						
3	16590.00	49.64	68.20	-18.56	42.21	7.43	Peak	210	313																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

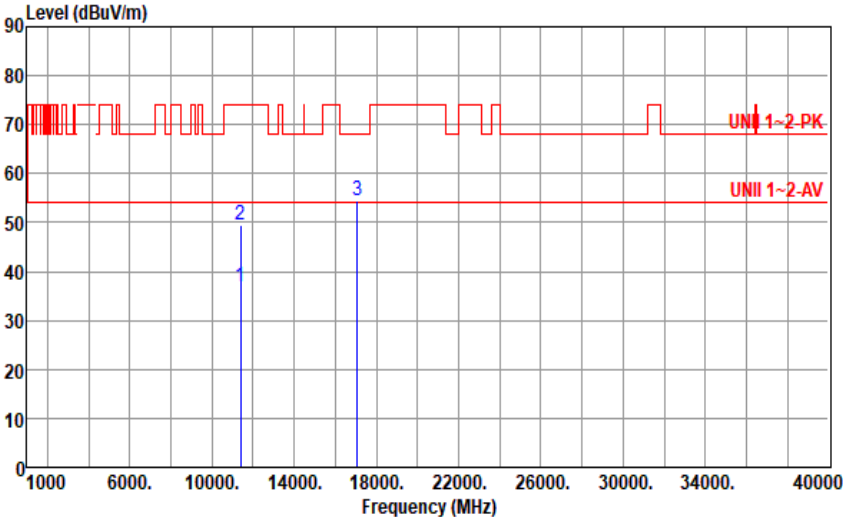


Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11220.00</td><td>36.28</td><td>54.00</td><td>-17.72</td><td>27.23</td><td>9.05</td><td>Average</td><td>132</td><td>345</td></tr><tr><td>2</td><td>11220.00</td><td>49.29</td><td>74.00</td><td>-24.71</td><td>40.24</td><td>9.05</td><td>Peak</td><td>132</td><td>345</td></tr><tr><td>3</td><td>16830.00</td><td>50.54</td><td>68.20</td><td>-17.66</td><td>42.87</td><td>7.67</td><td>Peak</td><td>209</td><td>72</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	36.28	54.00	-17.72	27.23	9.05	Average	132	345	2	11220.00	49.29	74.00	-24.71	40.24	9.05	Peak	132	345	3	16830.00	50.54	68.20	-17.66	42.87	7.67	Peak	209	72
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	36.28	54.00	-17.72	27.23	9.05	Average	132	345																																		
2	11220.00	49.29	74.00	-24.71	40.24	9.05	Peak	132	345																																		
3	16830.00	50.54	68.20	-17.66	42.87	7.67	Peak	209	72																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80		Test Freq. (MHz)		5610																																									
Polarization	Vertical																																													
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																														
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11220.00</td><td>36.48</td><td>54.00</td><td>-17.52</td><td>27.43</td><td>9.05</td><td>Average</td><td>178</td><td>46</td></tr><tr><td>2</td><td>11220.00</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>40.87</td><td>9.05</td><td>Peak</td><td>178</td><td>46</td></tr><tr><td>3</td><td>16750.00</td><td>49.76</td><td>68.20</td><td>-18.44</td><td>42.18</td><td>7.58</td><td>Peak</td><td>244</td><td>288</td></tr></tbody></table>								Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	36.48	54.00	-17.52	27.43	9.05	Average	178	46	2	11220.00	49.92	74.00	-24.08	40.87	9.05	Peak	178	46	3	16750.00	49.76	68.20	-18.44	42.18	7.58	Peak	244	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																					
1	11220.00	36.48	54.00	-17.52	27.43	9.05	Average	178	46																																					
2	11220.00	49.92	74.00	-24.08	40.87	9.05	Peak	178	46																																					
3	16750.00	49.76	68.20	-18.44	42.18	7.58	Peak	244	288																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																														

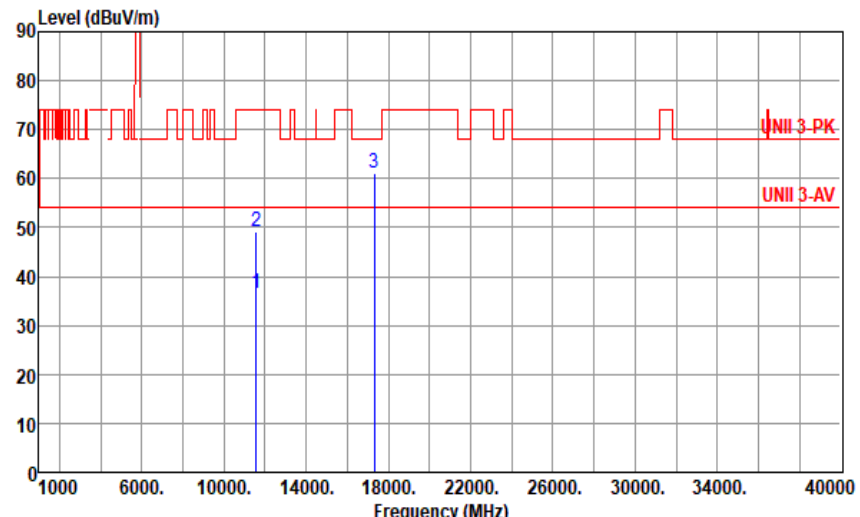


Modulation	be EHT80	Test Freq. (MHz)	5690																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11380.00</td><td>36.77</td><td>54.00</td><td>-17.23</td><td>27.67</td><td>9.10</td><td>Average</td><td>271</td><td>64</td></tr><tr><td>2</td><td>11380.00</td><td>49.52</td><td>74.00</td><td>-24.48</td><td>40.42</td><td>9.10</td><td>Peak</td><td>271</td><td>64</td></tr><tr><td>3</td><td>17070.00</td><td>54.56</td><td>68.20</td><td>-13.64</td><td>47.19</td><td>7.37</td><td>Peak</td><td>202</td><td>218</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	11380.00	36.77	54.00	-17.23	27.67	9.10	Average	271	64	2	11380.00	49.52	74.00	-24.48	40.42	9.10	Peak	271	64	3	17070.00	54.56	68.20	-13.64	47.19	7.37	Peak	202	218
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	11380.00	36.77	54.00	-17.23	27.67	9.10	Average	271	64																																												
2	11380.00	49.52	74.00	-24.48	40.42	9.10	Peak	271	64																																												
3	17070.00	54.56	68.20	-13.64	47.19	7.37	Peak	202	218																																												



Modulation	be EHT80	Test Freq. (MHz)	5690																																																												
Polarization	Vertical																																																														
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11380.00</td><td>36.79</td><td>54.00</td><td>-17.21</td><td>27.69</td><td>9.10</td><td>Average</td><td>334</td><td>52</td></tr><tr><td>2</td><td>11380.00</td><td>49.45</td><td>74.00</td><td>-24.55</td><td>40.35</td><td>9.10</td><td>Peak</td><td>334</td><td>52</td></tr><tr><td>3</td><td>17070.00</td><td>50.51</td><td>68.20</td><td>-17.69</td><td>43.14</td><td>7.37</td><td>Peak</td><td>309</td><td>350</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11380.00	36.79	54.00	-17.21	27.69	9.10	Average	334	52	2	11380.00	49.45	74.00	-24.55	40.35	9.10	Peak	334	52	3	17070.00	50.51	68.20	-17.69	43.14	7.37	Peak	309	350
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBuV			cm	deg																																																						
1	11380.00	36.79	54.00	-17.21	27.69	9.10	Average	334	52																																																						
2	11380.00	49.45	74.00	-24.55	40.35	9.10	Peak	334	52																																																						
3	17070.00	50.51	68.20	-17.69	43.14	7.37	Peak	309	350																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Modulation	be EHT80	Test Freq. (MHz)	5775																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11550.00</td><td>36.62</td><td>54.00</td><td>-17.38</td><td>27.47</td><td>9.15</td><td>Average</td><td>243</td><td>227</td></tr><tr><td>2</td><td>11550.00</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>39.89</td><td>9.15</td><td>Peak</td><td>243</td><td>227</td></tr><tr><td>3</td><td>17325.00</td><td>61.15</td><td>68.20</td><td>-7.05</td><td>53.61</td><td>7.54</td><td>Peak</td><td>166</td><td>174</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11550.00	36.62	54.00	-17.38	27.47	9.15	Average	243	227	2	11550.00	49.04	74.00	-24.96	39.89	9.15	Peak	243	227	3	17325.00	61.15	68.20	-7.05	53.61	7.54	Peak	166	174
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11550.00	36.62	54.00	-17.38	27.47	9.15	Average	243	227																																		
2	11550.00	49.04	74.00	-24.96	39.89	9.15	Peak	243	227																																		
3	17325.00	61.15	68.20	-7.05	53.61	7.54	Peak	166	174																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

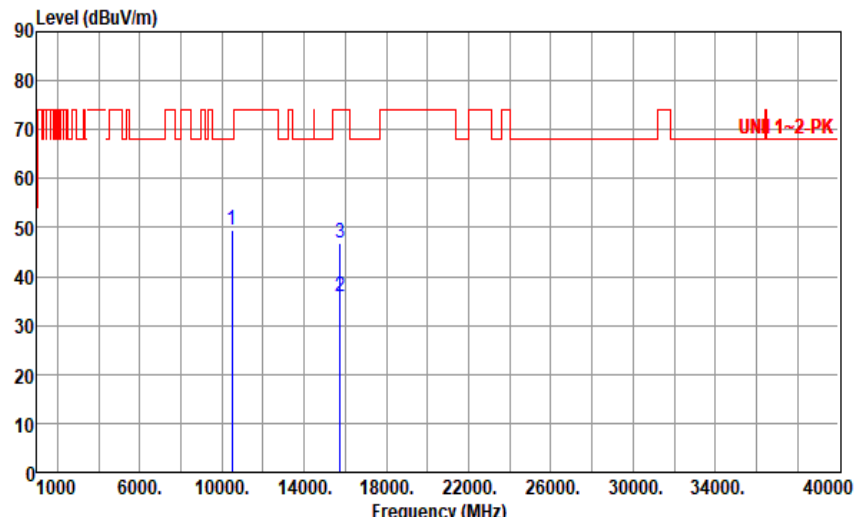


Modulation	be EHT80	Test Freq. (MHz)	5775																																								
Polarization	Vertical																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>36.19</td><td>54.00</td><td>-17.81</td><td>27.04</td><td>9.15</td><td>Average</td><td>315</td><td>57</td></tr><tr><td>2</td><td>11550.00</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>39.61</td><td>9.15</td><td>Peak</td><td>315</td><td>57</td></tr><tr><td>3</td><td>17325.00</td><td>53.03</td><td>68.20</td><td>-15.17</td><td>45.49</td><td>7.54</td><td>Peak</td><td>342</td><td>187</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11550.00	36.19	54.00	-17.81	27.04	9.15	Average	315	57	2	11550.00	48.76	74.00	-25.24	39.61	9.15	Peak	315	57	3	17325.00	53.03	68.20	-15.17	45.49	7.54	Peak	342	187
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11550.00	36.19	54.00	-17.81	27.04	9.15	Average	315	57																																		
2	11550.00	48.76	74.00	-25.24	39.61	9.15	Peak	315	57																																		
3	17325.00	53.03	68.20	-15.17	45.49	7.54	Peak	342	187																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT160	Test Freq. (MHz)	5250																																								
Polarization	Horizontal																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10500.00</td><td>49.82</td><td>68.20</td><td>-18.38</td><td>40.59</td><td>9.23</td><td>Peak</td><td>175</td><td>256</td></tr><tr><td>2</td><td>15750.00</td><td>36.13</td><td>54.00</td><td>-17.87</td><td>29.86</td><td>6.27</td><td>Average</td><td>210</td><td>303</td></tr><tr><td>3</td><td>15750.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>40.29</td><td>6.27</td><td>Peak</td><td>210</td><td>303</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10500.00	49.82	68.20	-18.38	40.59	9.23	Peak	175	256	2	15750.00	36.13	54.00	-17.87	29.86	6.27	Average	210	303	3	15750.00	46.56	74.00	-27.44	40.29	6.27	Peak	210	303
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10500.00	49.82	68.20	-18.38	40.59	9.23	Peak	175	256																																		
2	15750.00	36.13	54.00	-17.87	29.86	6.27	Average	210	303																																		
3	15750.00	46.56	74.00	-27.44	40.29	6.27	Peak	210	303																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT160		Test Freq. (MHz)		5250																																																																
Polarization	Vertical																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10500.00</td><td>49.63</td><td>68.20</td><td>-18.57</td><td>40.40</td><td>9.23</td><td>Peak</td><td>156</td><td>271</td></tr><tr><td>2</td><td>15750.00</td><td>36.00</td><td>74.00</td><td>-38.00</td><td>29.73</td><td>6.27</td><td>Average</td><td>121</td><td>7</td></tr><tr><td>3</td><td>15750.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>40.54</td><td>6.27</td><td>Peak</td><td>121</td><td>7</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	10500.00	49.63	68.20	-18.57	40.40	9.23	Peak	156	271	2	15750.00	36.00	74.00	-38.00	29.73	6.27	Average	121	7	3	15750.00	46.81	74.00	-27.19	40.54	6.27	Peak	121	7
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																												
		dBUV/m			dBuV			cm	deg																																																												
1	10500.00	49.63	68.20	-18.57	40.40	9.23	Peak	156	271																																																												
2	15750.00	36.00	74.00	-38.00	29.73	6.27	Average	121	7																																																												
3	15750.00	46.81	74.00	-27.19	40.54	6.27	Peak	121	7																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																					



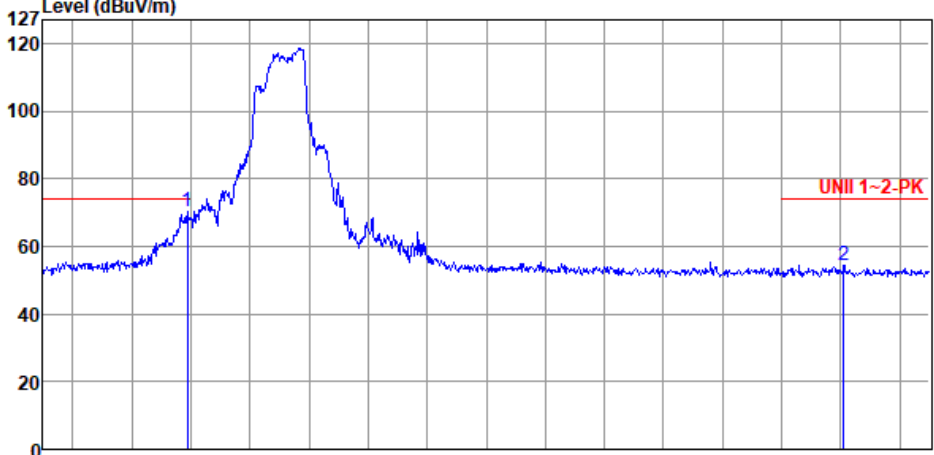
Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT160		Test Freq. (MHz)		5570																																																																
Polarization	Vertical																																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11140.00</td><td>36.50</td><td>54.00</td><td>-17.50</td><td>27.33</td><td>9.17</td><td>Average</td><td>189</td><td>50</td></tr><tr><td>2</td><td>11140.00</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>40.01</td><td>9.17</td><td>Peak</td><td>189</td><td>50</td></tr><tr><td>3</td><td>16710.00</td><td>48.35</td><td>68.20</td><td>-19.85</td><td>40.74</td><td>7.61</td><td>Peak</td><td>196</td><td>291</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	11140.00	36.50	54.00	-17.50	27.33	9.17	Average	189	50	2	11140.00	49.18	74.00	-24.82	40.01	9.17	Peak	189	50	3	16710.00	48.35	68.20	-19.85	40.74	7.61	Peak	196	291
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																												
		dBUV/m			dBuV			cm	deg																																																												
1	11140.00	36.50	54.00	-17.50	27.33	9.17	Average	189	50																																																												
2	11140.00	49.18	74.00	-24.82	40.01	9.17	Peak	189	50																																																												
3	16710.00	48.35	68.20	-19.85	40.74	7.61	Peak	196	291																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																					



Non-beamforming mode

Modulation		11a	Test Freq. (MHz)		5180																																																				
Polarization		Horizontal-Peak																																																							
Test By		:Brad Wu-		Temperature(°C):23		Humidity(%):62																																																			
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.90</td><td>70.30</td><td>74.00</td><td>-3.70</td><td>69.20</td><td>1.10</td><td>Peak</td><td>167</td><td>295</td></tr><tr><td>2</td><td>5370.90</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>54.05</td><td>0.36</td><td>Peak</td><td>167</td><td>295</td></tr></table>									Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1	5148.90	70.30	74.00	-3.70	69.20	1.10	Peak	167	295	2	5370.90	54.41	74.00	-19.59	54.05	0.36	Peak	167	295
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																
		dBUV/m			dBuV			cm	deg																																																
1	5148.90	70.30	74.00	-3.70	69.20	1.10	Peak	167	295																																																
2	5370.90	54.41	74.00	-19.59	54.05	0.36	Peak	167	295																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																									



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>52.79</td><td>54.00</td><td>-1.21</td><td>51.69</td><td>1.10</td><td>Average</td><td>167</td><td>295</td></tr><tr><td>2</td><td>5360.70</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>41.22</td><td>0.34</td><td>Average</td><td>167</td><td>295</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.79	54.00	-1.21	51.69	1.10	Average	167	295	2	5360.70	41.56	54.00	-12.44	41.22	0.34	Average	167	295
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.79	54.00	-1.21	51.69	1.10	Average	167	295																								
2	5360.70	41.56	54.00	-12.44	41.22	0.34	Average	167	295																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

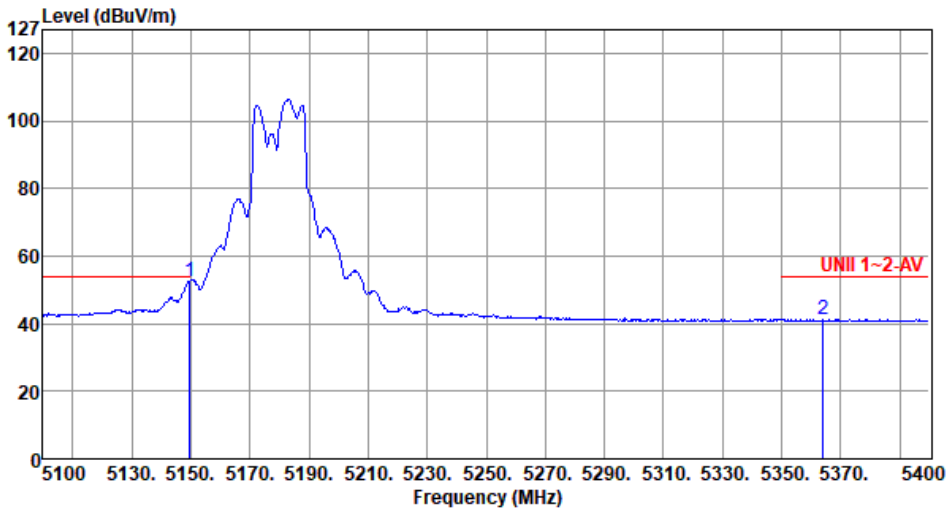
Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 1-2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>69.41</td><td>74.00</td><td>-4.59</td><td>68.31</td><td>1.10</td><td>Peak</td><td>177</td><td>329</td></tr><tr><td>2</td><td>5355.90</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>53.75</td><td>0.33</td><td>Peak</td><td>177</td><td>329</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	69.41	74.00	-4.59	68.31	1.10	Peak	177	329	2	5355.90	54.08	74.00	-19.92	53.75	0.33	Peak	177	329
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	69.41	74.00	-4.59	68.31	1.10	Peak	177	329																								
2	5355.90	54.08	74.00	-19.92	53.75	0.33	Peak	177	329																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.67</td><td>54.00</td><td>-1.33</td><td>51.57</td><td>1.10</td><td>Average</td><td>177</td><td>329</td></tr><tr><td>2</td><td>5364.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>40.82</td><td>0.36</td><td>Average</td><td>177</td><td>329</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.67	54.00	-1.33	51.57	1.10	Average	177	329	2	5364.00	41.18	54.00	-12.82	40.82	0.36	Average	177	329
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.67	54.00	-1.33	51.57	1.10	Average	177	329																								
2	5364.00	41.18	54.00	-12.82	40.82	0.36	Average	177	329																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>69.40</td><td>74.00</td><td>-4.60</td><td>68.30</td><td>1.10</td><td>Peak</td><td>313</td><td>184</td></tr><tr><td>2</td><td>5358.00</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>54.15</td><td>0.34</td><td>Peak</td><td>313</td><td>184</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	69.40	74.00	-4.60	68.30	1.10	Peak	313	184	2	5358.00	54.49	74.00	-19.51	54.15	0.34	Peak	313	184
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	69.40	74.00	-4.60	68.30	1.10	Peak	313	184																								
2	5358.00	54.49	74.00	-19.51	54.15	0.34	Peak	313	184																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

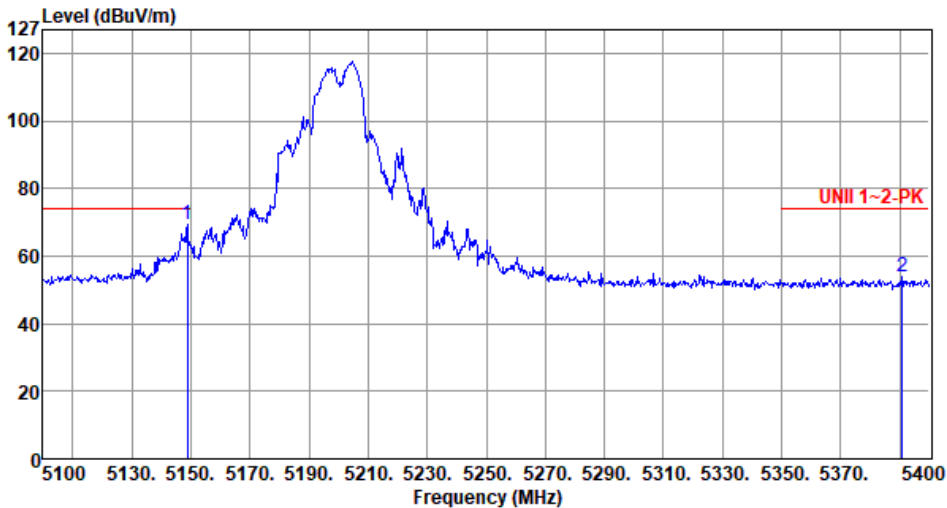
Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 1~2-AV 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>48.66</td><td>54.00</td><td>-5.34</td><td>47.56</td><td>1.10</td><td>Average</td><td>313</td><td>184</td></tr><tr><td>2</td><td>5377.20</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>41.18</td><td>0.38</td><td>Average</td><td>313</td><td>184</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	48.66	54.00	-5.34	47.56	1.10	Average	313	184	2	5377.20	41.56	54.00	-12.44	41.18	0.38	Average	313	184
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	48.66	54.00	-5.34	47.56	1.10	Average	313	184																								
2	5377.20	41.56	54.00	-12.44	41.18	0.38	Average	313	184																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

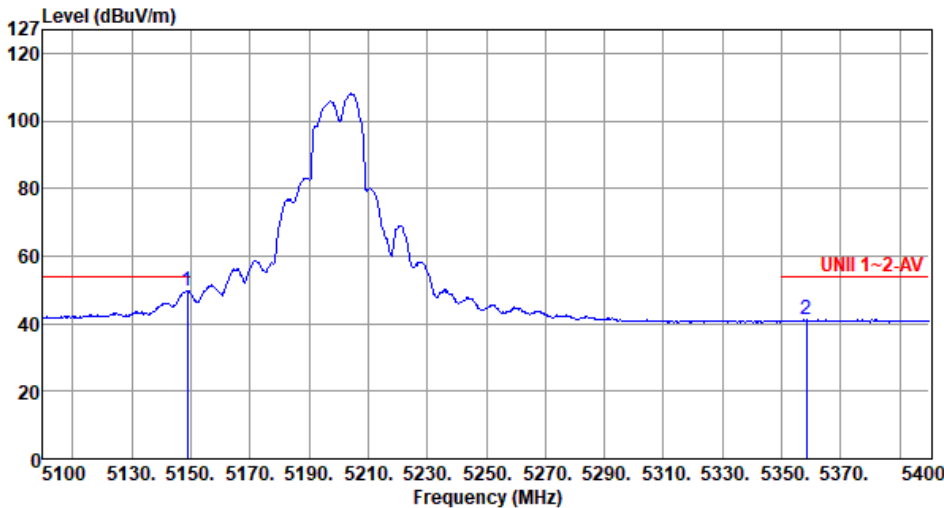
Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>69.22</td><td>74.00</td><td>-4.78</td><td>68.12</td><td>1.10</td><td>Peak</td><td>311</td><td>326</td></tr><tr><td>2</td><td>5390.70</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>53.46</td><td>0.40</td><td>Peak</td><td>311</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	69.22	74.00	-4.78	68.12	1.10	Peak	311	326	2	5390.70	53.86	74.00	-20.14	53.46	0.40	Peak	311	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	69.22	74.00	-4.78	68.12	1.10	Peak	311	326																								
2	5390.70	53.86	74.00	-20.14	53.46	0.40	Peak	311	326																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>49.78</td><td>54.00</td><td>-4.22</td><td>48.68</td><td>1.10</td><td>Average</td><td>311</td><td>326</td></tr><tr><td>2</td><td>5358.30</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>40.87</td><td>0.34</td><td>Average</td><td>311</td><td>326</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	49.78	54.00	-4.22	48.68	1.10	Average	311	326	2	5358.30	41.21	54.00	-12.79	40.87	0.34	Average	311	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	49.78	54.00	-4.22	48.68	1.10	Average	311	326																								
2	5358.30	41.21	54.00	-12.79	40.87	0.34	Average	311	326																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

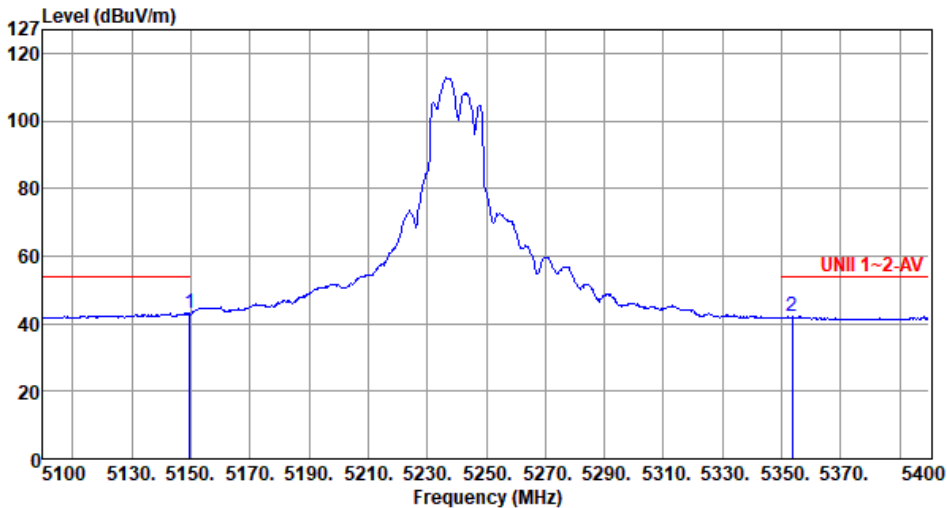
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td></td><td></td><td>dBUV/m</td><td></td><td></td><td>dBUV</td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>5148.30</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>54.49</td><td>1.10</td><td>Peak</td><td>315</td><td>181</td></tr><tr><td>2</td><td>5353.50</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>54.07</td><td>0.33</td><td>Peak</td><td>315</td><td>181</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5148.30	55.59	74.00	-18.41	54.49	1.10	Peak	315	181	2	5353.50	54.40	74.00	-19.60	54.07	0.33	Peak	315	181
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5148.30	55.59	74.00	-18.41	54.49	1.10	Peak	315	181																																												
2	5353.50	54.40	74.00	-19.60	54.07	0.33	Peak	315	181																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5240																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>41.99</td><td>1.10</td><td>Average</td><td>315</td><td>181</td></tr><tr><td>2</td><td>5353.50</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>41.72</td><td>0.33</td><td>Average</td><td>315</td><td>181</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5149.80	43.09	54.00	-10.91	41.99	1.10	Average	315	181	2	5353.50	42.05	54.00	-11.95	41.72	0.33	Average	315	181
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5149.80	43.09	54.00	-10.91	41.99	1.10	Average	315	181																																												
2	5353.50	42.05	54.00	-11.95	41.72	0.33	Average	315	181																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

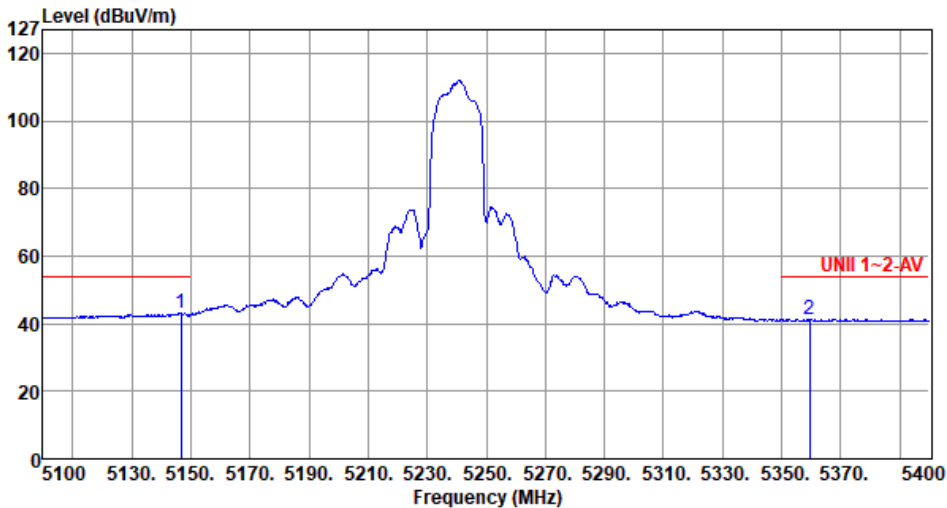
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.60</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>54.55</td><td>1.08</td><td>Peak</td><td>208</td><td>33</td></tr><tr><td>2</td><td>5372.70</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>53.96</td><td>0.37</td><td>Peak</td><td>208</td><td>33</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	55.63	74.00	-18.37	54.55	1.08	Peak	208	33	2	5372.70	54.33	74.00	-19.67	53.96	0.37	Peak	208	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	55.63	74.00	-18.37	54.55	1.08	Peak	208	33																								
2	5372.70	54.33	74.00	-19.67	53.96	0.37	Peak	208	33																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

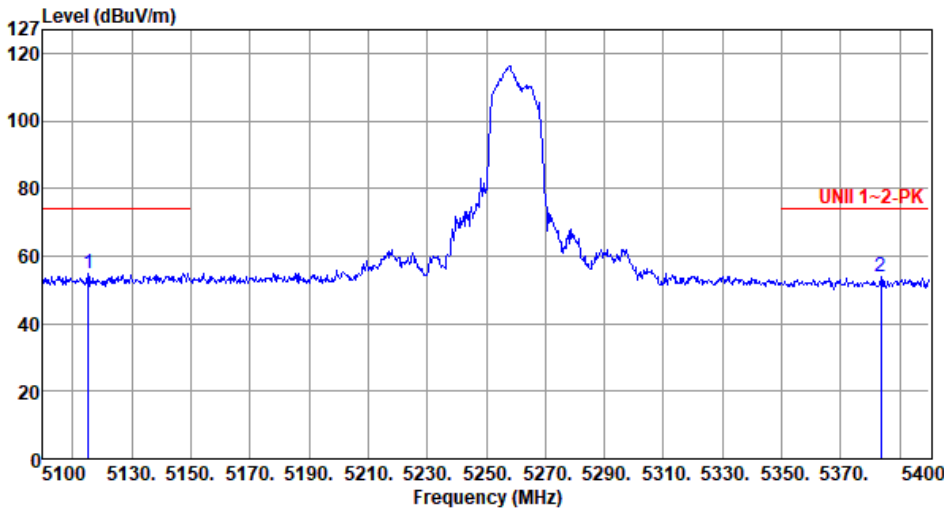
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.80</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>42.06</td><td>1.09</td><td>Average</td><td>208</td><td>33</td></tr><tr><td>2</td><td>5359.50</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>41.04</td><td>0.34</td><td>Average</td><td>208</td><td>33</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5146.80	43.15	54.00	-10.85	42.06	1.09	Average	208	33	2	5359.50	41.38	54.00	-12.62	41.04	0.34	Average	208	33
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5146.80	43.15	54.00	-10.85	42.06	1.09	Average	208	33																																												
2	5359.50	41.38	54.00	-12.62	41.04	0.34	Average	208	33																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5115.30</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>53.85</td><td>1.01</td><td>Peak</td><td>106</td><td>296</td></tr><tr><td>2</td><td>5383.50</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>53.68</td><td>0.40</td><td>Peak</td><td>106</td><td>296</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5115.30	54.86	74.00	-19.14	53.85	1.01	Peak	106	296	2	5383.50	54.08	74.00	-19.92	53.68	0.40	Peak	106	296
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5115.30	54.86	74.00	-19.14	53.85	1.01	Peak	106	296																																												
2	5383.50	54.08	74.00	-19.92	53.68	0.40	Peak	106	296																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

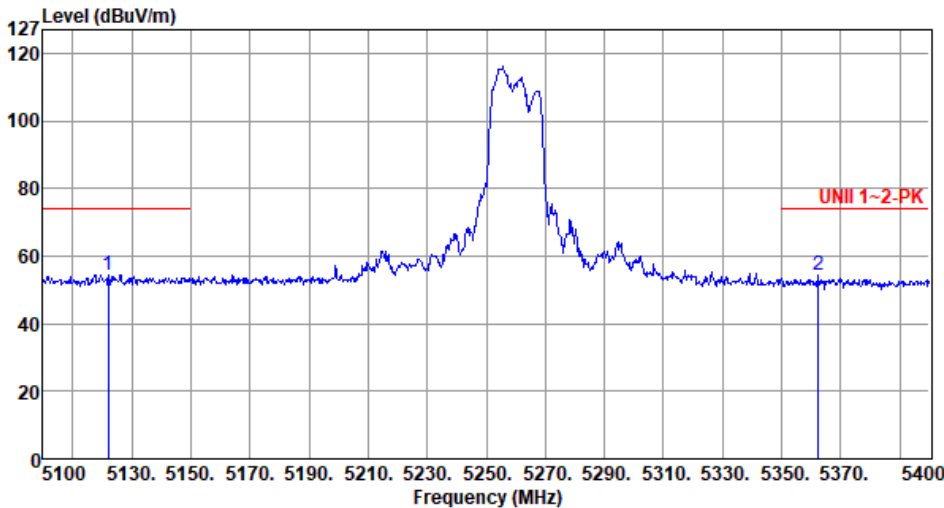
Appendix D

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.20</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>53.52</td><td>1.03</td><td>Peak</td><td>177</td><td>49</td></tr><tr><td>2</td><td>5362.50</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>53.84</td><td>0.36</td><td>Peak</td><td>177</td><td>49</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5122.20	54.55	74.00	-19.45	53.52	1.03	Peak	177	49	2	5362.50	54.20	74.00	-19.80	53.84	0.36	Peak	177	49
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5122.20	54.55	74.00	-19.45	53.52	1.03	Peak	177	49																																		
2	5362.50	54.20	74.00	-19.80	53.84	0.36	Peak	177	49																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.60</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>40.82</td><td>1.10</td><td>Average</td><td>177</td><td>49</td></tr><tr><td>2</td><td>5352.60</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>40.85</td><td>0.33</td><td>Average</td><td>177</td><td>49</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	41.92	54.00	-12.08	40.82	1.10	Average	177	49	2	5352.60	41.18	54.00	-12.82	40.85	0.33	Average	177	49
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	41.92	54.00	-12.08	40.82	1.10	Average	177	49																								
2	5352.60	41.18	54.00	-12.82	40.85	0.33	Average	177	49																								



Band Edge measurement

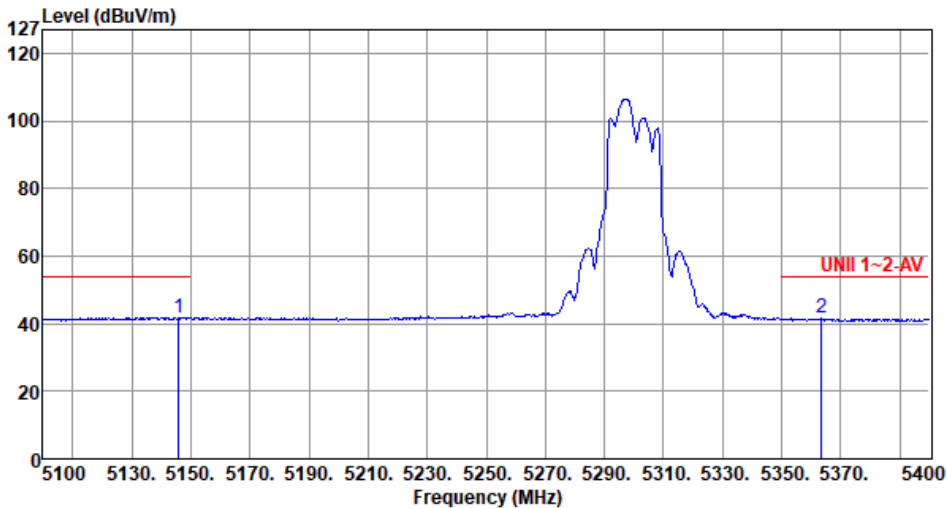
Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5107.80</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>52.99</td><td>1.01</td><td>Peak</td><td>298</td><td>182</td></tr><tr><td>2</td><td>5370.30</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>53.53</td><td>0.36</td><td>Peak</td><td>298</td><td>182</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5107.80	54.00	74.00	-20.00	52.99	1.01	Peak	298	182	2	5370.30	53.89	74.00	-20.11	53.53	0.36	Peak	298	182
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5107.80	54.00	74.00	-20.00	52.99	1.01	Peak	298	182																																												
2	5370.30	53.89	74.00	-20.11	53.53	0.36	Peak	298	182																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

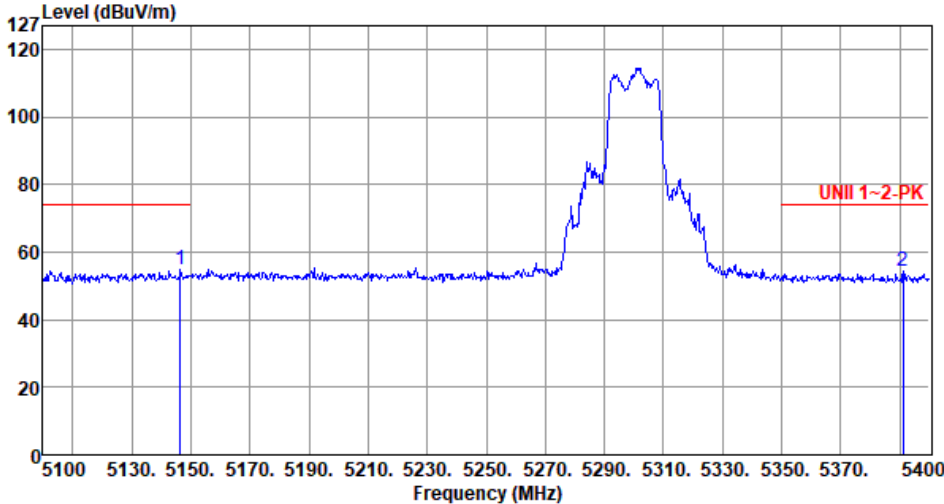
Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.90</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>40.76</td><td>1.08</td><td>Average</td><td>298</td><td>182</td></tr><tr><td>2</td><td>5363.40</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>41.16</td><td>0.36</td><td>Average</td><td>298</td><td>182</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5145.90	41.84	54.00	-12.16	40.76	1.08	Average	298	182	2	5363.40	41.52	54.00	-12.48	41.16	0.36	Average	298	182
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5145.90	41.84	54.00	-12.16	40.76	1.08	Average	298	182																																												
2	5363.40	41.52	54.00	-12.48	41.16	0.36	Average	298	182																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.50</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>53.56</td><td>1.09</td><td>Peak</td><td>287</td><td>301</td></tr><tr><td>2</td><td>5391.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>54.12</td><td>0.40</td><td>Peak</td><td>287</td><td>301</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5146.50	54.65	74.00	-19.35	53.56	1.09	Peak	287	301	2	5391.00	54.52	74.00	-19.48	54.12	0.40	Peak	287	301
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5146.50	54.65	74.00	-19.35	53.56	1.09	Peak	287	301																																												
2	5391.00	54.52	74.00	-19.48	54.12	0.40	Peak	287	301																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

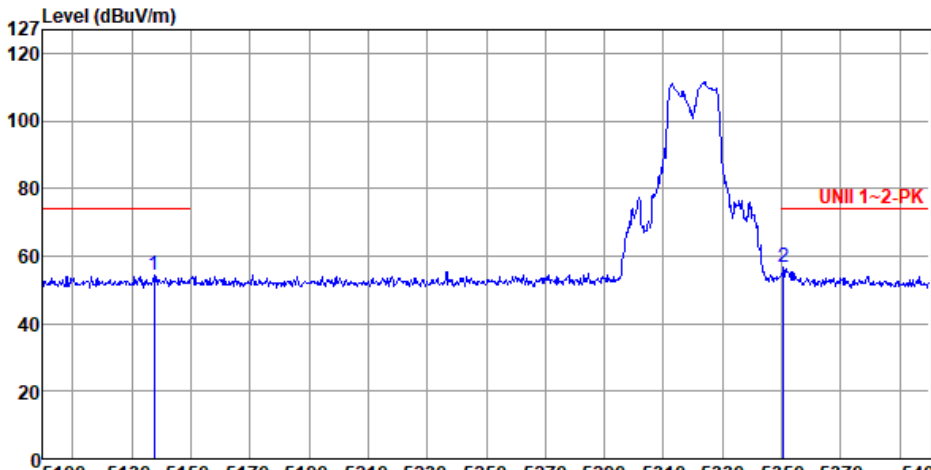
Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.60</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>40.76</td><td>1.10</td><td>Average</td><td>287</td><td>301</td></tr><tr><td>2</td><td>5371.80</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>41.25</td><td>0.36</td><td>Average</td><td>287</td><td>301</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.60	41.86	54.00	-12.14	40.76	1.10	Average	287	301	2	5371.80	41.61	54.00	-12.39	41.25	0.36	Average	287	301
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.60	41.86	54.00	-12.14	40.76	1.10	Average	287	301																																												
2	5371.80	41.61	54.00	-12.39	41.25	0.36	Average	287	301																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

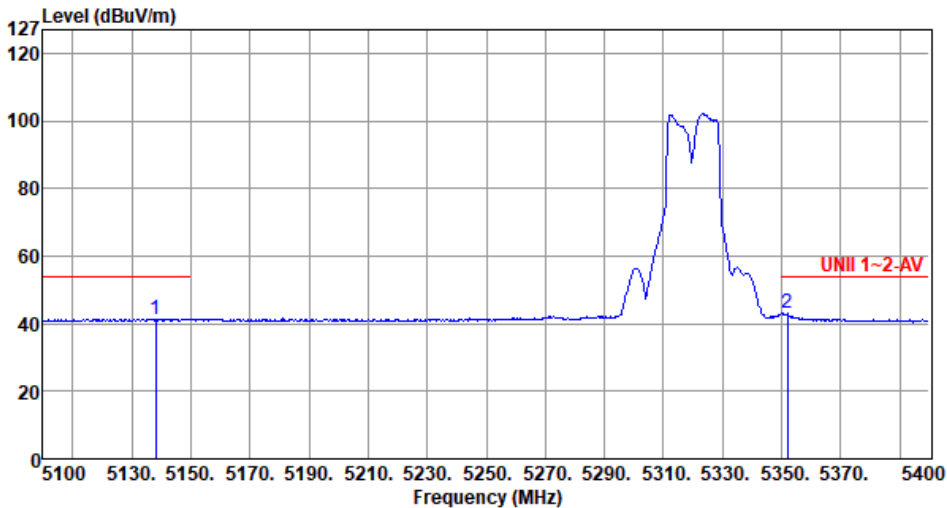
Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.50</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>53.06</td><td>1.07</td><td>Peak</td><td>114</td><td>86</td></tr><tr><td>2</td><td>5350.50</td><td>56.69</td><td>74.00</td><td>-17.31</td><td>56.37</td><td>0.32</td><td>Peak</td><td>114</td><td>86</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5137.50	54.13	74.00	-19.87	53.06	1.07	Peak	114	86	2	5350.50	56.69	74.00	-17.31	56.37	0.32	Peak	114	86
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5137.50	54.13	74.00	-19.87	53.06	1.07	Peak	114	86																																		
2	5350.50	56.69	74.00	-17.31	56.37	0.32	Peak	114	86																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

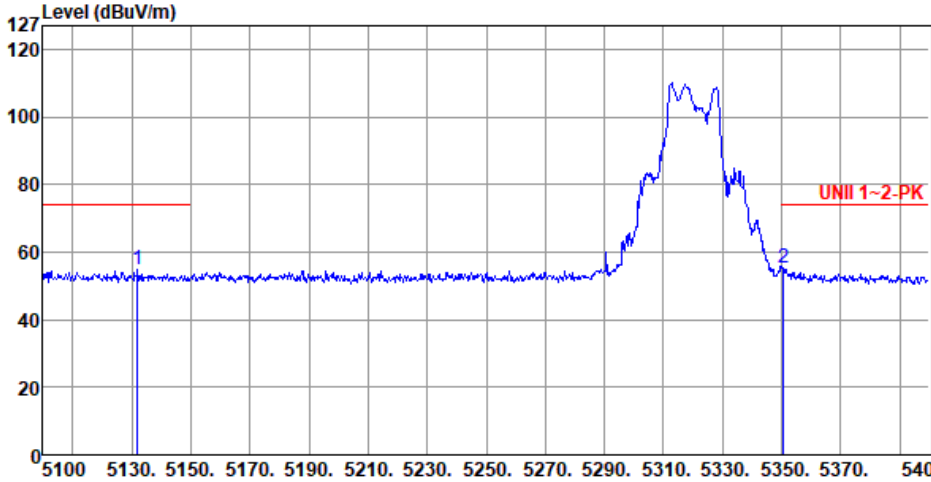
Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.10</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>40.37</td><td>1.07</td><td>Average</td><td>114</td><td>86</td></tr><tr><td>2</td><td>5352.00</td><td>42.98</td><td>54.00</td><td>-11.02</td><td>42.66</td><td>0.32</td><td>Average</td><td>114</td><td>86</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5138.10	41.44	54.00	-12.56	40.37	1.07	Average	114	86	2	5352.00	42.98	54.00	-11.02	42.66	0.32	Average	114	86
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5138.10	41.44	54.00	-12.56	40.37	1.07	Average	114	86																																												
2	5352.00	42.98	54.00	-11.02	42.66	0.32	Average	114	86																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5132.10</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>53.76</td><td>1.05</td><td>Peak</td><td>167</td><td>320</td></tr><tr><td>2</td><td>5350.50</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>54.85</td><td>0.32</td><td>Peak</td><td>167</td><td>320</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5132.10	54.81	74.00	-19.19	53.76	1.05	Peak	167	320	2	5350.50	55.17	74.00	-18.83	54.85	0.32	Peak	167	320
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5132.10	54.81	74.00	-19.19	53.76	1.05	Peak	167	320																																												
2	5350.50	55.17	74.00	-18.83	54.85	0.32	Peak	167	320																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

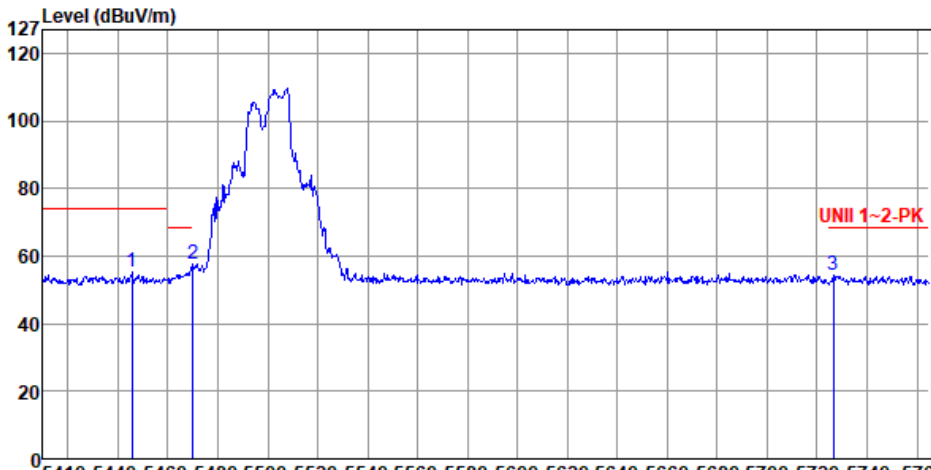
Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																																		
Polarization	Vertical-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>41.66</td><td>54.00</td><td>-12.34</td><td>40.56</td><td>1.10</td><td>Average</td><td>167</td><td>320</td></tr><tr><td>2</td><td>5350.20</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>42.12</td><td>0.32</td><td>Average</td><td>167</td><td>320</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.20	41.66	54.00	-12.34	40.56	1.10	Average	167	320	2	5350.20	42.44	54.00	-11.56	42.12	0.32	Average	167	320
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.20	41.66	54.00	-12.34	40.56	1.10	Average	167	320																																												
2	5350.20	42.44	54.00	-11.56	42.12	0.32	Average	167	320																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

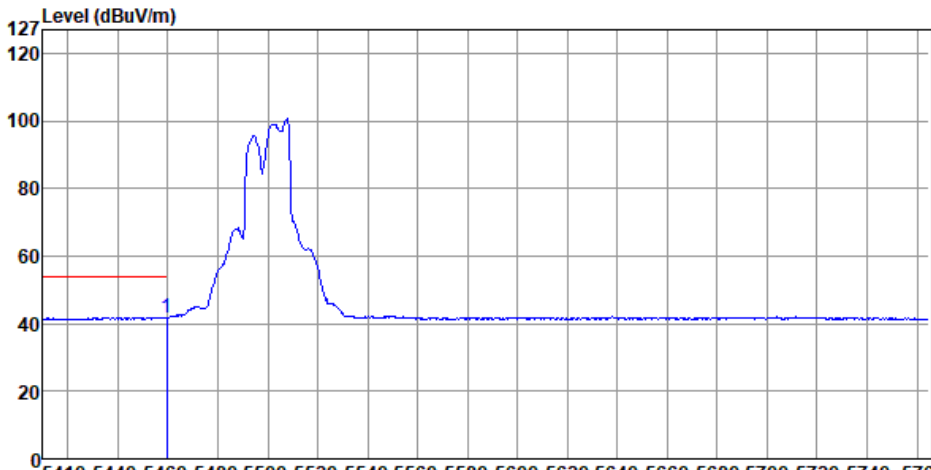
Appendix D

Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.50</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>54.52</td><td>0.64</td><td>Peak</td><td>171</td><td>331</td></tr><tr><td>2</td><td>5470.00</td><td>57.48</td><td>68.20</td><td>-10.72</td><td>56.76</td><td>0.72</td><td>Peak</td><td>180</td><td>301</td></tr><tr><td>3</td><td>5726.66</td><td>54.15</td><td>68.20</td><td>-14.05</td><td>53.04</td><td>1.11</td><td>Peak</td><td>171</td><td>331</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.50	55.16	74.00	-18.84	54.52	0.64	Peak	171	331	2	5470.00	57.48	68.20	-10.72	56.76	0.72	Peak	180	301	3	5726.66	54.15	68.20	-14.05	53.04	1.11	Peak	171	331
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.50	55.16	74.00	-18.84	54.52	0.64	Peak	171	331																																		
2	5470.00	57.48	68.20	-10.72	56.76	0.72	Peak	180	301																																		
3	5726.66	54.15	68.20	-14.05	53.04	1.11	Peak	171	331																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

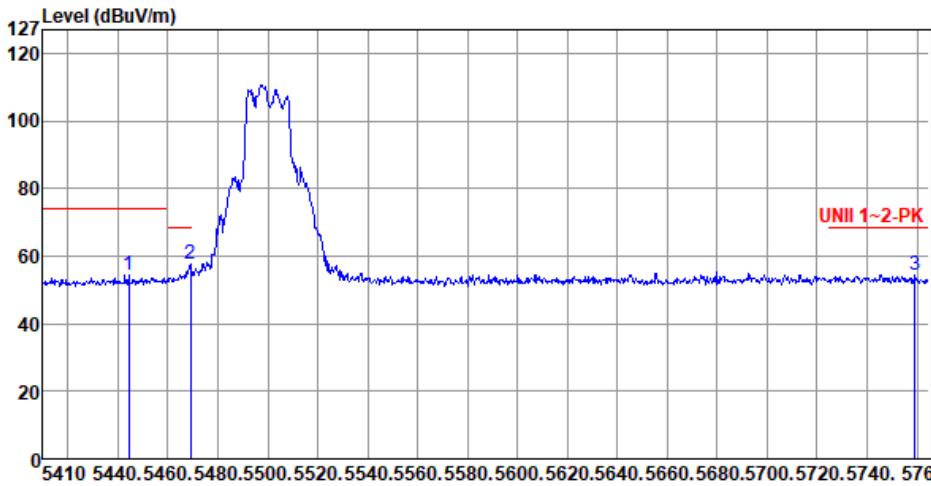
Appendix D

Modulation	11a	Test Freq. (MHz)	5500																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>41.15</td><td>0.69</td><td>Average</td><td>171</td><td>331</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	41.84	54.00	-12.16	41.15	0.69	Average	171	331
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	41.84	54.00	-12.16	41.15	0.69	Average	171	331														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5444.44</td><td>54.37</td><td>74.00</td><td>-19.63</td><td>53.73</td><td>0.64</td><td>Peak</td><td>278</td><td>66</td></tr><tr><td>2</td><td>5468.93</td><td>57.47</td><td>68.20</td><td>-10.73</td><td>56.75</td><td>0.72</td><td>Peak</td><td>305</td><td>40</td></tr><tr><td>3</td><td>5759.32</td><td>54.57</td><td>68.20</td><td>-13.63</td><td>53.37</td><td>1.20</td><td>Peak</td><td>278</td><td>66</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5444.44	54.37	74.00	-19.63	53.73	0.64	Peak	278	66	2	5468.93	57.47	68.20	-10.73	56.75	0.72	Peak	305	40	3	5759.32	54.57	68.20	-13.63	53.37	1.20	Peak	278	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5444.44	54.37	74.00	-19.63	53.73	0.64	Peak	278	66																																		
2	5468.93	57.47	68.20	-10.73	56.75	0.72	Peak	305	40																																		
3	5759.32	54.57	68.20	-13.63	53.37	1.20	Peak	278	66																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>41.16</td><td>0.69</td><td>Average</td><td>278</td><td>66</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	41.85	54.00	-12.15	41.16	0.69	Average	278	66
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.35	41.85	54.00	-12.15	41.16	0.69	Average	278	66														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

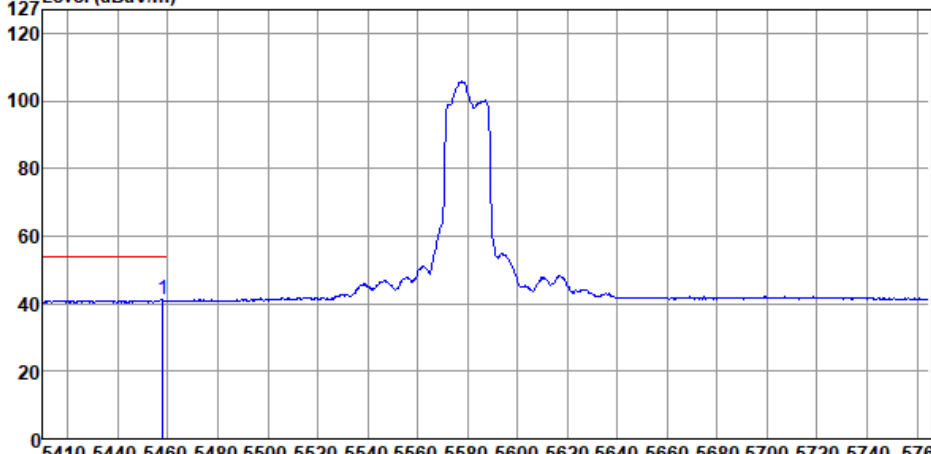
Appendix D

Modulation	11a	Test Freq. (MHz)	5580																																																												
Polarization	Horizontal-Peak																																																														
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5428.11</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>53.21</td><td>0.56</td><td>Peak</td><td>285</td><td>302</td></tr><tr><td>2</td><td>5466.09</td><td>53.20</td><td>68.20</td><td>-15.00</td><td>52.49</td><td>0.71</td><td>Peak</td><td>285</td><td>302</td></tr><tr><td>3</td><td>5726.66</td><td>54.23</td><td>68.20</td><td>-13.97</td><td>53.12</td><td>1.11</td><td>Peak</td><td>285</td><td>302</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5428.11	53.77	74.00	-20.23	53.21	0.56	Peak	285	302	2	5466.09	53.20	68.20	-15.00	52.49	0.71	Peak	285	302	3	5726.66	54.23	68.20	-13.97	53.12	1.11	Peak	285	302
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5428.11	53.77	74.00	-20.23	53.21	0.56	Peak	285	302																																																						
2	5466.09	53.20	68.20	-15.00	52.49	0.71	Peak	285	302																																																						
3	5726.66	54.23	68.20	-13.97	53.12	1.11	Peak	285	302																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

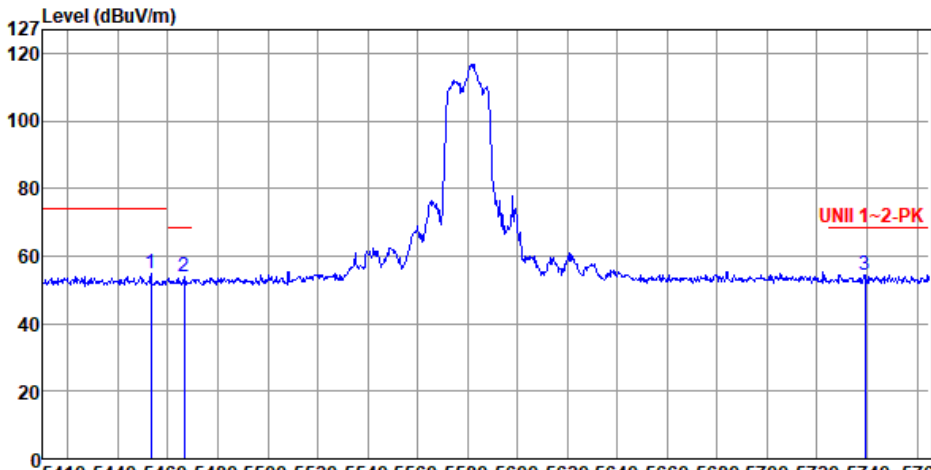
Appendix D

Modulation	11a	Test Freq. (MHz)	5580																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.93</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>40.39</td><td>0.69</td><td>Average</td><td>285</td><td>302</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.93	41.08	54.00	-12.92	40.39	0.69	Average	285	302
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5457.93	41.08	54.00	-12.92	40.39	0.69	Average	285	302														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5453.31</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>54.14</td><td>0.67</td><td>Peak</td><td>310</td><td>321</td></tr><tr><td>2</td><td>5466.45</td><td>53.81</td><td>68.20</td><td>-14.39</td><td>53.10</td><td>0.71</td><td>Peak</td><td>310</td><td>321</td></tr><tr><td>3</td><td>5739.09</td><td>54.49</td><td>68.20</td><td>-13.71</td><td>53.35</td><td>1.14</td><td>Peak</td><td>310</td><td>321</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5453.31	54.81	74.00	-19.19	54.14	0.67	Peak	310	321	2	5466.45	53.81	68.20	-14.39	53.10	0.71	Peak	310	321	3	5739.09	54.49	68.20	-13.71	53.35	1.14	Peak	310	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5453.31	54.81	74.00	-19.19	54.14	0.67	Peak	310	321																																		
2	5466.45	53.81	68.20	-14.39	53.10	0.71	Peak	310	321																																		
3	5739.09	54.49	68.20	-13.71	53.35	1.14	Peak	310	321																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

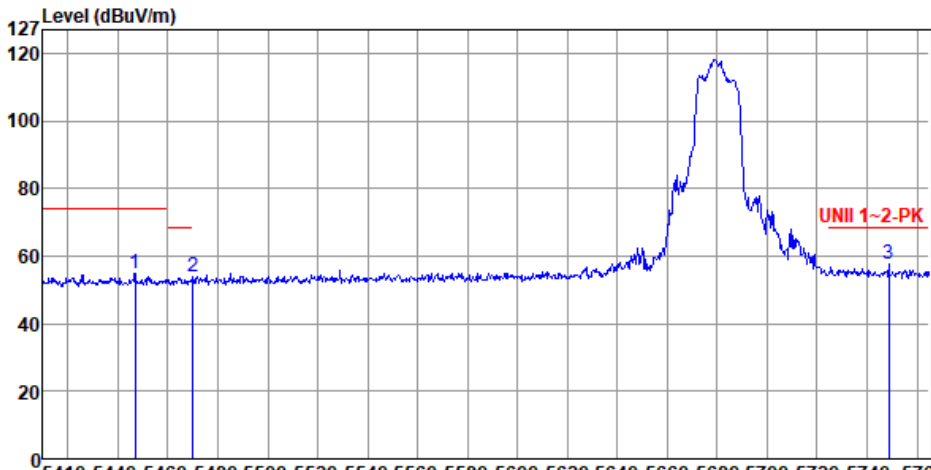
Appendix D

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5680																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5446.92</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>54.08</td><td>0.65</td><td>Peak</td><td>189</td><td>255</td></tr><tr><td>2</td><td>5470.00</td><td>53.92</td><td>68.20</td><td>-14.28</td><td>53.20</td><td>0.72</td><td>Peak</td><td>189</td><td>255</td></tr><tr><td>3</td><td>5748.67</td><td>57.51</td><td>68.20</td><td>-10.69</td><td>56.34</td><td>1.17</td><td>Peak</td><td>189</td><td>255</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5446.92	54.73	74.00	-19.27	54.08	0.65	Peak	189	255	2	5470.00	53.92	68.20	-14.28	53.20	0.72	Peak	189	255	3	5748.67	57.51	68.20	-10.69	56.34	1.17	Peak	189	255
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5446.92	54.73	74.00	-19.27	54.08	0.65	Peak	189	255																																		
2	5470.00	53.92	68.20	-14.28	53.20	0.72	Peak	189	255																																		
3	5748.67	57.51	68.20	-10.69	56.34	1.17	Peak	189	255																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

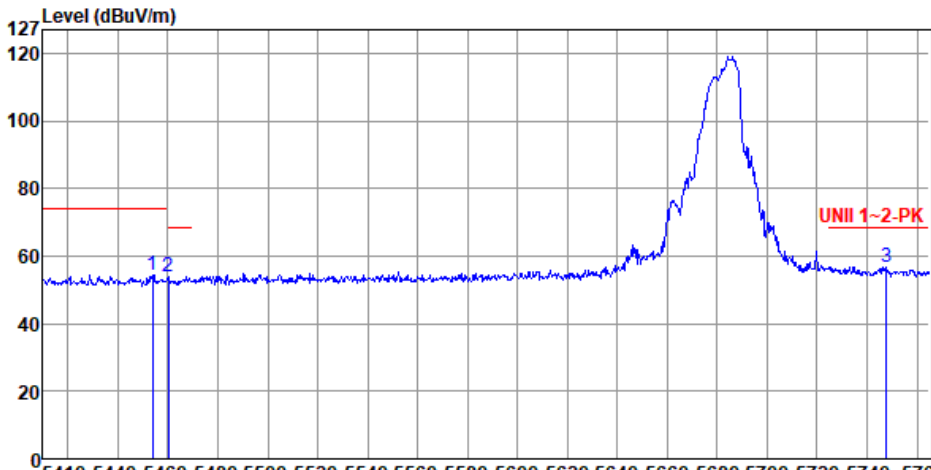
Appendix D

Modulation	11a	Test Freq. (MHz)	5680
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):64			
Level (dBUV/m)			



Band Edge measurement

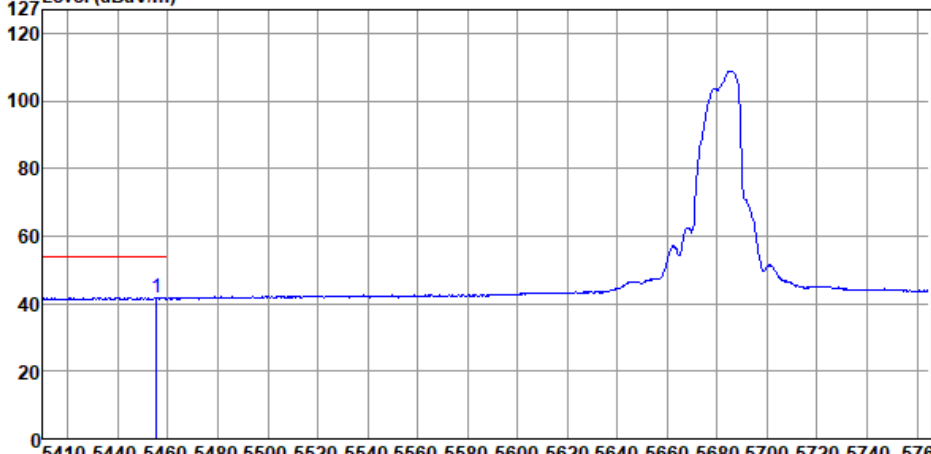
Appendix D

Modulation	11a	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.02</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>53.86</td><td>0.67</td><td>Peak</td><td>182</td><td>327</td></tr><tr><td>2</td><td>5460.10</td><td>54.00</td><td>68.20</td><td>-14.20</td><td>53.31</td><td>0.69</td><td>Peak</td><td>182</td><td>327</td></tr><tr><td>3</td><td>5747.61</td><td>56.77</td><td>68.20</td><td>-11.43</td><td>55.60</td><td>1.17</td><td>Peak</td><td>182</td><td>327</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.02	54.53	74.00	-19.47	53.86	0.67	Peak	182	327	2	5460.10	54.00	68.20	-14.20	53.31	0.69	Peak	182	327	3	5747.61	56.77	68.20	-11.43	55.60	1.17	Peak	182	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5454.02	54.53	74.00	-19.47	53.86	0.67	Peak	182	327																																		
2	5460.10	54.00	68.20	-14.20	53.31	0.69	Peak	182	327																																		
3	5747.61	56.77	68.20	-11.43	55.60	1.17	Peak	182	327																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

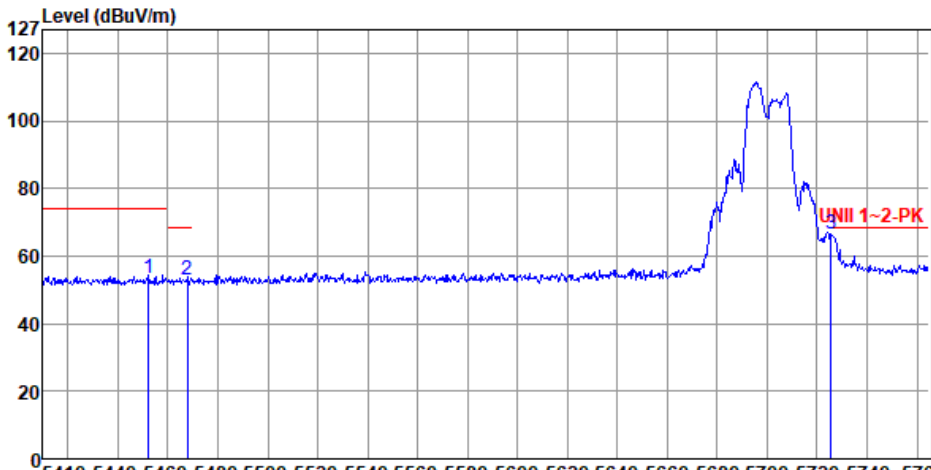
Appendix D

Modulation	11a	Test Freq. (MHz)	5680																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):64																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.44</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>41.10</td><td>0.67</td><td>Average</td><td>182</td><td>327</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5455.44	41.77	54.00	-12.23	41.10	0.67	Average	182	327
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																								
1	5455.44	41.77	54.00	-12.23	41.10	0.67	Average	182	327																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5700																																																												
Polarization	Horizontal-Peak																																																														
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.25</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>52.70</td><td>0.66</td><td>Peak</td><td>126</td><td>240</td></tr><tr><td>2</td><td>5467.87</td><td>53.13</td><td>68.20</td><td>-15.07</td><td>52.41</td><td>0.72</td><td>Peak</td><td>126</td><td>240</td></tr><tr><td>3</td><td>5725.60</td><td>66.70</td><td>68.20</td><td>-1.50</td><td>65.59</td><td>1.11</td><td>Peak</td><td>126</td><td>240</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5452.25	53.36	74.00	-20.64	52.70	0.66	Peak	126	240	2	5467.87	53.13	68.20	-15.07	52.41	0.72	Peak	126	240	3	5725.60	66.70	68.20	-1.50	65.59	1.11	Peak	126	240
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5452.25	53.36	74.00	-20.64	52.70	0.66	Peak	126	240																																																						
2	5467.87	53.13	68.20	-15.07	52.41	0.72	Peak	126	240																																																						
3	5725.60	66.70	68.20	-1.50	65.59	1.11	Peak	126	240																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

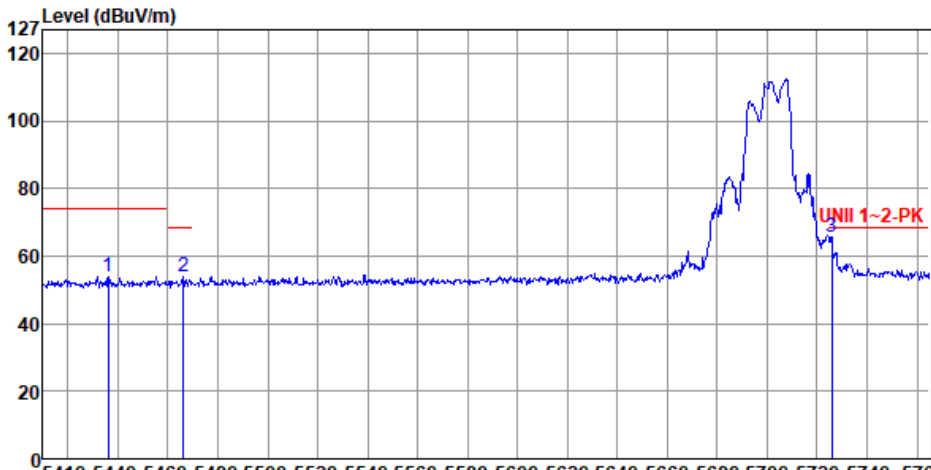
Appendix D

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.27</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>53.50</td><td>0.60</td><td>Peak</td><td>282</td><td>310</td></tr><tr><td>2</td><td>5466.09</td><td>53.69</td><td>68.20</td><td>-14.51</td><td>52.98</td><td>0.71</td><td>Peak</td><td>282</td><td>310</td></tr><tr><td>3</td><td>5725.95</td><td>65.69</td><td>68.20</td><td>-2.51</td><td>64.58</td><td>1.11</td><td>Peak</td><td>282</td><td>310</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.27	54.10	74.00	-19.90	53.50	0.60	Peak	282	310	2	5466.09	53.69	68.20	-14.51	52.98	0.71	Peak	282	310	3	5725.95	65.69	68.20	-2.51	64.58	1.11	Peak	282	310
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5436.27	54.10	74.00	-19.90	53.50	0.60	Peak	282	310																																		
2	5466.09	53.69	68.20	-14.51	52.98	0.71	Peak	282	310																																		
3	5725.95	65.69	68.20	-2.51	64.58	1.11	Peak	282	310																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

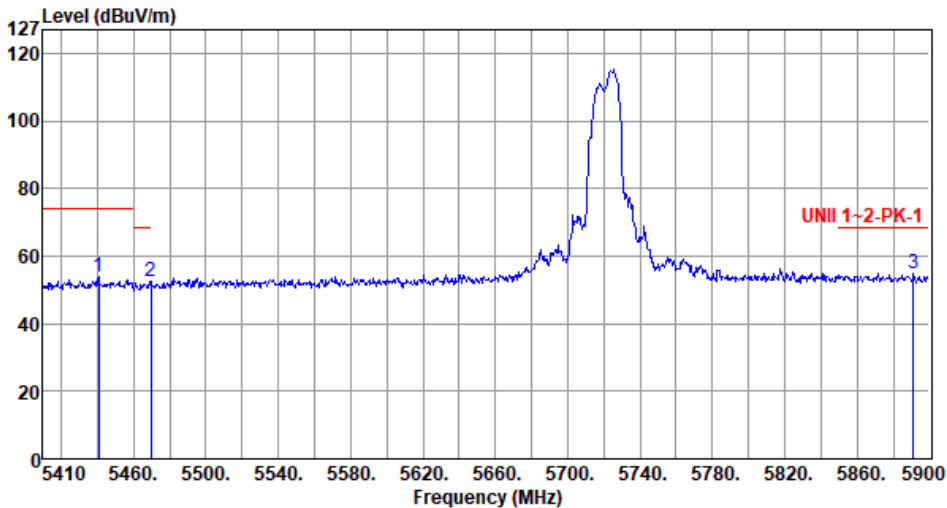
Appendix D

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5720																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5440.87</td><td>53.67</td><td>74.00</td><td>-20.33</td><td>53.05</td><td>0.62</td><td>Peak</td><td>229</td><td>286</td></tr><tr><td>2</td><td>5469.78</td><td>52.62</td><td>68.20</td><td>-15.58</td><td>51.90</td><td>0.72</td><td>Peak</td><td>229</td><td>286</td></tr><tr><td>3</td><td>5891.18</td><td>54.73</td><td>68.20</td><td>-13.47</td><td>53.14</td><td>1.59</td><td>Peak</td><td>229</td><td>286</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5440.87	53.67	74.00	-20.33	53.05	0.62	Peak	229	286	2	5469.78	52.62	68.20	-15.58	51.90	0.72	Peak	229	286	3	5891.18	54.73	68.20	-13.47	53.14	1.59	Peak	229	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5440.87	53.67	74.00	-20.33	53.05	0.62	Peak	229	286																																		
2	5469.78	52.62	68.20	-15.58	51.90	0.72	Peak	229	286																																		
3	5891.18	54.73	68.20	-13.47	53.14	1.59	Peak	229	286																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

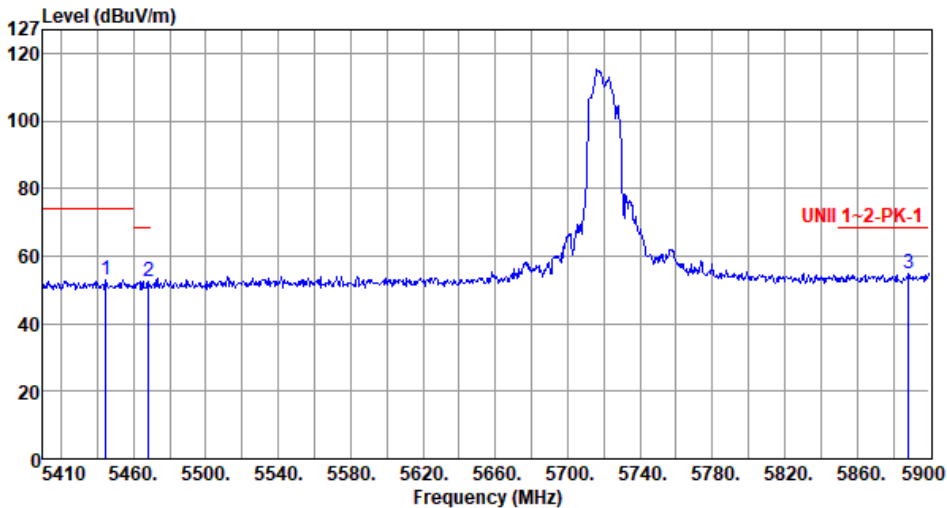
Appendix D

Modulation	11a	Test Freq. (MHz)	5720																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5436.95</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>40.17</td><td>0.60</td><td>Average</td><td>229</td><td>286</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.95	40.77	54.00	-13.23	40.17	0.60	Average	229	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5436.95	40.77	54.00	-13.23	40.17	0.60	Average	229	286														



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5720																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.79</td><td>53.09</td><td>74.00</td><td>-20.91</td><td>52.45</td><td>0.64</td><td>Peak</td><td>296</td><td>1</td></tr><tr><td>2</td><td>5468.31</td><td>52.71</td><td>68.20</td><td>-15.49</td><td>51.99</td><td>0.72</td><td>Peak</td><td>296</td><td>1</td></tr><tr><td>3</td><td>5888.24</td><td>55.02</td><td>68.20</td><td>-13.18</td><td>53.44</td><td>1.58</td><td>Peak</td><td>296</td><td>1</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5444.79	53.09	74.00	-20.91	52.45	0.64	Peak	296	1	2	5468.31	52.71	68.20	-15.49	51.99	0.72	Peak	296	1	3	5888.24	55.02	68.20	-13.18	53.44	1.58	Peak	296	1
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5444.79	53.09	74.00	-20.91	52.45	0.64	Peak	296	1																																												
2	5468.31	52.71	68.20	-15.49	51.99	0.72	Peak	296	1																																												
3	5888.24	55.02	68.20	-13.18	53.44	1.58	Peak	296	1																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

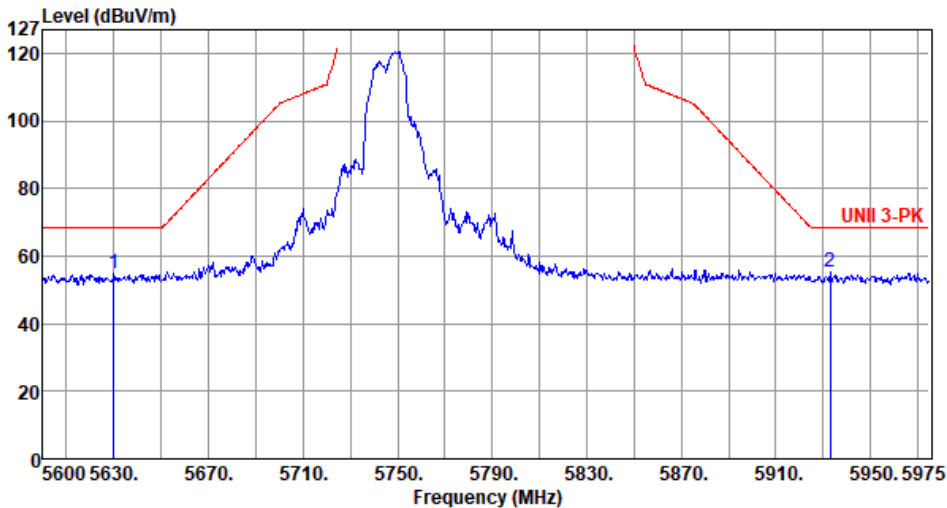
Appendix D

Modulation	11a	Test Freq. (MHz)	5720																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5430.58</td><td>40.83</td><td>54.00</td><td>-13.17</td><td>40.26</td><td>0.57</td><td>Average</td><td>296</td><td>1</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5430.58	40.83	54.00	-13.17	40.26	0.57	Average	296	1
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5430.58	40.83	54.00	-13.17	40.26	0.57	Average	296	1														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5630.00</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>53.81</td><td>0.87</td><td>Peak</td><td>132</td><td>280</td></tr><tr><td>2</td><td>5933.00</td><td>55.33</td><td>68.20</td><td>-12.87</td><td>53.67</td><td>1.66</td><td>Peak</td><td>132</td><td>280</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5630.00	54.68	68.20	-13.52	53.81	0.87	Peak	132	280	2	5933.00	55.33	68.20	-12.87	53.67	1.66	Peak	132	280
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5630.00	54.68	68.20	-13.52	53.81	0.87	Peak	132	280																								
2	5933.00	55.33	68.20	-12.87	53.67	1.66	Peak	132	280																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5641.63</td><td>54.83</td><td>68.20</td><td>-13.37</td><td>53.94</td><td>0.89</td><td>Peak</td><td>183</td><td>46</td></tr><tr><td>2</td><td>5946.88</td><td>55.06</td><td>68.20</td><td>-13.14</td><td>53.39</td><td>1.67</td><td>Peak</td><td>183</td><td>46</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.63	54.83	68.20	-13.37	53.94	0.89	Peak	183	46	2	5946.88	55.06	68.20	-13.14	53.39	1.67	Peak	183	46
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.63	54.83	68.20	-13.37	53.94	0.89	Peak	183	46																								
2	5946.88	55.06	68.20	-13.14	53.39	1.67	Peak	183	46																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal-Peak		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level reading High Table dBuV/m dBuV/m dB dBuV dB/m cm deg 1 5646.50 54.52 68.20 -13.68 53.61 0.91 Peak 130 280 2 5957.75 55.00 68.20 -13.20 53.31 1.69 Peak 130 280			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

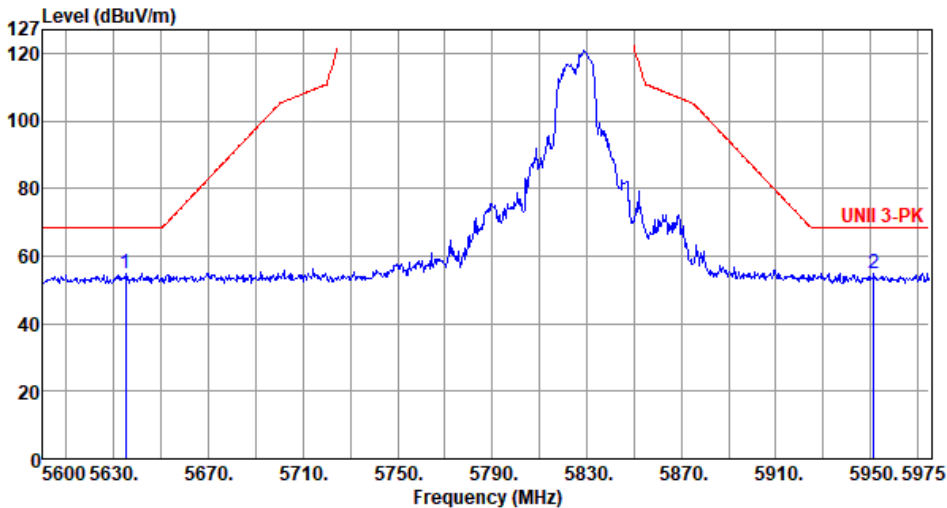
Appendix D

Modulation	11a	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5620.63</td><td>54.31</td><td>68.20</td><td>-13.89</td><td>53.46</td><td>0.85</td><td>Peak</td><td>200</td><td>50</td></tr><tr><td>2</td><td>5967.88</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>53.50</td><td>1.71</td><td>Peak</td><td>200</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5620.63	54.31	68.20	-13.89	53.46	0.85	Peak	200	50	2	5967.88	55.21	68.20	-12.99	53.50	1.71	Peak	200	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5620.63	54.31	68.20	-13.89	53.46	0.85	Peak	200	50																								
2	5967.88	55.21	68.20	-12.99	53.50	1.71	Peak	200	50																								



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5825																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5634.88</td><td>54.82</td><td>68.20</td><td>-13.38</td><td>53.94</td><td>0.88</td><td>Peak</td><td>133</td><td>284</td></tr><tr><td>2</td><td>5951.38</td><td>55.06</td><td>68.20</td><td>-13.14</td><td>53.39</td><td>1.67</td><td>Peak</td><td>133</td><td>284</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5634.88	54.82	68.20	-13.38	53.94	0.88	Peak	133	284	2	5951.38	55.06	68.20	-13.14	53.39	1.67	Peak	133	284
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5634.88	54.82	68.20	-13.38	53.94	0.88	Peak	133	284																																												
2	5951.38	55.06	68.20	-13.14	53.39	1.67	Peak	133	284																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5618.75</td><td>54.20</td><td>68.20</td><td>-14.00</td><td>53.35</td><td>0.85</td><td>Peak</td><td>181</td><td>45</td></tr><tr><td>2</td><td>5954.75</td><td>55.20</td><td>68.20</td><td>-13.00</td><td>53.52</td><td>1.68</td><td>Peak</td><td>181</td><td>45</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5618.75	54.20	68.20	-14.00	53.35	0.85	Peak	181	45	2	5954.75	55.20	68.20	-13.00	53.52	1.68	Peak	181	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5618.75	54.20	68.20	-14.00	53.35	0.85	Peak	181	45																								
2	5954.75	55.20	68.20	-13.00	53.52	1.68	Peak	181	45																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

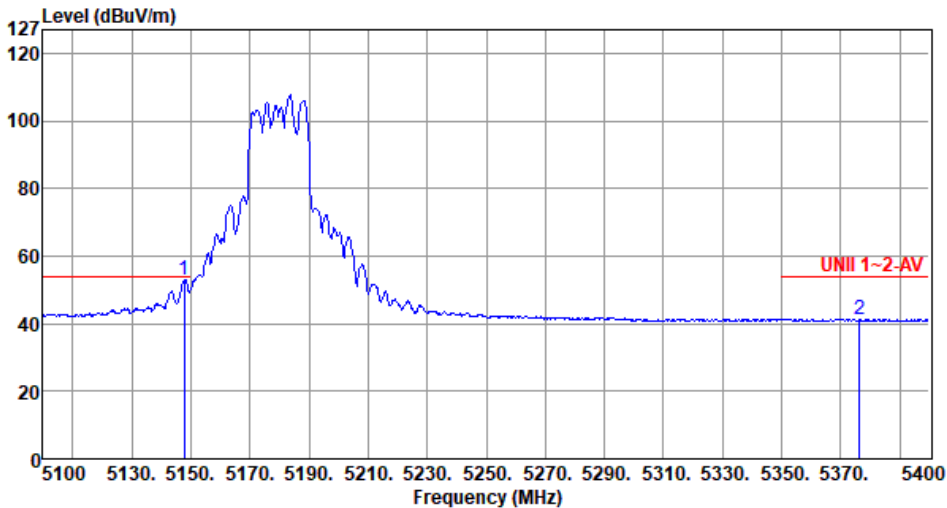
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.30</td><td>69.51</td><td>74.00</td><td>-4.49</td><td>68.41</td><td>1.10</td><td>Peak</td><td>182</td><td>284</td></tr><tr><td>2</td><td>5367.30</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>53.85</td><td>0.36</td><td>Peak</td><td>182</td><td>284</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.30	69.51	74.00	-4.49	68.41	1.10	Peak	182	284	2	5367.30	54.21	74.00	-19.79	53.85	0.36	Peak	182	284
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.30	69.51	74.00	-4.49	68.41	1.10	Peak	182	284																																												
2	5367.30	54.21	74.00	-19.79	53.85	0.36	Peak	182	284																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

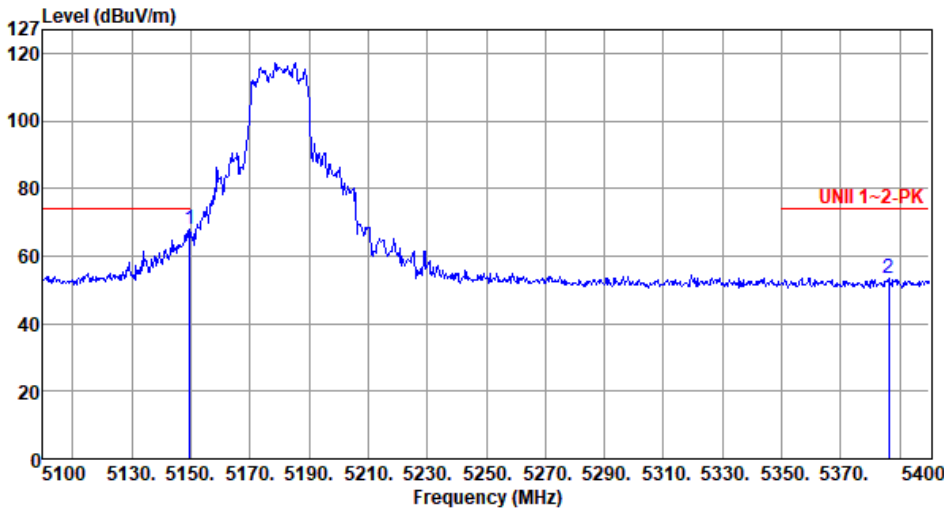
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.70</td><td>52.91</td><td>54.00</td><td>-1.09</td><td>51.81</td><td>1.10</td><td>Average</td><td>182</td><td>284</td></tr><tr><td>2</td><td>5376.30</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>41.09</td><td>0.37</td><td>Average</td><td>182</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	52.91	54.00	-1.09	51.81	1.10	Average	182	284	2	5376.30	41.46	54.00	-12.54	41.09	0.37	Average	182	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	52.91	54.00	-1.09	51.81	1.10	Average	182	284																								
2	5376.30	41.46	54.00	-12.54	41.09	0.37	Average	182	284																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>68.01</td><td>74.00</td><td>-5.99</td><td>66.91</td><td>1.10</td><td>Peak</td><td>307</td><td>317</td></tr><tr><td>2</td><td>5386.20</td><td>53.64</td><td>74.00</td><td>-20.36</td><td>53.24</td><td>0.40</td><td>Peak</td><td>307</td><td>317</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	68.01	74.00	-5.99	66.91	1.10	Peak	307	317	2	5386.20	53.64	74.00	-20.36	53.24	0.40	Peak	307	317
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	68.01	74.00	-5.99	66.91	1.10	Peak	307	317																								
2	5386.20	53.64	74.00	-20.36	53.24	0.40	Peak	307	317																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>51.91</td><td>54.00</td><td>-2.09</td><td>50.81</td><td>1.10</td><td>Average</td><td>307</td><td>317</td></tr><tr><td>2</td><td>5352.90</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>40.84</td><td>0.33</td><td>Average</td><td>307</td><td>317</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	51.91	54.00	-2.09	50.81	1.10	Average	307	317	2	5352.90	41.17	54.00	-12.83	40.84	0.33	Average	307	317
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	51.91	54.00	-2.09	50.81	1.10	Average	307	317																								
2	5352.90	41.17	54.00	-12.83	40.84	0.33	Average	307	317																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

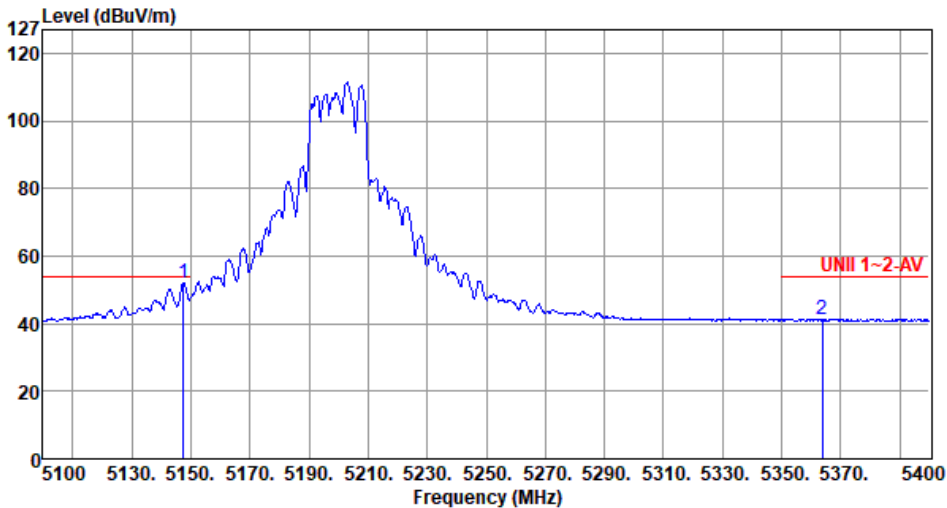
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>71.73</td><td>74.00</td><td>-2.27</td><td>70.63</td><td>1.10</td><td>Peak</td><td>167</td><td>297</td></tr><tr><td>2</td><td>5389.50</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>53.20</td><td>0.41</td><td>Peak</td><td>167</td><td>297</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	71.73	74.00	-2.27	70.63	1.10	Peak	167	297	2	5389.50	53.61	74.00	-20.39	53.20	0.41	Peak	167	297
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	71.73	74.00	-2.27	70.63	1.10	Peak	167	297																								
2	5389.50	53.61	74.00	-20.39	53.20	0.41	Peak	167	297																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5147.40</td><td>52.04</td><td>54.00</td><td>-1.96</td><td>50.95</td><td>1.09</td><td>Average</td><td>167</td><td>297</td></tr><tr><td>2</td><td>5363.70</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>41.10</td><td>0.36</td><td>Average</td><td>167</td><td>297</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.40	52.04	54.00	-1.96	50.95	1.09	Average	167	297	2	5363.70	41.46	54.00	-12.54	41.10	0.36	Average	167	297
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.40	52.04	54.00	-1.96	50.95	1.09	Average	167	297																								
2	5363.70	41.46	54.00	-12.54	41.10	0.36	Average	167	297																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>68.68</td><td>74.00</td><td>-5.32</td><td>67.58</td><td>1.10</td><td>Peak</td><td>327</td><td>313</td></tr><tr><td>2</td><td>5358.60</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>53.32</td><td>0.34</td><td>Peak</td><td>327</td><td>313</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	68.68	74.00	-5.32	67.58	1.10	Peak	327	313	2	5358.60	53.66	74.00	-20.34	53.32	0.34	Peak	327	313
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	68.68	74.00	-5.32	67.58	1.10	Peak	327	313																								
2	5358.60	53.66	74.00	-20.34	53.32	0.34	Peak	327	313																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>51.37</td><td>54.00</td><td>-2.63</td><td>50.27</td><td>1.10</td><td>Average</td><td>327</td><td>313</td></tr><tr><td>2</td><td>5368.50</td><td>41.17</td><td>54.00</td><td>-12.83</td><td>40.80</td><td>0.37</td><td>Average</td><td>327</td><td>313</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	51.37	54.00	-2.63	50.27	1.10	Average	327	313	2	5368.50	41.17	54.00	-12.83	40.80	0.37	Average	327	313
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	51.37	54.00	-2.63	50.27	1.10	Average	327	313																								
2	5368.50	41.17	54.00	-12.83	40.80	0.37	Average	327	313																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5138.10</td><td>56.57</td><td>74.00</td><td>-17.43</td><td>55.50</td><td>1.07</td><td>Peak</td><td>117</td><td>291</td></tr><tr><td>2</td><td>5366.70</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>53.49</td><td>0.36</td><td>Peak</td><td>117</td><td>291</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5138.10	56.57	74.00	-17.43	55.50	1.07	Peak	117	291	2	5366.70	53.85	74.00	-20.15	53.49	0.36	Peak	117	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5138.10	56.57	74.00	-17.43	55.50	1.07	Peak	117	291																								
2	5366.70	53.85	74.00	-20.15	53.49	0.36	Peak	117	291																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>43.13</td><td>1.10</td><td>Average</td><td>117</td><td>291</td></tr><tr><td>2</td><td>5357.70</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>41.40</td><td>0.34</td><td>Average</td><td>117</td><td>291</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	44.23	54.00	-9.77	43.13	1.10	Average	117	291	2	5357.70	41.74	54.00	-12.26	41.40	0.34	Average	117	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	44.23	54.00	-9.77	43.13	1.10	Average	117	291																								
2	5357.70	41.74	54.00	-12.26	41.40	0.34	Average	117	291																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

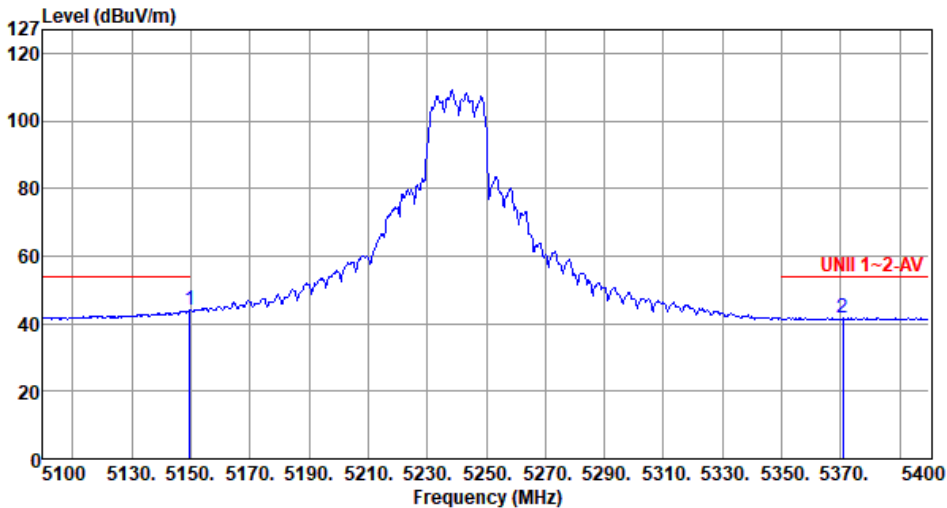
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5123.70</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>54.87</td><td>1.04</td><td>Peak</td><td>292</td><td>315</td></tr><tr><td>2</td><td>5357.10</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>54.49</td><td>0.33</td><td>Peak</td><td>292</td><td>315</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5123.70	55.91	74.00	-18.09	54.87	1.04	Peak	292	315	2	5357.10	54.82	74.00	-19.18	54.49	0.33	Peak	292	315
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5123.70	55.91	74.00	-18.09	54.87	1.04	Peak	292	315																								
2	5357.10	54.82	74.00	-19.18	54.49	0.33	Peak	292	315																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>44.01</td><td>54.00</td><td>-9.99</td><td>42.91</td><td>1.10</td><td>Average</td><td>292</td><td>315</td></tr><tr><td>2</td><td>5370.60</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>41.46</td><td>0.36</td><td>Average</td><td>292</td><td>315</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.80	44.01	54.00	-9.99	42.91	1.10	Average	292	315	2	5370.60	41.82	54.00	-12.18	41.46	0.36	Average	292	315
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.80	44.01	54.00	-9.99	42.91	1.10	Average	292	315																																												
2	5370.60	41.82	54.00	-12.18	41.46	0.36	Average	292	315																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

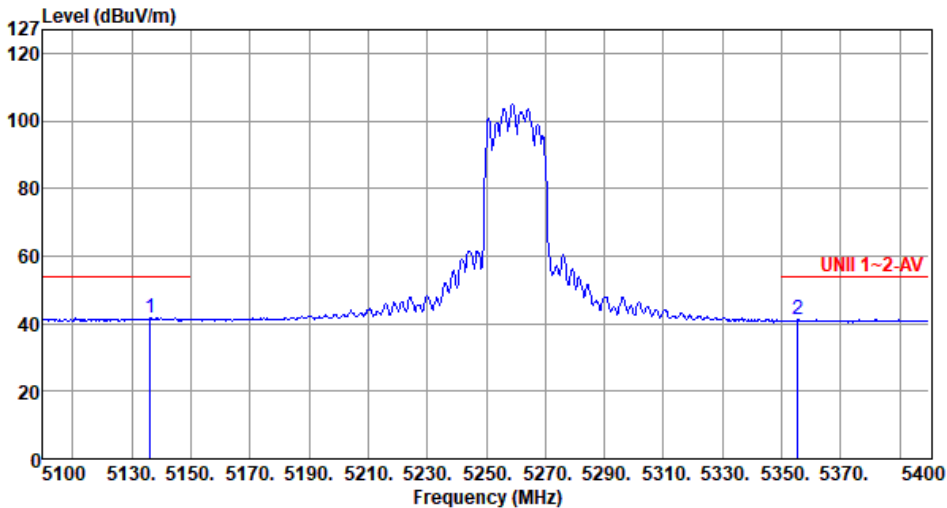
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5125.20</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>53.36</td><td>1.04</td><td>Peak</td><td>179</td><td>89</td></tr><tr><td>2</td><td>5395.20</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>53.82</td><td>0.42</td><td>Peak</td><td>179</td><td>89</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5125.20	54.40	74.00	-19.60	53.36	1.04	Peak	179	89	2	5395.20	54.24	74.00	-19.76	53.82	0.42	Peak	179	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5125.20	54.40	74.00	-19.60	53.36	1.04	Peak	179	89																																												
2	5395.20	54.24	74.00	-19.76	53.82	0.42	Peak	179	89																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

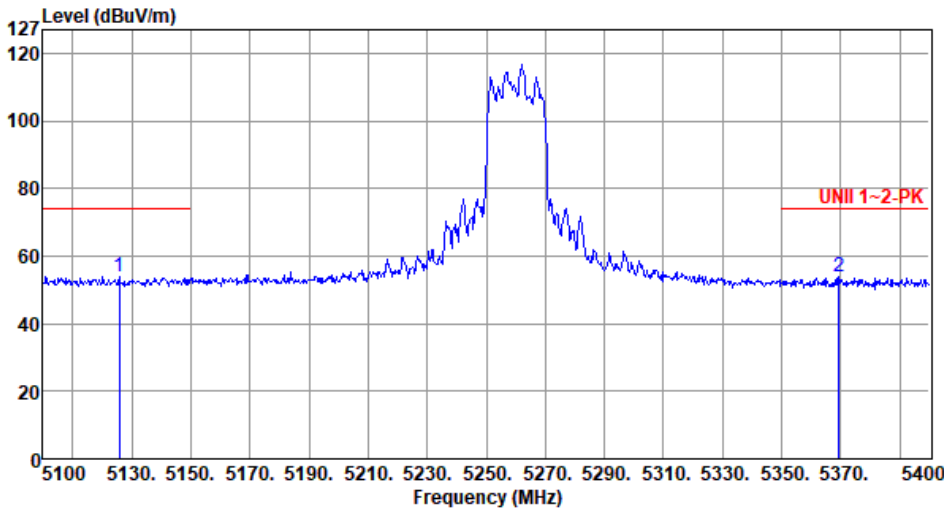
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5136.30</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>40.61</td><td>1.06</td><td>Average</td><td>179</td><td>89</td></tr><tr><td>2</td><td>5355.30</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>40.89</td><td>0.33</td><td>Average</td><td>179</td><td>89</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.30	41.67	54.00	-12.33	40.61	1.06	Average	179	89	2	5355.30	41.22	54.00	-12.78	40.89	0.33	Average	179	89
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.30	41.67	54.00	-12.33	40.61	1.06	Average	179	89																								
2	5355.30	41.22	54.00	-12.78	40.89	0.33	Average	179	89																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5125.80</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>52.85</td><td>1.04</td><td>Peak</td><td>153</td><td>69</td></tr><tr><td>2</td><td>5369.40</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>53.60</td><td>0.37</td><td>Peak</td><td>153</td><td>69</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5125.80	53.89	74.00	-20.11	52.85	1.04	Peak	153	69	2	5369.40	53.97	74.00	-20.03	53.60	0.37	Peak	153	69
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5125.80	53.89	74.00	-20.11	52.85	1.04	Peak	153	69																																												
2	5369.40	53.97	74.00	-20.03	53.60	0.37	Peak	153	69																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260						
Polarization	Vertical-Average								
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61									
Level (dBuV/m) 1 2 UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5101.50	41.64	54.00	-12.36	40.65	0.99	Average	153	69
2	5351.40	41.28	54.00	-12.72	40.96	0.32	Average	153	69

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

Appendix D

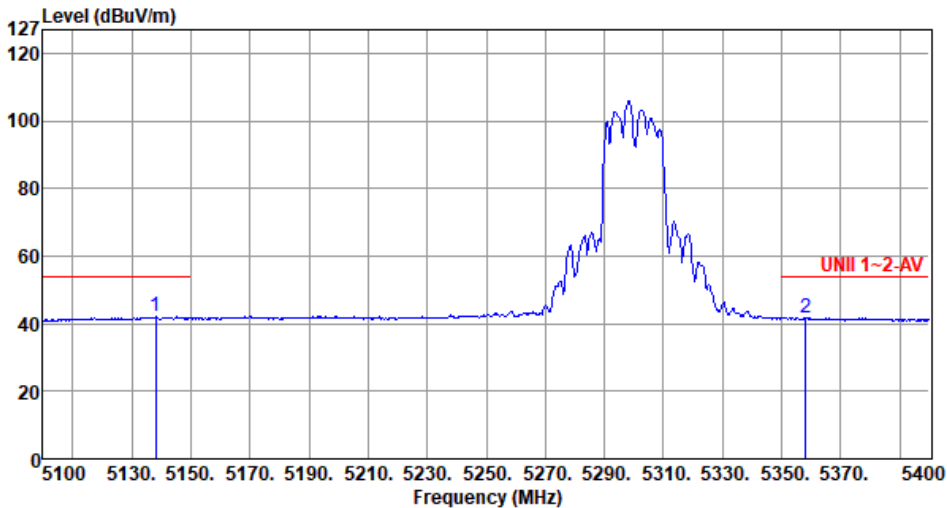
Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Horizontal-Peak								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5139.30	53.86	74.00	-20.14	52.79	1.07	Peak	187	301
2	5350.80	54.83	74.00	-19.17	54.51	0.32	Peak	187	301

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5138.10</td><td>42.02</td><td>54.00</td><td>-11.98</td><td>40.95</td><td>1.07</td><td>Average</td><td>187</td><td>301</td></tr><tr><td>2</td><td>5358.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>41.40</td><td>0.34</td><td>Average</td><td>187</td><td>301</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5138.10	42.02	54.00	-11.98	40.95	1.07	Average	187	301	2	5358.00	41.74	54.00	-12.26	41.40	0.34	Average	187	301
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5138.10	42.02	54.00	-11.98	40.95	1.07	Average	187	301																								
2	5358.00	41.74	54.00	-12.26	41.40	0.34	Average	187	301																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m) UNII 1-2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5100.90</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>54.32</td><td>0.99</td><td>Peak</td><td>256</td><td>315</td></tr><tr><td>2</td><td>5352.30</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>54.01</td><td>0.32</td><td>Peak</td><td>256</td><td>315</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5100.90	55.31	74.00	-18.69	54.32	0.99	Peak	256	315	2	5352.30	54.33	74.00	-19.67	54.01	0.32	Peak	256	315
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5100.90	55.31	74.00	-18.69	54.32	0.99	Peak	256	315																																												
2	5352.30	54.33	74.00	-19.67	54.01	0.32	Peak	256	315																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m) 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5143.80</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>40.74</td><td>1.08</td><td>Average</td><td>256</td><td>315</td></tr><tr><td>2</td><td>5351.70</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>41.74</td><td>0.32</td><td>Average</td><td>256</td><td>315</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.80	41.82	54.00	-12.18	40.74	1.08	Average	256	315	2	5351.70	42.06	54.00	-11.94	41.74	0.32	Average	256	315
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.80	41.82	54.00	-12.18	40.74	1.08	Average	256	315																								
2	5351.70	42.06	54.00	-11.94	41.74	0.32	Average	256	315																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

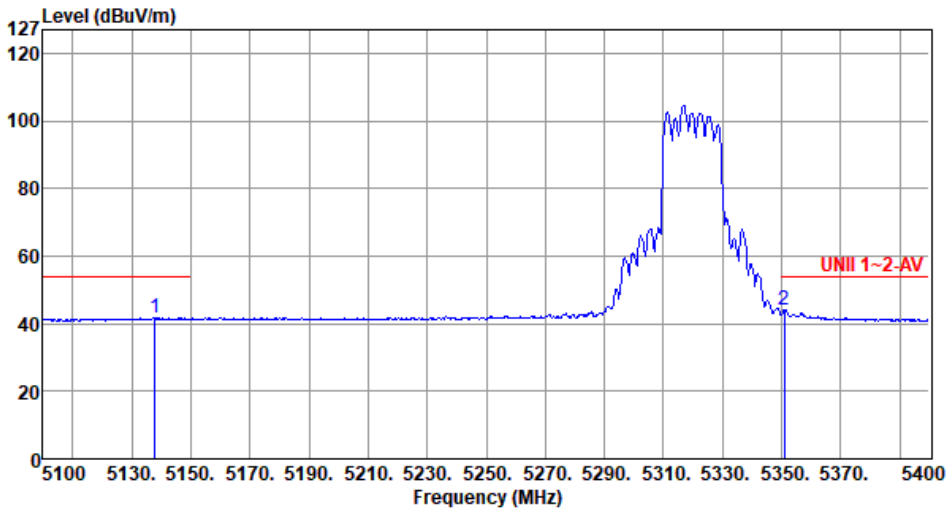
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5142.90</td><td>53.72</td><td>74.00</td><td>-20.28</td><td>52.64</td><td>1.08</td><td>Peak</td><td>220</td><td>98</td></tr><tr><td>2</td><td>5350.80</td><td>60.06</td><td>74.00</td><td>-13.94</td><td>59.74</td><td>0.32</td><td>Peak</td><td>220</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.90	53.72	74.00	-20.28	52.64	1.08	Peak	220	98	2	5350.80	60.06	74.00	-13.94	59.74	0.32	Peak	220	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.90	53.72	74.00	-20.28	52.64	1.08	Peak	220	98																								
2	5350.80	60.06	74.00	-13.94	59.74	0.32	Peak	220	98																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

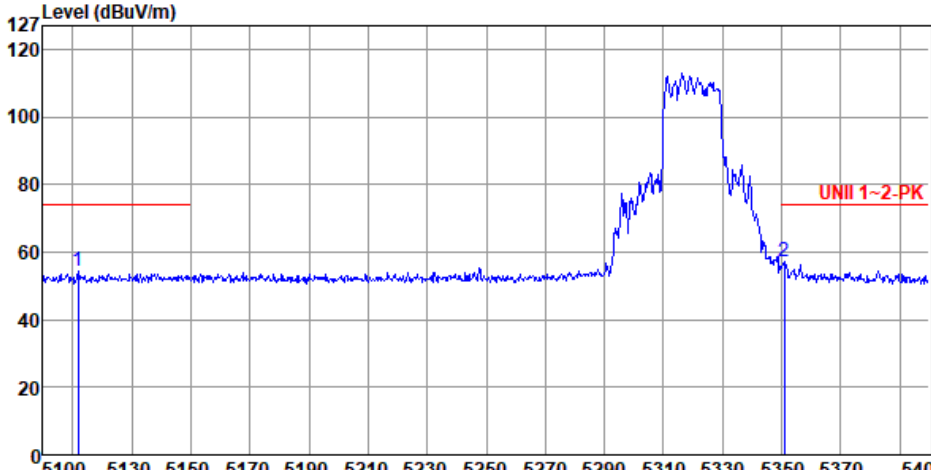
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.80</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>40.61</td><td>1.07</td><td>Average</td><td>220</td><td>98</td></tr><tr><td>2</td><td>5350.80</td><td>44.17</td><td>54.00</td><td>-9.83</td><td>43.85</td><td>0.32</td><td>Average</td><td>220</td><td>98</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5137.80	41.68	54.00	-12.32	40.61	1.07	Average	220	98	2	5350.80	44.17	54.00	-9.83	43.85	0.32	Average	220	98
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5137.80	41.68	54.00	-12.32	40.61	1.07	Average	220	98																																												
2	5350.80	44.17	54.00	-9.83	43.85	0.32	Average	220	98																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

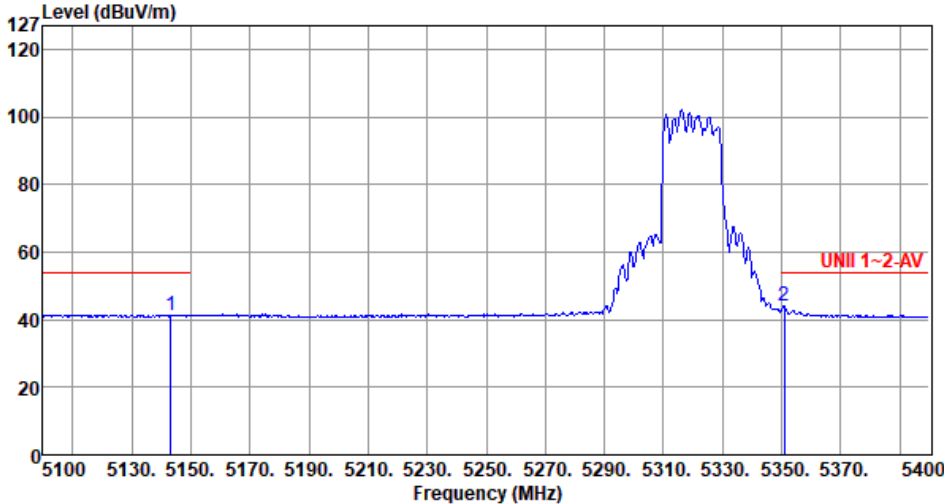
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5112.00</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>53.18</td><td>1.00</td><td>Peak</td><td>244</td><td>47</td></tr><tr><td>2</td><td>5350.80</td><td>57.12</td><td>74.00</td><td>-16.88</td><td>56.80</td><td>0.32</td><td>Peak</td><td>244</td><td>47</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5112.00	54.18	74.00	-19.82	53.18	1.00	Peak	244	47	2	5350.80	57.12	74.00	-16.88	56.80	0.32	Peak	244	47
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5112.00	54.18	74.00	-19.82	53.18	1.00	Peak	244	47																																		
2	5350.80	57.12	74.00	-16.88	56.80	0.32	Peak	244	47																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

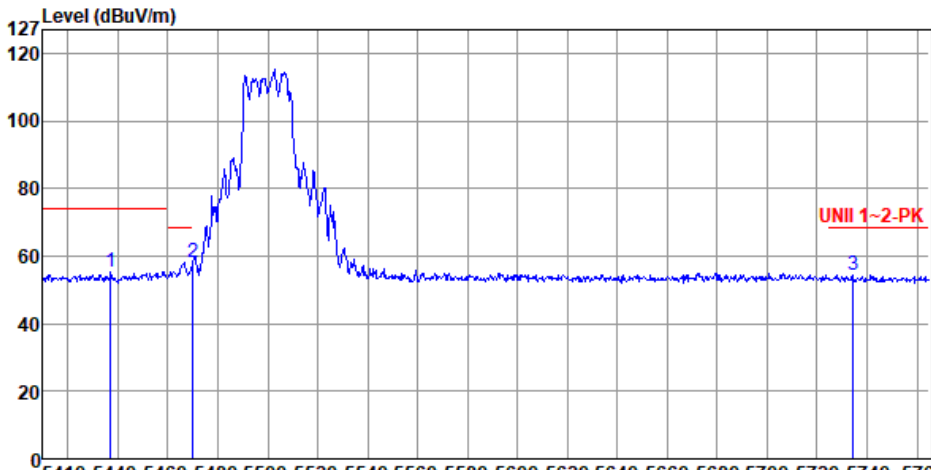
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5143.20</td><td>41.42</td><td>54.00</td><td>-12.58</td><td>40.34</td><td>1.08</td><td>Average</td><td>244</td><td>47</td></tr><tr><td>2</td><td>5350.80</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>43.70</td><td>0.32</td><td>Average</td><td>244</td><td>47</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.20	41.42	54.00	-12.58	40.34	1.08	Average	244	47	2	5350.80	44.02	54.00	-9.98	43.70	0.32	Average	244	47
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.20	41.42	54.00	-12.58	40.34	1.08	Average	244	47																								
2	5350.80	44.02	54.00	-9.98	43.70	0.32	Average	244	47																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

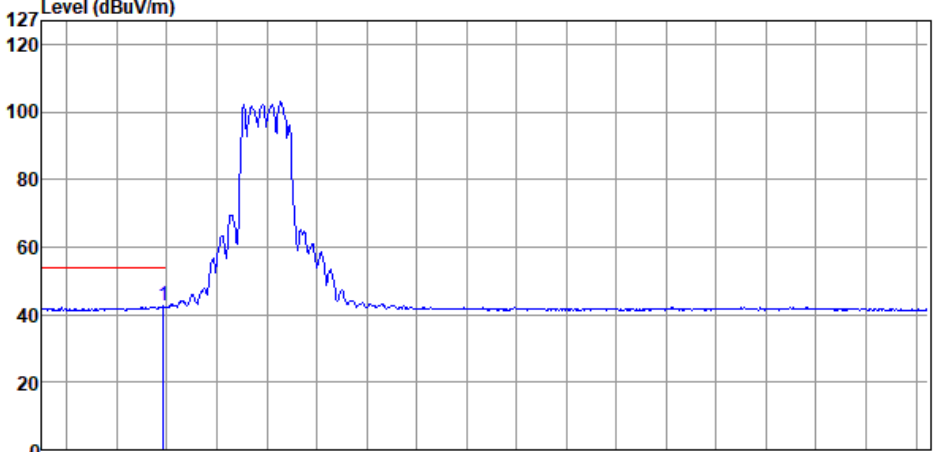
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.98</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>54.57</td><td>0.60</td><td>Peak</td><td>183</td><td>302</td></tr><tr><td>2</td><td>5470.00</td><td>58.25</td><td>68.20</td><td>-9.95</td><td>57.53</td><td>0.72</td><td>Peak</td><td>179</td><td>288</td></tr><tr><td>3</td><td>5734.47</td><td>54.35</td><td>68.20</td><td>-13.85</td><td>53.22</td><td>1.13</td><td>Peak</td><td>183</td><td>302</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.98	55.17	74.00	-18.83	54.57	0.60	Peak	183	302	2	5470.00	58.25	68.20	-9.95	57.53	0.72	Peak	179	288	3	5734.47	54.35	68.20	-13.85	53.22	1.13	Peak	183	302
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5436.98	55.17	74.00	-18.83	54.57	0.60	Peak	183	302																																		
2	5470.00	58.25	68.20	-9.95	57.53	0.72	Peak	179	288																																		
3	5734.47	54.35	68.20	-13.85	53.22	1.13	Peak	183	302																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

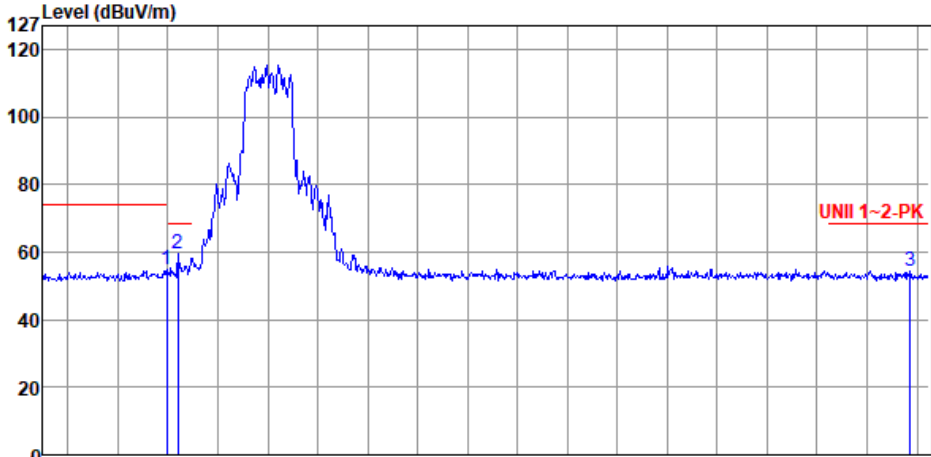
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.64</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>41.92</td><td>0.69</td><td>Average</td><td>183</td><td>302</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.64	42.61	54.00	-11.39	41.92	0.69	Average	183	302
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.64	42.61	54.00	-11.39	41.92	0.69	Average	183	302														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

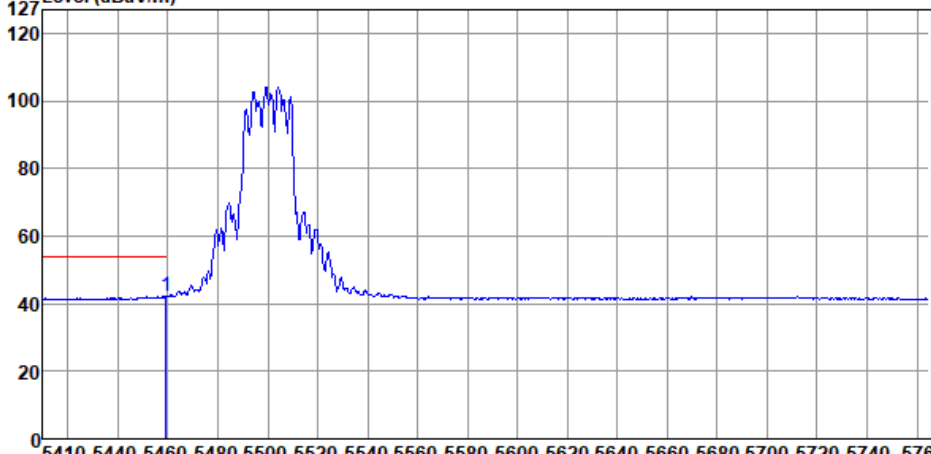
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>53.92</td><td>0.69</td><td>Peak</td><td>186</td><td>78</td></tr><tr><td>2</td><td>5463.96</td><td>59.48</td><td>68.20</td><td>-8.72</td><td>58.78</td><td>0.70</td><td>Peak</td><td>171</td><td>45</td></tr><tr><td>3</td><td>5757.19</td><td>54.44</td><td>68.20</td><td>-13.76</td><td>53.26</td><td>1.18</td><td>Peak</td><td>186</td><td>78</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	54.61	74.00	-19.39	53.92	0.69	Peak	186	78	2	5463.96	59.48	68.20	-8.72	58.78	0.70	Peak	171	45	3	5757.19	54.44	68.20	-13.76	53.26	1.18	Peak	186	78
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.70	54.61	74.00	-19.39	53.92	0.69	Peak	186	78																																		
2	5463.96	59.48	68.20	-8.72	58.78	0.70	Peak	171	45																																		
3	5757.19	54.44	68.20	-13.76	53.26	1.18	Peak	186	78																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

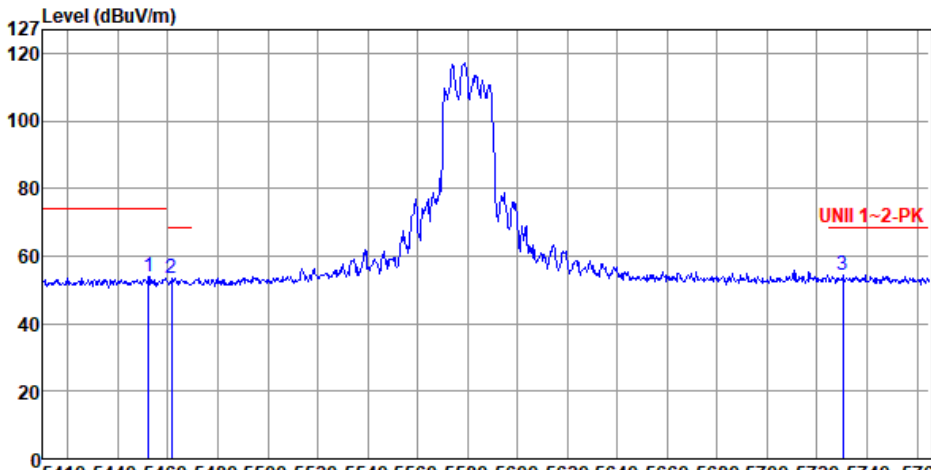
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Average																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.35</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>41.67</td><td>0.69</td><td>Average</td><td>186</td><td>78</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5459.35	42.36	54.00	-11.64	41.67	0.69	Average	186	78
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5459.35	42.36	54.00	-11.64	41.67	0.69	Average	186	78																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5452.25</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>53.15</td><td>0.66</td><td>Peak</td><td>178</td><td>252</td></tr><tr><td>2</td><td>5461.48</td><td>53.60</td><td>68.20</td><td>-14.60</td><td>52.91</td><td>0.69</td><td>Peak</td><td>178</td><td>252</td></tr><tr><td>3</td><td>5730.21</td><td>54.28</td><td>68.20</td><td>-13.92</td><td>53.16</td><td>1.12</td><td>Peak</td><td>178</td><td>252</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.25	53.81	74.00	-20.19	53.15	0.66	Peak	178	252	2	5461.48	53.60	68.20	-14.60	52.91	0.69	Peak	178	252	3	5730.21	54.28	68.20	-13.92	53.16	1.12	Peak	178	252
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5452.25	53.81	74.00	-20.19	53.15	0.66	Peak	178	252																																		
2	5461.48	53.60	68.20	-14.60	52.91	0.69	Peak	178	252																																		
3	5730.21	54.28	68.20	-13.92	53.16	1.12	Peak	178	252																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

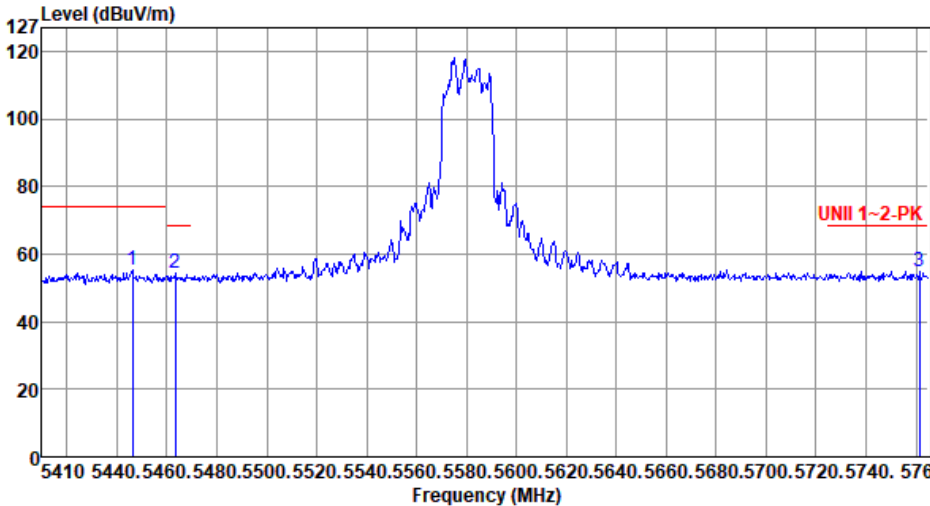
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580																																																												
Polarization	Vertical-Peak																																																														
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.21</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>54.55</td><td>0.64</td><td>Peak</td><td>259</td><td>310</td></tr><tr><td>2</td><td>5463.25</td><td>54.56</td><td>68.20</td><td>-13.64</td><td>53.86</td><td>0.70</td><td>Peak</td><td>259</td><td>310</td></tr><tr><td>3</td><td>5761.45</td><td>54.87</td><td>68.20</td><td>-13.33</td><td>53.67</td><td>1.20</td><td>Peak</td><td>259</td><td>310</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5446.21	55.19	74.00	-18.81	54.55	0.64	Peak	259	310	2	5463.25	54.56	68.20	-13.64	53.86	0.70	Peak	259	310	3	5761.45	54.87	68.20	-13.33	53.67	1.20	Peak	259	310
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5446.21	55.19	74.00	-18.81	54.55	0.64	Peak	259	310																																																						
2	5463.25	54.56	68.20	-13.64	53.86	0.70	Peak	259	310																																																						
3	5761.45	54.87	68.20	-13.33	53.67	1.20	Peak	259	310																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):64																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5411.07</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.80</td><td>0.47</td><td>Peak</td><td>189</td><td>250</td></tr><tr><td>2</td><td>5467.87</td><td>54.87</td><td>68.20</td><td>-13.33</td><td>54.15</td><td>0.72</td><td>Peak</td><td>189</td><td>250</td></tr><tr><td>3</td><td>5731.99</td><td>57.25</td><td>68.20</td><td>-10.95</td><td>56.13</td><td>1.12</td><td>Peak</td><td>189</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5411.07	54.27	74.00	-19.73	53.80	0.47	Peak	189	250	2	5467.87	54.87	68.20	-13.33	54.15	0.72	Peak	189	250	3	5731.99	57.25	68.20	-10.95	56.13	1.12	Peak	189	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5411.07	54.27	74.00	-19.73	53.80	0.47	Peak	189	250																																		
2	5467.87	54.87	68.20	-13.33	54.15	0.72	Peak	189	250																																		
3	5731.99	57.25	68.20	-10.95	56.13	1.12	Peak	189	250																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

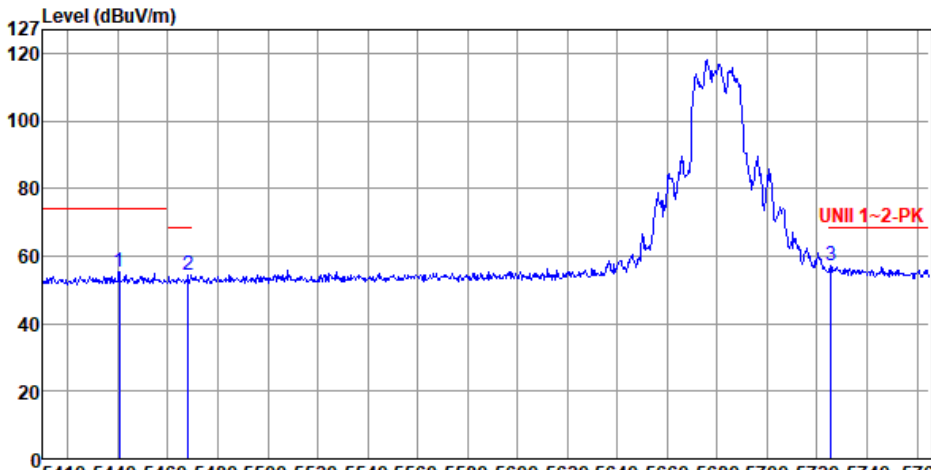
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):64																							
Level (dBUV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5438.40</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>41.11</td><td>0.60</td><td>Average</td><td>189</td><td>250</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.40	41.71	54.00	-12.29	41.11	0.60	Average	189	250
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5438.40	41.71	54.00	-12.29	41.11	0.60	Average	189	250														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):64																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5440.53</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>54.86</td><td>0.62</td><td>Peak</td><td>242</td><td>327</td></tr><tr><td>2</td><td>5468.22</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>53.61</td><td>0.72</td><td>Peak</td><td>242</td><td>327</td></tr><tr><td>3</td><td>5725.60</td><td>56.99</td><td>68.20</td><td>-11.21</td><td>55.88</td><td>1.11</td><td>Peak</td><td>242</td><td>327</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5440.53	55.48	74.00	-18.52	54.86	0.62	Peak	242	327	2	5468.22	54.33	68.20	-13.87	53.61	0.72	Peak	242	327	3	5725.60	56.99	68.20	-11.21	55.88	1.11	Peak	242	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5440.53	55.48	74.00	-18.52	54.86	0.62	Peak	242	327																																		
2	5468.22	54.33	68.20	-13.87	53.61	0.72	Peak	242	327																																		
3	5725.60	56.99	68.20	-11.21	55.88	1.11	Peak	242	327																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

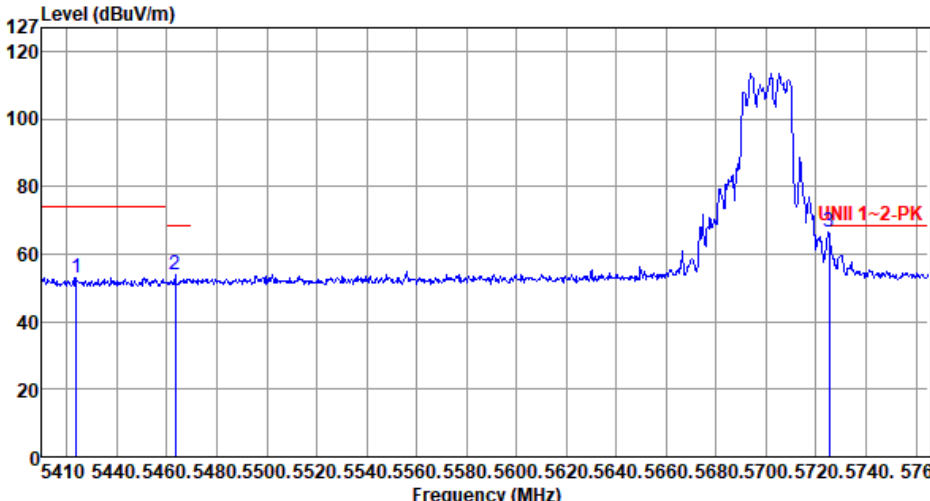
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):64			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700																																																												
Polarization	Horizontal-Peak																																																														
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5423.85</td><td>53.15</td><td>74.00</td><td>-20.85</td><td>52.60</td><td>0.55</td><td>Peak</td><td>252</td><td>352</td></tr><tr><td>2</td><td>5463.25</td><td>53.75</td><td>68.20</td><td>-14.45</td><td>53.05</td><td>0.70</td><td>Peak</td><td>252</td><td>352</td></tr><tr><td>3</td><td>5725.24</td><td>66.69</td><td>68.20</td><td>-1.51</td><td>65.58</td><td>1.11</td><td>Peak</td><td>252</td><td>352</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5423.85	53.15	74.00	-20.85	52.60	0.55	Peak	252	352	2	5463.25	53.75	68.20	-14.45	53.05	0.70	Peak	252	352	3	5725.24	66.69	68.20	-1.51	65.58	1.11	Peak	252	352
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5423.85	53.15	74.00	-20.85	52.60	0.55	Peak	252	352																																																						
2	5463.25	53.75	68.20	-14.45	53.05	0.70	Peak	252	352																																																						
3	5725.24	66.69	68.20	-1.51	65.58	1.11	Peak	252	352																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5458.64</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>53.57</td><td>0.69</td><td>Peak</td><td>180</td><td>324</td></tr><tr><td>2</td><td>5466.80</td><td>52.84</td><td>68.20</td><td>-15.36</td><td>52.13</td><td>0.71</td><td>Peak</td><td>180</td><td>324</td></tr><tr><td>3</td><td>5725.95</td><td>65.79</td><td>68.20</td><td>-2.41</td><td>64.68</td><td>1.11</td><td>Peak</td><td>180</td><td>324</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	5458.64	54.26	74.00	-19.74	53.57	0.69	Peak	180	324	2	5466.80	52.84	68.20	-15.36	52.13	0.71	Peak	180	324	3	5725.95	65.79	68.20	-2.41	64.68	1.11	Peak	180	324
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
1	5458.64	54.26	74.00	-19.74	53.57	0.69	Peak	180	324																																												
2	5466.80	52.84	68.20	-15.36	52.13	0.71	Peak	180	324																																												
3	5725.95	65.79	68.20	-2.41	64.68	1.11	Peak	180	324																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

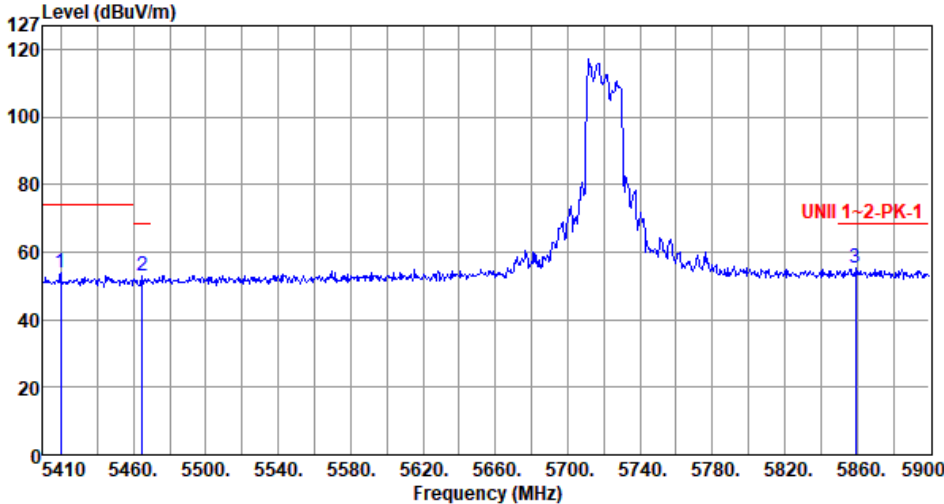
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5419.80</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>53.19</td><td>0.52</td><td>Peak</td><td>170</td><td>242</td></tr><tr><td>2</td><td>5464.88</td><td>52.92</td><td>68.20</td><td>-15.28</td><td>52.22</td><td>0.70</td><td>Peak</td><td>170</td><td>242</td></tr><tr><td>3</td><td>5859.33</td><td>55.14</td><td>68.20</td><td>-13.06</td><td>53.67</td><td>1.47</td><td>Peak</td><td>170</td><td>242</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5419.80	53.71	74.00	-20.29	53.19	0.52	Peak	170	242	2	5464.88	52.92	68.20	-15.28	52.22	0.70	Peak	170	242	3	5859.33	55.14	68.20	-13.06	53.67	1.47	Peak	170	242
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5419.80	53.71	74.00	-20.29	53.19	0.52	Peak	170	242																																		
2	5464.88	52.92	68.20	-15.28	52.22	0.70	Peak	170	242																																		
3	5859.33	55.14	68.20	-13.06	53.67	1.47	Peak	170	242																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

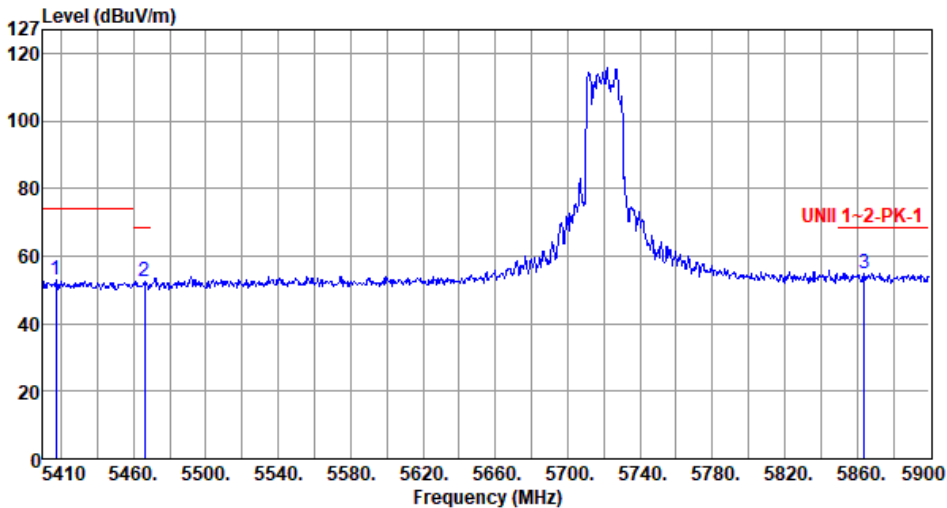
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5417.35</td><td>53.12</td><td>74.00</td><td>-20.88</td><td>52.61</td><td>0.51</td><td>Peak</td><td>180</td><td>330</td></tr><tr><td>2</td><td>5466.35</td><td>52.51</td><td>68.20</td><td>-15.69</td><td>51.80</td><td>0.71</td><td>Peak</td><td>180</td><td>330</td></tr><tr><td>3</td><td>5863.74</td><td>54.81</td><td>68.20</td><td>-13.39</td><td>53.33</td><td>1.48</td><td>Peak</td><td>180</td><td>330</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.35	53.12	74.00	-20.88	52.61	0.51	Peak	180	330	2	5466.35	52.51	68.20	-15.69	51.80	0.71	Peak	180	330	3	5863.74	54.81	68.20	-13.39	53.33	1.48	Peak	180	330
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.35	53.12	74.00	-20.88	52.61	0.51	Peak	180	330																																		
2	5466.35	52.51	68.20	-15.69	51.80	0.71	Peak	180	330																																		
3	5863.74	54.81	68.20	-13.39	53.33	1.48	Peak	180	330																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical-Average		
Test By :Akun Chung_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m) <			



Band Edge measurement

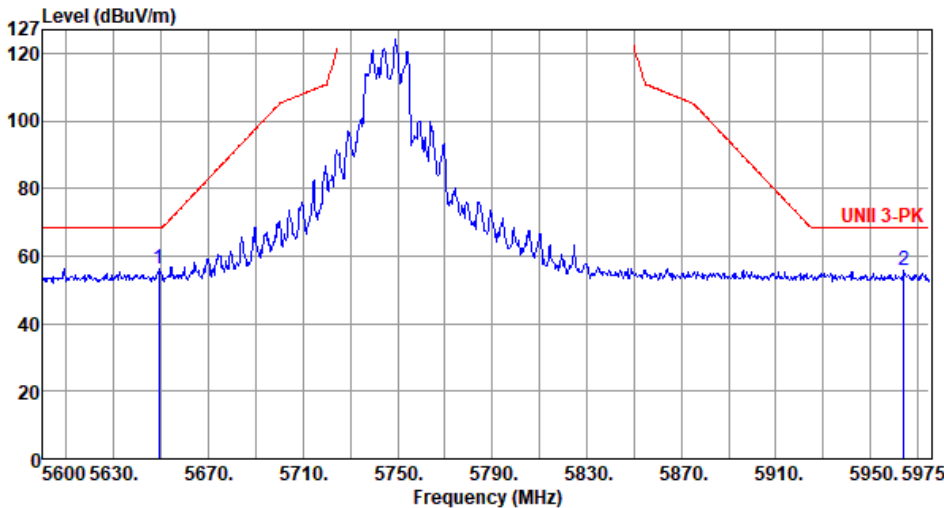
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 3-PK <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5626.63</td><td>55.18</td><td>68.20</td><td>-13.02</td><td>54.32</td><td>0.86</td><td>Peak</td><td>138</td><td>292</td></tr><tr><td>2</td><td>5949.88</td><td>55.12</td><td>68.20</td><td>-13.08</td><td>53.45</td><td>1.67</td><td>Peak</td><td>138</td><td>292</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5626.63	55.18	68.20	-13.02	54.32	0.86	Peak	138	292	2	5949.88	55.12	68.20	-13.08	53.45	1.67	Peak	138	292
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5626.63	55.18	68.20	-13.02	54.32	0.86	Peak	138	292																								
2	5949.88	55.12	68.20	-13.08	53.45	1.67	Peak	138	292																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

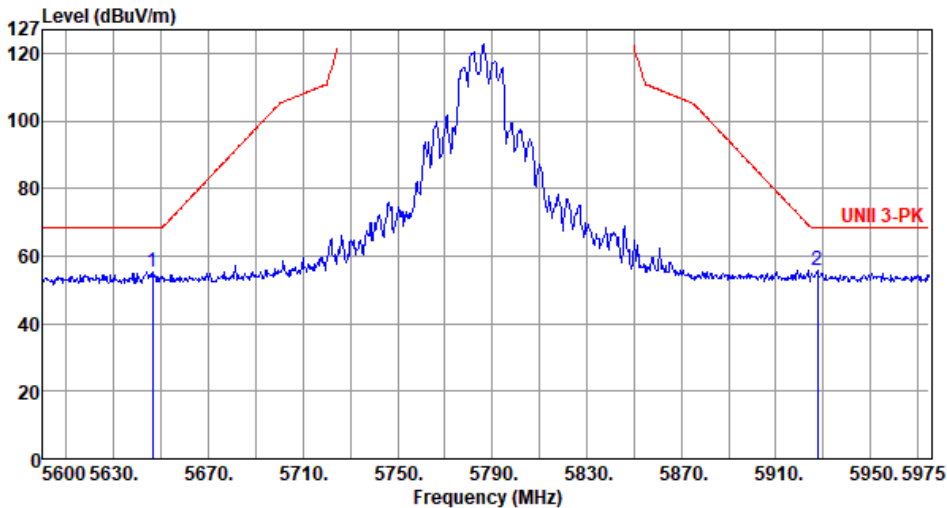
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.13</td><td>56.29</td><td>68.20</td><td>-11.91</td><td>55.37</td><td>0.92</td><td>Peak</td><td>227</td><td>314</td></tr><tr><td>2</td><td>5964.13</td><td>55.64</td><td>68.20</td><td>-12.56</td><td>53.94</td><td>1.70</td><td>Peak</td><td>227</td><td>314</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	56.29	68.20	-11.91	55.37	0.92	Peak	227	314	2	5964.13	55.64	68.20	-12.56	53.94	1.70	Peak	227	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	56.29	68.20	-11.91	55.37	0.92	Peak	227	314																								
2	5964.13	55.64	68.20	-12.56	53.94	1.70	Peak	227	314																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.50</td><td>55.49</td><td>68.20</td><td>-12.71</td><td>54.58</td><td>0.91</td><td>Peak</td><td>196</td><td>278</td></tr><tr><td>2</td><td>5927.75</td><td>55.66</td><td>68.20</td><td>-12.54</td><td>54.00</td><td>1.66</td><td>Peak</td><td>196</td><td>278</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.50	55.49	68.20	-12.71	54.58	0.91	Peak	196	278	2	5927.75	55.66	68.20	-12.54	54.00	1.66	Peak	196	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.50	55.49	68.20	-12.71	54.58	0.91	Peak	196	278																								
2	5927.75	55.66	68.20	-12.54	54.00	1.66	Peak	196	278																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

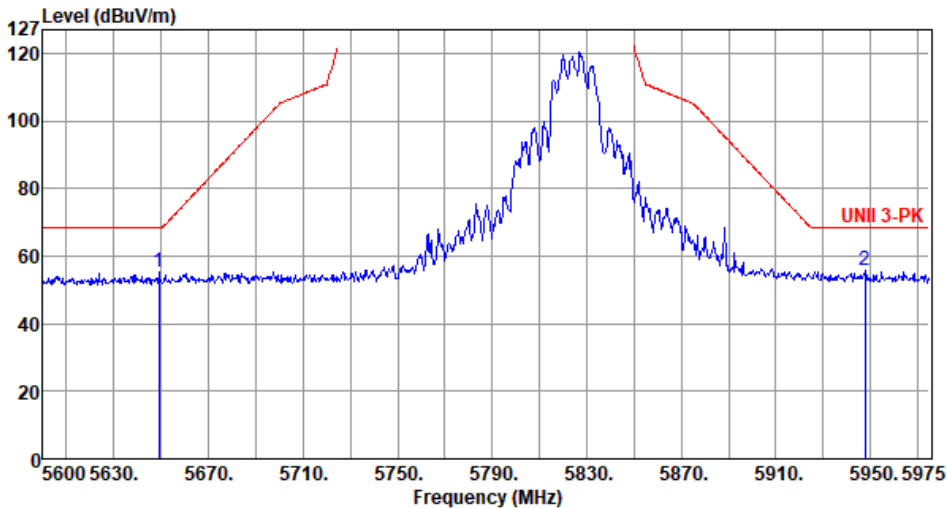
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5625.88</td><td>55.19</td><td>68.20</td><td>-13.01</td><td>54.33</td><td>0.86</td><td>Peak</td><td>237</td><td>314</td></tr><tr><td>2</td><td>5935.25</td><td>55.89</td><td>68.20</td><td>-12.31</td><td>54.23</td><td>1.66</td><td>Peak</td><td>237</td><td>314</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5625.88	55.19	68.20	-13.01	54.33	0.86	Peak	237	314	2	5935.25	55.89	68.20	-12.31	54.23	1.66	Peak	237	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5625.88	55.19	68.20	-13.01	54.33	0.86	Peak	237	314																								
2	5935.25	55.89	68.20	-12.31	54.23	1.66	Peak	237	314																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

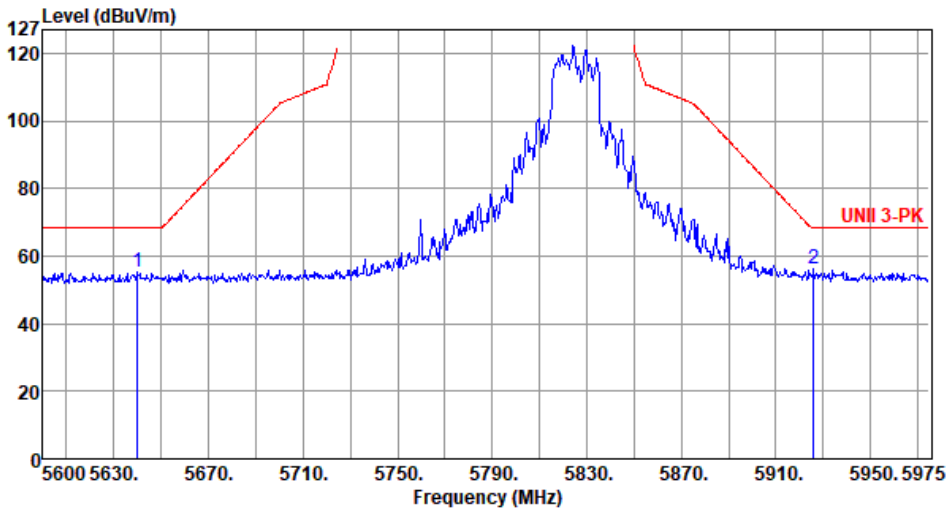
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.13</td><td>55.33</td><td>68.20</td><td>-12.87</td><td>54.41</td><td>0.92</td><td>Peak</td><td>317</td><td>281</td></tr><tr><td>2</td><td>5947.63</td><td>55.91</td><td>68.20</td><td>-12.29</td><td>54.24</td><td>1.67</td><td>Peak</td><td>317</td><td>281</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	55.33	68.20	-12.87	54.41	0.92	Peak	317	281	2	5947.63	55.91	68.20	-12.29	54.24	1.67	Peak	317	281
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	55.33	68.20	-12.87	54.41	0.92	Peak	317	281																								
2	5947.63	55.91	68.20	-12.29	54.24	1.67	Peak	317	281																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5640.13</td><td>55.22</td><td>68.20</td><td>-12.98</td><td>54.33</td><td>0.89</td><td>Peak</td><td>204</td><td>324</td></tr><tr><td>2</td><td>5925.88</td><td>56.16</td><td>68.20</td><td>-12.04</td><td>54.50</td><td>1.66</td><td>Peak</td><td>204</td><td>324</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5640.13	55.22	68.20	-12.98	54.33	0.89	Peak	204	324	2	5925.88	56.16	68.20	-12.04	54.50	1.66	Peak	204	324
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5640.13	55.22	68.20	-12.98	54.33	0.89	Peak	204	324																								
2	5925.88	56.16	68.20	-12.04	54.50	1.66	Peak	204	324																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

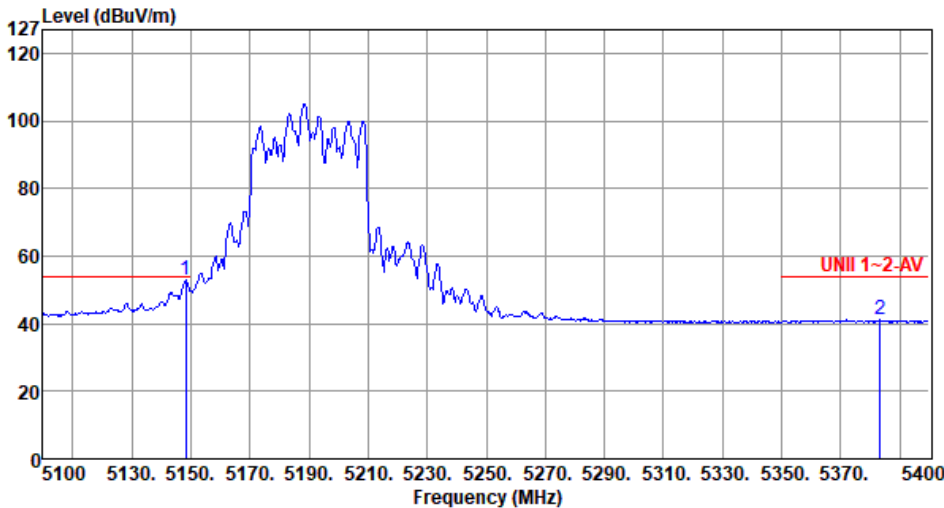
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.60</td><td>66.18</td><td>74.00</td><td>-7.82</td><td>65.08</td><td>1.10</td><td>Peak</td><td>298</td><td>212</td></tr><tr><td>2</td><td>5385.30</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>53.98</td><td>0.40</td><td>Peak</td><td>298</td><td>212</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.60	66.18	74.00	-7.82	65.08	1.10	Peak	298	212	2	5385.30	54.38	74.00	-19.62	53.98	0.40	Peak	298	212
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.60	66.18	74.00	-7.82	65.08	1.10	Peak	298	212																																												
2	5385.30	54.38	74.00	-19.62	53.98	0.40	Peak	298	212																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.30</td><td>52.78</td><td>54.00</td><td>-1.22</td><td>51.68</td><td>1.10</td><td>Average</td><td>298</td><td>212</td></tr><tr><td>2</td><td>5383.20</td><td>41.06</td><td>54.00</td><td>-12.94</td><td>40.66</td><td>0.40</td><td>Average</td><td>298</td><td>212</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	52.78	54.00	-1.22	51.68	1.10	Average	298	212	2	5383.20	41.06	54.00	-12.94	40.66	0.40	Average	298	212
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	52.78	54.00	-1.22	51.68	1.10	Average	298	212																								
2	5383.20	41.06	54.00	-12.94	40.66	0.40	Average	298	212																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>66.50</td><td>74.00</td><td>-7.50</td><td>65.40</td><td>1.10</td><td>Peak</td><td>310</td><td>323</td></tr><tr><td>2</td><td>5380.20</td><td>53.92</td><td>74.00</td><td>-20.08</td><td>53.53</td><td>0.39</td><td>Peak</td><td>310</td><td>323</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	66.50	74.00	-7.50	65.40	1.10	Peak	310	323	2	5380.20	53.92	74.00	-20.08	53.53	0.39	Peak	310	323
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	66.50	74.00	-7.50	65.40	1.10	Peak	310	323																								
2	5380.20	53.92	74.00	-20.08	53.53	0.39	Peak	310	323																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

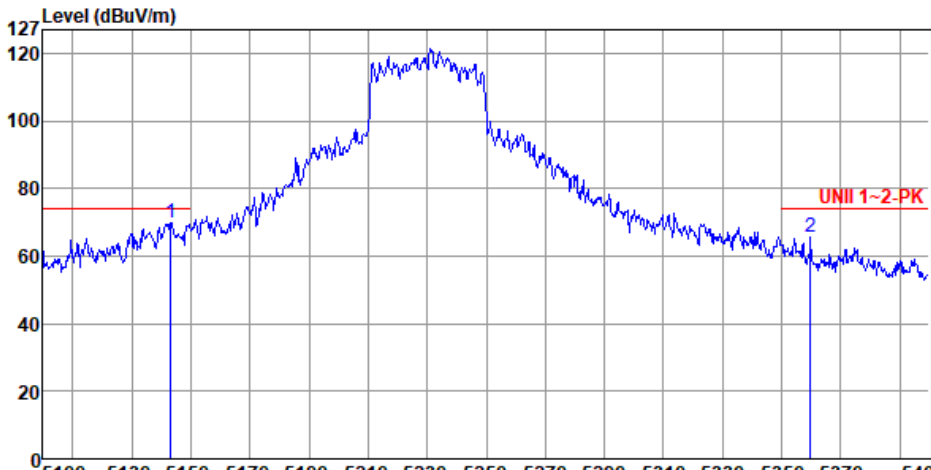
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>52.36</td><td>54.00</td><td>-1.64</td><td>51.26</td><td>1.10</td><td>Average</td><td>310</td><td>323</td></tr><tr><td>2</td><td>5362.20</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>40.76</td><td>0.35</td><td>Average</td><td>310</td><td>323</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.36	54.00	-1.64	51.26	1.10	Average	310	323	2	5362.20	41.11	54.00	-12.89	40.76	0.35	Average	310	323
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.36	54.00	-1.64	51.26	1.10	Average	310	323																								
2	5362.20	41.11	54.00	-12.89	40.76	0.35	Average	310	323																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

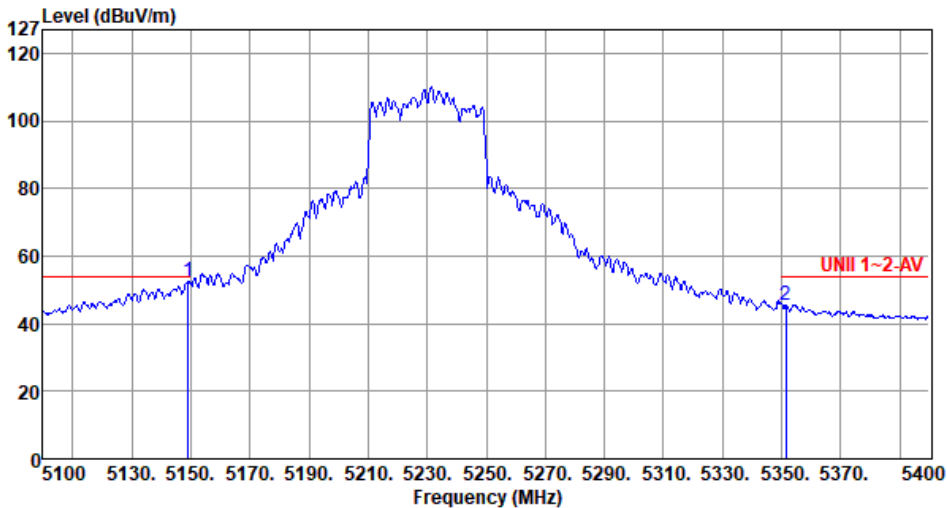
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5143.20</td><td>70.04</td><td>74.00</td><td>-3.96</td><td>68.96</td><td>1.08</td><td>Peak</td><td>313</td><td>176</td></tr><tr><td>2</td><td>5359.80</td><td>65.56</td><td>74.00</td><td>-8.44</td><td>65.22</td><td>0.34</td><td>Peak</td><td>200</td><td>98</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.20	70.04	74.00	-3.96	68.96	1.08	Peak	313	176	2	5359.80	65.56	74.00	-8.44	65.22	0.34	Peak	200	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.20	70.04	74.00	-3.96	68.96	1.08	Peak	313	176																								
2	5359.80	65.56	74.00	-8.44	65.22	0.34	Peak	200	98																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>52.56</td><td>54.00</td><td>-1.44</td><td>51.46</td><td>1.10</td><td>Average</td><td>313</td><td>176</td></tr><tr><td>2</td><td>5351.40</td><td>45.66</td><td>54.00</td><td>-8.34</td><td>45.34</td><td>0.32</td><td>Average</td><td>200</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.56	54.00	-1.44	51.46	1.10	Average	313	176	2	5351.40	45.66	54.00	-8.34	45.34	0.32	Average	200	98
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.56	54.00	-1.44	51.46	1.10	Average	313	176																								
2	5351.40	45.66	54.00	-8.34	45.34	0.32	Average	200	98																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5143.80</td><td>70.19</td><td>74.00</td><td>-3.81</td><td>69.11</td><td>1.08</td><td>Peak</td><td>305</td><td>323</td></tr><tr><td>2</td><td>5352.30</td><td>64.83</td><td>74.00</td><td>-9.17</td><td>64.51</td><td>0.32</td><td>Peak</td><td>255</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5143.80	70.19	74.00	-3.81	69.11	1.08	Peak	305	323	2	5352.30	64.83	74.00	-9.17	64.51	0.32	Peak	255	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5143.80	70.19	74.00	-3.81	69.11	1.08	Peak	305	323																								
2	5352.30	64.83	74.00	-9.17	64.51	0.32	Peak	255	305																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230						
Polarization	Vertical-Average								
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	5149.50	52.46	54.00	-1.54	51.36	1.10	Average	305	323
2	5352.30	46.13	54.00	-7.87	45.81	0.32	Average	255	305

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

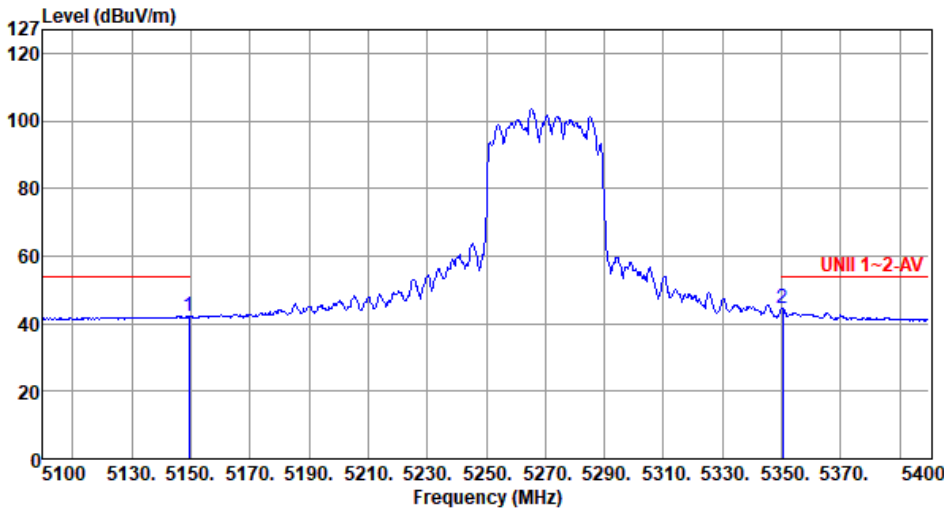
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5120.40</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>53.64</td><td>1.03</td><td>Peak</td><td>190</td><td>252</td></tr><tr><td>2</td><td>5350.50</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>56.24</td><td>0.32</td><td>Peak</td><td>151</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5120.40	54.67	74.00	-19.33	53.64	1.03	Peak	190	252	2	5350.50	56.56	74.00	-17.44	56.24	0.32	Peak	151	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5120.40	54.67	74.00	-19.33	53.64	1.03	Peak	190	252																								
2	5350.50	56.56	74.00	-17.44	56.24	0.32	Peak	151	305																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>40.99</td><td>1.10</td><td>Average</td><td>190</td><td>252</td></tr><tr><td>2</td><td>5350.20</td><td>44.69</td><td>54.00</td><td>-9.31</td><td>44.37</td><td>0.32</td><td>Average</td><td>151</td><td>305</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	42.09	54.00	-11.91	40.99	1.10	Average	190	252	2	5350.20	44.69	54.00	-9.31	44.37	0.32	Average	151	305
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	42.09	54.00	-11.91	40.99	1.10	Average	190	252																								
2	5350.20	44.69	54.00	-9.31	44.37	0.32	Average	151	305																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

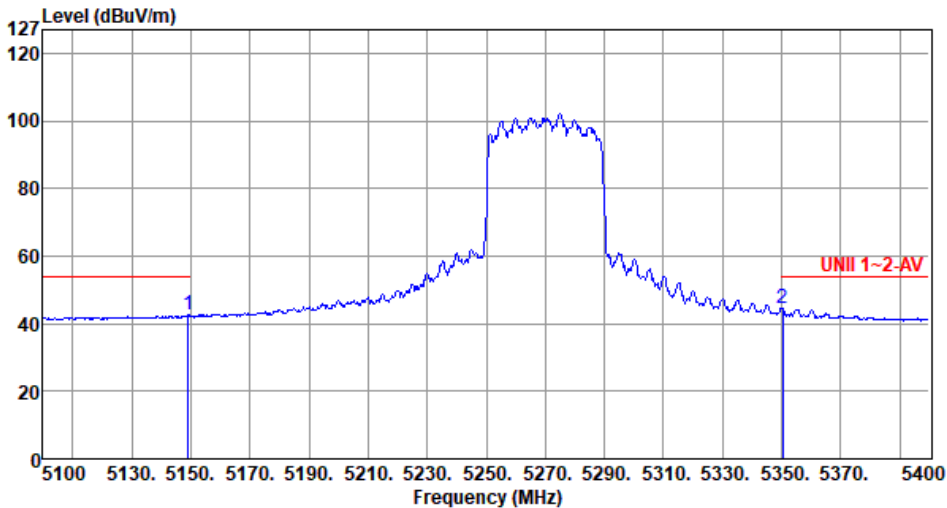
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m) UNII 1~2-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m 1 5107.50 54.53 74.00 -19.47 53.53 1.00 Peak 202 330 2 5352.30 57.07 74.00 -16.93 56.75 0.32 Peak 322 297			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>41.35</td><td>1.10</td><td>Average</td><td>202</td><td>330</td></tr><tr><td>2</td><td>5350.20</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>44.36</td><td>0.32</td><td>Average</td><td>322</td><td>297</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	42.45	54.00	-11.55	41.35	1.10	Average	202	330	2	5350.20	44.68	54.00	-9.32	44.36	0.32	Average	322	297
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	42.45	54.00	-11.55	41.35	1.10	Average	202	330																								
2	5350.20	44.68	54.00	-9.32	44.36	0.32	Average	322	297																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

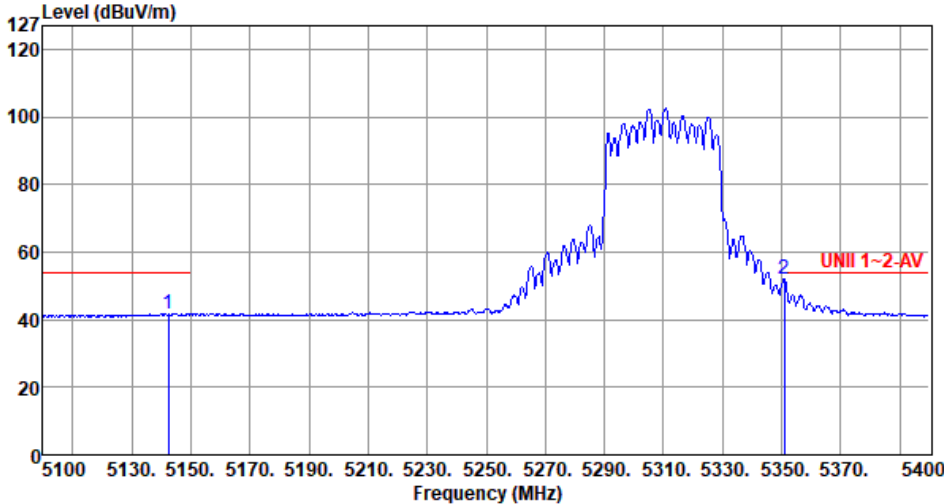
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5110.80</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>53.66</td><td>1.00</td><td>Peak</td><td>234</td><td>108</td></tr><tr><td>2</td><td>5351.10</td><td>64.26</td><td>74.00</td><td>-9.74</td><td>63.94</td><td>0.32</td><td>Peak</td><td>234</td><td>108</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5110.80	54.66	74.00	-19.34	53.66	1.00	Peak	234	108	2	5351.10	64.26	74.00	-9.74	63.94	0.32	Peak	234	108
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5110.80	54.66	74.00	-19.34	53.66	1.00	Peak	234	108																																		
2	5351.10	64.26	74.00	-9.74	63.94	0.32	Peak	234	108																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

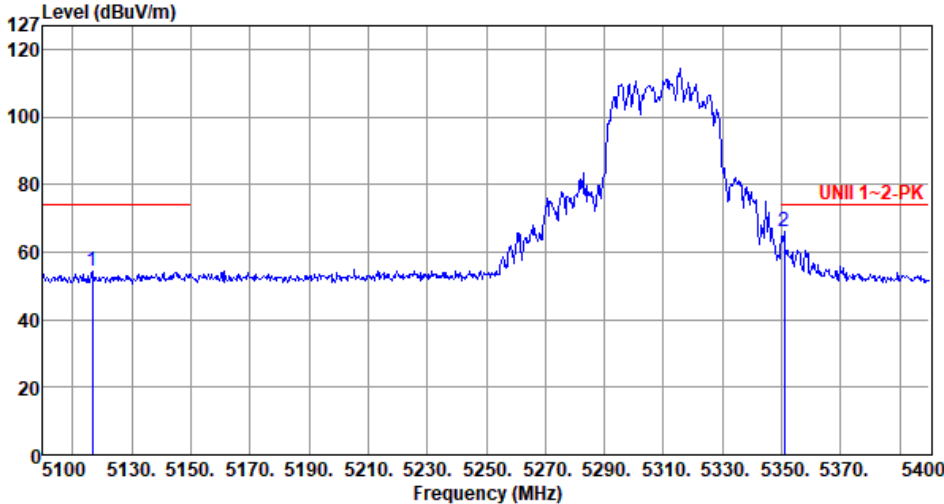
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5142.30</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>40.67</td><td>1.07</td><td>Average</td><td>234</td><td>108</td></tr><tr><td>2</td><td>5350.80</td><td>52.14</td><td>54.00</td><td>-1.86</td><td>51.82</td><td>0.32</td><td>Average</td><td>234</td><td>108</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.30	41.74	54.00	-12.26	40.67	1.07	Average	234	108	2	5350.80	52.14	54.00	-1.86	51.82	0.32	Average	234	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.30	41.74	54.00	-12.26	40.67	1.07	Average	234	108																								
2	5350.80	52.14	54.00	-1.86	51.82	0.32	Average	234	108																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5116.80</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>53.28</td><td>1.02</td><td>Peak</td><td>134</td><td>89</td></tr><tr><td>2</td><td>5350.80</td><td>66.00</td><td>74.00</td><td>-8.00</td><td>65.68</td><td>0.32</td><td>Peak</td><td>134</td><td>89</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5116.80	54.30	74.00	-19.70	53.28	1.02	Peak	134	89	2	5350.80	66.00	74.00	-8.00	65.68	0.32	Peak	134	89
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5116.80	54.30	74.00	-19.70	53.28	1.02	Peak	134	89																																		
2	5350.80	66.00	74.00	-8.00	65.68	0.32	Peak	134	89																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>40.63</td><td>1.10</td><td>Average</td><td>134</td><td>89</td></tr><tr><td>2</td><td>5350.20</td><td>50.35</td><td>54.00</td><td>-3.65</td><td>50.03</td><td>0.32</td><td>Average</td><td>134</td><td>89</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	41.73	54.00	-12.27	40.63	1.10	Average	134	89	2	5350.20	50.35	54.00	-3.65	50.03	0.32	Average	134	89
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	41.73	54.00	-12.27	40.63	1.10	Average	134	89																								
2	5350.20	50.35	54.00	-3.65	50.03	0.32	Average	134	89																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

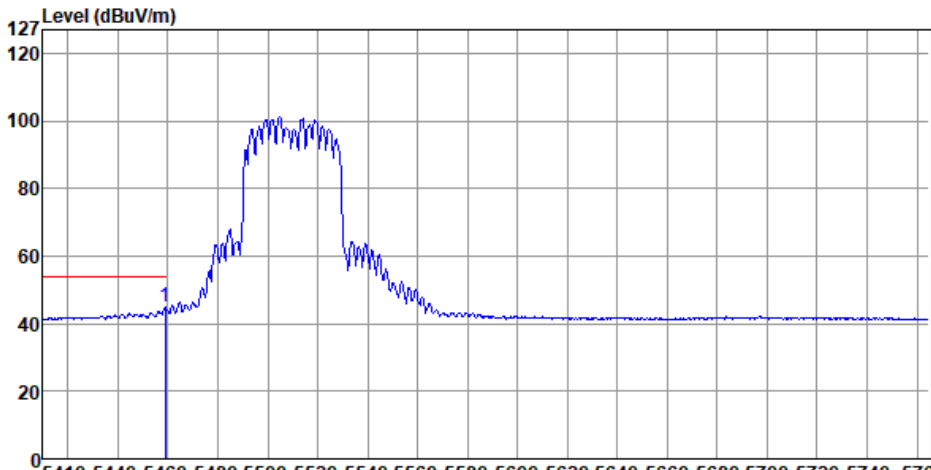
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz)																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>57.15</td><td>0.69</td><td>Peak</td><td>169</td><td>88</td></tr><tr><td>2</td><td>5468.22</td><td>63.05</td><td>68.20</td><td>-5.15</td><td>62.33</td><td>0.72</td><td>Peak</td><td>170</td><td>296</td></tr><tr><td>3</td><td>5737.31</td><td>54.81</td><td>68.20</td><td>-13.39</td><td>53.68</td><td>1.13</td><td>Peak</td><td>170</td><td>296</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	57.84	74.00	-16.16	57.15	0.69	Peak	169	88	2	5468.22	63.05	68.20	-5.15	62.33	0.72	Peak	170	296	3	5737.31	54.81	68.20	-13.39	53.68	1.13	Peak	170	296
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.70	57.84	74.00	-16.16	57.15	0.69	Peak	169	88																																		
2	5468.22	63.05	68.20	-5.15	62.33	0.72	Peak	170	296																																		
3	5737.31	54.81	68.20	-13.39	53.68	1.13	Peak	170	296																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

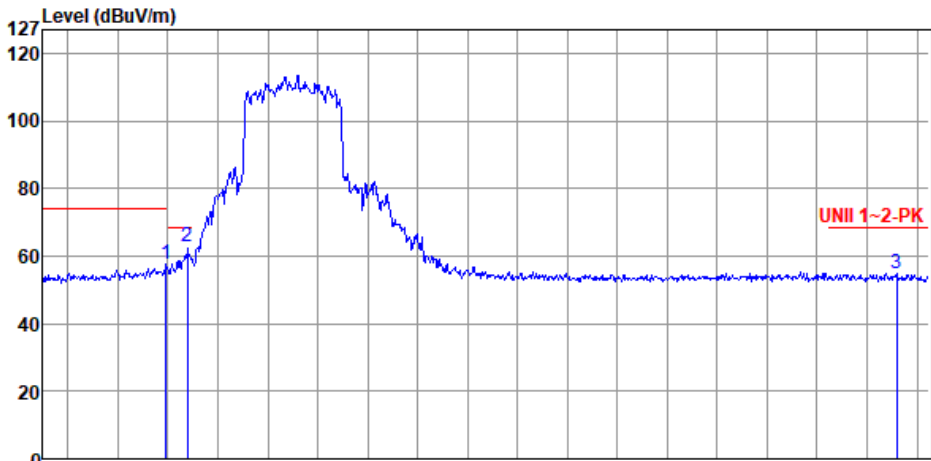
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.99</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>44.09</td><td>0.69</td><td>Average</td><td>169</td><td>88</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	44.78	54.00	-9.22	44.09	0.69	Average	169	88
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.99	44.78	54.00	-9.22	44.09	0.69	Average	169	88														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>57.16</td><td>0.69</td><td>Peak</td><td>179</td><td>62</td></tr><tr><td>2</td><td>5467.87</td><td>62.72</td><td>68.20</td><td>-5.48</td><td>62.00</td><td>0.72</td><td>Peak</td><td>227</td><td>38</td></tr><tr><td>3</td><td>5751.87</td><td>54.86</td><td>68.20</td><td>-13.34</td><td>53.69</td><td>1.17</td><td>Peak</td><td>227</td><td>38</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	57.85	74.00	-16.15	57.16	0.69	Peak	179	62	2	5467.87	62.72	68.20	-5.48	62.00	0.72	Peak	227	38	3	5751.87	54.86	68.20	-13.34	53.69	1.17	Peak	227	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	57.85	74.00	-16.15	57.16	0.69	Peak	179	62																																		
2	5467.87	62.72	68.20	-5.48	62.00	0.72	Peak	227	38																																		
3	5751.87	54.86	68.20	-13.34	53.69	1.17	Peak	227	38																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

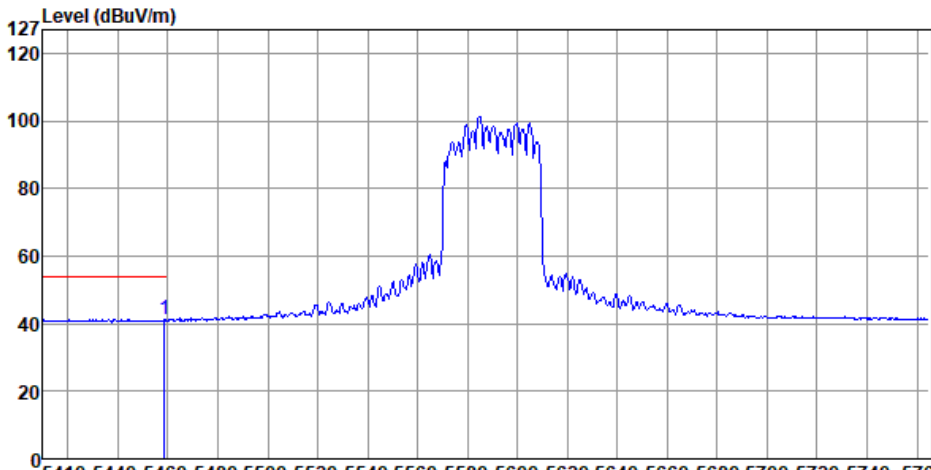
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5417.10</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>54.49</td><td>0.51</td><td>Peak</td><td>173</td><td>80</td></tr><tr><td>2</td><td>5467.87</td><td>55.03</td><td>68.20</td><td>-13.17</td><td>54.31</td><td>0.72</td><td>Peak</td><td>178</td><td>302</td></tr><tr><td>3</td><td>5725.24</td><td>55.35</td><td>68.20</td><td>-12.85</td><td>54.24</td><td>1.11</td><td>Peak</td><td>178</td><td>302</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.10	55.00	74.00	-19.00	54.49	0.51	Peak	173	80	2	5467.87	55.03	68.20	-13.17	54.31	0.72	Peak	178	302	3	5725.24	55.35	68.20	-12.85	54.24	1.11	Peak	178	302
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.10	55.00	74.00	-19.00	54.49	0.51	Peak	173	80																																		
2	5467.87	55.03	68.20	-13.17	54.31	0.72	Peak	178	302																																		
3	5725.24	55.35	68.20	-12.85	54.24	1.11	Peak	178	302																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.64</td><td>41.39</td><td>54.00</td><td>-12.61</td><td>40.70</td><td>0.69</td><td>Average</td><td>173</td><td>80</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.64	41.39	54.00	-12.61	40.70	0.69	Average	173	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.64	41.39	54.00	-12.61	40.70	0.69	Average	173	80														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

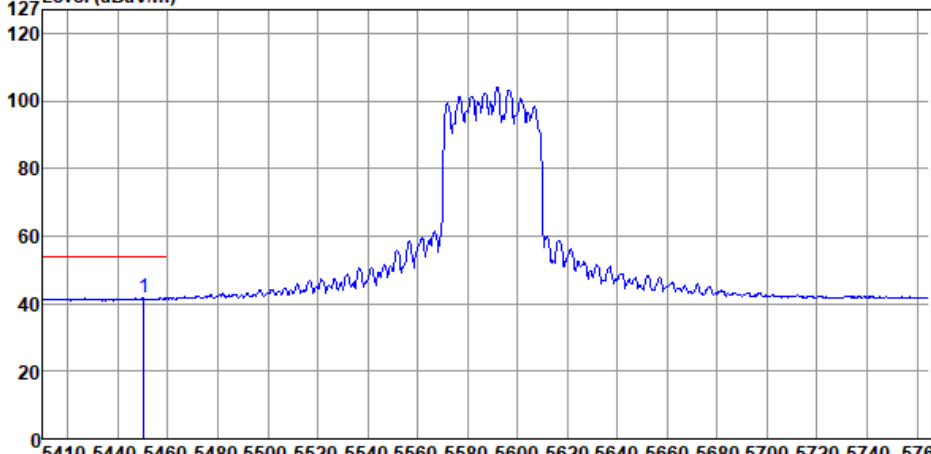
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5447.63</td><td>55.11</td><td>74.00</td><td>-18.89</td><td>54.46</td><td>0.65</td><td>Peak</td><td>239</td><td>311</td></tr><tr><td>2</td><td>5466.80</td><td>54.84</td><td>68.20</td><td>-13.36</td><td>54.13</td><td>0.71</td><td>Peak</td><td>319</td><td>293</td></tr><tr><td>3</td><td>5729.15</td><td>55.48</td><td>68.20</td><td>-12.72</td><td>54.36</td><td>1.12</td><td>Peak</td><td>319</td><td>293</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5447.63	55.11	74.00	-18.89	54.46	0.65	Peak	239	311	2	5466.80	54.84	68.20	-13.36	54.13	0.71	Peak	319	293	3	5729.15	55.48	68.20	-12.72	54.36	1.12	Peak	319	293
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5447.63	55.11	74.00	-18.89	54.46	0.65	Peak	239	311																																		
2	5466.80	54.84	68.20	-13.36	54.13	0.71	Peak	319	293																																		
3	5729.15	55.48	68.20	-12.72	54.36	1.12	Peak	319	293																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5450.47</td><td>41.62</td><td>54.00</td><td>-12.38</td><td>40.96</td><td>0.66</td><td>Average</td><td>239</td><td>311</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5450.47	41.62	54.00	-12.38	40.96	0.66	Average	239	311
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5450.47	41.62	54.00	-12.38	40.96	0.66	Average	239	311														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5423.14</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>52.71</td><td>0.54</td><td>Peak</td><td>158</td><td>304</td></tr><tr><td>2</td><td>5469.64</td><td>52.88</td><td>68.20</td><td>-15.32</td><td>52.16</td><td>0.72</td><td>Peak</td><td>158</td><td>304</td></tr><tr><td>3</td><td>5728.08</td><td>62.29</td><td>68.20</td><td>-5.91</td><td>61.17</td><td>1.12</td><td>Peak</td><td>158</td><td>304</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5423.14	53.25	74.00	-20.75	52.71	0.54	Peak	158	304	2	5469.64	52.88	68.20	-15.32	52.16	0.72	Peak	158	304	3	5728.08	62.29	68.20	-5.91	61.17	1.12	Peak	158	304
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5423.14	53.25	74.00	-20.75	52.71	0.54	Peak	158	304																																		
2	5469.64	52.88	68.20	-15.32	52.16	0.72	Peak	158	304																																		
3	5728.08	62.29	68.20	-5.91	61.17	1.12	Peak	158	304																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

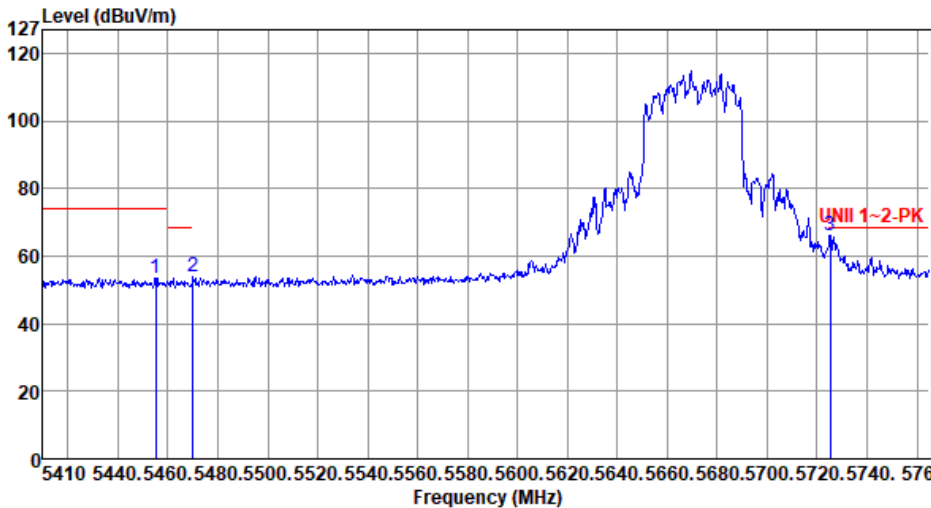
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBUV/m)			



Band Edge measurement

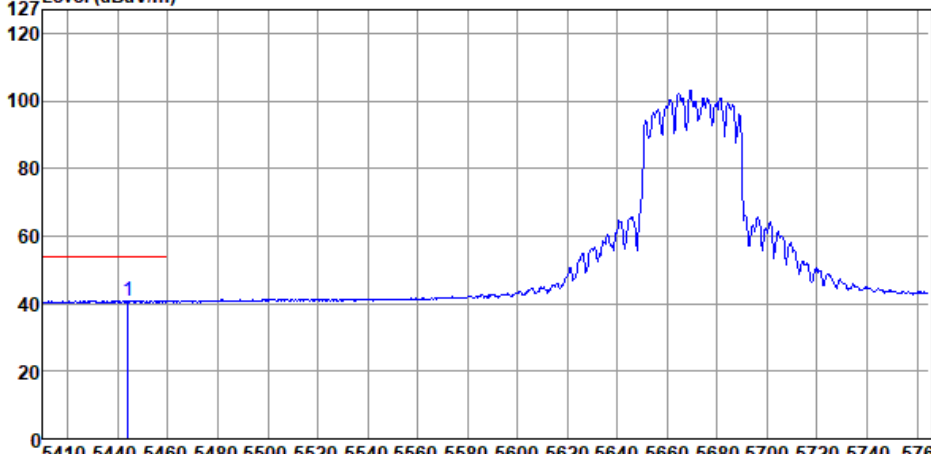
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5455.09</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>52.89</td><td>0.67</td><td>Peak</td><td>310</td><td>306</td></tr><tr><td>2</td><td>5470.00</td><td>53.94</td><td>68.20</td><td>-14.26</td><td>53.22</td><td>0.72</td><td>Peak</td><td>310</td><td>306</td></tr><tr><td>3</td><td>5725.24</td><td>66.07</td><td>68.20</td><td>-2.13</td><td>64.96</td><td>1.11</td><td>Peak</td><td>310</td><td>306</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.09	53.56	74.00	-20.44	52.89	0.67	Peak	310	306	2	5470.00	53.94	68.20	-14.26	53.22	0.72	Peak	310	306	3	5725.24	66.07	68.20	-2.13	64.96	1.11	Peak	310	306
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5455.09	53.56	74.00	-20.44	52.89	0.67	Peak	310	306																																		
2	5470.00	53.94	68.20	-14.26	53.22	0.72	Peak	310	306																																		
3	5725.24	66.07	68.20	-2.13	64.96	1.11	Peak	310	306																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

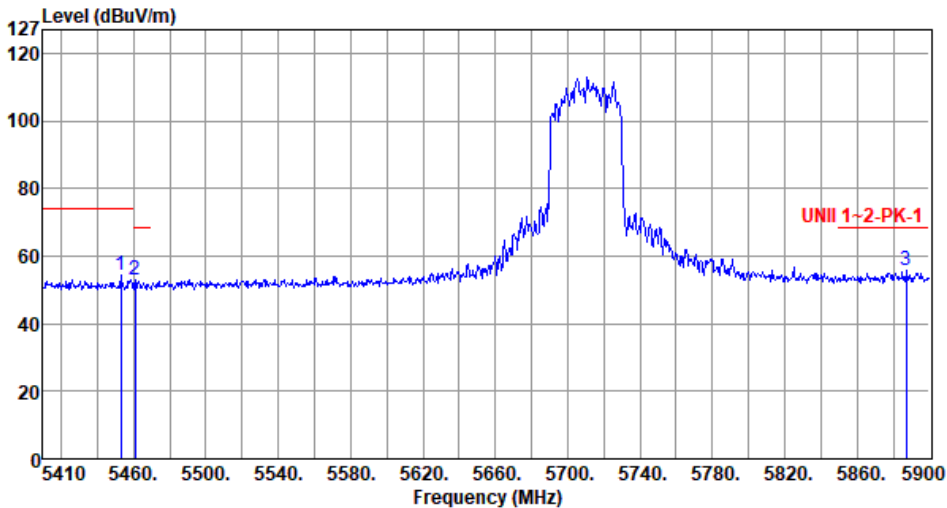
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5444.08</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>40.32</td><td>0.64</td><td>Average</td><td>310</td><td>306</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5444.08	40.96	54.00	-13.04	40.32	0.64	Average	310	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5444.08	40.96	54.00	-13.04	40.32	0.64	Average	310	306														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

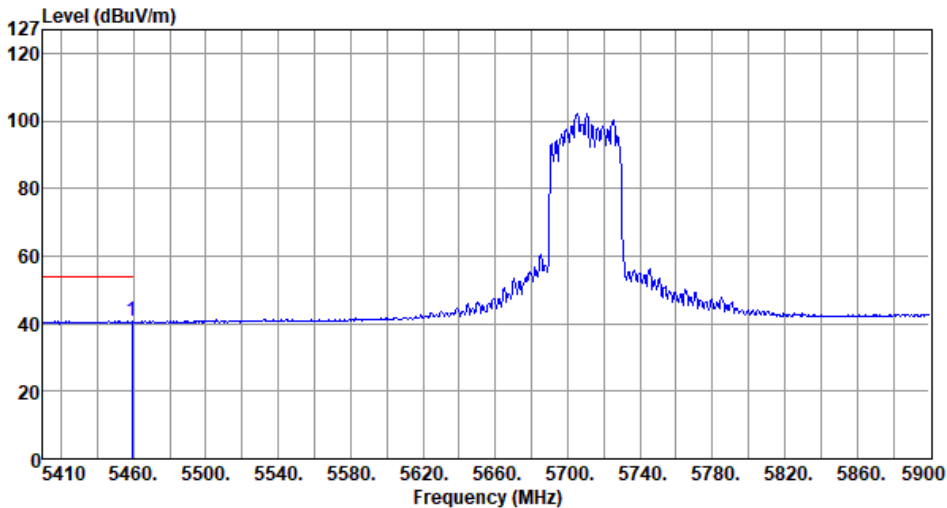
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.12</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>53.49</td><td>0.67</td><td>Peak</td><td>229</td><td>116</td></tr><tr><td>2</td><td>5460.96</td><td>52.82</td><td>68.20</td><td>-15.38</td><td>52.13</td><td>0.69</td><td>Peak</td><td>229</td><td>116</td></tr><tr><td>3</td><td>5887.26</td><td>55.73</td><td>68.20</td><td>-12.47</td><td>54.15</td><td>1.58</td><td>Peak</td><td>229</td><td>116</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5453.12	54.16	74.00	-19.84	53.49	0.67	Peak	229	116	2	5460.96	52.82	68.20	-15.38	52.13	0.69	Peak	229	116	3	5887.26	55.73	68.20	-12.47	54.15	1.58	Peak	229	116
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	5453.12	54.16	74.00	-19.84	53.49	0.67	Peak	229	116																																												
2	5460.96	52.82	68.20	-15.38	52.13	0.69	Peak	229	116																																												
3	5887.26	55.73	68.20	-12.47	54.15	1.58	Peak	229	116																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

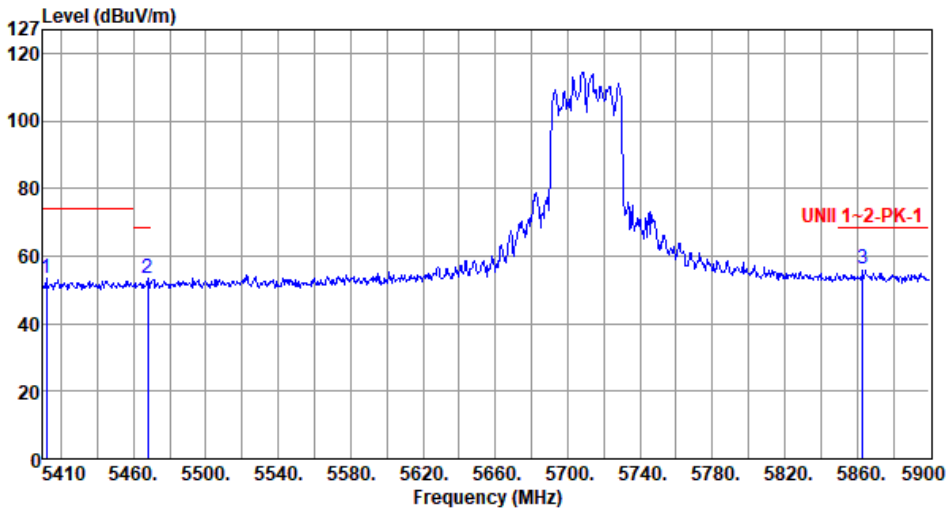
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Horizontal-Average																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m)  <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.00</td><td>40.76</td><td>54.00</td><td>-13.24</td><td>40.07</td><td>0.69</td><td>Average</td><td>229</td><td>116</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5459.00	40.76	54.00	-13.24	40.07	0.69	Average	229	116
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5459.00	40.76	54.00	-13.24	40.07	0.69	Average	229	116																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5411.96</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>52.76</td><td>0.48</td><td>Peak</td><td>228</td><td>306</td></tr><tr><td>2</td><td>5467.82</td><td>53.34</td><td>68.20</td><td>-14.86</td><td>52.62</td><td>0.72</td><td>Peak</td><td>228</td><td>306</td></tr><tr><td>3</td><td>5863.25</td><td>56.10</td><td>68.20</td><td>-12.10</td><td>54.62</td><td>1.48</td><td>Peak</td><td>228</td><td>306</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5411.96	53.24	74.00	-20.76	52.76	0.48	Peak	228	306	2	5467.82	53.34	68.20	-14.86	52.62	0.72	Peak	228	306	3	5863.25	56.10	68.20	-12.10	54.62	1.48	Peak	228	306
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5411.96	53.24	74.00	-20.76	52.76	0.48	Peak	228	306																																																						
2	5467.82	53.34	68.20	-14.86	52.62	0.72	Peak	228	306																																																						
3	5863.25	56.10	68.20	-12.10	54.62	1.48	Peak	228	306																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

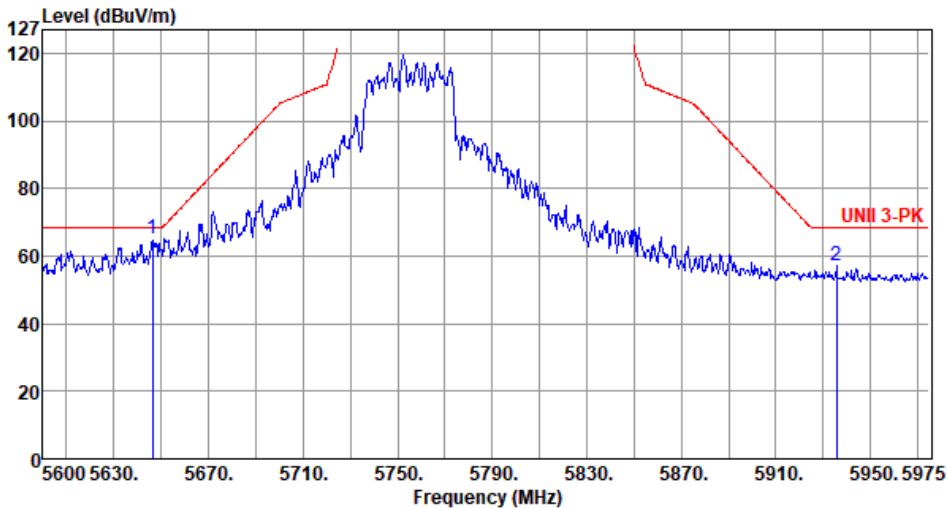
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5434.50</td><td>40.86</td><td>54.00</td><td>-13.14</td><td>40.27</td><td>0.59</td><td>Average</td><td>228</td><td>306</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5434.50	40.86	54.00	-13.14	40.27	0.59	Average	228	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5434.50	40.86	54.00	-13.14	40.27	0.59	Average	228	306														



Band Edge measurement

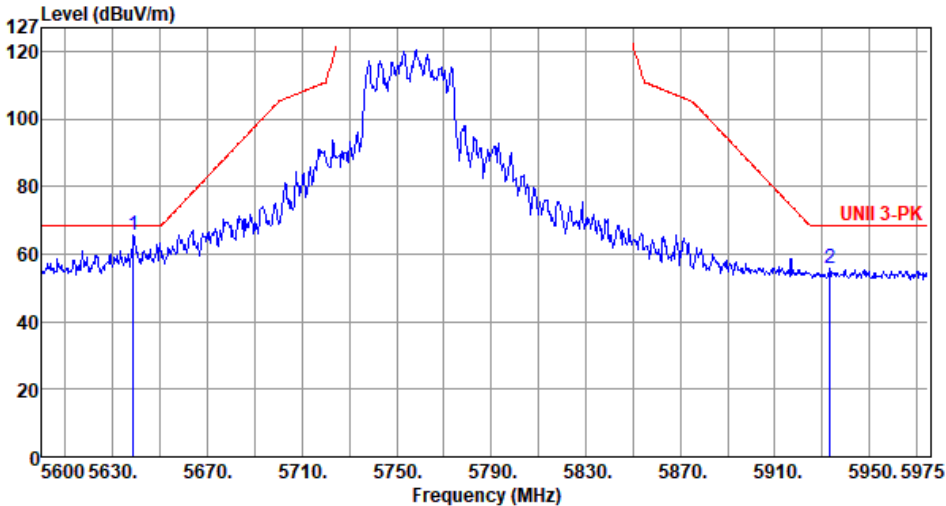
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.50</td><td>64.99</td><td>68.20</td><td>-3.21</td><td>64.08</td><td>0.91</td><td>Peak</td><td>183</td><td>108</td></tr><tr><td>2</td><td>5935.63</td><td>57.11</td><td>68.20</td><td>-11.09</td><td>55.45</td><td>1.66</td><td>Peak</td><td>183</td><td>108</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.50	64.99	68.20	-3.21	64.08	0.91	Peak	183	108	2	5935.63	57.11	68.20	-11.09	55.45	1.66	Peak	183	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.50	64.99	68.20	-3.21	64.08	0.91	Peak	183	108																								
2	5935.63	57.11	68.20	-11.09	55.45	1.66	Peak	183	108																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

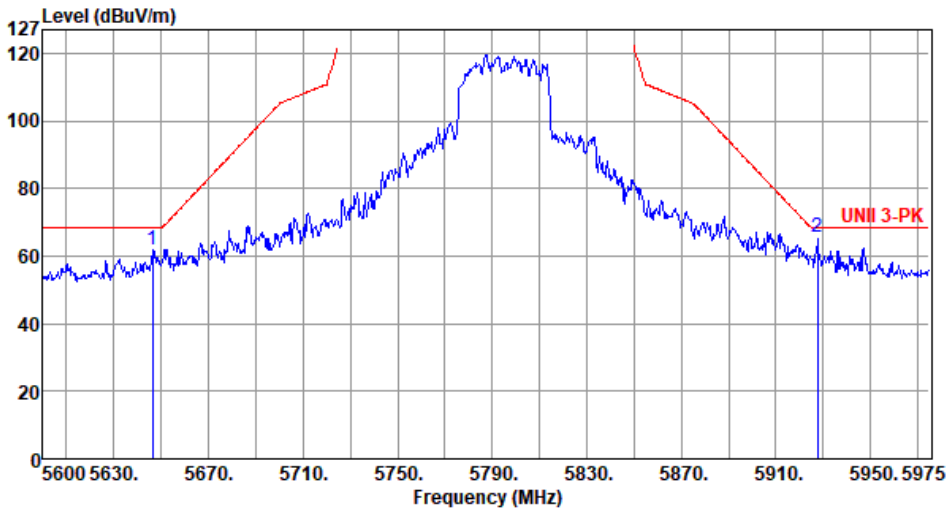
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5638.63</td><td>65.44</td><td>68.20</td><td>-2.76</td><td>64.55</td><td>0.89</td><td>Peak</td><td>190</td><td>317</td></tr><tr><td>2</td><td>5933.38</td><td>55.76</td><td>68.20</td><td>-12.44</td><td>54.10</td><td>1.66</td><td>Peak</td><td>190</td><td>317</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5638.63	65.44	68.20	-2.76	64.55	0.89	Peak	190	317	2	5933.38	55.76	68.20	-12.44	54.10	1.66	Peak	190	317
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5638.63	65.44	68.20	-2.76	64.55	0.89	Peak	190	317																																												
2	5933.38	55.76	68.20	-12.44	54.10	1.66	Peak	190	317																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

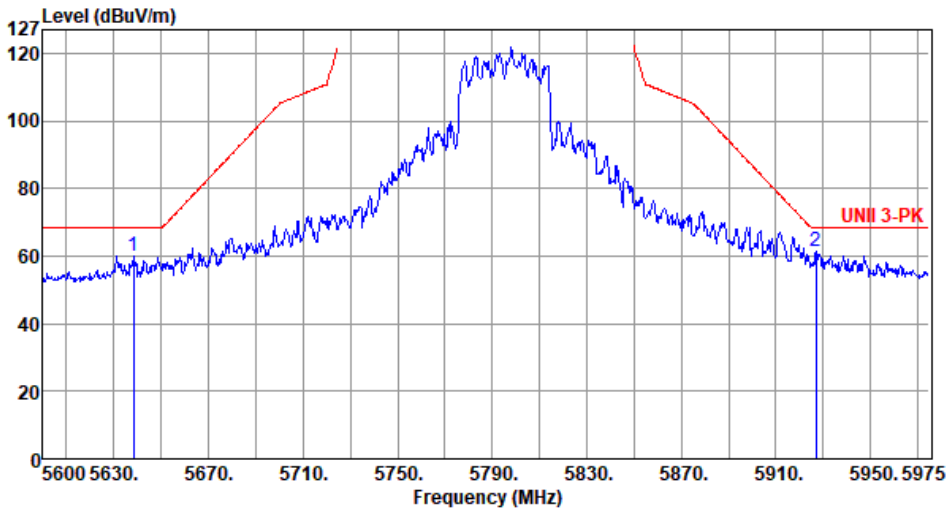
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.50</td><td>61.68</td><td>68.20</td><td>-6.52</td><td>60.77</td><td>0.91</td><td>Peak</td><td>176</td><td>260</td></tr><tr><td>2</td><td>5927.75</td><td>65.48</td><td>68.20</td><td>-2.72</td><td>63.82</td><td>1.66</td><td>Peak</td><td>168</td><td>102</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5646.50	61.68	68.20	-6.52	60.77	0.91	Peak	176	260	2	5927.75	65.48	68.20	-2.72	63.82	1.66	Peak	168	102
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5646.50	61.68	68.20	-6.52	60.77	0.91	Peak	176	260																																												
2	5927.75	65.48	68.20	-2.72	63.82	1.66	Peak	168	102																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

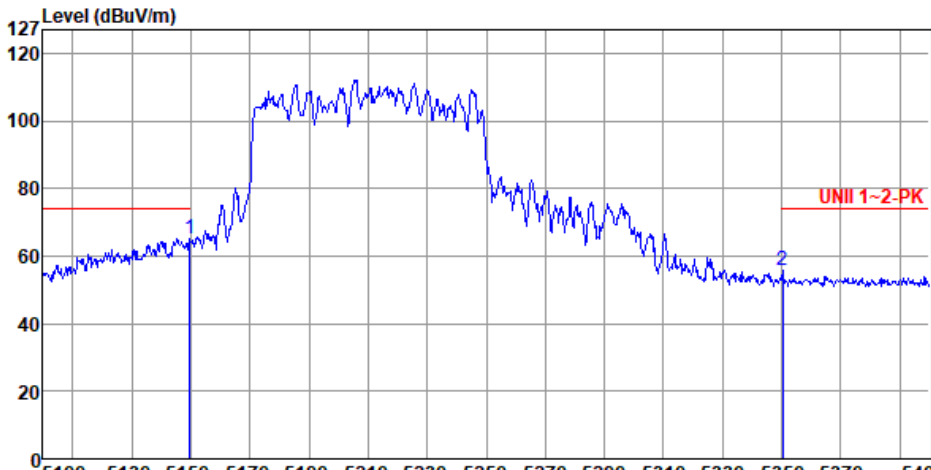
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5638.25</td><td>59.98</td><td>68.20</td><td>-8.22</td><td>59.09</td><td>0.89</td><td>Peak</td><td>182</td><td>312</td></tr><tr><td>2</td><td>5927.00</td><td>61.53</td><td>68.20</td><td>-6.67</td><td>59.87</td><td>1.66</td><td>Peak</td><td>226</td><td>43</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5638.25	59.98	68.20	-8.22	59.09	0.89	Peak	182	312	2	5927.00	61.53	68.20	-6.67	59.87	1.66	Peak	226	43
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5638.25	59.98	68.20	-8.22	59.09	0.89	Peak	182	312																								
2	5927.00	61.53	68.20	-6.67	59.87	1.66	Peak	226	43																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>65.28</td><td>74.00</td><td>-8.72</td><td>64.18</td><td>1.10</td><td>Peak</td><td>155</td><td>295</td></tr><tr><td>2</td><td>5350.20</td><td>55.82</td><td>74.00</td><td>-18.18</td><td>55.50</td><td>0.32</td><td>Peak</td><td>155</td><td>295</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	65.28	74.00	-8.72	64.18	1.10	Peak	155	295	2	5350.20	55.82	74.00	-18.18	55.50	0.32	Peak	155	295
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	65.28	74.00	-8.72	64.18	1.10	Peak	155	295																								
2	5350.20	55.82	74.00	-18.18	55.50	0.32	Peak	155	295																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

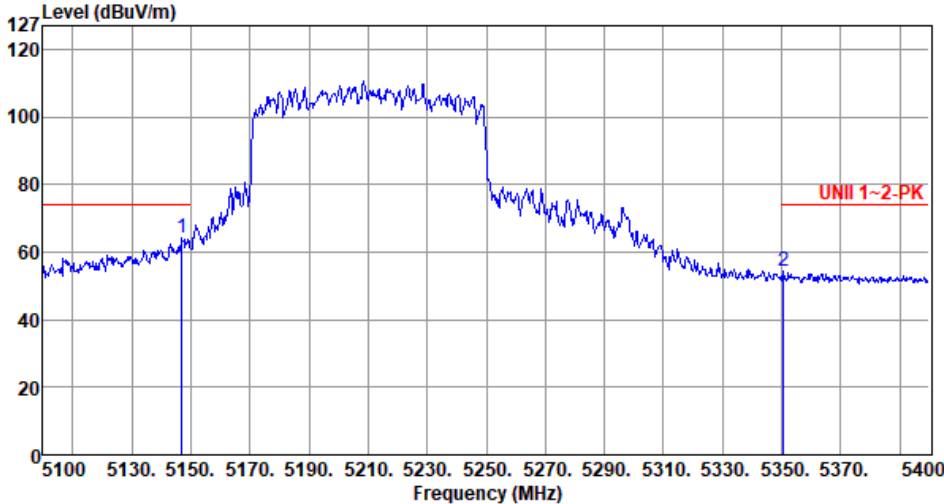
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>52.99</td><td>54.00</td><td>-1.01</td><td>51.89</td><td>1.10</td><td>Average</td><td>155</td><td>295</td></tr><tr><td>2</td><td>5350.50</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>41.95</td><td>0.32</td><td>Average</td><td>155</td><td>295</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.99	54.00	-1.01	51.89	1.10	Average	155	295	2	5350.50	42.27	54.00	-11.73	41.95	0.32	Average	155	295
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.99	54.00	-1.01	51.89	1.10	Average	155	295																								
2	5350.50	42.27	54.00	-11.73	41.95	0.32	Average	155	295																								



Band Edge measurement

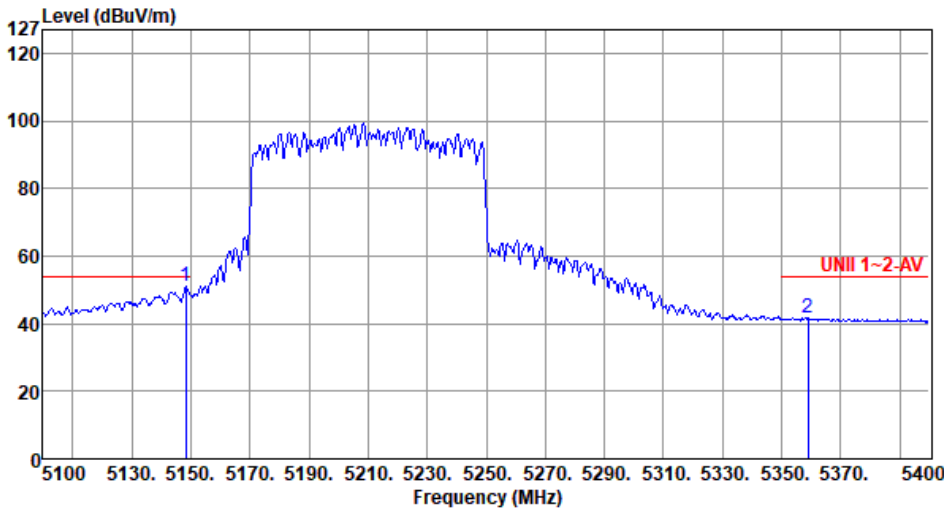
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.10</td><td>64.10</td><td>74.00</td><td>-9.90</td><td>63.01</td><td>1.09</td><td>Peak</td><td>145</td><td>44</td></tr><tr><td>2</td><td>5350.50</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>54.07</td><td>0.32</td><td>Peak</td><td>145</td><td>44</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.10	64.10	74.00	-9.90	63.01	1.09	Peak	145	44	2	5350.50	54.39	74.00	-19.61	54.07	0.32	Peak	145	44
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.10	64.10	74.00	-9.90	63.01	1.09	Peak	145	44																								
2	5350.50	54.39	74.00	-19.61	54.07	0.32	Peak	145	44																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Average																																
Test By :Brad Wu- Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.30</td><td>50.93</td><td>54.00</td><td>-3.07</td><td>49.83</td><td>1.10</td><td>Average</td><td>145</td><td>44</td></tr><tr><td>2</td><td>5358.90</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>41.51</td><td>0.34</td><td>Average</td><td>145</td><td>44</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	50.93	54.00	-3.07	49.83	1.10	Average	145	44	2	5358.90	41.85	54.00	-12.15	41.51	0.34	Average	145	44
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	50.93	54.00	-3.07	49.83	1.10	Average	145	44																								
2	5358.90	41.85	54.00	-12.15	41.51	0.34	Average	145	44																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

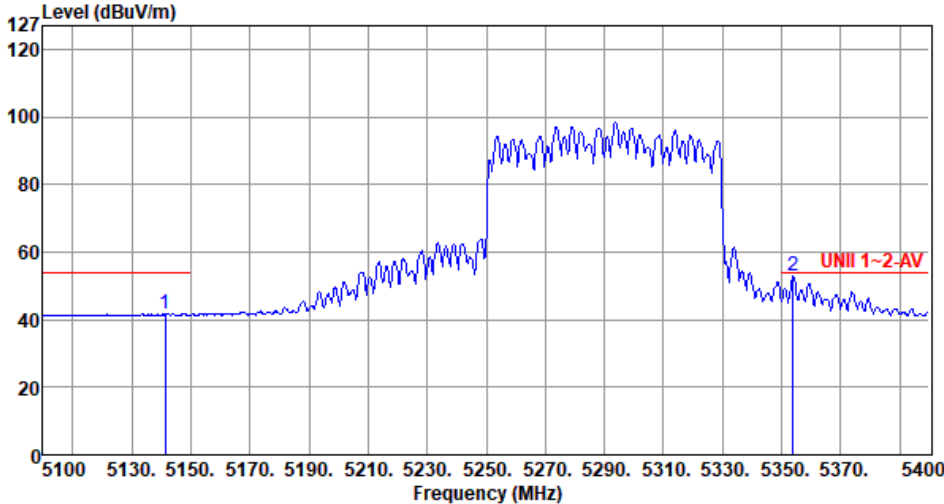
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m) </			



Band Edge measurement

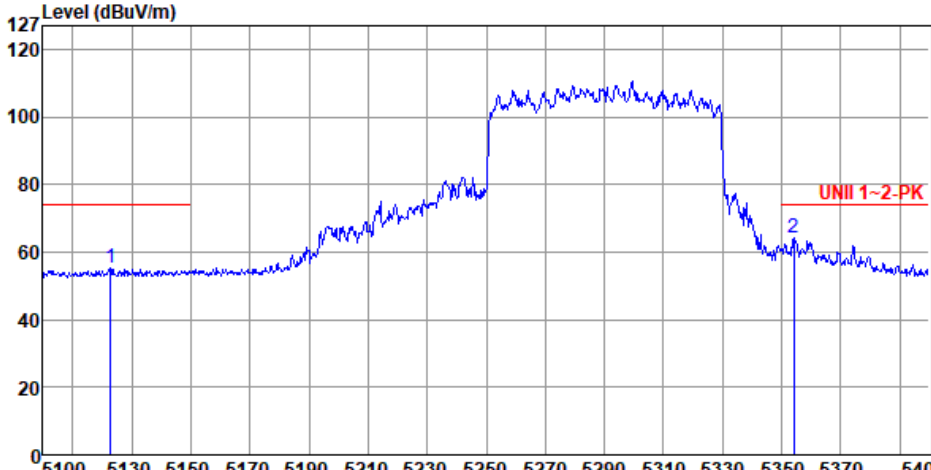
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5141.40</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>40.74</td><td>1.07</td><td>Average</td><td>190</td><td>282</td></tr><tr><td>2</td><td>5353.80</td><td>52.91</td><td>54.00</td><td>-1.09</td><td>52.58</td><td>0.33</td><td>Average</td><td>147</td><td>94</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5141.40	41.81	54.00	-12.19	40.74	1.07	Average	190	282	2	5353.80	52.91	54.00	-1.09	52.58	0.33	Average	147	94
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5141.40	41.81	54.00	-12.19	40.74	1.07	Average	190	282																								
2	5353.80	52.91	54.00	-1.09	52.58	0.33	Average	147	94																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5122.80</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>54.04</td><td>1.04</td><td>Peak</td><td>177</td><td>335</td></tr><tr><td>2</td><td>5354.10</td><td>64.01</td><td>74.00</td><td>-9.99</td><td>63.68</td><td>0.33</td><td>Peak</td><td>171</td><td>70</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5122.80	55.08	74.00	-18.92	54.04	1.04	Peak	177	335	2	5354.10	64.01	74.00	-9.99	63.68	0.33	Peak	171	70
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5122.80	55.08	74.00	-18.92	54.04	1.04	Peak	177	335																																		
2	5354.10	64.01	74.00	-9.99	63.68	0.33	Peak	171	70																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

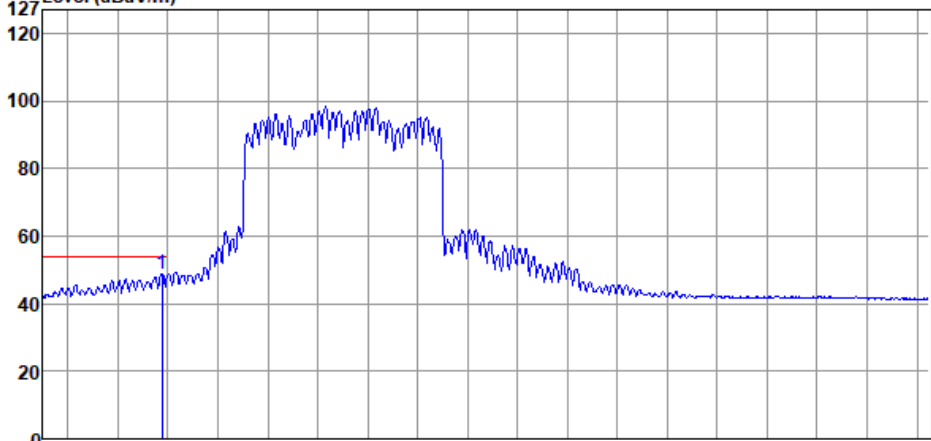
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.93</td><td>60.94</td><td>74.00</td><td>-13.06</td><td>60.25</td><td>0.69</td><td>Peak</td><td>175</td><td>89</td></tr><tr><td>2</td><td>5465.03</td><td>64.86</td><td>68.20</td><td>-3.34</td><td>64.16</td><td>0.70</td><td>Peak</td><td>166</td><td>300</td></tr><tr><td>3</td><td>5740.86</td><td>55.84</td><td>68.20</td><td>-12.36</td><td>54.70</td><td>1.14</td><td>Peak</td><td>166</td><td>300</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.93	60.94	74.00	-13.06	60.25	0.69	Peak	175	89	2	5465.03	64.86	68.20	-3.34	64.16	0.70	Peak	166	300	3	5740.86	55.84	68.20	-12.36	54.70	1.14	Peak	166	300
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.93	60.94	74.00	-13.06	60.25	0.69	Peak	175	89																																		
2	5465.03	64.86	68.20	-3.34	64.16	0.70	Peak	166	300																																		
3	5740.86	55.84	68.20	-12.36	54.70	1.14	Peak	166	300																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Average																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.57</td><td>48.95</td><td>54.00</td><td>-5.05</td><td>48.26</td><td>0.69</td><td>Average</td><td>175</td><td>89</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5457.57	48.95	54.00	-5.05	48.26	0.69	Average	175	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5457.57	48.95	54.00	-5.05	48.26	0.69	Average	175	89																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.64</td><td>61.32</td><td>74.00</td><td>-12.68</td><td>60.63</td><td>0.69</td><td>Peak</td><td>258</td><td>36</td></tr><tr><td>2</td><td>5466.80</td><td>63.03</td><td>68.20</td><td>-5.17</td><td>62.32</td><td>0.71</td><td>Peak</td><td>230</td><td>42</td></tr><tr><td>3</td><td>5735.54</td><td>55.18</td><td>68.20</td><td>-13.02</td><td>54.05</td><td>1.13</td><td>Peak</td><td>230</td><td>42</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5458.64	61.32	74.00	-12.68	60.63	0.69	Peak	258	36	2	5466.80	63.03	68.20	-5.17	62.32	0.71	Peak	230	42	3	5735.54	55.18	68.20	-13.02	54.05	1.13	Peak	230	42
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5458.64	61.32	74.00	-12.68	60.63	0.69	Peak	258	36																																																						
2	5466.80	63.03	68.20	-5.17	62.32	0.71	Peak	230	42																																																						
3	5735.54	55.18	68.20	-13.02	54.05	1.13	Peak	230	42																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.28</td><td>48.14</td><td>54.00</td><td>-5.86</td><td>47.45</td><td>0.69</td><td>Average</td><td>258</td><td>36</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.28	48.14	54.00	-5.86	47.45	0.69	Average	258	36
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.28	48.14	54.00	-5.86	47.45	0.69	Average	258	36														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5445.15</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>55.11</td><td>0.64</td><td>Peak</td><td>138</td><td>288</td></tr><tr><td>2</td><td>5466.45</td><td>55.83</td><td>68.20</td><td>-12.37</td><td>55.12</td><td>0.71</td><td>Peak</td><td>170</td><td>293</td></tr><tr><td>3</td><td>5725.60</td><td>62.45</td><td>68.20</td><td>-5.75</td><td>61.34</td><td>1.11</td><td>Peak</td><td>194</td><td>281</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.15	55.75	74.00	-18.25	55.11	0.64	Peak	138	288	2	5466.45	55.83	68.20	-12.37	55.12	0.71	Peak	170	293	3	5725.60	62.45	68.20	-5.75	61.34	1.11	Peak	194	281
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.15	55.75	74.00	-18.25	55.11	0.64	Peak	138	288																																		
2	5466.45	55.83	68.20	-12.37	55.12	0.71	Peak	170	293																																		
3	5725.60	62.45	68.20	-5.75	61.34	1.11	Peak	194	281																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>55.79</td><td>74.00</td><td>-18.21</td><td>55.10</td><td>0.69</td><td>Peak</td><td>243</td><td>316</td></tr><tr><td>2</td><td>5470.00</td><td>55.77</td><td>68.20</td><td>-12.43</td><td>55.05</td><td>0.72</td><td>Peak</td><td>228</td><td>39</td></tr><tr><td>3</td><td>5734.12</td><td>63.56</td><td>68.20</td><td>-4.64</td><td>62.43</td><td>1.13</td><td>Peak</td><td>324</td><td>306</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	55.79	74.00	-18.21	55.10	0.69	Peak	243	316	2	5470.00	55.77	68.20	-12.43	55.05	0.72	Peak	228	39	3	5734.12	63.56	68.20	-4.64	62.43	1.13	Peak	324	306
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.70	55.79	74.00	-18.21	55.10	0.69	Peak	243	316																																		
2	5470.00	55.77	68.20	-12.43	55.05	0.72	Peak	228	39																																		
3	5734.12	63.56	68.20	-4.64	62.43	1.13	Peak	324	306																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

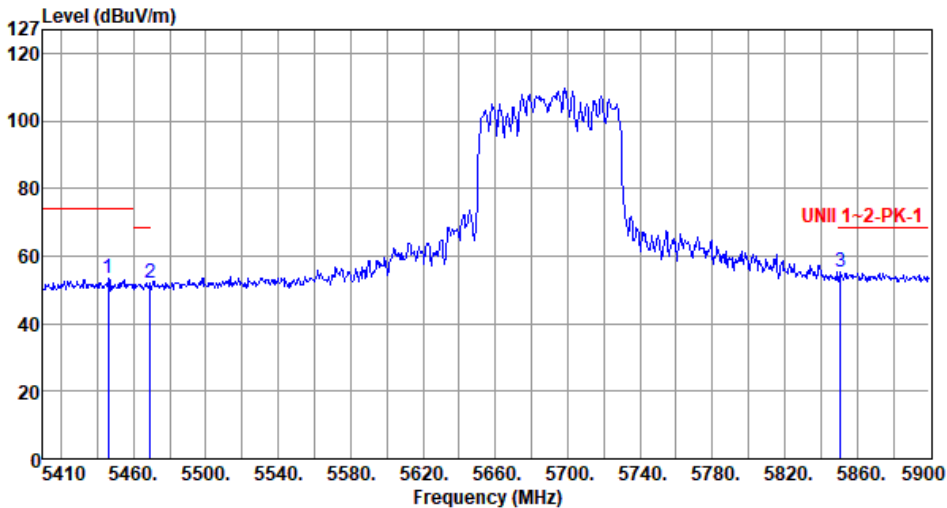
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.26</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>52.73</td><td>0.65</td><td>Peak</td><td>313</td><td>286</td></tr><tr><td>2</td><td>5469.29</td><td>51.92</td><td>68.20</td><td>-16.28</td><td>51.20</td><td>0.72</td><td>Peak</td><td>313</td><td>286</td></tr><tr><td>3</td><td>5851.00</td><td>55.16</td><td>68.20</td><td>-13.04</td><td>53.74</td><td>1.42</td><td>Peak</td><td>313</td><td>286</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5446.26	53.38	74.00	-20.62	52.73	0.65	Peak	313	286	2	5469.29	51.92	68.20	-16.28	51.20	0.72	Peak	313	286	3	5851.00	55.16	68.20	-13.04	53.74	1.42	Peak	313	286
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5446.26	53.38	74.00	-20.62	52.73	0.65	Peak	313	286																																												
2	5469.29	51.92	68.20	-16.28	51.20	0.72	Peak	313	286																																												
3	5851.00	55.16	68.20	-13.04	53.74	1.42	Peak	313	286																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5418.33</td><td>40.73</td><td>54.00</td><td>-13.27</td><td>40.22</td><td>0.51</td><td>Average</td><td>313</td><td>286</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5418.33	40.73	54.00	-13.27	40.22	0.51	Average	313	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5418.33	40.73	54.00	-13.27	40.22	0.51	Average	313	286														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

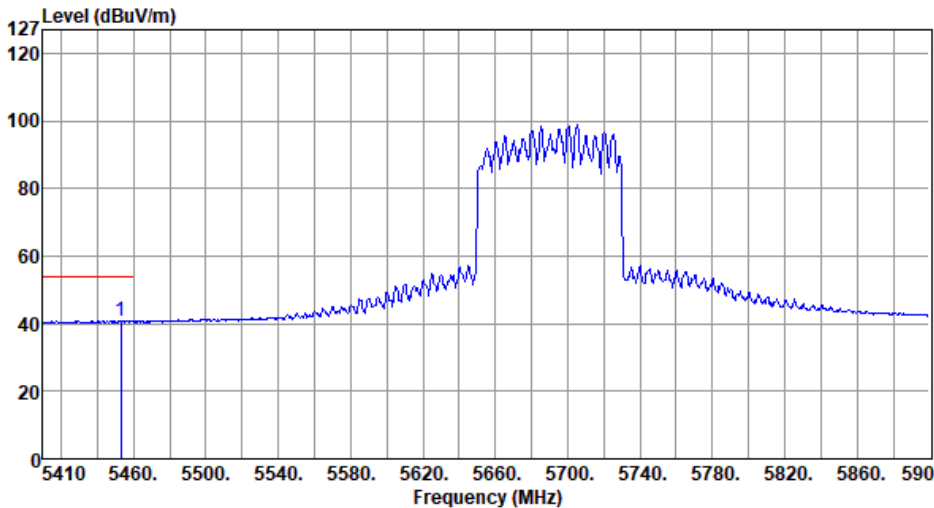
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																																															
Level (dBUV/m) 127 120 100 80 60 40 20 0 5410 5460. 5500. 5540. 5580. 5620. 5660. 5700. 5740. 5780. 5820. 5860. 5900 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.77</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>52.71</td><td>0.64</td><td>Peak</td><td>308</td><td>309</td></tr><tr><td>2</td><td>5463.41</td><td>53.84</td><td>68.20</td><td>-14.36</td><td>53.14</td><td>0.70</td><td>Peak</td><td>308</td><td>309</td></tr><tr><td>3</td><td>5861.29</td><td>56.42</td><td>68.20</td><td>-11.78</td><td>54.94</td><td>1.48</td><td>Peak</td><td>308</td><td>309</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5445.77	53.35	74.00	-20.65	52.71	0.64	Peak	308	309	2	5463.41	53.84	68.20	-14.36	53.14	0.70	Peak	308	309	3	5861.29	56.42	68.20	-11.78	54.94	1.48	Peak	308	309
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5445.77	53.35	74.00	-20.65	52.71	0.64	Peak	308	309																																																						
2	5463.41	53.84	68.20	-14.36	53.14	0.70	Peak	308	309																																																						
3	5861.29	56.42	68.20	-11.78	54.94	1.48	Peak	308	309																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

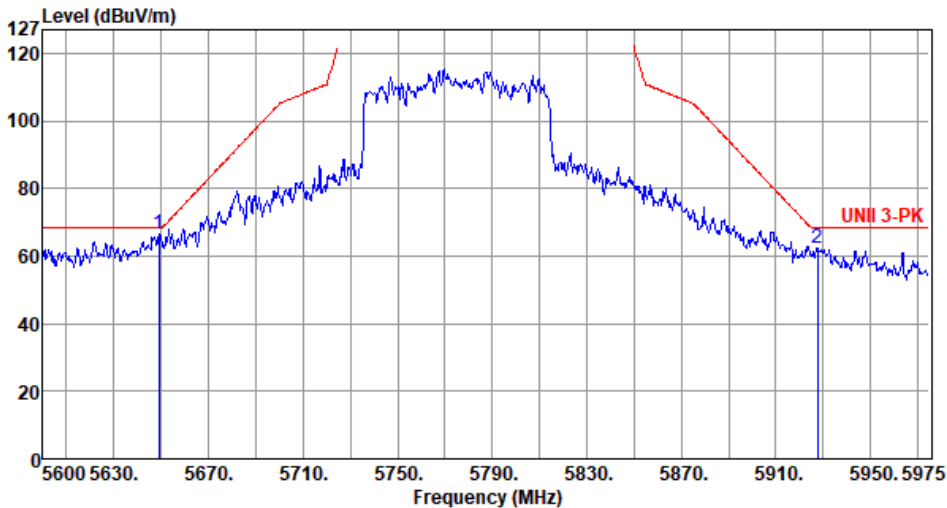
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5453.12</td><td>40.93</td><td>54.00</td><td>-13.07</td><td>40.26</td><td>0.67</td><td>Average</td><td>308</td><td>309</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5453.12	40.93	54.00	-13.07	40.26	0.67	Average	308	309
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5453.12	40.93	54.00	-13.07	40.26	0.67	Average	308	309														



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5649.13</td><td>66.78</td><td>68.20</td><td>-1.42</td><td>65.86</td><td>0.92</td><td>Peak</td><td>194</td><td>182</td></tr><tr><td>2</td><td>5927.75</td><td>62.39</td><td>68.20</td><td>-5.81</td><td>60.73</td><td>1.66</td><td>Peak</td><td>168</td><td>256</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.13	66.78	68.20	-1.42	65.86	0.92	Peak	194	182	2	5927.75	62.39	68.20	-5.81	60.73	1.66	Peak	168	256
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.13	66.78	68.20	-1.42	65.86	0.92	Peak	194	182																								
2	5927.75	62.39	68.20	-5.81	60.73	1.66	Peak	168	256																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

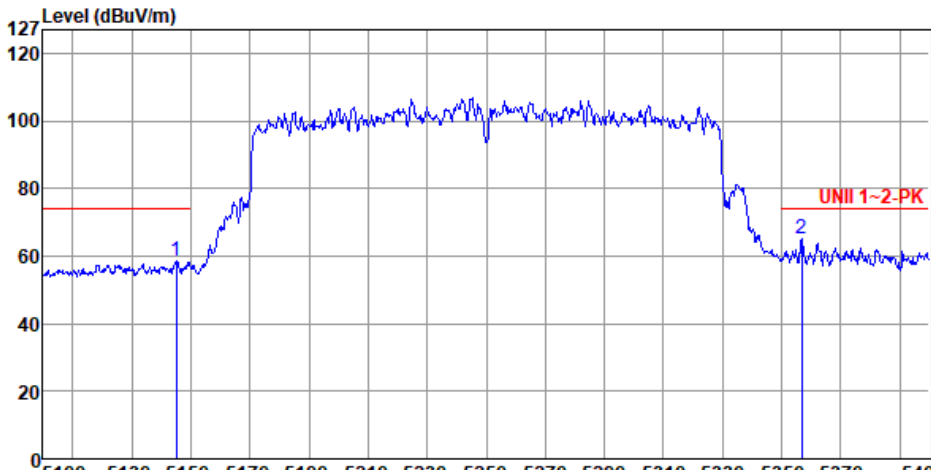
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5648.75</td><td>63.85</td><td>68.20</td><td>-4.35</td><td>62.93</td><td>0.92</td><td>Peak</td><td>232</td><td>324</td></tr><tr><td>2</td><td>5928.13</td><td>66.43</td><td>68.20</td><td>-1.77</td><td>64.77</td><td>1.66</td><td>Peak</td><td>317</td><td>35</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.75	63.85	68.20	-4.35	62.93	0.92	Peak	232	324	2	5928.13	66.43	68.20	-1.77	64.77	1.66	Peak	317	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.75	63.85	68.20	-4.35	62.93	0.92	Peak	232	324																								
2	5928.13	66.43	68.20	-1.77	64.77	1.66	Peak	317	35																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

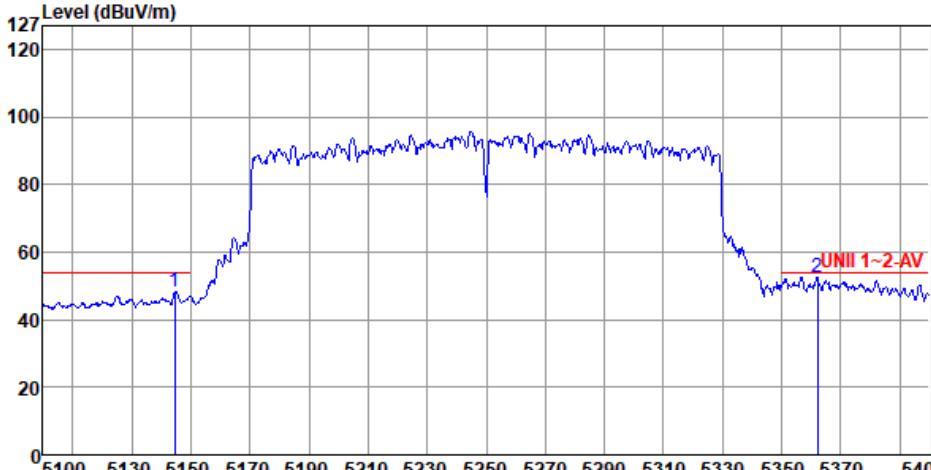
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.00</td><td>58.66</td><td>74.00</td><td>-15.34</td><td>57.58</td><td>1.08</td><td>Peak</td><td>108</td><td>307</td></tr><tr><td>2</td><td>5356.80</td><td>65.16</td><td>74.00</td><td>-8.84</td><td>64.83</td><td>0.33</td><td>Peak</td><td>167</td><td>70</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.00	58.66	74.00	-15.34	57.58	1.08	Peak	108	307	2	5356.80	65.16	74.00	-8.84	64.83	0.33	Peak	167	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.00	58.66	74.00	-15.34	57.58	1.08	Peak	108	307																								
2	5356.80	65.16	74.00	-8.84	64.83	0.33	Peak	167	70																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

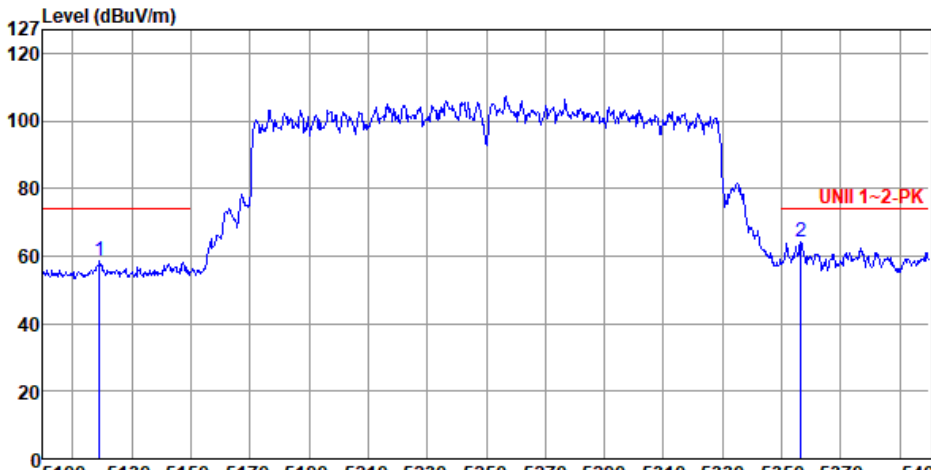
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5144.70</td><td>48.30</td><td>54.00</td><td>-5.70</td><td>47.22</td><td>1.08</td><td>Average</td><td>108</td><td>307</td></tr><tr><td>2</td><td>5362.20</td><td>52.69</td><td>54.00</td><td>-1.31</td><td>52.34</td><td>0.35</td><td>Average</td><td>167</td><td>70</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.70	48.30	54.00	-5.70	47.22	1.08	Average	108	307	2	5362.20	52.69	54.00	-1.31	52.34	0.35	Average	167	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.70	48.30	54.00	-5.70	47.22	1.08	Average	108	307																								
2	5362.20	52.69	54.00	-1.31	52.34	0.35	Average	167	70																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5119.20</td><td>58.51</td><td>74.00</td><td>-15.49</td><td>57.48</td><td>1.03</td><td>Peak</td><td>309</td><td>331</td></tr><tr><td>2</td><td>5356.50</td><td>64.00</td><td>74.00</td><td>-10.00</td><td>63.67</td><td>0.33</td><td>Peak</td><td>168</td><td>71</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5119.20	58.51	74.00	-15.49	57.48	1.03	Peak	309	331	2	5356.50	64.00	74.00	-10.00	63.67	0.33	Peak	168	71
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5119.20	58.51	74.00	-15.49	57.48	1.03	Peak	309	331																																		
2	5356.50	64.00	74.00	-10.00	63.67	0.33	Peak	168	71																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5149.20	46.24	54.00	-7.76	45.14	1.10	Average	309	331
2	5356.50	52.87	54.00	-1.13	52.54	0.33	Average	168	71

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5454.02</td><td>59.21</td><td>74.00</td><td>-14.79</td><td>58.54</td><td>0.67</td><td>Peak</td><td>222</td><td>106</td></tr><tr><td>2</td><td>5466.45</td><td>58.12</td><td>68.20</td><td>-10.08</td><td>57.41</td><td>0.71</td><td>Peak</td><td>159</td><td>63</td></tr><tr><td>3</td><td>5725.24</td><td>65.01</td><td>68.20</td><td>-3.19</td><td>63.90</td><td>1.11</td><td>Peak</td><td>159</td><td>63</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5454.02	59.21	74.00	-14.79	58.54	0.67	Peak	222	106	2	5466.45	58.12	68.20	-10.08	57.41	0.71	Peak	159	63	3	5725.24	65.01	68.20	-3.19	63.90	1.11	Peak	159	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5454.02	59.21	74.00	-14.79	58.54	0.67	Peak	222	106																																		
2	5466.45	58.12	68.20	-10.08	57.41	0.71	Peak	159	63																																		
3	5725.24	65.01	68.20	-3.19	63.90	1.11	Peak	159	63																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5429.53</td><td>46.99</td><td>54.00</td><td>-7.01</td><td>46.42</td><td>0.57</td><td>Average</td><td>222</td><td>106</td></tr></tbody></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5429.53	46.99	54.00	-7.01	46.42	0.57	Average	222	106
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																								
1	5429.53	46.99	54.00	-7.01	46.42	0.57	Average	222	106																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.93</td><td>59.76</td><td>74.00</td><td>-14.24</td><td>59.07</td><td>0.69</td><td>Peak</td><td>296</td><td>20</td></tr><tr><td>2</td><td>5466.80</td><td>58.91</td><td>68.20</td><td>-9.29</td><td>58.20</td><td>0.71</td><td>Peak</td><td>228</td><td>330</td></tr><tr><td>3</td><td>5730.92</td><td>66.71</td><td>68.20</td><td>-1.49</td><td>65.59</td><td>1.12</td><td>Peak</td><td>228</td><td>330</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.93	59.76	74.00	-14.24	59.07	0.69	Peak	296	20	2	5466.80	58.91	68.20	-9.29	58.20	0.71	Peak	228	330	3	5730.92	66.71	68.20	-1.49	65.59	1.12	Peak	228	330
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.93	59.76	74.00	-14.24	59.07	0.69	Peak	296	20																																		
2	5466.80	58.91	68.20	-9.29	58.20	0.71	Peak	228	330																																		
3	5730.92	66.71	68.20	-1.49	65.59	1.12	Peak	228	330																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):24 Humidity(%):61																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5434.85</td><td>47.11</td><td>54.00</td><td>-6.89</td><td>46.52</td><td>0.59</td><td>Average</td><td>296</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5434.85	47.11	54.00	-6.89	46.52	0.59	Average	296	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5434.85	47.11	54.00	-6.89	46.52	0.59	Average	296	20														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



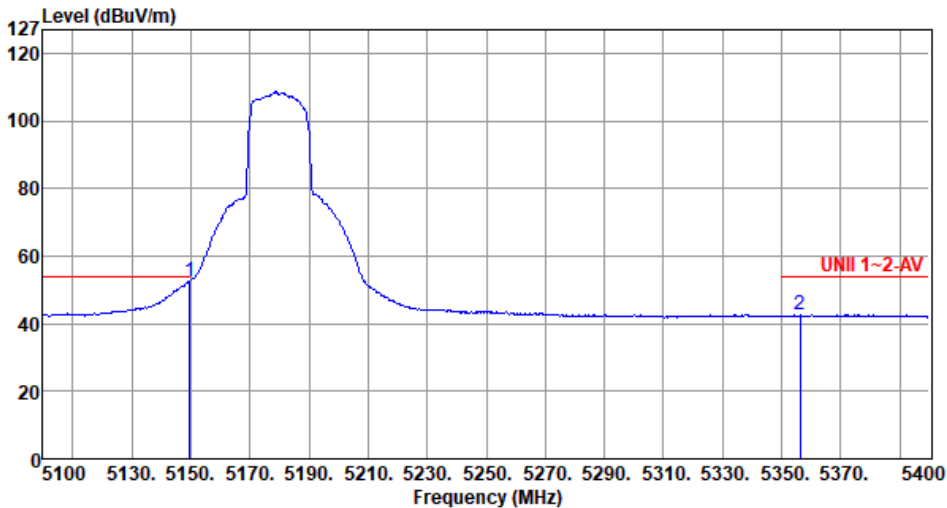
Beamforming mode

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>70.64</td><td>74.00</td><td>-3.36</td><td>69.54</td><td>1.10</td><td>Peak</td><td>217</td><td>255</td></tr><tr><td>2</td><td>5354.70</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>54.64</td><td>0.33</td><td>Peak</td><td>217</td><td>255</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	70.64	74.00	-3.36	69.54	1.10	Peak	217	255	2	5354.70	54.97	74.00	-19.03	54.64	0.33	Peak	217	255
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	70.64	74.00	-3.36	69.54	1.10	Peak	217	255																								
2	5354.70	54.97	74.00	-19.03	54.64	0.33	Peak	217	255																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

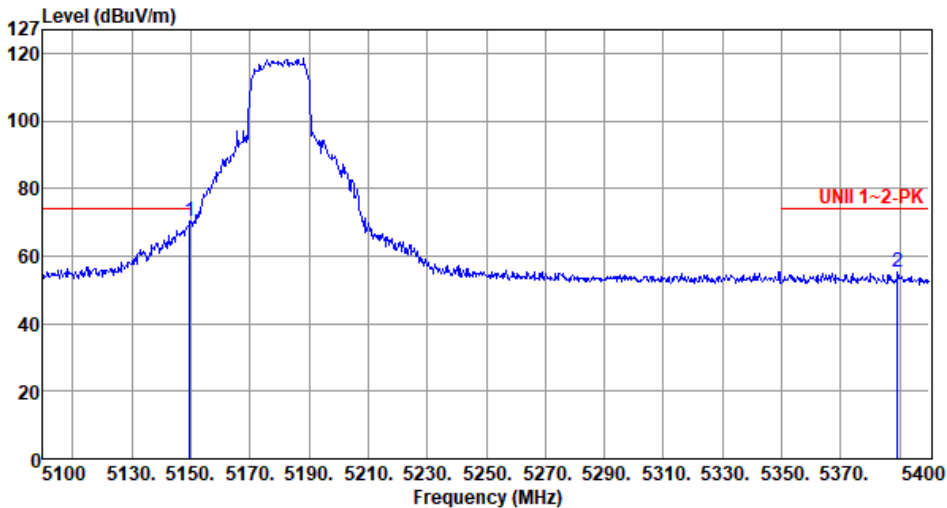
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.53</td><td>54.00</td><td>-1.47</td><td>51.43</td><td>1.10</td><td>Average</td><td>217</td><td>255</td></tr><tr><td>2</td><td>5356.20</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>42.31</td><td>0.33</td><td>Average</td><td>217</td><td>255</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.53	54.00	-1.47	51.43	1.10	Average	217	255	2	5356.20	42.64	54.00	-11.36	42.31	0.33	Average	217	255
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.53	54.00	-1.47	51.43	1.10	Average	217	255																								
2	5356.20	42.64	54.00	-11.36	42.31	0.33	Average	217	255																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>70.43</td><td>74.00</td><td>-3.57</td><td>69.33</td><td>1.10</td><td>Peak</td><td>182</td><td>278</td></tr><tr><td>2</td><td>5389.20</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>54.85</td><td>0.41</td><td>Peak</td><td>182</td><td>278</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	70.43	74.00	-3.57	69.33	1.10	Peak	182	278	2	5389.20	55.26	74.00	-18.74	54.85	0.41	Peak	182	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	70.43	74.00	-3.57	69.33	1.10	Peak	182	278																								
2	5389.20	55.26	74.00	-18.74	54.85	0.41	Peak	182	278																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

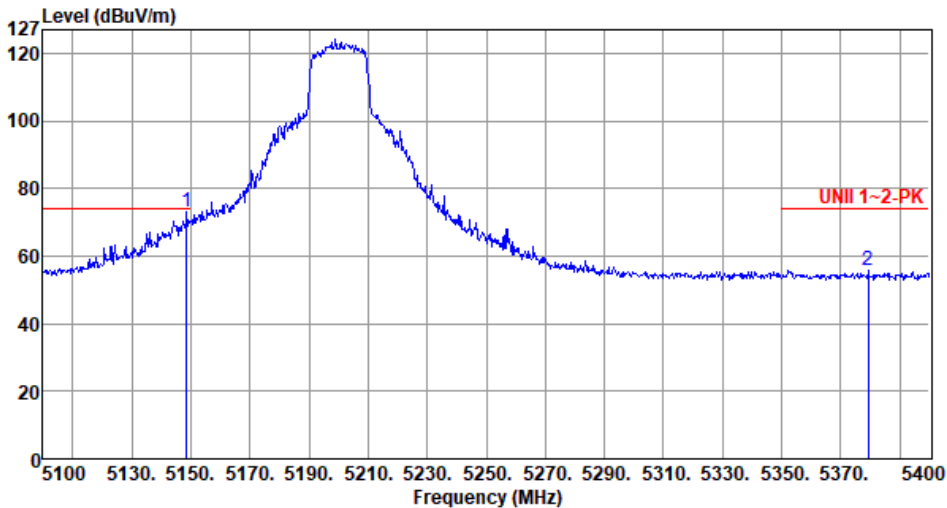
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.49</td><td>54.00</td><td>-1.51</td><td>51.39</td><td>1.10</td><td>Average</td><td>182</td><td>278</td></tr><tr><td>2</td><td>5389.80</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>42.16</td><td>0.41</td><td>Average</td><td>182</td><td>278</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.49	54.00	-1.51	51.39	1.10	Average	182	278	2	5389.80	42.57	54.00	-11.43	42.16	0.41	Average	182	278
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.49	54.00	-1.51	51.39	1.10	Average	182	278																								
2	5389.80	42.57	54.00	-11.43	42.16	0.41	Average	182	278																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.60</td><td>73.00</td><td>74.00</td><td>-1.00</td><td>71.90</td><td>1.10</td><td>Peak</td><td>167</td><td>276</td></tr><tr><td>2</td><td>5379.30</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>55.53</td><td>0.39</td><td>Peak</td><td>167</td><td>276</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.60	73.00	74.00	-1.00	71.90	1.10	Peak	167	276	2	5379.30	55.92	74.00	-18.08	55.53	0.39	Peak	167	276
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.60	73.00	74.00	-1.00	71.90	1.10	Peak	167	276																																												
2	5379.30	55.92	74.00	-18.08	55.53	0.39	Peak	167	276																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>52.55</td><td>54.00</td><td>-1.45</td><td>51.45</td><td>1.10</td><td>Average</td><td>167</td><td>276</td></tr><tr><td>2</td><td>5355.90</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>42.53</td><td>0.33</td><td>Average</td><td>167</td><td>276</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.55	54.00	-1.45	51.45	1.10	Average	167	276	2	5355.90	42.86	54.00	-11.14	42.53	0.33	Average	167	276
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.55	54.00	-1.45	51.45	1.10	Average	167	276																								
2	5355.90	42.86	54.00	-11.14	42.53	0.33	Average	167	276																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>71.48</td><td>74.00</td><td>-2.52</td><td>70.38</td><td>1.10</td><td>Peak</td><td>230</td><td>341</td></tr><tr><td>2</td><td>5391.30</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>55.48</td><td>0.40</td><td>Peak</td><td>230</td><td>341</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	71.48	74.00	-2.52	70.38	1.10	Peak	230	341	2	5391.30	55.88	74.00	-18.12	55.48	0.40	Peak	230	341
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	71.48	74.00	-2.52	70.38	1.10	Peak	230	341																								
2	5391.30	55.88	74.00	-18.12	55.48	0.40	Peak	230	341																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>51.37</td><td>54.00</td><td>-2.63</td><td>50.27</td><td>1.10</td><td>Average</td><td>230</td><td>341</td></tr><tr><td>2</td><td>5367.90</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>42.30</td><td>0.37</td><td>Average</td><td>230</td><td>341</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	51.37	54.00	-2.63	50.27	1.10	Average	230	341	2	5367.90	42.67	54.00	-11.33	42.30	0.37	Average	230	341
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	51.37	54.00	-2.63	50.27	1.10	Average	230	341																								
2	5367.90	42.67	54.00	-11.33	42.30	0.37	Average	230	341																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

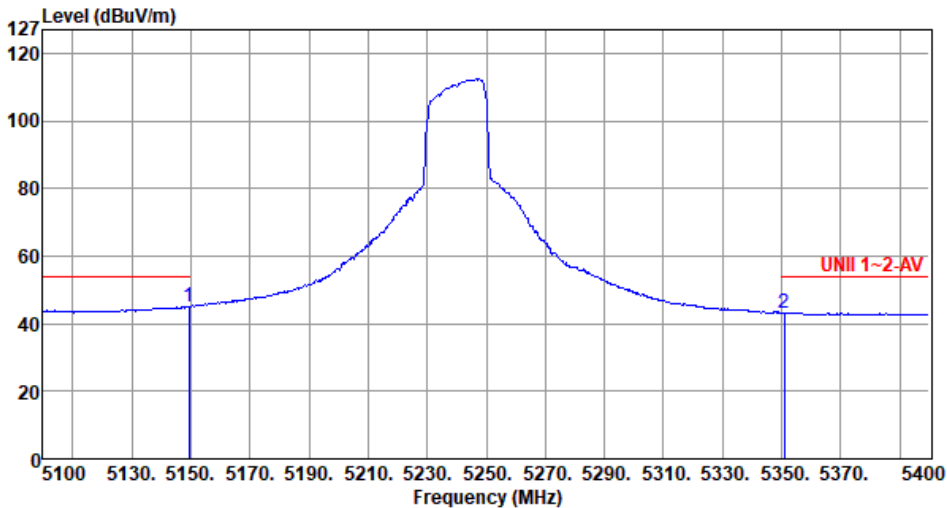
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) UNII 1-2-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBuV/m dBuV/m dB reading MHz dBuV/m dB dBuV dB/m 1 5149.20 57.95 74.00 -16.05 56.85 1.10 Peak 172 282 2 5399.10 56.29 74.00 -17.71 55.86 0.43 Peak 248 92			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>43.98</td><td>1.10</td><td>Average</td><td>172</td><td>282</td></tr><tr><td>2</td><td>5350.80</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>42.91</td><td>0.32</td><td>Average</td><td>248</td><td>92</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5149.50	45.08	54.00	-8.92	43.98	1.10	Average	172	282	2	5350.80	43.23	54.00	-10.77	42.91	0.32	Average	248	92
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5149.50	45.08	54.00	-8.92	43.98	1.10	Average	172	282																																												
2	5350.80	43.23	54.00	-10.77	42.91	0.32	Average	248	92																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.80</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>55.79</td><td>1.09</td><td>Peak</td><td>194</td><td>24</td></tr><tr><td>2</td><td>5367.60</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>55.10</td><td>0.37</td><td>Peak</td><td>142</td><td>43</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.80	56.88	74.00	-17.12	55.79	1.09	Peak	194	24	2	5367.60	55.47	74.00	-18.53	55.10	0.37	Peak	142	43
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.80	56.88	74.00	-17.12	55.79	1.09	Peak	194	24																								
2	5367.60	55.47	74.00	-18.53	55.10	0.37	Peak	142	43																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

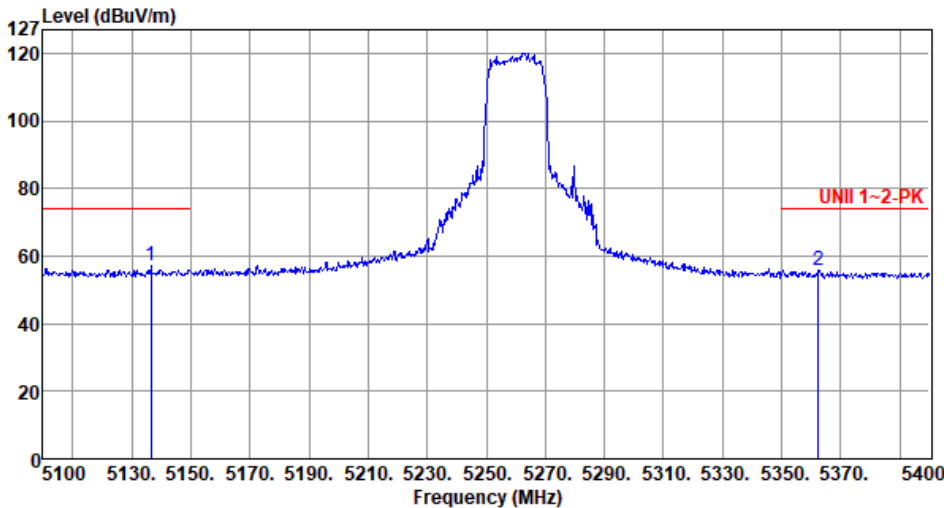
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>44.85</td><td>54.00</td><td>-9.15</td><td>43.75</td><td>1.10</td><td>Average</td><td>194</td><td>24</td></tr><tr><td>2</td><td>5353.50</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>42.49</td><td>0.33</td><td>Average</td><td>142</td><td>43</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	44.85	54.00	-9.15	43.75	1.10	Average	194	24	2	5353.50	42.82	54.00	-11.18	42.49	0.33	Average	142	43
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	44.85	54.00	-9.15	43.75	1.10	Average	194	24																								
2	5353.50	42.82	54.00	-11.18	42.49	0.33	Average	142	43																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

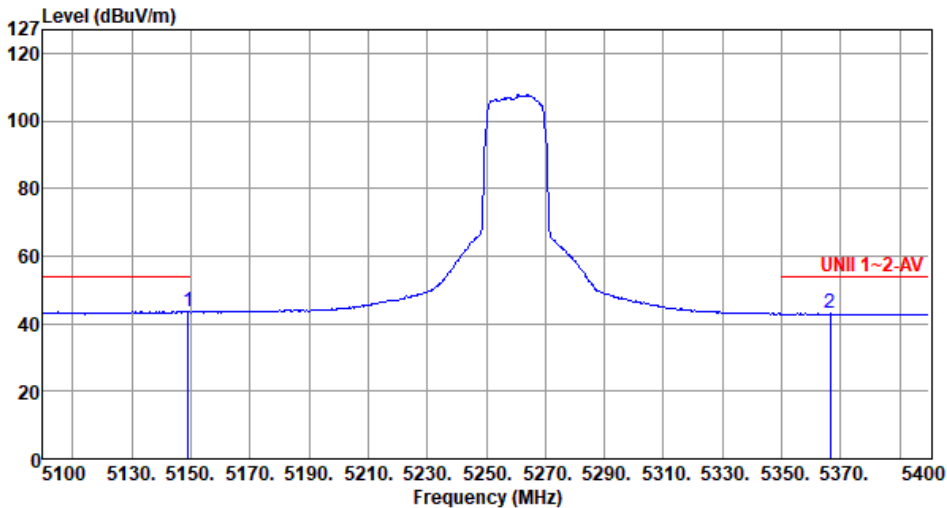
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5136.60</td><td>57.01</td><td>74.00</td><td>-16.99</td><td>55.95</td><td>1.06</td><td>Peak</td><td>165</td><td>307</td></tr><tr><td>2</td><td>5362.50</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>55.63</td><td>0.36</td><td>Peak</td><td>280</td><td>88</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5136.60	57.01	74.00	-16.99	55.95	1.06	Peak	165	307	2	5362.50	55.99	74.00	-18.01	55.63	0.36	Peak	280	88
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5136.60	57.01	74.00	-16.99	55.95	1.06	Peak	165	307																								
2	5362.50	55.99	74.00	-18.01	55.63	0.36	Peak	280	88																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																																																		
Polarization	Horizontal-Average																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.20</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>42.43</td><td>1.10</td><td>Average</td><td>165</td><td>307</td></tr><tr><td>2</td><td>5366.40</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>42.55</td><td>0.36</td><td>Average</td><td>280</td><td>88</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5149.20	43.53	54.00	-10.47	42.43	1.10	Average	165	307	2	5366.40	42.91	54.00	-11.09	42.55	0.36	Average	280	88
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5149.20	43.53	54.00	-10.47	42.43	1.10	Average	165	307																																												
2	5366.40	42.91	54.00	-11.09	42.55	0.36	Average	280	88																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

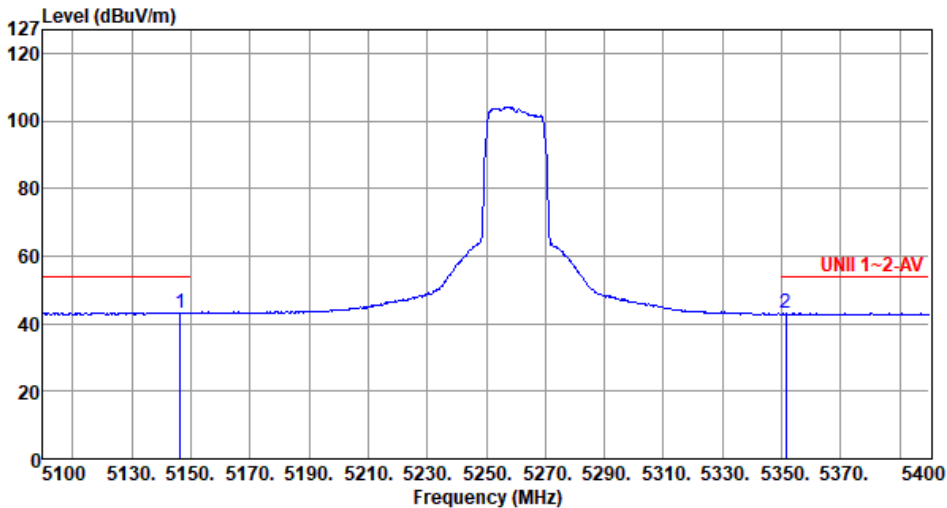
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5100.60</td><td>55.80</td><td>74.00</td><td>-18.20</td><td>54.81</td><td>0.99</td><td>Peak</td><td>150</td><td>322</td></tr><tr><td>2</td><td>5361.60</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>55.12</td><td>0.35</td><td>Peak</td><td>317</td><td>307</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5100.60	55.80	74.00	-18.20	54.81	0.99	Peak	150	322	2	5361.60	55.47	74.00	-18.53	55.12	0.35	Peak	317	307
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5100.60	55.80	74.00	-18.20	54.81	0.99	Peak	150	322																								
2	5361.60	55.47	74.00	-18.53	55.12	0.35	Peak	317	307																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.50</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>42.18</td><td>1.09</td><td>Average</td><td>150</td><td>322</td></tr><tr><td>2</td><td>5351.40</td><td>43.05</td><td>54.00</td><td>-10.95</td><td>42.73</td><td>0.32</td><td>Average</td><td>317</td><td>307</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	43.27	54.00	-10.73	42.18	1.09	Average	150	322	2	5351.40	43.05	54.00	-10.95	42.73	0.32	Average	317	307
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	43.27	54.00	-10.73	42.18	1.09	Average	150	322																								
2	5351.40	43.05	54.00	-10.95	42.73	0.32	Average	317	307																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Horizontal-Peak								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	5103.90	55.39	74.00	-18.61	54.39	1.00	Peak	309	99
2	5382.90	55.89	74.00	-18.11	55.49	0.40	Peak	309	99
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			



Band Edge measurement

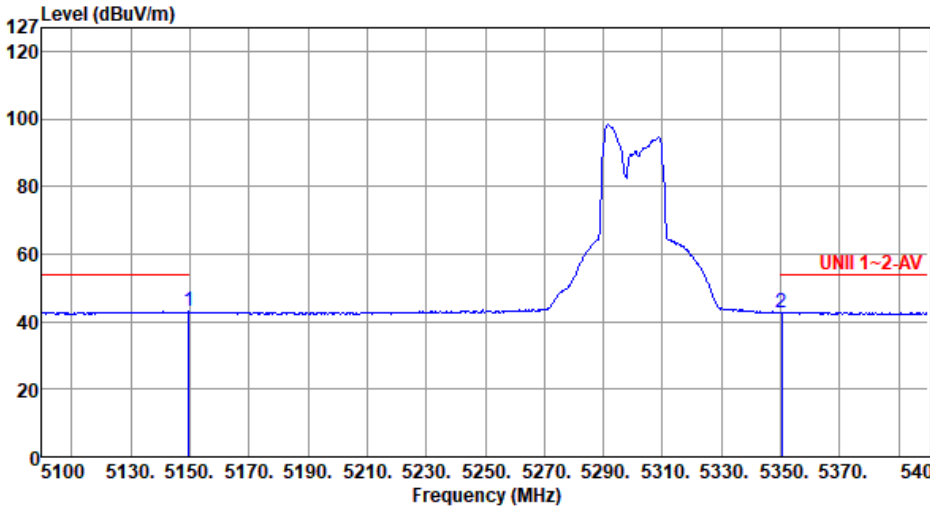
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5134.50</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>54.35</td><td>1.06</td><td>Peak</td><td>312</td><td>284</td></tr><tr><td>2</td><td>5360.40</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>54.94</td><td>0.34</td><td>Peak</td><td>312</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5134.50	55.41	74.00	-18.59	54.35	1.06	Peak	312	284	2	5360.40	55.28	74.00	-18.72	54.94	0.34	Peak	312	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5134.50	55.41	74.00	-18.59	54.35	1.06	Peak	312	284																								
2	5360.40	55.28	74.00	-18.72	54.94	0.34	Peak	312	284																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

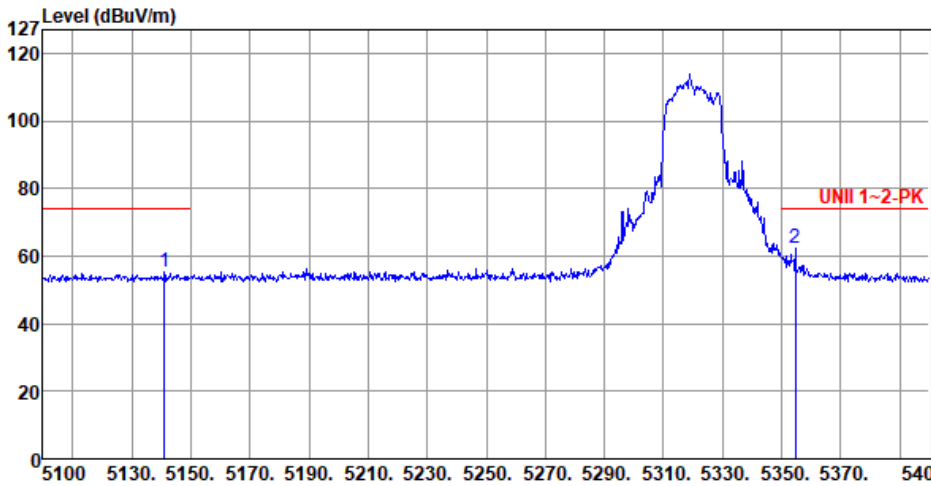
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Vertical-Average																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>41.80</td><td>1.10</td><td>Average</td><td>312</td><td>284</td></tr><tr><td>2</td><td>5350.20</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>42.53</td><td>0.32</td><td>Average</td><td>312</td><td>284</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5149.80	42.90	54.00	-11.10	41.80	1.10	Average	312	284	2	5350.20	42.85	54.00	-11.15	42.53	0.32	Average	312	284
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5149.80	42.90	54.00	-11.10	41.80	1.10	Average	312	284																																												
2	5350.20	42.85	54.00	-11.15	42.53	0.32	Average	312	284																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

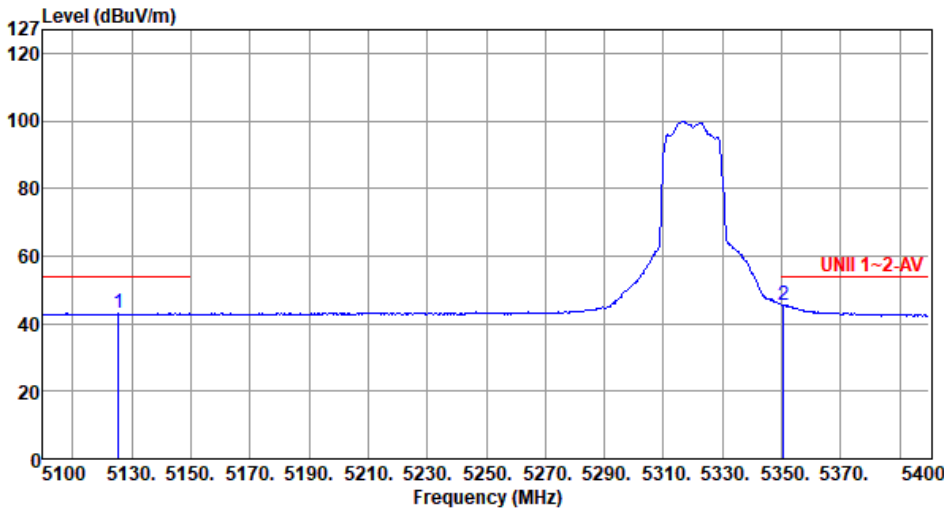
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5141.10</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>54.00</td><td>1.07</td><td>Peak</td><td>313</td><td>101</td></tr><tr><td>2</td><td>5354.70</td><td>62.28</td><td>74.00</td><td>-11.72</td><td>61.95</td><td>0.33</td><td>Peak</td><td>313</td><td>101</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5141.10	55.07	74.00	-18.93	54.00	1.07	Peak	313	101	2	5354.70	62.28	74.00	-11.72	61.95	0.33	Peak	313	101
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5141.10	55.07	74.00	-18.93	54.00	1.07	Peak	313	101																								
2	5354.70	62.28	74.00	-11.72	61.95	0.33	Peak	313	101																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320						
Polarization	Horizontal-Average								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5125.50	43.01	54.00	-10.99	41.97	1.04	Average	313	101
2	5350.50	45.64	54.00	-8.36	45.32	0.32	Average	313	101

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5120.40</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>54.11</td><td>1.03</td><td>Peak</td><td>180</td><td>66</td></tr><tr><td>2</td><td>5350.50</td><td>59.77</td><td>74.00</td><td>-14.23</td><td>59.45</td><td>0.32</td><td>Peak</td><td>180</td><td>66</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5120.40	55.14	74.00	-18.86	54.11	1.03	Peak	180	66	2	5350.50	59.77	74.00	-14.23	59.45	0.32	Peak	180	66
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5120.40	55.14	74.00	-18.86	54.11	1.03	Peak	180	66																								
2	5350.50	59.77	74.00	-14.23	59.45	0.32	Peak	180	66																								



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.99</td><td>59.86</td><td>74.00</td><td>-14.14</td><td>59.17</td><td>0.69</td><td>Peak</td><td>201</td><td>285</td></tr><tr><td>2</td><td>5469.29</td><td>61.31</td><td>68.20</td><td>-6.89</td><td>60.59</td><td>0.72</td><td>Peak</td><td>188</td><td>269</td></tr><tr><td>3</td><td>5741.93</td><td>56.71</td><td>68.20</td><td>-11.49</td><td>55.56</td><td>1.15</td><td>Peak</td><td>201</td><td>285</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	59.86	74.00	-14.14	59.17	0.69	Peak	201	285	2	5469.29	61.31	68.20	-6.89	60.59	0.72	Peak	188	269	3	5741.93	56.71	68.20	-11.49	55.56	1.15	Peak	201	285
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.99	59.86	74.00	-14.14	59.17	0.69	Peak	201	285																																		
2	5469.29	61.31	68.20	-6.89	60.59	0.72	Peak	188	269																																		
3	5741.93	56.71	68.20	-11.49	55.56	1.15	Peak	201	285																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

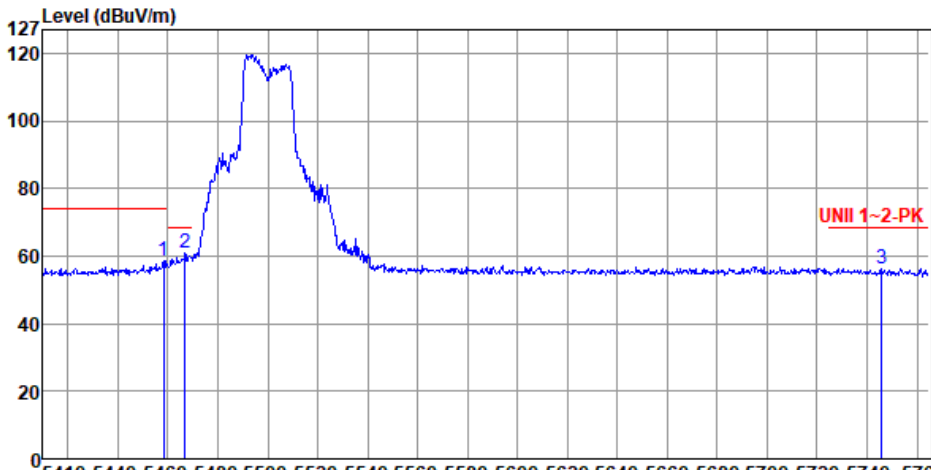
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>44.71</td><td>54.00</td><td>-9.29</td><td>44.02</td><td>0.69</td><td>Average</td><td>201</td><td>285</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	44.71	54.00	-9.29	44.02	0.69	Average	201	285
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	44.71	54.00	-9.29	44.02	0.69	Average	201	285														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.28</td><td>58.65</td><td>74.00</td><td>-15.35</td><td>57.96</td><td>0.69</td><td>Peak</td><td>220</td><td>321</td></tr><tr><td>2</td><td>5466.80</td><td>60.89</td><td>68.20</td><td>-7.31</td><td>60.18</td><td>0.71</td><td>Peak</td><td>240</td><td>303</td></tr><tr><td>3</td><td>5745.83</td><td>56.34</td><td>68.20</td><td>-11.86</td><td>55.18</td><td>1.16</td><td>Peak</td><td>220</td><td>321</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.28	58.65	74.00	-15.35	57.96	0.69	Peak	220	321	2	5466.80	60.89	68.20	-7.31	60.18	0.71	Peak	240	303	3	5745.83	56.34	68.20	-11.86	55.18	1.16	Peak	220	321
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.28	58.65	74.00	-15.35	57.96	0.69	Peak	220	321																																		
2	5466.80	60.89	68.20	-7.31	60.18	0.71	Peak	240	303																																		
3	5745.83	56.34	68.20	-11.86	55.18	1.16	Peak	220	321																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

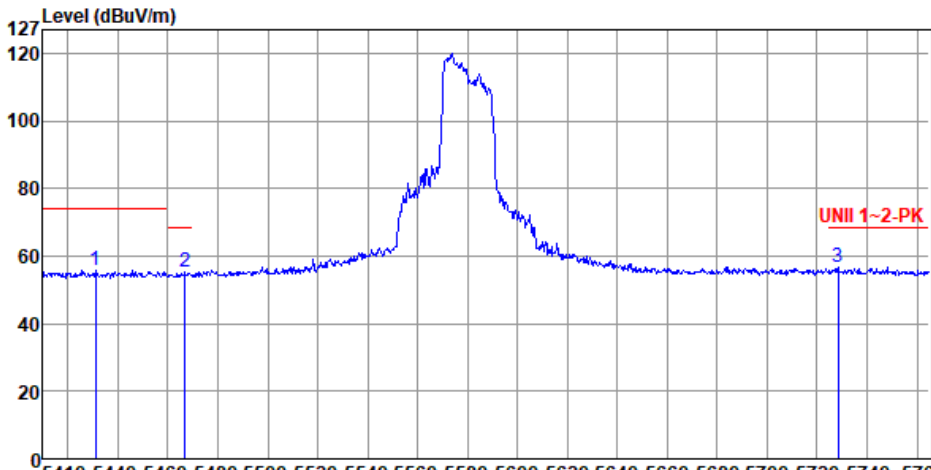
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																							
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.70</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>44.21</td><td>0.69</td><td>Average</td><td>220</td><td>321</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	44.90	54.00	-9.10	44.21	0.69	Average	220	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	44.90	54.00	-9.10	44.21	0.69	Average	220	321														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5430.95</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>55.16</td><td>0.57</td><td>Peak</td><td>208</td><td>89</td></tr><tr><td>2</td><td>5466.80</td><td>55.19</td><td>68.20</td><td>-13.01</td><td>54.48</td><td>0.71</td><td>Peak</td><td>151</td><td>86</td></tr><tr><td>3</td><td>5728.44</td><td>56.79</td><td>68.20</td><td>-11.41</td><td>55.67</td><td>1.12</td><td>Peak</td><td>208</td><td>89</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table	1	5430.95	55.73	74.00	-18.27	55.16	0.57	Peak	208	89	2	5466.80	55.19	68.20	-13.01	54.48	0.71	Peak	151	86	3	5728.44	56.79	68.20	-11.41	55.67	1.12	Peak	208	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
1	5430.95	55.73	74.00	-18.27	55.16	0.57	Peak	208	89																																												
2	5466.80	55.19	68.20	-13.01	54.48	0.71	Peak	151	86																																												
3	5728.44	56.79	68.20	-11.41	55.67	1.12	Peak	208	89																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

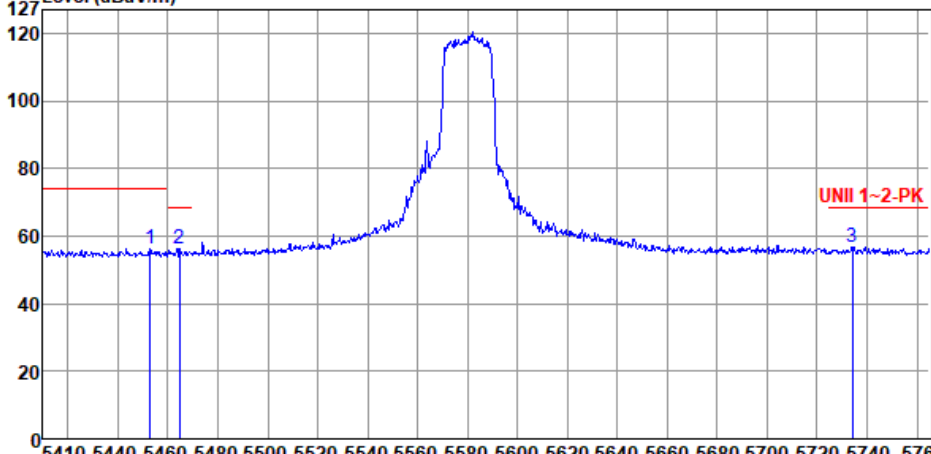
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580																			
Polarization	Horizontal-Average																					
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																						
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5410.71</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>42.61</td><td>0.47</td><td>Average</td><td>208</td><td>89</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).				Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5410.71	43.08	54.00	-10.92	42.61	0.47	Average	208	89
Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5410.71	43.08	54.00	-10.92	42.61	0.47	Average	208	89													



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5452.96</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>55.47</td><td>0.67</td><td>Peak</td><td>238</td><td>315</td></tr><tr><td>2</td><td>5464.67</td><td>56.22</td><td>68.20</td><td>-11.98</td><td>55.52</td><td>0.70</td><td>Peak</td><td>237</td><td>324</td></tr><tr><td>3</td><td>5734.12</td><td>56.87</td><td>68.20</td><td>-11.33</td><td>55.74</td><td>1.13</td><td>Peak</td><td>238</td><td>315</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.96	56.14	74.00	-17.86	55.47	0.67	Peak	238	315	2	5464.67	56.22	68.20	-11.98	55.52	0.70	Peak	237	324	3	5734.12	56.87	68.20	-11.33	55.74	1.13	Peak	238	315
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5452.96	56.14	74.00	-17.86	55.47	0.67	Peak	238	315																																		
2	5464.67	56.22	68.20	-11.98	55.52	0.70	Peak	237	324																																		
3	5734.12	56.87	68.20	-11.33	55.74	1.13	Peak	238	315																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

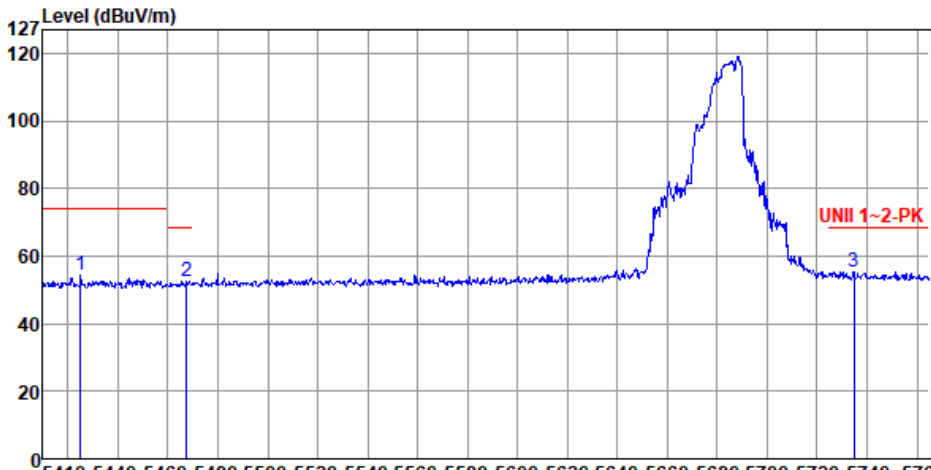
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5457.93	43.31	54.00	-10.69	42.62	0.69	Average	238	315
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td>1</td><td>5424.91</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>53.65</td><td>0.55</td><td>Peak</td><td>209</td><td>98</td></tr><tr><td>2</td><td>5467.51</td><td>52.52</td><td>68.20</td><td>-15.68</td><td>51.80</td><td>0.72</td><td>Peak</td><td>209</td><td>98</td></tr><tr><td>3</td><td>5734.83</td><td>55.48</td><td>68.20</td><td>-12.72</td><td>54.35</td><td>1.13</td><td>Peak</td><td>209</td><td>98</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table	1	5424.91	54.20	74.00	-19.80	53.65	0.55	Peak	209	98	2	5467.51	52.52	68.20	-15.68	51.80	0.72	Peak	209	98	3	5734.83	55.48	68.20	-12.72	54.35	1.13	Peak	209	98
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
1	5424.91	54.20	74.00	-19.80	53.65	0.55	Peak	209	98																																												
2	5467.51	52.52	68.20	-15.68	51.80	0.72	Peak	209	98																																												
3	5734.83	55.48	68.20	-12.72	54.35	1.13	Peak	209	98																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5447.63</td><td>40.50</td><td>54.00</td><td>-13.50</td><td>39.85</td><td>0.65</td><td>Average</td><td>209</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5447.63	40.50	54.00	-13.50	39.85	0.65	Average	209	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5447.63	40.50	54.00	-13.50	39.85	0.65	Average	209	98														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5438.40</td><td>53.07</td><td>74.00</td><td>-20.93</td><td>52.47</td><td>0.60</td><td>Peak</td><td>234</td><td>64</td></tr><tr><td>2</td><td>5463.25</td><td>53.04</td><td>68.20</td><td>-15.16</td><td>52.34</td><td>0.70</td><td>Peak</td><td>234</td><td>64</td></tr><tr><td>3</td><td>5742.99</td><td>55.51</td><td>68.20</td><td>-12.69</td><td>54.35</td><td>1.16</td><td>Peak</td><td>234</td><td>64</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.40	53.07	74.00	-20.93	52.47	0.60	Peak	234	64	2	5463.25	53.04	68.20	-15.16	52.34	0.70	Peak	234	64	3	5742.99	55.51	68.20	-12.69	54.35	1.16	Peak	234	64
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5438.40	53.07	74.00	-20.93	52.47	0.60	Peak	234	64																																		
2	5463.25	53.04	68.20	-15.16	52.34	0.70	Peak	234	64																																		
3	5742.99	55.51	68.20	-12.69	54.35	1.16	Peak	234	64																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5680
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5417.81</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>54.79</td><td>0.51</td><td>Peak</td><td>179</td><td>83</td></tr><tr><td>2</td><td>5467.51</td><td>54.76</td><td>68.20</td><td>-13.44</td><td>54.04</td><td>0.72</td><td>Peak</td><td>179</td><td>83</td></tr><tr><td>3</td><td>5725.60</td><td>67.15</td><td>68.20</td><td>-1.05</td><td>66.04</td><td>1.11</td><td>Peak</td><td>179</td><td>83</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.81	55.30	74.00	-18.70	54.79	0.51	Peak	179	83	2	5467.51	54.76	68.20	-13.44	54.04	0.72	Peak	179	83	3	5725.60	67.15	68.20	-1.05	66.04	1.11	Peak	179	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.81	55.30	74.00	-18.70	54.79	0.51	Peak	179	83																																		
2	5467.51	54.76	68.20	-13.44	54.04	0.72	Peak	179	83																																		
3	5725.60	67.15	68.20	-1.05	66.04	1.11	Peak	179	83																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

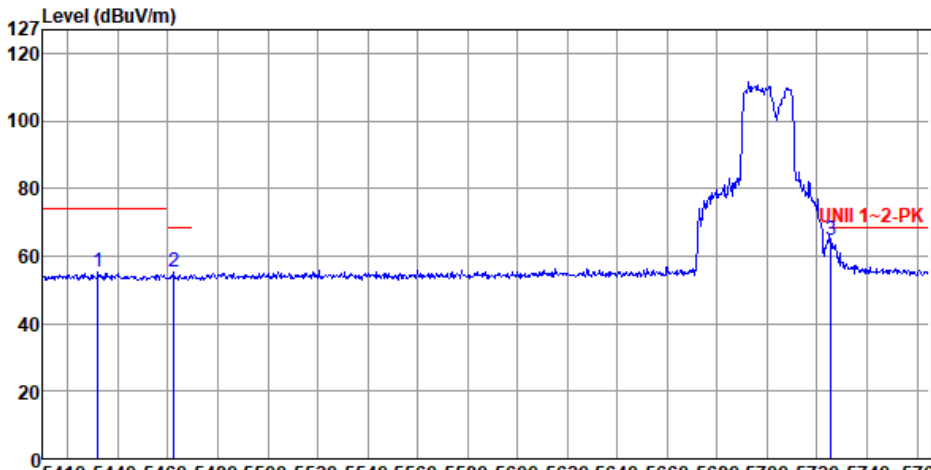
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5432.01</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>54.71</td><td>0.58</td><td>Peak</td><td>310</td><td>30</td></tr><tr><td>2</td><td>5462.54</td><td>55.11</td><td>68.20</td><td>-13.09</td><td>54.41</td><td>0.70</td><td>Peak</td><td>310</td><td>30</td></tr><tr><td>3</td><td>5725.60</td><td>64.86</td><td>68.20</td><td>-3.34</td><td>63.75</td><td>1.11</td><td>Peak</td><td>310</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5432.01	55.29	74.00	-18.71	54.71	0.58	Peak	310	30	2	5462.54	55.11	68.20	-13.09	54.41	0.70	Peak	310	30	3	5725.60	64.86	68.20	-3.34	63.75	1.11	Peak	310	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5432.01	55.29	74.00	-18.71	54.71	0.58	Peak	310	30																																		
2	5462.54	55.11	68.20	-13.09	54.41	0.70	Peak	310	30																																		
3	5725.60	64.86	68.20	-3.34	63.75	1.11	Peak	310	30																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700																				
Polarization	Vertical-Average																						
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5455.44</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>41.50</td><td>0.67</td><td>Average</td><td>310</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.44	42.17	54.00	-11.83	41.50	0.67	Average	310	30
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5455.44	42.17	54.00	-11.83	41.50	0.67	Average	310	30														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Peak		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) <			



Band Edge measurement

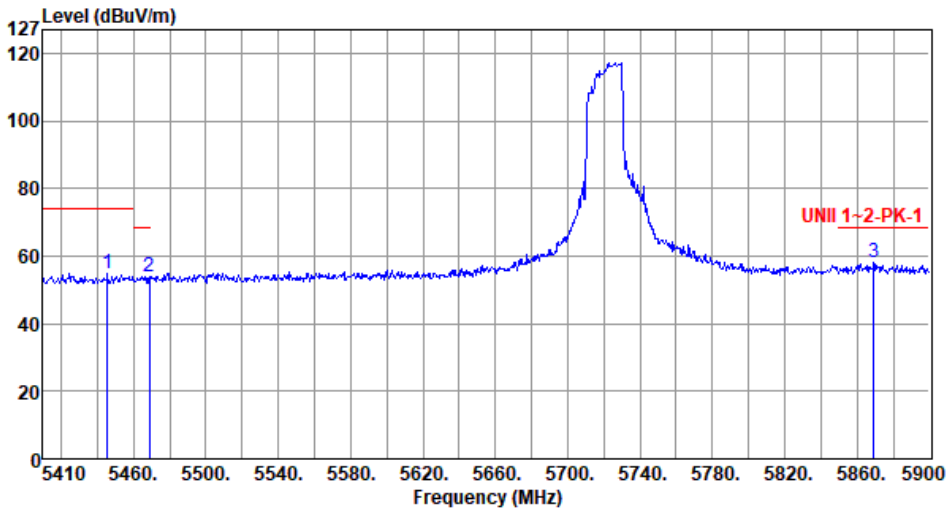
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.77</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>54.15</td><td>0.64</td><td>Peak</td><td>237</td><td>311</td></tr><tr><td>2</td><td>5468.80</td><td>54.04</td><td>68.20</td><td>-14.16</td><td>53.32</td><td>0.72</td><td>Peak</td><td>237</td><td>311</td></tr><tr><td>3</td><td>5869.13</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>56.60</td><td>1.51</td><td>Peak</td><td>237</td><td>311</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.77	54.79	74.00	-19.21	54.15	0.64	Peak	237	311	2	5468.80	54.04	68.20	-14.16	53.32	0.72	Peak	237	311	3	5869.13	58.11	68.20	-10.09	56.60	1.51	Peak	237	311
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.77	54.79	74.00	-19.21	54.15	0.64	Peak	237	311																																		
2	5468.80	54.04	68.20	-14.16	53.32	0.72	Peak	237	311																																		
3	5869.13	58.11	68.20	-10.09	56.60	1.51	Peak	237	311																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720						
Polarization	Vertical-Average								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5450.67	42.57	54.00	-11.43	41.91	0.66	Average	237	311
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.88</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>55.45</td><td>0.91</td><td>Peak</td><td>177</td><td>259</td></tr><tr><td>2</td><td>5949.13</td><td>56.73</td><td>68.20</td><td>-11.47</td><td>55.06</td><td>1.67</td><td>Peak</td><td>177</td><td>259</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.88	56.36	68.20	-11.84	55.45	0.91	Peak	177	259	2	5949.13	56.73	68.20	-11.47	55.06	1.67	Peak	177	259
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.88	56.36	68.20	-11.84	55.45	0.91	Peak	177	259																								
2	5949.13	56.73	68.20	-11.47	55.06	1.67	Peak	177	259																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5646.50</td><td>56.70</td><td>68.20</td><td>-11.50</td><td>55.79</td><td>0.91</td><td>Peak</td><td>204</td><td>309</td></tr><tr><td>2</td><td>5930.38</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>56.06</td><td>1.66</td><td>Peak</td><td>204</td><td>309</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.50	56.70	68.20	-11.50	55.79	0.91	Peak	204	309	2	5930.38	57.72	68.20	-10.48	56.06	1.66	Peak	204	309
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.50	56.70	68.20	-11.50	55.79	0.91	Peak	204	309																								
2	5930.38	57.72	68.20	-10.48	56.06	1.66	Peak	204	309																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5628.13</td><td>56.59</td><td>68.20</td><td>-11.61</td><td>55.72</td><td>0.87</td><td>Peak</td><td>151</td><td>256</td></tr><tr><td>2</td><td>5956.25</td><td>57.66</td><td>68.20</td><td>-10.54</td><td>55.98</td><td>1.68</td><td>Peak</td><td>143</td><td>240</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5628.13	56.59	68.20	-11.61	55.72	0.87	Peak	151	256	2	5956.25	57.66	68.20	-10.54	55.98	1.68	Peak	143	240
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5628.13	56.59	68.20	-11.61	55.72	0.87	Peak	151	256																								
2	5956.25	57.66	68.20	-10.54	55.98	1.68	Peak	143	240																								



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5785						
Polarization	Vertical-Peak								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
Level (dBuV/m) UNII 3-PK Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5610.88	57.41	68.20	-10.79	56.58	0.83	Peak	214	324
2	5934.50	58.41	68.20	-9.79	56.75	1.66	Peak	238	300

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																																																		
Polarization	Horizontal-Peak																																																				
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5645.00</td><td>56.50</td><td>68.20</td><td>-11.70</td><td>55.59</td><td>0.91</td><td>Peak</td><td>115</td><td>284</td></tr><tr><td>2</td><td>5956.25</td><td>57.87</td><td>68.20</td><td>-10.33</td><td>56.19</td><td>1.68</td><td>Peak</td><td>115</td><td>284</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5645.00	56.50	68.20	-11.70	55.59	0.91	Peak	115	284	2	5956.25	57.87	68.20	-10.33	56.19	1.68	Peak	115	284
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5645.00	56.50	68.20	-11.70	55.59	0.91	Peak	115	284																																												
2	5956.25	57.87	68.20	-10.33	56.19	1.68	Peak	115	284																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

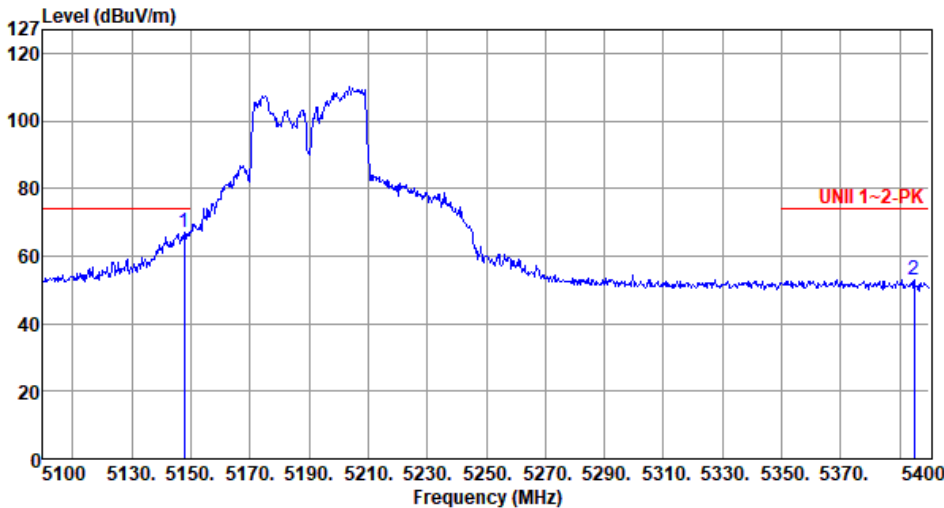
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5612.38</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>55.75</td><td>0.83</td><td>Peak</td><td>250</td><td>317</td></tr><tr><td>2</td><td>5969.00</td><td>57.73</td><td>68.20</td><td>-10.47</td><td>56.02</td><td>1.71</td><td>Peak</td><td>250</td><td>317</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5612.38	56.58	68.20	-11.62	55.75	0.83	Peak	250	317	2	5969.00	57.73	68.20	-10.47	56.02	1.71	Peak	250	317
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5612.38	56.58	68.20	-11.62	55.75	0.83	Peak	250	317																								
2	5969.00	57.73	68.20	-10.47	56.02	1.71	Peak	250	317																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

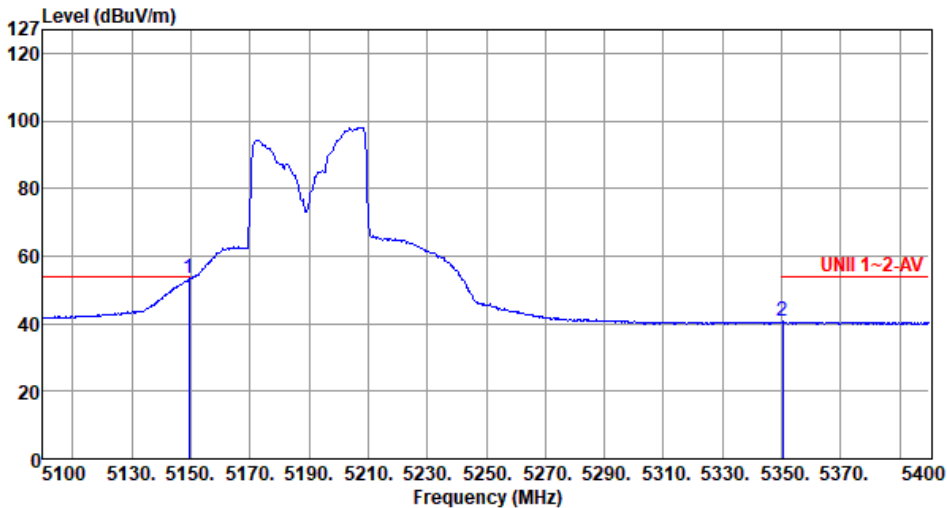
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.70</td><td>67.01</td><td>74.00</td><td>-6.99</td><td>65.91</td><td>1.10</td><td>Peak</td><td>108</td><td>284</td></tr><tr><td>2</td><td>5394.90</td><td>52.85</td><td>74.00</td><td>-21.15</td><td>52.43</td><td>0.42</td><td>Peak</td><td>108</td><td>284</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	67.01	74.00	-6.99	65.91	1.10	Peak	108	284	2	5394.90	52.85	74.00	-21.15	52.43	0.42	Peak	108	284
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	67.01	74.00	-6.99	65.91	1.10	Peak	108	284																								
2	5394.90	52.85	74.00	-21.15	52.43	0.42	Peak	108	284																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

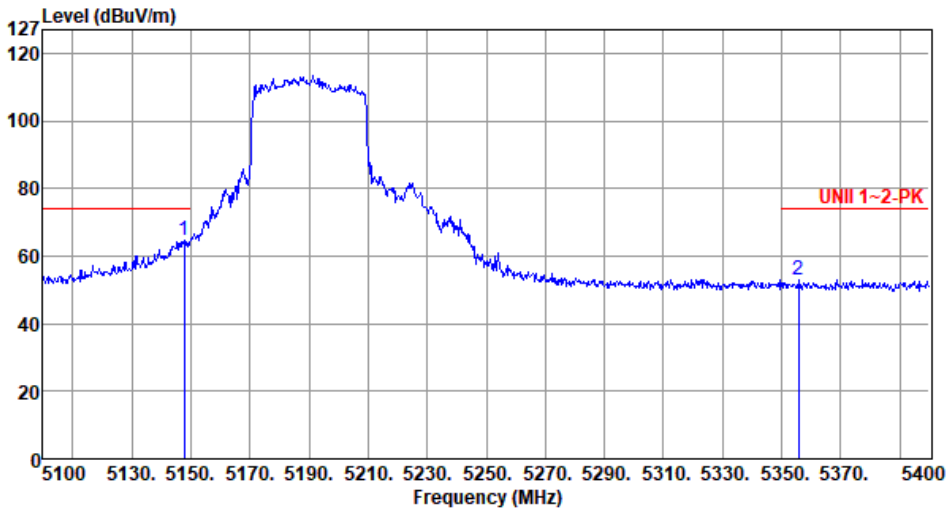
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>53.33</td><td>54.00</td><td>-0.67</td><td>52.23</td><td>1.10</td><td>Average</td><td>108</td><td>284</td></tr><tr><td>2</td><td>5350.20</td><td>40.56</td><td>54.00</td><td>-13.44</td><td>40.24</td><td>0.32</td><td>Average</td><td>108</td><td>284</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	53.33	54.00	-0.67	52.23	1.10	Average	108	284	2	5350.20	40.56	54.00	-13.44	40.24	0.32	Average	108	284
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	53.33	54.00	-0.67	52.23	1.10	Average	108	284																								
2	5350.20	40.56	54.00	-13.44	40.24	0.32	Average	108	284																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

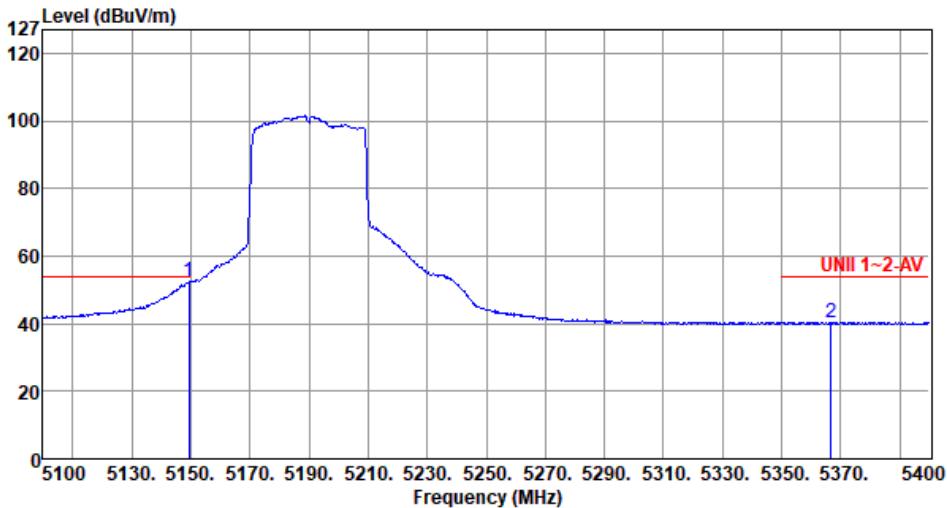
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.70</td><td>64.49</td><td>74.00</td><td>-9.51</td><td>63.39</td><td>1.10</td><td>Peak</td><td>179</td><td>328</td></tr><tr><td>2</td><td>5355.60</td><td>53.17</td><td>74.00</td><td>-20.83</td><td>52.84</td><td>0.33</td><td>Peak</td><td>179</td><td>328</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	64.49	74.00	-9.51	63.39	1.10	Peak	179	328	2	5355.60	53.17	74.00	-20.83	52.84	0.33	Peak	179	328
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	64.49	74.00	-9.51	63.39	1.10	Peak	179	328																								
2	5355.60	53.17	74.00	-20.83	52.84	0.33	Peak	179	328																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

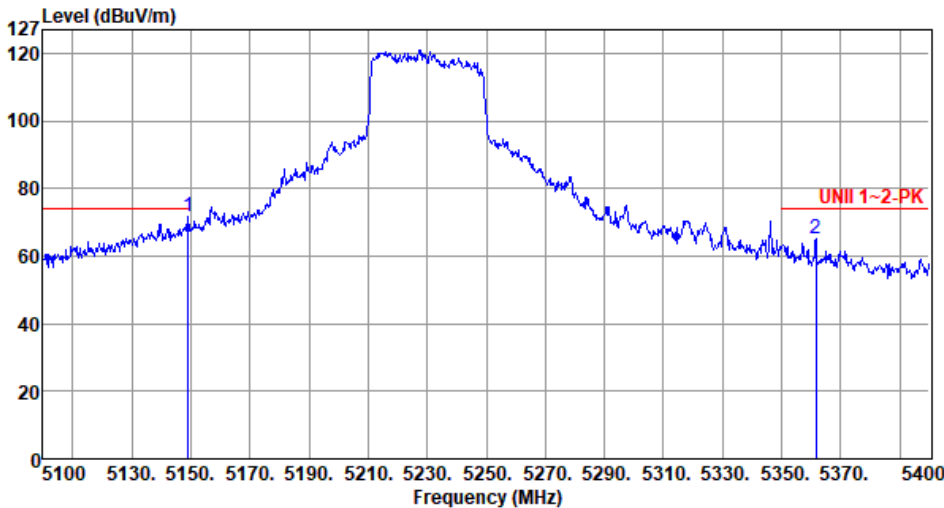
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>52.54</td><td>54.00</td><td>-1.46</td><td>51.44</td><td>1.10</td><td>Average</td><td>179</td><td>328</td></tr><tr><td>2</td><td>5366.70</td><td>40.44</td><td>54.00</td><td>-13.56</td><td>40.08</td><td>0.36</td><td>Average</td><td>179</td><td>328</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	52.54	54.00	-1.46	51.44	1.10	Average	179	328	2	5366.70	40.44	54.00	-13.56	40.08	0.36	Average	179	328
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	52.54	54.00	-1.46	51.44	1.10	Average	179	328																								
2	5366.70	40.44	54.00	-13.56	40.08	0.36	Average	179	328																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

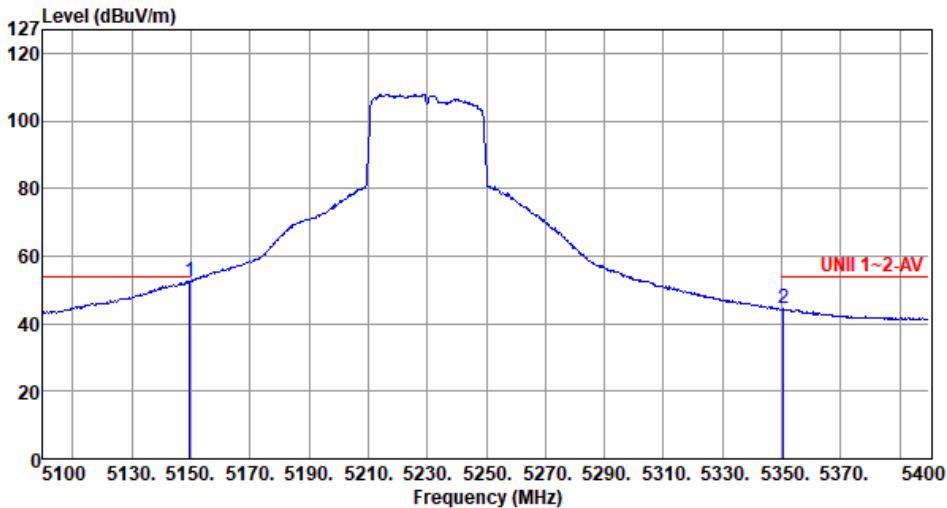
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>71.62</td><td>74.00</td><td>-2.38</td><td>70.52</td><td>1.10</td><td>Peak</td><td>310</td><td>187</td></tr><tr><td>2</td><td>5361.60</td><td>65.21</td><td>74.00</td><td>-8.79</td><td>64.86</td><td>0.35</td><td>Peak</td><td>240</td><td>185</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	71.62	74.00	-2.38	70.52	1.10	Peak	310	187	2	5361.60	65.21	74.00	-8.79	64.86	0.35	Peak	240	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	71.62	74.00	-2.38	70.52	1.10	Peak	310	187																								
2	5361.60	65.21	74.00	-8.79	64.86	0.35	Peak	240	185																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.56</td><td>54.00</td><td>-1.44</td><td>51.46</td><td>1.10</td><td>Average</td><td>310</td><td>187</td></tr><tr><td>2</td><td>5350.50</td><td>44.40</td><td>54.00</td><td>-9.60</td><td>44.08</td><td>0.32</td><td>Average</td><td>240</td><td>185</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.56	54.00	-1.44	51.46	1.10	Average	310	187	2	5350.50	44.40	54.00	-9.60	44.08	0.32	Average	240	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.56	54.00	-1.44	51.46	1.10	Average	310	187																								
2	5350.50	44.40	54.00	-9.60	44.08	0.32	Average	240	185																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

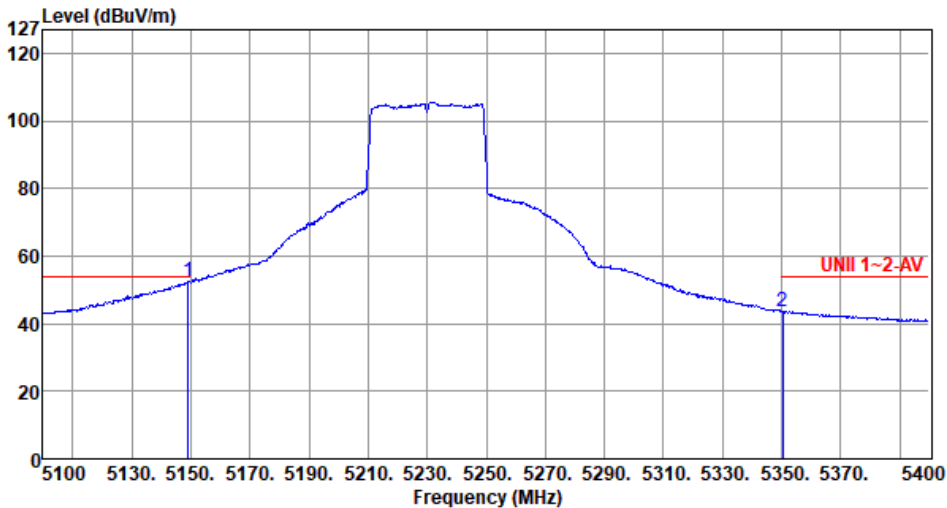
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>69.37</td><td>74.00</td><td>-4.63</td><td>68.27</td><td>1.10</td><td>Peak</td><td>140</td><td>268</td></tr><tr><td>2</td><td>5358.00</td><td>63.09</td><td>74.00</td><td>-10.91</td><td>62.75</td><td>0.34</td><td>Peak</td><td>151</td><td>74</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	69.37	74.00	-4.63	68.27	1.10	Peak	140	268	2	5358.00	63.09	74.00	-10.91	62.75	0.34	Peak	151	74
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	69.37	74.00	-4.63	68.27	1.10	Peak	140	268																								
2	5358.00	63.09	74.00	-10.91	62.75	0.34	Peak	151	74																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

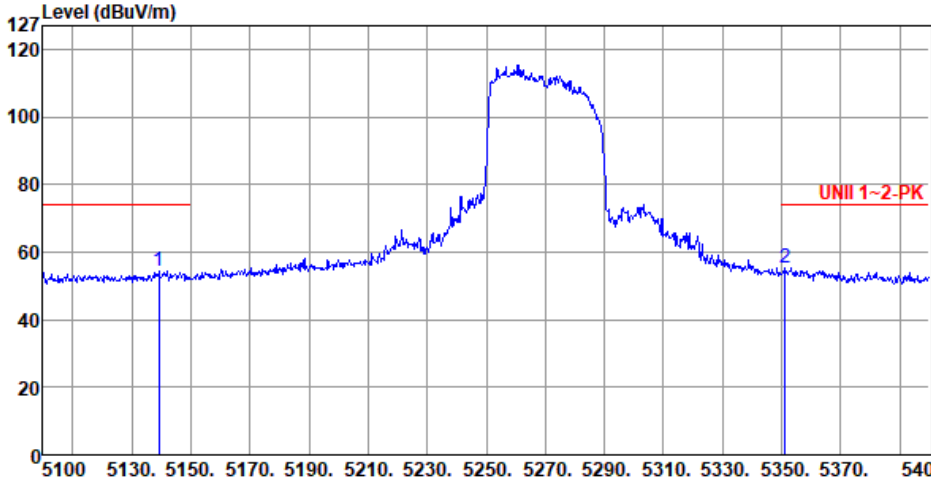
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>52.69</td><td>54.00</td><td>-1.31</td><td>51.59</td><td>1.10</td><td>Average</td><td>140</td><td>268</td></tr><tr><td>2</td><td>5350.20</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>43.37</td><td>0.32</td><td>Average</td><td>151</td><td>74</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.69	54.00	-1.31	51.59	1.10	Average	140	268	2	5350.20	43.69	54.00	-10.31	43.37	0.32	Average	151	74
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.69	54.00	-1.31	51.59	1.10	Average	140	268																								
2	5350.20	43.69	54.00	-10.31	43.37	0.32	Average	151	74																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5139.30</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.20</td><td>1.07</td><td>Peak</td><td>179</td><td>291</td></tr><tr><td>2</td><td>5351.10</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>55.07</td><td>0.32</td><td>Peak</td><td>179</td><td>291</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5139.30	54.27	74.00	-19.73	53.20	1.07	Peak	179	291	2	5351.10	55.39	74.00	-18.61	55.07	0.32	Peak	179	291
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5139.30	54.27	74.00	-19.73	53.20	1.07	Peak	179	291																								
2	5351.10	55.39	74.00	-18.61	55.07	0.32	Peak	179	291																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67			
Level (dBuV/m)			



Band Edge measurement

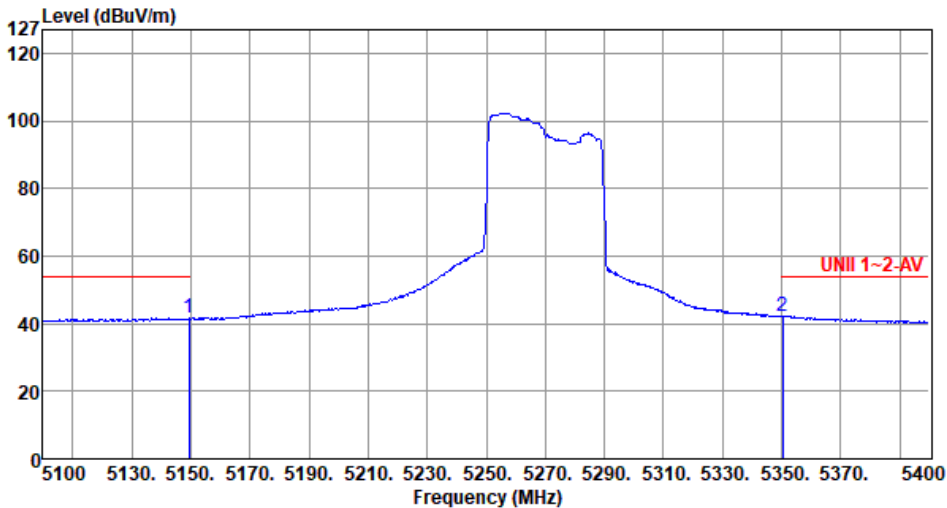
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5124.00</td><td>53.71</td><td>74.00</td><td>-20.29</td><td>52.67</td><td>1.04</td><td>Peak</td><td>171</td><td>38</td></tr><tr><td>2</td><td>5357.70</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>54.52</td><td>0.34</td><td>Peak</td><td>171</td><td>38</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5124.00	53.71	74.00	-20.29	52.67	1.04	Peak	171	38	2	5357.70	54.86	74.00	-19.14	54.52	0.34	Peak	171	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5124.00	53.71	74.00	-20.29	52.67	1.04	Peak	171	38																								
2	5357.70	54.86	74.00	-19.14	54.52	0.34	Peak	171	38																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

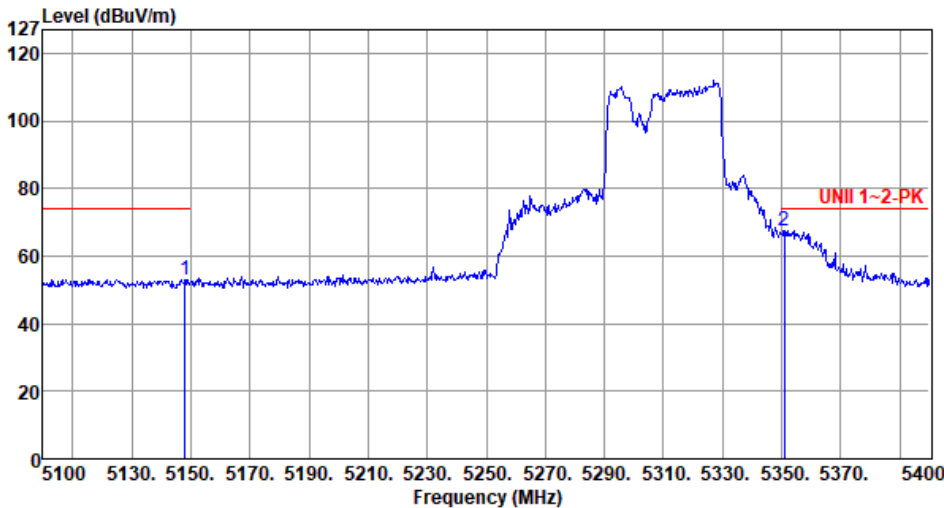
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>40.54</td><td>1.10</td><td>Average</td><td>171</td><td>38</td></tr><tr><td>2</td><td>5350.20</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>41.85</td><td>0.32</td><td>Average</td><td>171</td><td>38</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	41.64	54.00	-12.36	40.54	1.10	Average	171	38	2	5350.20	42.17	54.00	-11.83	41.85	0.32	Average	171	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	41.64	54.00	-12.36	40.54	1.10	Average	171	38																								
2	5350.20	42.17	54.00	-11.83	41.85	0.32	Average	171	38																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.00</td><td>53.08</td><td>74.00</td><td>-20.92</td><td>51.98</td><td>1.10</td><td>Peak</td><td>201</td><td>104</td></tr><tr><td>2</td><td>5350.80</td><td>67.60</td><td>74.00</td><td>-6.40</td><td>67.28</td><td>0.32</td><td>Peak</td><td>201</td><td>104</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.00	53.08	74.00	-20.92	51.98	1.10	Peak	201	104	2	5350.80	67.60	74.00	-6.40	67.28	0.32	Peak	201	104
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.00	53.08	74.00	-20.92	51.98	1.10	Peak	201	104																																												
2	5350.80	67.60	74.00	-6.40	67.28	0.32	Peak	201	104																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal-Average		
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67			
Level (dBUV/m) </			



Band Edge measurement

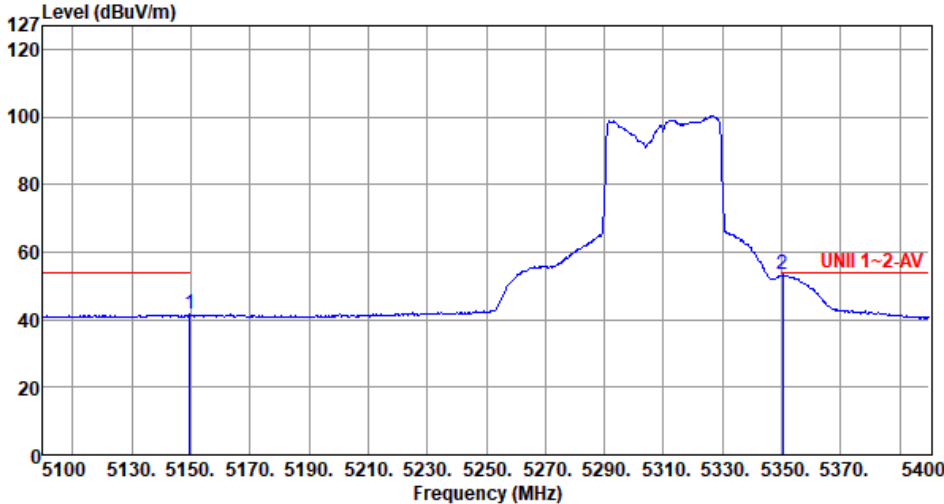
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical-Peak		
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67			
Level (dBuV/m) <			



Band Edge measurement

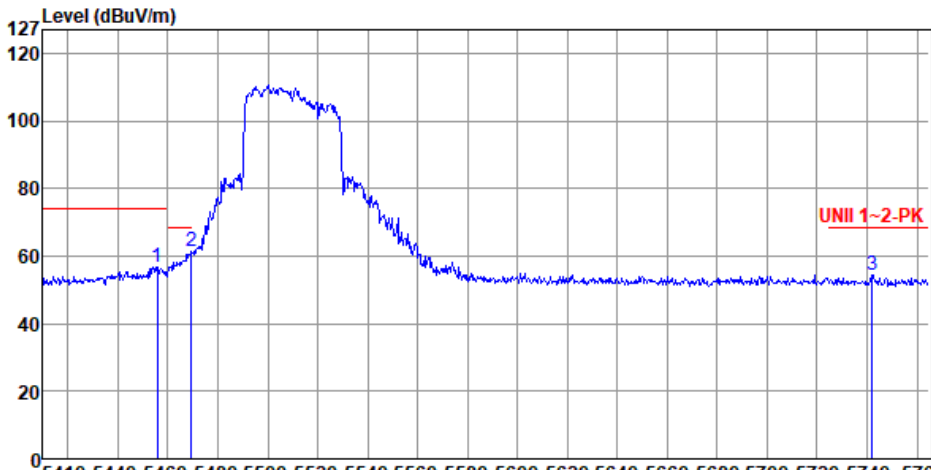
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>41.49</td><td>54.00</td><td>-12.51</td><td>40.39</td><td>1.10</td><td>Average</td><td>189</td><td>44</td></tr><tr><td>2</td><td>5350.20</td><td>53.37</td><td>54.00</td><td>-0.63</td><td>53.05</td><td>0.32</td><td>Average</td><td>189</td><td>44</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	41.49	54.00	-12.51	40.39	1.10	Average	189	44	2	5350.20	53.37	54.00	-0.63	53.05	0.32	Average	189	44
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	41.49	54.00	-12.51	40.39	1.10	Average	189	44																								
2	5350.20	53.37	54.00	-0.63	53.05	0.32	Average	189	44																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

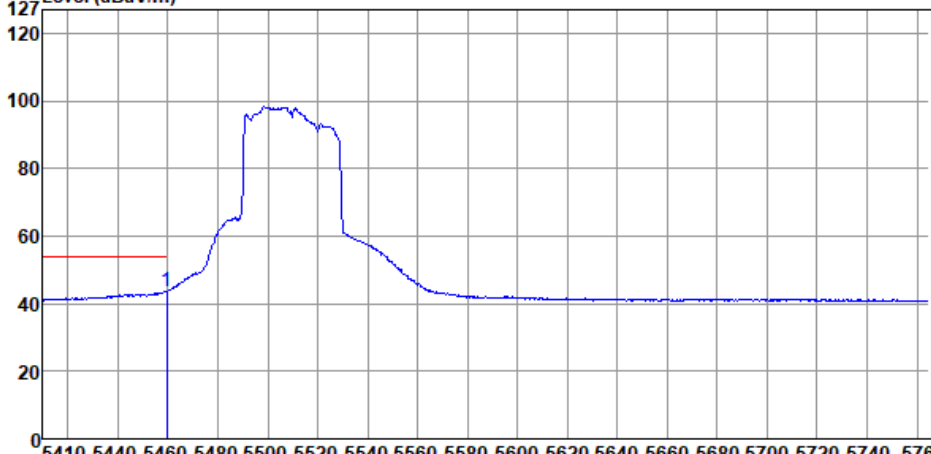
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5455.80</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>56.06</td><td>0.67</td><td>Peak</td><td>155</td><td>285</td></tr><tr><td>2</td><td>5469.29</td><td>61.42</td><td>68.20</td><td>-6.78</td><td>60.70</td><td>0.72</td><td>Peak</td><td>142</td><td>287</td></tr><tr><td>3</td><td>5741.93</td><td>54.28</td><td>68.20</td><td>-13.92</td><td>53.13</td><td>1.15</td><td>Peak</td><td>155</td><td>285</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.80	56.73	74.00	-17.27	56.06	0.67	Peak	155	285	2	5469.29	61.42	68.20	-6.78	60.70	0.72	Peak	142	287	3	5741.93	54.28	68.20	-13.92	53.13	1.15	Peak	155	285
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5455.80	56.73	74.00	-17.27	56.06	0.67	Peak	155	285																																		
2	5469.29	61.42	68.20	-6.78	60.70	0.72	Peak	142	287																																		
3	5741.93	54.28	68.20	-13.92	53.13	1.15	Peak	155	285																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.70</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>42.98</td><td>0.69</td><td>Average</td><td>155</td><td>285</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5459.70	43.67	54.00	-10.33	42.98	0.69	Average	155	285
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5459.70	43.67	54.00	-10.33	42.98	0.69	Average	155	285																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

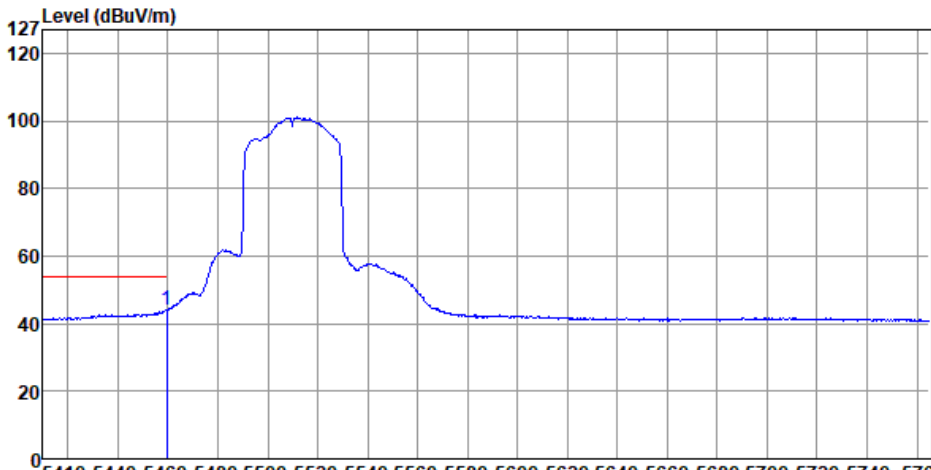
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5459.35</td><td>57.19</td><td>74.00</td><td>-16.81</td><td>56.50</td><td>0.69</td><td>Peak</td><td>226</td><td>305</td></tr><tr><td>2</td><td>5468.93</td><td>62.27</td><td>68.20</td><td>-5.93</td><td>61.55</td><td>0.72</td><td>Peak</td><td>258</td><td>303</td></tr><tr><td>3</td><td>5732.70</td><td>54.59</td><td>68.20</td><td>-13.61</td><td>53.46</td><td>1.13</td><td>Peak</td><td>226</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	57.19	74.00	-16.81	56.50	0.69	Peak	226	305	2	5468.93	62.27	68.20	-5.93	61.55	0.72	Peak	258	303	3	5732.70	54.59	68.20	-13.61	53.46	1.13	Peak	226	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	57.19	74.00	-16.81	56.50	0.69	Peak	226	305																																		
2	5468.93	62.27	68.20	-5.93	61.55	0.72	Peak	258	303																																		
3	5732.70	54.59	68.20	-13.61	53.46	1.13	Peak	226	305																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

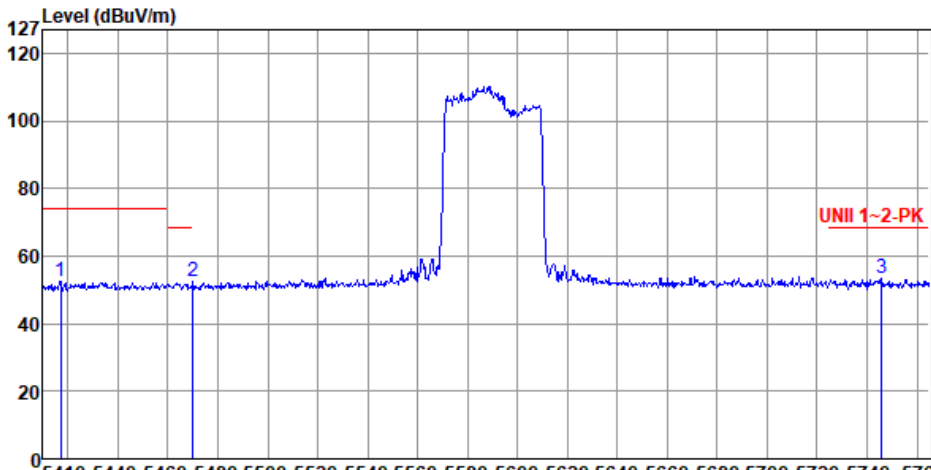
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.70</td><td>44.18</td><td>54.00</td><td>-9.82</td><td>43.49</td><td>0.69</td><td>Average</td><td>226</td><td>305</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.70	44.18	54.00	-9.82	43.49	0.69	Average	226	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5459.70	44.18	54.00	-9.82	43.49	0.69	Average	226	305														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

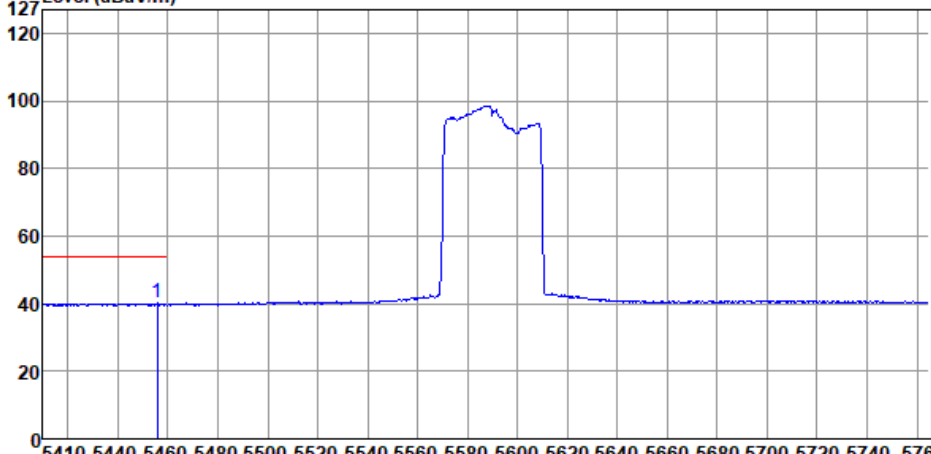
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5417.10</td><td>52.66</td><td>74.00</td><td>-21.34</td><td>52.15</td><td>0.51</td><td>Peak</td><td>177</td><td>271</td></tr><tr><td>2</td><td>5470.00</td><td>52.33</td><td>68.20</td><td>-15.87</td><td>51.61</td><td>0.72</td><td>Peak</td><td>177</td><td>271</td></tr><tr><td>3</td><td>5745.83</td><td>53.42</td><td>68.20</td><td>-14.78</td><td>52.26</td><td>1.16</td><td>Peak</td><td>177</td><td>271</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.10	52.66	74.00	-21.34	52.15	0.51	Peak	177	271	2	5470.00	52.33	68.20	-15.87	51.61	0.72	Peak	177	271	3	5745.83	53.42	68.20	-14.78	52.26	1.16	Peak	177	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.10	52.66	74.00	-21.34	52.15	0.51	Peak	177	271																																		
2	5470.00	52.33	68.20	-15.87	51.61	0.72	Peak	177	271																																		
3	5745.83	53.42	68.20	-14.78	52.26	1.16	Peak	177	271																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

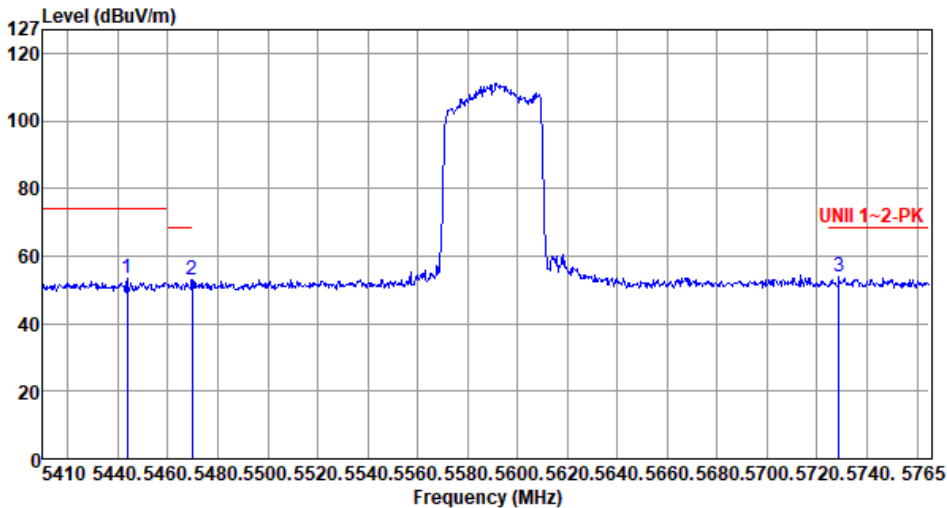
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5455.80</td><td>40.08</td><td>54.00</td><td>-13.92</td><td>39.41</td><td>0.67</td><td>Average</td><td>177</td><td>271</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.80	40.08	54.00	-13.92	39.41	0.67	Average	177	271
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5455.80	40.08	54.00	-13.92	39.41	0.67	Average	177	271														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

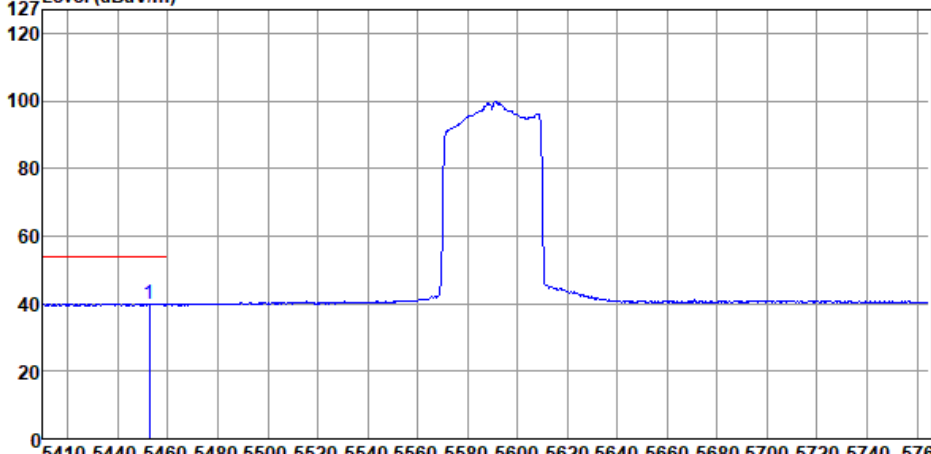
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5443.73</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>52.59</td><td>0.63</td><td>Peak</td><td>177</td><td>43</td></tr><tr><td>2</td><td>5469.64</td><td>52.91</td><td>68.20</td><td>-15.29</td><td>52.19</td><td>0.72</td><td>Peak</td><td>177</td><td>43</td></tr><tr><td>3</td><td>5728.79</td><td>53.85</td><td>68.20</td><td>-14.35</td><td>52.73</td><td>1.12</td><td>Peak</td><td>177</td><td>43</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5443.73	53.22	74.00	-20.78	52.59	0.63	Peak	177	43	2	5469.64	52.91	68.20	-15.29	52.19	0.72	Peak	177	43	3	5728.79	53.85	68.20	-14.35	52.73	1.12	Peak	177	43
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5443.73	53.22	74.00	-20.78	52.59	0.63	Peak	177	43																																		
2	5469.64	52.91	68.20	-15.29	52.19	0.72	Peak	177	43																																		
3	5728.79	53.85	68.20	-14.35	52.73	1.12	Peak	177	43																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

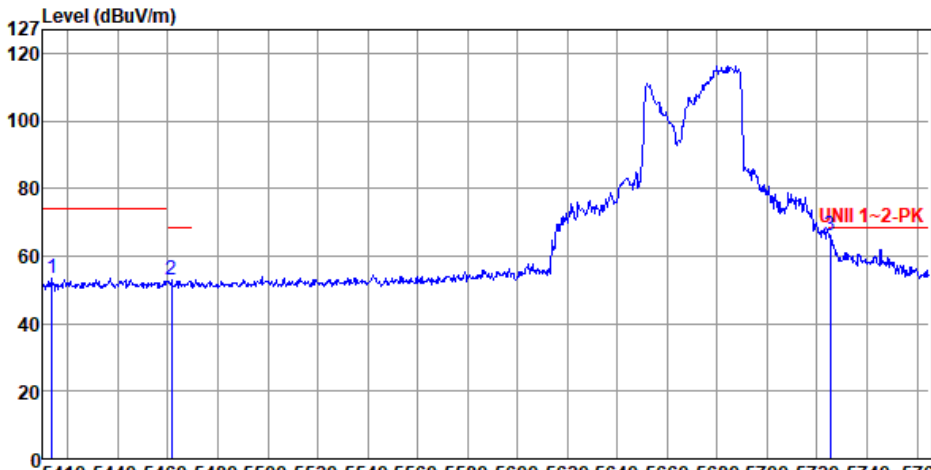
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5452.60</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>39.37</td><td>0.67</td><td>Average</td><td>177</td><td>43</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5452.60	40.04	54.00	-13.96	39.37	0.67	Average	177	43
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5452.60	40.04	54.00	-13.96	39.37	0.67	Average	177	43														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):65																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5413.55</td><td>53.37</td><td>74.00</td><td>-20.63</td><td>52.88</td><td>0.49</td><td>Peak</td><td>187</td><td>271</td></tr><tr><td>2</td><td>5461.48</td><td>52.89</td><td>68.20</td><td>-15.31</td><td>52.20</td><td>0.69</td><td>Peak</td><td>187</td><td>271</td></tr><tr><td>3</td><td>5725.24</td><td>66.27</td><td>68.20</td><td>-1.93</td><td>65.16</td><td>1.11</td><td>Peak</td><td>187</td><td>271</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.55	53.37	74.00	-20.63	52.88	0.49	Peak	187	271	2	5461.48	52.89	68.20	-15.31	52.20	0.69	Peak	187	271	3	5725.24	66.27	68.20	-1.93	65.16	1.11	Peak	187	271
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5413.55	53.37	74.00	-20.63	52.88	0.49	Peak	187	271																																		
2	5461.48	52.89	68.20	-15.31	52.20	0.69	Peak	187	271																																		
3	5725.24	66.27	68.20	-1.93	65.16	1.11	Peak	187	271																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670						
Polarization	Horizontal-Average								
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5439.82	40.53	54.00	-13.47	39.91	0.62	Average	187	271
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.36</td><td>53.36</td><td>74.00</td><td>-20.64</td><td>52.89</td><td>0.47</td><td>Peak</td><td>219</td><td>296</td></tr><tr><td>2</td><td>5469.29</td><td>54.17</td><td>68.20</td><td>-14.03</td><td>53.45</td><td>0.72</td><td>Peak</td><td>219</td><td>296</td></tr><tr><td>3</td><td>5725.24</td><td>63.89</td><td>68.20</td><td>-4.31</td><td>62.78</td><td>1.11</td><td>Peak</td><td>219</td><td>296</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5410.36	53.36	74.00	-20.64	52.89	0.47	Peak	219	296	2	5469.29	54.17	68.20	-14.03	53.45	0.72	Peak	219	296	3	5725.24	63.89	68.20	-4.31	62.78	1.11	Peak	219	296
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5410.36	53.36	74.00	-20.64	52.89	0.47	Peak	219	296																																																						
2	5469.29	54.17	68.20	-14.03	53.45	0.72	Peak	219	296																																																						
3	5725.24	63.89	68.20	-4.31	62.78	1.11	Peak	219	296																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Band Edge measurement

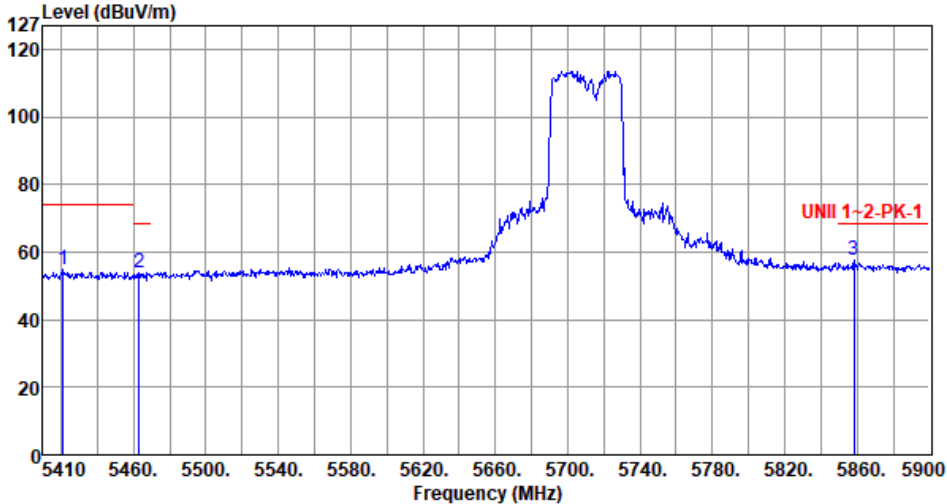
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710						
Polarization	Horizontal-Peak								
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5421.27	54.78	74.00	-19.22	54.25	0.53	Peak	187	251
2	5462.92	53.77	68.20	-14.43	53.07	0.70	Peak	187	251
3	5858.35	57.86	68.20	-10.34	56.40	1.46	Peak	187	251

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement

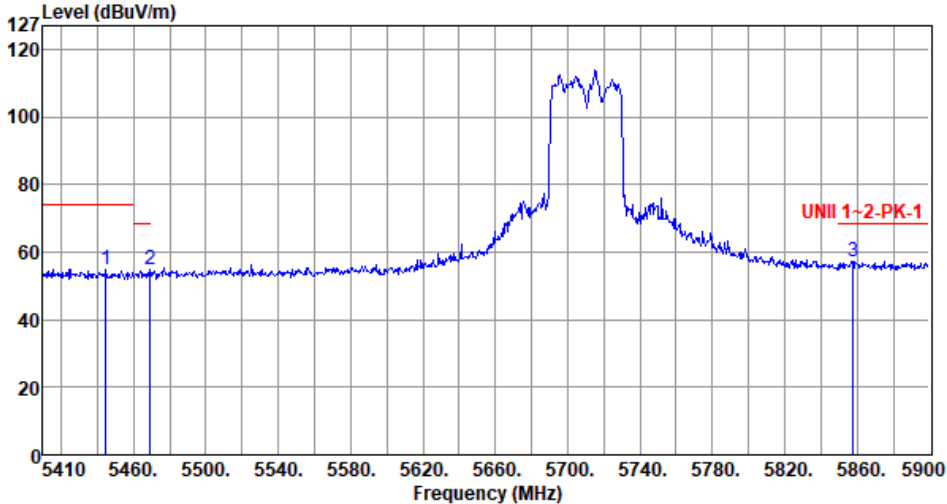
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																							
Level (dBUV/m) 1 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.02</td><td>42.15</td><td>54.00</td><td>-11.85</td><td>41.46</td><td>0.69</td><td>Average</td><td>187</td><td>251</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.02	42.15	54.00	-11.85	41.46	0.69	Average	187	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.02	42.15	54.00	-11.85	41.46	0.69	Average	187	251														



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																																												
Polarization	Vertical-Peak																																																														
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																																															
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.79</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>54.41</td><td>0.64</td><td>Peak</td><td>242</td><td>316</td></tr><tr><td>2</td><td>5469.29</td><td>55.05</td><td>68.20</td><td>-13.15</td><td>54.33</td><td>0.72</td><td>Peak</td><td>242</td><td>316</td></tr><tr><td>3</td><td>5857.86</td><td>57.22</td><td>68.20</td><td>-10.98</td><td>55.77</td><td>1.45</td><td>Peak</td><td>242</td><td>316</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5444.79	55.05	74.00	-18.95	54.41	0.64	Peak	242	316	2	5469.29	55.05	68.20	-13.15	54.33	0.72	Peak	242	316	3	5857.86	57.22	68.20	-10.98	55.77	1.45	Peak	242	316
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																						
		dBuV/m			dBuV			cm	deg																																																						
1	5444.79	55.05	74.00	-18.95	54.41	0.64	Peak	242	316																																																						
2	5469.29	55.05	68.20	-13.15	54.33	0.72	Peak	242	316																																																						
3	5857.86	57.22	68.20	-10.98	55.77	1.45	Peak	242	316																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

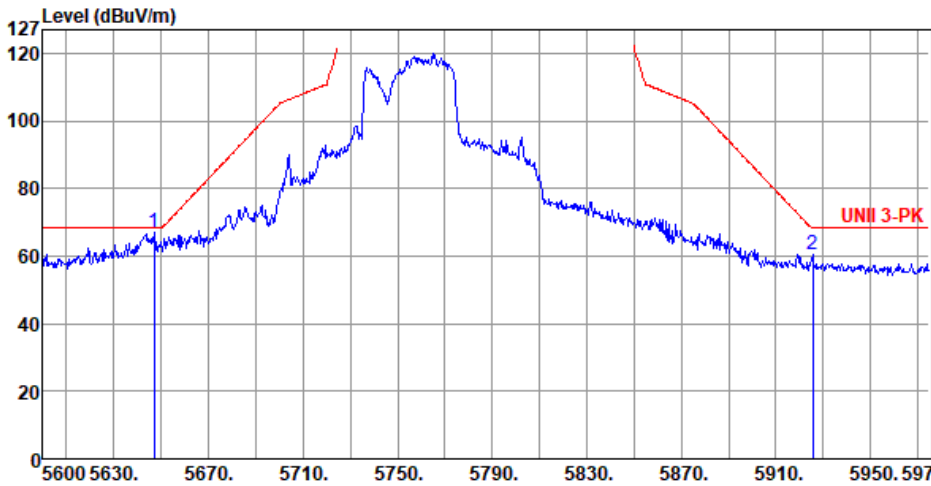
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Vertical-Average																																										
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																											
Level (dBUV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.00</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>41.73</td><td>0.69</td><td>Average</td><td>242</td><td>316</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5459.00	42.42	54.00	-11.58	41.73	0.69	Average	242	316
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																		
		dBUV/m			dBUV			cm	deg																																		
1	5459.00	42.42	54.00	-11.58	41.73	0.69	Average	242	316																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.88</td><td>66.94</td><td>68.20</td><td>-1.26</td><td>66.03</td><td>0.91</td><td>Peak</td><td>208</td><td>273</td></tr><tr><td>2</td><td>5925.50</td><td>60.25</td><td>68.20</td><td>-7.95</td><td>58.59</td><td>1.66</td><td>Peak</td><td>208</td><td>273</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.88	66.94	68.20	-1.26	66.03	0.91	Peak	208	273	2	5925.50	60.25	68.20	-7.95	58.59	1.66	Peak	208	273
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.88	66.94	68.20	-1.26	66.03	0.91	Peak	208	273																								
2	5925.50	60.25	68.20	-7.95	58.59	1.66	Peak	208	273																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5645.75</td><td>66.49</td><td>68.20</td><td>-1.71</td><td>65.58</td><td>0.91</td><td>Peak</td><td>226</td><td>340</td></tr><tr><td>2</td><td>5931.50</td><td>59.64</td><td>68.20</td><td>-8.56</td><td>57.98</td><td>1.66</td><td>Peak</td><td>226</td><td>340</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5645.75	66.49	68.20	-1.71	65.58	0.91	Peak	226	340	2	5931.50	59.64	68.20	-8.56	57.98	1.66	Peak	226	340
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5645.75	66.49	68.20	-1.71	65.58	0.91	Peak	226	340																								
2	5931.50	59.64	68.20	-8.56	57.98	1.66	Peak	226	340																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

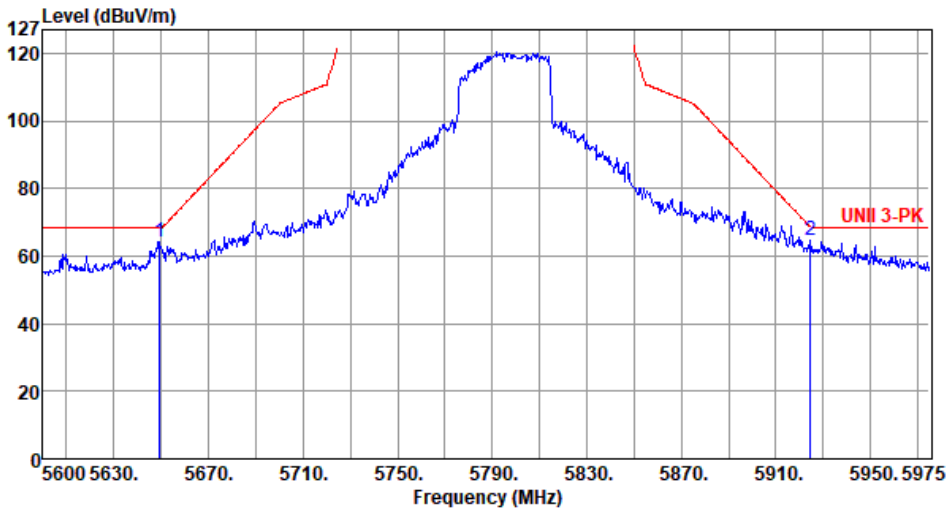
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5649.88</td><td>61.22</td><td>68.20</td><td>-6.98</td><td>60.30</td><td>0.92</td><td>Peak</td><td>178</td><td>113</td></tr><tr><td>2</td><td>5926.63</td><td>63.12</td><td>68.20</td><td>-5.08</td><td>61.46</td><td>1.66</td><td>Peak</td><td>167</td><td>74</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	61.22	68.20	-6.98	60.30	0.92	Peak	178	113	2	5926.63	63.12	68.20	-5.08	61.46	1.66	Peak	167	74
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	61.22	68.20	-6.98	60.30	0.92	Peak	178	113																								
2	5926.63	63.12	68.20	-5.08	61.46	1.66	Peak	167	74																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

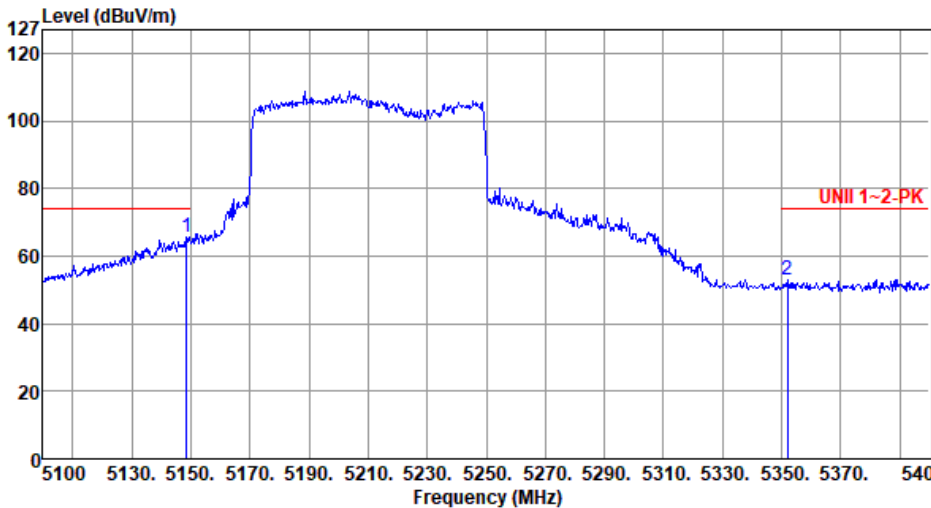
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):23 Humidity(%):62																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.50</td><td>64.23</td><td>68.20</td><td>-3.97</td><td>63.31</td><td>0.92</td><td>Peak</td><td>280</td><td>13</td></tr><tr><td>2</td><td>5924.75</td><td>64.49</td><td>68.38</td><td>-3.89</td><td>62.84</td><td>1.65</td><td>Peak</td><td>106</td><td>282</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.50	64.23	68.20	-3.97	63.31	0.92	Peak	280	13	2	5924.75	64.49	68.38	-3.89	62.84	1.65	Peak	106	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.50	64.23	68.20	-3.97	63.31	0.92	Peak	280	13																								
2	5924.75	64.49	68.38	-3.89	62.84	1.65	Peak	106	282																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

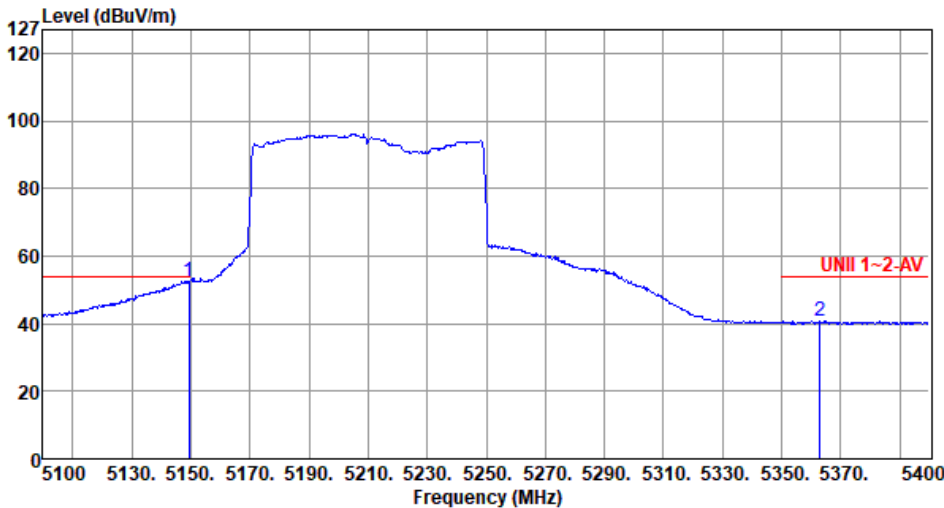
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>65.62</td><td>74.00</td><td>-8.38</td><td>64.52</td><td>1.10</td><td>Peak</td><td>212</td><td>263</td></tr><tr><td>2</td><td>5352.00</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>52.87</td><td>0.32</td><td>Peak</td><td>212</td><td>263</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	65.62	74.00	-8.38	64.52	1.10	Peak	212	263	2	5352.00	53.19	74.00	-20.81	52.87	0.32	Peak	212	263
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	65.62	74.00	-8.38	64.52	1.10	Peak	212	263																								
2	5352.00	53.19	74.00	-20.81	52.87	0.32	Peak	212	263																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>52.52</td><td>54.00</td><td>-1.48</td><td>51.42</td><td>1.10</td><td>Average</td><td>212</td><td>263</td></tr><tr><td>2</td><td>5362.80</td><td>40.63</td><td>54.00</td><td>-13.37</td><td>40.27</td><td>0.36</td><td>Average</td><td>212</td><td>263</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	52.52	54.00	-1.48	51.42	1.10	Average	212	263	2	5362.80	40.63	54.00	-13.37	40.27	0.36	Average	212	263
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	52.52	54.00	-1.48	51.42	1.10	Average	212	263																								
2	5362.80	40.63	54.00	-13.37	40.27	0.36	Average	212	263																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

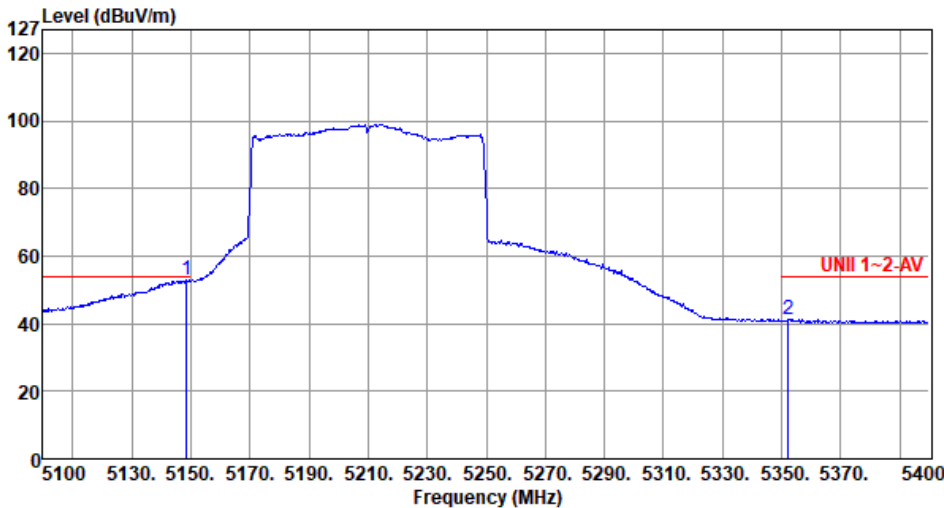
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.60</td><td>65.89</td><td>74.00</td><td>-8.11</td><td>64.79</td><td>1.10</td><td>Peak</td><td>189</td><td>328</td></tr><tr><td>2</td><td>5366.10</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>54.00</td><td>0.36</td><td>Peak</td><td>189</td><td>328</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	65.89	74.00	-8.11	64.79	1.10	Peak	189	328	2	5366.10	54.36	74.00	-19.64	54.00	0.36	Peak	189	328
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	65.89	74.00	-8.11	64.79	1.10	Peak	189	328																								
2	5366.10	54.36	74.00	-19.64	54.00	0.36	Peak	189	328																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

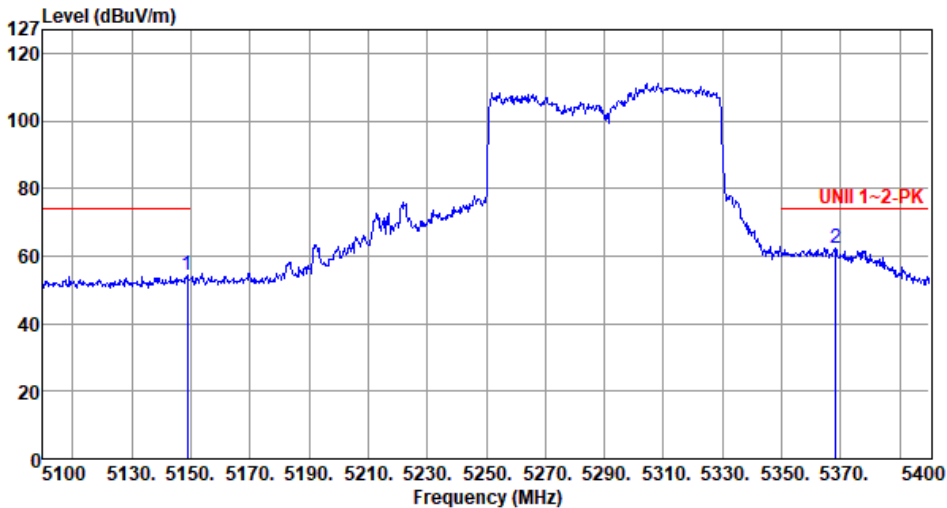
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBUV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.60</td><td>52.87</td><td>54.00</td><td>-1.13</td><td>51.77</td><td>1.10</td><td>Average</td><td>189</td><td>328</td></tr><tr><td>2</td><td>5352.30</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>40.89</td><td>0.32</td><td>Average</td><td>189</td><td>328</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5148.60	52.87	54.00	-1.13	51.77	1.10	Average	189	328	2	5352.30	41.21	54.00	-12.79	40.89	0.32	Average	189	328
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																												
		dBUV/m			dBUV			cm	deg																																												
1	5148.60	52.87	54.00	-1.13	51.77	1.10	Average	189	328																																												
2	5352.30	41.21	54.00	-12.79	40.89	0.32	Average	189	328																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																																																		
Polarization	Horizontal-Peak																																																				
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.90</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>53.23</td><td>1.10</td><td>Peak</td><td>137</td><td>289</td></tr><tr><td>2</td><td>5368.20</td><td>62.22</td><td>74.00</td><td>-11.78</td><td>61.85</td><td>0.37</td><td>Peak</td><td>137</td><td>289</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5148.90	54.33	74.00	-19.67	53.23	1.10	Peak	137	289	2	5368.20	62.22	74.00	-11.78	61.85	0.37	Peak	137	289
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5148.90	54.33	74.00	-19.67	53.23	1.10	Peak	137	289																																												
2	5368.20	62.22	74.00	-11.78	61.85	0.37	Peak	137	289																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

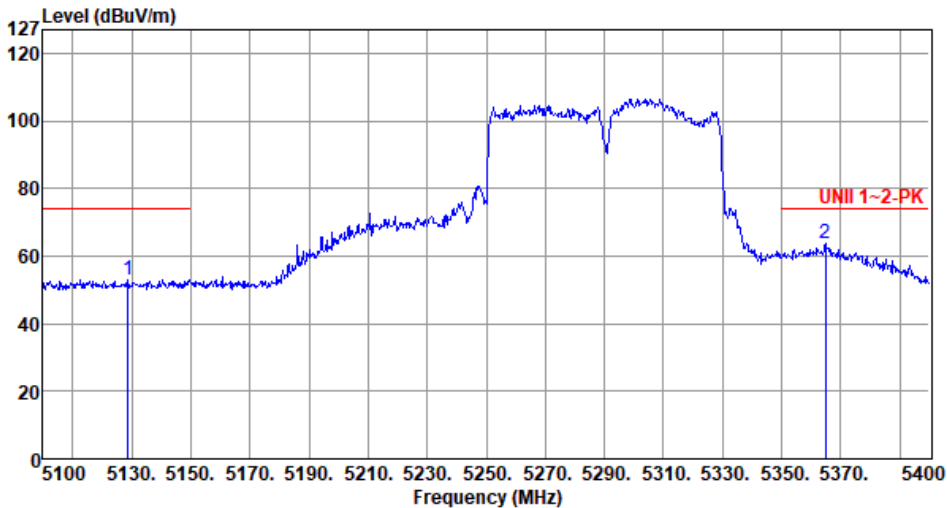
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Horizontal-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>41.29</td><td>1.08</td><td>Average</td><td>137</td><td>289</td></tr><tr><td>2</td><td>5352.30</td><td>50.47</td><td>54.00</td><td>-3.53</td><td>50.15</td><td>0.32</td><td>Average</td><td>137</td><td>289</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	42.37	54.00	-11.63	41.29	1.08	Average	137	289	2	5352.30	50.47	54.00	-3.53	50.15	0.32	Average	137	289
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	42.37	54.00	-11.63	41.29	1.08	Average	137	289																								
2	5352.30	50.47	54.00	-3.53	50.15	0.32	Average	137	289																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

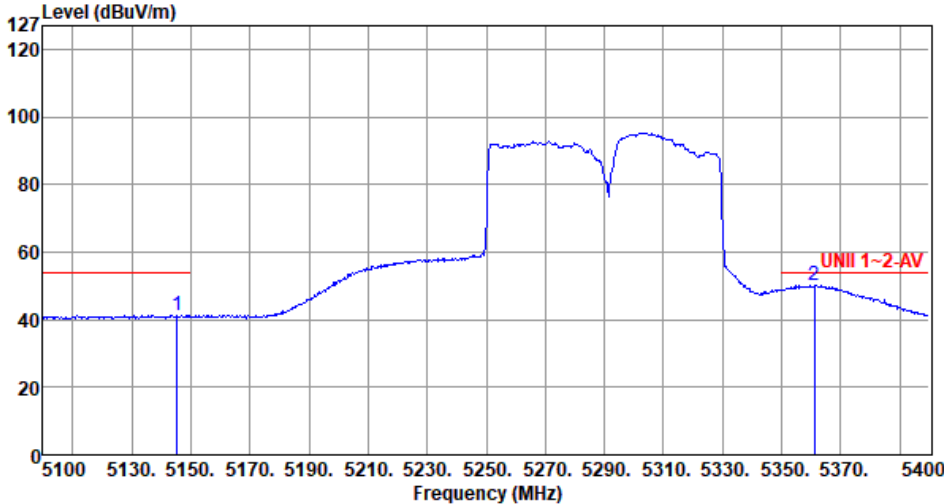
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																																																		
Polarization	Vertical-Peak																																																				
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5128.80</td><td>53.09</td><td>74.00</td><td>-20.91</td><td>52.04</td><td>1.05</td><td>Peak</td><td>126</td><td>225</td></tr><tr><td>2</td><td>5364.90</td><td>63.94</td><td>74.00</td><td>-10.06</td><td>63.58</td><td>0.36</td><td>Peak</td><td>126</td><td>225</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5128.80	53.09	74.00	-20.91	52.04	1.05	Peak	126	225	2	5364.90	63.94	74.00	-10.06	63.58	0.36	Peak	126	225
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																												
		dBuV/m			dBuV			cm	deg																																												
1	5128.80	53.09	74.00	-20.91	52.04	1.05	Peak	126	225																																												
2	5364.90	63.94	74.00	-10.06	63.58	0.36	Peak	126	225																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																														
Polarization	Vertical-Average																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.30</td><td>41.23</td><td>54.00</td><td>-12.77</td><td>40.15</td><td>1.08</td><td>Average</td><td>126</td><td>225</td></tr><tr><td>2</td><td>5361.00</td><td>50.29</td><td>54.00</td><td>-3.71</td><td>49.95</td><td>0.34</td><td>Average</td><td>126</td><td>225</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	41.23	54.00	-12.77	40.15	1.08	Average	126	225	2	5361.00	50.29	54.00	-3.71	49.95	0.34	Average	126	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	41.23	54.00	-12.77	40.15	1.08	Average	126	225																								
2	5361.00	50.29	54.00	-3.71	49.95	0.34	Average	126	225																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

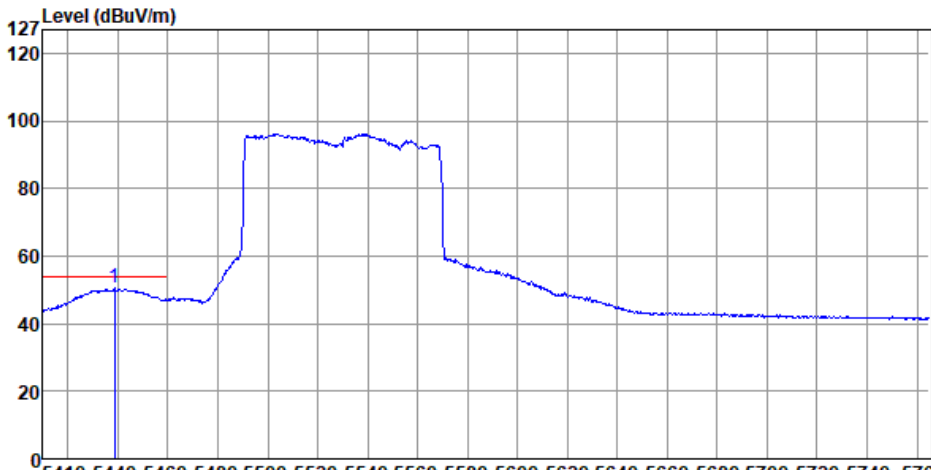
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5426.33</td><td>63.28</td><td>74.00</td><td>-10.72</td><td>62.72</td><td>0.56</td><td>Peak</td><td>160</td><td>76</td></tr><tr><td>2</td><td>5460.41</td><td>60.84</td><td>68.20</td><td>-7.36</td><td>60.15</td><td>0.69</td><td>Peak</td><td>298</td><td>188</td></tr><tr><td>3</td><td>5751.16</td><td>54.51</td><td>68.20</td><td>-13.69</td><td>53.34</td><td>1.17</td><td>Peak</td><td>160</td><td>76</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5426.33	63.28	74.00	-10.72	62.72	0.56	Peak	160	76	2	5460.41	60.84	68.20	-7.36	60.15	0.69	Peak	298	188	3	5751.16	54.51	68.20	-13.69	53.34	1.17	Peak	160	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5426.33	63.28	74.00	-10.72	62.72	0.56	Peak	160	76																																		
2	5460.41	60.84	68.20	-7.36	60.15	0.69	Peak	298	188																																		
3	5751.16	54.51	68.20	-13.69	53.34	1.17	Peak	160	76																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

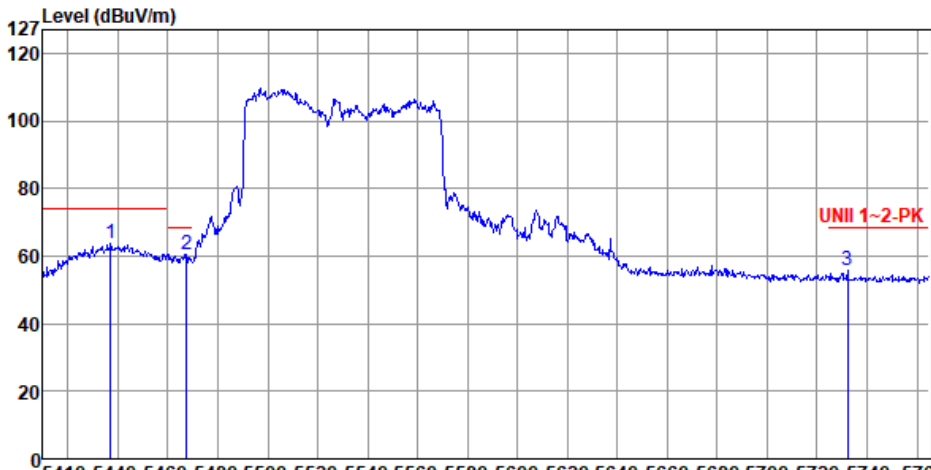
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5438.76</td><td>50.41</td><td>54.00</td><td>-3.59</td><td>49.80</td><td>0.61</td><td>Average</td><td>160</td><td>76</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.76	50.41	54.00	-3.59	49.80	0.61	Average	160	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5438.76	50.41	54.00	-3.59	49.80	0.61	Average	160	76														



Band Edge measurement

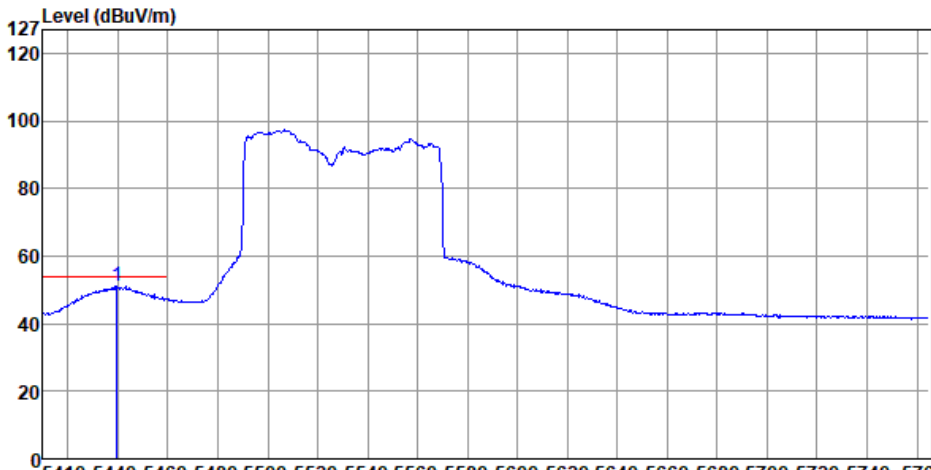
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.98</td><td>63.53</td><td>74.00</td><td>-10.47</td><td>62.93</td><td>0.60</td><td>Peak</td><td>239</td><td>47</td></tr><tr><td>2</td><td>5467.51</td><td>60.57</td><td>68.20</td><td>-7.63</td><td>59.85</td><td>0.72</td><td>Peak</td><td>238</td><td>38</td></tr><tr><td>3</td><td>5732.34</td><td>55.75</td><td>68.20</td><td>-12.45</td><td>54.63</td><td>1.12</td><td>Peak</td><td>239</td><td>47</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.98	63.53	74.00	-10.47	62.93	0.60	Peak	239	47	2	5467.51	60.57	68.20	-7.63	59.85	0.72	Peak	238	38	3	5732.34	55.75	68.20	-12.45	54.63	1.12	Peak	239	47
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5436.98	63.53	74.00	-10.47	62.93	0.60	Peak	239	47																																		
2	5467.51	60.57	68.20	-7.63	59.85	0.72	Peak	238	38																																		
3	5732.34	55.75	68.20	-12.45	54.63	1.12	Peak	239	47																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5439.47</td><td>50.97</td><td>54.00</td><td>-3.03</td><td>50.35</td><td>0.62</td><td>Average</td><td>239</td><td>47</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.47	50.97	54.00	-3.03	50.35	0.62	Average	239	47
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5439.47	50.97	54.00	-3.03	50.35	0.62	Average	239	47														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5447.28</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>54.10</td><td>0.65</td><td>Peak</td><td>189</td><td>275</td></tr><tr><td>2</td><td>5462.54</td><td>55.22</td><td>68.20</td><td>-12.98</td><td>54.52</td><td>0.70</td><td>Peak</td><td>193</td><td>269</td></tr><tr><td>3</td><td>5735.89</td><td>59.77</td><td>68.20</td><td>-8.43</td><td>58.64</td><td>1.13</td><td>Peak</td><td>205</td><td>280</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5447.28	54.75	74.00	-19.25	54.10	0.65	Peak	189	275	2	5462.54	55.22	68.20	-12.98	54.52	0.70	Peak	193	269	3	5735.89	59.77	68.20	-8.43	58.64	1.13	Peak	205	280
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5447.28	54.75	74.00	-19.25	54.10	0.65	Peak	189	275																																		
2	5462.54	55.22	68.20	-12.98	54.52	0.70	Peak	193	269																																		
3	5735.89	59.77	68.20	-8.43	58.64	1.13	Peak	205	280																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

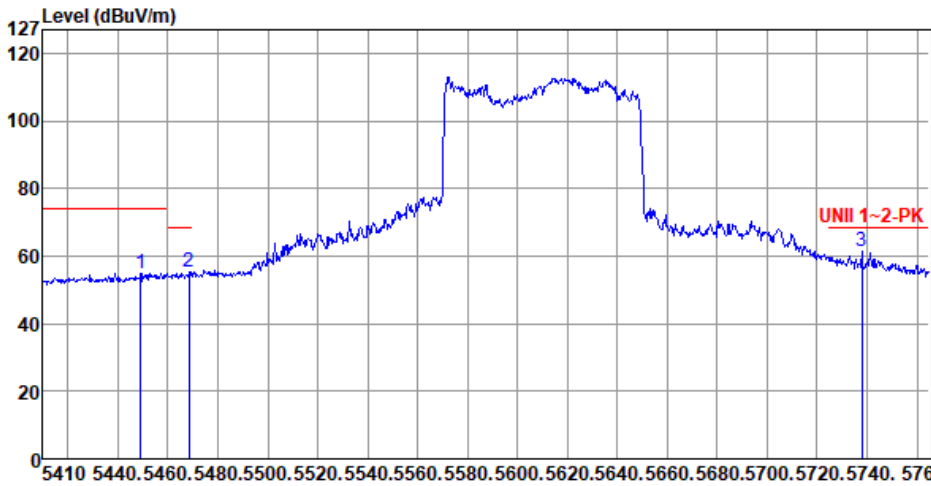
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																				
Polarization	Horizontal-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.28</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>41.69</td><td>0.69</td><td>Average</td><td>189</td><td>275</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.28	42.38	54.00	-11.62	41.69	0.69	Average	189	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5458.28	42.38	54.00	-11.62	41.69	0.69	Average	189	275														



Band Edge measurement

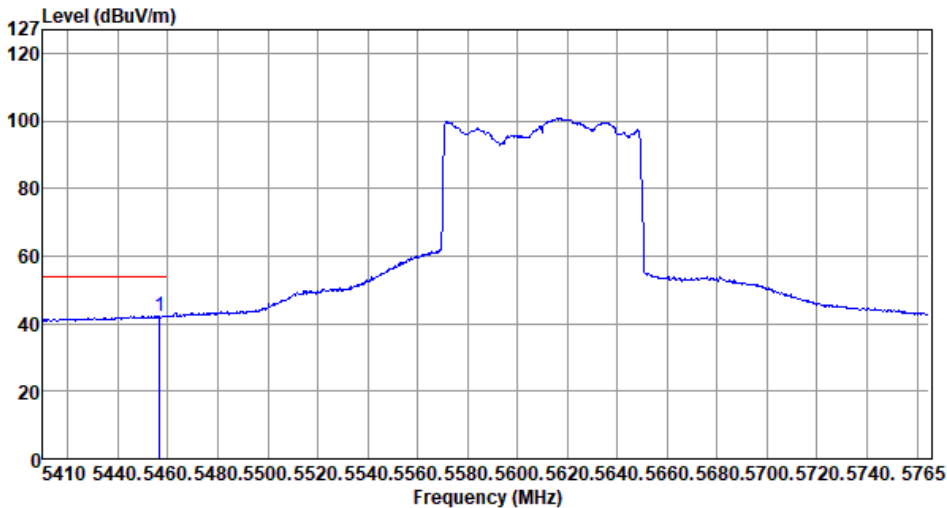
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5449.05</td><td>54.90</td><td>74.00</td><td>-19.10</td><td>54.23</td><td>0.67</td><td>Peak</td><td>242</td><td>323</td></tr><tr><td>2</td><td>5468.58</td><td>55.33</td><td>68.20</td><td>-12.87</td><td>54.61</td><td>0.72</td><td>Peak</td><td>251</td><td>311</td></tr><tr><td>3</td><td>5738.02</td><td>61.28</td><td>68.20</td><td>-6.92</td><td>60.14</td><td>1.14</td><td>Peak</td><td>296</td><td>4</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5449.05	54.90	74.00	-19.10	54.23	0.67	Peak	242	323	2	5468.58	55.33	68.20	-12.87	54.61	0.72	Peak	251	311	3	5738.02	61.28	68.20	-6.92	60.14	1.14	Peak	296	4
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5449.05	54.90	74.00	-19.10	54.23	0.67	Peak	242	323																																		
2	5468.58	55.33	68.20	-12.87	54.61	0.72	Peak	251	311																																		
3	5738.02	61.28	68.20	-6.92	60.14	1.14	Peak	296	4																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

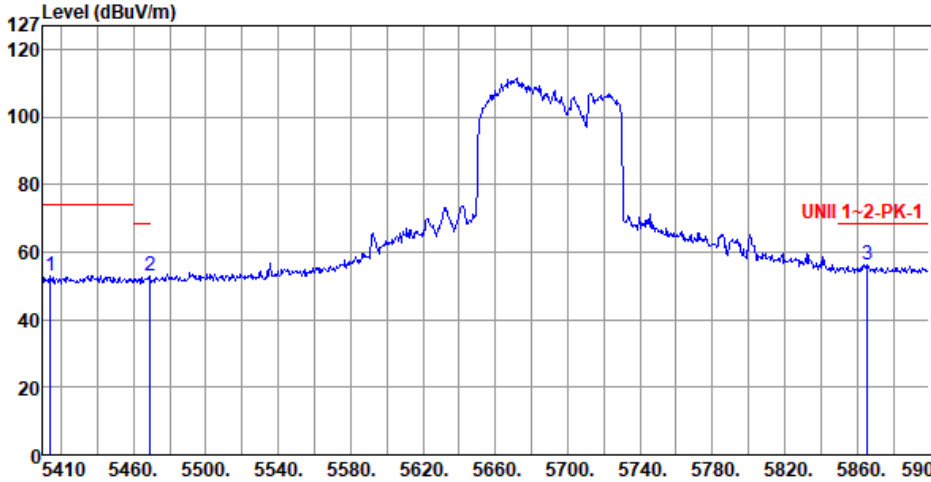
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																				
Polarization	Vertical-Average																						
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5456.86</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>41.69</td><td>0.68</td><td>Average</td><td>242</td><td>323</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5456.86	42.37	54.00	-11.63	41.69	0.68	Average	242	323
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5456.86	42.37	54.00	-11.63	41.69	0.68	Average	242	323														



Band Edge measurement

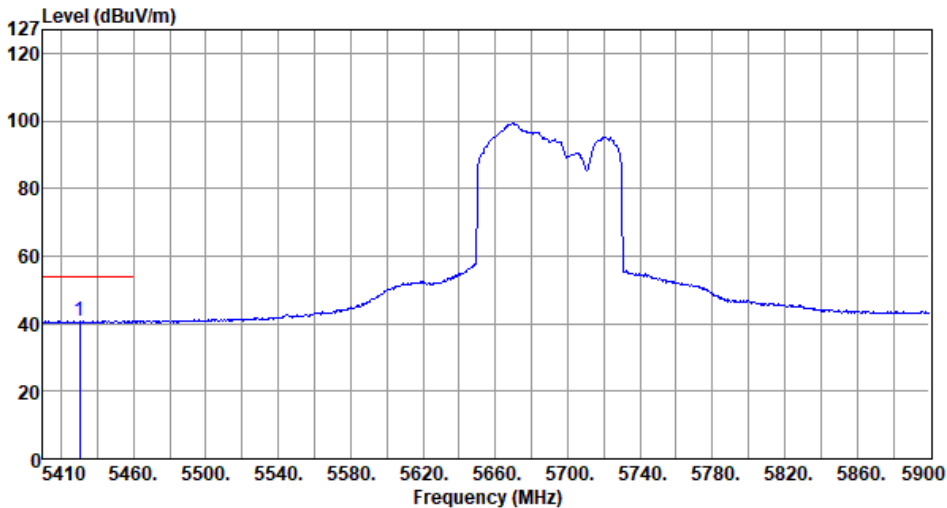
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5413.92</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>52.66</td><td>0.50</td><td>Peak</td><td>151</td><td>242</td></tr><tr><td>2</td><td>5469.29</td><td>52.94</td><td>68.20</td><td>-15.26</td><td>52.22</td><td>0.72</td><td>Peak</td><td>151</td><td>242</td></tr><tr><td>3</td><td>5865.70</td><td>56.20</td><td>68.20</td><td>-12.00</td><td>54.71</td><td>1.49</td><td>Peak</td><td>151</td><td>242</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.92	53.16	74.00	-20.84	52.66	0.50	Peak	151	242	2	5469.29	52.94	68.20	-15.26	52.22	0.72	Peak	151	242	3	5865.70	56.20	68.20	-12.00	54.71	1.49	Peak	151	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5413.92	53.16	74.00	-20.84	52.66	0.50	Peak	151	242																																		
2	5469.29	52.94	68.20	-15.26	52.22	0.72	Peak	151	242																																		
3	5865.70	56.20	68.20	-12.00	54.71	1.49	Peak	151	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

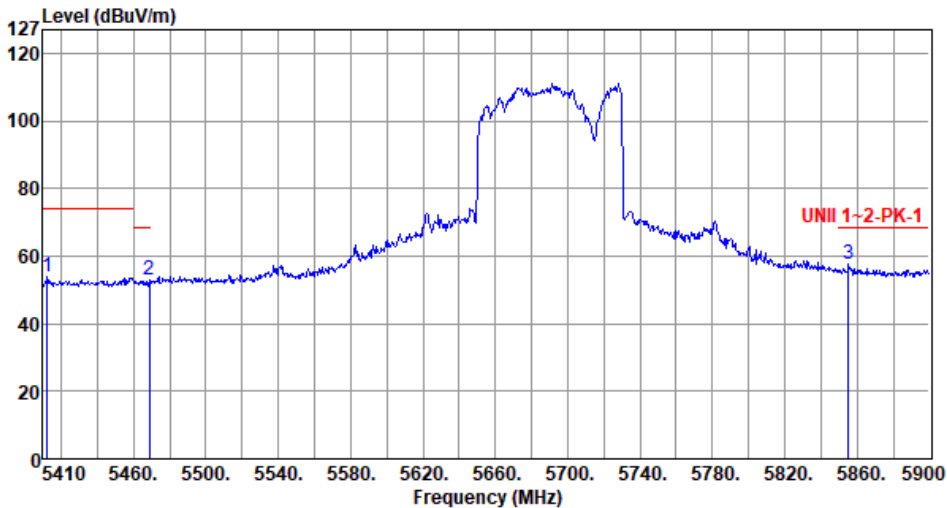
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5430.09</td><td>40.84</td><td>54.00</td><td>-13.16</td><td>40.28</td><td>0.56</td><td>Average</td><td>151</td><td>242</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5430.09	40.84	54.00	-13.16	40.28	0.56	Average	151	242
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
		dBuV/m			dBuV			cm	deg																																		
1	5430.09	40.84	54.00	-13.16	40.28	0.56	Average	151	242																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5412.45</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>53.45</td><td>0.48</td><td>Peak</td><td>238</td><td>318</td></tr><tr><td>2</td><td>5468.80</td><td>52.78</td><td>68.20</td><td>-15.42</td><td>52.06</td><td>0.72</td><td>Peak</td><td>238</td><td>318</td></tr><tr><td>3</td><td>5855.41</td><td>57.44</td><td>68.20</td><td>-10.76</td><td>56.00</td><td>1.44</td><td>Peak</td><td>238</td><td>318</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5412.45	53.93	74.00	-20.07	53.45	0.48	Peak	238	318	2	5468.80	52.78	68.20	-15.42	52.06	0.72	Peak	238	318	3	5855.41	57.44	68.20	-10.76	56.00	1.44	Peak	238	318
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5412.45	53.93	74.00	-20.07	53.45	0.48	Peak	238	318																																		
2	5468.80	52.78	68.20	-15.42	52.06	0.72	Peak	238	318																																		
3	5855.41	57.44	68.20	-10.76	56.00	1.44	Peak	238	318																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

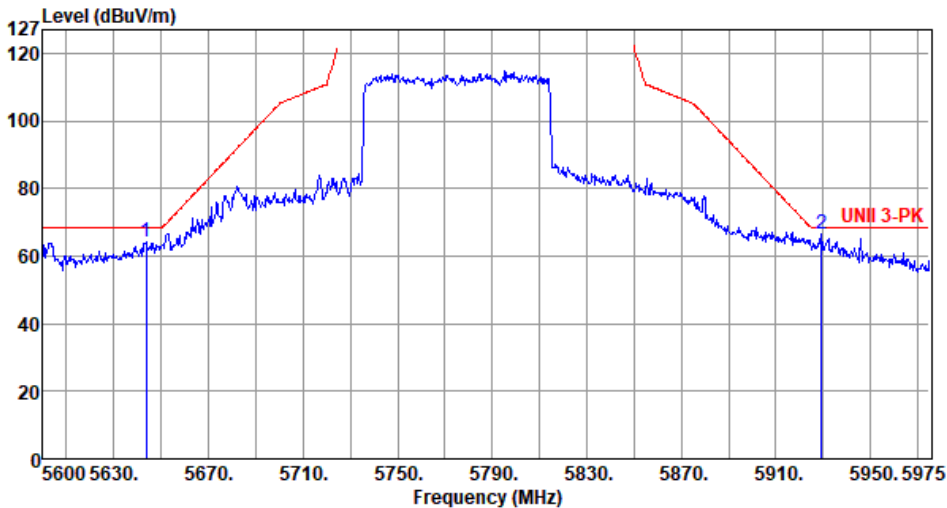
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																											
Polarization	Vertical-Average																													
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																														
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5438.91</td><td>41.10</td><td>54.00</td><td>-12.90</td><td>40.49</td><td>0.61</td><td>Average</td><td>238</td><td>318</td></tr></tbody></table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 5438.91	41.10	54.00	-12.90	40.49	0.61	Average	238	318
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																						
1 5438.91	41.10	54.00	-12.90	40.49	0.61	Average	238	318																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																														



Band Edge measurement

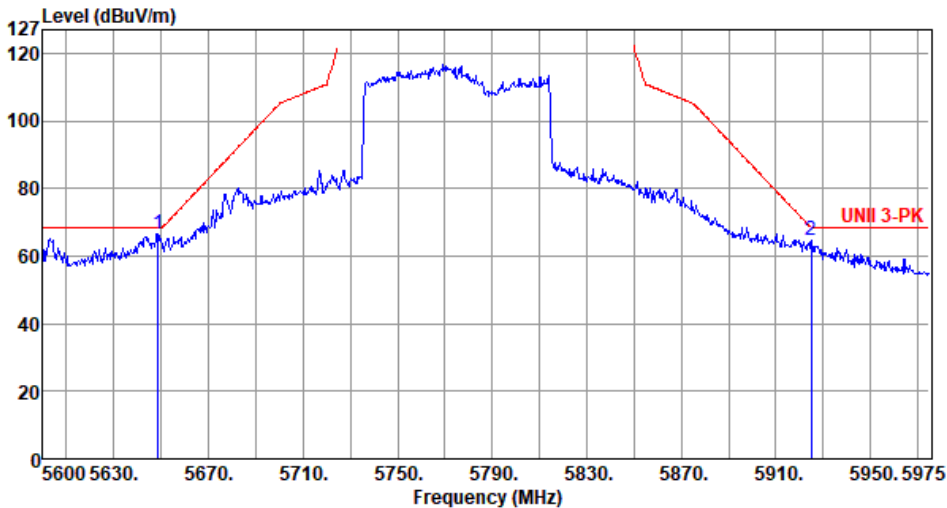
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5643.50</td><td>64.01</td><td>68.20</td><td>-4.19</td><td>63.10</td><td>0.91</td><td>Peak</td><td>315</td><td>183</td></tr><tr><td>2</td><td>5929.25</td><td>66.69</td><td>68.20</td><td>-1.51</td><td>65.03</td><td>1.66</td><td>Peak</td><td>138</td><td>252</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5643.50	64.01	68.20	-4.19	63.10	0.91	Peak	315	183	2	5929.25	66.69	68.20	-1.51	65.03	1.66	Peak	138	252
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5643.50	64.01	68.20	-4.19	63.10	0.91	Peak	315	183																								
2	5929.25	66.69	68.20	-1.51	65.03	1.66	Peak	138	252																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5648.75</td><td>66.58</td><td>68.20</td><td>-1.62</td><td>65.66</td><td>0.92</td><td>Peak</td><td>244</td><td>2</td></tr><tr><td>2</td><td>5925.13</td><td>64.44</td><td>68.20</td><td>-3.76</td><td>62.78</td><td>1.66</td><td>Peak</td><td>203</td><td>299</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.75	66.58	68.20	-1.62	65.66	0.92	Peak	244	2	2	5925.13	64.44	68.20	-3.76	62.78	1.66	Peak	203	299
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.75	66.58	68.20	-1.62	65.66	0.92	Peak	244	2																								
2	5925.13	64.44	68.20	-3.76	62.78	1.66	Peak	203	299																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

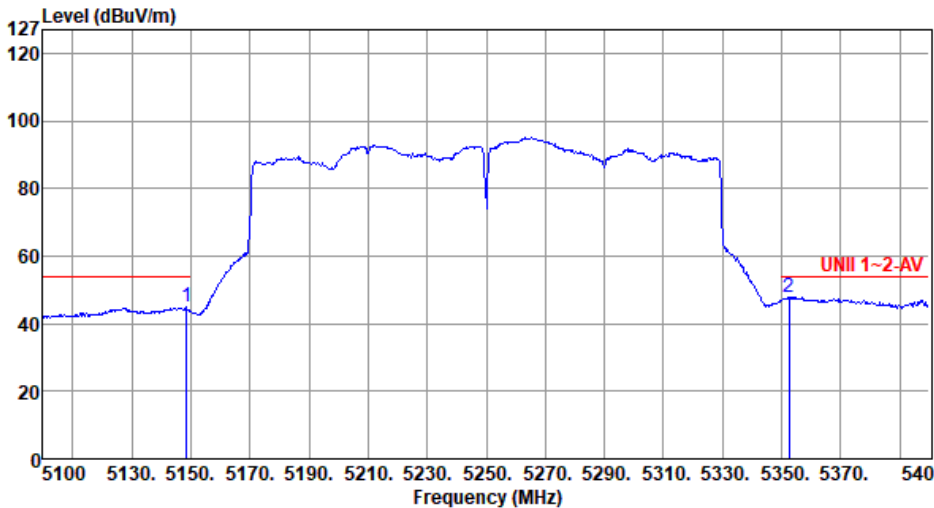
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5125.80</td><td>58.36</td><td>74.00</td><td>-15.64</td><td>57.32</td><td>1.04</td><td>Peak</td><td>163</td><td>292</td></tr><tr><td>2</td><td>5354.40</td><td>61.30</td><td>74.00</td><td>-12.70</td><td>60.97</td><td>0.33</td><td>Peak</td><td>206</td><td>79</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5125.80	58.36	74.00	-15.64	57.32	1.04	Peak	163	292	2	5354.40	61.30	74.00	-12.70	60.97	0.33	Peak	206	79
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5125.80	58.36	74.00	-15.64	57.32	1.04	Peak	163	292																								
2	5354.40	61.30	74.00	-12.70	60.97	0.33	Peak	206	79																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Average																																
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.60</td><td>44.80</td><td>54.00</td><td>-9.20</td><td>43.70</td><td>1.10</td><td>Average</td><td>163</td><td>292</td></tr><tr><td>2</td><td>5352.60</td><td>47.91</td><td>54.00</td><td>-6.09</td><td>47.58</td><td>0.33</td><td>Average</td><td>206</td><td>79</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	44.80	54.00	-9.20	43.70	1.10	Average	163	292	2	5352.60	47.91	54.00	-6.09	47.58	0.33	Average	206	79
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	44.80	54.00	-9.20	43.70	1.10	Average	163	292																								
2	5352.60	47.91	54.00	-6.09	47.58	0.33	Average	206	79																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

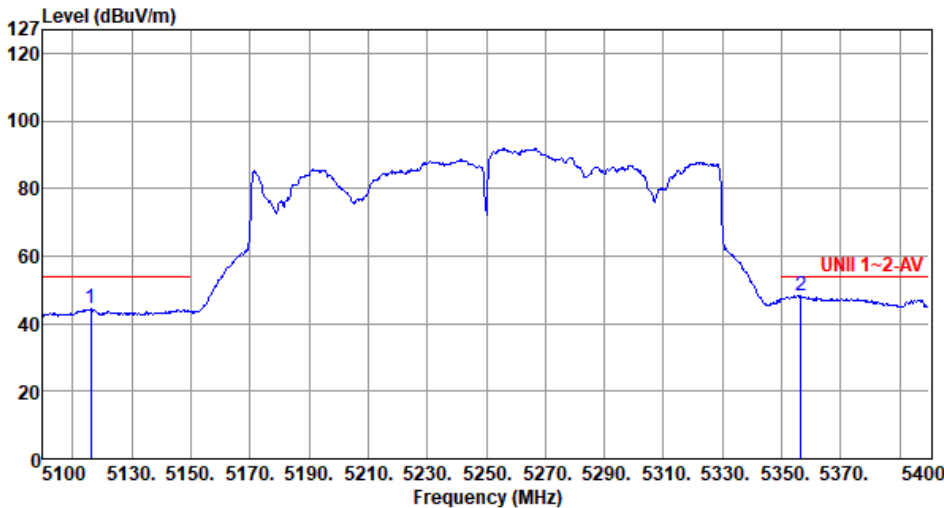
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5115.00</td><td>58.29</td><td>74.00</td><td>-15.71</td><td>57.28</td><td>1.01</td><td>Peak</td><td>170</td><td>48</td></tr><tr><td>2</td><td>5394.60</td><td>62.46</td><td>74.00</td><td>-11.54</td><td>62.04</td><td>0.42</td><td>Peak</td><td>174</td><td>52</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5115.00	58.29	74.00	-15.71	57.28	1.01	Peak	170	48	2	5394.60	62.46	74.00	-11.54	62.04	0.42	Peak	174	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5115.00	58.29	74.00	-15.71	57.28	1.01	Peak	170	48																								
2	5394.60	62.46	74.00	-11.54	62.04	0.42	Peak	174	52																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Average																																
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5116.20</td><td>44.51</td><td>54.00</td><td>-9.49</td><td>43.49</td><td>1.02</td><td>Average</td><td>170</td><td>48</td></tr><tr><td>2</td><td>5356.50</td><td>48.23</td><td>54.00</td><td>-5.77</td><td>47.90</td><td>0.33</td><td>Average</td><td>174</td><td>52</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5116.20	44.51	54.00	-9.49	43.49	1.02	Average	170	48	2	5356.50	48.23	54.00	-5.77	47.90	0.33	Average	174	52
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5116.20	44.51	54.00	-9.49	43.49	1.02	Average	170	48																								
2	5356.50	48.23	54.00	-5.77	47.90	0.33	Average	174	52																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

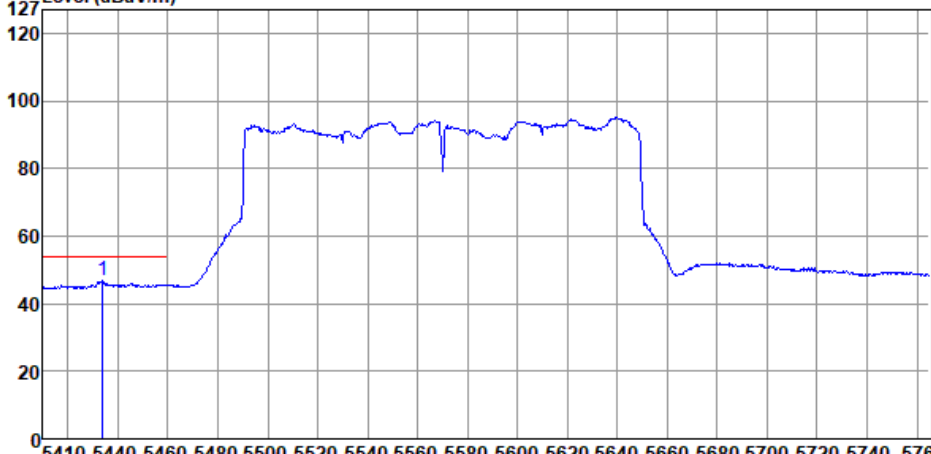
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																																												
Polarization	Horizontal-Peak																																																														
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																																															
Level (dBUV/m) 127 120 100 80 60 40 20 0 5410 5440.5460.5480.5500.5520.5540.5560.5580.5600.5620.5640.5660.5680.5700.5720.5740. 5765 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><td></td><td></td><td>dBUV/m</td><td></td><td></td><td>dBUV</td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>5434.85</td><td>59.76</td><td>74.00</td><td>-14.24</td><td>59.17</td><td>0.59</td><td>Peak</td><td>173</td><td>88</td></tr><tr><td>2</td><td>5466.80</td><td>57.42</td><td>68.20</td><td>-10.78</td><td>56.71</td><td>0.71</td><td>Peak</td><td>189</td><td>274</td></tr><tr><td>3</td><td>5727.73</td><td>66.45</td><td>68.20</td><td>-1.75</td><td>65.33</td><td>1.12</td><td>Peak</td><td>307</td><td>305</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBUV			cm	deg	1	5434.85	59.76	74.00	-14.24	59.17	0.59	Peak	173	88	2	5466.80	57.42	68.20	-10.78	56.71	0.71	Peak	189	274	3	5727.73	66.45	68.20	-1.75	65.33	1.12	Peak	307	305
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																						
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																						
		dBUV/m			dBUV			cm	deg																																																						
1	5434.85	59.76	74.00	-14.24	59.17	0.59	Peak	173	88																																																						
2	5466.80	57.42	68.20	-10.78	56.71	0.71	Peak	189	274																																																						
3	5727.73	66.45	68.20	-1.75	65.33	1.12	Peak	307	305																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															



Band Edge measurement

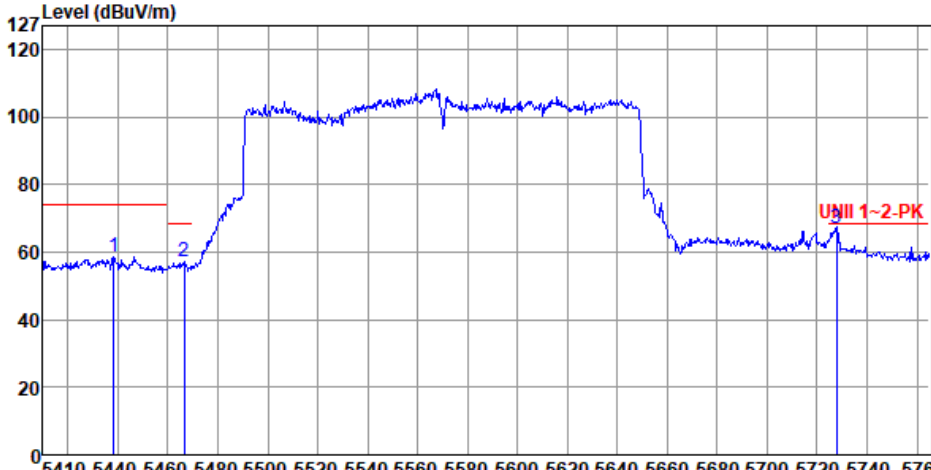
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																				
Polarization	Horizontal-Average																						
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5433.79</td><td>46.69</td><td>54.00</td><td>-7.31</td><td>46.10</td><td>0.59</td><td>Average</td><td>173</td><td>88</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5433.79	46.69	54.00	-7.31	46.10	0.59	Average	173	88
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5433.79	46.69	54.00	-7.31	46.10	0.59	Average	173	88														



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																																		
Polarization	Vertical-Peak																																																				
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.40</td><td>58.78</td><td>74.00</td><td>-15.22</td><td>58.18</td><td>0.60</td><td>Peak</td><td>203</td><td>28</td></tr><tr><td>2</td><td>5466.45</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>56.33</td><td>0.71</td><td>Peak</td><td>296</td><td>14</td></tr><tr><td>3</td><td>5727.73</td><td>67.19</td><td>68.20</td><td>-1.01</td><td>66.07</td><td>1.12</td><td>Peak</td><td>312</td><td>344</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5438.40	58.78	74.00	-15.22	58.18	0.60	Peak	203	28	2	5466.45	57.04	68.20	-11.16	56.33	0.71	Peak	296	14	3	5727.73	67.19	68.20	-1.01	66.07	1.12	Peak	312	344
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	5438.40	58.78	74.00	-15.22	58.18	0.60	Peak	203	28																																												
2	5466.45	57.04	68.20	-11.16	56.33	0.71	Peak	296	14																																												
3	5727.73	67.19	68.20	-1.01	66.07	1.12	Peak	312	344																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical-Average		
Test By :Brad Wu_ Temperature(°C):22 Humidity(%):67			
Level (dBuV/m) <			



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.52	0.82	0.62	0.83
T20°C Vmin	0.39	0.25	0.80	-0.01
T40°C Vnom	-5.53	-4.89	-5.67	-5.99
T30°C Vnom	-5.87	-5.53	-6.18	-5.48
T20°C Vnom	0.79	1.54	0.98	0.76
T10°C Vnom	6.77	6.56	7.36	6.99
T5°C Vnom	6.76	6.75	6.73	6.87
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 5	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.72	1.33	0.87	0.44
T20°C Vmin	0.33	1.07	0.18	0.67
T40°C Vnom	-5.35	-5.36	-4.59	-5.45
T30°C Vnom	-4.99	-5.15	-4.61	-4.52
T20°C Vnom	0.61	0.93	0.84	0.78
T10°C Vnom	6.23	6.56	6.32	6.12
T5°C Vnom	6.73	6.99	7.11	6.92
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 5	

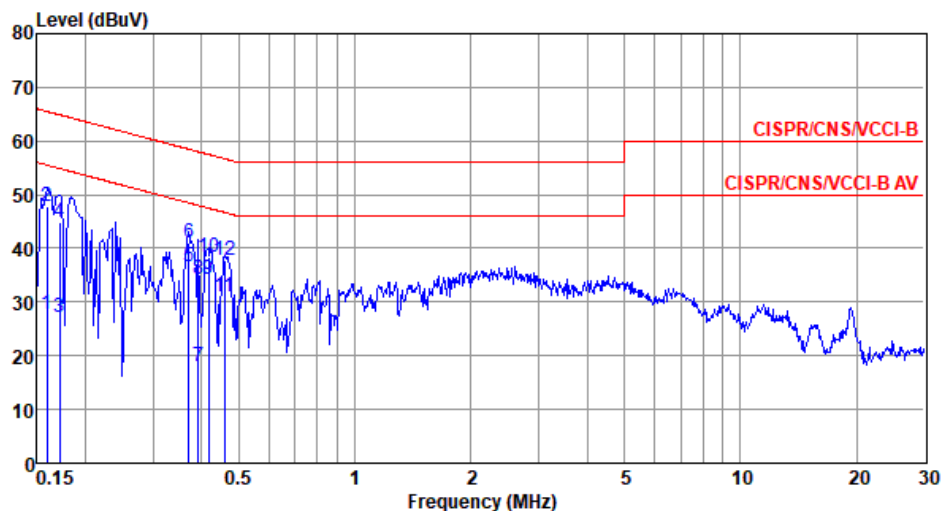
Non-beamforming mode

Modulation Mode	be EHT40	Test Freq. (MHz)	5755
Power Phase	Line		

Test by : Akun Chung-

Temperature: 24°C

Humidity: 65%



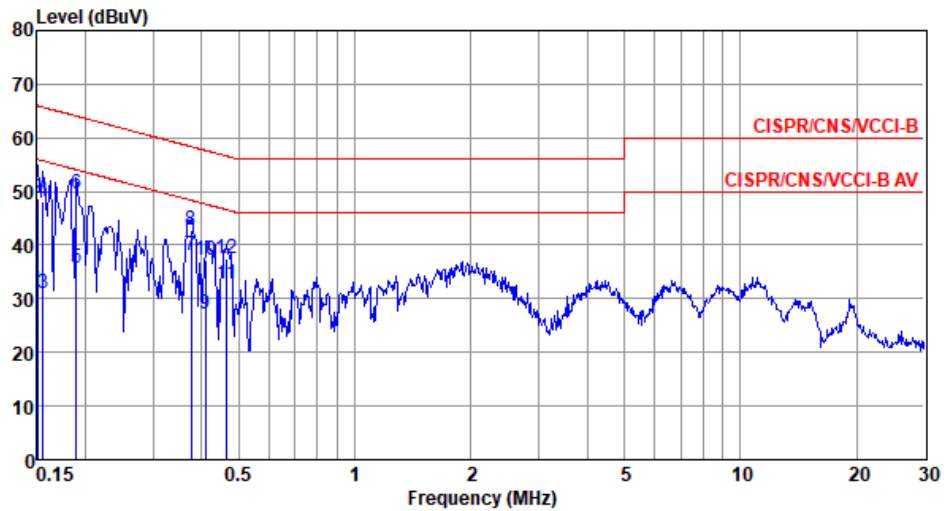
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	27.67	55.52	-27.85	17.89	9.75	0.03	0.00	Average
2	0.159	47.74	65.52	-17.78	37.96	9.75	0.03	0.00	QP
3	0.171	27.17	54.90	-27.73	17.39	9.75	0.03	0.00	Average
4	0.171	44.80	64.90	-20.10	35.02	9.75	0.03	0.00	QP
5*	0.371	36.56	48.47	-11.91	26.77	9.75	0.04	0.00	Average
6	0.371	41.09	58.47	-17.38	31.30	9.75	0.04	0.00	QP
7	0.393	18.14	47.99	-29.85	8.35	9.75	0.04	0.00	Average
8	0.393	34.11	57.99	-23.88	24.32	9.75	0.04	0.00	QP
9	0.417	34.19	47.51	-13.32	24.40	9.75	0.04	0.00	Average
10	0.417	38.48	57.51	-19.03	28.69	9.75	0.04	0.00	QP
11	0.459	30.99	46.71	-15.72	21.20	9.75	0.04	0.00	Average
12	0.459	37.77	56.71	-18.94	27.98	9.75	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	be EHT40	Test Freq. (MHz)	5755
Power Phase	Neutral		

Test by : Akun Chung- Temperature: 24°C Humidity: 65%



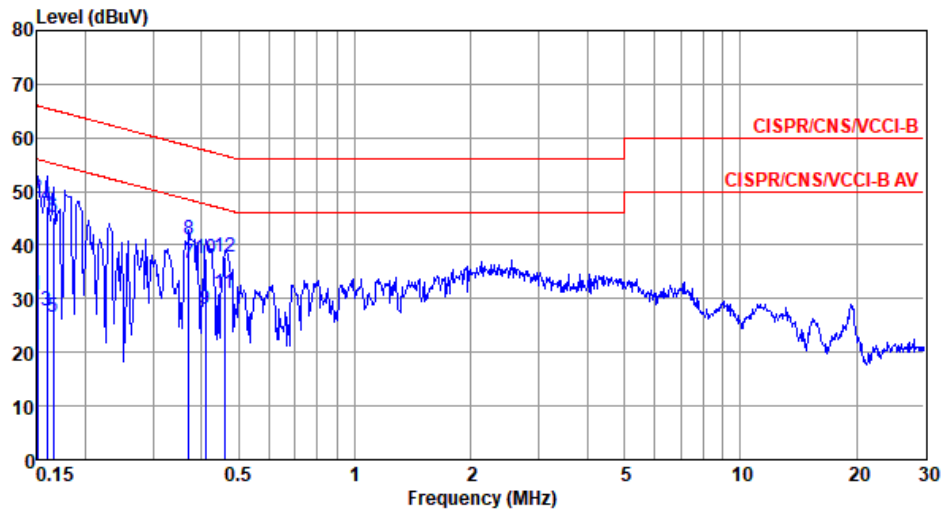
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	31.61	56.00	-24.39	21.84	9.74	0.03	0.00	Average
2	0.150	48.69	66.00	-17.31	38.92	9.74	0.03	0.00	QP
3	0.156	30.98	55.69	-24.71	21.21	9.74	0.03	0.00	Average
4	0.156	48.06	65.69	-17.63	38.29	9.74	0.03	0.00	QP
5	0.189	35.79	54.06	-18.27	26.01	9.74	0.04	0.00	Average
6	0.189	49.61	64.06	-14.45	39.83	9.74	0.04	0.00	QP
7*	0.377	38.20	48.34	-10.14	28.41	9.75	0.04	0.00	Average
8	0.377	42.84	58.34	-15.50	33.05	9.75	0.04	0.00	QP
9	0.410	27.21	47.64	-20.43	17.42	9.75	0.04	0.00	Average
10	0.410	37.13	57.64	-20.51	27.34	9.75	0.04	0.00	QP
11	0.466	32.74	46.58	-13.84	22.94	9.76	0.04	0.00	Average
12	0.466	37.60	56.58	-18.98	27.80	9.76	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Beamforming mode

Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Akun Chung- Temperature: 24°C Humidity: 65%

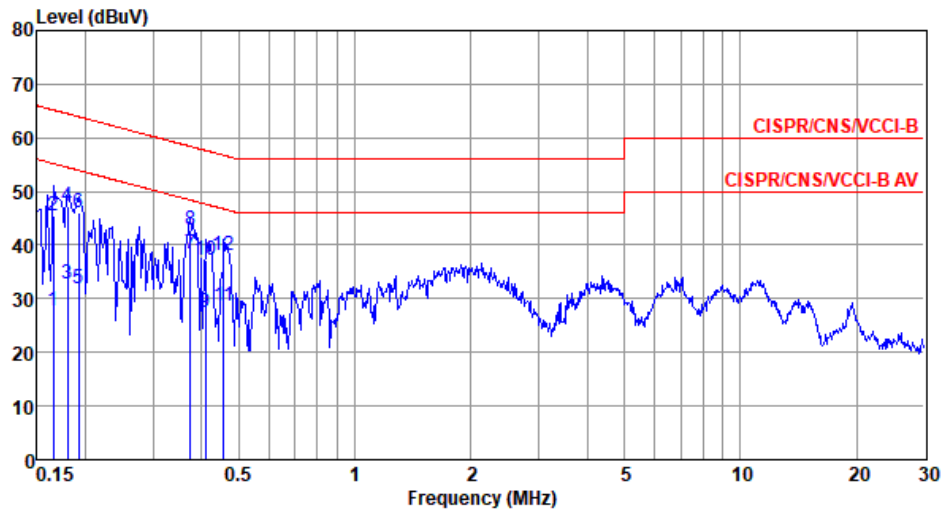


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	30.60	56.00	-25.40	20.82	9.75	0.03	0.00	Average
2	0.150	48.64	66.00	-17.36	38.86	9.75	0.03	0.00	QP
3	0.159	27.66	55.52	-27.86	17.88	9.75	0.03	0.00	Average
4	0.159	47.16	65.52	-18.36	37.38	9.75	0.03	0.00	QP
5	0.165	26.71	55.21	-28.50	16.93	9.75	0.03	0.00	Average
6	0.165	45.29	65.21	-19.92	35.51	9.75	0.03	0.00	QP
7*	0.371	36.68	48.47	-11.79	26.89	9.75	0.04	0.00	Average
8	0.371	41.10	58.47	-17.37	31.31	9.75	0.04	0.00	QP
9	0.410	27.95	47.64	-19.69	18.16	9.75	0.04	0.00	Average
10	0.410	37.52	57.64	-20.12	27.73	9.75	0.04	0.00	QP
11	0.459	31.08	46.71	-15.63	21.29	9.75	0.04	0.00	Average
12	0.459	37.84	56.71	-18.87	28.05	9.75	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Akun Chung- Temperature: 24°C Humidity: 65%



	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	27.67	55.21	-27.54	17.90	9.74	0.03	0.00	Average
2	0.165	45.55	65.21	-19.66	35.78	9.74	0.03	0.00	QP
3	0.180	32.71	54.50	-21.79	22.93	9.74	0.04	0.00	Average
4	0.180	47.35	64.50	-17.15	37.57	9.74	0.04	0.00	QP
5	0.192	31.93	53.93	-22.00	22.15	9.74	0.04	0.00	Average
6	0.192	46.18	63.93	-17.75	36.40	9.74	0.04	0.00	QP
7*	0.375	38.36	48.39	-10.03	28.57	9.75	0.04	0.00	Average
8	0.375	42.84	58.39	-15.55	33.05	9.75	0.04	0.00	QP
9	0.410	27.48	47.64	-20.16	17.69	9.75	0.04	0.00	Average
10	0.410	37.17	57.64	-20.47	27.38	9.75	0.04	0.00	QP
11	0.456	28.74	46.76	-18.02	18.95	9.75	0.04	0.00	Average
12	0.456	38.11	56.76	-18.65	28.32	9.75	0.04	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).