



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																																								
Polarization	Vertical																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10540.00</td><td>49.94</td><td>68.20</td><td>-18.26</td><td>41.00</td><td>8.94</td><td>Peak</td><td>100</td><td>51</td></tr><tr><td>2</td><td>15810.00</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>33.39</td><td>6.25</td><td>Average</td><td>289</td><td>25</td></tr><tr><td>3</td><td>15810.00</td><td>52.65</td><td>74.00</td><td>-21.35</td><td>46.40</td><td>6.25</td><td>Peak</td><td>289</td><td>25</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10540.00	49.94	68.20	-18.26	41.00	8.94	Peak	100	51	2	15810.00	39.64	54.00	-14.36	33.39	6.25	Average	289	25	3	15810.00	52.65	74.00	-21.35	46.40	6.25	Peak	289	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10540.00	49.94	68.20	-18.26	41.00	8.94	Peak	100	51																																		
2	15810.00	39.64	54.00	-14.36	33.39	6.25	Average	289	25																																		
3	15810.00	52.65	74.00	-21.35	46.40	6.25	Peak	289	25																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Horizontal																																																				
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>36.48</td><td>54.00</td><td>-17.52</td><td>27.41</td><td>9.07</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>2</td><td>10620.00</td><td>49.26</td><td>74.00</td><td>-24.74</td><td>40.19</td><td>9.07</td><td>Peak</td><td>100</td><td>29</td></tr><tr><td>3</td><td>15930.00</td><td>38.62</td><td>54.00</td><td>-15.38</td><td>32.19</td><td>6.43</td><td>Average</td><td>111</td><td>45</td></tr><tr><td>4</td><td>15930.00</td><td>51.44</td><td>74.00</td><td>-22.56</td><td>45.01</td><td>6.43</td><td>Peak</td><td>111</td><td>45</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	36.48	54.00	-17.52	27.41	9.07	Average	100	29	2	10620.00	49.26	74.00	-24.74	40.19	9.07	Peak	100	29	3	15930.00	38.62	54.00	-15.38	32.19	6.43	Average	111	45	4	15930.00	51.44	74.00	-22.56	45.01	6.43	Peak	111	45
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	36.48	54.00	-17.52	27.41	9.07	Average	100	29																																												
2	10620.00	49.26	74.00	-24.74	40.19	9.07	Peak	100	29																																												
3	15930.00	38.62	54.00	-15.38	32.19	6.43	Average	111	45																																												
4	15930.00	51.44	74.00	-22.56	45.01	6.43	Peak	111	45																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

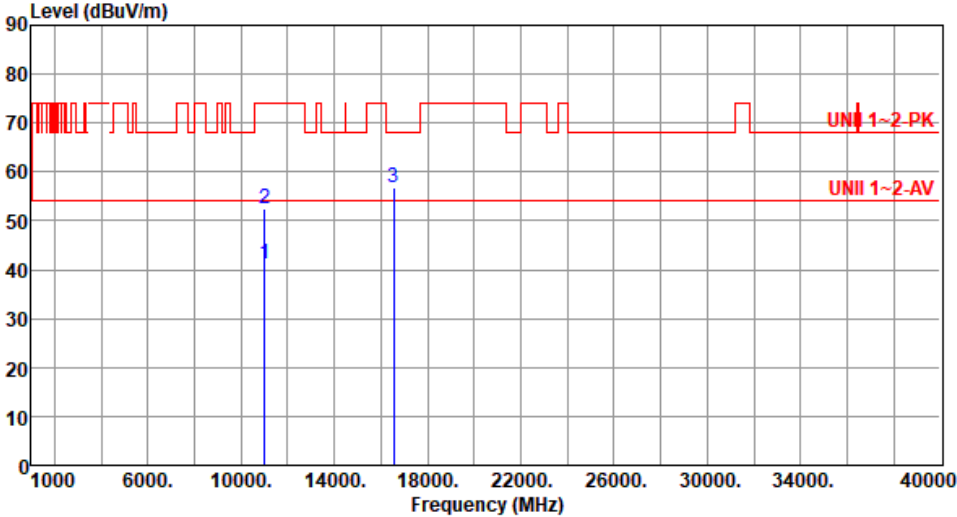
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Vertical																																																				
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>36.67</td><td>54.00</td><td>-17.33</td><td>27.60</td><td>9.07</td><td>Average</td><td>100</td><td>59</td></tr><tr><td>2</td><td>10620.00</td><td>49.85</td><td>74.00</td><td>-24.15</td><td>40.78</td><td>9.07</td><td>Peak</td><td>100</td><td>59</td></tr><tr><td>3</td><td>15930.00</td><td>39.68</td><td>54.00</td><td>-14.32</td><td>33.25</td><td>6.43</td><td>Average</td><td>269</td><td>41</td></tr><tr><td>4</td><td>15930.00</td><td>52.87</td><td>74.00</td><td>-21.13</td><td>46.44</td><td>6.43</td><td>Peak</td><td>269</td><td>41</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	36.67	54.00	-17.33	27.60	9.07	Average	100	59	2	10620.00	49.85	74.00	-24.15	40.78	9.07	Peak	100	59	3	15930.00	39.68	54.00	-14.32	33.25	6.43	Average	269	41	4	15930.00	52.87	74.00	-21.13	46.44	6.43	Peak	269	41
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	36.67	54.00	-17.33	27.60	9.07	Average	100	59																																												
2	10620.00	49.85	74.00	-24.15	40.78	9.07	Peak	100	59																																												
3	15930.00	39.68	54.00	-14.32	33.25	6.43	Average	269	41																																												
4	15930.00	52.87	74.00	-21.13	46.44	6.43	Peak	269	41																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510																																																										
Polarization	Vertical																																																												
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																																													
																																																													
	<table><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>41.09</td><td>54.00</td><td>-12.91</td><td>31.79</td><td>9.30</td><td>Average</td><td>187</td><td>342</td></tr><tr><td>2</td><td>11020.00</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>43.28</td><td>9.30</td><td>Peak</td><td>187</td><td>342</td></tr><tr><td>3</td><td>16530.00</td><td>56.86</td><td>68.20</td><td>-11.34</td><td>48.43</td><td>8.43</td><td>Peak</td><td>324</td><td>29</td></tr></table>	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level			reading			High	Table		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	11020.00	41.09	54.00	-12.91	31.79	9.30	Average	187	342	2	11020.00	52.58	74.00	-21.42	43.28	9.30	Peak	187	342	3	16530.00	56.86	68.20	-11.34	48.43	8.43	Peak	324	29			
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																					
MHz	level			reading			High	Table																																																					
	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																					
1	11020.00	41.09	54.00	-12.91	31.79	9.30	Average	187	342																																																				
2	11020.00	52.58	74.00	-21.42	43.28	9.30	Peak	187	342																																																				
3	16530.00	56.86	68.20	-11.34	48.43	8.43	Peak	324	29																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																													



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11180.00</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>32.27</td><td>8.84</td><td>Average</td><td>214</td><td>342</td></tr><tr><td>2</td><td>11180.00</td><td>52.29</td><td>74.00</td><td>-21.71</td><td>43.45</td><td>8.84</td><td>Peak</td><td>214</td><td>342</td></tr><tr><td>3</td><td>16770.00</td><td>56.82</td><td>68.20</td><td>-11.38</td><td>47.75</td><td>9.07</td><td>Peak</td><td>264</td><td>35</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	41.11	54.00	-12.89	32.27	8.84	Average	214	342	2	11180.00	52.29	74.00	-21.71	43.45	8.84	Peak	214	342	3	16770.00	56.82	68.20	-11.38	47.75	9.07	Peak	264	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11180.00	41.11	54.00	-12.89	32.27	8.84	Average	214	342																																		
2	11180.00	52.29	74.00	-21.71	43.45	8.84	Peak	214	342																																		
3	16770.00	56.82	68.20	-11.38	47.75	9.07	Peak	264	35																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11340.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>30.36</td><td>9.09</td><td>Average</td><td>111</td><td>64</td></tr><tr><td>2</td><td>11340.00</td><td>51.16</td><td>74.00</td><td>-22.84</td><td>42.07</td><td>9.09</td><td>Peak</td><td>111</td><td>64</td></tr><tr><td>3</td><td>17010.00</td><td>53.29</td><td>68.20</td><td>-14.91</td><td>44.53</td><td>8.76</td><td>Peak</td><td>315</td><td>42</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	39.45	54.00	-14.55	30.36	9.09	Average	111	64	2	11340.00	51.16	74.00	-22.84	42.07	9.09	Peak	111	64	3	17010.00	53.29	68.20	-14.91	44.53	8.76	Peak	315	42
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11340.00	39.45	54.00	-14.55	30.36	9.09	Average	111	64																																		
2	11340.00	51.16	74.00	-22.84	42.07	9.09	Peak	111	64																																		
3	17010.00	53.29	68.20	-14.91	44.53	8.76	Peak	315	42																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11340.00</td><td>41.05</td><td>54.00</td><td>-12.95</td><td>31.96</td><td>9.09</td><td>Average</td><td>167</td><td>342</td></tr><tr><td>2</td><td>11340.00</td><td>53.08</td><td>74.00</td><td>-20.92</td><td>43.99</td><td>9.09</td><td>Peak</td><td>167</td><td>342</td></tr><tr><td>3</td><td>17010.00</td><td>55.36</td><td>68.20</td><td>-12.84</td><td>46.60</td><td>8.76</td><td>Peak</td><td>266</td><td>14</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	41.05	54.00	-12.95	31.96	9.09	Average	167	342	2	11340.00	53.08	74.00	-20.92	43.99	9.09	Peak	167	342	3	17010.00	55.36	68.20	-12.84	46.60	8.76	Peak	266	14
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11340.00	41.05	54.00	-12.95	31.96	9.09	Average	167	342																																		
2	11340.00	53.08	74.00	-20.92	43.99	9.09	Peak	167	342																																		
3	17010.00	55.36	68.20	-12.84	46.60	8.76	Peak	266	14																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11510.00</td><td>42.21</td><td>54.00</td><td>-11.79</td><td>32.86</td><td>9.35</td><td>Average</td><td>114</td><td>46</td></tr><tr><td>2</td><td>11510.00</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>45.04</td><td>9.35</td><td>Peak</td><td>114</td><td>46</td></tr><tr><td>3</td><td>17265.00</td><td>63.02</td><td>68.20</td><td>-5.18</td><td>54.43</td><td>8.59</td><td>Peak</td><td>211</td><td>258</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	42.21	54.00	-11.79	32.86	9.35	Average	114	46	2	11510.00	54.39	74.00	-19.61	45.04	9.35	Peak	114	46	3	17265.00	63.02	68.20	-5.18	54.43	8.59	Peak	211	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	42.21	54.00	-11.79	32.86	9.35	Average	114	46																																		
2	11510.00	54.39	74.00	-19.61	45.04	9.35	Peak	114	46																																		
3	17265.00	63.02	68.20	-5.18	54.43	8.59	Peak	211	258																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

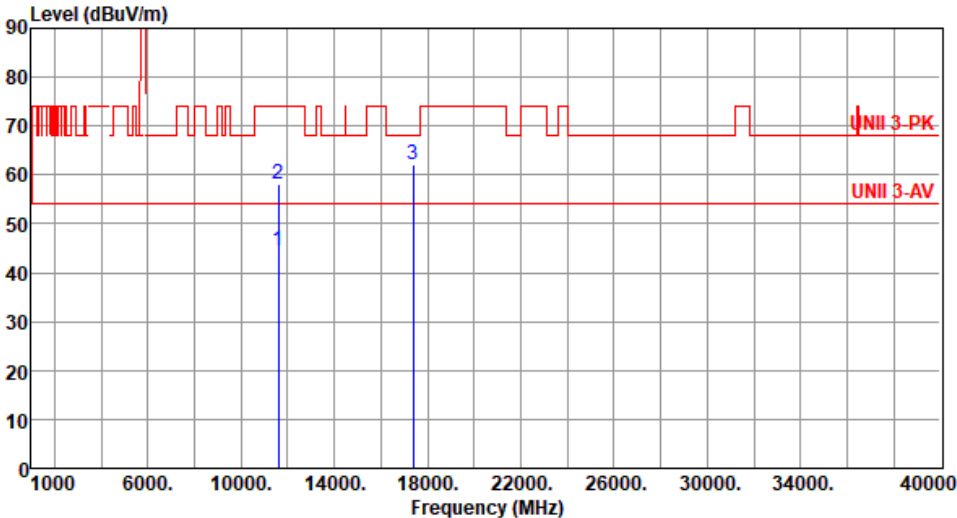
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11510.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>33.39</td><td>9.35</td><td>Average</td><td>159</td><td>345</td></tr><tr><td>2</td><td>11510.00</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>45.01</td><td>9.35</td><td>Peak</td><td>159</td><td>345</td></tr><tr><td>3</td><td>17265.00</td><td>63.62</td><td>68.20</td><td>-4.58</td><td>55.03</td><td>8.59</td><td>Peak</td><td>224</td><td>36</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	42.74	54.00	-11.26	33.39	9.35	Average	159	345	2	11510.00	54.36	74.00	-19.64	45.01	9.35	Peak	159	345	3	17265.00	63.62	68.20	-4.58	55.03	8.59	Peak	224	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	42.74	54.00	-11.26	33.39	9.35	Average	159	345																																		
2	11510.00	54.36	74.00	-19.64	45.01	9.35	Peak	159	345																																		
3	17265.00	63.62	68.20	-4.58	55.03	8.59	Peak	224	36																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

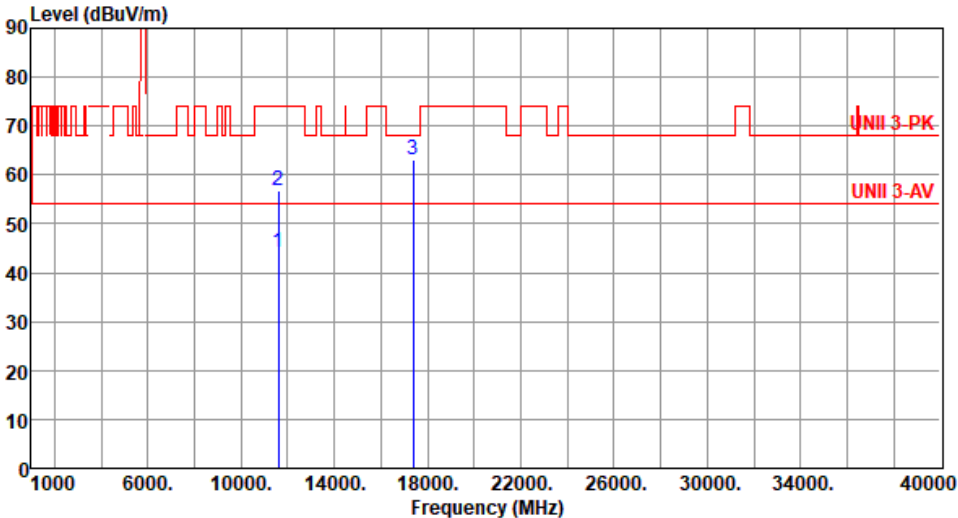


Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
																																											
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>44.61</td><td>54.00</td><td>-9.39</td><td>35.51</td><td>9.10</td><td>Average</td><td>100</td><td>62</td></tr><tr><td>2</td><td>11590.00</td><td>58.14</td><td>74.00</td><td>-15.86</td><td>49.04</td><td>9.10</td><td>Peak</td><td>100</td><td>62</td></tr><tr><td>3</td><td>17385.00</td><td>62.24</td><td>68.20</td><td>-5.96</td><td>53.06</td><td>9.18</td><td>Peak</td><td>226</td><td>253</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	44.61	54.00	-9.39	35.51	9.10	Average	100	62	2	11590.00	58.14	74.00	-15.86	49.04	9.10	Peak	100	62	3	17385.00	62.24	68.20	-5.96	53.06	9.18	Peak	226	253		
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	44.61	54.00	-9.39	35.51	9.10	Average	100	62																																		
2	11590.00	58.14	74.00	-15.86	49.04	9.10	Peak	100	62																																		
3	17385.00	62.24	68.20	-5.96	53.06	9.18	Peak	226	253																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>35.21</td><td>9.10</td><td>Average</td><td>299</td><td>356</td></tr><tr><td>2</td><td>11590.00</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>47.58</td><td>9.10</td><td>Peak</td><td>299</td><td>356</td></tr><tr><td>3</td><td>17385.00</td><td>63.21</td><td>68.20</td><td>-4.99</td><td>54.03</td><td>9.18</td><td>Peak</td><td>311</td><td>346</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	44.31	54.00	-9.69	35.21	9.10	Average	299	356	2	11590.00	56.68	74.00	-17.32	47.58	9.10	Peak	299	356	3	17385.00	63.21	68.20	-4.99	54.03	9.18	Peak	311	346
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	44.31	54.00	-9.69	35.21	9.10	Average	299	356																																		
2	11590.00	56.68	74.00	-17.32	47.58	9.10	Peak	299	356																																		
3	17385.00	63.21	68.20	-4.99	54.03	9.18	Peak	311	346																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

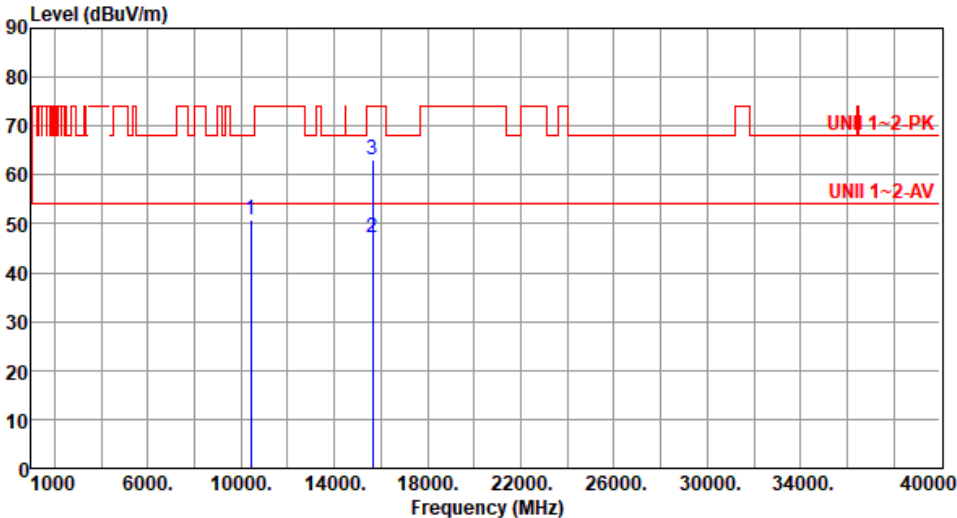
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>52.16</td><td>68.20</td><td>-16.04</td><td>43.39</td><td>8.77</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>2</td><td>15630.00</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>39.97</td><td>6.17</td><td>Average</td><td>266</td><td>55</td></tr><tr><td>3</td><td>15630.00</td><td>61.05</td><td>74.00</td><td>-12.95</td><td>54.88</td><td>6.17</td><td>Peak</td><td>266</td><td>55</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	52.16	68.20	-16.04	43.39	8.77	Peak	100	49	2	15630.00	46.14	54.00	-7.86	39.97	6.17	Average	266	55	3	15630.00	61.05	74.00	-12.95	54.88	6.17	Peak	266	55
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	52.16	68.20	-16.04	43.39	8.77	Peak	100	49																																		
2	15630.00	46.14	54.00	-7.86	39.97	6.17	Average	266	55																																		
3	15630.00	61.05	74.00	-12.95	54.88	6.17	Peak	266	55																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

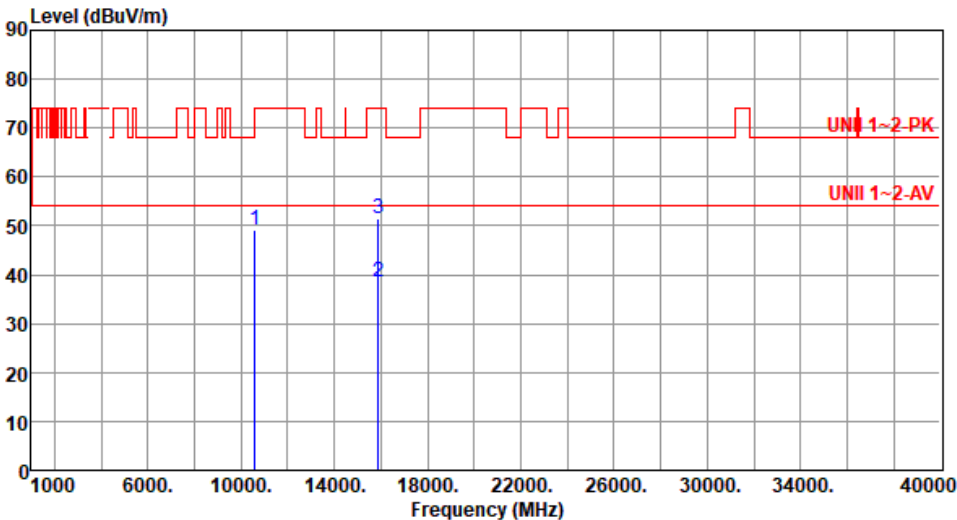


Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																																								
Polarization	Vertical																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>50.82</td><td>68.20</td><td>-17.38</td><td>42.05</td><td>8.77</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>2</td><td>15630.00</td><td>47.02</td><td>54.00</td><td>-6.98</td><td>40.85</td><td>6.17</td><td>Average</td><td>348</td><td>316</td></tr><tr><td>3</td><td>15630.00</td><td>63.01</td><td>74.00</td><td>-10.99</td><td>56.84</td><td>6.17</td><td>Peak</td><td>348</td><td>316</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	50.82	68.20	-17.38	42.05	8.77	Peak	100	19	2	15630.00	47.02	54.00	-6.98	40.85	6.17	Average	348	316	3	15630.00	63.01	74.00	-10.99	56.84	6.17	Peak	348	316
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	50.82	68.20	-17.38	42.05	8.77	Peak	100	19																																		
2	15630.00	47.02	54.00	-6.98	40.85	6.17	Average	348	316																																		
3	15630.00	63.01	74.00	-10.99	56.84	6.17	Peak	348	316																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

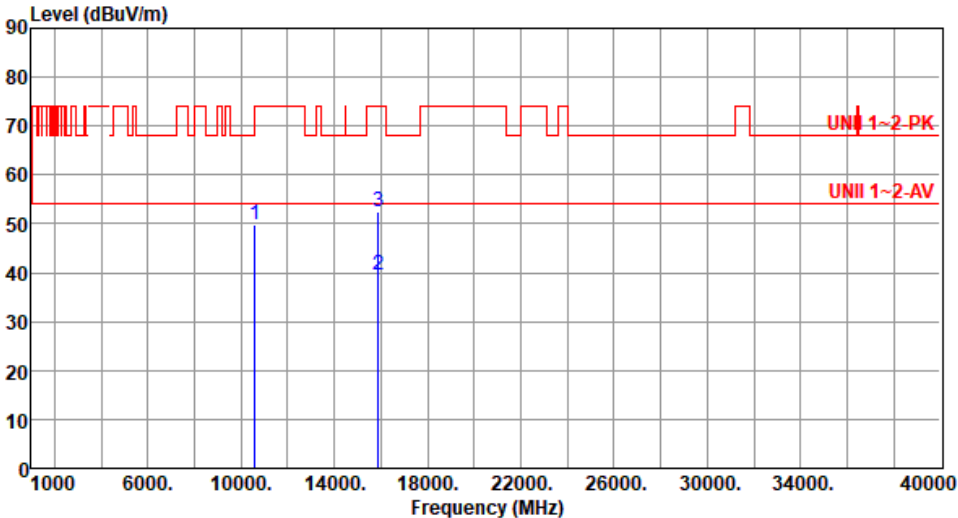


Modulation	be EHT80	Test Freq. (MHz)	5290																																								
Polarization	Horizontal																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10580.00</td><td>49.25</td><td>68.20</td><td>-18.95</td><td>40.23</td><td>9.02</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>2</td><td>15870.00</td><td>38.61</td><td>54.00</td><td>-15.39</td><td>32.23</td><td>6.38</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>3</td><td>15870.00</td><td>51.44</td><td>74.00</td><td>-22.56</td><td>45.06</td><td>6.38</td><td>Peak</td><td>100</td><td>52</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10580.00	49.25	68.20	-18.95	40.23	9.02	Peak	100	41	2	15870.00	38.61	54.00	-15.39	32.23	6.38	Average	100	52	3	15870.00	51.44	74.00	-22.56	45.06	6.38	Peak	100	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10580.00	49.25	68.20	-18.95	40.23	9.02	Peak	100	41																																		
2	15870.00	38.61	54.00	-15.39	32.23	6.38	Average	100	52																																		
3	15870.00	51.44	74.00	-22.56	45.06	6.38	Peak	100	52																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																																								
Polarization	Vertical																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10580.00</td><td>49.86</td><td>68.20</td><td>-18.34</td><td>40.84</td><td>9.02</td><td>Peak</td><td>100</td><td>44</td></tr><tr><td>2</td><td>15870.00</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>33.07</td><td>6.38</td><td>Average</td><td>281</td><td>52</td></tr><tr><td>3</td><td>15870.00</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>46.08</td><td>6.38</td><td>Peak</td><td>281</td><td>52</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10580.00	49.86	68.20	-18.34	40.84	9.02	Peak	100	44	2	15870.00	39.45	54.00	-14.55	33.07	6.38	Average	281	52	3	15870.00	52.46	74.00	-21.54	46.08	6.38	Peak	281	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10580.00	49.86	68.20	-18.34	40.84	9.02	Peak	100	44																																		
2	15870.00	39.45	54.00	-14.55	33.07	6.38	Average	281	52																																		
3	15870.00	52.46	74.00	-21.54	46.08	6.38	Peak	281	52																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):21 Humidity(%):62			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11060.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>31.67</td><td>9.15</td><td>Average</td><td>178</td><td>355</td></tr><tr><td>2</td><td>11060.00</td><td>52.24</td><td>74.00</td><td>-21.76</td><td>43.09</td><td>9.15</td><td>Peak</td><td>178</td><td>355</td></tr><tr><td>3</td><td>16590.00</td><td>54.62</td><td>68.20</td><td>-13.58</td><td>46.27</td><td>8.35</td><td>Peak</td><td>317</td><td>56</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11060.00	40.82	54.00	-13.18	31.67	9.15	Average	178	355	2	11060.00	52.24	74.00	-21.76	43.09	9.15	Peak	178	355	3	16590.00	54.62	68.20	-13.58	46.27	8.35	Peak	317	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11060.00	40.82	54.00	-13.18	31.67	9.15	Average	178	355																																		
2	11060.00	52.24	74.00	-21.76	43.09	9.15	Peak	178	355																																		
3	16590.00	54.62	68.20	-13.58	46.27	8.35	Peak	317	56																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>39.46</td><td>54.00</td><td>-14.54</td><td>30.60</td><td>8.86</td><td>Average</td><td>115</td><td>62</td></tr><tr><td>2</td><td>11220.00</td><td>51.07</td><td>74.00</td><td>-22.93</td><td>42.21</td><td>8.86</td><td>Peak</td><td>115</td><td>62</td></tr><tr><td>3</td><td>16830.00</td><td>53.14</td><td>68.20</td><td>-15.06</td><td>43.80</td><td>9.34</td><td>Peak</td><td>315</td><td>59</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	39.46	54.00	-14.54	30.60	8.86	Average	115	62	2	11220.00	51.07	74.00	-22.93	42.21	8.86	Peak	115	62	3	16830.00	53.14	68.20	-15.06	43.80	9.34	Peak	315	59
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	39.46	54.00	-14.54	30.60	8.86	Average	115	62																																		
2	11220.00	51.07	74.00	-22.93	42.21	8.86	Peak	115	62																																		
3	16830.00	53.14	68.20	-15.06	43.80	9.34	Peak	315	59																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

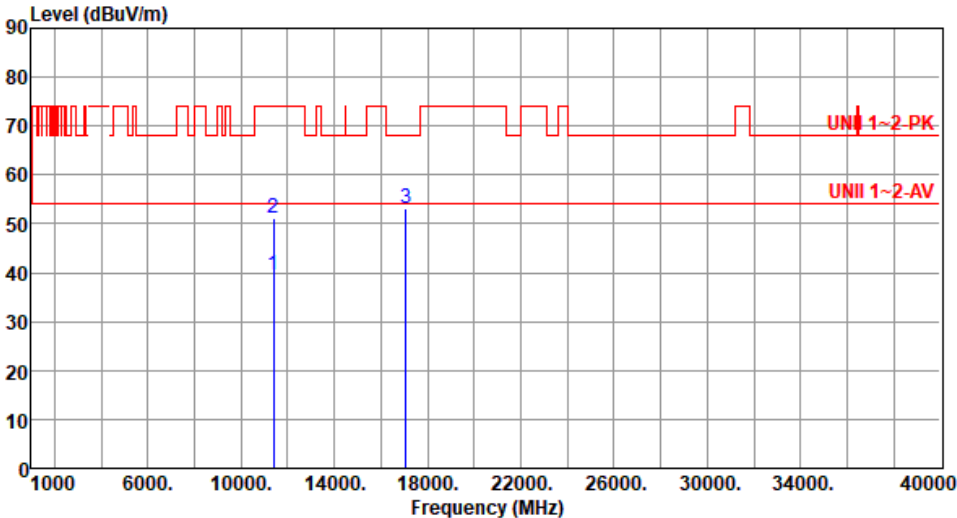
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>40.06</td><td>54.00</td><td>-13.94</td><td>31.20</td><td>8.86</td><td>Average</td><td>211</td><td>339</td></tr><tr><td>2</td><td>11220.00</td><td>51.85</td><td>74.00</td><td>-22.15</td><td>42.99</td><td>8.86</td><td>Peak</td><td>211</td><td>339</td></tr><tr><td>3</td><td>16830.00</td><td>54.67</td><td>68.20</td><td>-13.53</td><td>45.33</td><td>9.34</td><td>Peak</td><td>256</td><td>42</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	40.06	54.00	-13.94	31.20	8.86	Average	211	339	2	11220.00	51.85	74.00	-22.15	42.99	8.86	Peak	211	339	3	16830.00	54.67	68.20	-13.53	45.33	9.34	Peak	256	42
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	40.06	54.00	-13.94	31.20	8.86	Average	211	339																																		
2	11220.00	51.85	74.00	-22.15	42.99	8.86	Peak	211	339																																		
3	16830.00	54.67	68.20	-13.53	45.33	9.34	Peak	256	42																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11380.00	39.36	54.00	-14.64	30.24	9.12	Average	118	59
2	11380.00	51.14	74.00	-22.86	42.02	9.12	Peak	118	59
3	17070.00	53.22	68.20	-14.98	44.58	8.64	Peak	306	41
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																									
Polarization	Vertical																																											
Test By :Roger Lu Temperature(°C):21 Humidity(%):62																																												
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11380.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>31.02</td><td>9.12</td><td>Average</td><td>156</td><td>354</td></tr><tr><td>2</td><td>11380.00</td><td>52.66</td><td>74.00</td><td>-21.34</td><td>43.54</td><td>9.12</td><td>Peak</td><td>156</td><td>354</td></tr><tr><td>3</td><td>17070.00</td><td>54.16</td><td>68.20</td><td>-14.04</td><td>45.52</td><td>8.64</td><td>Peak</td><td>259</td><td>21</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11380.00	40.14	54.00	-13.86	31.02	9.12	Average	156	354	2	11380.00	52.66	74.00	-21.34	43.54	9.12	Peak	156	354	3	17070.00	54.16	68.20	-14.04	45.52	8.64	Peak	259	21			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																			
1	11380.00	40.14	54.00	-13.86	31.02	9.12	Average	156	354																																			
2	11380.00	52.66	74.00	-21.34	43.54	9.12	Peak	156	354																																			
3	17070.00	54.16	68.20	-14.04	45.52	8.64	Peak	259	21																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																												



Modulation	be EHT80	Test Freq. (MHz)	5775																																								
Polarization	Horizontal																																										
Test By :Akun Chung Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11550.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>33.43</td><td>9.26</td><td>Average</td><td>148</td><td>326</td></tr><tr><td>2</td><td>11550.00</td><td>54.15</td><td>74.00</td><td>-19.85</td><td>44.89</td><td>9.26</td><td>Peak</td><td>148</td><td>326</td></tr><tr><td>3</td><td>17325.00</td><td>61.34</td><td>68.20</td><td>-6.86</td><td>52.52</td><td>8.82</td><td>Peak</td><td>219</td><td>45</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11550.00	42.69	54.00	-11.31	33.43	9.26	Average	148	326	2	11550.00	54.15	74.00	-19.85	44.89	9.26	Peak	148	326	3	17325.00	61.34	68.20	-6.86	52.52	8.82	Peak	219	45
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11550.00	42.69	54.00	-11.31	33.43	9.26	Average	148	326																																		
2	11550.00	54.15	74.00	-19.85	44.89	9.26	Peak	148	326																																		
3	17325.00	61.34	68.20	-6.86	52.52	8.82	Peak	219	45																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

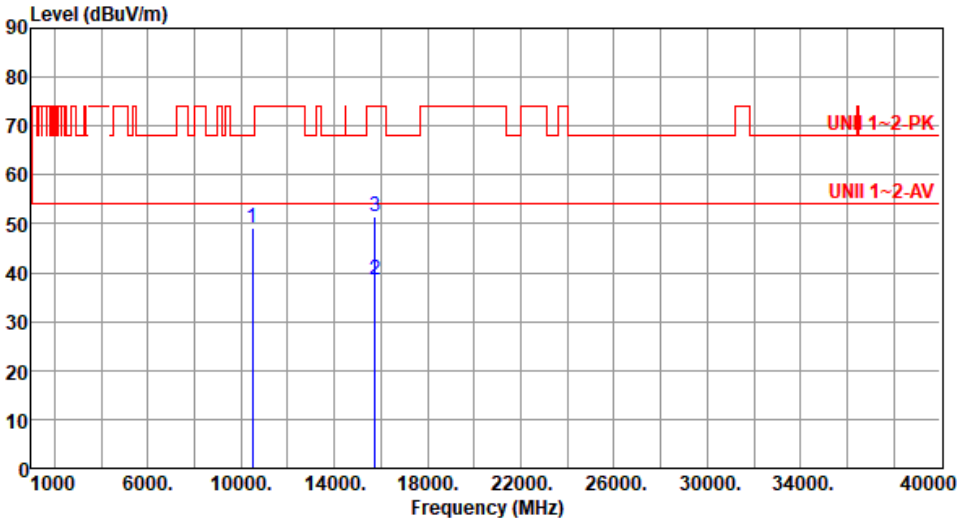
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Vertical		
Test By :Akun Chung Temperature(°C):21 Humidity(%):62			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																																								
Polarization	Horizontal																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10500.00</td><td>49.21</td><td>68.20</td><td>-18.99</td><td>40.35</td><td>8.86</td><td>Peak</td><td>100</td><td>24</td></tr><tr><td>2</td><td>15750.00</td><td>38.56</td><td>54.00</td><td>-15.44</td><td>32.16</td><td>6.40</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>3</td><td>15750.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>44.99</td><td>6.40</td><td>Peak</td><td>100</td><td>36</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10500.00	49.21	68.20	-18.99	40.35	8.86	Peak	100	24	2	15750.00	38.56	54.00	-15.44	32.16	6.40	Average	100	36	3	15750.00	51.39	74.00	-22.61	44.99	6.40	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10500.00	49.21	68.20	-18.99	40.35	8.86	Peak	100	24																																		
2	15750.00	38.56	54.00	-15.44	32.16	6.40	Average	100	36																																		
3	15750.00	51.39	74.00	-22.61	44.99	6.40	Peak	100	36																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

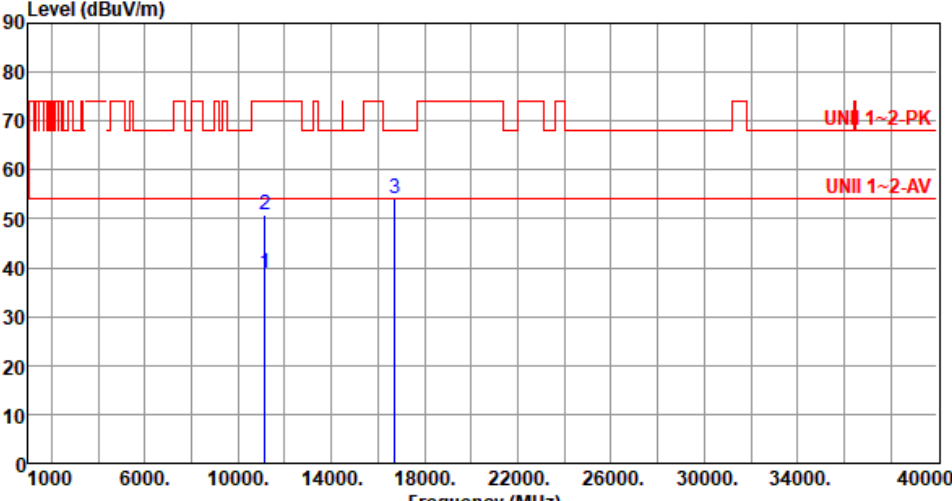
Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):21 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	10500.00	49.75	68.20	-18.45	40.89	8.86	Peak	100	22
2	15750.00	39.04	54.00	-14.96	32.64	6.40	Average	279	47
3	15750.00	52.16	74.00	-21.84	45.76	6.40	Peak	279	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11140.00</td><td>38.94</td><td>54.00</td><td>-15.06</td><td>30.07</td><td>8.87</td><td>Average</td><td>114</td><td>59</td></tr><tr><td>2</td><td>11140.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>41.85</td><td>8.87</td><td>Peak</td><td>114</td><td>59</td></tr><tr><td>3</td><td>16710.00</td><td>54.25</td><td>68.20</td><td>-13.95</td><td>45.42</td><td>8.83</td><td>Peak</td><td>249</td><td>56</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11140.00	38.94	54.00	-15.06	30.07	8.87	Average	114	59	2	11140.00	50.72	74.00	-23.28	41.85	8.87	Peak	114	59	3	16710.00	54.25	68.20	-13.95	45.42	8.83	Peak	249	56
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11140.00	38.94	54.00	-15.06	30.07	8.87	Average	114	59																																		
2	11140.00	50.72	74.00	-23.28	41.85	8.87	Peak	114	59																																		
3	16710.00	54.25	68.20	-13.95	45.42	8.83	Peak	249	56																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical																																										
Test By :Brad Wu Temperature(°C):21 Humidity(%):62																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11140.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>30.88</td><td>8.87</td><td>Average</td><td>209</td><td>342</td></tr><tr><td>2</td><td>11140.00</td><td>51.68</td><td>74.00</td><td>-22.32</td><td>42.81</td><td>8.87</td><td>Peak</td><td>209</td><td>342</td></tr><tr><td>3</td><td>16710.00</td><td>54.02</td><td>68.20</td><td>-14.18</td><td>45.19</td><td>8.83</td><td>Peak</td><td>211</td><td>57</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11140.00	39.75	54.00	-14.25	30.88	8.87	Average	209	342	2	11140.00	51.68	74.00	-22.32	42.81	8.87	Peak	209	342	3	16710.00	54.02	68.20	-14.18	45.19	8.83	Peak	211	57
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11140.00	39.75	54.00	-14.25	30.88	8.87	Average	209	342																																		
2	11140.00	51.68	74.00	-22.32	42.81	8.87	Peak	209	342																																		
3	16710.00	54.02	68.20	-14.18	45.19	8.83	Peak	211	57																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

**Beamforming mode****Unwanted Emissions (Below 1GHz)**

Modulation	be EHT20	Test Freq. (MHz)	5785																																																																						
Polarization	Horizontal																																																																								
Test By :Hugo Zhen Temperature(°C):21 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>97.90</td><td>29.96</td><td>43.50</td><td>-13.54</td><td>43.66</td><td>-13.70</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>140.58</td><td>32.03</td><td>43.50</td><td>-11.47</td><td>41.19</td><td>-9.16</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>322.94</td><td>33.59</td><td>46.00</td><td>-12.41</td><td>40.85</td><td>-7.26</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>445.16</td><td>29.10</td><td>46.00</td><td>-16.90</td><td>32.78</td><td>-3.68</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>780.78</td><td>36.20</td><td>46.00</td><td>-9.80</td><td>33.26</td><td>2.94</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>909.79</td><td>36.40</td><td>46.00</td><td>-9.60</td><td>31.69</td><td>4.71</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	97.90	29.96	43.50	-13.54	43.66	-13.70	Peak	---	---	2	140.58	32.03	43.50	-11.47	41.19	-9.16	Peak	---	---	3	322.94	33.59	46.00	-12.41	40.85	-7.26	Peak	---	---	4	445.16	29.10	46.00	-16.90	32.78	-3.68	Peak	---	---	5	780.78	36.20	46.00	-9.80	33.26	2.94	Peak	---	---	6	909.79	36.40	46.00	-9.60	31.69	4.71	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	97.90	29.96	43.50	-13.54	43.66	-13.70	Peak	---	---																																																																
2	140.58	32.03	43.50	-11.47	41.19	-9.16	Peak	---	---																																																																
3	322.94	33.59	46.00	-12.41	40.85	-7.26	Peak	---	---																																																																
4	445.16	29.10	46.00	-16.90	32.78	-3.68	Peak	---	---																																																																
5	780.78	36.20	46.00	-9.80	33.26	2.94	Peak	---	---																																																																
6	909.79	36.40	46.00	-9.60	31.69	4.71	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	be EHT20		Test Freq. (MHz)		5785				
Polarization	Vertical								
Test By :Hugo Zhen Temperature(°C):21 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	47.46	33.67	40.00	-6.33	42.05	-8.38	QP	100	155
2	94.02	35.48	43.50	-8.02	49.78	-14.30	Peak	---	---
3	322.94	31.87	46.00	-14.13	39.13	-7.26	Peak	---	---
4	456.80	36.20	46.00	-9.80	39.88	-3.68	Peak	---	---
5	812.79	37.70	46.00	-8.30	34.43	3.27	Peak	---	---
6	937.92	36.70	46.00	-9.30	31.46	5.24	Peak	---	---
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.									



Unwanted Emissions (Above 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB dBuV dB/m cm Table deg 1 10360.00 51.93 68.20 -16.27 43.23 8.70 Peak 100 56 2 15540.00 48.89 54.00 -5.11 42.34 6.55 Average 100 78 3 15540.00 63.89 74.00 -10.11 57.34 6.55 Peak 100 78			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5180																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>51.01</td><td>68.20</td><td>-17.19</td><td>42.31</td><td>8.70</td><td>Peak</td><td>100</td><td>37</td></tr><tr><td>2</td><td>15540.00</td><td>50.03</td><td>54.00</td><td>-3.97</td><td>43.48</td><td>6.55</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>3</td><td>15540.00</td><td>66.29</td><td>74.00</td><td>-7.71</td><td>59.74</td><td>6.55</td><td>Peak</td><td>100</td><td>254</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10360.00	51.01	68.20	-17.19	42.31	8.70	Peak	100	37	2	15540.00	50.03	54.00	-3.97	43.48	6.55	Average	100	254	3	15540.00	66.29	74.00	-7.71	59.74	6.55	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10360.00	51.01	68.20	-17.19	42.31	8.70	Peak	100	37																																		
2	15540.00	50.03	54.00	-3.97	43.48	6.55	Average	100	254																																		
3	15540.00	66.29	74.00	-7.71	59.74	6.55	Peak	100	254																																		



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10400.00</td><td>50.72</td><td>68.20</td><td>-17.48</td><td>42.03</td><td>8.69</td><td>Peak</td><td>199</td><td>322</td></tr><tr><td>2</td><td>15600.00</td><td>48.44</td><td>54.00</td><td>-5.56</td><td>42.06</td><td>6.38</td><td>Average</td><td>187</td><td>314</td></tr><tr><td>3</td><td>15600.00</td><td>64.72</td><td>74.00</td><td>-9.28</td><td>58.34</td><td>6.38</td><td>Peak</td><td>187</td><td>314</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10400.00	50.72	68.20	-17.48	42.03	8.69	Peak	199	322	2	15600.00	48.44	54.00	-5.56	42.06	6.38	Average	187	314	3	15600.00	64.72	74.00	-9.28	58.34	6.38	Peak	187	314
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10400.00	50.72	68.20	-17.48	42.03	8.69	Peak	199	322																																		
2	15600.00	48.44	54.00	-5.56	42.06	6.38	Average	187	314																																		
3	15600.00	64.72	74.00	-9.28	58.34	6.38	Peak	187	314																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5240																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10480.00</td><td>52.05</td><td>68.20</td><td>-16.15</td><td>43.19</td><td>8.86</td><td>Peak</td><td>100</td><td>165</td></tr><tr><td>2</td><td>15720.00</td><td>49.46</td><td>54.00</td><td>-4.54</td><td>43.08</td><td>6.38</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>3</td><td>15720.00</td><td>62.73</td><td>74.00</td><td>-11.27</td><td>56.35</td><td>6.38</td><td>Peak</td><td>100</td><td>254</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10480.00	52.05	68.20	-16.15	43.19	8.86	Peak	100	165	2	15720.00	49.46	54.00	-4.54	43.08	6.38	Average	100	254	3	15720.00	62.73	74.00	-11.27	56.35	6.38	Peak	100	254
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10480.00	52.05	68.20	-16.15	43.19	8.86	Peak	100	165																																		
2	15720.00	49.46	54.00	-4.54	43.08	6.38	Average	100	254																																		
3	15720.00	62.73	74.00	-11.27	56.35	6.38	Peak	100	254																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5240																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10480.00</td><td>52.52</td><td>68.20</td><td>-15.68</td><td>43.66</td><td>8.86</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>2</td><td>15720.00</td><td>51.93</td><td>54.00</td><td>-2.07</td><td>45.55</td><td>6.38</td><td>Average</td><td>100</td><td>328</td></tr><tr><td>3</td><td>15720.00</td><td>67.01</td><td>74.00</td><td>-6.99</td><td>60.63</td><td>6.38</td><td>Peak</td><td>100</td><td>328</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10480.00	52.52	68.20	-15.68	43.66	8.86	Peak	100	54	2	15720.00	51.93	54.00	-2.07	45.55	6.38	Average	100	328	3	15720.00	67.01	74.00	-6.99	60.63	6.38	Peak	100	328
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10480.00	52.52	68.20	-15.68	43.66	8.86	Peak	100	54																																		
2	15720.00	51.93	54.00	-2.07	45.55	6.38	Average	100	328																																		
3	15720.00	67.01	74.00	-6.99	60.63	6.38	Peak	100	328																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5260																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>50.44</td><td>68.20</td><td>-17.76</td><td>41.54</td><td>8.90</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15780.00</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>33.74</td><td>6.30</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>3</td><td>15780.00</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>46.74</td><td>6.30</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10520.00	50.44	68.20	-17.76	41.54	8.90	Peak	100	55	2	15780.00	40.04	54.00	-13.96	33.74	6.30	Average	100	90	3	15780.00	53.04	74.00	-20.96	46.74	6.30	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10520.00	50.44	68.20	-17.76	41.54	8.90	Peak	100	55																																		
2	15780.00	40.04	54.00	-13.96	33.74	6.30	Average	100	90																																		
3	15780.00	53.04	74.00	-20.96	46.74	6.30	Peak	100	90																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5260																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>51.22</td><td>68.20</td><td>-16.98</td><td>42.32</td><td>8.90</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15780.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>34.65</td><td>6.30</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>3</td><td>15780.00</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>47.59</td><td>6.30</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10520.00	51.22	68.20	-16.98	42.32	8.90	Peak	100	55	2	15780.00	40.95	54.00	-13.05	34.65	6.30	Average	100	34	3	15780.00	53.89	74.00	-20.11	47.59	6.30	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10520.00	51.22	68.20	-16.98	42.32	8.90	Peak	100	55																																		
2	15780.00	40.95	54.00	-13.05	34.65	6.30	Average	100	34																																		
3	15780.00	53.89	74.00	-20.11	47.59	6.30	Peak	100	34																																		



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Horizontal																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10600.00</td><td>36.47</td><td>54.00</td><td>-17.53</td><td>27.41</td><td>9.06</td><td>Average</td><td>100</td><td>26</td></tr><tr><td>2</td><td>10600.00</td><td>49.25</td><td>74.00</td><td>-24.75</td><td>40.19</td><td>9.06</td><td>Peak</td><td>100</td><td>26</td></tr><tr><td>3</td><td>15900.00</td><td>38.54</td><td>54.00</td><td>-15.46</td><td>32.02</td><td>6.52</td><td>Average</td><td>115</td><td>72</td></tr><tr><td>4</td><td>15900.00</td><td>51.33</td><td>74.00</td><td>-22.67</td><td>44.81</td><td>6.52</td><td>Peak</td><td>115</td><td>72</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10600.00	36.47	54.00	-17.53	27.41	9.06	Average	100	26	2	10600.00	49.25	74.00	-24.75	40.19	9.06	Peak	100	26	3	15900.00	38.54	54.00	-15.46	32.02	6.52	Average	115	72	4	15900.00	51.33	74.00	-22.67	44.81	6.52	Peak	115	72
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10600.00	36.47	54.00	-17.53	27.41	9.06	Average	100	26																																												
2	10600.00	49.25	74.00	-24.75	40.19	9.06	Peak	100	26																																												
3	15900.00	38.54	54.00	-15.46	32.02	6.52	Average	115	72																																												
4	15900.00	51.33	74.00	-22.67	44.81	6.52	Peak	115	72																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5300																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																																					
Level (dBUV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10600.00</td><td>36.77</td><td>54.00</td><td>-17.23</td><td>27.71</td><td>9.06</td><td>Average</td><td>100</td><td>45</td></tr><tr><td>2</td><td>10600.00</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>40.76</td><td>9.06</td><td>Peak</td><td>100</td><td>45</td></tr><tr><td>3</td><td>15900.00</td><td>43.19</td><td>54.00</td><td>-10.81</td><td>36.67</td><td>6.52</td><td>Average</td><td>313</td><td>326</td></tr><tr><td>4</td><td>15900.00</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>52.55</td><td>6.52</td><td>Peak</td><td>313</td><td>326</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10600.00	36.77	54.00	-17.23	27.71	9.06	Average	100	45	2	10600.00	49.82	74.00	-24.18	40.76	9.06	Peak	100	45	3	15900.00	43.19	54.00	-10.81	36.67	6.52	Average	313	326	4	15900.00	59.07	74.00	-14.93	52.55	6.52	Peak	313	326
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10600.00	36.77	54.00	-17.23	27.71	9.06	Average	100	45																																												
2	10600.00	49.82	74.00	-24.18	40.76	9.06	Peak	100	45																																												
3	15900.00	43.19	54.00	-10.81	36.67	6.52	Average	313	326																																												
4	15900.00	59.07	74.00	-14.93	52.55	6.52	Peak	313	326																																												



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Unwanted Emissions

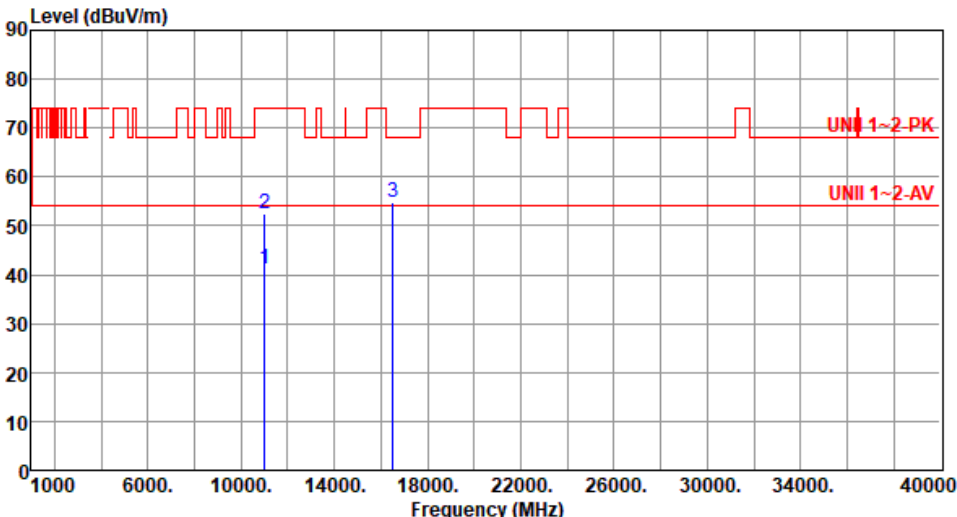
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5320																																																		
Polarization	Vertical																																																				
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10640.00</td><td>39.00</td><td>54.00</td><td>-15.00</td><td>29.94</td><td>9.06</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>10640.00</td><td>51.90</td><td>74.00</td><td>-22.10</td><td>42.84</td><td>9.06</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>15960.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>34.89</td><td>6.33</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>4</td><td>15960.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>46.89</td><td>6.33</td><td>Peak</td><td>100</td><td>20</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10640.00	39.00	54.00	-15.00	29.94	9.06	Average	100	65	2	10640.00	51.90	74.00	-22.10	42.84	9.06	Peak	100	65	3	15960.00	41.22	54.00	-12.78	34.89	6.33	Average	100	20	4	15960.00	53.22	74.00	-20.78	46.89	6.33	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10640.00	39.00	54.00	-15.00	29.94	9.06	Average	100	65																																												
2	10640.00	51.90	74.00	-22.10	42.84	9.06	Peak	100	65																																												
3	15960.00	41.22	54.00	-12.78	34.89	6.33	Average	100	20																																												
4	15960.00	53.22	74.00	-20.78	46.89	6.33	Peak	100	20																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					

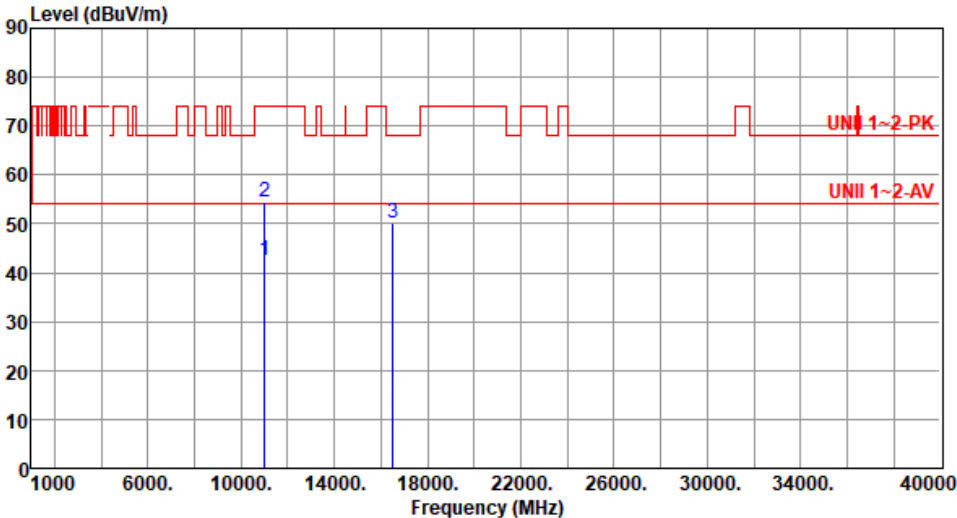


Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>31.94</td><td>9.37</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>2</td><td>11000.00</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>42.95</td><td>9.37</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>3</td><td>16500.00</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>46.21</td><td>8.47</td><td>Peak</td><td>100</td><td>54</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11000.00	41.31	54.00	-12.69	31.94	9.37	Average	100	80	2	11000.00	52.32	74.00	-21.68	42.95	9.37	Peak	100	80	3	16500.00	54.68	68.20	-13.52	46.21	8.47	Peak	100	54
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11000.00	41.31	54.00	-12.69	31.94	9.37	Average	100	80																																		
2	11000.00	52.32	74.00	-21.68	42.95	9.37	Peak	100	80																																		
3	16500.00	54.68	68.20	-13.52	46.21	8.47	Peak	100	54																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11000.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>33.26</td><td>9.37</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>2</td><td>11000.00</td><td>54.32</td><td>74.00</td><td>-19.68</td><td>44.95</td><td>9.37</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>3</td><td>16500.00</td><td>50.15</td><td>68.20</td><td>-18.05</td><td>41.68</td><td>8.47</td><td>Peak</td><td>100</td><td>52</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11000.00	42.63	54.00	-11.37	33.26	9.37	Average	100	325	2	11000.00	54.32	74.00	-19.68	44.95	9.37	Peak	100	325	3	16500.00	50.15	68.20	-18.05	41.68	8.47	Peak	100	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11000.00	42.63	54.00	-11.37	33.26	9.37	Average	100	325																																		
2	11000.00	54.32	74.00	-19.68	44.95	9.37	Peak	100	325																																		
3	16500.00	50.15	68.20	-18.05	41.68	8.47	Peak	100	52																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

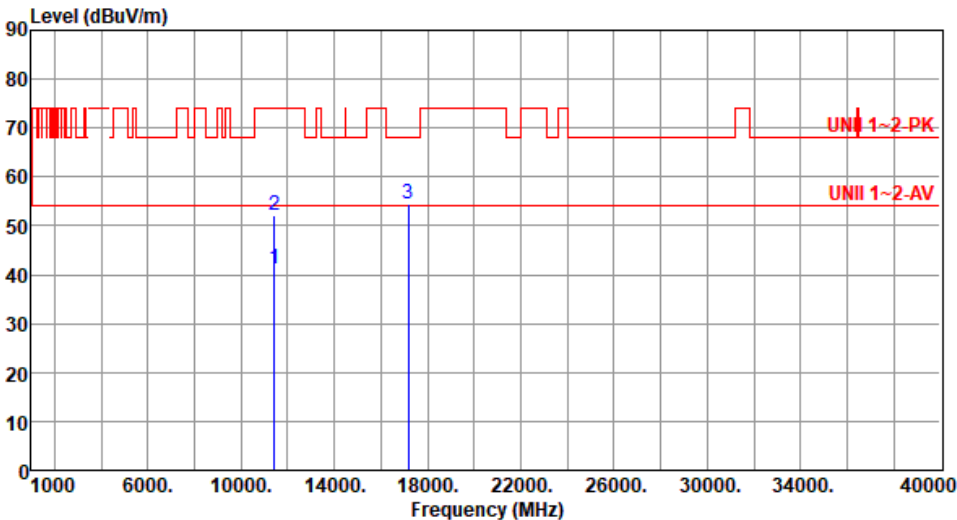
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11440.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>31.95</td><td>9.23</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>2</td><td>11440.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>42.95</td><td>9.23</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>3</td><td>17160.00</td><td>54.43</td><td>68.20</td><td>-13.77</td><td>45.95</td><td>8.48</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11440.00	41.18	54.00	-12.82	31.95	9.23	Average	100	56	2	11440.00	52.18	74.00	-21.82	42.95	9.23	Peak	100	56	3	17160.00	54.43	68.20	-13.77	45.95	8.48	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11440.00	41.18	54.00	-12.82	31.95	9.23	Average	100	56																																		
2	11440.00	52.18	74.00	-21.82	42.95	9.23	Peak	100	56																																		
3	17160.00	54.43	68.20	-13.77	45.95	8.48	Peak	100	30																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

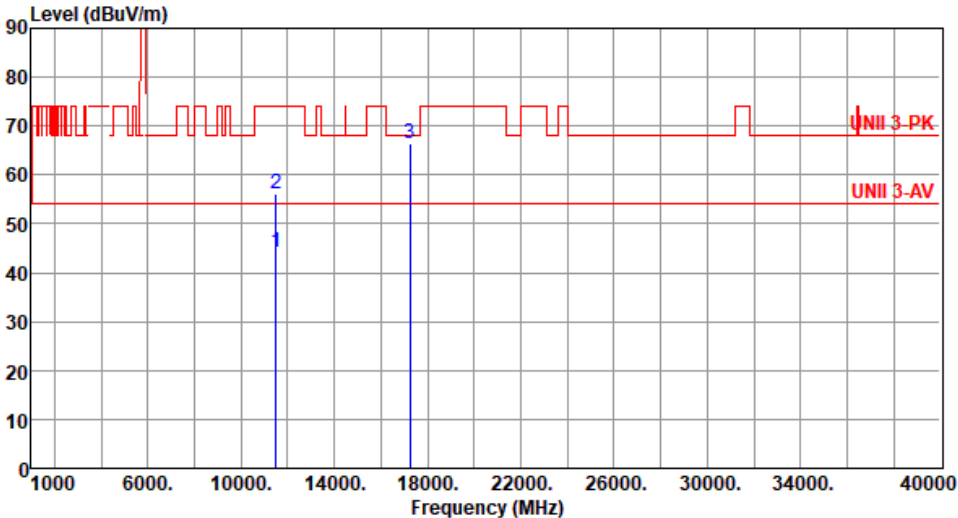


Modulation	be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11440.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>33.67</td><td>9.23</td><td>Average</td><td>100</td><td>356</td></tr><tr><td>2</td><td>11440.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>45.23</td><td>9.23</td><td>Peak</td><td>100</td><td>356</td></tr><tr><td>3</td><td>17160.00</td><td>59.71</td><td>68.20</td><td>-8.49</td><td>51.23</td><td>8.48</td><td>Peak</td><td>100</td><td>23</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11440.00	42.90	54.00	-11.10	33.67	9.23	Average	100	356	2	11440.00	54.46	74.00	-19.54	45.23	9.23	Peak	100	356	3	17160.00	59.71	68.20	-8.49	51.23	8.48	Peak	100	23
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11440.00	42.90	54.00	-11.10	33.67	9.23	Average	100	356																																		
2	11440.00	54.46	74.00	-19.54	45.23	9.23	Peak	100	356																																		
3	17160.00	59.71	68.20	-8.49	51.23	8.48	Peak	100	23																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5745																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>34.23</td><td>9.35</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>2</td><td>11490.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>46.56</td><td>9.35</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>3</td><td>17235.00</td><td>65.58</td><td>68.20</td><td>-2.62</td><td>57.01</td><td>8.57</td><td>Peak</td><td>100</td><td>250</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	43.58	54.00	-10.42	34.23	9.35	Average	100	54	2	11490.00	55.91	74.00	-18.09	46.56	9.35	Peak	100	54	3	17235.00	65.58	68.20	-2.62	57.01	8.57	Peak	100	250
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11490.00	43.58	54.00	-10.42	34.23	9.35	Average	100	54																																		
2	11490.00	55.91	74.00	-18.09	46.56	9.35	Peak	100	54																																		
3	17235.00	65.58	68.20	-2.62	57.01	8.57	Peak	100	250																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT20	Test Freq. (MHz)	5745																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
																																											
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11490.00</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>34.85</td><td>9.35</td><td>Average</td><td>100</td><td>325</td></tr><tr><td>2</td><td>11490.00</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>46.85</td><td>9.35</td><td>Peak</td><td>100</td><td>325</td></tr><tr><td>3</td><td>17235.00</td><td>66.43</td><td>68.20</td><td>-1.77</td><td>57.86</td><td>8.57</td><td>Peak</td><td>100</td><td>63</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11490.00	44.20	54.00	-9.80	34.85	9.35	Average	100	325	2	11490.00	56.20	74.00	-17.80	46.85	9.35	Peak	100	325	3	17235.00	66.43	68.20	-1.77	57.86	8.57	Peak	100	63		
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11490.00	44.20	54.00	-9.80	34.85	9.35	Average	100	325																																		
2	11490.00	56.20	74.00	-17.80	46.85	9.35	Peak	100	325																																		
3	17235.00	66.43	68.20	-1.77	57.86	8.57	Peak	100	63																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

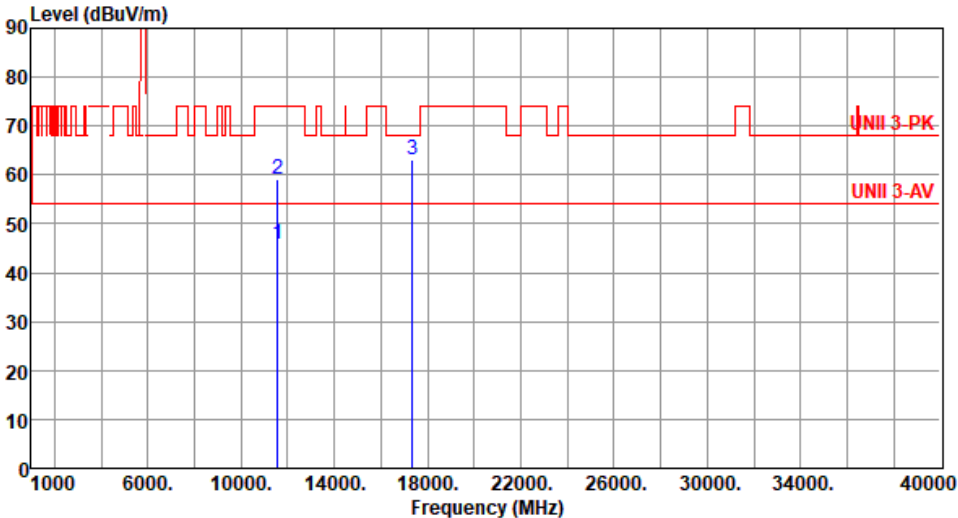


Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			

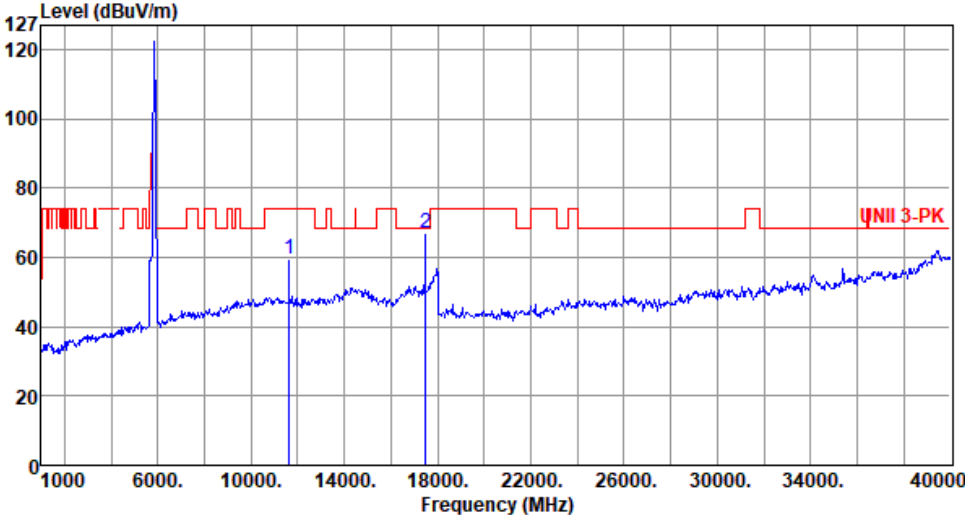


Modulation	be EHT20	Test Freq. (MHz)	5785																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11570.00</td><td>45.69</td><td>54.00</td><td>-8.31</td><td>36.51</td><td>9.18</td><td>Average</td><td>324</td><td>1</td></tr><tr><td>2</td><td>11570.00</td><td>59.15</td><td>74.00</td><td>-14.85</td><td>49.97</td><td>9.18</td><td>Peak</td><td>324</td><td>1</td></tr><tr><td>3</td><td>17355.00</td><td>63.18</td><td>68.20</td><td>-5.02</td><td>54.19</td><td>8.99</td><td>Peak</td><td>322</td><td>345</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11570.00	45.69	54.00	-8.31	36.51	9.18	Average	324	1	2	11570.00	59.15	74.00	-14.85	49.97	9.18	Peak	324	1	3	17355.00	63.18	68.20	-5.02	54.19	8.99	Peak	322	345
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11570.00	45.69	54.00	-8.31	36.51	9.18	Average	324	1																																		
2	11570.00	59.15	74.00	-14.85	49.97	9.18	Peak	324	1																																		
3	17355.00	63.18	68.20	-5.02	54.19	8.99	Peak	322	345																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11650.00</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>50.86</td><td>8.64</td><td>Peak</td><td>100</td><td>70</td></tr><tr><td>2</td><td>17475.00</td><td>66.89</td><td>68.20</td><td>-1.31</td><td>57.67</td><td>9.22</td><td>Peak</td><td>100</td><td>200</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	59.50	74.00	-14.50	50.86	8.64	Peak	100	70	2	17475.00	66.89	68.20	-1.31	57.67	9.22	Peak	100	200
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11650.00	59.50	74.00	-14.50	50.86	8.64	Peak	100	70																								
2	17475.00	66.89	68.20	-1.31	57.67	9.22	Peak	100	200																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Unwanted Emissions

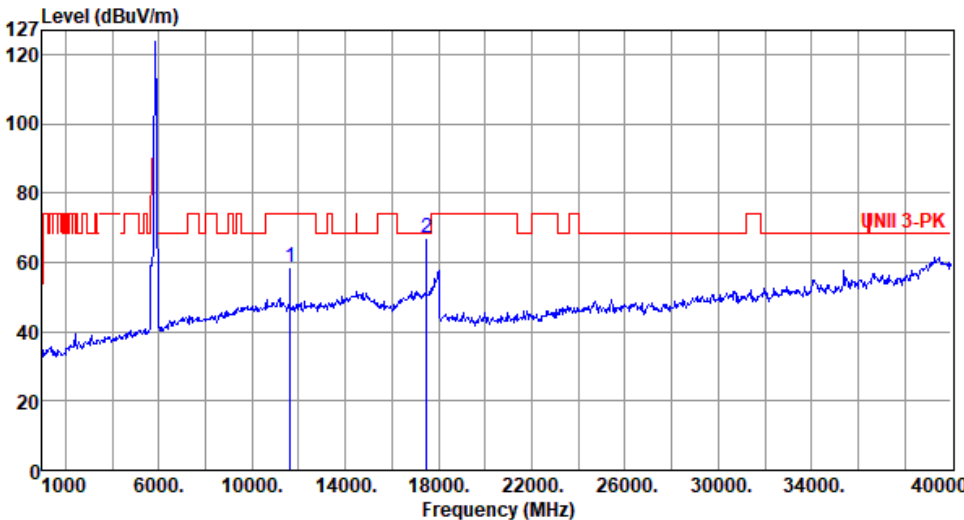
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11650.00</td><td>58.39</td><td>74.00</td><td>-15.61</td><td>49.75</td><td>8.64</td><td>Peak</td><td>100</td><td>332</td></tr><tr><td>2</td><td>17475.00</td><td>67.12</td><td>68.20</td><td>-1.08</td><td>57.90</td><td>9.22</td><td>Peak</td><td>100</td><td>350</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11650.00	58.39	74.00	-15.61	49.75	8.64	Peak	100	332	2	17475.00	67.12	68.20	-1.08	57.90	9.22	Peak	100	350
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	11650.00	58.39	74.00	-15.61	49.75	8.64	Peak	100	332																								
2	17475.00	67.12	68.20	-1.08	57.90	9.22	Peak	100	350																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Unwanted Emissions

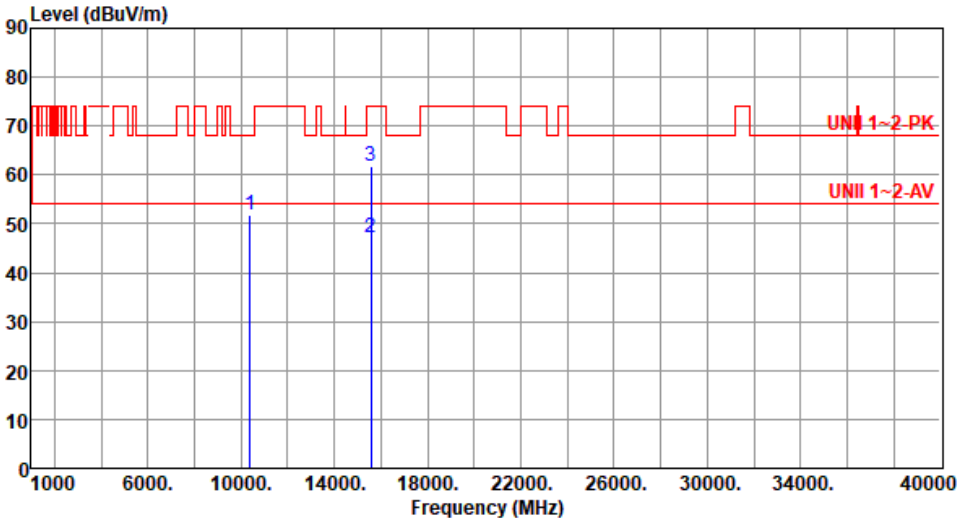
Appendix D

Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10380.00</td><td>51.91</td><td>68.20</td><td>-16.29</td><td>43.21</td><td>8.70</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>2</td><td>15570.00</td><td>47.04</td><td>54.00</td><td>-6.96</td><td>40.56</td><td>6.48</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>3</td><td>15570.00</td><td>61.82</td><td>74.00</td><td>-12.18</td><td>55.34</td><td>6.48</td><td>Peak</td><td>100</td><td>77</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10380.00	51.91	68.20	-16.29	43.21	8.70	Peak	100	60	2	15570.00	47.04	54.00	-6.96	40.56	6.48	Average	100	77	3	15570.00	61.82	74.00	-12.18	55.34	6.48	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10380.00	51.91	68.20	-16.29	43.21	8.70	Peak	100	60																																		
2	15570.00	47.04	54.00	-6.96	40.56	6.48	Average	100	77																																		
3	15570.00	61.82	74.00	-12.18	55.34	6.48	Peak	100	77																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5190																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10380.00</td><td>51.95</td><td>68.20</td><td>-16.25</td><td>43.25</td><td>8.70</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15570.00</td><td>49.04</td><td>54.00</td><td>-4.96</td><td>42.56</td><td>6.48</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>3</td><td>15570.00</td><td>64.02</td><td>74.00</td><td>-9.98</td><td>57.54</td><td>6.48</td><td>Peak</td><td>100</td><td>70</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10380.00	51.95	68.20	-16.25	43.25	8.70	Peak	100	55	2	15570.00	49.04	54.00	-4.96	42.56	6.48	Average	100	70	3	15570.00	64.02	74.00	-9.98	57.54	6.48	Peak	100	70
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10380.00	51.95	68.20	-16.25	43.25	8.70	Peak	100	55																																		
2	15570.00	49.04	54.00	-4.96	42.56	6.48	Average	100	70																																		
3	15570.00	64.02	74.00	-9.98	57.54	6.48	Peak	100	70																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5230																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>53.43</td><td>68.20</td><td>-14.77</td><td>44.56</td><td>8.87</td><td>Peak</td><td>100</td><td>154</td></tr><tr><td>2</td><td>15690.00</td><td>49.87</td><td>54.00</td><td>-4.13</td><td>43.57</td><td>6.30</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>3</td><td>15690.00</td><td>63.18</td><td>74.00</td><td>-10.82</td><td>56.88</td><td>6.30</td><td>Peak</td><td>100</td><td>241</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	10460.00	53.43	68.20	-14.77	44.56	8.87	Peak	100	154	2	15690.00	49.87	54.00	-4.13	43.57	6.30	Average	100	241	3	15690.00	63.18	74.00	-10.82	56.88	6.30	Peak	100	241
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	10460.00	53.43	68.20	-14.77	44.56	8.87	Peak	100	154																																												
2	15690.00	49.87	54.00	-4.13	43.57	6.30	Average	100	241																																												
3	15690.00	63.18	74.00	-10.82	56.88	6.30	Peak	100	241																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>10540.00</td><td>50.50</td><td>68.20</td><td>-17.70</td><td>41.56</td><td>8.94</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15810.00</td><td>39.99</td><td>54.00</td><td>-14.01</td><td>33.74</td><td>6.25</td><td>Average</td><td>100</td><td>70</td></tr><tr><td>3</td><td>15810.00</td><td>52.71</td><td>74.00</td><td>-21.29</td><td>46.46</td><td>6.25</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10540.00	50.50	68.20	-17.70	41.56	8.94	Peak	100	55	2	15810.00	39.99	54.00	-14.01	33.74	6.25	Average	100	70	3	15810.00	52.71	74.00	-21.29	46.46	6.25	Peak	100	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10540.00	50.50	68.20	-17.70	41.56	8.94	Peak	100	55																																		
2	15810.00	39.99	54.00	-14.01	33.74	6.25	Average	100	70																																		
3	15810.00	52.71	74.00	-21.29	46.46	6.25	Peak	100	70																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			



Unwanted Emissions

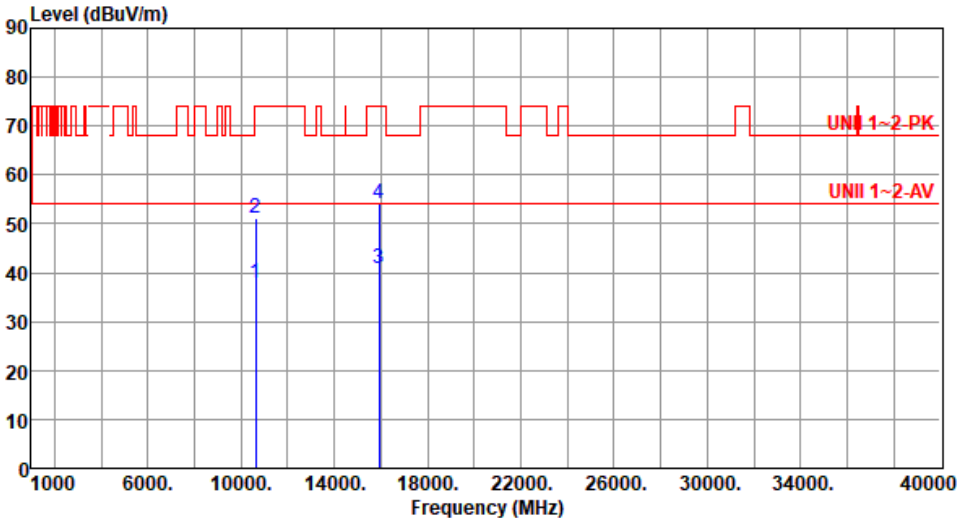
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>37.90</td><td>54.00</td><td>-16.10</td><td>28.83</td><td>9.07</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>10620.00</td><td>50.71</td><td>74.00</td><td>-23.29</td><td>41.64</td><td>9.07</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>15930.00</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>33.53</td><td>6.43</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>4</td><td>15930.00</td><td>53.16</td><td>74.00</td><td>-20.84</td><td>46.73</td><td>6.43</td><td>Peak</td><td>100</td><td>46</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	37.90	54.00	-16.10	28.83	9.07	Average	100	55	2	10620.00	50.71	74.00	-23.29	41.64	9.07	Peak	100	55	3	15930.00	39.96	54.00	-14.04	33.53	6.43	Average	100	46	4	15930.00	53.16	74.00	-20.84	46.73	6.43	Peak	100	46
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	37.90	54.00	-16.10	28.83	9.07	Average	100	55																																												
2	10620.00	50.71	74.00	-23.29	41.64	9.07	Peak	100	55																																												
3	15930.00	39.96	54.00	-14.04	33.53	6.43	Average	100	46																																												
4	15930.00	53.16	74.00	-20.84	46.73	6.43	Peak	100	46																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5310																																																		
Polarization	Vertical																																																				
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10620.00</td><td>37.90</td><td>54.00</td><td>-16.10</td><td>28.83</td><td>9.07</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>2</td><td>10620.00</td><td>51.00</td><td>74.00</td><td>-23.00</td><td>41.93</td><td>9.07</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>3</td><td>15930.00</td><td>41.00</td><td>54.00</td><td>-13.00</td><td>34.57</td><td>6.43</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>4</td><td>15930.00</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>47.83</td><td>6.43</td><td>Peak</td><td>100</td><td>55</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10620.00	37.90	54.00	-16.10	28.83	9.07	Average	100	66	2	10620.00	51.00	74.00	-23.00	41.93	9.07	Peak	100	66	3	15930.00	41.00	54.00	-13.00	34.57	6.43	Average	100	55	4	15930.00	54.26	74.00	-19.74	47.83	6.43	Peak	100	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	10620.00	37.90	54.00	-16.10	28.83	9.07	Average	100	66																																												
2	10620.00	51.00	74.00	-23.00	41.93	9.07	Peak	100	66																																												
3	15930.00	41.00	54.00	-13.00	34.57	6.43	Average	100	55																																												
4	15930.00	54.26	74.00	-19.74	47.83	6.43	Peak	100	55																																												



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Unwanted Emissions

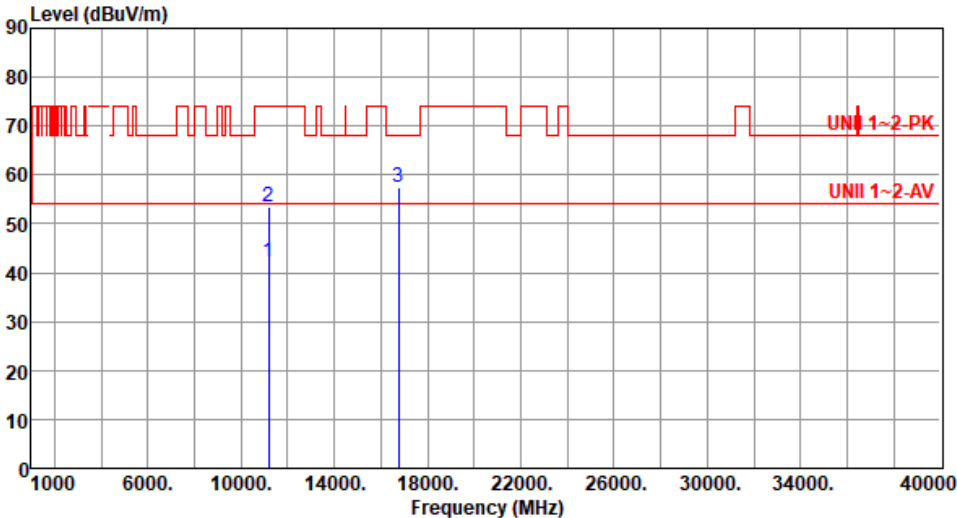
Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(℃):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11180.00</td><td>40.09</td><td>54.00</td><td>-13.91</td><td>31.25</td><td>8.84</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>11180.00</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>43.65</td><td>8.84</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>16770.00</td><td>54.61</td><td>68.20</td><td>-13.59</td><td>45.54</td><td>9.07</td><td>Peak</td><td>100</td><td>77</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11180.00	40.09	54.00	-13.91	31.25	8.84	Average	100	55	2	11180.00	52.49	74.00	-21.51	43.65	8.84	Peak	100	55	3	16770.00	54.61	68.20	-13.59	45.54	9.07	Peak	100	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11180.00	40.09	54.00	-13.91	31.25	8.84	Average	100	55																																		
2	11180.00	52.49	74.00	-21.51	43.65	8.84	Peak	100	55																																		
3	16770.00	54.61	68.20	-13.59	45.54	9.07	Peak	100	77																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5590						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	11180.00	42.30	54.00	-11.70	33.46	8.84	Average	100	334
2	11180.00	53.40	74.00	-20.60	44.56	8.84	Peak	100	334
3	16770.00	57.42	68.20	-10.78	48.35	9.07	Peak	100	58
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

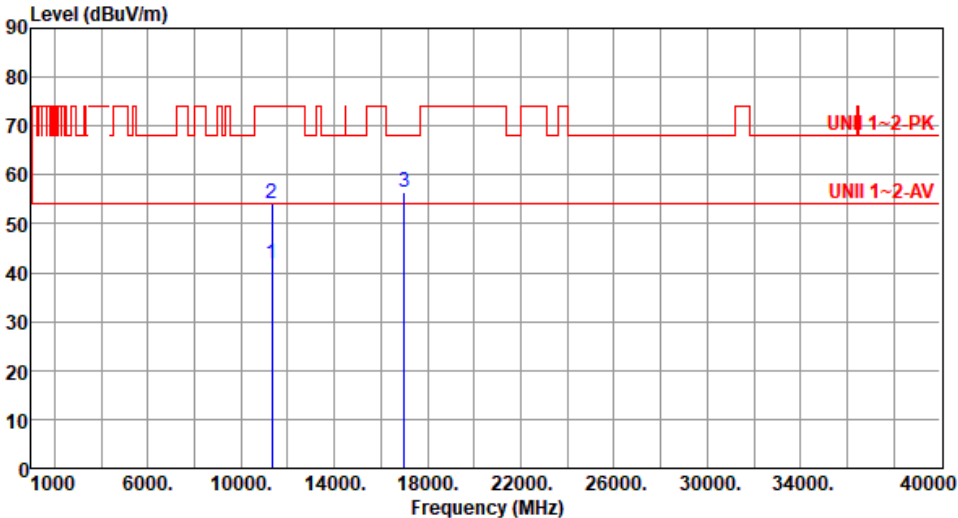


Modulation	be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11340.00</td><td>40.34</td><td>54.00</td><td>-13.66</td><td>31.25</td><td>9.09</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>11340.00</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>43.35</td><td>9.09</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>17010.00</td><td>54.17</td><td>68.20</td><td>-14.03</td><td>45.41</td><td>8.76</td><td>Peak</td><td>100</td><td>58</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	40.34	54.00	-13.66	31.25	9.09	Average	100	77	2	11340.00	52.44	74.00	-21.56	43.35	9.09	Peak	100	77	3	17010.00	54.17	68.20	-14.03	45.41	8.76	Peak	100	58
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11340.00	40.34	54.00	-13.66	31.25	9.09	Average	100	77																																		
2	11340.00	52.44	74.00	-21.56	43.35	9.09	Peak	100	77																																		
3	17010.00	54.17	68.20	-14.03	45.41	8.76	Peak	100	58																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5670																																									
Polarization	Vertical																																											
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																												
Level (dBuV/m)  Frequency (MHz)																																												
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11340.00</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>32.88</td><td>9.09</td><td>Average</td><td>100</td><td>355</td></tr><tr><td>2</td><td>11340.00</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>45.11</td><td>9.09</td><td>Peak</td><td>100</td><td>355</td></tr><tr><td>3</td><td>17010.00</td><td>56.54</td><td>68.20</td><td>-11.66</td><td>47.78</td><td>8.76</td><td>Peak</td><td>100</td><td>28</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11340.00	41.97	54.00	-12.03	32.88	9.09	Average	100	355	2	11340.00	54.20	74.00	-19.80	45.11	9.09	Peak	100	355	3	17010.00	56.54	68.20	-11.66	47.78	8.76	Peak	100	28			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																			
1	11340.00	41.97	54.00	-12.03	32.88	9.09	Average	100	355																																			
2	11340.00	54.20	74.00	-19.80	45.11	9.09	Peak	100	355																																			
3	17010.00	56.54	68.20	-11.66	47.78	8.76	Peak	100	28																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																												



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Roger Lu Temperature(℃):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			

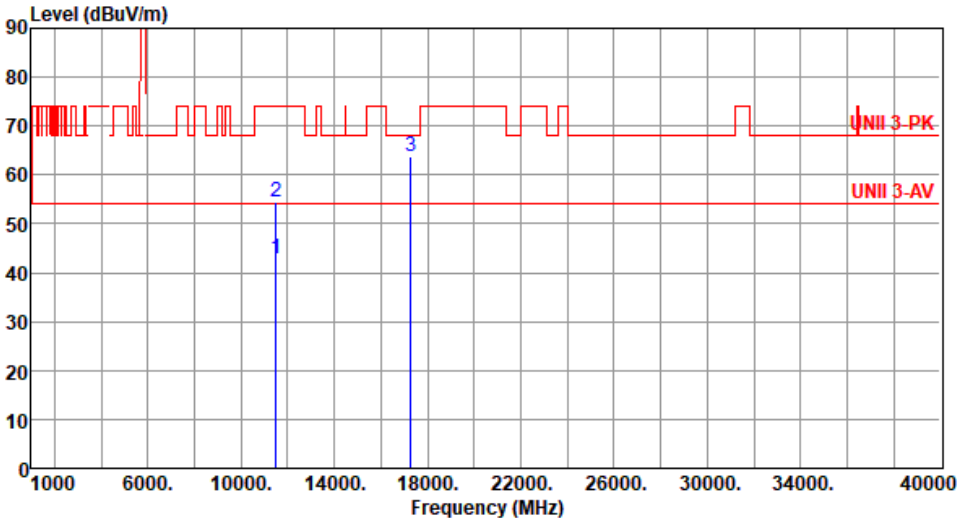


Unwanted Emissions

Appendix D

Modulation	be EHT40	Test Freq. (MHz)	5755																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11510.00</td><td>42.12</td><td>54.00</td><td>-11.88</td><td>32.77</td><td>9.35</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>11510.00</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>45.23</td><td>9.35</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>17265.00</td><td>62.93</td><td>68.20</td><td>-5.27</td><td>54.34</td><td>8.59</td><td>Peak</td><td>100</td><td>270</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	42.12	54.00	-11.88	32.77	9.35	Average	100	55	2	11510.00	54.58	74.00	-19.42	45.23	9.35	Peak	100	55	3	17265.00	62.93	68.20	-5.27	54.34	8.59	Peak	100	270
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	42.12	54.00	-11.88	32.77	9.35	Average	100	55																																		
2	11510.00	54.58	74.00	-19.42	45.23	9.35	Peak	100	55																																		
3	17265.00	62.93	68.20	-5.27	54.34	8.59	Peak	100	270																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5755																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11510.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>33.41</td><td>9.35</td><td>Average</td><td>100</td><td>343</td></tr><tr><td>2</td><td>11510.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>45.21</td><td>9.35</td><td>Peak</td><td>100</td><td>343</td></tr><tr><td>3</td><td>17265.00</td><td>63.71</td><td>68.20</td><td>-4.49</td><td>55.12</td><td>8.59</td><td>Peak</td><td>100</td><td>50</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11510.00	42.76	54.00	-11.24	33.41	9.35	Average	100	343	2	11510.00	54.56	74.00	-19.44	45.21	9.35	Peak	100	343	3	17265.00	63.71	68.20	-4.49	55.12	8.59	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11510.00	42.76	54.00	-11.24	33.41	9.35	Average	100	343																																		
2	11510.00	54.56	74.00	-19.44	45.21	9.35	Peak	100	343																																		
3	17265.00	63.71	68.20	-4.49	55.12	8.59	Peak	100	50																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Horizontal																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>34.02</td><td>9.10</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>2</td><td>11590.00</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>48.23</td><td>9.10</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>3</td><td>17385.00</td><td>61.64</td><td>68.20</td><td>-6.56</td><td>52.46</td><td>9.18</td><td>Peak</td><td>100</td><td>268</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	43.12	54.00	-10.88	34.02	9.10	Average	100	77	2	11590.00	57.33	74.00	-16.67	48.23	9.10	Peak	100	77	3	17385.00	61.64	68.20	-6.56	52.46	9.18	Peak	100	268
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	43.12	54.00	-10.88	34.02	9.10	Average	100	77																																		
2	11590.00	57.33	74.00	-16.67	48.23	9.10	Peak	100	77																																		
3	17385.00	61.64	68.20	-6.56	52.46	9.18	Peak	100	268																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

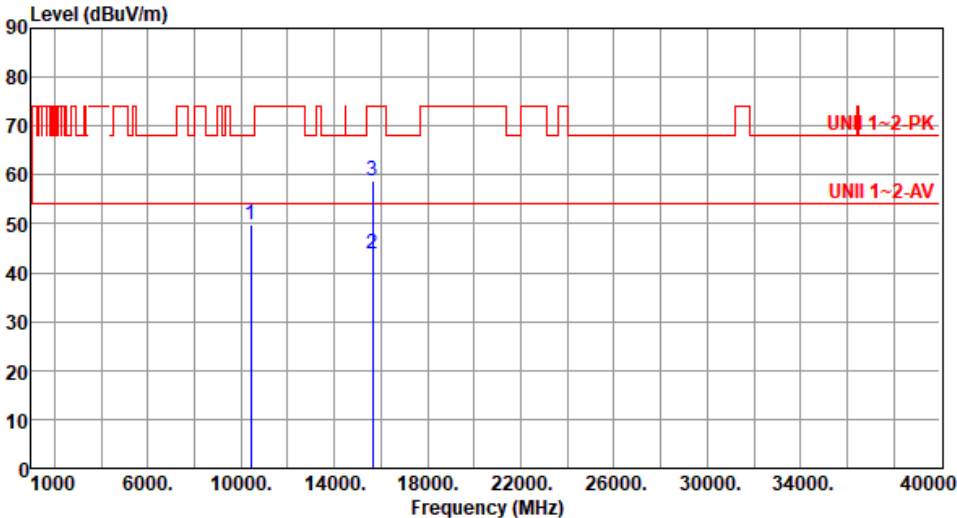


Modulation	be EHT40	Test Freq. (MHz)	5795																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11590.00</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>34.38</td><td>9.10</td><td>Average</td><td>100</td><td>330</td></tr><tr><td>2</td><td>11590.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>46.28</td><td>9.10</td><td>Peak</td><td>100</td><td>330</td></tr><tr><td>3</td><td>17385.00</td><td>62.43</td><td>68.20</td><td>-5.77</td><td>53.25</td><td>9.18</td><td>Peak</td><td>100</td><td>318</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11590.00	43.48	54.00	-10.52	34.38	9.10	Average	100	330	2	11590.00	55.38	74.00	-18.62	46.28	9.10	Peak	100	330	3	17385.00	62.43	68.20	-5.77	53.25	9.18	Peak	100	318
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11590.00	43.48	54.00	-10.52	34.38	9.10	Average	100	330																																		
2	11590.00	55.38	74.00	-18.62	46.28	9.10	Peak	100	330																																		
3	17385.00	62.43	68.20	-5.77	53.25	9.18	Peak	100	318																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5210																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>49.88</td><td>68.20</td><td>-18.32</td><td>41.11</td><td>8.77</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15630.00</td><td>43.98</td><td>54.00</td><td>-10.02</td><td>37.81</td><td>6.17</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>3</td><td>15630.00</td><td>58.62</td><td>74.00</td><td>-15.38</td><td>52.45</td><td>6.17</td><td>Peak</td><td>100</td><td>76</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	49.88	68.20	-18.32	41.11	8.77	Peak	100	55	2	15630.00	43.98	54.00	-10.02	37.81	6.17	Average	100	76	3	15630.00	58.62	74.00	-15.38	52.45	6.17	Peak	100	76
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	49.88	68.20	-18.32	41.11	8.77	Peak	100	55																																		
2	15630.00	43.98	54.00	-10.02	37.81	6.17	Average	100	76																																		
3	15630.00	58.62	74.00	-15.38	52.45	6.17	Peak	100	76																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80	Test Freq. (MHz)	5210																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10420.00</td><td>49.38</td><td>68.20</td><td>-18.82</td><td>40.61</td><td>8.77</td><td>Peak</td><td>100</td><td>32</td></tr><tr><td>2</td><td>15630.00</td><td>45.11</td><td>54.00</td><td>-8.89</td><td>38.94</td><td>6.17</td><td>Average</td><td>100</td><td>300</td></tr><tr><td>3</td><td>15630.00</td><td>60.44</td><td>74.00</td><td>-13.56</td><td>54.27</td><td>6.17</td><td>Peak</td><td>100</td><td>300</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10420.00	49.38	68.20	-18.82	40.61	8.77	Peak	100	32	2	15630.00	45.11	54.00	-8.89	38.94	6.17	Average	100	300	3	15630.00	60.44	74.00	-13.56	54.27	6.17	Peak	100	300
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10420.00	49.38	68.20	-18.82	40.61	8.77	Peak	100	32																																		
2	15630.00	45.11	54.00	-8.89	38.94	6.17	Average	100	300																																		
3	15630.00	60.44	74.00	-13.56	54.27	6.17	Peak	100	300																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

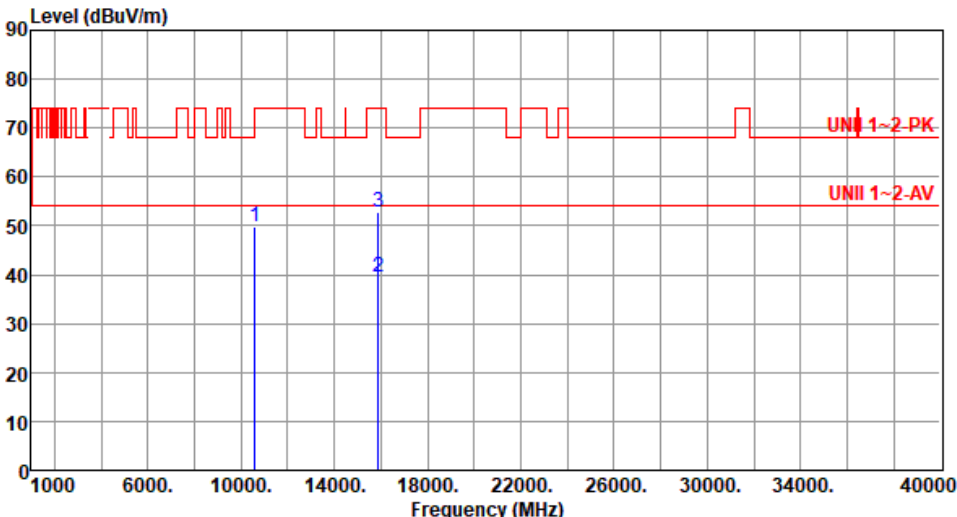
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		
Test By :Roger Lu Temperature(℃):25 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5290																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>10580.00</td><td>49.77</td><td>68.20</td><td>-18.43</td><td>40.75</td><td>9.02</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>2</td><td>15870.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>33.11</td><td>6.38</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>3</td><td>15870.00</td><td>52.70</td><td>74.00</td><td>-21.30</td><td>46.32</td><td>6.38</td><td>Peak</td><td>100</td><td>74</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	10580.00	49.77	68.20	-18.43	40.75	9.02	Peak	100	49	2	15870.00	39.49	54.00	-14.51	33.11	6.38	Average	100	74	3	15870.00	52.70	74.00	-21.30	46.32	6.38	Peak	100	74
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	10580.00	49.77	68.20	-18.43	40.75	9.02	Peak	100	49																																		
2	15870.00	39.49	54.00	-14.51	33.11	6.38	Average	100	74																																		
3	15870.00	52.70	74.00	-21.30	46.32	6.38	Peak	100	74																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

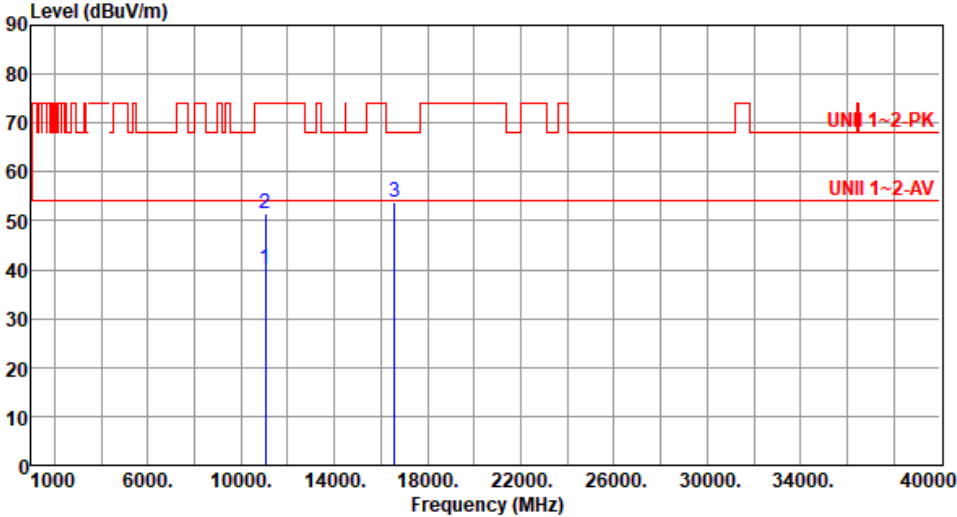
Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																																		
Polarization	Horizontal																																																				
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																																					
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11060.00</td><td>39.26</td><td>54.00</td><td>-14.74</td><td>30.11</td><td>9.15</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>2</td><td>11060.00</td><td>50.50</td><td>74.00</td><td>-23.50</td><td>41.35</td><td>9.15</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>3</td><td>16590.00</td><td>52.89</td><td>68.20</td><td>-15.31</td><td>44.54</td><td>8.35</td><td>Peak</td><td>100</td><td>43</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	11060.00	39.26	54.00	-14.74	30.11	9.15	Average	100	65	2	11060.00	50.50	74.00	-23.50	41.35	9.15	Peak	100	65	3	16590.00	52.89	68.20	-15.31	44.54	8.35	Peak	100	43
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	11060.00	39.26	54.00	-14.74	30.11	9.15	Average	100	65																																												
2	11060.00	50.50	74.00	-23.50	41.35	9.15	Peak	100	65																																												
3	16590.00	52.89	68.20	-15.31	44.54	8.35	Peak	100	43																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11060.00</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>30.89</td><td>9.15</td><td>Average</td><td>100</td><td>329</td></tr><tr><td>2</td><td>11060.00</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>42.28</td><td>9.15</td><td>Peak</td><td>100</td><td>329</td></tr><tr><td>3</td><td>16590.00</td><td>53.68</td><td>68.20</td><td>-14.52</td><td>45.33</td><td>8.35</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11060.00	40.04	54.00	-13.96	30.89	9.15	Average	100	329	2	11060.00	51.43	74.00	-22.57	42.28	9.15	Peak	100	329	3	16590.00	53.68	68.20	-14.52	45.33	8.35	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11060.00	40.04	54.00	-13.96	30.89	9.15	Average	100	329																																		
2	11060.00	51.43	74.00	-22.57	42.28	9.15	Peak	100	329																																		
3	16590.00	53.68	68.20	-14.52	45.33	8.35	Peak	100	60																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											

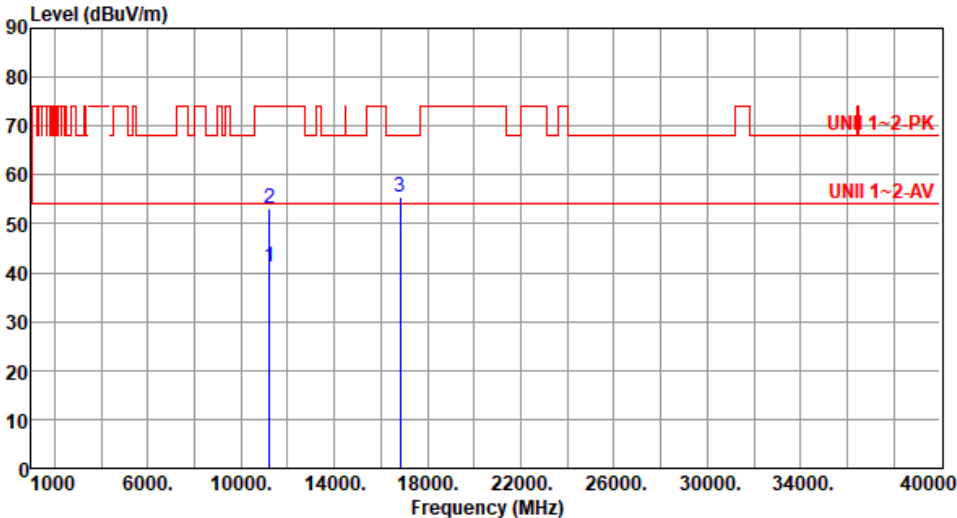


Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>40.27</td><td>54.00</td><td>-13.73</td><td>31.41</td><td>8.86</td><td>Average</td><td>100</td><td>74</td></tr><tr><td>2</td><td>11220.00</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>43.35</td><td>8.86</td><td>Peak</td><td>100</td><td>74</td></tr><tr><td>3</td><td>16830.00</td><td>53.75</td><td>68.20</td><td>-14.45</td><td>44.41</td><td>9.34</td><td>Peak</td><td>100</td><td>51</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	40.27	54.00	-13.73	31.41	8.86	Average	100	74	2	11220.00	52.21	74.00	-21.79	43.35	8.86	Peak	100	74	3	16830.00	53.75	68.20	-14.45	44.41	9.34	Peak	100	51
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	40.27	54.00	-13.73	31.41	8.86	Average	100	74																																		
2	11220.00	52.21	74.00	-21.79	43.35	8.86	Peak	100	74																																		
3	16830.00	53.75	68.20	-14.45	44.41	9.34	Peak	100	51																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

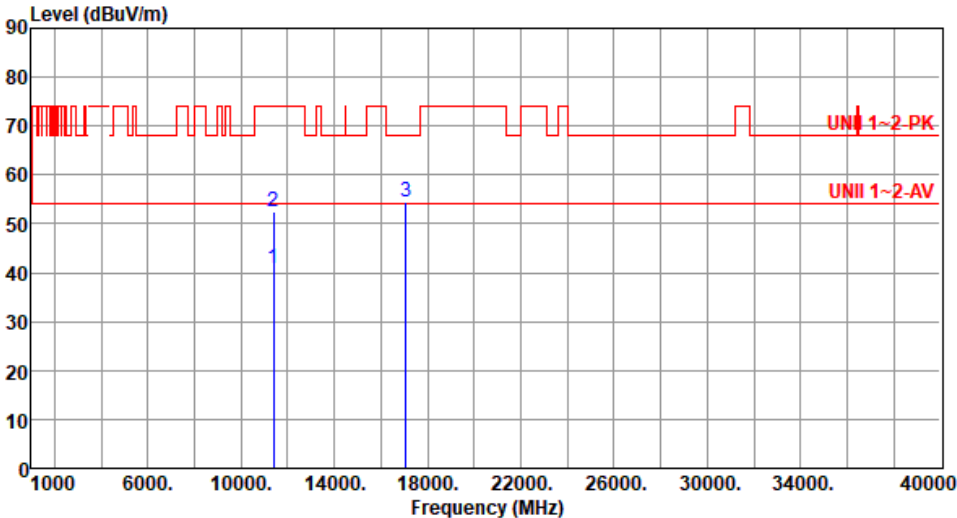


Modulation	be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11220.00</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>32.46</td><td>8.86</td><td>Average</td><td>100</td><td>340</td></tr><tr><td>2</td><td>11220.00</td><td>53.01</td><td>74.00</td><td>-20.99</td><td>44.15</td><td>8.86</td><td>Peak</td><td>100</td><td>340</td></tr><tr><td>3</td><td>16830.00</td><td>55.55</td><td>68.20</td><td>-12.65</td><td>46.21</td><td>9.34</td><td>Peak</td><td>100</td><td>50</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11220.00	41.32	54.00	-12.68	32.46	8.86	Average	100	340	2	11220.00	53.01	74.00	-20.99	44.15	8.86	Peak	100	340	3	16830.00	55.55	68.20	-12.65	46.21	9.34	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11220.00	41.32	54.00	-12.68	32.46	8.86	Average	100	340																																		
2	11220.00	53.01	74.00	-20.99	44.15	8.86	Peak	100	340																																		
3	16830.00	55.55	68.20	-12.65	46.21	9.34	Peak	100	50																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

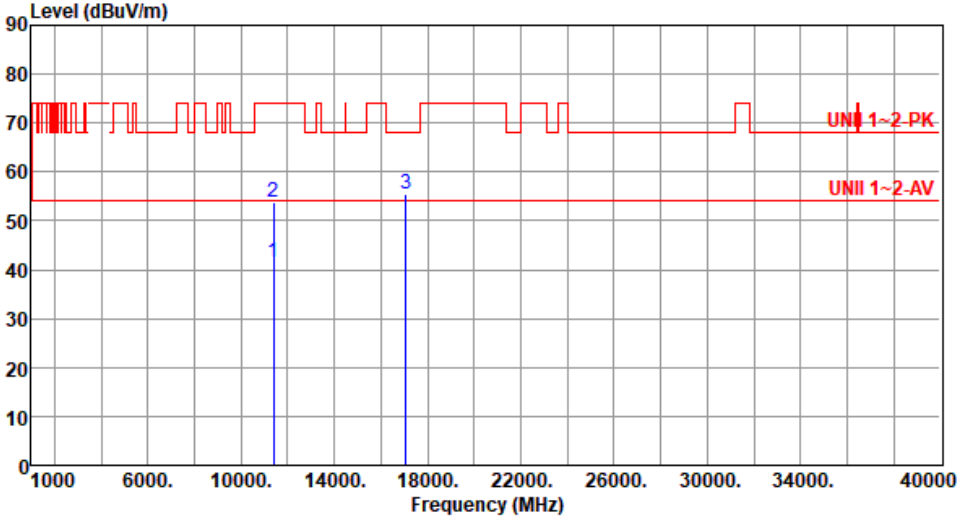


Unwanted Emissions

Appendix D

Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>11380.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>31.65</td><td>9.12</td><td>Average</td><td>100</td><td>67</td></tr><tr><td>2</td><td>11380.00</td><td>52.40</td><td>74.00</td><td>-21.60</td><td>43.28</td><td>9.12</td><td>Peak</td><td>100</td><td>67</td></tr><tr><td>3</td><td>17070.00</td><td>54.49</td><td>68.20</td><td>-13.71</td><td>45.85</td><td>8.64</td><td>Peak</td><td>100</td><td>33</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11380.00	40.77	54.00	-13.23	31.65	9.12	Average	100	67	2	11380.00	52.40	74.00	-21.60	43.28	9.12	Peak	100	67	3	17070.00	54.49	68.20	-13.71	45.85	8.64	Peak	100	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11380.00	40.77	54.00	-13.23	31.65	9.12	Average	100	67																																		
2	11380.00	52.40	74.00	-21.60	43.28	9.12	Peak	100	67																																		
3	17070.00	54.49	68.20	-13.71	45.85	8.64	Peak	100	33																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											

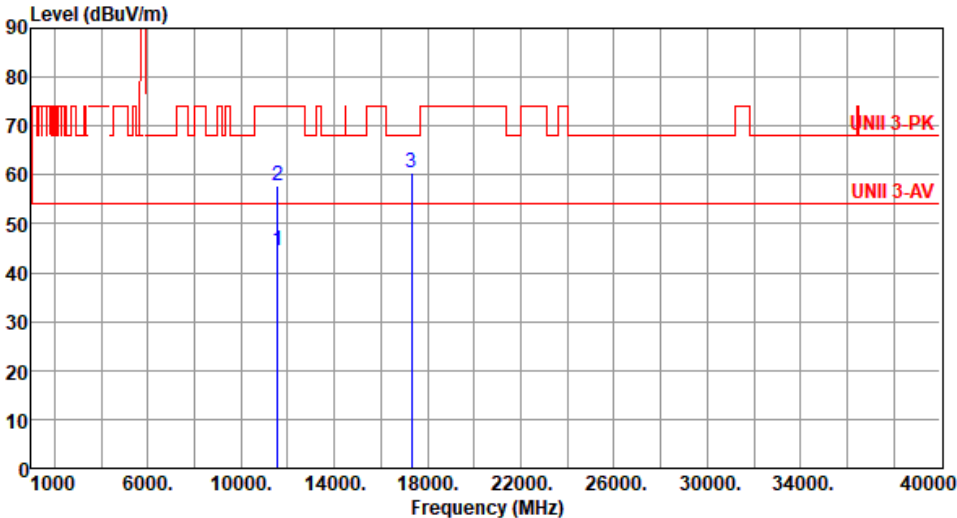


Modulation	be EHT80	Test Freq. (MHz)	5690																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11380.00</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>32.46</td><td>9.12</td><td>Average</td><td>100</td><td>318</td></tr><tr><td>2</td><td>11380.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>44.74</td><td>9.12</td><td>Peak</td><td>100</td><td>318</td></tr><tr><td>3</td><td>17070.00</td><td>55.49</td><td>68.20</td><td>-12.71</td><td>46.85</td><td>8.64</td><td>Peak</td><td>100</td><td>71</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11380.00	41.58	54.00	-12.42	32.46	9.12	Average	100	318	2	11380.00	53.86	74.00	-20.14	44.74	9.12	Peak	100	318	3	17070.00	55.49	68.20	-12.71	46.85	8.64	Peak	100	71
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11380.00	41.58	54.00	-12.42	32.46	9.12	Average	100	318																																		
2	11380.00	53.86	74.00	-20.14	44.74	9.12	Peak	100	318																																		
3	17070.00	55.49	68.20	-12.71	46.85	8.64	Peak	100	71																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5775																																								
Polarization	Vertical																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
 <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11550.00</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>35.11</td><td>9.26</td><td>Average</td><td>100</td><td>55</td></tr><tr><td>2</td><td>11550.00</td><td>57.90</td><td>74.00</td><td>-16.10</td><td>48.64</td><td>9.26</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>3</td><td>17325.00</td><td>60.34</td><td>68.20</td><td>-7.86</td><td>51.52</td><td>8.82</td><td>Peak</td><td>100</td><td>200</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11550.00	44.37	54.00	-9.63	35.11	9.26	Average	100	55	2	11550.00	57.90	74.00	-16.10	48.64	9.26	Peak	100	55	3	17325.00	60.34	68.20	-7.86	51.52	8.82	Peak	100	200
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11550.00	44.37	54.00	-9.63	35.11	9.26	Average	100	55																																		
2	11550.00	57.90	74.00	-16.10	48.64	9.26	Peak	100	55																																		
3	17325.00	60.34	68.20	-7.86	51.52	8.82	Peak	100	200																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Unwanted Emissions

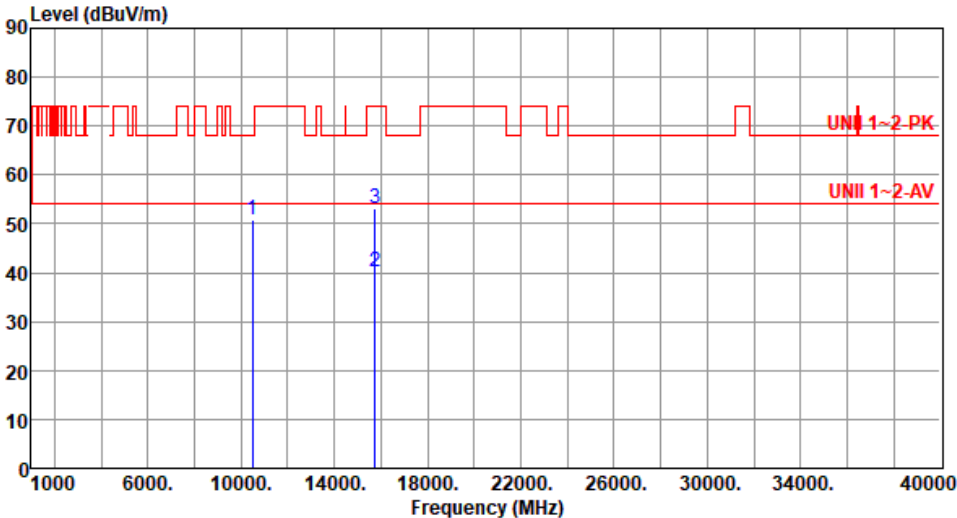
Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5250																																																		
Polarization	Vertical																																																				
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																																					
Level (dBuV/m)  <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10500.00</td><td>50.79</td><td>68.20</td><td>-17.41</td><td>41.93</td><td>8.86</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>2</td><td>15750.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>33.95</td><td>6.40</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>3</td><td>15750.00</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>46.88</td><td>6.40</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	10500.00	50.79	68.20	-17.41	41.93	8.86	Peak	100	55	2	15750.00	40.35	54.00	-13.65	33.95	6.40	Average	100	65	3	15750.00	53.28	74.00	-20.72	46.88	6.40	Peak	100	65
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	10500.00	50.79	68.20	-17.41	41.93	8.86	Peak	100	55																																												
2	15750.00	40.35	54.00	-13.65	33.95	6.40	Average	100	65																																												
3	15750.00	53.28	74.00	-20.72	46.88	6.40	Peak	100	65																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11140.00</td><td>38.89</td><td>54.00</td><td>-15.11</td><td>30.02</td><td>8.87</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>2</td><td>11140.00</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>41.07</td><td>8.87</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>3</td><td>16710.00</td><td>53.15</td><td>68.20</td><td>-15.05</td><td>44.32</td><td>8.83</td><td>Peak</td><td>100</td><td>54</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11140.00	38.89	54.00	-15.11	30.02	8.87	Average	100	60	2	11140.00	49.94	74.00	-24.06	41.07	8.87	Peak	100	60	3	16710.00	53.15	68.20	-15.05	44.32	8.83	Peak	100	54
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11140.00	38.89	54.00	-15.11	30.02	8.87	Average	100	60																																		
2	11140.00	49.94	74.00	-24.06	41.07	8.87	Peak	100	60																																		
3	16710.00	53.15	68.20	-15.05	44.32	8.83	Peak	100	54																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Unwanted Emissions

Appendix D

Modulation	be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>11140.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>30.46</td><td>8.87</td><td>Average</td><td>100</td><td>350</td></tr><tr><td>2</td><td>11140.00</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>42.02</td><td>8.87</td><td>Peak</td><td>100</td><td>350</td></tr><tr><td>3</td><td>16710.00</td><td>53.15</td><td>68.20</td><td>-15.05</td><td>44.32</td><td>8.83</td><td>Peak</td><td>100</td><td>50</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	11140.00	39.33	54.00	-14.67	30.46	8.87	Average	100	350	2	11140.00	50.89	74.00	-23.11	42.02	8.87	Peak	100	350	3	16710.00	53.15	68.20	-15.05	44.32	8.83	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	11140.00	39.33	54.00	-14.67	30.46	8.87	Average	100	350																																		
2	11140.00	50.89	74.00	-23.11	42.02	8.87	Peak	100	350																																		
3	16710.00	53.15	68.20	-15.05	44.32	8.83	Peak	100	50																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Non-beamforming mode

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>69.06</td><td>74.00</td><td>-4.94</td><td>67.87</td><td>1.19</td><td>Peak</td><td>235</td><td>262</td></tr><tr><td>2</td><td>5382.90</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>53.86</td><td>1.16</td><td>Peak</td><td>235</td><td>262</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	69.06	74.00	-4.94	67.87	1.19	Peak	235	262	2	5382.90	55.02	74.00	-18.98	53.86	1.16	Peak	235	262
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	69.06	74.00	-4.94	67.87	1.19	Peak	235	262																								
2	5382.90	55.02	74.00	-18.98	53.86	1.16	Peak	235	262																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

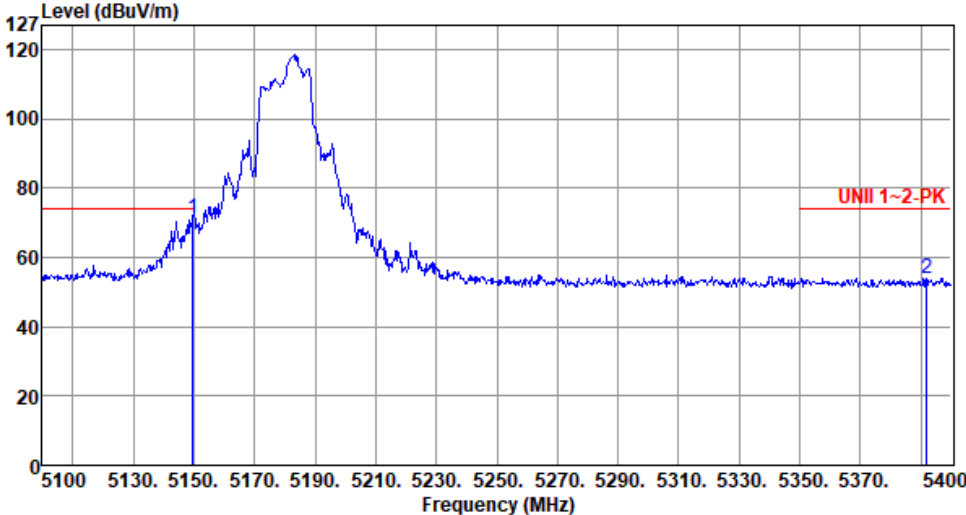
Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) UNII 1-2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>53.60</td><td>54.00</td><td>-0.40</td><td>52.40</td><td>1.20</td><td>Average</td><td>235</td><td>262</td></tr><tr><td>2</td><td>5397.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>41.14</td><td>1.24</td><td>Average</td><td>235</td><td>262</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	53.60	54.00	-0.40	52.40	1.20	Average	235	262	2	5397.00	42.38	54.00	-11.62	41.14	1.24	Average	235	262
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	53.60	54.00	-0.40	52.40	1.20	Average	235	262																								
2	5397.00	42.38	54.00	-11.62	41.14	1.24	Average	235	262																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

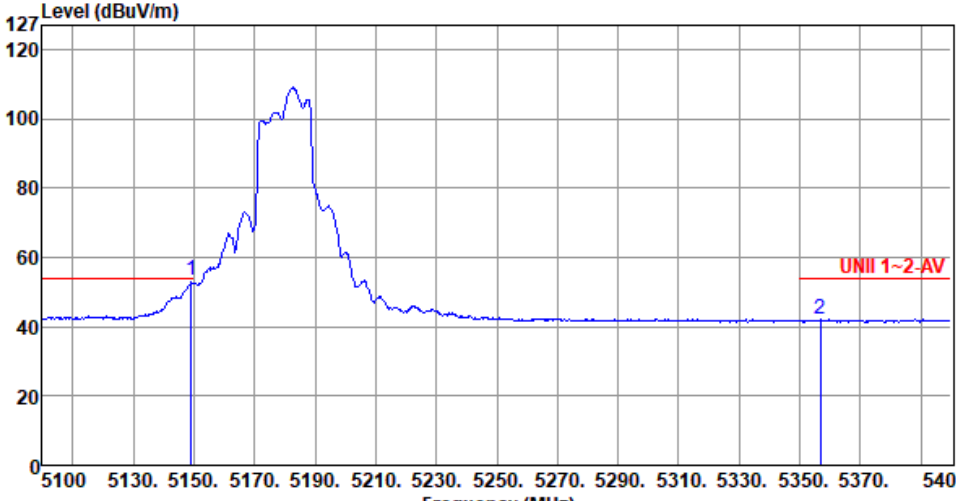
Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>71.29</td><td>74.00</td><td>-2.71</td><td>70.09</td><td>1.20</td><td>Peak</td><td>191</td><td>333</td></tr><tr><td>2</td><td>5391.90</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>52.85</td><td>1.21</td><td>Peak</td><td>191</td><td>333</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	71.29	74.00	-2.71	70.09	1.20	Peak	191	333	2	5391.90	54.06	74.00	-19.94	52.85	1.21	Peak	191	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	71.29	74.00	-2.71	70.09	1.20	Peak	191	333																								
2	5391.90	54.06	74.00	-19.94	52.85	1.21	Peak	191	333																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.20</td><td>53.65</td><td>54.00</td><td>-0.35</td><td>52.45</td><td>1.20</td><td>Average</td><td>191</td><td>333</td></tr><tr><td>2</td><td>5356.80</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>40.92</td><td>1.05</td><td>Average</td><td>191</td><td>333</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	53.65	54.00	-0.35	52.45	1.20	Average	191	333	2	5356.80	41.97	54.00	-12.03	40.92	1.05	Average	191	333
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	53.65	54.00	-0.35	52.45	1.20	Average	191	333																								
2	5356.80	41.97	54.00	-12.03	40.92	1.05	Average	191	333																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

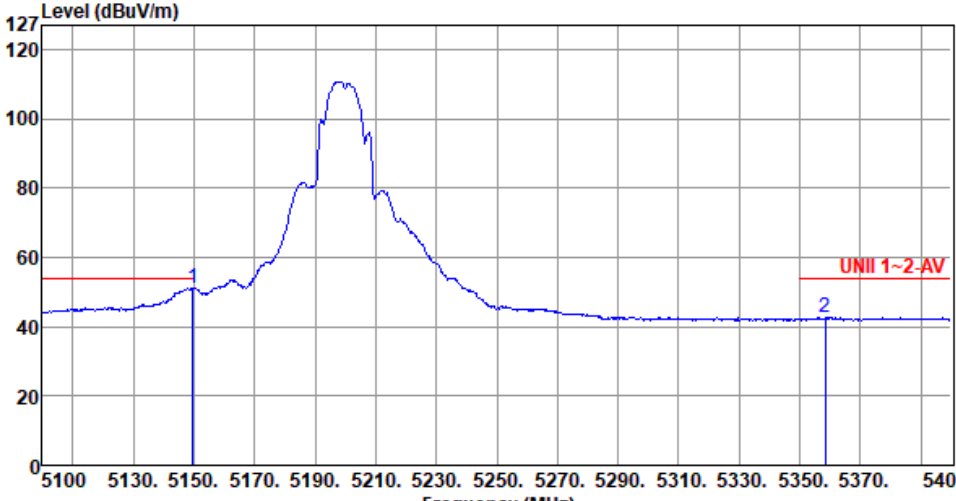
Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m) UNII 1-2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.30</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>64.29</td><td>1.20</td><td>Peak</td><td>143</td><td>267</td></tr><tr><td>2</td><td>5400.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>54.06</td><td>1.25</td><td>Peak</td><td>143</td><td>267</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	65.49	74.00	-8.51	64.29	1.20	Peak	143	267	2	5400.00	55.31	74.00	-18.69	54.06	1.25	Peak	143	267
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	65.49	74.00	-8.51	64.29	1.20	Peak	143	267																								
2	5400.00	55.31	74.00	-18.69	54.06	1.25	Peak	143	267																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

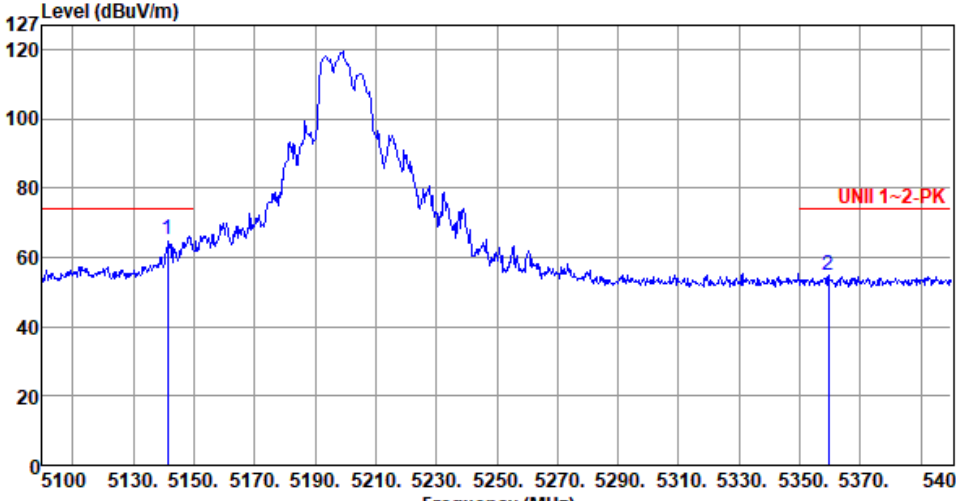
Appendix D

Modulation	11a	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>51.12</td><td>54.00</td><td>-2.88</td><td>49.92</td><td>1.20</td><td>Average</td><td>143</td><td>267</td></tr><tr><td>2</td><td>5358.30</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>41.49</td><td>1.05</td><td>Average</td><td>143</td><td>267</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	51.12	54.00	-2.88	49.92	1.20	Average	143	267	2	5358.30	42.54	54.00	-11.46	41.49	1.05	Average	143	267
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	51.12	54.00	-2.88	49.92	1.20	Average	143	267																								
2	5358.30	42.54	54.00	-11.46	41.49	1.05	Average	143	267																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.40</td><td>65.26</td><td>74.00</td><td>-8.74</td><td>64.08</td><td>1.18</td><td>Peak</td><td>151</td><td>281</td></tr><tr><td>2</td><td>5359.50</td><td>54.62</td><td>74.00</td><td>-19.38</td><td>53.56</td><td>1.06</td><td>Peak</td><td>151</td><td>281</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5141.40	65.26	74.00	-8.74	64.08	1.18	Peak	151	281	2	5359.50	54.62	74.00	-19.38	53.56	1.06	Peak	151	281
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5141.40	65.26	74.00	-8.74	64.08	1.18	Peak	151	281																																		
2	5359.50	54.62	74.00	-19.38	53.56	1.06	Peak	151	281																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5200																																																		
Polarization	Vertical-Average																																																				
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																																					
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) 1 2 UNII 1~2-AV 5148.30 5360.10 49.34 42.52 54.00 54.00 -4.66 -11.48 48.14 41.46 1.20 1.06 Average Average 151 151 281 281																																																					
<table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>5148.30</td><td>49.34</td><td>54.00</td><td>-4.66</td><td>48.14</td><td>1.20</td><td>Average</td><td>151</td><td>281</td></tr><tr><td>2</td><td>5360.10</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>41.46</td><td>1.06</td><td>Average</td><td>151</td><td>281</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5148.30	49.34	54.00	-4.66	48.14	1.20	Average	151	281	2	5360.10	42.52	54.00	-11.48	41.46	1.06	Average	151	281
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																												
	MHz	level			reading			High	Table																																												
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5148.30	49.34	54.00	-4.66	48.14	1.20	Average	151	281																																												
2	5360.10	42.52	54.00	-11.48	41.46	1.06	Average	151	281																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

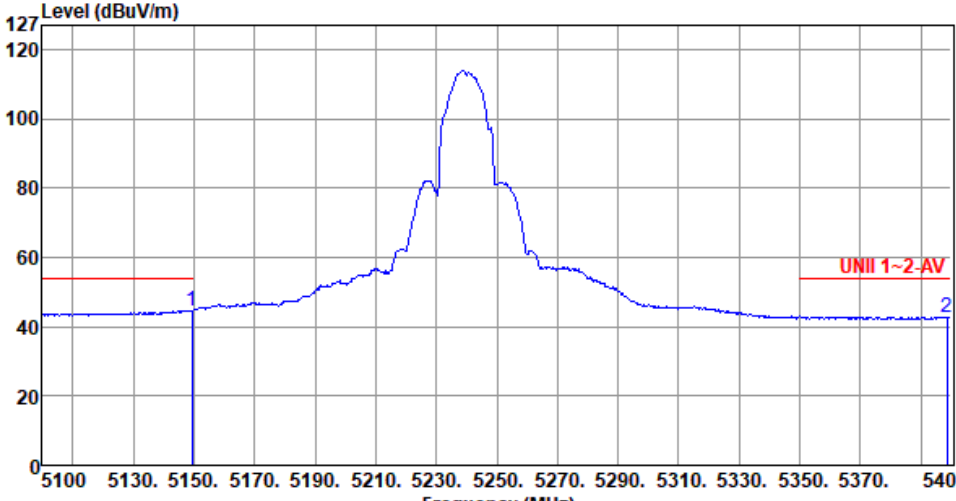
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5101.50</td><td>56.49</td><td>74.00</td><td>-17.51</td><td>55.40</td><td>1.09</td><td>Peak</td><td>227</td><td>277</td></tr><tr><td>2</td><td>5363.10</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>54.58</td><td>1.07</td><td>Peak</td><td>227</td><td>277</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5101.50	56.49	74.00	-17.51	55.40	1.09	Peak	227	277	2	5363.10	55.65	74.00	-18.35	54.58	1.07	Peak	227	277
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5101.50	56.49	74.00	-17.51	55.40	1.09	Peak	227	277																																		
2	5363.10	55.65	74.00	-18.35	54.58	1.07	Peak	227	277																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

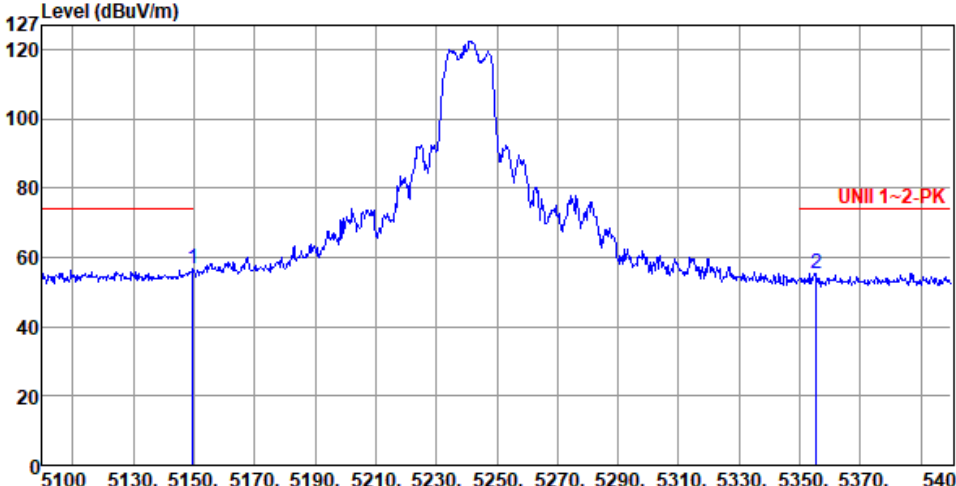
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>44.72</td><td>54.00</td><td>-9.28</td><td>43.52</td><td>1.20</td><td>Peak</td><td>227</td><td>277</td></tr><tr><td>2</td><td>5398.50</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>41.61</td><td>1.24</td><td>Peak</td><td>227</td><td>277</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5149.50	44.72	54.00	-9.28	43.52	1.20	Peak	227	277	2	5398.50	42.85	54.00	-11.15	41.61	1.24	Peak	227	277
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.50	44.72	54.00	-9.28	43.52	1.20	Peak	227	277																																		
2	5398.50	42.85	54.00	-11.15	41.61	1.24	Peak	227	277																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

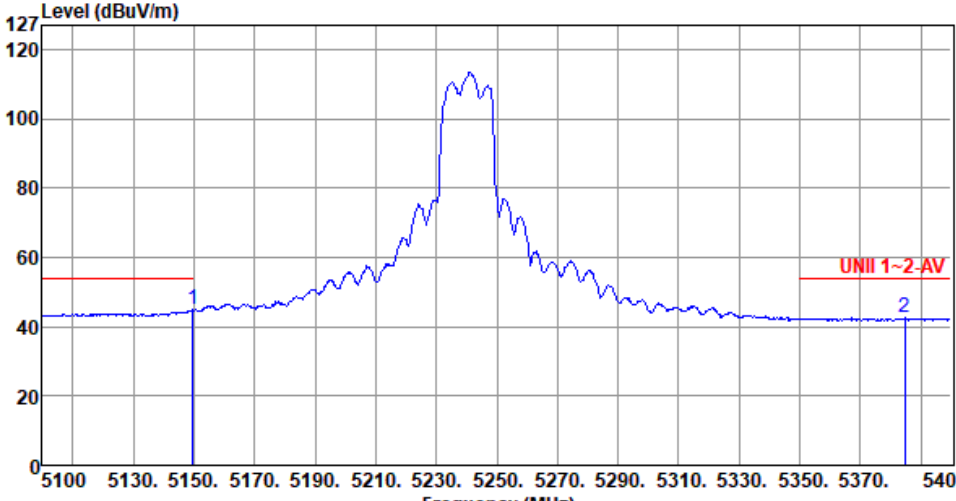
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>55.38</td><td>1.20</td><td>Peak</td><td>136</td><td>327</td></tr><tr><td>2</td><td>5355.30</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>54.42</td><td>1.04</td><td>Peak</td><td>136</td><td>327</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	56.58	74.00	-17.42	55.38	1.20	Peak	136	327	2	5355.30	55.46	74.00	-18.54	54.42	1.04	Peak	136	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	56.58	74.00	-17.42	55.38	1.20	Peak	136	327																								
2	5355.30	55.46	74.00	-18.54	54.42	1.04	Peak	136	327																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

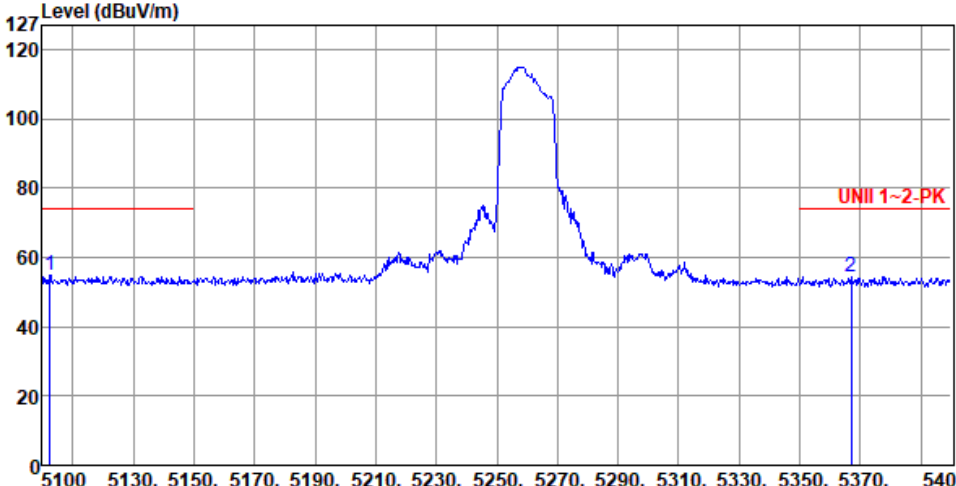
Appendix D

Modulation	11a	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>43.66</td><td>1.20</td><td>Average</td><td>136</td><td>327</td></tr><tr><td>2</td><td>5384.70</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>41.41</td><td>1.17</td><td>Average</td><td>136</td><td>327</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	44.86	54.00	-9.14	43.66	1.20	Average	136	327	2	5384.70	42.58	54.00	-11.42	41.41	1.17	Average	136	327
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	44.86	54.00	-9.14	43.66	1.20	Average	136	327																								
2	5384.70	42.58	54.00	-11.42	41.41	1.17	Average	136	327																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Peak																																
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5102.40</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>53.60</td><td>1.09</td><td>Peak</td><td>100</td><td>238</td></tr><tr><td>2</td><td>5367.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>53.36</td><td>1.10</td><td>Peak</td><td>100</td><td>238</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5102.40	54.69	74.00	-19.31	53.60	1.09	Peak	100	238	2	5367.00	54.46	74.00	-19.54	53.36	1.10	Peak	100	238
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5102.40	54.69	74.00	-19.31	53.60	1.09	Peak	100	238																								
2	5367.00	54.46	74.00	-19.54	53.36	1.10	Peak	100	238																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

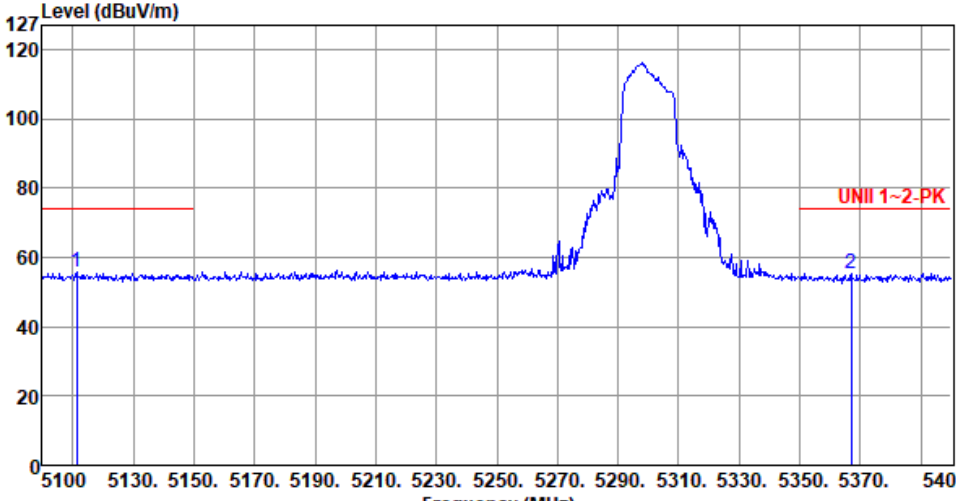
Appendix D

Modulation	11a	Test Freq. (MHz)	5260																																								
Polarization	Vertical-Average																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 1 2 UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.60</td><td>42.00</td><td>54.00</td><td>-12.00</td><td>40.90</td><td>1.10</td><td>Average</td><td>123</td><td>271</td></tr><tr><td>2</td><td>5357.40</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>40.55</td><td>1.05</td><td>Average</td><td>123</td><td>271</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5106.60	42.00	54.00	-12.00	40.90	1.10	Average	123	271	2	5357.40	41.60	54.00	-12.40	40.55	1.05	Average	123	271
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5106.60	42.00	54.00	-12.00	40.90	1.10	Average	123	271																																		
2	5357.40	41.60	54.00	-12.40	40.55	1.05	Average	123	271																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5300																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5111.40</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>54.49</td><td>1.11</td><td>Peak</td><td>100</td><td>239</td></tr><tr><td>2</td><td>5367.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>54.36</td><td>1.10</td><td>Peak</td><td>100</td><td>239</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5111.40	55.60	74.00	-18.40	54.49	1.11	Peak	100	239	2	5367.00	55.46	74.00	-18.54	54.36	1.10	Peak	100	239
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5111.40	55.60	74.00	-18.40	54.49	1.11	Peak	100	239																																		
2	5367.00	55.46	74.00	-18.54	54.36	1.10	Peak	100	239																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

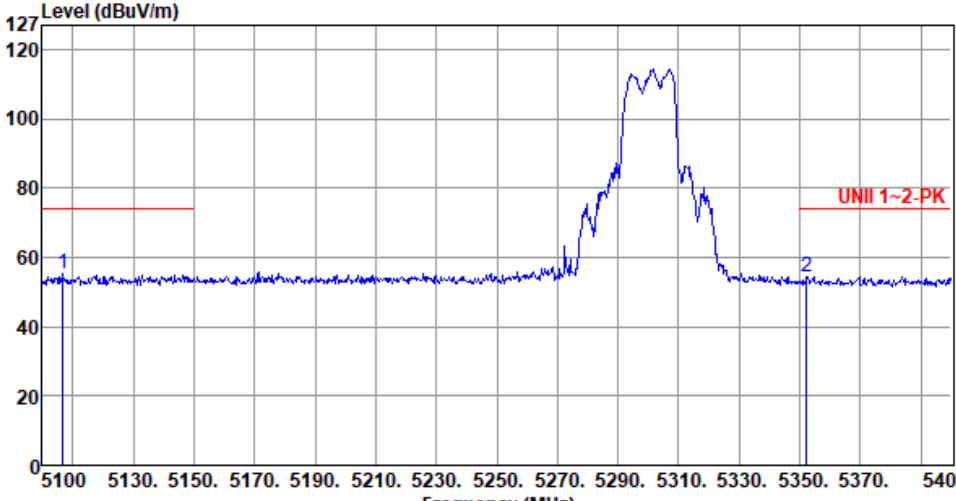
Appendix D

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5300																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5106.90</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>54.02</td><td>1.10</td><td>Peak</td><td>126</td><td>281</td></tr><tr><td>2</td><td>5352.30</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>53.55</td><td>1.02</td><td>Peak</td><td>126</td><td>281</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5106.90	55.12	74.00	-18.88	54.02	1.10	Peak	126	281	2	5352.30	54.57	74.00	-19.43	53.55	1.02	Peak	126	281
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5106.90	55.12	74.00	-18.88	54.02	1.10	Peak	126	281																								
2	5352.30	54.57	74.00	-19.43	53.55	1.02	Peak	126	281																								



Band Edge measurement

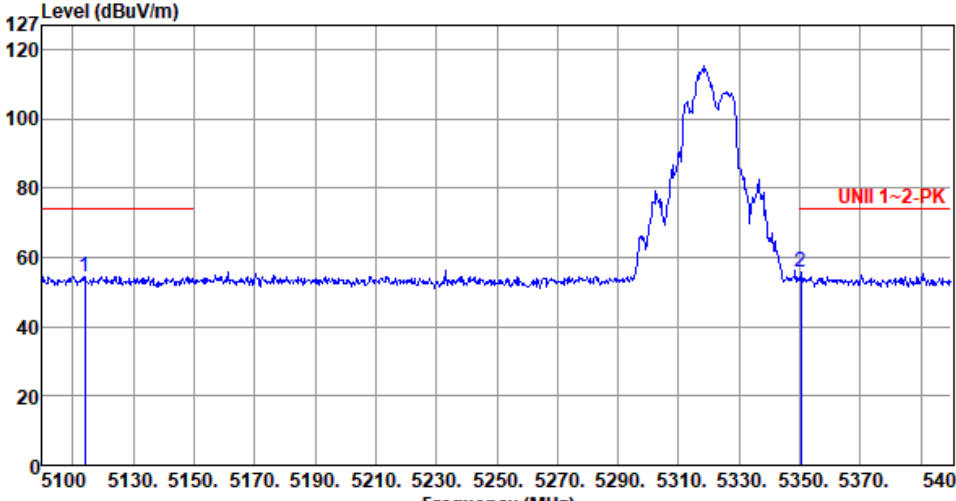
Appendix D

Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5114.10</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>53.45</td><td>1.13</td><td>Peak</td><td>161</td><td>130</td></tr><tr><td>2</td><td>5350.20</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>54.55</td><td>1.01</td><td>Peak</td><td>161</td><td>130</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5114.10	54.58	74.00	-19.42	53.45	1.13	Peak	161	130	2	5350.20	55.56	74.00	-18.44	54.55	1.01	Peak	161	130
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5114.10	54.58	74.00	-19.42	53.45	1.13	Peak	161	130																																		
2	5350.20	55.56	74.00	-18.44	54.55	1.01	Peak	161	130																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5320																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) 1 2 UNII 1~2-PK <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5134.50</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>53.59</td><td>1.16</td><td>Peak</td><td>142</td><td>136</td></tr><tr><td>2</td><td>5372.10</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>54.40</td><td>1.12</td><td>Peak</td><td>142</td><td>136</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5134.50	54.75	74.00	-19.25	53.59	1.16	Peak	142	136	2	5372.10	55.52	74.00	-18.48	54.40	1.12	Peak	142	136
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5134.50	54.75	74.00	-19.25	53.59	1.16	Peak	142	136																								
2	5372.10	55.52	74.00	-18.48	54.40	1.12	Peak	142	136																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

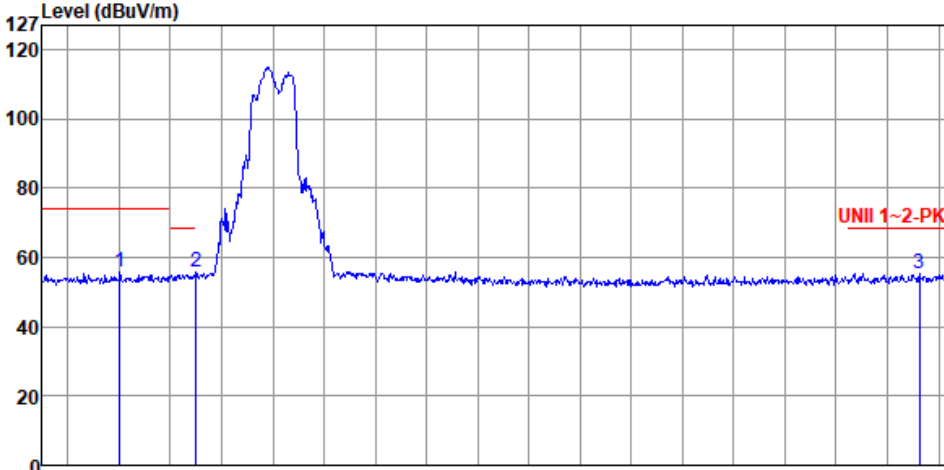
Appendix D

Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5440.18</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>54.29</td><td>1.35</td><td>Peak</td><td>163</td><td>53</td></tr><tr><td>2</td><td>5470.00</td><td>55.74</td><td>68.20</td><td>-12.46</td><td>54.36</td><td>1.38</td><td>Peak</td><td>163</td><td>53</td></tr><tr><td>3</td><td>5752.58</td><td>55.45</td><td>68.20</td><td>-12.75</td><td>53.57</td><td>1.88</td><td>Peak</td><td>163</td><td>53</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5440.18	55.64	74.00	-18.36	54.29	1.35	Peak	163	53	2	5470.00	55.74	68.20	-12.46	54.36	1.38	Peak	163	53	3	5752.58	55.45	68.20	-12.75	53.57	1.88	Peak	163	53
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5440.18	55.64	74.00	-18.36	54.29	1.35	Peak	163	53																																		
2	5470.00	55.74	68.20	-12.46	54.36	1.38	Peak	163	53																																		
3	5752.58	55.45	68.20	-12.75	53.57	1.88	Peak	163	53																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

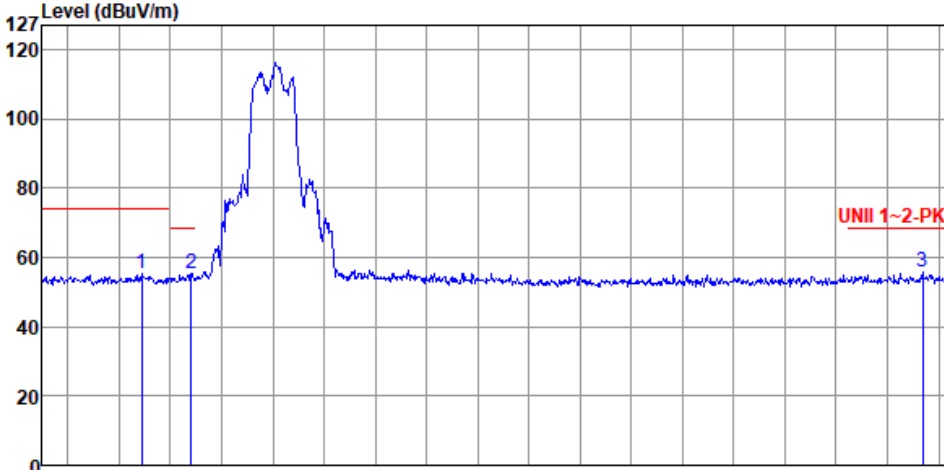
Appendix D

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5500																																																		
Polarization	Vertical-Peak																																																				
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5448.70</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>53.78</td><td>1.36</td><td>Peak</td><td>162</td><td>123</td></tr><tr><td>2</td><td>5468.22</td><td>55.27</td><td>68.20</td><td>-12.93</td><td>53.90</td><td>1.37</td><td>Peak</td><td>162</td><td>123</td></tr><tr><td>3</td><td>5753.64</td><td>55.63</td><td>68.20</td><td>-12.57</td><td>53.75</td><td>1.88</td><td>Peak</td><td>162</td><td>123</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5448.70	55.14	74.00	-18.86	53.78	1.36	Peak	162	123	2	5468.22	55.27	68.20	-12.93	53.90	1.37	Peak	162	123	3	5753.64	55.63	68.20	-12.57	53.75	1.88	Peak	162	123
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5448.70	55.14	74.00	-18.86	53.78	1.36	Peak	162	123																																												
2	5468.22	55.27	68.20	-12.93	53.90	1.37	Peak	162	123																																												
3	5753.64	55.63	68.20	-12.57	53.75	1.88	Peak	162	123																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal-Peak		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

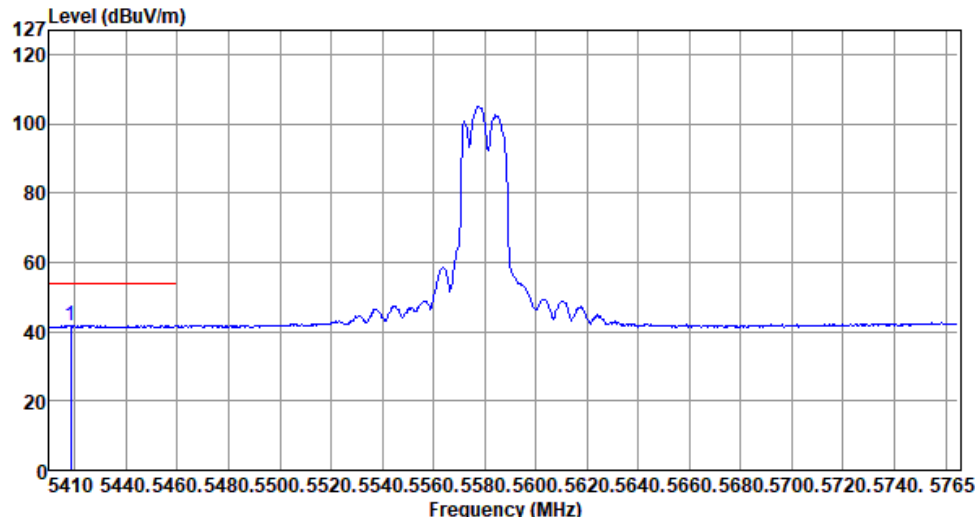
Appendix D

Modulation	11a	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5445.50</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>53.09</td><td>1.36</td><td>Peak</td><td>131</td><td>98</td></tr><tr><td>2</td><td>5466.45</td><td>54.45</td><td>68.20</td><td>-13.75</td><td>53.08</td><td>1.37</td><td>Peak</td><td>131</td><td>98</td></tr><tr><td>3</td><td>5737.67</td><td>56.37</td><td>68.20</td><td>-11.83</td><td>54.52</td><td>1.85</td><td>Peak</td><td>131</td><td>98</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5445.50	54.45	74.00	-19.55	53.09	1.36	Peak	131	98	2	5466.45	54.45	68.20	-13.75	53.08	1.37	Peak	131	98	3	5737.67	56.37	68.20	-11.83	54.52	1.85	Peak	131	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5445.50	54.45	74.00	-19.55	53.09	1.36	Peak	131	98																																		
2	5466.45	54.45	68.20	-13.75	53.08	1.37	Peak	131	98																																		
3	5737.67	56.37	68.20	-11.83	54.52	1.85	Peak	131	98																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Vertical-Average								
Test By :Brad Wu Temperature(°C):24 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5418.52	41.75	54.00	-12.25	40.46	1.29	Average	131	98
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

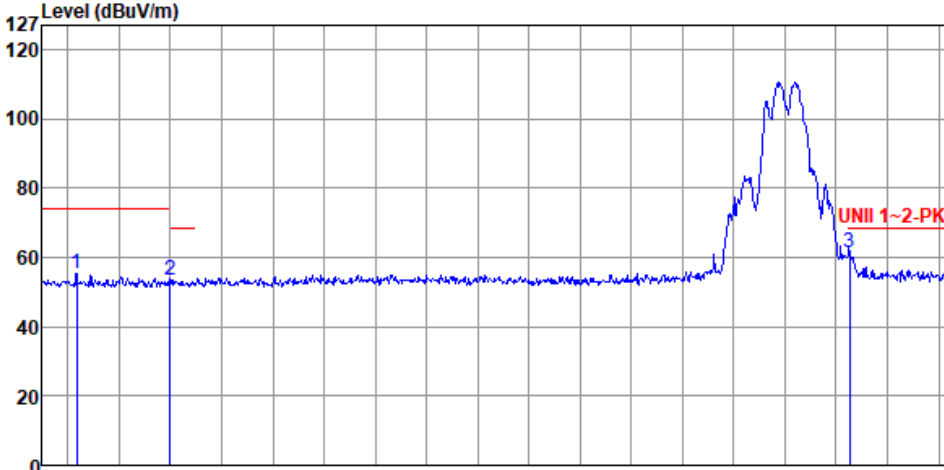
Appendix D

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5700																																																		
Polarization	Vertical-Peak																																																				
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5423.49</td><td>55.11</td><td>74.00</td><td>-18.89</td><td>53.80</td><td>1.31</td><td>Peak</td><td>135</td><td>128</td></tr><tr><td>2</td><td>5460.00</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>51.97</td><td>1.37</td><td>Peak</td><td>135</td><td>128</td></tr><tr><td>3</td><td>5725.24</td><td>61.54</td><td>68.20</td><td>-6.66</td><td>59.73</td><td>1.81</td><td>Peak</td><td>135</td><td>128</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5423.49	55.11	74.00	-18.89	53.80	1.31	Peak	135	128	2	5460.00	53.34	74.00	-20.66	51.97	1.37	Peak	135	128	3	5725.24	61.54	68.20	-6.66	59.73	1.81	Peak	135	128
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5423.49	55.11	74.00	-18.89	53.80	1.31	Peak	135	128																																												
2	5460.00	53.34	74.00	-20.66	51.97	1.37	Peak	135	128																																												
3	5725.24	61.54	68.20	-6.66	59.73	1.81	Peak	135	128																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5700																				
Polarization	Vertical-Average																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																							
Level (dBuV/m) 1 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5417.81</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>40.46</td><td>1.29</td><td>Average</td><td>135</td><td>128</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.81	41.75	54.00	-12.25	40.46	1.29	Average	135	128
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5417.81	41.75	54.00	-12.25	40.46	1.29	Average	135	128														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																							



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5720																																																		
Polarization	Horizontal-Peak																																																				
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																																					
Level (dBUV/m) UNII 1-2-PK-1 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.14</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>53.38</td><td>1.36</td><td>Peak</td><td>300</td><td>278</td></tr><tr><td>2</td><td>5463.90</td><td>53.82</td><td>68.20</td><td>-14.38</td><td>52.45</td><td>1.37</td><td>Peak</td><td>300</td><td>278</td></tr><tr><td>3</td><td>5851.49</td><td>55.92</td><td>68.20</td><td>-12.28</td><td>53.76</td><td>2.16</td><td>Peak</td><td>300</td><td>278</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5452.14	54.74	74.00	-19.26	53.38	1.36	Peak	300	278	2	5463.90	53.82	68.20	-14.38	52.45	1.37	Peak	300	278	3	5851.49	55.92	68.20	-12.28	53.76	2.16	Peak	300	278
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	5452.14	54.74	74.00	-19.26	53.38	1.36	Peak	300	278																																												
2	5463.90	53.82	68.20	-14.38	52.45	1.37	Peak	300	278																																												
3	5851.49	55.92	68.20	-12.28	53.76	2.16	Peak	300	278																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

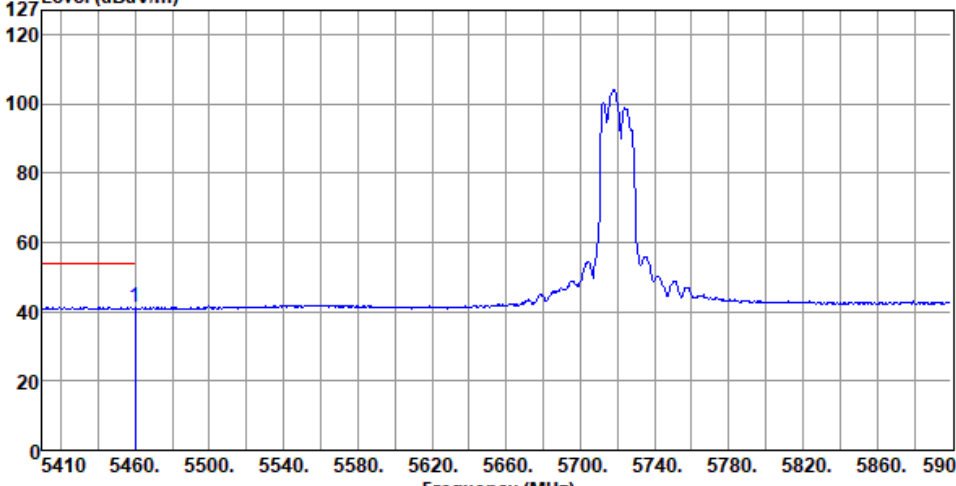
Appendix D

Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5720						
Polarization	Vertical-Average								
Test By :Roger Lu Temperature(°C):24 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5459.98	41.25	54.00	-12.75	39.88	1.37	Average	244	99
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

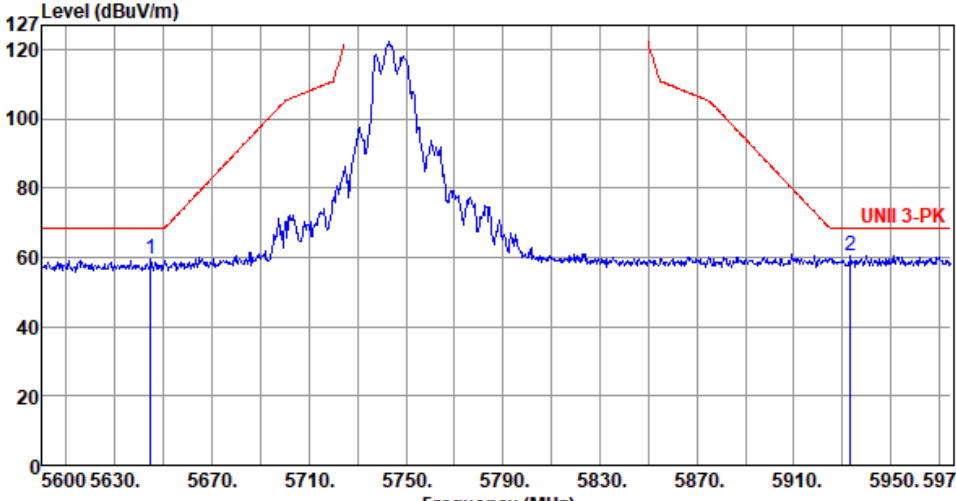
Appendix D

Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5644.63</td><td>59.36</td><td>68.20</td><td>-8.84</td><td>57.88</td><td>1.48</td><td>Peak</td><td>169</td><td>249</td></tr><tr><td>2</td><td>5933.38</td><td>60.35</td><td>68.20</td><td>-7.85</td><td>58.02</td><td>2.33</td><td>Peak</td><td>169</td><td>249</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5644.63	59.36	68.20	-8.84	57.88	1.48	Peak	169	249	2	5933.38	60.35	68.20	-7.85	58.02	2.33	Peak	169	249
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5644.63	59.36	68.20	-8.84	57.88	1.48	Peak	169	249																								
2	5933.38	60.35	68.20	-7.85	58.02	2.33	Peak	169	249																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5785																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5630.00</td><td>59.24</td><td>68.20</td><td>-8.96</td><td>57.80</td><td>1.44</td><td>Peak</td><td>212</td><td>58</td></tr><tr><td>2</td><td>5932.63</td><td>60.39</td><td>68.20</td><td>-7.81</td><td>58.06</td><td>2.33</td><td>Peak</td><td>212</td><td>58</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5630.00	59.24	68.20	-8.96	57.80	1.44	Peak	212	58	2	5932.63	60.39	68.20	-7.81	58.06	2.33	Peak	212	58
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5630.00	59.24	68.20	-8.96	57.80	1.44	Peak	212	58																								
2	5932.63	60.39	68.20	-7.81	58.06	2.33	Peak	212	58																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11a	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5627.00</td><td>58.82</td><td>68.20</td><td>-9.38</td><td>57.40</td><td>1.42</td><td>Peak</td><td>158</td><td>110</td></tr><tr><td>2</td><td>5963.38</td><td>60.32</td><td>68.20</td><td>-7.88</td><td>57.91</td><td>2.41</td><td>Peak</td><td>158</td><td>110</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5627.00	58.82	68.20	-9.38	57.40	1.42	Peak	158	110	2	5963.38	60.32	68.20	-7.88	57.91	2.41	Peak	158	110
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5627.00	58.82	68.20	-9.38	57.40	1.42	Peak	158	110																								
2	5963.38	60.32	68.20	-7.88	57.91	2.41	Peak	158	110																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

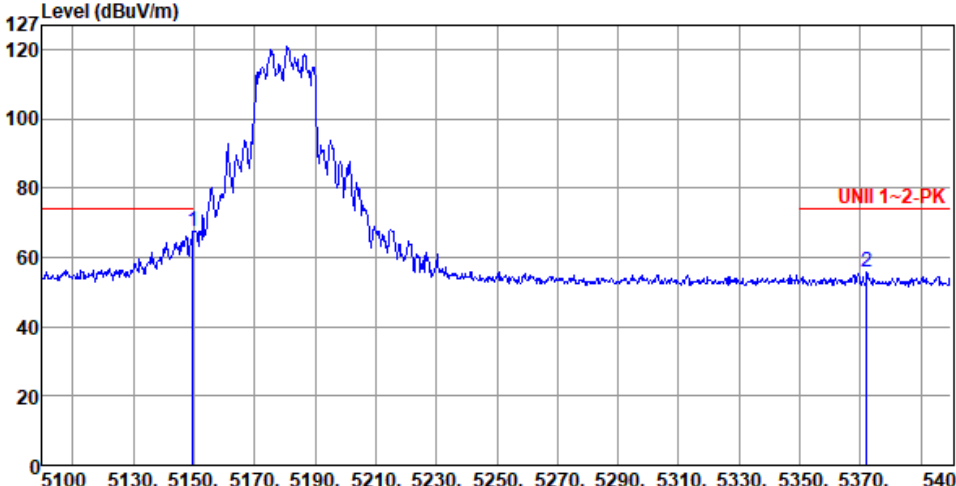
Appendix D

Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) 127 120 100 80 60 40 20 0 5600 5630. 5670. 5710. 5750. 5790. 5830. 5870. 5910. 5950. 5975 1 2 UNII 3-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBUV/m dBUV/m dB reading dBUV dB/m 1 5614.63 59.58 68.20 -8.62 58.19 1.39 Peak 108 89 2 5970.88 60.34 68.20 -7.86 57.90 2.44 Peak 108 89 Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).			



Band Edge measurement

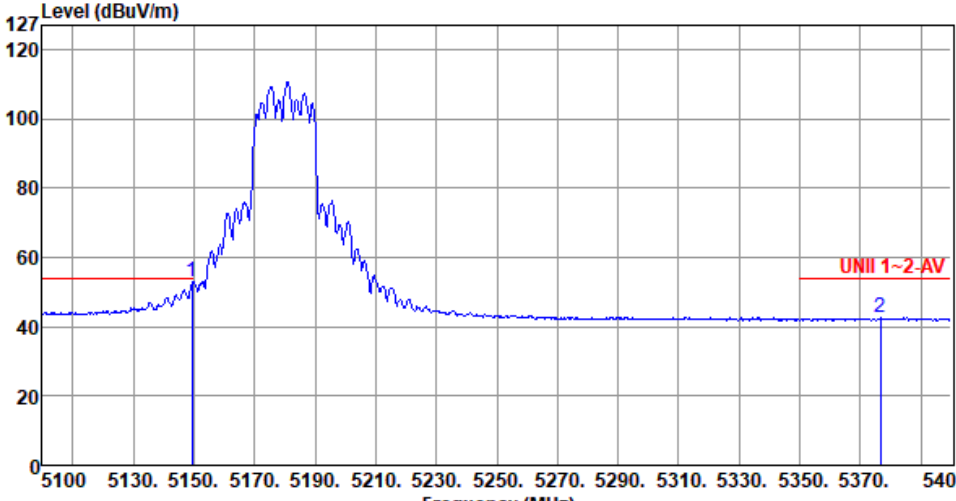
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>67.53</td><td>74.00</td><td>-6.47</td><td>66.33</td><td>1.20</td><td>Peak</td><td>225</td><td>255</td></tr><tr><td>2</td><td>5372.10</td><td>55.84</td><td>74.00</td><td>-18.16</td><td>54.72</td><td>1.12</td><td>Peak</td><td>225</td><td>255</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	67.53	74.00	-6.47	66.33	1.20	Peak	225	255	2	5372.10	55.84	74.00	-18.16	54.72	1.12	Peak	225	255
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	67.53	74.00	-6.47	66.33	1.20	Peak	225	255																								
2	5372.10	55.84	74.00	-18.16	54.72	1.12	Peak	225	255																								



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>52.75</td><td>54.00</td><td>-1.25</td><td>51.55</td><td>1.20</td><td>Average</td><td>225</td><td>255</td></tr><tr><td>2</td><td>5376.60</td><td>42.46</td><td>54.00</td><td>-11.54</td><td>41.32</td><td>1.14</td><td>Average</td><td>225</td><td>255</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	52.75	54.00	-1.25	51.55	1.20	Average	225	255	2	5376.60	42.46	54.00	-11.54	41.32	1.14	Average	225	255
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	52.75	54.00	-1.25	51.55	1.20	Average	225	255																								
2	5376.60	42.46	54.00	-11.54	41.32	1.14	Average	225	255																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

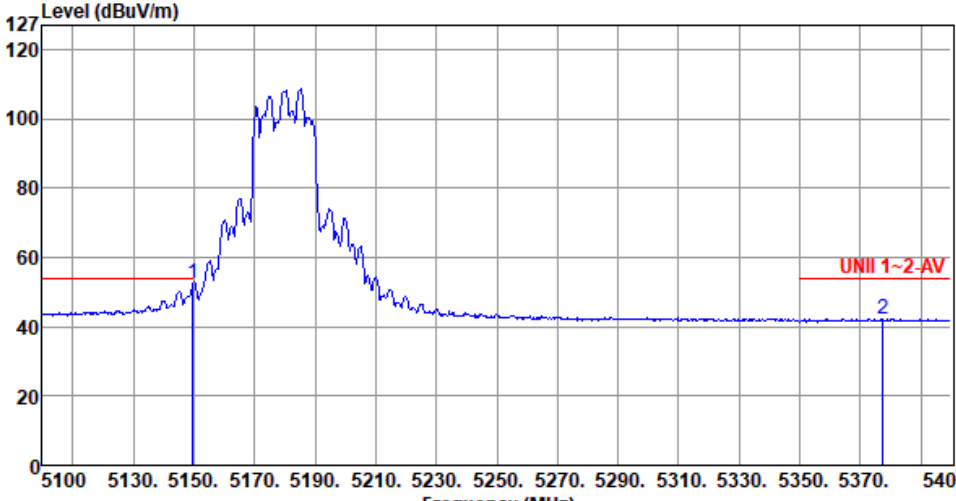
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>67.12</td><td>74.00</td><td>-6.88</td><td>65.92</td><td>1.20</td><td>Peak</td><td>174</td><td>286</td></tr><tr><td>2</td><td>5358.30</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>53.36</td><td>1.05</td><td>Peak</td><td>174</td><td>286</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	67.12	74.00	-6.88	65.92	1.20	Peak	174	286	2	5358.30	54.41	74.00	-19.59	53.36	1.05	Peak	174	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	67.12	74.00	-6.88	65.92	1.20	Peak	174	286																								
2	5358.30	54.41	74.00	-19.59	53.36	1.05	Peak	174	286																								



Band Edge measurement

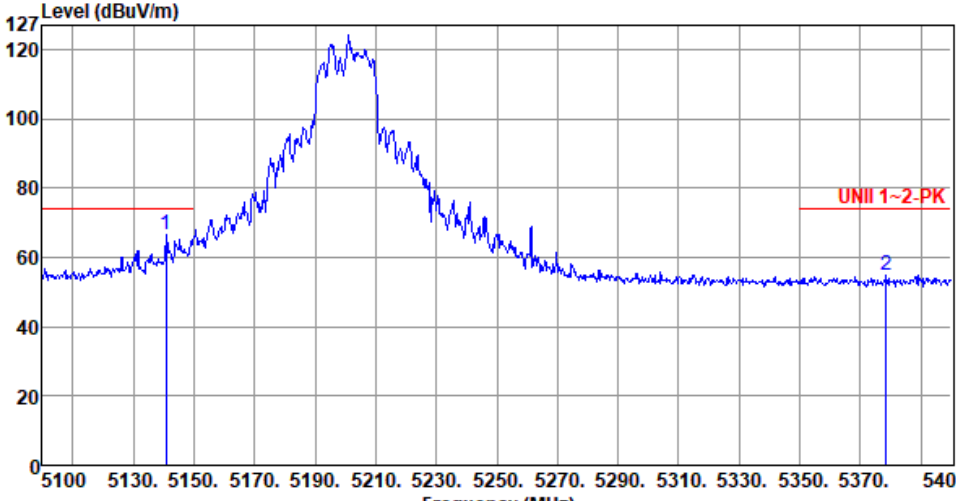
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.67</td><td>54.00</td><td>-1.33</td><td>51.47</td><td>1.20</td><td>Average</td><td>174</td><td>286</td></tr><tr><td>2</td><td>5377.50</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>41.17</td><td>1.14</td><td>Average</td><td>174</td><td>286</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.67	54.00	-1.33	51.47	1.20	Average	174	286	2	5377.50	42.31	54.00	-11.69	41.17	1.14	Average	174	286
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.67	54.00	-1.33	51.47	1.20	Average	174	286																								
2	5377.50	42.31	54.00	-11.69	41.17	1.14	Average	174	286																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

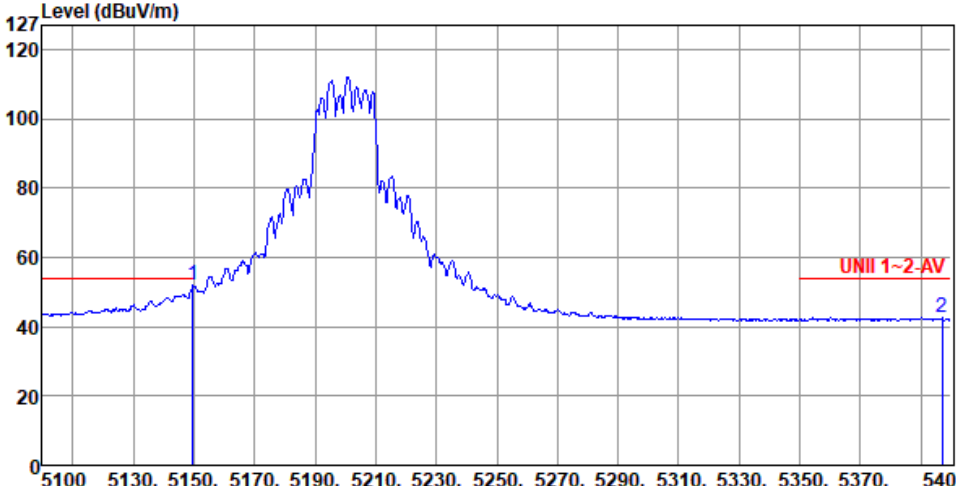
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5140.80</td><td>66.36</td><td>74.00</td><td>-7.64</td><td>65.18</td><td>1.18</td><td>Peak</td><td>205</td><td>246</td></tr><tr><td>2</td><td>5378.40</td><td>54.87</td><td>74.00</td><td>-19.13</td><td>53.73</td><td>1.14</td><td>Peak</td><td>205</td><td>246</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5140.80	66.36	74.00	-7.64	65.18	1.18	Peak	205	246	2	5378.40	54.87	74.00	-19.13	53.73	1.14	Peak	205	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5140.80	66.36	74.00	-7.64	65.18	1.18	Peak	205	246																								
2	5378.40	54.87	74.00	-19.13	53.73	1.14	Peak	205	246																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

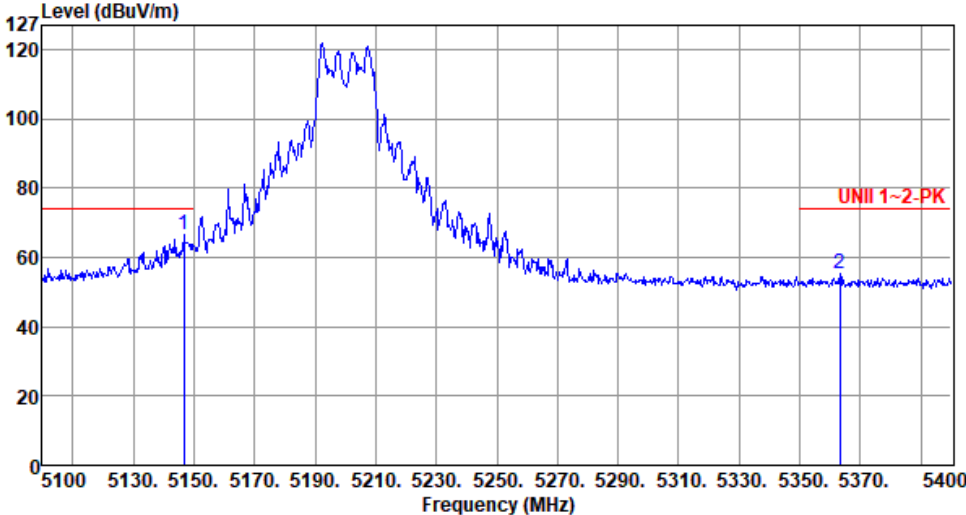
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																																								
Polarization	Horizontal-Average																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>51.83</td><td>54.00</td><td>-2.17</td><td>50.63</td><td>1.20</td><td>Average</td><td>205</td><td>246</td></tr><tr><td>2</td><td>5397.00</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>41.34</td><td>1.24</td><td>Average</td><td>205</td><td>246</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5149.80	51.83	54.00	-2.17	50.63	1.20	Average	205	246	2	5397.00	42.58	54.00	-11.42	41.34	1.24	Average	205	246
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.80	51.83	54.00	-2.17	50.63	1.20	Average	205	246																																		
2	5397.00	42.58	54.00	-11.42	41.34	1.24	Average	205	246																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.80</td><td>66.51</td><td>74.00</td><td>-7.49</td><td>65.32</td><td>1.19</td><td>Peak</td><td>229</td><td>305</td></tr><tr><td>2</td><td>5363.10</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>54.12</td><td>1.07</td><td>Peak</td><td>229</td><td>305</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5146.80	66.51	74.00	-7.49	65.32	1.19	Peak	229	305	2	5363.10	55.19	74.00	-18.81	54.12	1.07	Peak	229	305
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5146.80	66.51	74.00	-7.49	65.32	1.19	Peak	229	305																																		
2	5363.10	55.19	74.00	-18.81	54.12	1.07	Peak	229	305																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

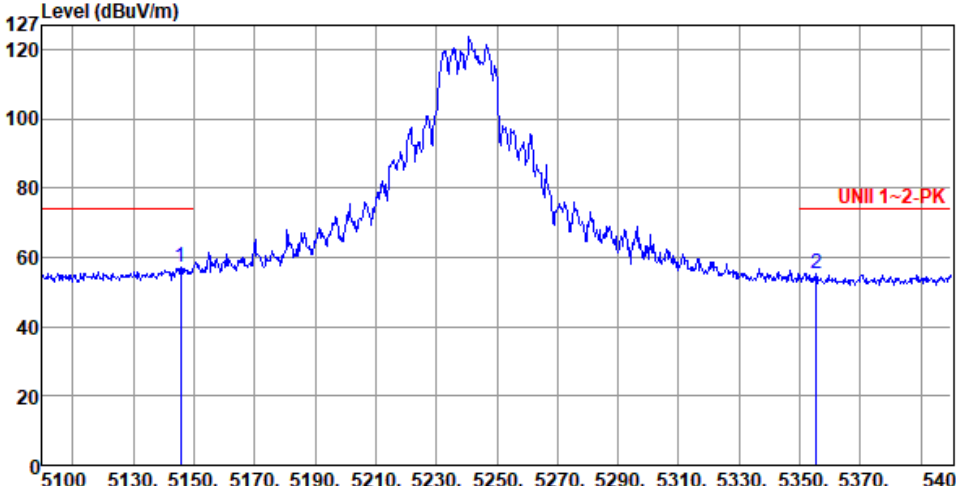
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) 1 2 UNII 1~2-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5147.70</td><td>51.48</td><td>54.00</td><td>-2.52</td><td>50.28</td><td>1.20</td><td>Average</td><td>229</td><td>305</td></tr><tr><td>2</td><td>5352.00</td><td>42.32</td><td>54.00</td><td>-11.68</td><td>41.30</td><td>1.02</td><td>Average</td><td>229</td><td>305</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.70	51.48	54.00	-2.52	50.28	1.20	Average	229	305	2	5352.00	42.32	54.00	-11.68	41.30	1.02	Average	229	305
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.70	51.48	54.00	-2.52	50.28	1.20	Average	229	305																								
2	5352.00	42.32	54.00	-11.68	41.30	1.02	Average	229	305																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.60</td><td>57.20</td><td>74.00</td><td>-16.80</td><td>56.01</td><td>1.19</td><td>Peak</td><td>241</td><td>258</td></tr><tr><td>2</td><td>5355.30</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>54.34</td><td>1.04</td><td>Peak</td><td>241</td><td>258</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	57.20	74.00	-16.80	56.01	1.19	Peak	241	258	2	5355.30	55.38	74.00	-18.62	54.34	1.04	Peak	241	258
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	57.20	74.00	-16.80	56.01	1.19	Peak	241	258																								
2	5355.30	55.38	74.00	-18.62	54.34	1.04	Peak	241	258																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

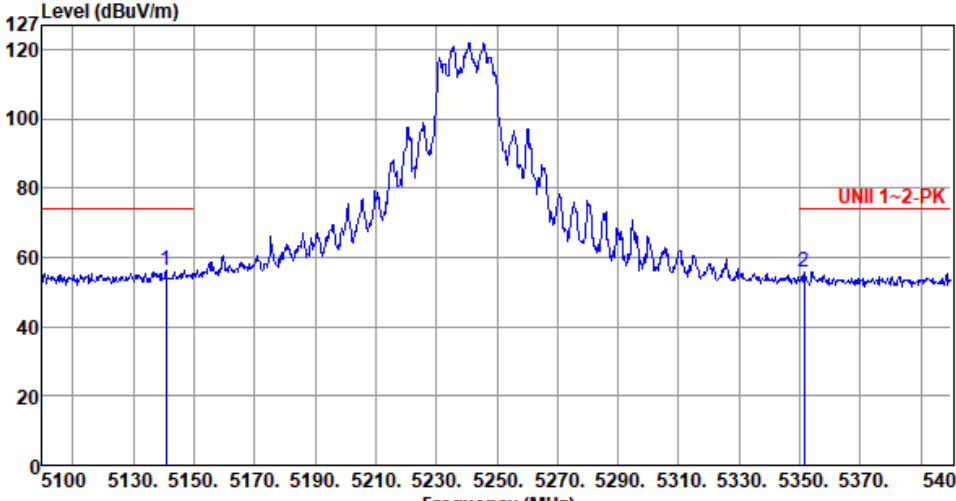
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

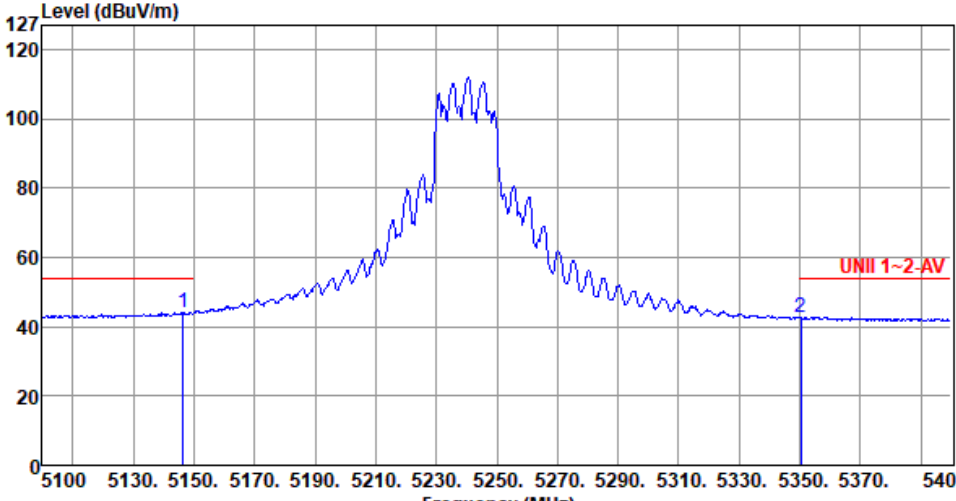
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5140.80</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>55.09</td><td>1.18</td><td>Peak</td><td>298</td><td>55</td></tr><tr><td>2</td><td>5351.40</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>54.96</td><td>1.02</td><td>Peak</td><td>298</td><td>55</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5140.80	56.27	74.00	-17.73	55.09	1.18	Peak	298	55	2	5351.40	55.98	74.00	-18.02	54.96	1.02	Peak	298	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5140.80	56.27	74.00	-17.73	55.09	1.18	Peak	298	55																								
2	5351.40	55.98	74.00	-18.02	54.96	1.02	Peak	298	55																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

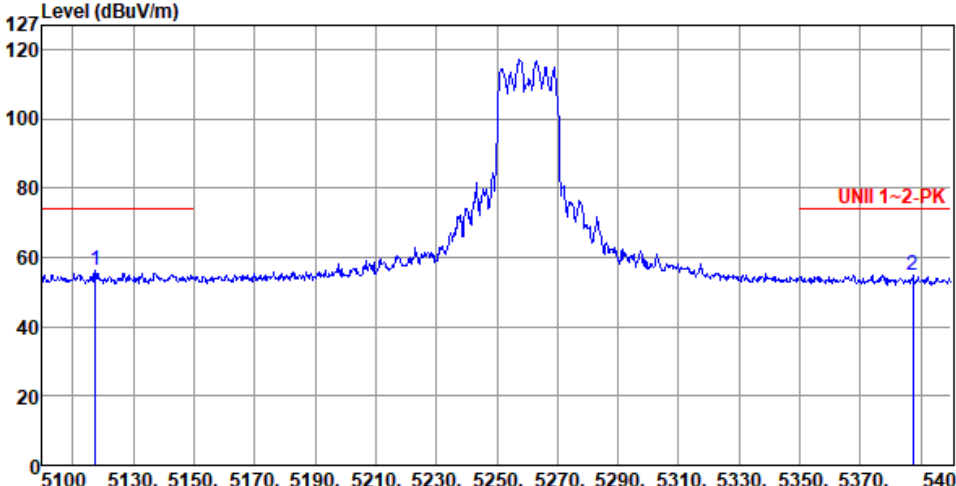
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.50</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>43.04</td><td>1.19</td><td>Average</td><td>298</td><td>55</td></tr><tr><td>2</td><td>5350.20</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>41.80</td><td>1.01</td><td>Average</td><td>298</td><td>55</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.50	44.23	54.00	-9.77	43.04	1.19	Average	298	55	2	5350.20	42.81	54.00	-11.19	41.80	1.01	Average	298	55
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.50	44.23	54.00	-9.77	43.04	1.19	Average	298	55																								
2	5350.20	42.81	54.00	-11.19	41.80	1.01	Average	298	55																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Peak																																
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5117.40</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>55.14</td><td>1.13</td><td>Peak</td><td>221</td><td>259</td></tr><tr><td>2</td><td>5387.40</td><td>54.93</td><td>74.00</td><td>-19.07</td><td>53.74</td><td>1.19</td><td>Peak</td><td>221</td><td>259</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5117.40	56.27	74.00	-17.73	55.14	1.13	Peak	221	259	2	5387.40	54.93	74.00	-19.07	53.74	1.19	Peak	221	259
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5117.40	56.27	74.00	-17.73	55.14	1.13	Peak	221	259																								
2	5387.40	54.93	74.00	-19.07	53.74	1.19	Peak	221	259																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

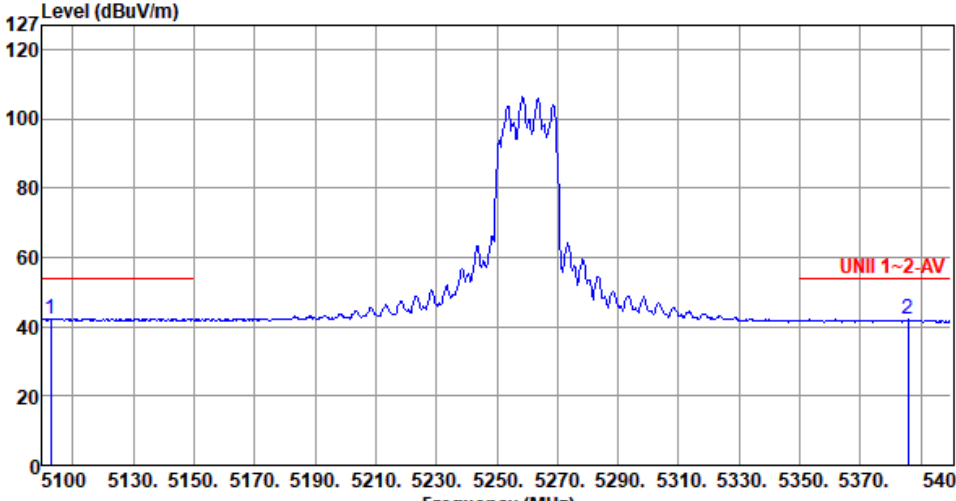
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260																														
Polarization	Vertical-Average																																
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5102.70</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>41.19</td><td>1.10</td><td>Average</td><td>100</td><td>319</td></tr><tr><td>2</td><td>5385.60</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>40.85</td><td>1.18</td><td>Average</td><td>100</td><td>319</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5102.70	42.29	54.00	-11.71	41.19	1.10	Average	100	319	2	5385.60	42.03	54.00	-11.97	40.85	1.18	Average	100	319
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5102.70	42.29	54.00	-11.71	41.19	1.10	Average	100	319																								
2	5385.60	42.03	54.00	-11.97	40.85	1.18	Average	100	319																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

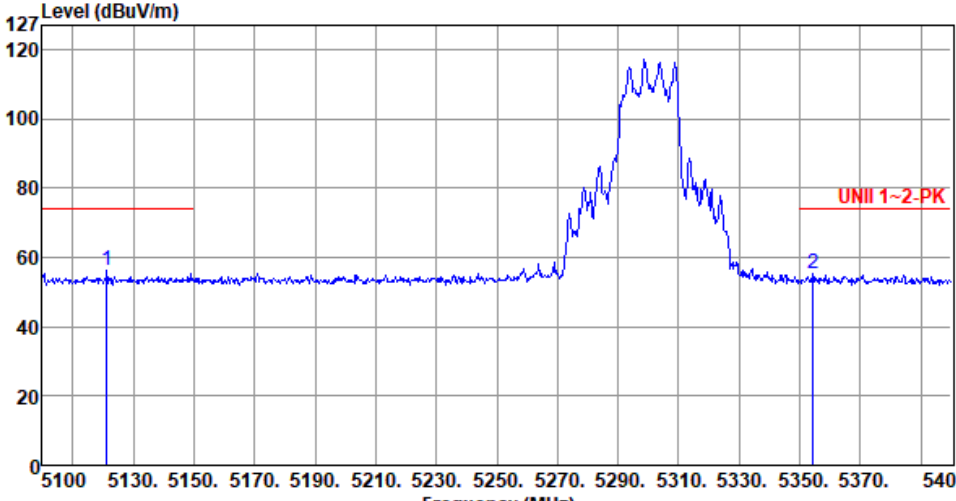
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5121.30</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>54.98</td><td>1.14</td><td>Peak</td><td>100</td><td>320</td></tr><tr><td>2</td><td>5354.40</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>54.10</td><td>1.03</td><td>Peak</td><td>100</td><td>320</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5121.30	56.12	74.00	-17.88	54.98	1.14	Peak	100	320	2	5354.40	55.13	74.00	-18.87	54.10	1.03	Peak	100	320
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5121.30	56.12	74.00	-17.88	54.98	1.14	Peak	100	320																								
2	5354.40	55.13	74.00	-18.87	54.10	1.03	Peak	100	320																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

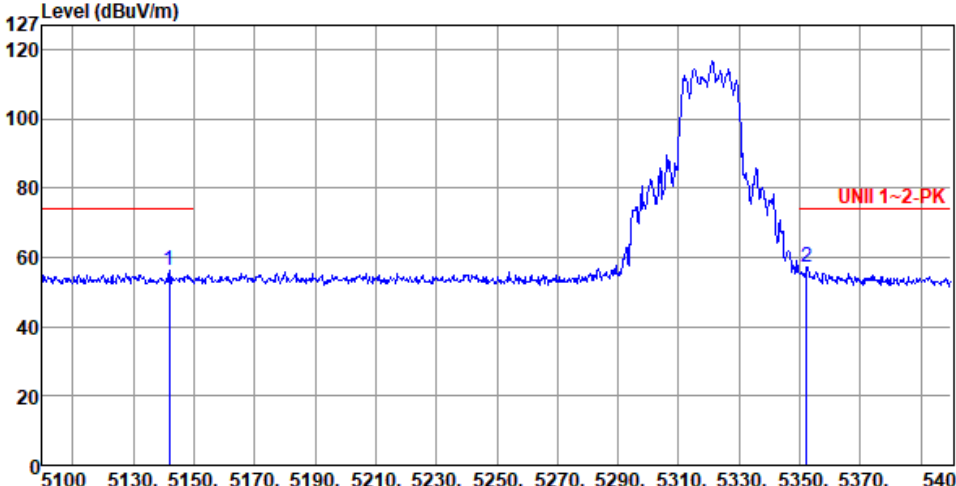
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300																																								
Polarization	Vertical-Average																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) 1 2 UNII 1~2-AV <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.40</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>41.18</td><td>1.18</td><td>Average</td><td>100</td><td>320</td></tr><tr><td>2</td><td>5350.50</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>41.30</td><td>1.01</td><td>Average</td><td>100</td><td>320</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5138.40	42.36	54.00	-11.64	41.18	1.18	Average	100	320	2	5350.50	42.31	54.00	-11.69	41.30	1.01	Average	100	320
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5138.40	42.36	54.00	-11.64	41.18	1.18	Average	100	320																																		
2	5350.50	42.31	54.00	-11.69	41.30	1.01	Average	100	320																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.00</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>55.03</td><td>1.18</td><td>Peak</td><td>167</td><td>259</td></tr><tr><td>2</td><td>5352.30</td><td>57.32</td><td>74.00</td><td>-16.68</td><td>56.30</td><td>1.02</td><td>Peak</td><td>167</td><td>259</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5142.00	56.21	74.00	-17.79	55.03	1.18	Peak	167	259	2	5352.30	57.32	74.00	-16.68	56.30	1.02	Peak	167	259
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5142.00	56.21	74.00	-17.79	55.03	1.18	Peak	167	259																																		
2	5352.30	57.32	74.00	-16.68	56.30	1.02	Peak	167	259																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

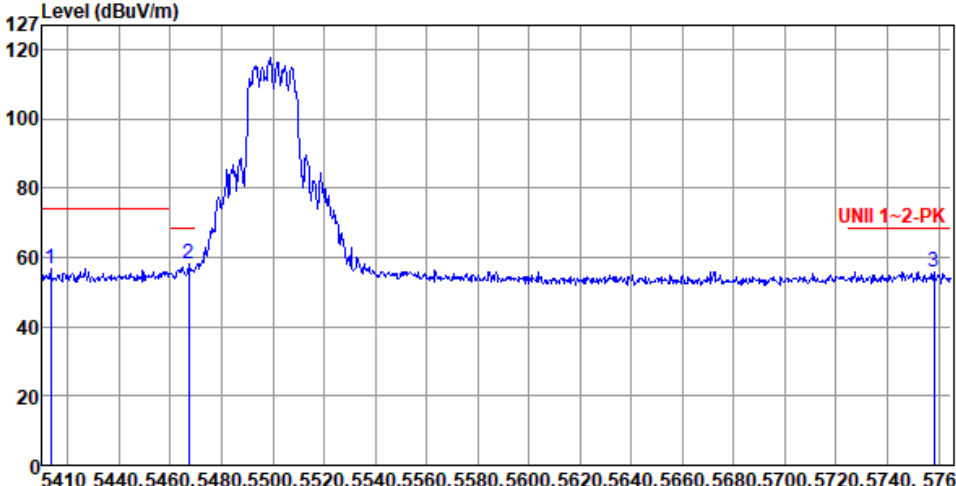
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5413.20</td><td>56.93</td><td>74.00</td><td>-17.07</td><td>55.65</td><td>1.28</td><td>Peak</td><td>215</td><td>268</td></tr><tr><td>2</td><td>5467.16</td><td>58.32</td><td>68.20</td><td>-9.88</td><td>56.95</td><td>1.37</td><td>Peak</td><td>215</td><td>268</td></tr><tr><td>3</td><td>5758.26</td><td>55.88</td><td>68.20</td><td>-12.32</td><td>53.98</td><td>1.90</td><td>Peak</td><td>215</td><td>268</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.20	56.93	74.00	-17.07	55.65	1.28	Peak	215	268	2	5467.16	58.32	68.20	-9.88	56.95	1.37	Peak	215	268	3	5758.26	55.88	68.20	-12.32	53.98	1.90	Peak	215	268
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5413.20	56.93	74.00	-17.07	55.65	1.28	Peak	215	268																																		
2	5467.16	58.32	68.20	-9.88	56.95	1.37	Peak	215	268																																		
3	5758.26	55.88	68.20	-12.32	53.98	1.90	Peak	215	268																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

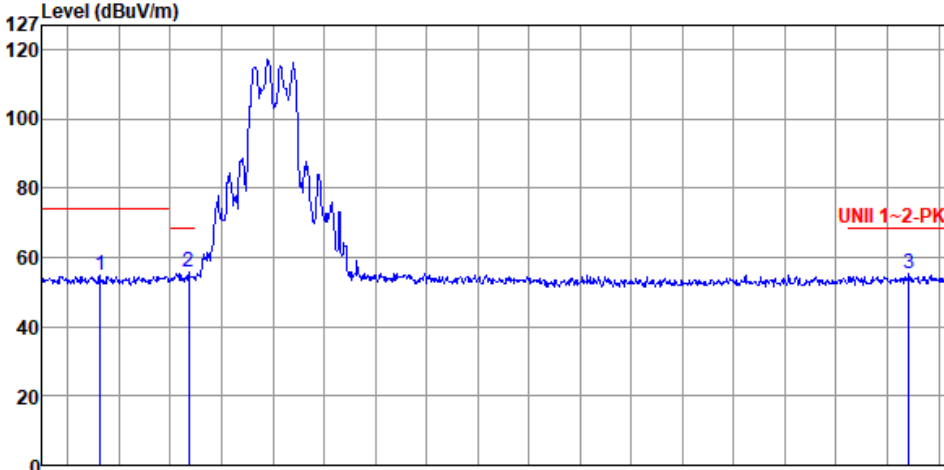
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

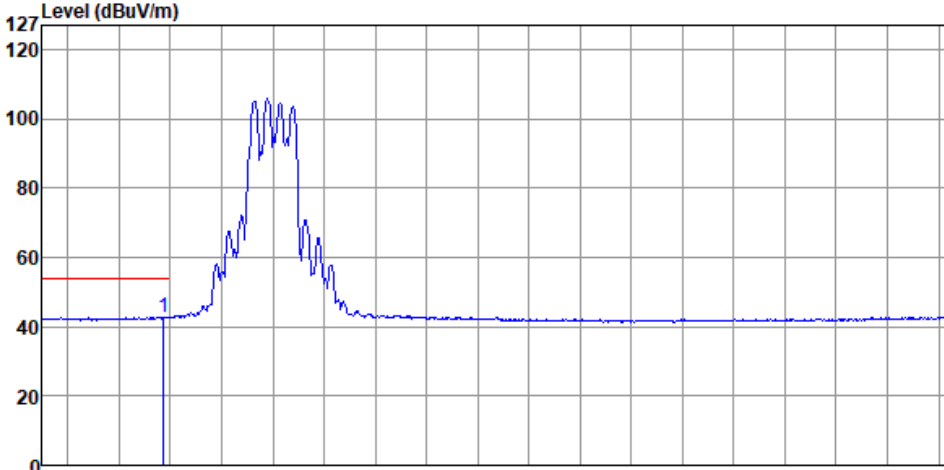
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5432.72</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>53.71</td><td>1.33</td><td>Peak</td><td>178</td><td>129</td></tr><tr><td>2</td><td>5467.16</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>54.17</td><td>1.37</td><td>Peak</td><td>178</td><td>129</td></tr><tr><td>3</td><td>5748.32</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>53.33</td><td>1.88</td><td>Peak</td><td>178</td><td>129</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5432.72	55.04	74.00	-18.96	53.71	1.33	Peak	178	129	2	5467.16	55.54	68.20	-12.66	54.17	1.37	Peak	178	129	3	5748.32	55.21	68.20	-12.99	53.33	1.88	Peak	178	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5432.72	55.04	74.00	-18.96	53.71	1.33	Peak	178	129																																		
2	5467.16	55.54	68.20	-12.66	54.17	1.37	Peak	178	129																																		
3	5748.32	55.21	68.20	-12.99	53.33	1.88	Peak	178	129																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500																				
Polarization	Vertical-Average																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.22</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>41.50</td><td>1.37</td><td>Average</td><td>178</td><td>129</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.22	42.87	54.00	-11.13	41.50	1.37	Average	178	129
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5457.22	42.87	54.00	-11.13	41.50	1.37	Average	178	129														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

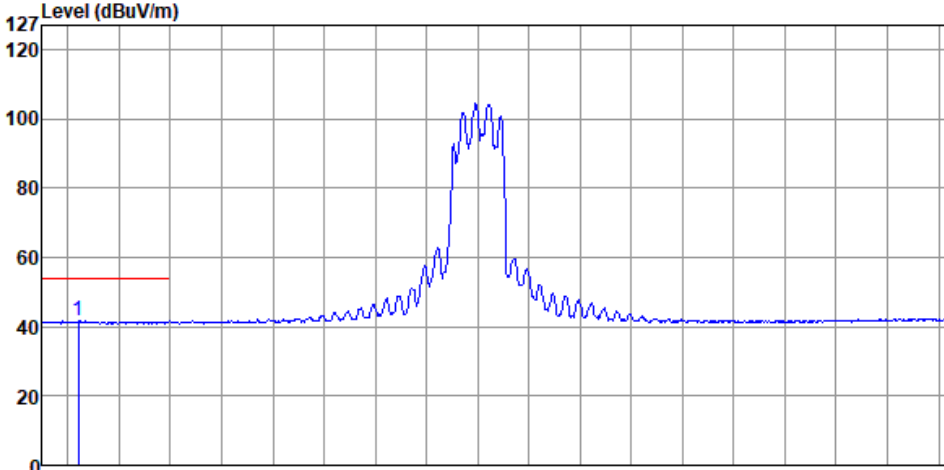
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5426.33</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>53.39</td><td>1.31</td><td>Peak</td><td>110</td><td>213</td></tr><tr><td>2</td><td>5466.09</td><td>54.10</td><td>68.20</td><td>-14.10</td><td>52.73</td><td>1.37</td><td>Peak</td><td>110</td><td>213</td></tr><tr><td>3</td><td>5731.63</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>52.96</td><td>1.82</td><td>Peak</td><td>110</td><td>213</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5426.33	54.70	74.00	-19.30	53.39	1.31	Peak	110	213	2	5466.09	54.10	68.20	-14.10	52.73	1.37	Peak	110	213	3	5731.63	54.78	68.20	-13.42	52.96	1.82	Peak	110	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5426.33	54.70	74.00	-19.30	53.39	1.31	Peak	110	213																																		
2	5466.09	54.10	68.20	-14.10	52.73	1.37	Peak	110	213																																		
3	5731.63	54.78	68.20	-13.42	52.96	1.82	Peak	110	213																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580																				
Polarization	Vertical-Average																						
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5424.20</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>40.48</td><td>1.31</td><td>Average</td><td>110</td><td>213</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5424.20	41.79	54.00	-12.21	40.48	1.31	Average	110	213
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg														
1	5424.20	41.79	54.00	-12.21	40.48	1.31	Average	110	213														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																							



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

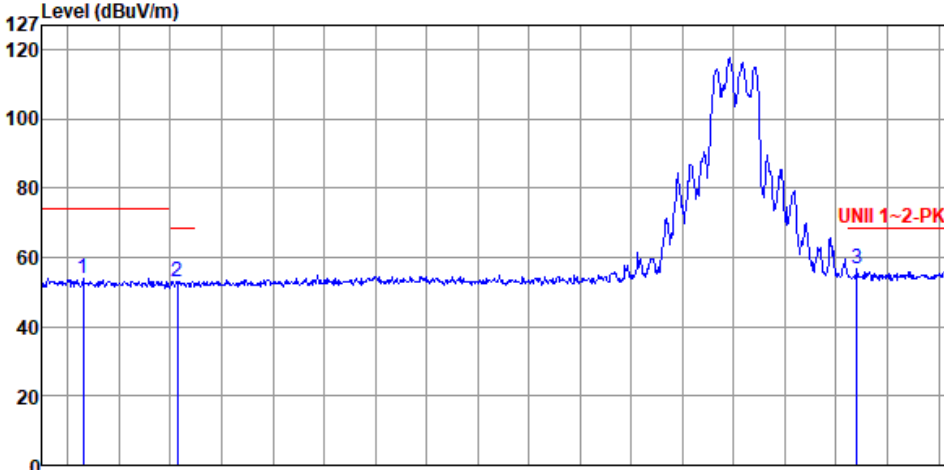
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680																																																		
Polarization	Vertical-Peak																																																				
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																																					
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.98</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>52.70</td><td>1.31</td><td>Peak</td><td>111</td><td>85</td></tr><tr><td>2</td><td>5462.90</td><td>53.10</td><td>68.20</td><td>-15.10</td><td>51.73</td><td>1.37</td><td>Peak</td><td>111</td><td>85</td></tr><tr><td>3</td><td>5728.08</td><td>56.50</td><td>68.20</td><td>-11.70</td><td>54.68</td><td>1.82</td><td>Peak</td><td>111</td><td>85</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5425.98	54.01	74.00	-19.99	52.70	1.31	Peak	111	85	2	5462.90	53.10	68.20	-15.10	51.73	1.37	Peak	111	85	3	5728.08	56.50	68.20	-11.70	54.68	1.82	Peak	111	85
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5425.98	54.01	74.00	-19.99	52.70	1.31	Peak	111	85																																												
2	5462.90	53.10	68.20	-15.10	51.73	1.37	Peak	111	85																																												
3	5728.08	56.50	68.20	-11.70	54.68	1.82	Peak	111	85																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

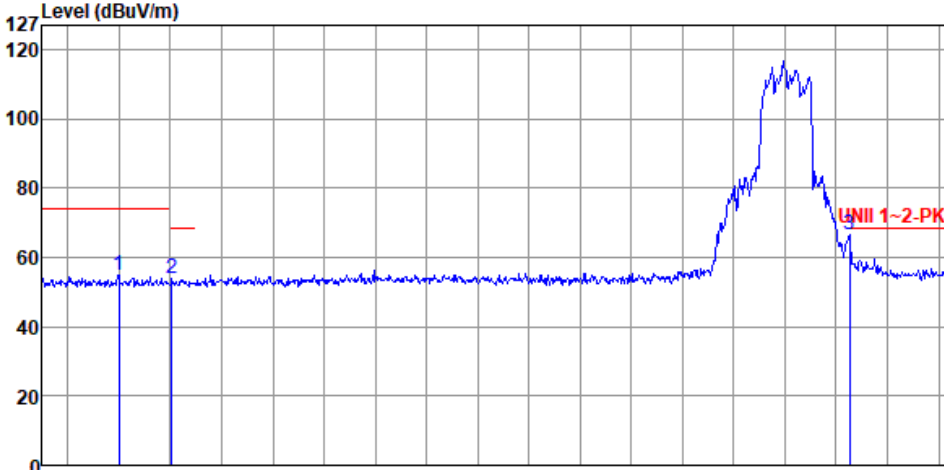
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5439.82</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>53.41</td><td>1.35</td><td>Peak</td><td>117</td><td>90</td></tr><tr><td>2</td><td>5460.41</td><td>53.71</td><td>68.20</td><td>-14.49</td><td>52.34</td><td>1.37</td><td>Peak</td><td>117</td><td>90</td></tr><tr><td>3</td><td>5725.24</td><td>66.53</td><td>68.20</td><td>-1.67</td><td>64.72</td><td>1.81</td><td>Peak</td><td>117</td><td>90</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.82	54.76	74.00	-19.24	53.41	1.35	Peak	117	90	2	5460.41	53.71	68.20	-14.49	52.34	1.37	Peak	117	90	3	5725.24	66.53	68.20	-1.67	64.72	1.81	Peak	117	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5439.82	54.76	74.00	-19.24	53.41	1.35	Peak	117	90																																		
2	5460.41	53.71	68.20	-14.49	52.34	1.37	Peak	117	90																																		
3	5725.24	66.53	68.20	-1.67	64.72	1.81	Peak	117	90																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

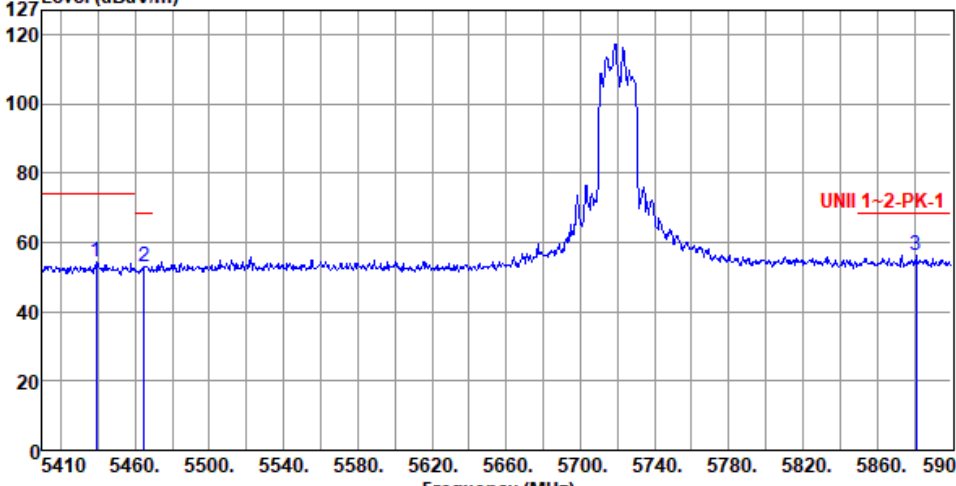
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

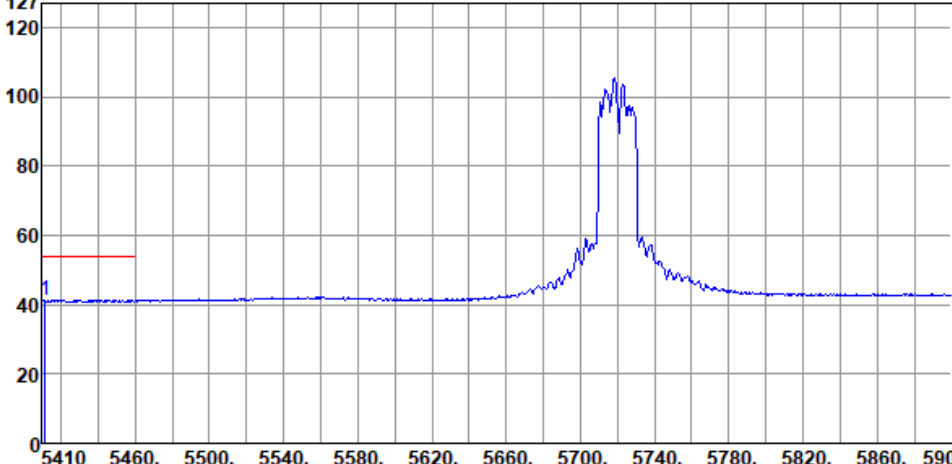
Modulation	11be EHT20	Test Freq. (MHz)	5720						
Polarization	Horizontal-Peak								
Test By :Roger Lu Temperature(°C):24 Humidity(%):66									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg
1	5438.91	54.14	74.00	-19.86	52.79	1.35	Peak	200	61
2	5464.88	53.11	68.20	-15.09	51.74	1.37	Peak	200	61
3	5880.89	56.11	68.20	-12.09	53.87	2.24	Peak	200	61

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720						
Polarization	Horizontal-Average								
Test By :Roger Lu Temperature(°C):24 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5411.47	41.39	54.00	-12.61	40.12	1.27	Average	200	61
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

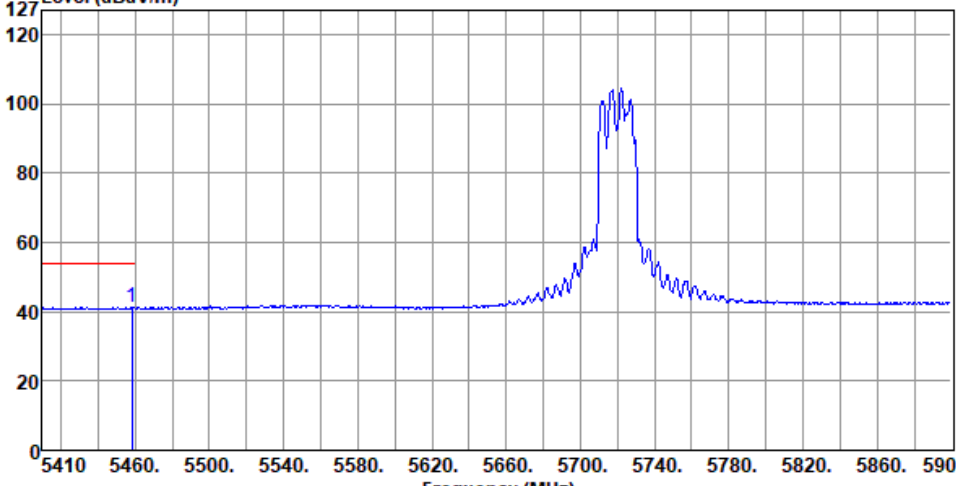
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720						
Polarization	Vertical-Average								
Test By :Roger Lu Temperature(°C):24 Humidity(%):66									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5458.51	41.42	54.00	-12.58	40.05	1.37	Average	100	271
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

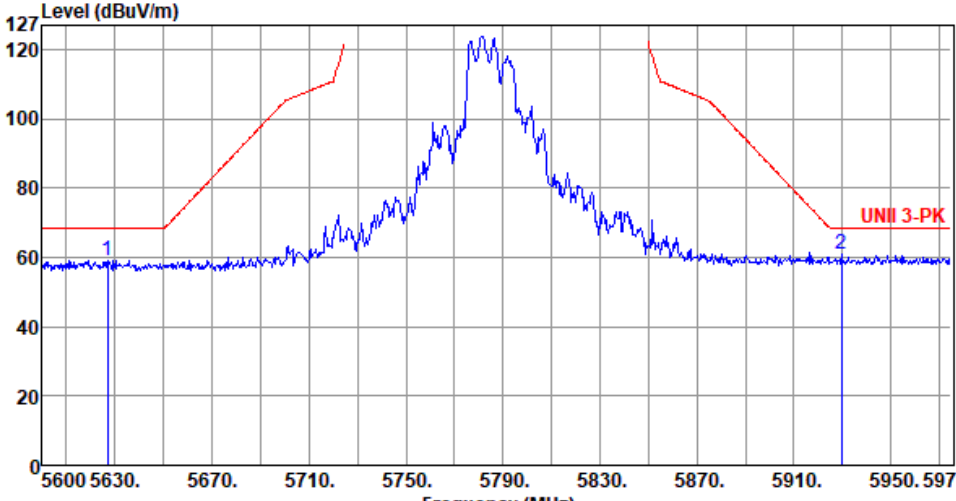
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5627.00</td><td>59.20</td><td>68.20</td><td>-9.00</td><td>57.78</td><td>1.42</td><td>Peak</td><td>175</td><td>120</td></tr><tr><td>2</td><td>5929.63</td><td>60.78</td><td>68.20</td><td>-7.42</td><td>58.45</td><td>2.33</td><td>Peak</td><td>175</td><td>120</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5627.00	59.20	68.20	-9.00	57.78	1.42	Peak	175	120	2	5929.63	60.78	68.20	-7.42	58.45	2.33	Peak	175	120
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5627.00	59.20	68.20	-9.00	57.78	1.42	Peak	175	120																								
2	5929.63	60.78	68.20	-7.42	58.45	2.33	Peak	175	120																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5785																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m) 127 120 100 80 60 40 20 0 5600 5630. 5670. 5710. 5750. 5790. 5830. 5870. 5910. 5950. 5975 Frequency (MHz) 1 2 UNII 3-PK <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5617.63</td><td>58.41</td><td>68.20</td><td>-9.79</td><td>57.01</td><td>1.40</td><td>Peak</td><td>144</td><td>247</td></tr><tr><td>2</td><td>5960.00</td><td>61.12</td><td>68.20</td><td>-7.08</td><td>58.73</td><td>2.39</td><td>Peak</td><td>144</td><td>247</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5617.63	58.41	68.20	-9.79	57.01	1.40	Peak	144	247	2	5960.00	61.12	68.20	-7.08	58.73	2.39	Peak	144	247
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5617.63	58.41	68.20	-9.79	57.01	1.40	Peak	144	247																																		
2	5960.00	61.12	68.20	-7.08	58.73	2.39	Peak	144	247																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

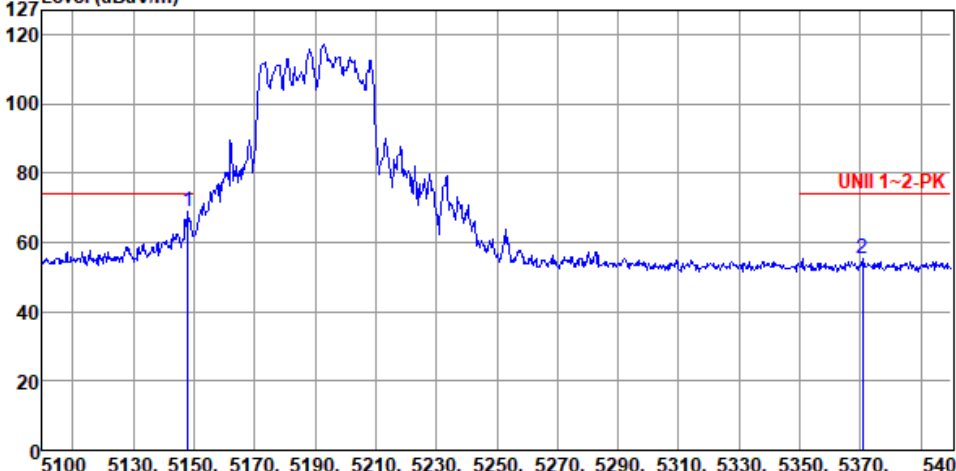
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5825
Polarization	Vertical-Peak		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.00</td><td>68.80</td><td>74.00</td><td>-5.20</td><td>67.60</td><td>1.20</td><td>Peak</td><td>114</td><td>71</td></tr><tr><td>2</td><td>5370.60</td><td>55.50</td><td>74.00</td><td>-18.50</td><td>54.39</td><td>1.11</td><td>Peak</td><td>114</td><td>71</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	68.80	74.00	-5.20	67.60	1.20	Peak	114	71	2	5370.60	55.50	74.00	-18.50	54.39	1.11	Peak	114	71
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	68.80	74.00	-5.20	67.60	1.20	Peak	114	71																								
2	5370.60	55.50	74.00	-18.50	54.39	1.11	Peak	114	71																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

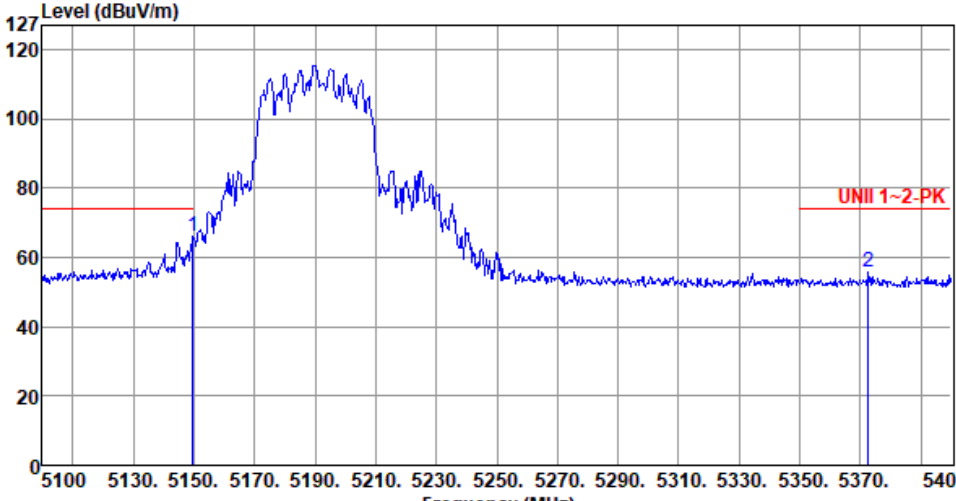
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.80</td><td>65.92</td><td>74.00</td><td>-8.08</td><td>64.72</td><td>1.20</td><td>Peak</td><td>204</td><td>312</td></tr><tr><td>2</td><td>5372.70</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>54.42</td><td>1.12</td><td>Peak</td><td>204</td><td>312</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5149.80	65.92	74.00	-8.08	64.72	1.20	Peak	204	312	2	5372.70	55.54	74.00	-18.46	54.42	1.12	Peak	204	312
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.80	65.92	74.00	-8.08	64.72	1.20	Peak	204	312																																		
2	5372.70	55.54	74.00	-18.46	54.42	1.12	Peak	204	312																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

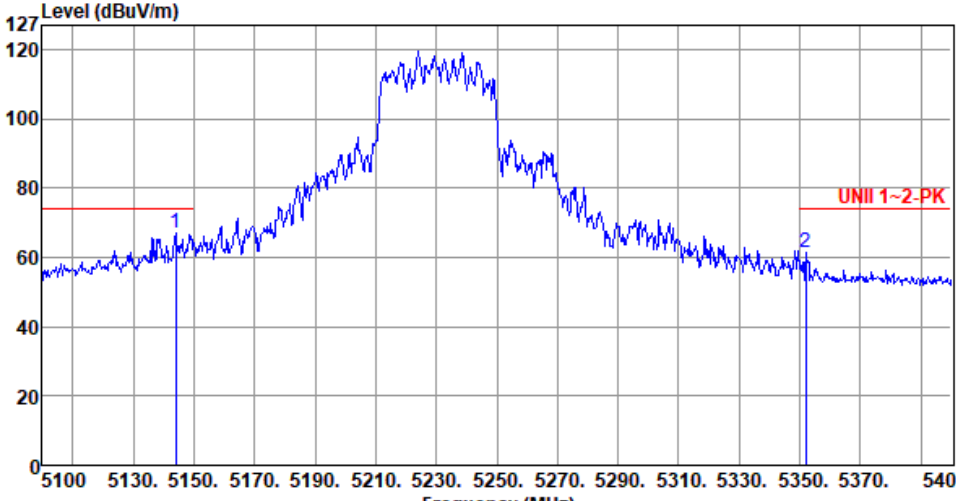
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical-Average		
Test By :Akun Chung Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

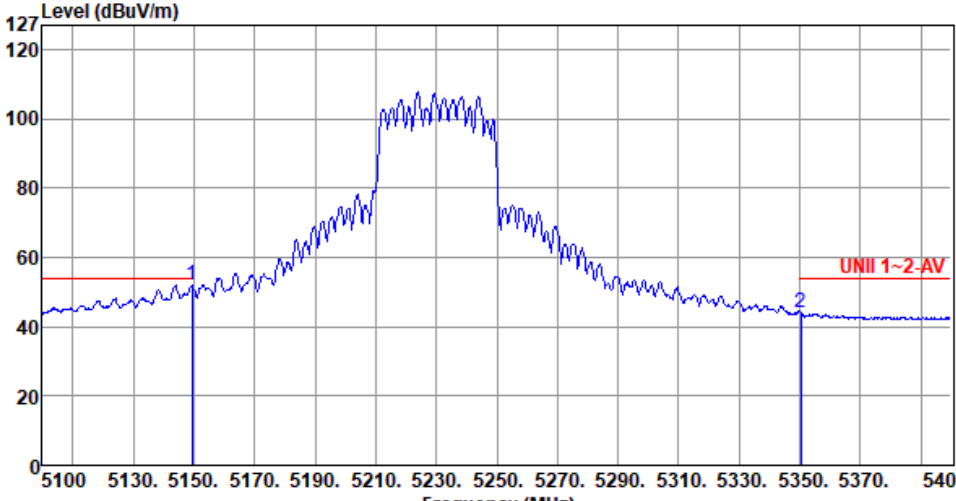
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5144.10</td><td>66.98</td><td>74.00</td><td>-7.02</td><td>65.79</td><td>1.19</td><td>Peak</td><td>241</td><td>266</td></tr><tr><td>2</td><td>5352.00</td><td>61.20</td><td>74.00</td><td>-12.80</td><td>60.18</td><td>1.02</td><td>Peak</td><td>241</td><td>266</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5144.10	66.98	74.00	-7.02	65.79	1.19	Peak	241	266	2	5352.00	61.20	74.00	-12.80	60.18	1.02	Peak	241	266
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5144.10	66.98	74.00	-7.02	65.79	1.19	Peak	241	266																								
2	5352.00	61.20	74.00	-12.80	60.18	1.02	Peak	241	266																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

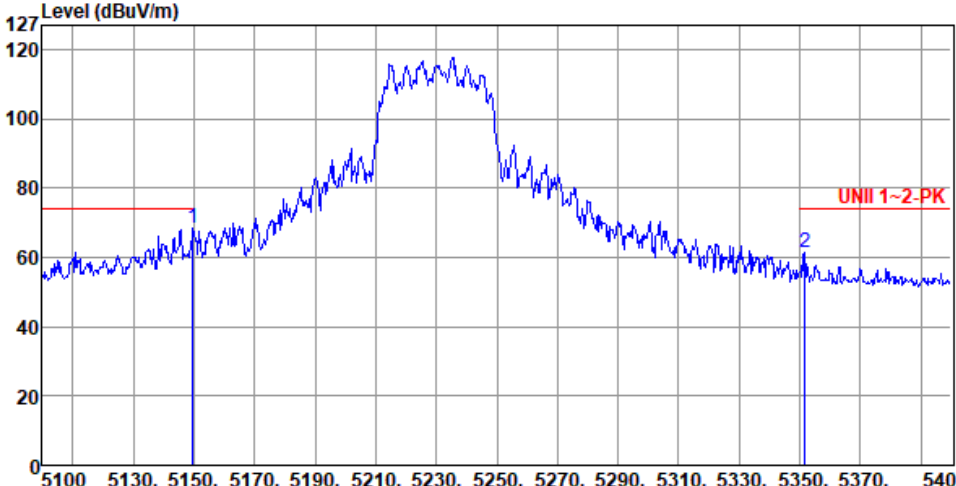
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230																														
Polarization	Horizontal-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.50</td><td>51.98</td><td>54.00</td><td>-2.02</td><td>50.78</td><td>1.20</td><td>Average</td><td>241</td><td>266</td></tr><tr><td>2</td><td>5350.20</td><td>44.25</td><td>54.00</td><td>-9.75</td><td>43.24</td><td>1.01</td><td>Average</td><td>241</td><td>266</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	51.98	54.00	-2.02	50.78	1.20	Average	241	266	2	5350.20	44.25	54.00	-9.75	43.24	1.01	Average	241	266
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	51.98	54.00	-2.02	50.78	1.20	Average	241	266																								
2	5350.20	44.25	54.00	-9.75	43.24	1.01	Average	241	266																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

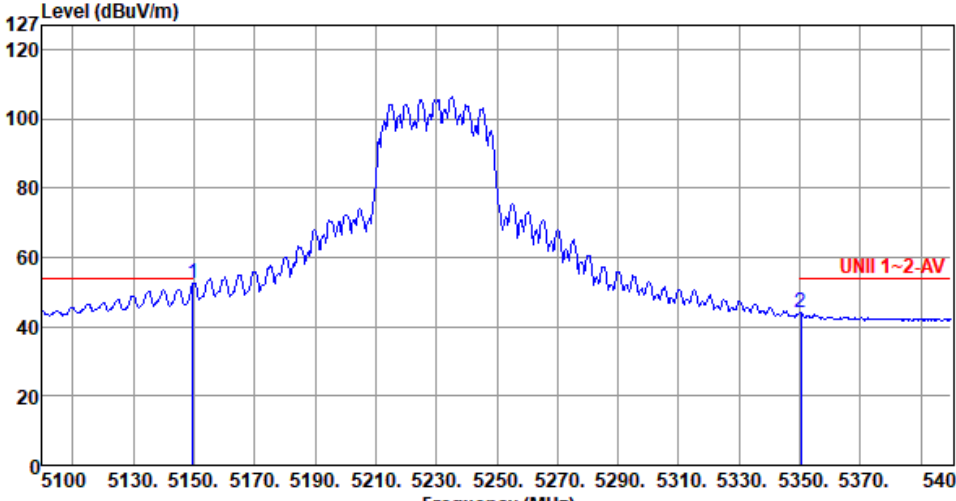
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>68.64</td><td>74.00</td><td>-5.36</td><td>67.44</td><td>1.20</td><td>Peak</td><td>181</td><td>321</td></tr><tr><td>2</td><td>5351.70</td><td>61.29</td><td>74.00</td><td>-12.71</td><td>60.27</td><td>1.02</td><td>Peak</td><td>181</td><td>321</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	68.64	74.00	-5.36	67.44	1.20	Peak	181	321	2	5351.70	61.29	74.00	-12.71	60.27	1.02	Peak	181	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	68.64	74.00	-5.36	67.44	1.20	Peak	181	321																								
2	5351.70	61.29	74.00	-12.71	60.27	1.02	Peak	181	321																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

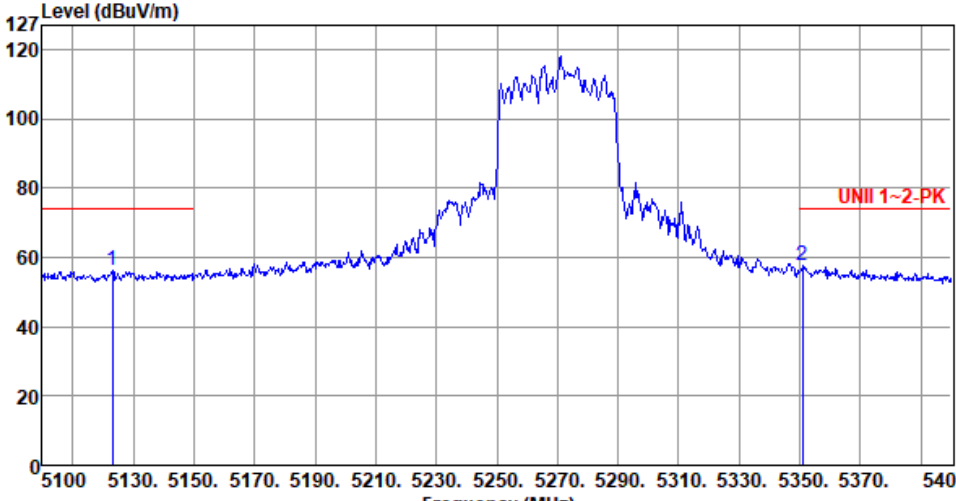
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>52.55</td><td>54.00</td><td>-1.45</td><td>51.35</td><td>1.20</td><td>Average</td><td>181</td><td>321</td></tr><tr><td>2</td><td>5350.20</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>43.02</td><td>1.01</td><td>Average</td><td>181</td><td>321</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.55	54.00	-1.45	51.35	1.20	Average	181	321	2	5350.20	44.03	54.00	-9.97	43.02	1.01	Average	181	321
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.55	54.00	-1.45	51.35	1.20	Average	181	321																								
2	5350.20	44.03	54.00	-9.97	43.02	1.01	Average	181	321																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5123.10</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>54.91</td><td>1.15</td><td>Peak</td><td>168</td><td>265</td></tr><tr><td>2</td><td>5350.80</td><td>57.81</td><td>74.00</td><td>-16.19</td><td>56.80</td><td>1.01</td><td>Peak</td><td>168</td><td>265</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5123.10	56.06	74.00	-17.94	54.91	1.15	Peak	168	265	2	5350.80	57.81	74.00	-16.19	56.80	1.01	Peak	168	265
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5123.10	56.06	74.00	-17.94	54.91	1.15	Peak	168	265																								
2	5350.80	57.81	74.00	-16.19	56.80	1.01	Peak	168	265																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

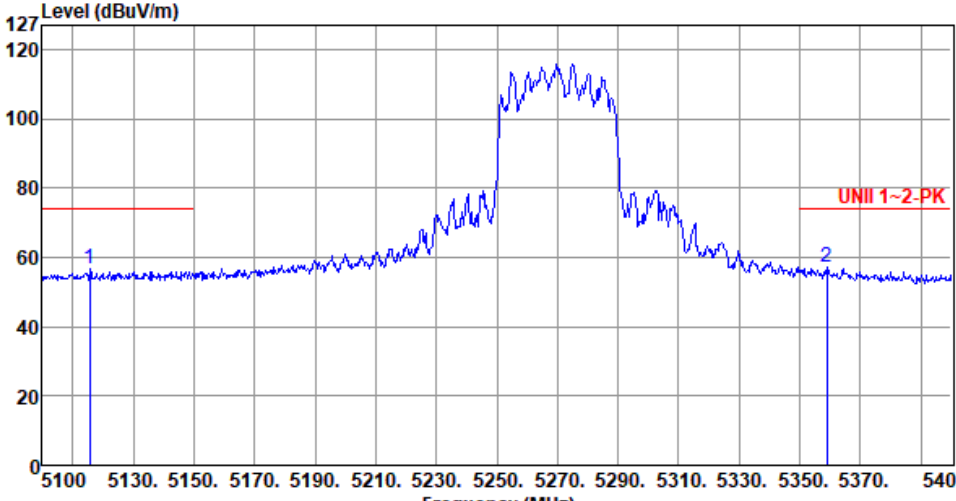
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

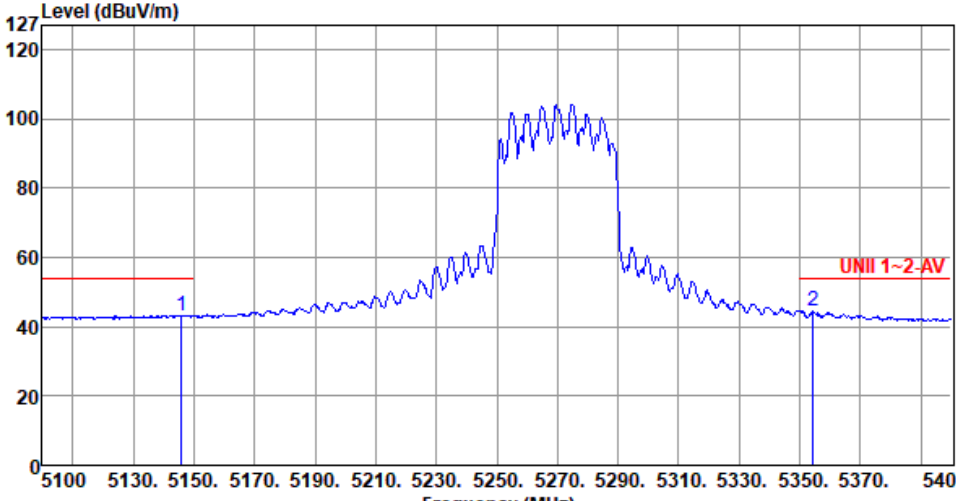
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5115.60</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>55.43</td><td>1.13</td><td>Peak</td><td>298</td><td>53</td></tr><tr><td>2</td><td>5358.90</td><td>57.27</td><td>74.00</td><td>-16.73</td><td>56.21</td><td>1.06</td><td>Peak</td><td>298</td><td>53</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5115.60	56.56	74.00	-17.44	55.43	1.13	Peak	298	53	2	5358.90	57.27	74.00	-16.73	56.21	1.06	Peak	298	53
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5115.60	56.56	74.00	-17.44	55.43	1.13	Peak	298	53																								
2	5358.90	57.27	74.00	-16.73	56.21	1.06	Peak	298	53																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

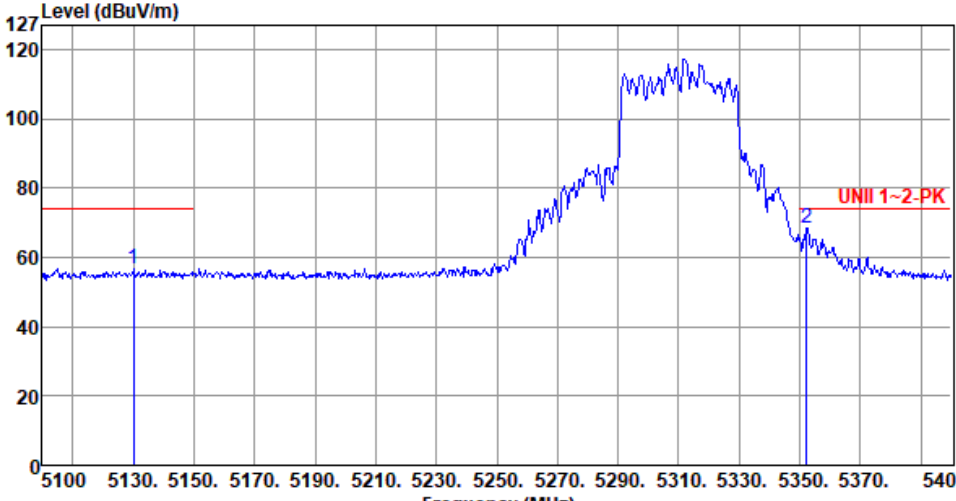
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Average																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.90</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>42.04</td><td>1.19</td><td>Average</td><td>298</td><td>53</td></tr><tr><td>2</td><td>5354.40</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>43.55</td><td>1.03</td><td>Average</td><td>298</td><td>53</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.90	43.23	54.00	-10.77	42.04	1.19	Average	298	53	2	5354.40	44.58	54.00	-9.42	43.55	1.03	Average	298	53
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.90	43.23	54.00	-10.77	42.04	1.19	Average	298	53																								
2	5354.40	44.58	54.00	-9.42	43.55	1.03	Average	298	53																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Peak																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5130.00</td><td>56.78</td><td>74.00</td><td>-17.22</td><td>55.63</td><td>1.15</td><td>Peak</td><td>276</td><td>251</td></tr><tr><td>2</td><td>5352.30</td><td>68.53</td><td>74.00</td><td>-5.47</td><td>67.51</td><td>1.02</td><td>Peak</td><td>276</td><td>251</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5130.00	56.78	74.00	-17.22	55.63	1.15	Peak	276	251	2	5352.30	68.53	74.00	-5.47	67.51	1.02	Peak	276	251
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5130.00	56.78	74.00	-17.22	55.63	1.15	Peak	276	251																								
2	5352.30	68.53	74.00	-5.47	67.51	1.02	Peak	276	251																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

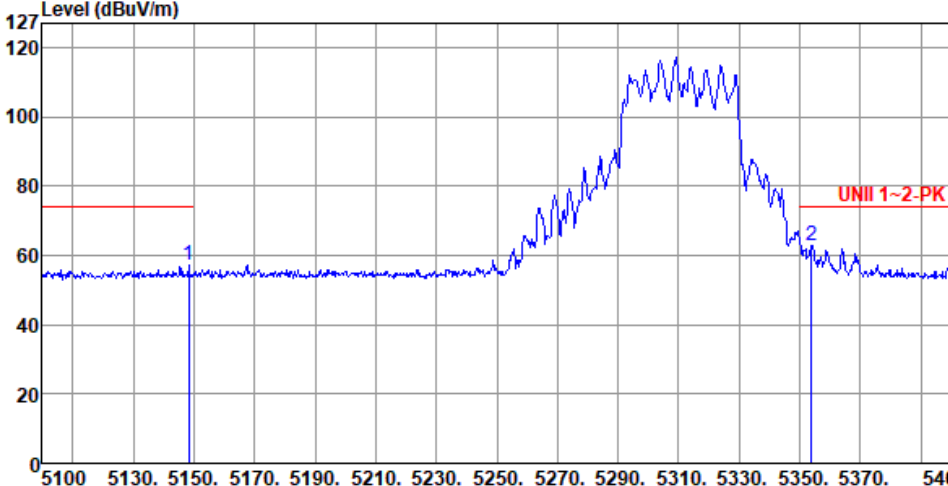
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.30</td><td>57.08</td><td>74.00</td><td>-16.92</td><td>55.88</td><td>1.20</td><td>Peak</td><td>149</td><td>35</td></tr><tr><td>2</td><td>5353.80</td><td>62.97</td><td>74.00</td><td>-11.03</td><td>61.94</td><td>1.03</td><td>Peak</td><td>149</td><td>35</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	57.08	74.00	-16.92	55.88	1.20	Peak	149	35	2	5353.80	62.97	74.00	-11.03	61.94	1.03	Peak	149	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	57.08	74.00	-16.92	55.88	1.20	Peak	149	35																								
2	5353.80	62.97	74.00	-11.03	61.94	1.03	Peak	149	35																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

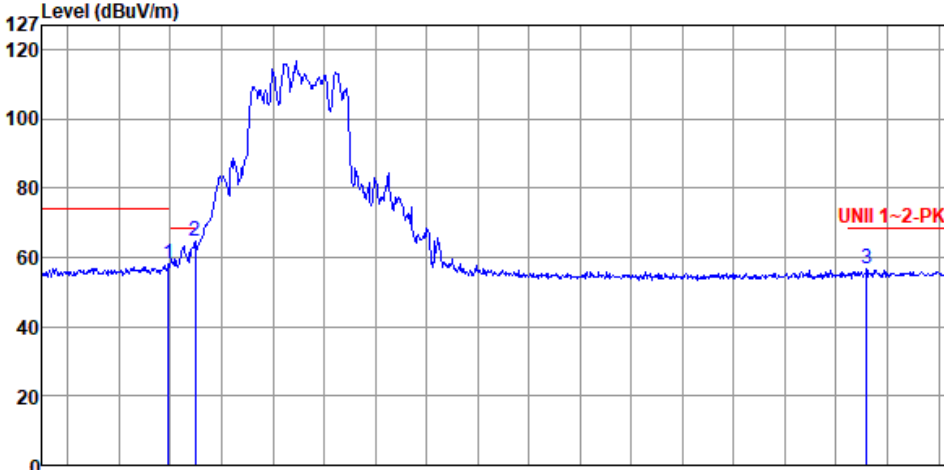
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5459.35</td><td>58.17</td><td>74.00</td><td>-15.83</td><td>56.80</td><td>1.37</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>2</td><td>5469.64</td><td>64.65</td><td>68.20</td><td>-3.55</td><td>63.27</td><td>1.38</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>3</td><td>5731.99</td><td>56.50</td><td>68.20</td><td>-11.70</td><td>54.68</td><td>1.82</td><td>Peak</td><td>100</td><td>69</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5459.35	58.17	74.00	-15.83	56.80	1.37	Peak	100	69	2	5469.64	64.65	68.20	-3.55	63.27	1.38	Peak	100	69	3	5731.99	56.50	68.20	-11.70	54.68	1.82	Peak	100	69
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5459.35	58.17	74.00	-15.83	56.80	1.37	Peak	100	69																																		
2	5469.64	64.65	68.20	-3.55	63.27	1.38	Peak	100	69																																		
3	5731.99	56.50	68.20	-11.70	54.68	1.82	Peak	100	69																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5458.99</td><td>58.59</td><td>74.00</td><td>-15.41</td><td>57.22</td><td>1.37</td><td>Peak</td><td>114</td><td>29</td></tr><tr><td>2</td><td>5469.29</td><td>61.88</td><td>68.20</td><td>-6.32</td><td>60.50</td><td>1.38</td><td>Peak</td><td>114</td><td>29</td></tr><tr><td>3</td><td>5754.00</td><td>55.69</td><td>68.20</td><td>-12.51</td><td>53.80</td><td>1.89</td><td>Peak</td><td>114</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.99	58.59	74.00	-15.41	57.22	1.37	Peak	114	29	2	5469.29	61.88	68.20	-6.32	60.50	1.38	Peak	114	29	3	5754.00	55.69	68.20	-12.51	53.80	1.89	Peak	114	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.99	58.59	74.00	-15.41	57.22	1.37	Peak	114	29																																		
2	5469.29	61.88	68.20	-6.32	60.50	1.38	Peak	114	29																																		
3	5754.00	55.69	68.20	-12.51	53.80	1.89	Peak	114	29																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

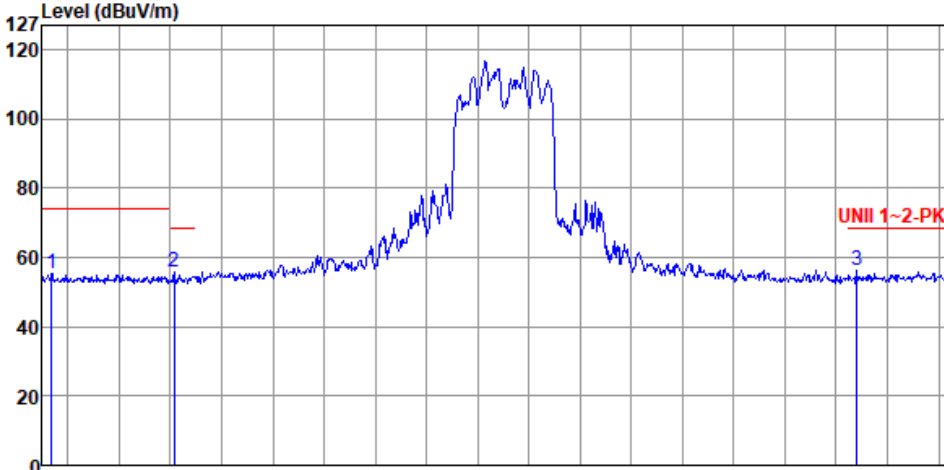
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5413.55</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>54.11</td><td>1.28</td><td>Peak</td><td>179</td><td>120</td></tr><tr><td>2</td><td>5461.48</td><td>55.82</td><td>68.20</td><td>-12.38</td><td>54.45</td><td>1.37</td><td>Peak</td><td>179</td><td>120</td></tr><tr><td>3</td><td>5728.08</td><td>56.33</td><td>68.20</td><td>-11.87</td><td>54.51</td><td>1.82</td><td>Peak</td><td>179</td><td>120</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5413.55	55.39	74.00	-18.61	54.11	1.28	Peak	179	120	2	5461.48	55.82	68.20	-12.38	54.45	1.37	Peak	179	120	3	5728.08	56.33	68.20	-11.87	54.51	1.82	Peak	179	120
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5413.55	55.39	74.00	-18.61	54.11	1.28	Peak	179	120																																		
2	5461.48	55.82	68.20	-12.38	54.45	1.37	Peak	179	120																																		
3	5728.08	56.33	68.20	-11.87	54.51	1.82	Peak	179	120																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5417.46</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>53.01</td><td>1.28</td><td>Peak</td><td>143</td><td>224</td></tr><tr><td>2</td><td>5466.45</td><td>54.51</td><td>68.20</td><td>-13.69</td><td>53.14</td><td>1.37</td><td>Peak</td><td>143</td><td>224</td></tr><tr><td>3</td><td>5728.44</td><td>62.08</td><td>68.20</td><td>-6.12</td><td>60.26</td><td>1.82</td><td>Peak</td><td>143</td><td>224</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5417.46	54.29	74.00	-19.71	53.01	1.28	Peak	143	224	2	5466.45	54.51	68.20	-13.69	53.14	1.37	Peak	143	224	3	5728.44	62.08	68.20	-6.12	60.26	1.82	Peak	143	224
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5417.46	54.29	74.00	-19.71	53.01	1.28	Peak	143	224																																		
2	5466.45	54.51	68.20	-13.69	53.14	1.37	Peak	143	224																																		
3	5728.44	62.08	68.20	-6.12	60.26	1.82	Peak	143	224																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBUV/m) </			



Band Edge measurement

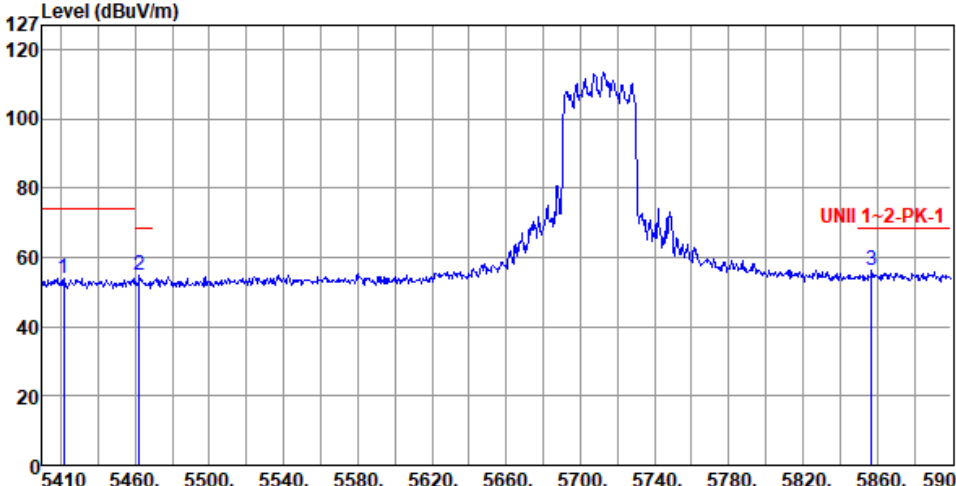
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):24 Humidity(%):66			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):24 Humidity(%):66																																											
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5421.76</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>52.52</td><td>1.29</td><td>Peak</td><td>139</td><td>103</td></tr><tr><td>2</td><td>5462.43</td><td>54.84</td><td>68.20</td><td>-13.36</td><td>53.47</td><td>1.37</td><td>Peak</td><td>139</td><td>103</td></tr><tr><td>3</td><td>5856.88</td><td>56.04</td><td>68.20</td><td>-12.16</td><td>53.87</td><td>2.17</td><td>Peak</td><td>139</td><td>103</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5421.76	53.81	74.00	-20.19	52.52	1.29	Peak	139	103	2	5462.43	54.84	68.20	-13.36	53.47	1.37	Peak	139	103	3	5856.88	56.04	68.20	-12.16	53.87	2.17	Peak	139	103
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5421.76	53.81	74.00	-20.19	52.52	1.29	Peak	139	103																																		
2	5462.43	54.84	68.20	-13.36	53.47	1.37	Peak	139	103																																		
3	5856.88	56.04	68.20	-12.16	53.87	2.17	Peak	139	103																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

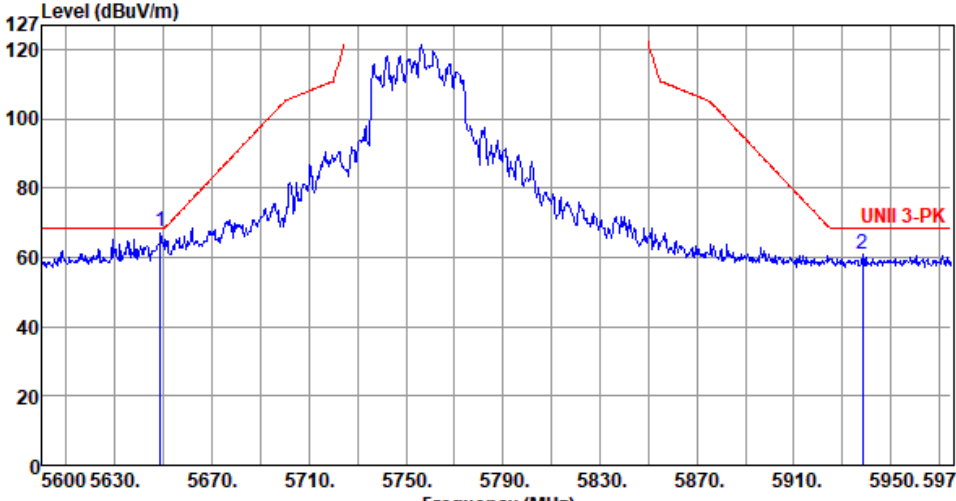
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710						
Polarization	Vertical-Average								
Test By :Roger Lu Temperature(°C):24 Humidity(%):66									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5441.36	42.23	54.00	-11.77	40.88	1.35	Average	139	103
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Band Edge measurement

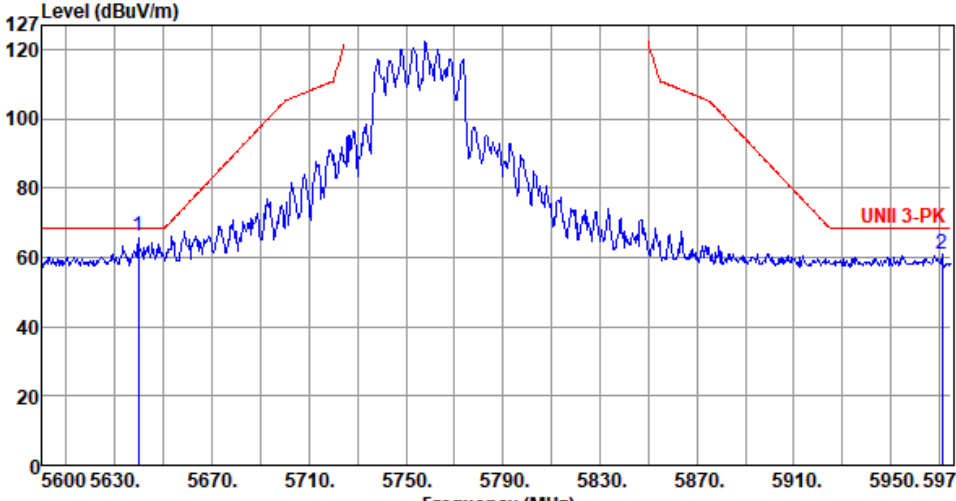
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5648.75</td><td>67.55</td><td>68.20</td><td>-0.65</td><td>66.06</td><td>1.49</td><td>Peak</td><td>230</td><td>293</td></tr><tr><td>2</td><td>5938.25</td><td>60.87</td><td>68.20</td><td>-7.33</td><td>58.54</td><td>2.33</td><td>Peak</td><td>230</td><td>293</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.75	67.55	68.20	-0.65	66.06	1.49	Peak	230	293	2	5938.25	60.87	68.20	-7.33	58.54	2.33	Peak	230	293
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.75	67.55	68.20	-0.65	66.06	1.49	Peak	230	293																								
2	5938.25	60.87	68.20	-7.33	58.54	2.33	Peak	230	293																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

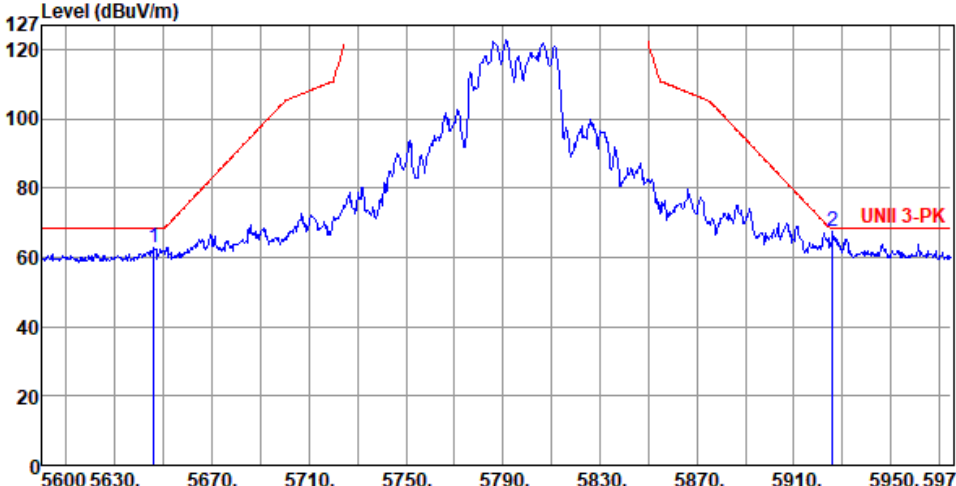
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5639.75</td><td>65.86</td><td>68.20</td><td>-2.34</td><td>64.40</td><td>1.46</td><td>Peak</td><td>126</td><td>96</td></tr><tr><td>2</td><td>5971.25</td><td>60.81</td><td>68.20</td><td>-7.39</td><td>58.36</td><td>2.45</td><td>Peak</td><td>126</td><td>96</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5639.75	65.86	68.20	-2.34	64.40	1.46	Peak	126	96	2	5971.25	60.81	68.20	-7.39	58.36	2.45	Peak	126	96
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5639.75	65.86	68.20	-2.34	64.40	1.46	Peak	126	96																								
2	5971.25	60.81	68.20	-7.39	58.36	2.45	Peak	126	96																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

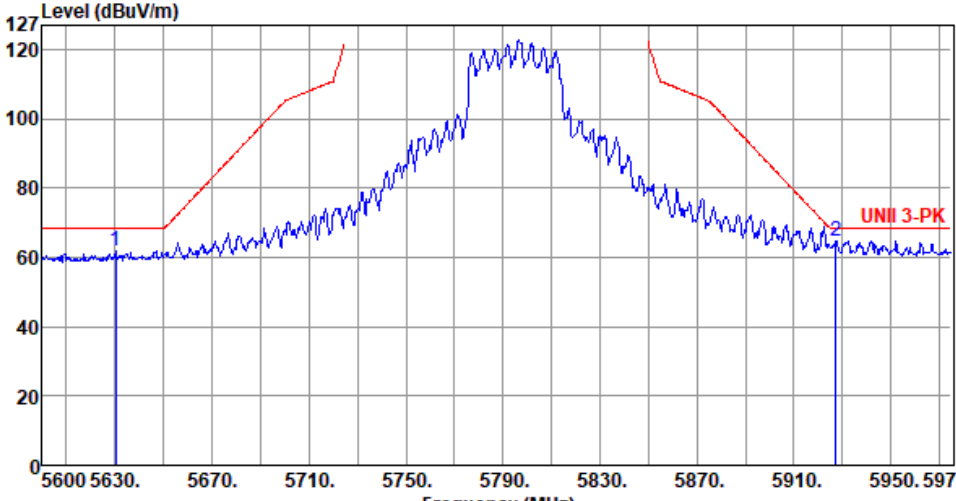
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5795																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5646.13</td><td>62.58</td><td>68.20</td><td>-5.62</td><td>61.10</td><td>1.48</td><td>Peak</td><td>134</td><td>127</td></tr><tr><td>2</td><td>5925.88</td><td>67.36</td><td>68.20</td><td>-0.84</td><td>65.04</td><td>2.32</td><td>Peak</td><td>134</td><td>127</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.13	62.58	68.20	-5.62	61.10	1.48	Peak	134	127	2	5925.88	67.36	68.20	-0.84	65.04	2.32	Peak	134	127
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.13	62.58	68.20	-5.62	61.10	1.48	Peak	134	127																								
2	5925.88	67.36	68.20	-0.84	65.04	2.32	Peak	134	127																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

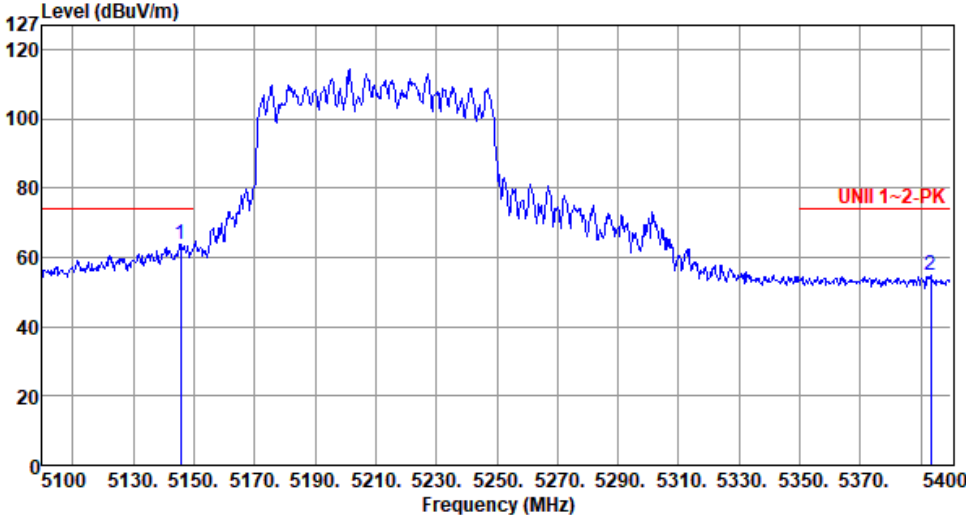
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):24 Humidity(%):66																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5630.38</td><td>61.92</td><td>68.20</td><td>-6.28</td><td>60.48</td><td>1.44</td><td>Peak</td><td>114</td><td>93</td></tr><tr><td>2</td><td>5927.38</td><td>64.80</td><td>68.20</td><td>-3.40</td><td>62.48</td><td>2.32</td><td>Peak</td><td>114</td><td>93</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5630.38	61.92	68.20	-6.28	60.48	1.44	Peak	114	93	2	5927.38	64.80	68.20	-3.40	62.48	2.32	Peak	114	93
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5630.38	61.92	68.20	-6.28	60.48	1.44	Peak	114	93																								
2	5927.38	64.80	68.20	-3.40	62.48	2.32	Peak	114	93																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.60</td><td>63.87</td><td>74.00</td><td>-10.13</td><td>62.68</td><td>1.19</td><td>Peak</td><td>234</td><td>263</td></tr><tr><td>2</td><td>5393.10</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>53.43</td><td>1.21</td><td>Peak</td><td>234</td><td>263</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	63.87	74.00	-10.13	62.68	1.19	Peak	234	263	2	5393.10	54.64	74.00	-19.36	53.43	1.21	Peak	234	263
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	63.87	74.00	-10.13	62.68	1.19	Peak	234	263																								
2	5393.10	54.64	74.00	-19.36	53.43	1.21	Peak	234	263																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal-Average		
Test By :Akun Chung Temperature(°C):22 Humidity(%):65			
Level (dBuV/m) <			



Band Edge measurement

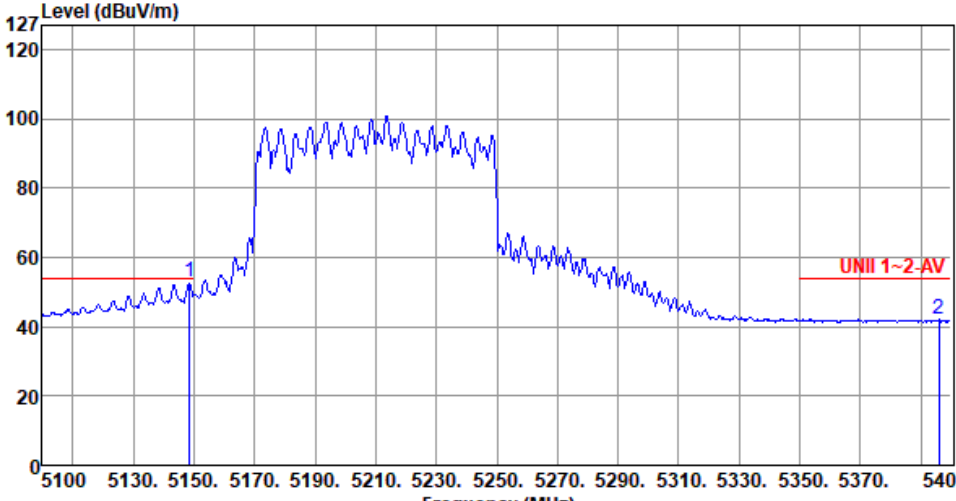
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.00</td><td>66.54</td><td>74.00</td><td>-7.46</td><td>65.34</td><td>1.20</td><td>Peak</td><td>169</td><td>282</td></tr><tr><td>2</td><td>5385.60</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>53.12</td><td>1.18</td><td>Peak</td><td>169</td><td>282</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	66.54	74.00	-7.46	65.34	1.20	Peak	169	282	2	5385.60	54.30	74.00	-19.70	53.12	1.18	Peak	169	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	66.54	74.00	-7.46	65.34	1.20	Peak	169	282																								
2	5385.60	54.30	74.00	-19.70	53.12	1.18	Peak	169	282																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Average																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.60</td><td>52.85</td><td>54.00</td><td>-1.15</td><td>51.65</td><td>1.20</td><td>Average</td><td>169</td><td>282</td></tr><tr><td>2</td><td>5395.80</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>40.91</td><td>1.23</td><td>Average</td><td>169</td><td>282</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	52.85	54.00	-1.15	51.65	1.20	Average	169	282	2	5395.80	42.14	54.00	-11.86	40.91	1.23	Average	169	282
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	52.85	54.00	-1.15	51.65	1.20	Average	169	282																								
2	5395.80	42.14	54.00	-11.86	40.91	1.23	Average	169	282																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Peak		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical-Peak		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal-Peak		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m) UNII 1~2-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m 1 5438.40 60.66 74.00 -13.34 59.32 1.34 Peak 137 61 2 5461.83 63.50 68.20 -4.70 62.13 1.37 Peak 137 61 3 5727.73 56.16 68.20 -12.04 54.34 1.82 Peak 137 61			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):65																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5455.80</td><td>58.67</td><td>74.00</td><td>-15.33</td><td>57.30</td><td>1.37</td><td>Peak</td><td>104</td><td>42</td></tr><tr><td>2</td><td>5469.64</td><td>60.54</td><td>68.20</td><td>-7.66</td><td>59.16</td><td>1.38</td><td>Peak</td><td>104</td><td>42</td></tr><tr><td>3</td><td>5739.44</td><td>55.67</td><td>68.20</td><td>-12.53</td><td>53.82</td><td>1.85</td><td>Peak</td><td>104</td><td>42</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.80	58.67	74.00	-15.33	57.30	1.37	Peak	104	42	2	5469.64	60.54	68.20	-7.66	59.16	1.38	Peak	104	42	3	5739.44	55.67	68.20	-12.53	53.82	1.85	Peak	104	42
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5455.80	58.67	74.00	-15.33	57.30	1.37	Peak	104	42																																		
2	5469.64	60.54	68.20	-7.66	59.16	1.38	Peak	104	42																																		
3	5739.44	55.67	68.20	-12.53	53.82	1.85	Peak	104	42																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):22 Humidity(%):65																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5438.40</td><td>55.80</td><td>74.00</td><td>-18.20</td><td>54.46</td><td>1.34</td><td>Peak</td><td>112</td><td>70</td></tr><tr><td>2</td><td>5469.64</td><td>55.50</td><td>68.20</td><td>-12.70</td><td>54.12</td><td>1.38</td><td>Peak</td><td>112</td><td>70</td></tr><tr><td>3</td><td>5732.70</td><td>57.46</td><td>68.20</td><td>-10.74</td><td>55.63</td><td>1.83</td><td>Peak</td><td>112</td><td>70</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5438.40	55.80	74.00	-18.20	54.46	1.34	Peak	112	70	2	5469.64	55.50	68.20	-12.70	54.12	1.38	Peak	112	70	3	5732.70	57.46	68.20	-10.74	55.63	1.83	Peak	112	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5438.40	55.80	74.00	-18.20	54.46	1.34	Peak	112	70																																		
2	5469.64	55.50	68.20	-12.70	54.12	1.38	Peak	112	70																																		
3	5732.70	57.46	68.20	-10.74	55.63	1.83	Peak	112	70																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5690																																																		
Polarization	Horizontal-Peak																																																				
Test By :Roger Lu Temperature(°C):22 Humidity(%):65																																																					
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5460 5500 5540 5580 5620 5660 5700 5740 5780 5820 5860 5900 Frequency (MHz) 1 2 3 UNII 1-2-PK-1 <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5443.81</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>53.60</td><td>1.36</td><td>Peak</td><td>112</td><td>69</td></tr><tr><td>2</td><td>5469.78</td><td>53.99</td><td>68.20</td><td>-14.21</td><td>52.61</td><td>1.38</td><td>Peak</td><td>112</td><td>69</td></tr><tr><td>3</td><td>5854.92</td><td>57.10</td><td>68.20</td><td>-11.10</td><td>54.93</td><td>2.17</td><td>Peak</td><td>112</td><td>69</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5443.81	54.96	74.00	-19.04	53.60	1.36	Peak	112	69	2	5469.78	53.99	68.20	-14.21	52.61	1.38	Peak	112	69	3	5854.92	57.10	68.20	-11.10	54.93	2.17	Peak	112	69
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																												
1	5443.81	54.96	74.00	-19.04	53.60	1.36	Peak	112	69																																												
2	5469.78	53.99	68.20	-14.21	52.61	1.38	Peak	112	69																																												
3	5854.92	57.10	68.20	-11.10	54.93	2.17	Peak	112	69																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																					



Band Edge measurement

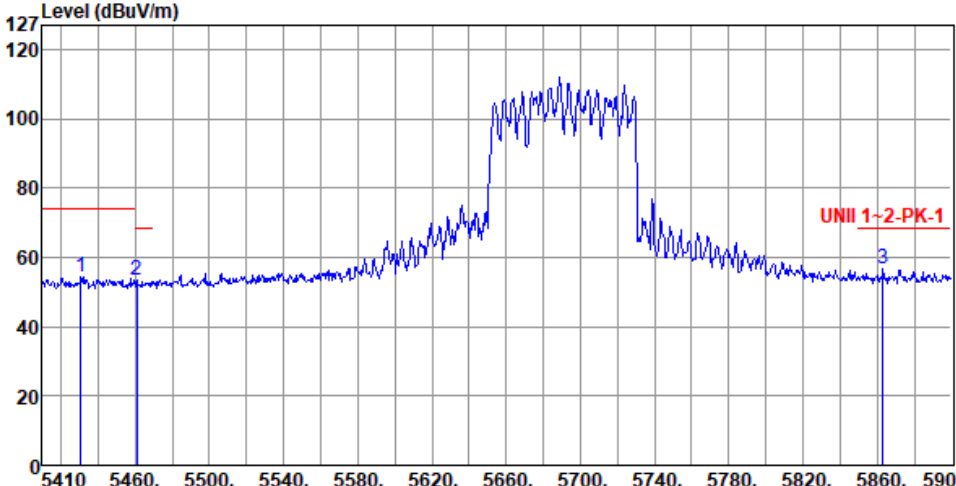
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5690																																																		
Polarization	Vertical-Peak																																																				
Test By :Roger Lu Temperature(°C):22 Humidity(%):65																																																					
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5430.58</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>53.15</td><td>1.32</td><td>Peak</td><td>124</td><td>31</td></tr><tr><td>2</td><td>5460.96</td><td>53.29</td><td>68.20</td><td>-14.91</td><td>51.92</td><td>1.37</td><td>Peak</td><td>124</td><td>31</td></tr><tr><td>3</td><td>5863.25</td><td>56.48</td><td>68.20</td><td>-11.72</td><td>54.28</td><td>2.20</td><td>Peak</td><td>124</td><td>31</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5430.58	54.47	74.00	-19.53	53.15	1.32	Peak	124	31	2	5460.96	53.29	68.20	-14.91	51.92	1.37	Peak	124	31	3	5863.25	56.48	68.20	-11.72	54.28	2.20	Peak	124	31
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																												
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																												
1	5430.58	54.47	74.00	-19.53	53.15	1.32	Peak	124	31																																												
2	5460.96	53.29	68.20	-14.91	51.92	1.37	Peak	124	31																																												
3	5863.25	56.48	68.20	-11.72	54.28	2.20	Peak	124	31																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					



Band Edge measurement

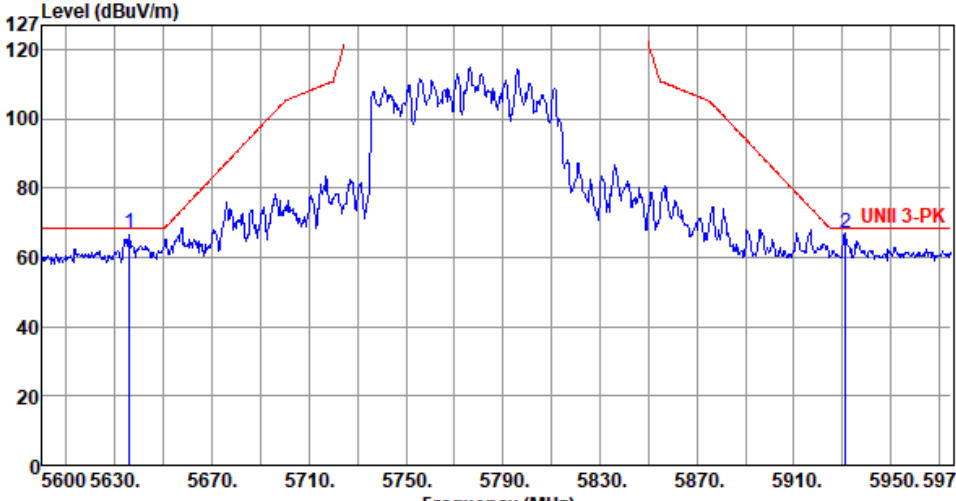
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

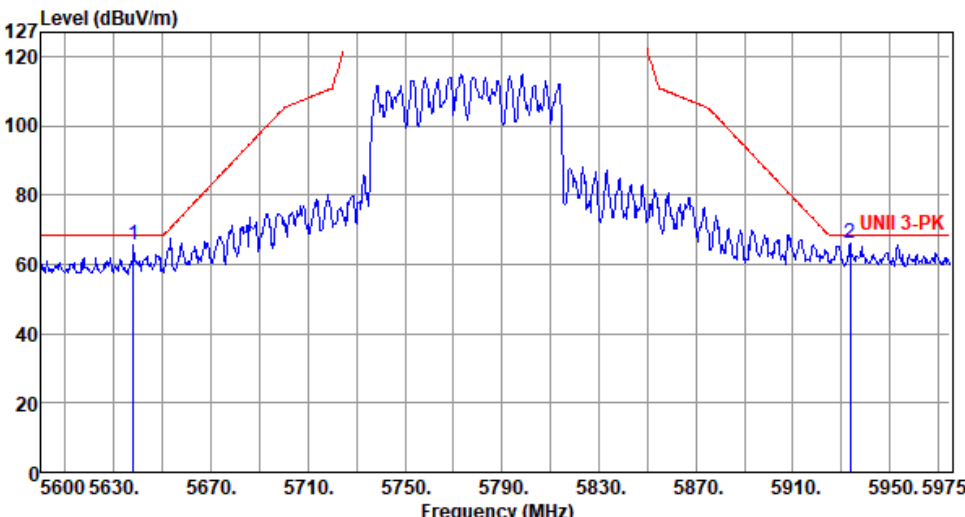
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5636.00</td><td>67.05</td><td>68.20</td><td>-1.15</td><td>65.60</td><td>1.45</td><td>Peak</td><td>311</td><td>186</td></tr><tr><td>2</td><td>5931.50</td><td>67.11</td><td>68.20</td><td>-1.09</td><td>64.78</td><td>2.33</td><td>Peak</td><td>311</td><td>77</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5636.00	67.05	68.20	-1.15	65.60	1.45	Peak	311	186	2	5931.50	67.11	68.20	-1.09	64.78	2.33	Peak	311	77
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5636.00	67.05	68.20	-1.15	65.60	1.45	Peak	311	186																								
2	5931.50	67.11	68.20	-1.09	64.78	2.33	Peak	311	77																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung Temperature(°C):22 Humidity(%):65																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5637.88</td><td>65.61</td><td>68.20</td><td>-2.59</td><td>64.15</td><td>1.46</td><td>Peak</td><td>109</td><td>98</td></tr><tr><td>2</td><td>5933.75</td><td>65.98</td><td>68.20</td><td>-2.22</td><td>63.65</td><td>2.33</td><td>Peak</td><td>109</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5637.88	65.61	68.20	-2.59	64.15	1.46	Peak	109	98	2	5933.75	65.98	68.20	-2.22	63.65	2.33	Peak	109	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5637.88	65.61	68.20	-2.59	64.15	1.46	Peak	109	98																								
2	5933.75	65.98	68.20	-2.22	63.65	2.33	Peak	109	98																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal-Peak		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBUV/m) <			



Band Edge measurement

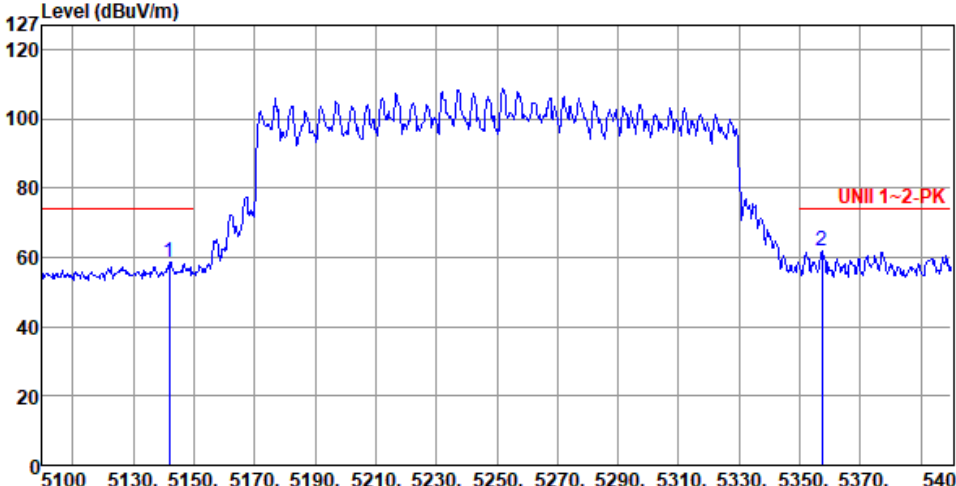
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

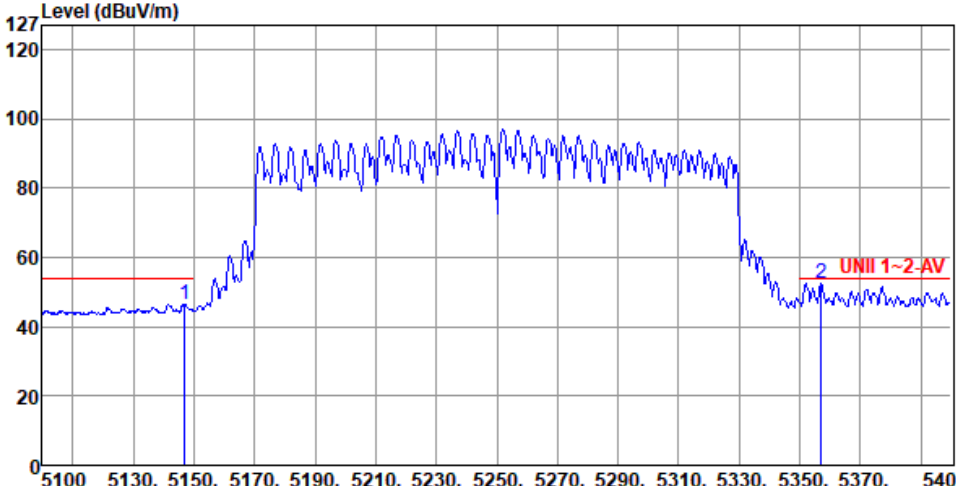
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5142.00</td><td>58.64</td><td>74.00</td><td>-15.36</td><td>57.46</td><td>1.18</td><td>Peak</td><td>100</td><td>294</td></tr><tr><td>2</td><td>5357.40</td><td>61.78</td><td>74.00</td><td>-12.22</td><td>60.73</td><td>1.05</td><td>Peak</td><td>100</td><td>294</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5142.00	58.64	74.00	-15.36	57.46	1.18	Peak	100	294	2	5357.40	61.78	74.00	-12.22	60.73	1.05	Peak	100	294
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5142.00	58.64	74.00	-15.36	57.46	1.18	Peak	100	294																								
2	5357.40	61.78	74.00	-12.22	60.73	1.05	Peak	100	294																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

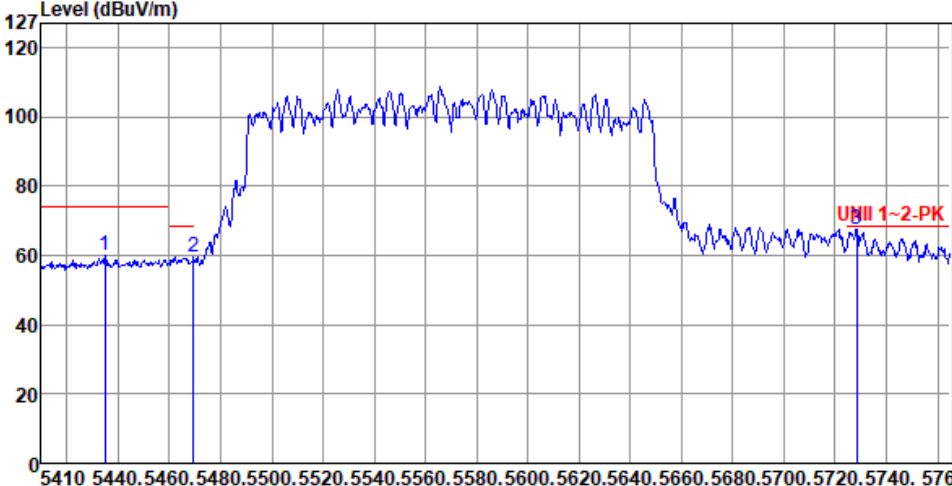
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Average																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):65																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5147.10</td><td>46.59</td><td>54.00</td><td>-7.41</td><td>45.40</td><td>1.19</td><td>Average</td><td>100</td><td>294</td></tr><tr><td>2</td><td>5357.10</td><td>52.45</td><td>54.00</td><td>-1.55</td><td>51.40</td><td>1.05</td><td>Average</td><td>100</td><td>294</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5147.10	46.59	54.00	-7.41	45.40	1.19	Average	100	294	2	5357.10	52.45	54.00	-1.55	51.40	1.05	Average	100	294
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5147.10	46.59	54.00	-7.41	45.40	1.19	Average	100	294																								
2	5357.10	52.45	54.00	-1.55	51.40	1.05	Average	100	294																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Horizontal-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):65																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5434.85</td><td>59.91</td><td>74.00</td><td>-14.09</td><td>58.58</td><td>1.33</td><td>Peak</td><td>183</td><td>63</td></tr><tr><td>2</td><td>5469.29</td><td>59.64</td><td>68.20</td><td>-8.56</td><td>58.26</td><td>1.38</td><td>Peak</td><td>183</td><td>63</td></tr><tr><td>3</td><td>5728.44</td><td>67.64</td><td>68.20</td><td>-0.56</td><td>65.82</td><td>1.82</td><td>Peak</td><td>183</td><td>63</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5434.85	59.91	74.00	-14.09	58.58	1.33	Peak	183	63	2	5469.29	59.64	68.20	-8.56	58.26	1.38	Peak	183	63	3	5728.44	67.64	68.20	-0.56	65.82	1.82	Peak	183	63
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5434.85	59.91	74.00	-14.09	58.58	1.33	Peak	183	63																																		
2	5469.29	59.64	68.20	-8.56	58.26	1.38	Peak	183	63																																		
3	5728.44	67.64	68.20	-0.56	65.82	1.82	Peak	183	63																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

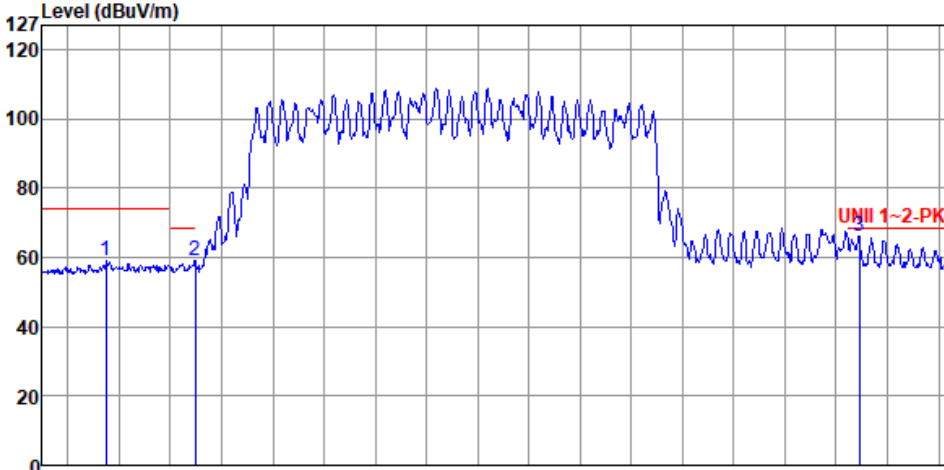
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570																																								
Polarization	Vertical-Peak																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):65																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5434.85</td><td>59.10</td><td>74.00</td><td>-14.90</td><td>57.77</td><td>1.33</td><td>Peak</td><td>108</td><td>30</td></tr><tr><td>2</td><td>5469.64</td><td>59.21</td><td>68.20</td><td>-8.99</td><td>57.83</td><td>1.38</td><td>Peak</td><td>108</td><td>30</td></tr><tr><td>3</td><td>5729.15</td><td>66.23</td><td>68.20</td><td>-1.97</td><td>64.41</td><td>1.82</td><td>Peak</td><td>108</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5434.85	59.10	74.00	-14.90	57.77	1.33	Peak	108	30	2	5469.64	59.21	68.20	-8.99	57.83	1.38	Peak	108	30	3	5729.15	66.23	68.20	-1.97	64.41	1.82	Peak	108	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5434.85	59.10	74.00	-14.90	57.77	1.33	Peak	108	30																																		
2	5469.64	59.21	68.20	-8.99	57.83	1.38	Peak	108	30																																		
3	5729.15	66.23	68.20	-1.97	64.41	1.82	Peak	108	30																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



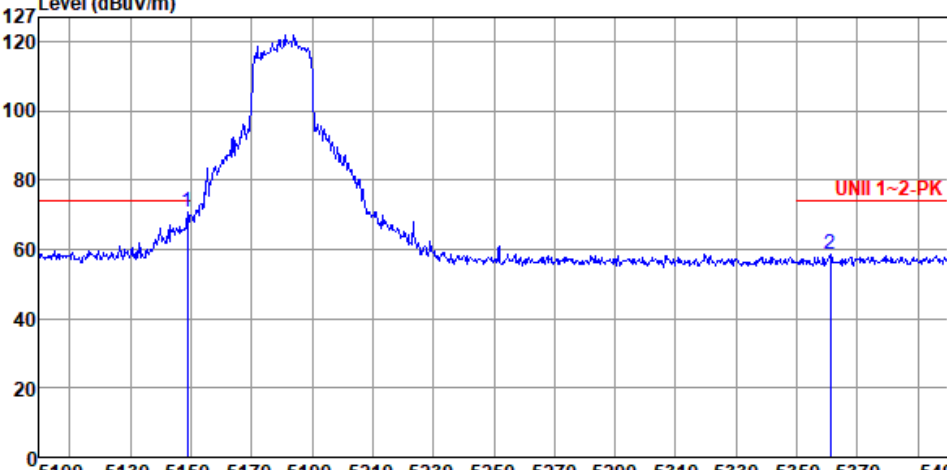
Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical-Average		
Test By :Brad Wu Temperature(°C):22 Humidity(%):65			
Level (dBuV/m)			



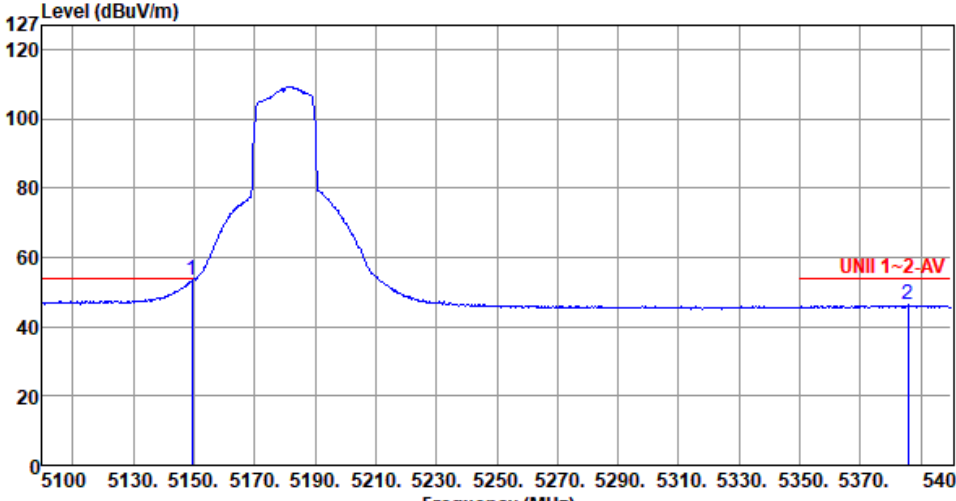
Beamforming mode

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.90</td><td>70.97</td><td>74.00</td><td>-3.03</td><td>69.77</td><td>1.20</td><td>Peak</td><td>123</td><td>278</td></tr><tr><td>2</td><td>5361.00</td><td>58.35</td><td>74.00</td><td>-15.65</td><td>57.29</td><td>1.06</td><td>Peak</td><td>123</td><td>278</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.90	70.97	74.00	-3.03	69.77	1.20	Peak	123	278	2	5361.00	58.35	74.00	-15.65	57.29	1.06	Peak	123	278
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.90	70.97	74.00	-3.03	69.77	1.20	Peak	123	278																								
2	5361.00	58.35	74.00	-15.65	57.29	1.06	Peak	123	278																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

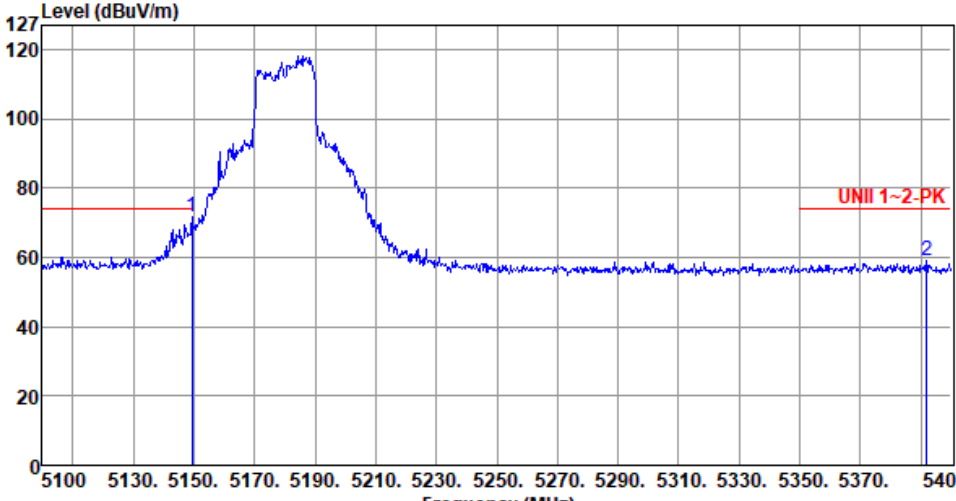
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>52.39</td><td>1.20</td><td>Average</td><td>123</td><td>278</td></tr><tr><td>2</td><td>5385.60</td><td>46.18</td><td>54.00</td><td>-7.82</td><td>45.00</td><td>1.18</td><td>Average</td><td>123</td><td>278</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	53.59	54.00	-0.41	52.39	1.20	Average	123	278	2	5385.60	46.18	54.00	-7.82	45.00	1.18	Average	123	278
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	53.59	54.00	-0.41	52.39	1.20	Average	123	278																								
2	5385.60	46.18	54.00	-7.82	45.00	1.18	Average	123	278																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>71.50</td><td>74.00</td><td>-2.50</td><td>70.30</td><td>1.20</td><td>Peak</td><td>123</td><td>292</td></tr><tr><td>2</td><td>5391.90</td><td>59.12</td><td>74.00</td><td>-14.88</td><td>57.91</td><td>1.21</td><td>Peak</td><td>123</td><td>292</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	71.50	74.00	-2.50	70.30	1.20	Peak	123	292	2	5391.90	59.12	74.00	-14.88	57.91	1.21	Peak	123	292
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	71.50	74.00	-2.50	70.30	1.20	Peak	123	292																								
2	5391.90	59.12	74.00	-14.88	57.91	1.21	Peak	123	292																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

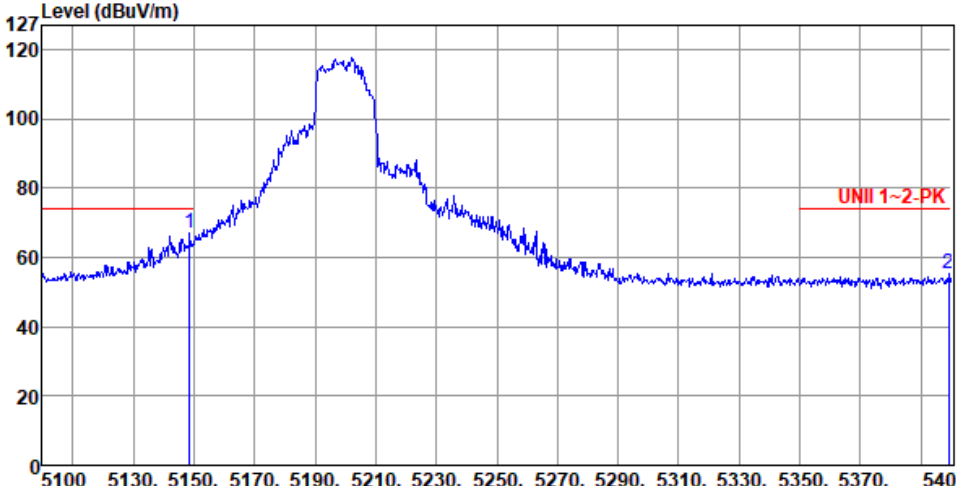
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5180																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m) UNII 1~2-AV 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.80</td><td>52.88</td><td>54.00</td><td>-1.12</td><td>51.68</td><td>1.20</td><td>Average</td><td>123</td><td>292</td></tr><tr><td>2</td><td>5375.40</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>45.08</td><td>1.13</td><td>Average</td><td>123</td><td>292</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	52.88	54.00	-1.12	51.68	1.20	Average	123	292	2	5375.40	46.21	54.00	-7.79	45.08	1.13	Average	123	292
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	52.88	54.00	-1.12	51.68	1.20	Average	123	292																								
2	5375.40	46.21	54.00	-7.79	45.08	1.13	Average	123	292																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

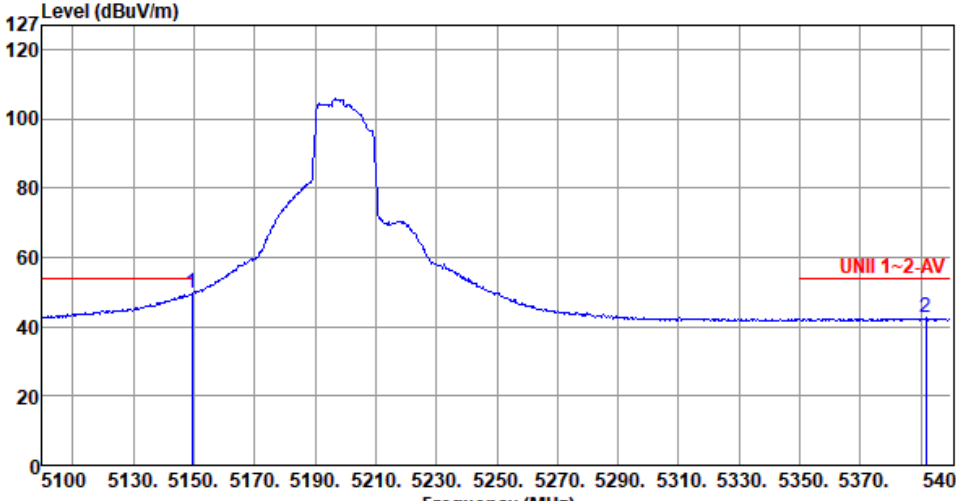
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.60</td><td>66.84</td><td>74.00</td><td>-7.16</td><td>65.64</td><td>1.20</td><td>Peak</td><td>309</td><td>1</td></tr><tr><td>2</td><td>5399.10</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>54.17</td><td>1.25</td><td>Peak</td><td>309</td><td>1</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.60	66.84	74.00	-7.16	65.64	1.20	Peak	309	1	2	5399.10	55.42	74.00	-18.58	54.17	1.25	Peak	309	1
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.60	66.84	74.00	-7.16	65.64	1.20	Peak	309	1																								
2	5399.10	55.42	74.00	-18.58	54.17	1.25	Peak	309	1																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>49.59</td><td>54.00</td><td>-4.41</td><td>48.39</td><td>1.20</td><td>Average</td><td>309</td><td>1</td></tr><tr><td>2</td><td>5391.60</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>41.27</td><td>1.21</td><td>Average</td><td>309</td><td>1</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	49.59	54.00	-4.41	48.39	1.20	Average	309	1	2	5391.60	42.48	54.00	-11.52	41.27	1.21	Average	309	1
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	49.59	54.00	-4.41	48.39	1.20	Average	309	1																								
2	5391.60	42.48	54.00	-11.52	41.27	1.21	Average	309	1																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

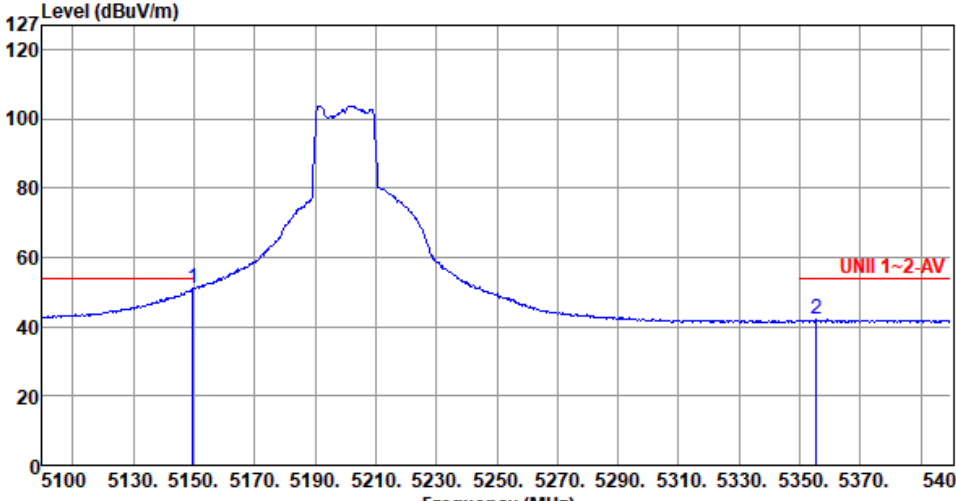
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5148.30</td><td>69.13</td><td>74.00</td><td>-4.87</td><td>67.93</td><td>1.20</td><td>Peak</td><td>118</td><td>275</td></tr><tr><td>2</td><td>5392.50</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>53.26</td><td>1.21</td><td>Peak</td><td>118</td><td>275</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.30	69.13	74.00	-4.87	67.93	1.20	Peak	118	275	2	5392.50	54.47	74.00	-19.53	53.26	1.21	Peak	118	275
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.30	69.13	74.00	-4.87	67.93	1.20	Peak	118	275																								
2	5392.50	54.47	74.00	-19.53	53.26	1.21	Peak	118	275																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

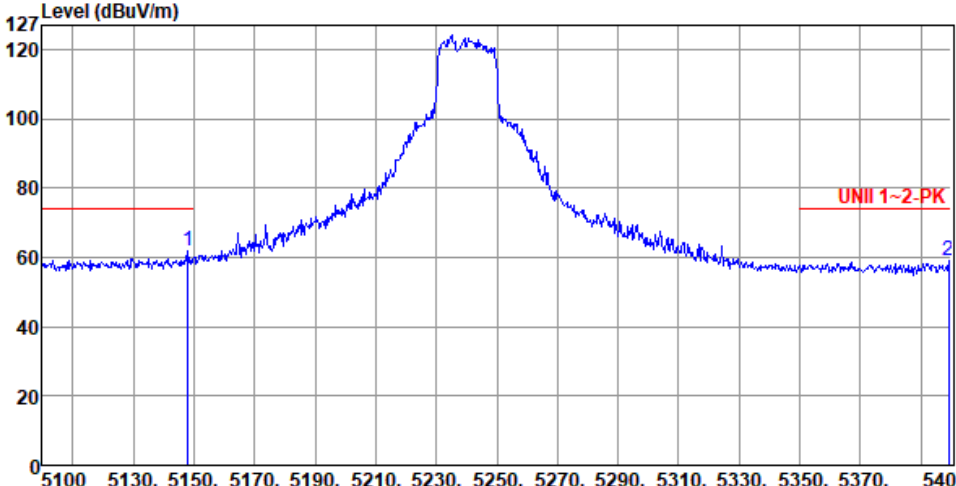
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5200																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>49.72</td><td>1.20</td><td>Average</td><td>118</td><td>275</td></tr><tr><td>2</td><td>5355.30</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>40.93</td><td>1.04</td><td>Average</td><td>118</td><td>275</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	50.92	54.00	-3.08	49.72	1.20	Average	118	275	2	5355.30	41.97	54.00	-12.03	40.93	1.04	Average	118	275
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	50.92	54.00	-3.08	49.72	1.20	Average	118	275																								
2	5355.30	41.97	54.00	-12.03	40.93	1.04	Average	118	275																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.00</td><td>61.85</td><td>74.00</td><td>-12.15</td><td>60.65</td><td>1.20</td><td>Peak</td><td>103</td><td>5</td></tr><tr><td>2</td><td>5399.10</td><td>59.20</td><td>74.00</td><td>-14.80</td><td>57.95</td><td>1.25</td><td>Peak</td><td>103</td><td>5</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5148.00	61.85	74.00	-12.15	60.65	1.20	Peak	103	5	2	5399.10	59.20	74.00	-14.80	57.95	1.25	Peak	103	5
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5148.00	61.85	74.00	-12.15	60.65	1.20	Peak	103	5																																		
2	5399.10	59.20	74.00	-14.80	57.95	1.25	Peak	103	5																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

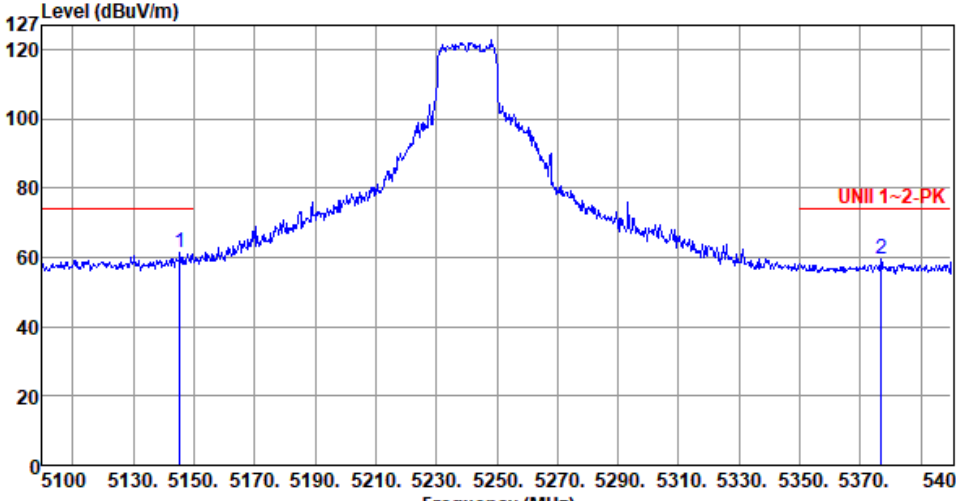
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBuV/m dBuV/m dB reading MHz dBuV/m dB dBuV dB/m 1 5149.80 47.89 54.00 -6.11 46.69 1.20 Average 103 5 2 5385.60 46.40 54.00 -7.60 45.22 1.18 Average 103 5			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)			
*Factor includes antenna factor , cable loss and amplifier gain			
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

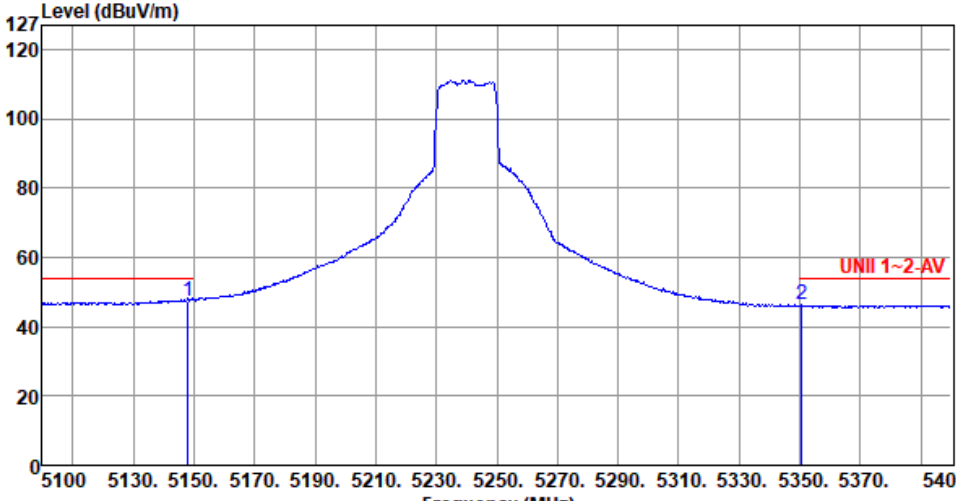
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5145.30</td><td>61.43</td><td>74.00</td><td>-12.57</td><td>60.24</td><td>1.19</td><td>Peak</td><td>125</td><td>101</td></tr><tr><td>2</td><td>5376.90</td><td>59.68</td><td>74.00</td><td>-14.32</td><td>58.54</td><td>1.14</td><td>Peak</td><td>125</td><td>101</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	61.43	74.00	-12.57	60.24	1.19	Peak	125	101	2	5376.90	59.68	74.00	-14.32	58.54	1.14	Peak	125	101
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	61.43	74.00	-12.57	60.24	1.19	Peak	125	101																								
2	5376.90	59.68	74.00	-14.32	58.54	1.14	Peak	125	101																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5240																														
Polarization	Vertical-Average																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5148.00</td><td>47.56</td><td>54.00</td><td>-6.44</td><td>46.36</td><td>1.20</td><td>Average</td><td>125</td><td>279</td></tr><tr><td>2</td><td>5350.50</td><td>46.43</td><td>54.00</td><td>-7.57</td><td>45.42</td><td>1.01</td><td>Average</td><td>125</td><td>279</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5148.00	47.56	54.00	-6.44	46.36	1.20	Average	125	279	2	5350.50	46.43	54.00	-7.57	45.42	1.01	Average	125	279
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5148.00	47.56	54.00	-6.44	46.36	1.20	Average	125	279																								
2	5350.50	46.43	54.00	-7.57	45.42	1.01	Average	125	279																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

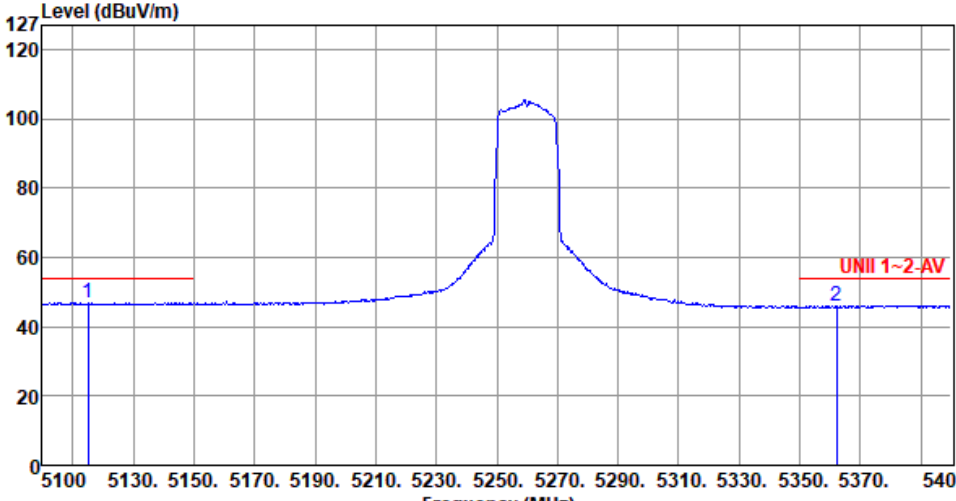
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260																														
Polarization	Horizontal-Average																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5115.00</td><td>46.90</td><td>54.00</td><td>-7.10</td><td>45.77</td><td>1.13</td><td>Average</td><td>170</td><td>248</td></tr><tr><td>2</td><td>5362.20</td><td>46.13</td><td>54.00</td><td>-7.87</td><td>45.06</td><td>1.07</td><td>Average</td><td>170</td><td>248</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5115.00	46.90	54.00	-7.10	45.77	1.13	Average	170	248	2	5362.20	46.13	54.00	-7.87	45.06	1.07	Average	170	248
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5115.00	46.90	54.00	-7.10	45.77	1.13	Average	170	248																								
2	5362.20	46.13	54.00	-7.87	45.06	1.07	Average	170	248																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

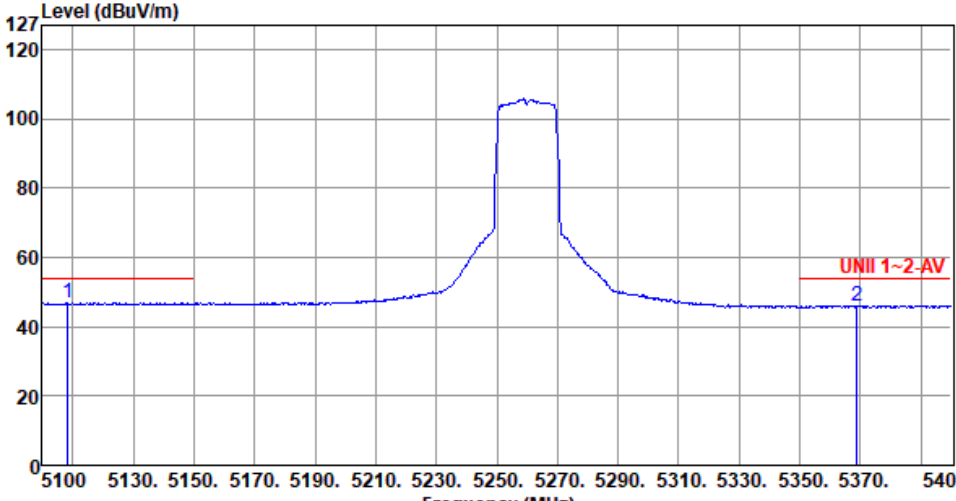
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5260																																								
Polarization	Vertical-Average																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5108.40</td><td>46.97</td><td>54.00</td><td>-7.03</td><td>45.86</td><td>1.11</td><td>Average</td><td>144</td><td>324</td></tr><tr><td>2</td><td>5368.80</td><td>46.06</td><td>54.00</td><td>-7.94</td><td>44.95</td><td>1.11</td><td>Average</td><td>144</td><td>324</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5108.40	46.97	54.00	-7.03	45.86	1.11	Average	144	324	2	5368.80	46.06	54.00	-7.94	44.95	1.11	Average	144	324
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5108.40	46.97	54.00	-7.03	45.86	1.11	Average	144	324																																		
2	5368.80	46.06	54.00	-7.94	44.95	1.11	Average	144	324																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) <			



Band Edge measurement

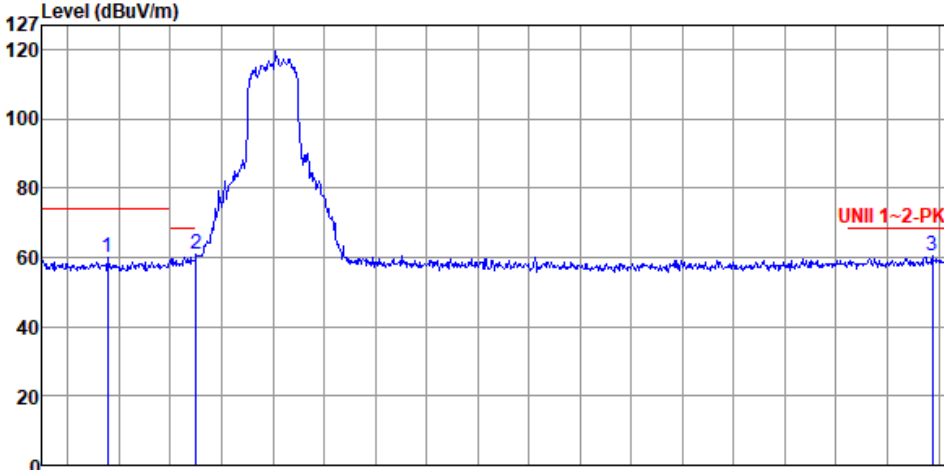
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5435.56</td><td>60.05</td><td>74.00</td><td>-13.95</td><td>58.72</td><td>1.33</td><td>Peak</td><td>131</td><td>259</td></tr><tr><td>2</td><td>5470.00</td><td>60.79</td><td>68.20</td><td>-7.41</td><td>59.41</td><td>1.38</td><td>Peak</td><td>131</td><td>259</td></tr><tr><td>3</td><td>5757.55</td><td>60.26</td><td>68.20</td><td>-7.94</td><td>58.36</td><td>1.90</td><td>Peak</td><td>131</td><td>259</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5435.56	60.05	74.00	-13.95	58.72	1.33	Peak	131	259	2	5470.00	60.79	68.20	-7.41	59.41	1.38	Peak	131	259	3	5757.55	60.26	68.20	-7.94	58.36	1.90	Peak	131	259
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5435.56	60.05	74.00	-13.95	58.72	1.33	Peak	131	259																																		
2	5470.00	60.79	68.20	-7.41	59.41	1.38	Peak	131	259																																		
3	5757.55	60.26	68.20	-7.94	58.36	1.90	Peak	131	259																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

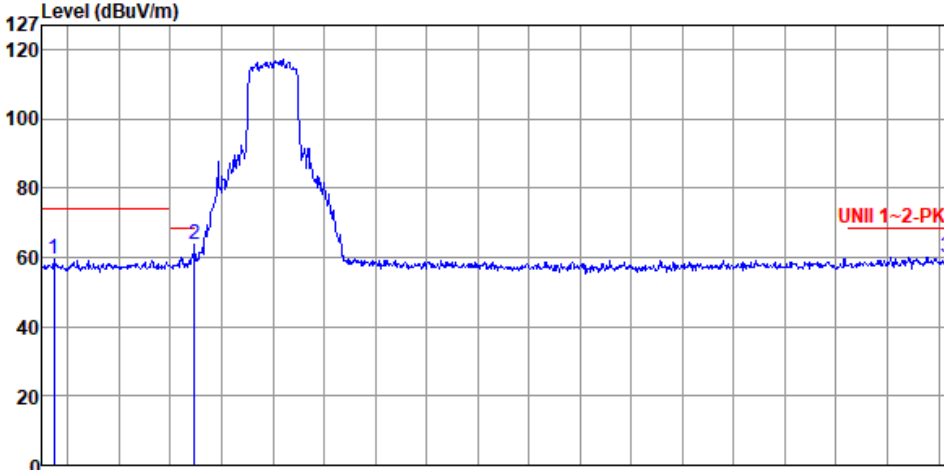
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5414.62</td><td>59.73</td><td>74.00</td><td>-14.27</td><td>58.45</td><td>1.28</td><td>Peak</td><td>158</td><td>95</td></tr><tr><td>2</td><td>5469.29</td><td>63.51</td><td>68.20</td><td>-4.69</td><td>62.13</td><td>1.38</td><td>Peak</td><td>158</td><td>95</td></tr><tr><td>3</td><td>5763.23</td><td>60.18</td><td>68.20</td><td>-8.02</td><td>58.25</td><td>1.93</td><td>Peak</td><td>158</td><td>95</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5414.62	59.73	74.00	-14.27	58.45	1.28	Peak	158	95	2	5469.29	63.51	68.20	-4.69	62.13	1.38	Peak	158	95	3	5763.23	60.18	68.20	-8.02	58.25	1.93	Peak	158	95
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5414.62	59.73	74.00	-14.27	58.45	1.28	Peak	158	95																																		
2	5469.29	63.51	68.20	-4.69	62.13	1.38	Peak	158	95																																		
3	5763.23	60.18	68.20	-8.02	58.25	1.93	Peak	158	95																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

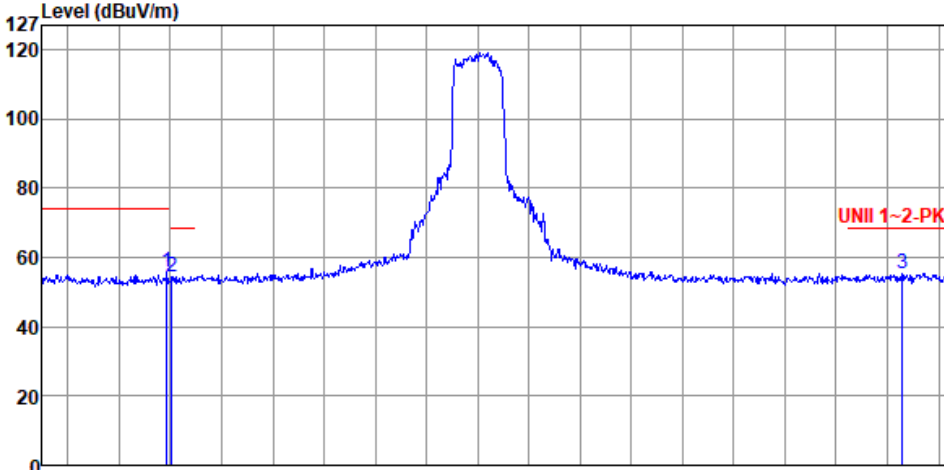
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.64</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>54.28</td><td>1.37</td><td>Peak</td><td>113</td><td>91</td></tr><tr><td>2</td><td>5460.41</td><td>54.39</td><td>68.20</td><td>-13.81</td><td>53.02</td><td>1.37</td><td>Peak</td><td>113</td><td>91</td></tr><tr><td>3</td><td>5745.83</td><td>55.37</td><td>68.20</td><td>-12.83</td><td>53.51</td><td>1.86</td><td>Peak</td><td>113</td><td>91</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.64	55.65	74.00	-18.35	54.28	1.37	Peak	113	91	2	5460.41	54.39	68.20	-13.81	53.02	1.37	Peak	113	91	3	5745.83	55.37	68.20	-12.83	53.51	1.86	Peak	113	91
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.64	55.65	74.00	-18.35	54.28	1.37	Peak	113	91																																		
2	5460.41	54.39	68.20	-13.81	53.02	1.37	Peak	113	91																																		
3	5745.83	55.37	68.20	-12.83	53.51	1.86	Peak	113	91																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

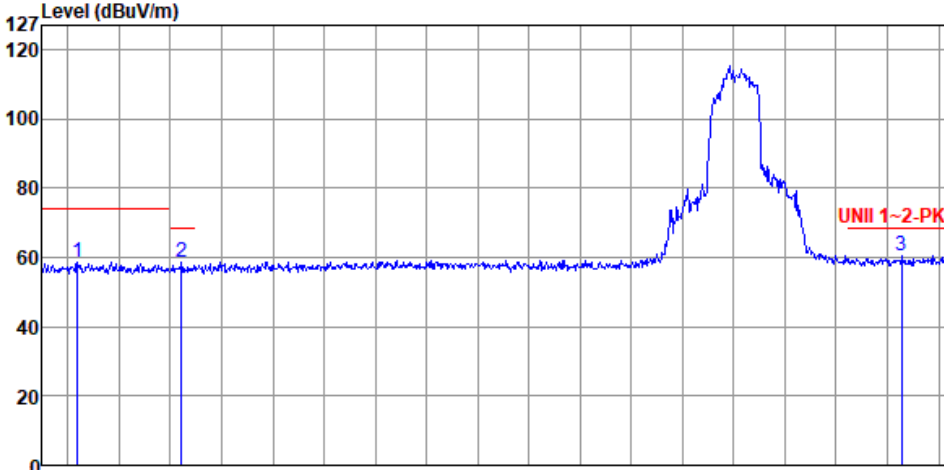
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680																																								
Polarization	Horizontal-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5423.85</td><td>58.47</td><td>74.00</td><td>-15.53</td><td>57.16</td><td>1.31</td><td>Peak</td><td>142</td><td>246</td></tr><tr><td>2</td><td>5464.32</td><td>58.59</td><td>68.20</td><td>-9.61</td><td>57.22</td><td>1.37</td><td>Peak</td><td>142</td><td>246</td></tr><tr><td>3</td><td>5745.48</td><td>60.40</td><td>68.20</td><td>-7.80</td><td>58.54</td><td>1.86</td><td>Peak</td><td>142</td><td>246</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5423.85	58.47	74.00	-15.53	57.16	1.31	Peak	142	246	2	5464.32	58.59	68.20	-9.61	57.22	1.37	Peak	142	246	3	5745.48	60.40	68.20	-7.80	58.54	1.86	Peak	142	246
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5423.85	58.47	74.00	-15.53	57.16	1.31	Peak	142	246																																		
2	5464.32	58.59	68.20	-9.61	57.22	1.37	Peak	142	246																																		
3	5745.48	60.40	68.20	-7.80	58.54	1.86	Peak	142	246																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5421.01</td><td>59.07</td><td>74.00</td><td>-14.93</td><td>57.78</td><td>1.29</td><td>Peak</td><td>138</td><td>144</td></tr><tr><td>2</td><td>5466.09</td><td>58.19</td><td>68.20</td><td>-10.01</td><td>56.82</td><td>1.37</td><td>Peak</td><td>138</td><td>144</td></tr><tr><td>3</td><td>5744.41</td><td>60.89</td><td>68.20</td><td>-7.31</td><td>59.03</td><td>1.86</td><td>Peak</td><td>138</td><td>144</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5421.01	59.07	74.00	-14.93	57.78	1.29	Peak	138	144	2	5466.09	58.19	68.20	-10.01	56.82	1.37	Peak	138	144	3	5744.41	60.89	68.20	-7.31	59.03	1.86	Peak	138	144
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5421.01	59.07	74.00	-14.93	57.78	1.29	Peak	138	144																																		
2	5466.09	58.19	68.20	-10.01	56.82	1.37	Peak	138	144																																		
3	5744.41	60.89	68.20	-7.31	59.03	1.86	Peak	138	144																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5680						
Polarization	Vertical-Average								
Test By :Roger Lu Temperature(°C):25 Humidity(%):63									
Level (dBUV/m) 1 Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg
1	5416.39	45.85	54.00	-8.15	44.57	1.28	Average	138	144

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Band Edge measurement

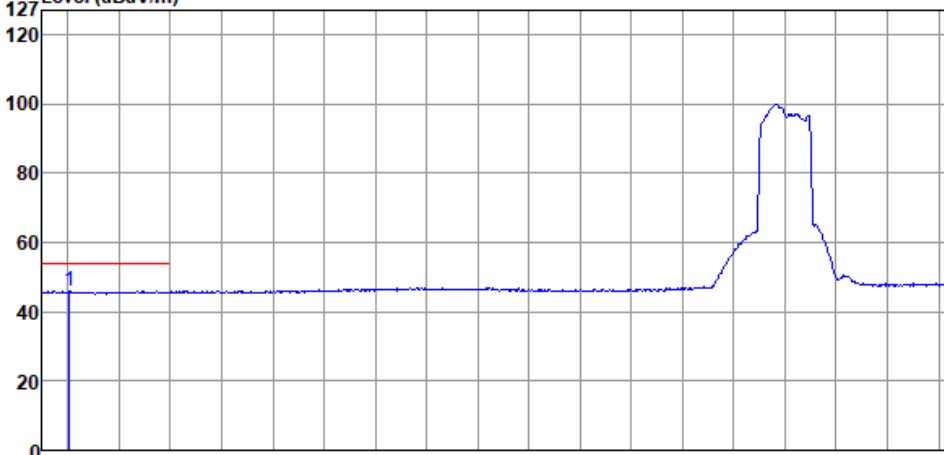
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

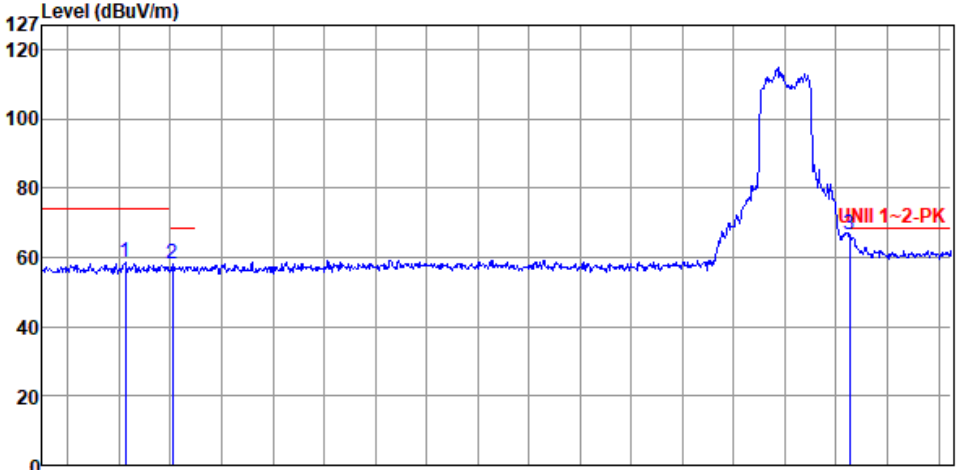
Modulation	11be EHT20	Test Freq. (MHz)	5700						
Polarization	Horizontal-Average								
Test By :Roger Lu Temperature(°C):25 Humidity(%):63									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5420.65	45.99	54.00	-8.01	44.70	1.29	Average	177	247

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700																																								
Polarization	Vertical-Peak																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5442.31</td><td>58.40</td><td>74.00</td><td>-15.60</td><td>57.05</td><td>1.35</td><td>Peak</td><td>178</td><td>150</td></tr><tr><td>2</td><td>5460.77</td><td>58.08</td><td>68.20</td><td>-10.12</td><td>56.71</td><td>1.37</td><td>Peak</td><td>178</td><td>150</td></tr><tr><td>3</td><td>5725.24</td><td>66.42</td><td>68.20</td><td>-1.78</td><td>64.61</td><td>1.81</td><td>Peak</td><td>178</td><td>150</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5442.31	58.40	74.00	-15.60	57.05	1.35	Peak	178	150	2	5460.77	58.08	68.20	-10.12	56.71	1.37	Peak	178	150	3	5725.24	66.42	68.20	-1.78	64.61	1.81	Peak	178	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5442.31	58.40	74.00	-15.60	57.05	1.35	Peak	178	150																																		
2	5460.77	58.08	68.20	-10.12	56.71	1.37	Peak	178	150																																		
3	5725.24	66.42	68.20	-1.78	64.61	1.81	Peak	178	150																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical-Peak		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBUV/m) </			



Band Edge measurement

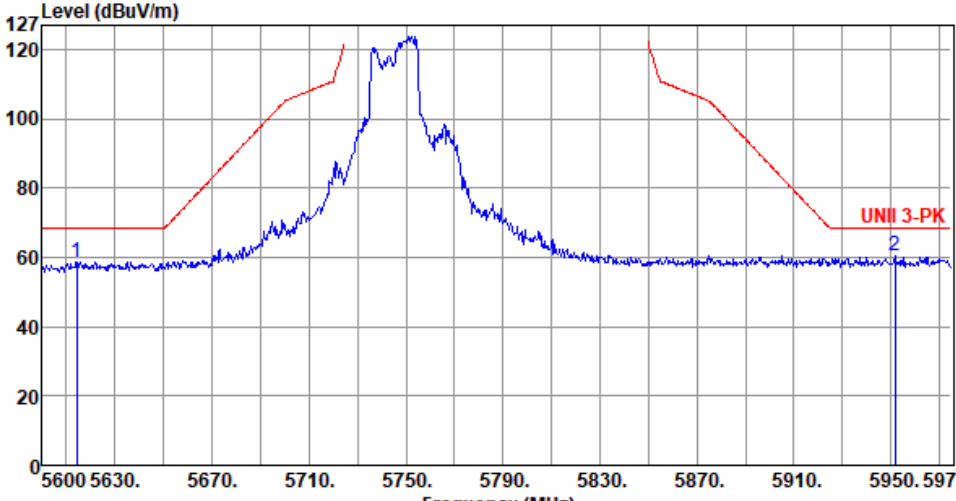
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5720																																								
Polarization	Vertical-Average																																										
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																											
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5460 5500 5540 5580 5620 5660 5700 5740 5780 5820 5860 5900 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.68</td><td>41.95</td><td>54.00</td><td>-12.05</td><td>40.64</td><td>1.31</td><td>Average</td><td>144</td><td>147</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	5425.68	41.95	54.00	-12.05	40.64	1.31	Average	144	147
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																		
					dBuV			cm	deg																																		
1	5425.68	41.95	54.00	-12.05	40.64	1.31	Average	144	147																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5745																														
Polarization	Horizontal-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5614.25</td><td>58.66</td><td>68.20</td><td>-9.54</td><td>57.27</td><td>1.39</td><td>Peak</td><td>161</td><td>286</td></tr><tr><td>2</td><td>5951.75</td><td>60.49</td><td>68.20</td><td>-7.71</td><td>58.13</td><td>2.36</td><td>Peak</td><td>161</td><td>286</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5614.25	58.66	68.20	-9.54	57.27	1.39	Peak	161	286	2	5951.75	60.49	68.20	-7.71	58.13	2.36	Peak	161	286
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5614.25	58.66	68.20	-9.54	57.27	1.39	Peak	161	286																								
2	5951.75	60.49	68.20	-7.71	58.13	2.36	Peak	161	286																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5745																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m) UNII 3-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5622.88</td><td>58.79</td><td>68.20</td><td>-9.41</td><td>57.37</td><td>1.42</td><td>Peak</td><td>135</td><td>212</td></tr><tr><td>2</td><td>5940.13</td><td>60.07</td><td>68.20</td><td>-8.13</td><td>57.73</td><td>2.34</td><td>Peak</td><td>135</td><td>212</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5622.88	58.79	68.20	-9.41	57.37	1.42	Peak	135	212	2	5940.13	60.07	68.20	-8.13	57.73	2.34	Peak	135	212
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5622.88	58.79	68.20	-9.41	57.37	1.42	Peak	135	212																								
2	5940.13	60.07	68.20	-8.13	57.73	2.34	Peak	135	212																								



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5785																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5618.00</td><td>62.30</td><td>68.20</td><td>-5.90</td><td>60.89</td><td>1.41</td><td>Peak</td><td>226</td><td>280</td></tr><tr><td>2</td><td>5958.13</td><td>63.64</td><td>68.20</td><td>-4.56</td><td>61.26</td><td>2.38</td><td>Peak</td><td>226</td><td>280</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5618.00	62.30	68.20	-5.90	60.89	1.41	Peak	226	280	2	5958.13	63.64	68.20	-4.56	61.26	2.38	Peak	226	280
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5618.00	62.30	68.20	-5.90	60.89	1.41	Peak	226	280																								
2	5958.13	63.64	68.20	-4.56	61.26	2.38	Peak	226	280																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

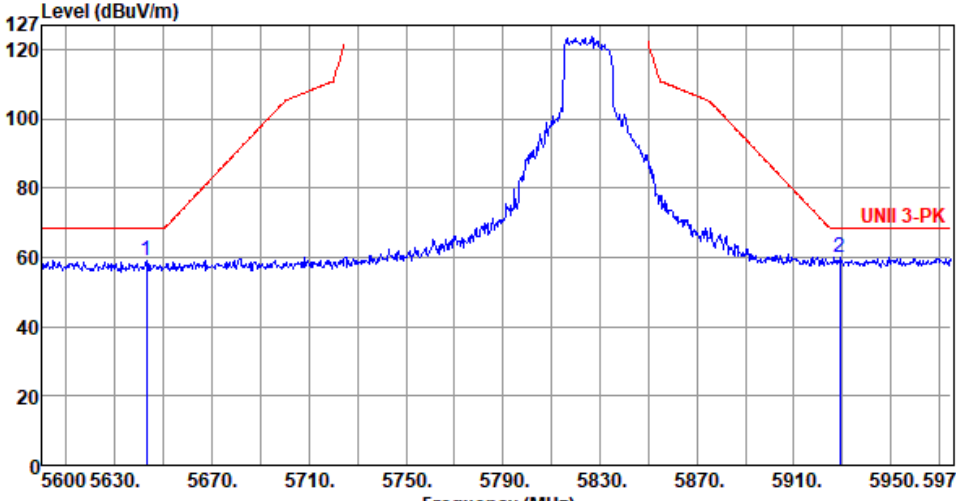
Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5825																														
Polarization	Horizontal-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5641.25</td><td>59.24</td><td>68.20</td><td>-8.96</td><td>57.77</td><td>1.47</td><td>Peak</td><td>147</td><td>254</td></tr><tr><td>2</td><td>5928.50</td><td>61.16</td><td>68.20</td><td>-7.04</td><td>58.83</td><td>2.33</td><td>Peak</td><td>147</td><td>254</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5641.25	59.24	68.20	-8.96	57.77	1.47	Peak	147	254	2	5928.50	61.16	68.20	-7.04	58.83	2.33	Peak	147	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5641.25	59.24	68.20	-8.96	57.77	1.47	Peak	147	254																								
2	5928.50	61.16	68.20	-7.04	58.83	2.33	Peak	147	254																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT20	Test Freq. (MHz)	5825																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5643.13</td><td>59.20</td><td>68.20</td><td>-9.00</td><td>57.72</td><td>1.48</td><td>Peak</td><td>135</td><td>237</td></tr><tr><td>2</td><td>5928.88</td><td>60.10</td><td>68.20</td><td>-8.10</td><td>57.77</td><td>2.33</td><td>Peak</td><td>135</td><td>237</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5643.13	59.20	68.20	-9.00	57.72	1.48	Peak	135	237	2	5928.88	60.10	68.20	-8.10	57.77	2.33	Peak	135	237
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5643.13	59.20	68.20	-9.00	57.72	1.48	Peak	135	237																								
2	5928.88	60.10	68.20	-8.10	57.77	2.33	Peak	135	237																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190																														
Polarization	Horizontal-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.50</td><td>68.12</td><td>74.00</td><td>-5.88</td><td>66.92</td><td>1.20</td><td>Peak</td><td>105</td><td>287</td></tr><tr><td>2</td><td>5375.10</td><td>59.22</td><td>74.00</td><td>-14.78</td><td>58.09</td><td>1.13</td><td>Peak</td><td>105</td><td>287</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.50	68.12	74.00	-5.88	66.92	1.20	Peak	105	287	2	5375.10	59.22	74.00	-14.78	58.09	1.13	Peak	105	287
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.50	68.12	74.00	-5.88	66.92	1.20	Peak	105	287																								
2	5375.10	59.22	74.00	-14.78	58.09	1.13	Peak	105	287																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal-Average		
Test By :Roger Lu Temperature(°C):25 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

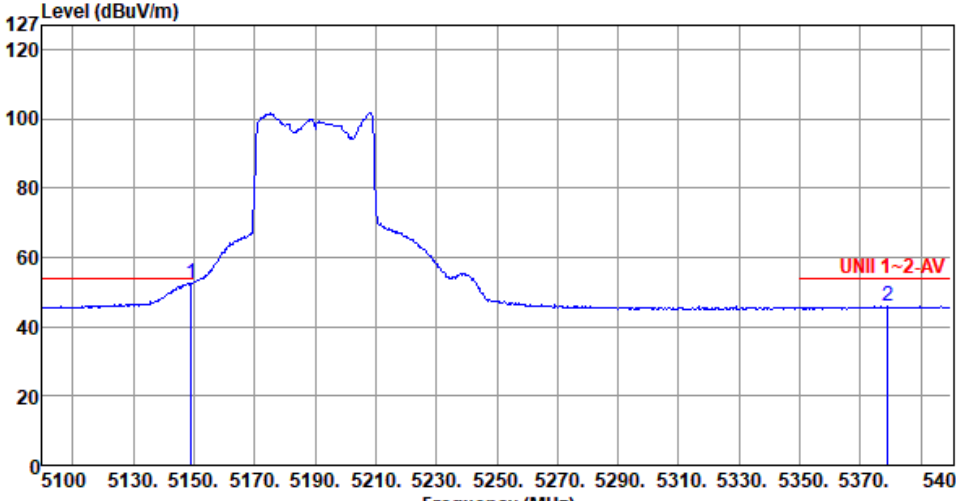
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Peak																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m) UNII 1~2-PK 2 Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.80</td><td>68.48</td><td>74.00</td><td>-5.52</td><td>67.29</td><td>1.19</td><td>Peak</td><td>129</td><td>284</td></tr><tr><td>2</td><td>5365.80</td><td>58.49</td><td>74.00</td><td>-15.51</td><td>57.40</td><td>1.09</td><td>Peak</td><td>129</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.80	68.48	74.00	-5.52	67.29	1.19	Peak	129	284	2	5365.80	58.49	74.00	-15.51	57.40	1.09	Peak	129	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.80	68.48	74.00	-5.52	67.29	1.19	Peak	129	284																								
2	5365.80	58.49	74.00	-15.51	57.40	1.09	Peak	129	284																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5190																														
Polarization	Vertical-Average																																
Test By :Roger Lu Temperature(°C):25 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5149.20</td><td>52.71</td><td>54.00</td><td>-1.29</td><td>51.51</td><td>1.20</td><td>Average</td><td>129</td><td>284</td></tr><tr><td>2</td><td>5379.00</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>44.78</td><td>1.15</td><td>Average</td><td>129</td><td>284</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.20	52.71	54.00	-1.29	51.51	1.20	Average	129	284	2	5379.00	45.93	54.00	-8.07	44.78	1.15	Average	129	284
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.20	52.71	54.00	-1.29	51.51	1.20	Average	129	284																								
2	5379.00	45.93	54.00	-8.07	44.78	1.15	Average	129	284																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

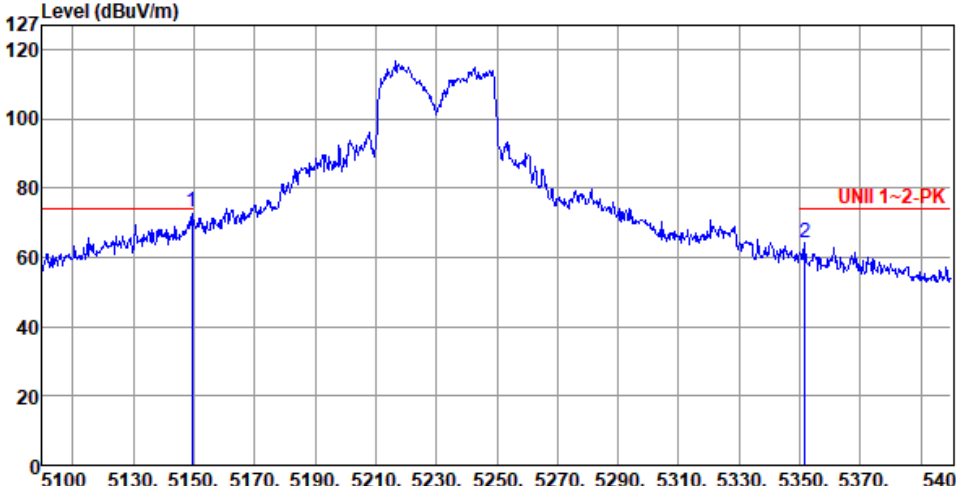
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.50</td><td>73.32</td><td>74.00</td><td>-0.68</td><td>72.12</td><td>1.20</td><td>Peak</td><td>170</td><td>272</td></tr><tr><td>2</td><td>5351.70</td><td>64.10</td><td>74.00</td><td>-9.90</td><td>63.08</td><td>1.02</td><td>Peak</td><td>130</td><td>310</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5149.50	73.32	74.00	-0.68	72.12	1.20	Peak	170	272	2	5351.70	64.10	74.00	-9.90	63.08	1.02	Peak	130	310
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																		
1	5149.50	73.32	74.00	-0.68	72.12	1.20	Peak	170	272																																		
2	5351.70	64.10	74.00	-9.90	63.08	1.02	Peak	130	310																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

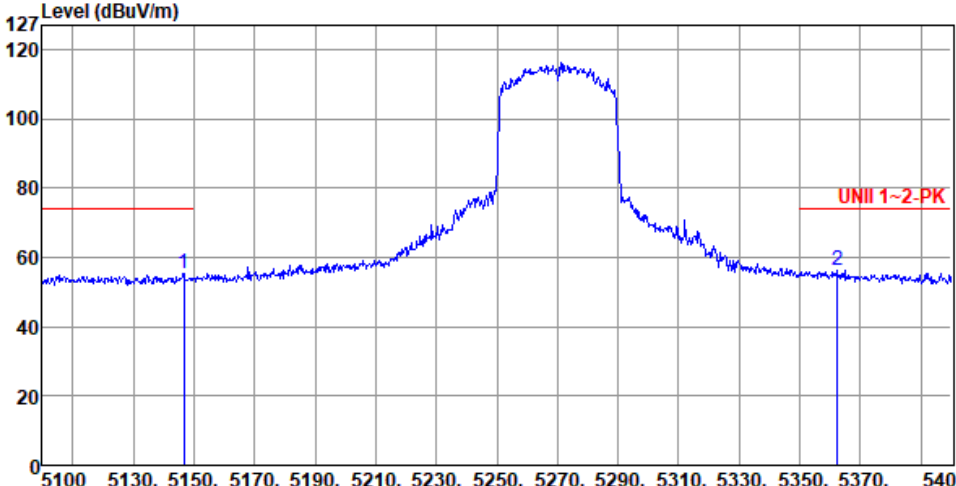
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5146.80</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>54.32</td><td>1.19</td><td>Peak</td><td>181</td><td>278</td></tr><tr><td>2</td><td>5362.50</td><td>56.38</td><td>74.00</td><td>-17.62</td><td>55.31</td><td>1.07</td><td>Peak</td><td>181</td><td>278</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.80	55.51	74.00	-18.49	54.32	1.19	Peak	181	278	2	5362.50	56.38	74.00	-17.62	55.31	1.07	Peak	181	278
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.80	55.51	74.00	-18.49	54.32	1.19	Peak	181	278																								
2	5362.50	56.38	74.00	-17.62	55.31	1.07	Peak	181	278																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

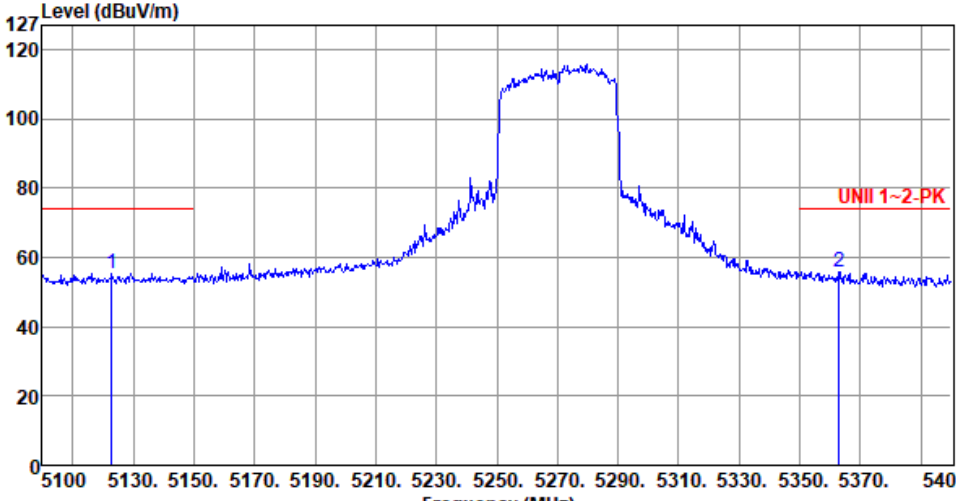
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5270																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5122.80</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>54.11</td><td>1.15</td><td>Peak</td><td>181</td><td>280</td></tr><tr><td>2</td><td>5362.80</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>54.64</td><td>1.07</td><td>Peak</td><td>181</td><td>280</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5122.80	55.26	74.00	-18.74	54.11	1.15	Peak	181	280	2	5362.80	55.71	74.00	-18.29	54.64	1.07	Peak	181	280
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5122.80	55.26	74.00	-18.74	54.11	1.15	Peak	181	280																								
2	5362.80	55.71	74.00	-18.29	54.64	1.07	Peak	181	280																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

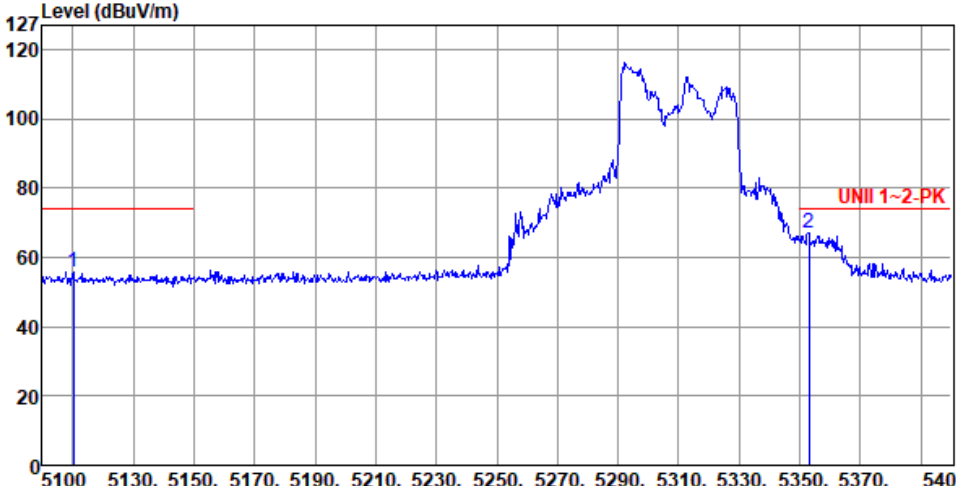
Modulation	11be EHT40	Test Freq. (MHz)	5270						
Polarization	Vertical-Average								
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) 127 120 100 80 60 40 20 0 5100 5130 5150 5170 5190 5210 5230 5250 5270 5290 5310 5330 5350 5370 5400 Frequency (MHz) 1 2 UNII 1~2-AV									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5128.20	43.05	54.00	-10.95	41.90	1.15	Average	181	280
2	5350.80	43.62	54.00	-10.38	42.61	1.01	Average	181	280

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5110.20</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>54.80</td><td>1.11</td><td>Peak</td><td>172</td><td>251</td></tr><tr><td>2</td><td>5352.90</td><td>67.09</td><td>74.00</td><td>-6.91</td><td>66.07</td><td>1.02</td><td>Peak</td><td>172</td><td>251</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5110.20	55.91	74.00	-18.09	54.80	1.11	Peak	172	251	2	5352.90	67.09	74.00	-6.91	66.07	1.02	Peak	172	251
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5110.20	55.91	74.00	-18.09	54.80	1.11	Peak	172	251																								
2	5352.90	67.09	74.00	-6.91	66.07	1.02	Peak	172	251																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5457.57</td><td>60.70</td><td>74.00</td><td>-13.30</td><td>59.33</td><td>1.37</td><td>Peak</td><td>180</td><td>283</td></tr><tr><td>2</td><td>5467.87</td><td>67.12</td><td>68.20</td><td>-1.08</td><td>65.75</td><td>1.37</td><td>Peak</td><td>180</td><td>283</td></tr><tr><td>3</td><td>5756.13</td><td>55.82</td><td>68.20</td><td>-12.38</td><td>53.93</td><td>1.89</td><td>Peak</td><td>180</td><td>283</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.57	60.70	74.00	-13.30	59.33	1.37	Peak	180	283	2	5467.87	67.12	68.20	-1.08	65.75	1.37	Peak	180	283	3	5756.13	55.82	68.20	-12.38	53.93	1.89	Peak	180	283
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.57	60.70	74.00	-13.30	59.33	1.37	Peak	180	283																																		
2	5467.87	67.12	68.20	-1.08	65.75	1.37	Peak	180	283																																		
3	5756.13	55.82	68.20	-12.38	53.93	1.89	Peak	180	283																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5458.28</td><td>59.92</td><td>74.00</td><td>-14.08</td><td>58.55</td><td>1.37</td><td>Peak</td><td>129</td><td>264</td></tr><tr><td>2</td><td>5468.58</td><td>65.13</td><td>68.20</td><td>-3.07</td><td>63.76</td><td>1.37</td><td>Peak</td><td>129</td><td>264</td></tr><tr><td>3</td><td>5746.90</td><td>55.60</td><td>68.20</td><td>-12.60</td><td>53.74</td><td>1.86</td><td>Peak</td><td>129</td><td>264</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5458.28	59.92	74.00	-14.08	58.55	1.37	Peak	129	264	2	5468.58	65.13	68.20	-3.07	63.76	1.37	Peak	129	264	3	5746.90	55.60	68.20	-12.60	53.74	1.86	Peak	129	264
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5458.28	59.92	74.00	-14.08	58.55	1.37	Peak	129	264																																		
2	5468.58	65.13	68.20	-3.07	63.76	1.37	Peak	129	264																																		
3	5746.90	55.60	68.20	-12.60	53.74	1.86	Peak	129	264																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) </			



Band Edge measurement

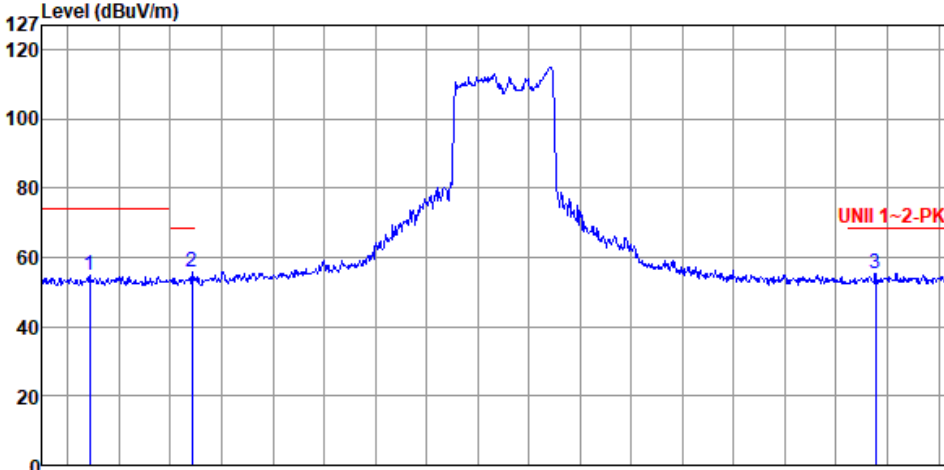
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5428.46</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>53.51</td><td>1.32</td><td>Peak</td><td>180</td><td>138</td></tr><tr><td>2</td><td>5468.58</td><td>55.64</td><td>68.20</td><td>-12.56</td><td>54.27</td><td>1.37</td><td>Peak</td><td>180</td><td>138</td></tr><tr><td>3</td><td>5735.54</td><td>55.51</td><td>68.20</td><td>-12.69</td><td>53.67</td><td>1.84</td><td>Peak</td><td>180</td><td>138</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5428.46	54.83	74.00	-19.17	53.51	1.32	Peak	180	138	2	5468.58	55.64	68.20	-12.56	54.27	1.37	Peak	180	138	3	5735.54	55.51	68.20	-12.69	53.67	1.84	Peak	180	138
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5428.46	54.83	74.00	-19.17	53.51	1.32	Peak	180	138																																		
2	5468.58	55.64	68.20	-12.56	54.27	1.37	Peak	180	138																																		
3	5735.54	55.51	68.20	-12.69	53.67	1.84	Peak	180	138																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

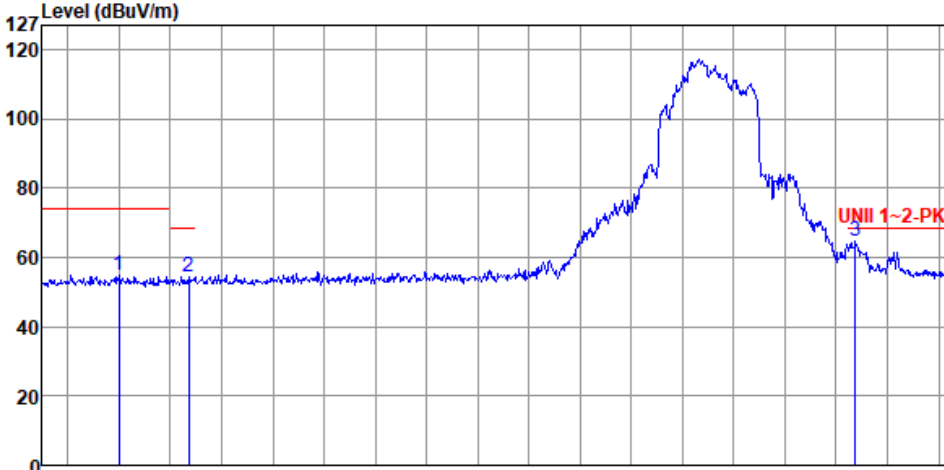
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5439.82</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>53.44</td><td>1.35</td><td>Peak</td><td>178</td><td>256</td></tr><tr><td>2</td><td>5467.16</td><td>54.17</td><td>68.20</td><td>-14.03</td><td>52.80</td><td>1.37</td><td>Peak</td><td>178</td><td>256</td></tr><tr><td>3</td><td>5727.37</td><td>64.55</td><td>68.20</td><td>-3.65</td><td>62.74</td><td>1.81</td><td>Peak</td><td>178</td><td>256</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5439.82	54.79	74.00	-19.21	53.44	1.35	Peak	178	256	2	5467.16	54.17	68.20	-14.03	52.80	1.37	Peak	178	256	3	5727.37	64.55	68.20	-3.65	62.74	1.81	Peak	178	256
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5439.82	54.79	74.00	-19.21	53.44	1.35	Peak	178	256																																		
2	5467.16	54.17	68.20	-14.03	52.80	1.37	Peak	178	256																																		
3	5727.37	64.55	68.20	-3.65	62.74	1.81	Peak	178	256																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) <			



Band Edge measurement

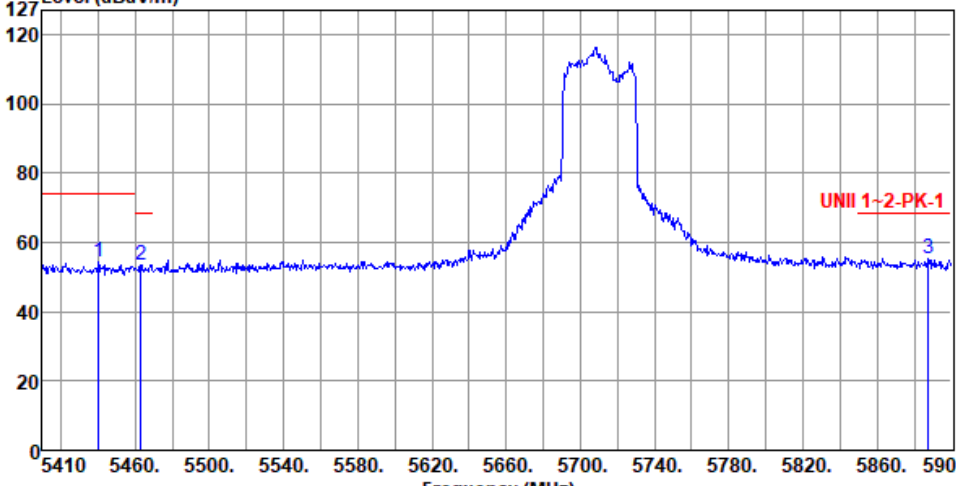
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5440.38</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>52.87</td><td>1.35</td><td>Peak</td><td>306</td><td>52</td></tr><tr><td>2</td><td>5462.92</td><td>53.59</td><td>68.20</td><td>-14.61</td><td>52.22</td><td>1.37</td><td>Peak</td><td>306</td><td>52</td></tr><tr><td>3</td><td>5887.75</td><td>55.35</td><td>68.20</td><td>-12.85</td><td>53.08</td><td>2.27</td><td>Peak</td><td>306</td><td>52</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5440.38	54.22	74.00	-19.78	52.87	1.35	Peak	306	52	2	5462.92	53.59	68.20	-14.61	52.22	1.37	Peak	306	52	3	5887.75	55.35	68.20	-12.85	53.08	2.27	Peak	306	52
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5440.38	54.22	74.00	-19.78	52.87	1.35	Peak	306	52																																		
2	5462.92	53.59	68.20	-14.61	52.22	1.37	Peak	306	52																																		
3	5887.75	55.35	68.20	-12.85	53.08	2.27	Peak	306	52																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

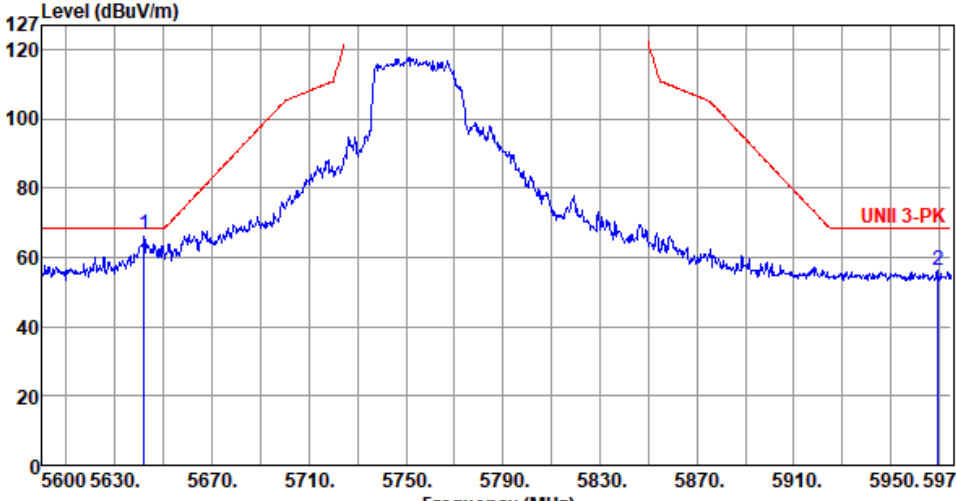
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5710																														
Polarization	Vertical-Average																																
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																	
Level (dBuV/m) 127 120 100 80 60 40 20 0 5410 5460 5500 5540 5580 5620 5660 5700 5740 5780 5820 5860 5900 Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5414.41</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>40.47</td><td>1.28</td><td>Average</td><td>306</td><td>52</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5414.41	41.75	54.00	-12.25	40.47	1.28	Average	306	52
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																								
1	5414.41	41.75	54.00	-12.25	40.47	1.28	Average	306	52																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

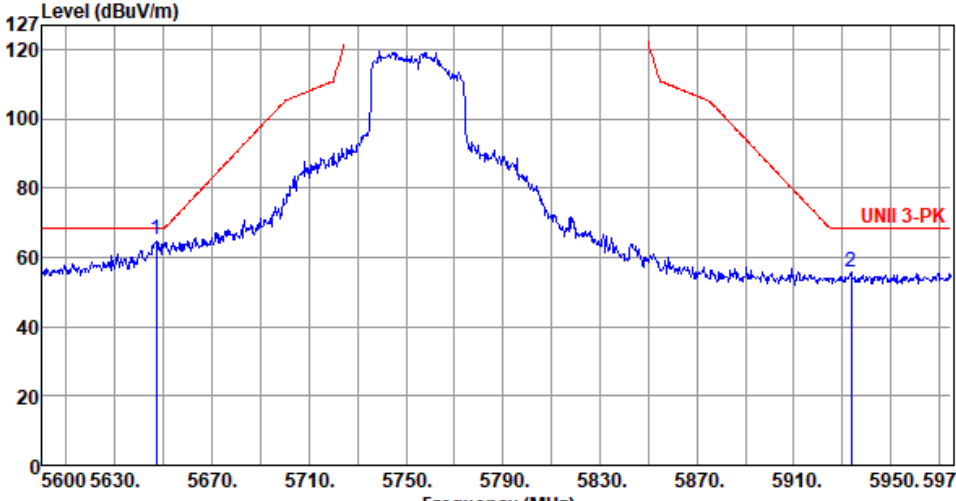
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5755																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5642.00</td><td>66.42</td><td>68.20</td><td>-1.78</td><td>64.95</td><td>1.47</td><td>Peak</td><td>228</td><td>240</td></tr><tr><td>2</td><td>5969.38</td><td>56.09</td><td>68.20</td><td>-12.11</td><td>53.65</td><td>2.44</td><td>Peak</td><td>228</td><td>240</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5642.00	66.42	68.20	-1.78	64.95	1.47	Peak	228	240	2	5969.38	56.09	68.20	-12.11	53.65	2.44	Peak	228	240
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5642.00	66.42	68.20	-1.78	64.95	1.47	Peak	228	240																								
2	5969.38	56.09	68.20	-12.11	53.65	2.44	Peak	228	240																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

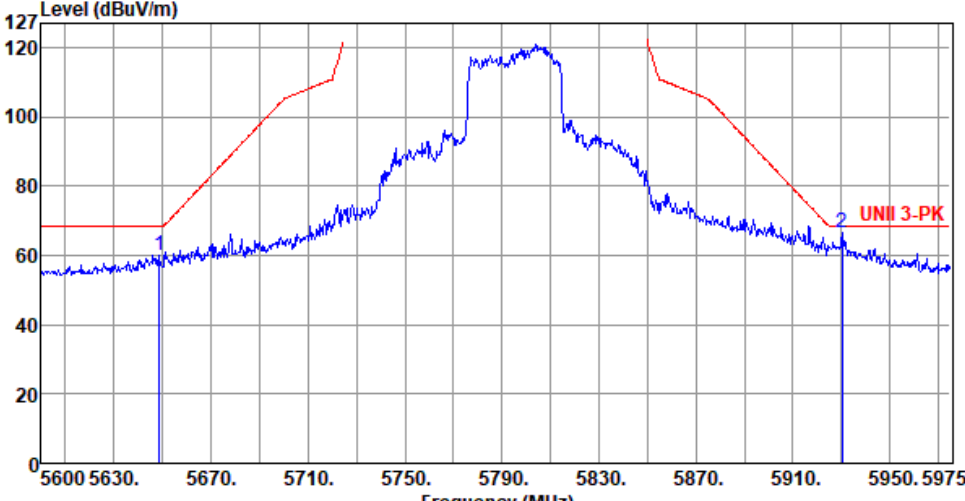
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5755																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5646.88</td><td>65.16</td><td>68.20</td><td>-3.04</td><td>63.68</td><td>1.48</td><td>Peak</td><td>180</td><td>137</td></tr><tr><td>2</td><td>5933.75</td><td>55.68</td><td>68.20</td><td>-12.52</td><td>53.35</td><td>2.33</td><td>Peak</td><td>180</td><td>137</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.88	65.16	68.20	-3.04	63.68	1.48	Peak	180	137	2	5933.75	55.68	68.20	-12.52	53.35	2.33	Peak	180	137
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.88	65.16	68.20	-3.04	63.68	1.48	Peak	180	137																								
2	5933.75	55.68	68.20	-12.52	53.35	2.33	Peak	180	137																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

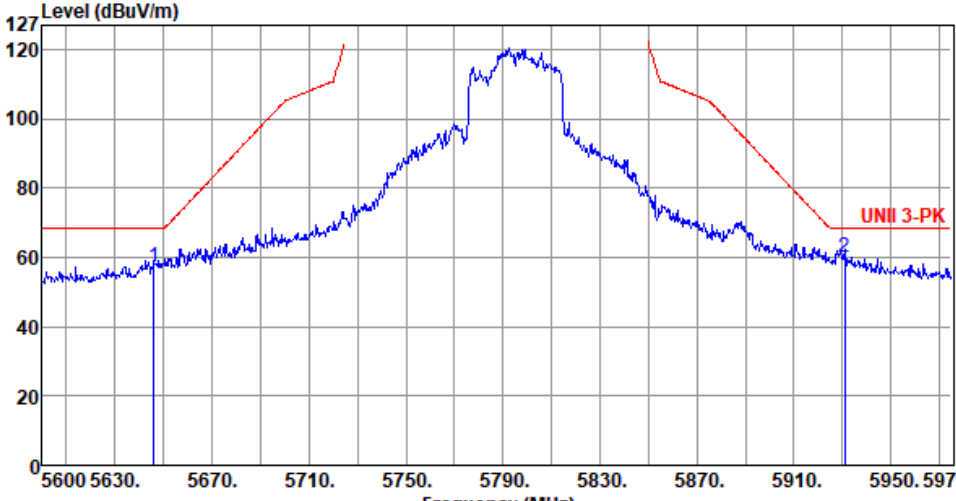
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5795																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5648.75</td><td>60.06</td><td>68.20</td><td>-8.14</td><td>58.57</td><td>1.49</td><td>Peak</td><td>218</td><td>291</td></tr><tr><td>2</td><td>5930.38</td><td>66.58</td><td>68.20</td><td>-1.62</td><td>64.25</td><td>2.33</td><td>Peak</td><td>229</td><td>236</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5648.75	60.06	68.20	-8.14	58.57	1.49	Peak	218	291	2	5930.38	66.58	68.20	-1.62	64.25	2.33	Peak	229	236
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5648.75	60.06	68.20	-8.14	58.57	1.49	Peak	218	291																								
2	5930.38	66.58	68.20	-1.62	64.25	2.33	Peak	229	236																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

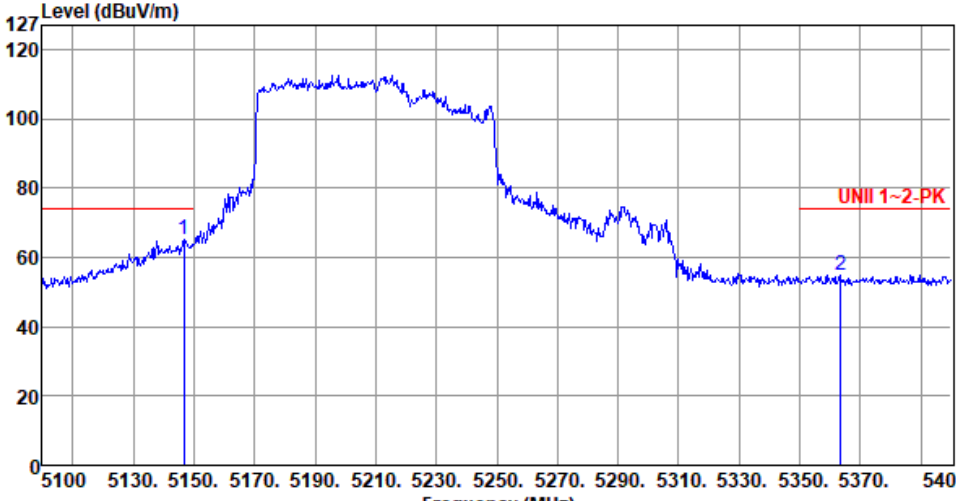
Appendix D

Modulation	11be EHT40	Test Freq. (MHz)	5795																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5646.13</td><td>57.24</td><td>68.20</td><td>-10.96</td><td>55.76</td><td>1.48</td><td>Peak</td><td>183</td><td>145</td></tr><tr><td>2</td><td>5931.13</td><td>60.14</td><td>68.20</td><td>-8.06</td><td>57.81</td><td>2.33</td><td>Peak</td><td>183</td><td>145</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5646.13	57.24	68.20	-10.96	55.76	1.48	Peak	183	145	2	5931.13	60.14	68.20	-8.06	57.81	2.33	Peak	183	145
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5646.13	57.24	68.20	-10.96	55.76	1.48	Peak	183	145																								
2	5931.13	60.14	68.20	-8.06	57.81	2.33	Peak	183	145																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

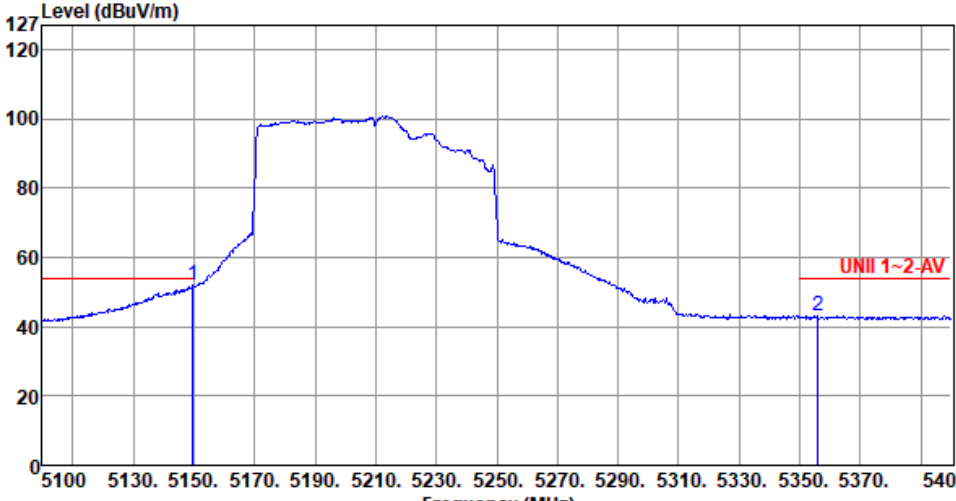
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5146.80</td><td>65.26</td><td>74.00</td><td>-8.74</td><td>64.07</td><td>1.19</td><td>Peak</td><td>130</td><td>277</td></tr><tr><td>2</td><td>5363.40</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>53.97</td><td>1.07</td><td>Peak</td><td>130</td><td>277</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5146.80	65.26	74.00	-8.74	64.07	1.19	Peak	130	277	2	5363.40	55.04	74.00	-18.96	53.97	1.07	Peak	130	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5146.80	65.26	74.00	-8.74	64.07	1.19	Peak	130	277																								
2	5363.40	55.04	74.00	-18.96	53.97	1.07	Peak	130	277																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

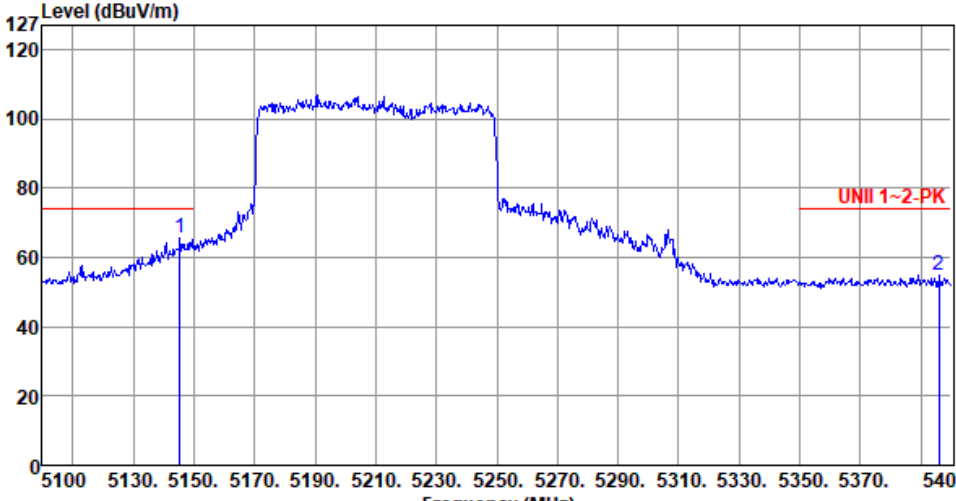
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Horizontal-Average																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5149.80</td><td>51.81</td><td>54.00</td><td>-2.19</td><td>50.61</td><td>1.20</td><td>Average</td><td>130</td><td>277</td></tr><tr><td>2</td><td>5355.90</td><td>43.09</td><td>54.00</td><td>-10.91</td><td>42.05</td><td>1.04</td><td>Average</td><td>130</td><td>277</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5149.80	51.81	54.00	-2.19	50.61	1.20	Average	130	277	2	5355.90	43.09	54.00	-10.91	42.05	1.04	Average	130	277
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5149.80	51.81	54.00	-2.19	50.61	1.20	Average	130	277																								
2	5355.90	43.09	54.00	-10.91	42.05	1.04	Average	130	277																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.30</td><td>65.79</td><td>74.00</td><td>-8.21</td><td>64.60</td><td>1.19</td><td>Peak</td><td>135</td><td>123</td></tr><tr><td>2</td><td>5395.80</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>53.71</td><td>1.23</td><td>Peak</td><td>135</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.30	65.79	74.00	-8.21	64.60	1.19	Peak	135	123	2	5395.80	54.94	74.00	-19.06	53.71	1.23	Peak	135	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.30	65.79	74.00	-8.21	64.60	1.19	Peak	135	123																								
2	5395.80	54.94	74.00	-19.06	53.71	1.23	Peak	135	123																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

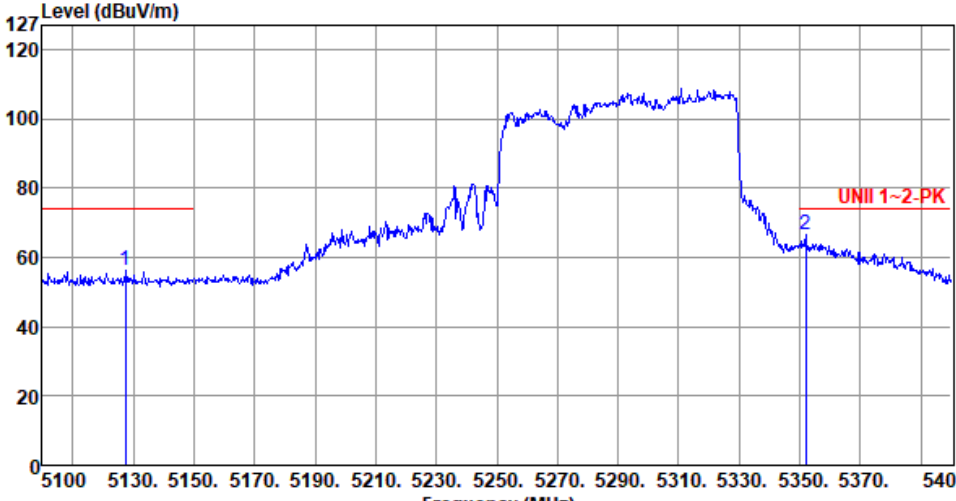
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission level</th><th>Limit</th><th>Margin</th><th>SA reading</th><th>Factor</th><th>Remark</th><th>ANT High</th><th>Turn Table</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dBUV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5127.30</td><td>56.05</td><td>74.00</td><td>-17.95</td><td>54.91</td><td>1.14</td><td>Peak</td><td>181</td><td>221</td></tr><tr><td>2</td><td>5352.00</td><td>66.76</td><td>74.00</td><td>-7.24</td><td>65.74</td><td>1.02</td><td>Peak</td><td>181</td><td>221</td></tr></table>					Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg	1	5127.30	56.05	74.00	-17.95	54.91	1.14	Peak	181	221	2	5352.00	66.76	74.00	-7.24	65.74	1.02	Peak	181	221
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																		
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg																																		
1	5127.30	56.05	74.00	-17.95	54.91	1.14	Peak	181	221																																		
2	5352.00	66.76	74.00	-7.24	65.74	1.02	Peak	181	221																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Horizontal-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5457.22</td><td>61.78</td><td>74.00</td><td>-12.22</td><td>60.41</td><td>1.37</td><td>Peak</td><td>228</td><td>70</td></tr><tr><td>2</td><td>5469.29</td><td>64.97</td><td>68.20</td><td>-3.23</td><td>63.59</td><td>1.38</td><td>Peak</td><td>228</td><td>70</td></tr><tr><td>3</td><td>5731.63</td><td>55.30</td><td>68.20</td><td>-12.90</td><td>53.48</td><td>1.82</td><td>Peak</td><td>228</td><td>70</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5457.22	61.78	74.00	-12.22	60.41	1.37	Peak	228	70	2	5469.29	64.97	68.20	-3.23	63.59	1.38	Peak	228	70	3	5731.63	55.30	68.20	-12.90	53.48	1.82	Peak	228	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5457.22	61.78	74.00	-12.22	60.41	1.37	Peak	228	70																																		
2	5469.29	64.97	68.20	-3.23	63.59	1.38	Peak	228	70																																		
3	5731.63	55.30	68.20	-12.90	53.48	1.82	Peak	228	70																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m) <			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																											
Level (dBuV/m) UNII 1~2-PK Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5455.44</td><td>58.98</td><td>74.00</td><td>-15.02</td><td>57.61</td><td>1.37</td><td>Peak</td><td>183</td><td>151</td></tr><tr><td>2</td><td>5468.93</td><td>62.87</td><td>68.20</td><td>-5.33</td><td>61.50</td><td>1.37</td><td>Peak</td><td>183</td><td>151</td></tr><tr><td>3</td><td>5731.99</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>53.72</td><td>1.82</td><td>Peak</td><td>183</td><td>151</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5455.44	58.98	74.00	-15.02	57.61	1.37	Peak	183	151	2	5468.93	62.87	68.20	-5.33	61.50	1.37	Peak	183	151	3	5731.99	55.54	68.20	-12.66	53.72	1.82	Peak	183	151
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5455.44	58.98	74.00	-15.02	57.61	1.37	Peak	183	151																																		
2	5468.93	62.87	68.20	-5.33	61.50	1.37	Peak	183	151																																		
3	5731.99	55.54	68.20	-12.66	53.72	1.82	Peak	183	151																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) <			



Band Edge measurement

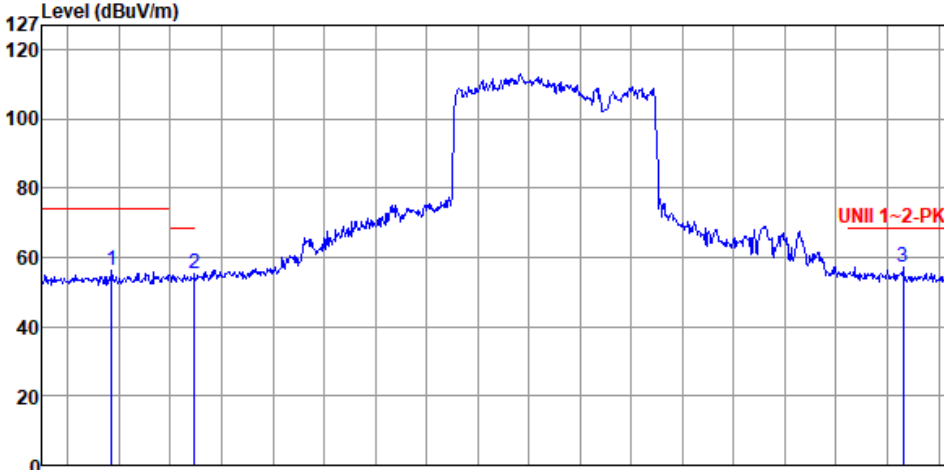
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5436.98</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>54.92</td><td>1.33</td><td>Peak</td><td>193</td><td>139</td></tr><tr><td>2</td><td>5469.29</td><td>55.31</td><td>68.20</td><td>-12.89</td><td>53.93</td><td>1.38</td><td>Peak</td><td>193</td><td>139</td></tr><tr><td>3</td><td>5746.19</td><td>57.29</td><td>68.20</td><td>-10.91</td><td>55.43</td><td>1.86</td><td>Peak</td><td>193</td><td>139</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5436.98	56.25	74.00	-17.75	54.92	1.33	Peak	193	139	2	5469.29	55.31	68.20	-12.89	53.93	1.38	Peak	193	139	3	5746.19	57.29	68.20	-10.91	55.43	1.86	Peak	193	139
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5436.98	56.25	74.00	-17.75	54.92	1.33	Peak	193	139																																		
2	5469.29	55.31	68.20	-12.89	53.93	1.38	Peak	193	139																																		
3	5746.19	57.29	68.20	-10.91	55.43	1.86	Peak	193	139																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5680
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m)			



Band Edge measurement

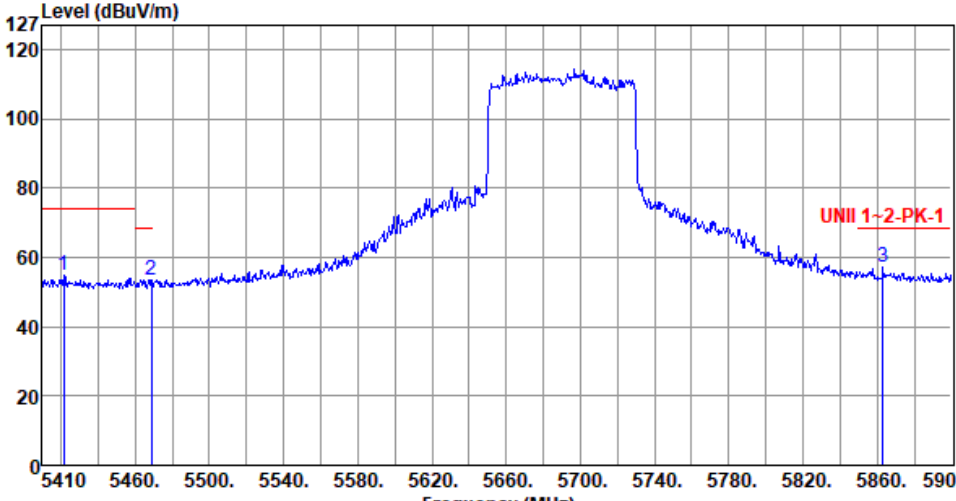
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5680
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5680																																								
Polarization	Vertical-Peak																																										
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62																																											
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5421.76</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>53.46</td><td>1.29</td><td>Peak</td><td>142</td><td>140</td></tr><tr><td>2</td><td>5468.80</td><td>53.57</td><td>68.20</td><td>-14.63</td><td>52.20</td><td>1.37</td><td>Peak</td><td>142</td><td>140</td></tr><tr><td>3</td><td>5863.25</td><td>57.17</td><td>68.20</td><td>-11.03</td><td>54.97</td><td>2.20</td><td>Peak</td><td>142</td><td>140</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5421.76	54.75	74.00	-19.25	53.46	1.29	Peak	142	140	2	5468.80	53.57	68.20	-14.63	52.20	1.37	Peak	142	140	3	5863.25	57.17	68.20	-11.03	54.97	2.20	Peak	142	140
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																		
1	5421.76	54.75	74.00	-19.25	53.46	1.29	Peak	142	140																																		
2	5468.80	53.57	68.20	-14.63	52.20	1.37	Peak	142	140																																		
3	5863.25	57.17	68.20	-11.03	54.97	2.20	Peak	142	140																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																											



Band Edge measurement

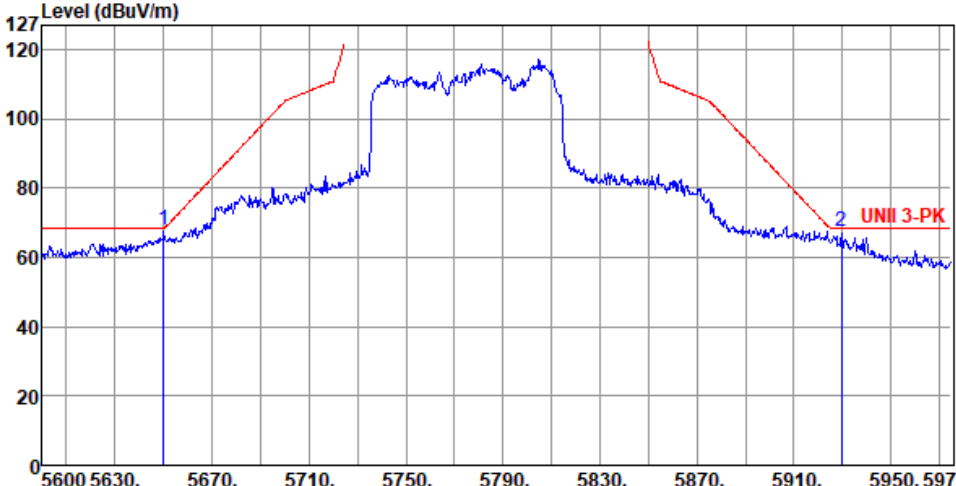
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5680
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):25 Humidity(%):62			
Level (dBUV/m) </			



Band Edge measurement

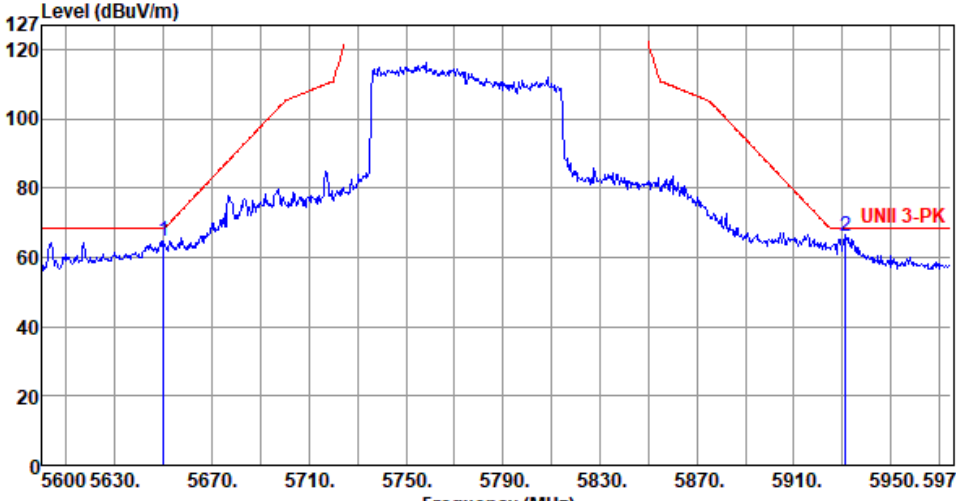
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5775																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5649.88</td><td>67.79</td><td>68.20</td><td>-0.41</td><td>66.30</td><td>1.49</td><td>Peak</td><td>138</td><td>118</td></tr><tr><td>2</td><td>5929.63</td><td>67.66</td><td>68.20</td><td>-0.54</td><td>65.33</td><td>2.33</td><td>Peak</td><td>231</td><td>232</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	67.79	68.20	-0.41	66.30	1.49	Peak	138	118	2	5929.63	67.66	68.20	-0.54	65.33	2.33	Peak	231	232
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	67.79	68.20	-0.41	66.30	1.49	Peak	138	118																								
2	5929.63	67.66	68.20	-0.54	65.33	2.33	Peak	231	232																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

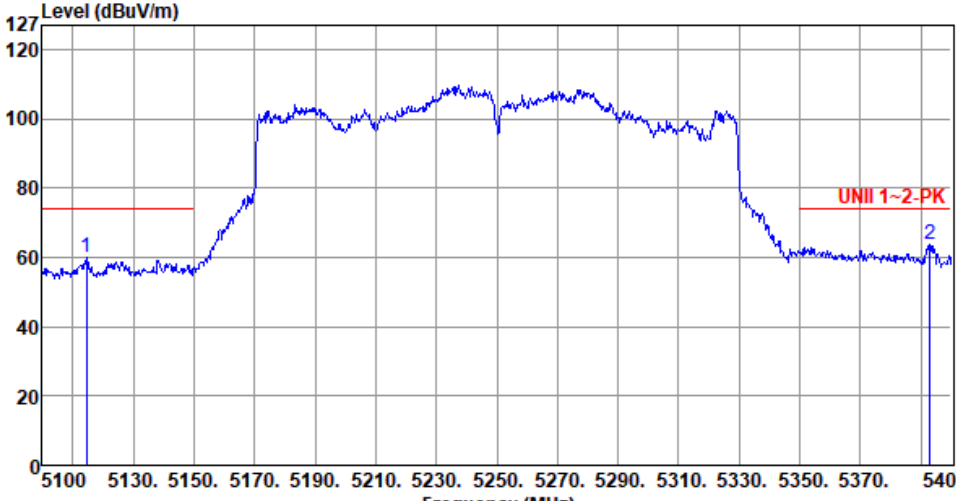
Appendix D

Modulation	11be EHT80	Test Freq. (MHz)	5775																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5649.88</td><td>64.76</td><td>68.20</td><td>-3.44</td><td>63.27</td><td>1.49</td><td>Peak</td><td>178</td><td>142</td></tr><tr><td>2</td><td>5931.50</td><td>66.22</td><td>68.20</td><td>-1.98</td><td>63.89</td><td>2.33</td><td>Peak</td><td>208</td><td>225</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5649.88	64.76	68.20	-3.44	63.27	1.49	Peak	178	142	2	5931.50	66.22	68.20	-1.98	63.89	2.33	Peak	208	225
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5649.88	64.76	68.20	-3.44	63.27	1.49	Peak	178	142																								
2	5931.50	66.22	68.20	-1.98	63.89	2.33	Peak	208	225																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																	



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250																														
Polarization	Horizontal-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5114.70</td><td>59.83</td><td>74.00</td><td>-14.17</td><td>58.70</td><td>1.13</td><td>Peak</td><td>307</td><td>262</td></tr><tr><td>2</td><td>5392.80</td><td>63.88</td><td>74.00</td><td>-10.12</td><td>62.67</td><td>1.21</td><td>Peak</td><td>244</td><td>242</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5114.70	59.83	74.00	-14.17	58.70	1.13	Peak	307	262	2	5392.80	63.88	74.00	-10.12	62.67	1.21	Peak	244	242
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5114.70	59.83	74.00	-14.17	58.70	1.13	Peak	307	262																								
2	5392.80	63.88	74.00	-10.12	62.67	1.21	Peak	244	242																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																	



Band Edge measurement

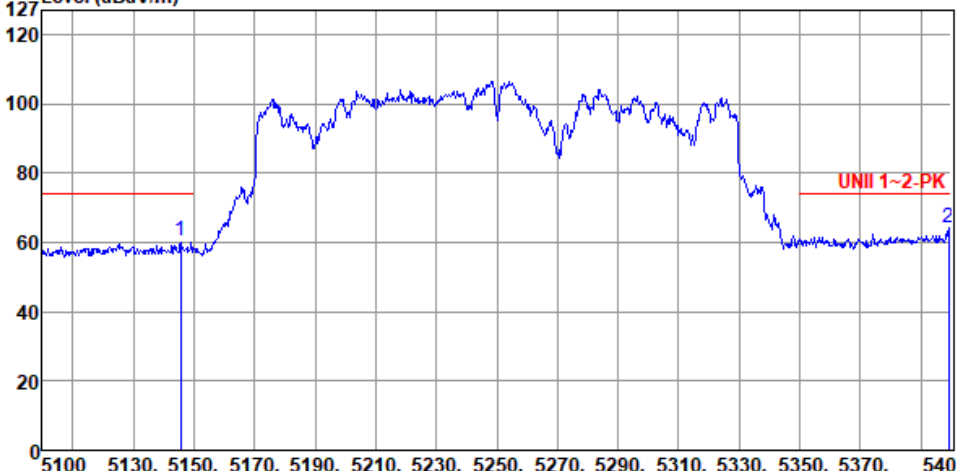
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250																														
Polarization	Vertical-Peak																																
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63																																	
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5145.60</td><td>60.24</td><td>74.00</td><td>-13.76</td><td>59.05</td><td>1.19</td><td>Peak</td><td>171</td><td>263</td></tr><tr><td>2</td><td>5399.10</td><td>64.12</td><td>74.00</td><td>-9.88</td><td>62.87</td><td>1.25</td><td>Peak</td><td>167</td><td>270</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5145.60	60.24	74.00	-13.76	59.05	1.19	Peak	171	263	2	5399.10	64.12	74.00	-9.88	62.87	1.25	Peak	167	270
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																								
1	5145.60	60.24	74.00	-13.76	59.05	1.19	Peak	171	263																								
2	5399.10	64.12	74.00	-9.88	62.87	1.25	Peak	167	270																								



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m) </			



Band Edge measurement

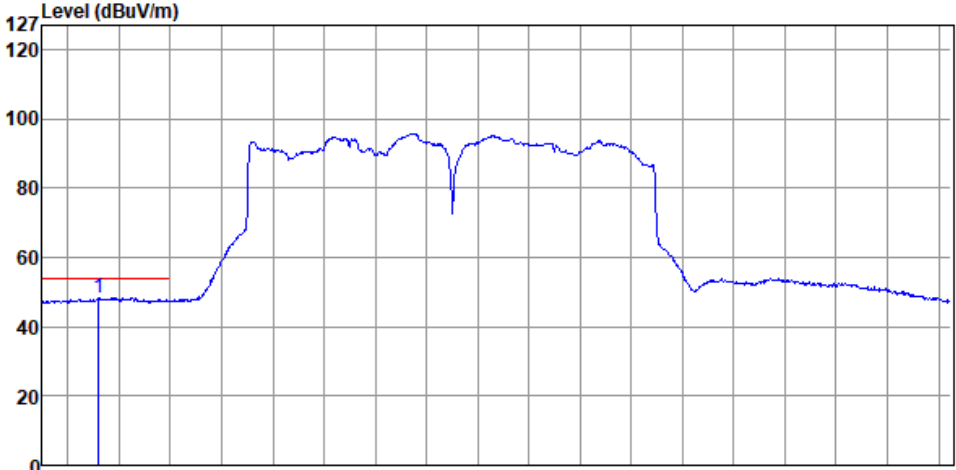
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal-Peak		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)			



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal-Average		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBuV/m)  Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB reading dB/m High Table dBuV dBuV cm deg 1 5432.01 48.20 54.00 -5.80 46.88 1.32 Average 303 237			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).			



Band Edge measurement

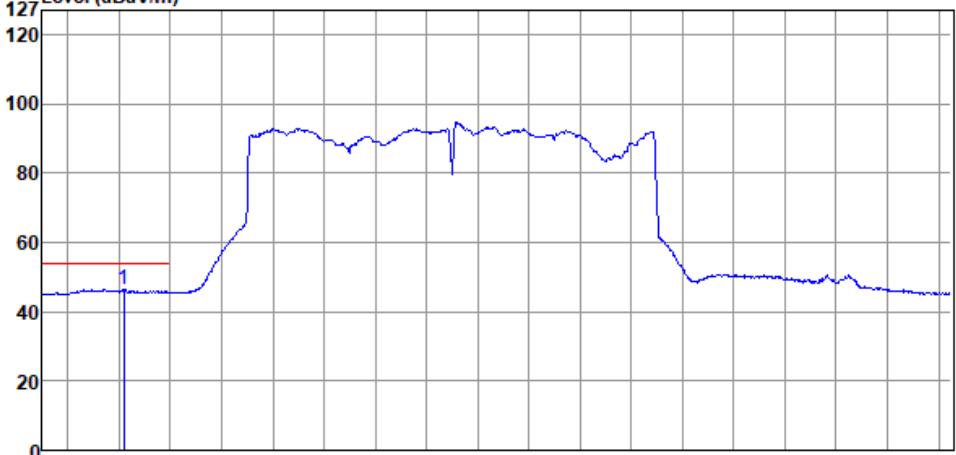
Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical-Peak		
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63			
Level (dBUV/m) UNII 1~2-PK Freq. Emission Limit Margin SA Factor Remark ANT Turn level dBUV/m dBUV/m dB reading MHz dBUV/m dB dBUV dB/m cm Table 			



Band Edge measurement

Appendix D

Modulation	11be EHT160	Test Freq. (MHz)	5570						
Polarization	Vertical-Average								
Test By :Akun Chung- Temperature(°C):23 Humidity(%):63									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		cm	deg
1	5441.95	46.38	54.00	-7.62	45.03	1.35	Average	129	268

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-2.52	-2.66	-1.99	-2.82
T20°CVmin	-2.47	-1.86	-2.59	-2.62
T40°CVnom	-6.90	-6.98	-6.21	-6.85
T30°CVnom	-6.80	-7.21	-6.77	-6.84
T20°CVnom	-2.40	-2.33	-1.74	-2.32
T10°CVnom	2.33	2.83	2.77	1.87
T5°CVnom	2.30	2.88	2.16	1.96
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 5	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-2.22	-2.07	-1.72	-2.22
T20°CVmin	-2.14	-1.88	-1.51	-2.05
T40°CVnom	-6.94	-7.02	-6.65	-6.94
T30°CVnom	-4.82	-4.75	-4.62	-4.54
T20°CVnom	-1.98	-1.47	-2.09	-1.38
T10°CVnom	0.06	0.46	-0.03	-0.12
T5°CVnom	0.76	1.51	1.48	0.43
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 5	



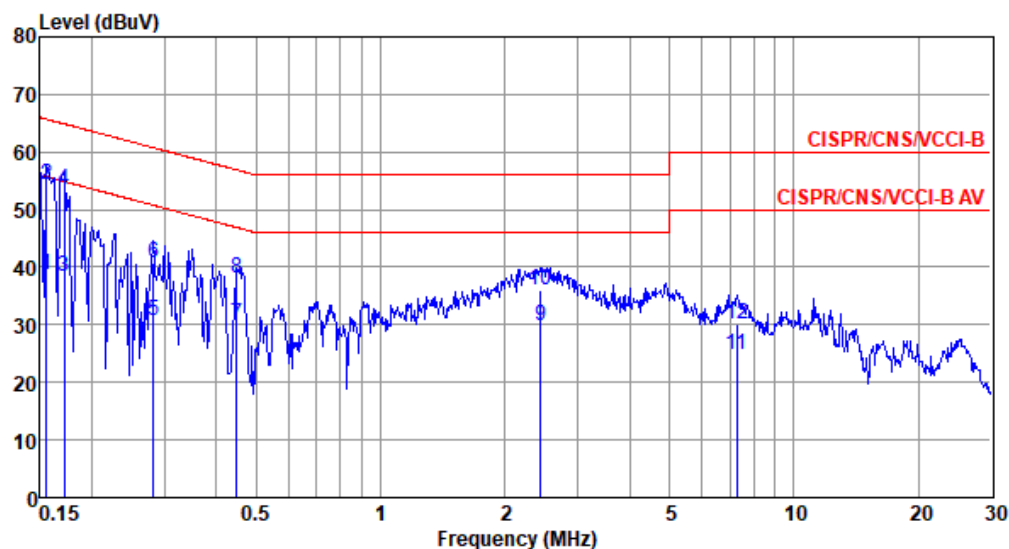
Non-beamforming mode

Modulation Mode	11a	Test Freq. (MHz)	5785
Power Phase	Line		

Test by : Joe Liao

Temperature: 21°C

Humidity: 65%



	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	38.62	55.69	-17.07	28.78	9.65	0.03	0.16	Average
2	0.156	54.21	65.69	-11.48	44.37	9.65	0.03	0.16	QP
3	0.171	38.26	54.90	-16.64	28.42	9.65	0.03	0.16	Average
4*	0.171	53.47	64.90	-11.43	43.63	9.65	0.03	0.16	QP
5	0.282	30.57	50.76	-20.19	20.70	9.64	0.04	0.19	Average
6	0.282	40.76	60.76	-20.00	30.89	9.64	0.04	0.19	QP
7	0.449	30.13	46.89	-16.76	20.22	9.64	0.04	0.23	Average
8	0.449	37.98	56.89	-18.91	28.07	9.64	0.04	0.23	QP
9	2.435	29.93	46.00	-16.07	19.72	9.66	0.11	0.44	Average
10	2.435	36.03	56.00	-19.97	25.82	9.66	0.11	0.44	QP
11	7.290	24.94	50.00	-25.06	14.45	9.70	0.20	0.59	Average
12	7.290	30.00	60.00	-30.00	19.51	9.70	0.20	0.59	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



Modulation Mode	11a	Test Freq. (MHz)	5785																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 21°C Humidity: 65%																																																																																																																																					
Level (dBuV) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.153</td><td>38.98</td><td>55.82</td><td>-16.84</td><td>29.09</td><td>9.64</td><td>0.03</td><td>0.22</td><td>Average</td></tr><tr><td>2*</td><td>0.153</td><td>56.26</td><td>65.82</td><td>-9.56</td><td>46.37</td><td>9.64</td><td>0.03</td><td>0.22</td><td>QP</td></tr><tr><td>3</td><td>0.168</td><td>38.35</td><td>55.08</td><td>-16.73</td><td>28.43</td><td>9.64</td><td>0.03</td><td>0.25</td><td>Average</td></tr><tr><td>4</td><td>0.168</td><td>53.20</td><td>65.08</td><td>-11.88</td><td>43.28</td><td>9.64</td><td>0.03</td><td>0.25</td><td>QP</td></tr><tr><td>5</td><td>0.360</td><td>28.80</td><td>48.74</td><td>-19.94</td><td>18.79</td><td>9.63</td><td>0.04</td><td>0.34</td><td>Average</td></tr><tr><td>6</td><td>0.360</td><td>39.65</td><td>58.74</td><td>-19.09</td><td>29.64</td><td>9.63</td><td>0.04</td><td>0.34</td><td>QP</td></tr><tr><td>7</td><td>2.077</td><td>27.56</td><td>46.00</td><td>-18.44</td><td>17.33</td><td>9.65</td><td>0.09</td><td>0.49</td><td>Average</td></tr><tr><td>8</td><td>2.077</td><td>34.37</td><td>56.00</td><td>-21.63</td><td>24.14</td><td>9.65</td><td>0.09</td><td>0.49</td><td>QP</td></tr><tr><td>9</td><td>4.478</td><td>26.16</td><td>46.00</td><td>-19.84</td><td>15.74</td><td>9.67</td><td>0.16</td><td>0.59</td><td>Average</td></tr><tr><td>10</td><td>4.478</td><td>31.91</td><td>56.00</td><td>-24.09</td><td>21.49</td><td>9.67</td><td>0.16</td><td>0.59</td><td>QP</td></tr><tr><td>11</td><td>6.627</td><td>23.92</td><td>50.00</td><td>-26.08</td><td>13.44</td><td>9.69</td><td>0.19</td><td>0.60</td><td>Average</td></tr><tr><td>12</td><td>6.627</td><td>29.19</td><td>60.00</td><td>-30.81</td><td>18.71</td><td>9.69</td><td>0.19</td><td>0.60</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.153	38.98	55.82	-16.84	29.09	9.64	0.03	0.22	Average	2*	0.153	56.26	65.82	-9.56	46.37	9.64	0.03	0.22	QP	3	0.168	38.35	55.08	-16.73	28.43	9.64	0.03	0.25	Average	4	0.168	53.20	65.08	-11.88	43.28	9.64	0.03	0.25	QP	5	0.360	28.80	48.74	-19.94	18.79	9.63	0.04	0.34	Average	6	0.360	39.65	58.74	-19.09	29.64	9.63	0.04	0.34	QP	7	2.077	27.56	46.00	-18.44	17.33	9.65	0.09	0.49	Average	8	2.077	34.37	56.00	-21.63	24.14	9.65	0.09	0.49	QP	9	4.478	26.16	46.00	-19.84	15.74	9.67	0.16	0.59	Average	10	4.478	31.91	56.00	-24.09	21.49	9.67	0.16	0.59	QP	11	6.627	23.92	50.00	-26.08	13.44	9.69	0.19	0.60	Average	12	6.627	29.19	60.00	-30.81	18.71	9.69	0.19	0.60	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.153	38.98	55.82	-16.84	29.09	9.64	0.03	0.22	Average																																																																																																																												
2*	0.153	56.26	65.82	-9.56	46.37	9.64	0.03	0.22	QP																																																																																																																												
3	0.168	38.35	55.08	-16.73	28.43	9.64	0.03	0.25	Average																																																																																																																												
4	0.168	53.20	65.08	-11.88	43.28	9.64	0.03	0.25	QP																																																																																																																												
5	0.360	28.80	48.74	-19.94	18.79	9.63	0.04	0.34	Average																																																																																																																												
6	0.360	39.65	58.74	-19.09	29.64	9.63	0.04	0.34	QP																																																																																																																												
7	2.077	27.56	46.00	-18.44	17.33	9.65	0.09	0.49	Average																																																																																																																												
8	2.077	34.37	56.00	-21.63	24.14	9.65	0.09	0.49	QP																																																																																																																												
9	4.478	26.16	46.00	-19.84	15.74	9.67	0.16	0.59	Average																																																																																																																												
10	4.478	31.91	56.00	-24.09	21.49	9.67	0.16	0.59	QP																																																																																																																												
11	6.627	23.92	50.00	-26.08	13.44	9.69	0.19	0.60	Average																																																																																																																												
12	6.627	29.19	60.00	-30.81	18.71	9.69	0.19	0.60	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					



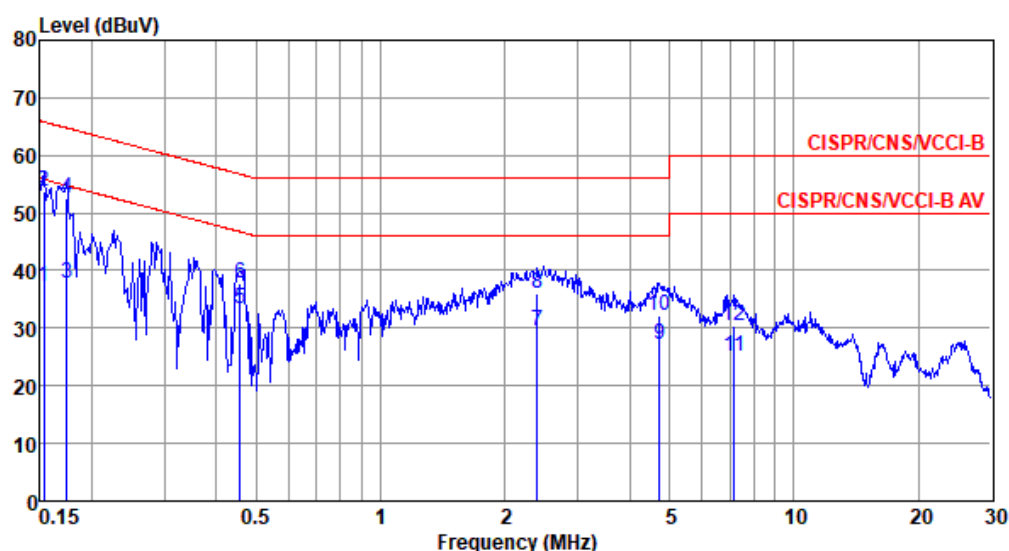
Beamforming mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5785
Power Phase	Line		

Test by : Joe Liao

Temperature: 21°C

Humidity: 65%



	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	37.13	55.82	-18.69	27.29	9.65	0.03	0.16	Average
2*	0.153	53.81	65.82	-12.01	43.97	9.65	0.03	0.16	QP
3	0.174	37.68	54.77	-17.09	27.84	9.64	0.04	0.16	Average
4	0.174	52.50	64.77	-12.27	42.66	9.64	0.04	0.16	QP
5	0.456	33.30	46.76	-13.46	23.39	9.64	0.04	0.23	Average
6	0.456	37.72	56.76	-19.04	27.81	9.64	0.04	0.23	QP
7	2.396	29.65	46.00	-16.35	19.44	9.66	0.11	0.44	Average
8	2.396	36.09	56.00	-19.91	25.88	9.66	0.11	0.44	QP
9	4.721	27.08	46.00	-18.92	16.68	9.68	0.16	0.56	Average
10	4.721	32.05	56.00	-23.95	21.65	9.68	0.16	0.56	QP
11	7.175	25.22	50.00	-24.78	14.73	9.70	0.20	0.59	Average
12	7.175	30.39	60.00	-29.61	19.90	9.70	0.20	0.59	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5785																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Joe Liao Temperature: 21°C Humidity: 65%																																																																																																																																					
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.156</td><td>36.08</td><td>55.69</td><td>-19.61</td><td>26.18</td><td>9.64</td><td>0.03</td><td>0.23</td><td>Average</td></tr><tr><td>2</td><td>0.156</td><td>52.87</td><td>65.69</td><td>-12.82</td><td>42.97</td><td>9.64</td><td>0.03</td><td>0.23</td><td>QP</td></tr><tr><td>3</td><td>0.172</td><td>38.81</td><td>54.86</td><td>-16.05</td><td>28.88</td><td>9.64</td><td>0.03</td><td>0.26</td><td>Average</td></tr><tr><td>4*</td><td>0.172</td><td>53.44</td><td>64.86</td><td>-11.42</td><td>43.51</td><td>9.64</td><td>0.03</td><td>0.26</td><td>QP</td></tr><tr><td>5</td><td>0.288</td><td>34.40</td><td>50.59</td><td>-16.19</td><td>24.40</td><td>9.63</td><td>0.04</td><td>0.33</td><td>Average</td></tr><tr><td>6</td><td>0.288</td><td>42.02</td><td>60.59</td><td>-18.57</td><td>32.02</td><td>9.63</td><td>0.04</td><td>0.33</td><td>QP</td></tr><tr><td>7</td><td>2.088</td><td>28.08</td><td>46.00</td><td>-17.92</td><td>17.85</td><td>9.65</td><td>0.09</td><td>0.49</td><td>Average</td></tr><tr><td>8</td><td>2.088</td><td>35.74</td><td>56.00</td><td>-20.26</td><td>25.51</td><td>9.65</td><td>0.09</td><td>0.49</td><td>QP</td></tr><tr><td>9</td><td>4.525</td><td>26.23</td><td>46.00</td><td>-19.77</td><td>15.81</td><td>9.67</td><td>0.16</td><td>0.59</td><td>Average</td></tr><tr><td>10</td><td>4.525</td><td>31.96</td><td>56.00</td><td>-24.04</td><td>21.54</td><td>9.67</td><td>0.16</td><td>0.59</td><td>QP</td></tr><tr><td>11</td><td>6.841</td><td>24.77</td><td>50.00</td><td>-25.23</td><td>14.27</td><td>9.70</td><td>0.20</td><td>0.60</td><td>Average</td></tr><tr><td>12</td><td>6.841</td><td>29.96</td><td>60.00</td><td>-30.04</td><td>19.46</td><td>9.70</td><td>0.20</td><td>0.60</td><td>QP</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.156	36.08	55.69	-19.61	26.18	9.64	0.03	0.23	Average	2	0.156	52.87	65.69	-12.82	42.97	9.64	0.03	0.23	QP	3	0.172	38.81	54.86	-16.05	28.88	9.64	0.03	0.26	Average	4*	0.172	53.44	64.86	-11.42	43.51	9.64	0.03	0.26	QP	5	0.288	34.40	50.59	-16.19	24.40	9.63	0.04	0.33	Average	6	0.288	42.02	60.59	-18.57	32.02	9.63	0.04	0.33	QP	7	2.088	28.08	46.00	-17.92	17.85	9.65	0.09	0.49	Average	8	2.088	35.74	56.00	-20.26	25.51	9.65	0.09	0.49	QP	9	4.525	26.23	46.00	-19.77	15.81	9.67	0.16	0.59	Average	10	4.525	31.96	56.00	-24.04	21.54	9.67	0.16	0.59	QP	11	6.841	24.77	50.00	-25.23	14.27	9.70	0.20	0.60	Average	12	6.841	29.96	60.00	-30.04	19.46	9.70	0.20	0.60	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.156	36.08	55.69	-19.61	26.18	9.64	0.03	0.23	Average																																																																																																																												
2	0.156	52.87	65.69	-12.82	42.97	9.64	0.03	0.23	QP																																																																																																																												
3	0.172	38.81	54.86	-16.05	28.88	9.64	0.03	0.26	Average																																																																																																																												
4*	0.172	53.44	64.86	-11.42	43.51	9.64	0.03	0.26	QP																																																																																																																												
5	0.288	34.40	50.59	-16.19	24.40	9.63	0.04	0.33	Average																																																																																																																												
6	0.288	42.02	60.59	-18.57	32.02	9.63	0.04	0.33	QP																																																																																																																												
7	2.088	28.08	46.00	-17.92	17.85	9.65	0.09	0.49	Average																																																																																																																												
8	2.088	35.74	56.00	-20.26	25.51	9.65	0.09	0.49	QP																																																																																																																												
9	4.525	26.23	46.00	-19.77	15.81	9.67	0.16	0.59	Average																																																																																																																												
10	4.525	31.96	56.00	-24.04	21.54	9.67	0.16	0.59	QP																																																																																																																												
11	6.841	24.77	50.00	-25.23	14.27	9.70	0.20	0.60	Average																																																																																																																												
12	6.841	29.96	60.00	-30.04	19.46	9.70	0.20	0.60	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					