

Nemko Test Report: 1L0489RUS2

Applicant: Adtran
901 Explorer Blvd.
Huntsville, AL 35806

Equipment Under Test (EUT): Tracer 2631 Baseband Processor with Tracer 3101
RFC

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Direct Sequence Spread Spectrum Transmitters

Tested By: Nemko Dallas Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

Authorized By:

A handwritten signature in blue ink, appearing to read "John F. Kealy", is written over the "Authorized By:" label.

Date: 3/19/02

Total Number of Pages: 25

Table of Contents

Section 1. Summary of Test Results.....	3
Section 2. Equipment Under Test (E.U.T.)	5
Section 3. Spurious Emissions (Radiated)	8
Section 4. Test Equipment List.....	11
ANNEX A - TEST DETAILS	12
ANNEX B - TEST DIAGRAMS.....	22

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Section 1. Summary of Test Results

Manufacturer: Adtran

Model No.: Tracer 2631 Baseband Processor with Tracer 3101 RFC

Serial No.: None

General:

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Direct Sequence Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

☐

New Submission

☒

Production Unit

☒

Class II Permissive Change

☐

Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST
SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



NVLAP LAB CODE: 100426-0

Nemko Dallas Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Dallas Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFCPROJECT NO.: 1L0489RUS2

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
Powerline Conducted Emissions	15.207(a)	48 dB μ V	Not Applicable
Minimum 6 dB Bandwidth	15.247(a)(2)	>500 kHz	Not Applicable
Maximum Peak Power Output	15.247(b)(1)	<1 Watt	Not Applicable
Spurious Emissions (Antenna Conducted)	15.247(c)	-20 dBc/100kHz	Not Applicable
Spurious Emissions (Restricted Bands)	15.247(c)	< 74 dBuV/m Peak < 54 dBuV/m Avg	Complies
Peak Power Spectral Density	15.247(d)	+8 dBm/3kHz	Not Applicable
Processing Gain	15.247(e)	10 dB	Not Applicable

Footnotes:

This report is to support a Class II Permissive Change for this equipment. The RFC unit has not been modified. The baseband processor unit has been modified to provide for different data inputs.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band:

- ☐ 902 – 928 MHz
☒ 2400 – 2483.5 MHz
☐ 5725 – 5850 MHz

Channel Spacing:

Operates on single channel 2422 or 2462 MHz

User Frequency Adjustment:

Hardware controlled. Set at factory.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Description of Modification for Modification Filing

Modifications were made to the baseband processor Unit to allow for different data interfaces.


EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Theory of Operation

The TRACER provides dual T1 transport by way of a spread spectrum microwave link for distances up to 30 miles or more depending on path engineering. System performance is determined, in part, by the engineering of the microwave link. Each end of a TRACER link is composed of two units – the baseband processor (BBP) and the radio frequency converter (RFC). Two DS1/DSX-1 (T1) interfaces are provided on the rear of the BBP, which can be mounted in a 19-inch rack. The DS1/DSX-1 interface provides connections up to 6000 feet from T1 equipment. A single coaxial cable connects the BBP to the RFC and another connects the RFC to the antenna.

System Diagram

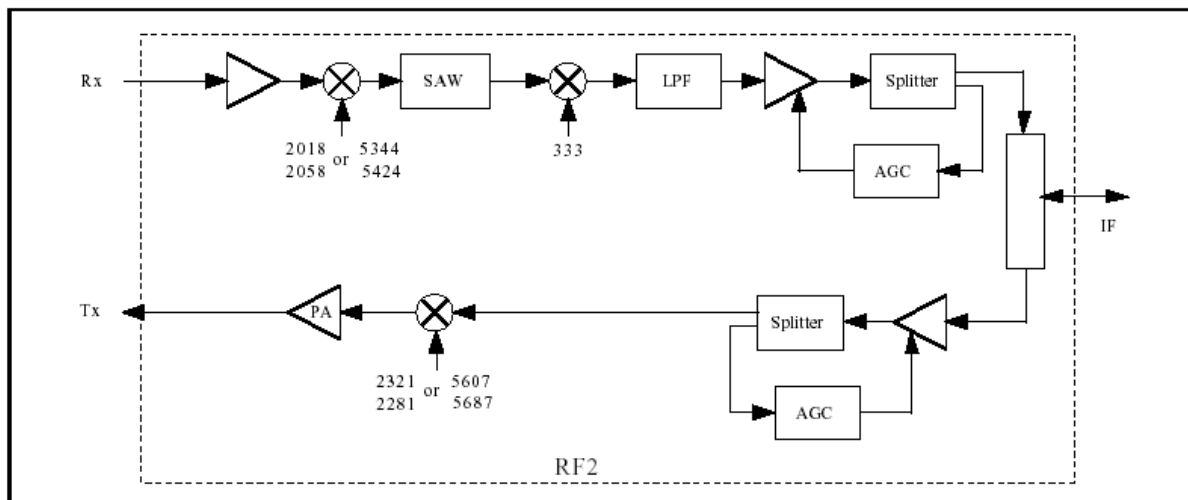

RFC Function Block Diagram

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFCPROJECT NO.: 1L0489RUS2

Section 3. Spurious Emissions (Radiated)

NAME OF TEST: Peak Power Output	PARA. NO.: 15.247 (c)
TESTED BY: Lance Walker	DATE:9/21/2001

Test Results: Complies.**Measurement Data:** See attached table.**Duty Cycle Calculation:**Duty Cycle correction factor(dB) = $20 \log (rf_{ON} \text{ in ms}/100\text{ms})$ **Measurement Uncertainty:** +/- 0.7 dB

PROJECT NO.: 1L0489RUS2



802 N. Kealy
Lewisville, TX 75057
Tel: (972) 436-9600
Fax: (972) 436-2667

Page 1 of

Test Equipment Used

Additional
equipment used: _____
Measurement
Uncertainty: +/-1.6 dB



[illegible]

Notes: traced higher nothing but Noise Floor

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Radiated Photographs (Worst Case Configuration)

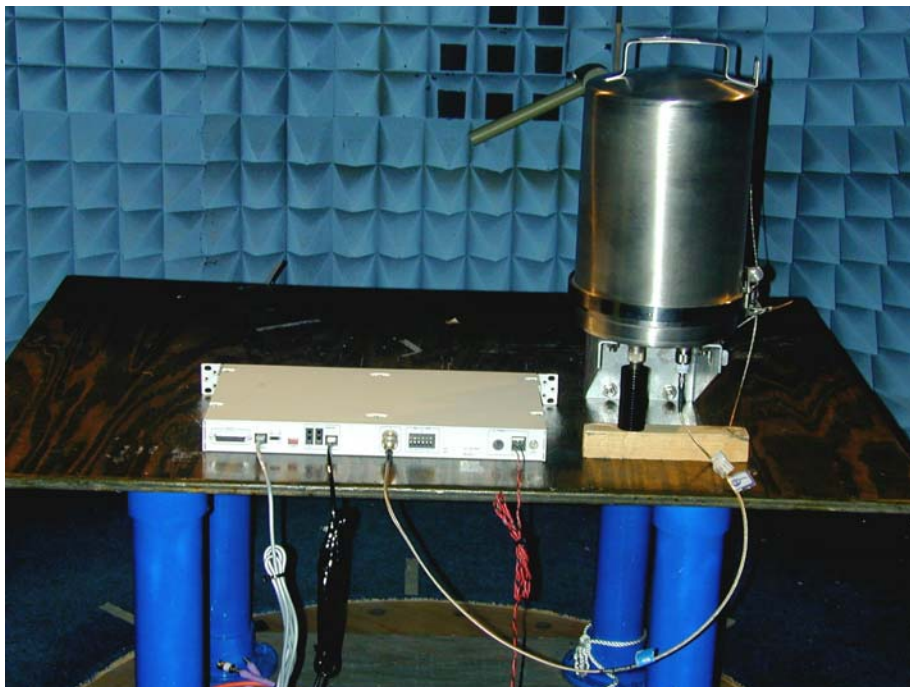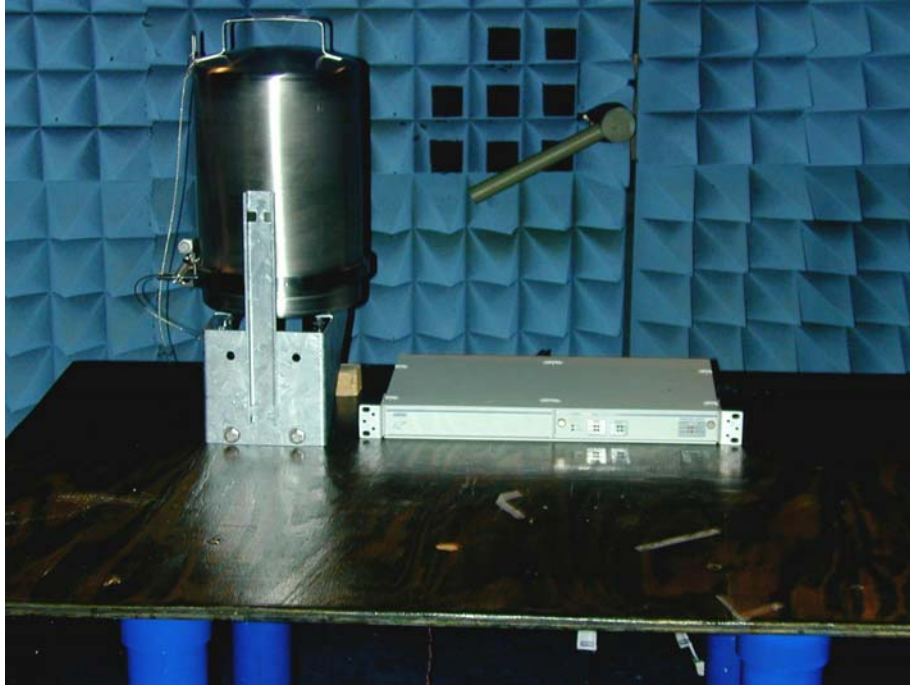

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFCPROJECT NO.: 1L0489RUS2

Section 4. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date
993	Horn antenna	A.H. Systems SAS-200/571	XXX	07/16/99
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/30/01
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/02/01
1484	Cable 2.0-18.0 Ghz	Storm PR90-010-072	N/A	06/01/01
1485	Cable 2.0-18.0 Ghz	Storm PR90-010-216	N/A	06/01/01

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

ANNEX A - TEST DETAILS

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
---	----------------------

Minimum Standard:

The R.F. that is conducted back onto the AC power line on any frequency within the band 0.45 to 30 MHz shall not exceed 250 μ V (48 dB μ V) across 50 ohms.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Minimum 6 dB bandwidth	PARA. NO.: 15.247(a)(2)
--------------------------------------	-------------------------

Minimum Standard: The minimum 6 dB bandwidth shall be at least 500 kHz

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Maximum Peak Output Power

PARA. NO.: 15.247(b)(1)

Minimum Standard: The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Calculation Of EIRP For Integral Antenna:

If the antenna is not detachable from the circuit then the Peak Power Output is derived from the peak radiated field strength of the fundamental emission by using the plane wave relation $GP/4\pi R^2 = E^2/120\pi$ and proceeding as follows:

$$P = \frac{E^2 R^2}{30G} = \frac{E^2 3^2}{30G}$$

where,

P = the equivalent isotropic radiated power in watts

E = the maximum measured field strength in V/m

R = the measurement range (3 meters)

G = the numeric gain of the transmit antenna in relation to an isotropic radiator

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFCPROJECT NO.: 1L0489RUS2

The RBW of the spectrum analyzer shall be set to a value greater than the measured 6 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: RF Exposure	PARA. NO.: 15.247(b)(4)
---------------------------	-------------------------

Minimum Standard:

Systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines stipulated in 1.1307(b)(1) of CFR 47.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Spurious Emissions(conducted)

PARA. NO.: 15.247(c)

Minimum Standard:

In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM IS SEARCHED TO THE 10th HARMONIC OF THE HIGHEST FREQUENCY GENERATED IN THE EUT.

Method Of Measurement:

30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Radiated Spurious Emissions

PARA. NO.: 15.247(c)

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Transmitter Power Density

PARA. NO.: 15.247(d)

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement: The spectrum analyzer is set as follows:

RBW: 3 kHz

VBW: >3 kHz

Span: => measured 6 dB bandwidth

Sweep: Span(kHz)/3 (i.e. for a span of 1.5 MHz the sweep rate is $1500/3 = 500$ sec.

LOG dB/div.: 2 dB

Note: For devices with spectrum line spacing ≤ 3 kHz, the RBW of the analyzer is reduced until the spectral lines are resolved. The measurement data is normalized to 3 kHz by summing the power of all the individual spectral lines within a 3 kHz band in linear power units.

For Devices With Integral Antenna:

For devices with non-detachable antennas, the received field strength is peaked and the spectrum analyzer is set as above. The peak emission level is then measured and converted to a field strength by adding the appropriate antenna factor and cable loss. This field strength is then converted to an equivalent isotropic radiated power using the same method as described for Peak Power output.

Number of channels tested:

Tuning Range	Number Of Channels Tested	Channel Location In Band
1 MHz or Less	1	Middle
1 to 10 MHz	2	Top And Bottom
More Than 10 MHz	3	Top, Middle, Bottom

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

NAME OF TEST: Processing Gain

PARA. NO.: 15.247(e)

Minimum Standard: The processing gain shall be at least 10 dB.

Method Of Measurement: The CW jamming margin method was used to determine the processing gain. A CW signal generator is stepped across the passband of the receiver in 50 kHz increments. At each point the signal generator level required to obtain the recommended bit error rate is recorded. The jammer to signal ratio (J/S) is then calculated. The worst 20% of the J/S points is discarded. The lowest remaining J/S ratio is used to calculate the processing gain.

Calculation Of Processing Gain:

The processing gain was determined by measuring the jamming margin of the E.U.T. and using the following formula:

$$\text{Jamming Margin} = G_p - (S/N)_{\text{out}} - L_{\text{sys}}$$

For a receiver using non-coherent detection the value $(S/N)_{\text{out}}$ is calculated using the formula:

$P_e = (1/2)\text{EXP}\{-E/2N_o\}$ where P_e is the probability of error (minimum Bit Error Rate required for proper operation).

E/N_o is $(S/N)_{\text{out}}$

for example, for a bit error rate of 10^{-4} a S/N ratio of 12.3 dB is required.

L_{sys} (system losses) is assumed to be 2 dB.

$$\text{Therefore } G_p = M_j + (S/N)_{\text{out}} + L_{\text{sys}}$$

Measurement performed at a channel in the center of the operating band of the EUT.

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC


PROJECT NO.: 1L0489RUS2

ANNEX B - TEST DIAGRAMS


EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Test Site For Radiated Emissions

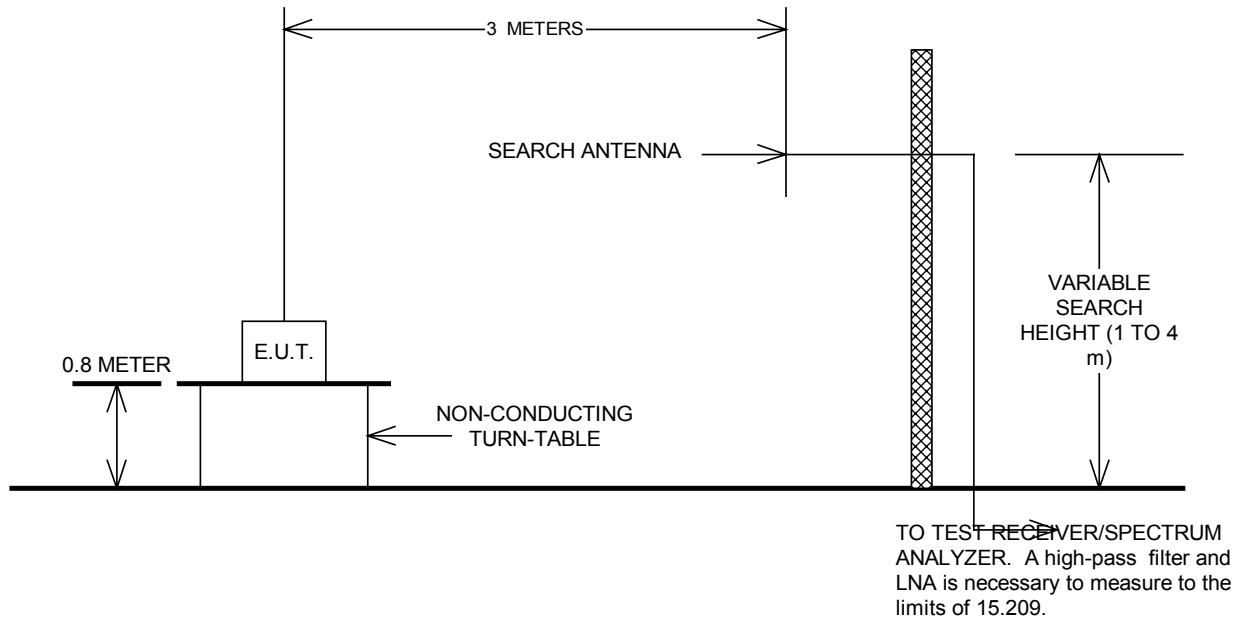


Conducted Emissions

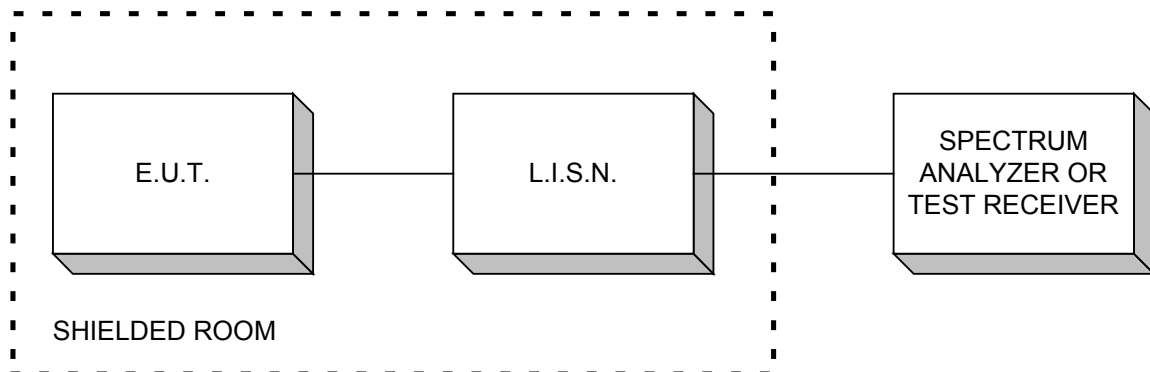


EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Peak Power At Antenna Terminals

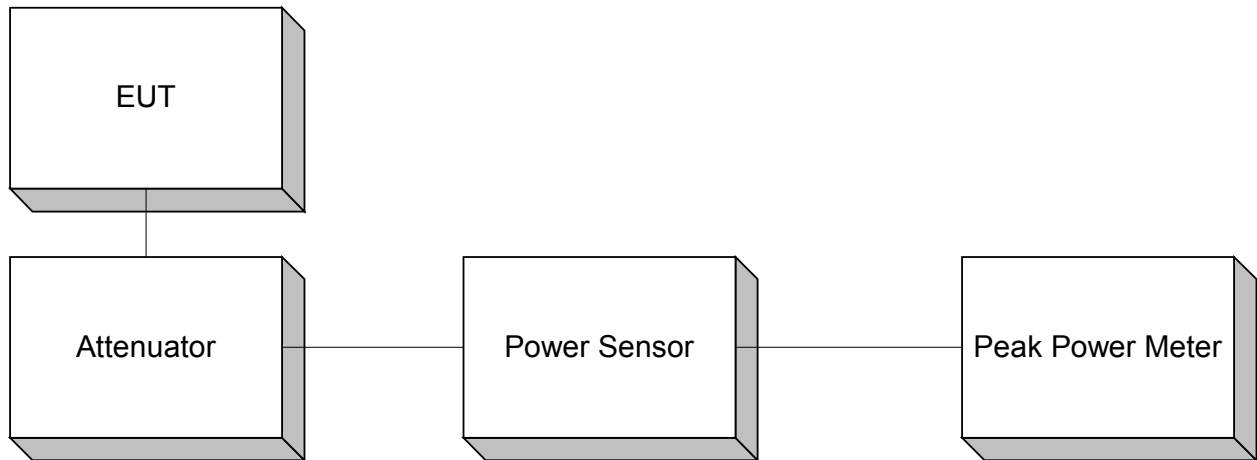


Minimum 6 dB Bandwidth Peak Power Spectral Density Spurious Emissions (conducted)

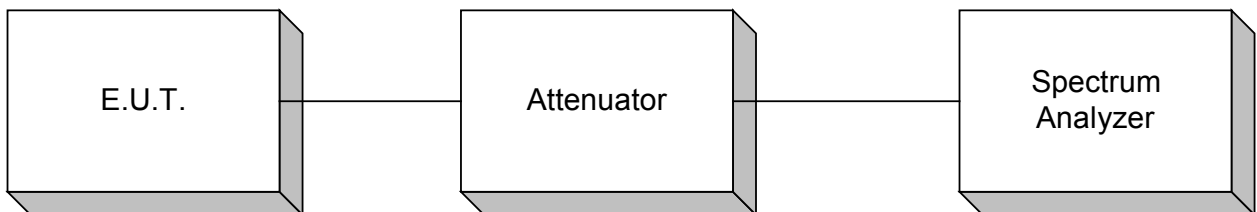

EQUIPMENT: Tracer 2631 Baseband Processor
with 3101 RFC

PROJECT NO.: 1L0489RUS2

Processing Gain

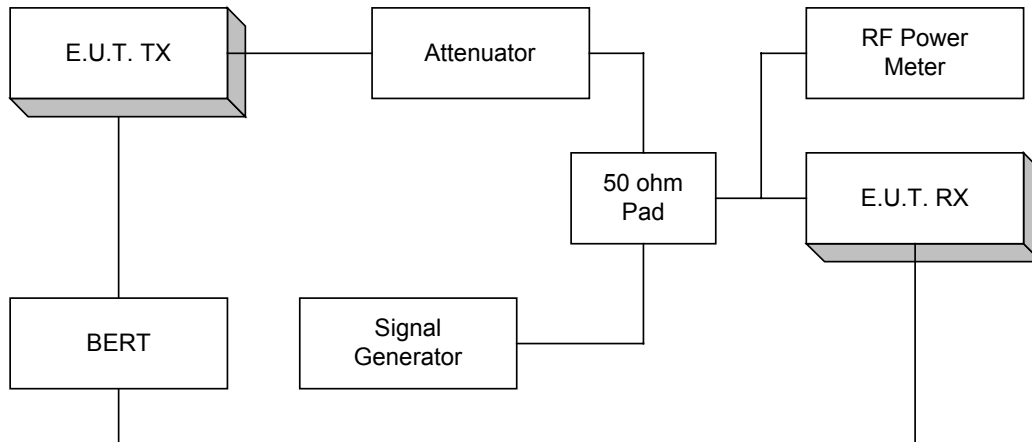

NOTE: This is a typical setup. The setup may vary slightly since many devices have BER test functions built into the device.