

FCC TEST REPORT

REPORT NO.: RF950215H01

MODEL NO.: VM1188T , SMCWSP-100, WM4101,
VM1185T, WSKP100, WM4201

RECEIVED: March 7, 2006

TESTED: March 10, 2006

ISSUED: March 11, 2006

APPLICANT: Accton Technology Corporation

ADDRESS: 4F., No.16, Lane 77, Sing-ai Rd., Neihs District,
Taipei City 114, Taiwan, (R.O.C.)

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	10
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	11
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3.5	DESCRIPTION OF SUPPORT UNITS	14
3.6	CONFIGURATION OF SYSTEM UNDER TEST	15
4	TEST TYPES AND RESULTS	18
4.1	CONDUCTED EMISSION MEASUREMENT	18
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	18
4.1.2	TEST INSTRUMENTS.....	18
4.1.3	TEST PROCEDURES	19
4.1.4	TEST SETUP	19
4.1.5	EUT OPERATING CONDITIONS	20
4.1.6	TEST RESULTS	21
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2	TEST INSTRUMENTS.....	26
4.2.3	TEST PROCEDURES	27
4.2.4	TEST SETUP	28
4.2.5	EUT OPERATING CONDITIONS	28
4.2.6	TEST RESULTS	29
4.2.7	TEST RESULTS - DSSS	33
4.2.8	TEST RESULTS - OFDM	36
4.3	6DB BANDWIDTH MEASUREMENT	39
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT	39
4.3.2	TEST INSTRUMENTS.....	39
4.3.3	TEST PROCEDURE.....	40
4.3.4	TEST SETUP	40
4.3.5	EUT OPERATING CONDITIONS	40
4.3.6	TEST RESULTS –DSSS.....	41
4.3.7	TEST RESULTS-OFDM	44
4.4	MAXIMUM PEAK OUTPUT POWER	47

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47
4.4.2	TEST INSTRUMENTS.....	47
4.4.3	TEST PROCEDURES	48
4.4.4	TEST SETUP	48
4.4.5	EUT OPERATING CONDITIONS	48
4.4.6	TEST RESULTS – DSSS.....	49
4.4.7	TEST RESULTS –OFDM.....	50
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	52
4.5.4	TEST SETUP	52
4.5.5	EUT OPERATING CONDITIONS	52
4.5.6	TEST RESULTS –DSSS.....	53
4.5.7	TEST RESULTS –OFDM.....	56
4.6	BAND EDGES MEASUREMENT	59
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	59
4.6.2	TEST INSTRUMENTS.....	59
4.6.3	TEST PROCEDURE.....	59
4.6.4	EUT OPERATING CONDITION.....	59
4.6.5	TEST RESULTS - DSSS	60
4.6.6	TEST RESULTS -OFDM	64
4.7	ANTENNA REQUIREMENT	68
4.7.1	STANDARD APPLICABLE	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION	68
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	69
6	INFORMATION ON THE TESTING LABORATORIES	75
	APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT : SIP WiFi Phone, VoIP SIP WiFi Phone,
VoWi-Fi Phone, Skype WiFi Phone

BRAND NAME : Accton, SMC, Edge-Core

MODEL NO. : VM1188T , SMCWSP-100, WM4101,
VM1185T, WSKP100, WM4201

TESTED: March 10, 2006

APPLICANT : Accton Technology Corporation

TEST ITEM: ENGINEERING SAMPLE

STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: VM1185T) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** March 11, 2006
(Carol Liao)

TECHNICAL
ACCEPTANCE : Hank Chung , **DATE:** March 11, 2006
Responsible for RF (Hank Chung)

APPROVED BY : May Chen , **DATE:** March 11, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is –18.39 dB at 0.447 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is –5.5 dB at 215.99 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	SIP WiFi Phone, VoIP SIP WiFi Phone, VoWi-Fi Phone, Skype WiFi Phone
MODEL NO.	VM1188T , SMCWSP-100, WM4101, VM1185T, WSKP100, WM4201
FCC ID	HEDVM1185T
POWER SUPPLY	DC 5V from power adapter or 3.7VDC from battery
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 46.774mW 802.11g: 75.858mW
ANTENNA TYPE	PIFA antenna with 5.5dBi antenna gain
I/O PORT	DC power Port x 1, USB Port x 1, Headset Port x 1
ASSOCIATED DEVICES	1. USB cable x 1 (1.2m, Unshielded, W/O core) 2. Earphone x 1 3. Battery (Brand: Formosa and WELLDONE) 4. AC Power Charger 5. Cradle

NOTE:

1. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.

2. The EUT has six models which are identical to each other in all aspects except for the followings:

Brand Name	Product Name	Model Name	Description
Accton	SIP WiFi Phone	VM1188T	a. SIP Phone b. SIP VI, and VoIP signaling protocol
SMC	VoIP SIP WiFi Phone	SMCWSP-100	
Edge-Core	VoWi-Fi Phone	WM4101	
Accton	Skype WiFi Phone	VM1185T	a. Skype Phone b. Skype VI, and VoIP signaling protocol
SMC	Skype WiFi Phone	WSKP100	
Edge-Core	Skype WiFi Phone	WM4201	

From the above models, model: **VM1185T** was selected as representative model for the test and its data were recorded in this report.

3. The EUT was pre-tested in chamber as the following test modes:

Test Mode	Description
Mode A	Battery 1 + Earphone + DC input through USB data cable
Mode B	Battery 2 + Earphone + DC input through USB data cable
Mode C	Battery 2 + Earphone + Power adapter
Mode D	Battery 2 + Cradle + DC input through USB data cable
Mode E	Battery 2 + Cradle + Power adapter

The worst was found in Mode B, C, D and E, the worse cases, were chosen for final test.

4. For Spurious Emissions test, the EUT was pre-tested under the following test modes for three different axes placements:

Test Mode	Description
Mode A	X-Y plane
Mode B	X-Z plane
Mode C	Y-Z plane

From the above modes, the worst emission level was found in **Mode B**. Therefore only the test data of the modes were recorded in this report individually.

5. The EUT must be supplied with a power adapter or rechargeable lithium ion battery and following different models could be chosen:

Adapter 1:	
Brand:	DVE
Model No.:	DSA-5P-05 FUS 050100
Input power :	AC 100-240V, 50/60Hz, 0.2A
Output power :	DC 5V 1.0A 1.8m/ nonshield/ without core
Adapter 2:	
Brand:	DVE
Model No.:	DSA-5P-05 FUK 050100
Input power :	AC 100-240V, 50/60Hz, 0.2A
Output power :	DC 5V 1.0A 1.6m/ nonshield/ without core
Adapter 3:	
Brand:	DVE
Model No.:	DSA-5P-05 FEU 050100
Input power :	AC 100-240V, 50/60Hz, 0.2A
Output power :	DC 5V 1.0A 1.6m/ nonshield/ without core
Battery 1:	
Brand:	Formosa
Model No.:	BI-NP60T-1K2KAX
Input power :	3.7 V
Output power :	1200 mAh
Battery 2:	
Brand:	WELLDONE
Model No.:	NP-60
Input power :	3.7 V
Output power :	1100mAh

From above adapters and batteries, **adapter 1** and **battery 2** were selected as representative for the test and its data were recorded in this report individually.

6. The EUT was tested with the following modes:

Conducted Emission	
Test Mode	Description
Mode 1	Battery 2 + Power adapter
Mode 2	Battery 2 + Cradle + Power adapter
Transmitter Radiated Emissions test (30MHz ~ 1GHz)	
Test Mode	Description
Mode 1	Battery 2 + Earphone + Power adapter
Mode 2	Battery 2 + Earphone + DC input through USB data cable
Mode 3	Battery 2 + Cradle + Power adapter
Mode 4	Battery 2 + Cradle + DC input through USB data cable
The others test	
Test Mode	Description
Mode 1	Battery 2 + Earphone + Power adapter

7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Skype WiFi Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP01L	TW-09C748-12800-165-3171	FCC DoC
2	PRINTER	HP	C2642A	MY79F1C3MZ	B94C2642X
3	MODEM	ACEEX	1414	0206026776	IFAXDM1414

No.	Signal cable description
1	NA
2	1.1 m braid shielded wire, terminated with DB25 connector via metallic frame, w/o core.
3	1.3 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core

Note: 1. All power cords of the above support units are unshielded (1.8m).


3.6 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted Emission test (Test Mode 1):

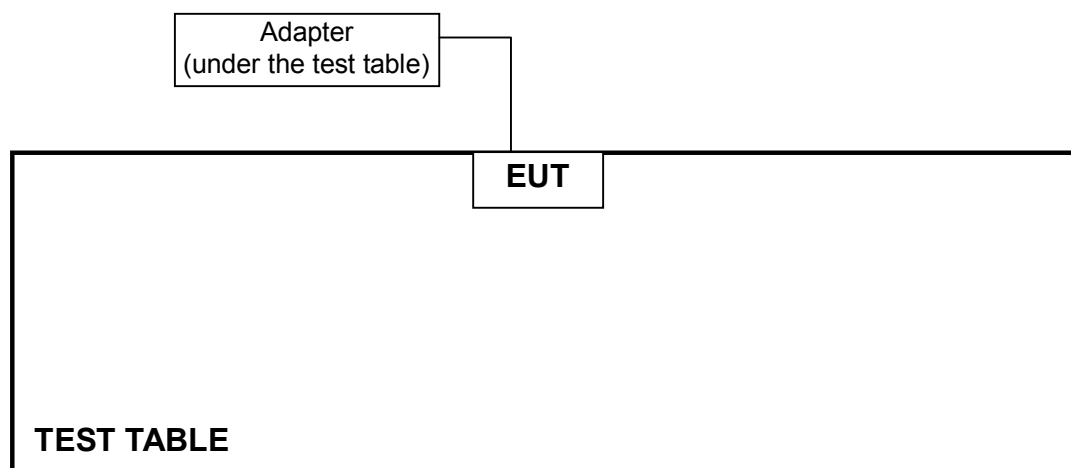


NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

For Conducted Emission test (Test Mode 2):

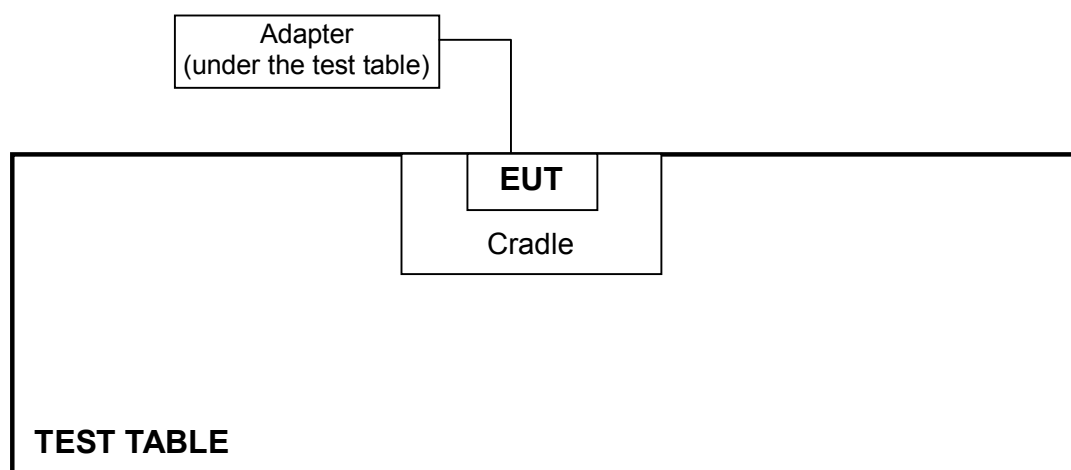


NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

For Transmitter Radiated Emissions test (30MHz ~ 1GHz) (Test Mode 1):

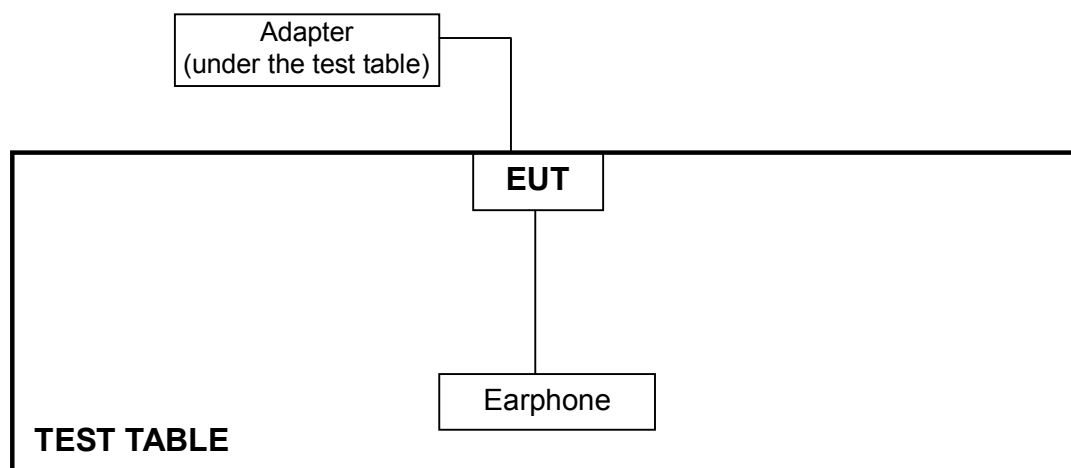


For Transmitter Radiated Emissions test (30MHz ~ 1GHz) (Test Mode 2):

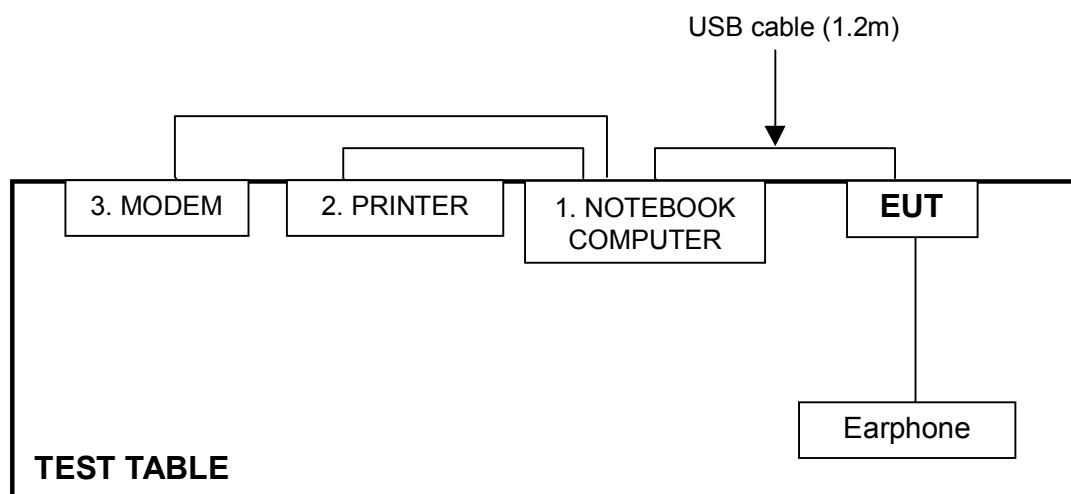


NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

For Transmitter Radiated Emissions test (30MHz ~ 1GHz) (Test Mode 3):

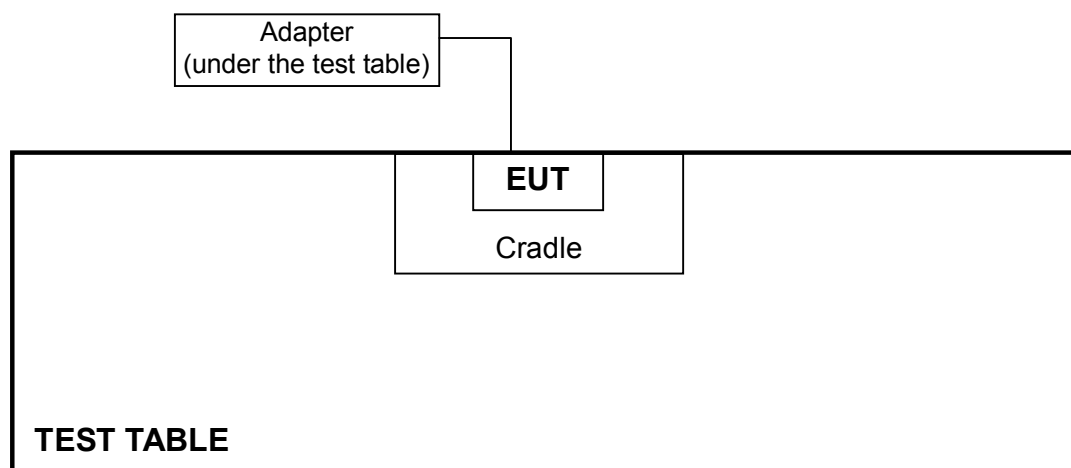

For Transmitter Radiated Emissions test (30MHz ~ 1GHz) (Test Mode 4):

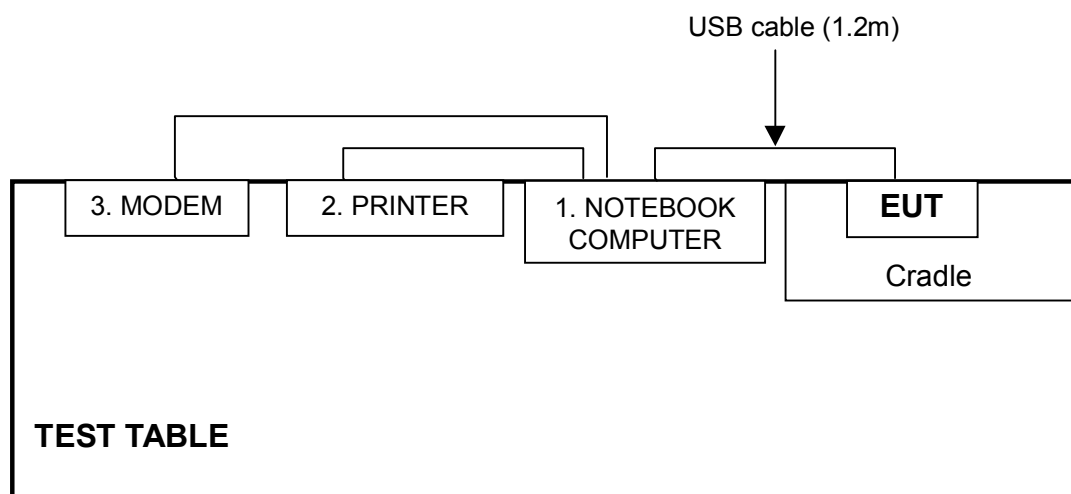

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Sep. 19, 2006
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
ROHDE & SCHWARZ LISN	KNW-407	8/1395/12	Jul. 19, 2006
RF Signal Cable	RG233/U	Cable_CA_02	Dec. 10, 2006
Terminator(for KYORITSU)	50	2	Oct. 08, 2006
Software	ADT_Cond_V7.3.2	NA	NA


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.
4. The measurement uncertainty is 2.26 dB, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

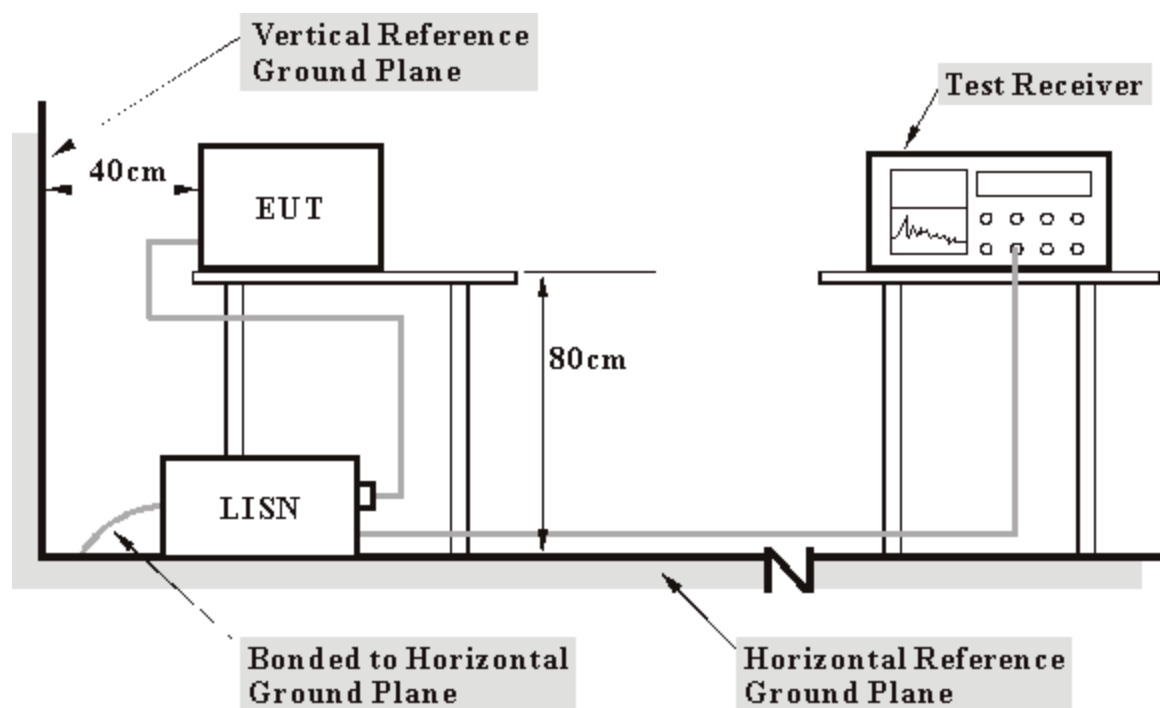

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Connect the EUT with the support unit 1 (Notebook computer) via one USB cable and placed it on the testing table.
- b. The support unit 1 (Notebook computer) ran a test program "HyperTerminal" to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to modem.
- d. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	PHASE	Line (L)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.60	24.73	-	34.33	-	63.42	53.42	-29.09	-
2	0.326	9.60	22.07	-	31.67	-	59.56	49.56	-27.89	-
3	0.408	9.60	20.76	-	30.36	-	57.69	47.69	-27.33	-
4	0.443	9.60	25.40	-	35.00	-	57.01	47.01	-22.01	-
5	0.826	9.60	20.46	-	30.06	-	56.00	46.00	-25.94	-
6	1.728	9.67	18.60	-	28.27	-	56.00	46.00	-27.73	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

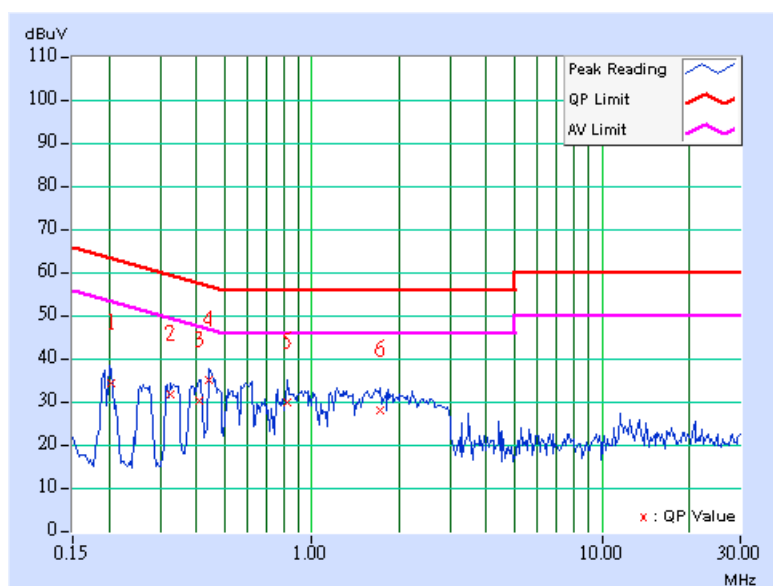

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	PHASE	Neutral (N)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	9.60	23.45	-	33.05	-	63.91	53.91	-30.86	-
2	0.341	9.60	23.03	-	32.63	-	59.17	49.17	-26.54	-
3	0.416	9.60	27.15	-	36.75	-	57.54	47.54	-20.79	-
4	0.447	9.60	28.94	-	38.54	-	56.93	46.93	-18.39	-
5	0.826	9.60	25.06	-	34.66	-	56.00	46.00	-21.34	-
6	2.701	9.70	19.36	-	29.06	-	56.00	46.00	-26.94	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

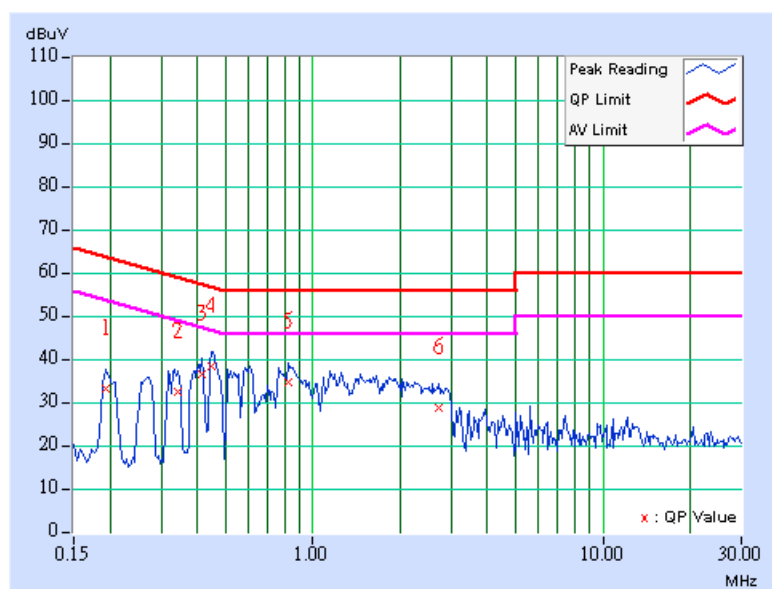

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	PHASE	Line (L)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.192	9.60	28.16	-	37.76	-	63.97	53.97	-26.21	-
2	0.405	9.60	29.04	-	38.64	-	57.74	47.74	-19.10	-
3	0.681	9.60	24.46	-	34.06	-	56.00	46.00	-21.94	-
4	1.775	9.68	21.84	-	31.52	-	56.00	46.00	-24.48	-
5	5.629	9.75	8.51	-	18.26	-	60.00	50.00	-41.74	-
6	10.883	9.94	9.94	-	19.88	-	60.00	50.00	-40.12	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

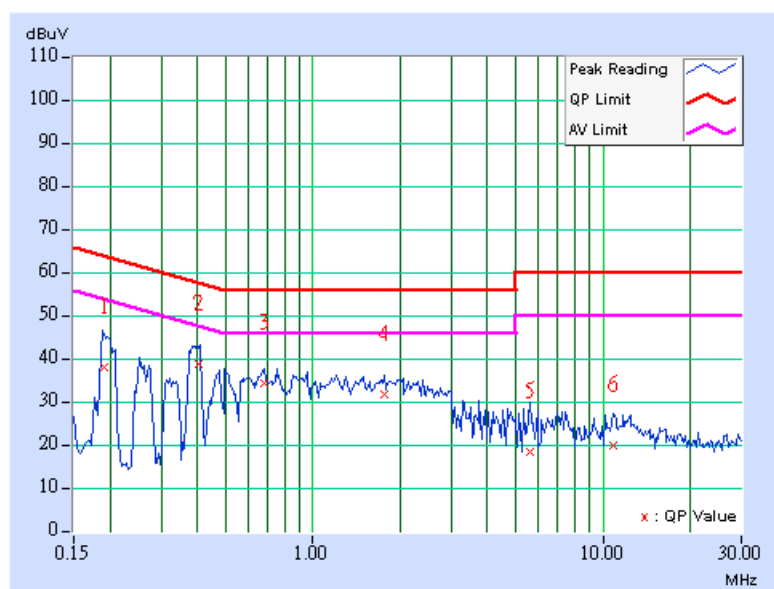

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 972hPa	PHASE	Neutral (N)
TESTED BY	Eric Lee		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	9.60	28.45	-	38.05	-	63.91	53.91	-25.86	-
2	0.271	9.60	22.21	-	31.81	-	61.08	51.08	-29.27	-
3	0.752	9.60	19.63	-	29.23	-	56.00	46.00	-26.77	-
4	1.841	9.68	15.62	-	25.30	-	56.00	46.00	-30.70	-
5	8.313	9.84	9.88	-	19.72	-	60.00	50.00	-40.28	-
6	12.543	9.95	10.51	-	20.46	-	60.00	50.00	-39.54	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

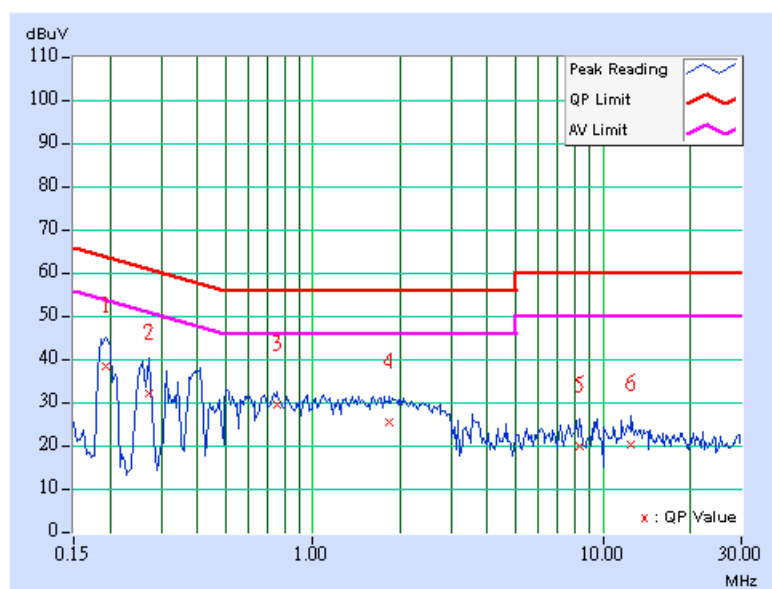

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*ADVANTEST Spectrum Analyzer	R3271A	85060311	July 07, 2006
*HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
*ROHDE & SCHWARZ Test Receiver	ESCS 30	100027	Jul. 18, 2006
*CHASE Broadband Antenna	CBL6112B	2798	Dec. 20, 2006
*Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Sep. 23, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 26, 2006
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 26, 2006
*RF Switches	MP59B	M50867	Jul. 16, 2006
*RF Cable(JETBAO)	9913-30M N-N Cable	STACAB-30M- 1GHz-021	Jul. 31, 2006
*Software	ADT_Radiated_V 5.14	NA	NA
*EMCO Antenna Tower	2075-2	9712-2124	NA
*EMCO Turn Table	2081-1.53	9712-2030	NA
*CORCOM AC Filter	MRI2030	107/108	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. A.
5. The VCCI Site Registration No. is R-782.
6. The FCC Site Registration No. is 91097.
7. The CANADA Site Registration No. is IC 4824-1.
8. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.30 dB
Radiated emissions (1GHz ~18GHz)	2.25 dB
Radiated emissions (18GHz ~20GHz)	1.88 dB


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

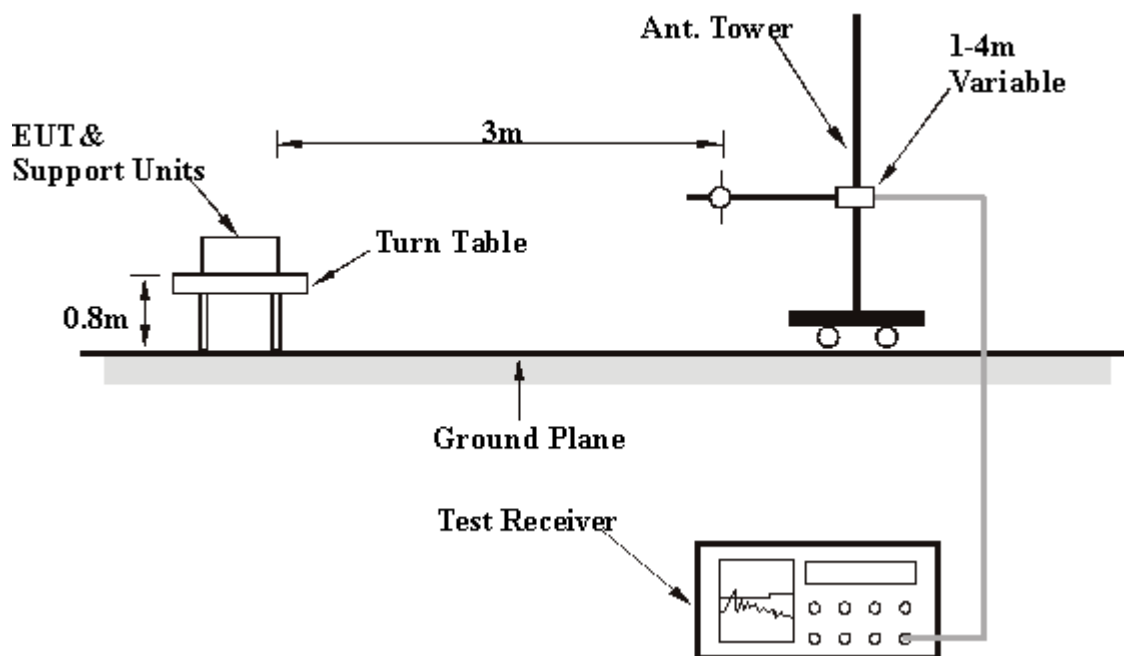

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 1	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.02	23.60 QP	43.50	-19.90	2.45 H	1	13.00	10.60
2	215.99	36.70 QP	43.50	-6.80	1.64 H	271	25.10	11.60
3	240.02	28.60 QP	46.00	-17.40	1.40 H	148	15.80	12.80
4	323.99	39.20 QP	46.00	-6.80	1.00 H	144	24.30	14.90
5	395.98	26.70 QP	46.00	-19.30	1.00 H	190	9.70	17.00
6	539.98	29.30 QP	46.00	-16.70	2.29 H	59	8.60	20.70
7	647.98	30.70 QP	46.00	-15.30	1.57 H	306	8.00	22.70
8	755.98	39.60 QP	46.00	-6.40	1.31 H	99	15.70	24.00
9	863.98	32.50 QP	46.00	-13.50	1.19 H	82	8.40	24.00
10	971.97	38.30 QP	54.00	-15.70	1.00 H	80	12.70	25.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.01	28.90 QP	43.50	-14.60	1.09 V	235	18.30	10.60
2	215.99	30.90 QP	43.50	-12.60	1.01 V	280	19.30	11.60
3	299.78	27.50 QP	46.00	-18.50	1.04 V	338	12.90	14.60
4	323.99	32.80 QP	46.00	-13.20	1.00 V	53	18.00	14.90
5	396.60	28.20 QP	46.00	-17.80	1.15 V	28	11.20	17.00
6	539.98	30.30 QP	46.00	-15.70	1.57 V	340	9.60	20.70
7	647.98	30.20 QP	46.00	-15.80	1.00 V	338	7.50	22.70
8	755.97	38.70 QP	46.00	-7.30	1.01 V	31	14.70	24.00
9	863.97	28.50 QP	46.00	-17.50	1.02 V	2	4.50	24.00
10	971.97	34.20 QP	54.00	-19.80	1.00 V	13	8.60	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Below 1GHz Worst-Case Data

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 2	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.02	24.40 QP	43.50	-19.10	2.19 H	234	13.80	10.60
2	215.99	38.00 QP	43.50	-5.50	1.66 H	251	26.40	11.60
3	300.02	26.20 QP	46.00	-19.80	1.04 H	331	11.70	14.60
4	323.99	36.40 QP	46.00	-9.60	1.22 H	51	21.50	14.90
5	395.99	25.10 QP	46.00	-20.90	1.00 H	234	8.10	17.00
6	539.98	30.40 QP	46.00	-15.60	2.36 H	55	9.70	20.70
7	647.98	29.80 QP	46.00	-16.20	1.44 H	236	7.10	22.70
8	755.97	35.60 QP	46.00	-10.40	1.35 H	99	11.60	24.00
9	863.97	32.60 QP	46.00	-13.40	1.20 H	82	8.60	24.00
10	971.97	38.00 QP	54.00	-16.00	1.09 H	78	12.40	25.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	144.02	24.00 QP	43.50	-19.50	1.00 V	1	13.40	10.60
2	215.99	29.90 QP	43.50	-13.60	1.00 V	1	18.40	11.60
3	299.70	27.00 QP	46.00	-19.00	1.01 V	336	12.50	14.60
4	323.99	32.80 QP	46.00	-13.20	1.00 V	0	18.00	14.90
5	396.60	27.30 QP	46.00	-18.70	1.12 V	21	10.30	17.00
6	539.98	29.10 QP	46.00	-16.90	1.57 V	339	8.40	20.70
7	647.98	29.20 QP	46.00	-16.80	1.12 V	355	6.50	22.70
8	755.97	36.20 QP	46.00	-9.80	1.00 V	37	12.20	24.00
9	863.97	26.20 QP	46.00	-19.80	1.00 V	9	2.20	24.00
10	971.97	33.60 QP	54.00	-20.40	1.00 V	9	8.00	25.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

Below 1GHz Worst-Case Data

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 3	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	215.99	30.40 QP	43.50	-13.10	1.83 H	281	18.60	11.90
2	323.98	27.80 QP	46.00	-18.20	1.00 H	312	11.30	16.60
3	431.99	30.50 QP	46.00	-15.50	1.00 H	158	11.30	19.20
4	539.98	31.60 QP	46.00	-14.40	2.01 H	111	9.60	22.00
5	755.98	35.00 QP	46.00	-11.00	1.03 H	16	8.60	26.40
6	971.96	36.10 QP	54.00	-17.90	1.42 H	306	7.20	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	216.00	29.40 QP	43.50	-14.10	1.00 V	23	17.60	11.90
2	323.99	27.80 QP	46.00	-18.20	1.00 V	266	11.30	16.60
3	431.97	30.50 QP	46.00	-15.50	1.00 V	14	11.20	19.20
4	539.98	33.00 QP	46.00	-13.00	1.00 V	354	11.00	22.00
5	755.98	37.00 QP	46.00	-9.00	1.46 V	318	10.50	26.40
6	971.98	36.40 QP	54.00	-17.60	1.38 V	230	7.50	28.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

MODULATION TYPE	BPSK	CHANNEL	Channel 11
TEST MODE	Mode 4	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	6Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	DETECTOR FUNCTION	Quasi-Peak, 120kHz
TESTED BY	Wen Yu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	216.00	29.10 QP	43.50	-14.40	1.68 H	116	17.30	11.90
2	240.01	25.70 QP	46.00	-20.30	1.79 H	298	12.80	12.90
3	323.99	28.80 QP	46.00	-17.20	1.53 H	131	12.20	16.60
4	432.00	34.10 QP	46.00	-11.90	1.00 H	348	14.90	19.20
5	479.91	29.00 QP	46.00	-17.00	1.00 H	231	8.60	20.40
6	539.99	34.60 QP	46.00	-11.40	1.75 H	302	12.60	22.00
7	755.97	37.90 QP	46.00	-8.10	1.11 H	43	11.40	26.40
8	971.97	35.10 QP	54.00	-18.90	1.27 H	272	6.20	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	215.99	31.40 QP	43.50	-12.10	1.00 V	4	19.50	11.90
2	240.01	27.80 QP	46.00	-18.20	1.00 V	183	14.90	12.90
3	323.99	28.80 QP	46.00	-17.20	1.00 V	200	12.30	16.60
4	431.99	32.80 QP	46.00	-13.20	1.41 V	343	13.60	19.20
5	479.97	26.40 QP	46.00	-19.60	1.00 V	340	6.00	20.40
6	539.98	33.60 QP	46.00	-12.40	1.00 V	316	11.60	22.00
7	755.98	35.70 QP	46.00	-10.30	1.72 V	264	9.30	26.40
8	971.97	39.20 QP	54.00	-14.80	1.06 V	349	10.30	28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS - DSSS

802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.50 PK	74.00	-20.50	1.23 H	238	19.80	33.70
1	2390.00	42.90 AV	54.00	-11.10	1.23 H	238	9.20	33.70
2	*2412.00	107.60 PK			1.23 H	238	77.70	29.80
2	*2412.00	103.40 AV			1.23 H	238	73.50	29.80
3	3216.00	42.40 PK	74.00	-31.60	1.77 H	327	10.40	32.00
3	3216.00	29.70 AV	54.00	-24.30	1.77 H	327	-2.30	32.00
4	4824.00	44.70 PK	74.00	-29.30	1.54 H	187	9.60	35.10
4	4824.00	31.20 AV	54.00	-22.80	1.54 H	187	-3.90	35.10
5	7236.00	50.60 PK	74.00	-23.40	1.33 H	246	10.10	40.50
5	7236.00	36.80 AV	54.00	-17.20	1.33 H	246	-3.70	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.40 PK	74.00	-21.60	1.12 V	133	22.10	30.30
1	2390.00	41.60 AV	54.00	-12.40	1.12 V	133	11.30	30.30
2	*2412.00	106.50 PK			1.12 V	133	76.00	30.50
2	*2412.00	102.10 AV			1.12 V	133	71.60	30.50
3	3216.00	43.10 PK	74.00	-30.90	1.35 V	10	10.70	32.40
3	3216.00	30.70 AV	54.00	-23.30	1.35 V	10	-1.70	32.40
4	4824.00	44.50 PK	74.00	-29.50	1.69 V	257	9.40	35.10
4	4824.00	31.40 AV	54.00	-22.60	1.69 V	257	-3.70	35.10
5	7236.00	50.30 PK	74.00	-23.70	1.72 V	348	9.80	40.50
5	7236.00	36.70 AV	54.00	-17.30	1.72 V	348	-3.80	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.70 PK			1.24 H	236	76.10	30.60
1	*2437.00	102.80 AV			1.24 H	236	72.20	30.60
2	3249.30	42.70 PK	74.00	-31.30	1.80 H	331	10.20	32.40
2	3249.30	29.30 AV	54.00	-24.70	1.80 H	331	-3.20	32.40
3	4874.00	44.90 PK	74.00	-29.10	1.50 H	180	9.60	35.30
3	4874.00	31.30 AV	54.00	-22.70	1.50 H	180	-4.00	35.30
4	7311.00	51.10 PK	74.00	-22.90	1.30 H	257	10.40	40.70
4	7311.00	37.20 AV	54.00	-16.80	1.30 H	257	-3.50	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.30 PK			1.11 V	167	75.70	30.60
1	*2437.00	102.00 AV			1.11 V	167	71.40	30.60
2	3249.30	42.80 PK	74.00	-31.20	1.33 V	12	10.30	32.40
2	3249.30	30.40 AV	54.00	-23.60	1.33 V	12	-2.10	32.40
3	4874.00	44.70 PK	74.00	-29.30	1.72 V	255	9.40	35.30
3	4874.00	31.40 AV	54.00	-22.60	1.72 V	255	-3.90	35.30
4	7311.00	50.70 PK	74.00	-23.30	1.78 V	351	10.00	40.70
4	7311.00	37.10 AV	54.00	-16.90	1.78 V	351	-3.60	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.10 PK			1.18 H	239	77.30	30.80
1	*2462.00	103.80 AV			1.18 H	239	73.00	30.80
2	2483.50	52.40 PK	74.00	-21.60	1.18 H	239	21.40	30.90
2	2483.50	43.20 AV	54.00	-10.80	1.18 H	239	12.30	30.90
3	3282.70	42.60 PK	74.00	-31.40	1.83 H	326	10.10	32.50
3	3282.70	29.70 AV	54.00	-24.30	1.83 H	326	-2.80	32.50
4	4924.00	45.20 PK	74.00	-28.80	1.52 H	171	9.70	35.50
4	4924.00	31.60 AV	54.00	-22.40	1.52 H	171	-3.90	35.50
5	7386.00	51.50 PK	74.00	-22.50	1.31 H	253	10.70	40.80
5	7386.00	37.50 AV	54.00	-16.50	1.31 H	253	-3.30	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.70 PK			1.13 V	165	76.90	30.80
1	*2462.00	103.20 AV			1.13 V	165	72.40	30.80
2	2483.50	52.00 PK	74.00	-22.00	1.13 V	165	21.00	30.90
2	2483.50	42.60 AV	54.00	-11.40	1.13 V	165	11.70	30.90
3	3282.70	43.20 PK	74.00	-30.80	1.38 V	15	10.70	32.50
3	3282.70	30.70 AV	54.00	-23.30	1.38 V	15	-1.80	32.50
4	4924.00	44.90 PK	74.00	-29.10	1.61 V	271	9.40	35.50
4	4924.00	31.70 AV	54.00	-22.30	1.61 V	271	-3.80	35.50
5	7386.00	50.90 PK	74.00	-23.10	1.69 V	346	10.10	40.80
5	7386.00	37.30 AV	54.00	-16.70	1.69 V	346	-3.50	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS - OFDM

802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.80 PK	74.00	-14.20	1.22 H	236	29.50	30.30
1	2390.00	43.40 AV	54.00	-10.60	1.22 H	236	13.10	30.30
2	*2412.00	105.40 PK			1.22 H	236	74.90	30.50
2	*2412.00	94.30 AV			1.22 H	236	63.80	30.50
3	3216.00	43.10 PK	74.00	-30.90	1.22 H	263	10.70	32.40
3	3216.00	30.80 AV	54.00	-23.20	1.22 H	263	-1.60	32.40
4	4824.00	45.30 PK	74.00	-28.70	1.40 H	86	10.20	35.10
4	4824.00	31.30 AV	54.00	-22.70	1.40 H	86	-3.80	35.10
5	7236.00	50.60 PK	74.00	-23.40	1.19 H	215	10.10	40.50
5	7236.00	36.50 AV	54.00	-17.50	1.19 H	215	-4.00	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.90 PK	74.00	-15.10	1.12 V	135	28.60	30.30
1	2390.00	42.50 AV	54.00	-11.50	1.12 V	135	12.20	30.30
2	*2412.00	104.50 PK			1.12 V	135	74.00	30.50
2	*2412.00	93.40 AV			1.12 V	135	62.90	30.50
3	3216.00	44.20 PK	74.00	-29.80	1.31 V	35	11.80	32.40
3	3216.00	31.80 AV	54.00	-22.20	1.31 V	35	-0.60	32.40
4	4824.00	44.50 PK	74.00	-29.50	1.62 V	186	9.40	35.10
4	4824.00	31.30 AV	54.00	-22.70	1.62 V	186	-3.80	35.10
5	7236.00	50.10 PK	74.00	-23.90	1.59 V	239	9.60	40.50
5	7236.00	36.50 AV	54.00	-17.50	1.59 V	239	-4.00	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.70 PK			1.22 H	234	73.10	30.60
1	*2437.00	93.00 AV			1.22 H	234	62.40	30.60
2	3249.30	43.00 PK	74.00	-31.00	1.28 H	254	10.60	32.40
2	3249.30	30.70 AV	54.00	-23.30	1.28 H	254	-1.80	32.40
3	4874.00	45.60 PK	74.00	-28.40	1.41 H	73	10.30	35.30
3	4874.00	31.30 AV	54.00	-22.70	1.41 H	73	-4.00	35.30
4	7311.00	51.00 PK	74.00	-23.00	1.17 H	209	10.30	40.70
4	7311.00	36.90 AV	54.00	-17.10	1.17 H	209	-3.80	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.30 PK			1.13 V	166	72.70	30.60
1	*2437.00	92.50 AV			1.13 V	166	61.90	30.60
2	3249.30	43.60 PK	74.00	-30.40	1.33 V	31	11.10	32.40
2	3249.30	31.60 AV	54.00	-22.40	1.33 V	31	-0.90	32.40
3	4874.00	44.70 PK	74.00	-29.30	1.69 V	191	9.40	35.30
3	4874.00	31.50 AV	54.00	-22.50	1.69 V	191	-3.80	35.30
4	7311.00	50.70 PK	74.00	-23.30	1.54 V	248	10.00	40.70
4	7311.00	37.00 AV	54.00	-17.00	1.54 V	248	-3.70	40.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	20deg. C, 62%RH, 972hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.10 PK			1.19 H	240	74.30	30.80
1	*2462.00	94.40 AV			1.19 H	240	63.60	30.80
2	2483.50	61.20 PK	74.00	-12.80	1.19 H	240	30.20	30.90
2	2483.50	45.10 AV	54.00	-8.90	1.19 H	240	14.20	30.90
3	3282.70	42.90 PK	74.00	-31.10	1.26 H	266	10.40	32.50
3	3282.70	30.70 AV	54.00	-23.30	1.26 H	266	-1.80	32.50
4	4924.00	45.90 PK	74.00	-28.10	1.38 H	65	10.40	35.50
4	4924.00	31.60 AV	54.00	-22.40	1.38 H	65	-3.90	35.50
5	7386.00	51.20 PK	74.00	-22.80	1.15 H	211	10.40	40.80
5	7386.00	37.20 AV	54.00	-16.80	1.15 H	211	-3.60	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.70 PK			1.10 V	164	73.90	30.80
1	*2462.00	94.20 AV			1.10 V	164	63.40	30.80
2	2483.50	60.80 PK	74.00	-13.20	1.10 V	164	29.80	30.90
2	2483.50	44.90 AV	54.00	-9.10	1.10 V	164	14.00	30.90
3	3282.70	43.80 PK	74.00	-30.20	1.38 V	42	11.30	32.50
3	3282.70	31.90 AV	54.00	-22.10	1.38 V	42	-0.60	32.50
4	4924.00	44.90 PK	74.00	-29.10	1.66 V	173	9.40	35.50
4	4924.00	31.70 AV	54.00	-22.30	1.66 V	173	-3.80	35.50
5	7386.00	50.70 PK	74.00	-23.30	1.51 V	259	9.90	40.80
5	7386.00	37.10 AV	54.00	-16.90	1.51 V	259	-3.70	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.55	0.5	PASS
6	2437	9.55	0.5	PASS
11	2462	9.55	0.5	PASS


CH1

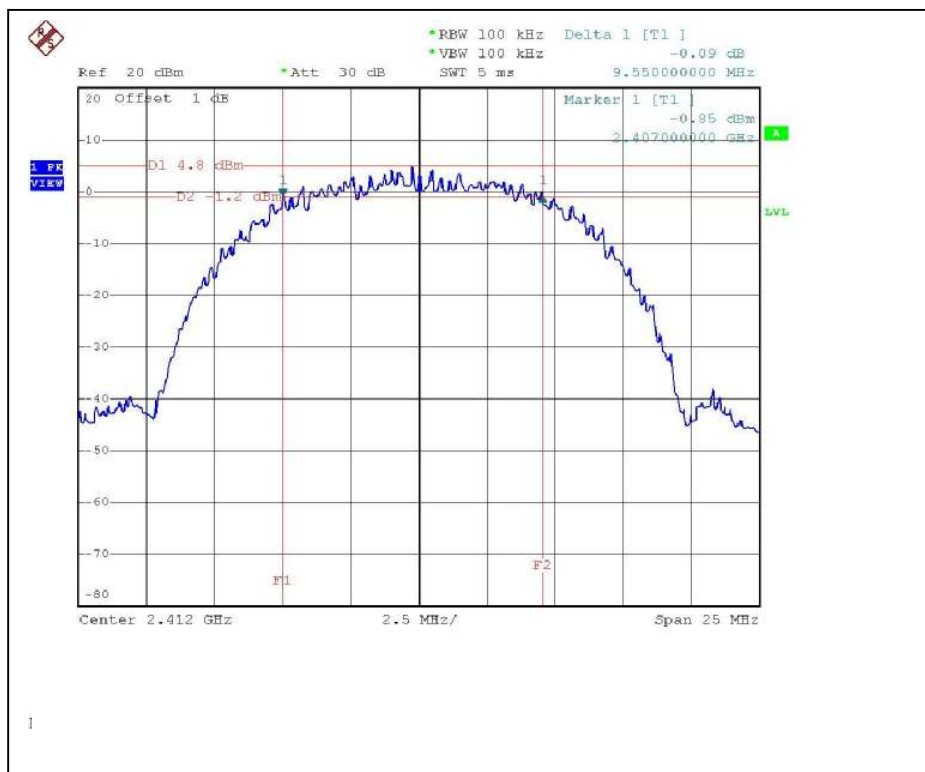

CH6

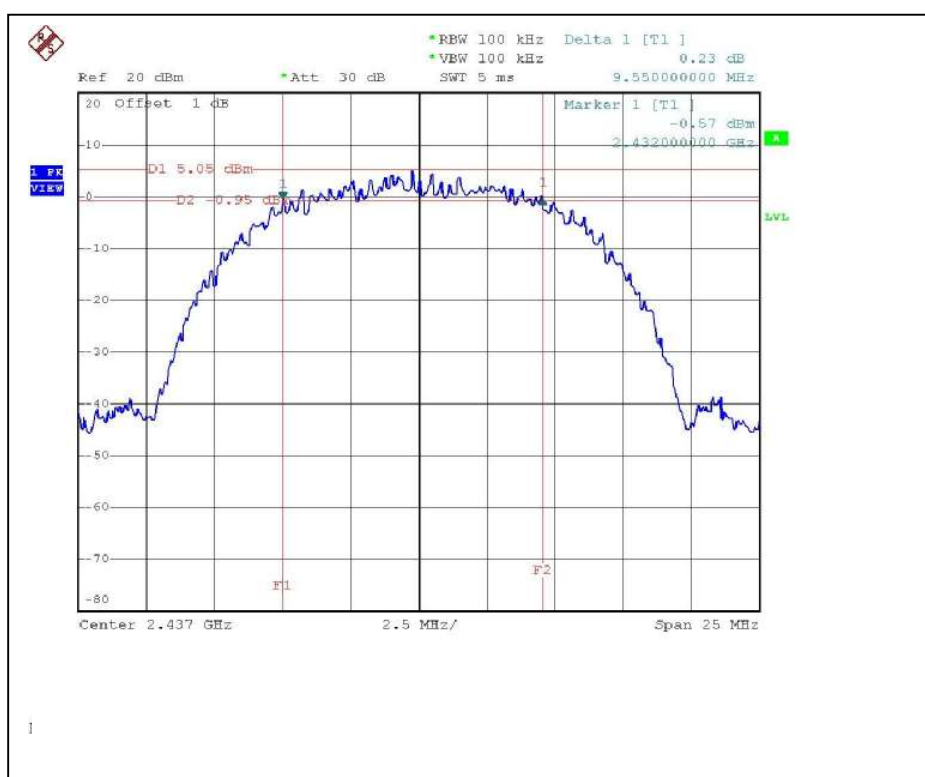

CH11

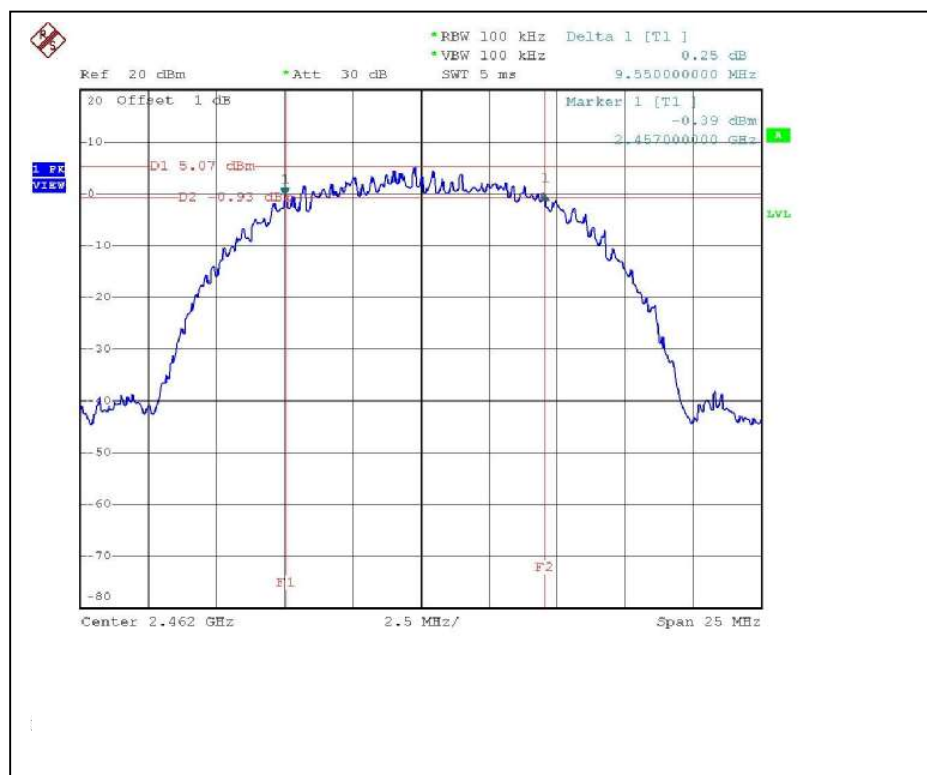


4.3.7 TEST RESULTS-OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.45	0.5	PASS
6	2437	16.55	0.5	PASS
11	2462	16.50	0.5	PASS


CH1

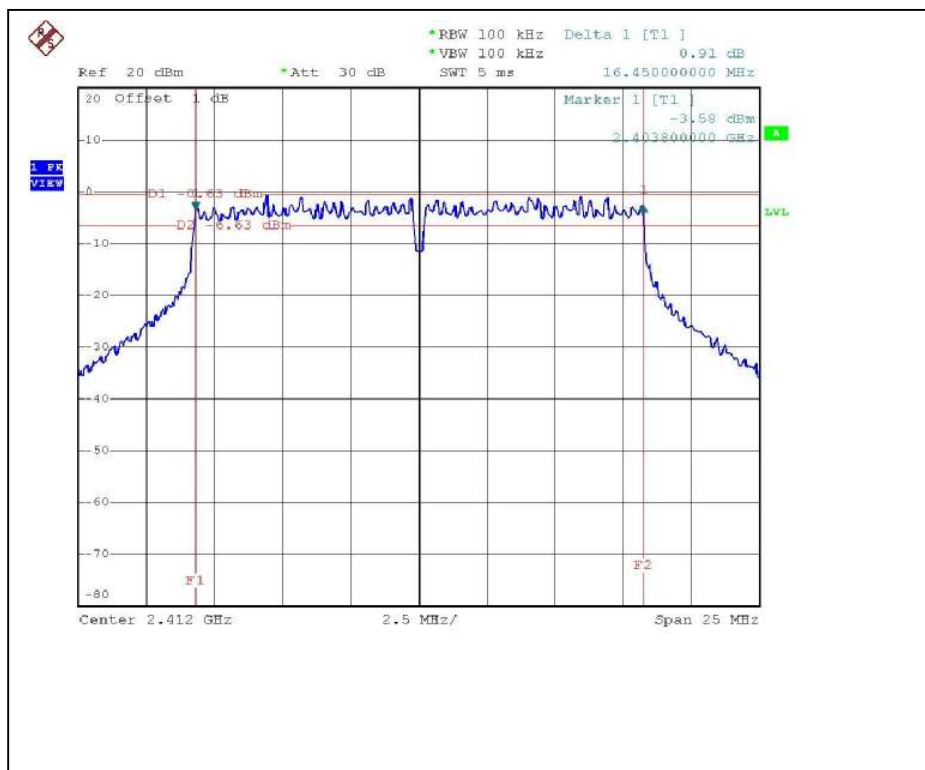

CH6

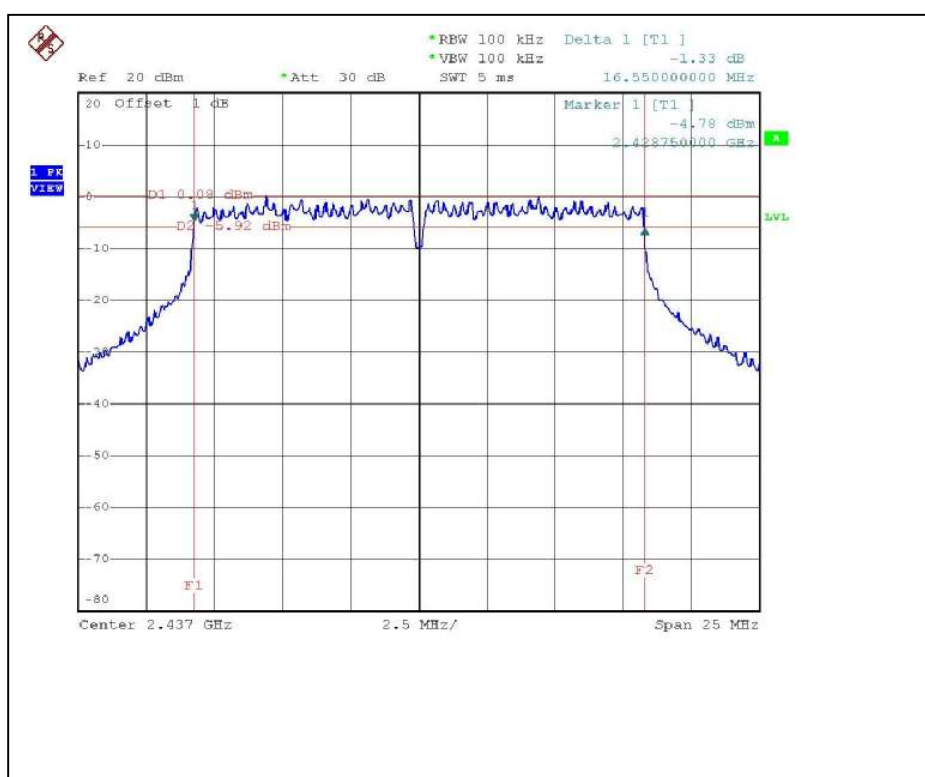

CH11

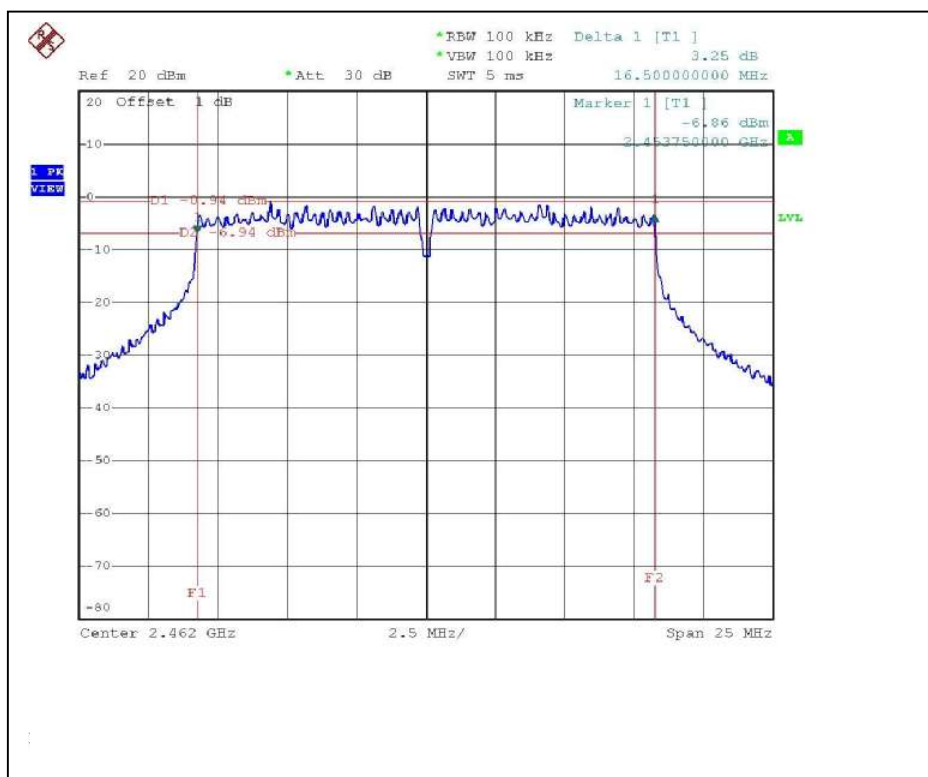

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2006
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Jun. 22, 2006
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	39.811	16.00	30	PASS
6	2437	43.652	16.40	30	PASS
11	2462	46.774	16.70	30	PASS

4.4.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	60.256	17.80	30	PASS
6	2437	75.858	18.80	30	PASS
11	2462	56.234	17.50	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5


4.5.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.33	8	PASS
6	2437	-8.88	8	PASS
11	2462	-8.66	8	PASS


CH1

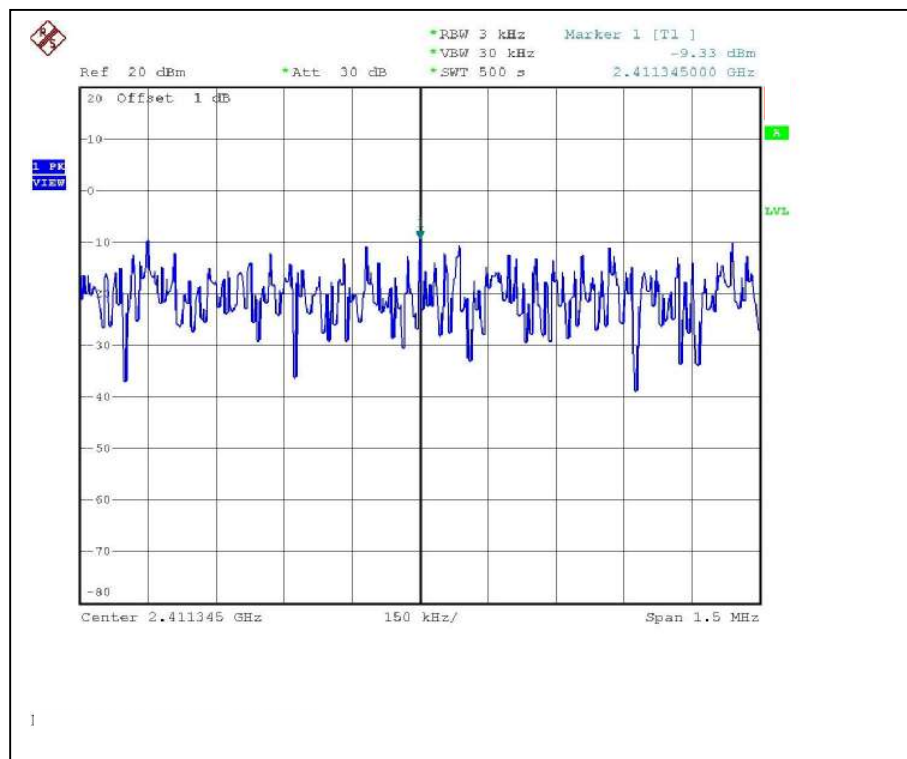

CH6

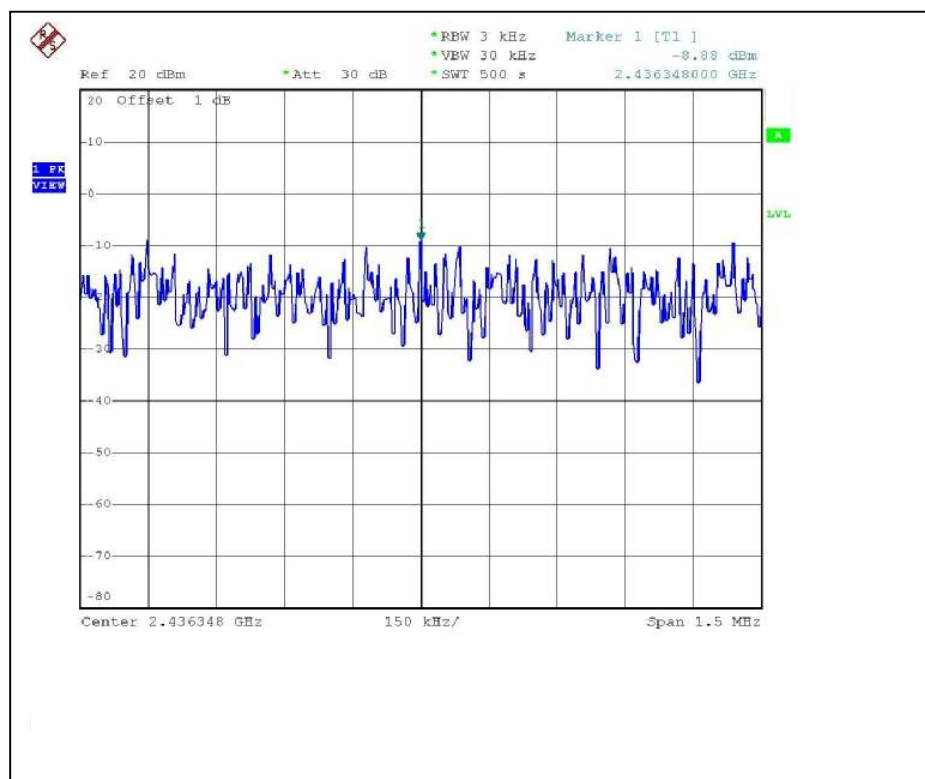

CH11

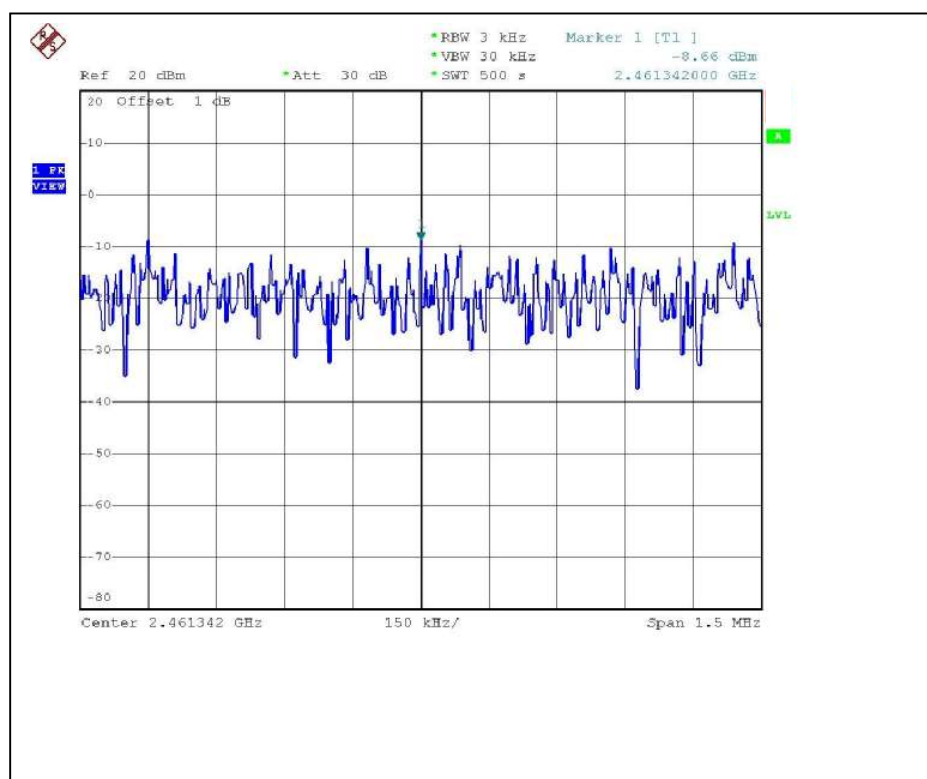


4.5.7 TEST RESULTS –OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 72%RH, 972hPa
TESTED BY	Wen Yu		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.38	8	PASS
6	2437	-13.56	8	PASS
11	2462	-14.81	8	PASS


CH1

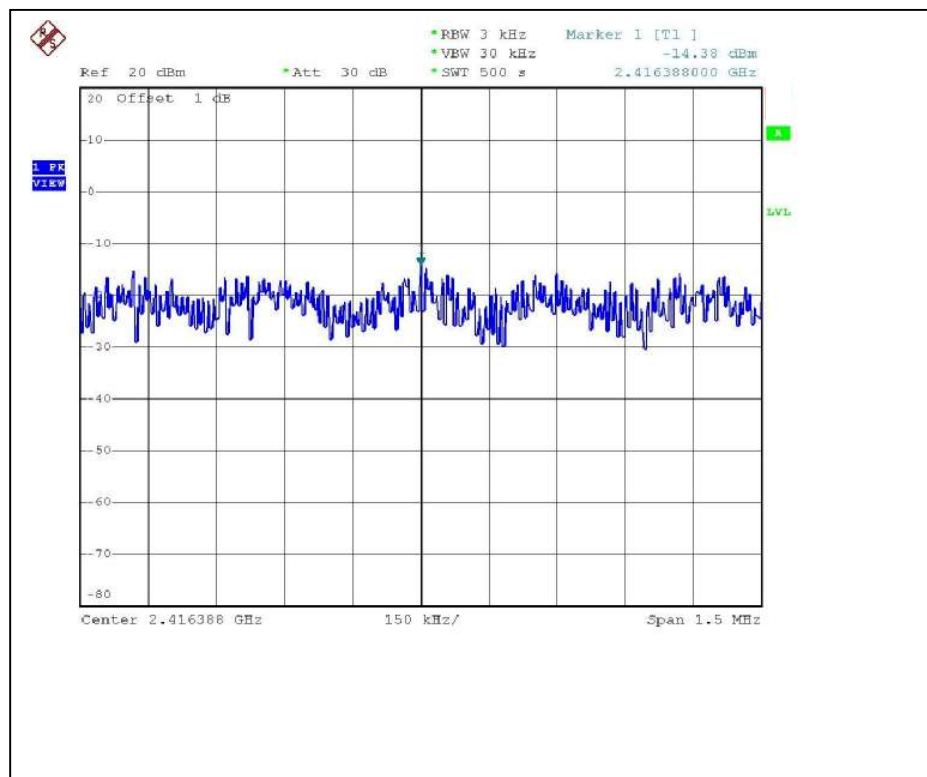

CH6

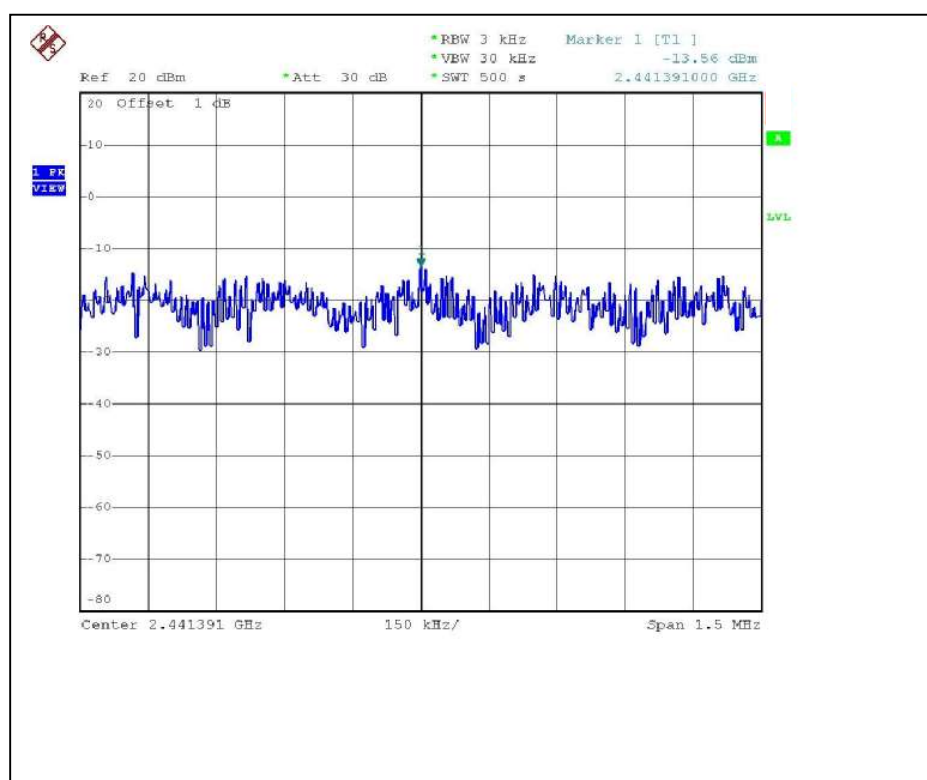

CH11

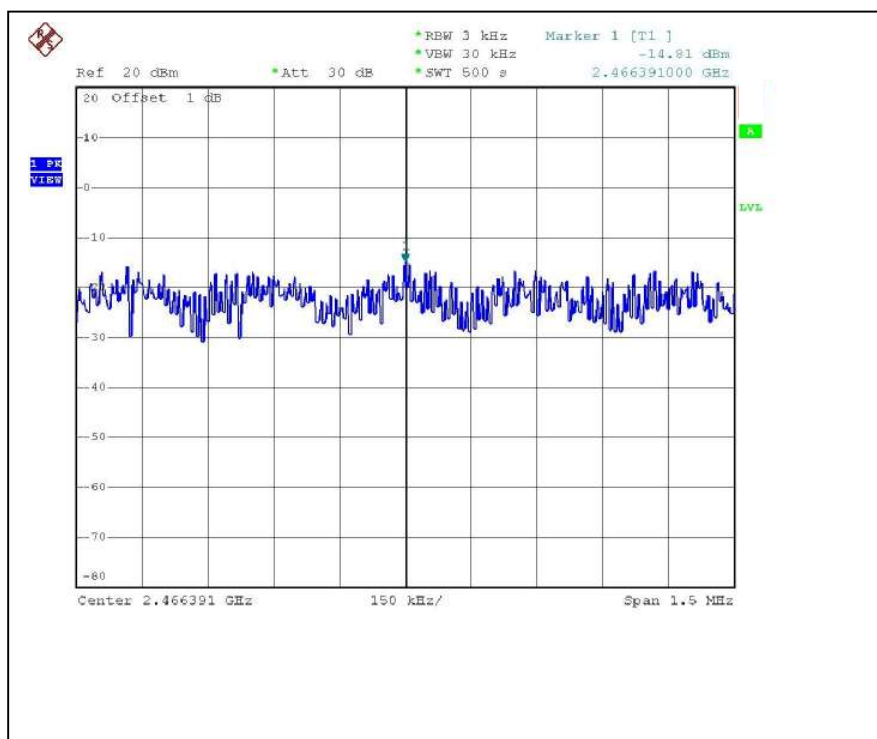

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 23, 2006

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5

4.6.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 54.13dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 107.6dBuV/m, so the maximum field strength in restrict band is $107.6 - 54.13 = 53.47$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of DSSS technique on the following first page shows 55.73dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 108.1dBuV/m, so the maximum field strength in restrict band is $108.1 - 55.73 = 52.37$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 60.46dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 103.4dBuV/m, so the maximum field strength in restrict band is $103.4 - 60.46 = 42.94$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 60.56dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 103.8dBuV/m, so the maximum field strength in restrict band is $103.8 - 60.56 = 43.24$ dBuV/m which is under 54 dBuV/m limit.


CH1

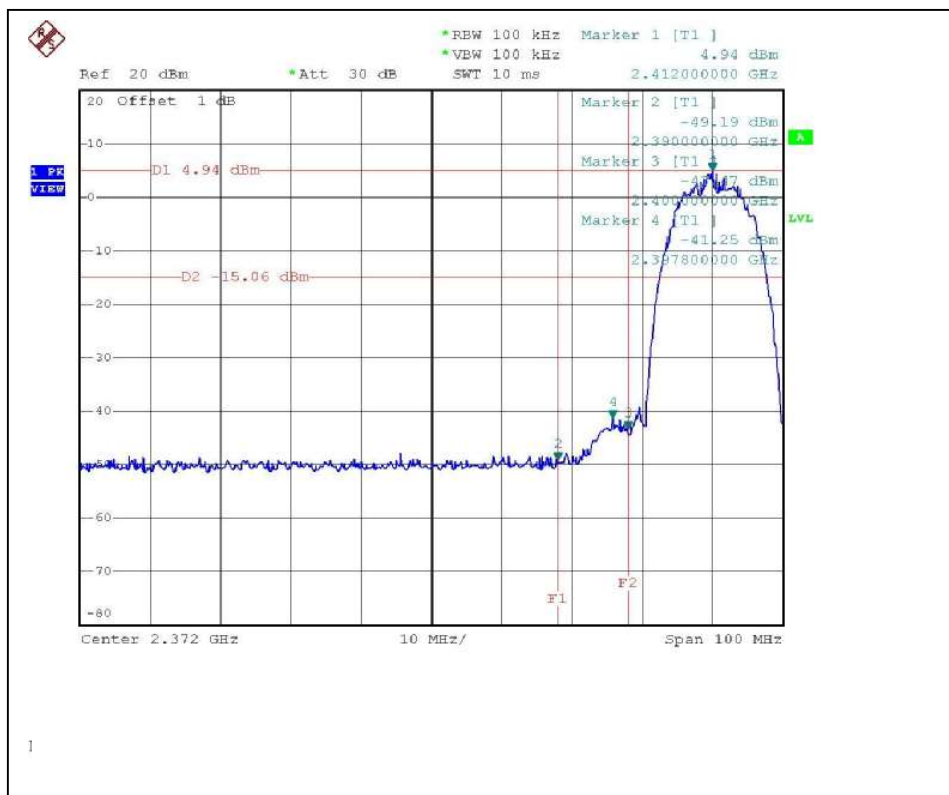


CH11

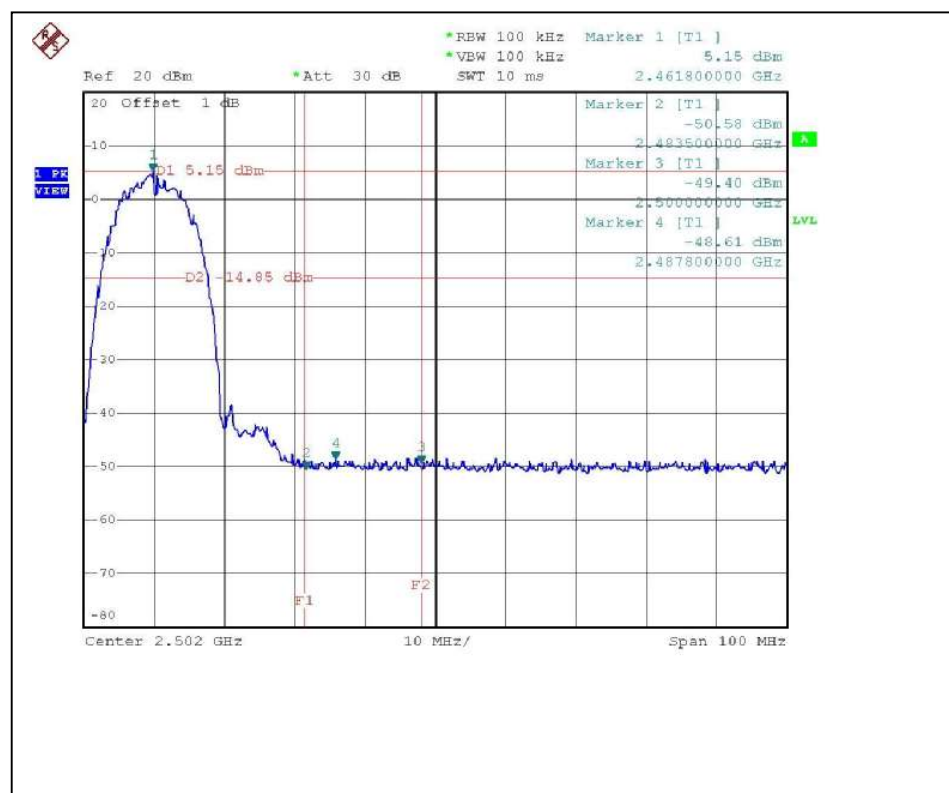

CH1

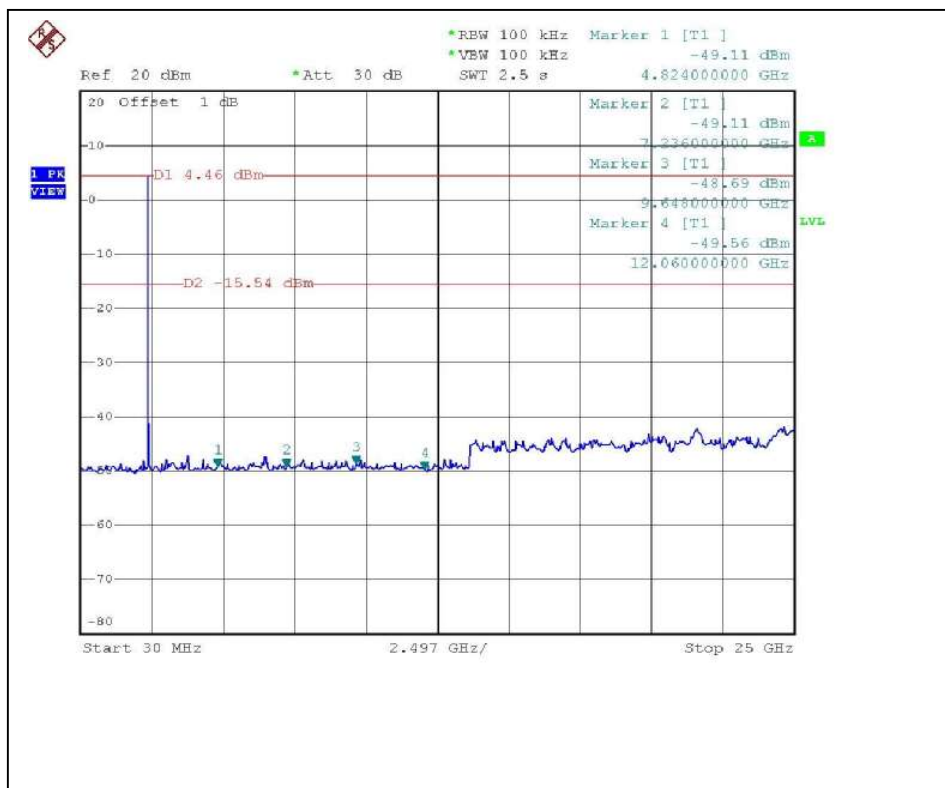

CH11

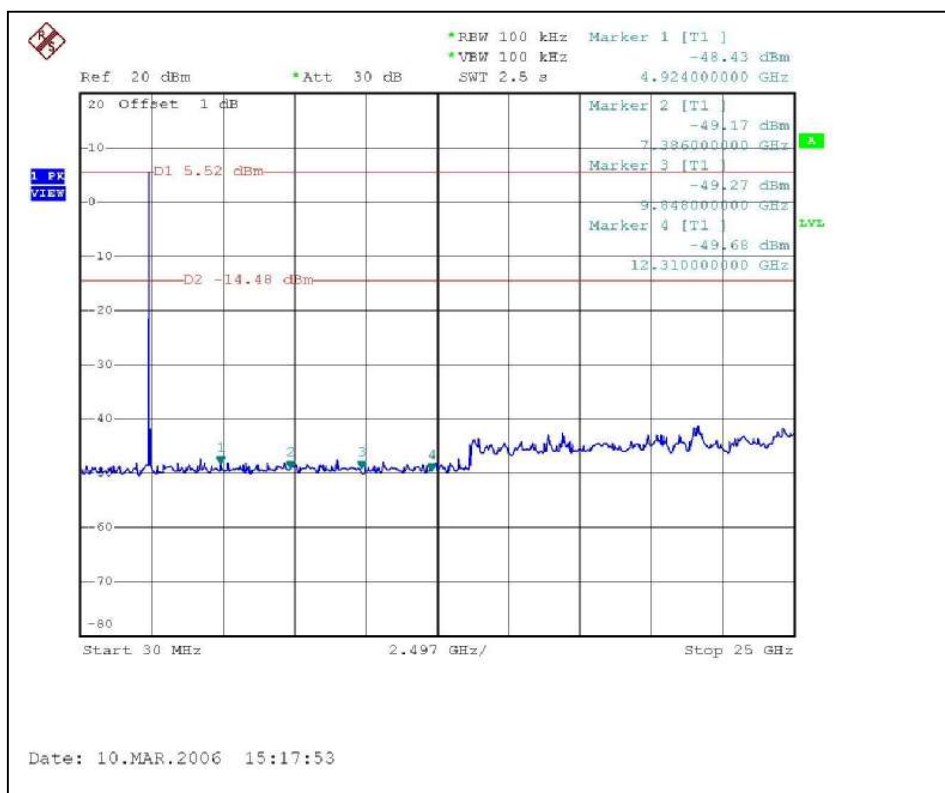

4.6.6 TEST RESULTS -OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 45.63dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 105.4dBuV/m, so the maximum field strength in restrict band is $105.4 - 45.63 = 59.77$ dBuV/m which is under 74 dBuV/m limit.


The band edge emission plot of OFDM technique on the following first page shows 43.92dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 105.1dBuV/m, so the maximum field strength in restrict band is $105.1 - 43.92 = 61.18$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 50.86dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 94.3dBuV/m, so the maximum field strength in restrict band is $94.3 - 50.86 = 43.44$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 49.28dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 94.4dBuV/m, so the maximum field strength in restrict band is $94.4 - 49.28 = 45.12$ dBuV/m which is under 54 dBuV/m limit.


CH1

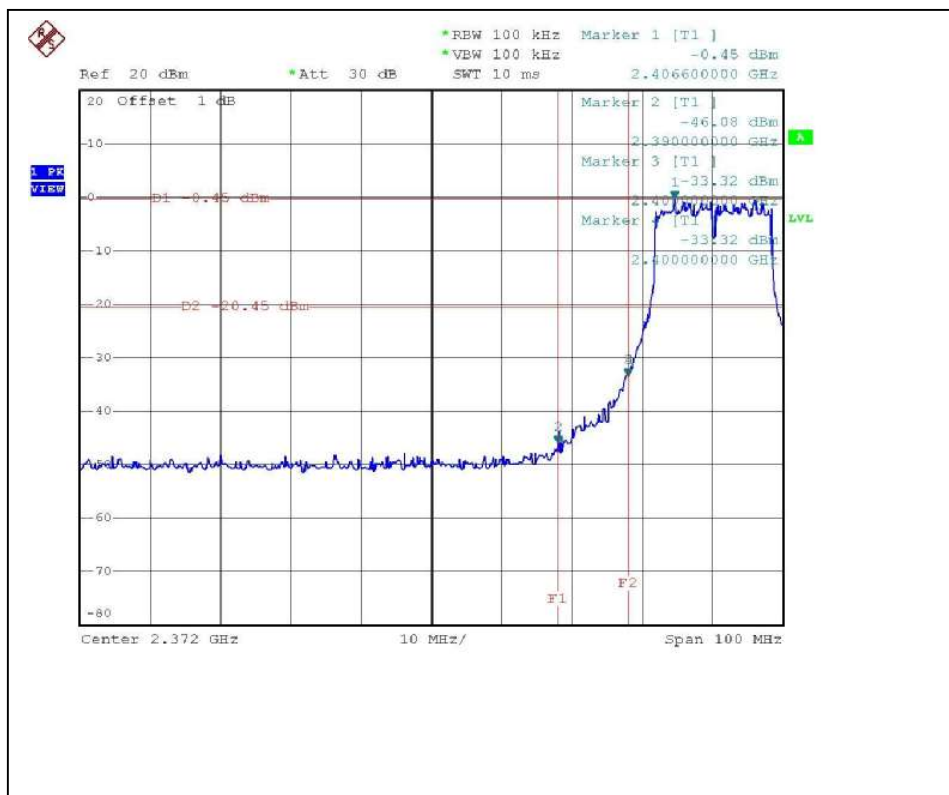


CH11

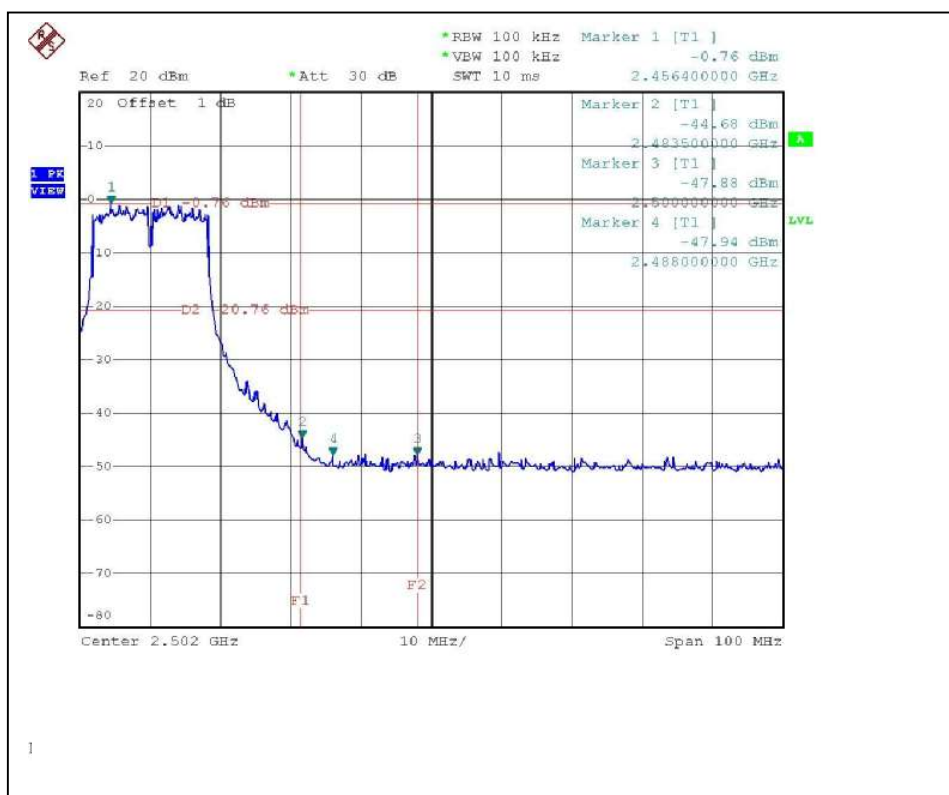

CH1

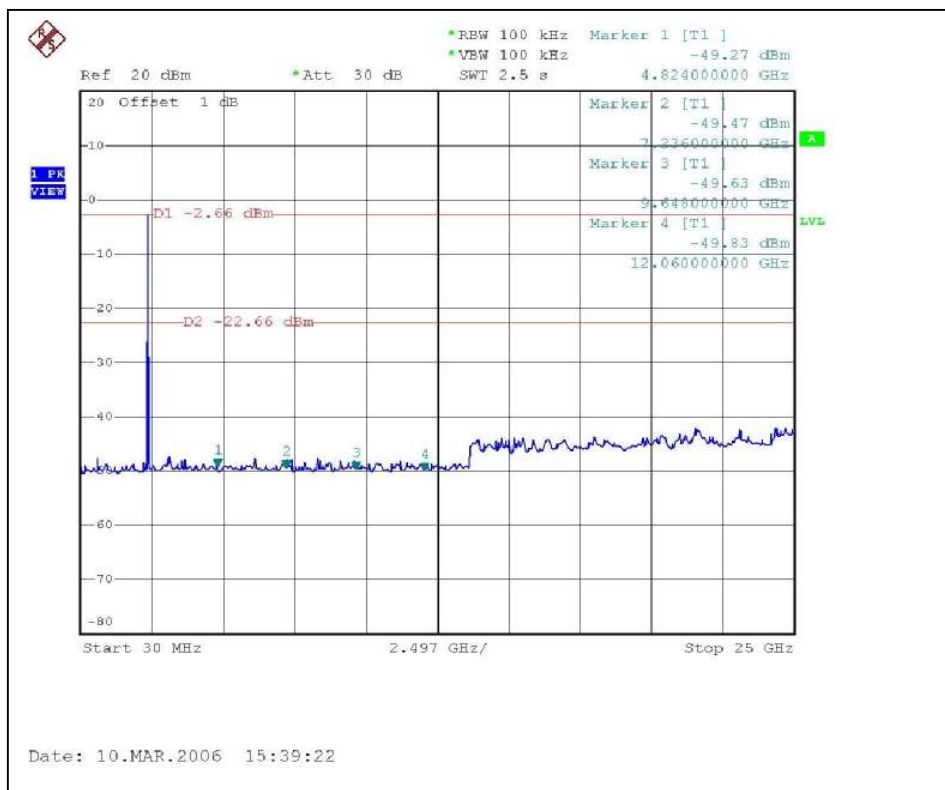

CH11

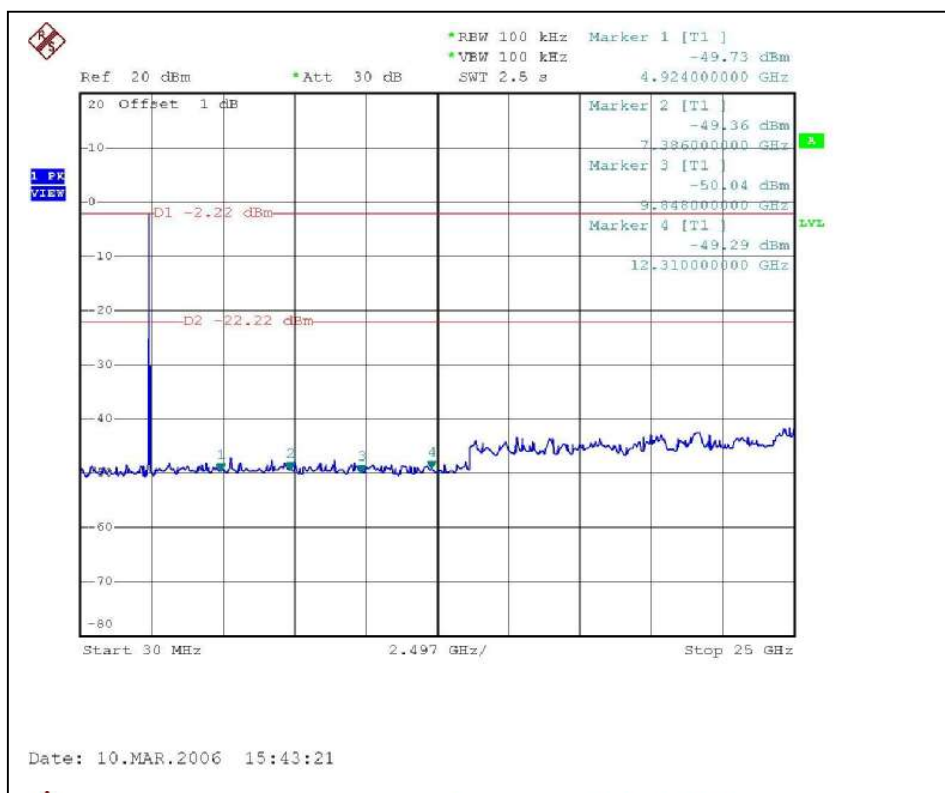

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with Murata micro-coaxial connector. The maximum Gain of the antenna is 5.5 dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (MODE 1)



CONDUCTED EMISSION TEST (MODE 2)



RADIATED EMISSION TEST (MODE 1)



RADIATED EMISSION TEST (MODE 2)



RADIATED EMISSION TEST (MODE 3)



RADIATED EMISSION TEST (MODE 4)



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.