



FCC TEST REPORT

REPORT NO.: RF921008H03B

MODEL NO.: WL-463

RECEIVED: Dec. 24, 2003

TESTED: Dec. 27 to 31, 2003

APPLICANT: Accton Technology Corporation

ADDRESS: No.1, Creation Rd. III, Science-based Industrial
Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 112 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0536
ILAC MRA



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS.....	9
4.1.3	TEST SETUP	10
4.1.4	EUT OPERATING CONDITIONS	11
4.1.5	TEST RESULTS.....	12
4.2	Radiated Emission Measurement.....	14
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	14
4.2.2	TEST INSTRUMENTS.....	15
4.2.3	TEST PROCEDURES	16
4.2.4	TEST SETUP	17
4.2.5	EUT OPERATING CONDITIONS	17
4.2.6	TEST RESULTS.....	18
4.2.7	TEST RESULTS – DSSS (Antenna 1)	22
4.2.8	TEST RESULTS – DSSS (Antenna 2)	25
4.2.9	TEST RESULTS – DSSS (Antenna 3)	28
4.2.10	TEST RESULTS – DSSS (Antenna 4)	31
4.2.11	TEST RESULTS –OFDM (Antenna 1).....	34
4.2.12	TEST RESULTS –OFDM (Antenna 2).....	38
4.2.13	TEST RESULTS –OFDM (Antenna 3).....	42
4.2.14	TEST RESULTS –OFDM (Antenna 4).....	46
4.3	6dB BANDWIDTH MEASUREMENT	50
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	50
4.3.2	TEST INSTRUMENTS.....	50
4.3.3	TEST PROCEDURE	51
4.3.4	TEST SETUP	51
4.3.5	EUT OPERATING CONDITIONS	51



4.3.6	TEST RESULTS-DSSS	52
4.3.7	TEST RESULTS-OFDM	56
4.4	MAXIMUM PEAK OUTPUT POWER	61
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	61
4.4.2	TEST INSTRUMENTS	61
4.4.3	TEST PROCEDURES	62
4.4.4	TEST SETUP	62
4.4.5	EUT OPERATING CONDITIONS	62
4.4.6	TEST RESULTS- DSSS	63
4.4.7	TEST RESULTS- OFDM	64
4.5	POWER SPECTRAL DENSITY MEASUREMENT	65
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	65
4.5.2	TEST INSTRUMENTS	65
4.5.3	TEST PROCEDURE	66
4.5.4	TEST SETUP	66
4.5.5	EUT OPERATING CONDITIONS	66
4.5.6	TEST RESULTS-DSSS	67
4.5.7	TEST RESULTS-OFDM	71
4.6	BAND EDGES MEASUREMENT.....	76
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	76
4.6.2	TEST INSTRUMENTS	76
4.6.3	TEST PROCEDURE	76
4.6.4	EUT OPERATING CONDITION.....	76
4.6.5	TEST RESULTS – DSSS (Antenna 1)	77
4.6.6	TEST RESULTS – DSSS (Antenna 2)	80
4.6.7	TEST RESULTS – DSSS (Antenna 3)	83
4.6.8	TEST RESULTS – DSSS (Antenna 4)	86
4.6.9	TEST RESULTS-OFDM (Antenna 1).....	89
4.6.10	TEST RESULTS-OFDM (Antenna 2).....	92
4.6.11	TEST RESULTS-OFDM (Antenna 3).....	95
4.6.12	TEST RESULTS-OFDM (Antenna 4).....	98
4.7	ANTENNA REQUIREMENT.....	101
4.7.1	STANDARD APPLICABLE.....	101
4.7.2	ANTENNA CONNECTED CONSTRUCTION	101
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	102
6	INFORMATION ON THE TESTING LABORATORIES.....	112



1 CERTIFICATION

PRODUCT : Upgrade Kit - 802.11g
BRAND NAME : 3Com
MODEL NO. : WL-463
APPLICANT : Accton Technology Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Dec. 27 to 31, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Carol Liao , **DATE:** Jan. 05, 2003
(Carol Liao)

APPROVED BY: Eric Lin , **DATE:** Jan. 05, 2003
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -14.70 dBuV at 0.177 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.50 dBuV at 2390.0MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Upgrade Kit - 802.11g
MODEL NO.	WL-463
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	20.09dBm
ANTENNA TYPE	Please see below (note 3)
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
3. There are four antennas provided to this EUT, please refer to the following table:

No.	Model No.	Gain (dBi)	Antenna Type	Antenna Connector
1		1dBi	Detachable antenna	SMA
2	3CWE498	8dBi	Sector-Panel Antenna Product	N type
3	3CWE491	8dBi	Omnidirectional Antenna Product	N type
4	3CWE497	4dBi	Hallway Bidirectional Antenna Product	N type

4. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		
6 (Turbo)	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.
4. "Turbo Mode" allows data rates of up to 108Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Upgrade Kit - 802.11g . According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-17Q-C504	FCC DoC
2	Matrix Printer	EPSON	LQ-300+	DCGY017079	FCC DoC
3	MODEM	ACEEX	1414	0206026771	IFAXDM1414

No.	Signal cable description
1	NA
2	1.6 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.4 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

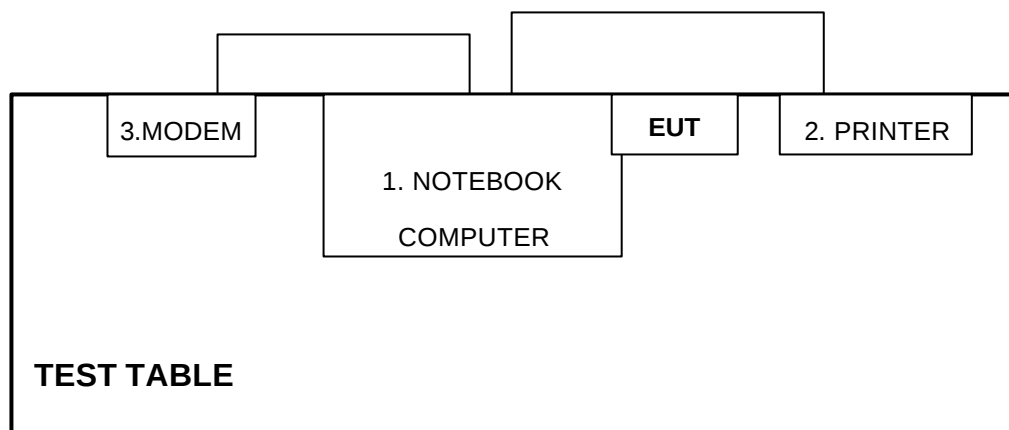

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2004
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2004
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2004
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

3. TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

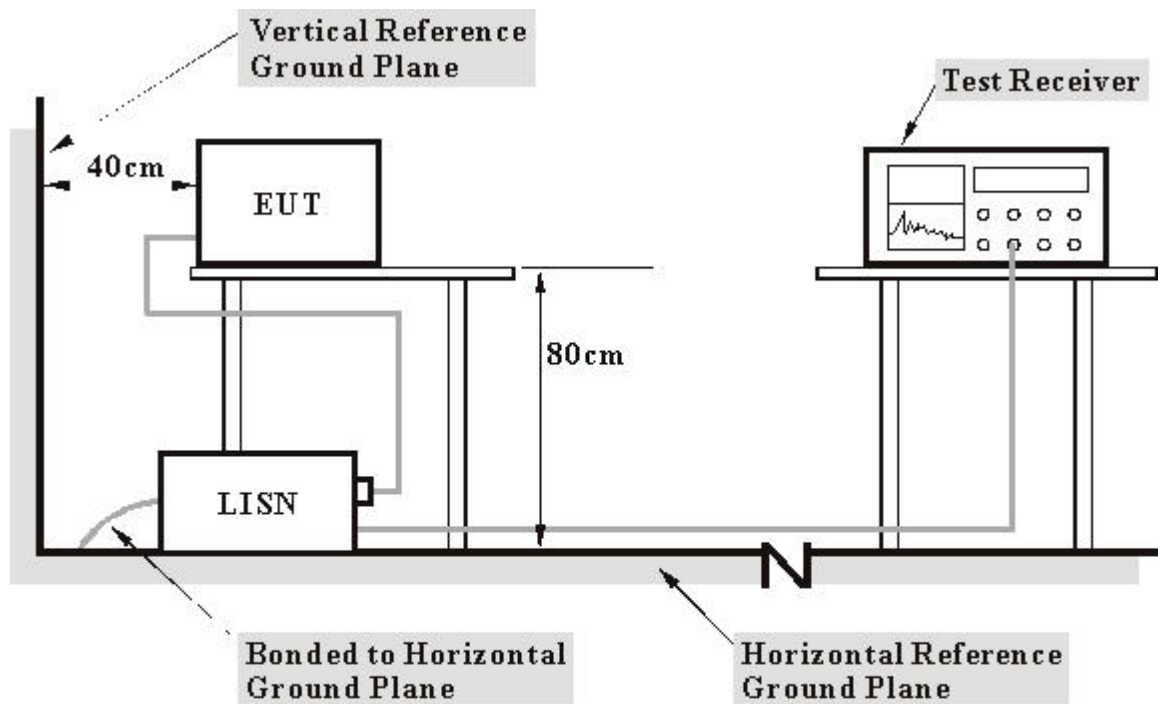

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS


- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program to enable EUT under transmission condition continuously at specific channel frequency.
- c. Notebook computer sends "H" messages to modem.
- d. Notebook computer sends "H" messages to printer, and the printer prints them on paper.

4.1.5 TEST RESULTS

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 980 hPa	TESTED BY	Eric Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.20	49.71	-	49.91	-	64.61	54.61	-14.70	-
2	0.236	0.20	42.68	-	42.88	-	62.24	52.24	-19.36	-
3	0.294	0.20	35.48	-	35.68	-	60.41	50.41	-24.73	-
4	0.350	0.20	33.85	-	34.05	-	58.97	48.97	-24.92	-
5	0.468	0.21	31.09	-	31.30	-	56.56	46.56	-25.26	-
6	23.574	1.24	24.34	-	25.58	-	60.00	50.00	-34.42	-


- NOTES:** (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

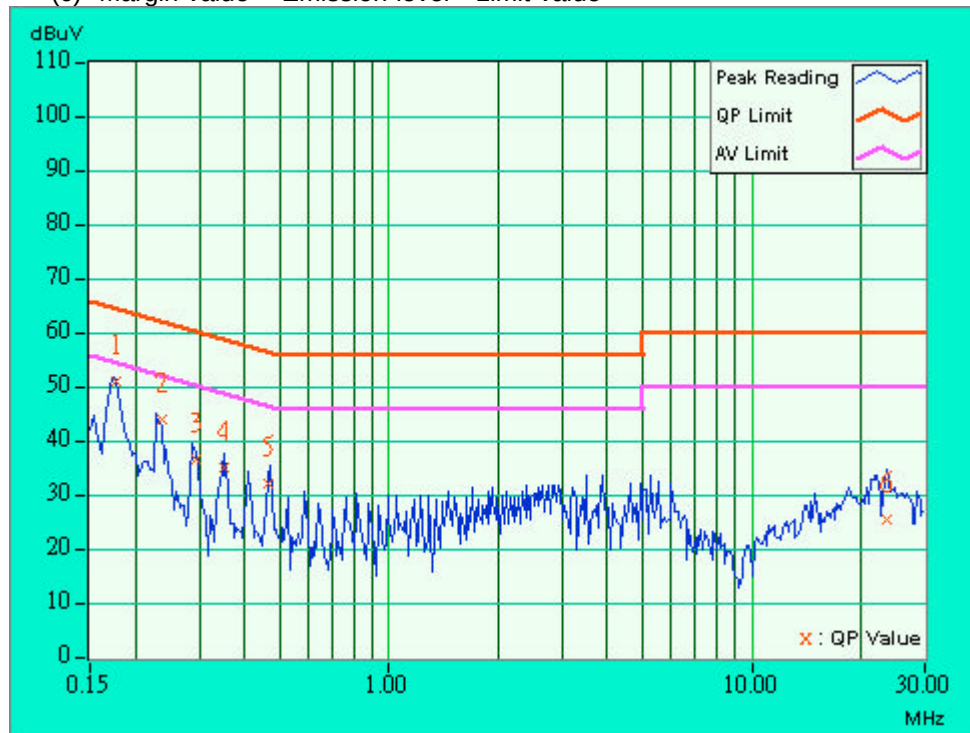

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 980 hPa	TESTED BY	Eric Lee

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.20	49.44	-	49.64	-	64.61	54.61	-14.97	-
2	0.232	0.20	41.08	-	41.28	-	62.38	52.38	-21.10	-
3	0.291	0.20	36.40	-	36.60	-	60.51	50.51	-23.91	-
4	0.349	0.20	34.25	-	34.45	-	58.98	48.98	-24.53	-
5	5.850	0.49	25.83	-	26.32	-	60.00	50.00	-33.68	-
6	21.645	1.07	24.48	-	25.55	-	60.00	50.00	-34.45	-

- NOTES:** (1) "*": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

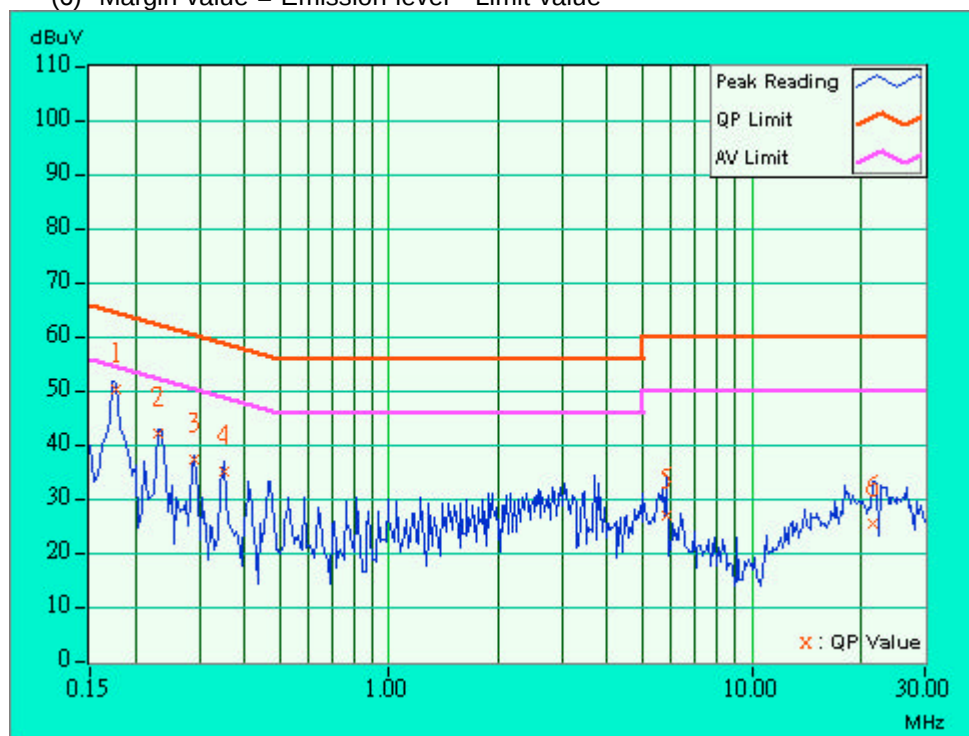



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2004
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2004
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2004
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2004
Schwarzbeck Horn_Antenna	3115	5619	Jul. 17, 2004
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Dec. 01, 2004
RF CABLE (Chaintek) 1GHz-20GHz	SF102	22054-2	Feb. 10. 2004
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2004
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.

2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 3789-C.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

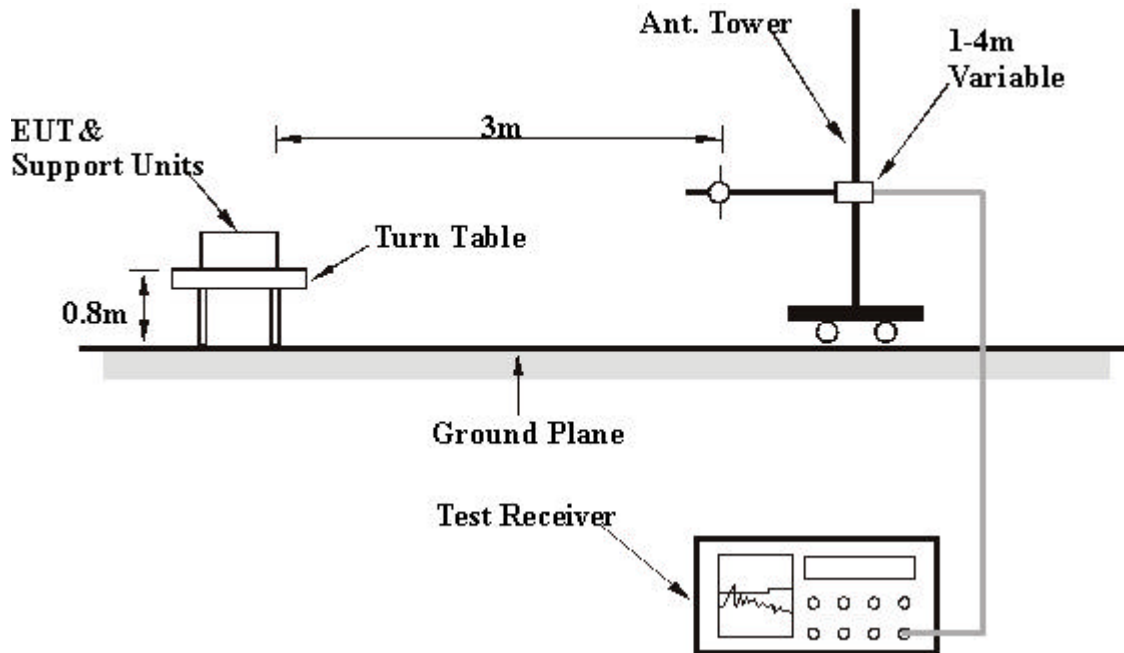

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11 (Antenna 1)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 58%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.24	24.60 QP	40.00	-15.40	1.56 H	326	19.40	5.20
2	126.54	31.60 QP	43.50	-11.90	1.20 H	54	19.60	12.00
3	200.15	31.00 QP	43.50	-12.50	1.06 H	323	22.00	9.00
4	260.24	35.00 QP	46.00	-11.00	1.20 H	9	20.50	14.50
5	319.98	34.50 QP	46.00	-11.50	1.56 H	326	20.00	14.60
6	396.83	24.10 QP	46.00	-21.90	1.08 H	224	7.20	17.00
7	400.03	29.60 QP	46.00	-16.40	1.47 H	77	12.50	17.10
8	499.96	30.70 QP	46.00	-15.30	1.35 H	96	11.40	19.30
9	600.24	28.50 QP	46.00	-17.50	1.88 H	52	7.60	20.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.20	27.20 QP	40.00	-12.80	1.25 V	42	21.90	5.30
2	126.24	31.40 QP	43.50	-12.10	1.65 V	250	19.50	12.00
3	200.23	26.70 QP	43.50	-16.80	1.26 V	54	17.80	9.00
4	256.24	32.60 QP	46.00	-13.40	1.02 V	333	18.60	13.90
5	300.12	32.60 QP	46.00	-13.40	1.00 V	62	18.40	14.20
6	339.86	34.90 QP	46.00	-11.10	1.08 V	53	19.70	15.20
7	358.13	36.90 QP	46.00	-9.10	1.74 V	1	21.20	15.70
8	400.59	25.70 QP	46.00	-20.30	1.58 V	269	8.50	17.10
9	499.68	32.60 QP	46.00	-13.40	1.37 V	89	13.30	19.30
10	800.13	31.60 QP	46.00	-14.40	1.57 V	299	7.90	23.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11 (Antenna 2)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 55%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	124.67	24.80 QP	43.50	-18.70	1.91 H	217	11.80	13.00
2	150.04	20.90 QP	43.50	-22.60	1.42 H	74	8.30	12.60
3	250.01	24.70 QP	46.00	-21.30	1.67 H	318	10.30	14.40
4	374.95	28.30 QP	46.00	-17.70	1.42 H	1	10.50	17.80
5	460.50	28.60 QP	46.00	-17.40	1.13 H	164	8.20	20.40
6	560.80	34.90 QP	46.00	-11.10	1.00 H	116	11.40	23.50
7	624.65	31.80 QP	46.00	-14.20	1.50 H	256	8.00	23.80
8	754.80	34.90 QP	46.00	-11.10	1.34 H	164	8.80	26.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.00	29.10 QP	40.00	-10.90	1.01 V	4	21.20	7.90
2	125.02	30.40 QP	43.50	-13.10	1.19 V	182	17.30	13.10
3	150.01	24.50 QP	43.50	-19.00	1.23 V	7	11.90	12.60
4	200.03	28.70 QP	43.50	-14.80	1.67 V	0	18.60	10.10
5	202.78	22.80 QP	43.50	-20.70	1.48 V	242	12.80	9.90
6	300.33	32.40 QP	46.00	-13.60	1.19 V	24	17.00	15.40
7	375.01	29.20 QP	46.00	-16.80	1.47 V	127	11.40	17.80
8	441.64	28.20 QP	46.00	-17.80	1.34 V	67	8.30	19.90
9	500.02	30.60 QP	46.00	-15.40	1.25 V	224	9.00	21.60
10	624.65	33.50 QP	46.00	-12.50	1.05 V	75	9.70	23.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11 (Antenna 3)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 55%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	124.99	25.30 QP	43.50	-18.20	1.02 H	32	12.20	13.10
2	150.01	21.60 QP	43.50	-21.90	1.02 H	300	9.00	12.60
3	250.22	24.70 QP	46.00	-21.30	1.45 H	241	10.20	14.40
4	375.01	31.30 QP	46.00	-14.70	1.45 H	62	13.60	17.80
5	460.27	29.80 QP	46.00	-16.20	1.63 H	62	9.40	20.40
6	560.20	33.40 QP	46.00	-12.60	1.58 H	57	9.90	23.50
7	625.02	31.00 QP	46.00	-15.00	1.89 H	65	7.20	23.80
8	755.03	34.10 QP	46.00	-11.90	1.47 H	54	8.00	26.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.68	29.50 QP	40.00	-10.50	1.45 V	32	20.20	9.30
2	125.20	29.40 QP	43.50	-14.10	1.02 V	75	16.40	13.00
3	150.36	35.80 QP	43.50	-7.70	1.11 V	45	23.20	12.50
4	200.01	27.60 QP	43.50	-15.90	1.55 V	54	17.50	10.10
5	203.20	26.20 QP	43.50	-17.30	1.25 V	3	16.30	9.90
6	300.02	31.10 QP	46.00	-14.90	1.52 V	254	15.70	15.40
7	375.02	30.00 QP	46.00	-16.00	1.54 V	25	12.20	17.80
8	440.99	28.80 QP	46.00	-17.20	1.56 V	325	8.90	19.90
9	499.99	30.90 QP	46.00	-15.10	1.42 V	62	9.30	21.60
10	625.00	33.70 QP	46.00	-12.30	1.78 V	54	9.90	23.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11 (Antenna 4)	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 55%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.01	26.40 QP	43.50	-17.10	1.76 H	95	13.30	13.10
2	149.99	21.20 QP	43.50	-22.20	1.52 H	209	8.60	12.60
3	250.00	25.00 QP	46.00	-21.00	1.08 H	333	10.60	14.40
4	375.00	29.00 QP	46.00	-17.00	1.24 H	10	11.20	17.80
5	460.37	30.30 QP	46.00	-15.70	1.51 H	242	9.80	20.40
6	559.98	33.20 QP	46.00	-12.80	1.45 H	210	9.70	23.50
7	625.03	32.60 QP	46.00	-13.40	1.44 H	278	8.80	23.80
8	755.01	34.20 QP	46.00	-11.80	1.11 H	56	8.10	26.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.65	30.40 QP	40.00	-9.60	1.54 V	87	20.60	9.80
2	150.01	24.50 QP	43.50	-19.00	1.23 V	7	11.90	12.60
3	199.99	30.00 QP	43.50	-13.50	1.02 V	63	19.90	10.10
4	200.00	23.30 QP	43.50	-20.20	1.32 V	249	13.20	10.10
5	236.00	31.00 QP	46.00	-15.00	1.11 V	54	18.50	12.50
6	300.21	33.20 QP	46.00	-12.80	1.20 V	326	17.80	15.40
7	375.12	30.30 QP	46.00	-15.70	1.59 V	353	12.50	17.80
8	441.35	27.50 QP	46.00	-18.50	4.00 V	52	7.60	19.90
9	500.00	32.00 QP	46.00	-14.00	1.98 V	63	10.40	21.60
10	624.65	34.60 QP	46.00	-11.40	1.12 V	245	10.80	23.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS – DSSS (Antenna 1)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 64%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	41.20 PK	74.00	-32.80	1.44 H	54	11.50	29.70
2	2386.00	53.60 PK	74.00	-20.40	1.59 H	352	23.80	29.80
2	2386.00	42.90 AV	54.00	-11.10	1.59 H	352	13.10	29.80
3	2390.00	54.90 PK	74.00	-19.10	1.45 H	241	25.10	29.80
3	2390.00	43.70 AV	54.00	-10.30	1.45 H	241	13.90	29.80
4	*2412.00	97.70 PK			1.66 H	98	67.80	29.90
4	*2412.00	91.80 AV			1.66 H	98	61.90	29.90
5	2688.00	35.60 PK	74.00	-38.40	1.11 H	56	4.90	30.70
6	4824.00	40.40 PK	74.00	-33.60	1.59 H	352	4.20	36.20
7	7236.00	45.70 PK	74.00	-28.30	1.47 H	54	4.00	41.70
8	9648.00	48.40 PK	74.00	-25.60	1.01 H	264	3.50	44.90
9	10000.00	42.50 PK	74.00	-31.50	1.59 H	98	-1.50	44.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	48.80 PK	74.00	-25.20	1.35 V	241	19.10	29.70
2	2386.00	62.70 PK	74.00	-11.30	1.11 V	230	32.90	29.80
2	2386.00	52.50 AV	54.00	-1.50	1.11 V	230	22.70	29.80
3	2390.00	61.10 PK	74.00	-12.90	1.09 V	209	31.30	29.80
3	2390.00	52.00 AV	54.00	-2.00	1.09 V	209	22.20	29.80
4	*2412.00	105.60 PK			1.09 V	11	75.70	29.90
4	*2412.00	100.40 AV			1.09 V	11	70.50	29.90
5	2688.00	42.70 PK	74.00	-31.30	1.20 V	53	12.00	30.70
6	2928.00	48.50 PK	74.00	-25.50	1.02 V	59	17.20	31.30
7	4824.00	48.40 PK	74.00	-25.60	1.02 V	59	12.20	36.20
8	7236.00	47.40 PK	74.00	-26.60	1.11 V	74	5.70	41.70
9	9648.00	50.20 PK	74.00	-23.80	1.56 V	63	5.30	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 64%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.20 PK	74.00	-21.80	1.48 H	78	21.80	30.40
1	2390.00	43.80 AV	54.00	-10.20	1.48 H	78	13.40	30.40
2	*2437.00	98.20 PK			1.11 H	54	67.60	30.70
2	*2437.00	91.90 AV			1.11 H	54	61.20	30.70
3	2483.50	54.70 PK	74.00	-19.30	1.68 H	333	23.70	31.00
3	2483.50	44.20 AV	54.00	-9.80	1.68 H	333	13.20	31.00
4	2688.00	36.60 PK	74.00	-37.40	1.11 H	96	5.40	31.30
5	2928.00	44.50 PK	74.00	-29.50	1.49 H	5	12.50	32.00
6	4874.00	40.20 PK	74.00	-33.80	1.45 H	241	3.70	36.50
7	7311.00	45.80 PK	74.00	-28.20	1.16 H	352	4.00	41.80
8	9748.00	49.00 PK	74.00	-25.00	1.79 H	63	4.30	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	44.30 PK	74.00	-29.70	1.11 V	60	13.90	30.30
2	2390.00	60.10 PK	74.00	-13.90	1.18 V	54	29.60	30.40
2	2390.00	52.50 AV	54.00	-1.50	1.18 V	54	22.10	30.40
3	*2437.00	109.30 PK			1.11 V	69	78.60	30.70
3	*2437.00	103.30 AV			1.11 V	69	72.70	30.70
4	2483.50	62.70 PK	74.00	-11.30	1.25 V	162	31.70	31.00
4	2483.50	53.00 AV	54.00	-1.00	1.25 V	162	22.00	31.00
5	2688.00	43.60 PK	74.00	-30.40	1.11 V	45	12.40	31.30
6	2928.00	54.80 PK	74.00	-19.20	1.36 V	75	22.80	32.00
6	2928.00	52.20 AV	54.00	-1.80	1.36 V	75	20.20	32.00
7	4874.00	45.10 PK	74.00	-28.90	1.41 V	85	8.60	36.50
8	7311.00	49.20 PK	74.00	-24.80	1.36 V	65	7.40	41.80
9	9748.00	52.10 PK	74.00	-21.90	1.28 V	60	7.40	44.60
9	9748.00	40.60 AV	54.00	-13.40	1.28 V	60	-4.00	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 64%RH, 980 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.60 PK			1.63 H	52	68.70	30.80
1	*2462.00	91.10 AV			1.63 H	52	60.20	30.80
2	2496.00	45.80 PK	74.00	-28.20	1.40 H	9	15.00	30.80
3	2688.00	36.60 PK	74.00	-37.40	1.08 H	96	5.30	31.30
4	2928.00	43.90 PK	74.00	-30.10	1.15 H	65	11.90	32.00
5	4924.00	40.30 PK	74.00	-33.70	1.30 H	52	3.60	36.70
6	7386.00	46.00 PK	74.00	-28.00	1.65 H	243	4.20	41.80
7	9848.00	48.50 PK	74.00	-25.50	1.68 H	98	4.10	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.00 PK			1.02 V	16	74.20	30.80
1	*2462.00	99.40 AV			1.02 V	16	68.60	30.80
2	2483.50	62.40 PK	74.00	-11.60	1.02 V	12	31.50	31.00
2	2483.50	53.00 AV	54.00	-1.00	1.02 V	12	22.00	31.00
3	2496.00	54.00 PK	74.00	-20.00	1.55 V	65	23.30	30.80
3	2496.00	46.00 AV	54.00	-8.00	1.55 V	65	15.20	30.80
4	2688.00	43.60 PK	74.00	-30.40	1.21 V	90	12.40	31.30
5	2928.00	50.20 PK	74.00	-23.80	1.07 V	4	18.20	32.00
6	4924.00	45.50 PK	74.00	-28.50	1.19 V	57	8.90	36.70
7	7386.00	48.80 PK	74.00	-25.20	1.75 V	241	7.00	41.80
8	9848.00	51.00 PK	74.00	-23.00	1.02 V	36	6.70	44.40
8	9848.00	40.50 AV	54.00	-13.50	1.02 V	36	-3.90	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.8 TEST RESULTS – DSSS (Antenna 2)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	53.30 PK	74.00	-20.70	1.05 H	17	23.00	30.30
1	2368.00	46.70 AV	54.00	-7.30	1.05 H	17	16.40	30.30
2	2390.00	58.50 PK	74.00	-15.50	1.24 H	257	28.10	30.40
2	2390.00	49.40 AV	54.00	-4.60	1.24 H	257	19.00	30.40
3	*2412.00	105.30 PK			1.42 H	4	74.80	30.50
3	*2412.00	98.90 AV			1.42 H	4	68.30	30.50
4	4824.00	41.50 PK	74.00	-32.50	1.20 H	360	5.30	36.20
5	5582.00	51.20 PK	74.00	-22.80	1.74 H	47	14.00	37.20
6	6336.00	52.20 PK	74.00	-21.80	1.64 H	169	13.60	38.60
7	7236.00	45.60 PK	74.00	-28.40	1.23 H	333	3.90	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	46.40 PK	74.00	-27.60	1.16 V	3	16.10	30.30
2	2390.00	58.60 PK	74.00	-15.40	1.03 V	2	28.20	30.40
2	2390.00	51.30 AV	54.00	-2.70	1.03 V	2	20.90	30.40
3	*2412.00	108.50 PK			1.06 V	23	78.00	30.50
3	*2412.00	100.80 AV			1.06 V	23	70.30	30.50
4	4824.00	41.20 PK	74.00	-32.80	1.27 V	238	5.00	36.20
5	5580.00	52.80 PK	74.00	-21.20	1.32 V	57	15.60	37.20
6	6336.00	53.90 PK	74.00	-20.10	1.00 V	19	15.20	38.60
7	7236.00	46.50 PK	74.00	-27.50	1.24 V	203	4.80	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.20 PK	74.00	-21.80	1.02 H	54	21.80	30.40
1	2390.00	42.60 AV	54.00	-11.40	1.02 H	54	12.10	30.40
2	*2437.00	112.90 PK			1.51 H	360	82.20	30.70
2	*2437.00	105.90 AV			1.51 H	360	75.20	30.70
3	2483.50	57.90 PK	74.00	-16.10	1.35 H	63	26.90	31.00
3	2483.50	46.60 AV	54.00	-7.40	1.35 H	63	15.70	31.00
4	2496.00	42.50 PK	74.00	-31.50	1.24 H	256	11.70	30.80
5	4874.00	41.50 PK	74.00	-32.50	1.28 H	236	5.10	36.50
6	5605.00	53.10 PK	74.00	-20.90	1.21 H	21	15.80	37.30
6	5605.00	46.70 AV	54.00	-7.30	1.21 H	21	9.50	37.30
7	6336.00	50.50 PK	74.00	-23.50	1.52 H	16	11.90	38.60
8	7311.00	45.70 PK	74.00	-28.30	1.47 H	230	3.90	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	52.70 PK	74.00	-21.30	1.47 V	54	22.40	30.40
1	2375.00	46.20 AV	54.00	-7.80	1.47 V	54	15.90	30.40
2	2390.00	59.30 PK	74.00	-14.70	1.54 V	241	28.90	30.40
2	2390.00	47.20 AV	54.00	-6.80	1.54 V	241	16.80	30.40
3	*2437.00	112.10 PK			1.02 V	17	81.40	30.70
3	*2437.00	107.70 AV			1.02 V	17	77.00	30.70
4	2483.50	63.00 PK	74.00	-11.00	1.11 V	20	32.00	31.00
4	2483.50	51.90 AV	54.00	-2.10	1.11 V	20	21.00	31.00
5	2499.00	46.80 PK	74.00	-27.20	1.27 V	24	16.10	30.70
6	4874.00	46.10 PK	74.00	-27.90	1.23 V	234	9.60	36.50
7	5605.00	59.60 PK	74.00	-14.40	1.19 V	65	22.30	37.30
8	6336.00	60.10 PK	74.00	-13.90	1.22 V	90	21.50	38.60
9	7311.00	47.40 PK	74.00	-26.60	1.25 V	225	5.60	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.30 PK			1.51 H	360	77.50	30.80
1	*2462.00	101.60 AV			1.51 H	360	70.80	30.80
2	2483.50	58.30 PK	74.00	-15.70	1.24 H	236	27.40	31.00
2	2483.50	49.40 AV	54.00	-4.60	1.24 H	236	18.40	31.00
3	4924.00	41.40 PK	74.00	-32.60	1.11 H	227	4.70	36.70
4	5630.00	54.70 PK	74.00	-19.30	1.88 H	226	17.40	37.30
4	5630.00	48.00 AV	54.00	-6.00	1.88 H	226	10.70	37.30
5	6336.00	50.30 PK	74.00	-23.70	1.47 H	232	11.70	38.60
6	7386.00	51.70 PK	74.00	-22.30	1.35 H	297	9.90	41.80
6	7386.00	42.80 AV	54.00	-11.20	1.35 H	297	1.00	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.10 PK			1.00 V	351	79.30	30.80
1	*2462.00	104.10 AV			1.00 V	351	73.30	30.80
2	2483.50	60.30 PK	74.00	-13.70	1.01 V	245	29.30	31.00
2	2483.50	51.90 AV	54.00	-2.10	1.01 V	245	20.90	31.00
3	4924.00	43.20 PK	74.00	-30.80	1.23 V	235	6.50	36.70
4	5630.00	56.70 PK	74.00	-17.30	1.45 V	20	19.40	37.30
4	5630.00	50.10 AV	54.00	-3.90	1.45 V	20	12.80	37.30
5	6336.00	57.00 PK	74.00	-17.00	1.43 V	264	18.40	38.60
6	7386.00	52.60 PK	74.00	-21.40	1.04 V	262	10.80	41.80
6	7386.00	43.10 AV	54.00	-10.90	1.04 V	262	1.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.9 TEST RESULTS – DSSS (Antenna 3)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2367.00	44.50 PK	74.00	-29.50	1.17 H	279	14.20	30.30
2	2390.00	48.70 PK	74.00	-25.30	1.02 H	341	18.30	30.40
3	*2412.00	95.50 PK			1.20 H	278	65.00	30.50
3	*2412.00	89.90 AV			1.20 H	278	59.30	30.50
4	4824.00	40.50 PK	74.00	-33.50	1.78 H	247	4.30	36.20
5	5582.00	50.50 PK	74.00	-23.50	1.40 H	358	13.30	37.20
6	6336.00	45.60 PK	74.00	-28.40	1.61 H	267	7.00	38.60
7	7236.00	45.60 PK	74.00	-28.40	1.38 H	360	4.00	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	52.40 PK	74.00	-21.60	1.13 V	15	22.10	30.30
1	2368.00	45.80 AV	54.00	-8.20	1.13 V	15	15.50	30.30
2	2390.00	60.20 PK	74.00	-13.80	1.25 V	320	29.80	30.40
2	2390.00	51.70 AV	54.00	-2.30	1.25 V	320	21.30	30.40
3	*2412.00	108.20 PK			1.34 V	360	77.70	30.50
3	*2412.00	101.40 AV			1.34 V	360	70.90	30.50
4	4824.00	40.60 PK	74.00	-33.40	1.06 V	360	4.40	36.20
5	5582.00	55.30 PK	74.00	-18.70	1.11 V	48	18.10	37.20
6	6336.00	54.40 PK	74.00	-19.60	1.18 V	260	15.70	38.60
7	7236.00	46.60 PK	74.00	-27.40	1.29 V	341	4.90	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	49.70 PK	74.00	-24.30	1.02 H	35	19.40	30.40
2	2390.00	51.40 PK	74.00	-22.60	1.13 H	243	21.00	30.40
2	2390.00	40.80 AV	54.00	-13.20	1.13 H	243	10.30	30.40
3	*2437.00	105.00 PK			1.21 H	275	74.40	30.70
3	*2437.00	98.20 AV			1.21 H	275	67.60	30.70
4	2483.50	53.70 PK	74.00	-20.30	1.37 H	60	22.70	31.00
4	2483.50	44.60 AV	54.00	-9.40	1.37 H	60	13.60	31.00
5	2496.00	45.30 PK	74.00	-28.70	1.00 H	246	14.50	30.80
6	4874.00	43.80 PK	74.00	-30.20	1.33 H	38	7.30	36.50
7	5605.00	54.90 PK	74.00	-19.10	1.11 H	281	17.60	37.30
7	5605.00	48.80 AV	54.00	-5.20	1.11 H	281	11.50	37.30
8	6336.00	50.60 PK	74.00	-23.40	1.45 H	258	12.00	38.60
9	7311.00	45.60 PK	74.00	-28.40	1.11 H	23	3.80	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	56.10 PK	74.00	-17.90	1.10 V	331	25.70	30.40
1	2375.00	47.60 AV	54.00	-6.40	1.10 V	331	17.30	30.40
2	2390.00	61.90 PK	74.00	-12.10	1.54 V	74	31.50	30.40
2	2390.00	50.20 AV	54.00	-3.80	1.54 V	74	19.70	30.40
3	*2437.00	113.90 PK			1.10 V	351	83.30	30.70
3	*2437.00	107.70 AV			1.10 V	351	77.00	30.70
4	2483.50	64.00 PK	74.00	-10.00	1.53 V	62	33.00	31.00
4	2483.50	51.90 AV	54.00	-2.10	1.53 V	62	20.90	31.00
5	2485.00	56.50 PK	74.00	-17.50	1.24 V	349	25.60	30.90
5	2485.00	51.90 AV	54.00	-2.10	1.24 V	349	20.90	30.90
6	4874.00	44.70 PK	74.00	-29.30	1.22 V	38	8.20	36.50
7	5604.00	60.10 PK	74.00	-13.90	1.00 V	233	22.90	37.30
8	6336.00	58.60 PK	74.00	-15.40	1.00 V	235	20.00	38.60
9	7311.00	45.00 PK	74.00	-29.00	1.24 V	257	3.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.10 PK			1.27 H	276	67.20	30.80
1	*2462.00	91.60 AV			1.27 H	276	60.80	30.80
2	2483.50	48.90 PK	74.00	-25.10	1.02 H	247	17.90	31.00
3	4924.00	40.20 PK	74.00	-33.80	1.23 H	235	3.50	36.70
4	5632.00	49.60 PK	74.00	-24.40	1.31 H	293	12.30	37.30
5	6336.00	45.60 PK	74.00	-28.40	1.38 H	15	7.00	38.60
6	7386.00	46.30 PK	74.00	-27.70	1.03 H	247	4.50	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.20 PK			1.14 V	353	79.40	30.80
1	*2462.00	104.80 AV			1.14 V	353	74.00	30.80
2	2483.50	61.30 PK	74.00	-12.70	1.24 V	320	30.30	31.00
2	2483.50	52.60 AV	54.00	-1.40	1.24 V	320	21.60	31.00
3	4924.00	41.80 PK	74.00	-32.20	1.27 V	230	5.10	36.70
4	5630.00	56.50 PK	74.00	-17.50	1.48 V	256	19.20	37.30
5	6336.00	53.70 PK	74.00	-20.30	1.33 V	258	15.10	38.60
6	7386.00	44.70 PK	74.00	-29.30	1.34 V	298	2.80	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

4.2.10 TEST RESULTS – DSSS (Antenna 4)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2366.00	47.00 PK	74.00	-27.00	1.43 H	360	16.70	30.30
2	2390.00	58.70 PK	74.00	-15.30	1.24 H	20	28.30	30.40
2	2390.00	49.90 AV	54.00	-4.10	1.24 H	20	19.50	30.40
3	*2412.00	102.70 PK			1.18 H	27	72.20	30.50
3	*2412.00	97.50 AV			1.18 H	27	66.90	30.50
4	4824.00	41.50 PK	74.00	-32.50	1.25 H	236	5.30	36.20
5	5580.00	60.70 PK	74.00	-13.30	1.15 H	47	23.50	37.20
6	6336.00	57.40 PK	74.00	-16.60	1.24 H	222	18.80	38.60
7	7236.00	46.50 PK	74.00	-27.50	1.14 H	114	4.80	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2362.00	55.30 PK	74.00	-18.70	1.04 V	2	24.90	30.30
1	2362.00	47.60 AV	54.00	-6.40	1.04 V	2	17.30	30.30
2	2390.00	61.20 PK	74.00	-12.80	1.02 V	247	30.80	30.40
2	2390.00	52.90 AV	54.00	-1.10	1.02 V	247	22.50	30.40
3	*2412.00	106.60 PK			1.00 V	346	76.10	30.50
3	*2412.00	99.50 AV			1.00 V	346	69.00	30.50
4	4824.00	40.40 PK	74.00	-33.60	1.20 V	236	4.20	36.20
5	5580.00	55.00 PK	74.00	-19.00	1.23 V	46	17.80	37.20
6	6336.00	54.80 PK	74.00	-19.20	1.28 V	30	16.20	38.60
7	7236.00	50.00 PK	74.00	-24.00	1.47 V	258	8.40	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.90 PK	74.00	-16.10	1.47 H	5	27.50	30.40
1	2390.00	44.50 AV	54.00	-9.50	1.47 H	5	14.10	30.40
2	*2437.00	103.90 PK			1.36 H	24	73.20	30.70
2	*2437.00	99.60 AV			1.36 H	24	68.90	30.70
3	2483.50	57.90 PK	74.00	-16.10	1.32 H	65	26.90	31.00
3	2483.50	46.60 AV	54.00	-7.40	1.32 H	65	15.60	31.00
4	2498.00	49.10 PK	74.00	-24.90	1.34 H	34	18.30	30.70
5	4874.00	46.00 PK	74.00	-28.00	2.01 H	239	9.50	36.50
6	5603.00	57.60 PK	74.00	-16.40	1.34 H	21	20.30	37.30
7	6336.00	56.80 PK	74.00	-17.20	1.10 H	25	18.20	38.60
8	7311.00	45.80 PK	74.00	-28.20	1.27 H	256	4.00	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.10 PK	74.00	-15.90	1.23 V	65	27.70	30.40
1	2390.00	49.20 AV	54.00	-4.80	1.23 V	65	18.70	30.40
2	*2437.00	110.00 PK			1.02 V	47	79.30	30.70
2	*2437.00	103.20 AV			1.02 V	47	72.60	30.70
3	2483.50	63.60 PK	74.00	-10.40	1.54 V	241	32.70	31.00
3	2483.50	51.70 AV	54.00	-2.30	1.54 V	241	20.70	31.00
4	2498.00	50.70 PK	74.00	-23.30	1.39 V	5	20.00	30.70
5	4874.00	41.00 PK	74.00	-33.00	1.47 V	120	4.60	36.50
6	5606.00	58.30 PK	74.00	-15.70	1.47 V	20	21.00	37.30
7	6336.00	59.20 PK	74.00	-14.80	1.23 V	90	20.50	38.60
8	7311.00	46.40 PK	74.00	-27.60	1.26 V	268	4.60	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.80 PK			1.20 H	241	71.90	30.80
1	*2462.00	96.60 AV			1.20 H	241	65.80	30.80
2	2483.50	57.40 PK	74.00	-16.60	1.23 H	201	26.40	31.00
2	2483.50	48.20 AV	54.00	-5.80	1.23 H	201	17.20	31.00
3	2488.00	57.40 PK	74.00	-16.60	1.86 H	32	26.50	30.90
3	2488.00	46.10 AV	54.00	-7.90	1.86 H	32	15.20	30.90
4	4924.00	41.30 PK	74.00	-32.70	1.36 H	236	4.60	36.70
5	5628.00	51.50 PK	74.00	-22.50	1.22 H	28	14.20	37.30
6	6336.00	51.60 PK	74.00	-22.40	1.45 H	24	13.00	38.60
7	7386.00	47.30 PK	74.00	-26.70	1.24 H	223	5.50	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.20 PK			1.00 V	357	76.40	30.80
1	*2462.00	100.70 AV			1.00 V	357	69.90	30.80
2	2483.50	61.30 PK	74.00	-12.70	1.01 V	345	30.30	31.00
2	2483.50	52.30 AV	54.00	-1.70	1.01 V	345	21.30	31.00
3	2488.00	60.60 PK	74.00	-13.40	1.50 V	202	29.70	30.90
3	2488.00	50.90 AV	54.00	-3.10	1.50 V	202	20.00	30.90
4	4924.00	42.50 PK	74.00	-31.50	1.02 V	320	5.80	36.70
5	5628.00	58.00 PK	74.00	-16.00	1.81 V	0	20.70	37.30
6	6336.00	55.50 PK	74.00	-18.50	1.27 V	235	16.90	38.60
7	7386.00	47.30 PK	74.00	-26.70	1.24 V	201	5.50	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

4.2.11 TEST RESULTS –OFDM (Antenna 1)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	46.90 PK	74.00	-27.10	1.13 H	111	16.60	30.30
2	2390.00	53.60 PK	74.00	-20.40	1.40 H	201	23.20	30.40
2	2390.00	42.70 AV	54.00	-11.30	1.40 H	201	12.30	30.40
3	*2412.00	94.70 PK			1.55 H	360	64.20	30.50
3	*2412.00	85.80 AV			1.55 H	360	55.20	30.50
4	2688.00	41.30 PK	74.00	-32.70	1.36 H	69	10.00	31.30
5	2928.00	41.20 PK	74.00	-32.80	1.24 H	62	9.20	32.00
6	4824.00	42.50 PK	74.00	-31.50	1.54 H	241	6.20	36.20
7	7236.00	48.40 PK	74.00	-25.60	1.68 H	74	6.70	41.70
8	9648.00	47.10 PK	74.00	-26.90	1.42 H	202	2.20	44.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	55.00 PK	74.00	-19.00	1.30 V	236	24.70	30.30
1	2368.00	47.60 AV	54.00	-6.40	1.30 V	236	17.20	30.30
2	2390.00	61.50 PK	74.00	-12.50	1.45 V	241	31.10	30.40
2	2390.00	51.90 AV	54.00	-2.10	1.45 V	241	21.50	30.40
3	*2412.00	102.10 PK			1.16 V	20	71.50	30.50
3	*2412.00	92.60 AV			1.16 V	20	62.00	30.50
4	2688.00	47.60 PK	74.00	-26.40	1.10 V	70	16.40	31.30
5	2928.00	49.30 PK	74.00	-24.70	1.10 V	21	17.40	32.00
6	4824.00	45.20 PK	74.00	-28.80	1.42 V	21	9.00	36.20
7	7236.00	52.20 PK	74.00	-21.80	1.63 V	254	10.50	41.70
7	7236.00	43.40 AV	54.00	-10.60	1.63 V	254	1.70	41.70
8	9648.00	50.10 PK	74.00	-23.90	1.54 V	245	5.20	44.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	45.80 PK	74.00	-28.20	1.25 H	55	15.40	30.40
2	*2437.00	100.70 PK			1.25 H	52	70.00	30.70
2	*2437.00	91.90 AV			1.25 H	52	61.20	30.70
3	2483.50	48.30 PK	74.00	-25.70	1.58 H	98	17.40	31.00
4	2688.00	43.60 PK	74.00	-30.40	1.52 H	36	12.40	31.30
5	2928.00	44.90 PK	74.00	-29.10	1.35 H	62	12.90	32.00
6	4874.00	43.10 PK	74.00	-30.90	1.16 H	10	6.60	36.50
7	7311.00	48.80 PK	74.00	-25.20	1.47 H	54	7.00	41.80
8	9748.00	46.50 PK	74.00	-27.50	1.44 H	44	1.90	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.40 PK	74.00	-19.60	1.13 V	110	24.00	30.40
1	2390.00	46.30 AV	54.00	-7.70	1.13 V	110	15.90	30.40
2	*2437.00	107.80 PK			1.15 V	25	77.20	30.70
2	*2437.00	99.30 AV			1.15 V	25	68.60	30.70
3	2483.50	56.80 PK	74.00	-17.20	1.12 V	60	25.80	31.00
3	2483.50	49.00 AV	54.00	-5.00	1.12 V	60	18.00	31.00
4	2688.00	52.60 PK	74.00	-21.40	1.11 V	86	21.40	31.30
4	2688.00	51.60 AV	54.00	-2.40	1.11 V	86	20.30	31.30
5	2928.00	53.70 PK	74.00	-20.30	1.26 V	5	21.70	32.00
5	2928.00	51.50 AV	54.00	-2.50	1.26 V	5	19.50	32.00
6	4874.00	47.00 PK	74.00	-27.00	1.16 V	25	10.60	36.50
7	7311.00	53.40 PK	74.00	-20.60	1.16 V	254	11.70	41.80
7	7311.00	44.20 AV	54.00	-9.80	1.16 V	254	2.50	41.80
8	9748.00	50.50 PK	74.00	-23.50	1.15 V	96	5.90	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.50 PK			1.20 H	50	63.70	30.80
1	*2462.00	85.70 AV			1.20 H	50	54.90	30.80
2	2483.50	54.50 PK	74.00	-19.50	1.45 H	57	23.50	31.00
2	2483.50	43.20 AV	54.00	-10.80	1.45 H	57	12.20	31.00
3	2496.00	50.40 PK	74.00	-23.60	1.58 H	87	19.60	30.80
4	2688.00	41.30 PK	74.00	-32.70	1.63 H	265	10.00	31.30
5	2928.00	40.70 PK	74.00	-33.30	1.54 H	21	8.70	32.00
6	4924.00	43.20 PK	74.00	-30.80	1.52 H	45	6.50	36.70
7	7386.00	48.50 PK	74.00	-25.50	1.23 H	65	6.60	41.80
8	9848.00	45.80 PK	74.00	-28.20	1.11 H	4	1.50	44.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.80 PK			1.16 V	68	71.00	30.80
1	*2462.00	92.60 AV			1.16 V	68	61.80	30.80
2	2483.50	62.10 PK	74.00	-11.90	1.45 V	241	31.10	31.00
2	2483.50	52.10 AV	54.00	-1.90	1.45 V	241	21.10	31.00
3	2496.00	57.80 PK	74.00	-16.20	1.05 V	6	27.00	30.80
3	2496.00	49.70 AV	54.00	-4.30	1.05 V	6	19.00	30.80
4	2688.00	47.70 PK	74.00	-26.30	1.10 V	72	16.40	31.30
5	2928.00	49.70 PK	74.00	-24.30	1.42 V	1	17.70	32.00
6	4924.00	45.80 PK	74.00	-28.20	1.45 V	241	9.10	36.70
7	7386.00	52.50 PK	74.00	-21.50	1.22 V	65	10.70	41.80
7	7386.00	42.40 AV	54.00	-11.60	1.22 V	65	0.50	41.80
8	9848.00	49.00 PK	74.00	-25.00	1.54 V	241	4.60	44.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23 deg. C, 65%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.10 PK	74.00	-17.90	1.53 H	116	25.70	30.40
1	2390.00	42.80 AV	54.00	-11.20	1.53 H	116	12.30	30.40
2	*2437.00	92.30 PK			1.55 H	8	61.60	30.70
2	*2437.00	84.70 AV			1.55 H	8	54.00	30.70
3	2483.50	54.90 PK	74.00	-19.10	1.02 H	8	23.90	31.00
3	2483.50	43.20 AV	54.00	-10.80	1.02 H	8	12.20	31.00
4	2554.00	46.20 PK	74.00	-27.80	1.22 H	213	15.30	30.90
5	2688.00	42.20 PK	74.00	-31.80	1.53 H	62	11.00	31.30
6	2928.00	39.10 PK	74.00	-34.90	1.53 H	62	7.10	32.00
7	4874.00	42.70 PK	74.00	-31.30	1.11 H	172	6.20	36.50
8	7311.00	46.90 PK	74.00	-27.10	1.02 H	32	5.10	41.80
9	9748.00	47.30 PK	74.00	-26.70	1.66 H	202	2.60	44.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.90 PK	74.00	-9.10	1.35 V	62	34.40	30.40
1	2390.00	52.60 AV	54.00	-1.40	1.35 V	62	22.20	30.40
2	*2437.00	99.70 PK			1.35 V	35	69.00	30.70
2	*2437.00	92.10 AV			1.35 V	35	61.40	30.70
3	2483.50	64.20 PK	74.00	-9.80	1.54 V	241	33.20	31.00
3	2483.50	52.80 AV	54.00	-1.20	1.54 V	241	21.80	31.00
4	2554.00	52.90 PK	74.00	-21.10	1.12 V	70	22.10	30.90
4	2554.00	47.90 AV	54.00	-6.10	1.12 V	70	17.10	30.90
5	2688.00	47.30 PK	74.00	-26.70	1.19 V	86	16.00	31.30
6	2928.00	45.70 PK	74.00	-28.30	1.02 V	47	13.70	32.00
7	4874.00	46.40 PK	74.00	-27.60	1.08 V	73	9.90	36.50
8	7311.00	52.30 PK	74.00	-21.70	1.20 V	36	10.50	41.80
8	7311.00	43.20 AV	54.00	-10.80	1.20 V	36	1.40	41.80
9	9748.00	48.90 PK	74.00	-25.10	1.54 V	241	4.20	44.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.12 TEST RESULTS –OFDM (Antenna 2)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	55.30 PK	74.00	-18.70	1.30 H	346	24.90	30.30
1	2368.00	47.20 AV	54.00	-6.80	1.30 H	346	16.80	30.30
2	2390.00	62.50 PK	74.00	-11.50	1.23 H	247	32.10	30.40
2	2390.00	53.50 AV	54.00	-0.50	1.23 H	247	23.10	30.40
3	*2412.00	102.10 PK			1.35 H	343	71.60	30.50
3	*2412.00	93.80 AV			1.35 H	343	63.20	30.50
4	4824.00	42.00 PK	74.00	-32.00	1.24 H	144	5.80	36.20
5	5585.00	46.00 PK	74.00	-28.00	1.40 H	39	8.80	37.20
6	6336.00	48.20 PK	74.00	-25.80	1.64 H	151	9.60	38.60
7	7236.00	51.00 PK	74.00	-23.00	1.23 H	234	9.40	41.70
7	7236.00	41.40 AV	54.00	-12.60	1.23 H	234	-0.20	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	50.70 PK	74.00	-23.30	1.06 V	18	20.30	30.30
2	2390.00	59.70 PK	74.00	-14.30	1.03 V	234	29.30	30.40
2	2390.00	52.20 AV	54.00	-1.80	1.03 V	234	21.80	30.40
3	*2412.00	100.40 PK			1.00 V	23	69.90	30.50
3	*2412.00	92.50 AV			1.00 V	23	62.00	30.50
4	4824.00	40.20 PK	74.00	-33.80	1.24 V	241	4.00	36.20
5	5583.00	52.90 PK	74.00	-21.10	1.31 V	64	15.70	37.20
5	5583.00	45.50 AV	54.00	-8.50	1.31 V	64	8.30	37.20
6	6336.00	48.80 PK	74.00	-25.20	1.56 V	61	10.20	38.60
7	7236.00	47.20 PK	74.00	-26.80	1.36 V	25	5.50	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.40 PK	74.00	-16.60	1.47 H	54	27.00	30.40
1	2390.00	46.70 AV	54.00	-7.30	1.47 H	54	16.20	30.40
2	*2437.00	109.30 PK			1.59 H	35	78.60	30.70
2	*2437.00	101.90 AV			1.59 H	35	71.20	30.70
3	2483.50	58.00 PK	74.00	-16.00	1.53 H	62	27.00	31.00
3	2483.50	47.80 AV	54.00	-6.20	1.53 H	62	16.80	31.00
4	2496.00	58.00 PK	74.00	-16.00	1.46 H	10	27.20	30.80
4	2496.00	51.10 AV	54.00	-2.90	1.46 H	10	20.30	30.80
5	4874.00	44.80 PK	74.00	-29.20	1.24 H	256	8.30	36.50
6	5600.00	49.20 PK	74.00	-24.80	1.76 H	360	12.00	37.20
7	6336.00	48.60 PK	74.00	-25.40	1.53 H	155	10.00	38.60
8	7311.00	45.90 PK	74.00	-28.10	1.27 H	350	4.10	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.50 PK	74.00	-14.50	1.41 V	203	29.10	30.40
1	2390.00	47.20 AV	54.00	-6.80	1.41 V	203	16.80	30.40
2	*2437.00	107.00 PK			1.00 V	15	76.30	30.70
2	*2437.00	99.70 AV			1.00 V	15	69.00	30.70
3	2483.50	62.70 PK	74.00	-11.30	1.54 V	241	31.70	31.00
3	2483.50	52.00 AV	54.00	-2.00	1.54 V	241	21.00	31.00
4	2496.00	57.10 PK	74.00	-16.90	1.00 V	360	26.40	30.80
4	2496.00	47.00 AV	54.00	-7.00	1.00 V	360	16.20	30.80
5	4874.00	44.70 PK	74.00	-29.30	1.45 V	256	8.20	36.50
6	5605.00	49.80 PK	74.00	-24.20	1.11 V	253	12.60	37.30
7	6336.00	51.00 PK	74.00	-23.00	1.45 V	360	12.40	38.60
7	6336.00	48.30 AV	54.00	-5.70	1.45 V	360	9.70	38.60
8	7311.00	51.20 PK	74.00	-22.80	1.24 V	222	9.50	41.80
8	7311.00	41.40 AV	54.00	-12.60	1.24 V	222	-0.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.60 PK			1.22 H	360	72.70	30.80
1	*2462.00	96.60 AV			1.22 H	360	65.80	30.80
2	2483.50	61.50 PK	74.00	-12.50	1.04 H	233	30.50	31.00
2	2483.50	52.40 AV	54.00	-1.60	1.04 H	233	21.40	31.00
3	4924.00	41.60 PK	74.00	-32.40	1.23 H	245	5.00	36.70
4	5628.00	44.50 PK	74.00	-29.50	1.14 H	65	7.20	37.30
5	6336.00	53.80 PK	74.00	-20.20	1.72 H	27	15.20	38.60
5	6336.00	51.90 AV	54.00	-2.10	1.72 H	27	13.20	38.60
6	7386.00	52.40 PK	74.00	-21.60	1.20 H	222	10.60	41.80
6	7386.00	42.60 AV	54.00	-11.40	1.20 H	222	0.80	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.30 PK			1.24 V	352	73.50	30.80
1	*2462.00	93.00 AV			1.24 V	352	62.20	30.80
2	2483.50	61.20 PK	74.00	-12.80	1.23 V	254	30.20	31.00
2	2483.50	52.40 AV	54.00	-1.60	1.23 V	254	21.40	31.00
3	4924.00	42.20 PK	74.00	-31.80	1.24 V	201	5.50	36.70
4	5628.00	52.50 PK	74.00	-21.50	1.63 V	62	15.20	37.30
4	5628.00	45.00 AV	54.00	-9.00	1.63 V	62	7.70	37.30
5	6336.00	54.70 PK	74.00	-19.30	1.25 V	30	16.10	38.60
5	6336.00	52.80 AV	54.00	-1.20	1.25 V	30	14.20	38.60
6	7386.00	52.40 PK	74.00	-21.60	1.22 V	236	10.50	41.80
6	7386.00	43.10 AV	54.00	-10.90	1.22 V	236	1.30	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 980 hPa	TESTED BY	Hank Chung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.80 PK	74.00	-17.20	1.05 H	110	27.00	29.80
1	2390.00	45.80 AV	54.00	-8.20	1.05 H	110	16.00	29.80
2	*2437.00	100.80 PK			1.33 H	188	70.80	30.00
2	*2437.00	91.80 AV			1.33 H	188	61.80	30.00
3	2483.50	56.80 PK	74.00	-17.20	1.05 H	105	26.70	30.10
3	2483.50	45.70 AV	54.00	-8.30	1.05 H	105	15.50	30.10
4	2496.00	54.70 PK	74.00	-19.30	1.30 H	203	24.50	30.20
4	2496.00	45.00 AV	54.00	-9.00	1.30 H	203	14.80	30.20
5	4874.00	46.90 PK	74.00	-27.10	1.05 H	90	10.40	36.50
6	5600.00	49.40 PK	74.00	-24.60	1.00 H	200	12.20	37.20
7	6336.00	52.60 PK	74.00	-21.40	1.31 H	150	14.00	38.60
7	6336.00	47.60 AV	54.00	-6.40	1.31 H	150	9.00	38.60
8	7311.00	52.10 PK	74.00	-21.90	1.05 H	80	10.40	41.80
8	7311.00	39.60 AV	54.00	-14.40	1.05 H	80	-2.10	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.80 PK	74.00	-20.20	1.05 V	110	24.00	29.80
1	2390.00	43.00 AV	54.00	-11.00	1.05 V	110	13.10	29.80
2	*2437.00	98.20 PK			1.21 V	186	68.20	30.00
2	*2437.00	89.00 AV			1.21 V	186	59.00	30.00
3	2483.50	54.20 PK	74.00	-19.80	1.05 V	100	24.10	30.10
3	2483.50	42.90 AV	54.00	-11.10	1.05 V	100	12.70	30.10
4	2496.00	50.20 PK	74.00	-23.80	1.18 V	220	20.00	30.20
5	4874.00	45.20 PK	74.00	-28.80	1.05 V	80	8.70	36.50
6	5600.00	49.70 PK	74.00	-24.30	1.20 V	150	12.50	37.20
7	6336.00	54.80 PK	74.00	-19.20	1.25 V	67	16.20	38.60
7	6336.00	50.90 AV	54.00	-3.10	1.25 V	67	12.30	38.60
8	7311.00	50.10 PK	74.00	-23.90	1.05 V	80	8.40	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.13 TEST RESULTS –OFDM (Antenna 3)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	37.80 PK	74.00	-36.20	1.04 H	56	7.40	30.40
2	2390.00	45.40 PK	74.00	-28.60	1.24 H	230	14.90	30.40
3	*2412.00	87.50 PK			1.26 H	274	57.00	30.50
3	*2412.00	81.00 AV			1.26 H	274	50.40	30.50
4	4824.00	41.50 PK	74.00	-32.50	1.24 H	360	5.30	36.20
5	5582.00	43.20 PK	74.00	-30.80	1.67 H	23	6.00	37.20
6	6336.00	47.10 PK	74.00	-26.90	1.64 H	23	8.50	38.60
7	7236.00	45.30 PK	74.00	-28.70	1.02 H	241	3.60	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	51.60 PK	74.00	-22.40	1.00 V	343	21.20	30.30
1	2368.00	42.10 AV	54.00	-11.90	1.00 V	343	11.80	30.30
2	2390.00	59.40 PK	74.00	-14.60	1.24 V	24	29.00	30.40
2	2390.00	50.30 AV	54.00	-3.70	1.24 V	24	19.90	30.40
3	*2412.00	102.50 PK			1.36 V	2	72.00	30.50
3	*2412.00	95.20 AV			1.36 V	2	64.70	30.50
4	4824.00	39.90 PK	74.00	-34.10	1.13 V	360	3.60	36.20
5	5579.00	46.80 PK	74.00	-27.20	1.36 V	261	9.60	37.20
6	6336.00	51.90 PK	74.00	-22.10	1.34 V	259	13.30	38.60
6	6336.00	49.20 AV	54.00	-4.80	1.34 V	259	10.60	38.60
7	7236.00	46.20 PK	74.00	-27.80	1.28 V	349	4.60	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2380.00	43.90 PK	74.00	-30.10	2.00 H	254	13.50	30.40
2	2390.00	56.30 PK	74.00	-17.70	1.02 H	62	25.90	30.40
2	2390.00	45.20 AV	54.00	-8.80	1.02 H	62	14.80	30.40
3	*2437.00	97.70 PK			1.24 H	273	67.00	30.70
3	*2437.00	91.40 AV			1.24 H	273	60.70	30.70
4	2483.50	60.30 PK	74.00	-13.70	1.76 H	326	29.30	31.00
4	2483.50	48.00 AV	54.00	-6.00	1.76 H	326	17.00	31.00
5	2496.00	44.30 PK	74.00	-29.70	1.91 H	268	13.60	30.80
6	4874.00	46.10 PK	74.00	-27.90	1.25 H	258	9.70	36.50
7	5610.00	46.80 PK	74.00	-27.20	1.23 H	201	9.50	37.30
8	6336.00	52.20 PK	74.00	-21.80	1.30 H	42	13.60	38.60
9	7311.00	45.30 PK	74.00	-28.70	1.22 H	222	3.50	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2381.00	58.70 PK	74.00	-15.30	1.00 V	360	28.40	30.40
1	2381.00	47.00 AV	54.00	-7.00	1.00 V	360	16.60	30.40
2	2390.00	64.30 PK	74.00	-9.70	1.02 V	47	33.90	30.40
2	2390.00	51.90 AV	54.00	-2.10	1.02 V	47	21.50	30.40
3	*2437.00	109.00 PK			1.22 V	360	78.30	30.70
3	*2437.00	101.90 AV			1.22 V	360	71.20	30.70
4	2483.50	63.30 PK	74.00	-10.70	1.45 V	74	32.30	31.00
4	2483.50	51.90 AV	54.00	-2.10	1.45 V	74	20.90	31.00
5	2496.00	64.00 PK	74.00	-10.00	1.39 V	45	33.20	30.80
5	2496.00	50.80 AV	54.00	-3.20	1.39 V	45	20.00	30.80
6	4874.00	44.10 PK	74.00	-29.90	1.02 V	321	7.60	36.50
7	5604.00	54.20 PK	74.00	-19.80	1.02 V	264	17.00	37.30
8	6336.00	57.20 PK	74.00	-16.80	1.16 V	267	18.60	38.60
9	7311.00	45.60 PK	74.00	-28.40	1.24 V	247	3.80	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	90.90 PK			1.21 H	277	60.00	30.80
1	*2462.00	84.30 AV			1.21 H	277	53.50	30.80
2	2483.50	48.40 PK	74.00	-25.60	1.24 H	256	17.40	31.00
3	4924.00	40.20 PK	74.00	-33.80	1.23 H	234	3.50	36.70
4	5637.00	45.40 PK	74.00	-28.60	1.60 H	287	8.10	37.30
5	6336.00	47.40 PK	74.00	-26.60	1.08 H	125	8.80	38.60
6	7386.00	47.50 PK	74.00	-26.50	1.22 H	114	5.70	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.60 PK			1.11 V	247	73.80	30.80
1	*2462.00	97.00 AV			1.11 V	247	66.20	30.80
2	2483.50	61.30 PK	74.00	-12.70	1.24 V	231	30.30	31.00
2	2483.50	52.80 AV	54.00	-1.20	1.24 V	231	21.80	31.00
3	4924.00	41.10 PK	74.00	-32.90	1.02 V	257	4.40	36.70
4	5632.00	49.20 PK	74.00	-24.80	1.00 V	270	11.90	37.30
5	6336.00	49.20 PK	74.00	-24.80	1.20 V	2	10.60	38.60
6	7386.00	51.50 PK	74.00	-22.50	1.07 V	253	9.60	41.80
6	7386.00	42.50 AV	54.00	-11.50	1.07 V	253	0.60	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 980 hPa	TESTED BY	Hank Chung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	44.10 PK	74.00	-29.90	1.00 H	80	14.30	29.80
2	*2437.00	87.80 PK			1.28 H	191	57.80	30.00
2	*2437.00	78.80 AV			1.28 H	191	48.80	30.00
3	2483.50	43.70 PK	74.00	-30.30	1.00 H	80	13.60	30.10
4	2496.00	43.70 PK	74.00	-30.30	1.00 H	90	13.50	30.20
5	4874.00	45.90 PK	74.00	-28.10	1.00 H	90	9.40	36.50
6	5600.00	46.90 PK	74.00	-27.10	1.00 H	190	9.70	37.20
7	6336.00	51.90 PK	74.00	-22.10	1.00 H	145	13.30	38.60
7	6336.00	46.90 AV	54.00	-7.10	1.00 H	145	8.30	38.60
8	7311.00	51.50 PK	74.00	-22.50	1.00 H	80	9.80	41.80
8	7311.00	39.90 AV	54.00	-14.10	1.00 H	80	-1.80	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.50 PK	74.00	-13.50	1.14 V	192	30.70	29.80
1	2390.00	50.00 AV	54.00	-4.00	1.14 V	192	20.20	29.80
2	*2437.00	105.50 PK			1.14 V	190	75.50	30.00
2	*2437.00	96.00 AV			1.14 V	190	66.00	30.00
3	2483.50	60.50 PK	74.00	-13.50	1.14 V	195	30.40	30.10
3	2483.50	49.90 AV	54.00	-4.10	1.14 V	195	19.80	30.10
4	2486.00	55.00 PK	74.00	-19.00	1.00 V	242	24.90	30.10
4	2486.00	46.70 AV	54.00	-7.30	1.00 V	242	16.50	30.10
5	4874.00	44.80 PK	74.00	-29.20	1.00 V	60	8.30	36.50
6	5600.00	48.10 PK	74.00	-25.90	1.00 V	250	10.80	37.20
7	6336.00	55.60 PK	74.00	-18.40	1.05 V	261	17.00	38.60
7	6336.00	52.40 AV	54.00	-1.60	1.05 V	261	13.80	38.60
8	7311.00	50.60 PK	74.00	-23.40	1.00 V	75	8.90	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.14 TEST RESULTS –OFDM (Antenna 4)

EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2336.00	46.50 PK	74.00	-27.50	1.02 H	321	16.30	30.20
2	2390.00	52.40 PK	74.00	-21.60	1.23 H	120	22.00	30.40
2	2390.00	43.50 AV	54.00	-10.50	1.23 H	120	13.10	30.40
3	*2412.00	94.70 PK			1.20 H	23	64.20	30.50
3	*2412.00	86.90 AV			1.20 H	23	56.30	30.50
4	4824.00	41.20 PK	74.00	-32.80	1.04 H	204	5.00	36.20
5	5574.00	49.20 PK	74.00	-24.80	1.17 H	217	12.10	37.20
6	6336.00	53.50 PK	74.00	-20.50	1.38 H	247	14.90	38.60
7	7236.00	45.20 PK	74.00	-28.80	1.24 H	111	3.50	41.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2336.00	57.50 PK	74.00	-16.50	1.02 V	36	27.30	30.20
1	2336.00	46.50 AV	54.00	-7.50	1.02 V	36	16.20	30.20
2	2390.00	61.40 PK	74.00	-12.60	1.23 V	2	31.00	30.40
2	2390.00	52.80 AV	54.00	-1.20	1.23 V	2	22.40	30.40
3	*2412.00	100.50 PK			1.20 V	13	70.00	30.50
3	*2412.00	93.10 AV			1.20 V	13	62.60	30.50
4	4824.00	42.30 PK	74.00	-31.70	1.29 V	57	6.10	36.20
5	5586.00	51.70 PK	74.00	-22.30	1.49 V	62	14.50	37.20
6	6336.00	55.40 PK	74.00	-18.60	1.40 V	30	16.80	38.60
7	7236.00	51.20 PK	74.00	-22.80	1.23 V	360	9.50	41.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.20 PK	74.00	-16.80	1.54 H	74	26.80	30.40
1	2390.00	44.20 AV	54.00	-9.80	1.54 H	74	13.80	30.40
2	*2437.00	101.70 PK			1.14 H	20	71.00	30.70
2	*2437.00	95.90 AV			1.14 H	20	65.20	30.70
3	2483.50	58.60 PK	74.00	-15.40	1.23 H	62	27.70	31.00
3	2483.50	45.60 AV	54.00	-8.40	1.23 H	62	14.70	31.00
4	2496.00	48.70 PK	74.00	-25.30	1.13 H	32	17.90	30.80
5	4874.00	43.50 PK	74.00	-30.50	1.02 H	360	7.00	36.50
6	5607.00	58.10 PK	74.00	-15.90	1.20 H	236	20.80	37.30
6	5607.00	50.50 AV	54.00	-3.50	1.20 H	236	13.30	37.30
7	6336.00	59.90 PK	74.00	-14.10	1.36 H	201	21.30	38.60
8	7311.00	45.10 PK	74.00	-28.90	1.20 H	201	3.30	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.90 PK	74.00	-11.10	1.23 V	65	32.50	30.40
1	2390.00	51.50 AV	54.00	-2.50	1.23 V	65	21.10	30.40
2	*2437.00	105.40 PK			1.24 V	256	74.70	30.70
2	*2437.00	98.90 AV			1.24 V	256	68.20	30.70
3	2483.50	62.30 PK	74.00	-11.70	1.59 V	353	31.30	31.00
3	2483.50	50.90 AV	54.00	-3.10	1.59 V	353	20.00	31.00
4	2497.00	49.40 PK	74.00	-24.60	1.15 V	9	18.60	30.70
5	4874.00	44.80 PK	74.00	-29.20	2.30 V	214	8.30	36.50
6	5612.00	57.60 PK	74.00	-16.40	1.35 V	33	20.40	37.30
6	5612.00	51.50 AV	54.00	-2.50	1.35 V	33	14.30	37.30
7	6336.00	59.60 PK	74.00	-14.40	1.42 V	35	21.00	38.60
8	7311.00	46.50 PK	74.00	-27.50	1.24 V	256	4.70	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 57%RH, 980 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.30 PK			1.16 H	27	66.50	30.80
1	*2462.00	90.10 AV			1.16 H	27	59.20	30.80
2	2483.50	57.60 PK	74.00	-16.40	1.56 H	360	26.70	31.00
2	2483.50	48.30 AV	54.00	-5.70	1.56 H	360	17.30	31.00
3	2496.00	49.80 PK	74.00	-24.20	1.65 H	24	19.00	30.80
4	4924.00	41.50 PK	74.00	-32.50	1.20 H	36	4.80	36.70
5	5626.00	50.40 PK	74.00	-23.60	1.33 H	10	13.10	37.30
6	6336.00	53.50 PK	74.00	-20.50	1.38 H	36	14.80	38.60
6	6336.00	48.50 AV	54.00	-5.50	1.38 H	36	9.90	38.60
7	7386.00	47.90 PK	74.00	-26.10	1.23 H	20	6.10	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.60 PK			1.00 V	11	68.80	30.80
1	*2462.00	92.60 AV			1.00 V	11	61.80	30.80
2	2483.50	58.70 PK	74.00	-15.30	1.02 V	24	27.70	31.00
2	2483.50	50.30 AV	54.00	-3.70	1.02 V	24	19.30	31.00
3	2496.00	54.30 PK	74.00	-19.70	1.02 V	321	23.60	30.80
3	2496.00	45.00 AV	54.00	-9.00	1.02 V	321	14.30	30.80
4	4924.00	41.80 PK	74.00	-32.20	1.26 V	236	5.10	36.70
5	5635.00	53.60 PK	74.00	-20.40	1.33 V	122	16.30	37.30
5	5635.00	45.80 AV	54.00	-8.20	1.33 V	122	8.50	37.30
6	6336.00	54.80 PK	74.00	-19.20	1.29 V	30	16.20	38.60
7	7386.00	47.90 PK	74.00	-26.10	1.45 V	21	6.10	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	Upgrade Kit - 802.11g	MODEL	WL-463
MODE	Turbo Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60%RH, 980 hPa	TESTED BY	Hank Chung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.10 PK	74.00	-19.90	1.10 H	75	24.30	29.80
1	2390.00	45.20 AV	54.00	-8.80	1.10 H	75	15.40	29.80
2	*2437.00	97.20 PK			1.00 H	152	67.20	30.00
2	*2437.00	88.00 AV			1.00 H	152	58.00	30.00
3	2483.50	53.40 PK	74.00	-20.60	1.10 H	70	23.30	30.10
3	2483.50	42.70 AV	54.00	-11.30	1.10 H	70	12.60	30.10
4	4874.00	44.80 PK	74.00	-29.20	1.00 H	50	8.30	36.50
5	5600.00	48.00 PK	74.00	-26.00	1.05 H	152	10.80	37.20
6	6336.00	52.30 PK	74.00	-21.70	1.05 H	187	13.70	38.60
6	6336.00	47.90 AV	54.00	-6.10	1.05 H	187	9.30	38.60
7	7311.00	52.90 PK	74.00	-21.10	1.05 H	60	11.20	41.80
7	7311.00	40.60 AV	54.00	-13.40	1.05 H	60	-1.10	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.50 PK	74.00	-14.50	1.10 V	50	29.70	29.80
1	2390.00	48.50 AV	54.00	-5.50	1.10 V	50	18.70	29.80
2	*2437.00	100.30 PK			1.00 V	0	70.30	30.00
2	*2437.00	91.70 AV			1.00 V	0	61.70	30.00
3	2483.50	55.80 PK	74.00	-18.20	1.05 V	68	25.70	30.10
3	2483.50	45.30 AV	54.00	-8.70	1.05 V	68	15.10	30.10
4	2496.00	55.80 PK	74.00	-18.20	1.00 V	360	25.60	30.20
4	2496.00	40.90 AV	54.00	-13.10	1.00 V	360	10.70	30.20
5	4874.00	46.20 PK	74.00	-27.80	1.00 V	0	9.70	36.50
6	5600.00	50.00 PK	74.00	-24.00	1.05 V	167	12.80	37.20
7	6336.00	53.80 PK	74.00	-20.20	1.05 V	160	15.20	38.60
7	6336.00	50.30 AV	54.00	-3.70	1.05 V	160	11.70	38.60
8	7311.00	49.90 PK	74.00	-24.10	1.00 V	15	8.20	41.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.6 TEST RESULTS-DSSS


EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.12	0.5	PASS
6	2437	11.28	0.5	PASS
11	2462	11.88	0.5	PASS


CH1

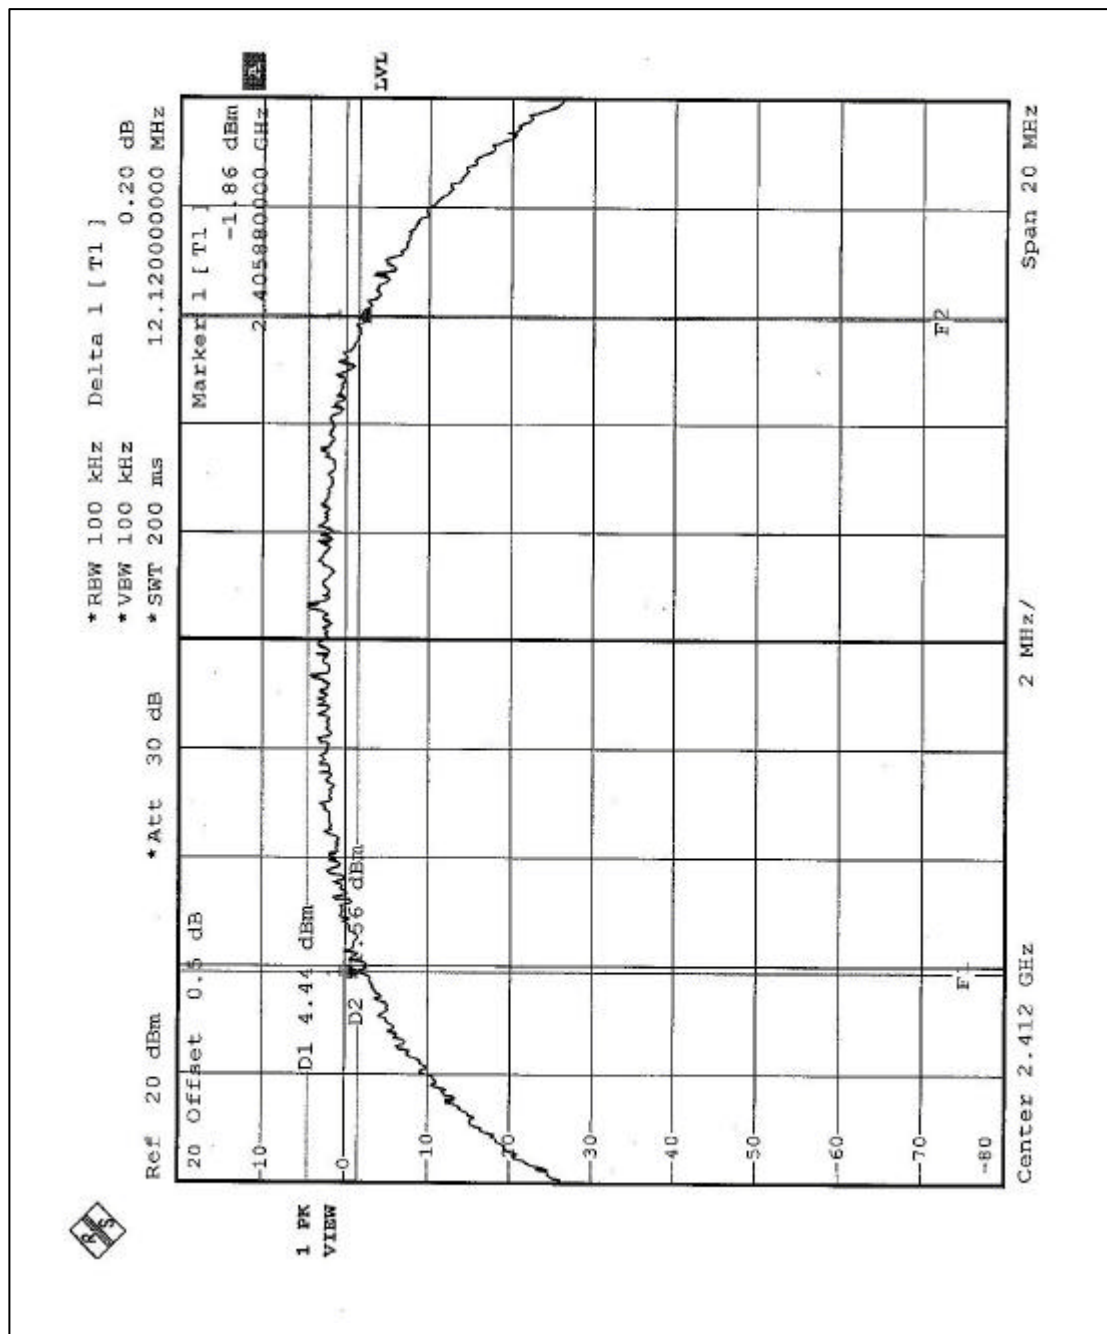

CH6

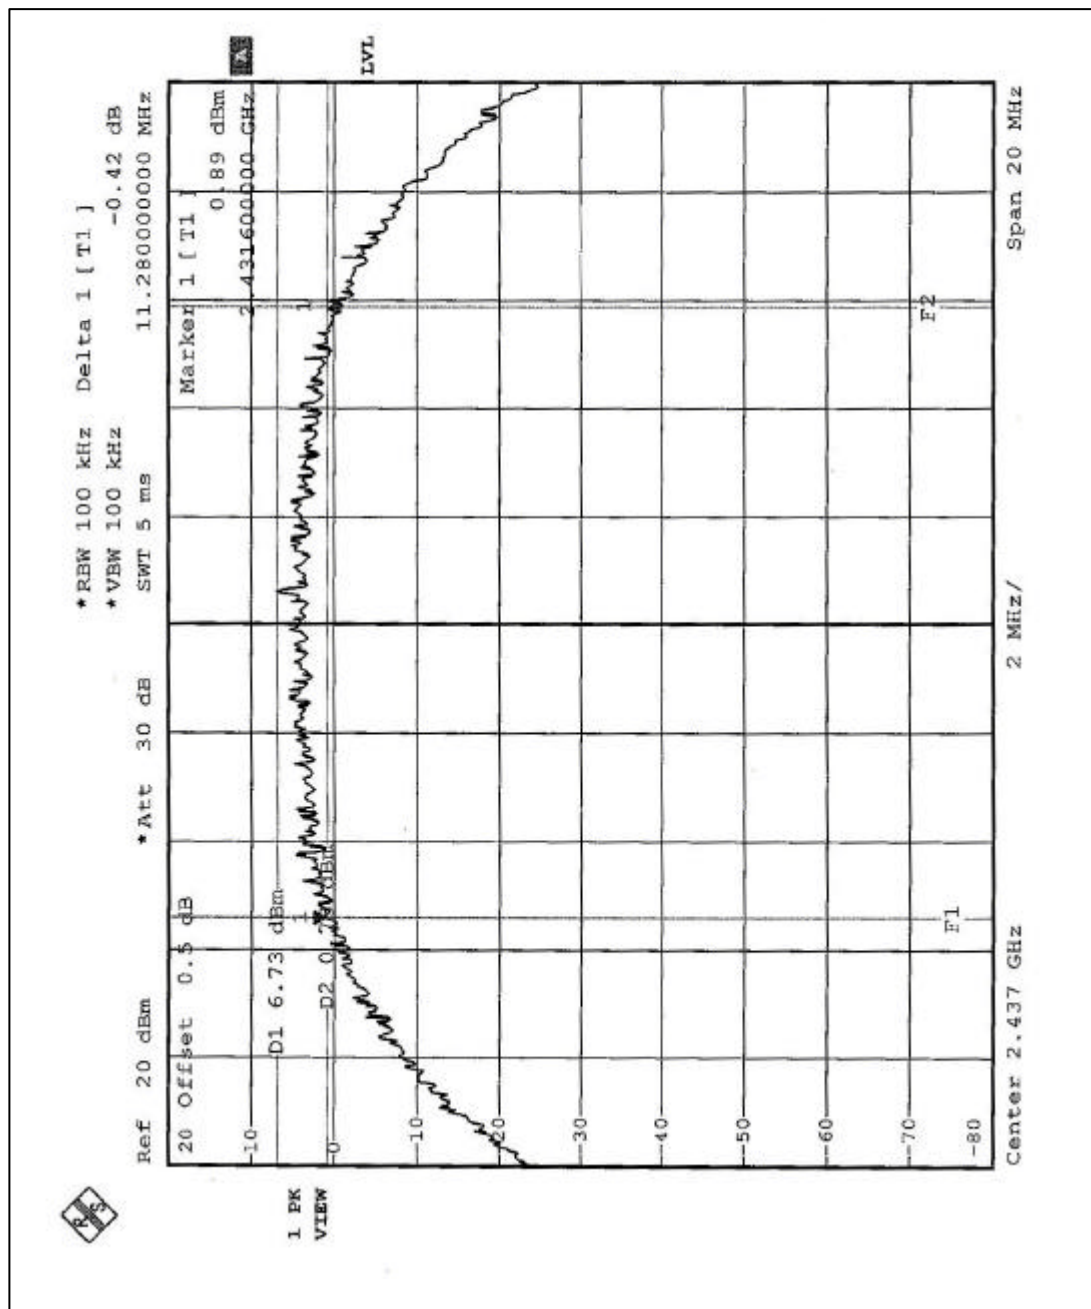

CH11

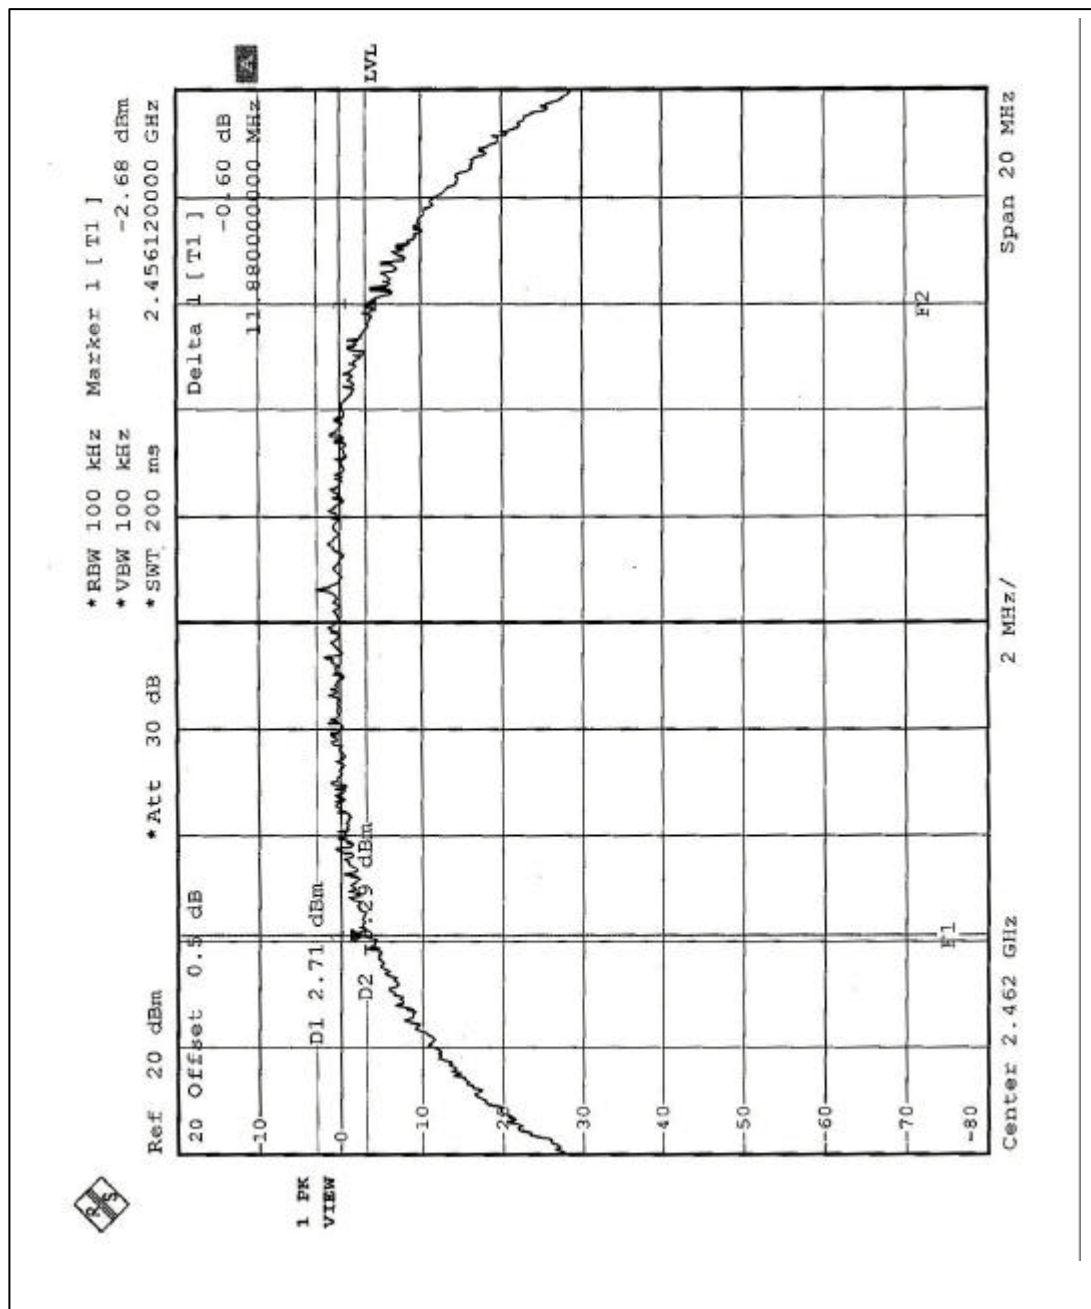


4.3.7 TEST RESULTS-OFDM


EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.42	0.5	PASS
11	2462	16.56	0.5	PASS
Turbo 6	2437	33.12	0.5	PASS


CH1

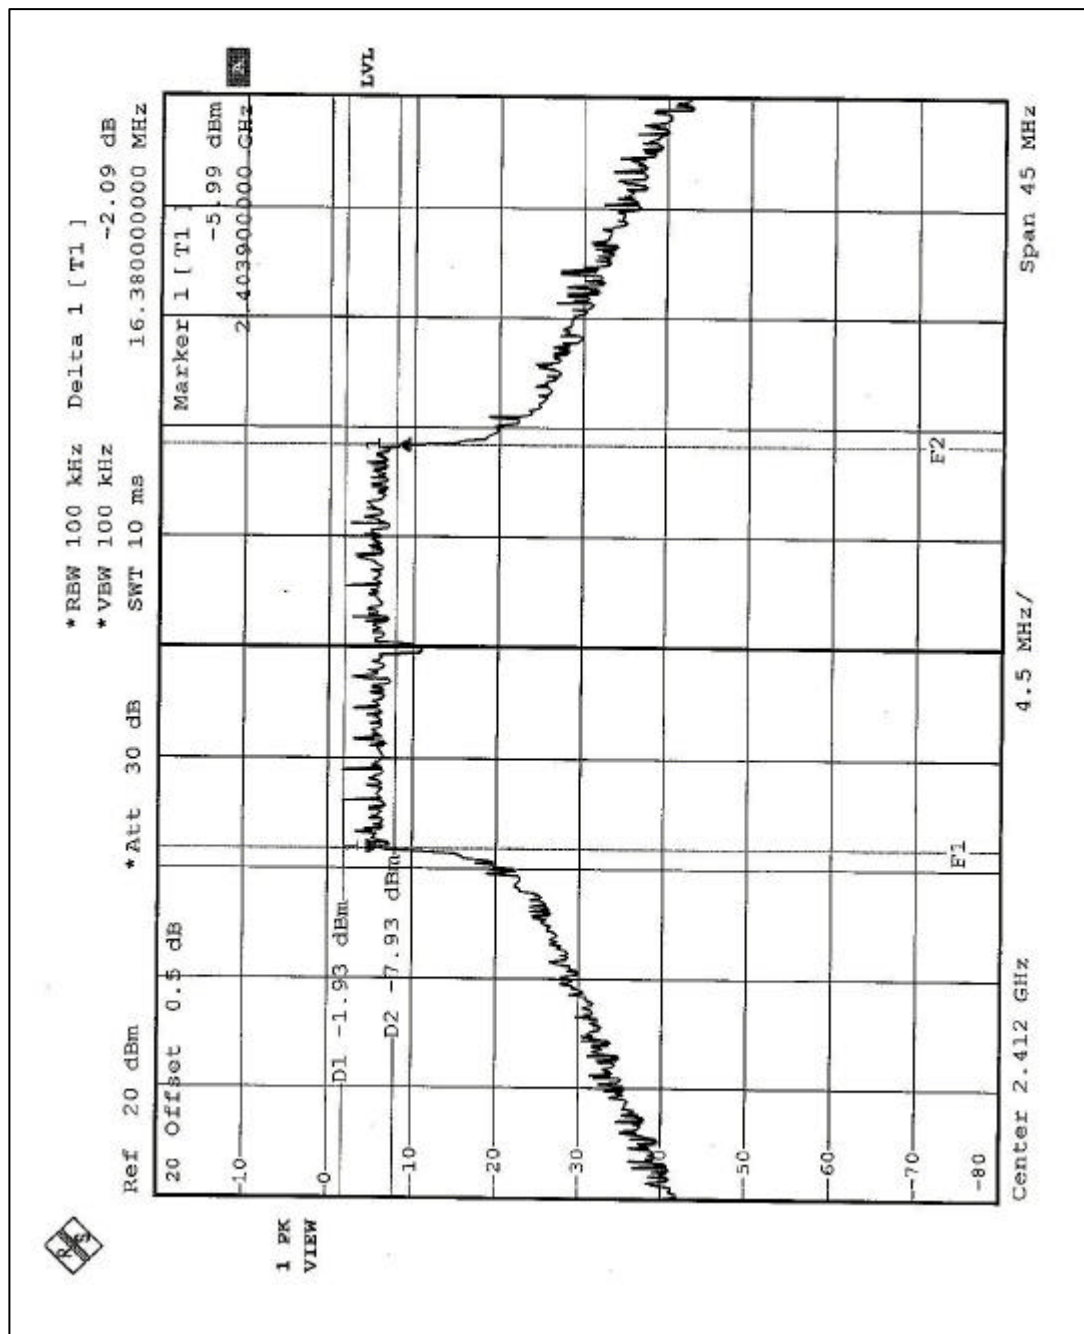


CH6

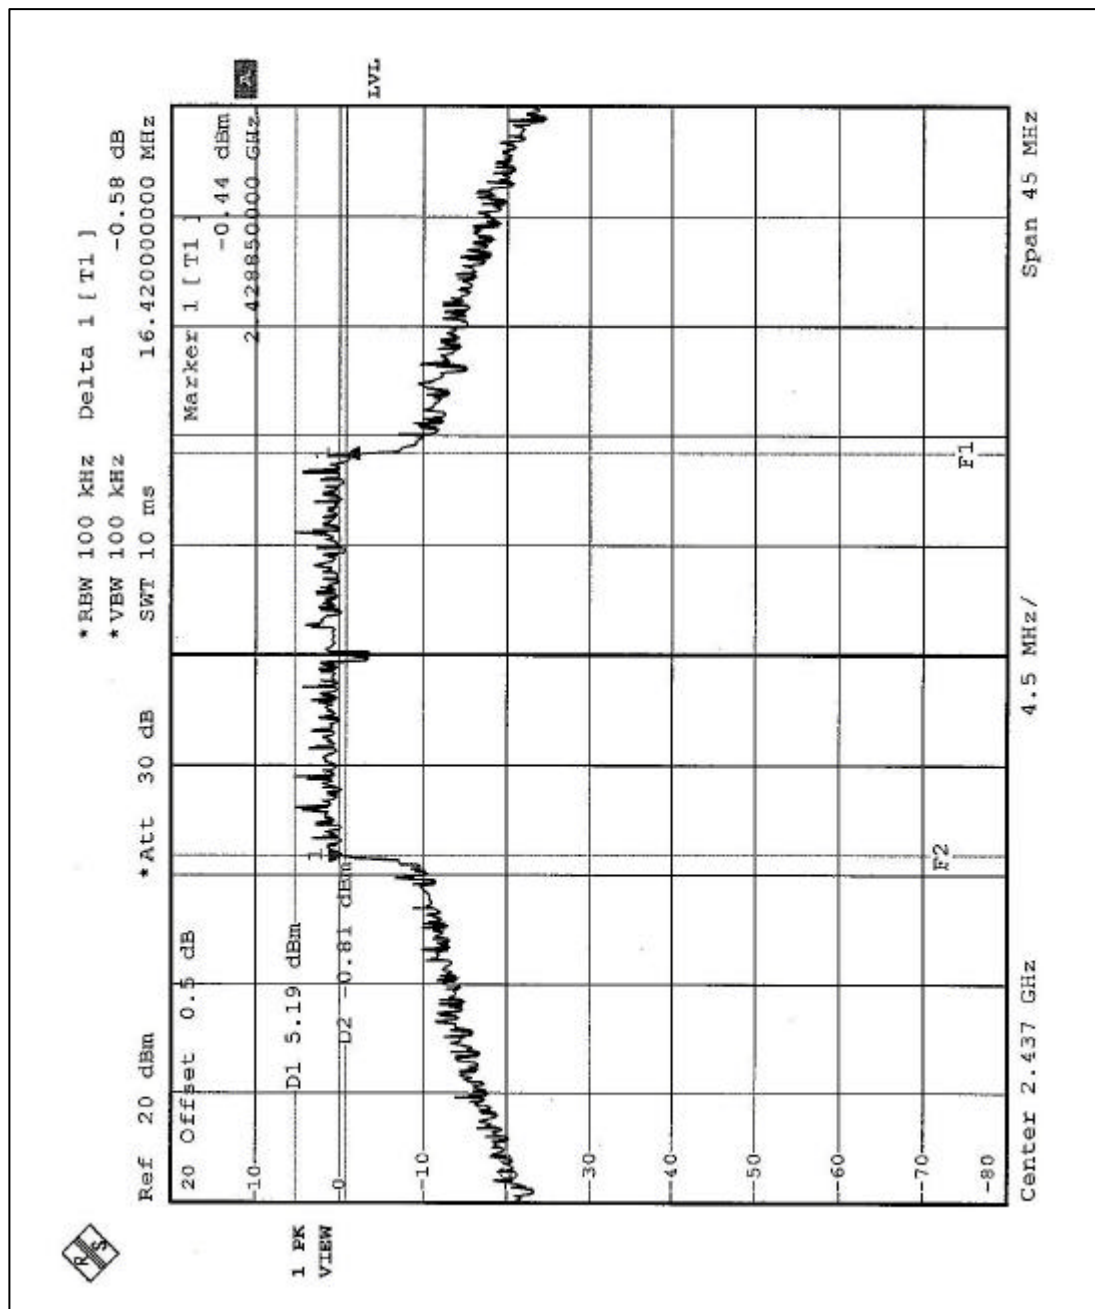

CH11

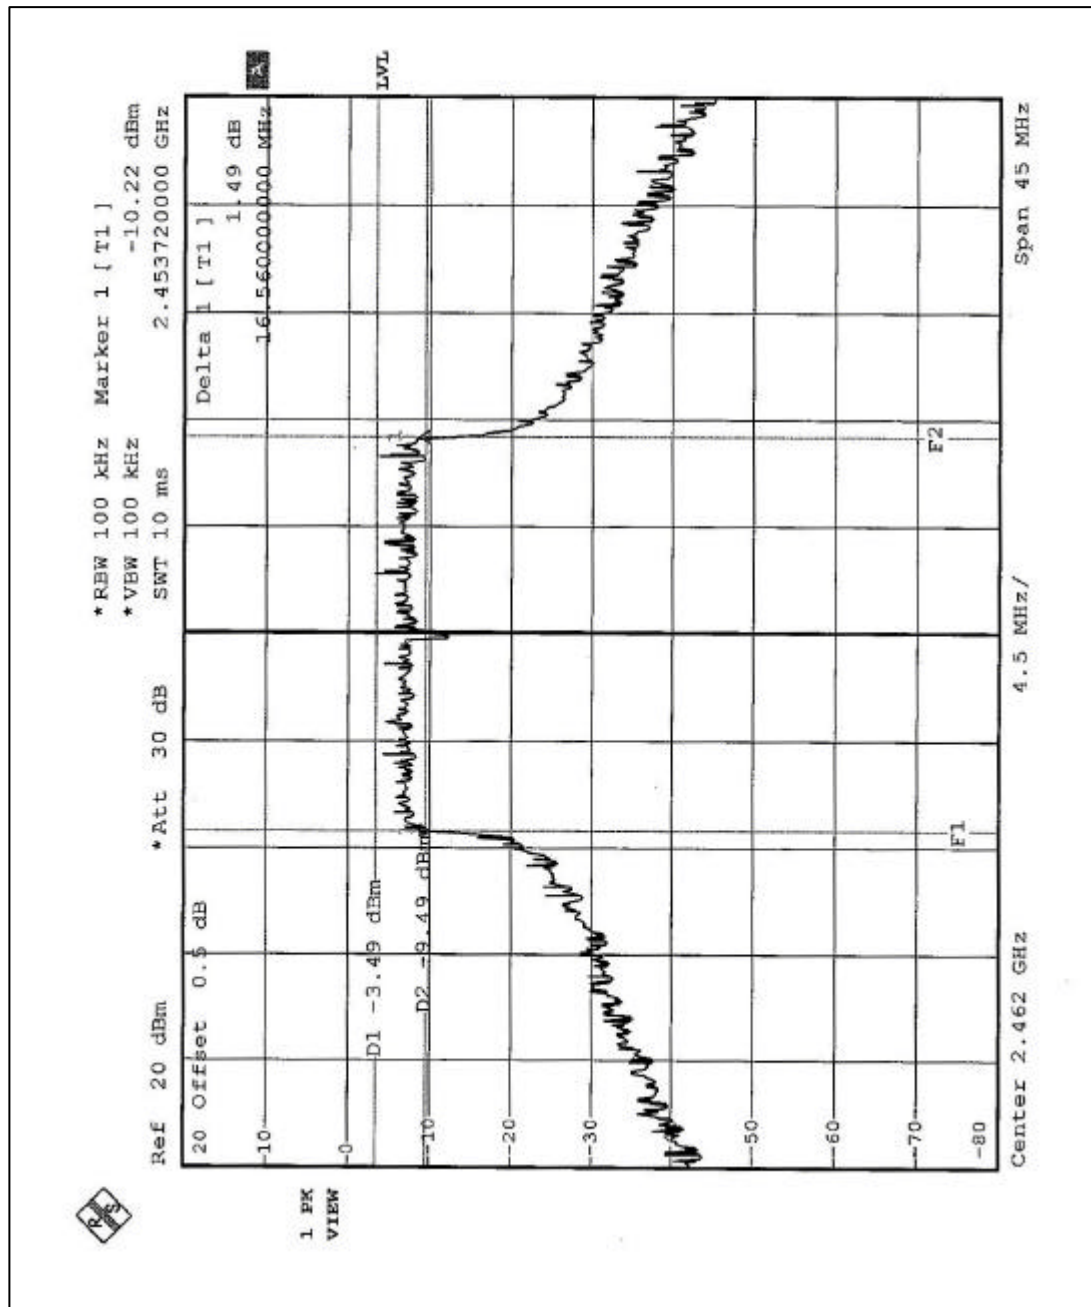

Turbo CH6

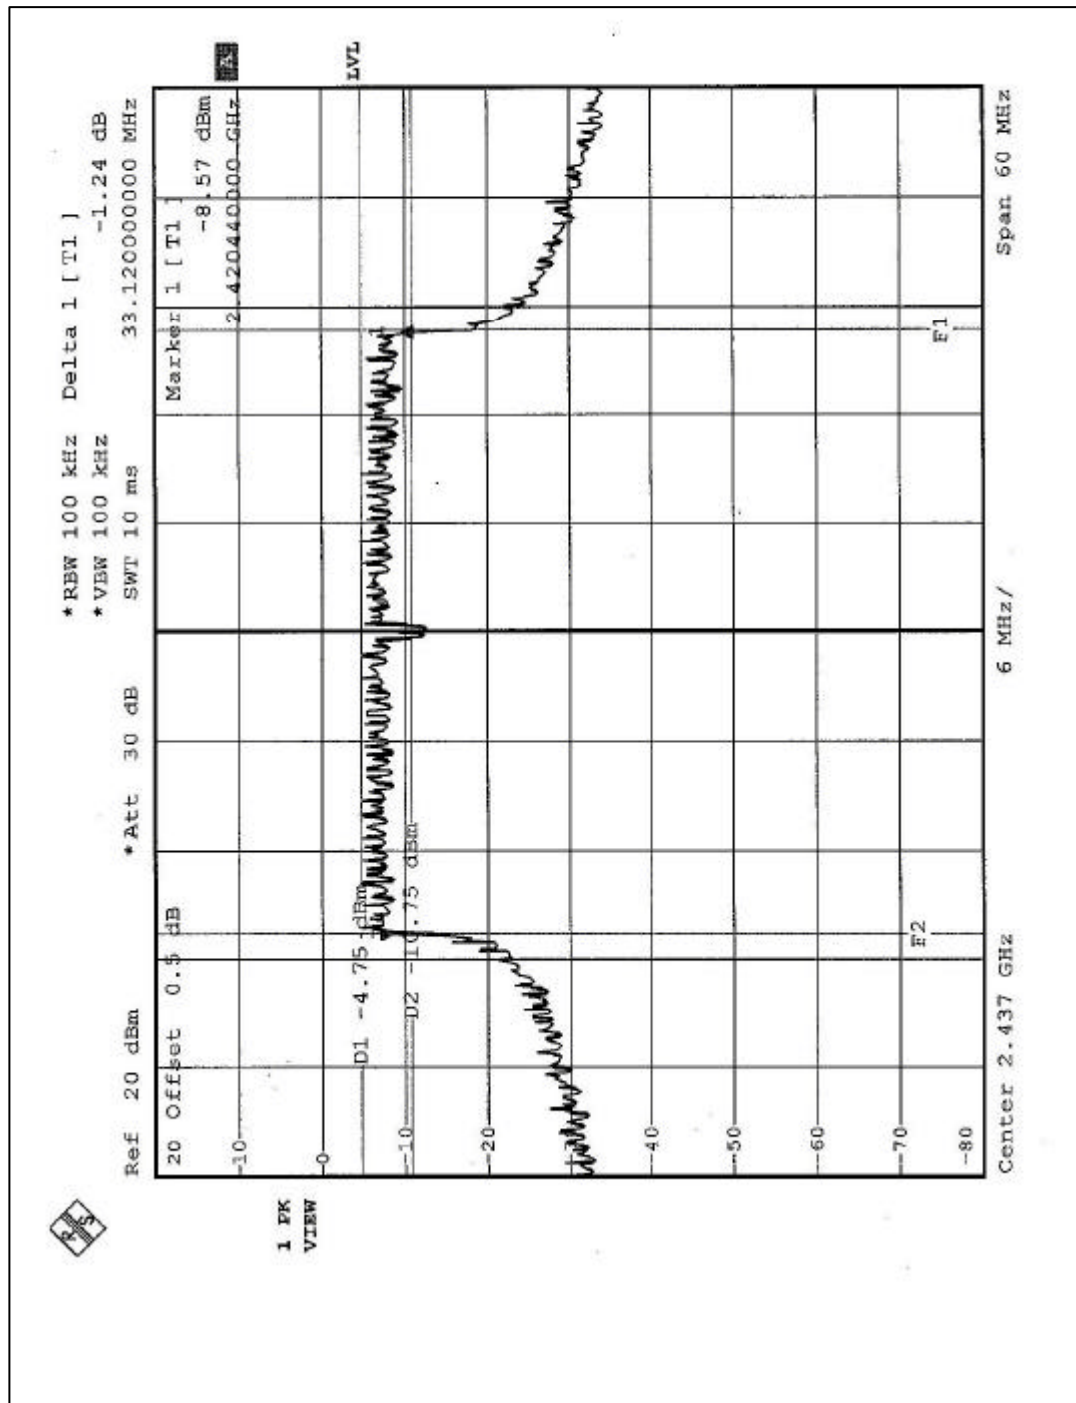

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP30	100019	Dec. 19, 2004
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the peak response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS- DSSS

EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

Antenna 1 (Gain 1 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.17	30	PASS
6	2437	18.43	30	PASS
11	2462	15.27	30	PASS

Antenna 2 (Gain 8 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	12.20	28	PASS
6	2437	18.10	28	PASS
11	2462	15.10	28	PASS

Antenna 3 (Gain 8 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.10	28	PASS
6	2437	18.00	28	PASS
11	2462	15.20	28	PASS

Antenna 4 (Gain 4 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.10	30	PASS
6	2437	19.00	30	PASS
11	2462	16.20	30	PASS



4.4.7 TEST RESULTS- OFDM

EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

Antenna 1 (Gain 1 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.16	30	PASS
6	2437	20.09	30	PASS
11	2462	16.23	30	PASS
Turbo 6	2462	17.24	30	PASS

Antenna 2 (Gain 8dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.50	28	PASS
6	2437	18.00	28	PASS
11	2462	11.30	28	PASS
Turbo 6	2462	13.00	28	PASS

Antenna 3 (Gain 8 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	11.20	28	PASS
6	2437	18.00	28	PASS
11	2462	11.30	28	PASS
Turbo 6	2462	13.00	28	PASS

Antenna 4 (Gain 4 dBi)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	13.50	30	PASS
6	2437	20.00	30	PASS
11	2462	14.20	30	PASS
Turbo 6	2462	15.20	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




4.5.6 TEST RESULTS-DSSS


EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.48	8	PASS
6	2437	-5.25	8	PASS
11	2462	-8.30	8	PASS


CH1

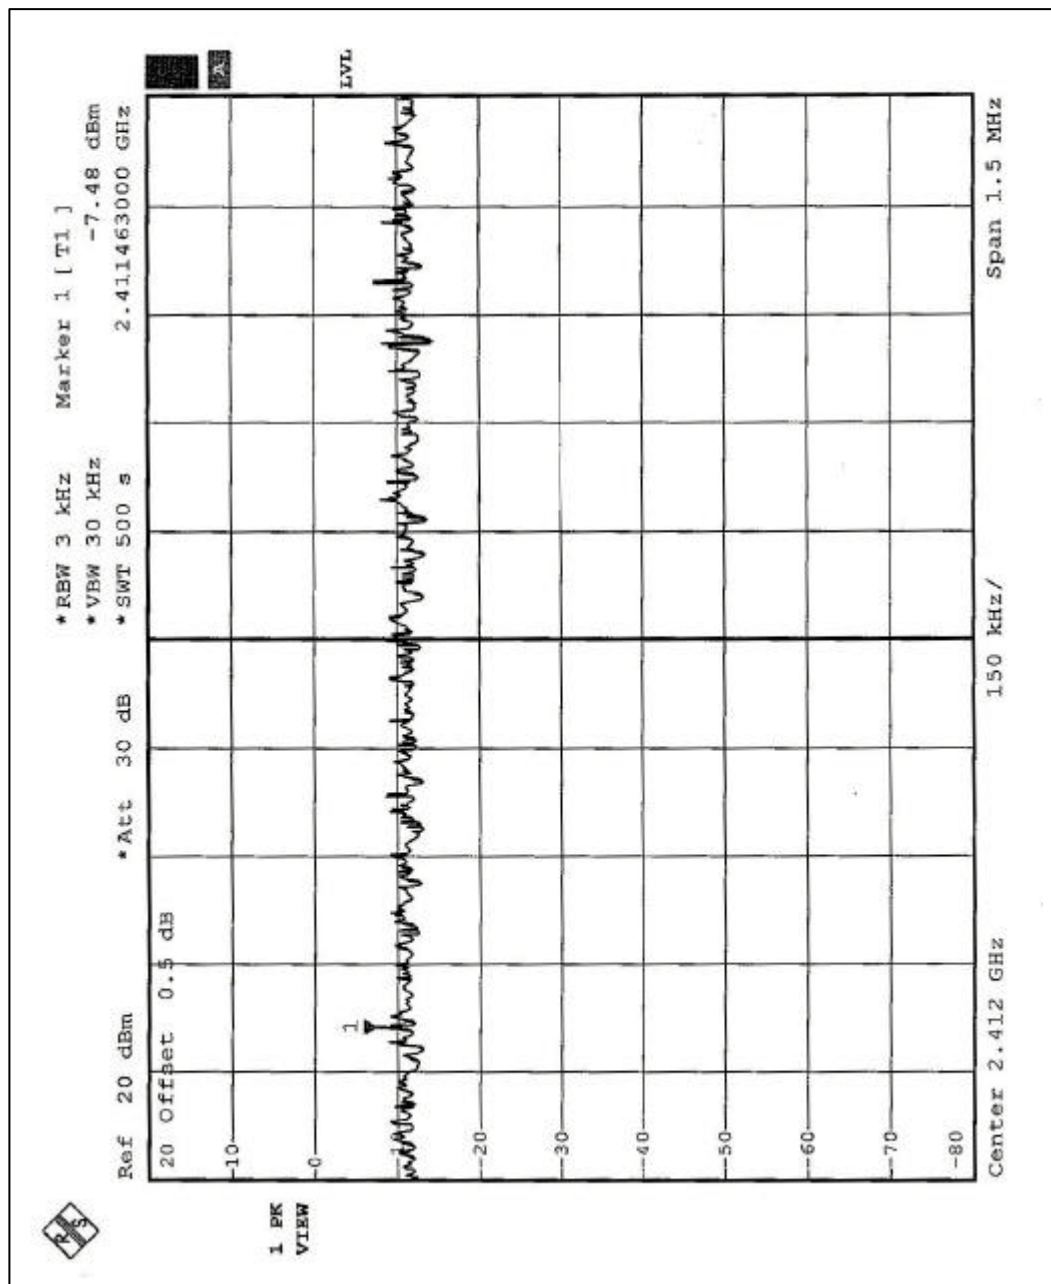

CH6

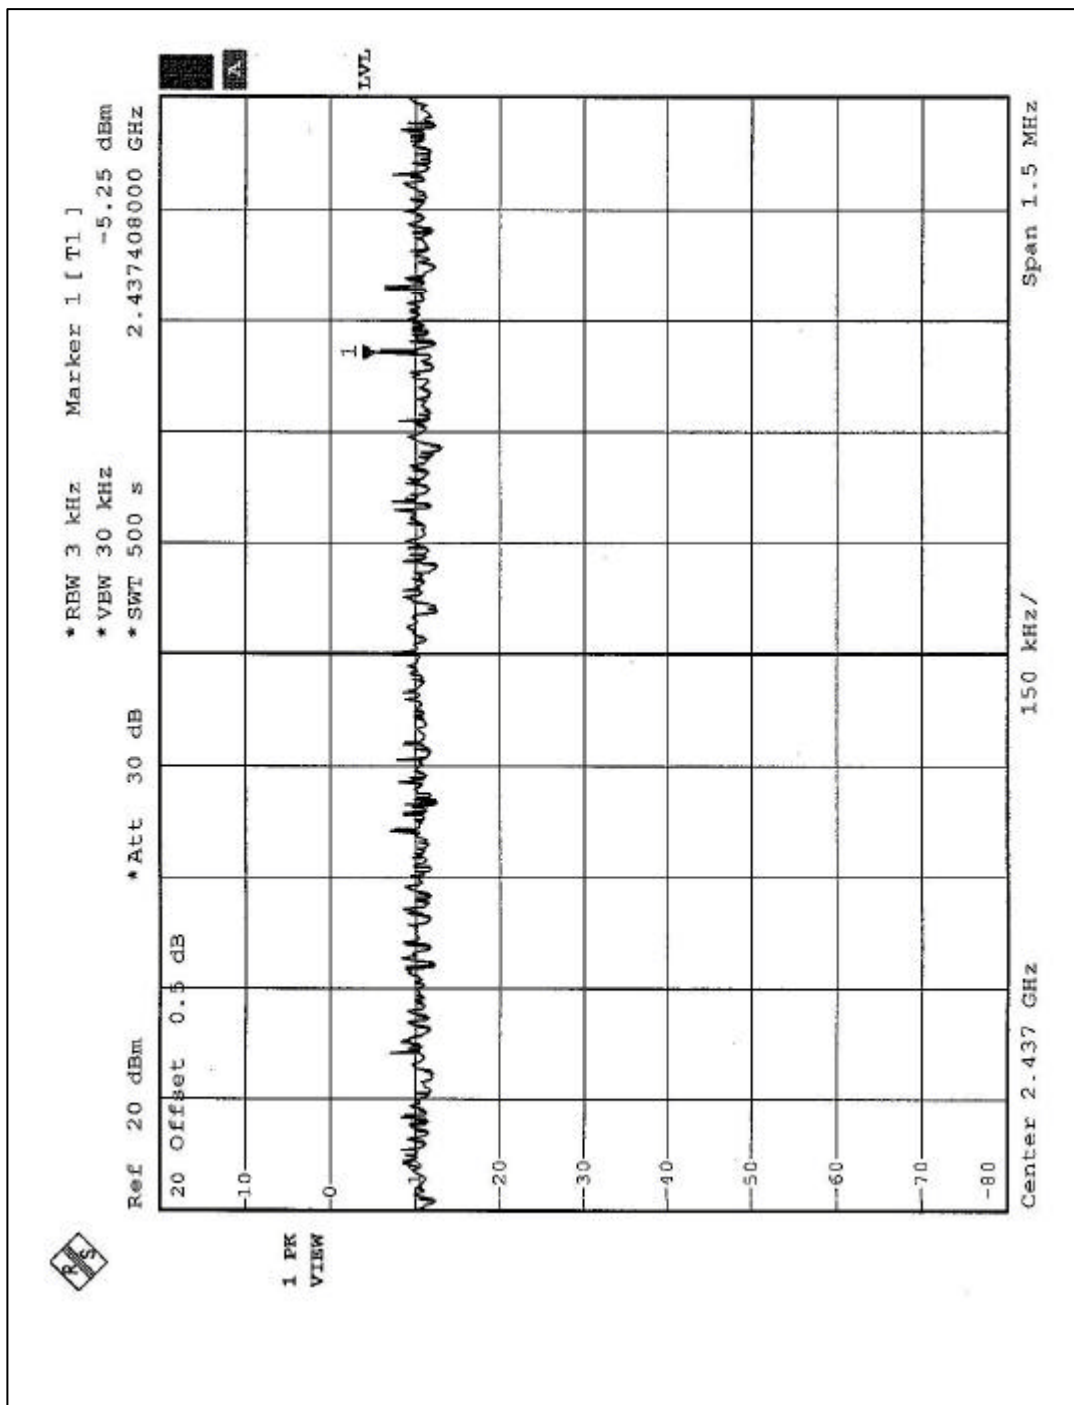

CH11

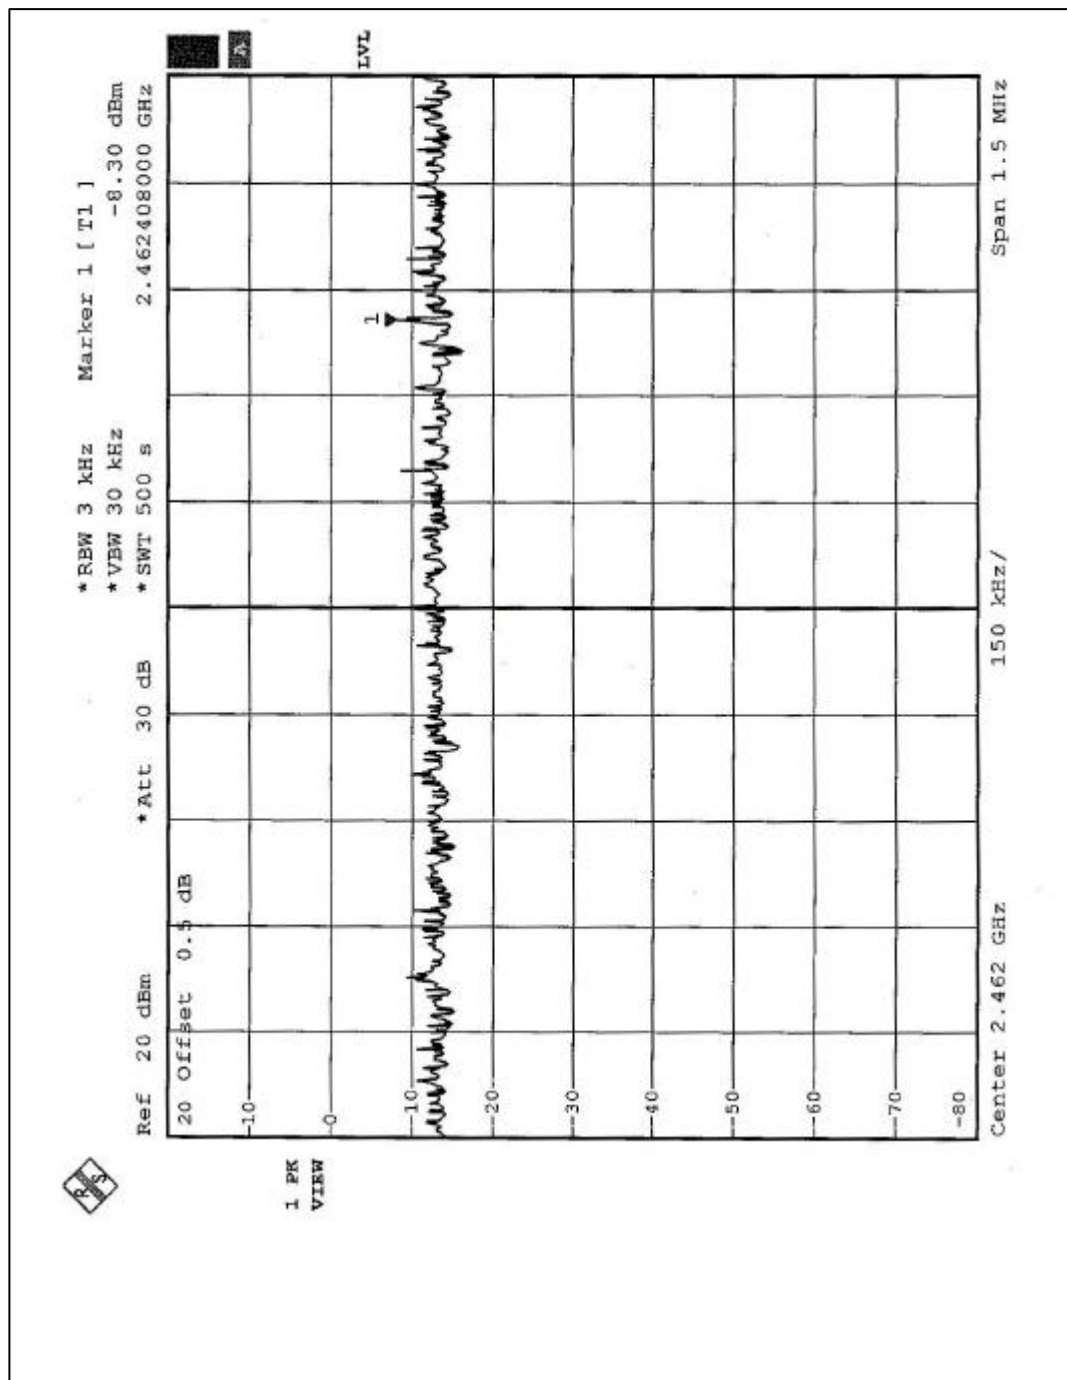




4.5.7 TEST RESULTS-OFDM


EUT	Upgrade Kit - 802.11g		
MODEL	WL-463	ENVIRONMENTAL CONDITIONS	24 deg. C, 60%RH, 980 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hank Chung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.14	8	PASS
6	2437	-8.96	8	PASS
11	2462	-15.54	8	PASS
Turbo 6	2437	-12.46	8	PASS


CH1

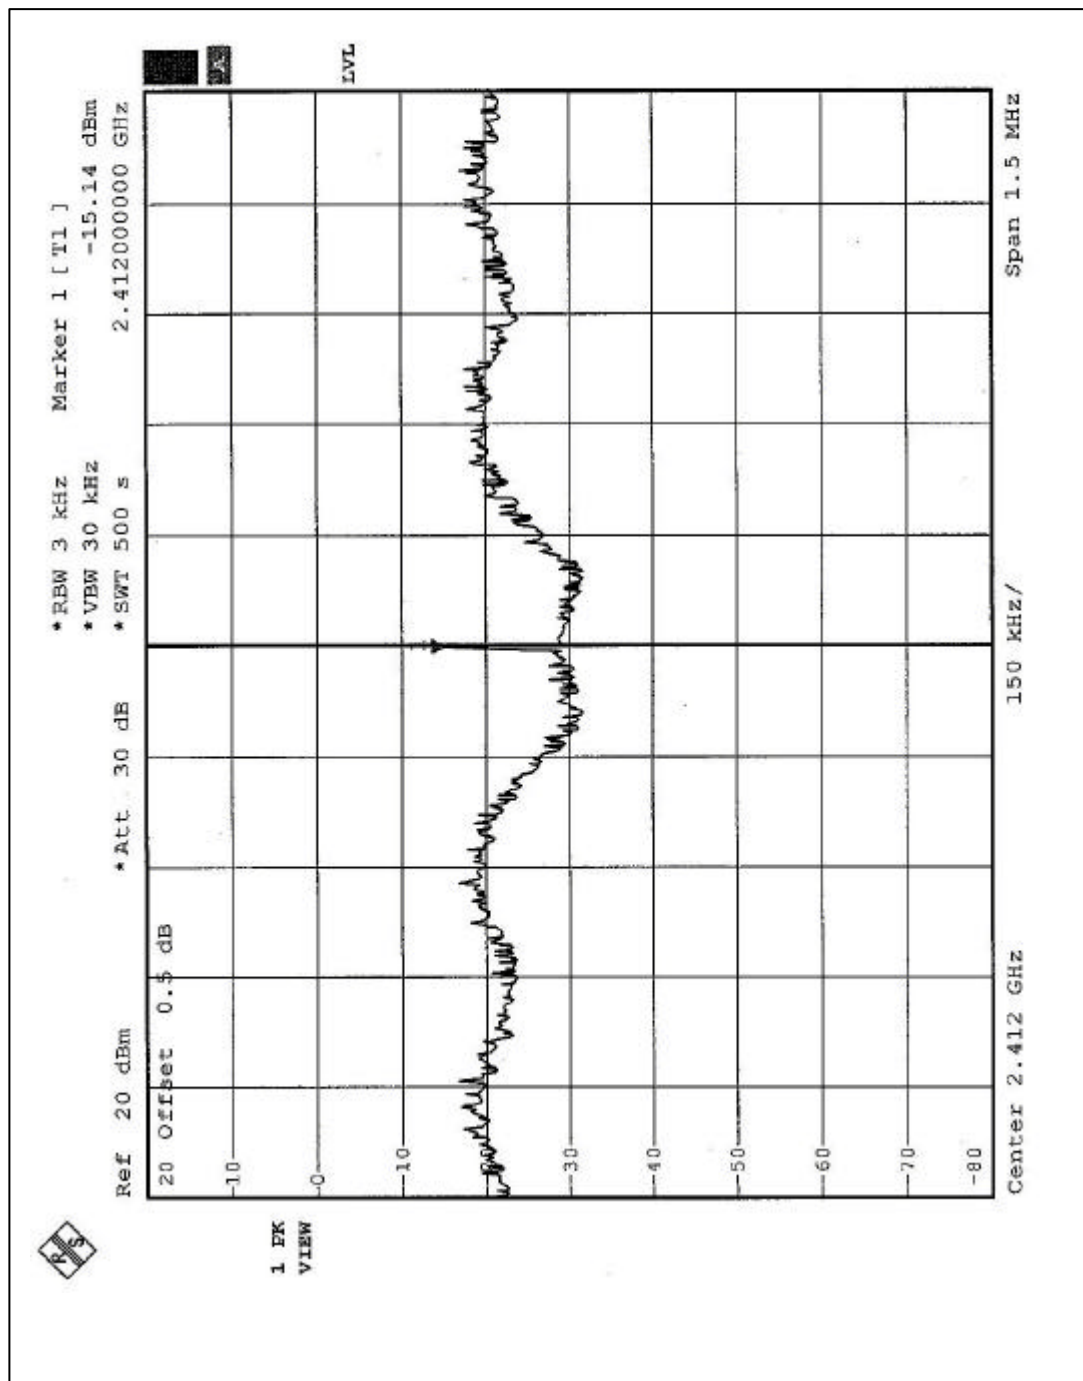


CH6

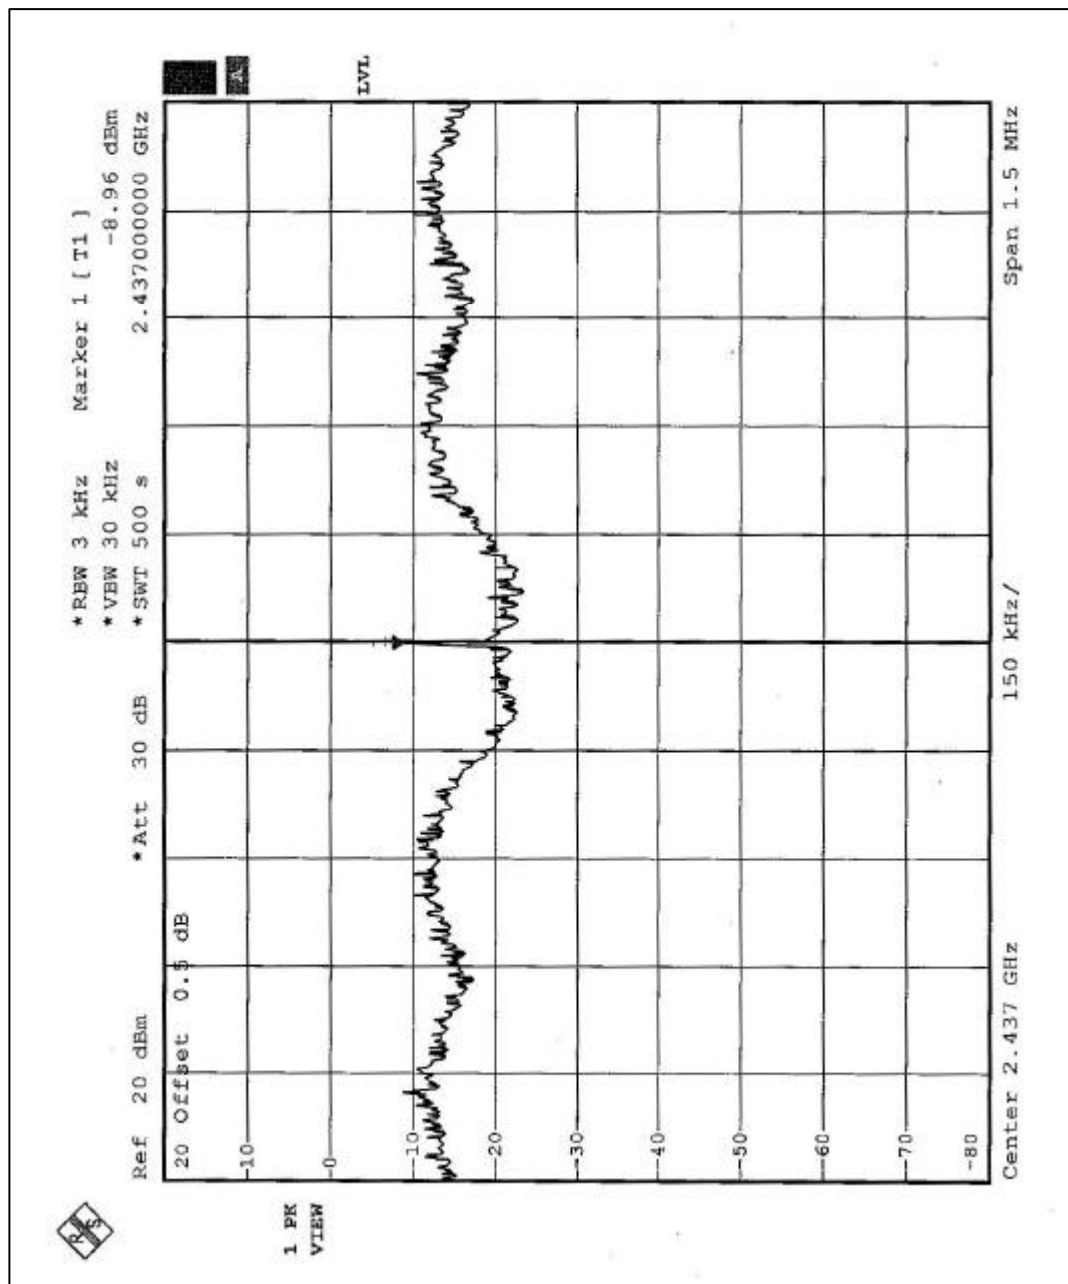

CH11

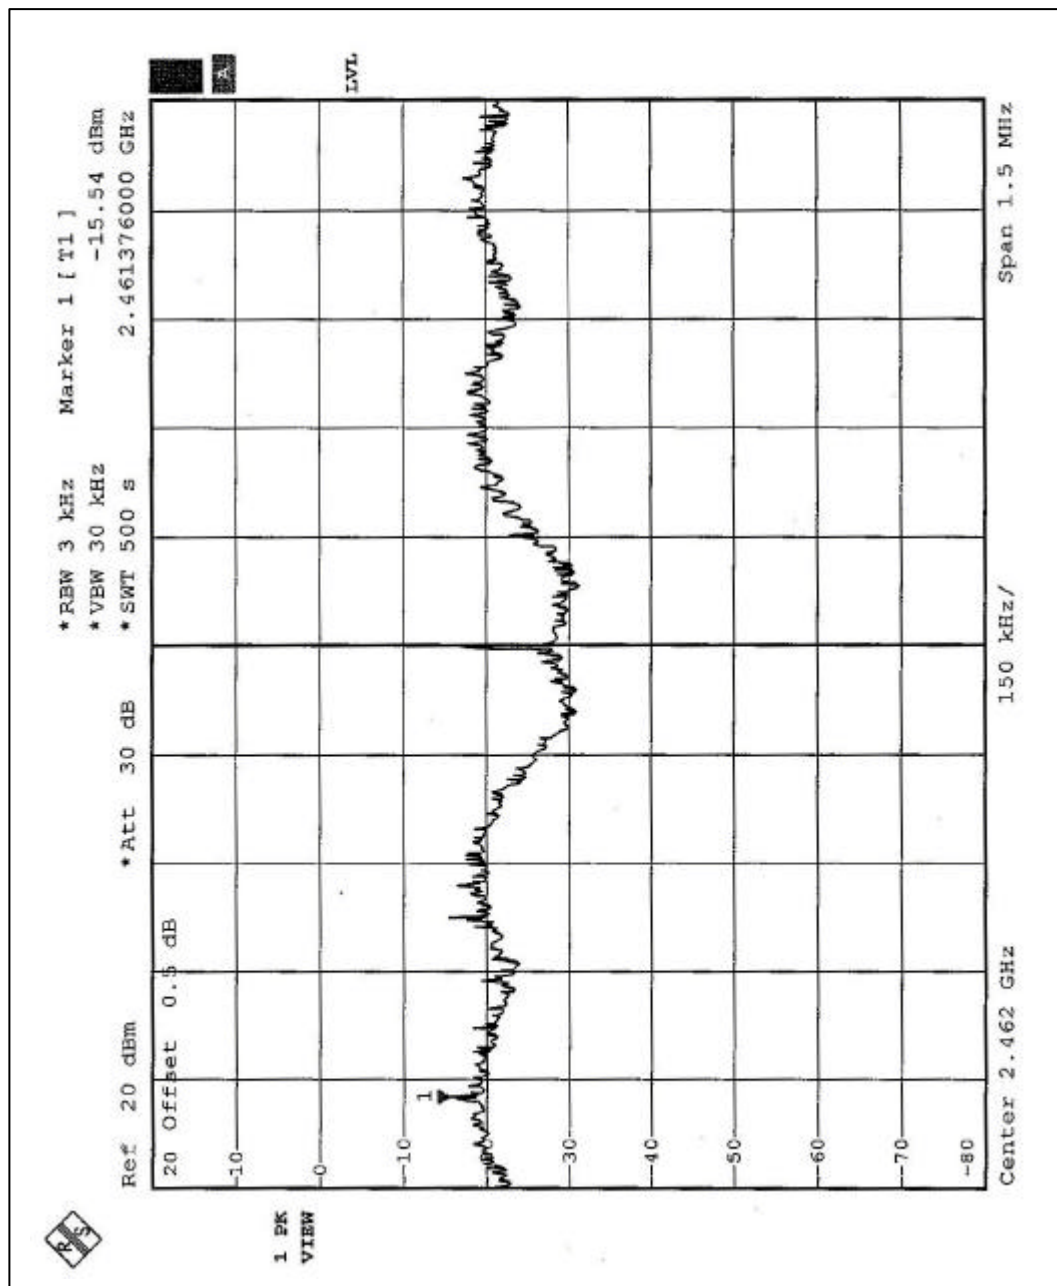

Turbo CH6

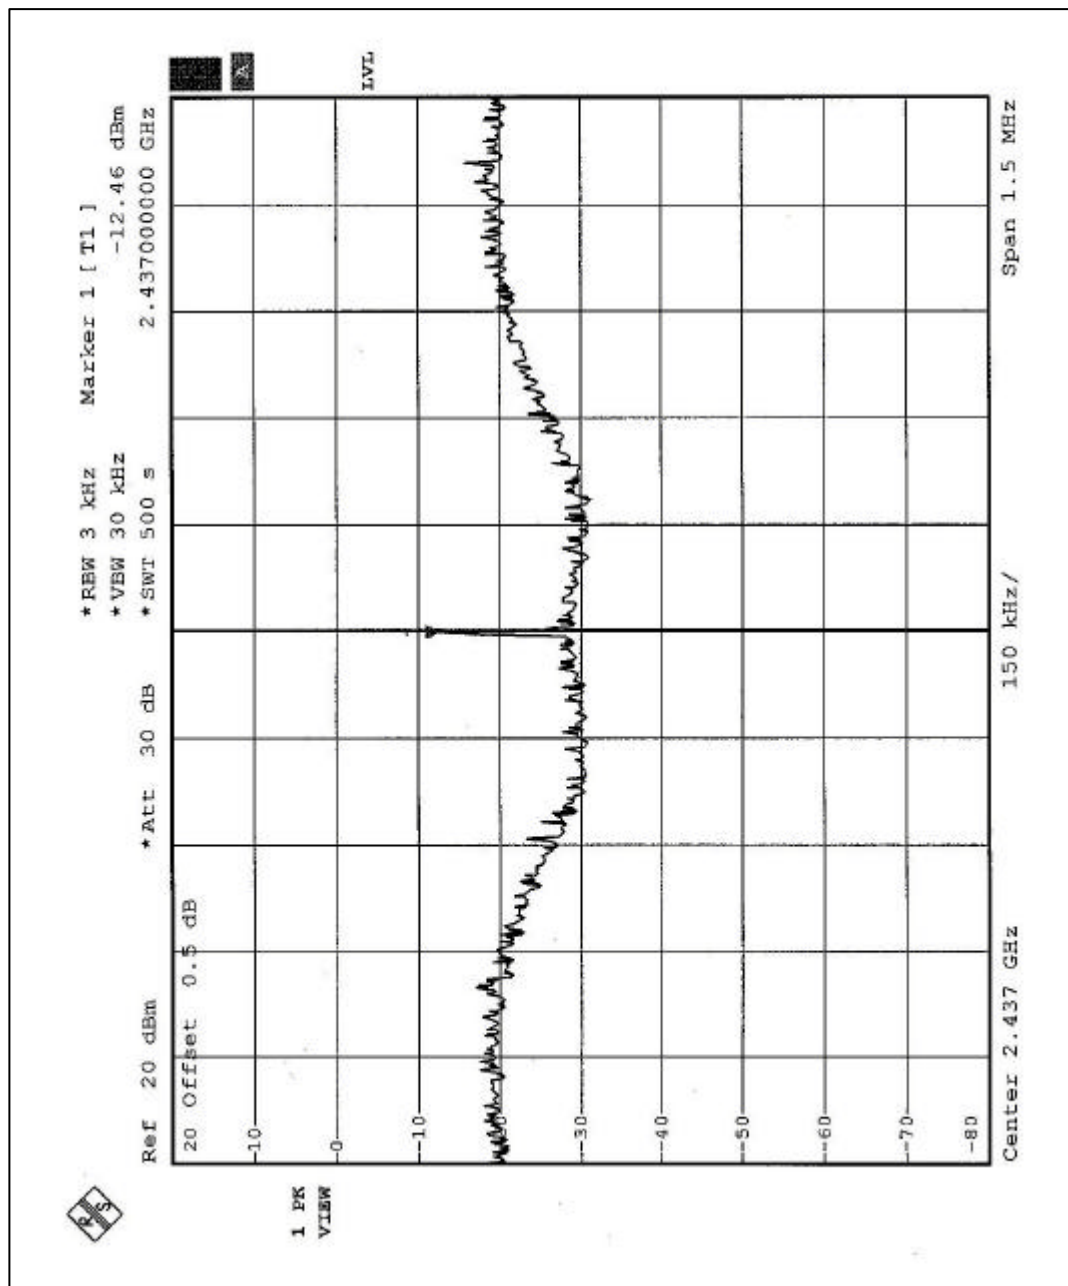

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2004

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5




4.6.5 TEST RESULTS – DSSS (Antenna 1)


The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 48.91dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.4dBuV/m, so the maximum field strength in restrict band is $100.4 - 48.91 = 51.49$ dBuV/m which is under 54 dBuV/m limit.

We use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge, and the 2.3900GHz is the worst one , the delta is 48.91dB. Radiated emissions (2.386GHz) that are measured and meet the requirement of 15.247(c) limit.

NOTE (2): The band edge emission plot on the following second page shows 51.02dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.4dBuV/m, so the maximum field strength in restrict band is $99.4 - 51.02 = 48.38$ dBuV/m which is under 54 dBuV/m limit.

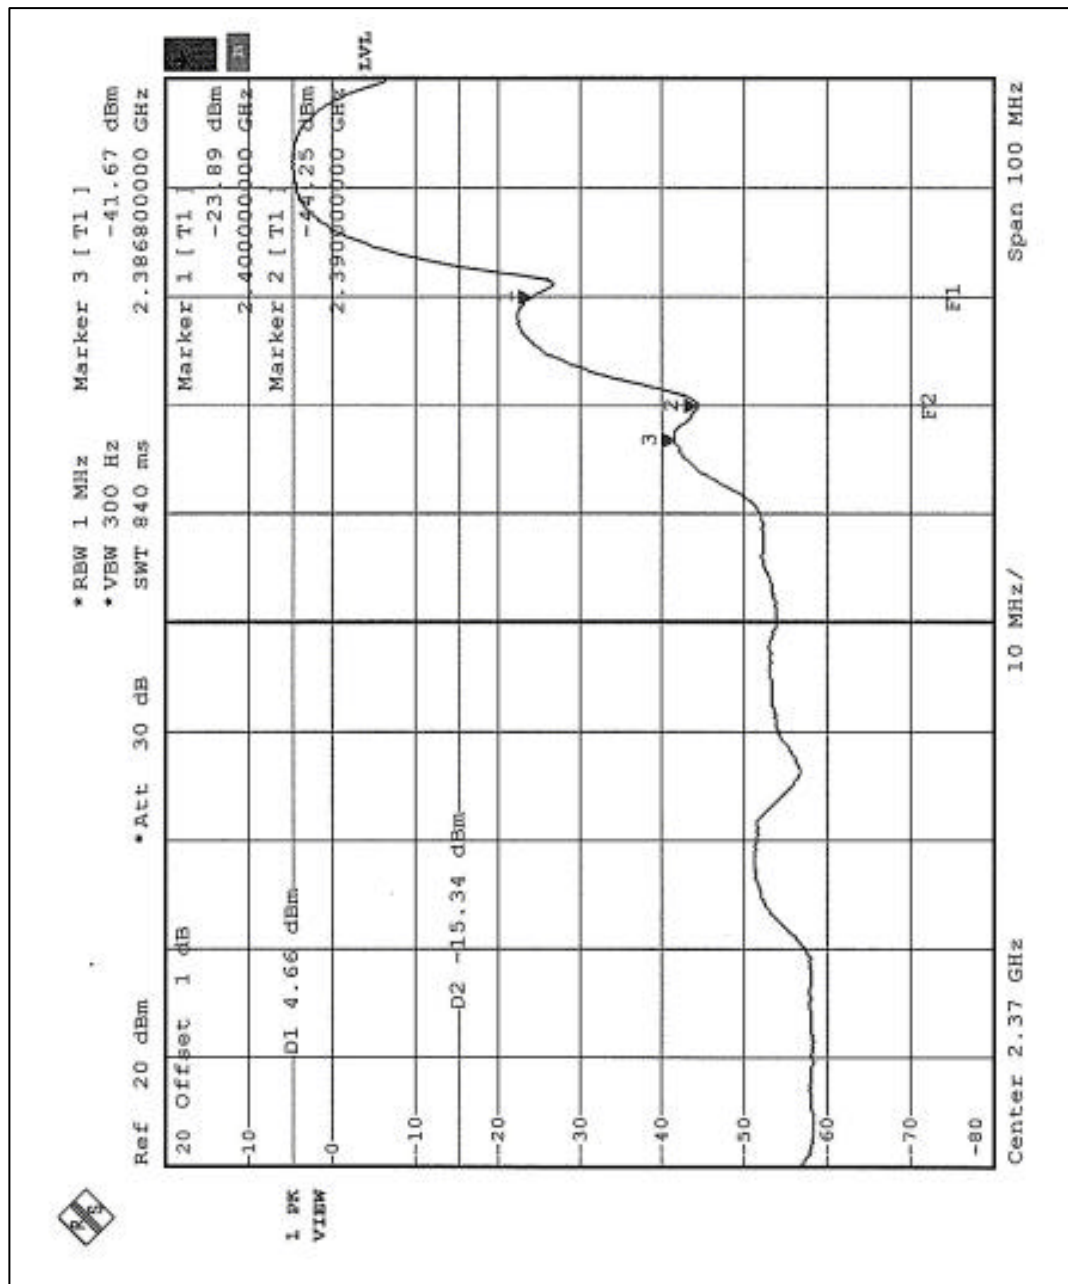

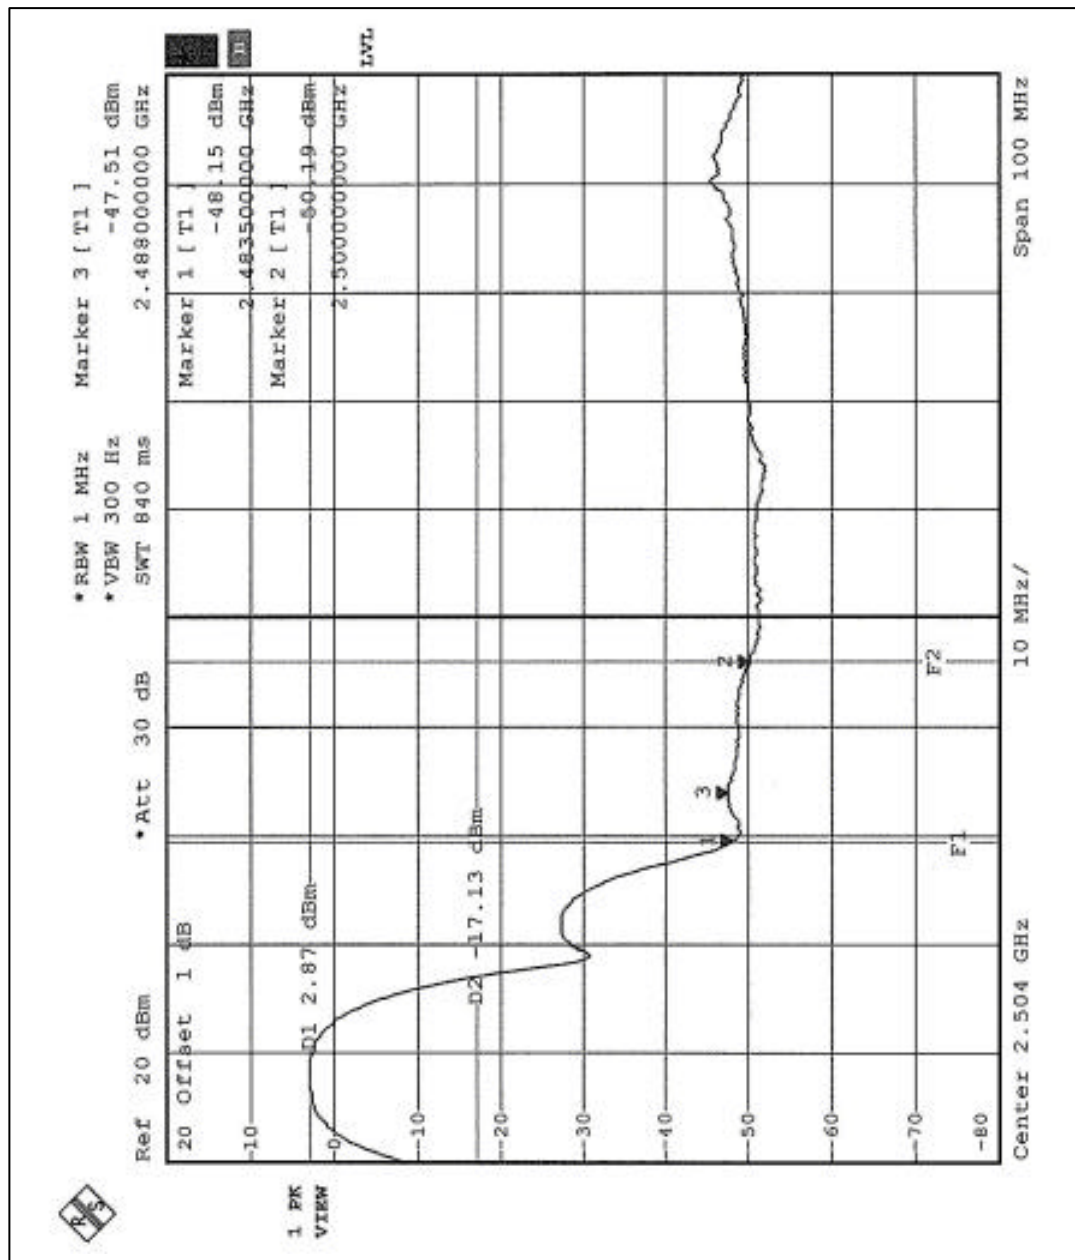



4.6.6 TEST RESULTS – DSSS (Antenna 2)

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 53.29dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 100.8dBuV/m, so the maximum field strength in restrict band is $100.8 - 53.29 = 47.51$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 52.95dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.1dBuV/m, so the maximum field strength in restrict band is $104.1 - 52.95 = 51.15$ dBuV/m which is under 54 dBuV/m limit.