




802.11b/20MHz/1M/2412MHz/Ch1/Ant.1(Band Edge)

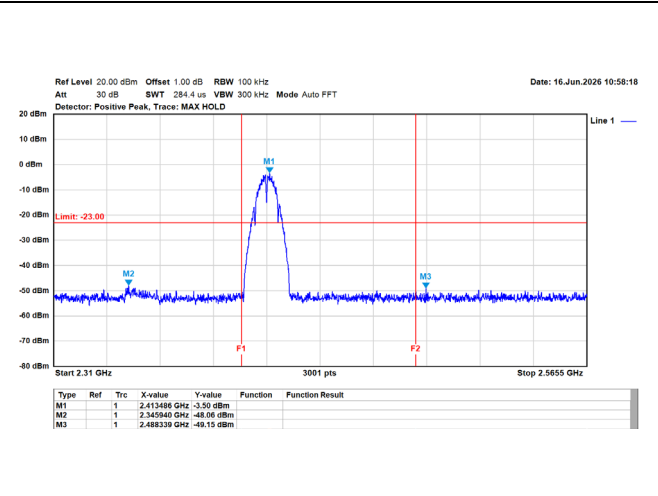


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1(Band Edge)

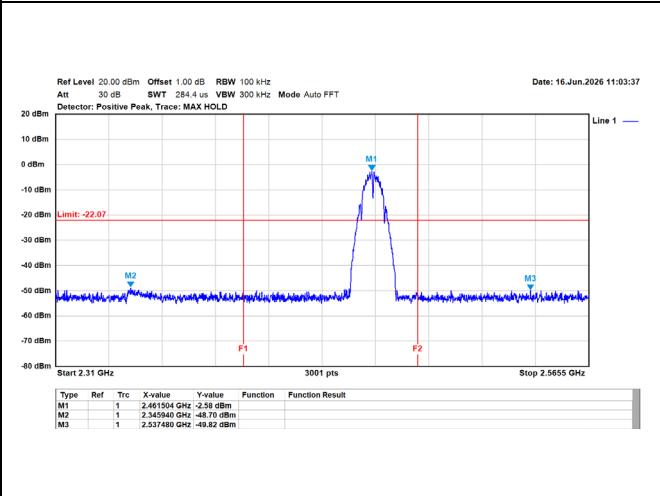


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1(Band Edge)

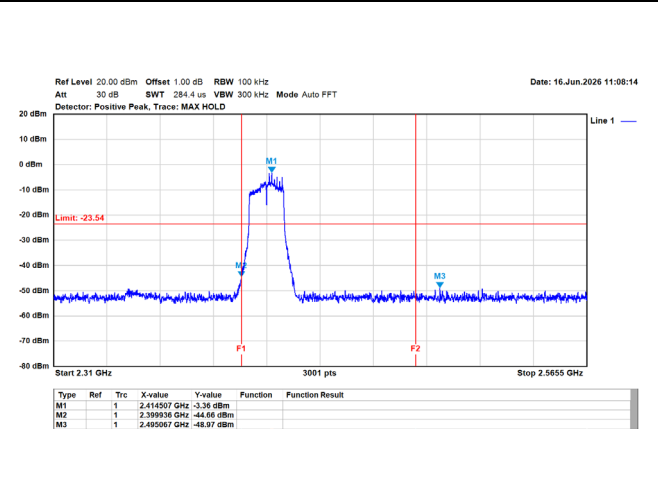


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1(Band Edge)

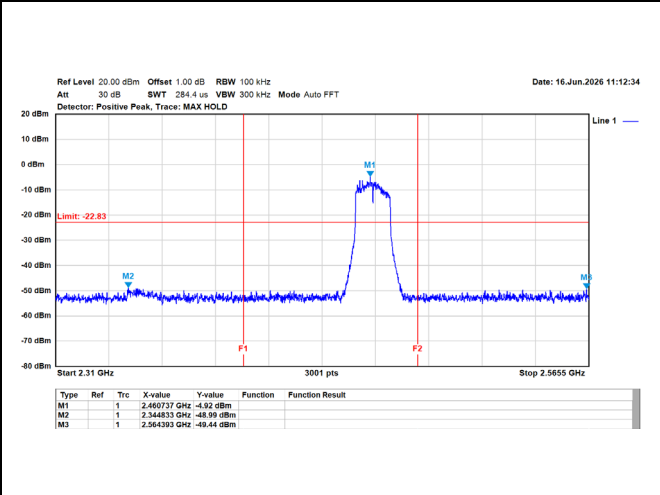


802.11ac/20MHz/MCS0/2412MHz/Ch1/Ant.1(Band Edge)

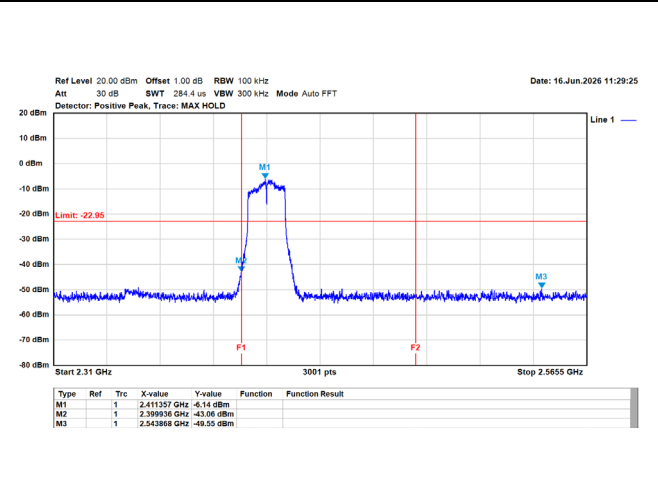


802.11ac/20MHz/MCS0/2462MHz/Ch11/Ant.1(Band Edge)

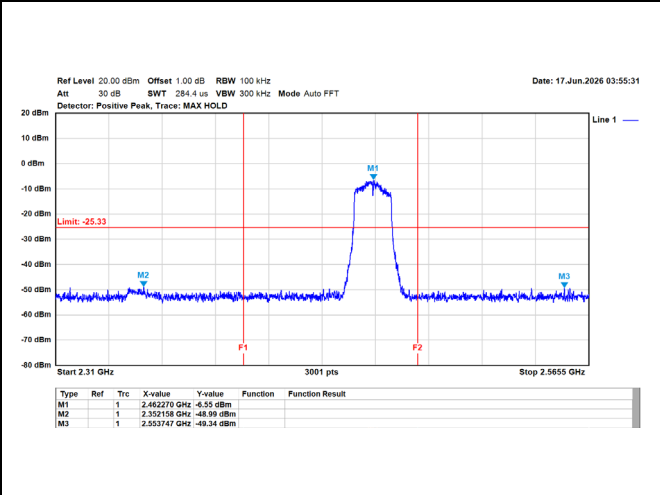


802.11ac/40MHz/MCS0/2422MHz/Ch3/Ant.1(Band Edge)

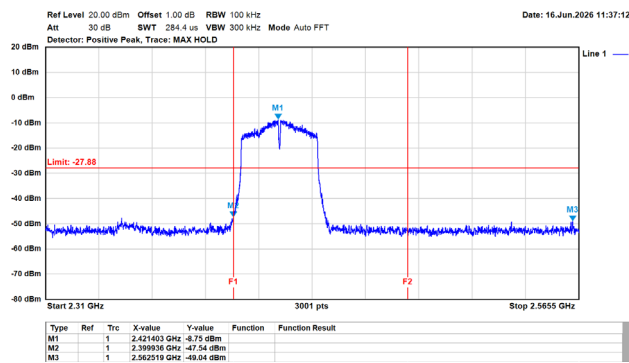


802.11ac/40MHz/MCS0/2452MHz/Ch9/Ant.1(Band Edge)

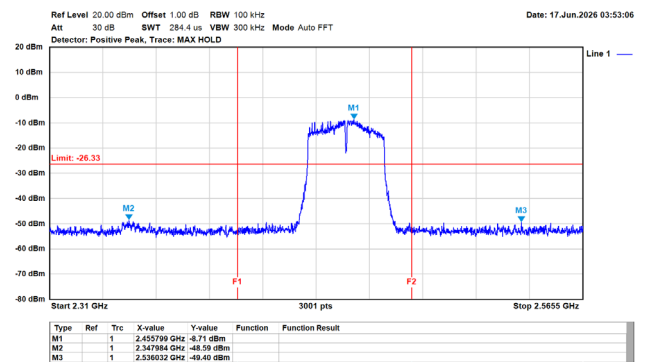


802.11ax/20MHz/MCS0/2412MHz/Ch1/Ant.1(Band Edge)

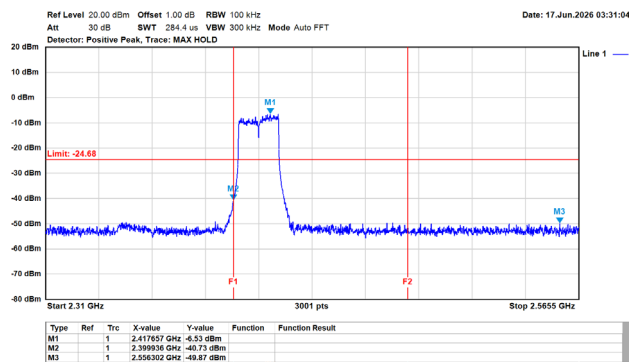


802.11ax/20MHz/MCS0/2462MHz/Ch11/Ant.1(Band Edge)

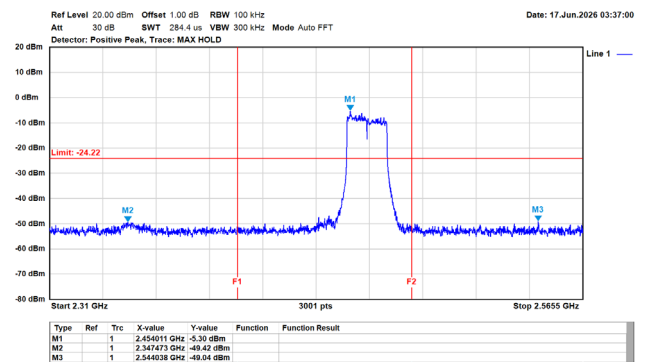


802.11ax/40MHz/MCS0/2422MHz/Ch3/Ant.1(Band Edge)

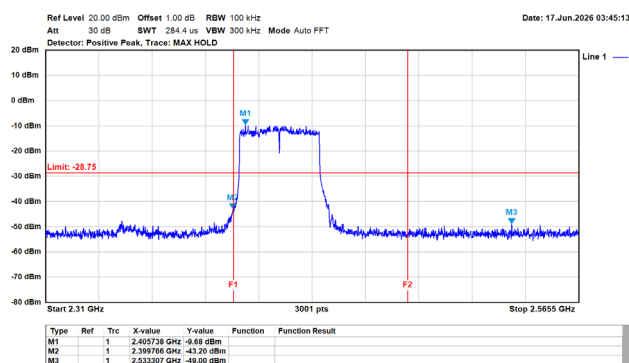


802.11ax/40MHz/MCS0/2452MHz/Ch9/Ant.1(Band Edge)

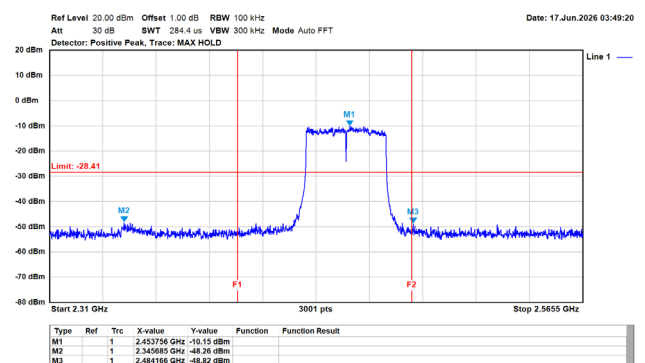


26-tone RU

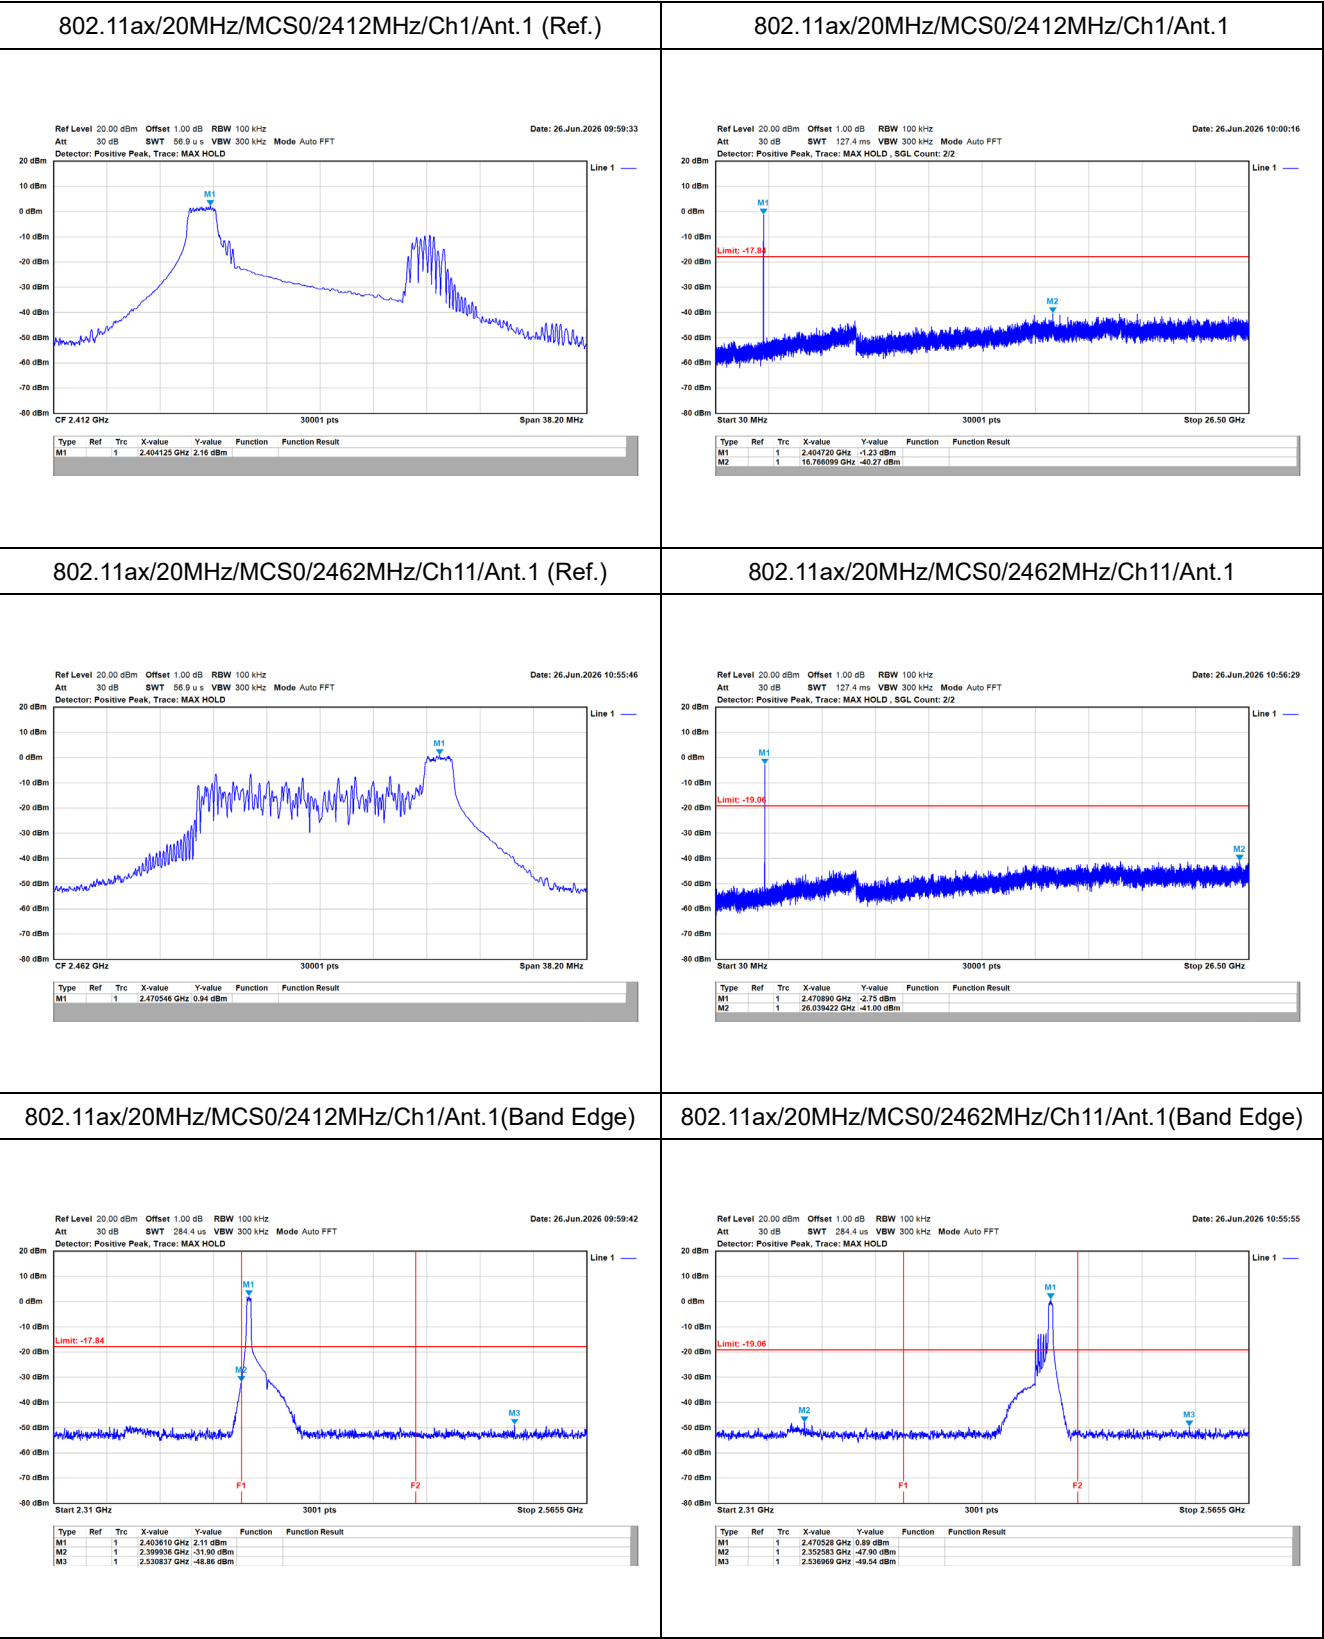

52-tone RU

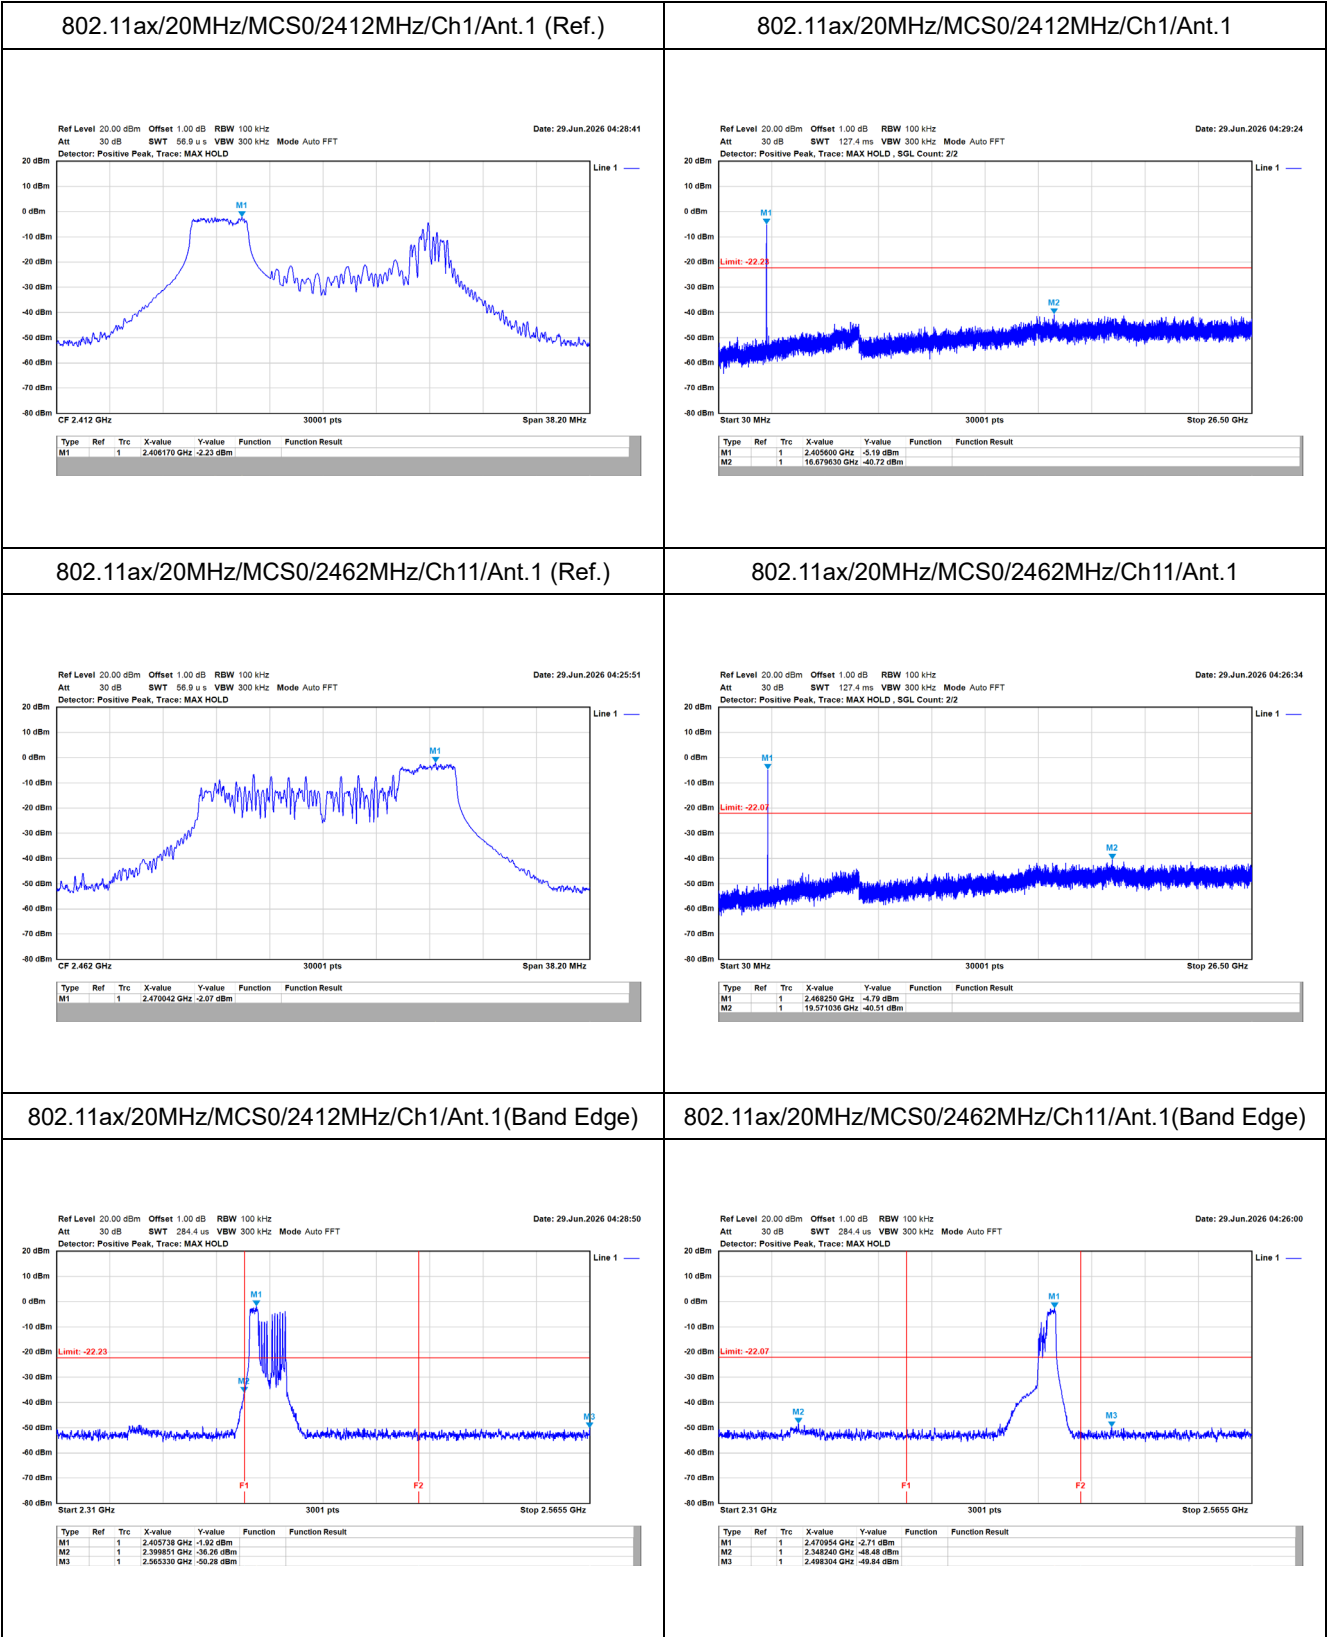


106-tone RU

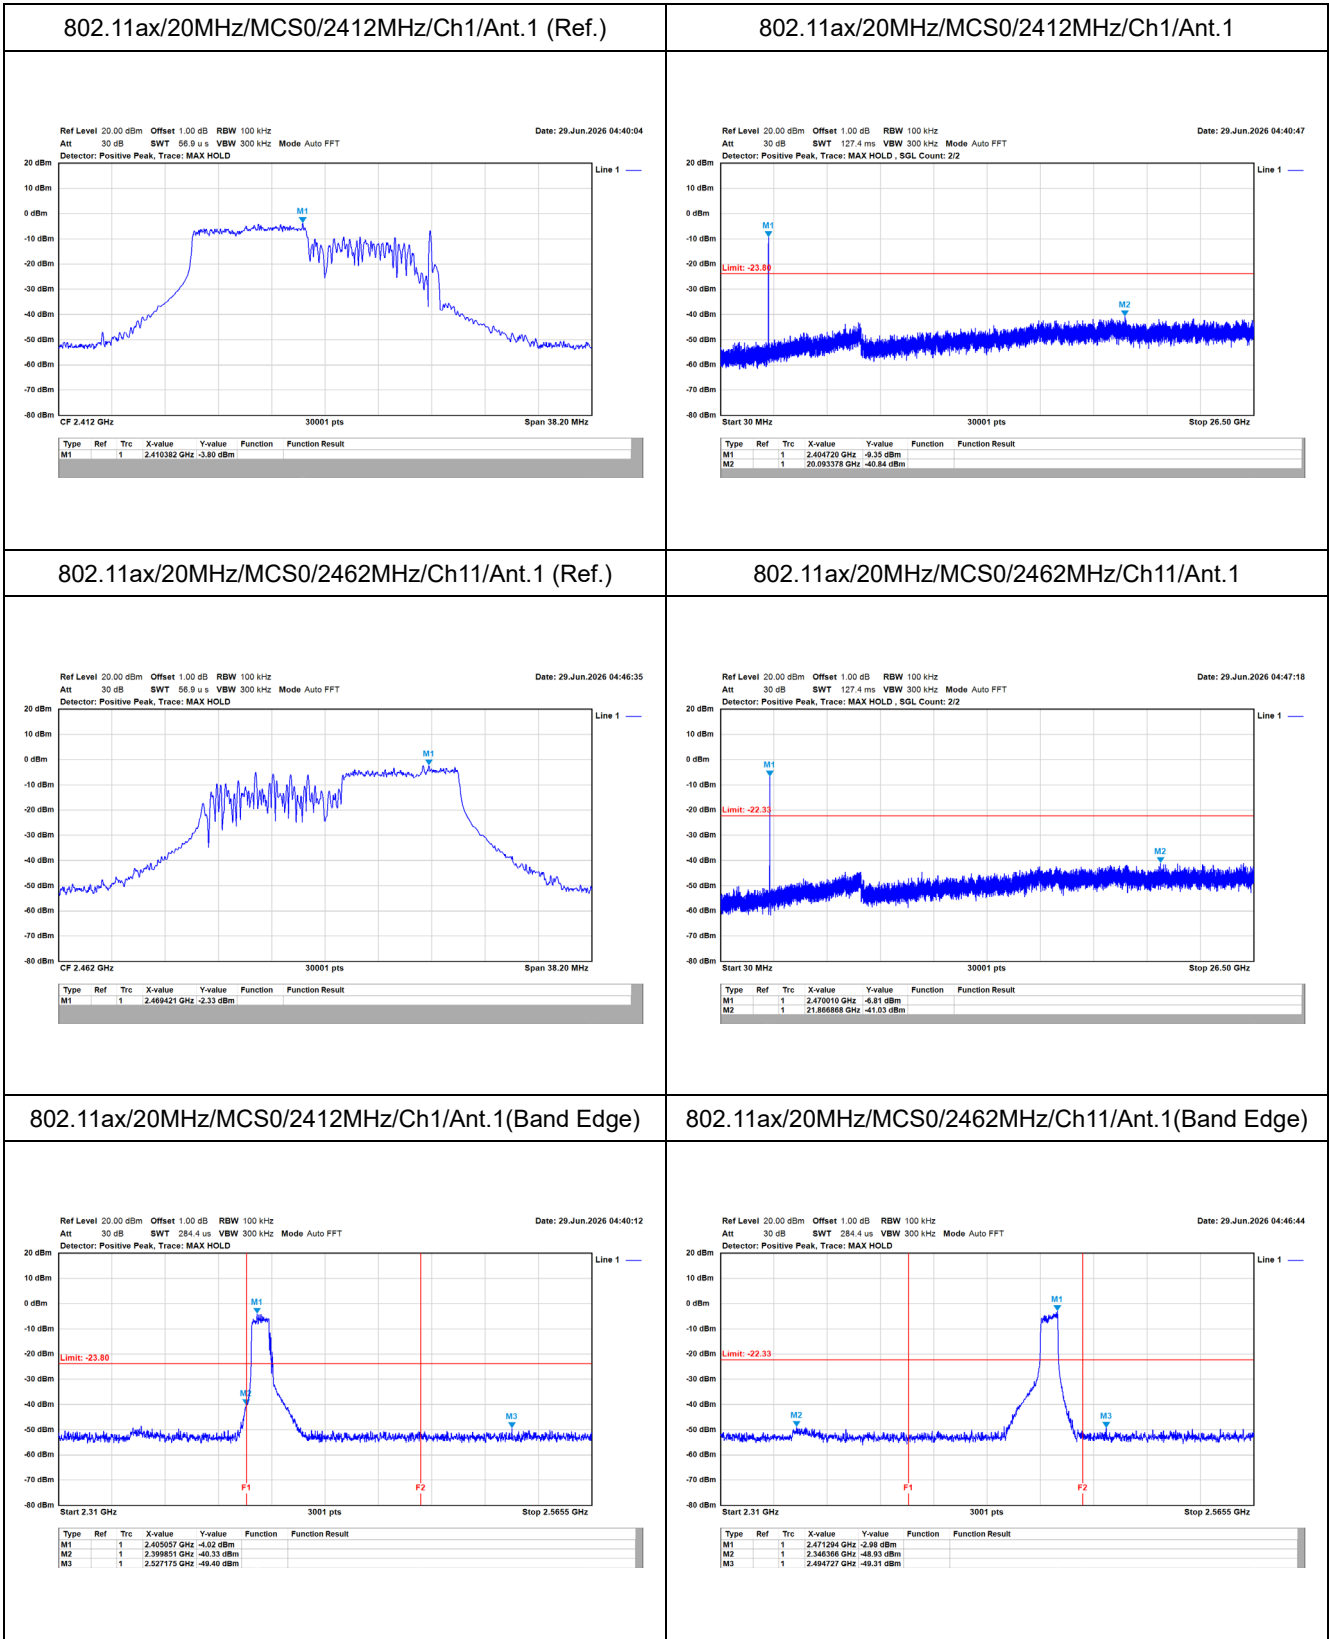

Appendix F. Test Result of Radiated Emission

TX_b_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Rock

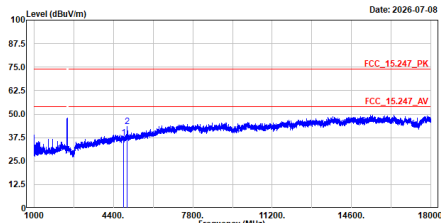


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	37.53	74.00	-36.47	52.15	-14.62	Peak
2	4995.850	43.56	74.00	-30.44	57.66	-14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Rock

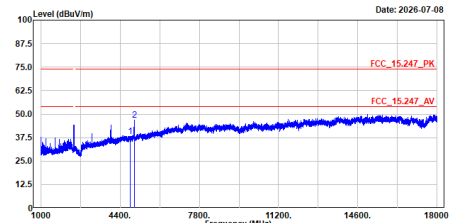


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	38.18	74.00	-35.82	52.80	-14.62	Peak
2	4998.400	46.97	74.00	-27.03	61.05	-14.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2437MHz
Test BY :Rock

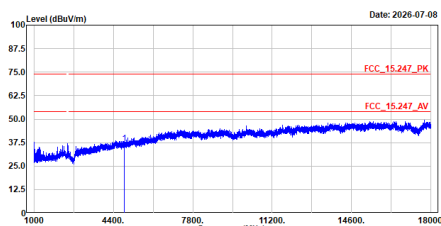


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.82	74.00	-37.18	51.28	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2437MHz
Test BY :Rock

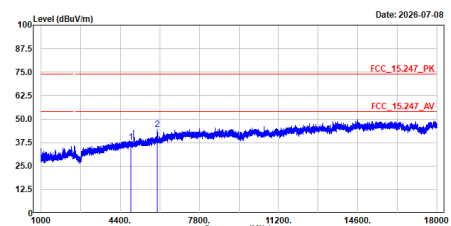


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.69	74.00	-36.31	52.15	-14.46	Peak
2	5999.700	44.69	74.00	-29.31	55.80	-11.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Rock

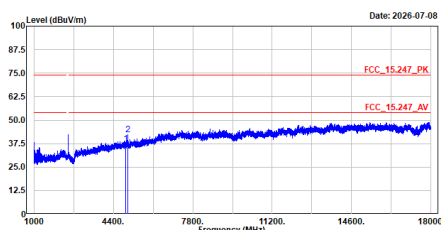


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.33	74.00	-36.67	51.68	-14.35	Peak
2	5000.100	42.38	74.00	-31.62	56.45	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Rock

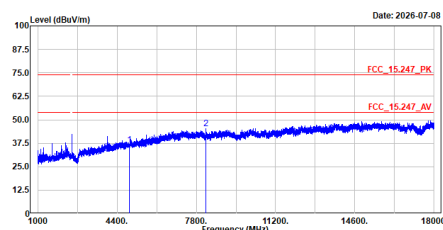


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.56	74.00	-37.44	50.91	-14.35	Peak
2	8219.900	45.16	74.00	-28.84	52.07	-6.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Rock

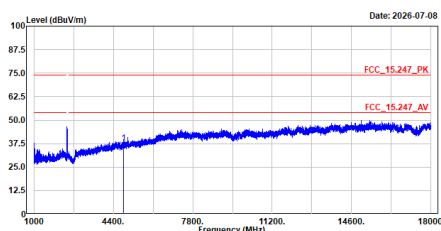


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	37.56	74.00	-36.44	52.18	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Rock

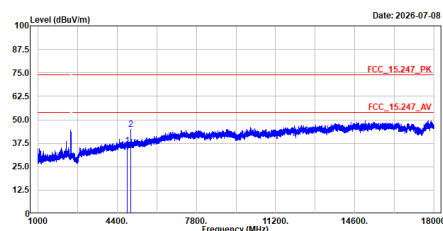


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	36.19	74.00	-37.81	50.81	-14.62	Peak
2	4980.550	44.95	74.00	-29.05	59.11	-14.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Rock

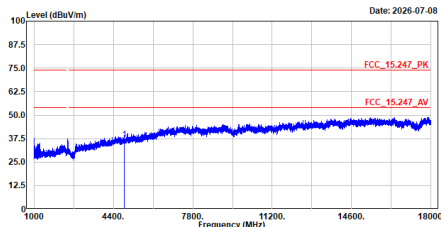


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.96	74.00	-37.04	51.42	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Rock

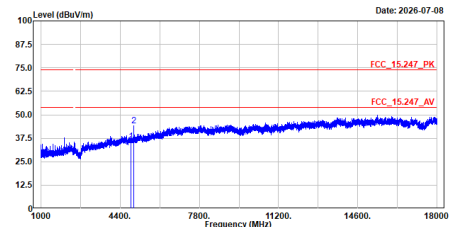


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.88	74.00	-38.12	50.34	-14.46	Peak
2	4985.650	44.83	74.00	-29.17	58.17	-14.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Rock

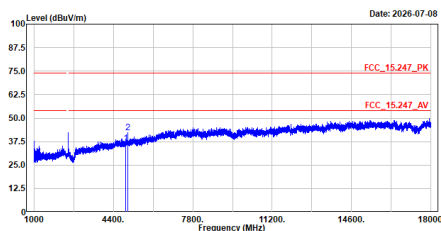


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.44	74.00	-37.56	50.79	-14.35	Peak
2	5000.100	42.27	74.00	-31.73	56.34	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.13	74.00	-37.87	50.48	-14.35	Peak
2	7386.000	45.67	74.00	-28.33	52.60	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Rock

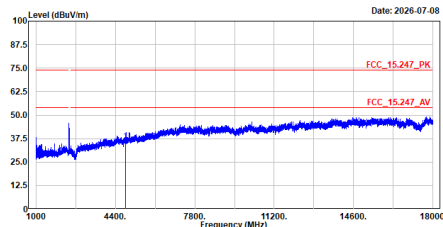


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	36.24	74.00	-37.76	50.86	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Rock

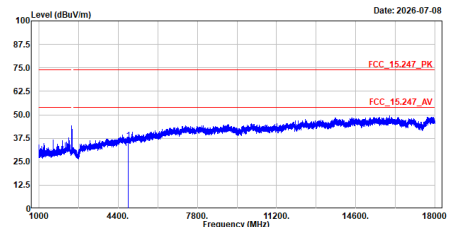


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	36.41	74.00	-37.59	51.83	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2437MHz
Test BY :Rock

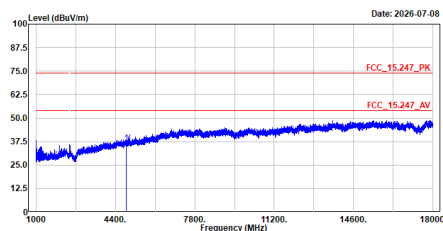


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.72	74.00	-37.28	51.18	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2437MHz
Test BY :Rock

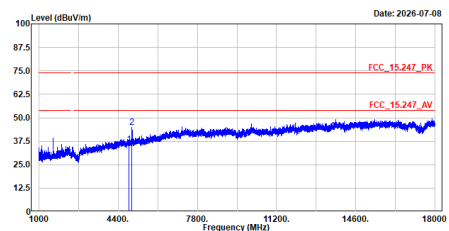


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.95	74.00	-38.05	50.41	-14.46	Peak
2	4989.900	44.93	74.00	-29.07	59.05	-14.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock

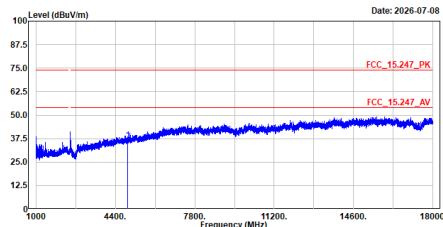


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.63	74.00	-37.37	50.98	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock

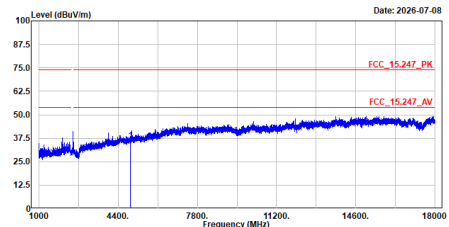


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.11	74.00	-37.89	50.46	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Rock

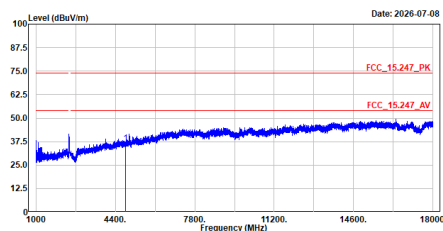


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	36.66	74.00	-37.34	51.17	-14.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Rock

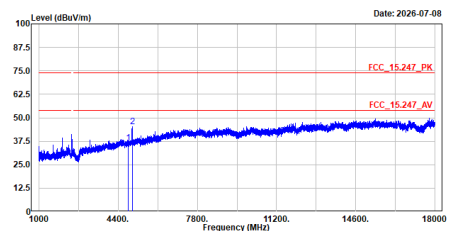


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4844.000	36.76	74.00	-37.24	51.27	-14.51	Peak
2	4999.250	45.37	74.00	-28.63	59.44	-14.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Rock

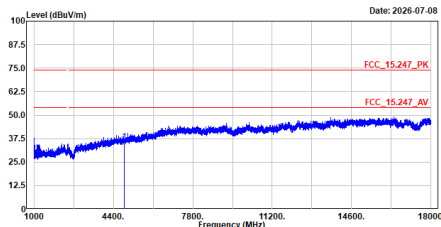


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.73	74.00	-38.27	50.19	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Rock

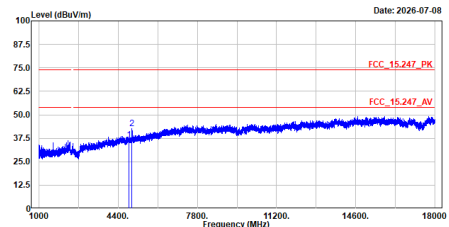


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.64	74.00	-37.36	51.10	-14.46	Peak
2	4979.700	42.66	74.00	-31.34	56.82	-14.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	37.05	74.00	-36.95	51.47	-14.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock

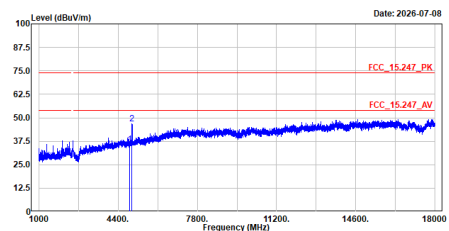


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	35.90	74.00	-38.10	50.32	-14.42	Peak
2	4978.850	46.70	74.00	-27.30	60.86	-14.16	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz
Test BY :Rock

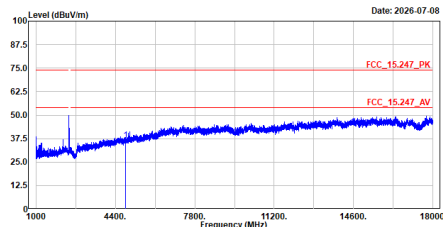


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	36.52	74.00	-37.48	51.14	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz
Test BY :Rock

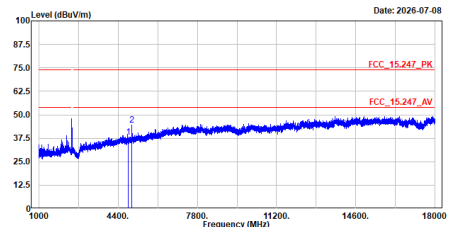


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	37.99	74.00	-36.01	52.61	-14.62	Peak
2	4989.050	44.38	74.00	-29.62	58.58	-14.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2437MHz
Test BY :Rock

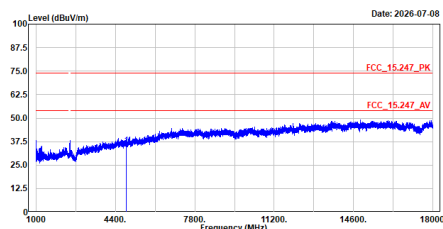


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	35.58	74.00	-38.42	50.04	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2437MHz
Test BY :Rock

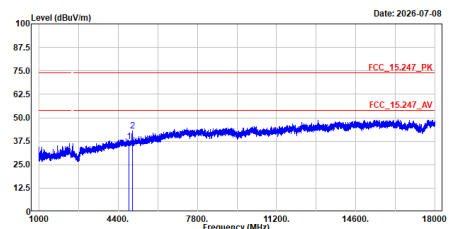


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	37.43	74.00	-36.57	51.89	-14.46	Peak
2	4998.400	43.04	74.00	-30.96	57.12	-14.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz
Test BY :Rock

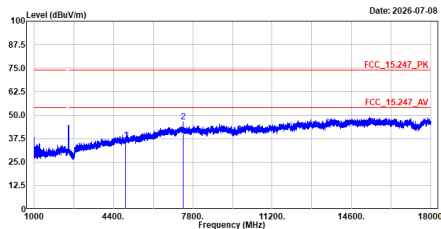


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	36.70	74.00	-37.30	51.05	-14.35	Peak
2	7386.000	46.47	74.00	-27.53	53.40	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz
Test BY :Rock

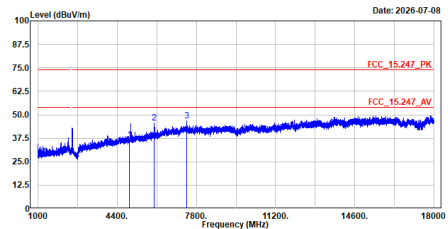


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4924.000	36.58	74.00	-37.42	50.93	-14.35	Peak
2	5999.700	45.60	74.00	-28.40	56.71	-11.11	Peak
3	7386.000	46.68	74.00	-27.32	53.61	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	35.30	74.00	-38.70	49.81	-14.51	Peak
2	4978.000	42.32	74.00	-31.68	56.48	-14.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Rock

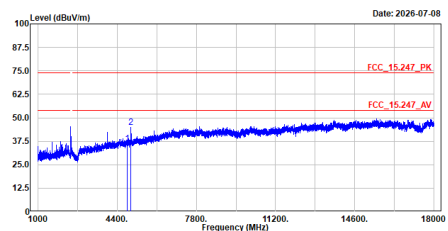


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4844.000	36.06	74.00	-37.94	50.57	-14.51	Peak
2	4979.700	45.03	74.00	-28.97	59.19	-14.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2437MHz
Test BY :Rock

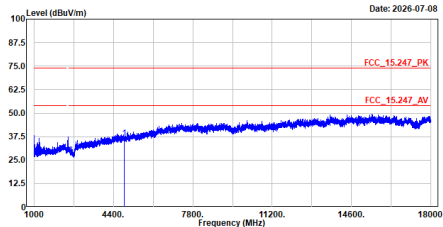


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.46	74.00	-37.54	50.92	-14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
Test BY :Rock

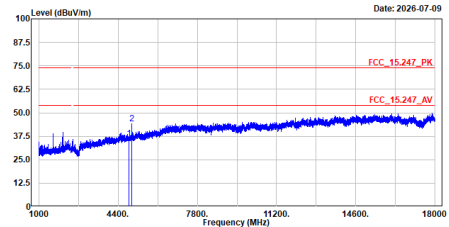


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	36.17	74.00	-37.83	50.63	-14.46	Peak
2	4889.050	43.99	74.00	-30.01	58.11	-14.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2452MHz
Test BY :Rock

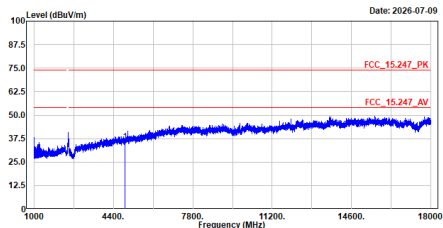


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	35.74	74.00	-38.26	50.16	-14.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2452MHz
Test BY :Rock

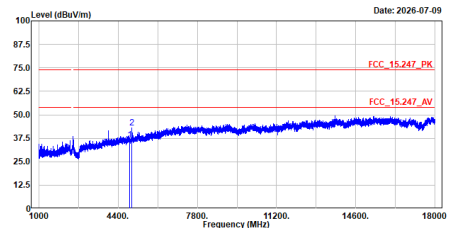


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4904.000	36.77	74.00	-37.23	51.19	-14.42	Peak
2	4977.150	42.92	74.00	-31.08	57.09	-14.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2437MHz
Test BY :Ashton

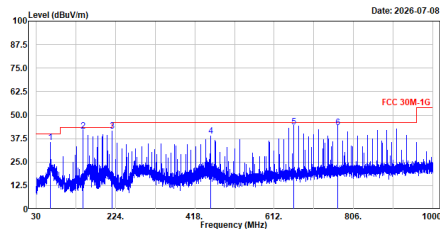


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	64.047	35.57	40.00	-4.43	60.58	-25.01	QP
2	143.975	41.43	43.50	-2.07	65.49	-24.06	QP
3	216.046	41.54	46.00	-4.46	68.06	-26.52	QP
4	456.121	38.75	46.00	-7.25	57.66	-18.91	QP
5	660.112	43.60	46.00	-2.40	58.47	-14.87	QP
6	768.170	43.35	46.00	-2.65	56.24	-12.89	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ac40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2437MHz
Test BY :Ashton

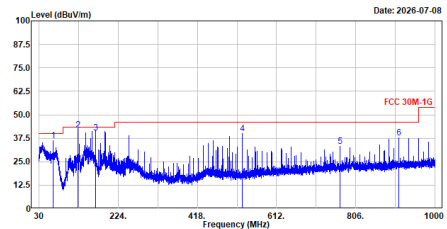


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	63.950	36.34	40.00	-3.66	61.33	-24.99	QP
2	124.963	41.71	43.50	-1.79	67.66	-25.95	QP
3	168.031	40.45	43.50	-3.05	64.72	-24.27	QP
4	528.095	39.85	46.00	-6.15	57.49	-17.64	QP
5	768.170	33.37	46.00	-12.63	46.26	-12.89	QP
6	912.215	37.91	46.00	-8.09	49.35	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2437MHz
Test BY :Ashton

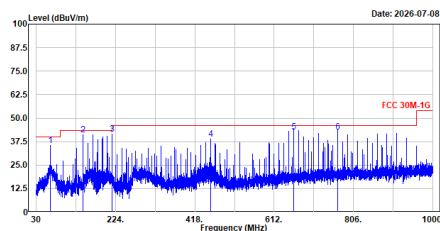


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	63.950	35.43	40.00	-4.57	60.42	-24.99	QP
2	143.975	41.21	43.50	-2.29	65.27	-24.06	QP
3	216.046	41.40	46.00	-4.60	67.92	-26.52	QP
4	456.121	38.74	46.00	-7.26	57.65	-18.91	QP
5	660.112	42.75	46.00	-3.25	57.62	-14.87	QP
6	768.170	42.79	46.00	-3.21	55.68	-12.89	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax40_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2437MHz
Test BY :Ashton

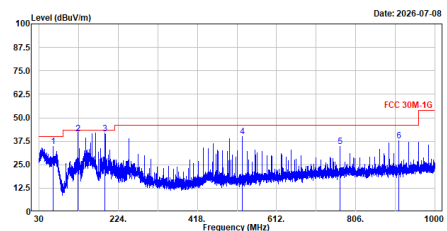


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	63.950	34.69	40.00	-5.31	59.68	-24.99	QP
2	124.963	41.36	43.50	-2.14	67.31	-25.95	QP
3	191.990	41.41	43.50	-2.09	67.93	-26.52	QP
4	528.095	40.04	46.00	-5.96	57.68	-17.64	QP
5	768.170	34.74	46.00	-11.26	47.63	-12.89	QP
6	912.215	37.72	46.00	-8.28	49.16	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Rock

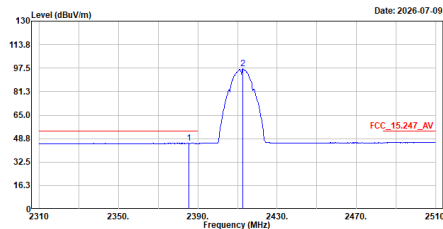


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2385.400	45.43	54.00	-8.57	14.99	30.44	Average
2	2412.000	96.94	-----	-----	66.62	30.32	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz
Test BY :Rock

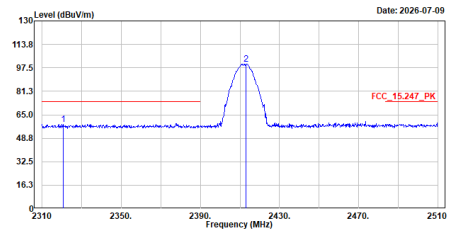


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2320.600	58.60	74.00	-15.40	28.03	30.57	Peak
2	2412.200	100.30	-----	-----	69.98	30.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Rock

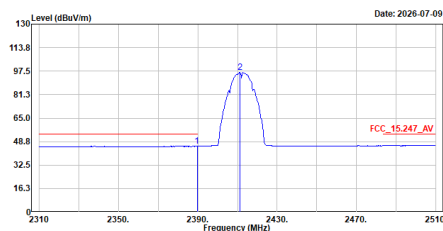


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	45.53	54.00	-8.47	15.14	30.39	Average
2	2411.200	96.60	-----	-----	66.30	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz
Test BY :Rock

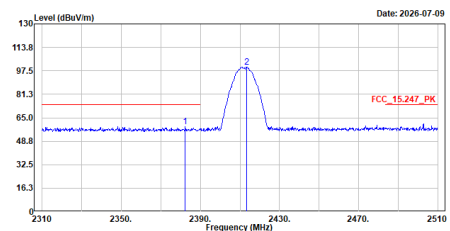


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2382.400	59.07	74.00	-14.93	28.60	30.47	Peak
2	2413.400	99.96	-----	-----	69.64	30.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Rock

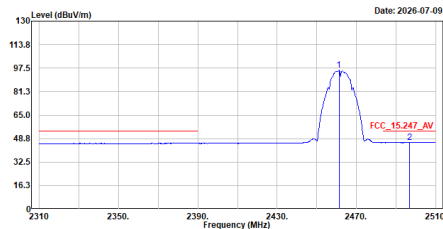


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	95.94	-----	-----	65.53	30.41	Average
2	2496.800	46.01	54.00	-7.99	15.57	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Rock

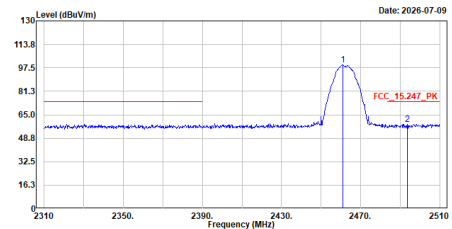


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	99.40	-----	-----	68.99	30.41	Peak
2	2493.600	58.59	74.00	-15.41	28.15	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Rock

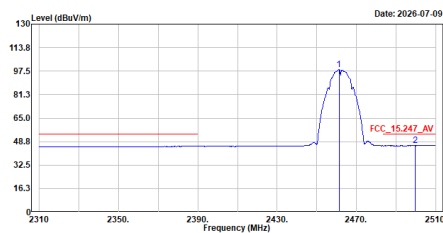


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	98.62	-----	-----	68.21	30.41	Average
2	2499.800	45.94	54.00	-8.06	15.49	30.45	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Rock

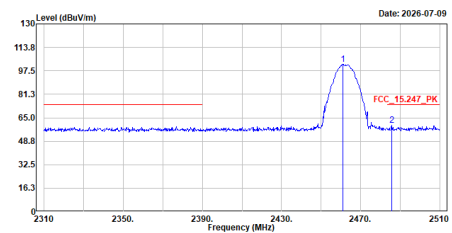


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	101.94	-----	-----	71.53	30.41	Peak
2	2485.600	59.79	74.00	-14.21	29.36	30.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Rock

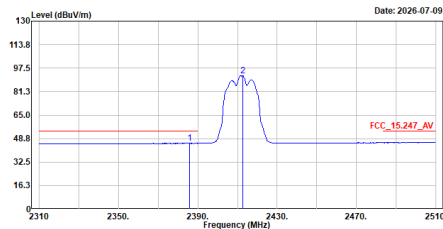


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.000	45.45	54.00	-8.55	15.02	30.43	Average
2	2412.600	92.46	-----	-----	62.14	30.32	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Rock

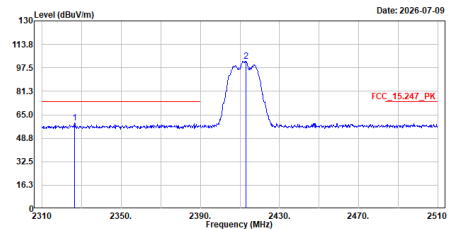


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2326.400	59.13	74.00	-14.87	28.56	30.57	Peak
2	2413.000	102.06	-----	-----	71.74	30.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Rock

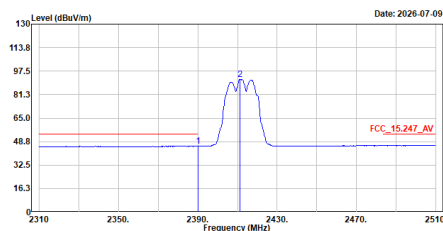


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.54	54.00	-8.46	15.15	30.39	Average
2	2411.400	91.95	-----	-----	61.65	30.30	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Rock

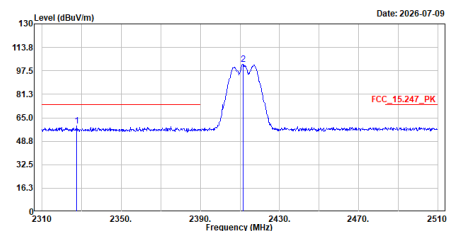


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2327.600	59.37	74.00	-14.63	28.88	30.57	Peak
2	2411.600	102.16	-----	-----	71.85	30.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Rock

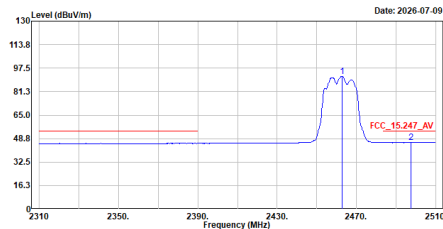


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	91.96	-----	-----	61.55	30.41	Average
2	2497.600	45.98	54.00	-8.02	15.54	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Rock

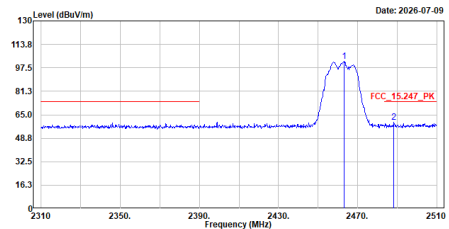


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	101.95	-----	-----	71.54	30.41	Peak
2	2498.400	59.79	74.00	-14.21	29.35	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Rock

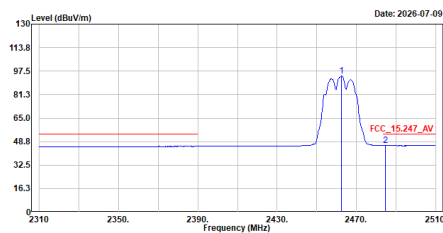


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	94.06	-----	-----	63.65	30.41	Average
2	2484.800	46.01	54.00	-7.99	15.58	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Rock

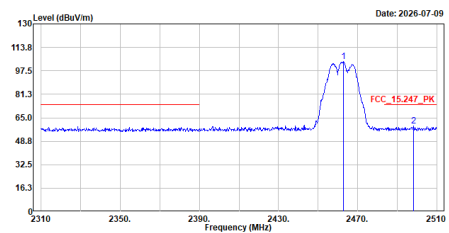


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2462.800	103.85	-----	-----	73.44	30.41	Peak
2	2498.400	59.30	74.00	-14.70	28.86	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Rock

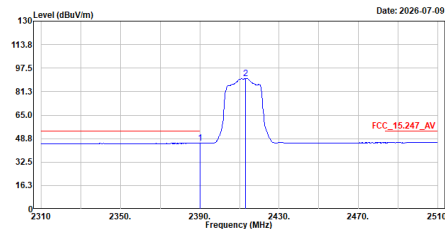


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.48	54.00	-8.52	15.09	30.39	Average
2	2413.000	98.51	-----	-----	60.19	30.32	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2412MHz
Test BY :Rock

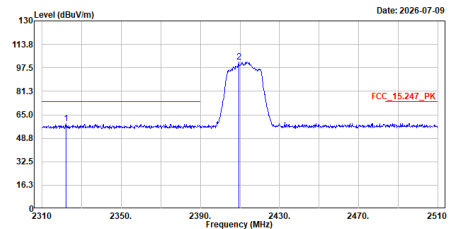


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2322.200	58.75	74.00	-15.25	28.18	30.57	Peak
2	2409.400	101.45	-----	-----	71.15	30.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Rock

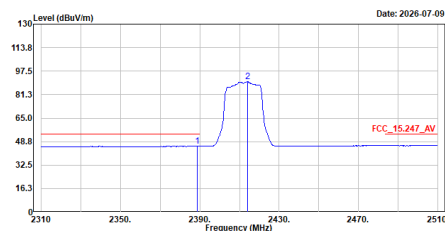


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.800	45.50	54.00	-8.50	15.10	30.40	Average
2	2414.000	98.31	-----	-----	59.98	30.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2412MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2412MHz
Test BY :Rock

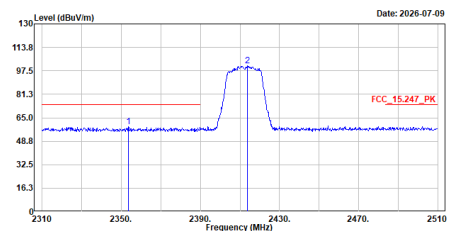


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2353.600	58.76	74.00	-15.24	28.28	30.48	Peak
2	2413.800	101.10	-----	-----	70.77	30.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock

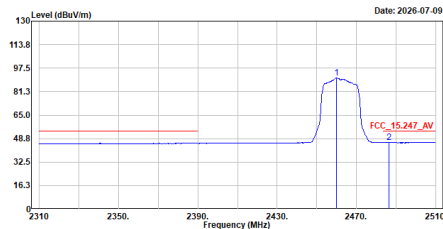


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.000	98.72	-----	-----	60.31	38.41	Average
2	2486.400	45.94	54.00	-8.06	15.51	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_2462MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.200	101.56	-----	-----	71.16	30.40	Peak
2	2485.600	59.32	74.00	-14.68	28.89	30.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock

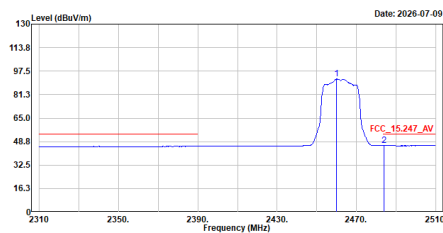


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.800	92.13	-----	-----	61.72	30.41	Average
2	2483.800	46.00	54.00	-8.00	15.57	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_2462MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.400	103.42	-----	-----	73.82	30.40	Peak
2	2495.600	58.48	74.00	-15.52	28.04	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Rock

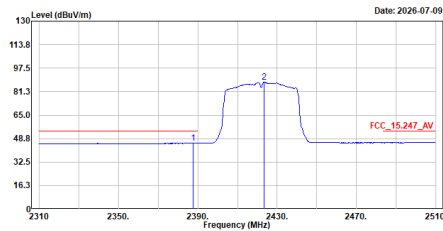


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2387.600	45.53	54.00	-8.47	15.12	30.41	Average
2	2423.600	87.70	-----	-----	57.31	30.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2422MHz
Test BY :Rock

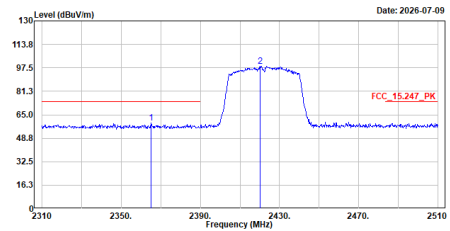


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2365.200	59.29	74.00	-14.71	28.81	30.48	Peak
2	2420.200	98.80	-----	-----	68.41	30.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Rock

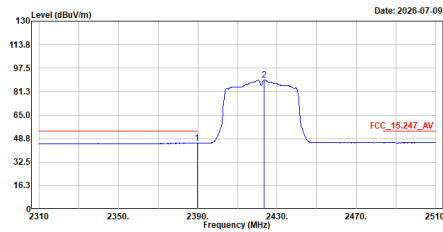


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.600	45.59	54.00	-8.41	15.20	30.39	Average
2	2423.600	89.18	-----	-----	58.79	30.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2422MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2422MHz
Test BY :Rock

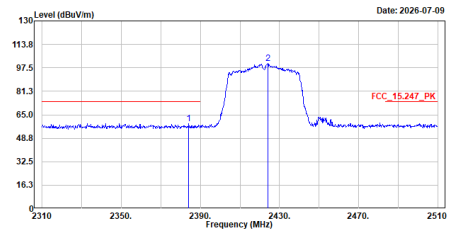


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2384.200	58.97	74.00	-15.03	28.52	30.45	Peak
2	2424.000	100.43	-----	-----	70.03	30.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock

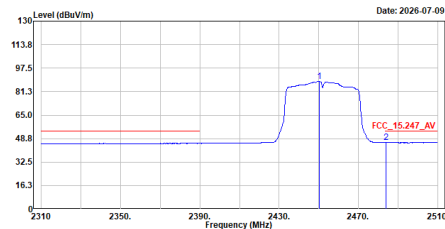


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2450.200	88.43	54.00	-7.90	58.13	30.30	Average
2	2483.800	46.10	54.00	-7.90	15.67	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_2452MHz
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2449.600	99.29	54.00	-13.77	68.99	30.30	Peak
2	2490.200	60.23	54.00	-13.77	29.79	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_2452MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock

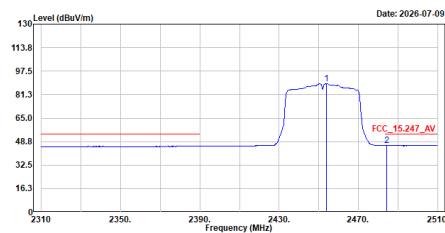


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2453.800	88.95	54.00	-7.78	58.60	30.35	Average
2	2484.200	46.22	54.00	-7.78	15.79	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.





TX_ac40_2452MHz_V_Peak





Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_2452MHz
Test BY :Rock



No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2453.600	100.17	54.00	-15.09	69.82	30.35	Peak
2	2486.000	58.91	54.00	-15.09	28.48	30.43	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

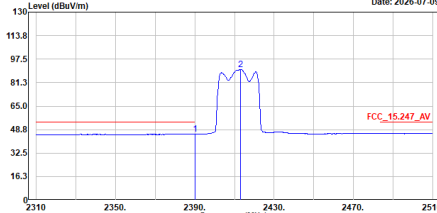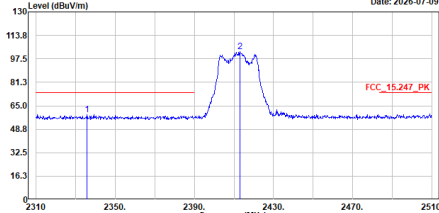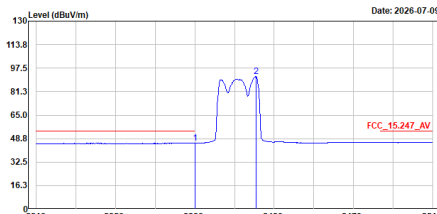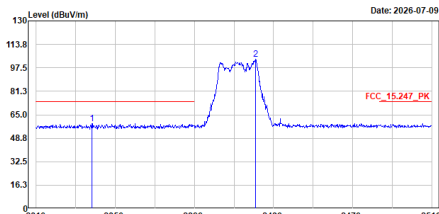TX_ax20_2412MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2412MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 23102350.23902430.2470.2510 Frequency (MHz) 130 Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2390.000</td><td>45.60</td><td>54.00</td><td>-8.40</td><td>15.21</td><td>30.39</td><td>Average</td></tr><tr><td>2</td><td>2413.000</td><td>98.50</td><td>-----</td><td>-----</td><td>60.18</td><td>30.32</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. TX_ax20_2412MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2412MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 23102350.23902430.2470.2510 Frequency (MHz) 130 Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2335.600</td><td>58.81</td><td>74.00</td><td>-15.19</td><td>28.24</td><td>30.57</td><td>Peak</td></tr><tr><td>2</td><td>2413.000</td><td>102.42</td><td>-----</td><td>-----</td><td>72.10</td><td>30.32</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2390.000	45.60	54.00	-8.40	15.21	30.39	Average	2	2413.000	98.50	-----	-----	60.18	30.32	Average	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2335.600	58.81	74.00	-15.19	28.24	30.57	Peak	2	2413.000	102.42	-----	-----	72.10	30.32	Peak	TX_ax20_2412MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2412MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 23102350.23902430.2470.2510 Frequency (MHz) 130 Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2390.000</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>15.25</td><td>30.39</td><td>Average</td></tr><tr><td>2</td><td>2420.800</td><td>91.60</td><td>-----</td><td>-----</td><td>61.21</td><td>30.39</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. TX_ax20_2412MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2412MHz Test BY :Rock Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 23102350.23902430.2470.2510 Frequency (MHz) 130 Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2338.200</td><td>59.11</td><td>74.00</td><td>-14.89</td><td>28.54</td><td>30.57</td><td>Peak</td></tr><tr><td>2</td><td>2421.000</td><td>103.28</td><td>-----</td><td>-----</td><td>72.89</td><td>30.39</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2390.000	45.64	54.00	-8.36	15.25	30.39	Average	2	2420.800	91.60	-----	-----	61.21	30.39	Average	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2338.200	59.11	74.00	-14.89	28.54	30.57	Peak	2	2421.000	103.28	-----	-----	72.89	30.39	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2390.000	45.60	54.00	-8.40	15.21	30.39	Average																																																																																																																										
2	2413.000	98.50	-----	-----	60.18	30.32	Average																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2335.600	58.81	74.00	-15.19	28.24	30.57	Peak																																																																																																																										
2	2413.000	102.42	-----	-----	72.10	30.32	Peak																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2390.000	45.64	54.00	-8.36	15.25	30.39	Average																																																																																																																										
2	2420.800	91.60	-----	-----	61.21	30.39	Average																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	2338.200	59.11	74.00	-14.89	28.54	30.57	Peak																																																																																																																										
2	2421.000	103.28	-----	-----	72.89	30.39	Peak																																																																																																																										

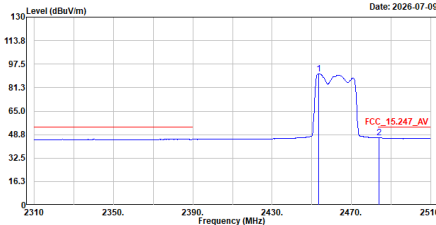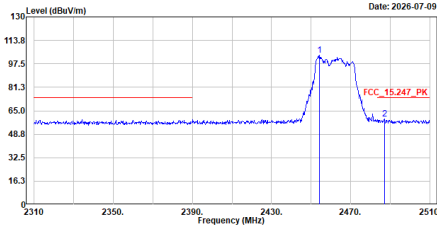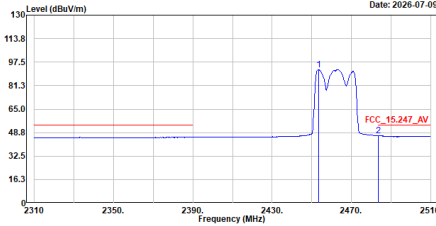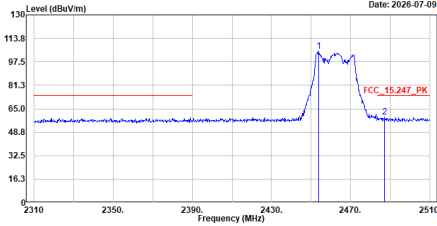TX_ax20_2462MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2462MHz Test BY :Rock Level (dBuV/m) Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2453.400</td><td>98.94</td><td>-----</td><td>-----</td><td>60.60</td><td>30.34</td><td>Average</td></tr><tr><td>2</td><td>2484.000</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>16.05</td><td>30.43</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2453.400	98.94	-----	-----	60.60	30.34	Average	2	2484.000	46.48	54.00	-7.52	16.05	30.43	Average	TX_ax20_2462MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2462MHz Test BY :Rock Level (dBuV/m) Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2454.200</td><td>103.35</td><td>-----</td><td>-----</td><td>73.00</td><td>30.35</td><td>Peak</td></tr><tr><td>2</td><td>2487.000</td><td>59.30</td><td>74.00</td><td>-14.70</td><td>28.87</td><td>30.43</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2454.200	103.35	-----	-----	73.00	30.35	Peak	2	2487.000	59.30	74.00	-14.70	28.87	30.43	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2453.400	98.94	-----	-----	60.60	30.34	Average																																																										
2	2484.000	46.48	54.00	-7.52	16.05	30.43	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2454.200	103.35	-----	-----	73.00	30.35	Peak																																																										
2	2487.000	59.30	74.00	-14.70	28.87	30.43	Peak																																																										
TX_ax20_2462MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2462MHz Test BY :Rock Level (dBuV/m) Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2453.400</td><td>92.38</td><td>-----</td><td>-----</td><td>62.04</td><td>30.34</td><td>Average</td></tr><tr><td>2</td><td>2483.600</td><td>46.52</td><td>54.00</td><td>-7.48</td><td>16.09</td><td>30.43</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2453.400	92.38	-----	-----	62.04	30.34	Average	2	2483.600	46.52	54.00	-7.48	16.09	30.43	Average	TX_ax20_2462MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2462MHz Test BY :Rock Level (dBuV/m) Date: 2026-07-09  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2454.000</td><td>105.04</td><td>-----</td><td>-----</td><td>74.69</td><td>30.35</td><td>Peak</td></tr><tr><td>2</td><td>2487.200</td><td>59.13</td><td>74.00</td><td>-14.87</td><td>28.70</td><td>30.43</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2454.000	105.04	-----	-----	74.69	30.35	Peak	2	2487.200	59.13	74.00	-14.87	28.70	30.43	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2453.400	92.38	-----	-----	62.04	30.34	Average																																																										
2	2483.600	46.52	54.00	-7.48	16.09	30.43	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	2454.000	105.04	-----	-----	74.69	30.35	Peak																																																										
2	2487.200	59.13	74.00	-14.87	28.70	30.43	Peak																																																										

TX_ax40_2422MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Rock

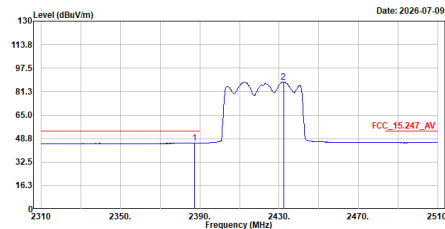


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2387.200	45.62	54.00	-8.38	15.20	30.42	Average
2	2432.200	87.81	-----	-----	57.43	30.38	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_2422MHz
Test BY :Rock

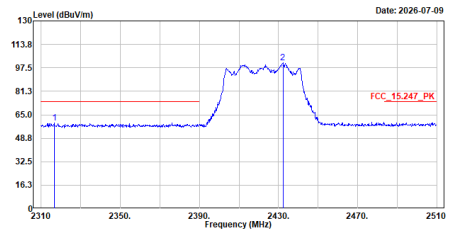


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2316.600	59.31	74.00	-14.69	28.75	30.56	Peak
2	2432.200	100.91	-----	-----	70.53	30.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Rock

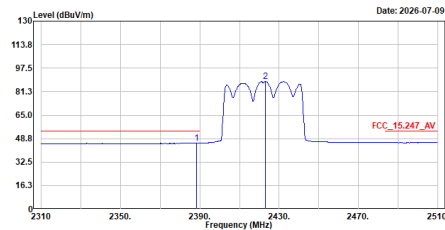


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.400	45.61	54.00	-8.39	15.20	30.41	Average
2	2423.000	88.35	-----	-----	57.96	30.39	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_2422MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_2422MHz
Test BY :Rock

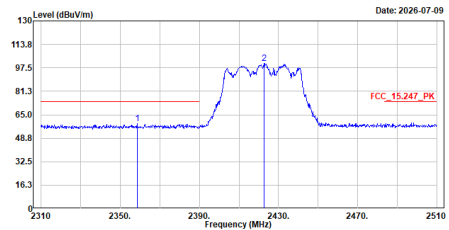

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2358.600	58.64	74.00	-15.36	28.16	30.48	Peak
2	2422.000	100.59	-----	-----	70.20	30.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

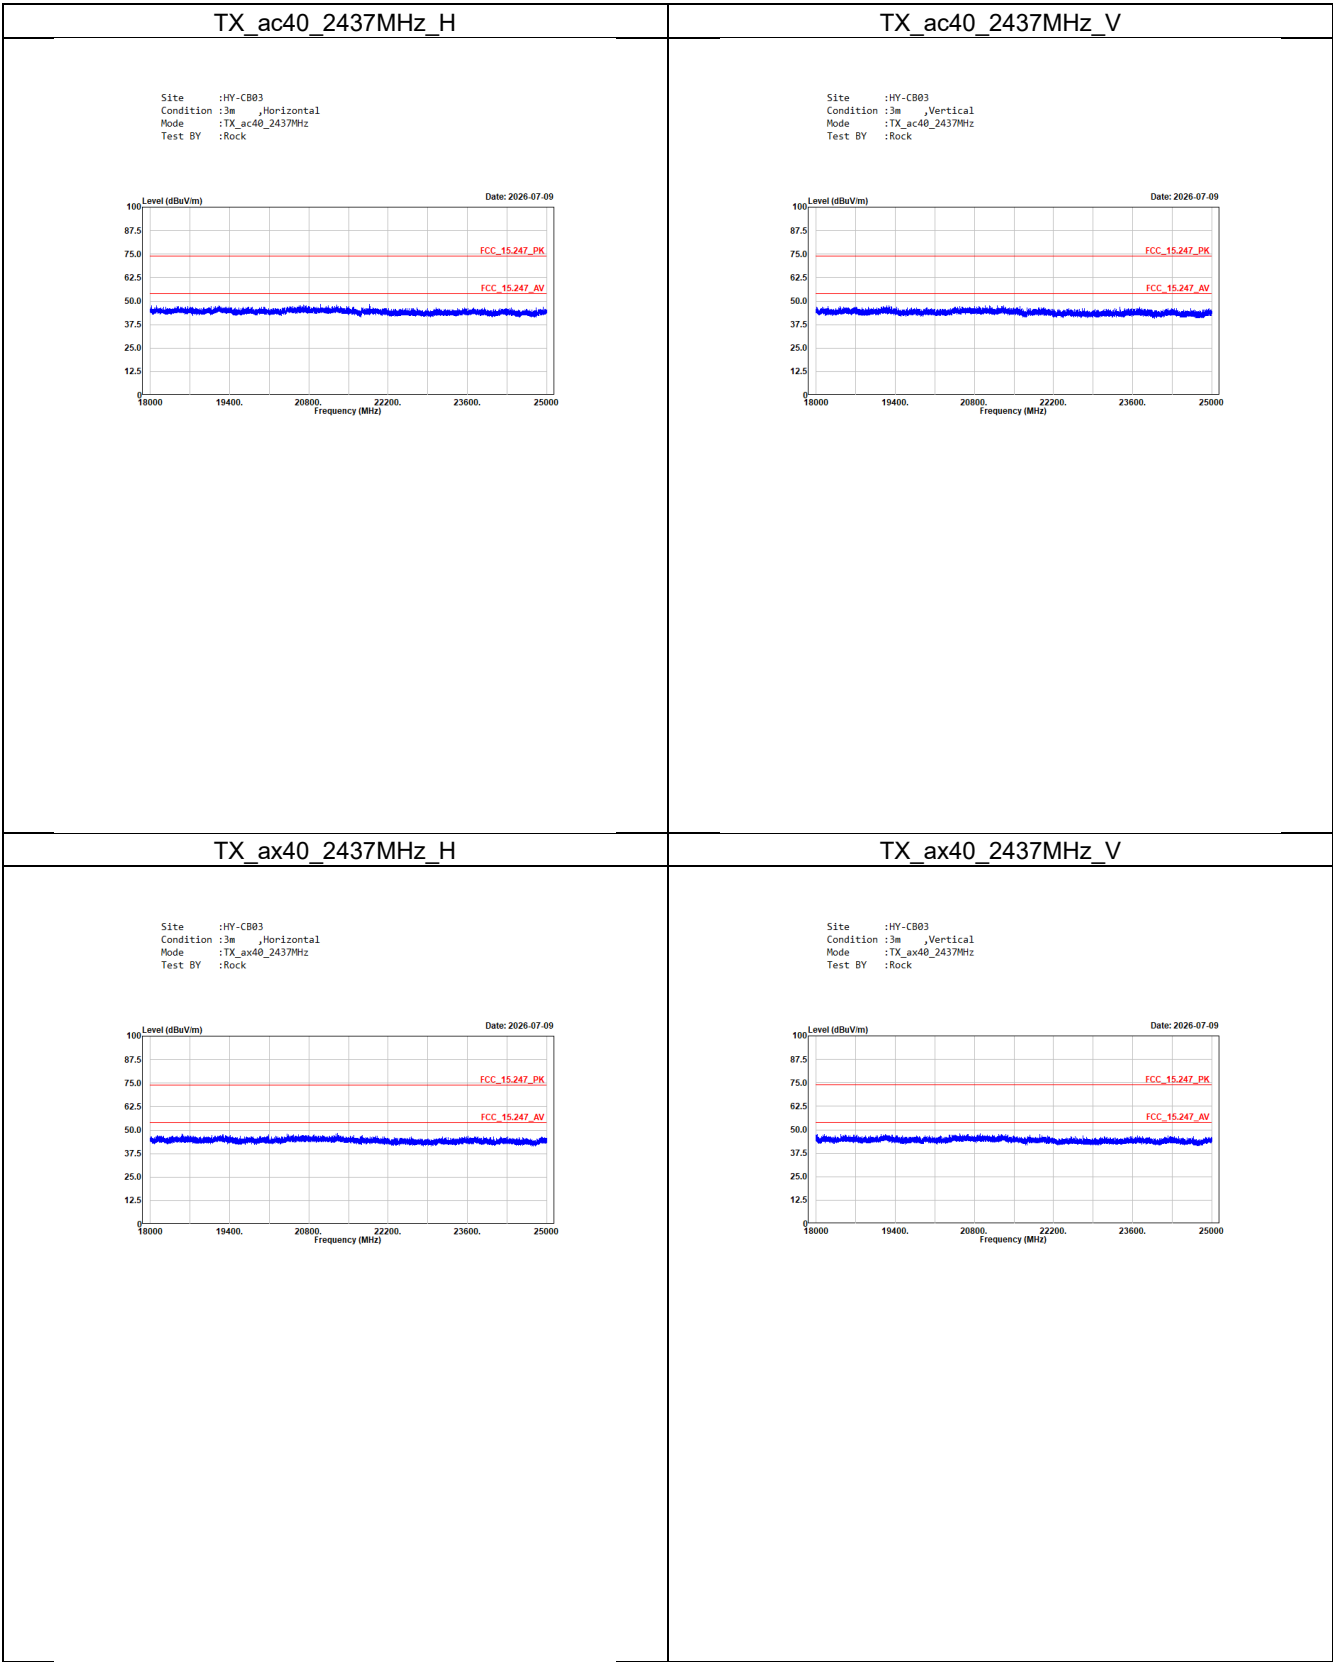


Partial RU

TX_ax20_2412MHz_RU 26 0_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2412MHz_RU 26 0 Test BY :Rock Level (dBuV/m) Date: 2026-07-15 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>37.78</td><td>74.00</td><td>-36.22</td><td>52.40</td><td>-14.62</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. <td> TX_ax20_2412MHz_RU 26 0_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2412MHz_RU 26 0 Test BY :Rock Level (dBuV/m) Date: 2026-07-15 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>36.89</td><td>74.00</td><td>-37.11</td><td>51.51</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>4989.900</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>61.74</td><td>-14.12</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report. </td>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	37.78	74.00	-36.22	52.40	-14.62	Peak	TX_ax20_2412MHz_RU 26 0_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2412MHz_RU 26 0 Test BY :Rock Level (dBuV/m) Date: 2026-07-15 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>36.89</td><td>74.00</td><td>-37.11</td><td>51.51</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>4989.900</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>61.74</td><td>-14.12</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	36.89	74.00	-37.11	51.51	-14.62	Peak	2	4989.900	47.62	74.00	-26.38	61.74	-14.12	Peak																
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																			
1	4824.000	37.78	74.00	-36.22	52.40	-14.62	Peak																																																																		
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																			
1	4824.000	36.89	74.00	-37.11	51.51	-14.62	Peak																																																																		
2	4989.900	47.62	74.00	-26.38	61.74	-14.12	Peak																																																																		
TX_ax20_2412MHz_RU 52 37_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax20_2412MHz_RU 52 37 Test BY :Rock Level (dBuV/m) Date: 2026-07-15 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>38.31</td><td>74.00</td><td>-35.69</td><td>52.93</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>7236.000</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>57.05</td><td>-7.22</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	38.31	74.00	-35.69	52.93	-14.62	Peak	2	7236.000	49.83	74.00	-24.17	57.05	-7.22	Peak	TX_ax20_2412MHz_RU 52 37_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax20_2412MHz_RU 52 37 Test BY :Rock Level (dBuV/m) Date: 2026-07-15 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>38.19</td><td>74.00</td><td>-35.81</td><td>52.81</td><td>-14.62</td><td>Peak</td></tr><tr><td>2</td><td>4995.000</td><td>46.19</td><td>74.00</td><td>-27.81</td><td>60.29</td><td>-14.10</td><td>Peak</td></tr><tr><td>3</td><td>7236.000</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>57.83</td><td>-7.22</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	38.19	74.00	-35.81	52.81	-14.62	Peak	2	4995.000	46.19	74.00	-27.81	60.29	-14.10	Peak	3	7236.000	50.61	74.00	-23.39	57.83	-7.22	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																			
1	4824.000	38.31	74.00	-35.69	52.93	-14.62	Peak																																																																		
2	7236.000	49.83	74.00	-24.17	57.05	-7.22	Peak																																																																		
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																			
1	4824.000	38.19	74.00	-35.81	52.81	-14.62	Peak																																																																		
2	4995.000	46.19	74.00	-27.81	60.29	-14.10	Peak																																																																		
3	7236.000	50.61	74.00	-23.39	57.83	-7.22	Peak																																																																		

TX_ax20_2412MHz_RU 106 53_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

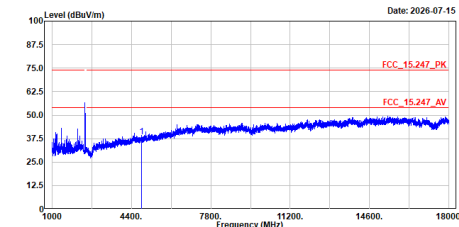


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	38.62	74.00	-35.38	53.24	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 106 53_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

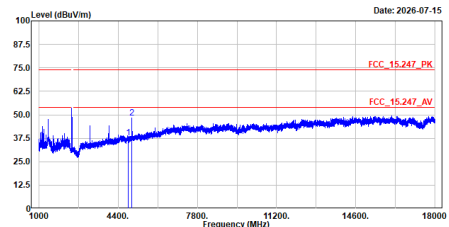


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	37.64	74.00	-36.36	52.26	-14.62	Peak
2	4983.950	48.13	74.00	-25.87	62.27	-14.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

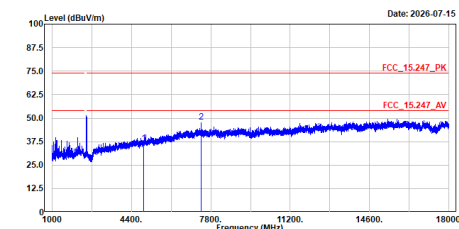


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.45	74.00	-37.55	50.80	-14.35	Peak
2	7386.000	47.97	74.00	-26.03	54.90	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

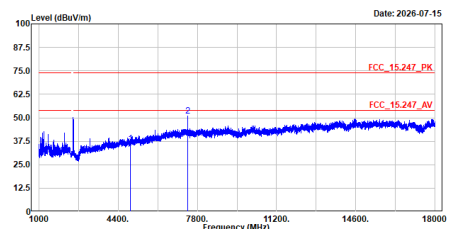


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.22	74.00	-37.78	50.57	-14.35	Peak
2	7386.000	50.83	74.00	-23.17	57.76	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

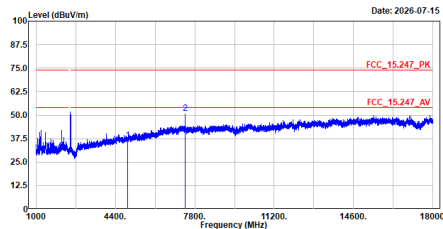


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	36.78	74.00	-37.22	51.13	-14.35	Peak
2	7386.000	58.99	74.00	-23.01	57.92	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

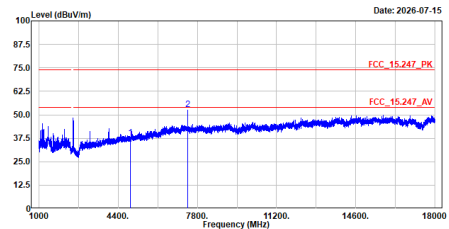


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.82	74.00	-36.18	52.17	-14.35	Peak
2	7386.000	52.77	74.00	-21.23	59.78	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz_RU 106 54
Test BY :Rock

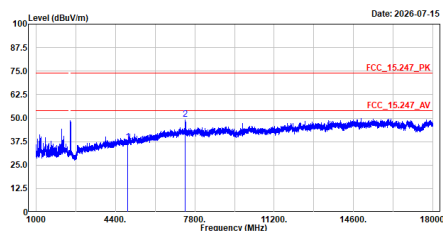


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.26	74.00	-36.74	51.61	-14.35	Peak
2	7386.000	49.25	74.00	-24.75	56.18	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 106 54
Test BY :Rock

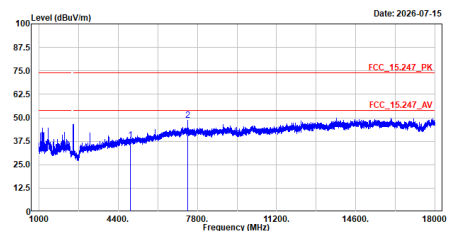


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.93	74.00	-36.07	52.28	-14.35	Peak
2	7386.000	48.67	74.00	-25.33	55.60	-6.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2462MHz RU 106 54
Test BY :Ashton

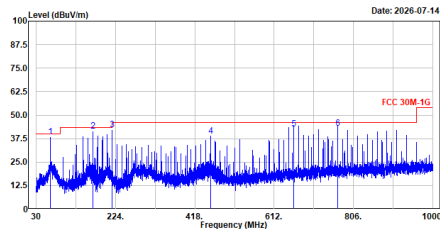


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	63.950	38.38	48.00	-1.70	63.29	-24.99	QP
2	168.031	41.46	43.50	-2.04	65.73	-24.27	QP
3	216.046	42.42	46.00	-3.58	68.94	-26.52	QP
4	456.121	38.71	46.00	-7.29	57.62	-18.91	QP
5	660.112	42.58	46.00	-3.42	57.45	-14.87	QP
6	768.170	42.95	46.00	-3.05	55.84	-12.89	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_2462MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz RU 106 54
Test BY :Ashton

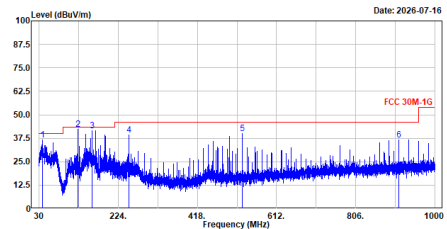


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	37.760	36.79	48.00	-3.21	61.13	-24.34	QP
2	124.963	42.29	43.50	-1.21	68.24	-25.95	QP
3	159.980	41.47	43.50	-2.03	65.39	-23.92	QP
4	249.996	39.08	46.00	-6.92	63.94	-24.86	QP
5	528.095	48.07	46.00	-5.93	57.71	-17.64	QP
6	912.215	36.73	46.00	-9.27	48.17	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_2412MHz_RU 26 0_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz RU 26 0
Test BY :Rock

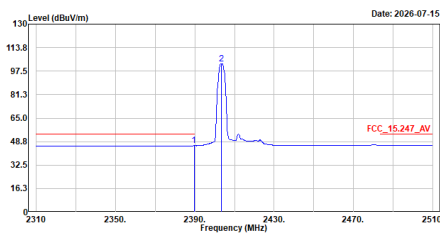


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	45.90	54.00	-8.10	15.51	30.39	Average
2	2403.400	102.75	-----	-----	72.39	30.36	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 26 0_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_2412MHz RU 26 0
Test BY :Rock

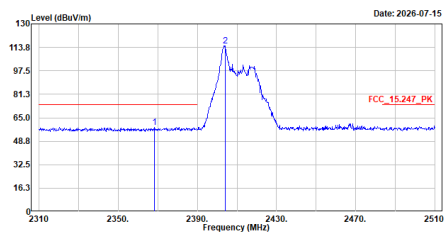


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2368.200	58.56	74.00	-15.44	28.08	30.48	Peak
2	2404.000	114.96	-----	-----	84.61	30.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 26 0
Test BY :Rock

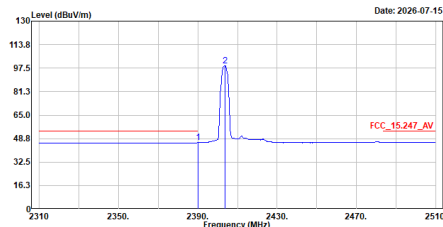


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.97	54.00	-8.03	15.58	30.39	Average
2	2403.600	99.23	-----	-----	68.88	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 26 0
Test BY :Rock

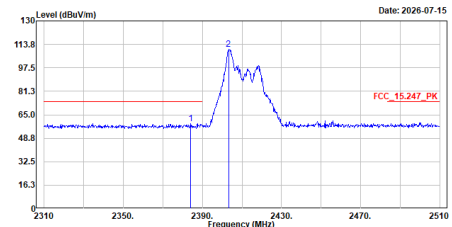


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2384.200	58.89	74.00	-15.11	28.44	30.45	Peak
2	2403.200	110.20	-----	-----	79.84	30.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2412MHz_RU 52 37
Test BY :Rock

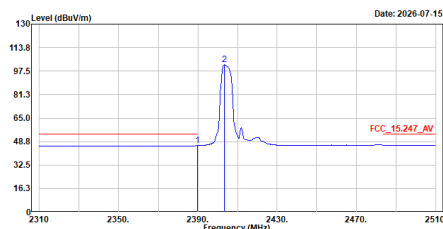


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	45.99	54.00	-8.01	15.60	30.39	Average
2	2403.400	101.80	-----	-----	71.44	30.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2412MHz_RU 52 37
Test BY :Rock

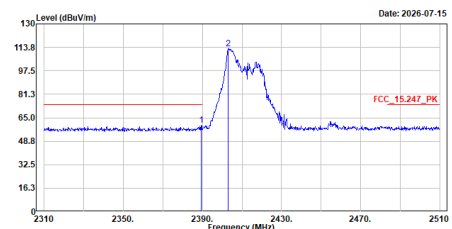


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.400	59.92	74.00	-14.08	29.52	30.40	Peak
2	2403.000	112.67	-----	-----	82.31	30.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 52 37
Test BY :Rock

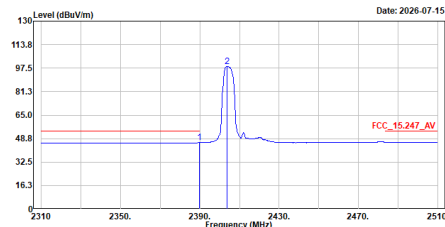


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.000	45.98	54.00	-8.02	15.59	30.39	Average
2	2403.000	98.72	-----	-----	68.37	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 52 37
Test BY :Rock

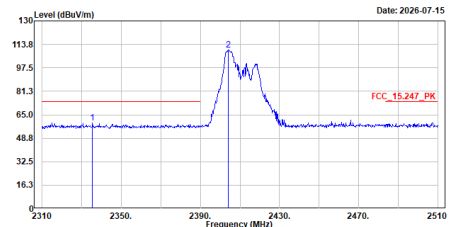


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2335.400	59.60	74.00	-14.40	29.63	30.57	Peak
2	2404.200	109.81	-----	-----	79.46	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

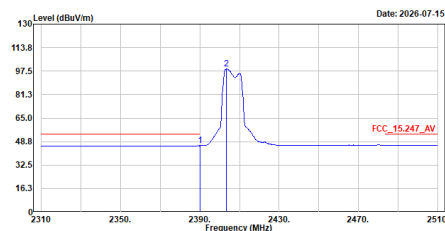


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.91	54.00	-8.09	15.52	30.39	Average
2	2403.400	98.97	-----	-----	68.61	30.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

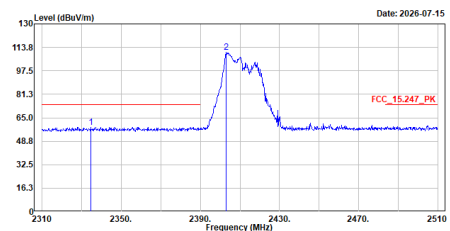


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2334.600	58.61	74.00	-15.39	28.64	30.57	Peak
2	2403.000	110.34	-----	-----	79.98	30.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

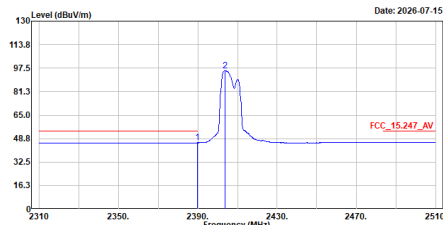


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	45.89	54.00	-8.11	15.50	30.39	Average
2	2403.800	95.83	-----	-----	65.48	30.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2412MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2412MHz_RU 106 53
Test BY :Rock

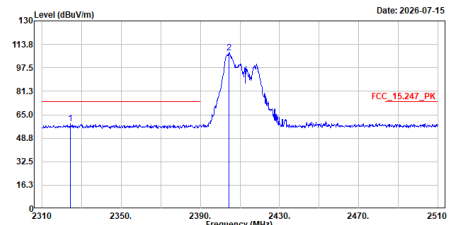


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2324.400	58.71	74.00	-15.29	28.14	30.57	Peak
2	2404.400	108.07	-----	-----	77.72	30.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

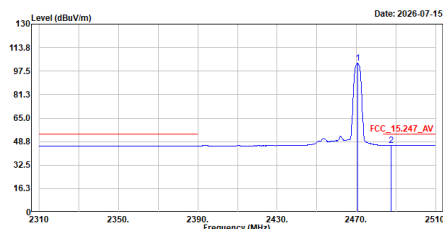


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.600	102.93	-----	-----	72.51	30.42	Average
2	2487.600	46.23	54.00	-7.77	15.79	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

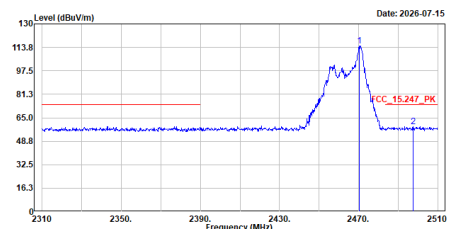


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.200	114.90	-----	-----	84.48	30.42	Peak
2	2497.600	58.83	74.00	-15.17	28.39	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

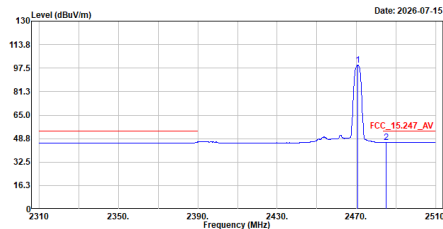


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.600	99.77	46.17	-7.83	69.35	30.42	Average
2	2485.000	46.17	54.00	-7.83	15.74	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_2462MHz_RU 26 8
Test BY :Rock

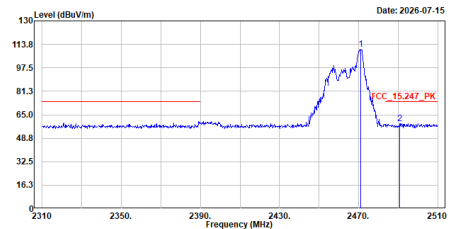


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2471.000	118.44	46.17	-14.95	80.82	30.42	Peak
2	2490.000	59.05	54.00	-14.95	26.61	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

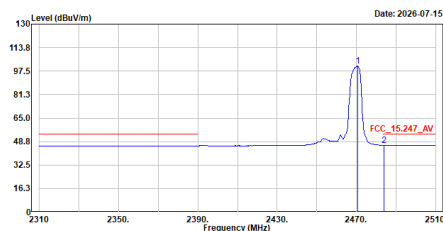


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.600	100.86	46.17	-7.71	70.44	30.42	Average
2	2483.000	46.29	54.00	-7.71	15.86	30.43	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

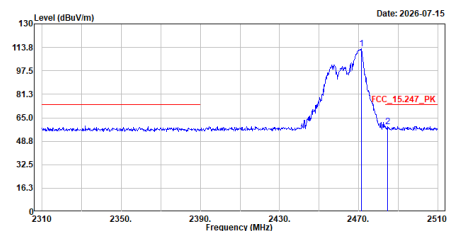

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2471.400	112.67	46.17	-15.01	82.25	30.42	Peak
2	2484.000	58.99	54.00	-15.01	26.56	30.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

Level (dBuV/m)

113.8
97.5
81.3
65.0
48.8
32.5
16.3

231023502390243024702510

Frequency (MHz)

2026-07-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.800	97.43	-----	-----	67.01	30.42	Average
2	2484.000	46.22	54.00	-7.78	15.79	30.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 52 40
Test BY :Rock

Level (dBuV/m)

113.8
97.5
81.3
65.0
48.8
32.5
16.3

231023502390243024702510

Frequency (MHz)

2026-07-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2471.200	110.16	-----	-----	79.74	30.42	Peak
2	2490.000	59.63	74.00	-14.37	29.19	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 106 54_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 106 54
Test BY :Rock

Level (dBuV/m)

113.8
97.5
81.3
65.0
48.8
32.5
16.3

231023502390243024702510

Frequency (MHz)

2026-07-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2470.800	94.68	-----	-----	64.26	30.42	Average
2	2483.600	46.17	54.00	-7.83	15.74	30.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_2462MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_2462MHz_RU 106 54
Test BY :Rock

Level (dBuV/m)

113.8
97.5
81.3
65.0
48.8
32.5
16.3

231023502390243024702510

Frequency (MHz)


2026-07-15

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2471.400	106.59	-----	-----	76.17	30.42	Peak
2	2492.000	59.37	74.00	-14.63	28.93	30.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

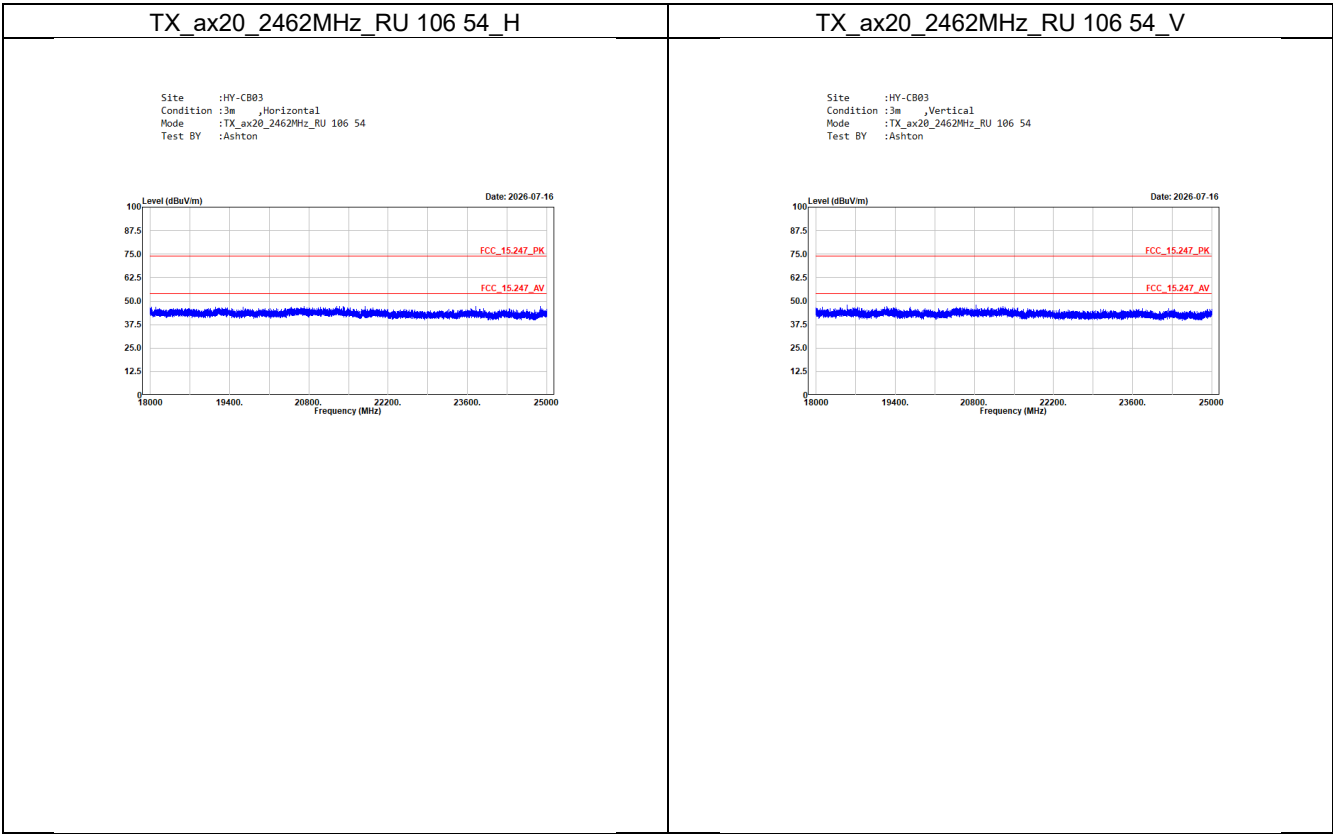

Co-location_ROW version

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
 Test BY :Ashton

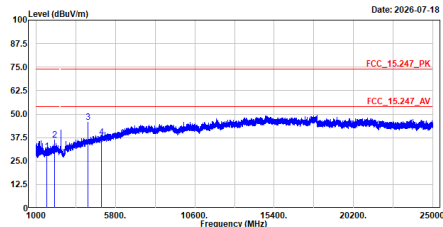


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1648.400	38.05	74.00	-43.95	55.50	-25.45	Peak
2	2100.750	36.26	74.00	-37.74	60.62	-24.36	Peak
3	4116.100	45.61	74.00	-28.39	64.08	-18.47	Peak
4	4960.000	37.81	74.00	-36.19	52.37	-14.56	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
 Test BY :Ashton

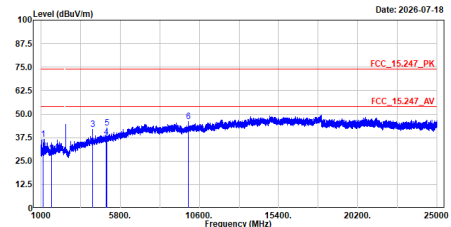


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1133.450	36.69	74.00	-37.31	62.69	-26.00	Peak
2	1648.400	29.17	74.00	-44.83	54.62	-25.45	Peak
3	4116.100	41.97	74.00	-32.03	60.44	-18.47	Peak
4	4960.000	37.65	74.00	-36.35	52.21	-14.56	Peak
5	5000.100	42.64	74.00	-31.36	57.02	-14.38	Peak
6	9919.900	45.87	74.00	-28.13	51.95	-6.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
 Test BY :Ashton

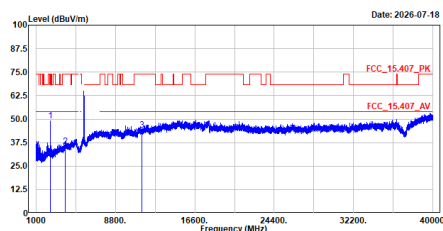


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	49.23	68.22	-18.99	73.10	-23.87	Peak
2	3825.000	35.43	74.00	-38.57	54.58	-19.15	Peak
3	11400.000	44.21	74.00	-29.79	46.78	-2.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
 Test BY :Ashton

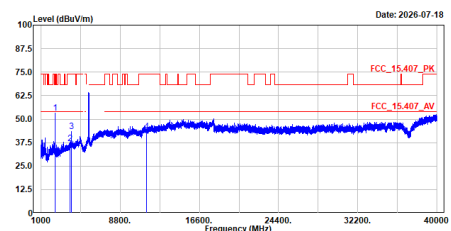


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.00	68.22	-15.14	76.95	-23.87	Peak
2	3825.000	36.97	74.00	-37.03	56.12	-19.15	Peak
3	3989.450	43.54	74.00	-30.46	62.32	-18.78	Peak
4	11400.000	43.46	74.00	-30.54	46.03	-2.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

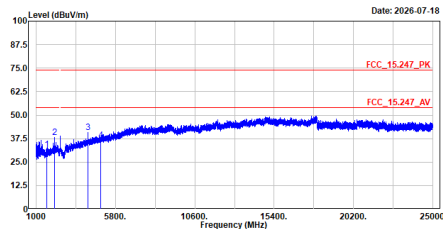


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1646.600	31.56	74.00	-42.44	57.00	-25.44	Peak
2	2099.900	38.18	74.00	-35.82	62.54	-24.36	Peak
3	4116.100	48.79	74.00	-33.21	59.26	-18.47	Peak
4	4984.000	36.55	74.00	-37.45	51.36	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

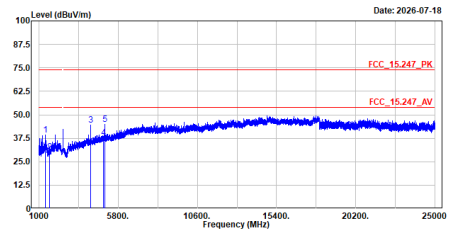


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1396.100	39.28	74.00	-34.72	64.74	-25.46	Peak
2	1646.600	38.29	74.00	-35.71	55.73	-25.44	Peak
3	4116.100	44.47	74.00	-29.53	62.94	-18.47	Peak
4	4984.000	37.66	74.00	-36.34	52.47	-14.81	Peak
5	4981.400	44.98	74.00	-29.02	59.45	-14.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

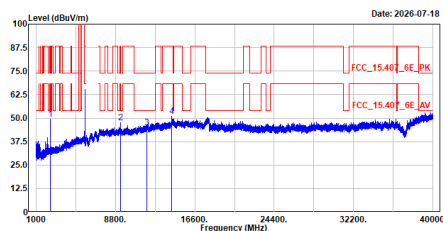


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	49.26	88.22	-38.96	73.13	-23.87	Peak
2	9272.200	47.45	88.22	-40.77	54.47	-7.02	Peak
3	11870.000	44.84	74.00	-29.16	46.91	-2.07	Peak
4	14350.100	51.08	88.22	-37.14	51.08	0.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

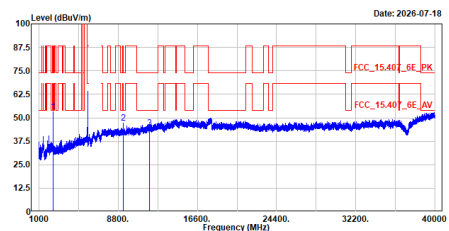


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	53.11	88.22	-35.11	76.98	-23.87	Peak
2	9272.200	47.29	88.22	-40.93	54.31	-7.02	Peak
3	11870.000	44.68	74.00	-29.32	46.75	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

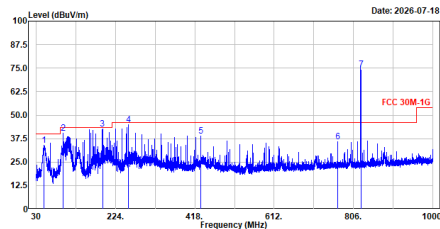


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.818	33.84	40.00	-6.16	57.34	-23.50	QP
2	95.960	40.22	43.50	-3.28	69.23	-29.01	QP
3	192.087	42.77	43.50	-0.73	69.35	-26.58	QP
4	256.107	44.90	46.00	-1.10	69.74	-24.84	QP
5	432.065	38.76	46.00	-7.24	58.44	-19.68	QP
6	768.170	35.91	46.00	-10.09	48.86	-12.95	QP
7	824.200	74.18	-----	-----	86.63	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

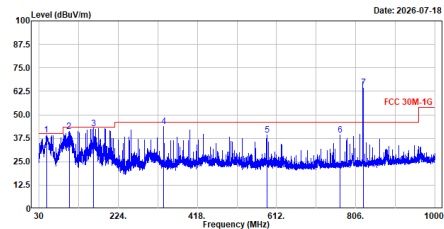


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.945	39.08	40.00	-0.92	62.60	-23.52	QP
2	103.526	41.17	43.50	-2.33	69.02	-27.85	QP
3	164.054	42.67	43.50	-0.83	66.69	-24.02	QP
4	336.035	43.85	46.00	-2.15	65.92	-22.07	QP
5	588.041	39.12	46.00	-6.88	55.33	-16.21	QP
6	768.170	39.28	46.00	-6.72	52.23	-12.95	QP
7	824.200	64.43	-----	-----	76.88	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock

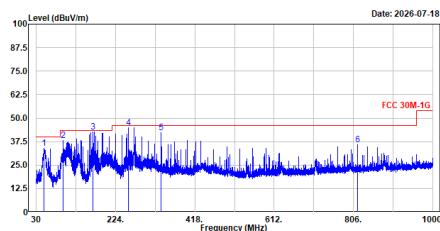


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.012	33.91	40.00	-6.09	57.42	-23.51	QP
2	95.960	37.97	43.50	-5.53	66.98	-29.01	QP
3	168.031	42.67	43.50	-0.83	66.96	-24.29	QP
4	256.107	44.81	46.00	-1.19	69.65	-24.84	QP
5	336.035	42.21	46.00	-3.79	64.28	-22.07	QP
6	816.088	35.88	46.00	-10.12	48.42	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock

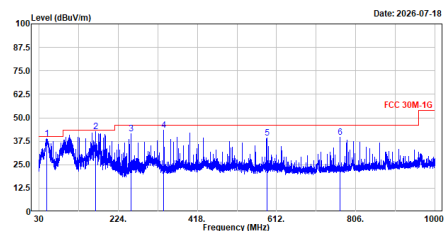


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.236	38.90	40.00	-1.10	62.41	-23.51	QP
2	168.031	42.57	43.50	-0.93	66.86	-24.29	QP
3	256.010	41.40	46.00	-4.60	66.24	-24.84	QP
4	336.035	43.32	46.00	-2.68	65.39	-22.07	QP
5	588.041	39.20	46.00	-6.80	55.41	-16.21	QP
6	768.170	39.45	46.00	-6.55	52.40	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

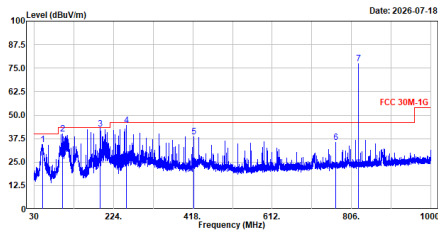


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.982	34.34	48.00	-5.66	57.94	-23.60	QP
2	99.840	39.83	43.50	-3.67	68.33	-28.50	QP
3	191.893	42.74	43.50	-0.76	69.30	-26.56	QP
4	256.010	44.52	46.00	-1.48	69.36	-24.84	QP
5	420.037	38.58	46.00	-7.42	58.77	-20.19	QP
6	768.170	35.43	46.00	-10.57	48.38	-12.95	QP
7	823.300	77.17	-----	-----	89.62	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

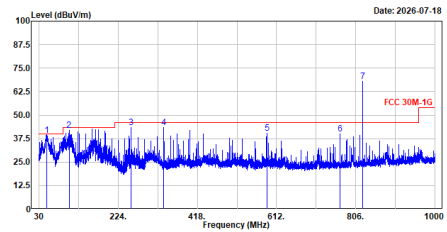


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	39.16	48.00	-8.84	62.67	-23.51	QP
2	103.526	41.87	43.50	-1.63	69.72	-27.85	QP
3	256.010	43.55	46.00	-2.45	68.39	-24.84	QP
4	336.035	43.39	46.00	-2.61	65.46	-22.07	QP
5	588.041	40.42	46.00	-5.58	56.63	-16.21	QP
6	768.170	40.06	46.00	-5.94	53.01	-12.95	QP
7	823.300	67.83	-----	-----	80.28	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

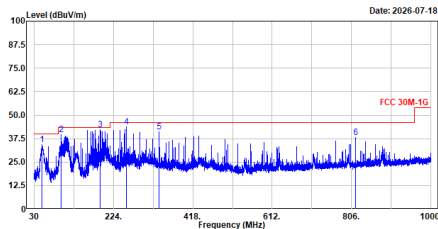


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.333	34.24	48.00	-5.76	57.75	-23.51	QP
2	95.960	39.61	43.50	-3.89	68.62	-29.01	QP
3	191.990	42.26	43.50	-1.24	68.82	-26.56	QP
4	256.010	43.85	46.00	-2.15	68.69	-24.84	QP
5	336.035	41.30	46.00	-4.70	63.37	-22.07	QP
6	816.088	38.23	46.00	-7.77	50.77	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

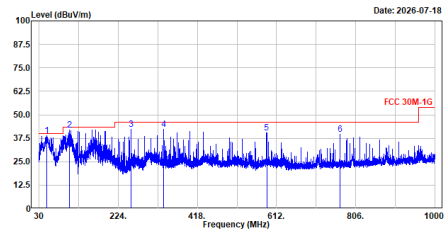

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.915	38.92	48.00	-1.08	62.42	-23.50	QP
2	103.623	41.70	43.50	-1.80	69.51	-27.81	QP
3	256.010	42.11	46.00	-3.89	66.95	-24.84	QP
4	336.035	42.30	46.00	-3.70	64.37	-22.07	QP
5	587.944	40.35	46.00	-5.65	56.56	-16.21	QP
6	768.170	39.76	46.00	-6.24	52.71	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.