


TX_a_5500MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test BY :Ashton

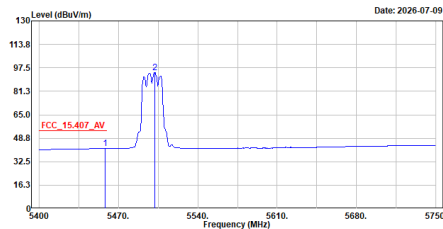


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5458.100	41.64	54.00	-12.36	25.38	16.26	Average
2	5501.850	94.41	-----	-----	78.88	16.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5500MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test BY :Ashton

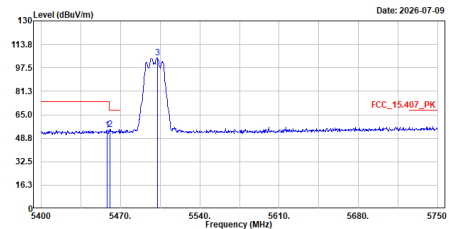


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5458.100	54.53	74.00	-19.47	38.27	16.26	Peak
2	5460.900	54.97	68.22	-13.25	38.70	16.27	Peak
3	5502.550	104.66	-----	-----	88.32	16.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5700MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5700MHz
Test BY :Ashton

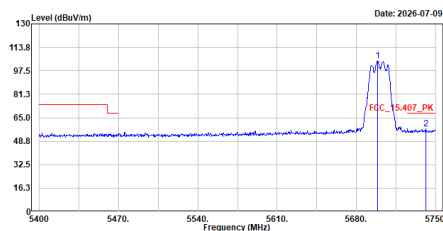


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5698.550	104.55	-----	-----	86.88	17.67	Peak
2	5741.600	57.51	68.22	-10.71	39.87	17.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5700MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5700MHz
Test BY :Ashton

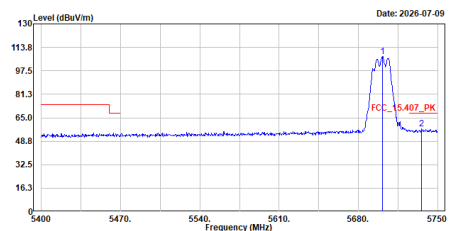


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5701.350	107.55	-----	-----	89.88	17.67	Peak
2	5735.650	57.25	68.22	-10.97	39.60	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test BY :Ashton

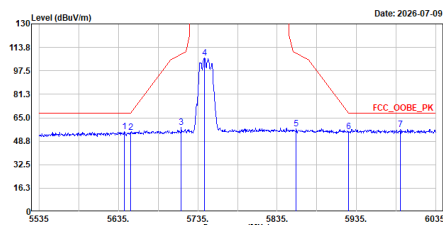


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	55.25	68.20	-12.95	37.88	17.37	Peak
2	5650.000	54.91	68.21	-13.30	37.50	17.41	Peak
3	5714.000	58.23	109.12	-50.89	40.57	17.66	Peak
4	5743.000	106.22	-----	-----	88.58	17.64	Peak
5	5859.000	57.30	109.68	-52.38	39.37	17.93	Peak
6	5925.000	55.40	68.21	-12.81	37.21	18.19	Peak
7	5990.000	56.97	68.20	-11.23	38.82	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test BY :Ashton

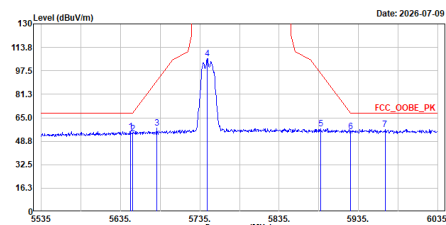


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.500	55.50	68.20	-12.70	38.09	17.41	Peak
2	5650.000	54.09	68.21	-14.12	36.68	17.41	Peak
3	5680.500	57.70	90.77	-33.07	40.11	17.59	Peak
4	5744.500	106.04	-----	-----	88.40	17.64	Peak
5	5887.500	57.57	95.95	-38.38	39.56	18.01	Peak
6	5925.000	55.42	68.21	-12.79	37.23	18.19	Peak
7	5968.500	57.14	68.20	-11.06	38.94	18.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test BY :Ashton

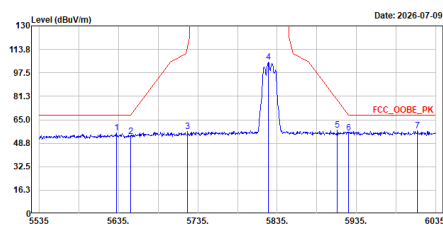


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5632.000	55.74	68.20	-12.46	38.39	17.35	Peak
2	5650.000	53.69	68.21	-14.52	36.28	17.41	Peak
3	5722.000	56.84	115.36	-58.52	39.19	17.65	Peak
4	5824.000	104.94	-----	-----	87.07	17.87	Peak
5	5911.000	57.75	78.57	-20.82	39.64	18.11	Peak
6	5925.000	55.83	68.21	-12.38	37.64	18.19	Peak
7	6012.000	57.32	68.20	-10.88	39.15	18.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test BY :Ashton

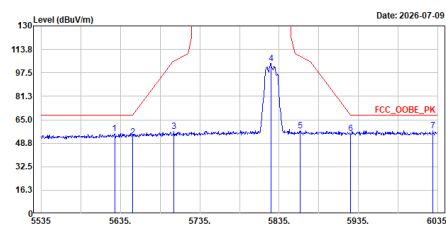


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5627.500	55.50	68.20	-12.70	38.17	17.33	Peak
2	5650.000	52.94	68.21	-15.27	35.53	17.41	Peak
3	5702.000	56.70	105.76	-49.06	39.04	17.66	Peak
4	5824.500	104.04	-----	-----	86.17	17.87	Peak
5	5861.500	57.56	100.98	-51.42	39.63	17.93	Peak
6	5925.000	55.31	68.21	-12.90	37.12	18.19	Peak
7	6029.000	57.56	68.20	-10.64	39.33	18.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Ashton

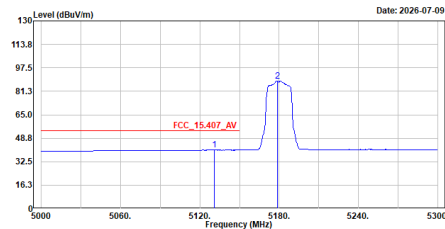


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5130.800	40.54	54.00	-13.46	24.68	15.86	Average
2	5178.800	88.40	-----	-----	72.42	15.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test BY :Ashton

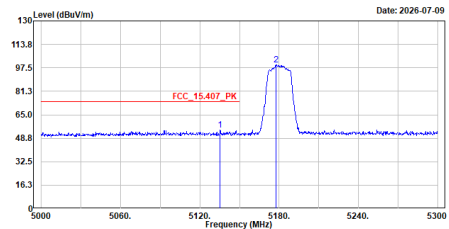


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5135.300	54.27	74.00	-19.73	38.41	15.86	Peak
2	5177.600	99.40	-----	-----	83.43	15.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Ashton

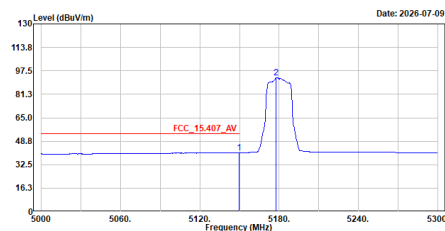


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	40.68	54.00	-13.32	24.82	15.86	Average
2	5177.900	92.90	-----	-----	76.92	15.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test BY :Ashton

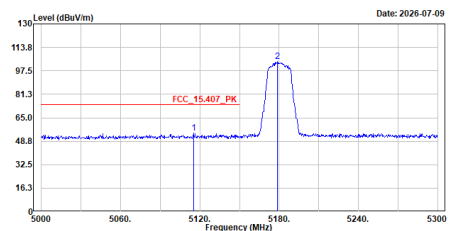


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5115.200	54.21	74.00	-19.79	38.34	15.87	Peak
2	5178.800	103.98	-----	-----	88.80	15.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5320MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ac20_5320MHz Test BY :Ashton Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 5160 5220 5280 5340 5400 5460 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1 2 FCC_15.407_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5321.100</td><td>90.04</td><td>-----</td><td>-----</td><td>73.99</td><td>16.05</td><td>Average</td></tr><tr><td>2</td><td>5449.500</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>24.98</td><td>16.26</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5321.100	90.04	-----	-----	73.99	16.05	Average	2	5449.500	41.24	54.00	-12.76	24.98	16.26	Average	TX_ac20_5320MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ac20_5320MHz Test BY :Ashton Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 5160 5220 5280 5340 5400 5460 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1 2 FCC_15.407_PK <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5322.600</td><td>101.02</td><td>-----</td><td>-----</td><td>84.98</td><td>16.04</td><td>Peak</td></tr><tr><td>2</td><td>5356.200</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>38.31</td><td>15.96</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5322.600	101.02	-----	-----	84.98	16.04	Peak	2	5356.200	54.27	74.00	-19.73	38.31	15.96	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5321.100	90.04	-----	-----	73.99	16.05	Average																																																										
2	5449.500	41.24	54.00	-12.76	24.98	16.26	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5322.600	101.02	-----	-----	84.98	16.04	Peak																																																										
2	5356.200	54.27	74.00	-19.73	38.31	15.96	Peak																																																										
TX_ac20_5320MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ac20_5320MHz Test BY :Ashton Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 5160 5220 5280 5340 5400 5460 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1 2 FCC_15.407_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5322.000</td><td>93.60</td><td>-----</td><td>-----</td><td>77.56</td><td>16.04</td><td>Average</td></tr><tr><td>2</td><td>5446.500</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>25.07</td><td>16.24</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5322.000	93.60	-----	-----	77.56	16.04	Average	2	5446.500	41.31	54.00	-12.69	25.07	16.24	Average	TX_ac20_5320MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ac20_5320MHz Test BY :Ashton Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 Frequency (MHz) 5160 5220 5280 5340 5400 5460 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1 2 FCC_15.407_PK <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5322.900</td><td>104.42</td><td>-----</td><td>-----</td><td>88.38</td><td>16.04</td><td>Peak</td></tr><tr><td>2</td><td>5360.100</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>38.67</td><td>15.97</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5322.900	104.42	-----	-----	88.38	16.04	Peak	2	5360.100	54.64	74.00	-19.36	38.67	15.97	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5322.000	93.60	-----	-----	77.56	16.04	Average																																																										
2	5446.500	41.31	54.00	-12.69	25.07	16.24	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5322.900	104.42	-----	-----	88.38	16.04	Peak																																																										
2	5360.100	54.64	74.00	-19.36	38.67	15.97	Peak																																																										

TX_ac20_5500MHz_H_Average


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
Test BY :Ashton

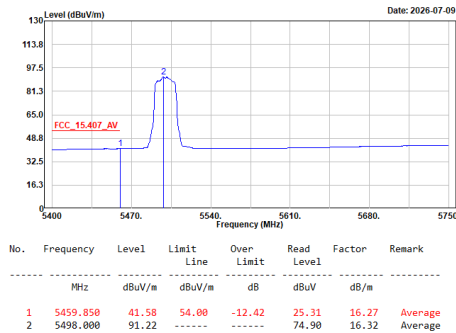

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5500MHz_H_Peak


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
Test BY :Ashton

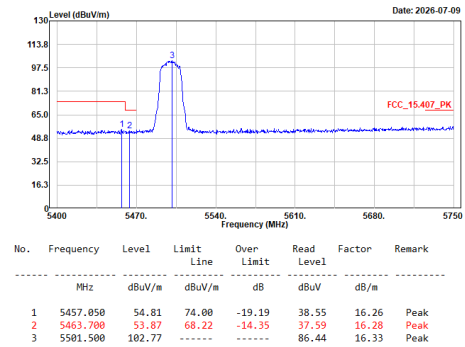

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5500MHz_V_Average


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
Test BY :Ashton

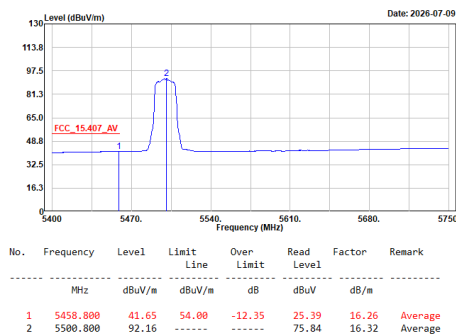

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5500MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
Test BY :Ashton

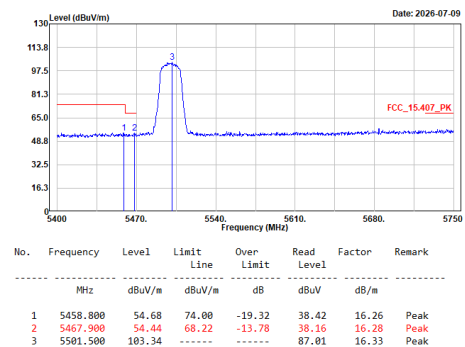

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5700MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5700MHz
Test BY :Ashton

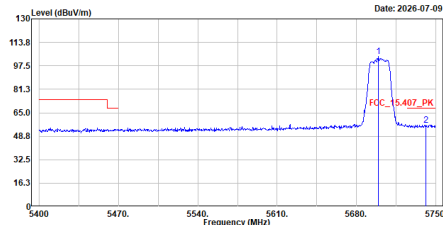


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5699.600	103.95	68.22	-11.67	86.28	17.67	Peak
2	5741.600	56.55	68.22	-11.67	38.91	17.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5700MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5700MHz
Test BY :Ashton

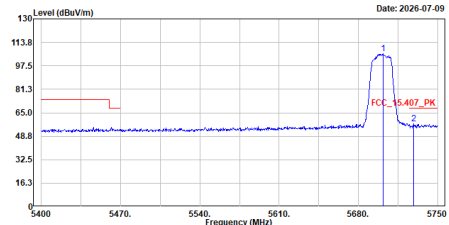


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5701.700	106.04	68.22	-10.65	88.37	17.67	Peak
2	5729.000	57.57	68.22	-10.65	39.92	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test BY :Ashton

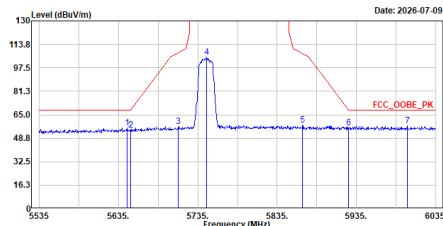


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5645.500	55.88	68.20	-12.32	38.49	17.39	Peak
2	5650.000	54.37	68.21	-13.84	36.96	17.41	Peak
3	5710.500	56.92	108.14	-51.22	39.26	17.66	Peak
4	5746.500	104.90	68.20	-10.95	87.27	17.63	Peak
5	5867.000	57.74	107.44	-49.70	39.79	17.95	Peak
6	5925.000	55.70	68.21	-12.51	37.51	18.19	Peak
7	5999.000	57.25	68.20	-10.95	39.12	18.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test BY :Ashton

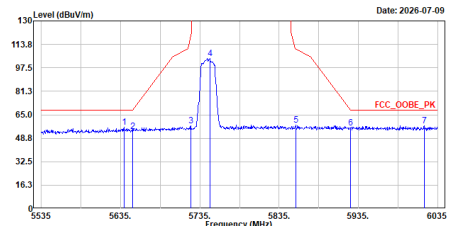


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5639.500	56.19	68.20	-12.01	38.82	17.37	Peak
2	5650.000	53.58	68.21	-14.63	36.17	17.41	Peak
3	5723.500	57.40	118.78	-61.38	39.74	17.66	Peak
4	5747.500	103.88	68.20	-10.78	86.25	17.63	Peak
5	5856.000	57.76	110.52	-52.76	39.84	17.92	Peak
6	5925.000	56.07	68.21	-12.14	37.88	18.19	Peak
7	6018.000	57.42	68.20	-10.78	39.23	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac20_5825MHz
Test BY :Ashton

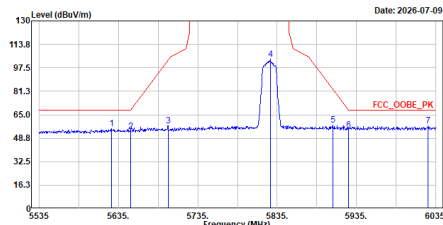


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5626.000	55.48	68.20	-12.72	38.15	17.33	Peak
2	5650.000	53.56	68.21	-14.65	36.15	17.41	Peak
3	5697.500	57.30	103.35	-46.05	39.64	17.66	Peak
4	5826.500	103.41	-----	-----	85.54	17.87	Peak
5	5905.000	58.08	83.00	-24.92	40.00	18.08	Peak
6	5925.000	54.61	68.21	-13.60	36.42	18.19	Peak
7	6025.500	57.25	68.20	-10.95	39.04	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac20_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac20_5825MHz
Test BY :Ashton

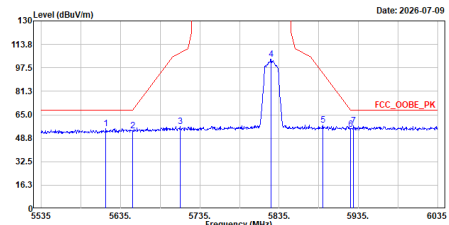


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5616.500	55.30	68.20	-12.90	38.00	17.30	Peak
2	5650.000	53.85	68.21	-14.36	36.44	17.41	Peak
3	5710.000	56.84	108.00	-51.16	39.18	17.66	Peak
4	5825.000	103.55	-----	-----	85.68	17.87	Peak
5	5890.000	57.84	94.10	-36.26	39.81	18.03	Peak
6	5925.000	55.02	68.21	-13.19	36.83	18.19	Peak
7	5929.000	57.53	68.20	-10.67	39.32	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Rock

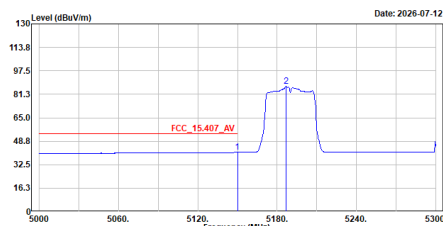


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5190.000	41.04	54.00	-12.96	25.18	15.86	Average
2	5186.600	86.62	-----	-----	70.59	16.03	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test BY :Rock

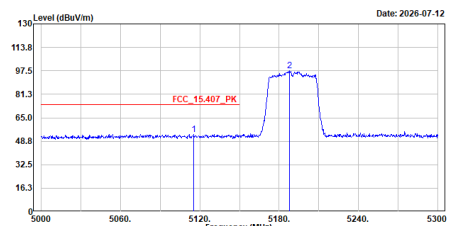


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5115.500	53.55	74.00	-20.45	37.68	15.87	Peak
2	5187.000	97.58	-----	-----	81.53	16.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ac40_5190MHz
Test BY :Rock

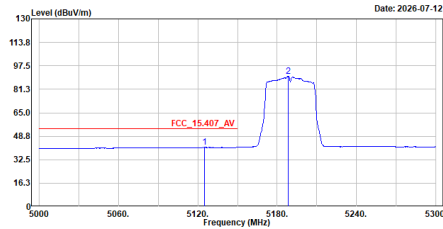


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5125.100	40.98	54.00	-13.02	25.11	15.87	Average
2	5188.400	90.06	-----	-----	74.01	16.05	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ac40_5190MHz
Test BY :Rock

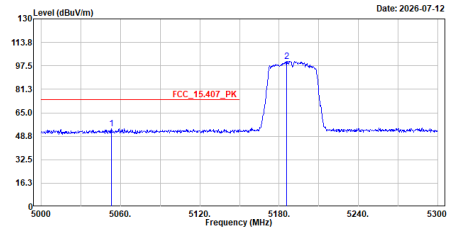


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5053.100	53.87	74.00	-20.13	37.95	15.92	Peak
2	5185.700	100.80	-----	-----	84.77	16.03	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5310MHz_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ac40_5310MHz
Test BY :Rock

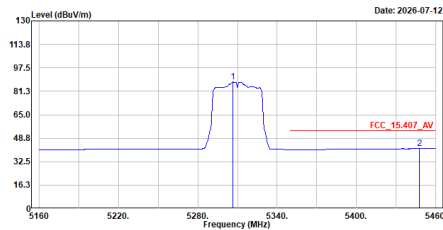


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5306.700	87.73	-----	-----	71.62	16.11	Average
2	5447.700	41.63	54.00	-12.37	25.37	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5310MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ac40_5310MHz
Test BY :Rock

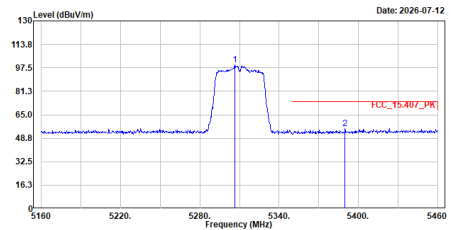


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5306.700	99.49	-----	-----	83.38	16.11	Peak
2	5389.800	55.32	74.00	-18.68	39.25	16.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5310MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
Test BY :Rock

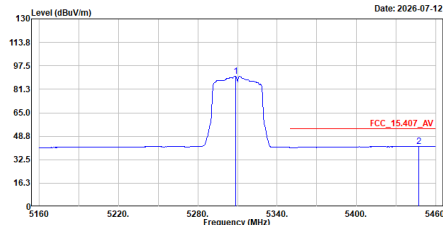


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5308.500	90.30	-----	-----	74.18	16.12	Average
2	5447.400	41.70	54.00	-12.22	25.54	16.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5310MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
Test BY :Rock

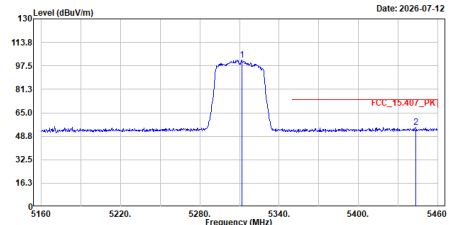


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5311.800	101.53	-----	-----	85.44	16.09	Peak
2	5443.500	54.93	74.00	-19.07	38.69	16.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5510MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5510MHz
Test BY :Rock

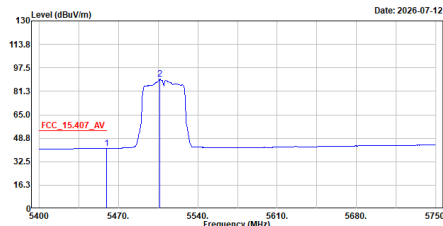


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.150	41.81	54.00	-12.19	25.55	16.26	Average
2	5506.400	89.58	-----	-----	73.22	16.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5510MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5510MHz
Test BY :Rock

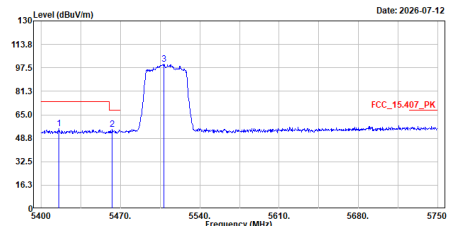


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5415.750	55.43	74.00	-18.57	39.28	16.15	Peak
2	5462.650	55.13	68.22	-13.09	38.85	16.28	Peak
3	5508.150	99.98	-----	-----	83.60	16.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5510MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ac40_5510MHz
Test BY :Rock

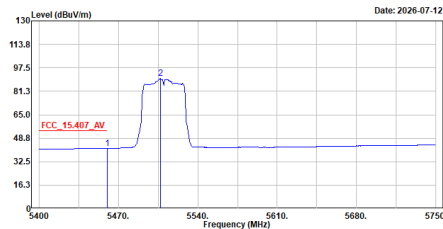


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	41.83	54.00	-12.17	25.56	16.27	Average
2	5506.750	90.02	-----	-----	73.66	16.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5510MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ac40_5510MHz
Test BY :Rock

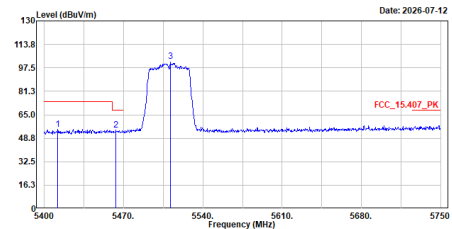


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5411.900	55.00	74.00	-19.00	38.87	16.13	Peak
2	5463.350	54.31	68.22	-13.91	38.83	16.28	Peak
3	5511.650	101.85	-----	-----	85.44	16.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5670MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ac40_5670MHz
Test BY :Ashton

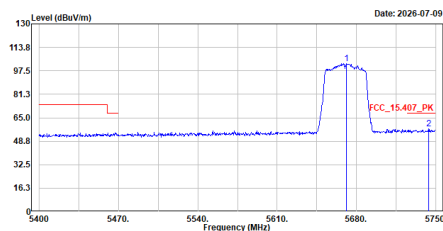


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5670.900	102.54	-----	-----	84.98	17.56	Peak
2	5743.700	57.44	68.22	-10.78	39.80	17.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5670MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ac40_5670MHz
Test BY :Ashton

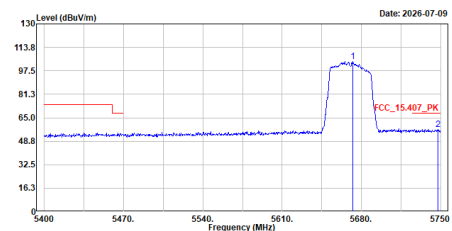


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5672.300	103.92	-----	-----	86.36	17.56	Peak
2	5747.900	57.13	68.22	-11.09	39.49	17.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test BY :Ashton

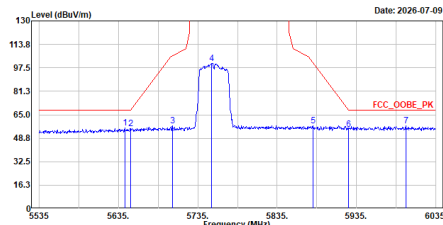


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5643.000	55.72	68.20	-12.48	38.34	17.38	Peak
2	5650.000	55.52	68.21	-12.69	38.11	17.41	Peak
3	5703.000	57.48	106.04	-48.56	39.81	17.67	Peak
4	5752.000	100.75	-----	-----	83.11	17.64	Peak
5	5880.000	57.40	101.50	-44.10	39.41	17.99	Peak
6	5925.000	55.18	68.21	-13.03	36.99	18.19	Peak
7	5997.500	57.40	68.20	-10.80	39.26	18.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test BY :Ashton

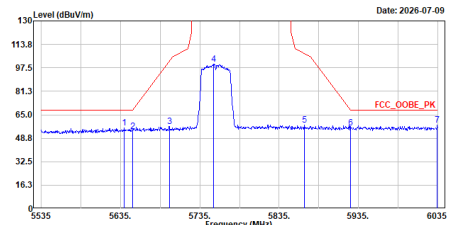


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5640.000	55.71	68.20	-12.49	38.34	17.37	Peak
2	5650.000	53.58	68.21	-14.63	36.17	17.41	Peak
3	5696.500	57.00	102.61	-45.61	39.35	17.65	Peak
4	5752.000	100.11	-----	-----	82.47	17.64	Peak
5	5866.500	57.71	107.58	-49.87	39.76	17.95	Peak
6	5925.000	56.12	68.21	-12.09	37.93	18.19	Peak
7	6034.500	57.80	68.20	-10.40	39.55	18.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac40_5795MHz
Test BY :Ashton

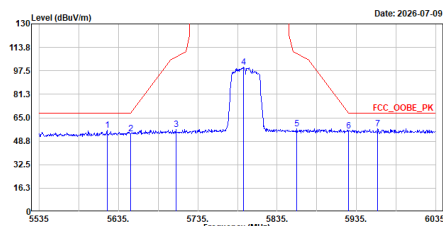


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5620.500	56.21	68.20	-11.99	38.90	17.31	Peak
2	5650.000	54.10	68.21	-14.11	36.69	17.41	Peak
3	5707.500	56.93	107.30	-50.37	39.26	17.67	Peak
4	5792.500	100.06	-----	-----	82.27	17.79	Peak
5	5860.000	57.62	109.40	-51.78	39.69	17.93	Peak
6	5925.000	55.86	68.21	-12.35	37.67	18.19	Peak
7	5962.000	57.59	68.20	-10.61	39.37	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac40_5795MHz
Test BY :Ashton

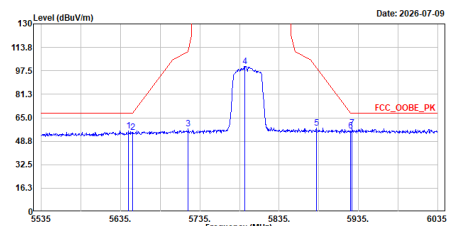


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.000	55.82	68.20	-12.38	38.43	17.39	Peak
2	5650.000	54.98	68.21	-13.23	37.57	17.41	Peak
3	5720.500	57.28	111.94	-54.66	39.62	17.66	Peak
4	5792.000	100.79	-----	-----	83.00	17.79	Peak
5	5882.000	57.70	100.02	-42.32	39.70	18.00	Peak
6	5925.000	55.99	68.21	-12.22	37.80	18.19	Peak
7	5927.000	57.86	68.20	-10.34	39.67	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Rock

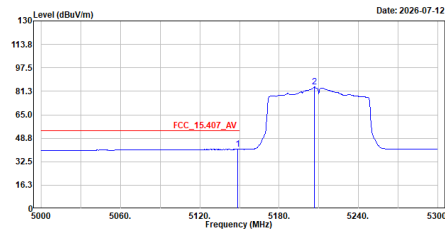


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5148.800	41.04	54.00	-12.96	25.18	15.86	Average
2	5206.700	84.25	-----	-----	68.09	16.16	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test BY :Rock

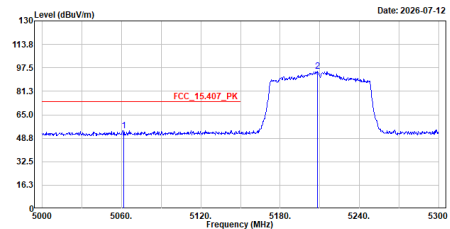


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5061.800	54.13	74.00	-19.87	38.21	15.92	Peak
2	5206.200	94.94	-----	-----	78.78	16.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Rock

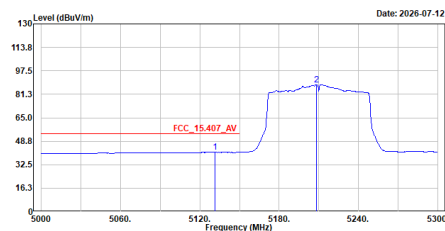


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5131.400	41.08	54.00	-12.92	25.22	15.86	Average
2	5206.500	87.07	-----	-----	71.71	16.16	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5210MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test BY :Rock

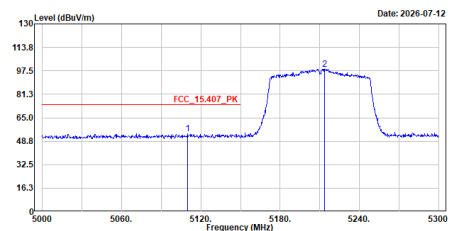


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5109.800	54.16	74.00	-19.84	38.30	15.86	Peak
2	5213.900	98.71	-----	-----	82.54	16.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5290MHz_H_Average


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Rock

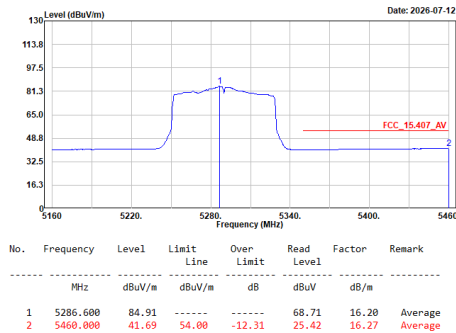

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5290MHz_H_Peak


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test BY :Rock

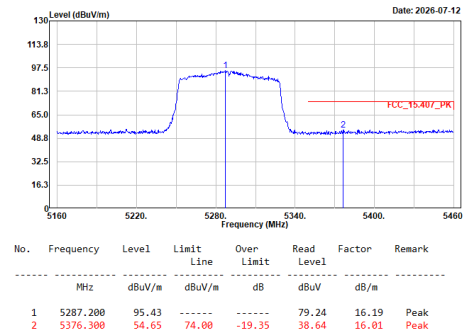

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5290MHz_V_Average


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Rock

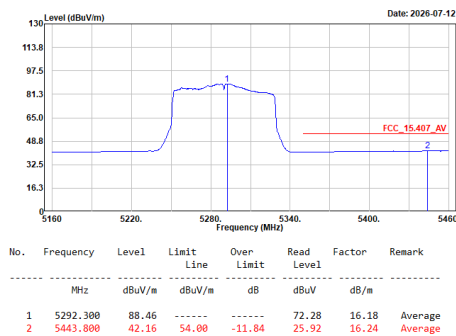

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5290MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test BY :Rock

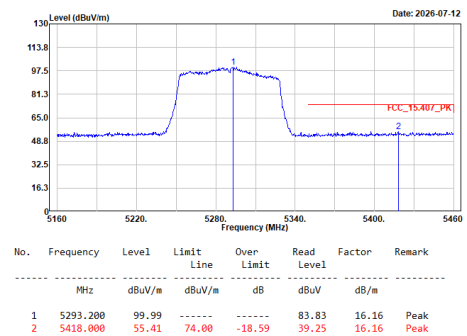

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5530MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Rock

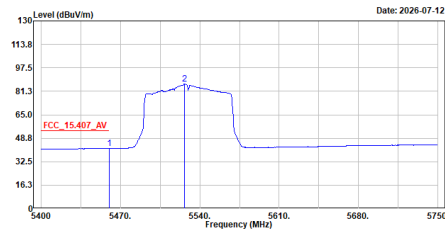


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	41.82	54.00	-12.18	25.55	16.27	Average
2	5526.350	86.58	-----	-----	70.04	16.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5530MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test BY :Rock

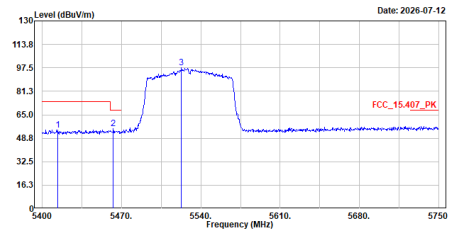


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5413.650	54.63	74.00	-19.37	38.48	16.15	Peak
2	5462.650	55.51	68.22	-12.71	39.23	16.28	Peak
3	5522.850	97.71	-----	-----	81.20	16.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5530MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Rock

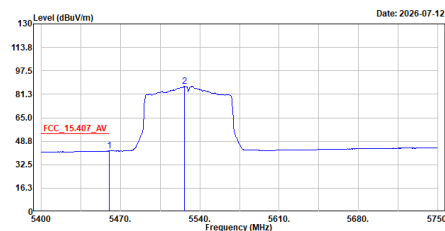


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	42.02	54.00	-11.98	25.75	16.27	Average
2	5526.350	86.89	-----	-----	70.35	16.54	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5530MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test BY :Rock

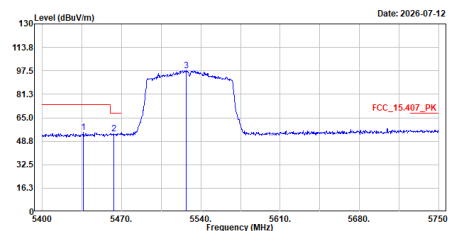


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5436.400	54.84	74.00	-19.16	38.62	16.22	Peak
2	5463.000	54.11	68.22	-14.09	37.85	16.28	Peak
3	5527.050	97.72	-----	-----	81.18	16.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Rock

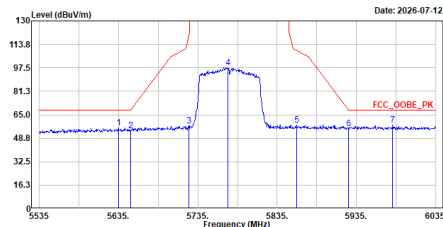


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5635.000	55.97	68.20	-12.23	38.61	17.36	Peak
2	5650.000	53.94	68.21	-14.27	36.53	17.41	Peak
3	5723.500	57.33	118.78	-61.45	39.67	17.66	Peak
4	5773.000	97.75	-----	-----	80.05	17.70	Peak
5	5860.000	57.91	109.40	-51.49	39.98	17.93	Peak
6	5925.000	55.43	68.21	-12.78	37.24	18.19	Peak
7	5981.000	57.76	68.20	-10.44	39.58	18.18	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ac80_5775MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Rock

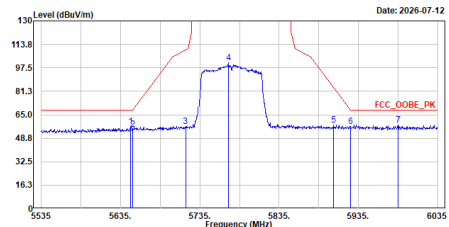


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5648.000	56.01	68.20	-11.39	39.40	17.41	Peak
2	5650.000	54.72	68.21	-13.49	37.51	17.41	Peak
3	5717.000	57.14	109.96	-52.82	39.48	17.66	Peak
4	5771.500	101.20	-----	-----	83.51	17.69	Peak
5	5904.000	58.05	83.74	-25.69	39.98	18.07	Peak
6	5925.000	56.73	68.21	-11.48	38.54	18.19	Peak
7	5985.000	58.11	68.20	-10.09	39.95	18.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Ashton

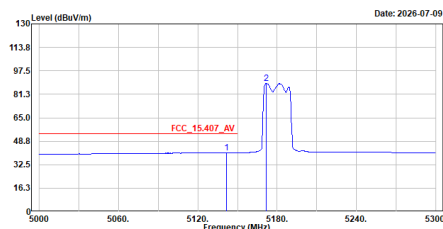


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5141.900	40.72	54.00	-13.28	24.86	15.86	Average
2	5171.900	88.89	-----	-----	72.96	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
Test BY :Ashton

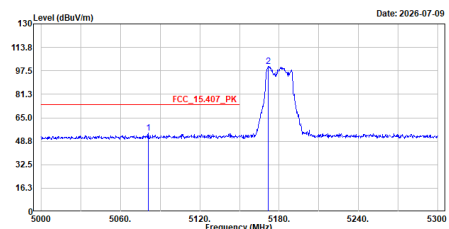


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5081.000	54.23	74.00	-19.77	38.31	15.92	Peak
2	5171.900	100.69	-----	-----	84.76	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz
Test BY :Ashton

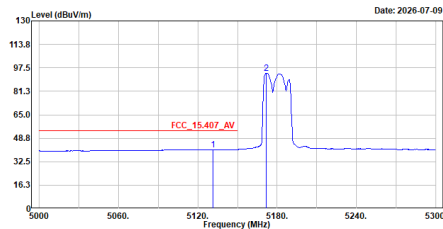


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5131.400	40.80	54.00	-13.20	24.94	15.86	Average
2	5171.900	93.82	-----	-----	77.89	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz
Test BY :Ashton

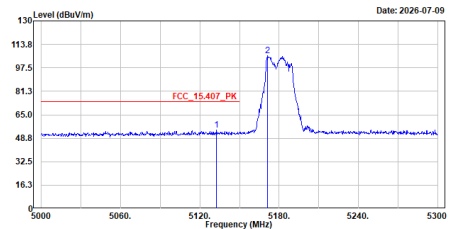


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5132.600	54.34	74.00	-19.66	38.48	15.86	Peak
2	5171.300	105.72	-----	-----	89.79	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz
Test BY :Ashton

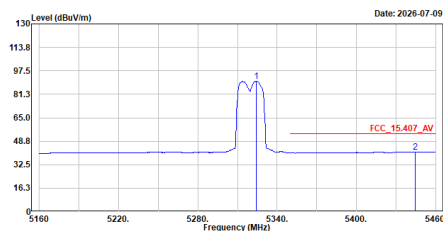


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5324.400	90.33	-----	-----	74.30	16.03	Average
2	5444.700	41.32	54.00	-12.68	25.08	16.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz
Test BY :Ashton

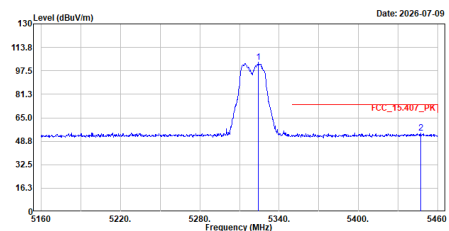


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5324.400	103.37	-----	-----	87.34	16.03	Peak
2	5447.400	54.41	74.00	-19.59	38.17	16.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Ashton

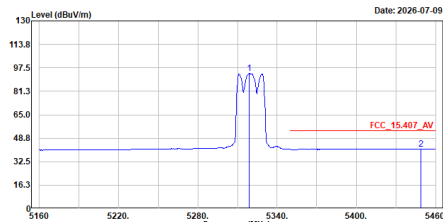


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5319.000	93.67	-----	-----	77.62	16.05	Average
2	5448.600	41.44	54.00	-12.56	25.18	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz
Test BY :Ashton

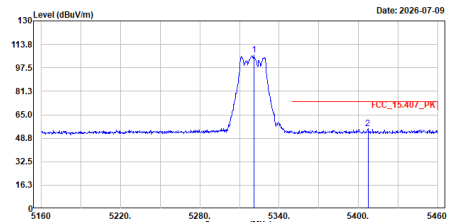


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5320.800	106.57	-----	-----	90.51	16.06	Peak
2	5407.200	55.22	74.00	-18.78	39.10	16.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Ashton

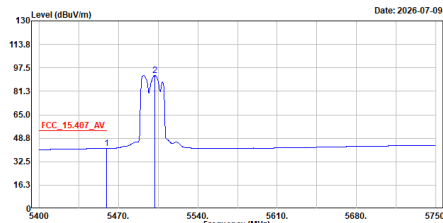


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.500	41.82	54.00	-12.18	25.55	16.27	Average
2	5502.200	92.12	-----	-----	75.79	16.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz
Test BY :Ashton

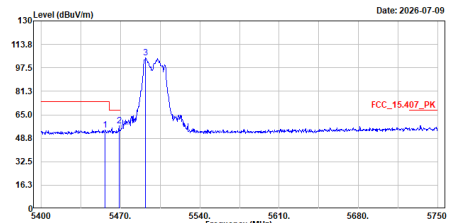


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.350	54.69	74.00	-19.31	38.43	16.26	Peak
2	5468.600	57.52	68.22	-10.70	41.24	16.28	Peak
3	5492.050	104.46	-----	-----	88.15	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz
Test BY :Ashton

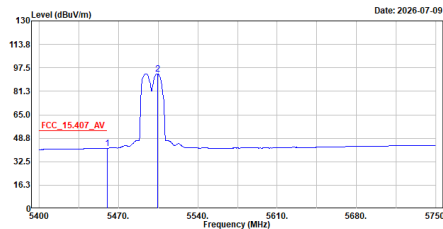


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	41.88	54.00	-12.12	25.61	16.27	Average
2	5504.300	93.39	-----	-----	77.04	16.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz
Test BY :Ashton

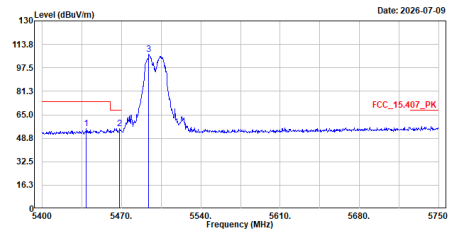


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5438.850	55.36	74.00	-18.64	39.13	16.23	Peak
2	5468.250	55.59	68.22	-12.63	39.31	16.28	Peak
3	5494.150	106.86	-----	-----	90.55	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5700MHz
Test BY :Ashton

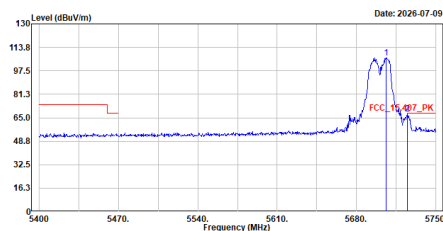


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5706.250	106.46	-----	-----	88.80	17.66	Peak
2	5725.150	67.69	68.22	-0.53	50.04	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5700MHz
Test BY :Ashton

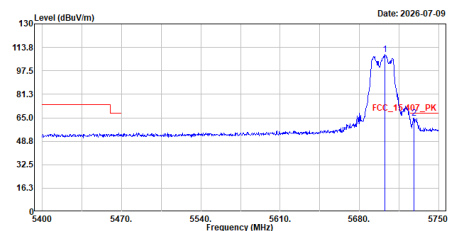


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5702.400	108.78	-----	-----	91.12	17.66	Peak
2	5727.950	64.71	68.22	-3.51	47.06	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz
Test BY :Ashton

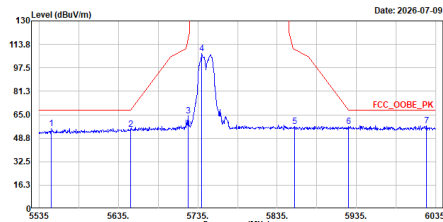


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5550.000	55.57	68.20	-12.63	38.83	16.74	Peak
2	5650.000	54.71	68.21	-13.50	37.30	17.41	Peak
3	5722.500	64.42	116.50	-52.08	46.77	17.65	Peak
4	5740.000	107.25	-----	-----	89.61	17.64	Peak
5	5857.000	56.98	110.24	-53.26	39.06	17.92	Peak
6	5925.000	56.93	68.21	-11.28	38.74	18.19	Peak
7	6023.500	57.50	68.20	-10.70	39.30	18.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz
Test BY :Ashton

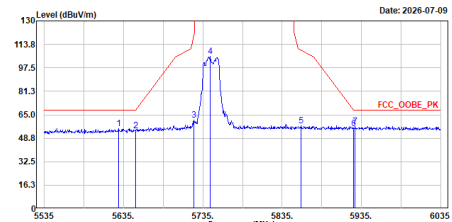


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5628.500	55.34	68.20	-12.86	38.00	17.34	Peak
2	5650.000	53.92	68.21	-14.29	36.51	17.41	Peak
3	5723.500	61.55	118.78	-57.23	43.89	17.66	Peak
4	5744.000	105.60	-----	-----	87.96	17.64	Peak
5	5859.000	57.60	109.68	-52.08	39.67	17.93	Peak
6	5925.000	55.55	68.21	-12.66	37.36	18.19	Peak
7	5927.000	56.95	68.20	-11.25	38.76	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz
Test BY :Ashton

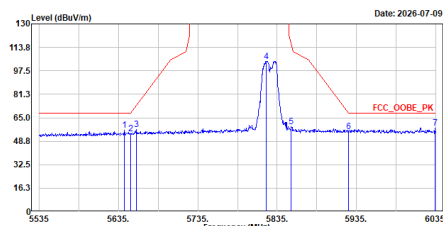


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	56.23	68.20	-11.97	38.86	17.37	Peak
2	5650.000	53.93	68.21	-14.28	36.52	17.41	Peak
3	5657.500	56.91	73.76	-16.85	39.46	17.45	Peak
4	5821.000	104.19	-----	-----	86.32	17.87	Peak
5	5853.000	58.85	115.36	-56.51	40.95	17.90	Peak
6	5925.000	55.64	68.21	-12.57	37.45	18.19	Peak
7	6034.000	58.02	68.20	-10.18	39.77	18.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.000	55.85	68.20	-12.35	38.46	17.39	Peak
2	5650.000	54.40	68.21	-13.81	36.99	17.41	Peak
3	5698.500	56.71	104.09	-47.38	39.04	17.67	Peak
4	5821.500	104.13	-----	-----	86.26	17.87	Peak
5	5882.000	57.79	100.02	-42.23	39.79	18.00	Peak
6	5925.000	56.13	68.21	-12.08	37.94	18.19	Peak
7	5951.500	58.17	68.20	-10.03	39.93	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5190MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Ashton

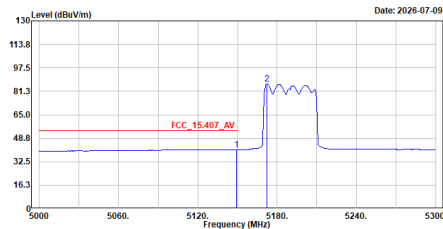


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	40.75	54.00	-13.25	24.89	15.86	Average
2	5172.200	86.51	-----	-----	70.58	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5190MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5190MHz
Test BY :Ashton

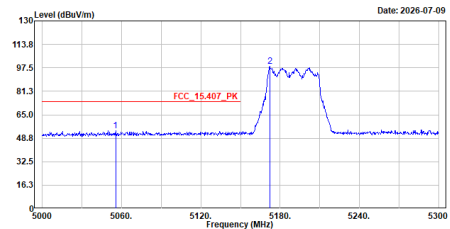


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5055.500	53.92	74.00	-20.08	38.00	15.92	Peak
2	5172.200	98.41	-----	-----	82.48	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5190MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Ashton

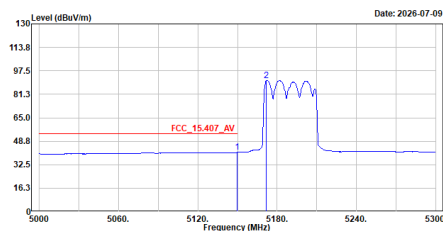


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	41.00	54.00	-13.00	25.14	15.86	Average
2	5171.900	90.94	-----	-----	75.01	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5190MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5190MHz
Test BY :Ashton

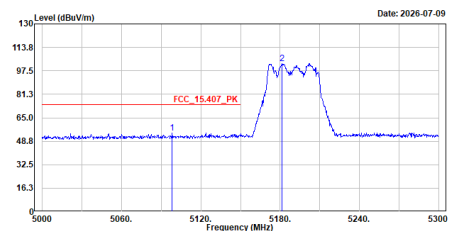


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5098.400	54.36	74.00	-19.64	38.49	15.87	Peak
2	5181.200	102.73	-----	-----	86.73	16.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5310MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Ashton

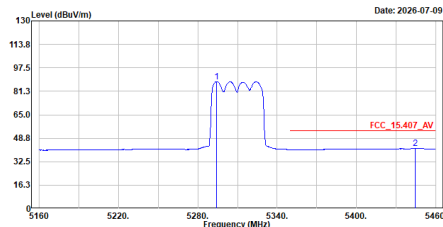


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5294.100	87.96	-----	-----	71.80	16.16	Average
2	5444.700	41.62	54.00	-12.38	25.38	16.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5310MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5310MHz
Test BY :Ashton

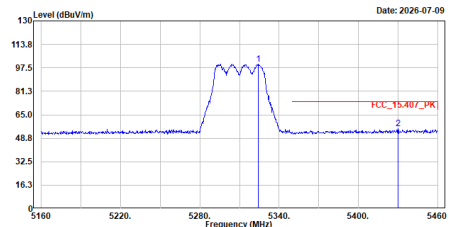


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5324.100	99.97	-----	-----	83.94	16.03	Peak
2	5430.000	55.22	74.00	-18.78	39.03	16.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5310MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Ashton

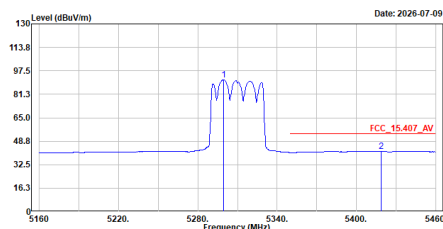


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5299.500	91.32	-----	-----	75.17	16.15	Average
2	5418.600	41.77	54.00	-12.23	25.61	16.16	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5310MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5310MHz
Test BY :Ashton

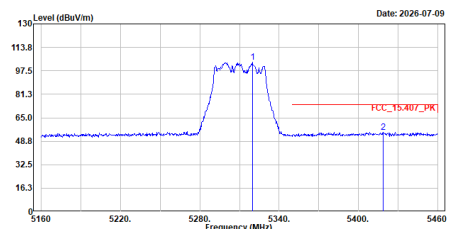


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5319.900	103.37	-----	-----	87.31	16.06	Peak
2	5418.900	55.03	74.00	-18.97	38.87	16.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5510MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Ashton

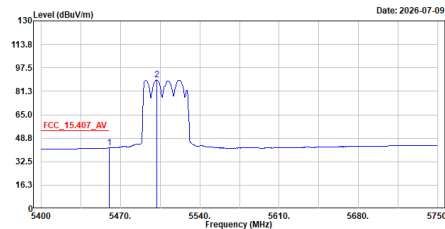


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	42.18	54.00	-11.82	25.91	16.27	Average
2	5501.850	89.09	-----	-----	72.76	16.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5510MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5510MHz
Test BY :Ashton

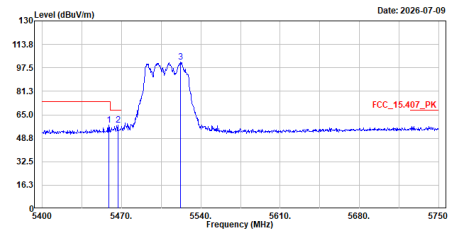


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.800	58.03	74.00	-15.97	41.77	16.26	Peak
2	5460.850	57.79	68.22	-10.43	41.51	16.28	Peak
3	5521.800	101.60	-----	-----	85.11	16.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5510MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Ashton

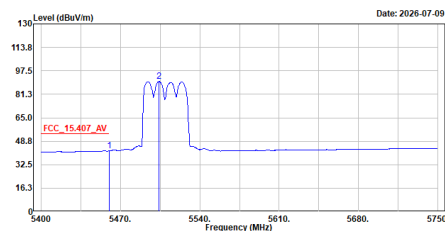


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	42.01	54.00	-11.99	25.74	16.27	Average
2	5503.950	90.13	-----	-----	73.79	16.34	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5510MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5510MHz
Test BY :Ashton

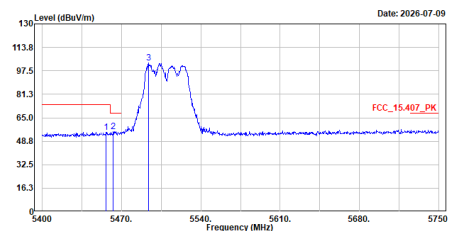


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.350	55.00	74.00	-19.00	38.74	16.26	Peak
2	5462.650	55.65	68.22	-12.57	39.37	16.28	Peak
3	5494.150	102.82	-----	-----	86.51	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5670MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5670MHz
Test BY :Ashton

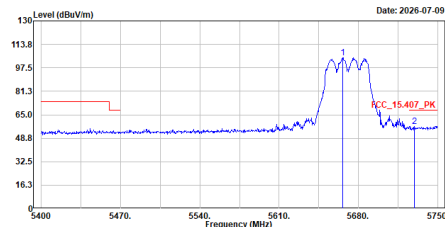


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5666.000	104.36	68.22	-11.16	86.83	17.53	Peak
2	5729.350	57.06	68.22	-11.16	39.41	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5670MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5670MHz
Test BY :Ashton

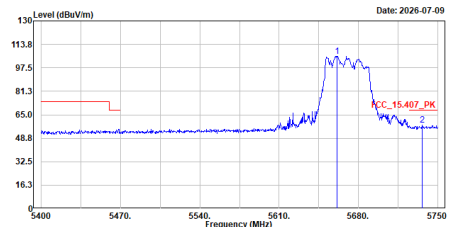


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5661.100	105.71	68.22	-10.42	88.23	17.48	Peak
2	5736.350	57.80	68.22	-10.42	40.15	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5755MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5755MHz
Test BY :Ashton

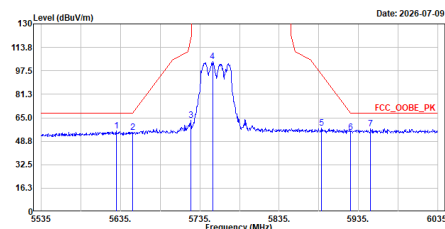


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5629.500	55.74	68.20	-12.46	38.39	17.35	Peak
2	5650.000	55.07	68.21	-13.14	37.66	17.41	Peak
3	5723.500	63.07	118.78	-55.71	45.41	17.66	Peak
4	5751.000	104.20	68.20	-11.16	86.56	17.64	Peak
5	5888.000	57.74	95.58	-37.84	39.72	18.02	Peak
6	5925.000	54.83	68.21	-13.38	36.64	18.19	Peak
7	5950.500	57.51	68.20	-10.69	39.27	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5755MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5755MHz
Test BY :Ashton

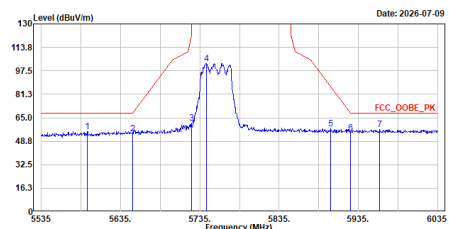


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5593.000	55.56	68.20	-12.64	38.38	17.18	Peak
2	5650.000	53.99	68.21	-14.22	36.58	17.41	Peak
3	5725.000	61.09	122.20	-61.11	43.44	17.65	Peak
4	5743.500	102.56	68.20	-11.16	84.92	17.64	Peak
5	5900.000	57.41	86.70	-29.29	39.36	18.05	Peak
6	5925.000	54.53	68.21	-13.68	36.34	18.19	Peak
7	5962.000	56.80	68.20	-11.40	38.50	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5795MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5795MHz
Test BY :Ashton

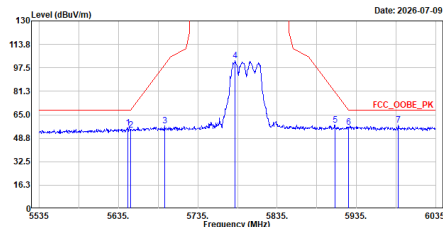


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5647.000	55.82	68.20	-12.38	38.42	17.40	Peak
2	5650.000	54.45	68.21	-13.76	37.04	17.41	Peak
3	5693.000	57.21	100.02	-42.81	39.57	17.64	Peak
4	5782.000	102.33	-----	-----	84.59	17.74	Peak
5	5908.000	58.11	80.78	-22.67	40.01	18.10	Peak
6	5925.000	56.28	68.21	-11.93	38.09	18.19	Peak
7	5988.000	57.67	68.20	-10.53	39.52	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5795MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5795MHz
Test BY :Ashton

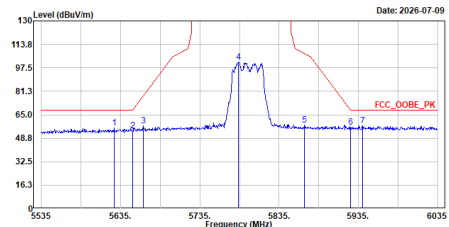


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5627.000	55.77	68.20	-12.43	38.44	17.33	Peak
2	5650.000	53.90	68.21	-14.31	36.49	17.41	Peak
3	5663.500	57.21	78.20	-20.99	39.72	17.49	Peak
4	5783.500	101.36	-----	-----	83.61	17.75	Peak
5	5867.000	57.72	107.44	-49.72	39.77	17.95	Peak
6	5925.000	56.25	68.21	-11.96	38.06	18.19	Peak
7	5940.000	57.50	68.20	-10.70	39.27	18.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Rock

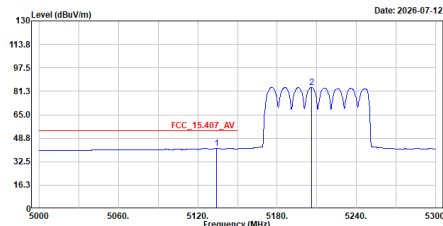


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5134.400	41.91	54.00	-12.09	26.04	15.87	Average
2	5206.100	83.92	-----	-----	67.76	16.16	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
Test BY :Rock

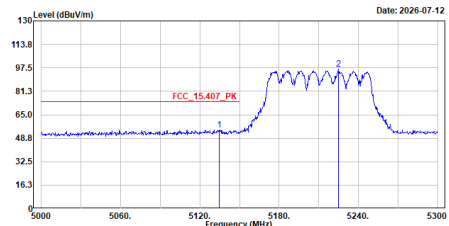


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5134.700	54.50	74.00	-19.50	38.63	15.87	Peak
2	5224.700	96.68	-----	-----	80.47	16.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_V_Average


Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax80_5210MHz
Test BY :Rock

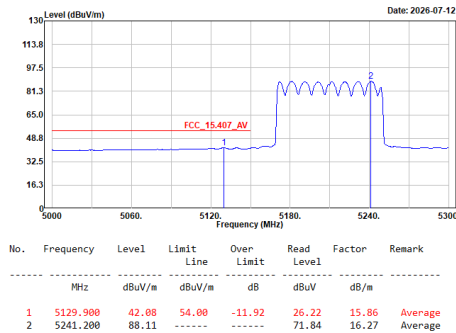

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5210MHz_V_Peak


Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax80_5210MHz
Test BY :Rock

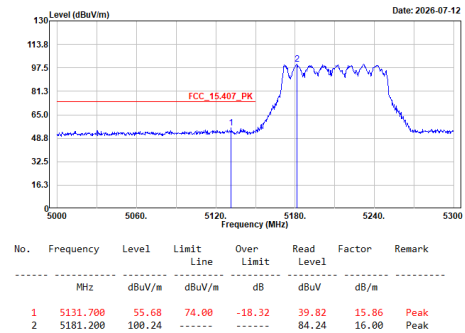

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5290MHz_H_Average


Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax80_5290MHz
Test BY :Rock

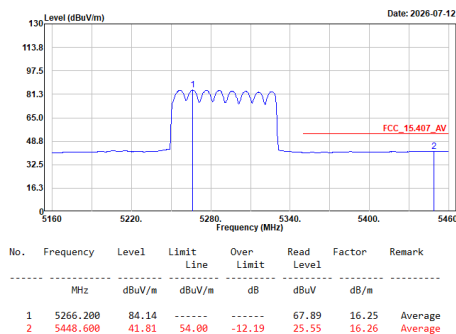

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5290MHz_H_Peak


Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax80_5290MHz
Test BY :Rock

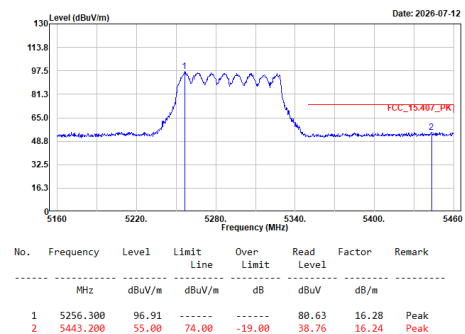

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5290MHz_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax80_5290MHz
Test BY :Rock

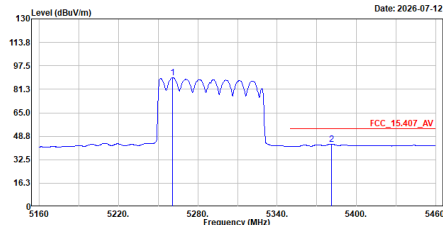


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5260.800	89.34	-----	-----	73.08	16.26	Average
2	5381.100	43.39	54.00	-10.61	27.35	16.04	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5290MHz_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax80_5290MHz
Test BY :Rock

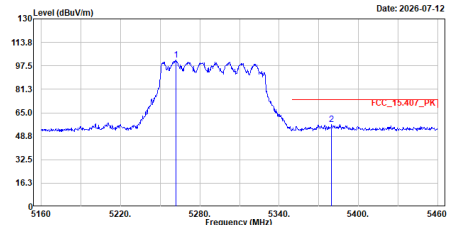


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5261.700	101.75	-----	-----	85.48	16.27	Peak
2	5379.600	57.05	74.00	-16.95	41.01	16.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5530MHz_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax80_5530MHz
Test BY :Rock

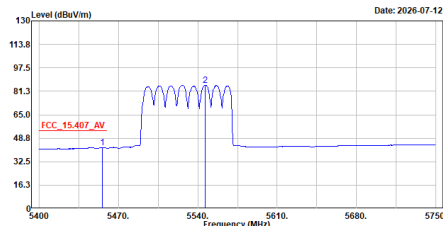


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5455.650	42.25	54.00	-11.75	25.99	16.26	Average
2	5546.650	85.57	-----	-----	68.86	16.71	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5530MHz_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax80_5530MHz
Test BY :Rock

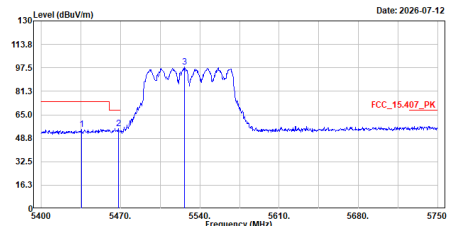


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5435.350	55.05	74.00	-18.95	38.84	16.21	Peak
2	5467.900	55.49	68.22	-12.73	39.21	16.28	Peak
3	5526.700	97.88	-----	-----	81.34	16.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5530MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Rock

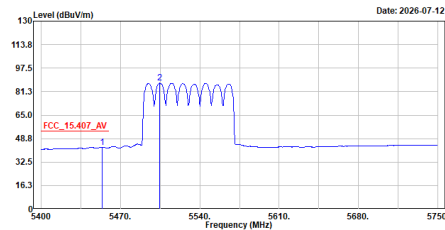


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5453.550	42.86	54.00	-11.14	26.60	16.26	Average
2	5504.650	87.08	-----	-----	70.73	16.35	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5530MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5530MHz
Test BY :Rock

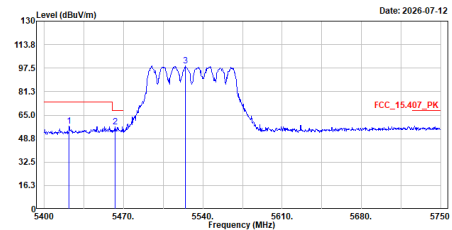


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5422.050	57.44	74.00	-16.56	41.28	16.16	Peak
2	5462.300	56.94	68.22	-11.28	40.67	16.27	Peak
3	5524.600	98.95	-----	-----	82.43	16.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5775MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
Test BY :Rock

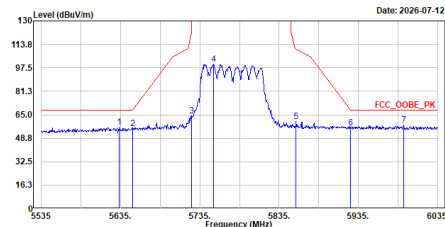


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5633.500	56.24	68.20	-11.96	38.88	17.36	Peak
2	5650.000	55.53	68.21	-12.68	38.12	17.41	Peak
3	5724.500	64.07	121.06	-56.99	46.42	17.65	Peak
4	5752.500	100.09	-----	-----	82.45	17.64	Peak
5	5856.500	60.43	110.38	-49.95	42.51	17.92	Peak
6	5925.000	56.02	68.21	-12.19	37.83	18.19	Peak
7	5992.000	57.67	68.20	-10.53	39.51	18.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5775MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
Test BY :Rock

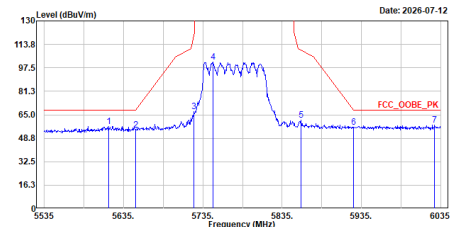

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5616.000	57.06	68.20	-11.14	39.76	17.30	Peak
2	5650.000	54.58	68.21	-13.63	37.17	17.41	Peak
3	5724.000	67.40	119.92	-52.52	49.75	17.65	Peak
4	5747.500	101.73	-----	-----	84.10	17.63	Peak
5	5859.000	61.22	109.68	-48.46	43.29	17.93	Peak
6	5925.000	56.34	68.21	-11.87	38.15	18.19	Peak
7	6027.500	57.68	68.20	-10.52	39.46	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

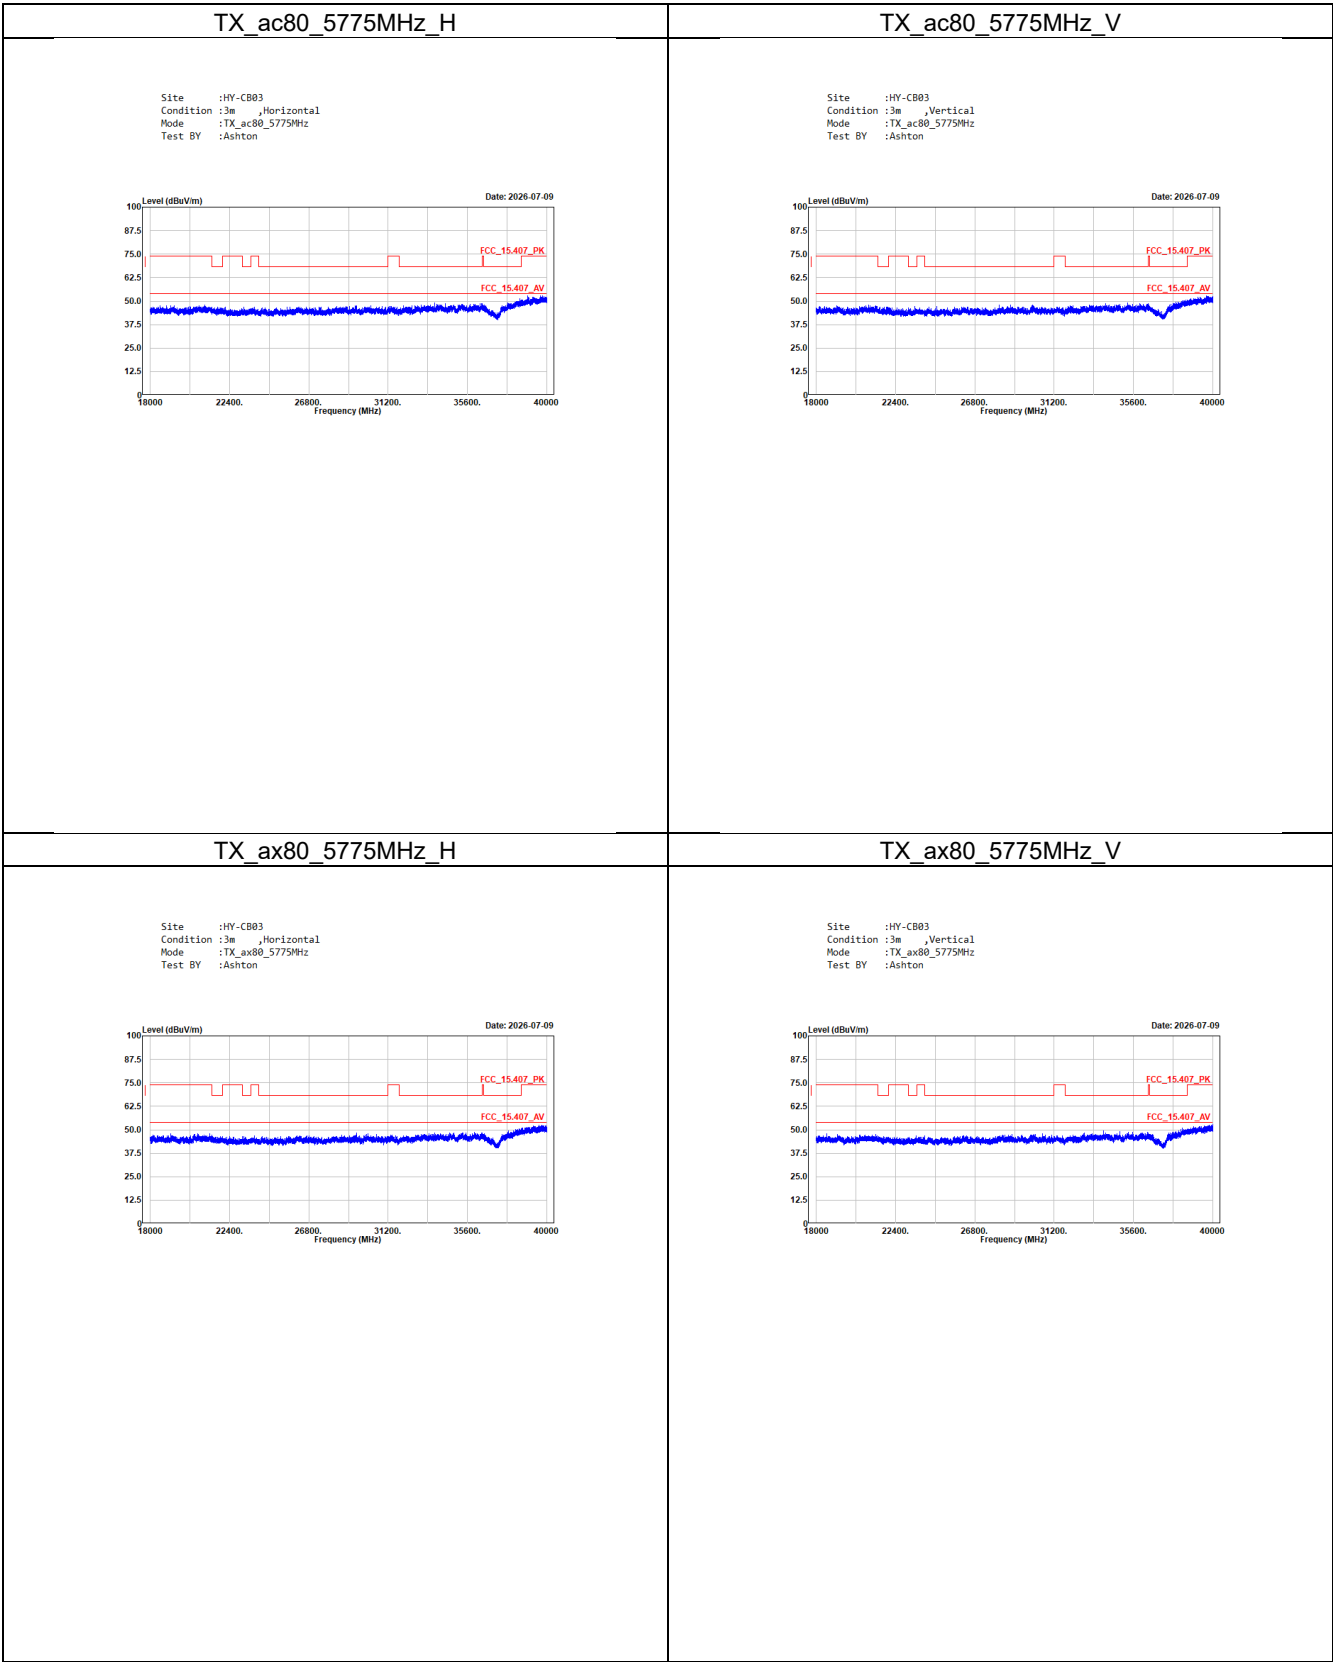

Partial RU

TX_ax20_5180MHz_RU 26 0_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

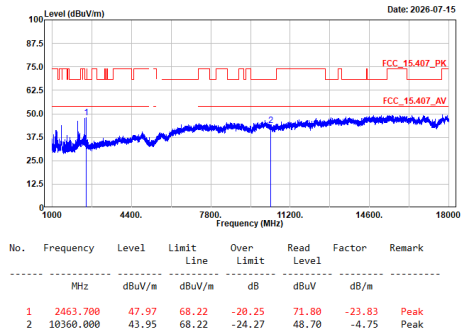

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

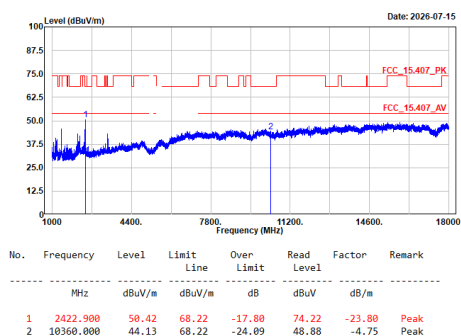

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

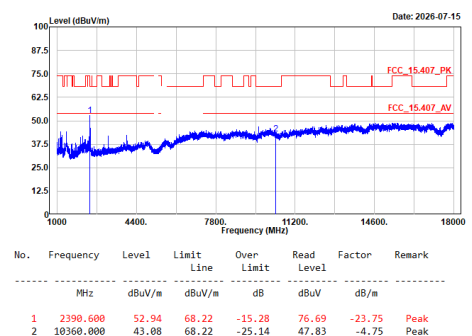

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

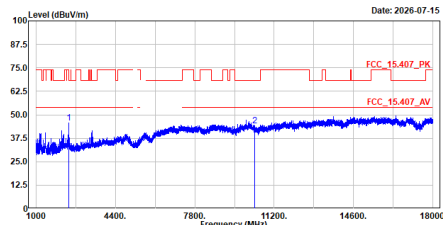


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	45.48	74.00	-28.52	69.23	-23.75	Peak
2	10360.000	44.07	68.22	-24.15	48.82	-4.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	52.99	68.22	-15.23	76.75	-23.76	Peak
2	10360.000	42.83	68.22	-25.39	47.58	-4.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

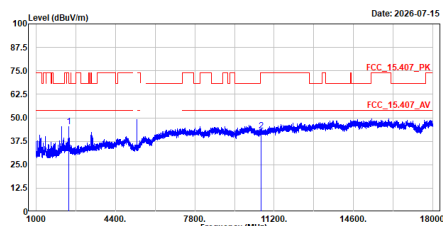


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	45.20	68.22	-23.02	68.96	-23.76	Peak
2	10640.000	42.83	74.00	-31.17	47.07	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	53.03	68.22	-15.19	76.78	-23.75	Peak
2	10640.000	43.50	74.00	-30.50	47.74	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

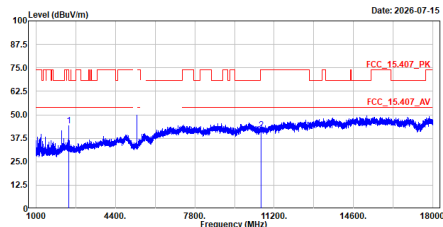


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	43.97	68.22	-24.25	67.72	-23.75	Peak
2	10640.000	41.87	74.00	-32.13	46.11	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.08	68.22	-15.14	76.84	-23.76	Peak
2	10640.000	42.10	74.00	-31.90	46.34	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

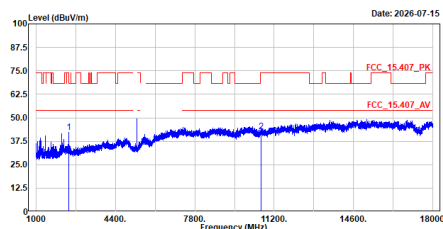


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	42.12	68.22	-26.10	65.88	-23.76	Peak
2	10640.000	42.53	74.00	-31.47	46.77	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2399.950	52.81	68.22	-15.41	76.58	-23.77	Peak
2	10640.000	43.23	74.00	-30.77	47.47	-4.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

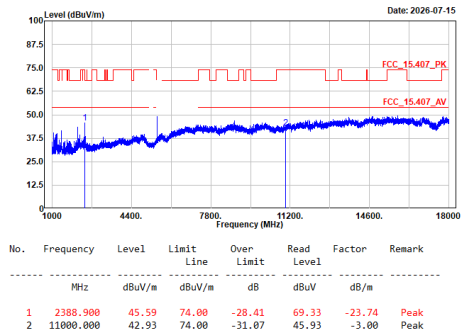

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

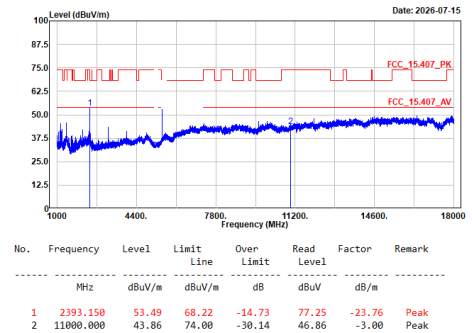

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

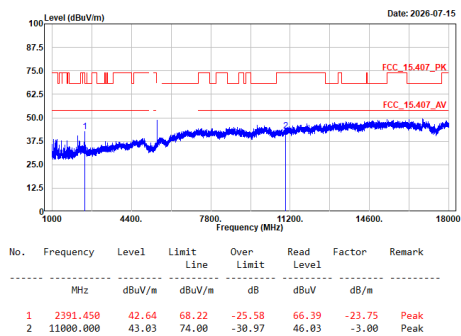

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

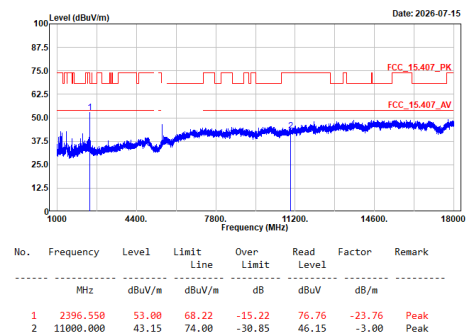

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

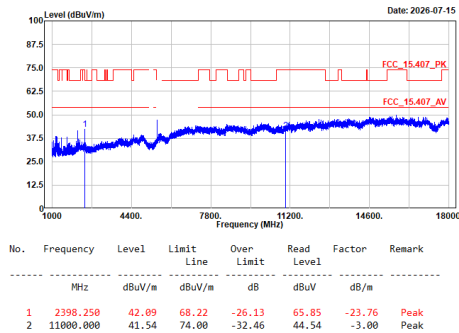

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

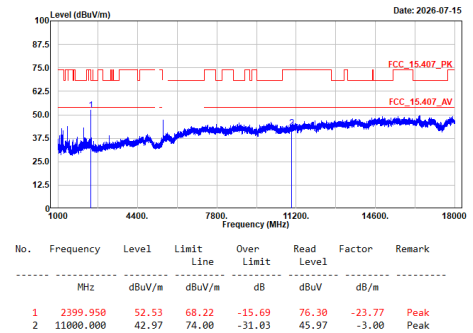

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

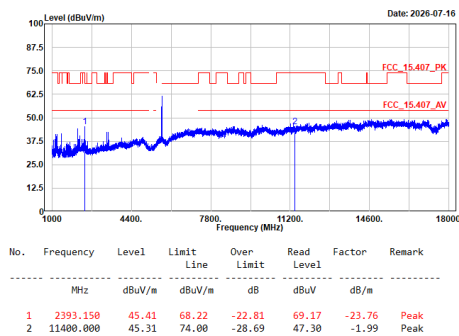

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

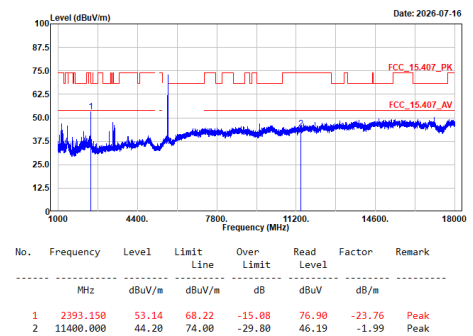

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock

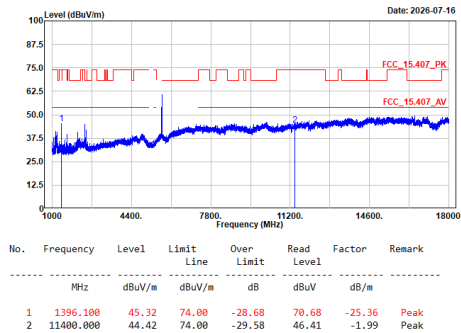

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock

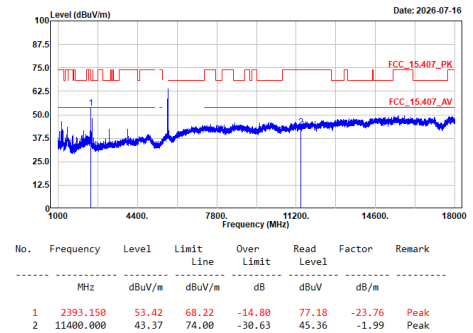

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock

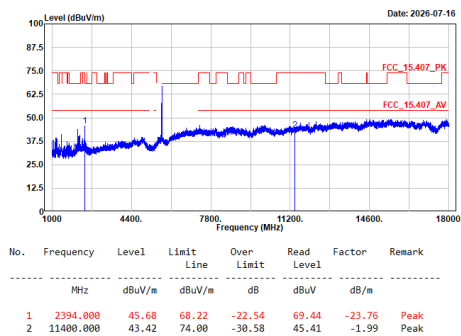

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock

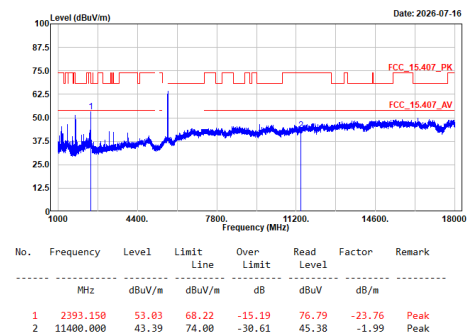

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

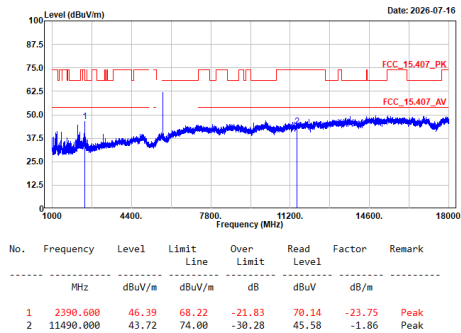

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

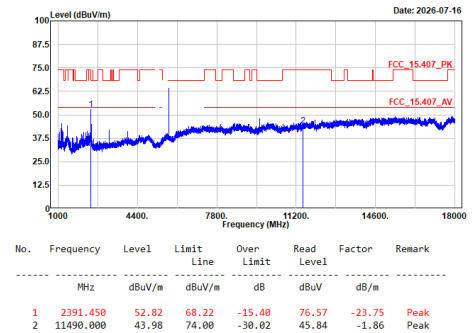

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock

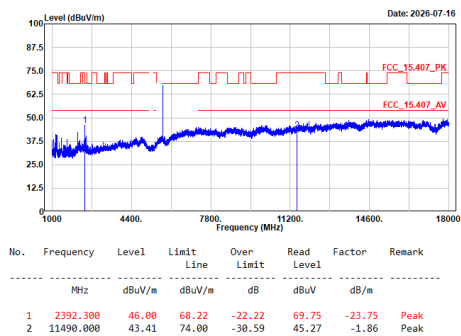

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock

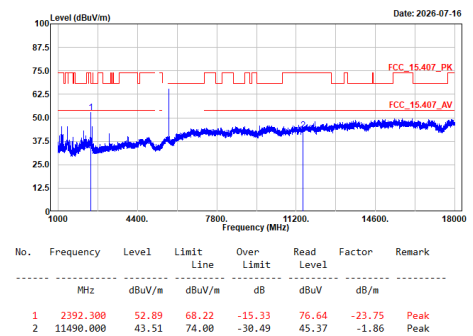

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

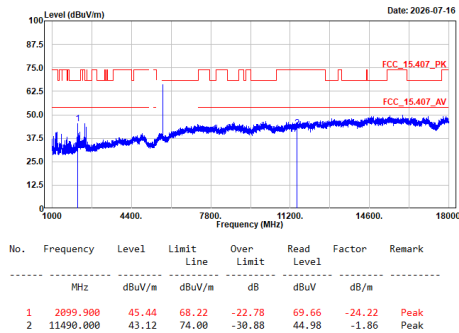

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

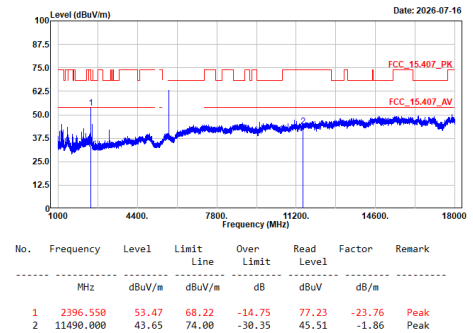

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Ashton

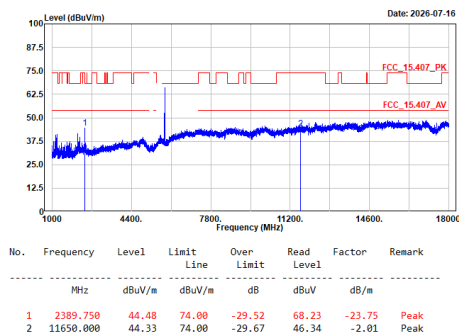

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Ashton

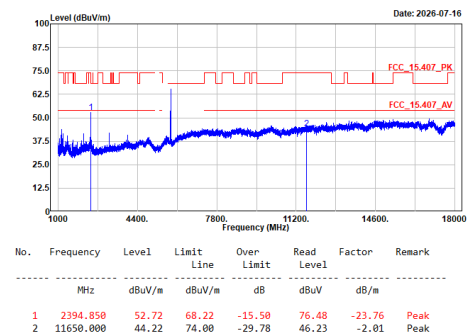

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Ashton

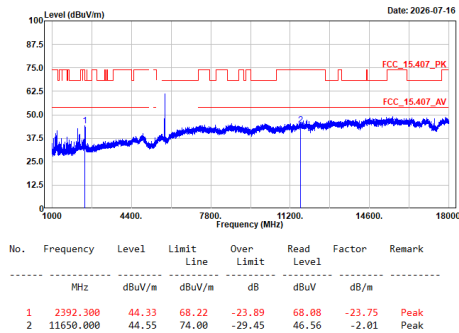

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Ashton

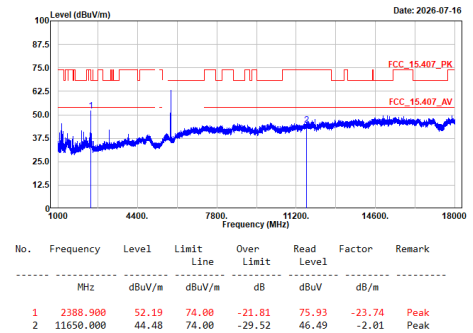

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Ashton

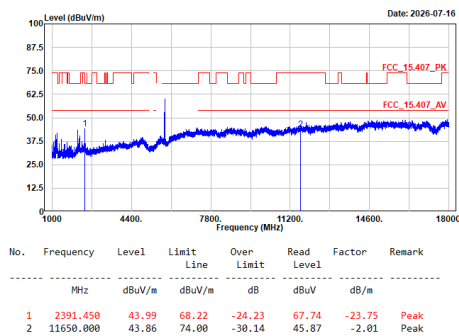

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Ashton

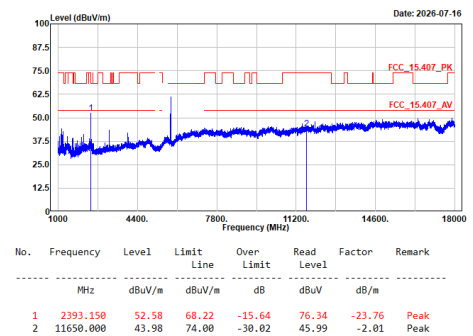

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Ashton

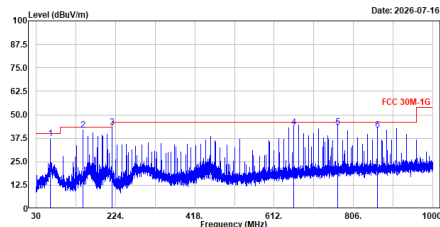


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	64.047	37.20	40.00	-2.80	62.21	-25.01	QP
2	143.975	41.70	43.50	-1.72	65.84	-24.06	QP
3	216.046	43.28	46.00	-2.72	69.80	-26.52	QP
4	660.112	43.58	46.00	-2.42	58.45	-14.87	QP
5	768.170	43.49	46.00	-2.51	56.38	-12.89	QP
6	864.103	41.86	46.00	-4.14	53.81	-11.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_5825MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Ashton

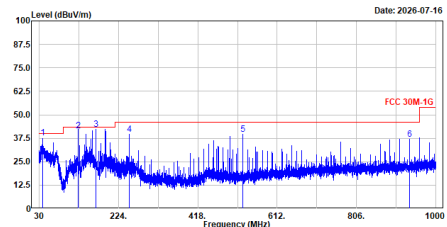


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38.924	37.60	40.00	-2.40	61.82	-24.22	QP
2	124.963	41.38	43.50	-2.12	67.33	-25.95	QP
3	168.031	42.23	43.50	-1.27	66.50	-24.27	QP
4	249.996	39.62	46.00	-6.38	64.48	-24.86	QP
5	528.095	39.75	46.00	-6.25	57.39	-17.64	QP
6	936.174	36.99	46.00	-9.01	48.00	-11.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_5180MHz_RU 26 0_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

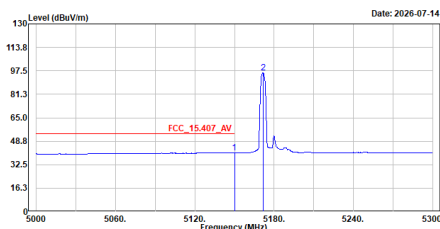


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	40.68	54.00	-13.32	24.82	15.86	Average
2	5171.600	96.30	-----	-----	80.37	15.93	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

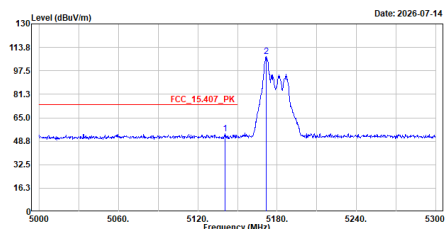


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5140.700	54.11	74.00	-19.89	38.25	15.86	Peak
2	5171.600	107.19	-----	-----	91.26	15.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

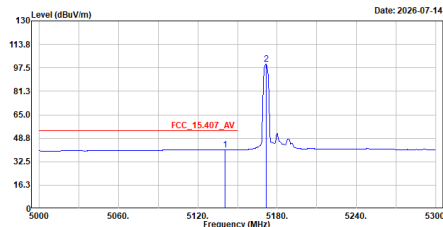


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.400	48.79	54.00	-13.21	24.93	15.86	Average
2	5171.600	100.03	-----	-----	84.10	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

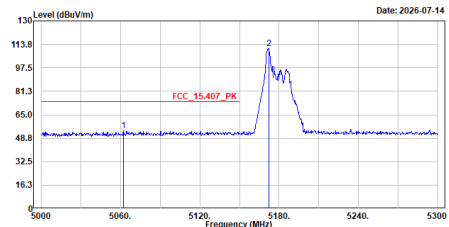


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5062.100	53.79	74.00	-20.21	37.87	15.92	Peak
2	5172.200	111.05	-----	-----	95.12	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

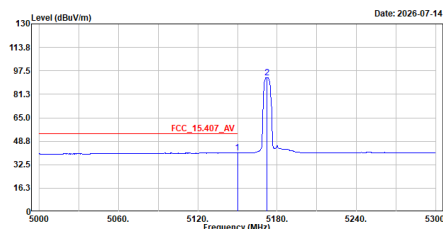


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	48.59	54.00	-13.41	24.73	15.86	Average
2	5172.200	92.85	-----	-----	76.92	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

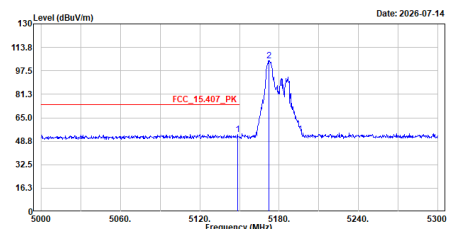


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.500	53.42	74.00	-20.58	37.56	15.86	Peak
2	5172.200	104.68	-----	-----	88.75	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5126.900	40.63	54.00	-13.37	24.77	15.86	Average
2	5171.600	96.57	-----	-----	80.64	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

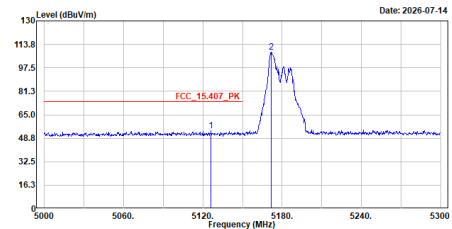


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5126.300	53.81	74.00	-20.19	37.94	15.87	Peak
2	5171.900	100.55	-----	-----	92.62	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5150.000	40.59	54.00	-13.41	24.73	15.86	Average
2	5172.200	90.06	-----	-----	74.13	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5117.000	54.00	74.00	-20.00	38.13	15.87	Peak
2	5173.100	100.71	-----	-----	84.76	15.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

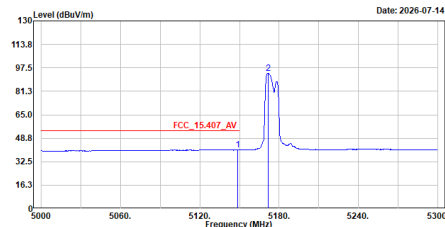


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5148.800	40.60	54.00	-13.40	24.74	15.86	Average
2	5171.600	93.71	-----	-----	77.78	15.93	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

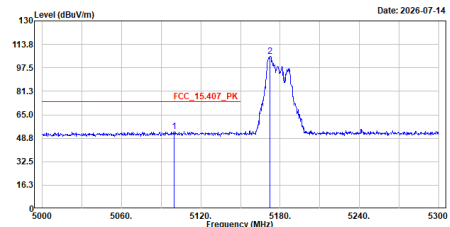


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5099.600	53.29	74.00	-20.71	37.41	15.88	Peak
2	5172.500	105.65	-----	-----	89.72	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

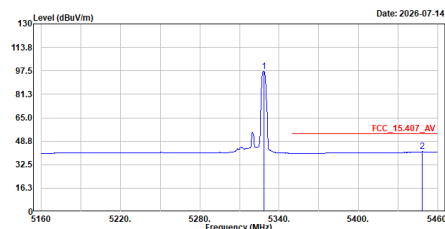


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5328.300	97.32	-----	-----	81.31	16.01	Average
2	5448.300	41.47	54.00	-12.53	25.21	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

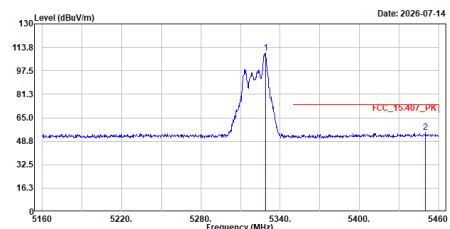


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5328.900	109.99	-----	-----	93.99	16.00	Peak
2	5458.100	54.85	74.00	-19.15	38.59	16.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

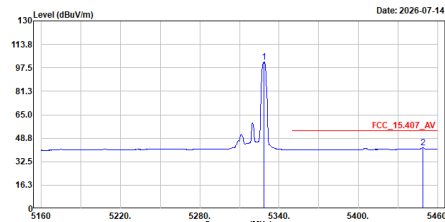


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	101.56	-----	-----	85.55	16.01	Average
2	5448.900	42.14	54.00	-11.86	25.88	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

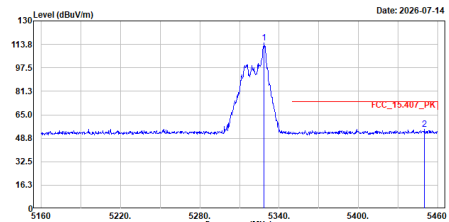


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	114.71	-----	-----	98.70	16.01	Peak
2	5450.100	54.74	74.00	-19.26	38.48	16.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

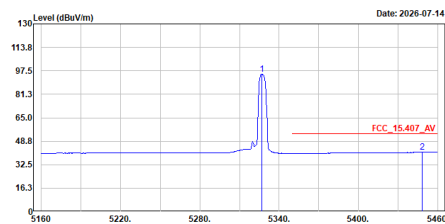


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.800	95.14	-----	-----	79.13	16.01	Average
2	5448.300	41.27	54.00	-12.73	25.01	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

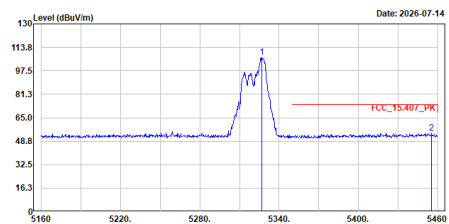


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5327.100	106.86	-----	-----	90.85	16.01	Peak
2	5455.500	54.27	74.00	-19.73	38.01	16.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

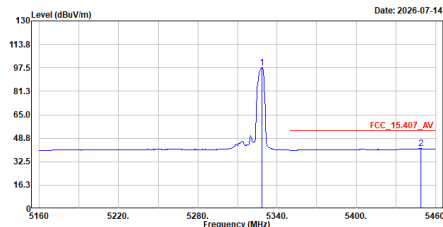


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	97.74	-----	-----	81.73	16.01	Average
2	5448.600	41.55	54.00	-12.45	25.29	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

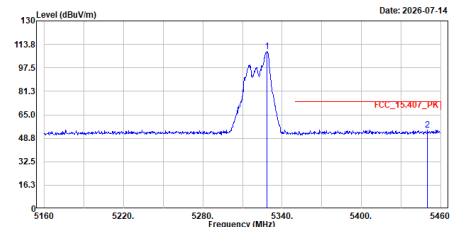


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	109.08	-----	-----	93.87	16.01	Peak
2	5448.100	54.64	74.00	-19.36	38.38	16.26	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

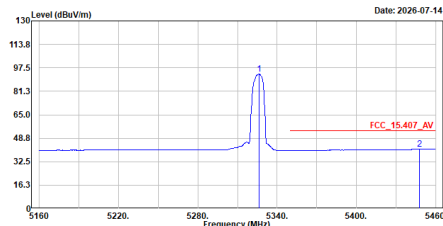


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5326.200	93.08	-----	-----	77.05	16.03	Average
2	5448.000	41.19	54.00	-12.81	24.93	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5327.100	104.18	-----	-----	88.17	16.01	Peak
2	5445.600	54.81	74.00	-19.19	38.57	16.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

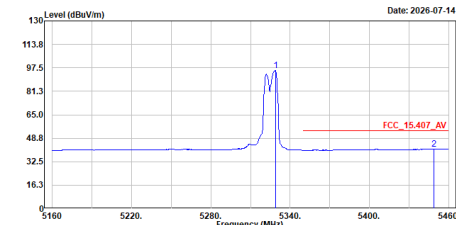


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5328.900	95.53	-----	-----	79.53	16.00	Average
2	5448.600	41.45	54.00	-12.55	25.19	16.26	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

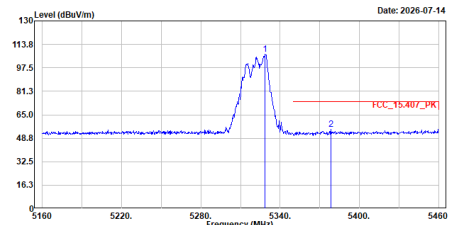


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5328.600	106.78	-----	-----	90.77	16.01	Peak
2	5378.400	55.13	74.00	-18.87	39.09	16.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

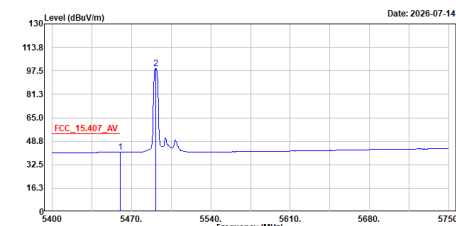


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	41.20	54.00	-12.80	24.93	16.27	Average
2	5491.350	99.31	-----	-----	83.00	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

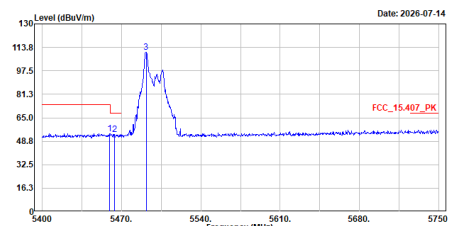


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.500	53.92	74.00	-20.08	37.65	16.27	Peak
2	5463.700	53.56	68.22	-14.66	37.28	16.28	Peak
3	5491.700	118.36	-----	-----	94.05	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

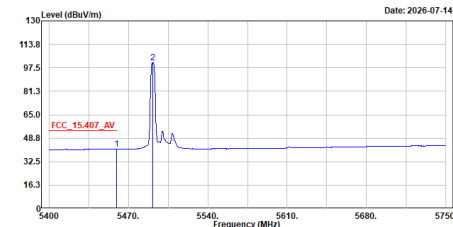


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.500	41.29	54.00	-12.71	25.02	16.27	Average
2	5491.350	101.27	-----	-----	84.96	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

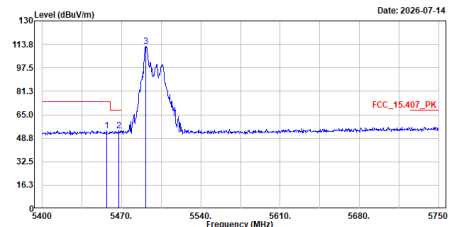


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.700	54.12	74.00	-19.88	37.86	16.26	Peak
2	5487.550	54.04	68.22	-14.18	37.76	16.28	Peak
3	5491.350	112.43	-----	-----	96.12	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

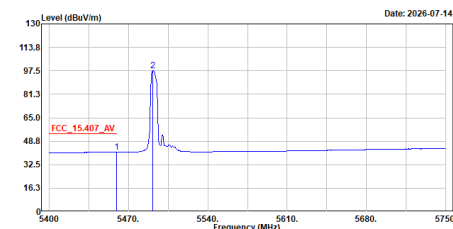


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.150	41.33	54.00	-12.67	25.07	16.26	Average
2	5491.350	97.54	-----	-----	81.23	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

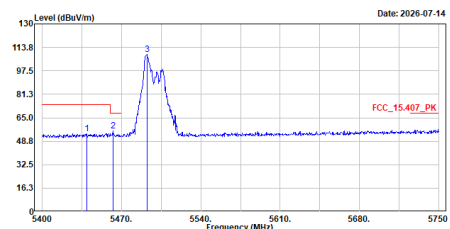


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5439.200	54.16	74.00	-19.84	37.93	16.23	Peak
2	5462.300	55.73	68.22	-12.49	39.46	16.27	Peak
3	5492.400	108.82	-----	-----	92.51	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.500	41.42	54.00	-12.58	25.15	16.27	Average
2	5491.350	99.26	-----	-----	82.95	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

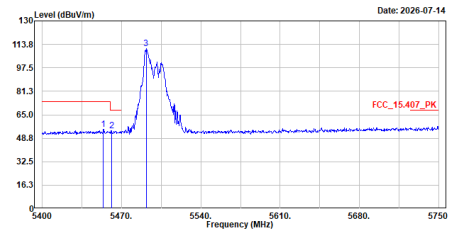


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5453.900	54.81	74.00	-19.19	38.55	16.26	Peak
2	5461.600	54.18	68.22	-14.04	37.91	16.27	Peak
3	5491.700	110.68	-----	-----	94.37	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.150	41.32	54.00	-12.68	25.06	16.26	Average
2	5491.350	95.24	-----	-----	78.93	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

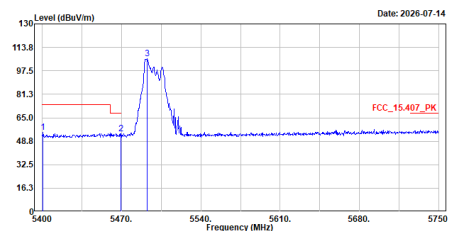


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5400.700	55.16	74.00	-18.84	39.07	16.09	Peak
2	5469.650	54.17	68.22	-14.05	37.89	16.28	Peak
3	5492.400	106.06	-----	-----	89.75	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5459.850	41.38	54.00	-12.62	25.11	16.27	Average
2	5491.350	96.98	-----	-----	80.67	16.31	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

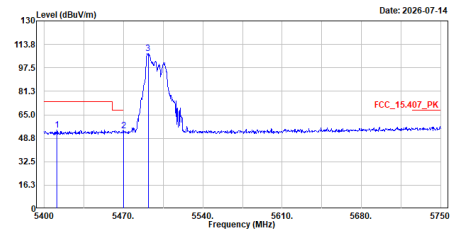


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5411.200	54.36	74.00	-19.64	38.23	16.13	Peak
2	5470.000	53.88	68.22	-14.34	37.60	16.28	Peak
3	5491.700	107.43	-----	-----	91.12	16.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

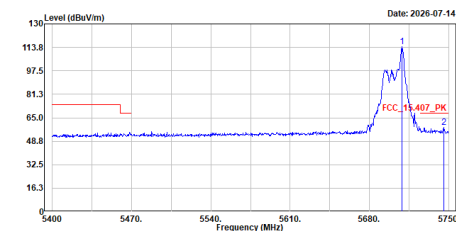


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5709.050	114.37	-----	-----	96.71	17.66	Peak
2	5745.450	58.28	68.22	-9.94	40.64	17.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

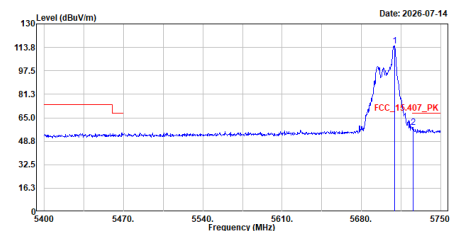


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5709.400	114.76	-----	-----	97.10	17.66	Peak
2	5725.500	58.56	68.22	-9.66	40.91	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5708.000	111.04	-----	-----	93.37	17.67	Peak
2	5729.000	58.50	66.22	-9.64	40.93	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock

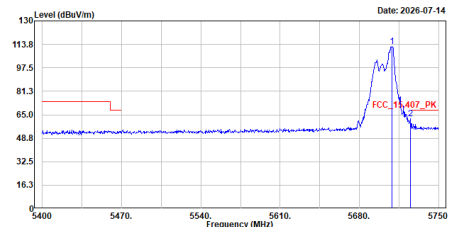


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5709.050	112.52	-----	-----	94.86	17.66	Peak
2	5729.000	62.30	66.22	-5.92	44.65	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5708.000	108.48	-----	-----	90.81	17.67	Peak
2	5729.500	57.26	66.22	-10.96	39.61	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock

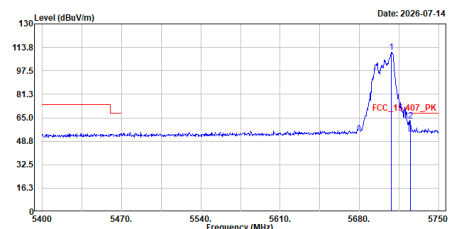


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5708.350	118.32	-----	-----	92.66	17.66	Peak
2	5729.000	62.69	66.22	-5.53	45.04	17.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

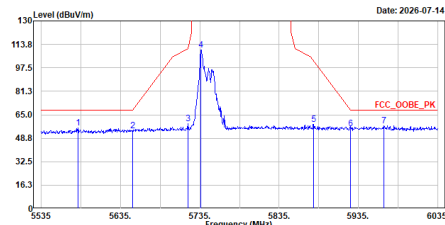


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5581.000	55.80	68.20	-12.40	38.73	17.07	Peak
2	5650.000	53.97	68.21	-14.24	36.56	17.41	Peak
3	5720.500	58.89	111.94	-53.05	41.23	17.66	Peak
4	5736.500	110.06	-----	-----	92.42	17.64	Peak
5	5878.500	58.39	102.61	-44.22	40.40	17.99	Peak
6	5925.000	55.33	68.21	-12.88	37.14	18.19	Peak
7	5967.500	57.43	68.20	-10.77	39.22	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

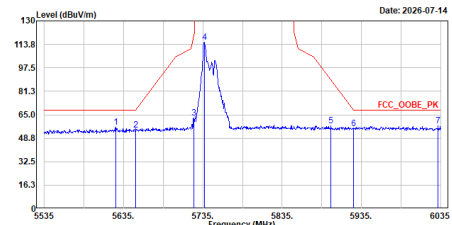


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5625.000	56.21	68.20	-11.99	38.88	17.33	Peak
2	5650.000	54.45	68.21	-13.76	37.04	17.41	Peak
3	5723.500	62.85	118.78	-55.93	45.19	17.66	Peak
4	5737.000	115.31	-----	-----	97.67	17.64	Peak
5	5896.500	57.51	89.29	-31.78	39.47	18.04	Peak
6	5925.000	55.49	68.21	-12.72	37.30	18.19	Peak
7	6032.000	57.16	68.20	-11.04	38.92	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock

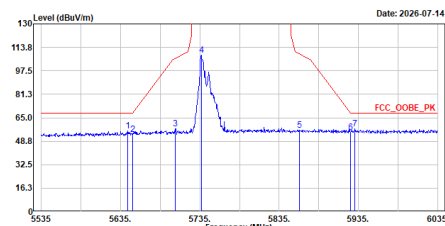


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5644.000	55.77	68.20	-12.43	38.38	17.39	Peak
2	5650.000	53.63	68.21	-14.58	36.22	17.41	Peak
3	5704.000	57.38	106.32	-48.94	39.71	17.67	Peak
4	5737.000	108.27	-----	-----	90.63	17.64	Peak
5	5861.000	56.60	109.12	-52.52	38.67	17.93	Peak
6	5925.000	55.06	68.21	-13.15	36.87	18.19	Peak
7	5930.500	57.43	68.20	-10.77	39.22	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5610.000	55.50	68.20	-12.70	38.22	17.28	Peak
2	5650.000	55.41	68.21	-12.80	38.00	17.41	Peak
3	5724.000	62.09	119.92	-57.83	44.44	17.65	Peak
4	5737.000	112.58	-----	-----	94.94	17.64	Peak
5	5867.000	57.29	107.44	-50.15	39.34	17.95	Peak
6	5925.000	54.85	68.21	-13.36	36.66	18.19	Peak
7	6006.500	57.53	68.20	-10.67	39.37	18.16	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

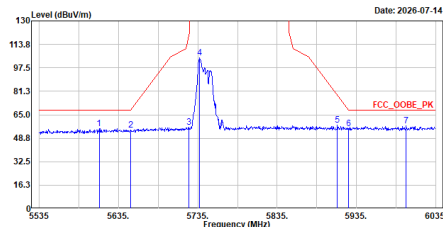


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5610.500	55.53	68.20	-12.67	38.25	17.28	Peak
2	5650.000	54.35	68.21	-13.86	36.94	17.41	Peak
3	5723.500	56.35	118.78	-62.43	38.69	17.66	Peak
4	5737.500	104.41	-----	-----	86.76	17.65	Peak
5	5911.000	57.90	78.57	-20.67	39.79	18.11	Peak
6	5925.000	55.45	68.21	-12.76	37.26	18.19	Peak
7	5990.000	57.36	68.20	-10.84	39.23	18.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

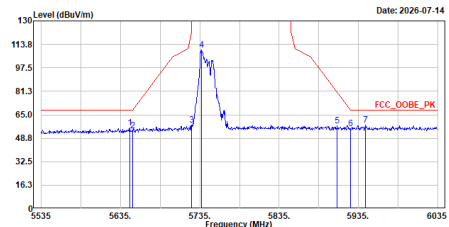


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5640.500	55.81	68.20	-12.39	38.42	17.39	Peak
2	5650.000	53.84	68.21	-14.37	36.43	17.41	Peak
3	5724.500	58.08	121.06	-62.98	40.43	17.65	Peak
4	5737.000	109.82	-----	-----	92.18	17.64	Peak
5	5908.500	57.43	80.41	-22.98	39.33	18.10	Peak
6	5925.000	55.23	68.21	-12.98	37.04	18.19	Peak
7	5943.500	57.81	68.20	-10.39	39.57	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

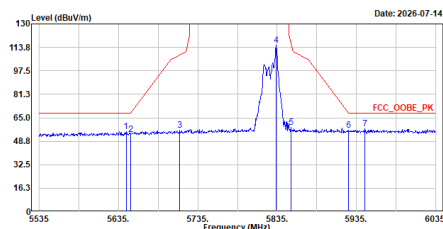


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5644.500	55.45	68.20	-12.75	38.06	17.39	Peak
2	5650.000	53.37	68.21	-14.84	35.96	17.41	Peak
3	5712.500	56.37	108.70	-52.33	38.72	17.65	Peak
4	5833.500	115.51	-----	-----	97.64	17.87	Peak
5	5852.500	58.41	116.50	-58.09	40.51	17.90	Peak
6	5925.000	56.20	68.21	-12.01	38.01	18.19	Peak
7	5946.000	57.44	68.20	-10.76	39.20	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

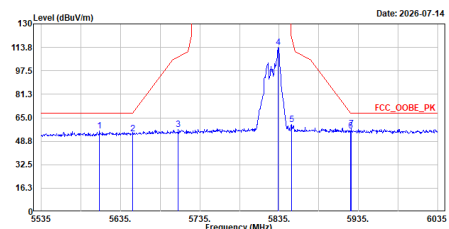


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5608.500	56.12	68.20	-12.08	38.84	17.28	Peak
2	5650.000	54.03	68.21	-14.18	36.62	17.41	Peak
3	5708.000	56.71	107.44	-50.73	39.04	17.67	Peak
4	5834.000	113.96	-----	-----	96.09	17.87	Peak
5	5850.500	60.19	121.06	-60.87	42.30	17.89	Peak
6	5925.000	55.91	68.21	-12.30	37.72	18.19	Peak
7	5926.000	57.37	68.20	-10.83	39.18	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

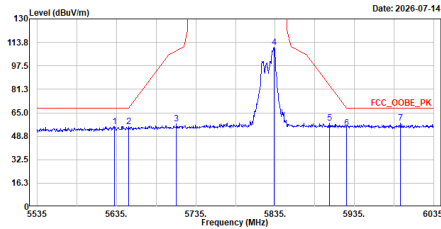


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5632.500	55.64	68.20	-12.56	38.28	17.36	Peak
2	5650.000	55.45	68.21	-12.76	38.04	17.41	Peak
3	5710.500	57.31	108.14	-50.83	39.65	17.66	Peak
4	5834.000	110.21	-----	-----	92.34	17.87	Peak
5	5904.000	57.96	83.74	-25.78	39.89	18.07	Peak
6	5925.000	54.59	68.21	-13.62	36.40	18.19	Peak
7	5993.000	57.73	68.20	-10.47	39.58	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

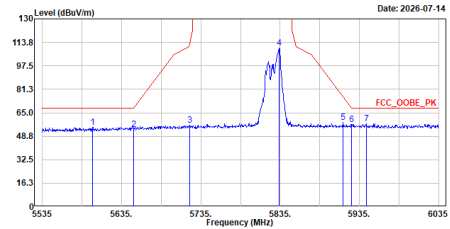


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5598.000	54.96	68.20	-13.24	37.73	17.23	Peak
2	5650.000	53.71	68.21	-14.50	36.30	17.41	Peak
3	5721.000	56.44	113.08	-56.64	38.79	17.65	Peak
4	5834.000	109.80	-----	-----	91.93	17.87	Peak
5	5914.500	58.24	75.98	-17.74	40.11	18.13	Peak
6	5925.000	56.70	68.21	-11.51	38.51	18.19	Peak
7	5943.500	57.39	68.20	-10.81	39.15	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

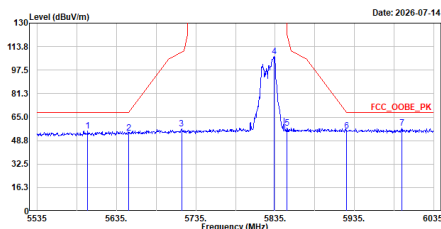


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5598.500	55.13	68.20	-12.89	38.07	17.24	Peak
2	5650.000	54.04	68.21	-14.17	36.63	17.41	Peak
3	5717.000	56.93	109.96	-53.03	39.27	17.66	Peak
4	5833.500	106.95	-----	-----	89.08	17.87	Peak
5	5850.000	57.48	122.20	-64.72	39.59	17.89	Peak
6	5925.000	55.61	68.21	-12.60	37.42	18.19	Peak
7	5994.500	57.26	68.20	-10.94	39.11	18.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

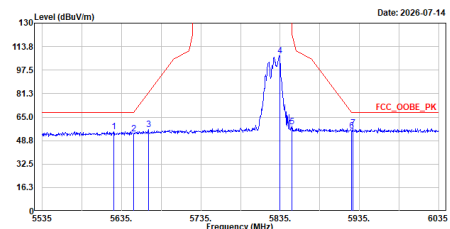

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5625.500	55.13	68.20	-13.07	37.80	17.33	Peak
2	5650.000	53.67	68.21	-14.54	36.26	17.41	Peak
3	5669.000	56.18	82.26	-26.08	38.64	17.54	Peak
4	5834.500	107.53	-----	-----	89.66	17.87	Peak
5	5850.000	58.61	122.20	-63.59	40.72	17.89	Peak
6	5925.000	55.22	68.21	-12.99	37.63	18.19	Peak
7	5926.500	57.20	68.20	-11.00	39.01	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

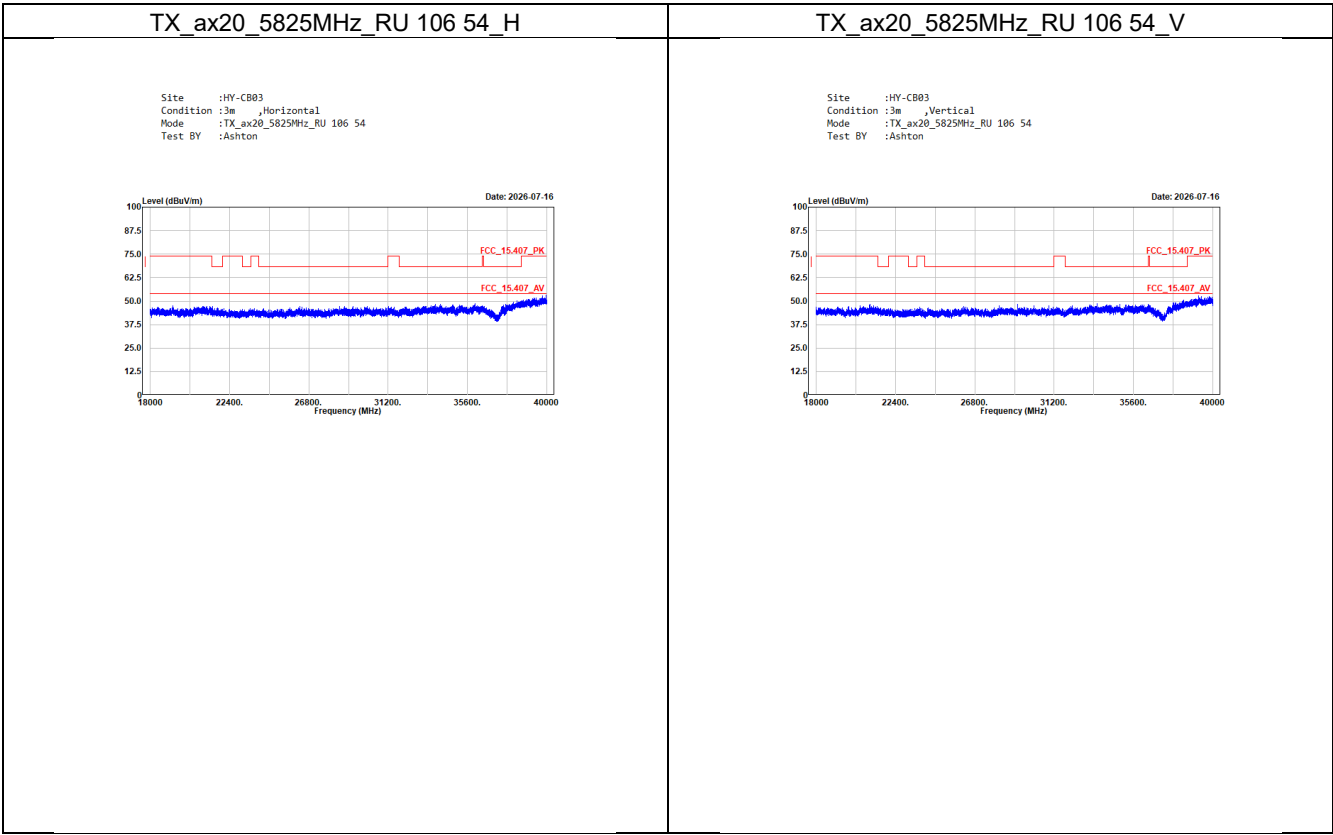

Co-location_ROW version

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
 Test BY :Ashton

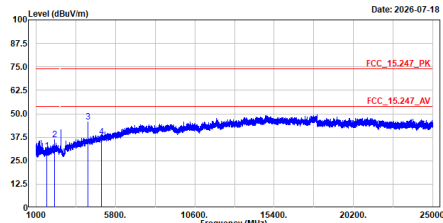


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1648.400	38.85	74.00	-43.95	55.50	-25.45	Peak
2	2100.750	36.26	74.00	-37.74	60.62	-24.36	Peak
3	4116.100	45.61	74.00	-28.39	64.08	-18.47	Peak
4	4960.000	37.81	74.00	-36.19	52.37	-14.56	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
 Test BY :Ashton

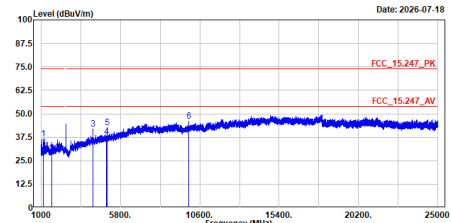


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1133.450	36.69	74.00	-37.31	62.69	-26.00	Peak
2	1648.400	29.17	74.00	-44.83	54.62	-25.45	Peak
3	4116.100	41.97	74.00	-32.03	60.44	-18.47	Peak
4	4960.000	37.65	74.00	-36.35	52.21	-14.56	Peak
5	5000.100	42.64	74.00	-31.36	57.02	-14.38	Peak
6	9919.900	45.87	74.00	-28.13	51.95	-6.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
 Test BY :Ashton

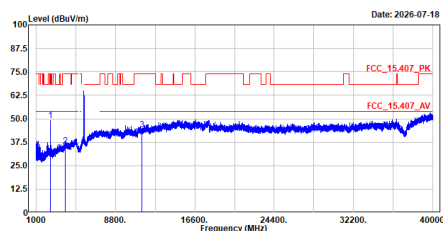


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	49.23	68.22	-18.99	73.10	-23.87	Peak
2	3825.000	35.43	74.00	-38.57	54.58	-19.15	Peak
3	11400.000	44.21	74.00	-29.79	46.78	-2.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
 Test BY :Ashton

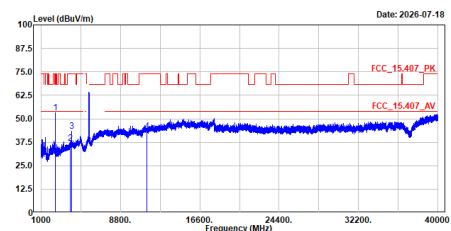


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	53.00	68.22	-15.14	76.95	-23.87	Peak
2	3825.000	36.97	74.00	-37.03	56.12	-19.15	Peak
3	3989.450	43.54	74.00	-30.46	62.32	-18.78	Peak
4	11400.000	43.46	74.00	-30.54	46.03	-2.57	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

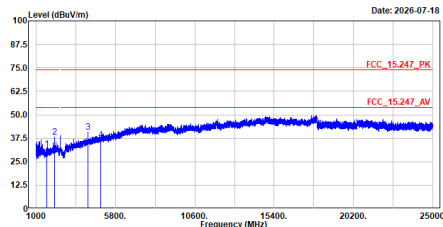


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1646.600	31.56	74.00	-42.44	57.00	-25.44	Peak
2	2099.900	38.18	74.00	-35.82	62.54	-24.36	Peak
3	4116.100	40.79	74.00	-33.21	59.26	-18.47	Peak
4	4904.000	36.55	74.00	-37.45	51.36	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

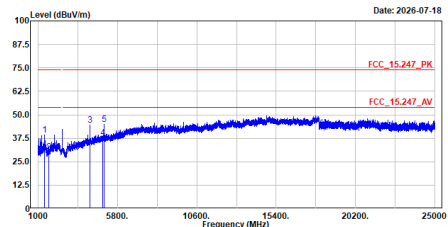


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1396.100	39.28	74.00	-34.72	64.74	-25.46	Peak
2	1646.600	38.29	74.00	-35.71	55.73	-25.44	Peak
3	4116.100	44.47	74.00	-29.53	62.94	-18.47	Peak
4	4904.000	37.66	74.00	-36.34	52.47	-14.81	Peak
5	4981.400	44.98	74.00	-29.02	59.45	-14.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

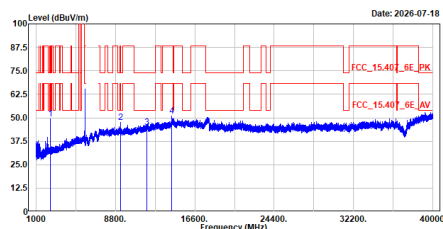


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	49.26	88.22	-38.96	73.13	-23.87	Peak
2	9272.200	47.45	88.22	-40.77	54.47	-7.02	Peak
3	11870.000	44.84	74.00	-29.16	46.91	-2.07	Peak
4	14350.100	51.08	88.22	-37.14	51.08	0.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

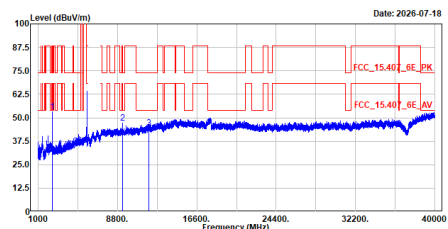


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	53.11	88.22	-35.11	76.98	-23.87	Peak
2	9272.200	47.29	88.22	-40.93	54.11	-7.02	Peak
3	11870.000	44.68	74.00	-29.32	46.75	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

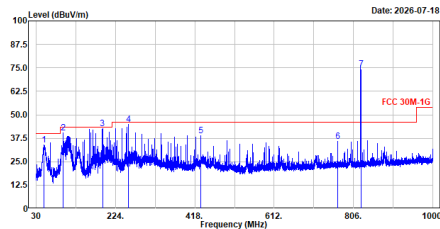


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.818	33.84	48.00	-6.16	57.34	-23.50	QP
2	95.960	40.22	43.50	-3.28	69.23	-29.01	QP
3	192.087	42.77	43.50	-0.73	69.35	-26.58	QP
4	256.107	44.90	46.00	-1.10	69.74	-24.84	QP
5	432.065	38.76	46.00	-7.24	58.44	-19.68	QP
6	768.170	35.91	46.00	-10.09	48.86	-12.95	QP
7	824.200	74.18	-----	-----	86.63	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

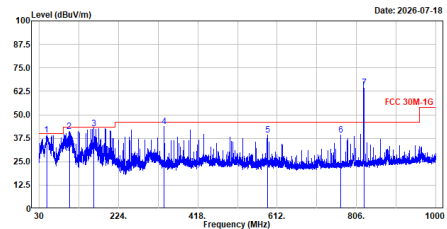


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.945	39.08	48.00	-8.92	62.00	-23.52	QP
2	103.526	41.17	43.50	-2.33	69.02	-27.85	QP
3	164.054	42.67	43.50	-0.83	66.69	-24.02	QP
4	336.035	43.85	46.00	-2.15	65.92	-22.07	QP
5	588.041	39.12	46.00	-6.88	55.33	-16.21	QP
6	768.170	39.28	46.00	-6.72	52.23	-12.95	QP
7	824.200	64.43	-----	-----	76.88	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock

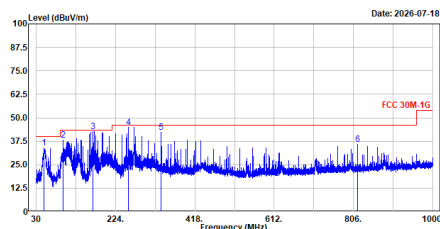


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.012	33.91	48.00	-6.09	57.42	-23.51	QP
2	95.960	37.97	43.50	-5.53	66.98	-29.01	QP
3	168.031	42.67	43.50	-0.83	66.96	-24.29	QP
4	256.107	44.81	46.00	-1.19	69.65	-24.84	QP
5	336.035	42.21	46.00	-3.79	64.28	-22.07	QP
6	816.088	35.88	46.00	-10.12	48.42	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock

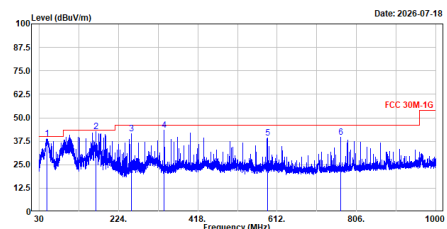


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.236	38.90	48.00	-1.10	62.41	-23.51	QP
2	168.031	42.57	43.50	-0.93	66.86	-24.29	QP
3	256.010	41.40	46.00	-4.60	66.24	-24.84	QP
4	336.035	43.32	46.00	-2.68	65.39	-22.07	QP
5	588.041	39.20	46.00	-6.80	55.41	-16.21	QP
6	768.170	39.45	46.00	-6.55	52.40	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

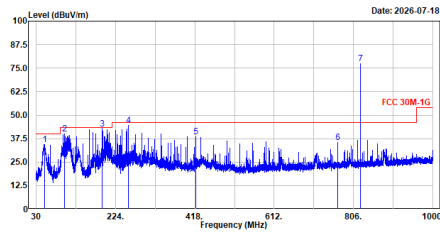


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.982	34.34	48.00	-5.66	57.94	-23.60	QP
2	99.840	39.83	43.50	-3.67	68.33	-28.50	QP
3	191.893	42.74	43.50	-0.76	69.30	-26.56	QP
4	256.010	44.52	46.00	-1.48	69.36	-24.84	QP
5	420.037	38.58	46.00	-7.42	58.77	-20.19	QP
6	768.170	35.43	46.00	-10.57	48.38	-12.95	QP
7	823.300	77.17	-----	-----	89.62	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

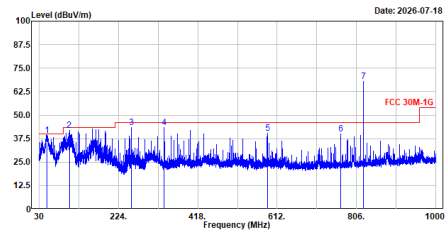


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	39.16	48.00	-8.84	62.67	-23.51	QP
2	103.526	41.87	43.50	-1.63	69.72	-27.85	QP
3	256.010	43.55	46.00	-2.45	68.39	-24.84	QP
4	336.035	43.39	46.00	-2.61	65.46	-22.07	QP
5	588.041	48.42	46.00	-5.58	56.63	-16.21	QP
6	768.170	40.06	46.00	-5.94	53.81	-12.95	QP
7	823.300	67.83	-----	-----	80.28	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

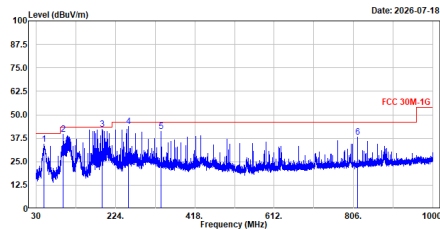


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.333	34.24	48.00	-5.76	57.75	-23.51	QP
2	95.960	39.61	43.50	-3.89	68.62	-29.01	QP
3	191.990	42.26	43.50	-1.24	68.82	-26.56	QP
4	256.010	43.85	46.00	-2.15	68.69	-24.84	QP
5	336.035	41.30	46.00	-4.70	63.37	-22.07	QP
6	816.088	38.23	46.00	-7.77	50.77	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

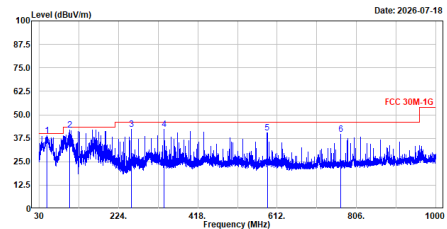


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.915	38.92	48.00	-1.08	62.42	-23.50	QP
2	103.623	41.70	43.50	-1.80	69.51	-27.81	QP
3	256.010	42.11	46.00	-3.89	66.95	-24.84	QP
4	336.035	42.30	46.00	-3.70	64.37	-22.07	QP
5	587.944	48.35	46.00	-5.65	56.56	-16.21	QP
6	768.170	39.76	46.00	-6.24	52.71	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location_US version**LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

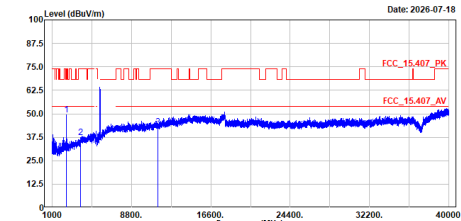


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	40.32	68.22	-18.90	73.19	-23.87	Peak
2	3765.000	37.18	74.00	-36.82	56.74	-19.56	Peak
3	11400.000	43.21	74.00	-30.79	45.78	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

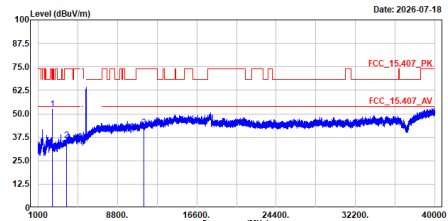


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.300	52.53	68.22	-15.69	76.39	-23.86	Peak
2	3765.000	35.67	74.00	-38.33	55.23	-19.56	Peak
3	11400.000	42.63	74.00	-31.37	45.20	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

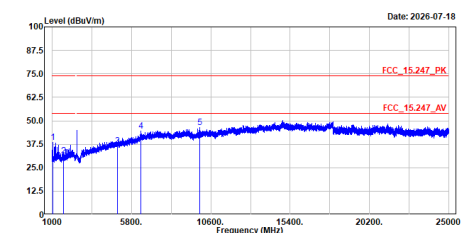


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1890.150	38.66	74.00	-35.34	64.61	-25.95	Peak
2	1683.000	31.39	74.00	-42.61	57.08	-25.69	Peak
3	4960.000	36.42	74.00	-37.58	50.98	-14.56	Peak
4	6357.550	44.46	74.00	-29.54	53.59	-9.13	Peak
5	9920.750	46.46	74.00	-27.54	52.53	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

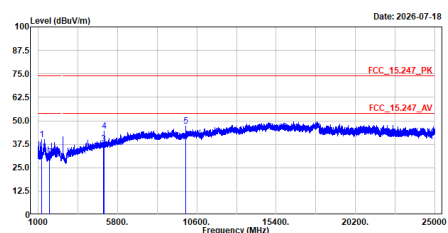


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1216.750	48.17	74.00	-25.83	66.02	-25.85	Peak
2	1683.000	30.49	74.00	-43.51	56.18	-25.69	Peak
3	4960.000	37.64	74.00	-36.36	52.20	-14.56	Peak
4	4981.400	44.61	74.00	-29.39	59.08	-14.47	Peak
5	9920.750	47.01	74.00	-26.99	53.08	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

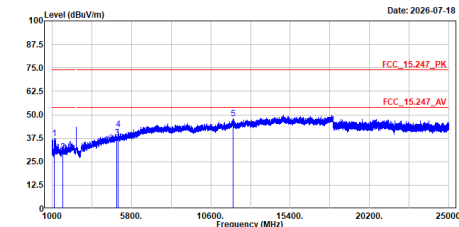


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1133.450	37.53	74.00	-36.47	63.53	-26.00	Peak
2	1645.000	36.25	74.00	-37.75	55.69	-25.44	Peak
3	4904.000	37.68	74.00	-36.32	52.49	-14.81	Peak
4	5000.100	42.29	74.00	-31.71	56.67	-14.38	Peak
5	11954.800	48.09	74.00	-25.91	50.22	-2.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

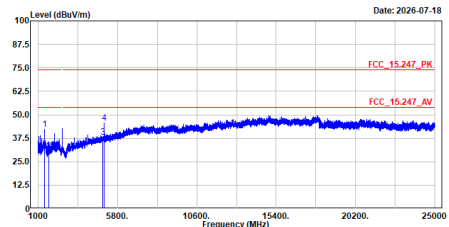


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1397.800	42.23	74.00	-31.77	67.71	-25.48	Peak
2	1645.000	36.49	74.00	-37.51	55.93	-25.44	Peak
3	4904.000	37.96	74.00	-36.04	52.77	-14.81	Peak
4	4995.000	45.57	74.00	-28.43	59.98	-14.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	48.23	88.22	-39.99	72.10	-23.87	Peak
2	7395.000	42.35	74.00	-31.65	49.79	-7.44	Peak
3	11870.000	44.60	74.00	-29.40	46.67	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

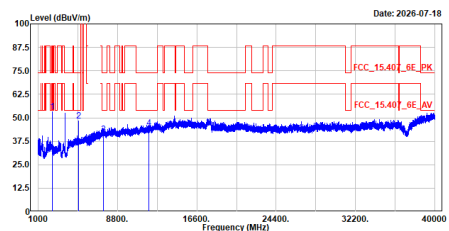


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.30	88.22	-34.92	77.17	-23.87	Peak
2	4980.550	40.44	74.00	-33.56	62.92	-14.40	Peak
3	7395.000	41.28	74.00	-32.72	48.72	-7.44	Peak
4	11870.000	44.70	74.00	-29.30	46.77	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

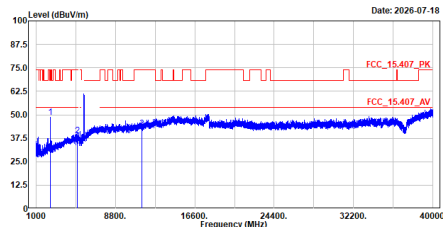


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2300.250	40.81	68.22	-19.41	72.68	-23.87	Peak
2	5670.000	38.75	74.00	-35.25	52.94	-14.19	Peak
3	11400.000	42.83	74.00	-31.17	45.40	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

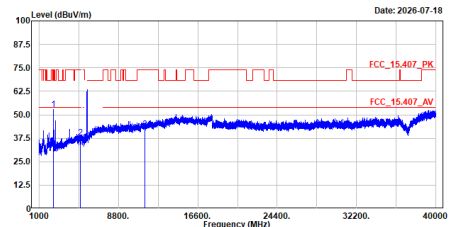


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2300.300	53.00	68.22	-15.22	76.86	-23.86	Peak
2	5670.000	37.75	74.00	-36.25	51.94	-14.19	Peak
3	11400.000	42.26	74.00	-31.74	44.83	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

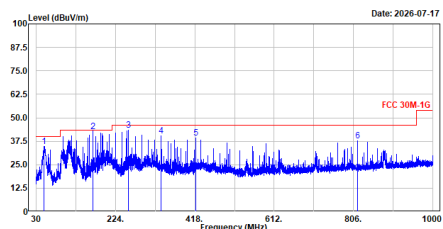


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.400	34.62	40.00	-5.38	58.17	-23.55	QP
2	168.031	42.54	43.50	-0.96	66.83	-24.29	QP
3	256.010	43.31	46.00	-2.69	68.15	-24.84	QP
4	336.035	40.31	46.00	-5.69	62.38	-22.07	QP
5	420.037	39.18	46.00	-6.82	59.37	-20.19	QP
6	816.088	37.87	46.00	-8.13	50.41	-12.54	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

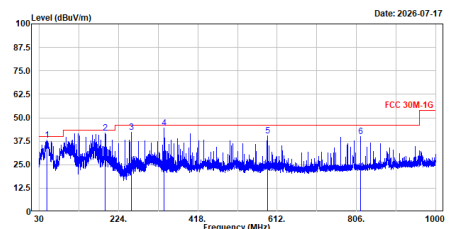

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.333	38.06	40.00	-1.94	61.57	-23.51	QP
2	191.990	41.71	43.50	-1.77	68.29	-26.56	QP
3	256.010	42.42	46.00	-3.58	67.26	-24.84	QP
4	336.035	44.45	46.00	-1.55	66.52	-22.07	QP
5	588.041	40.28	46.00	-5.72	56.49	-16.21	QP
6	816.088	40.17	46.00	-5.83	52.71	-12.54	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H Site:HY-CB03 Condition:3m,Horizontal Mode:LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz Test BY:Rock Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 30 224 418 612 806 1000 7 FCC 30M-1G <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>49.206</td><td>33.95</td><td>48.00</td><td>-6.05</td><td>57.48</td><td>-23.53</td><td>QP</td></tr><tr><td>2</td><td>111.189</td><td>38.80</td><td>43.50</td><td>-4.70</td><td>65.77</td><td>-26.97</td><td>QP</td></tr><tr><td>3</td><td>168.031</td><td>42.63</td><td>43.50</td><td>-0.87</td><td>66.92</td><td>-24.29</td><td>QP</td></tr><tr><td>4</td><td>256.107</td><td>44.95</td><td>46.00</td><td>-1.05</td><td>69.79</td><td>-24.84</td><td>QP</td></tr><tr><td>5</td><td>336.035</td><td>43.79</td><td>46.00</td><td>-2.21</td><td>65.86</td><td>-22.07</td><td>QP</td></tr><tr><td>6</td><td>816.185</td><td>37.63</td><td>46.00</td><td>-8.37</td><td>50.17</td><td>-12.54</td><td>QP</td></tr><tr><td>7</td><td>841.500</td><td>79.38</td><td>-----</td><td>-----</td><td>91.70</td><td>-12.32</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit. LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V Site:HY-CB03 Condition:3m,Vertical Mode:LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz Test BY:Rock Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 30 224 418 612 806 1000 7 FCC 30M-1G <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>47.848</td><td>39.09</td><td>48.00</td><td>-8.91</td><td>62.62</td><td>-23.53</td><td>QP</td></tr><tr><td>2</td><td>127.970</td><td>42.69</td><td>43.50</td><td>-0.81</td><td>68.44</td><td>-25.75</td><td>QP</td></tr><tr><td>3</td><td>256.010</td><td>42.42</td><td>46.00</td><td>-3.58</td><td>67.26</td><td>-24.84</td><td>QP</td></tr><tr><td>4</td><td>336.035</td><td>43.35</td><td>46.00</td><td>-2.65</td><td>65.42</td><td>-22.07</td><td>QP</td></tr><tr><td>5</td><td>588.041</td><td>40.16</td><td>46.00</td><td>-5.84</td><td>56.37</td><td>-16.21</td><td>QP</td></tr><tr><td>6</td><td>816.185</td><td>40.23</td><td>46.00</td><td>-5.77</td><td>52.77</td><td>-12.54</td><td>QP</td></tr><tr><td>7</td><td>841.500</td><td>55.44</td><td>-----</td><td>-----</td><td>67.76</td><td>-12.32</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	49.206	33.95	48.00	-6.05	57.48	-23.53	QP	2	111.189	38.80	43.50	-4.70	65.77	-26.97	QP	3	168.031	42.63	43.50	-0.87	66.92	-24.29	QP	4	256.107	44.95	46.00	-1.05	69.79	-24.84	QP	5	336.035	43.79	46.00	-2.21	65.86	-22.07	QP	6	816.185	37.63	46.00	-8.37	50.17	-12.54	QP	7	841.500	79.38	-----	-----	91.70	-12.32	QP	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	47.848	39.09	48.00	-8.91	62.62	-23.53	QP	2	127.970	42.69	43.50	-0.81	68.44	-25.75	QP	3	256.010	42.42	46.00	-3.58	67.26	-24.84	QP	4	336.035	43.35	46.00	-2.65	65.42	-22.07	QP	5	588.041	40.16	46.00	-5.84	56.37	-16.21	QP	6	816.185	40.23	46.00	-5.77	52.77	-12.54	QP	7	841.500	55.44	-----	-----	67.76	-12.32	QP	LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H Site:HY-CB03 Condition:3m,Horizontal Mode:LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz Test BY:Rock Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 30 224 418 612 806 1000 7 FCC 30M-1G <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>50.564</td><td>34.60</td><td>48.00</td><td>-5.40</td><td>58.14</td><td>-23.54</td><td>QP</td></tr><tr><td>2</td><td>111.965</td><td>39.00</td><td>43.50</td><td>-4.50</td><td>65.73</td><td>-26.73</td><td>QP</td></tr><tr><td>3</td><td>168.031</td><td>42.71</td><td>43.50</td><td>-0.79</td><td>67.00</td><td>-24.29</td><td>QP</td></tr><tr><td>4</td><td>252.033</td><td>43.34</td><td>46.00</td><td>-2.66</td><td>68.24</td><td>-24.90</td><td>QP</td></tr><tr><td>5</td><td>420.134</td><td>41.91</td><td>46.00</td><td>-4.09</td><td>62.09</td><td>-20.18</td><td>QP</td></tr><tr><td>6</td><td>768.170</td><td>36.30</td><td>46.00</td><td>-9.70</td><td>49.25</td><td>-12.95</td><td>QP</td></tr><tr><td>7</td><td>822.500</td><td>77.04</td><td>-----</td><td>-----</td><td>89.50</td><td>-12.46</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit. LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V Site:HY-CB03 Condition:3m,Vertical Mode:LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz Test BY:Rock Level (dBuV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 30 224 418 612 806 1000 7 FCC 30M-1G <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>47.945</td><td>39.24</td><td>48.00</td><td>-8.76</td><td>62.76</td><td>-23.52</td><td>QP</td></tr><tr><td>2</td><td>123.896</td><td>42.41</td><td>43.50</td><td>-1.09</td><td>68.40</td><td>-25.99</td><td>QP</td></tr><tr><td>3</td><td>256.010</td><td>42.23</td><td>46.00</td><td>-3.77</td><td>67.07</td><td>-24.84</td><td>QP</td></tr><tr><td>4</td><td>336.035</td><td>42.52</td><td>46.00</td><td>-3.48</td><td>64.59</td><td>-22.07</td><td>QP</td></tr><tr><td>5</td><td>587.944</td><td>38.85</td><td>46.00</td><td>-7.15</td><td>55.06</td><td>-16.21</td><td>QP</td></tr><tr><td>6</td><td>768.170</td><td>38.76</td><td>46.00</td><td>-7.24</td><td>51.71</td><td>-12.95</td><td>QP</td></tr><tr><td>7</td><td>822.500</td><td>65.66</td><td>-----</td><td>-----</td><td>78.12</td><td>-12.46</td><td>QP</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	50.564	34.60	48.00	-5.40	58.14	-23.54	QP	2	111.965	39.00	43.50	-4.50	65.73	-26.73	QP	3	168.031	42.71	43.50	-0.79	67.00	-24.29	QP	4	252.033	43.34	46.00	-2.66	68.24	-24.90	QP	5	420.134	41.91	46.00	-4.09	62.09	-20.18	QP	6	768.170	36.30	46.00	-9.70	49.25	-12.95	QP	7	822.500	77.04	-----	-----	89.50	-12.46	QP	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	47.945	39.24	48.00	-8.76	62.76	-23.52	QP	2	123.896	42.41	43.50	-1.09	68.40	-25.99	QP	3	256.010	42.23	46.00	-3.77	67.07	-24.84	QP	4	336.035	42.52	46.00	-3.48	64.59	-22.07	QP	5	587.944	38.85	46.00	-7.15	55.06	-16.21	QP	6	768.170	38.76	46.00	-7.24	51.71	-12.95	QP	7	822.500	65.66	-----	-----	78.12	-12.46	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																																																																																											
1	49.206	33.95	48.00	-6.05	57.48	-23.53	QP																																																																																																																																																																																																																																																																																										
2	111.189	38.80	43.50	-4.70	65.77	-26.97	QP																																																																																																																																																																																																																																																																																										
3	168.031	42.63	43.50	-0.87	66.92	-24.29	QP																																																																																																																																																																																																																																																																																										
4	256.107	44.95	46.00	-1.05	69.79	-24.84	QP																																																																																																																																																																																																																																																																																										
5	336.035	43.79	46.00	-2.21	65.86	-22.07	QP																																																																																																																																																																																																																																																																																										
6	816.185	37.63	46.00	-8.37	50.17	-12.54	QP																																																																																																																																																																																																																																																																																										
7	841.500	79.38	-----	-----	91.70	-12.32	QP																																																																																																																																																																																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																																																																																											
1	47.848	39.09	48.00	-8.91	62.62	-23.53	QP																																																																																																																																																																																																																																																																																										
2	127.970	42.69	43.50	-0.81	68.44	-25.75	QP																																																																																																																																																																																																																																																																																										
3	256.010	42.42	46.00	-3.58	67.26	-24.84	QP																																																																																																																																																																																																																																																																																										
4	336.035	43.35	46.00	-2.65	65.42	-22.07	QP																																																																																																																																																																																																																																																																																										
5	588.041	40.16	46.00	-5.84	56.37	-16.21	QP																																																																																																																																																																																																																																																																																										
6	816.185	40.23	46.00	-5.77	52.77	-12.54	QP																																																																																																																																																																																																																																																																																										
7	841.500	55.44	-----	-----	67.76	-12.32	QP																																																																																																																																																																																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																																																																																											
1	50.564	34.60	48.00	-5.40	58.14	-23.54	QP																																																																																																																																																																																																																																																																																										
2	111.965	39.00	43.50	-4.50	65.73	-26.73	QP																																																																																																																																																																																																																																																																																										
3	168.031	42.71	43.50	-0.79	67.00	-24.29	QP																																																																																																																																																																																																																																																																																										
4	252.033	43.34	46.00	-2.66	68.24	-24.90	QP																																																																																																																																																																																																																																																																																										
5	420.134	41.91	46.00	-4.09	62.09	-20.18	QP																																																																																																																																																																																																																																																																																										
6	768.170	36.30	46.00	-9.70	49.25	-12.95	QP																																																																																																																																																																																																																																																																																										
7	822.500	77.04	-----	-----	89.50	-12.46	QP																																																																																																																																																																																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																																																																																																																																																																																											
1	47.945	39.24	48.00	-8.76	62.76	-23.52	QP																																																																																																																																																																																																																																																																																										
2	123.896	42.41	43.50	-1.09	68.40	-25.99	QP																																																																																																																																																																																																																																																																																										
3	256.010	42.23	46.00	-3.77	67.07	-24.84	QP																																																																																																																																																																																																																																																																																										
4	336.035	42.52	46.00	-3.48	64.59	-22.07	QP																																																																																																																																																																																																																																																																																										
5	587.944	38.85	46.00	-7.15	55.06	-16.21	QP																																																																																																																																																																																																																																																																																										
6	768.170	38.76	46.00	-7.24	51.71	-12.95	QP																																																																																																																																																																																																																																																																																										
7	822.500	65.66	-----	-----	78.12	-12.46	QP																																																																																																																																																																																																																																																																																										

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

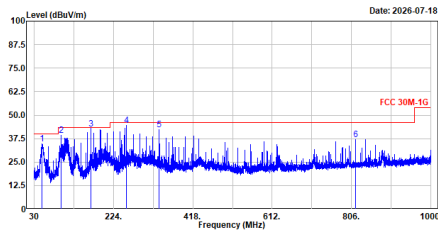


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.206	34.77	48.00	-5.23	58.30	-23.53	QP
2	95.960	39.26	43.50	-4.24	68.27	-29.01	QP
3	168.031	42.76	43.50	-0.74	67.05	-24.29	QP
4	256.010	44.51	46.00	-1.49	69.35	-24.84	QP
5	336.035	42.41	46.00	-3.59	64.48	-22.07	QP
6	816.185	36.87	46.00	-9.13	49.41	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

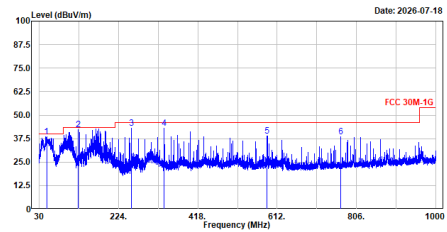


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.945	38.65	48.00	-1.35	62.17	-23.52	QP
2	125.060	42.15	43.50	-1.35	68.10	-25.95	QP
3	256.010	42.95	46.00	-3.05	67.79	-24.84	QP
4	336.035	43.01	46.00	-2.99	65.08	-22.07	QP
5	587.847	38.99	46.00	-7.01	55.20	-16.21	QP
6	768.170	38.46	46.00	-7.54	51.41	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock

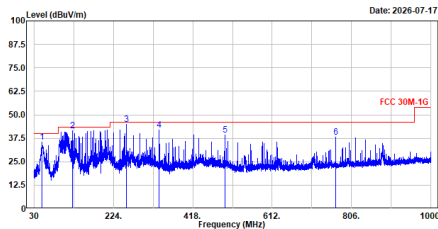


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	35.53	48.00	-4.47	59.04	-23.51	QP
2	123.993	41.35	43.50	-2.15	67.32	-25.97	QP
3	256.010	45.03	46.00	-0.97	69.87	-24.84	QP
4	336.035	41.87	46.00	-4.13	63.94	-22.07	QP
5	496.085	39.06	46.00	-6.94	57.41	-18.35	QP
6	768.170	38.27	46.00	-7.73	51.22	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock

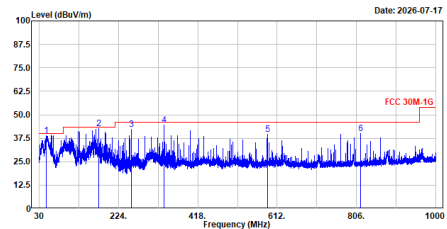

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.848	38.80	48.00	-1.20	62.33	-23.53	QP
2	175.985	42.62	43.50	-0.88	67.57	-24.95	QP
3	256.010	42.40	46.00	-3.60	67.24	-24.84	QP
4	336.035	44.39	46.00	-1.61	66.46	-22.07	QP
5	580.138	39.59	46.00	-6.41	55.80	-16.21	QP
6	816.088	40.12	46.00	-5.88	52.66	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.