






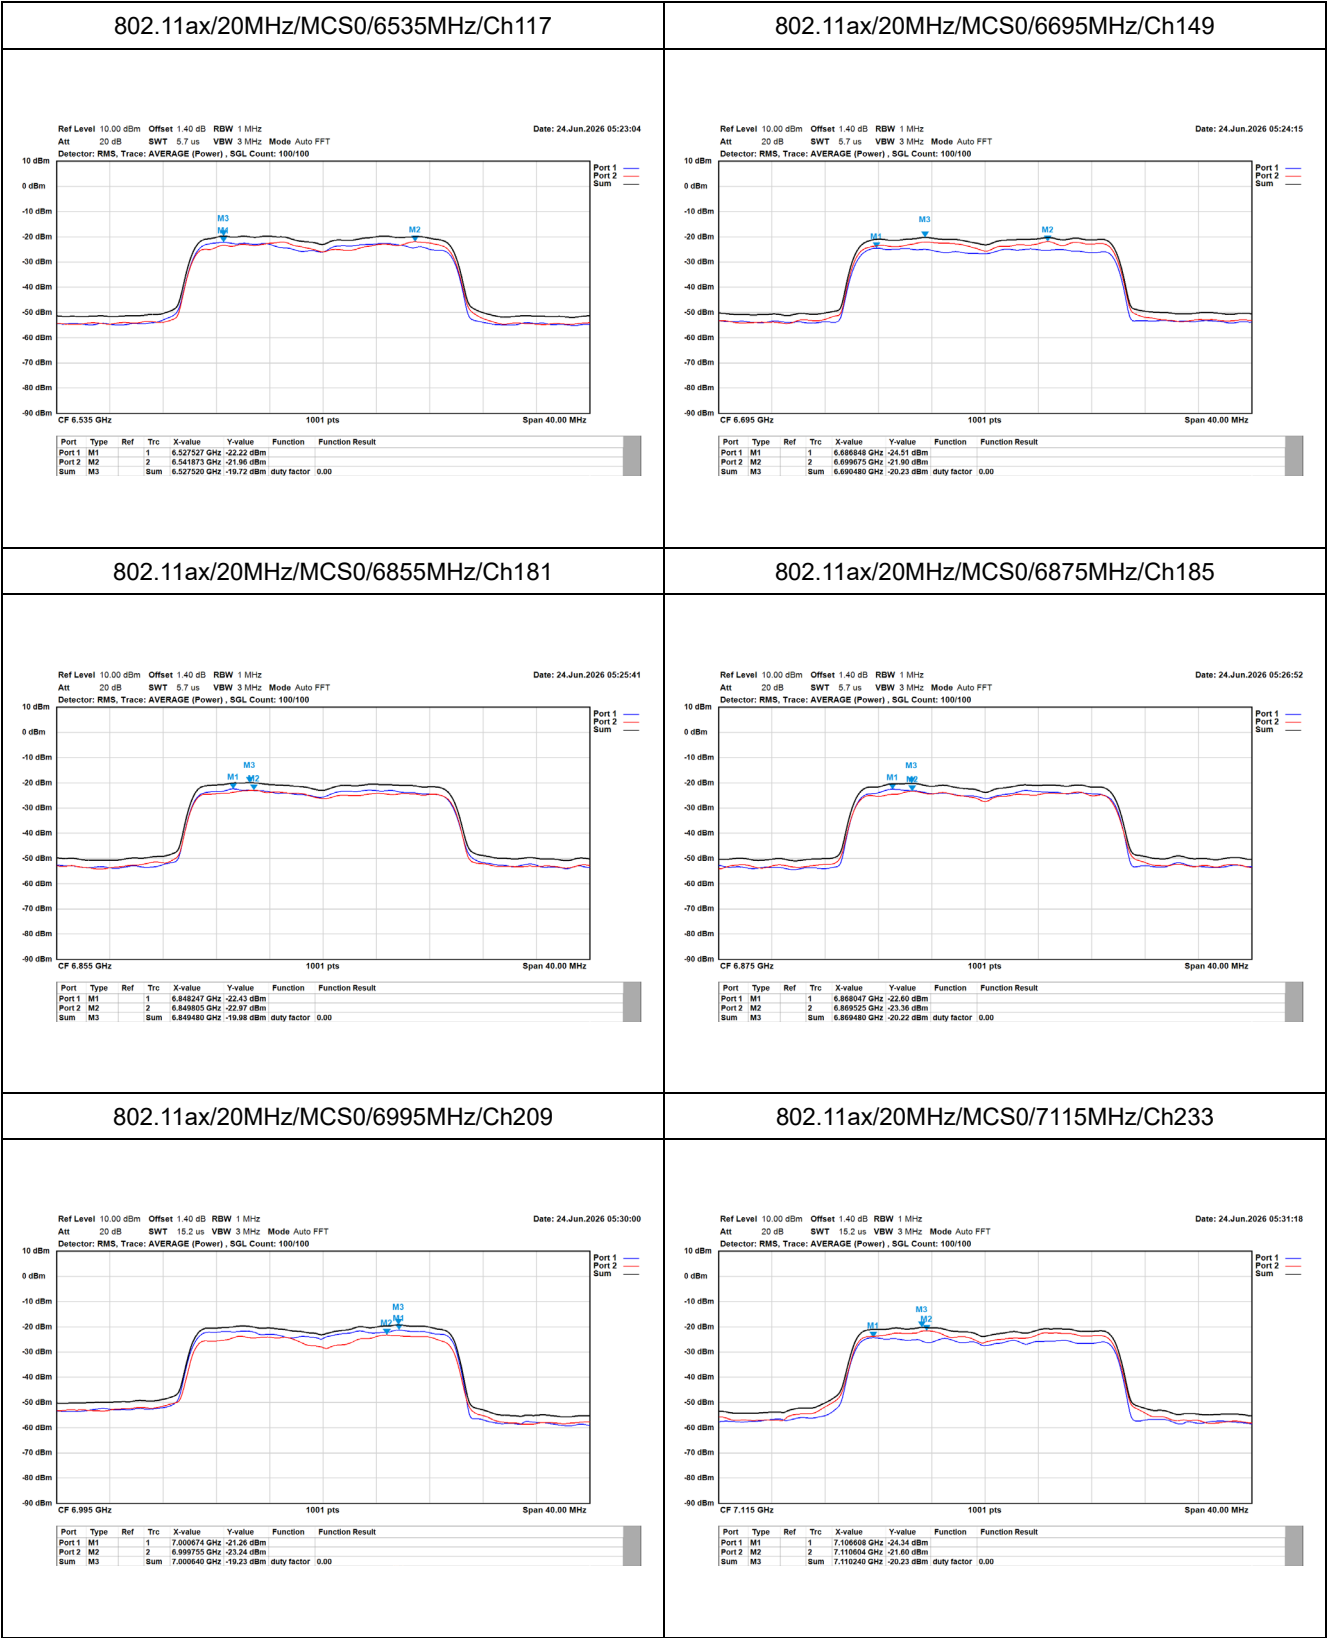


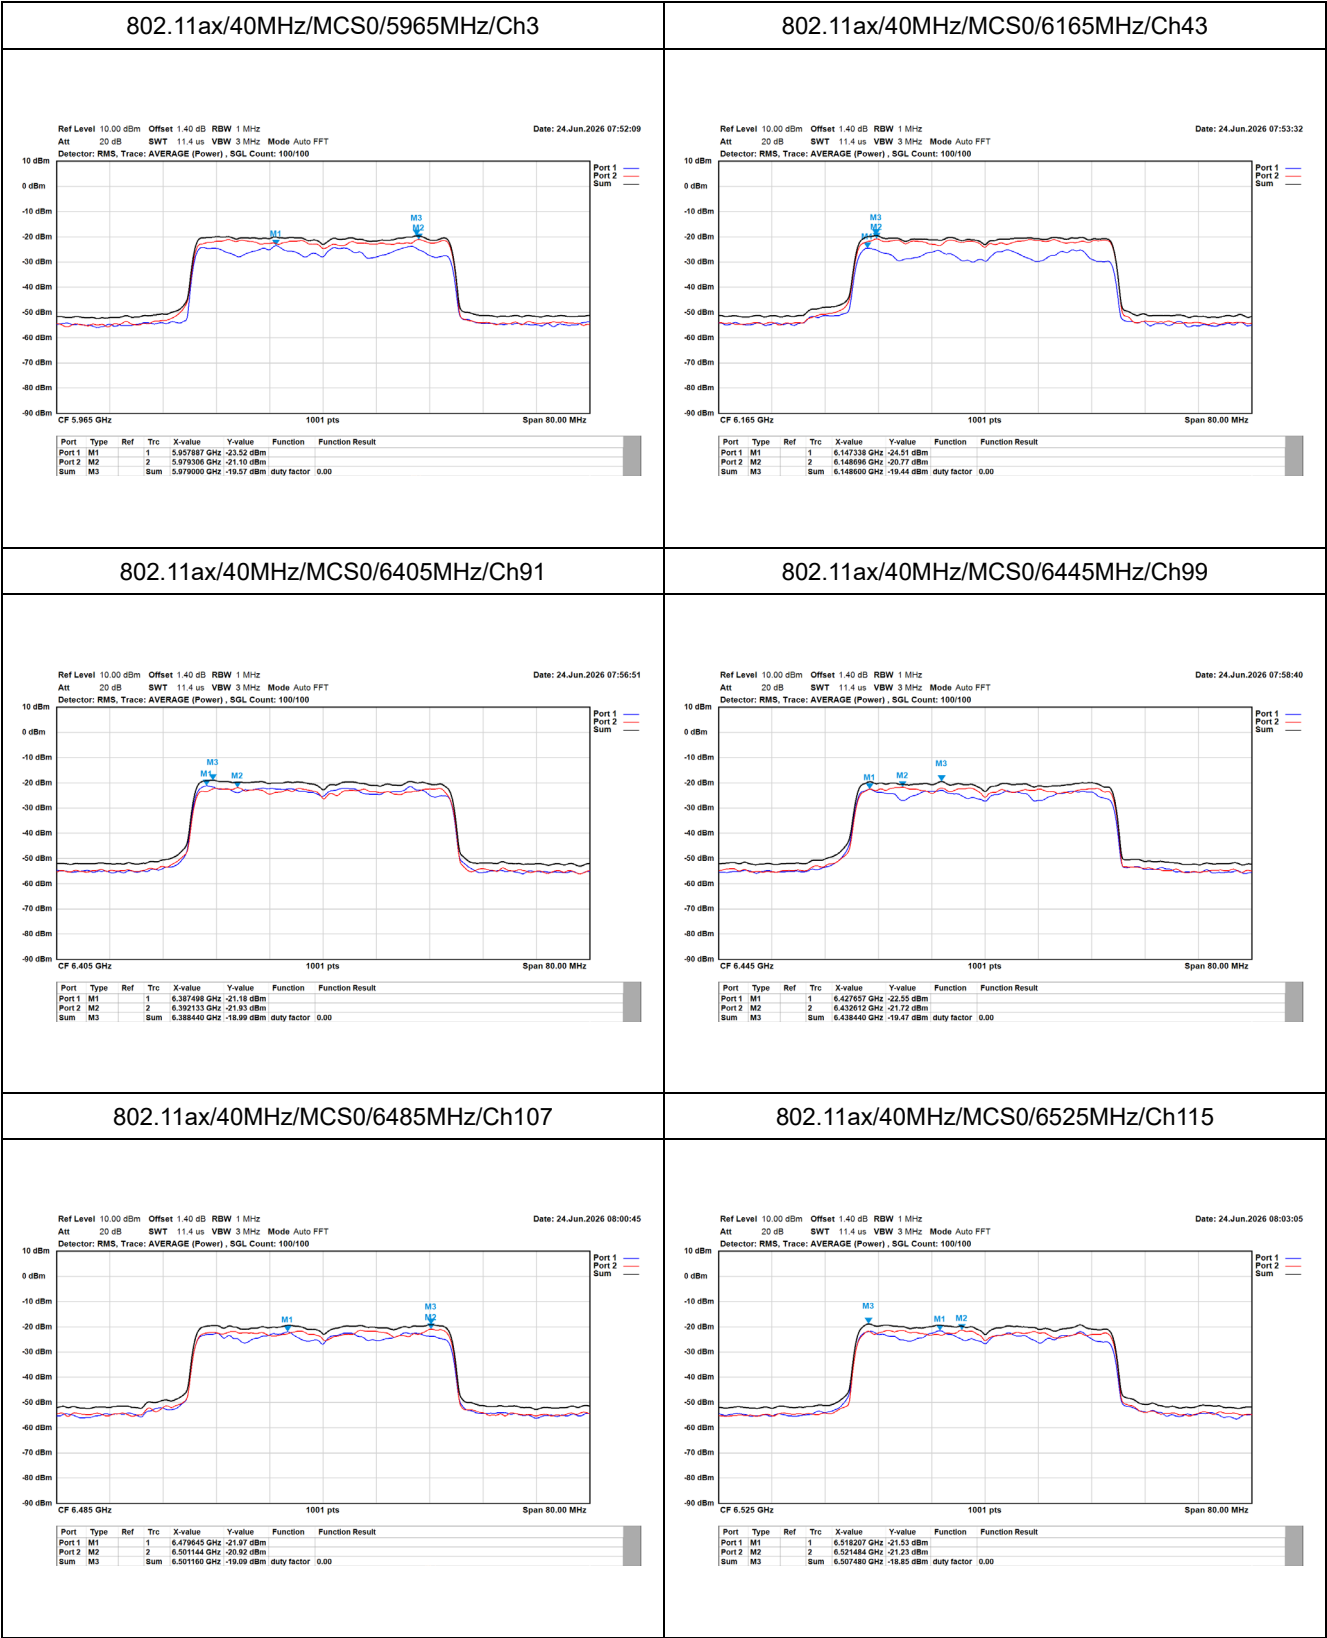

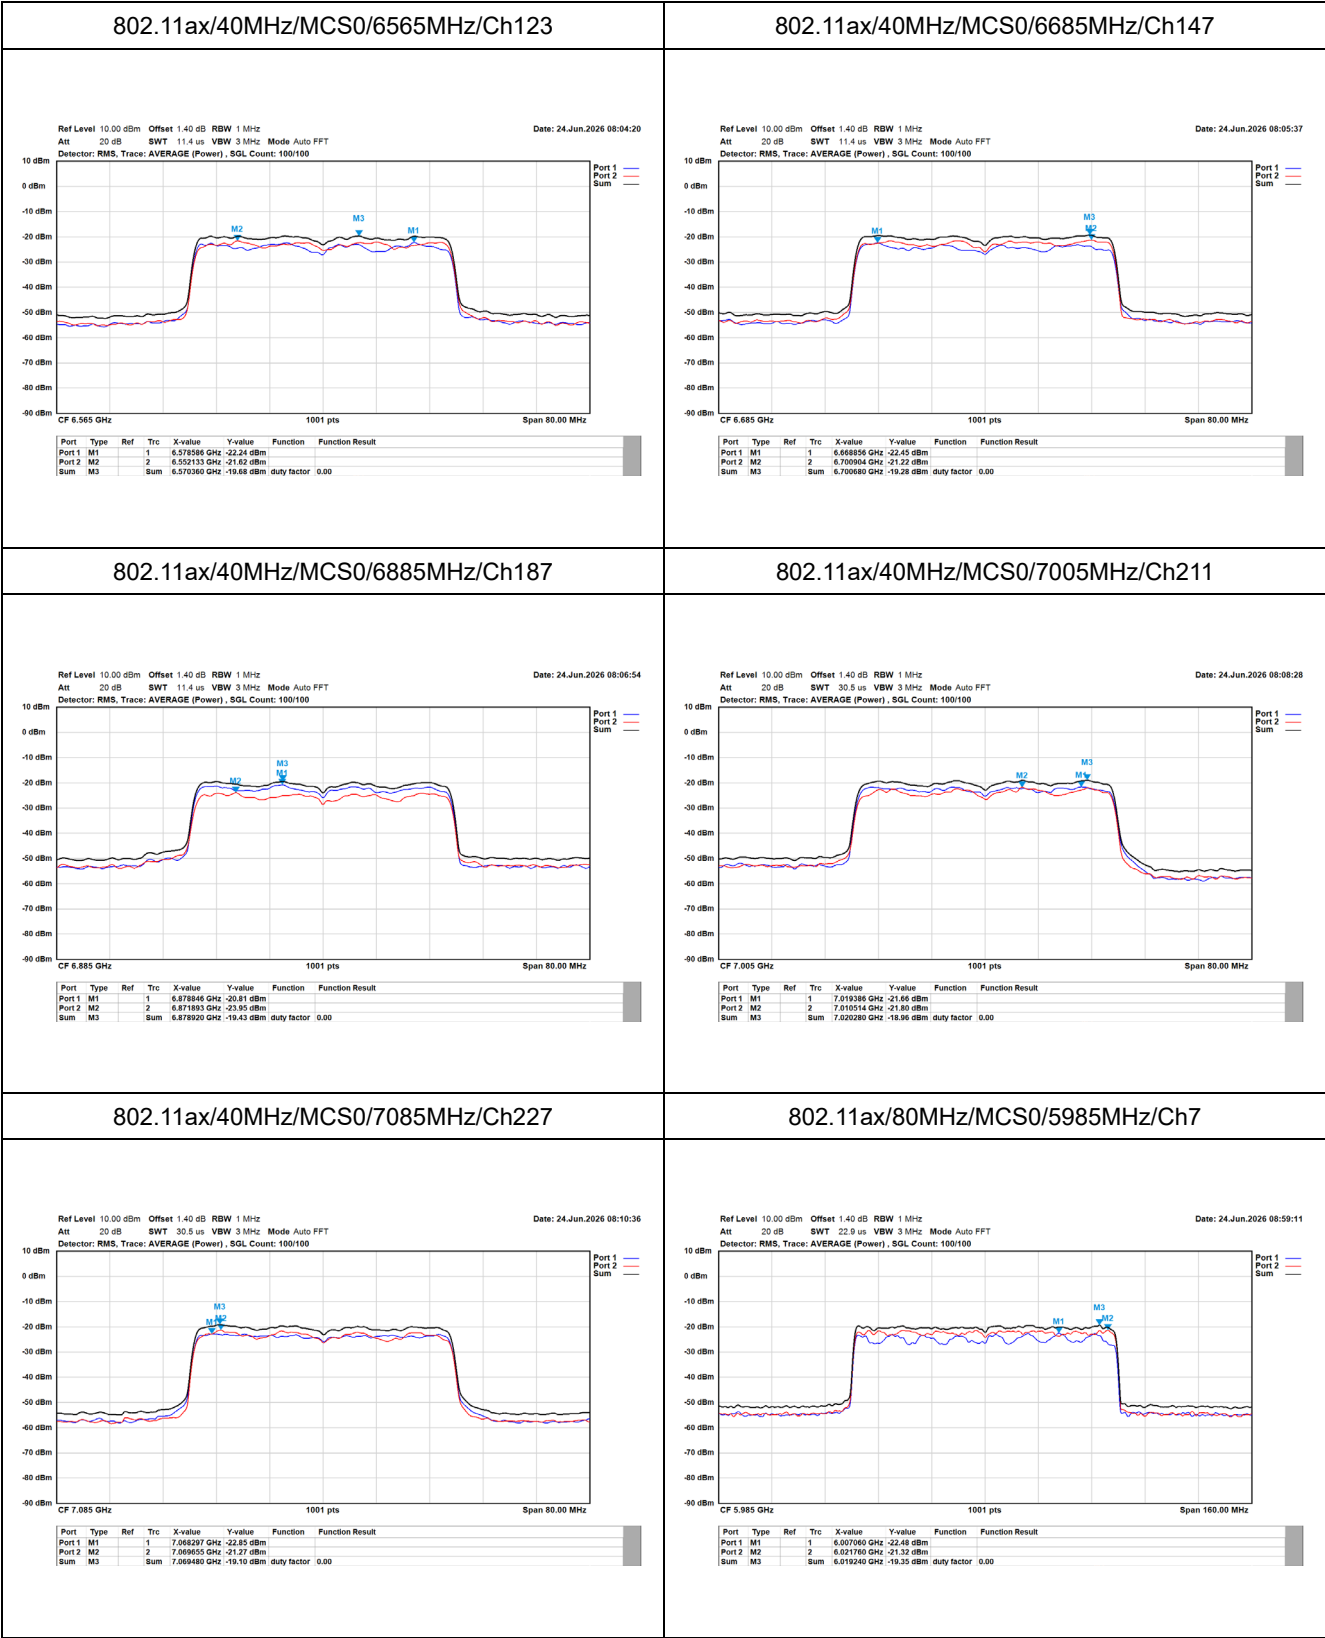

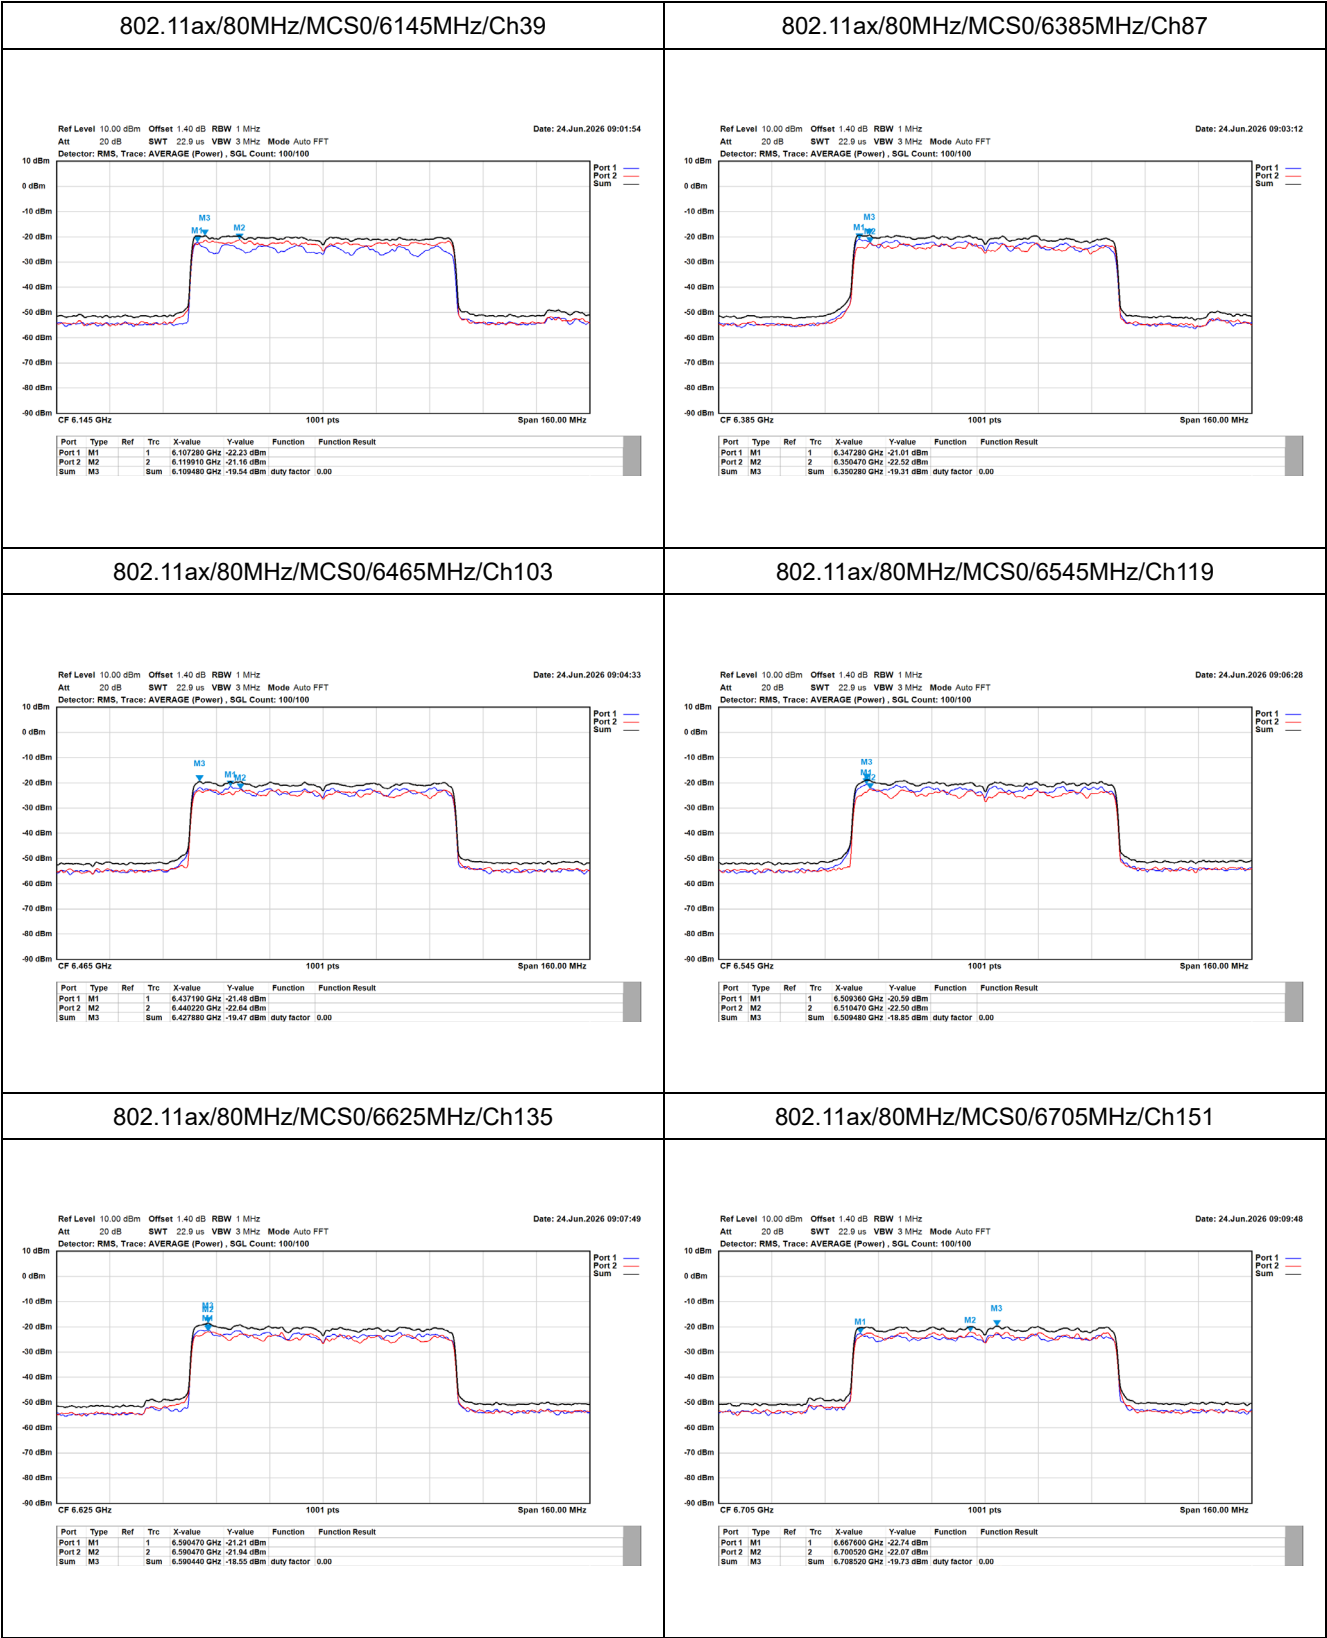

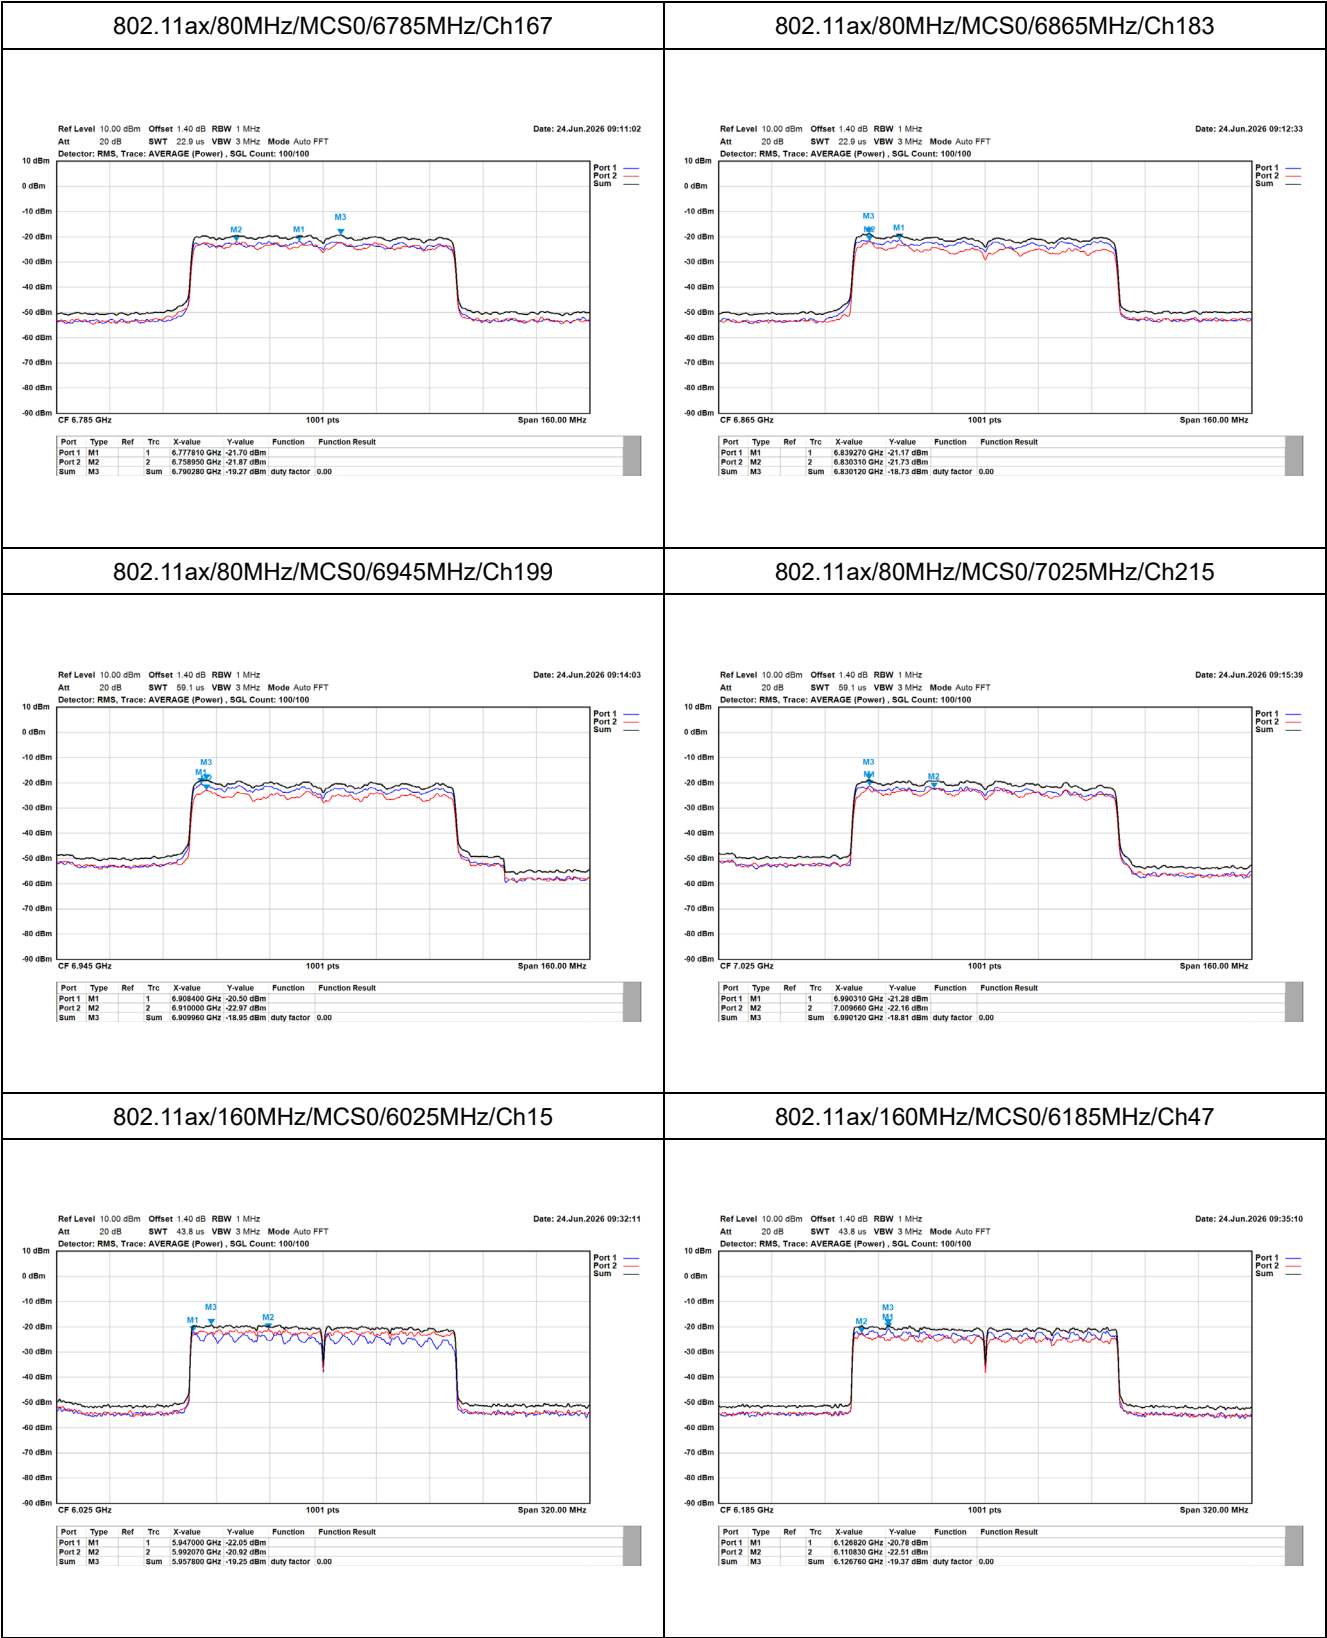

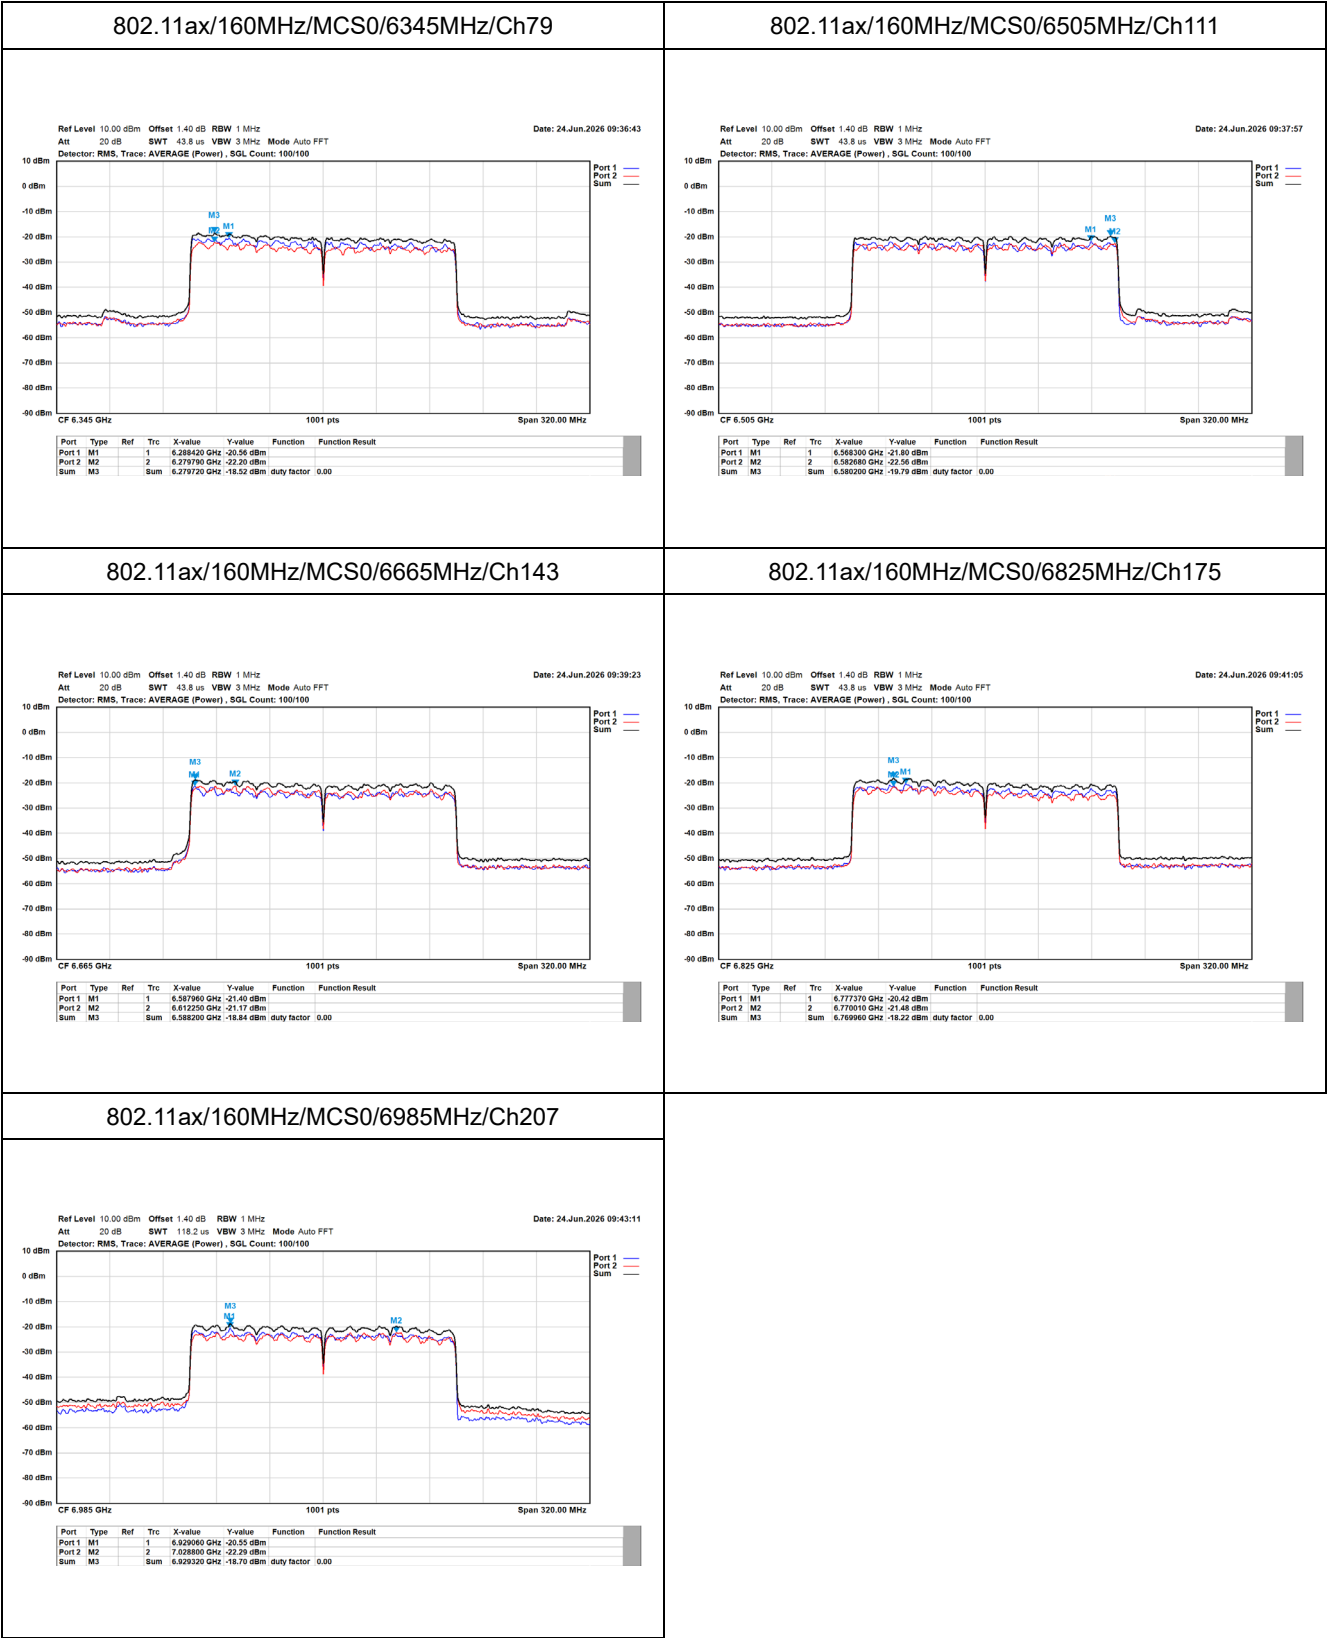

26-tone RU (0)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-24.10	-23.77	-20.93	-15.29	-5.00	Pass
	7115	-29.11	-28.16	-25.60	-21.98	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-30.42	-29.99	-27.13	-21.49	-11.00	Pass
	7115	-35.78	-35.12	-32.43	-28.81	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

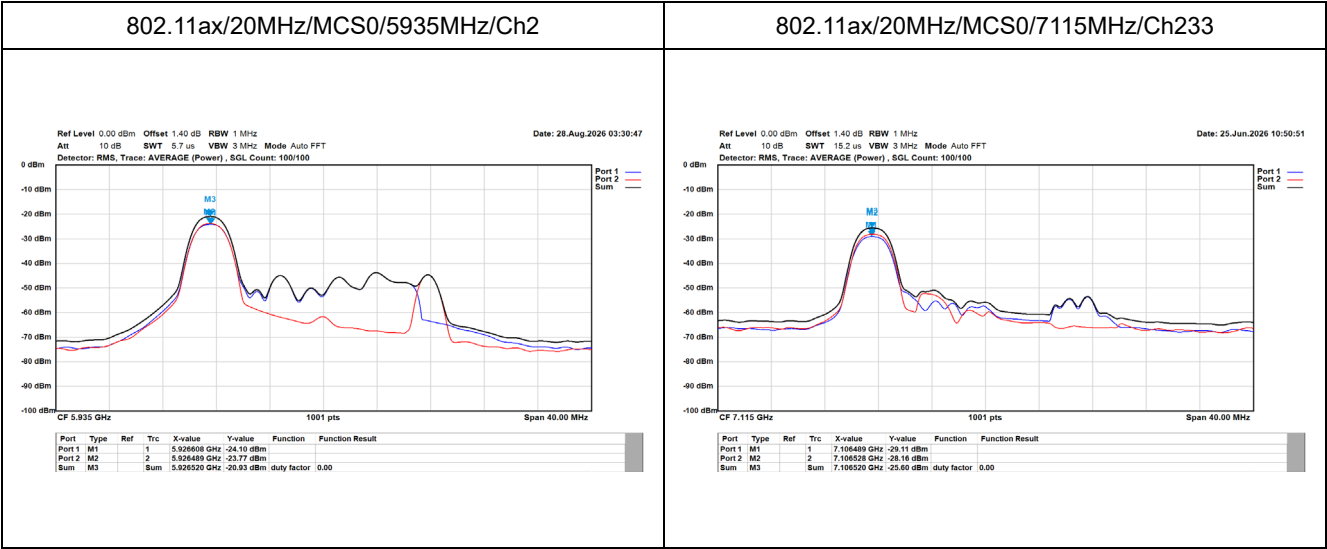

26-tone RU (8)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-22.50	-22.43	-19.48	-13.84	-5.00	Pass
	7115	-29.72	-28.15	-25.93	-22.31	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-29.48	-28.61	-26.01	-20.37	-11.00	Pass
	7115	-36.40	-34.20	-32.15	-28.53	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

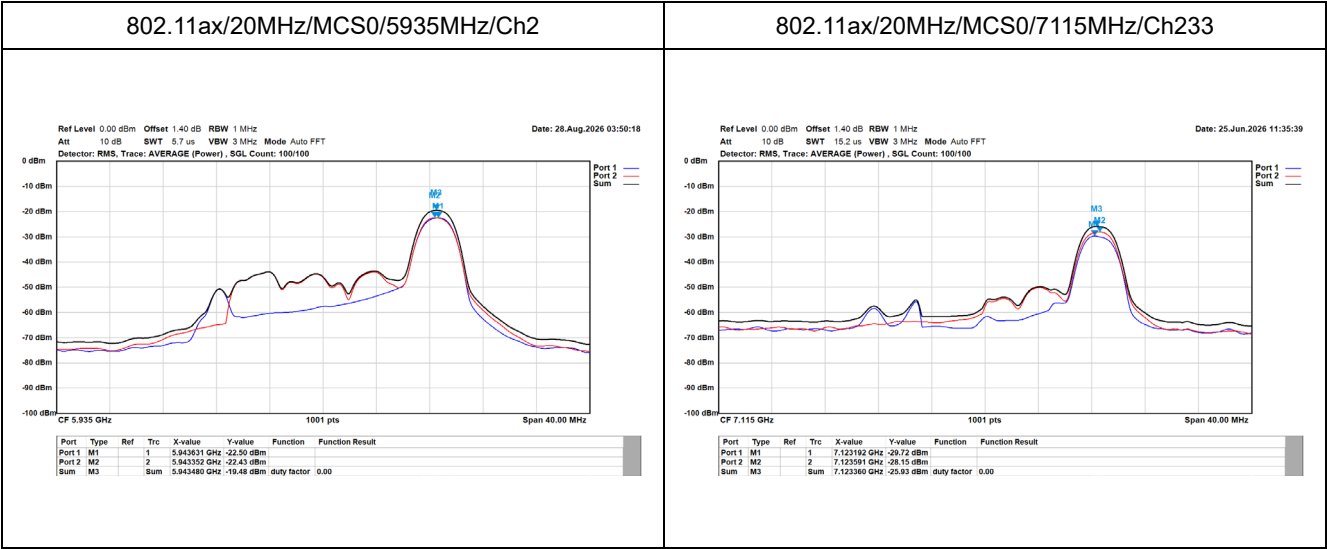

52-tone RU (37)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-22.09	-21.23	-18.76	-13.12	-5.00	Pass
	7115	-19.94	-18.47	-16.30	-12.68	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-28.87	-27.77	-25.27	-19.63	-11.00	Pass
	7115	-26.68	-25.04	-22.77	-19.15	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

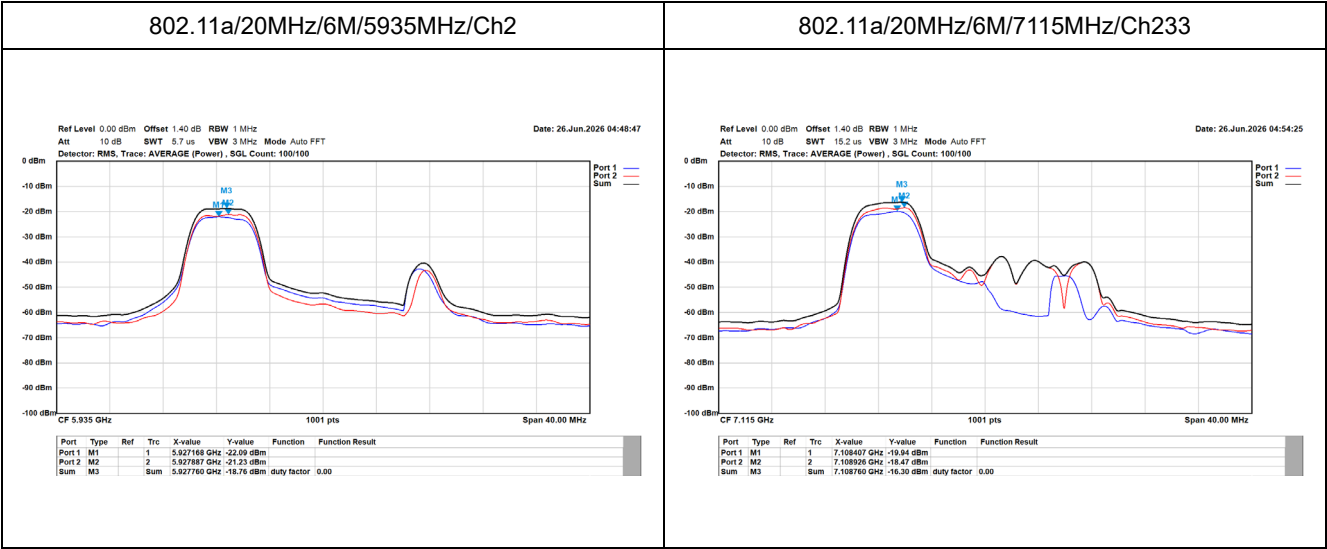

52-tone RU (40)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-24.57	-20.19	-18.90	-13.26	-5.00	Pass
	7115	-21.70	-19.40	-17.42	-13.80	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-31.48	-27.01	-25.68	-20.04	-11.00	Pass
	7115	-28.15	-26.11	-24.00	-20.38	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

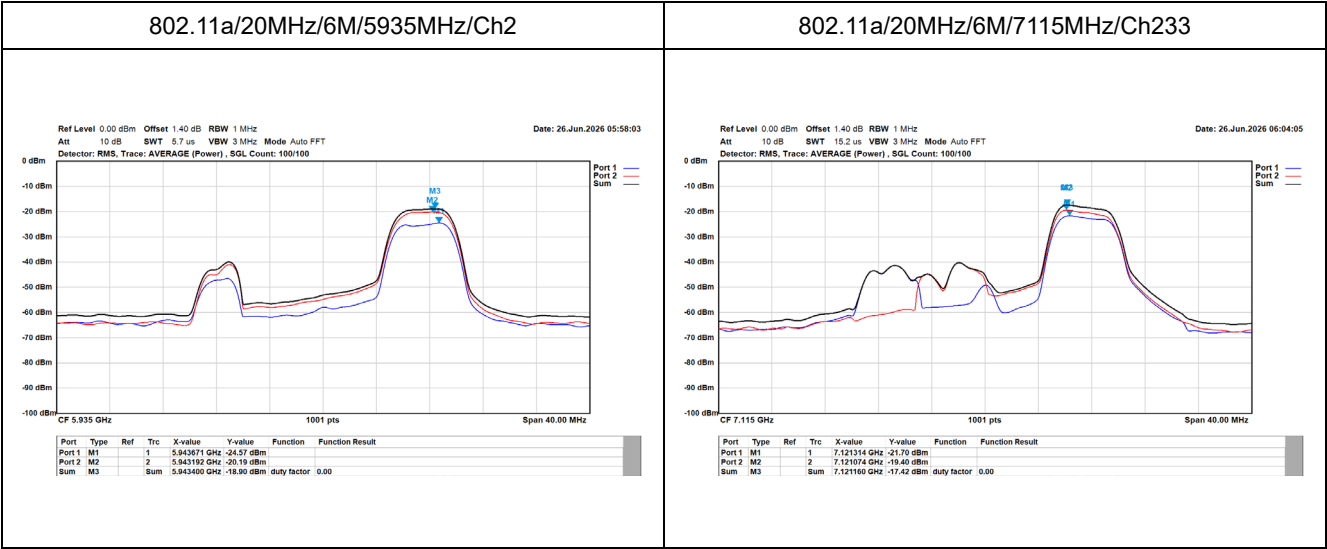

106-tone RU (53)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-22.01	-19.07	-18.00	-12.36	-5.00	Pass
	7115	-20.58	-18.31	-16.35	-12.73	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-28.70	-25.59	-23.86	-18.22	-11.00	Pass
	7115	-27.48	-24.94	-23.02	-19.40	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

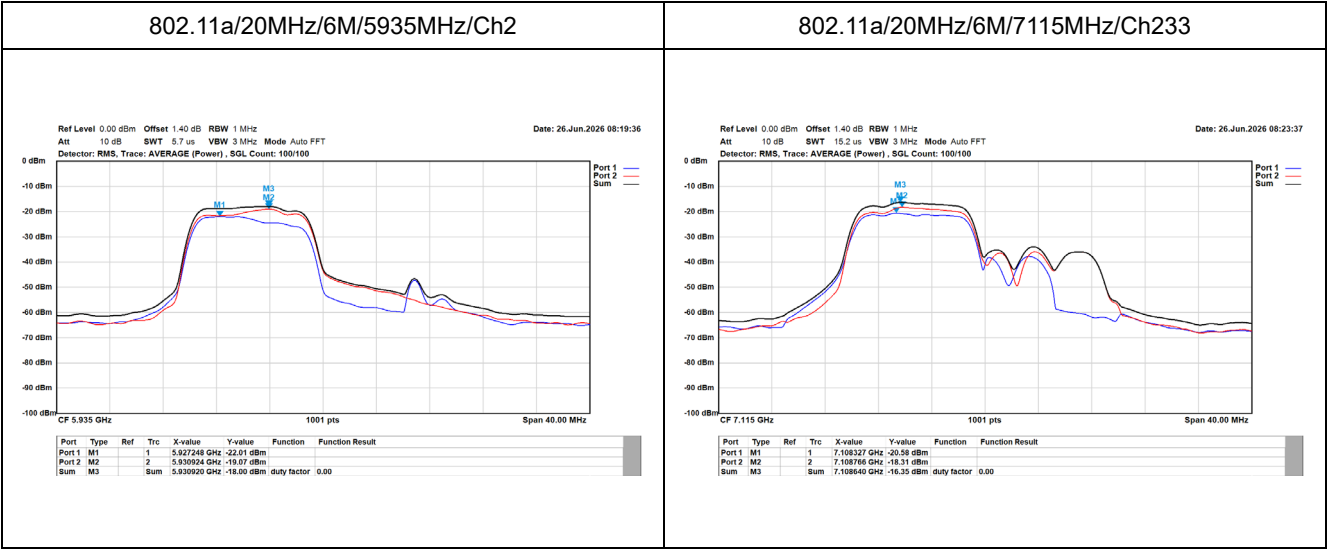

106-tone RU (54)


Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-22.62	-19.30	-18.42	-12.78	-5.00	Pass
	7115	-21.13	-18.38	-16.66	-13.04	-5.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
		Ant. 1	Ant. 2	Total			
802.11ax (20MHz)	5935	-29.11	-25.83	-24.16	-18.52	-11.00	Pass
	7115	-27.92	-25.18	-23.33	-19.71	-11.00	Pass

Note: Trace bin-by-bin of each transmits port summing can be performed maximum power density.

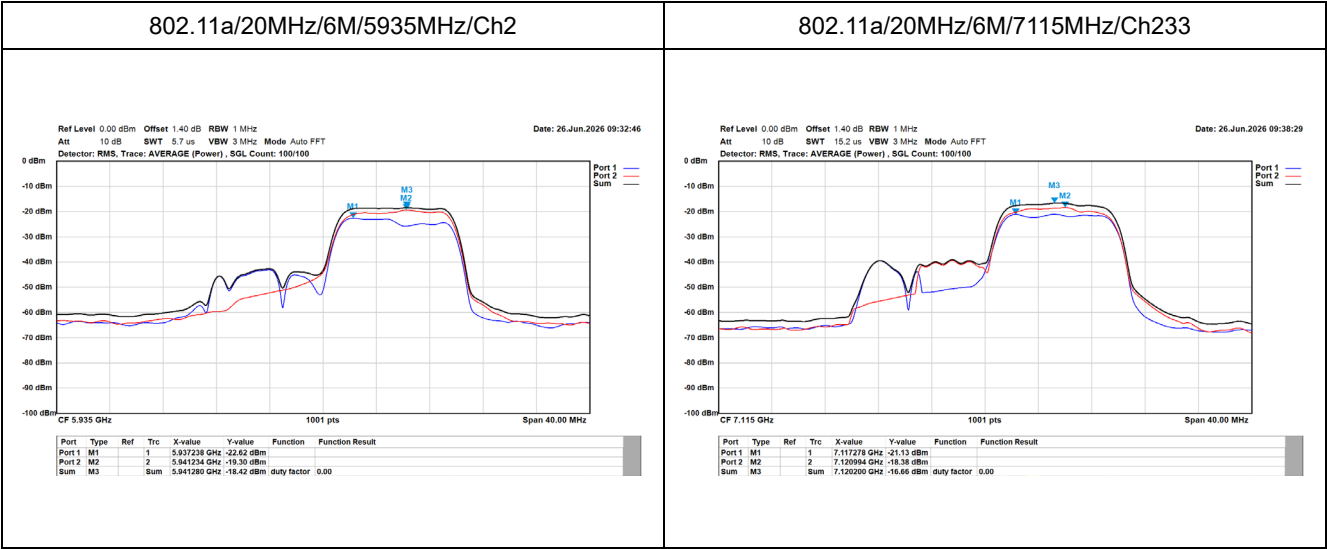

ANT.3 Antenna

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a (20MHz)	5935	-13.27	-10.87	-5.00	Pass
	6175	-10.27	-7.87	-5.00	Pass
	6415	-9.45	-7.05	-5.00	Pass
	6435	-10.52	-8.02	-5.00	Pass
	6475	-10.20	-7.70	-5.00	Pass
	6515	-9.65	-7.15	-5.00	Pass
	6535	-10.17	-7.67	-5.00	Pass
	6695	-9.93	-7.43	-5.00	Pass
	6855	-10.72	-8.22	-5.00	Pass
	6875	-10.96	-7.96	-5.00	Pass
	6995	-10.45	-7.45	-5.00	Pass
	7115	-10.55	-7.55	-5.00	Pass
802.11ax (20MHz)	5935	-14.43	-12.03	-5.00	Pass
	6175	-13.02	-10.62	-5.00	Pass
	6415	-10.90	-8.50	-5.00	Pass
	6435	-12.02	-9.52	-5.00	Pass
	6475	-11.78	-9.28	-5.00	Pass
	6515	-11.74	-9.24	-5.00	Pass
	6535	-12.12	-9.62	-5.00	Pass
	6695	-12.27	-9.77	-5.00	Pass
	6855	-12.28	-9.78	-5.00	Pass
	6875	-12.83	-9.83	-5.00	Pass
	6995	-12.21	-9.21	-5.00	Pass
	7115	-12.77	-9.77	-5.00	Pass
802.11ax (40MHz)	5965	-11.42	-9.02	-5.00	Pass
	6165	-11.55	-9.15	-5.00	Pass
	6405	-12.49	-10.09	-5.00	Pass
	6445	-12.32	-9.82	-5.00	Pass
	6485	-13.03	-10.53	-5.00	Pass
	6525	-13.32	-10.82	-5.00	Pass
	6565	-12.74	-10.24	-5.00	Pass
	6685	-13.55	-11.05	-5.00	Pass
	6885	-15.93	-12.93	-5.00	Pass

	7005	-13.93	-10.93	-5.00	Pass
	7085	-13.51	-10.51	-5.00	Pass
802.11ax (80MHz)	5985	-13.13	-10.73	-5.00	Pass
	6145	-12.39	-9.99	-5.00	Pass
	6385	-12.10	-9.70	-5.00	Pass
	6465	-13.30	-10.80	-5.00	Pass
	6545	-13.48	-10.98	-5.00	Pass
	6625	-12.75	-10.25	-5.00	Pass
	6705	-14.50	-12.00	-5.00	Pass
	6785	-13.79	-11.29	-5.00	Pass
	6865	-13.55	-10.55	-5.00	Pass
	6945	-14.53	-11.53	-5.00	Pass
	7025	-13.78	-10.78	-5.00	Pass
802.11ax (160MHz)	6025	-16.13	-13.73	-5.00	Pass
	6185	-15.95	-13.55	-5.00	Pass
	6345	-13.36	-10.96	-5.00	Pass
	6505	-16.91	-14.41	-5.00	Pass
	6665	-16.09	-13.59	-5.00	Pass
	6825	-16.31	-13.31	-5.00	Pass
	6985	-16.96	-13.96	-5.00	Pass

For TPC

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a (20MHz)	5935	-19.81	-17.41	-11.00	Pass
	6175	-16.30	-13.90	-11.00	Pass
	6415	-15.94	-13.54	-11.00	Pass
	6435	-17.51	-15.01	-11.00	Pass
	6475	-16.63	-14.13	-11.00	Pass
	6515	-16.00	-13.50	-11.00	Pass
	6535	-16.83	-14.33	-11.00	Pass
	6695	-16.13	-13.63	-11.00	Pass
	6855	-17.68	-15.18	-11.00	Pass
	6875	-17.47	-14.47	-11.00	Pass
	6995	-16.83	-13.83	-11.00	Pass
	7115	-16.62	-13.62	-11.00	Pass
802.11ax (20MHz)	5935	-20.66	-18.26	-11.00	Pass
	6175	-19.23	-16.83	-11.00	Pass
	6415	-17.27	-14.87	-11.00	Pass
	6435	-18.76	-16.26	-11.00	Pass
	6475	-18.72	-16.22	-11.00	Pass
	6515	-18.57	-16.07	-11.00	Pass
	6535	-18.16	-15.66	-11.00	Pass
	6695	-18.69	-16.19	-11.00	Pass
	6855	-18.84	-16.34	-11.00	Pass
	6875	-18.99	-15.99	-11.00	Pass
	6995	-18.97	-15.97	-11.00	Pass
	7115	-18.98	-15.98	-11.00	Pass
802.11ax (40MHz)	5965	-18.25	-15.85	-11.00	Pass
	6165	-17.91	-15.51	-11.00	Pass
	6405	-18.74	-16.34	-11.00	Pass
	6445	-18.56	-16.06	-11.00	Pass
	6485	-19.88	-17.38	-11.00	Pass
	6525	-19.75	-17.25	-11.00	Pass
	6565	-19.65	-17.15	-11.00	Pass
	6685	-19.75	-17.25	-11.00	Pass
	6885	-22.61	-19.61	-11.00	Pass
	7005	-20.52	-17.52	-11.00	Pass
	7085	-20.38	-17.38	-11.00	Pass

802.11ax (80MHz)	5985	-20.11	-17.71	-11.00	Pass
	6145	-18.71	-16.31	-11.00	Pass
	6385	-19.04	-16.64	-11.00	Pass
	6465	-19.88	-17.38	-11.00	Pass
	6545	-20.30	-17.80	-11.00	Pass
	6625	-19.70	-17.20	-11.00	Pass
	6705	-20.99	-18.49	-11.00	Pass
	6785	-19.98	-17.48	-11.00	Pass
	6865	-20.54	-17.54	-11.00	Pass
	6945	-20.70	-17.70	-11.00	Pass
	7025	-20.34	-17.34	-11.00	Pass
802.11ax (160MHz)	6025	-23.11	-20.71	-11.00	Pass
	6185	-22.67	-20.27	-11.00	Pass
	6345	-20.15	-17.75	-11.00	Pass
	6505	-23.41	-20.91	-11.00	Pass
	6665	-22.20	-19.70	-11.00	Pass
	6825	-22.95	-19.95	-11.00	Pass
	6985	-23.62	-20.62	-11.00	Pass