


TX_a_6415MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6415MHz
Test BY :Rock

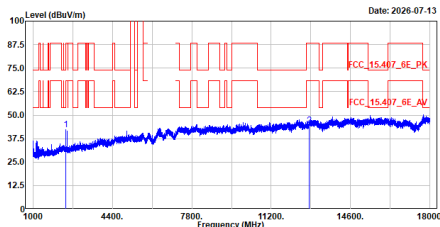


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	42.26	88.22	-45.96	66.01	-23.75	Peak
2	12830.000	44.49	88.22	-43.73	44.29	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6415MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6415MHz
Test BY :Rock

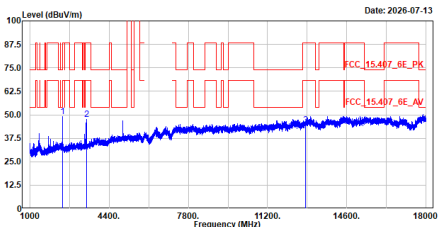


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	43.88	88.22	-44.34	72.84	-23.76	Peak
2	3418.250	47.41	88.22	-40.81	69.05	-21.64	Peak
3	12830.000	44.52	88.22	-43.70	44.32	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6435MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6435MHz
Test BY :Rock

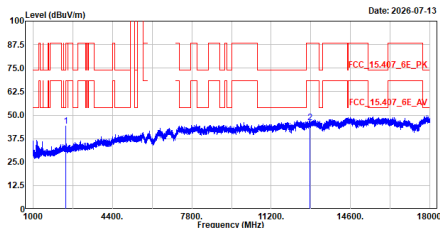


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	43.99	74.00	-30.01	67.74	-23.75	Peak
2	12870.000	46.21	88.22	-42.01	45.90	0.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6435MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6435MHz
Test BY :Rock

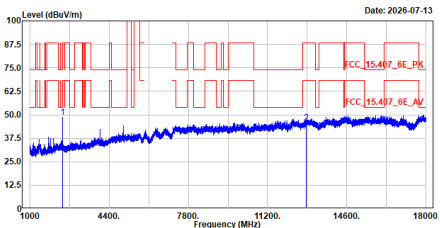


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	48.64	88.22	-39.58	72.40	-23.76	Peak
2	12870.000	45.81	88.22	-42.41	45.50	0.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6475MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6475MHz
Test BY :Rock

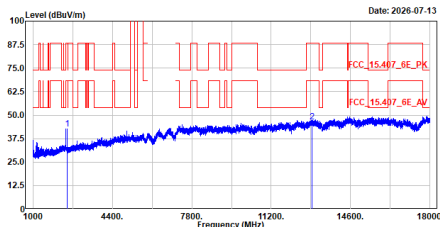


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2453.500	42.54	88.22	-45.68	66.43	-23.89	Peak
2	12950.000	46.27	88.22	-41.95	45.89	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6475MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6475MHz
Test BY :Rock

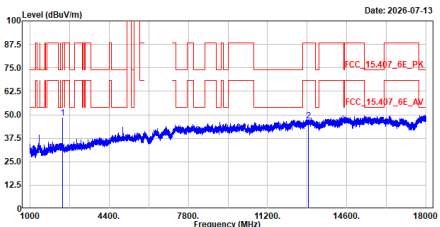


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2397.400	48.47	88.22	-39.75	72.23	-23.76	Peak
2	12950.000	46.85	88.22	-41.37	46.47	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6515MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6515MHz
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2388.900	43.58	88.22	-44.64	67.32	-23.74	Peak
2	13030.000	46.51	88.22	-41.71	46.01	0.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6515MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6515MHz
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	48.46	88.22	-39.76	72.22	-23.76	Peak
2	13030.000	45.41	88.22	-42.81	44.91	0.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6535MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6535MHz
Test BY :Rock

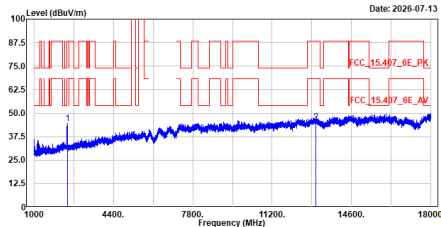


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2420.350	44.67	88.22	-43.55	68.47	-23.80	Peak
2	13070.000	45.15	88.22	-43.07	44.53	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6535MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6535MHz
Test BY :Rock

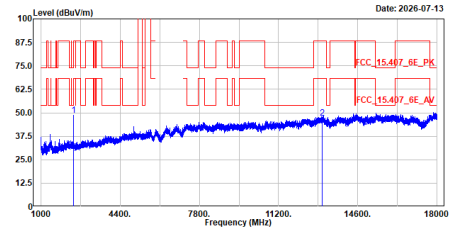


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	48.69	88.22	-39.53	72.45	-23.76	Peak
2	13070.000	47.08	88.22	-41.14	46.46	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6695MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6695MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	42.81	88.22	-45.41	66.57	-23.76	Peak
2	13390.000	44.52	74.00	-29.48	43.84	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6695MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6695MHz
Test BY :Rock

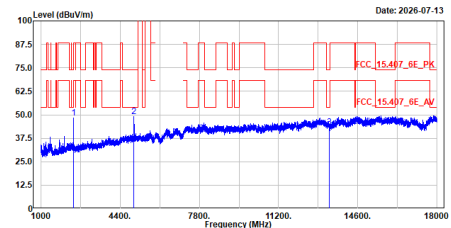


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	48.41	88.22	-39.81	72.16	-23.75	Peak
2	4977.150	49.21	74.00	-24.79	63.38	-14.17	Peak
3	13390.000	43.52	74.00	-30.48	42.84	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6855MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6855MHz
Test BY :Rock

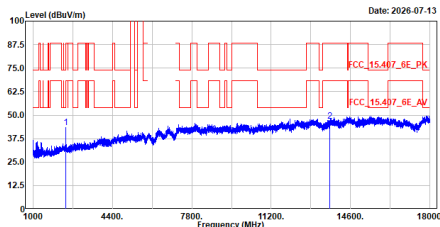


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	43.33	88.22	-44.89	67.08	-23.75	Peak
2	13710.000	46.61	88.22	-41.61	46.29	0.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6855MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6855MHz
Test BY :Rock

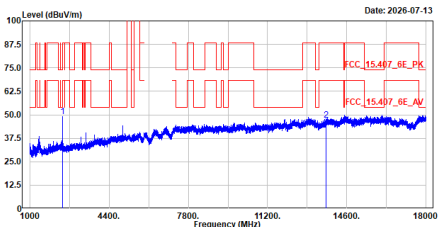


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	49.09	88.22	-39.13	72.85	-23.76	Peak
2	13710.000	47.35	88.22	-40.87	47.03	0.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6875MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6875MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	43.48	74.00	-30.52	67.23	-23.75	Peak
2	13750.000	44.93	88.22	-43.29	44.57	0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6875MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6875MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2395.700	48.08	88.22	-40.14	71.84	-23.76	Peak
2	13750.000	45.89	88.22	-42.33	45.53	0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6995MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_6995MHz
Test BY :Rock

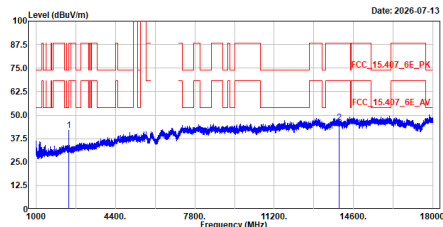


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	41.84	74.00	-32.16	65.58	-23.74	Peak
2	13990.000	46.13	88.22	-42.09	45.49	0.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_6995MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_6995MHz
Test BY :Rock

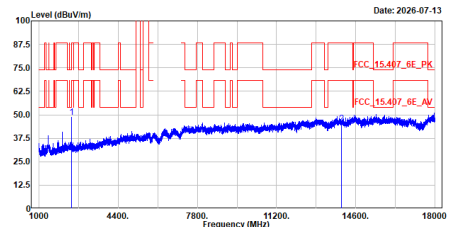


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	48.80	88.22	-39.42	72.56	-23.76	Peak
2	13990.000	45.47	88.22	-42.75	44.83	0.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_7115MHz
Test BY :Rock

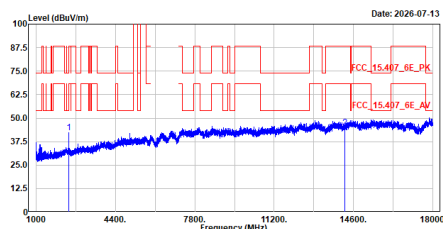


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	42.32	74.00	-31.68	66.07	-23.75	Peak
2	14230.000	44.78	88.22	-43.44	44.06	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_7115MHz
Test BY :Rock

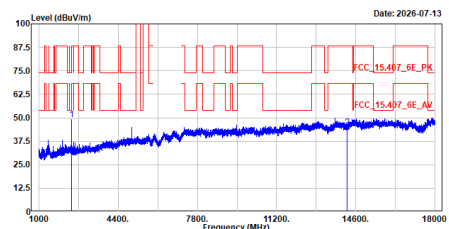


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	48.89	88.22	-39.33	72.64	-23.75	Peak
2	14230.000	44.90	88.22	-43.32	44.18	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz
Test BY :Rock

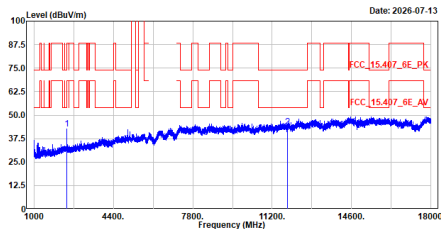


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	42.51	88.22	-45.71	66.27	-23.76	Peak
2	11870.000	43.59	74.00	-30.41	45.10	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz
Test BY :Rock

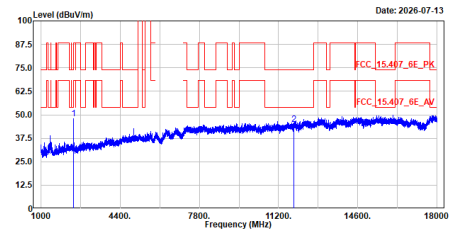


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	48.03	88.22	-40.19	71.78	-23.75	Peak
2	11870.000	44.83	74.00	-29.17	46.34	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6175MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6175MHz
Test BY :Rock

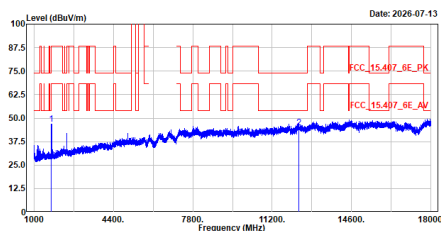


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1739.500	46.94	88.22	-41.28	72.36	-25.42	Peak
2	12350.000	45.00	74.00	-29.00	45.57	-0.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6175MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6175MHz
Test BY :Rock

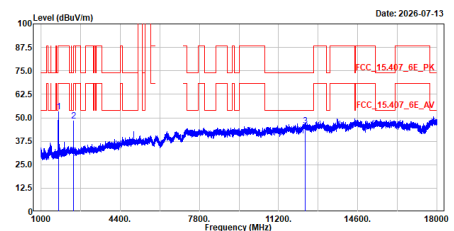


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1745.450	53.36	88.22	-34.86	78.74	-25.38	Peak
2	2393.150	48.45	88.22	-39.77	72.21	-23.76	Peak
3	12350.000	45.60	74.00	-28.40	46.17	-0.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6415MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6415MHz
Test BY :Rock

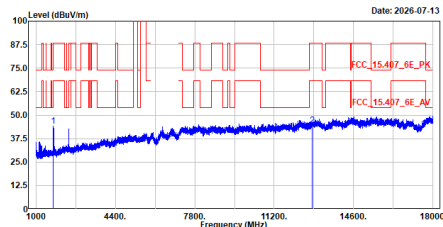


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1739.500	44.27	88.22	-43.95	69.69	-25.42	Peak
2	12830.000	44.49	88.22	-43.73	44.29	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6415MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6415MHz
Test BY :Rock

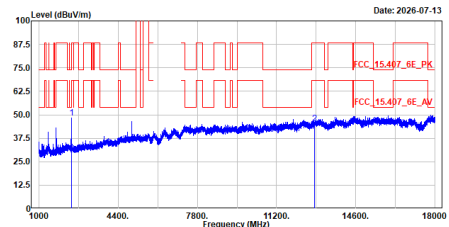


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	48.14	88.22	-40.08	71.89	-23.75	Peak
2	12830.000	45.12	88.22	-43.10	44.92	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6435MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6435MHz
Test BY :Rock

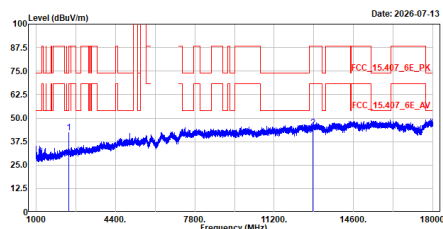


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	42.10	88.22	-46.12	65.85	-23.75	Peak
2	12870.000	44.73	88.22	-43.49	44.42	0.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6435MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6435MHz
Test BY :Rock

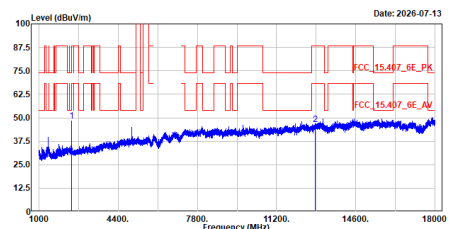


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	48.14	88.22	-40.08	71.90	-23.76	Peak
2	12870.000	46.56	88.22	-41.66	46.25	0.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6475MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6475MHz
Test BY :Rock

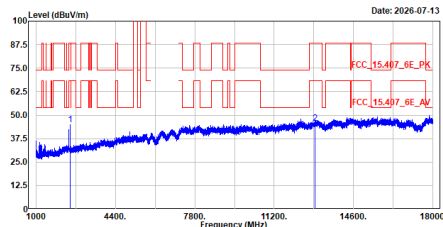


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2450.950	44.75	88.22	-43.47	68.67	-23.92	Peak
2	12950.000	45.64	88.22	-42.58	45.26	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6475MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6475MHz
Test BY :Rock

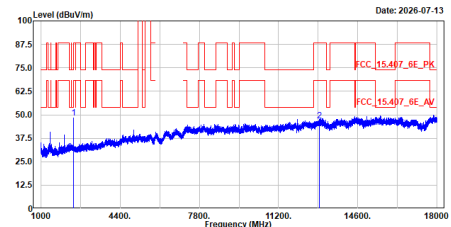


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	48.38	74.00	-25.62	72.12	-23.74	Peak
2	12950.000	46.71	88.22	-41.51	46.33	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6515MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6515MHz
Test BY :Rock

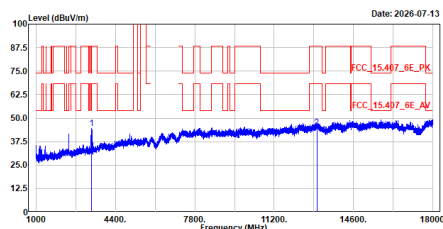


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3357.900	44.40	74.00	-29.60	66.22	-21.82	Peak
2	13030.000	44.82	88.22	-43.40	44.32	0.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6515MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6515MHz
Test BY :Rock

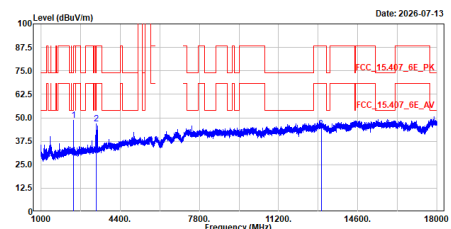


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	48.53	88.22	-39.69	72.28	-23.75	Peak
2	3357.050	46.63	74.00	-27.37	68.46	-21.83	Peak
3	13030.000	44.31	88.22	-43.91	43.81	0.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6535MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6535MHz
Test BY :Rock

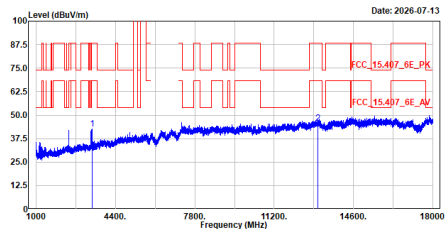


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3396.150	42.51	88.22	-45.71	64.24	-21.73	Peak
2	13070.000	45.61	88.22	-42.61	44.99	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6535MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6535MHz
Test BY :Rock

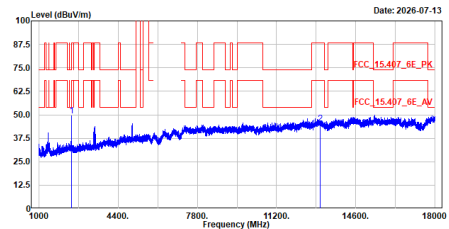


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	49.28	74.00	-24.72	73.03	-23.75	Peak
2	13070.000	45.34	88.22	-42.88	44.72	0.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6695MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6695MHz
Test BY :Rock

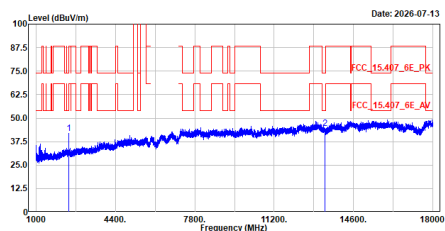


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	41.75	88.22	-46.47	65.50	-23.75	Peak
2	13390.000	44.37	74.00	-29.63	43.69	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6695MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6695MHz
Test BY :Rock

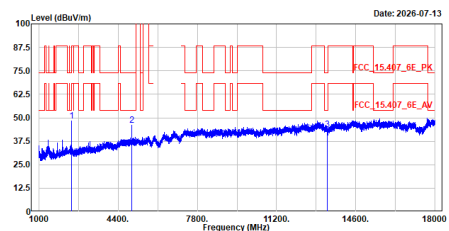


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	48.43	88.22	-39.79	72.18	-23.75	Peak
2	4993.300	46.13	74.00	-27.87	60.23	-14.10	Peak
3	13390.000	43.69	74.00	-30.31	43.01	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6855MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6855MHz
Test BY :Rock

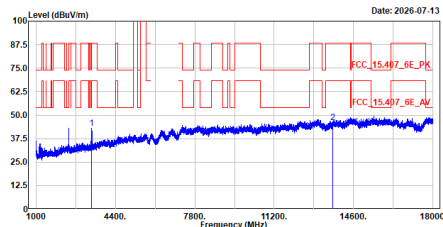


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3376.600	43.14	88.22	-45.08	64.92	-21.78	Peak
2	13710.000	46.13	88.22	-42.09	45.81	0.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6855MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6855MHz
Test BY :Rock

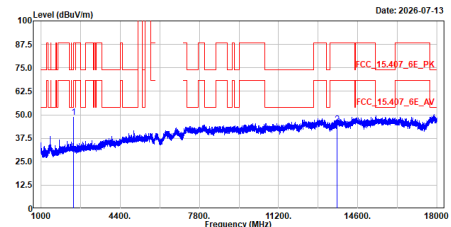


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	48.73	74.00	-25.27	72.48	-23.75	Peak
2	13710.000	45.08	88.22	-43.14	44.76	0.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6875MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6875MHz
Test BY :Rock

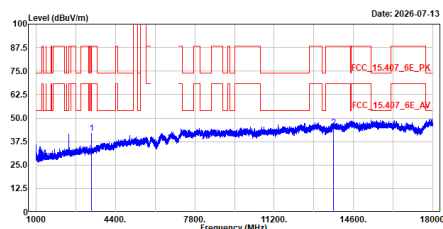


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	3361.300	41.98	88.22	-46.24	63.80	-21.82	Peak
2	13750.000	44.88	88.22	-43.34	44.52	0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6875MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6875MHz
Test BY :Rock

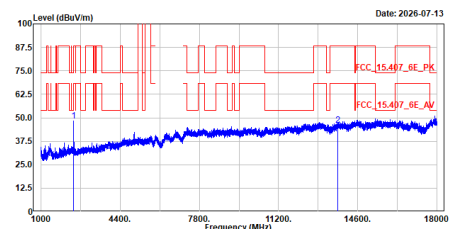


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	48.26	74.00	-25.74	72.01	-23.75	Peak
2	13750.000	45.93	88.22	-42.29	45.57	0.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6995MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_6995MHz
Test BY :Rock

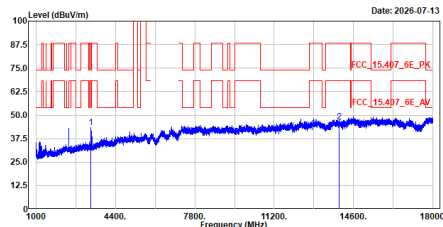


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3343.450	43.50	88.22	-44.72	65.36	-21.86	Peak
2	13990.000	46.44	88.22	-41.78	45.80	0.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_6995MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_6995MHz
Test BY :Rock

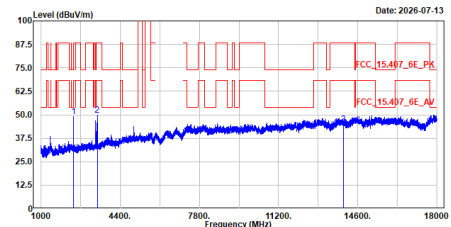


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	48.97	88.22	-39.25	72.72	-23.75	Peak
2	3414.000	49.66	88.22	-38.56	71.32	-21.66	Peak
3	13990.000	44.90	88.22	-43.32	44.26	0.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz
Test BY :Rock

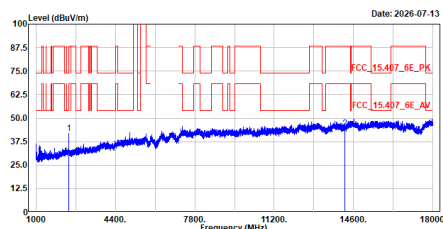


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2396.550	42.04	88.22	-46.18	65.80	-23.76	Peak
2	14230.000	44.52	88.22	-43.70	43.80	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz
Test BY :Rock

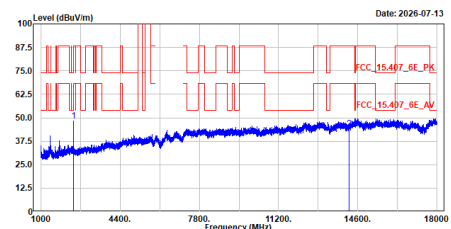


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	48.39	88.22	-39.83	72.14	-23.75	Peak
2	14230.000	44.18	88.22	-44.04	43.46	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5965MHz
Test BY :Rock

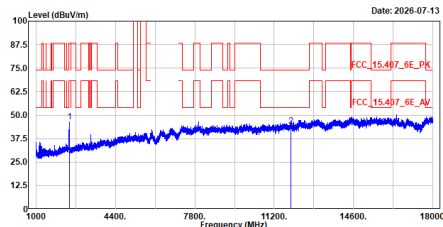


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2453.100	46.34	88.22	-41.88	70.18	-23.84	Peak
2	11930.000	44.24	74.00	-29.76	45.78	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5965MHz
Test BY :Rock

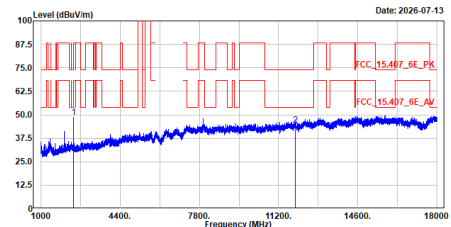


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	48.60	88.22	-39.62	72.35	-23.75	Peak
2	11930.000	44.70	74.00	-29.30	46.24	-1.54	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6165MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6165MHz
Test BY :Rock

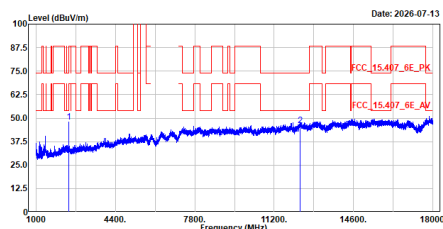


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	47.98	74.00	-26.02	71.73	-23.75	Peak
2	12330.000	46.00	74.00	-28.00	46.43	-0.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6165MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6165MHz
Test BY :Rock

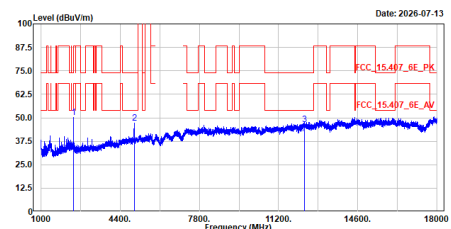


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	50.20	88.22	-38.02	73.96	-23.76	Peak
2	4990.400	47.23	74.00	-26.77	61.31	-14.00	Peak
3	12330.000	46.31	74.00	-27.69	46.74	-0.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6405MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6405MHz
Test BY :Rock

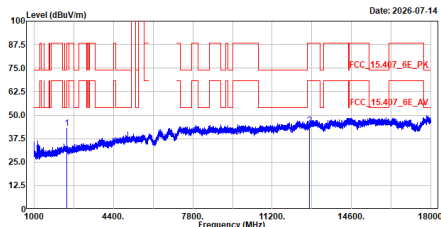


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	42.93	88.22	-45.29	66.68	-23.75	Peak
2	12810.000	44.48	88.22	-43.74	44.33	0.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6405MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6405MHz
Test BY :Rock

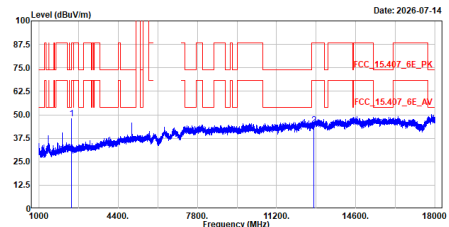


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	47.99	88.22	-40.23	71.74	-23.75	Peak
2	12810.000	44.67	88.22	-43.55	44.52	0.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6445MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6445MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.150	43.43	88.22	-44.79	67.27	-23.84	Peak
2	12890.000	45.24	88.22	-42.98	44.89	0.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6445MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6445MHz
Test BY :Rock

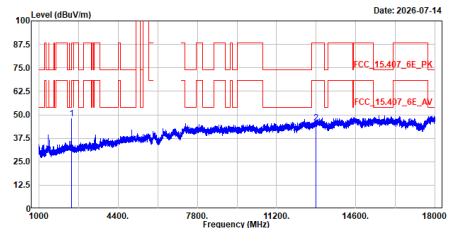


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	47.79	88.22	-40.43	71.55	-23.76	Peak
2	12890.000	45.68	88.22	-42.54	45.33	0.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6485MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6485MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	42.05	74.00	-31.95	65.79	-23.74	Peak
2	12970.000	45.38	88.22	-42.84	44.99	0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6485MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6485MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	48.07	88.22	-40.15	71.82	-23.75	Peak
2	12970.000	46.01	88.22	-42.21	45.62	0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6525MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6525MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	41.83	74.00	-32.17	65.57	-23.74	Peak
2	13050.000	44.99	88.22	-43.23	44.44	0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6525MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6525MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	49.08	88.22	-39.14	72.83	-23.75	Peak
2	13050.000	46.64	88.22	-41.58	46.09	0.55	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6565MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6565MHz
Test BY :Rock

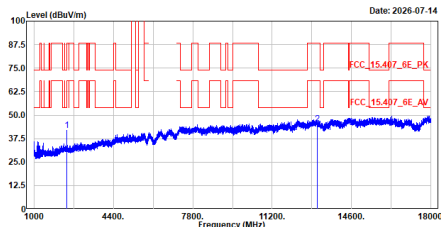


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	41.91	88.22	-46.31	65.66	-23.75	Peak
2	13130.000	45.11	88.22	-43.11	44.60	0.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6565MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6565MHz
Test BY :Rock

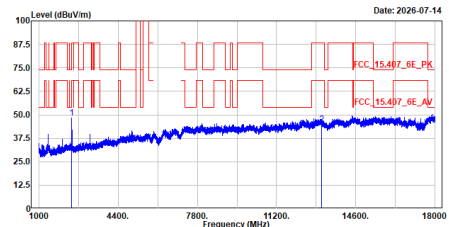


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	48.34	88.22	-39.88	72.10	-23.76	Peak
2	13130.000	44.83	88.22	-43.39	44.32	0.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6685MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6685MHz
Test BY :Rock

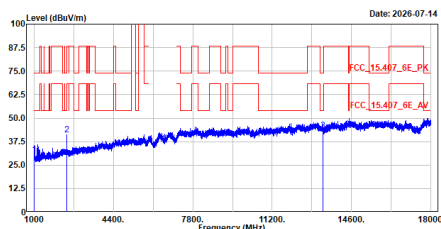


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1000.000	30.47	74.00	-43.53	56.32	-25.85	Peak
2	2394.000	41.08	88.22	-47.14	64.84	-23.76	Peak
3	13370.000	43.27	74.00	-30.73	42.50	0.77	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6685MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6685MHz
Test BY :Rock

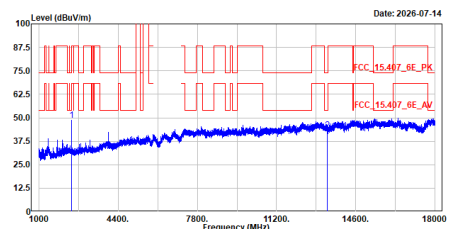


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	48.59	88.22	-39.63	72.35	-23.76	Peak
2	13370.000	43.44	74.00	-30.56	42.67	0.77	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6885MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_6885MHz
Test BY :Rock

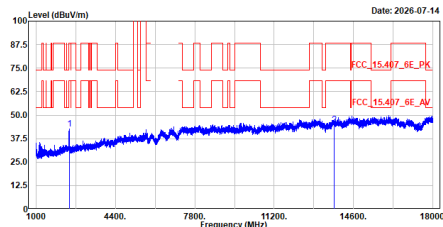


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2429.700	42.48	88.22	-45.74	66.28	-23.80	Peak
2	13770.000	44.96	88.22	-43.26	44.63	0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_6885MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_6885MHz
Test BY :Rock

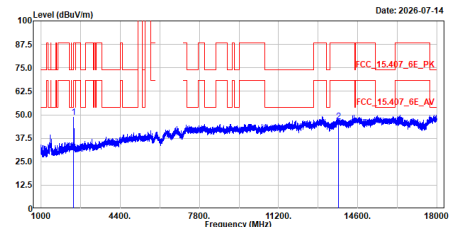


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2388.900	48.51	74.00	-25.49	72.25	-23.74	Peak
2	13770.000	46.43	88.22	-41.79	46.10	0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7005MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7005MHz
Test BY :Rock

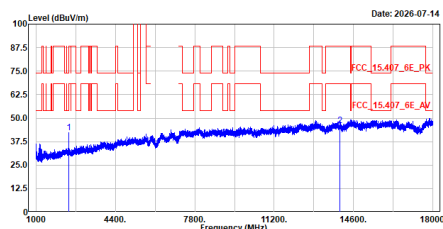


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	42.36	74.00	-31.64	66.11	-23.75	Peak
2	14010.000	45.95	88.22	-42.27	45.27	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7005MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7005MHz
Test BY :Rock

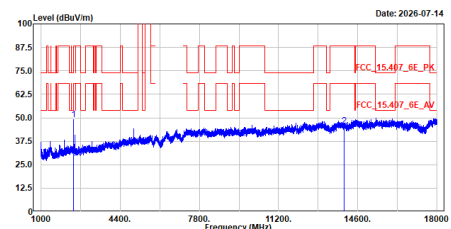


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	48.92	88.22	-39.30	72.67	-23.75	Peak
2	14010.000	45.59	88.22	-42.63	44.91	0.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7085MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	41.84	74.00	-32.16	65.58	-23.74	Peak
2	14170.000	45.02	88.22	-43.20	44.31	0.71	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7085MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	48.67	88.22	-39.55	72.43	-23.76	Peak
2	4988.200	45.84	74.00	-28.16	59.56	-14.12	Peak
3	14170.000	44.92	88.22	-43.30	44.21	0.71	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5985MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_5985MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	48.70	88.22	-47.52	64.46	-23.76	Peak
2	11970.000	43.23	74.00	-30.77	44.85	-1.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5985MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_5985MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	48.37	88.22	-39.85	72.13	-23.76	Peak
2	11970.000	43.01	74.00	-30.99	44.63	-1.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6145MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6145MHz
Test BY :Rock

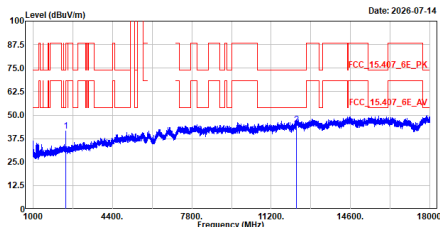


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	41.52	88.22	-46.70	65.27	-23.75	Peak
2	12290.000	44.84	74.00	-29.16	45.18	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6145MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6145MHz
Test BY :Rock

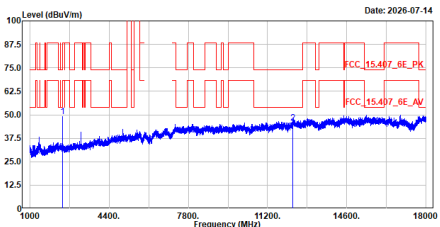


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	49.84	74.00	-24.96	72.79	-23.75	Peak
2	12290.000	45.58	74.00	-28.42	45.92	-0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6385MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6385MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	43.00	74.00	-31.00	66.75	-23.75	Peak
2	12770.000	45.70	88.22	-42.52	45.50	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6385MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6385MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	49.26	74.00	-24.74	73.00	-23.74	Peak
2	12770.000	43.78	88.22	-44.44	43.58	0.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6465MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6465MHz
Test BY :Rock

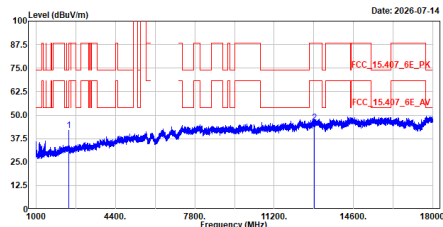


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	41.88	88.22	-46.34	65.64	-23.76	Peak
2	12930.000	45.07	88.22	-42.35	45.49	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6465MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6465MHz
Test BY :Rock

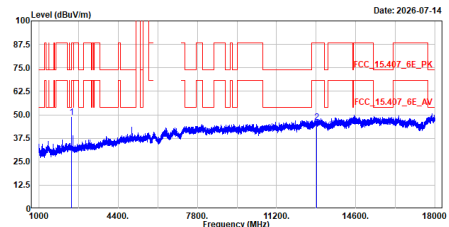


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	48.61	88.22	-39.61	72.36	-23.75	Peak
2	12930.000	46.02	88.22	-42.20	45.64	0.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6545MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6545MHz
Test BY :Rock

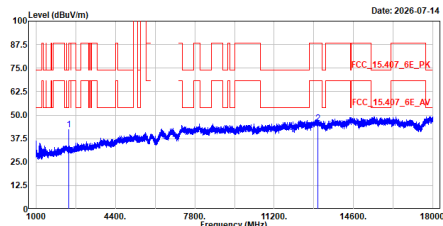


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	42.22	88.22	-46.00	65.98	-23.76	Peak
2	13090.000	45.54	88.22	-42.68	44.93	0.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6545MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6545MHz
Test BY :Rock

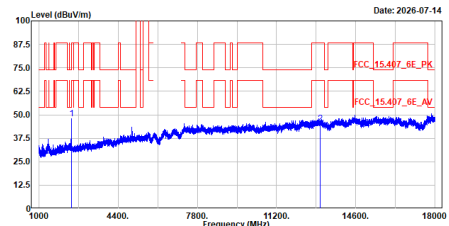


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	48.04	74.00	-25.96	71.78	-23.74	Peak
2	13090.000	45.29	88.22	-42.93	44.68	0.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6625MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6625MHz
Test BY :Rock

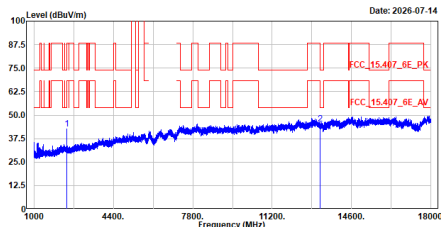


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	42.63	88.22	-45.59	66.38	-23.75	Peak
2	13250.000	45.31	74.00	-28.69	44.94	0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6625MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6625MHz
Test BY :Rock

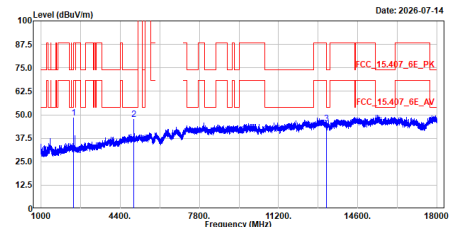


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	48.21	74.00	-25.79	71.96	-23.75	Peak
2	4978.000	47.47	74.00	-26.53	61.63	-14.16	Peak
3	13250.000	45.18	74.00	-28.82	44.81	0.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6705MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6705MHz
Test BY :Rock

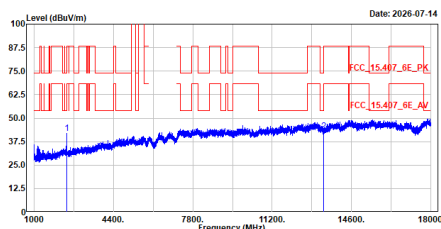


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	41.97	88.22	-46.25	65.72	-23.75	Peak
2	13410.000	42.88	88.22	-45.34	42.30	0.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6705MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6705MHz
Test BY :Rock

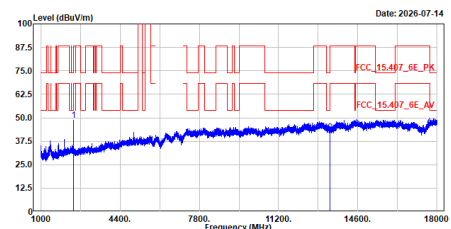


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	48.56	88.22	-39.66	72.32	-23.76	Peak
2	13410.000	42.13	88.22	-46.09	41.55	0.58	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6785MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6785MHz
Test BY :Rock

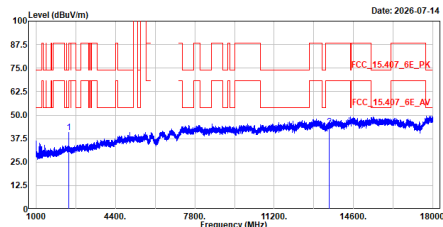


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	48.83	88.22	-47.39	64.59	-23.76	Peak
2	13570.000	43.60	88.22	-44.62	42.65	0.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6785MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6785MHz
Test BY :Rock

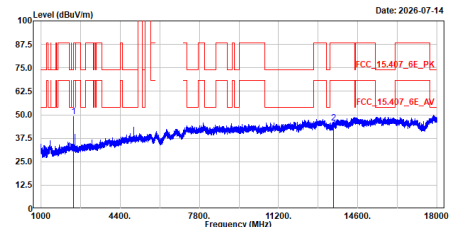


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.550	49.03	88.22	-39.19	72.79	-23.76	Peak
2	13570.000	45.79	88.22	-42.43	44.84	0.95	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6865MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6865MHz
Test BY :Rock

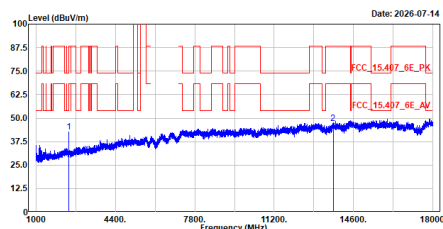


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2388.900	42.78	74.00	-31.22	66.52	-23.74	Peak
2	13730.000	47.18	88.22	-41.04	46.84	0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6865MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6865MHz
Test BY :Rock

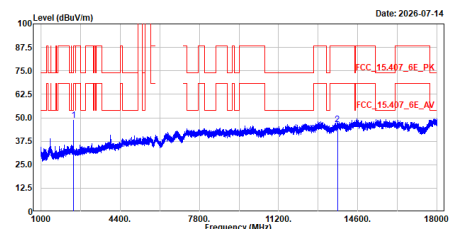


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	48.77	88.22	-39.45	72.52	-23.75	Peak
2	13730.000	46.51	88.22	-41.71	46.17	0.34	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6945MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_6945MHz
Test BY :Rock

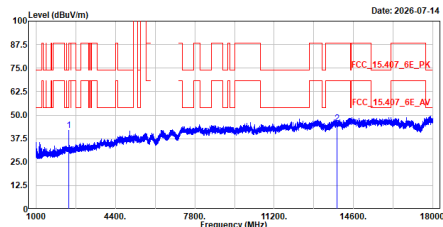


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.850	41.78	88.22	-46.44	65.54	-23.76	Peak
2	13890.000	45.49	88.22	-42.73	45.10	0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_6945MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_6945MHz
Test BY :Rock

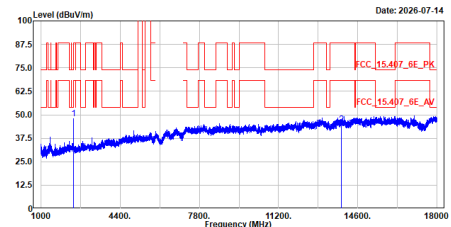


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	47.86	88.22	-40.36	71.62	-23.76	Peak
2	13890.000	45.02	88.22	-43.20	44.63	0.39	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_7025MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_7025MHz
Test BY :Rock

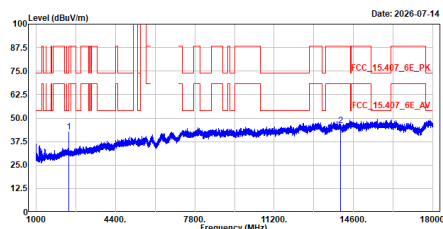


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	42.60	88.22	-45.62	66.35	-23.75	Peak
2	14050.000	46.21	88.22	-42.01	45.37	0.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_7025MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_7025MHz
Test BY :Rock

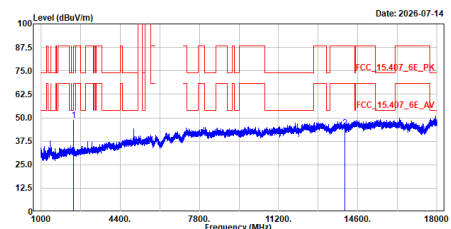


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	48.77	88.22	-39.45	72.52	-23.75	Peak
2	14050.000	44.44	88.22	-43.78	43.60	0.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6025MHz
Test BY :Ashton

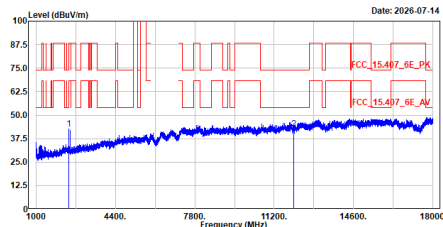


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2395.700	42.64	88.22	-45.58	66.40	-23.76	Peak
2	12050.000	42.01	74.00	-31.99	44.24	-1.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6025MHz
Test BY :Ashton

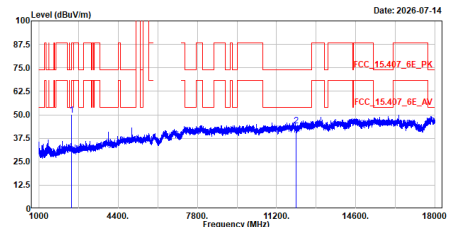


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2394.000	49.88	88.22	-38.34	73.64	-23.76	Peak
2	12050.000	43.99	74.00	-30.01	45.42	-1.43	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6185MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6185MHz
Test BY :Ashton

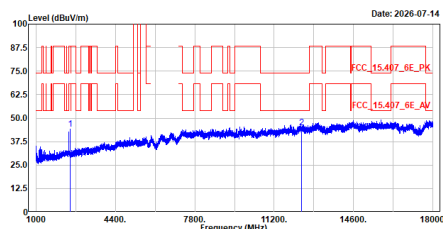


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2456.900	44.30	88.22	-43.92	68.16	-23.86	Peak
2	12370.000	44.80	74.00	-29.20	45.54	-0.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6185MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6185MHz
Test BY :Ashton

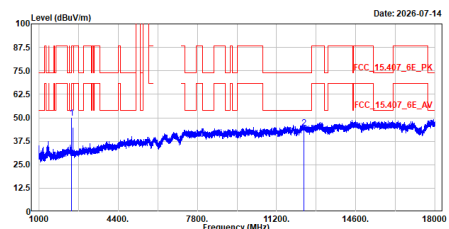


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2399.950	49.64	88.22	-38.58	73.41	-23.77	Peak
2	12370.000	44.41	74.00	-29.59	45.15	-0.74	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6345MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6345MHz
Test BY :Ashton

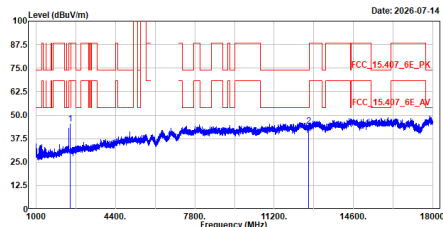


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2457.750	45.33	88.22	-42.89	69.18	-23.85	Peak
2	12690.000	44.33	74.00	-29.67	44.88	0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6345MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6345MHz
Test BY :Ashton




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	50.08	74.00	-23.92	73.83	-23.75	Peak
2	12690.000	42.96	74.00	-31.04	42.71	0.25	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6505MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6505MHz
Test BY :Ashton

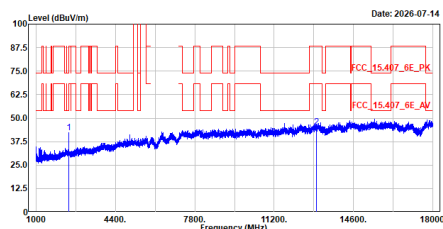


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2399.100	42.29	88.22	-45.93	66.05	-23.76	Peak
2	13010.000	45.40	88.22	-42.82	44.94	0.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6505MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6505MHz
Test BY :Ashton

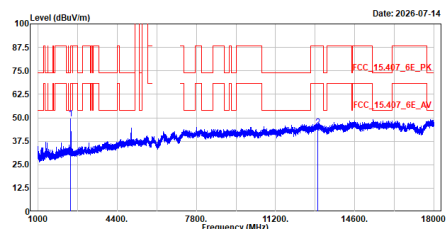


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	49.47	88.22	-38.75	73.22	-23.75	Peak
2	13010.000	45.00	88.22	-43.22	44.54	0.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6665MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6665MHz
Test BY :Ashton

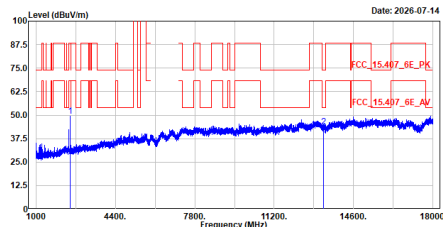


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2457.750	49.53	88.22	-38.69	73.38	-23.85	Peak
2	13330.000	43.95	74.00	-30.05	42.95	1.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6665MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6665MHz
Test BY :Ashton




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	49.62	88.22	-38.60	73.37	-23.75	Peak
2	13330.000	45.00	74.00	-29.00	44.00	1.00	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6825MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6825MHz
Test BY :Ashton

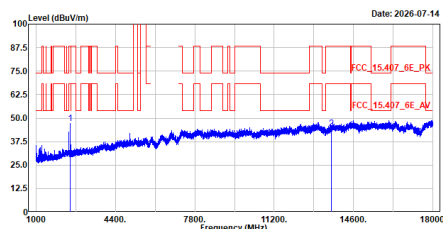


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2456.900	47.18	88.22	-41.04	71.04	-23.86	Peak
2	13650.000	44.34	88.22	-43.88	44.04	0.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6825MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6825MHz
Test BY :Ashton

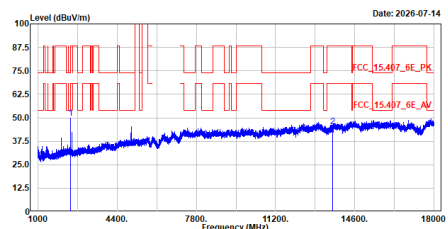


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2390.600	49.81	88.22	-38.41	73.56	-23.75	Peak
2	13650.000	45.12	88.22	-43.10	44.82	0.30	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6985MHz
Test BY :Ashton




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2456.900	48.26	88.22	-39.96	72.12	-23.86	Peak
2	13970.000	45.79	88.22	-42.43	45.18	0.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6985MHz
Test BY :Ashton




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2398.250	49.25	88.22	-38.97	73.01	-23.76	Peak
2	13970.000	44.69	88.22	-43.53	44.08	0.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6985MHz
Test BY :Ashton




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	63.950	36.96	40.00	-3.04	61.95	-24.99	QP
2	143.975	41.92	43.50	-1.58	65.98	-24.06	QP
3	456.121	38.90	46.00	-7.10	57.81	-18.91	QP
4	660.112	43.31	46.00	-2.69	58.18	-14.87	QP
5	768.170	43.37	46.00	-2.63	56.26	-12.89	QP
6	912.215	43.03	46.00	-2.97	54.47	-11.44	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax160_6985MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6985MHz
Test BY :Ashton

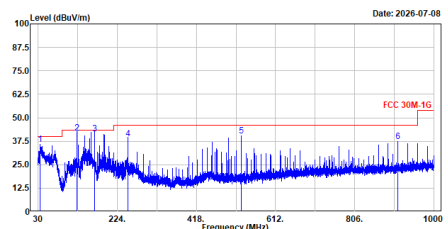


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	35.723	35.90	40.00	-4.10	60.53	-24.63	QP
2	124.903	41.79	43.50	-1.71	67.74	-25.95	QP
3	168.031	41.58	43.50	-1.92	65.85	-24.27	QP
4	249.996	38.71	46.00	-7.29	63.57	-24.86	QP
5	528.095	40.31	46.00	-5.69	57.95	-17.64	QP
6	912.215	37.39	46.00	-8.61	48.83	-11.44	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_a_5935MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5935MHz
Test BY :Ashton

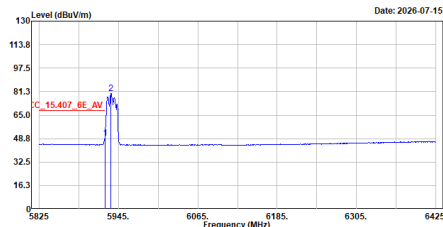


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	48.82	68.22	-19.40	30.63	18.19	Average
2	5935.000	80.00	68.22	11.78	61.86	18.22	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5935MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_5935MHz
Test BY :Ashton

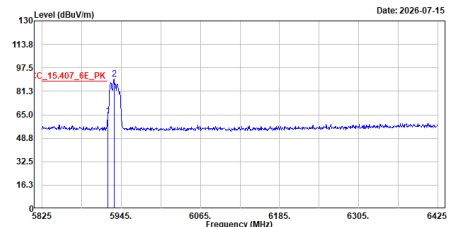


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	64.50	88.22	-23.72	46.31	18.19	Peak
2	5935.000	89.73	88.22	1.51	71.51	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5935MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5935MHz
Test BY :Ashton

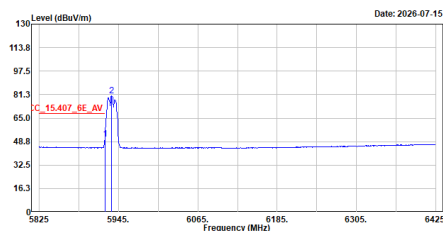


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	50.30	68.22	-17.92	32.11	18.19	Average
2	5935.000	80.30	68.22	12.08	62.08	18.22	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_5935MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_5935MHz
Test BY :Ashton

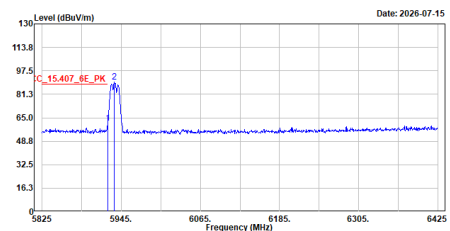


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	61.54	88.22	-26.68	43.35	18.19	Peak
2	5935.000	90.00	88.22	1.78	71.78	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_7115MHz
Test BY :Ashton

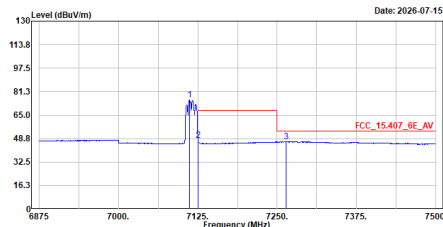


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7111.875	75.46	68.22	-7.41	53.94	21.52	Average
2	7125.000	47.59	68.22	-20.63	26.02	21.57	Average
3	7263.750	46.59	54.00	-7.41	24.92	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_a_7115MHz
Test BY :Ashton

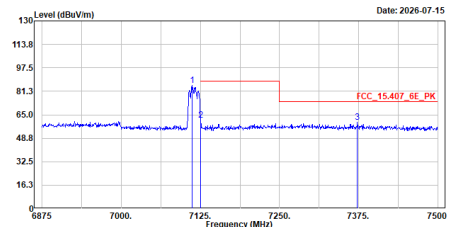


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7112.500	85.50	88.22	-26.77	63.97	21.53	Peak
2	7125.000	61.45	88.22	-26.77	39.88	21.57	Peak
3	7373.125	59.68	74.00	-14.32	37.69	21.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_7115MHz
Test BY :Ashton

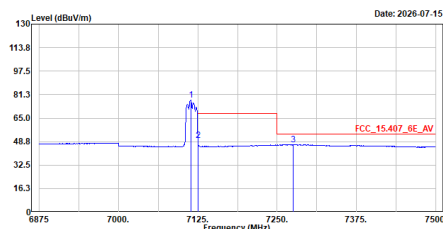


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7113.750	77.51	68.22	-9.48	55.98	21.53	Average
2	7125.000	49.74	68.22	-18.48	28.17	21.57	Average
3	7275.625	46.72	54.00	-7.28	25.05	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_a_7115MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_a_7115MHz
Test BY :Ashton

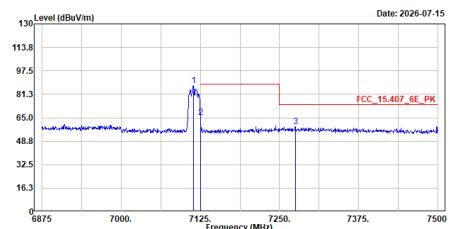


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7113.750	87.30	88.22	-22.87	43.78	21.57	Peak
2	7125.000	65.35	88.22	-22.87	43.78	21.57	Peak
3	7275.000	58.96	74.00	-15.04	37.28	21.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz
Test BY :Ashton

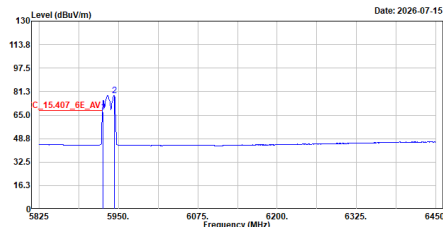


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5925.000	67.22	68.22	-1.00	49.03	18.19	Average
2	5943.125	78.41	-----	-----	60.17	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz
Test BY :Ashton

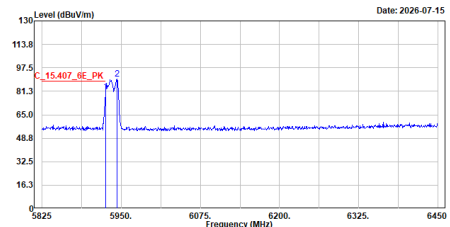


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5925.000	88.80	88.22	-7.42	62.61	18.19	Peak
2	5943.750	89.86	-----	-----	71.62	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz
Test BY :Ashton

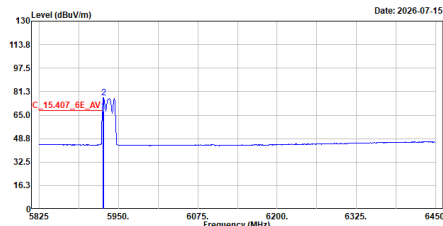


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5925.000	67.72	68.22	-0.50	49.53	18.19	Average
2	5926.250	77.01	-----	-----	58.82	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz
Test BY :Ashton

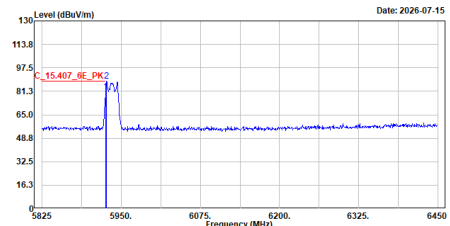


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5925.000	88.81	88.22	-7.41	62.62	18.19	Peak
2	5926.250	88.43	-----	-----	70.24	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz
Test BY :Ashton

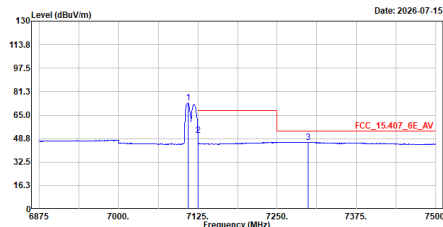


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7109.375	73.35	-----	-----	51.84	21.51	Average
2	7125.000	51.06	68.22	-17.16	29.49	21.57	Average
3	7298.750	46.32	54.00	-7.68	24.60	21.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz
Test BY :Ashton

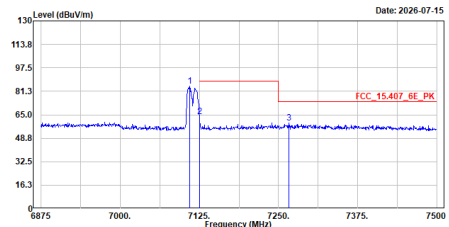


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7109.375	84.76	-----	-----	63.25	21.51	Peak
2	7125.000	63.83	88.22	-24.39	42.26	21.57	Peak
3	7266.250	59.40	74.00	-14.60	37.73	21.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz
Test BY :Ashton

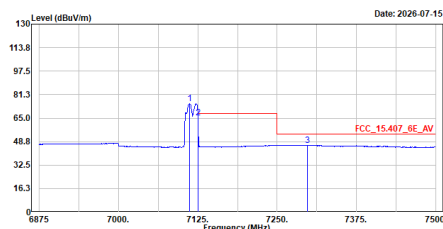


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7111.875	75.14	-----	-----	53.62	21.52	Average
2	7125.000	65.35	68.22	-2.87	43.78	21.57	Average
3	7298.125	46.33	54.00	-7.67	24.61	21.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz
Test BY :Ashton

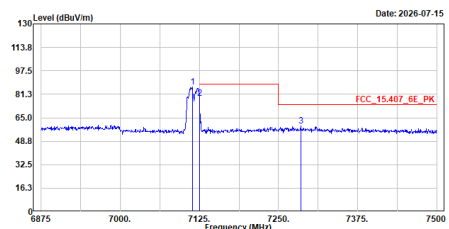


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7113.750	86.54	-----	-----	65.01	21.53	Peak
2	7125.000	78.54	88.22	-9.68	56.97	21.57	Peak
3	7285.000	59.53	74.00	-14.47	37.85	21.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5965MHz
Test BY :Ashton

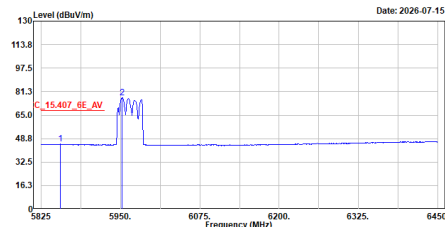


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5855.000	44.89	68.22	-23.33	26.97	17.92	Average
2	5952.500	77.14	-----	-----	58.90	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_5965MHz
Test BY :Ashton

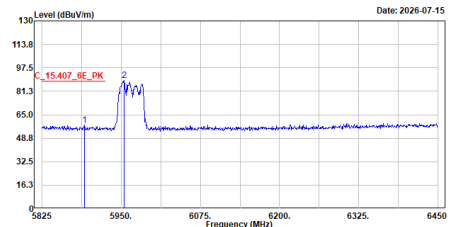


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5891.875	57.65	88.22	-30.57	39.62	18.03	Peak
2	5955.000	88.87	-----	-----	70.64	18.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5965MHz
Test BY :Ashton

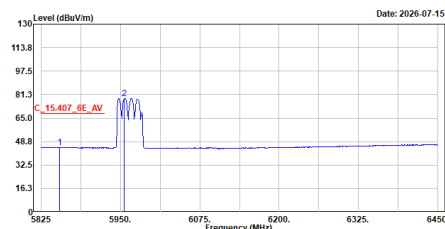


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5854.375	44.88	68.22	-23.34	26.97	17.91	Average
2	5956.250	78.55	-----	-----	60.32	18.23	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_5965MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_5965MHz
Test BY :Ashton

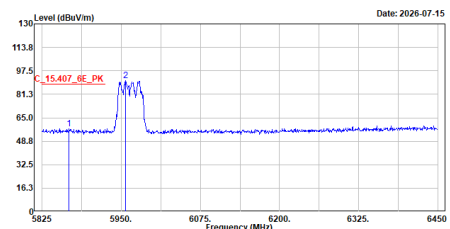


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5867.500	57.28	88.22	-30.94	39.33	17.95	Peak
2	5956.075	90.83	-----	-----	72.60	18.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7085MHz
Test BY :Ashton

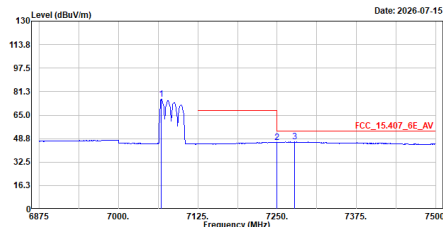


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7067.500	76.21	-----	-----	54.88	21.33	Average
2	7250.000	46.17	54.00	-7.83	24.50	21.67	Average
3	7277.500	46.45	54.00	-7.55	24.77	21.68	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax40_7085MHz
Test BY :Ashton

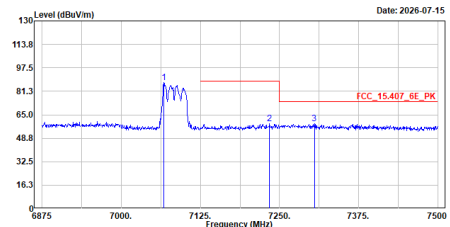


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7067.500	87.14	-----	-----	65.81	21.33	Peak
2	7234.375	58.67	88.22	-29.55	36.97	21.70	Peak
3	7305.000	58.73	74.00	-15.27	36.98	21.75	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7085MHz
Test BY :Ashton

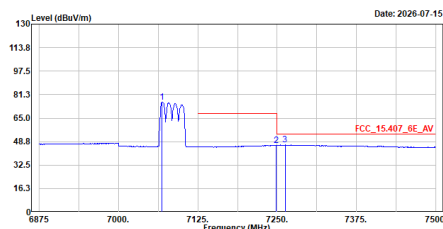


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7068.750	76.06	-----	-----	54.72	21.34	Average
2	7248.750	46.25	68.22	-21.97	24.57	21.68	Average
3	7262.500	46.41	54.00	-7.59	24.74	21.67	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax40_7085MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax40_7085MHz
Test BY :Ashton

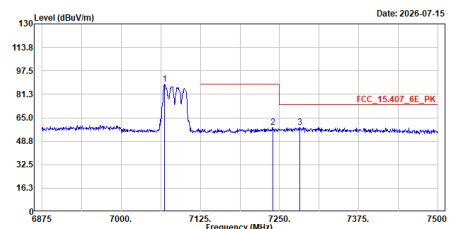


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7068.750	88.23	-----	-----	66.89	21.34	Peak
2	7239.375	58.26	88.22	-29.96	36.57	21.69	Peak
3	7281.875	58.56	74.00	-15.44	36.88	21.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_5985MHz_H_Average Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax80_5985MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 58255950.60756200.6325.6450 Frequency (MHz) C_15.407_0E_AV 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5839.375</td><td>44.87</td><td>68.22</td><td>-23.35</td><td>26.98</td><td>17.89</td><td>Average</td></tr><tr><td>2</td><td>5953.125</td><td>79.49</td><td>-----</td><td>-----</td><td>61.26</td><td>18.23</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5839.375	44.87	68.22	-23.35	26.98	17.89	Average	2	5953.125	79.49	-----	-----	61.26	18.23	Average	TX_ax80_5985MHz_H_Peak Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_ax80_5985MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 58255950.60756200.6325.6450 Frequency (MHz) C_15.407_0E_PK 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5851.875</td><td>57.33</td><td>88.22</td><td>-30.89</td><td>39.43</td><td>17.90</td><td>Peak</td></tr><tr><td>2</td><td>5962.500</td><td>90.46</td><td>-----</td><td>-----</td><td>72.24</td><td>18.22</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5851.875	57.33	88.22	-30.89	39.43	17.90	Peak	2	5962.500	90.46	-----	-----	72.24	18.22	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5839.375	44.87	68.22	-23.35	26.98	17.89	Average																																																										
2	5953.125	79.49	-----	-----	61.26	18.23	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5851.875	57.33	88.22	-30.89	39.43	17.90	Peak																																																										
2	5962.500	90.46	-----	-----	72.24	18.22	Peak																																																										
TX_ax80_5985MHz_V_Average Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax80_5985MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 58255950.60756200.6325.6450 Frequency (MHz) C_15.407_0E_AV 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5842.500</td><td>44.87</td><td>68.22</td><td>-23.35</td><td>26.99</td><td>17.88</td><td>Average</td></tr><tr><td>2</td><td>5953.750</td><td>78.26</td><td>-----</td><td>-----</td><td>60.03</td><td>18.23</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5842.500	44.87	68.22	-23.35	26.99	17.88	Average	2	5953.750	78.26	-----	-----	60.03	18.23	Average	TX_ax80_5985MHz_V_Peak Site :HY-CB03 Condition :3m ,Vertical Mode :TX_ax80_5985MHz Test BY :Ashton Level (dBuV/m) 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 58255950.60756200.6325.6450 Frequency (MHz) C_15.407_0E_PK 2 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>5911.875</td><td>58.43</td><td>88.22</td><td>-29.79</td><td>40.32</td><td>18.11</td><td>Peak</td></tr><tr><td>2</td><td>5953.750</td><td>89.89</td><td>-----</td><td>-----</td><td>71.66</td><td>18.23</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	5911.875	58.43	88.22	-29.79	40.32	18.11	Peak	2	5953.750	89.89	-----	-----	71.66	18.23	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5842.500	44.87	68.22	-23.35	26.99	17.88	Average																																																										
2	5953.750	78.26	-----	-----	60.03	18.23	Average																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																											
1	5911.875	58.43	88.22	-29.79	40.32	18.11	Peak																																																										
2	5953.750	89.89	-----	-----	71.66	18.23	Peak																																																										

TX_ax80_7025MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_7025MHz
Test BY :Ashton

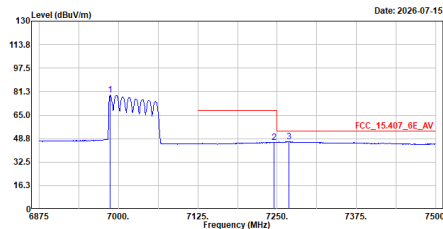


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	6986.875	79.12	-----	-----	58.14	20.98	Average
2	7245.625	46.19	68.22	-22.03	24.51	21.68	Average
3	7268.125	46.53	54.00	-7.47	24.86	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_7025MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax80_7025MHz
Test BY :Ashton

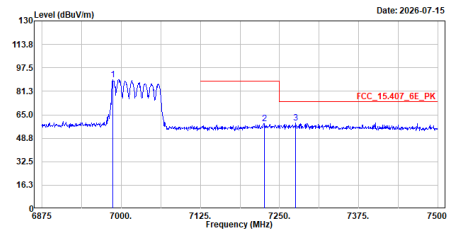


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	6986.875	89.52	-----	-----	68.54	20.98	Peak
2	7225.625	59.00	88.22	-29.22	37.29	21.71	Peak
3	7275.625	59.44	74.00	-14.56	37.77	21.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_7025MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_7025MHz
Test BY :Ashton

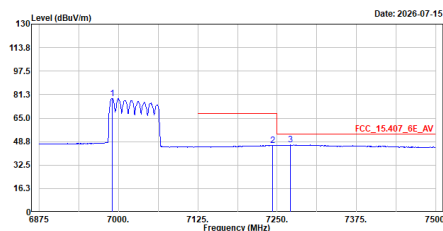


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	6990.000	78.72	-----	-----	57.73	20.99	Average
2	7242.500	46.22	68.22	-22.00	24.54	21.68	Average
3	7271.250	46.43	54.00	-7.57	24.76	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax80_7025MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax80_7025MHz
Test BY :Ashton

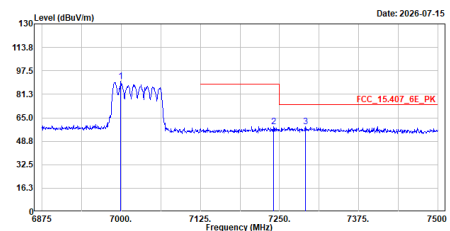


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	6999.375	90.43	-----	-----	69.42	21.01	Peak
2	7240.625	59.09	88.22	-29.13	37.40	21.69	Peak
3	7290.625	58.71	74.00	-15.29	37.03	21.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_H_Average


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6025MHz
Test BY :Ashton

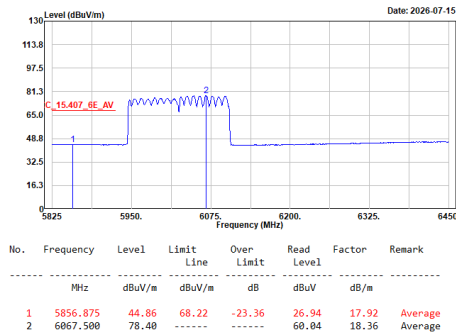

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_H_Peak


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6025MHz
Test BY :Ashton

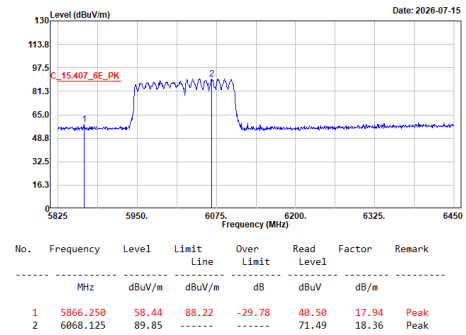

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_V_Average


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6025MHz
Test BY :Ashton

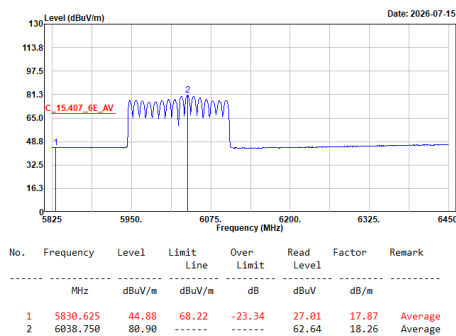

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6025MHz_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6025MHz
Test BY :Ashton

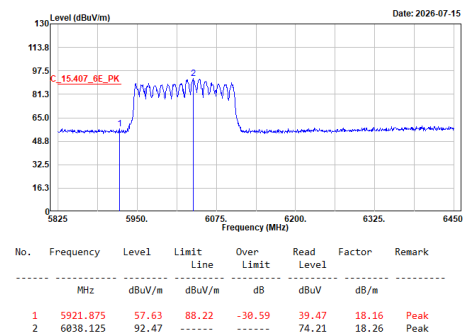

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6985MHz
Test BY :Ashton

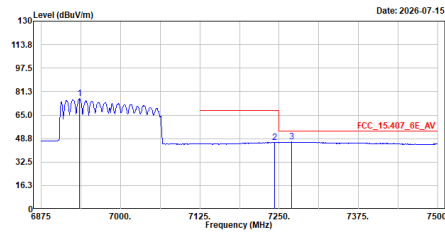


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	6935.000	76.35	-----	55.42	20.93	Average	
2	7243.125	46.18	68.22	-22.04	24.49	21.69	Average
3	7270.000	46.40	54.00	-7.60	24.72	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax160_6985MHz
Test BY :Ashton

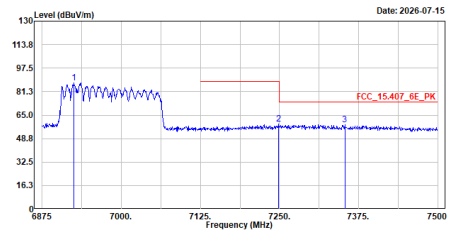


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	6925.625	87.22	-----	-----	66.28	20.94	Peak
2	7248.750	58.71	88.22	-29.51	37.63	21.68	Peak
3	7353.125	58.55	74.00	-15.45	36.63	21.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6985MHz
Test BY :Ashton

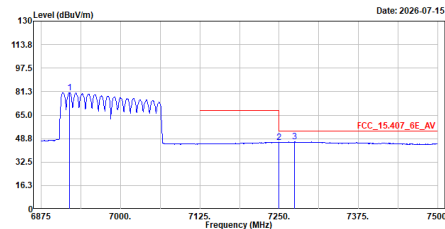


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	6919.375	88.64	-----	59.70	20.94	Average	
2	7250.000	46.19	54.00	-7.81	24.52	21.67	Average
3	7274.375	46.42	54.00	-7.58	24.74	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax160_6985MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax160_6985MHz
Test BY :Ashton

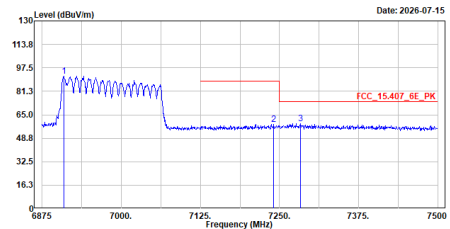


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	6909.375	91.69	-----	-----	70.74	20.95	Peak
2	7248.625	58.62	88.22	-29.60	36.93	21.69	Peak
3	7283.125	58.86	74.00	-15.14	37.18	21.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

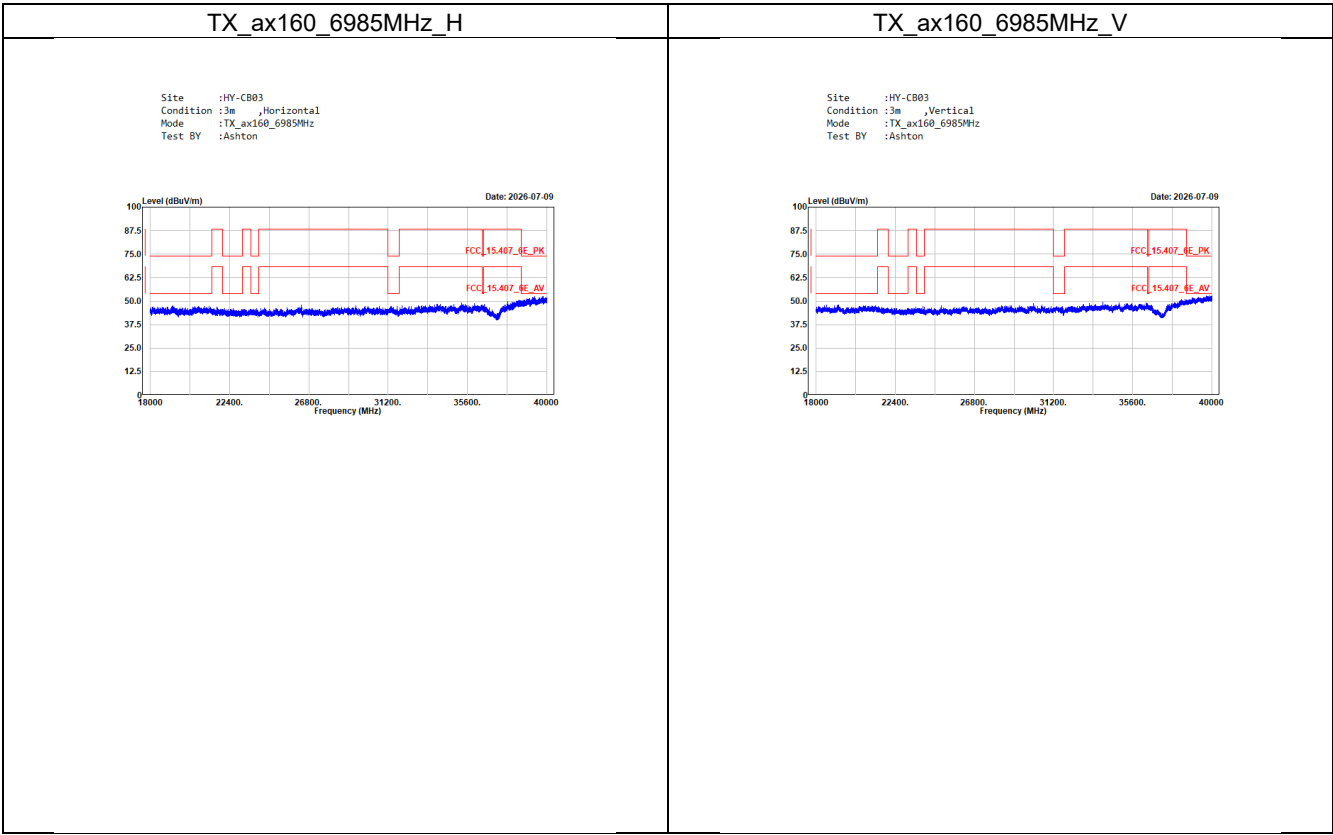

Partial RU

TX_ax20_5935MHz_RU 52 37_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Ashton

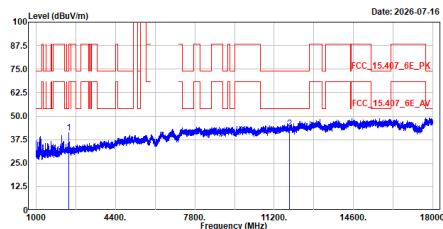


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	41.19	88.22	-47.03	64.95	-23.76	Peak
2	11870.000	43.36	74.00	-30.64	44.87	-1.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 37_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Ashton

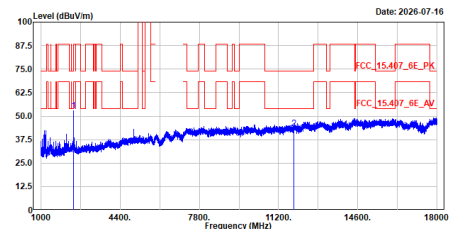


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	52.84	88.22	-35.38	76.60	-23.76	Peak
2	11870.000	43.34	74.00	-30.66	44.85	-1.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Ashton

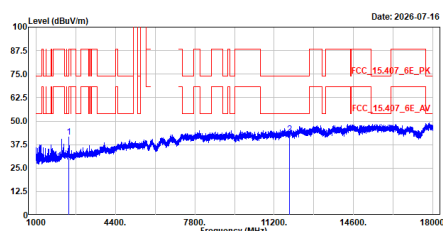


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	41.45	88.22	-46.77	65.20	-23.75	Peak
2	11870.000	42.96	74.00	-31.04	44.47	-1.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	52.51	88.22	-35.71	76.26	-23.75	Peak
2	11870.000	45.14	74.00	-28.86	46.65	-1.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Ashton

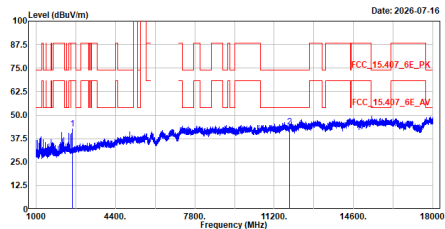


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2535.950	42.82	88.22	-45.40	66.75	-23.93	Peak
2	11870.000	43.76	74.00	-30.24	45.27	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Ashton

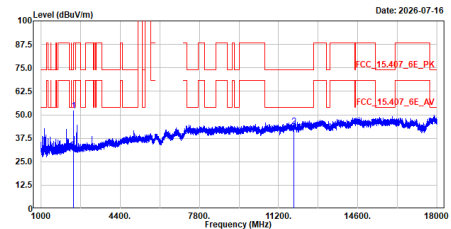


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.850	52.09	88.22	-36.13	75.85	-23.76	Peak
2	11870.000	43.75	74.00	-30.25	45.26	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Ashton

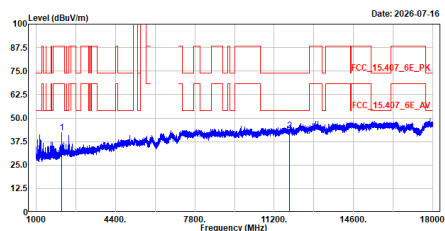


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2100.750	42.16	88.22	-46.06	66.38	-24.22	Peak
2	11870.000	43.34	74.00	-30.66	44.85	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	52.50	88.22	-35.72	76.25	-23.75	Peak
2	11870.000	44.51	74.00	-29.49	46.02	-1.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Ashton

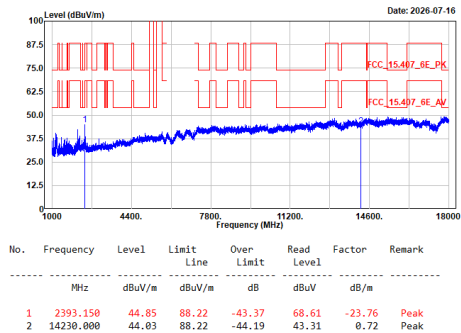

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Ashton



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Ashton



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Ashton



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_H


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Ashton

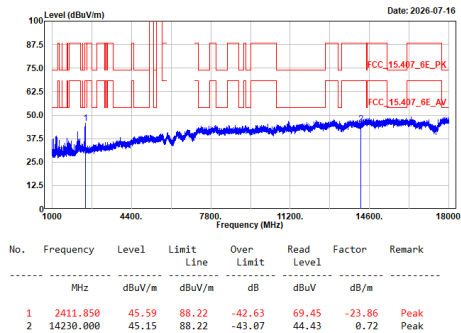

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Ashton

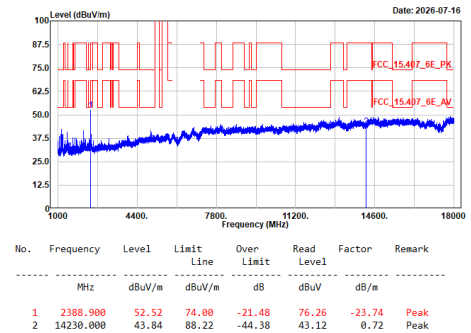

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_V


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton



Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Ashton

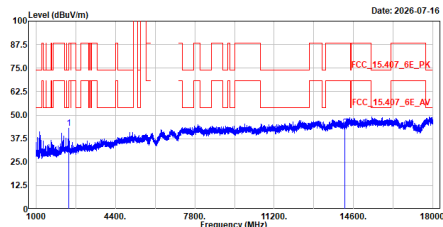


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	43.03	88.22	-45.19	66.78	-23.75	Peak
2	14230.000	43.47	88.22	-44.75	42.75	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Ashton

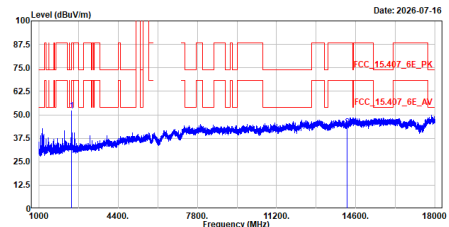


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	52.02	88.22	-36.20	75.78	-23.76	Peak
2	14230.000	43.23	88.22	-44.99	42.51	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Ashton

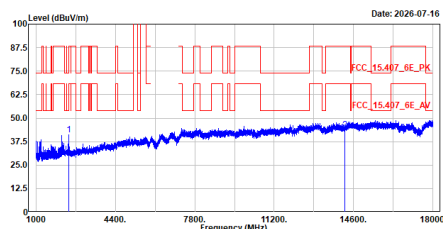


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	41.23	88.22	-46.99	64.98	-23.75	Peak
2	14230.000	43.77	88.22	-44.45	43.05	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Ashton

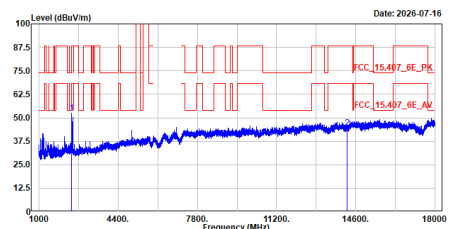


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	52.56	88.22	-35.66	76.31	-23.75	Peak
2	14230.000	44.61	88.22	-43.61	43.89	0.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	64.047	36.61	40.00	-3.39	61.62	-25.01	QP
2	143.975	41.59	43.50	-1.91	65.65	-24.06	QP
3	456.121	39.67	46.00	-6.33	58.58	-18.91	QP
4	660.112	43.59	46.00	-2.41	58.46	-14.87	QP
5	768.170	43.62	46.00	-2.38	56.51	-12.89	QP
6	864.103	42.86	46.00	-3.14	54.81	-11.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_7115MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Ashton

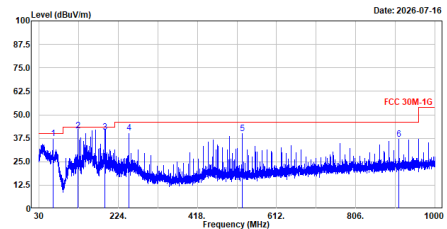


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	63.950	37.45	40.00	-2.55	62.44	-24.99	QP
2	124.963	41.39	43.50	-2.11	67.34	-25.95	QP
3	191.990	40.66	43.50	-2.84	67.18	-26.52	QP
4	249.996	40.53	46.00	-5.47	65.39	-24.86	QP
5	528.095	39.86	46.00	-6.14	57.50	-17.64	QP
6	912.215	36.91	46.00	-9.09	48.35	-11.44	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_5935MHz_RU 26 0_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 26 0
Test BY :Rock

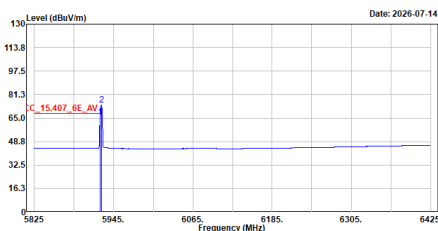


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	65.63	68.22	-2.59	47.44	18.19	Average
2	5926.400	74.07	-----	-----	55.88	18.19	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 0_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5935MHz_RU 26 0
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	70.67	88.22	-17.55	52.48	18.19	Peak
2	5926.400	84.67	-----	-----	66.48	18.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 26 0
Test BY :Rock

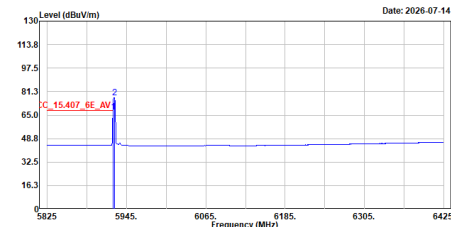


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	67.44	68.22	-0.78	49.25	18.19	Average
2	5926.400	77.18			58.99	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 26 0
Test BY :Rock

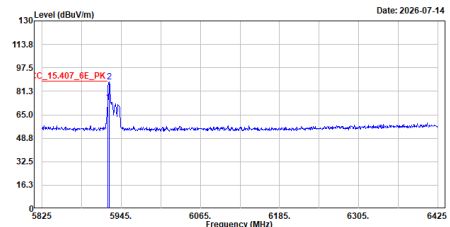


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	73.42	88.22	-14.80	55.23	18.19	Peak
2	5926.400	87.60			69.41	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 8_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 26 8
Test BY :Rock

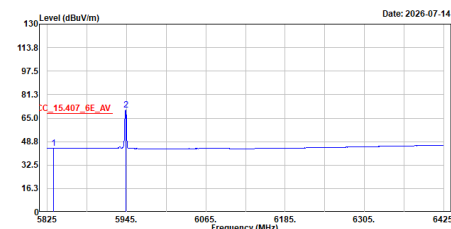


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5834.000	44.37	68.22	-23.85	26.50	17.87	Average
2	5943.800	70.86			52.62	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 26 8
Test BY :Rock

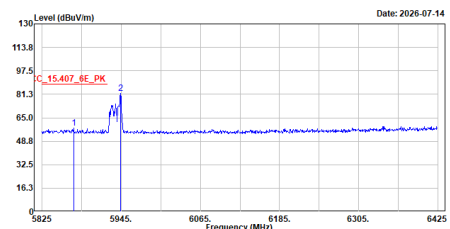


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5873.000	57.96	88.22	-30.26	39.99	17.97	Peak
2	5944.400	81.75			63.51	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 8_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 26 8
Test BY :Rock

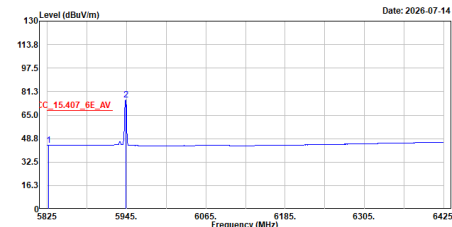


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5827.400	44.38	68.22	-23.84	26.51	17.87	Average
2	5943.800	75.58	68.22	7.36	57.34	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 26 8
Test BY :Rock

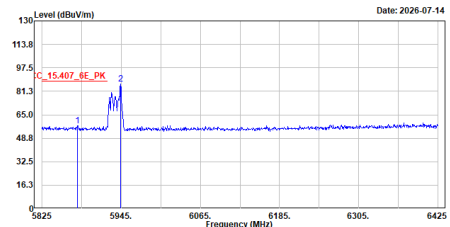


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5879.000	57.38	86.22	-28.84	39.39	17.99	Peak
2	5943.800	86.22	86.22	0.00	67.98	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Rock

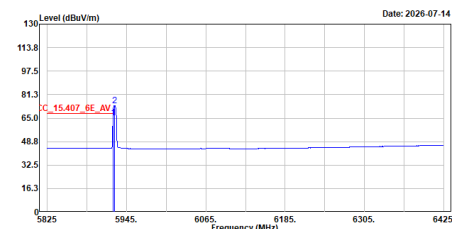


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	65.30	68.22	-2.92	47.11	18.19	Average
2	5926.400	73.73	68.22	5.51	55.54	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Rock

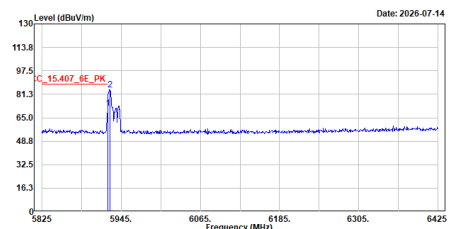


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	71.44	84.23	-12.79	53.25	18.19	Peak
2	5926.200	84.23	84.23	0.00	66.02	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Rock

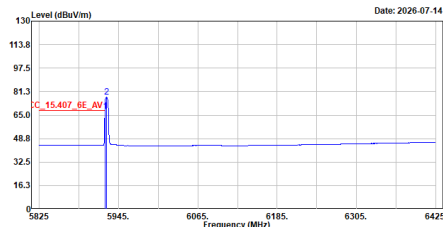


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	67.47	68.22	-0.75	49.28	18.19	Average
2	5926.400	77.29			59.10	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 52 37
Test BY :Rock

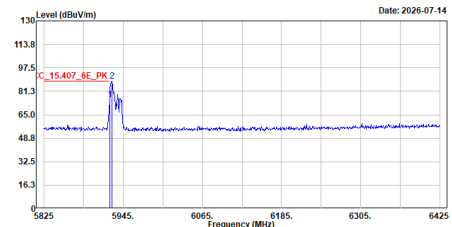


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5924.600	75.60	88.22	-12.62	57.41	18.19	Peak
2	5927.600	88.18			69.98	18.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Rock

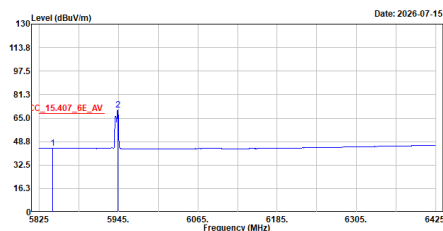


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5845.400	44.30	68.22	-23.92	26.41	17.89	Average
2	5943.800	70.44			52.20	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Rock

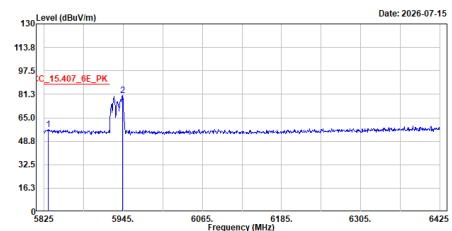


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5831.600	56.91	88.22	-31.31	39.63	17.88	Peak
2	5944.400	80.46			62.22	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5826.000	44.30	68.22	-23.92	26.43	17.87	Average
2	5943.000	75.00	68.22	6.78	56.84	18.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 52 40
Test BY :Rock

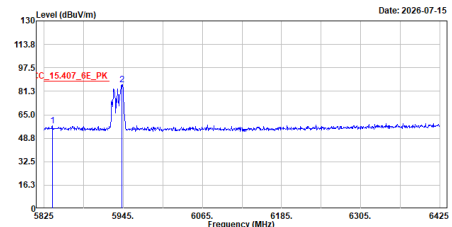


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5837.600	57.35	88.22	-30.87	39.47	17.88	Peak
2	5942.600	85.90	88.22	-2.32	67.66	18.24	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	64.20	68.22	-4.02	46.01	18.19	Average
2	5927.000	71.79	68.22	3.57	53.60	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Rock

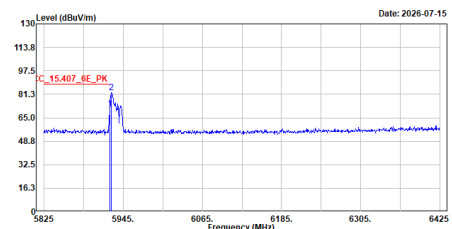


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	71.13	88.22	-17.09	52.94	18.19	Peak
2	5927.000	82.37	88.22	-5.85	64.18	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Rock

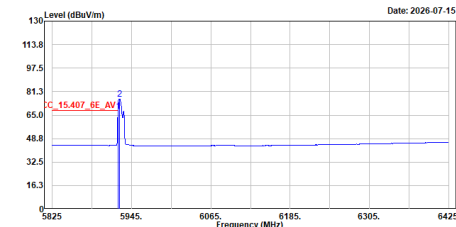


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	67.49	68.22	-0.73	49.30	18.19	Average
2	5926.400	76.24	-----	-----	58.05	18.19	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 106 53
Test BY :Rock

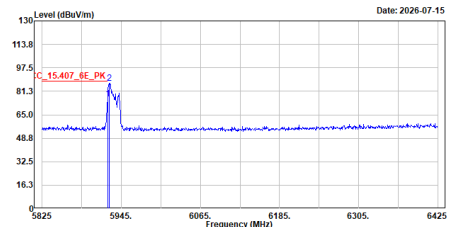


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	76.03	88.22	-12.19	57.84	18.19	Peak
2	5927.000	86.94	-----	-----	68.75	18.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Rock

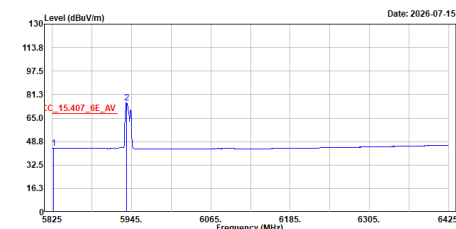


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5826.800	44.27	68.22	-23.95	26.40	17.87	Average
2	5937.200	75.51	-----	-----	57.30	18.21	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Rock

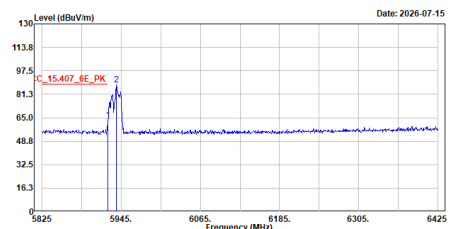


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	63.35	88.22	-24.87	45.16	18.19	Peak
2	5937.800	87.67	-----	-----	69.45	18.22	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Rock

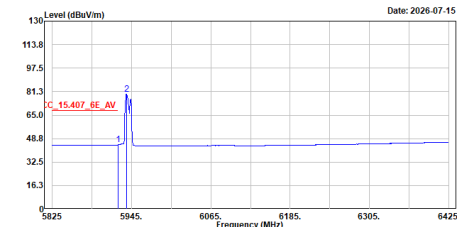


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	44.42	68.22	-23.80	26.23	18.19	Average
2	5937.200	79.39	-----	-----	61.18	18.21	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5935MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5935MHz_RU 106 54
Test BY :Rock

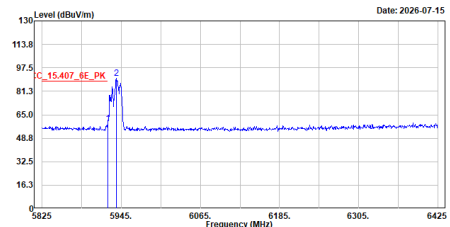


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5924.600	58.93	88.22	-29.29	40.74	18.19	Peak
2	5937.200	98.04	-----	-----	71.83	18.21	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Rock

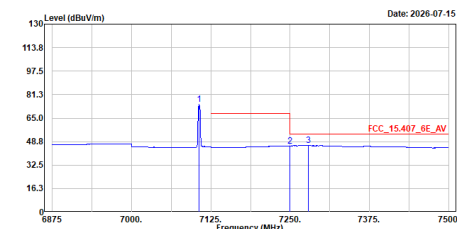


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7106.875	74.48	-----	-----	52.98	21.50	Average
2	7250.000	45.82	54.00	-8.18	24.15	21.67	Average
3	7278.750	46.00	54.00	-8.00	24.32	21.68	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Rock

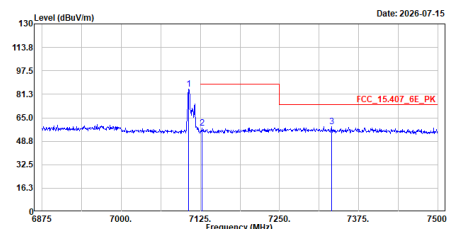


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	7106.875	84.83	-----	-----	63.33	21.50	Peak
2	7127.500	58.10	88.22	-30.12	36.53	21.57	Peak
3	7331.875	58.82	74.00	-15.18	36.98	21.84	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Rock

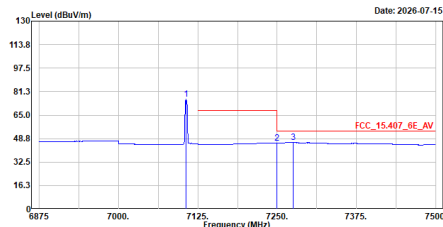


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7106.875	76.02	-----	-----	54.52	21.50	Average
2	7250.000	45.80	54.00	-8.20	24.13	21.67	Average
3	7275.625	45.94	54.00	-8.06	24.27	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 26 0
Test BY :Rock

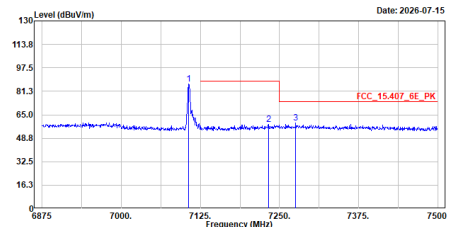


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7106.875	86.45	-----	-----	64.95	21.50	Peak
2	7233.125	58.24	88.22	-29.98	36.54	21.70	Peak
3	7275.625	59.30	74.00	-14.70	37.63	21.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Rock

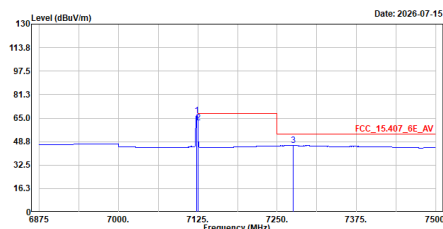


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.125	66.73	-----	-----	45.16	21.57	Average
2	7125.000	61.95	68.22	-6.27	40.38	21.57	Average
3	7275.000	45.96	54.00	-8.04	24.28	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Rock

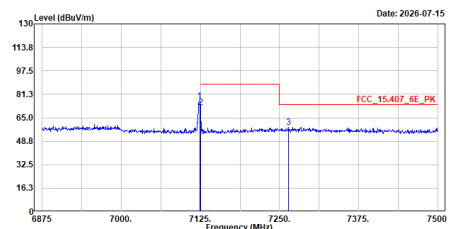


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.750	76.40	-----	-----	54.83	21.57	Peak
2	7125.000	72.31	88.22	-15.91	50.74	21.57	Peak
3	7264.375	58.34	74.00	-15.66	36.66	21.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Rock

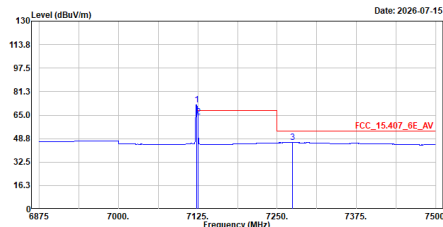


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.125	72.04	-----	-----	50.47	21.57	Average
2	7125.000	63.70	60.22	-4.44	42.21	21.57	Average
3	7274.375	45.98	54.00	-8.02	24.30	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 26 8
Test BY :Rock

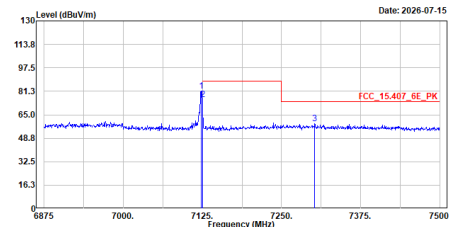


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.125	81.53	-----	-----	59.96	21.57	Peak
2	7125.000	75.34	80.22	-12.88	53.77	21.57	Peak
3	7302.500	58.67	74.00	-15.33	36.92	21.75	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Rock

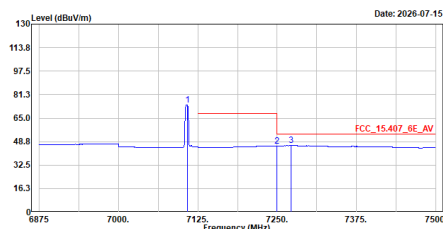


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7108.125	74.29	-----	-----	52.78	21.51	Average
2	7250.000	45.80	54.00	-8.20	24.13	21.67	Average
3	7272.500	45.94	54.00	-8.06	24.26	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Rock

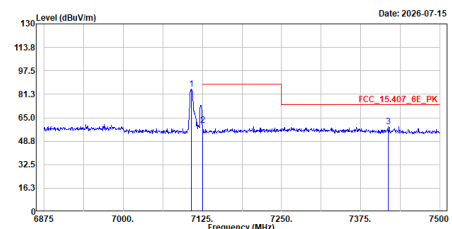


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7107.500	85.11	-----	-----	63.60	21.51	Peak
2	7125.625	60.00	80.22	-28.22	38.43	21.57	Peak
3	7418.125	58.76	74.00	-15.24	36.73	22.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7108.750	77.80	-----	-----	56.29	21.51	Average
2	7250.000	45.75	54.00	-8.25	24.00	21.67	Average
3	7265.625	45.93	54.00	-8.07	24.26	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 52 37
Test BY :Rock

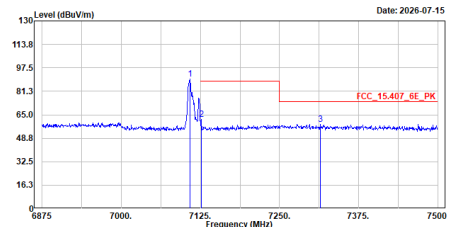


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7108.125	89.78	-----	-----	68.27	21.51	Peak
2	7126.250	61.88	88.22	-26.34	40.31	21.57	Peak
3	7314.375	58.49	74.00	-15.51	36.70	21.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7121.875	73.92	-----	-----	52.36	21.56	Average
2	7125.000	65.70	68.22	-2.52	44.13	21.57	Average
3	7273.750	46.16	54.00	-7.84	24.49	21.67	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton

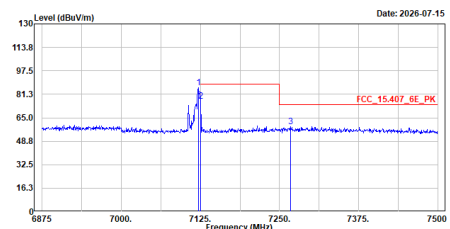


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7121.875	85.60	-----	-----	64.04	21.56	Peak
2	7125.000	76.50	88.22	-11.72	54.93	21.57	Peak
3	7267.500	58.83	74.00	-15.17	37.16	21.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.750	70.52	-----	-----	48.95	21.57	Average
2	7125.000	65.59	60.22	-2.63	44.02	21.57	Average
3	7268.750	46.19	54.00	-7.81	24.52	21.67	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 52 40
Test BY :Ashton

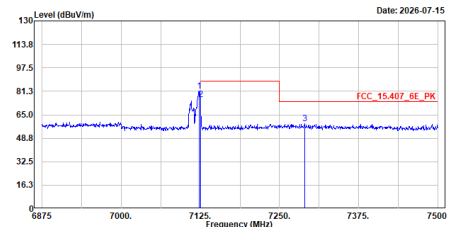


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7123.125	81.57	-----	-----	60.00	21.57	Peak
2	7125.000	75.76	80.22	-12.46	54.19	21.57	Peak
3	7289.375	58.87	74.00	-15.13	37.19	21.68	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7109.375	76.89	-----	-----	55.38	21.51	Average
2	7246.250	45.94	60.22	-22.28	24.27	21.67	Average
3	7270.625	46.13	54.00	-7.87	24.46	21.67	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Rock

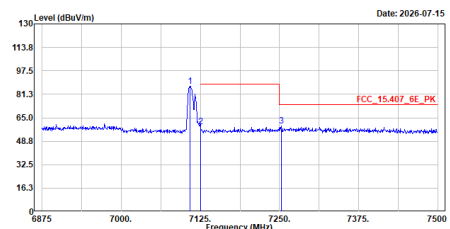


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7108.125	87.03	-----	-----	65.52	21.51	Peak
2	7125.000	58.93	80.22	-29.29	37.36	21.57	Peak
3	7252.500	59.38	74.00	-14.62	37.71	21.67	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Rock

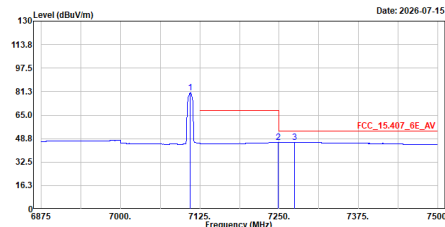


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7115.000	88.39	-----	-----	58.87	21.52	Average
2	7249.750	46.06	68.22	-22.16	24.38	21.68	Average
3	7274.375	46.24	54.00	-7.76	24.56	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 106 53
Test BY :Rock

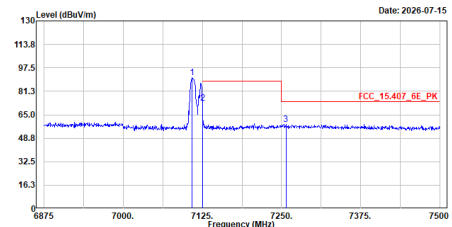


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7108.750	98.81	-----	-----	69.38	21.51	Peak
2	7125.000	72.98	88.22	-15.24	51.41	21.57	Peak
3	7256.875	58.60	74.00	-15.40	36.93	21.67	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Rock

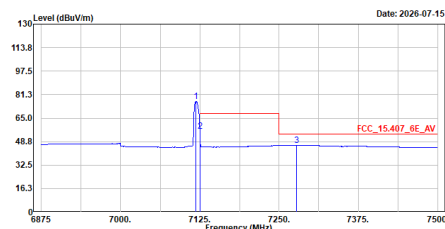


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7115.750	76.32	-----	-----	54.77	21.55	Average
2	7125.000	55.80	68.22	-12.42	34.23	21.57	Average
3	7277.500	46.20	54.00	-7.80	24.52	21.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Rock

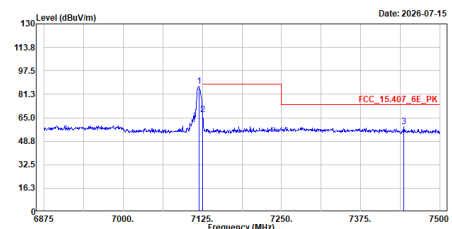


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7119.375	87.02	-----	-----	65.46	21.56	Peak
2	7125.000	67.25	88.22	-20.97	45.68	21.57	Peak
3	7443.125	58.85	74.00	-15.15	36.85	22.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Rock

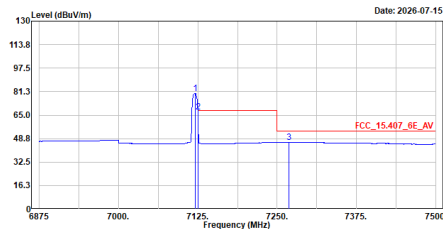


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7120.625	80.08	-----	-----	58.52	21.56	Average
2	7125.000	67.32	60.22	-0.90	45.75	21.57	Average
3	7268.750	46.34	54.00	-7.66	24.67	21.67	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_7115MHz_RU 106 54_V_Peak


Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_7115MHz_RU 106 54
Test BY :Rock

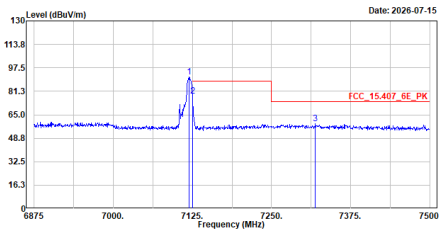

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7119.375	91.22	-----	-----	69.66	21.56	Peak
2	7125.000	78.17	80.22	-10.05	56.60	21.57	Peak
3	7319.375	59.05	74.00	-14.95	37.24	21.81	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Worst-Case Emissions Above 18 GHz

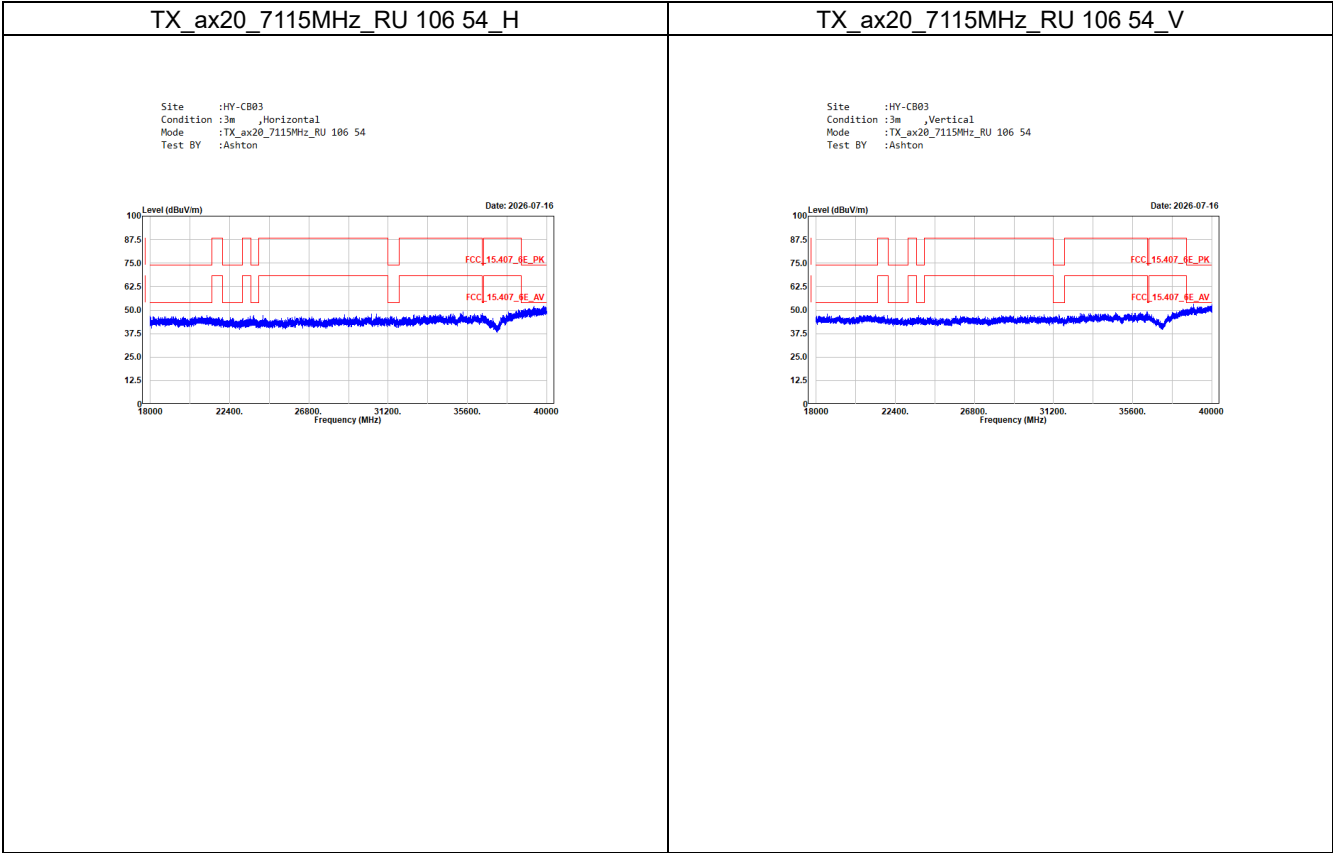

Co-location_ROW version**GSM850_voice_CH128_TX_BLE2M_2480MHz_H**

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

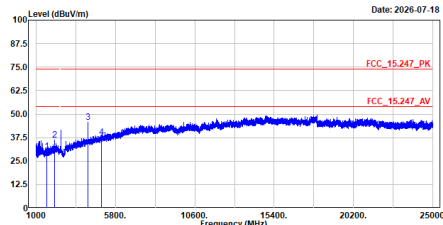


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1648.400	38.05	74.00	-43.95	55.50	-25.45	Peak
2	2100.750	36.26	74.00	-37.74	60.62	-24.36	Peak
3	4116.100	45.61	74.00	-28.39	64.08	-18.47	Peak
4	4960.000	37.81	74.00	-36.19	52.37	-14.56	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

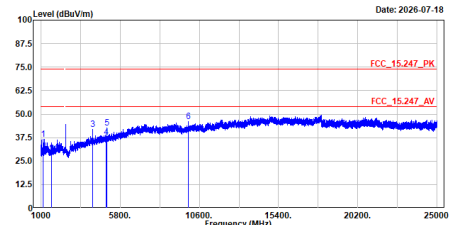


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1133.450	36.69	74.00	-37.31	62.69	-26.00	Peak
2	1648.400	29.17	74.00	-44.83	54.62	-25.45	Peak
3	4116.100	41.97	74.00	-32.03	60.44	-18.47	Peak
4	4960.000	37.65	74.00	-36.35	52.21	-14.56	Peak
5	5000.100	42.64	74.00	-31.36	57.02	-14.38	Peak
6	9919.900	45.87	74.00	-28.13	51.95	-6.08	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Ashton

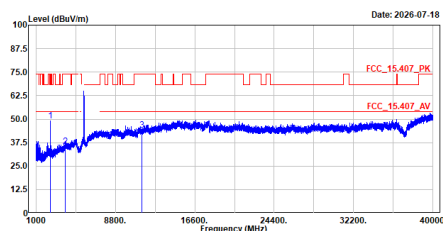


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	49.23	68.22	-18.99	73.10	-23.87	Peak
2	3825.000	35.43	74.00	-38.57	54.58	-19.15	Peak
3	11400.000	44.21	74.00	-29.79	46.78	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Ashton

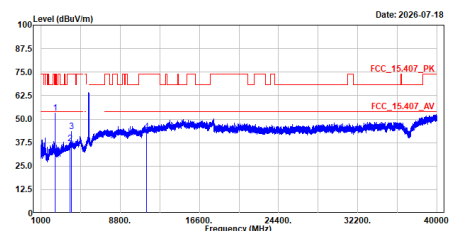


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.00	68.22	-15.14	76.95	-23.87	Peak
2	3825.000	36.97	74.00	-37.03	56.12	-19.15	Peak
3	3989.450	43.54	74.00	-30.46	62.32	-18.78	Peak
4	11400.000	43.46	74.00	-30.54	46.03	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

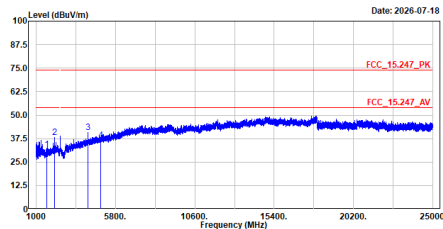


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1646.600	31.56	74.00	-42.44	57.00	-25.44	Peak
2	2099.900	38.18	74.00	-35.82	62.54	-24.36	Peak
3	4115.100	48.79	74.00	-33.21	59.26	-18.47	Peak
4	4904.000	36.55	74.00	-37.45	51.36	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Ashton

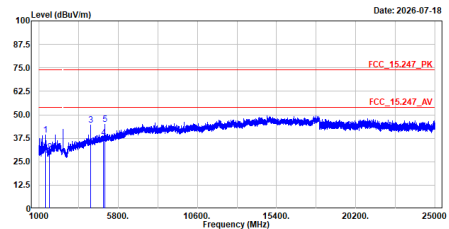


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1396.100	39.28	74.00	-34.72	64.74	-25.46	Peak
2	1646.600	38.29	74.00	-35.71	55.73	-25.44	Peak
3	4116.100	44.47	74.00	-29.53	62.94	-18.47	Peak
4	4904.000	37.66	74.00	-36.34	52.47	-14.81	Peak
5	4981.400	44.98	74.00	-29.02	59.45	-14.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

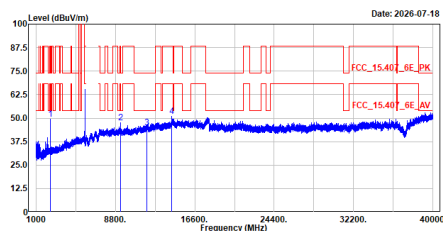


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	49.26	88.22	-38.96	73.13	-23.87	Peak
2	9272.200	47.45	88.22	-40.77	54.47	-7.02	Peak
3	11870.000	44.84	74.00	-29.16	46.91	-2.07	Peak
4	14350.100	51.08	88.22	-37.14	51.08	0.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Ashton

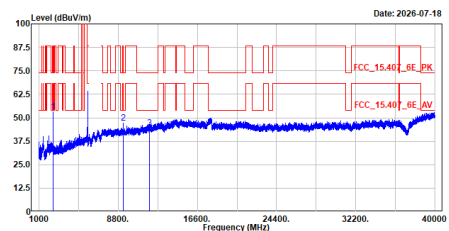


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2393.150	53.11	88.22	-35.11	76.98	-23.87	Peak
2	9272.200	47.29	88.22	-40.93	54.31	-7.02	Peak
3	11870.000	44.68	74.00	-29.32	46.75	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

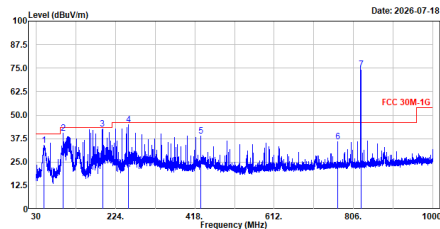


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.818	33.84	40.00	-6.16	57.34	-23.50	QP
2	95.960	40.22	43.50	-3.28	69.23	-29.01	QP
3	192.087	42.77	43.50	-0.73	69.35	-26.58	QP
4	256.107	44.90	46.00	-1.10	69.74	-24.84	QP
5	432.065	38.76	46.00	-7.24	58.44	-19.68	QP
6	768.170	35.91	46.00	-10.09	48.86	-12.95	QP
7	824.200	74.18	-----	-----	86.63	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

GSM850_Voice_CH128+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_Voice_CH128+TX_BLE2M_2480MHz
Test BY :Rock

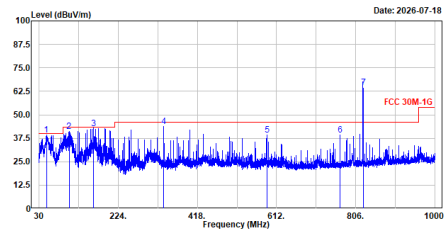


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.945	39.08	40.00	-0.92	62.60	-23.52	QP
2	103.526	41.17	43.50	-2.33	69.02	-27.85	QP
3	164.054	42.67	43.50	-0.83	66.69	-24.02	QP
4	336.035	43.85	46.00	-2.15	65.92	-22.07	QP
5	588.041	39.12	46.00	-6.88	55.33	-16.21	QP
6	768.170	39.28	46.00	-6.72	52.23	-12.95	QP
7	824.200	64.43	-----	-----	76.88	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock

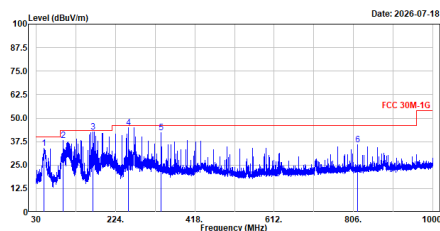


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.012	33.91	40.00	-6.09	57.42	-23.51	QP
2	95.960	37.97	43.50	-5.53	66.98	-29.01	QP
3	168.031	42.67	43.50	-0.83	66.96	-24.29	QP
4	256.107	44.81	46.00	-1.19	69.65	-24.84	QP
5	336.035	42.21	46.00	-3.79	64.28	-22.07	QP
6	816.088	35.88	46.00	-10.12	48.42	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_5M_QPSK_CH26665+TX_ax20_5700MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.236	38.90	40.00	-1.10	62.41	-23.51	QP
2	168.031	42.57	43.50	-0.93	66.86	-24.29	QP
3	256.010	41.40	46.00	-4.60	66.24	-24.84	QP
4	336.035	43.32	46.00	-2.68	65.39	-22.07	QP
5	588.041	39.20	46.00	-6.80	55.41	-16.21	QP
6	768.170	39.45	46.00	-6.55	52.40	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

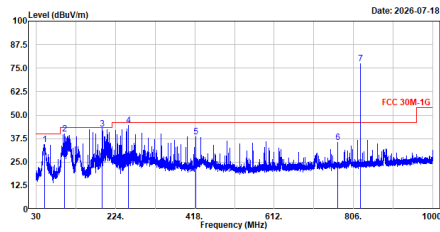


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.982	34.34	48.00	-5.66	57.94	-23.60	QP
2	99.840	39.83	43.50	-3.67	68.33	-28.50	QP
3	191.893	42.74	43.50	-0.76	69.30	-26.56	QP
4	256.010	44.52	46.00	-1.48	69.36	-24.84	QP
5	420.037	38.58	46.00	-7.42	58.77	-20.19	QP
6	768.170	35.43	46.00	-10.57	48.38	-12.95	QP
7	823.300	77.17	-----	-----	89.62	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_1.4M_QPSK_CH26783+TX_ax40_2452MHz
Test BY :Rock

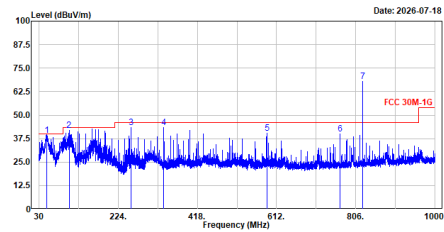


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	39.16	48.00	-8.84	62.67	-23.51	QP
2	103.526	41.87	43.50	-1.63	69.72	-27.85	QP
3	256.010	43.55	46.00	-2.45	68.39	-24.84	QP
4	336.035	43.39	46.00	-2.61	65.46	-22.07	QP
5	588.041	40.42	46.00	-5.58	56.63	-16.21	QP
6	768.170	40.06	46.00	-5.94	53.01	-12.95	QP
7	823.300	67.83	-----	-----	80.28	-12.45	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

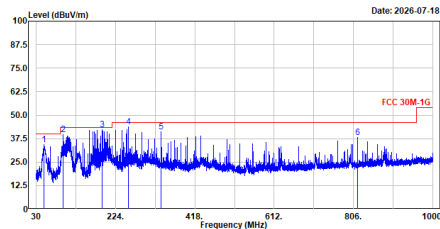


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.333	34.24	48.00	-5.76	57.75	-23.51	QP
2	95.960	39.61	43.50	-3.89	68.62	-29.01	QP
3	191.990	42.26	43.50	-1.24	68.82	-26.56	QP
4	256.010	43.85	46.00	-2.15	68.69	-24.84	QP
5	336.035	41.30	46.00	-4.70	63.37	-22.07	QP
6	816.088	38.23	46.00	-7.77	50.77	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_CH42165+TX_ax20_5935MHz
Test BY :Rock

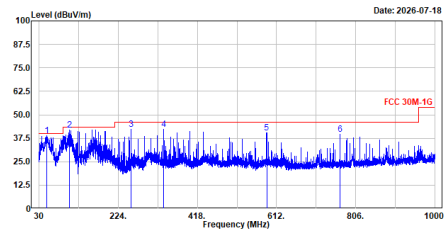


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.915	38.92	48.00	-1.08	62.42	-23.50	QP
2	103.623	41.70	43.50	-1.80	69.51	-27.81	QP
3	256.010	42.11	46.00	-3.89	66.95	-24.84	QP
4	336.035	42.30	46.00	-3.70	64.37	-22.07	QP
5	587.944	40.35	46.00	-5.65	56.56	-16.21	QP
6	768.170	39.76	46.00	-6.24	52.71	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location_US version

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

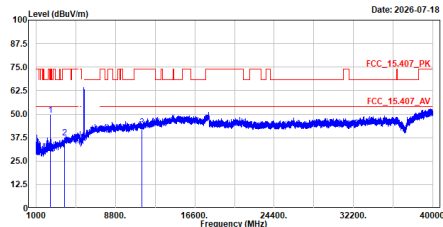


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	49.32	68.22	-18.90	73.19	-23.87	Peak
2	3765.000	37.18	74.00	-36.82	56.74	-19.56	Peak
3	11400.000	43.21	74.00	-30.79	45.78	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Ashton

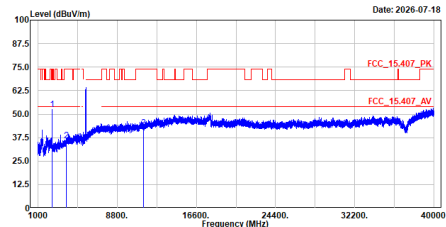


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2392.300	52.53	68.22	-15.69	76.39	-23.86	Peak
2	3765.000	35.67	74.00	-38.33	55.23	-19.56	Peak
3	11400.000	42.63	74.00	-31.37	45.20	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

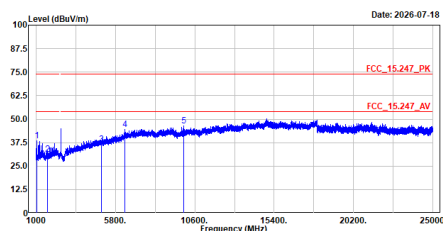


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1850.150	38.66	74.00	-35.34	64.61	-25.95	Peak
2	1683.000	31.39	74.00	-42.61	57.08	-25.69	Peak
3	4960.000	36.42	74.00	-37.58	50.98	-14.56	Peak
4	6357.550	44.46	74.00	-29.54	53.59	-9.13	Peak
5	9920.750	46.46	74.00	-27.54	52.53	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

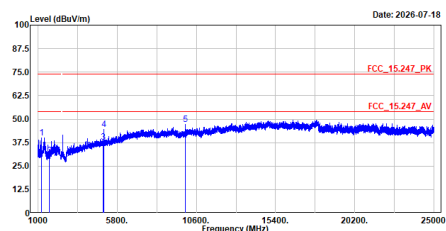


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1216.750	40.17	74.00	-33.83	66.02	-25.85	Peak
2	1683.000	30.49	74.00	-43.51	56.18	-25.69	Peak
3	4960.000	37.64	74.00	-36.36	52.20	-14.56	Peak
4	4981.400	44.61	74.00	-29.39	59.08	-14.47	Peak
5	9920.750	47.01	74.00	-26.99	53.08	-6.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m_Horizontal
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

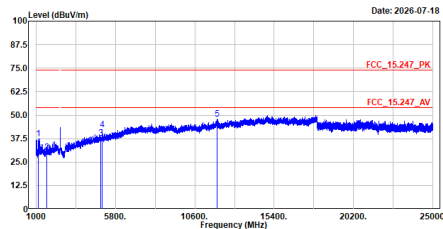


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1133.450	37.53	74.00	-36.47	63.53	-26.00	Peak
2	1645.000	30.25	74.00	-43.75	55.69	-25.44	Peak
3	4904.000	37.68	74.00	-36.32	52.49	-14.81	Peak
4	5000.100	42.29	74.00	-31.71	56.67	-14.38	Peak
5	11954.800	48.09	74.00	-25.91	50.22	-2.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m_Vertical
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

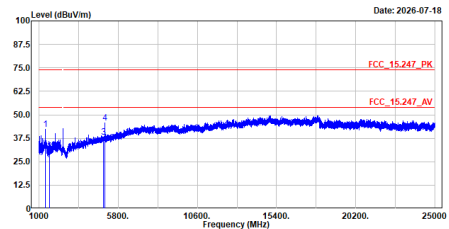


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1397.000	42.23	74.00	-31.77	67.71	-25.48	Peak
2	1645.000	30.49	74.00	-43.51	55.93	-25.44	Peak
3	4904.000	37.96	74.00	-36.04	52.77	-14.81	Peak
4	4995.000	45.57	74.00	-28.43	59.98	-14.41	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m_Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

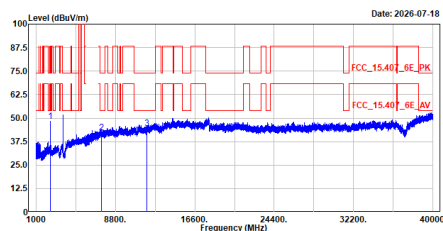


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	48.23	88.22	-39.99	72.10	-23.87	Peak
2	7395.000	42.35	74.00	-31.65	49.79	-7.44	Peak
3	11870.000	44.60	74.00	-29.40	46.67	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m_Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

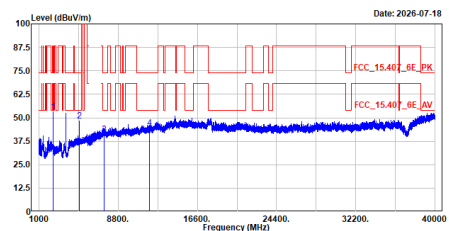


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	53.30	88.22	-34.92	77.17	-23.87	Peak
2	4900.550	40.44	74.00	-33.56	62.92	-14.48	Peak
3	7395.000	41.28	74.00	-32.72	48.72	-7.44	Peak
4	11870.000	44.70	74.00	-29.30	46.77	-2.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

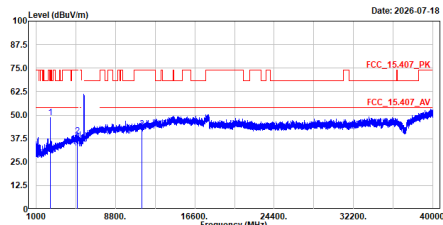


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2398.250	48.81	68.22	-19.41	72.68	-23.87	Peak
2	5070.000	38.75	74.00	-35.25	52.94	-14.19	Peak
3	11400.000	42.83	74.00	-31.17	45.40	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Ashton

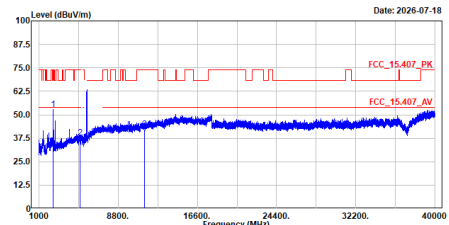


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2398.300	53.00	68.22	-15.22	76.86	-23.86	Peak
2	5070.000	37.75	74.00	-36.25	51.94	-14.19	Peak
3	11400.000	42.26	74.00	-31.74	44.83	-2.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

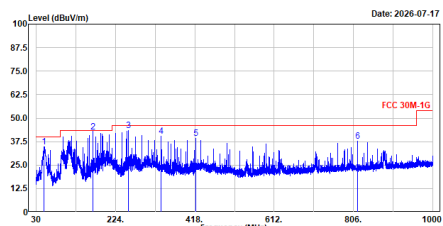


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.400	34.62	40.00	-5.38	58.17	-23.55	QP
2	168.031	42.54	43.50	-0.96	66.83	-24.29	QP
3	256.010	43.31	46.00	-2.69	68.15	-24.84	QP
4	336.035	40.31	46.00	-5.69	62.38	-22.07	QP
5	420.037	39.18	46.00	-6.82	59.37	-20.19	QP
6	816.088	37.87	46.00	-8.13	50.41	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax20_5700MHz
Test BY :Rock

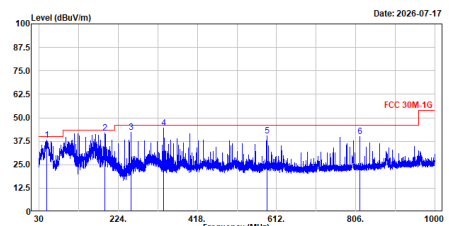


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48.333	38.06	40.00	-1.94	61.57	-23.51	QP
2	191.990	41.73	43.50	-1.77	68.29	-26.56	QP
3	256.010	42.42	46.00	-3.58	67.26	-24.84	QP
4	336.035	44.45	46.00	-1.55	66.52	-22.07	QP
5	588.041	40.28	46.00	-5.72	56.49	-16.21	QP
6	816.088	40.17	46.00	-5.83	52.71	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz Test BY :Rock </

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

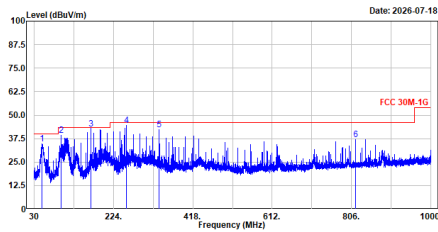


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	49.206	34.77	40.00	-5.23	50.30	-23.53	QP
2	95.960	39.26	43.50	-4.24	68.27	-29.01	QP
3	168.031	42.76	43.50	-0.74	67.05	-24.29	QP
4	256.010	44.51	46.00	-1.49	69.35	-24.84	QP
5	336.035	42.41	46.00	-3.59	64.48	-22.07	QP
6	816.185	36.87	46.00	-9.13	49.41	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Rock

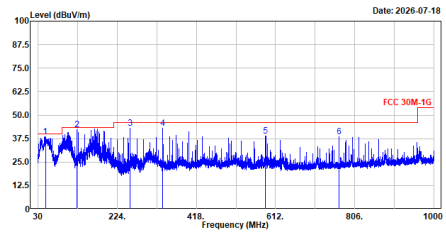


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.945	38.65	40.00	-1.35	62.17	-23.52	QP
2	125.060	42.15	43.50	-1.35	68.10	-25.95	QP
3	256.010	42.95	46.00	-3.05	67.79	-24.84	QP
4	336.035	43.01	46.00	-2.99	65.08	-22.07	QP
5	587.847	38.99	46.00	-7.01	55.20	-16.21	QP
6	768.170	38.46	46.00	-7.54	51.41	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	48.042	35.53	40.00	-4.47	59.04	-23.51	QP
2	123.993	41.35	43.50	-2.15	67.32	-25.97	QP
3	256.010	45.03	46.00	-0.97	69.87	-24.84	QP
4	336.035	41.87	46.00	-4.13	63.94	-22.07	QP
5	496.005	39.06	46.00	-6.94	57.41	-18.35	QP
6	768.170	38.27	46.00	-7.73	51.22	-12.95	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax20_5700MHz
Test BY :Rock

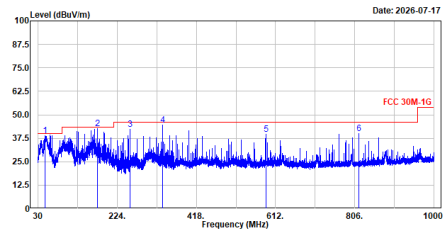

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	47.848	38.80	40.00	-1.20	62.33	-23.53	QP
2	175.985	42.62	43.50	-0.88	67.57	-24.95	QP
3	256.010	42.40	46.00	-3.60	67.24	-24.84	QP
4	336.035	44.39	46.00	-1.61	66.46	-22.07	QP
5	580.118	39.59	46.00	-6.41	55.80	-16.21	QP
6	816.088	40.12	46.00	-5.88	52.66	-12.54	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.