


TX_ax20_5745MHz_RU 106 53_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

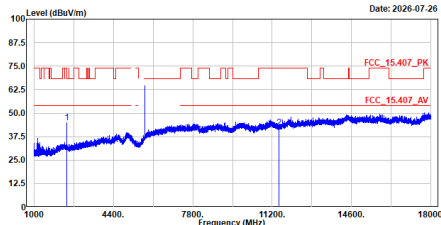


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2388.900	44.80	74.00	-29.20	68.66	-23.86	Peak
2	11490.000	42.44	74.00	-31.56	44.91	-2.47	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

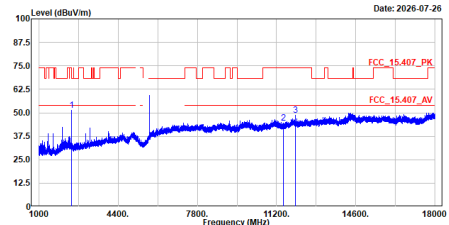


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2391.450	51.46	68.22	-16.76	75.33	-23.87	Peak
2	11490.000	44.53	74.00	-29.47	47.00	-2.47	Peak
3	11999.850	48.76	74.00	-25.24	50.88	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

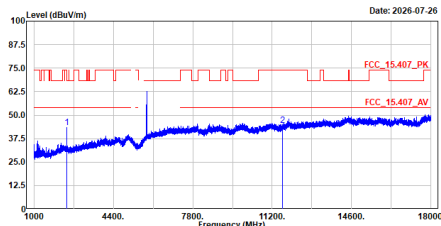


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2399.100	43.46	68.22	-24.76	67.33	-23.87	Peak
2	11650.000	44.43	74.00	-29.57	46.88	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

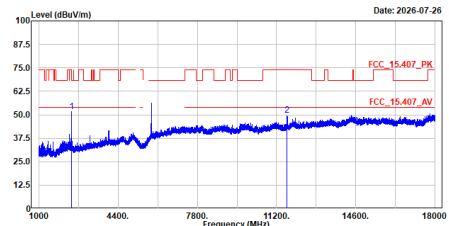


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.600	51.53	68.22	-16.69	75.40	-23.87	Peak
2	11650.000	49.85	74.00	-24.15	52.30	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

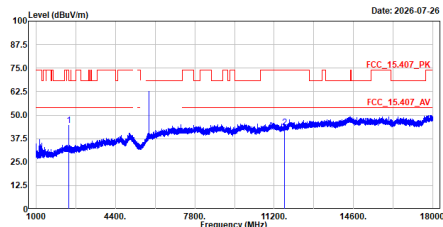


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2395.700	44.52	68.22	-23.70	68.39	-23.87	Peak
2	11650.000	43.41	74.00	-30.59	45.86	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

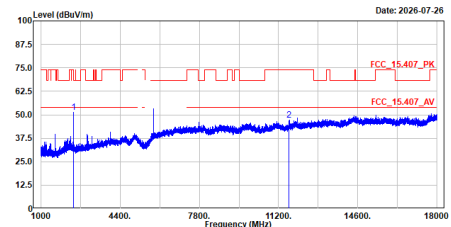


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	51.38	68.22	-16.84	75.24	-23.86	Peak
2	11650.000	47.15	74.00	-26.85	49.60	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

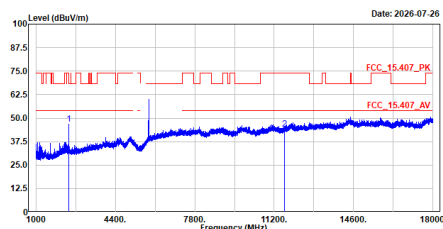


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	46.75	68.22	-21.47	70.61	-23.86	Peak
2	11650.000	44.26	74.00	-29.74	46.71	-2.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

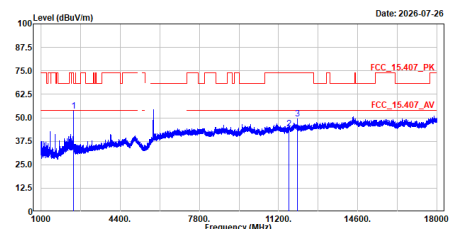


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	53.41	68.22	-14.81	77.27	-23.86	Peak
2	11650.000	44.30	74.00	-29.70	46.75	-2.45	Peak
3	11999.850	49.31	74.00	-24.69	51.43	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

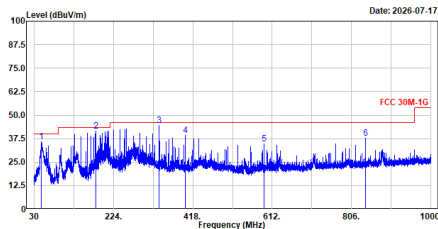


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	47.848	35.80	40.00	-4.20	59.32	-23.52	QP
2	180.059	41.45	43.50	-2.05	66.95	-25.50	QP
3	336.035	44.60	46.00	-1.40	66.62	-22.02	QP
4	400.055	39.14	46.00	-6.86	59.63	-20.49	QP
5	592.115	34.78	46.00	-11.22	50.83	-16.05	QP
6	840.144	37.65	46.00	-8.35	49.89	-12.24	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_5825MHz_RU 106 54_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

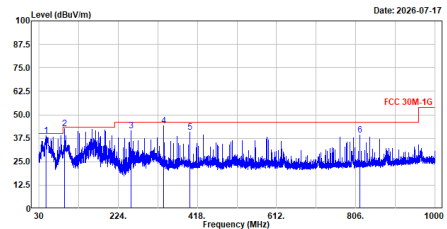


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	40.393	38.73	40.00	-1.27	62.27	-23.54	QP
2	91.093	42.46	43.50	-1.04	72.08	-29.62	QP
3	256.010	41.54	46.00	-4.46	66.33	-24.79	QP
4	336.035	44.10	46.00	-1.90	66.12	-22.02	QP
5	400.055	40.59	46.00	-5.41	61.08	-20.49	QP
6	816.088	39.38	46.00	-6.62	51.85	-12.47	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_ax20_5180MHz_RU 26 0_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

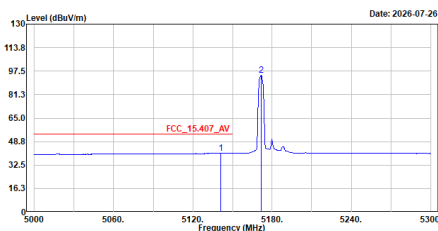


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5141.300	40.59	54.00	-13.41	24.94	15.65	Average
2	5171.600	94.46	-----	-----	78.74	15.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

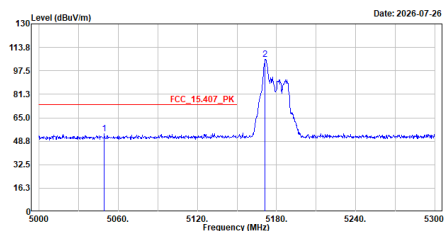


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5049.500	54.20	74.00	-19.80	38.57	15.63	Peak
2	5171.300	105.29	-----	-----	89.57	15.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

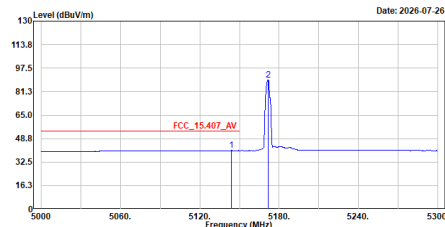


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.000	48.48	54.00	-13.52	24.83	15.65	Average
2	5171.600	89.45	-----	-----	73.73	15.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 26 0
Test BY :Rock

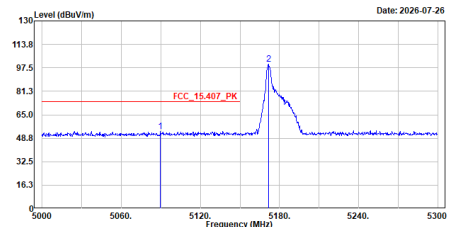


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5089.700	53.53	74.00	-20.47	37.89	15.64	Peak
2	5171.600	99.96	-----	-----	84.24	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

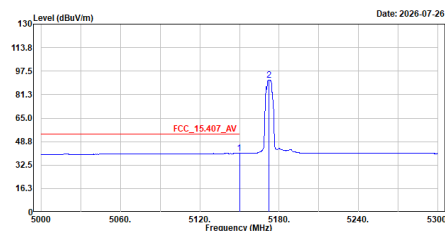


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	48.55	54.00	-13.45	24.89	15.66	Average
2	5172.500	91.27	-----	-----	75.55	15.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

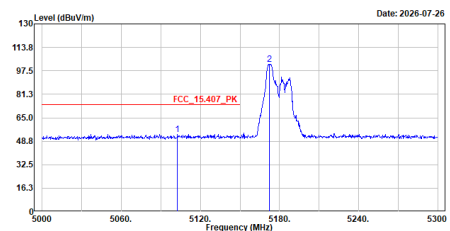


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5102.600	53.54	74.00	-20.46	37.91	15.63	Peak
2	5172.200	102.21	-----	-----	86.49	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

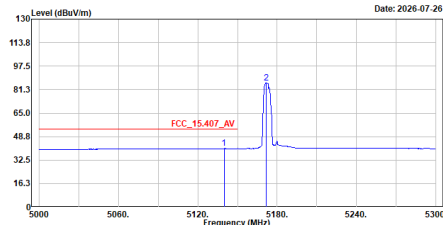


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5139.000	48.48	54.00	-13.52	24.83	15.65	Average
2	5171.900	86.06	-----	-----	70.34	15.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 52 37
Test BY :Rock

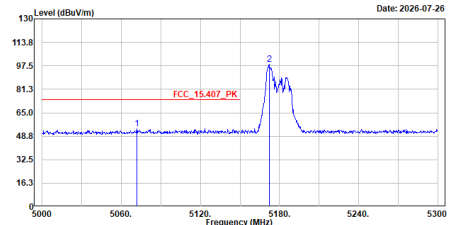


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5071.700	54.12	74.00	-19.88	38.47	15.65	Peak
2	5172.200	98.58	-----	-----	82.86	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

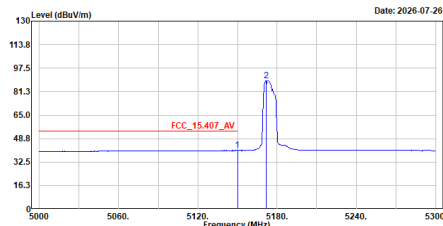


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	48.50	54.00	-13.50	24.84	15.66	Average
2	5171.600	88.87	-----	-----	73.15	15.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5012.900	53.93	74.00	-20.07	38.39	15.54	Peak
2	5172.500	101.43	-----	-----	85.71	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

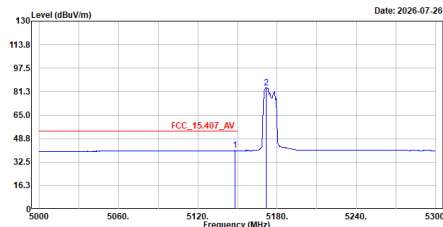


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.900	40.50	54.00	-13.50	24.84	15.66	Average
2	5171.900	84.12	-----	-----	68.40	15.72	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5180MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5180MHz_RU 106 53
Test BY :Rock

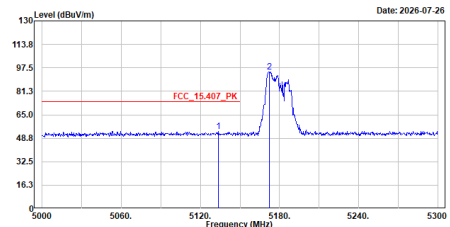


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5133.500	53.71	74.00	-20.29	38.87	15.64	Peak
2	5172.200	94.60	-----	-----	78.88	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

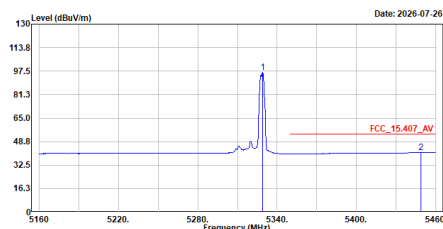


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	96.56	-----	-----	80.88	15.68	Average
2	5448.600	41.17	54.00	-12.83	25.22	15.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

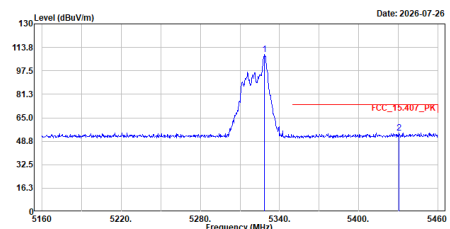


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.300	108.92	-----	-----	93.23	15.69	Peak
2	5430.600	54.50	74.00	-19.50	38.65	15.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

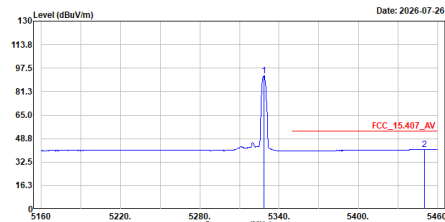


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	92.28	-----	-----	76.59	15.69	Average
2	5449.000	41.16	54.00	-12.84	25.21	15.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 26 8
Test BY :Rock

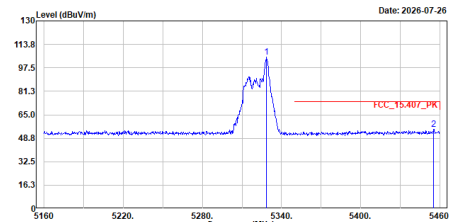


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	104.87	-----	-----	89.18	15.69	Peak
2	5455.500	55.18	74.00	-18.82	39.22	15.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

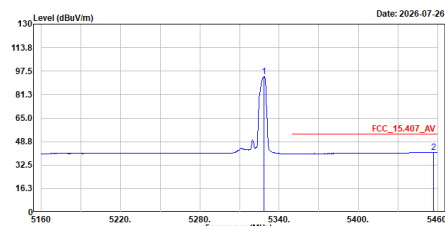


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.600	93.70	-----	-----	78.01	15.69	Average
2	5457.000	41.15	54.00	-12.85	25.19	15.96	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	105.20	-----	-----	89.52	15.68	Peak
2	5415.000	55.48	74.00	-18.52	39.69	15.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock

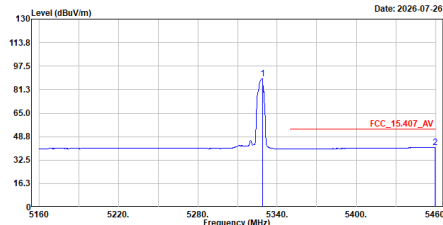


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	88.91	-----	-----	73.23	15.68	Average
2	5459.400	41.13	54.00	-12.87	25.15	15.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	100.09	-----	-----	84.41	15.68	Peak
2	5454.900	54.92	74.00	-19.08	38.96	15.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

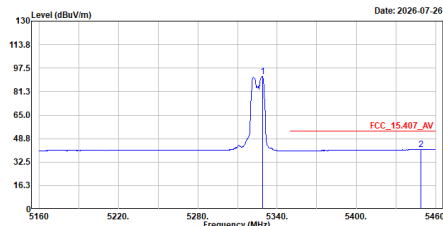


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	91.51	-----	-----	75.83	15.68	Average
2	5448.900	41.15	54.00	-12.85	25.20	15.95	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	102.60	-----	-----	86.90	15.70	Peak
2	5433.300	54.49	74.00	-19.51	38.62	15.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

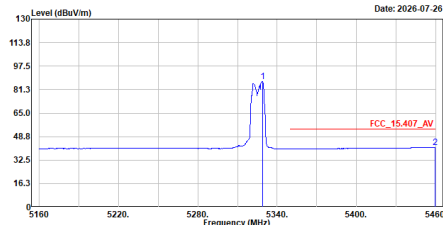


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5328.900	87.01	-----	-----	71.33	15.68	Average
2	5459.700	41.11	54.00	-12.89	25.13	15.98	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5320MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5320MHz_RU 106 54
Test BY :Rock

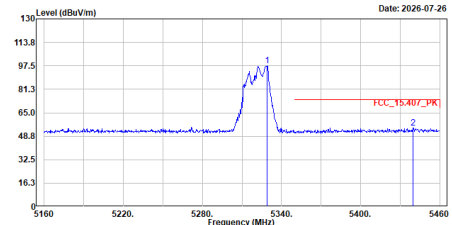


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5329.200	97.79	-----	-----	82.11	15.68	Peak
2	5439.900	54.49	74.00	-19.51	38.59	15.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

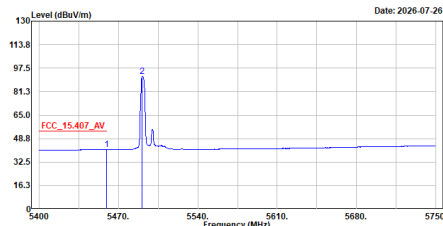


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5459.150	41.22	54.00	-12.78	25.25	15.97	Average
2	5491.000	91.65	-----	-----	75.59	16.06	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5447.600	54.61	74.00	-19.39	38.67	15.94	Peak
2	5463.700	54.62	68.22	-13.60	38.63	15.99	Peak
3	5491.700	103.39	-----	-----	87.33	16.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

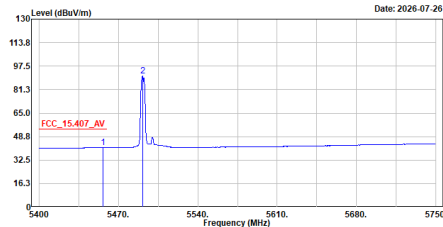


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5456.350	41.13	54.00	-12.87	25.17	15.96	Average
2	5491.350	90.82	-----	-----	74.76	16.06	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 26 0
Test BY :Rock

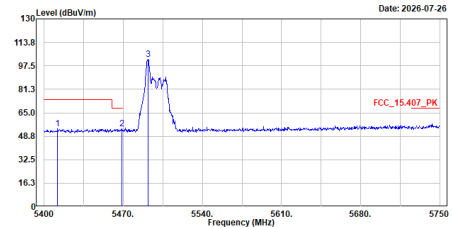


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5411.900	54.16	74.00	-19.84	38.39	15.77	Peak
2	5468.600	53.73	68.22	-14.49	37.73	16.00	Peak
3	5492.050	101.94	-----	-----	85.88	16.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

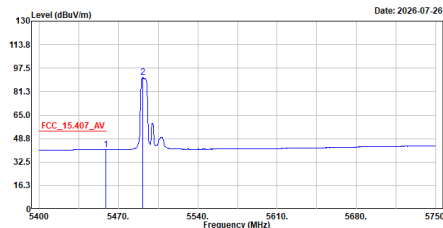


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5458.800	41.30	54.00	-12.70	25.33	15.97	Average
2	5491.350	91.03	-----	-----	74.97	16.06	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

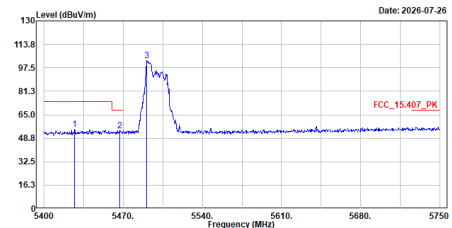


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5426.950	54.70	74.00	-19.30	38.87	15.83	Peak
2	5467.200	54.18	68.22	-14.04	38.19	15.99	Peak
3	5491.000	102.29	-----	-----	86.23	16.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

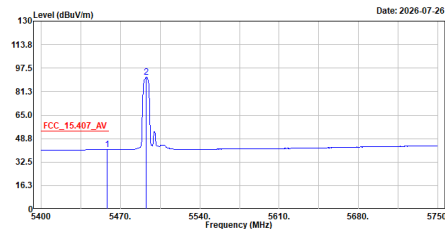


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5458.100	41.17	54.00	-12.83	25.20	15.97	Average
2	5492.750	91.26	-----	-----	75.19	16.07	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 52 37
Test BY :Rock

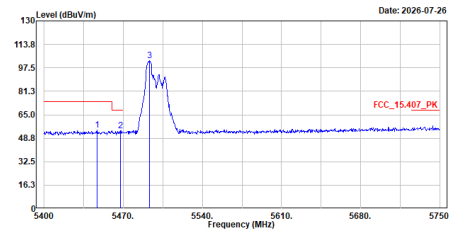


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5448.900	54.33	74.00	-19.67	38.41	15.92	Peak
2	5467.550	83.95	68.22	-14.27	37.95	16.00	Peak
3	5493.100	102.29	-----	-----	86.22	16.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_H_Average

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

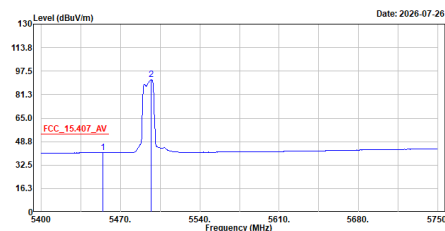


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5454.250	41.24	54.00	-12.76	25.28	15.96	Average
2	5497.300	91.51	-----	-----	75.43	16.08	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock




No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5458.100	54.10	74.00	-19.90	38.13	15.97	Peak
2	5465.000	54.20	68.22	-14.02	38.21	15.99	Peak
3	5498.000	102.36	-----	-----	86.27	16.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_V_Average

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

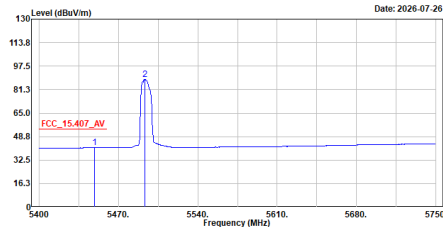


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5449.000	41.17	54.00	-12.83	25.22	15.95	Average
2	5493.100	88.26	-----	-----	72.19	16.07	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5500MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5500MHz_RU 106 53
Test BY :Rock

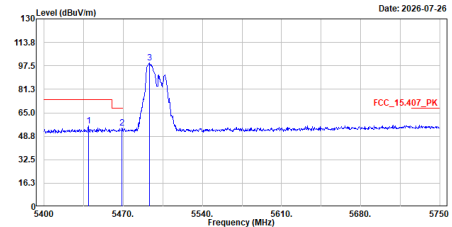


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5439.200	55.90	74.00	-18.10	40.00	15.90	Peak
2	5469.950	54.55	68.22	-13.67	38.55	16.00	Peak
3	5493.100	99.42	-----	-----	83.35	16.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m_Horizontal
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

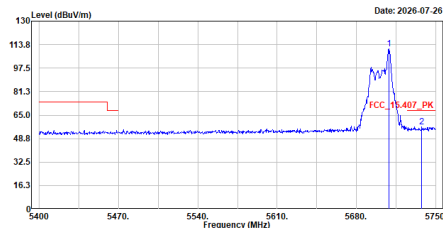


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5708.700	118.80	-----	-----	93.46	17.34	Peak
2	5737.750	56.87	68.22	-11.35	39.49	17.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m_Vertical
Mode :TX_ax20_5700MHz_RU 26 8
Test BY :Rock

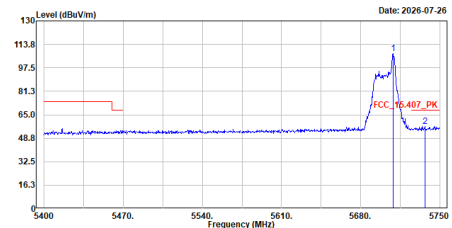


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	5708.700	107.35	-----	-----	90.01	17.34	Peak
2	5736.700	56.82	68.22	-11.40	39.45	17.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5708.000	108.41	-----	-----	91.87	17.34	Peak
2	5727.950	57.96	68.22	-10.26	40.60	17.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 52 40
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5708.700	104.36	-----	-----	87.02	17.34	Peak
2	5737.400	57.65	68.22	-10.57	40.28	17.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock




No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5706.950	105.71	-----	-----	88.38	17.33	Peak
2	5726.550	56.66	68.22	-11.56	39.31	17.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5700MHz_RU 106 54_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5700MHz_RU 106 54
Test BY :Rock

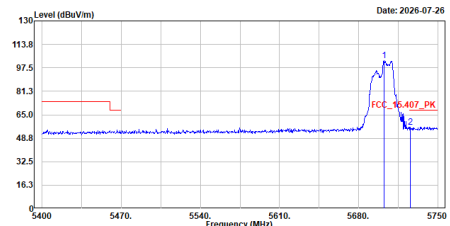


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5702.750	102.44	-----	-----	85.11	17.33	Peak
2	5725.850	56.63	68.22	-11.59	39.28	17.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

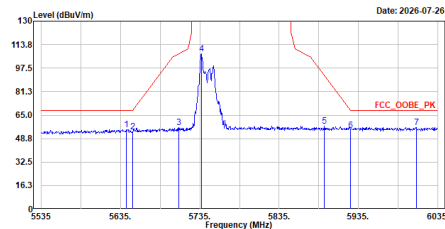


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	55.15	68.20	-13.05	38.18	16.97	Peak
2	5650.000	53.64	68.21	-14.57	36.64	17.00	Peak
3	5708.500	56.65	107.58	-50.93	39.31	17.34	Peak
4	5737.000	107.39	-----	-----	90.02	17.37	Peak
5	5892.000	57.63	92.62	-34.99	39.93	17.70	Peak
6	5925.000	54.60	68.21	-13.61	36.71	17.89	Peak
7	6000.000	56.51	68.20	-11.69	38.71	17.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 26 0_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 26 0
Test BY :Rock

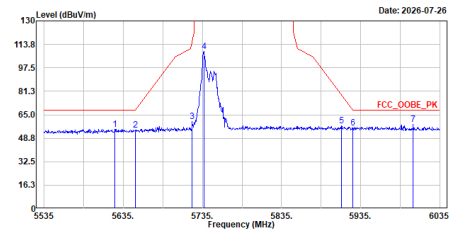


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5620.500	55.11	68.20	-13.09	38.20	16.91	Peak
2	5650.000	54.35	68.21	-13.86	37.35	17.00	Peak
3	5722.000	60.41	115.36	-54.95	43.06	17.35	Peak
4	5737.000	109.01	-----	-----	91.64	17.37	Peak
5	5911.000	57.34	78.57	-21.23	39.54	17.80	Peak
6	5925.000	56.10	68.21	-12.11	38.21	17.89	Peak
7	6001.500	58.27	68.20	-9.93	40.48	17.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock

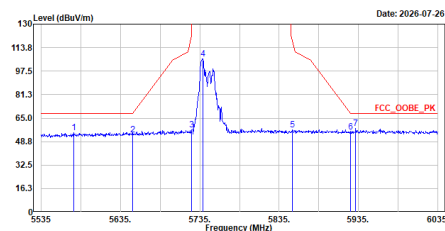


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5576.000	54.97	68.20	-13.23	38.36	16.61	Peak
2	5650.000	53.68	68.21	-14.53	36.68	17.00	Peak
3	5725.000	57.11	122.20	-65.09	39.75	17.36	Peak
4	5739.000	109.91	-----	-----	88.53	17.38	Peak
5	5851.500	57.11	118.78	-61.67	39.60	17.51	Peak
6	5925.000	55.52	68.21	-12.69	37.63	17.89	Peak
7	5931.500	57.66	68.20	-10.54	39.74	17.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 52 37_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 52 37
Test BY :Rock

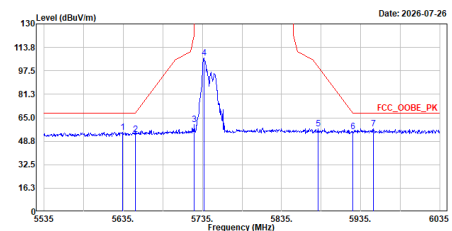


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5634.500	55.06	68.20	-13.14	38.11	16.95	Peak
2	5650.000	53.35	68.21	-14.86	36.35	17.00	Peak
3	5725.000	60.54	122.20	-61.66	43.18	17.36	Peak
4	5737.000	106.32	-----	-----	88.95	17.37	Peak
5	5881.000	57.44	100.76	-43.32	39.79	17.65	Peak
6	5925.000	55.55	68.21	-12.66	37.66	17.89	Peak
7	5951.000	57.51	68.20	-10.69	39.57	17.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

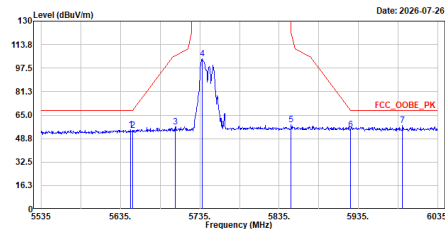


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.500	54.96	68.20	-13.24	37.96	17.00	Peak
2	5650.000	54.48	68.21	-13.73	37.48	17.00	Peak
3	5704.000	56.89	106.32	-49.43	39.56	17.33	Peak
4	5738.000	103.97	-----	-----	86.59	17.38	Peak
5	5850.000	58.51	122.20	-63.69	41.00	17.51	Peak
6	5925.000	54.97	68.21	-13.24	37.08	17.89	Peak
7	5990.500	57.04	68.20	-10.36	40.03	17.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5745MHz_RU 106 53_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5745MHz_RU 106 53
Test BY :Rock

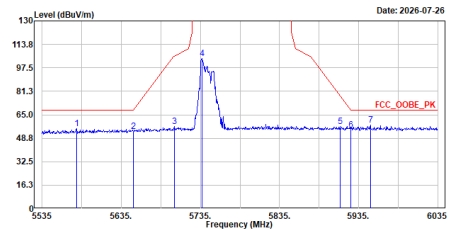


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5578.500	55.23	68.20	-12.97	38.59	16.64	Peak
2	5650.000	53.36	68.21	-14.85	36.36	17.00	Peak
3	5702.000	57.07	105.76	-48.69	39.74	17.33	Peak
4	5737.500	104.21	-----	-----	86.83	17.38	Peak
5	5912.000	56.95	77.83	-20.88	39.15	17.80	Peak
6	5925.000	54.38	68.21	-13.83	36.49	17.89	Peak
7	5950.000	57.74	68.20	-10.46	39.80	17.94	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

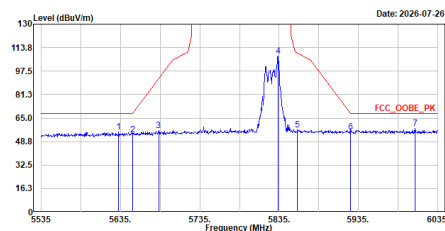


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5632.500	55.30	68.20	-12.90	38.35	16.95	Peak
2	5650.000	53.35	68.21	-14.86	36.35	17.00	Peak
3	5683.000	56.31	92.62	-36.31	39.07	17.24	Peak
4	5833.500	107.90	-----	-----	90.40	17.50	Peak
5	5858.000	56.97	109.96	-52.99	39.42	17.55	Peak
6	5925.000	55.54	68.21	-12.67	37.65	17.89	Peak
7	6000.500	57.68	68.20	-10.52	39.88	17.80	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 26 8_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 26 8
Test BY :Rock

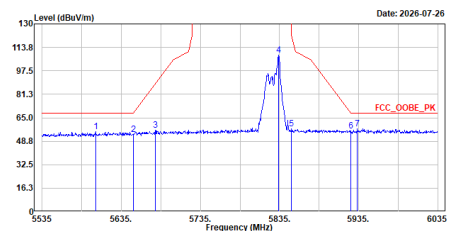


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5602.500	55.37	68.20	-12.83	38.54	16.83	Peak
2	5650.000	53.49	68.21	-14.72	36.49	17.00	Peak
3	5678.000	56.46	88.92	-32.46	39.25	17.21	Peak
4	5833.500	108.28	-----	-----	90.78	17.50	Peak
5	5850.000	57.27	122.20	-64.93	39.76	17.51	Peak
6	5925.000	55.73	68.21	-12.48	37.84	17.89	Peak
7	5933.500	57.58	68.20	-10.62	39.66	17.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

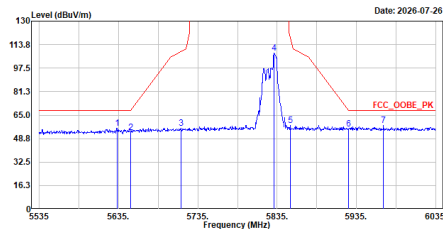


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5633.000	56.11	68.20	-12.09	39.16	16.95	Peak
2	5650.000	53.09	68.21	-15.12	36.09	17.00	Peak
3	5713.000	55.94	108.98	-53.04	38.60	17.34	Peak
4	5831.500	107.92	-----	-----	90.41	17.51	Peak
5	5851.500	57.87	118.78	-60.91	40.36	17.51	Peak
6	5925.000	55.46	68.21	-12.75	37.57	17.89	Peak
7	5969.000	57.02	68.20	-10.38	39.94	17.88	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 52 40_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 52 40
Test BY :Rock

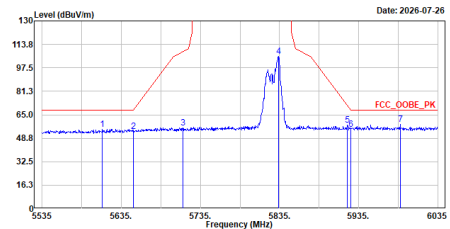


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5611.000	55.14	68.20	-13.06	38.29	16.85	Peak
2	5650.000	53.52	68.21	-14.69	36.52	17.00	Peak
3	5713.000	56.15	108.84	-52.69	38.81	17.34	Peak
4	5834.000	105.60	-----	-----	88.10	17.50	Peak
5	5921.000	57.68	71.17	-13.49	39.82	17.86	Peak
6	5925.000	55.01	68.21	-13.20	37.12	17.89	Peak
7	5987.500	58.38	68.20	-9.82	40.55	17.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

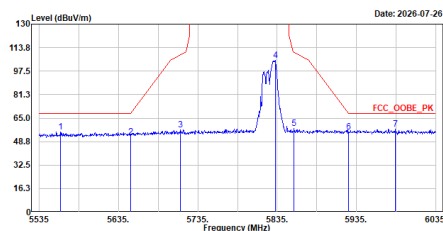


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5562.000	55.50	68.20	-12.70	38.99	16.51	Peak
2	5650.000	52.22	68.21	-15.99	35.22	17.00	Peak
3	5713.000	56.87	108.84	-51.97	39.53	17.34	Peak
4	5832.500	104.78	-----	-----	87.28	17.50	Peak
5	5856.500	57.69	110.38	-52.69	40.15	17.54	Peak
6	5925.000	55.20	68.21	-13.01	37.31	17.89	Peak
7	5984.000	57.44	68.20	-10.76	39.61	17.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_ax20_5825MHz_RU 106 54_V_Peak


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz_RU 106 54
Test BY :Rock

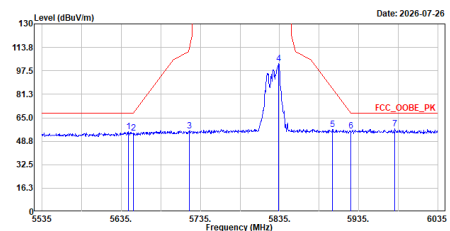

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5644.000	55.47	68.20	-12.73	38.49	16.98	Peak
2	5650.000	54.59	68.21	-13.62	37.59	17.00	Peak
3	5721.000	55.98	113.08	-57.10	38.63	17.35	Peak
4	5834.000	102.35	-----	-----	84.85	17.50	Peak
5	5902.000	57.13	85.22	-28.09	39.40	17.73	Peak
6	5925.000	55.83	68.21	-12.38	37.94	17.89	Peak
7	5981.000	57.19	68.20	-11.01	39.34	17.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Worst-Case Emissions Above 18 GHz

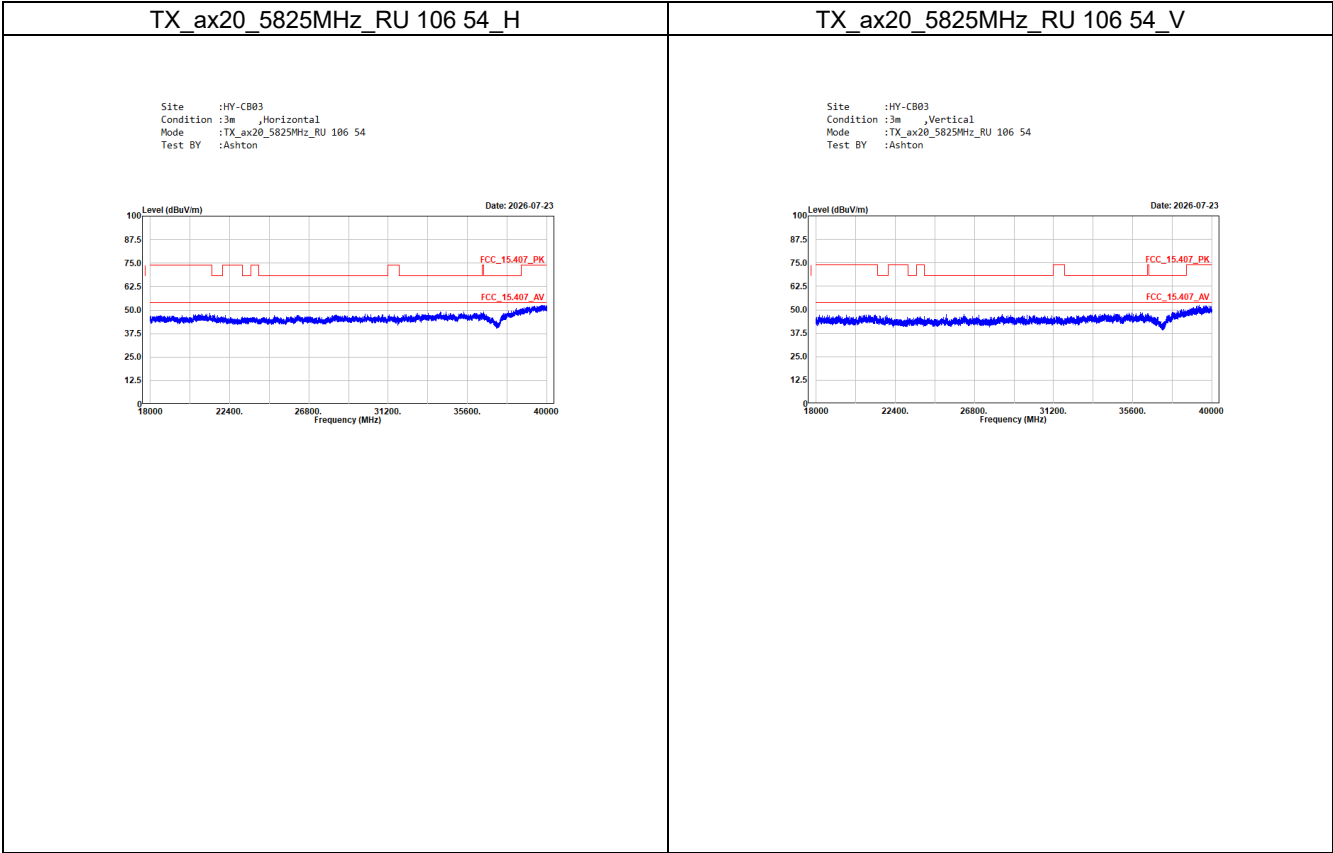

Co-location_ROW version

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

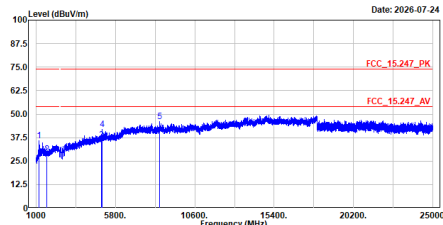


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1175.950	35.73	74.00	-38.27	61.66	-25.93	Peak
2	1648.400	28.77	74.00	-45.23	54.22	-25.45	Peak
3	4960.000	36.39	74.00	-37.61	50.95	-14.56	Peak
4	4997.550	41.78	74.00	-32.22	56.17	-14.39	Peak
5	8485.950	46.19	74.00	-27.81	53.68	-7.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

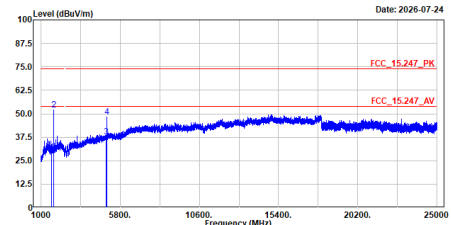


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1648.400	29.46	74.00	-44.54	54.91	-25.45	Peak
2	1759.050	51.96	74.00	-22.04	77.31	-25.35	Peak
3	4960.000	37.76	74.00	-36.24	52.32	-14.56	Peak
4	4989.900	48.25	74.00	-25.75	62.68	-14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

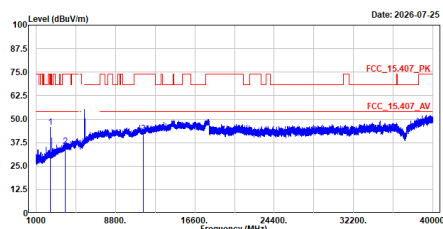


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	45.64	68.22	-22.58	69.51	-23.87	Peak
2	3825.000	35.46	74.00	-38.54	54.61	-19.15	Peak
3	11510.000	42.30	74.00	-31.70	44.76	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

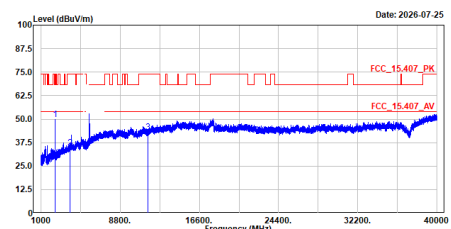


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2392.300	49.76	68.22	-18.46	73.62	-23.86	Peak
2	3825.000	34.81	74.00	-39.19	53.96	-19.15	Peak
3	11510.000	43.04	74.00	-30.96	45.50	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

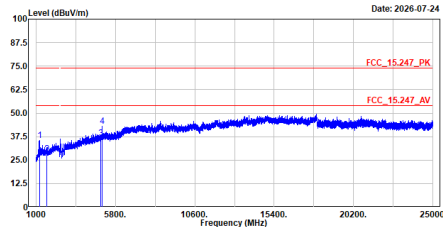


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1199.750	35.35	74.00	-38.65	61.29	-25.94	Peak
2	1646.600	28.48	74.00	-45.52	53.92	-25.44	Peak
3	4984.000	36.75	74.00	-37.25	51.56	-14.81	Peak
4	4994.150	43.06	74.00	-30.94	57.47	-14.41	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

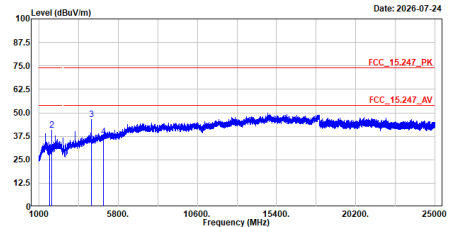


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1646.600	28.80	74.00	-45.20	54.24	-25.44	Peak
2	1768.400	40.87	74.00	-33.13	66.30	-25.43	Peak
3	4156.900	46.34	74.00	-27.66	64.86	-18.52	Peak
4	4984.000	37.22	74.00	-36.78	52.03	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

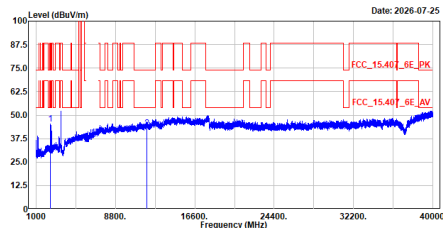


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2393.150	45.27	88.22	-42.95	69.14	-23.87	Peak
2	11870.000	43.18	74.00	-30.82	45.25	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

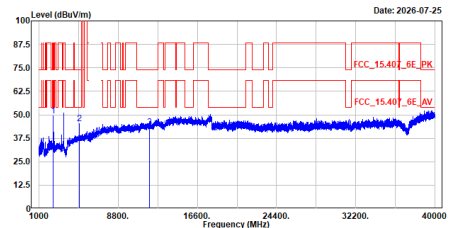


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2389.750	49.56	74.00	-24.44	73.43	-23.87	Peak
2	4981.400	45.22	74.00	-28.78	59.69	-14.47	Peak
3	11870.000	43.51	74.00	-30.49	45.58	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

GSM850_voice_CH128_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

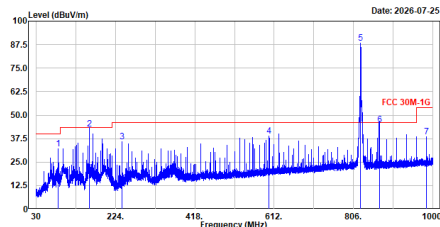


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.932	32.18	40.00	-7.90	61.96	-29.86	QP
2	160.029	42.49	43.50	-1.01	66.43	-23.94	QP
3	240.005	35.73	46.00	-10.27	60.85	-25.12	QP
4	600.069	38.69	46.00	-7.31	54.49	-15.80	QP
5	823.703	88.46	-----	-----	100.91	-12.45	QP
6	869.390	44.83	46.00	-1.17	56.92	-12.09	QP
7	984.092	38.40	54.00	-15.60	48.91	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

GSM850_voice_CH128_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :GSM850_voice_CH128_TX_BLE2M_2480MHz
Test BY :Ashton

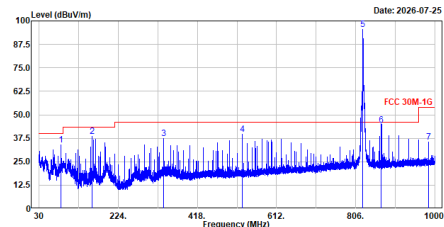


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	33.90	40.00	-6.10	63.77	-29.87	QP
2	160.029	38.46	43.50	-5.04	62.40	-23.94	QP
3	336.035	37.54	46.00	-8.46	59.61	-22.07	QP
4	528.047	39.74	46.00	-6.26	57.42	-17.68	QP
5	823.751	95.47	-----	-----	107.92	-12.45	QP
6	868.808	44.44	46.00	-1.56	56.52	-12.08	QP
7	984.092	35.51	54.00	-18.49	46.82	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

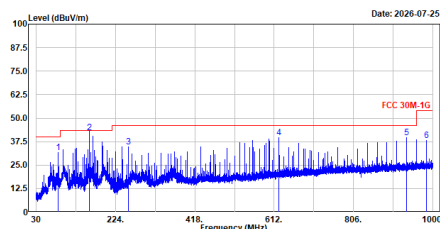


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	31.87	40.00	-8.13	61.74	-29.87	QP
2	160.029	42.12	43.50	-1.38	66.06	-23.94	QP
3	256.010	34.86	46.00	-11.14	59.70	-24.84	QP
4	624.077	39.76	46.00	-6.24	55.12	-15.36	QP
5	936.077	39.79	46.00	-6.21	50.88	-11.09	QP
6	984.092	38.03	54.00	-15.97	48.54	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB25_5M_QPSK_CH26665_TX_ax40_5755MHz
Test BY :Ashton

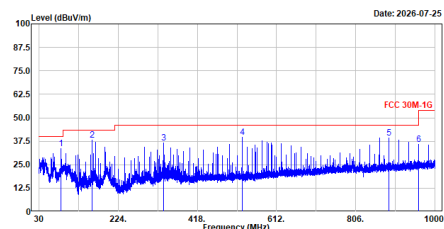


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.981	33.71	40.00	-6.29	63.58	-29.87	QP
2	160.029	38.06	43.50	-5.44	62.00	-23.94	QP
3	336.035	36.66	46.00	-9.34	58.73	-22.07	QP
4	528.047	39.59	46.00	-6.41	57.27	-17.68	QP
5	888.062	39.17	46.00	-6.83	51.08	-11.91	QP
6	968.085	35.92	54.00	-18.08	46.67	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

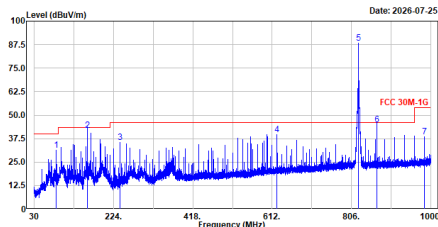


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.029	31.44	40.00	-8.56	61.31	-29.87	QP
2	160.029	41.93	43.50	-1.57	65.87	-23.94	QP
3	240.005	35.58	46.00	-10.42	60.70	-25.12	QP
4	624.077	39.66	46.00	-6.34	55.02	-15.36	QP
5	822.830	88.43	-----	-----	100.88	-12.45	QP
6	868.308	44.75	46.00	-1.25	56.83	-12.00	QP
7	984.092	38.50	54.00	-15.50	49.01	-10.51	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_1.4M_QPSK_CH26783_TX_ax40_2452MHz
Test BY :Ashton

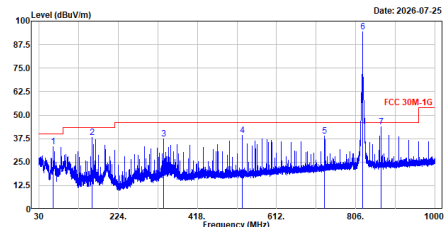


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	63.950	33.05	40.00	-6.95	58.06	-25.01	QP
2	160.029	38.18	43.50	-5.32	62.12	-23.94	QP
3	336.035	37.18	46.00	-8.82	59.25	-22.07	QP
4	528.047	39.22	46.00	-6.78	56.90	-17.68	QP
5	729.710	38.83	46.00	-7.17	52.32	-13.49	QP
6	823.000	94.33	-----	-----	106.78	-12.45	QP
7	868.371	43.00	46.00	-2.20	55.87	-12.07	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

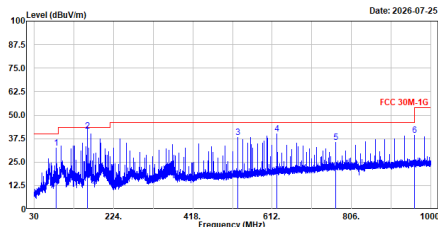


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	83.981	32.30	40.00	-7.70	62.17	-29.87	QP
2	160.029	41.66	43.50	-1.84	65.60	-23.94	QP
3	528.047	37.99	46.00	-8.01	55.67	-17.68	QP
4	624.077	39.96	46.00	-6.04	55.32	-15.36	QP
5	768.073	35.39	46.00	-10.61	48.34	-12.95	QP
6	960.085	39.21	54.00	-14.79	49.96	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB42_15M_QPSK_CH42165_TX_ax20_5935MHz
Test BY :Ashton

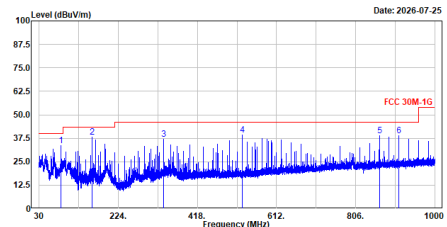


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	83.981	33.67	40.00	-6.33	63.54	-29.87	QP
2	160.029	38.23	43.50	-5.27	62.17	-23.94	QP
3	336.035	36.94	46.00	-9.06	59.01	-22.07	QP
4	528.047	39.30	46.00	-6.70	56.98	-17.68	QP
5	864.103	38.78	46.00	-7.22	50.78	-12.00	QP
6	912.070	38.84	46.00	-7.16	50.34	-11.50	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Co-location_US version

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

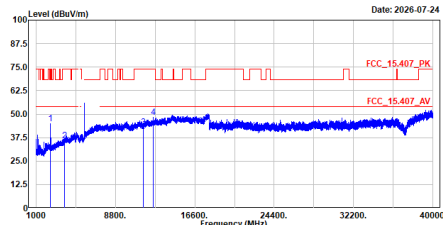


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2395.700	44.88	68.22	-23.34	68.75	-23.87	Peak
2	3765.000	35.66	74.00	-38.34	55.22	-19.56	Peak
3	11510.000	43.14	74.00	-30.86	45.60	-2.46	Peak
4	12499.650	48.13	74.00	-25.87	49.09	-0.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

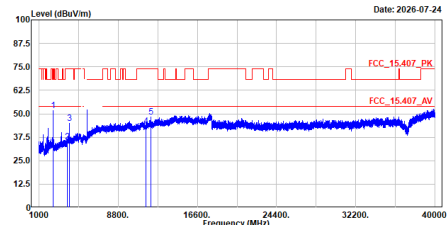


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.750	51.79	74.00	-22.21	75.66	-23.87	Peak
2	3765.000	34.95	74.00	-39.05	54.51	-19.56	Peak
3	3999.650	44.91	74.00	-29.09	63.68	-18.77	Peak
4	11510.000	43.30	74.00	-30.70	45.76	-2.46	Peak
5	11999.850	48.31	74.00	-25.69	50.43	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

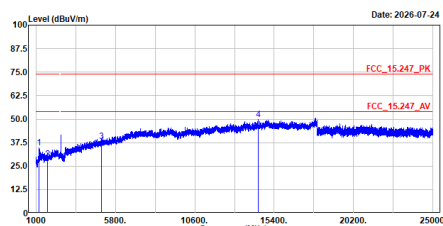


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1152.150	34.82	74.00	-39.18	60.83	-26.01	Peak
2	1683.000	28.84	74.00	-45.16	54.53	-25.69	Peak
3	4960.000	37.96	74.00	-36.04	52.52	-14.56	Peak
4	14432.550	49.95	74.00	-24.05	49.78	0.17	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_CH26965+TX_BLE2M_2480MHz
Test BY :Ashton

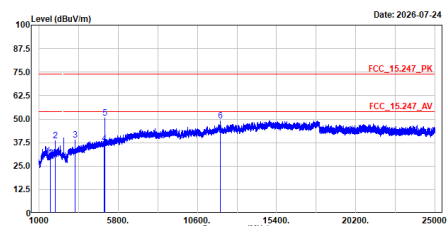


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1683.000	29.44	74.00	-44.56	55.13	-25.69	Peak
2	1993.650	38.66	74.00	-35.34	63.07	-24.41	Peak
3	3193.000	38.94	74.00	-35.06	61.00	-22.06	Peak
4	4960.000	36.97	74.00	-37.03	51.53	-14.56	Peak
5	4979.700	50.40	74.00	-23.60	64.88	-14.48	Peak
6	11999.850	48.89	74.00	-25.11	51.81	-2.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

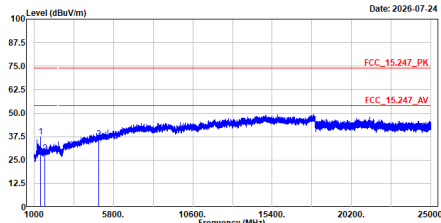


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1396.100	37.33	74.00	-36.67	62.79	-25.46	Peak
2	1645.000	28.62	74.00	-45.38	54.06	-25.44	Peak
3	4904.000	36.37	74.00	-37.63	51.18	-14.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_CH26775+TX_ax40_2452MHz
Test BY :Ashton

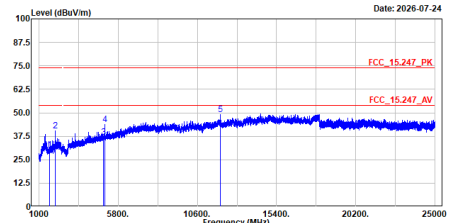


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1645.000	38.09	74.00	-35.91	55.53	-25.44	Peak
2	1994.500	40.54	74.00	-33.46	64.96	-24.42	Peak
3	4904.000	37.04	74.00	-36.96	51.85	-14.81	Peak
4	4983.950	43.64	74.00	-30.36	58.10	-14.46	Peak
5	12000.700	49.13	74.00	-24.87	51.25	-2.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

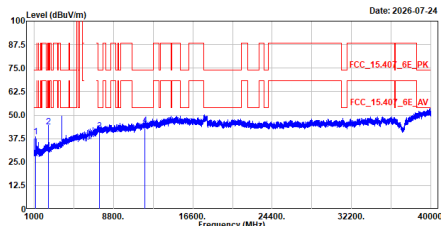


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	1152.150	38.52	74.00	-35.48	64.53	-26.01	Peak
2	2392.300	43.75	88.22	-44.47	67.61	-23.86	Peak
3	7395.000	41.61	74.00	-32.39	49.05	-7.44	Peak
4	11870.000	44.43	74.00	-29.57	46.50	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

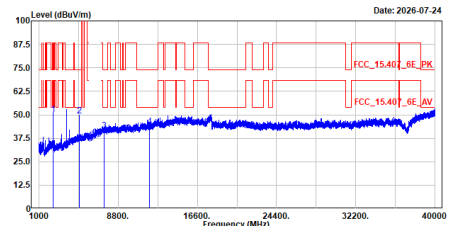


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	2391.450	50.32	88.22	-37.90	74.19	-23.87	Peak
2	4993.300	49.34	74.00	-24.66	63.75	-14.41	Peak
3	7395.000	41.61	74.00	-32.39	49.05	-7.44	Peak
4	11870.000	43.82	74.00	-30.18	45.89	-2.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

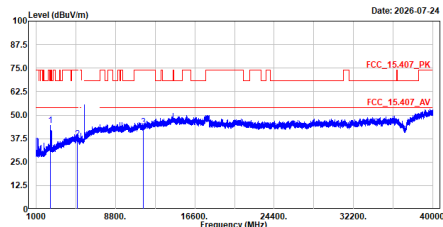


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2394.000	44.52	68.22	-23.70	68.39	-23.87	Peak
2	5070.000	37.21	74.00	-36.79	51.40	-14.19	Peak
3	11510.000	43.71	74.00	-30.29	46.17	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

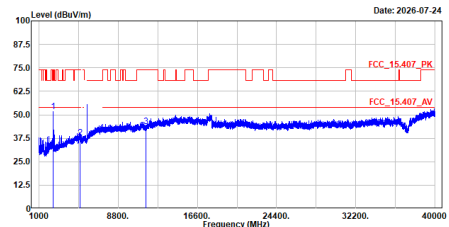


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	51.56	68.22	-16.66	75.43	-23.87	Peak
2	5070.000	37.86	74.00	-36.14	52.05	-14.19	Peak
3	11510.000	43.79	74.00	-30.21	46.25	-2.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz
Test BY :Ashton

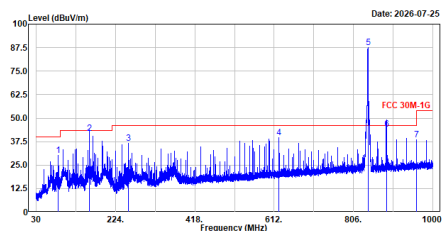


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.835	30.21	40.00	-9.79	60.05	-29.84	QP
2	160.029	41.75	43.50	-1.75	65.69	-23.94	QP
3	256.010	36.49	46.00	-9.51	61.33	-24.84	QP
4	624.077	39.59	46.00	-6.41	54.95	-15.36	QP
5	841.987	87.43	-----	-----	99.73	-12.30	QP
6	886.898	43.99	46.00	-2.01	55.92	-11.93	QP
7	960.133	38.57	54.00	-15.43	49.32	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_15M_QPSK_CH26965_TX_BLE2M_2480MHz
Test BY :Ashton

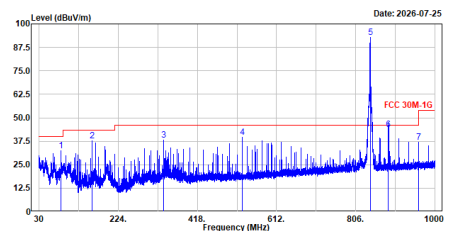


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.126	32.59	40.00	-7.41	62.47	-29.88	QP
2	160.029	37.91	43.50	-5.59	61.85	-23.94	QP
3	336.035	37.99	46.00	-8.01	60.06	-22.07	QP
4	528.047	39.62	46.00	-6.38	57.30	-17.68	QP
5	841.987	92.93	-----	-----	105.23	-12.30	QP
6	886.074	43.66	46.00	-2.34	55.61	-11.95	QP
7	960.005	36.87	54.00	-17.13	47.62	-10.75	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz
Test BY :Ashton

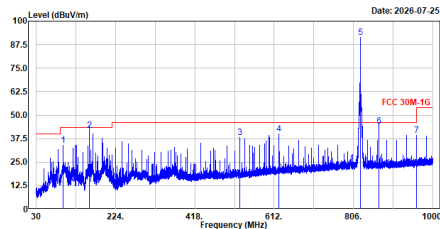


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	96.009	34.00	43.50	-9.50	63.00	-29.00	QP
2	160.029	42.06	43.50	-1.44	66.00	-23.94	QP
3	528.047	38.23	46.00	-7.77	55.91	-17.68	QP
4	624.077	40.16	46.00	-5.84	55.52	-15.36	QP
5	822.830	91.39	-----	-----	103.84	-12.45	QP
6	868.226	43.97	46.00	-2.03	56.03	-12.06	QP
7	960.133	39.23	54.00	-14.77	49.98	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTEB26_3M_QPSK_CH26775_TX_ax40_2452MHz
Test BY :Ashton

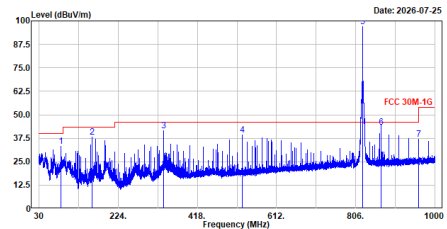


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.078	33.12	40.00	-6.88	63.00	-29.88	QP
2	160.029	37.96	43.50	-5.54	61.90	-23.94	QP
3	336.035	41.49	46.00	-4.51	63.56	-22.07	QP
4	528.047	39.41	46.00	-6.59	57.09	-17.68	QP
5	822.830	96.86	-----	-----	109.31	-12.45	QP
6	867.983	43.45	46.00	-2.55	55.51	-12.06	QP
7	960.133	36.79	54.00	-17.21	47.54	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

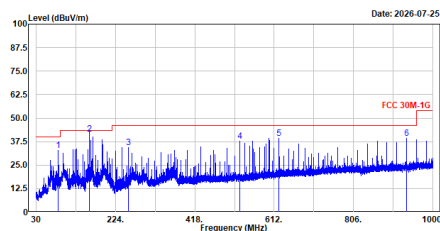


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83.981	32.64	40.00	-7.36	62.51	-29.87	QP
2	160.029	41.50	43.50	-1.92	65.52	-23.94	QP
3	256.010	34.52	46.00	-11.48	59.36	-24.84	QP
4	528.047	37.91	46.00	-8.09	55.59	-17.68	QP
5	624.077	39.17	46.00	-6.83	54.53	-15.36	QP
6	936.077	39.21	46.00	-6.79	50.30	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_CH26365+TX_ax40_5755MHz
Test BY :Ashton

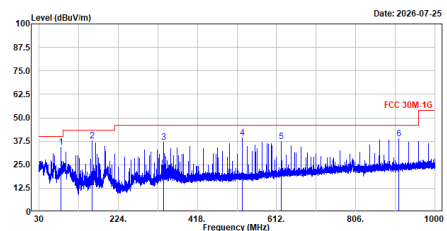


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	84.029	34.17	40.00	-5.83	64.04	-29.87	QP
2	160.029	37.65	43.50	-5.85	61.59	-23.94	QP
3	336.035	36.91	46.00	-9.09	58.98	-22.07	QP
4	528.047	39.43	46.00	-6.57	57.11	-17.68	QP
5	624.077	37.30	46.00	-8.70	52.66	-15.36	QP
6	912.070	38.86	46.00	-7.14	50.36	-11.50	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

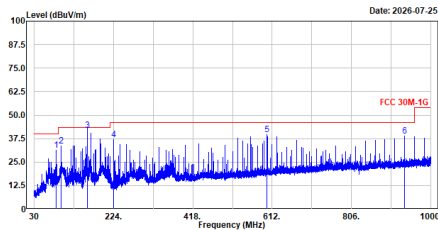


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.029	31.25	40.00	-8.75	61.12	-29.87	QP
2	96.009	33.47	43.50	-10.03	62.47	-29.00	QP
3	160.029	41.84	43.50	-1.66	65.78	-23.94	QP
4	224.049	36.98	46.00	-9.02	63.59	-26.61	QP
5	600.069	39.58	46.00	-6.42	55.38	-15.80	QP
6	936.077	39.05	46.00	-6.95	50.14	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B48_5M_QPSK_CH56715+TX_ax20_5935MHz
Test BY :Ashton

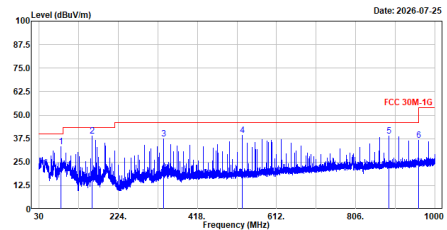


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.078	33.17	40.00	-6.83	63.05	-29.88	QP
2	160.029	38.69	43.50	-4.81	62.63	-23.94	QP
3	336.035	37.48	46.00	-8.52	59.55	-22.07	QP
4	528.047	39.18	46.00	-6.82	56.86	-17.68	QP
5	888.111	38.90	46.00	-7.10	50.81	-11.91	QP
6	960.085	36.52	54.00	-17.48	47.27	-10.75	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

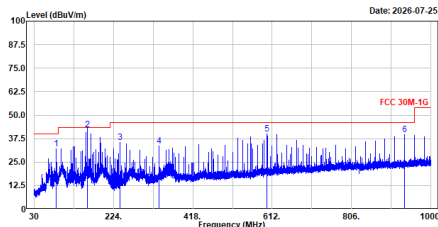


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.029	32.26	40.00	-7.74	62.13	-29.87	QP
2	160.029	42.43	43.50	-1.07	66.37	-23.94	QP
3	240.005	35.45	46.00	-10.55	60.57	-25.12	QP
4	336.035	33.58	46.00	-12.42	55.65	-22.07	QP
5	600.069	39.93	46.00	-6.07	55.73	-15.80	QP
6	936.126	39.60	46.00	-6.40	50.69	-11.09	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_CH21100+TX_ax40_5755MHz
Test BY :Ashton

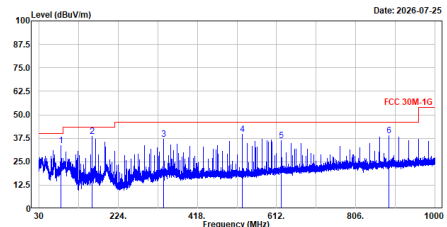

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	83.981	33.73	40.00	-6.27	63.60	-29.87	QP
2	160.029	38.45	43.50	-5.05	62.39	-23.94	QP
3	336.035	36.88	46.00	-9.12	58.95	-22.07	QP
4	528.047	39.75	46.00	-6.25	57.43	-17.68	QP
5	624.077	36.17	46.00	-9.83	51.53	-15.36	QP
6	888.062	38.91	46.00	-7.09	50.82	-11.91	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.