

Appendix A. Test Result of RF Output Power

Mode 1: 5G NR n7

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	500500	507000	513500	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2502.5 MHz)	(2535.0 MHz)	(2567.5 MHz)			
5	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.62	22.57	22.52	24.38	0.274	2
				1	13	22.57	22.64	22.48			
				1	23	22.78	22.59	22.47			
				12	0	22.08	22.12	22.02			
				12	7	22.59	22.69	22.53			
				12	13	22.05	22.13	22.01			
				25	0	22.09	22.25	22.06			
			QPSK	1	1	22.65	22.75	22.76	24.45	0.279	2
				1	13	22.61	22.84	22.85			
				1	23	22.64	22.82	22.84			
				12	0	21.57	21.71	21.54			
				12	7	22.56	22.75	22.52			
				12	13	21.53	21.69	21.53			
				25	0	21.57	21.73	21.54			
			16QAM	1	1	21.76	22.02	21.75	23.62	0.23	2
			64QAM	1	1	19.69	19.67	19.75	21.35	0.136	2
			256QAM	1	1	17.78	17.88	17.69	19.48	0.089	2
		CP-OFDM	QPSK	1	1	21.06	20.85	20.98	22.66	0.185	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	501000	507000	513000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2505 MHz)	(2535.0 MHz)	(2565 MHz)			
10	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.81	22.72	22.79	24.55	0.285	2
				1	26	22.79	22.73	22.74			
				1	50	22.75	22.66	22.87			
				25	0	22.07	22.21	22.36			
				25	14	22.62	22.71	22.95			
				25	27	22.05	22.25	22.48			
				50	0	22.11	22.26	22.46			
			QPSK	1	1	22.84	22.89	22.49	24.55	0.285	2
				1	26	22.81	22.75	22.52			
				1	50	22.75	22.88	22.51			
				25	0	21.67	21.77	21.94			
				25	14	22.66	22.79	22.95			
				25	27	21.56	21.82	22.01			
				50	0	21.61	21.8	21.96			
			16QAM	1	1	22.21	21.53	21.57	23.81	0.24	2
			64QAM	1	1	20.39	20.41	20.09	22.01	0.159	2
			256QAM	1	1	18.18	18.38	18.32	19.98	0.1	2
		CP-OFDM	QPSK	1	1	20.74	20.77	20.85	22.45	0.176	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	501500	507000	512500	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2507.5 MHz)	(2535.0 MHz)	(2562.5 MHz)			
15	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.98	22.75	22.91	24.65	0.292	2
				1	40	22.92	22.84	23.05			
				1	77	22.97	22.83	23.02			
				36	0	22.53	22.54	22.35			
				36	22	22.98	23.04	22.81			
				36	43	22.45	22.58	22.29			
				75	0	22.47	22.51	22.38			
			QPSK	1	1	22.81	22.97	22.82	24.67	0.293	2
				1	40	22.71	22.96	22.92			
				1	77	22.64	22.93	23.07			
				36	0	22.04	22.06	21.86			
				36	22	22.95	23.05	22.85			
				36	43	22.01	22.08	21.83			
				75	0	21.97	22.02	21.87			
			16QAM	1	1	22.54	21.75	21.92	24.14	0.259	2
			64QAM	1	1	20.61	20.59	20.29	22.21	0.166	2
			256QAM	1	1	18.59	18.65	18.04	20.25	0.106	2
		CP-OFDM	QPSK	1	1	21.04	21.05	20.73	22.65	0.184	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	502000	507000	512000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2510 MHz)	(2535.0 MHz)	(2560 MHz)			
20	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.75	22.91	22.59	24.64	0.291	2
				1	53	22.65	23.01	22.62			
				1	104	22.73	23.04	22.65			
				50	0	22.41	22.51	22.25			
				50	28	22.84	22.98	22.72			
				50	56	22.44	22.56	22.16			
				100	0	22.37	22.48	22.25			
			QPSK	1	1	22.84	22.84	22.66	24.54	0.284	2
				1	53	22.69	22.91	22.65			
				1	104	22.75	22.79	22.67			
				50	0	21.91	22.04	21.82			
				50	28	22.88	22.94	22.78			
				50	56	21.92	22.06	21.76			
				100	0	21.87	21.95	21.71			
			16QAM	1	1	21.94	22.23	21.66	23.83	0.242	2
			64QAM	1	1	20.49	20.25	20.24	22.09	0.162	2
			256QAM	1	1	18.24	18.19	18.29	19.89	0.097	2
		CP-OFDM	QPSK	1	1	21.34	21.23	21.16	22.94	0.197	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	502500	507000	511500	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2512.5 MHz)	(2535.0 MHz)	(2557.5 MHz)			
25	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.81	22.94	22.79	24.77	0.3	2
				1	66	22.71	23.17	22.81			
				1	131	22.79	23.14	22.78			
				64	0	22.16	22.66	22.22			
				64	35	22.74	23.11	22.78			
				64	69	22.21	22.53	22.12			
				128	0	22.19	22.39	22.31			
			QPSK	1	1	22.81	22.98	22.66	24.58	0.287	2
				1	66	22.72	22.95	22.82			
				1	131	22.84	22.97	22.62			
				64	0	21.99	21.94	21.79			
				64	35	22.84	22.87	22.85			
				64	69	21.87	22.11	21.9			
				128	0	21.72	22.15	21.79			
			16QAM	1	1	21.97	22.2	21.82	23.8	0.24	2
			64QAM	1	1	20.46	20.45	20.27	22.06	0.161	2
			256QAM	1	1	18.24	18.36	18.36	19.96	0.099	2
		CP-OFDM	QPSK	1	1	21.49	21.3	21.32	23.09	0.204	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	503000	507000	511000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2515 MHz)	(2535.0 MHz)	(2555 MHz)			
30	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.73	23.08	22.71	24.68	0.294	2
				1	80	22.66	23.07	22.65			
				1	158	22.66	23.01	22.78			
				80	0	22.48	22.47	22.18			
				80	40	22.81	23.03	22.63			
				80	80	22.52	22.51	22.29			
				160	0	22.46	22.54	22.36			
			QPSK	1	1	22.83	22.95	22.77	24.59	0.288	2
				1	80	22.77	22.82	22.63			
				1	158	22.89	22.97	22.79			
				80	0	21.85	22.05	21.76			
				80	40	22.87	22.99	22.75			
				80	80	22.03	21.98	21.77			
				160	0	21.97	21.86	21.62			
			16QAM	1	1	22.09	22.22	21.61	23.82	0.241	2
			64QAM	1	1	20.52	20.37	20.34	22.12	0.163	2
			256QAM	1	1	18.23	18.11	18.48	20.08	0.102	2
		CP-OFDM	QPSK	1	1	21.35	21.42	21.14	23.02	0.2	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	504000	507000	510000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2520 MHz)	(2535.0 MHz)	(2550 MHz)			
40	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.46	22.71	22.53	24.47	0.28	2
				1	108	22.57	22.82	22.69			
				1	214	22.6	22.65	22.52			
				108	0	22.25	22.41	22.48			
				108	54	22.85	22.83	22.4			
				108	108	22.17	22.87	22.09			
				216	0	22.12	22.25	22.12			
			QPSK	1	1	22.68	22.73	22.79	24.53	0.284	2
				1	108	22.77	22.82	22.72			
				1	214	22.68	22.55	22.68			
				108	0	21.77	21.78	21.85			
				108	54	22.93	22.83	22.79			
				108	108	21.95	21.82	21.71			
				216	0	21.64	21.71	21.82			
			16QAM	1	1	21.93	22.05	21.88	23.65	0.232	2
			64QAM	1	1	20.26	20.86	20.43	22.46	0.176	2
			256QAM	1	1	18.37	18.52	18.15	20.12	0.103	2
		CP-OFDM	QPSK	1	1	21.23	21.43	21.11	23.03	0.201	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n7 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	505000	507000	509000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2525 MHz)	(2535.0 MHz)	(2545 MHz)			
50	15	DFT-s-OFDM	pi/2 BPSK	1	1	22.65	22.67	22.62	24.49	0.281	2
				1	135	22.61	22.89	22.75			
				1	268	22.56	22.63	22.58			
				135	0	22.15	22.3	22.29			
				135	67	22.73	22.82	22.31			
				135	135	22.26	22.81	22.03			
				270	0	22.16	22.23	22.22			
			QPSK	1	1	22.68	22.66	22.64	24.41	0.276	2
				1	135	22.65	22.79	22.65			
				1	268	22.56	22.56	22.57			
				135	0	21.62	21.83	21.83			
				135	67	22.78	22.81	22.75			
				135	135	21.83	21.8	21.55			
				270	0	21.68	21.76	21.72			
			16QAM	1	1	21.84	22.01	21.81	23.61	0.23	2
			64QAM	1	1	20.23	20.78	20.21	22.38	0.173	2
			256QAM	1	1	18.41	18.34	18.01	20.01	0.1	2
		CP-OFDM	QPSK	1	1	21.12	21.34	21.02	22.94	0.197	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

Mode 2: 5G NR n41

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	500202	518598	537000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2501.01 MHz)	(2592.99 MHz)	(2685 MHz)			
10	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.64	22.59	22.32	24.28	0.268	2
				1	12	22.68	22.51	22.45			
				1	22	22.51	22.41	22.39			
				12	0	22.1	21.92	21.77			
				12	6	22.62	22.51	22.28			
				12	12	22.09	21.95	21.86			
				24	0	22.08	21.96	21.91			
			QPSK	1	1	22.48	22.43	22.19	24.22	0.264	2
				1	12	22.55	22.62	22.15			
				1	22	22.41	22.53	22.21			
				12	0	21.57	21.48	21.33			
				12	6	22.57	22.51	22.34			
				12	12	21.55	21.47	21.36			
				24	0	21.61	21.48	21.4			
			16QAM	1	1	21.65	21.42	21.35	23.25	0.211	2
			64QAM	1	1	20.19	20.43	19.39	22.03	0.16	2
			256QAM	1	1	18.44	18.12	17.81	20.04	0.101	2
		CP-OFDM	QPSK	1	1	21.34	20.99	20.73	22.94	0.197	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	500700	518598	536496	EIRP	EIRP	EIRP Limit
						(2503.5 MHz)	(2592.99 MHz)	(2682.48 MHz)	(dBm)	(W)	(W)
15	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.69	22.72	22.15	24.34	0.272	2
				1	18	22.68	22.56	22.34			
				1	36	22.61	22.59	22.41			
				18	0	22.22	22.09	21.85			
				18	9	22.74	22.57	22.31			
				18	18	22.19	22.05	21.91			
			QPSK	36	0	22.23	22.08	21.86	24.44	0.278	2
				1	1	22.84	22.69	21.86			
				1	18	22.81	22.54	21.99			
				1	36	22.78	22.34	22.11			
				18	0	21.74	21.61	21.41			
				18	9	22.76	22.58	22.41			
				18	18	21.73	21.57	21.47			
				36	0	21.72	21.58	21.38			
			16QAM	1	1	22.28	21.77	21.23	23.88	0.244	2
			64QAM	1	1	20.39	20.06	19.81	21.99	0.158	2
			256QAM	1	1	18.06	18.07	18.26	19.86	0.097	2
		CP-OFDM	QPSK	1	1	21.65	21.14	20.69	23.25	0.211	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	501204	518598	535998	EIRP	EIRP	EIRP Limit
						(2506.02 MHz)	(2592.99 MHz)	(2679.99 MHz)	(dBm)	(W)	(W)
20	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.69	22.61	22.08	24.39	0.275	2
				1	26	22.75	22.57	22.15			
				1	49	22.79	22.35	22.13			
				25	0	22.26	22.23	21.65			
				25	13	22.77	22.69	22.21			
				25	26	22.25	22.11	21.69			
				50	0	22.29	22.1	21.71			
			QPSK	1	1	22.78	22.68	21.97	24.38	0.274	2
				1	26	22.67	22.72	22.16			
				1	49	22.62	22.69	22.19			
				25	0	22.14	21.65	21.22			
				25	13	22.71	22.63	22.22			
				25	26	22.17	21.57	21.28			
				50	0	21.81	21.54	21.22			
			16QAM	1	1	21.83	21.58	21.24	23.43	0.22	2
			64QAM	1	1	20.29	20.16	19.92	21.89	0.155	2
			256QAM	1	1	18.39	18.51	17.86	20.11	0.103	2
		CP-OFDM	QPSK	1	1	21.31	20.88	20.51	22.91	0.195	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	502200	518598	534996	EIRP	EIRP	EIRP Limit
						(2511 MHz)	(2592.99 MHz)	(2674.98 MHz)	(dBm)	(W)	(W)
30	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.59	22.77	22.18	24.49	0.281	2
				1	39	22.67	22.67	22.16			
				1	76	22.71	22.47	22.2			
				36	0	22.44	22.39	21.56			
				36	21	22.89	22.85	22.17			
				36	42	22.28	22.23	21.68			
				75	0	22.26	22.04	21.75			
			QPSK	1	1	22.75	22.74	22.15	24.44	0.278	2
				1	39	22.81	22.82	22.33			
				1	76	22.52	22.84	22.14			
				36	0	22.31	21.74	21.12			
				36	21	22.69	22.57	22.4			
				36	42	22.27	21.55	21.29			
				75	0	21.99	21.58	21.31			
			16QAM	1	1	21.89	21.59	21.32	23.49	0.223	2
			64QAM	1	1	20.26	20.14	20.09	21.86	0.153	2
			256QAM	1	1	18.56	18.54	17.83	20.16	0.104	2
		CP-OFDM	QPSK	1	1	21.44	21.05	20.55	23.04	0.201	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	503202	518598	534000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2516.01 MHz)	(2592.99 MHz)	(2670 MHz)			
40	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.57	22.68	22.61	24.28	0.268	2
				1	53	22.32	22.56	22.61			
				1	104	22.52	22.08	22.06			
				50	0	21.86	21.93	21.97			
				50	28	22.45	22.61	22.49			
				50	56	22.21	21.77	21.92			
				100	0	22.01	21.93	21.81			
			QPSK	1	1	22.69	22.69	22.55	24.35	0.272	2
				1	53	22.29	22.28	22.59			
				1	104	22.75	22.16	22.16			
				50	0	21.33	21.52	21.71			
				50	28	22.42	22.65	22.59			
				50	56	21.69	21.19	21.24			
				100	0	21.56	21.54	21.32			
			16QAM	1	1	21.71	21.48	21.07	23.31	0.214	2
			64QAM	1	1	20.75	20.14	19.91	22.35	0.172	2
			256QAM	1	1	18.33	18.58	18.02	20.18	0.104	2
		CP-OFDM	QPSK	1	1	21.17	20.94	20.25	22.77	0.189	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5G NR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	504204	518598	532998	EIRP	EIRP	EIRP Limit
						(2521.02 MHz)	(2592.99 MHz)	(2664.99 MHz)	(dBm)	(W)	(W)
50	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.55	22.65	22.69	24.29	0.269	2
				1	67	22.46	22.52	22.53			
				1	131	22.59	22.21	22.23			
				64	0	21.95	22.07	22.09			
				64	35	22.58	22.55	22.53			
				64	69	22.11	21.83	21.84			
				128	0	21.95	21.93	21.94			
			QPSK	1	1	22.62	22.65	22.66	24.45	0.279	2
				1	67	22.47	22.48	22.51			
				1	131	22.85	22.17	22.21			
				64	0	21.49	21.59	21.62			
				64	35	22.61	22.57	22.55			
				64	69	21.6	21.37	21.38			
				128	0	21.53	21.44	21.46			
			16QAM	1	1	21.77	21.54	21.02	23.37	0.217	2
			64QAM	1	1	20.74	20.11	19.36	22.34	0.171	2
			256QAM	1	1	18.46	18.58	17.78	20.18	0.104	2
		CP-OFDM	QPSK	1	1	21.36	21.04	20.34	22.96	0.198	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	505200	518598	531996	EIRP	EIRP	EIRP Limit
						(2526 MHz)	(2592.99 MHz)	(2659.98 MHz)	(dBm)	(W)	(W)
60	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.75	22.55	22.69	24.35	0.272	2
				1	81	22.42	22.42	22.71			
				1	160	22.62	22.27	22.24			
				81	0	21.91	22.24	22.09			
				81	41	22.61	22.68	22.64			
				81	81	22.14	21.94	21.75			
				162	0	22.03	21.92	21.87			
			QPSK	1	1	22.64	22.63	22.77	24.43	0.277	2
				1	81	22.54	22.48	22.63			
				1	160	22.83	22.21	22.18			
				81	0	21.65	21.76	21.78			
				81	41	22.71	22.74	22.47			
				81	81	21.51	21.45	21.46			
				162	0	21.44	21.58	21.63			
			16QAM	1	1	21.74	21.61	21.06	23.34	0.216	2
			64QAM	1	1	20.83	20.15	19.55	22.43	0.175	2
			256QAM	1	1	18.54	18.59	17.69	20.19	0.104	2
		CP-OFDM	QPSK	1	1	21.27	21.04	20.3	22.87	0.194	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W)= $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	506202	518598	531000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2531.01 MHz)	(2592.99 MHz)	(2655 MHz)			
70	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.93	22.77	22.51	24.53	0.284	2
				1	81	22.59	22.57	22.26			
				1	160	22.64	22.08	22.51			
				81	0	22.19	22.15	21.83			
				81	41	22.79	22.51	22.33			
				81	81	22.32	21.94	21.85			
				162	0	22.2	22.19	21.97			
			QPSK	1	1	22.99	22.64	22.5	24.59	0.288	2
				1	81	22.86	22.66	22.14			
				1	160	22.93	22.22	22.37			
				81	0	21.62	21.75	21.27			
				81	41	22.75	22.55	22.24			
				81	81	21.79	21.57	21.24			
				162	0	21.69	21.65	21.26			
			16QAM	1	1	21.66	22.07	21.31	23.67	0.233	2
			64QAM	1	1	20.41	20.61	20.05	22.21	0.166	2
			256QAM	1	1	18.82	18.63	18.24	20.42	0.11	2
		CP-OFDM	QPSK	1	1	21.57	21.33	20.87	23.17	0.207	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	507204	518598	529998	EIRP	EIRP	EIRP Limit
						(2536.02 MHz)	(2592.99 MHz)	(2649.99 MHz)	(dBm)	(W)	(W)
80	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.76	22.74	22.41	24.44	0.278	2
				1	109	22.66	22.62	22.09			
				1	215	22.69	22.16	22.41			
				108	0	22.17	22.24	21.79			
				108	55	22.84	22.61	22.2			
				108	109	22.23	21.89	21.73			
				216	0	22.19	22.16	21.79			
			QPSK	1	1	22.8	22.71	22.38	24.43	0.277	2
				1	109	22.74	22.59	22.13			
				1	215	22.73	22.14	22.45			
				108	0	21.68	21.75	21.28			
				108	55	22.83	22.63	22.21			
				108	109	21.78	21.42	21.24			
				216	0	21.74	21.59	21.31			
			16QAM	1	1	21.71	21.87	21.38	23.47	0.222	2
			64QAM	1	1	20.21	20.71	19.86	22.31	0.17	2
			256QAM	1	1	18.71	18.58	18.14	20.31	0.107	2
		CP-OFDM	QPSK	1	1	21.43	21.15	20.89	23.03	0.201	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W)= $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	508200	518598	528996	EIRP	EIRP	EIRP Limit
						(2541 MHz)	(2592.99 MHz)	(2644.98 MHz)	(dBm)	(W)	(W)
90	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.62	22.79	22.66	24.41	0.276	2
				1	123	22.78	22.54	22.05			
				1	243	22.46	22.32	22.58			
				120	0	22.26	22.35	21.88			
				120	63	22.81	22.63	22.44			
				120	125	22.34	21.81	21.89			
				243	0	22.38	22.23	22.03			
			QPSK	1	1	22.82	22.73	22.81	24.42	0.277	2
				1	123	22.79	22.68	22.42			
				1	243	22.63	22.14	22.61			
				120	0	21.74	21.7	21.63			
				120	63	22.76	22.64	22.28			
				120	125	21.89	21.52	21.39			
				243	0	21.81	21.84	21.56			
			16QAM	1	1	21.87	21.71	21.59	23.47	0.222	2
			64QAM	1	1	20.43	20.53	19.94	22.13	0.163	2
			256QAM	1	1	18.51	17.99	18.09	20.11	0.103	2
		CP-OFDM	QPSK	1	1	21.22	21.06	21.07	22.82	0.191	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W)= $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

5GNR n41 Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	509202	518598	528000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(2546.01 MHz)	(2592.99 MHz)	(2640 MHz)			
100	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.79	22.67	22.54	24.48	0.281	2
				1	137	22.81	22.62	22.15			
				1	271	22.53	22.04	22.41			
				135	0	22.24	22.28	21.93			
				135	69	22.88	22.71	22.27			
				135	138	22.29	21.88	21.73			
				270	0	22.32	22.21	21.92			
			QPSK	1	1	22.82	22.68	22.63	24.51	0.282	2
				1	137	22.76	22.71	22.29			
				1	271	22.57	22.07	22.58			
				135	0	21.72	21.8	21.43			
				135	69	22.91	22.69	22.35			
				135	138	21.78	21.38	21.24			
				270	0	21.81	21.71	21.4			
			16QAM	1	1	21.73	21.51	21.69	23.33	0.215	2
			64QAM	1	1	20.28	20.48	19.98	22.08	0.161	2
			256QAM	1	1	18.49	18.01	18.04	20.09	0.102	2
		CP-OFDM	QPSK	1	1	21.21	21.09	21.01	22.81	0.191	2

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W)= $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

Mode 3: 5G NR n77 (3450 - 3550 MHz)**MIMO 1**

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630334	633334	636332	EIRP	EIRP	EIRP
						(3455.01 MHz)	(3500.01 MHz)	(3544.98 MHz)	(dBm)	(W)	Limit (W)
10	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.29	21.17	21.05	27.09	0.512	1
				1	12	21.23	21.18	21.24			
				1	22	21.17	21.07	21.11			
				12	0	20.88	20.78	20.81			
				12	6	21.19	21.09	21.07			
				12	12	20.86	20.82	20.84			
				24	0	20.91	20.77	20.89			
			QPSK	1	1	21.35	21.12	21.22	27.24	0.53	1
				1	12	21.31	21.05	21.44			
				1	22	21.21	21.06	21.29			
				12	0	20.41	20.26	20.29			
				12	6	21.19	21.07	21.18			
				12	12	20.42	20.28	20.36			
				24	0	20.38	20.3	20.37			
			16QAM	1	1	20.55	20.11	20.43	26.35	0.432	1
			64QAM	1	1	18.69	18.37	18.58	24.49	0.281	1
			256QAM	1	1	17.01	16.69	16.54	22.81	0.191	1
		CP-OFDM	QPSK	1	1	20.09	19.95	19.83	25.89	0.388	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630500	633334	636166	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3457.5 MHz)	(3500.01 MHz)	(3542.49 MHz)			
15	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.41	21.31	21.12	27.23	0.528	1
				1	18	21.43	21.38	21.33			
				1	36	21.31	21.15	21.05			
				18	0	20.82	20.83	20.71			
				18	9	21.25	21.13	21.14			
				18	18	20.84	20.86	20.81			
				36	0	20.85	20.77	21.03			
			QPSK	1	1	21.47	21.12	21.28	27.37	0.546	1
				1	18	21.35	20.96	21.57			
				1	36	21.37	21.08	21.48			
				18	0	20.38	20.27	20.37			
				18	9	21.19	21.05	21.37			
				18	18	20.53	20.33	20.51			
				36	0	20.42	20.37	20.39			
			16QAM	1	1	20.74	20.16	20.55	26.54	0.451	1
			64QAM	1	1	18.72	18.53	18.58	24.52	0.283	1
			256QAM	1	1	17.04	16.82	16.74	22.84	0.192	1
		CP-OFDM	QPSK	1	1	20.05	20.08	19.83	25.88	0.387	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630668	633334	636000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3460.02 MHz)	(3500.01 MHz)	(3540 MHz)			
20	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.49	21.45	21.43	27.38	0.547	1
				1	26	21.47	21.12	21.36			
				1	49	21.29	21.08	21.25			
				25	0	20.87	20.85	20.59			
				25	13	21.58	21.32	21.17			
				25	26	21.44	21.21	21.13			
				50	0	20.84	20.64	20.78			
			QPSK	1	1	21.41	21.54	20.88	27.34	0.542	1
				1	26	21.38	21.22	20.88			
				1	49	21.52	21.27	21.13			
				25	0	20.34	20.11	20.03			
				25	13	21.47	21.27	21.32			
				25	26	21.45	21.36	21.16			
				50	0	20.36	20.31	20.14			
			16QAM	1	1	20.32	19.9	20.08	26.12	0.409	1
			64QAM	1	1	19.25	19.02	18.76	25.05	0.32	1
			256QAM	1	1	16.98	16.76	16.92	22.78	0.19	1
		CP-OFDM	QPSK	1	1	20.12	19.68	19.72	25.92	0.391	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630834	633334	635832	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3462.51 MHz)	(3500.01 MHz)	(3537.48 MHz)			
25	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.51	21.42	21.38	27.31	0.538	1
				1	26	21.41	21.22	21.34			
				1	49	21.35	21.18	21.41			
				25	0	20.93	20.81	20.65			
				25	13	21.48	21.34	21.28			
				25	26	21.42	21.29	21.31			
				50	0	20.92	20.76	20.75			
			QPSK	1	1	21.54	21.54	20.97	27.41	0.551	1
				1	26	21.53	21.39	20.92			
				1	49	21.61	21.28	21.06			
				25	0	20.47	20.29	20.18			
				25	13	21.48	21.34	21.29			
				25	26	21.46	21.28	21.35			
				50	0	20.45	20.26	20.2			
			16QAM	1	1	20.48	19.96	20.05	26.28	0.425	1
			64QAM	1	1	19.44	19.01	18.82	25.24	0.334	1
			256QAM	1	1	17.13	16.79	16.89	22.93	0.196	1
		CP-OFDM	QPSK	1	1	20.25	19.77	19.65	26.05	0.403	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631000	633334	635666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3465 MHz)	(3500.01 MHz)	(3534.99 MHz)			
30	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.45	21.51	21.33	27.31	0.538	1
				1	39	21.36	21.23	21.43			
				1	76	21.31	21.21	21.37			
				36	0	20.95	20.84	20.72			
				36	21	21.46	21.43	21.28			
				36	42	21.39	21.2	21.21			
				75	0	20.88	20.68	20.73			
			QPSK	1	1	21.44	21.58	20.97	27.38	0.547	1
				1	39	21.44	21.48	21.02			
				1	76	21.57	21.32	21.14			
				36	0	20.42	20.31	20.21			
				36	21	21.49	21.39	21.24			
				36	42	21.48	21.31	21.43			
				75	0	20.51	20.23	20.16			
			16QAM	1	1	20.58	20.03	19.99	26.38	0.435	1
			64QAM	1	1	19.54	18.94	18.89	25.34	0.342	1
			256QAM	1	1	17.14	16.74	16.85	22.94	0.197	1
		CP-OFDM	QPSK	1	1	20.17	19.78	19.55	25.97	0.395	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631334	633334	635332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3470.01 MHz)	(3500.01 MHz)	(3529.98 MHz)			
40	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.54	21.49	21.13	27.34	0.542	1
				1	53	21.42	21.23	21.09			
				1	104	21.16	21.18	21.24			
				50	0	20.93	20.86	20.91			
				50	28	21.49	21.47	21.35			
				50	56	20.79	20.68	20.82			
				100	0	20.85	20.76	20.87			
			QPSK	1	1	21.68	21.32	21.26	27.48	0.56	1
				1	53	21.32	21.37	21.23			
				1	104	21.37	20.99	21.42			
				50	0	20.51	20.55	20.25			
				50	28	21.68	21.24	21.38			
				50	56	20.29	20.37	20.17			
				100	0	20.41	20.26	20.22			
			16QAM	1	1	20.22	20.11	19.96	26.02	0.4	1
			64QAM	1	1	18.77	18.72	18.67	24.57	0.286	1
			256QAM	1	1	16.59	16.86	16.73	22.66	0.185	1
		CP-OFDM	QPSK	1	1	20.14	19.94	19.92	25.94	0.393	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631668	633334	635000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3475.02 MHz)	(3500.01 MHz)	(3525 MHz)			
50	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.56	21.42	21.31	27.38	0.547	1
				1	67	21.49	21.25	21.23			
				1	131	21.28	21.16	21.36			
				64	0	21.05	21.01	20.81			
				64	35	21.58	21.43	21.35			
				64	69	20.92	20.79	20.86			
				128	0	21.01	20.89	20.85			
			QPSK	1	1	21.58	21.49	21.36	27.39	0.548	1
				1	67	21.51	21.28	21.34			
				1	131	21.32	21.17	21.47			
				64	0	20.56	20.45	20.26			
				64	35	21.59	21.42	21.36			
				64	69	20.41	20.28	20.33			
				128	0	20.51	20.39	20.34			
			16QAM	1	1	20.4	20.26	20.15	26.2	0.417	1
			64QAM	1	1	18.84	18.87	18.8	24.67	0.293	1
			256QAM	1	1	16.77	16.97	16.72	22.77	0.189	1
		CP-OFDM	QPSK	1	1	20.06	20.01	19.89	25.86	0.385	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632000	633334	634666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3480 MHz)	(3500.01 MHz)	(3519.99 MHz)			
60	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.53	21.26	21.14	27.33	0.541	1
				1	81	21.32	21.13	21.13			
				1	160	21.12	21.07	21.26			
				81	0	20.88	20.98	20.72			
				81	41	21.53	21.35	21.32			
				81	81	20.84	20.71	20.82			
				162	0	20.91	20.82	20.68			
			QPSK	1	1	21.55	21.45	21.25	27.35	0.543	1
				1	81	21.49	21.19	21.31			
				1	160	21.12	21.13	21.37			
				81	0	20.42	20.39	20.08			
				81	41	21.51	21.27	21.23			
				81	81	20.23	20.16	20.31			
				162	0	20.49	20.26	20.18			
			16QAM	1	1	20.28	20.23	20.02	26.08	0.406	1
			64QAM	1	1	18.82	18.69	18.75	24.62	0.29	1
			256QAM	1	1	16.66	16.95	16.6	22.75	0.188	1
		CP-OFDM	QPSK	1	1	19.94	19.82	19.81	25.74	0.375	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632334	633334	634332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3485.01 MHz)	(3500.01 MHz)	(3514.98 MHz)			
70	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.27	21.16	21.27	27.07	0.509	1
				1	81	21.11	20.92	21.08			
				1	160	20.85	20.81	20.96			
				81	0	20.95	20.97	20.82			
				81	41	21.06	21.15	20.96			
				81	81	20.62	20.63	20.77			
				162	0	20.91	20.79	20.89			
			QPSK	1	1	21.37	21.2	21.16	27.17	0.521	1
				1	81	21.12	21.06	20.97			
				1	160	20.96	20.98	21.04			
				81	0	20.51	20.48	20.41			
				81	41	21.19	21.08	21.12			
				81	81	20.24	20.15	20.22			
				162	0	20.25	20.21	20.18			
			16QAM	1	1	20.25	20.27	20.26	26.07	0.405	1
			64QAM	1	1	19.19	18.87	18.76	24.99	0.316	1
			256QAM	1	1	16.83	16.79	16.97	22.77	0.189	1
		CP-OFDM	QPSK	1	1	20.01	19.84	19.74	25.81	0.381	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632668	633334	634000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3490.02 MHz)	(3500.01 MHz)	(3510 MHz)			
80	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.32	21.21	21.31	27.12	0.515	1
				1	109	21.23	21.11	21.12			
				1	215	20.95	21.02	21.13			
				108	0	21.08	21.01	20.99			
				108	55	21.24	21.22	21.15			
				108	109	20.78	20.81	20.82			
				216	0	20.97	20.92	20.92			
			QPSK	1	1	21.43	21.26	21.23	27.23	0.528	1
				1	109	21.31	21.11	21.09			
				1	215	21.03	20.97	21.07			
				108	0	20.55	20.54	20.46			
				108	55	21.27	21.2	21.16			
				108	109	20.25	20.27	20.33			
				216	0	20.45	20.41	20.38			
			16QAM	1	1	20.44	20.35	20.41	26.24	0.421	1
			64QAM	1	1	19.28	19.01	18.87	25.08	0.322	1
			256QAM	1	1	16.99	16.91	16.98	22.79	0.19	1
		CP-OFDM	QPSK	1	1	20.07	19.98	19.92	25.87	0.386	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	633000	633334	633666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3495 MHz)	(3500.01 MHz)	(3504.99 MHz)			
90	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.23	21.38	21.24	27.18	0.522	1
				1	123	21.21	21.09	21.04			
				1	243	21.14	21.06	21.19			
				120	0	21.02	21.05	20.92			
				120	63	21.18	21.36	21.26			
				120	125	20.97	20.92	20.86			
				243	0	20.94	20.91	21.01			
			QPSK	1	1	21.38	21.18	21.25	27.23	0.528	1
				1	123	21.31	21.03	21.24			
				1	243	21.21	20.95	20.99			
				120	0	20.55	20.48	20.56			
				120	63	21.43	21.23	21.12			
				120	125	20.38	20.29	20.43			
				243	0	20.39	20.38	20.51			
			16QAM	1	1	20.59	20.54	20.36	26.39	0.436	1
			64QAM	1	1	19.21	19.15	18.98	25.01	0.317	1
			256QAM	1	1	17.08	16.84	17.11	22.91	0.195	1
		CP-OFDM	QPSK	1	1	20.14	20.04	19.99	25.94	0.393	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)									
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	633334	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3500.01 MHz)			
100	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.18	26.99	0.5	1
				1	137	21.08			
				1	271	20.93			
				135	0	21.01			
				135	69	21.19			
				135	138	20.77			
				270	0	20.95			
			QPSK	1	1	21.19	26.99	0.5	1
				1	137	21.05			
				1	271	20.96			
				135	0	20.52			
				135	69	21.17			
				135	138	20.27			
				270	0	20.42			
			16QAM	1	1	20.41	26.21	0.418	1
			64QAM	1	1	18.74	24.54	0.284	1
			256QAM	1	1	16.68	22.48	0.177	1
		CP-OFDM	QPSK	1	1	19.79	25.59	0.362	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

MIMO 2

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630334	633334	636332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3455.01 MHz)	(3500.01 MHz)	(3544.98 MHz)			
10	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.32	23.14	22.44	27.82	0.605	1
				1	12	23.21	23.15	22.55			
				1	22	23.07	23.09	22.51			
				12	0	22.97	22.38	22.14			
				12	6	23.16	22.54	22.38			
				12	12	22.92	22.34	22.19			
				24	0	22.93	22.38	22.18			
			QPSK	1	1	23.28	22.73	22.63	27.78	0.6	1
				1	12	23.14	22.69	23.06			
				1	22	23.08	22.56	22.29			
				12	0	22.41	21.92	21.69			
				12	6	23.16	22.55	22.47			
				12	12	22.36	21.83	21.75			
				24	0	22.42	21.91	21.67			
			16QAM	1	1	22.41	21.93	21.49	26.91	0.491	1
			64QAM	1	1	20.81	20.47	19.59	25.31	0.34	1
			256QAM	1	1	18.86	18.14	18.33	23.36	0.217	1
		CP-OFDM	QPSK	1	1	21.85	21.33	20.76	26.35	0.432	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630500	633334	636166	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3457.5 MHz)	(3500.01 MHz)	(3542.49 MHz)			
15	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.46	22.74	22.16	27.96	0.625	1
				1	18	23.42	22.57	22.15			
				1	36	23.25	22.39	22.36			
				18	0	23.17	21.86	22.02			
				18	9	23.35	22.53	22.23			
				18	18	23.13	21.71	22.04			
				36	0	23.19	21.76	22.05			
			QPSK	1	1	23.44	22.64	22.35	27.94	0.622	1
				1	18	23.38	22.59	22.31			
				1	36	23.37	22.41	22.38			
				18	0	22.66	21.84	21.49			
				18	9	23.26	22.59	22.29			
				18	18	22.36	21.72	21.55			
				36	0	22.39	21.82	21.54			
			16QAM	1	1	22.05	21.58	21.13	26.55	0.452	1
			64QAM	1	1	20.2	20.41	19.41	24.91	0.31	1
			256QAM	1	1	18.6	17.82	17.51	23.1	0.204	1
		CP-OFDM	QPSK	1	1	21.01	20.89	21.15	25.65	0.367	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630668	633334	636000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3460.02 MHz)	(3500.01 MHz)	(3540 MHz)			
20	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.39	23.13	22.31	27.89	0.615	1
				1	26	23.19	22.96	22.45			
				1	49	22.97	22.92	22.34			
				25	0	23.02	22.18	22.07			
				25	13	23.15	22.52	22.46			
				25	26	22.98	22.3	21.99			
				50	0	22.94	22.39	22.23			
			QPSK	1	1	23.13	22.76	22.71	27.63	0.579	1
				1	26	23.03	22.49	22.93			
				1	49	23.12	22.37	22.19			
				25	0	22.49	21.91	21.49			
				25	13	23.02	22.41	22.42			
				25	26	22.35	21.87	21.84			
				50	0	22.45	21.71	21.73			
			16QAM	1	1	22.39	21.92	21.31	26.89	0.489	1
			64QAM	1	1	20.88	20.27	19.41	25.38	0.345	1
			256QAM	1	1	18.78	17.98	18.39	23.28	0.213	1
		CP-OFDM	QPSK	1	1	21.67	21.28	20.84	26.17	0.414	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	630866	633334	635832	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3462.99 MHz)	(3500.01 MHz)	(3537.48 MHz)			
25	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.27	23.11	22.26	27.77	0.598	1
				1	26	23.09	23.24	22.52			
				1	49	23.17	23.19	22.61			
				25	0	23.01	22.26	21.97			
				25	13	23.07	22.52	22.47			
				25	26	22.83	22.28	22.18			
				50	0	22.93	22.47	22.01			
			QPSK	1	1	23.23	22.69	22.54	27.73	0.593	1
				1	26	22.94	22.63	22.97			
				1	49	23.07	22.38	22.15			
				25	0	22.24	21.95	21.57			
				25	13	23.21	22.44	22.51			
				25	26	22.22	21.98	21.62			
				50	0	22.35	21.83	21.69			
			16QAM	1	1	22.23	21.73	21.33	26.73	0.471	1
			64QAM	1	1	20.9	20.47	19.57	25.4	0.347	1
			256QAM	1	1	18.75	18.12	18.28	23.25	0.211	1
		CP-OFDM	QPSK	1	1	21.66	21.29	20.84	26.16	0.413	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631000	633334	635666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3465 MHz)	(3500.01 MHz)	(3534.99 MHz)			
30	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.18	22.83	22.33	27.68	0.586	1
				1	39	22.97	22.53	22.32			
				1	76	22.91	22.33	22.51			
				36	0	22.69	22.27	21.92			
				36	21	23.04	22.51	22.37			
				36	42	22.47	22.04	21.91			
				75	0	22.59	22.19	21.92			
			QPSK	1	1	23.11	22.86	22.28	27.61	0.577	1
				1	39	22.93	22.54	22.27			
				1	76	22.85	22.31	22.43			
				36	0	22.19	21.79	21.42			
				36	21	23.02	22.59	22.36			
				36	42	21.96	21.56	21.43			
				75	0	22.09	21.69	21.4			
			16QAM	1	1	22.07	21.75	21.21	26.57	0.454	1
			64QAM	1	1	20.51	19.96	19.73	25.01	0.317	1
			256QAM	1	1	18.59	18.23	17.76	23.09	0.204	1
		CP-OFDM	QPSK	1	1	21.65	21.06	20.96	26.15	0.412	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631334	633334	635332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3470.01 MHz)	(3500.01 MHz)	(3529.98 MHz)			
40	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.28	22.73	22.34	27.78	0.6	1
				1	53	23.05	22.58	22.42			
				1	104	22.89	22.32	22.53			
				50	0	22.65	22.31	21.83			
				50	28	23.03	22.52	22.33			
				50	56	22.47	22.05	21.82			
				100	0	22.62	22.21	21.85			
			QPSK	1	1	23.01	22.87	22.28	27.51	0.564	1
				1	53	22.86	22.62	22.19			
				1	104	22.93	22.27	22.42			
				50	0	22.22	21.76	21.52			
				50	28	22.95	22.69	22.27			
				50	56	21.9	21.51	21.52			
				100	0	22.05	21.63	21.47			
			16QAM	1	1	22.06	21.75	21.23	26.56	0.453	1
			64QAM	1	1	20.48	19.89	19.71	24.98	0.315	1
			256QAM	1	1	18.49	18.24	17.74	22.99	0.199	1
		CP-OFDM	QPSK	1	1	21.74	21.03	21.05	26.24	0.421	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	631668	633334	635000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3475.02 MHz)	(3500.01 MHz)	(3525 MHz)			
50	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.32	23.08	22.92	27.82	0.605	1
				1	67	23.13	22.86	22.59			
				1	131	22.59	22.52	22.47			
				64	0	22.88	22.44	22.13			
				64	35	22.91	22.57	22.42			
				64	69	22.22	22.14	21.87			
				128	0	22.42	22.37	22.25			
			QPSK	1	1	23.13	23.17	22.69	27.78	0.6	1
				1	67	23.28	22.87	22.32			
				1	131	22.33	22.31	22.29			
				64	0	22.38	21.88	21.75			
				64	35	23.07	22.67	22.37			
				64	69	21.87	21.52	21.45			
				128	0	22.07	21.91	21.54			
			16QAM	1	1	22.49	21.92	21.98	26.99	0.5	1
			64QAM	1	1	20.93	20.59	19.79	25.43	0.349	1
			256QAM	1	1	18.37	18.63	18.49	23.13	0.206	1
		CP-OFDM	QPSK	1	1	21.84	21.58	21.51	26.34	0.431	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632000	633334	634666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3480 MHz)	(3500.01 MHz)	(3519.99 MHz)			
60	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.14	23.05	22.75	27.64	0.581	1
				1	81	23.01	22.66	22.47			
				1	160	22.43	22.33	22.43			
				81	0	22.71	22.49	22.2			
				81	41	22.99	22.67	22.46			
				81	81	22.26	22.03	21.92			
				162	0	22.48	22.27	22.13			
			QPSK	1	1	23.16	23.09	22.65	27.71	0.59	1
				1	81	23.21	22.84	22.4			
				1	160	22.32	22.33	22.39			
				81	0	22.22	21.94	21.75			
				81	41	22.99	22.67	22.44			
				81	81	21.75	21.48	21.45			
				162	0	22.04	21.79	21.64			
			16QAM	1	1	22.39	21.78	21.89	26.89	0.489	1
			64QAM	1	1	20.85	20.64	19.87	25.35	0.343	1
			256QAM	1	1	18.44	18.61	18.34	23.11	0.205	1
		CP-OFDM	QPSK	1	1	21.73	21.59	21.32	26.23	0.42	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632334	633334	634332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3485.01 MHz)	(3500.01 MHz)	(3514.98 MHz)			
70	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.14	23.08	22.68	27.64	0.581	1
				1	81	22.91	22.64	22.43			
				1	160	22.49	22.35	22.44			
				81	0	22.72	22.52	22.22			
				81	41	23.03	22.61	22.46			
				81	81	22.32	22.03	21.86			
				162	0	22.47	22.18	22.05			
			QPSK	1	1	23.07	23.06	22.68	27.62	0.578	1
				1	81	23.12	22.88	22.45			
				1	160	22.22	22.28	22.3			
				81	0	22.19	21.89	21.84			
				81	41	23.01	22.72	22.41			
				81	81	21.71	21.52	21.51			
				162	0	21.98	21.89	21.74			
			16QAM	1	1	22.33	21.83	21.81	26.83	0.482	1
			64QAM	1	1	20.77	20.62	19.83	25.27	0.337	1
			256QAM	1	1	18.36	18.66	18.32	23.16	0.207	1
		CP-OFDM	QPSK	1	1	21.71	21.65	21.31	26.21	0.418	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	632668	633334	634000	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3490.02 MHz)	(3500.01 MHz)	(3510 MHz)			
80	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.16	23.31	23.22	27.81	0.604	1
				1	109	22.56	22.64	22.48			
				1	215	22.39	22.5	22.32			
				108	0	22.96	22.79	22.71			
				108	55	22.78	22.79	22.51			
				108	109	22.31	22.19	22.06			
				216	0	22.48	22.54	22.57			
			QPSK	1	1	23.13	23.15	23.2	27.7	0.589	1
				1	109	22.54	22.68	22.52			
				1	215	22.26	22.37	22.28			
				108	0	22.26	22.35	22.12			
				108	55	22.71	22.62	22.49			
				108	109	21.58	21.71	21.84			
				216	0	22.17	21.92	22.05			
			16QAM	1	1	22.66	22.41	22.62	27.16	0.52	1
			64QAM	1	1	20.59	21.03	20.89	25.53	0.357	1
			256QAM	1	1	19.03	18.51	18.83	23.53	0.225	1
		CP-OFDM	QPSK	1	1	21.88	21.76	21.73	26.38	0.435	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	633000	633334	633666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3495 MHz)	(3500.01 MHz)	(3504.99 MHz)			
90	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.09	23.18	23.05	27.68	0.586	1
				1	123	22.62	22.71	22.53			
				1	243	22.25	22.34	22.39			
				120	0	22.8	22.76	22.65			
				120	63	22.71	22.7	22.54			
				120	125	22.14	22.12	22.16			
				243	0	22.51	22.51	22.45			
			QPSK	1	1	23.04	23.07	23.1	27.6	0.575	1
				1	123	22.6	22.53	22.48			
				1	243	22.21	22.29	22.34			
				120	0	22.31	22.26	22.12			
				120	63	22.77	22.64	22.56			
				120	125	21.66	21.67	21.64			
				243	0	22.05	21.97	21.93			
			16QAM	1	1	22.52	22.41	22.51	27.02	0.504	1
			64QAM	1	1	20.51	21.08	20.77	25.58	0.361	1
			256QAM	1	1	18.95	18.58	18.87	23.45	0.221	1
		CP-OFDM	QPSK	1	1	21.91	21.85	21.77	26.41	0.438	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77 (3450 - 3550 MHz) Maximum Average Power (dBm)									
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	633334	EIRP	EIRP	EIRP Limit
						(3500.01 MHz)	(dBm)	(W)	(W)
100	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.12	27.62	0.578	1
				1	137	22.59			
				1	271	22.29			
				135	0	22.82			
				135	69	22.68			
				135	138	22.17			
				270	0	22.54			
			QPSK	1	1	23.03	27.53	0.566	1
				1	137	22.54			
				1	271	22.26			
				135	0	22.27			
				135	69	22.68			
				135	138	21.63			
				270	0	22.03			
			16QAM	1	1	22.31	26.81	0.48	1
			64QAM	1	1	20.65	25.15	0.327	1
			256QAM	1	1	18.94	23.44	0.221	1
		CP-OFDM	QPSK	1	1	21.91	26.41	0.438	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

Mode 4: 5G NR n77(n78) (3700 - 3980 MHz)**MIMO 1**

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647000	656000	665000	EIRP	EIRP	EIRP Limit
						(3705 MHz)	(3840 MHz)	(3975 MHz)	(dBm)	(W)	(W)
10	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.67	21.08	20.82	27.27	0.533	1
				1	12	21.65	21.09	20.92			
				1	22	21.66	21.08	20.76			
				12	0	21.21	20.72	20.58			
				12	6	21.52	21.04	20.83			
				12	12	21.21	20.71	20.62			
				24	0	21.2	20.69	20.57			
			QPSK	1	1	21.52	21.11	20.89	27.46	0.557	1
				1	12	21.86	21.36	20.97			
				1	22	21.52	21.04	20.92			
				12	0	20.67	20.21	20.05			
				12	6	21.51	21.12	20.89			
				12	12	20.65	20.25	20.12			
				24	0	20.68	20.19	20.07			
			16QAM	1	1	20.69	20.13	19.43	26.29	0.426	1
			64QAM	1	1	19.63	18.72	18.39	25.23	0.333	1
			256QAM	1	1	17.26	16.32	16.16	22.86	0.193	1
		CP-OFDM	QPSK	1	1	19.89	19.8	18.92	25.49	0.354	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647168	656000	664832	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3707.52 MHz)	(3840 MHz)	(3972.48 MHz)			
15	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.34	21.11	21.21	27.15	0.519	1
				1	18	21.29	21.09	21.13			
				1	36	21.28	21.07	21.08			
				18	0	21.26	20.79	20.77			
				18	9	21.55	21.07	21.07			
				18	18	21.28	20.79	20.77			
				36	0	21.24	20.77	20.76			
			QPSK	1	1	21.31	21.06	21.07	27.17	0.521	1
				1	18	21.38	20.99	21.03			
				1	36	21.4	20.87	20.97			
				18	0	20.76	20.29	20.27			
				18	9	21.57	21.06	21.08			
				18	18	20.74	20.27	20.26			
				36	0	20.78	20.28	20.25			
			16QAM	1	1	20.28	20.35	20.36	25.96	0.394	1
			64QAM	1	1	19.45	18.65	18.66	25.05	0.32	1
			256QAM	1	1	17.28	16.85	16.33	22.88	0.194	1
		CP-OFDM	QPSK	1	1	20.27	19.77	19.71	25.87	0.386	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647334	656000	664666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3710.01 MHz)	(3840 MHz)	(3969.99 MHz)			
20	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.33	21.18	21.27	27.12	0.515	1
				1	26	21.46	21.27	21.23			
				1	49	21.31	21.14	21.03			
				25	0	21.26	20.87	20.91			
				25	13	21.52	21.03	21.05			
				25	26	21.46	20.73	20.85			
				50	0	21.26	20.74	20.94			
			QPSK	1	1	21.49	21.12	21.23	27.09	0.512	1
				1	26	21.38	21.03	21.22			
				1	49	21.31	21.07	20.87			
				25	0	20.73	20.33	20.27			
				25	13	21.49	21.01	21.04			
				25	26	20.79	20.33	20.22			
				50	0	20.85	20.46	20.25			
			16QAM	1	1	20.25	20.45	20.53	26.13	0.41	1
			64QAM	1	1	19.63	18.77	18.64	25.23	0.333	1
			256QAM	1	1	17.43	16.96	16.26	23.03	0.201	1
		CP-OFDM	QPSK	1	1	20.24	19.87	19.75	25.84	0.384	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647500	656000	664500	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3712.5 MHz)	(3840 MHz)	(3967.5 MHz)			
25	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.51	21.34	20.89	27.31	0.538	1
				1	26	21.71	21.31	20.93			
				1	49	21.59	21.11	20.94			
				25	0	21.35	20.82	20.25			
				25	13	21.66	21.07	21.02			
				25	26	21.15	20.61	20.33			
			QPSK	50	0	21.14	20.64	20.25	27.47	0.558	1
				1	1	21.87	21.09	20.77			
				1	26	21.72	20.98	21.13			
				1	49	21.75	21.02	21.12			
				25	0	20.74	20.13	19.98			
				25	13	21.69	21.16	20.92			
				25	26	20.63	20.04	19.81			
				50	0	20.59	20.29	19.99			
			16QAM	1	1	20.47	20.16	20.08	26.07	0.405	1
			64QAM	1	1	19.19	18.75	18.38	24.79	0.301	1
			256QAM	1	1	17.31	17.03	16.57	22.91	0.195	1
		CP-OFDM	QPSK	1	1	20.27	19.64	19.18	25.87	0.386	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647668	656000	664332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3715.02 MHz)	(3840 MHz)	(3964.98 MHz)			
30	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.68	21.23	20.82	27.35	0.543	1
				1	39	21.65	21.17	20.85			
				1	76	21.61	21.04	20.88			
				36	0	21.21	20.64	20.33			
				36	21	21.75	21.14	20.86			
				36	42	21.17	20.56	20.37			
				75	0	21.21	20.61	20.32			
			QPSK	1	1	21.68	21.02	20.8	27.32	0.54	1
				1	39	21.7	20.98	20.95			
				1	76	21.67	20.82	20.98			
				36	0	20.66	20.13	19.78			
				36	21	21.72	21.12	20.85			
				36	42	20.64	20.07	19.85			
				75	0	20.69	20.13	19.79			
			16QAM	1	1	20.48	20.09	19.96	26.08	0.406	1
			64QAM	1	1	19.05	18.64	18.27	24.65	0.292	1
			256QAM	1	1	17.13	17.07	16.59	22.73	0.187	1
		CP-OFDM	QPSK	1	1	20.08	19.64	19.16	25.68	0.37	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648000	656000	664000	EIRP	EIRP	EIRP Limit
						(3720 MHz)	(3840 MHz)	(3960 MHz)	(dBm)	(W)	(W)
40	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.72	21.41	20.82	27.33	0.541	1
				1	53	21.55	21.32	20.94			
				1	104	21.53	21.14	20.98			
				50	0	21.21	20.63	20.52			
				50	28	21.73	21.13	20.86			
				50	56	21.33	20.62	20.48			
				100	0	21.24	20.61	20.27			
			QPSK	1	1	21.83	21.11	20.86	27.43	0.553	1
				1	53	21.79	20.91	21.11			
				1	104	21.71	20.74	21.14			
				50	0	20.72	20.13	19.82			
				50	28	21.63	21.24	20.94			
				50	56	20.82	19.99	20.05			
				100	0	20.68	20.31	19.74			
			16QAM	1	1	20.39	20.15	19.96	25.99	0.397	1
			64QAM	1	1	19.02	18.65	18.35	24.62	0.29	1
			256QAM	1	1	17.24	17.21	16.49	22.84	0.192	1
		CP-OFDM	QPSK	1	1	20.11	19.58	19.36	25.71	0.372	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648334	656000	663666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3725.01 MHz)	(3840 MHz)	(3954.99 MHz)			
50	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.44	21.14	21.28	27.37	0.546	1
				1	67	21.39	21.07	21.21			
				1	131	21.34	21.01	20.96			
				64	0	21.02	20.82	20.9			
				64	35	21.77	21.11	21.29			
				64	69	20.98	20.65	20.6			
				128	0	21.26	20.55	20.83			
			QPSK	1	1	21.61	21.28	21.14	27.32	0.54	1
				1	67	21.5	21.17	21.45			
				1	131	21.42	21.04	20.87			
				64	0	20.61	20.34	20.25			
				64	35	21.72	21.23	21.16			
				64	69	20.48	19.98	19.97			
				128	0	20.65	20.25	20.27			
			16QAM	1	1	20.27	20.31	20.31	25.91	0.39	1
			64QAM	1	1	19.17	18.94	19.01	24.77	0.3	1
			256QAM	1	1	16.71	16.57	16.32	22.31	0.17	1
		CP-OFDM	QPSK	1	1	19.89	19.83	19.19	25.49	0.354	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648668	656000	663332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3730.02 MHz)	(3840 MHz)	(3949.98 MHz)			
60	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.45	21.21	21.23	27.21	0.526	1
				1	81	21.48	21.14	21.11			
				1	160	21.31	20.84	20.82			
				81	0	21.08	20.71	20.72			
				81	41	21.61	21.17	21.21			
				81	81	20.99	20.51	20.53			
				162	0	21.06	20.63	20.65			
			QPSK	1	1	21.49	21.22	21.22	27.19	0.524	1
				1	81	21.55	21.14	21.26			
				1	160	21.3	20.89	20.88			
				81	0	20.56	20.19	20.21			
				81	41	21.59	21.18	21.21			
				81	81	20.48	19.99	20.03			
				162	0	20.55	20.13	20.14			
			16QAM	1	1	20.11	20.27	20.31	25.91	0.39	1
			64QAM	1	1	19.09	18.98	19.01	24.69	0.294	1
			256QAM	1	1	16.71	16.58	16.26	22.31	0.17	1
		CP-OFDM	QPSK	1	1	19.87	19.69	19.16	25.47	0.352	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649000	656000	663000	EIRP	EIRP	EIRP Limit
						(3735 MHz)	(3840 MHz)	(3945 MHz)	(dBm)	(W)	(W)
70	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.53	21.05	21.13	27.29	0.536	1
				1	81	21.48	21.18	21.02			
				1	160	21.12	20.89	20.62			
				81	0	21.15	20.67	20.58			
				81	41	21.69	21.26	21.04			
				81	81	21.06	20.37	20.53			
			QPSK	162	0	21.02	20.55	20.54	27.24	0.53	1
				1	1	21.54	21.14	21.17			
				1	81	21.54	21.03	21.18			
				1	160	21.35	20.92	20.82			
				81	0	20.59	20.27	20.01			
				81	41	21.64	21.24	21.23			
				81	81	20.49	19.84	20.05			
				162	0	20.62	20.22	20.18			
			16QAM	1	1	20.46	20.32	20.41	26.06	0.404	1
			64QAM	1	1	19.01	19.08	19.07	24.68	0.294	1
			256QAM	1	1	16.79	16.62	16.35	22.39	0.173	1
		CP-OFDM	QPSK	1	1	19.75	19.71	19.11	25.35	0.343	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649334	656000	662666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3740.01 MHz)	(3840 MHz)	(3939.99 MHz)			
80	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.52	21.16	20.73	27.19	0.524	1
				1	109	21.59	21.07	20.62			
				1	215	21.21	20.73	20.84			
				108	0	21.18	20.76	20.31			
				108	55	21.34	20.99	20.89			
				108	109	20.98	20.47	20.39			
				216	0	20.93	20.58	20.47			
			QPSK	1	1	21.55	21.23	20.56	27.17	0.521	1
				1	109	21.57	20.94	20.65			
				1	215	21.32	20.74	20.62			
				108	0	20.66	20.49	19.94			
				108	55	21.51	21.18	20.78			
				108	109	20.6	19.92	19.97			
				216	0	20.52	20.06	19.92			
			16QAM	1	1	20.63	20.22	19.4	26.23	0.42	1
			64QAM	1	1	19.29	18.99	18.55	24.89	0.308	1
			256QAM	1	1	17.09	16.88	16.35	22.69	0.186	1
		CP-OFDM	QPSK	1	1	20.05	19.82	19.51	25.65	0.367	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649668	656000	662332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3745.02 MHz)	(3840 MHz)	(3934.98 MHz)			
90	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.43	21.26	20.66	27.12	0.515	1
				1	123	21.52	21.19	20.76			
				1	243	21.28	20.77	20.77			
				120	0	21.13	20.86	20.46			
				120	63	21.45	21.16	20.83			
				120	125	20.98	20.64	20.47			
				243	0	21.06	20.77	20.46			
			QPSK	1	1	21.59	21.38	20.69	27.22	0.527	1
				1	123	21.62	21.09	20.76			
				1	243	21.41	20.7	20.75			
				120	0	20.69	20.42	19.94			
				120	63	21.52	21.23	20.85			
				120	125	20.58	20.11	19.98			
				243	0	20.56	20.23	19.95			
			16QAM	1	1	20.65	20.29	19.55	26.25	0.422	1
			64QAM	1	1	19.45	19.11	18.56	25.05	0.32	1
			256QAM	1	1	17.16	16.81	16.41	22.76	0.189	1
		CP-OFDM	QPSK	1	1	20.04	19.94	19.47	25.64	0.366	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	650000	656000	662000	EIRP	EIRP	EIRP Limit
						(3750 MHz)	(3840 MHz)	(3930 MHz)	(dBm)	(W)	(W)
100	30	DFT-s-OFDM	pi/2 BPSK	1	1	21.41	21.3	20.67	27.18	0.522	1
				1	137	21.45	21.12	20.77			
				1	271	21.12	20.65	20.71			
				135	0	21.19	20.93	20.46			
				135	69	21.58	21.23	20.82			
				135	138	21.06	20.62	20.49			
				270	0	21.17	20.78	20.54			
			QPSK	1	1	21.43	21.21	20.68	27.18	0.522	1
				1	137	21.58	21.06	20.71			
				1	271	21.23	20.69	20.67			
				135	0	20.69	20.4	19.95			
				135	69	21.58	21.17	20.82			
				135	138	20.54	20.09	19.96			
				270	0	20.64	20.26	20.01			
			16QAM	1	1	20.54	20.14	19.48	26.14	0.411	1
			64QAM	1	1	19.32	19.03	18.49	24.92	0.31	1
			256QAM	1	1	17.17	16.88	16.31	22.77	0.189	1
		CP-OFDM	QPSK	1	1	20.16	19.95	19.36	25.76	0.377	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

MIMO 2

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647000	656000	665000	EIRP	EIRP	EIRP Limit
						(3705 MHz)	(3840 MHz)	(3975 MHz)	(dBm)	(W)	(W)
10	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.24	22.49	22.53	29.34	0.859	1
				1	12	23.22	22.48	22.69			
				1	22	23.1	22.47	22.46			
				12	0	22.84	22.21	22.18			
				12	6	23.12	22.53	22.54			
				12	12	22.78	22.19	22.21			
				24	0	22.86	21.75	22.19			
			QPSK	1	1	22.94	22.58	22.57	29.14	0.82	1
				1	12	23.04	22.73	22.64			
				1	22	23.03	22.53	22.58			
				12	0	22.18	21.68	21.68			
				12	6	22.99	22.48	22.51			
				12	12	22.17	21.67	21.67			
				24	0	22.14	21.66	21.68			
			16QAM	1	1	22.18	21.73	21.74	28.28	0.673	1
			64QAM	1	1	20.12	19.66	19.74	26.22	0.419	1
			256QAM	1	1	18.55	18.12	17.56	24.65	0.292	1
		CP-OFDM	QPSK	1	1	21.03	20.97	20.53	27.13	0.516	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647168	656000	664832	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3707.52 MHz)	(3840 MHz)	(3972.48 MHz)			
15	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.97	22.44	22.46	29.07	0.807	1
				1	18	22.91	22.36	22.56			
				1	36	22.83	22.38	22.34			
				18	0	22.61	22.34	22.18			
				18	9	22.94	22.62	22.44			
				18	18	22.58	22.34	22.21			
				36	0	22.59	22.34	22.19			
			QPSK	1	1	23.16	22.55	22.51	29.26	0.843	1
				1	18	23.05	22.52	22.59			
				1	36	22.86	22.53	22.47			
				18	0	22.18	21.84	21.64			
				18	9	23.04	22.67	22.44			
				18	18	22.18	21.83	21.65			
				36	0	22.14	21.86	21.67			
			16QAM	1	1	22.41	21.69	21.94	28.51	0.71	1
			64QAM	1	1	20.46	20.47	19.79	26.57	0.454	1
			256QAM	1	1	18.38	18.26	17.89	24.48	0.281	1
		CP-OFDM	QPSK	1	1	22.04	21.05	20.91	28.14	0.652	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647334	656000	664666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3710.01 MHz)	(3840 MHz)	(3969.99 MHz)			
20	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.05	22.42	22.36	29.15	0.822	1
				1	26	22.85	22.28	22.62			
				1	49	22.74	22.32	22.41			
				25	0	22.58	22.38	22.12			
				25	13	22.89	22.57	22.51			
				25	26	22.59	22.25	22.23			
				50	0	22.69	22.37	22.09			
			QPSK	1	1	23.24	22.53	22.47	29.34	0.859	1
				1	26	22.98	22.51	22.52			
				1	49	22.83	22.49	22.41			
				25	0	22.12	21.78	21.72			
				25	13	23.06	22.69	22.42			
				25	26	22.22	21.77	21.61			
				50	0	22.15	21.94	21.6			
			16QAM	1	1	22.49	21.59	21.93	28.59	0.723	1
			64QAM	1	1	20.39	20.52	19.81	26.62	0.459	1
			256QAM	1	1	18.46	18.25	17.92	24.56	0.286	1
		CP-OFDM	QPSK	1	1	22.05	20.95	20.91	28.15	0.653	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647500	656000	664500	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3712.5 MHz)	(3840 MHz)	(3967.5 MHz)			
25	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.18	22.86	22.43	29.31	0.853	1
				1	26	23.21	22.73	22.45			
				1	49	23.16	22.68	22.55			
				25	0	22.44	22.42	21.96			
				25	13	23.08	22.72	22.59			
				25	26	22.42	22.12	22.03			
				50	0	22.52	22.16	22.08			
			QPSK	1	1	22.99	22.64	22.47	29.26	0.843	1
				1	26	22.96	22.79	22.78			
				1	49	22.85	22.72	22.69			
				25	0	22.22	21.77	21.63			
				25	13	23.16	22.84	22.65			
				25	26	22.04	21.85	21.55			
				50	0	22.07	21.68	21.55			
			16QAM	1	1	22.33	21.58	21.99	28.43	0.697	1
			64QAM	1	1	20.37	20.78	19.92	26.88	0.488	1
			256QAM	1	1	18.64	18.42	17.72	24.74	0.298	1
		CP-OFDM	QPSK	1	1	21.22	21.27	20.78	27.37	0.546	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	647668	656000	664332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3715.02 MHz)	(3840 MHz)	(3964.98 MHz)			
30	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.21	22.76	22.54	29.31	0.853	1
				1	39	23.19	22.81	22.59			
				1	76	23.12	22.71	22.61			
				36	0	22.61	22.37	22.13			
				36	21	23.14	22.87	22.68			
				36	42	22.57	22.29	22.14			
				75	0	22.64	22.34	22.13			
			QPSK	1	1	23.07	22.83	22.67	29.28	0.847	1
				1	39	23.12	22.82	22.69			
				1	76	23.05	22.75	22.75			
				36	0	22.15	21.84	21.61			
				36	21	23.18	22.86	22.66			
				36	42	22.07	21.79	21.63			
				75	0	22.12	21.82	21.62			
			16QAM	1	1	22.25	21.61	21.89	28.35	0.684	1
			64QAM	1	1	20.32	20.68	19.82	26.78	0.476	1
			256QAM	1	1	18.68	18.32	17.9	24.78	0.301	1
		CP-OFDM	QPSK	1	1	21.32	21.31	20.93	27.42	0.552	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648000	656000	664000	EIRP	EIRP	EIRP Limit
						(3720 MHz)	(3840 MHz)	(3960 MHz)	(dBm)	(W)	(W)
40	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.29	22.58	22.59	29.39	0.869	1
				1	53	23.08	22.69	22.39			
				1	104	22.93	22.81	22.61			
				50	0	22.45	22.28	22.17			
				50	28	23.08	22.63	22.7			
				50	56	22.58	22.33	22.19			
				100	0	22.59	22.43	22.03			
			QPSK	1	1	23.16	22.66	22.59	29.3	0.851	1
				1	53	23.2	22.77	22.76			
				1	104	23.15	22.74	22.81			
				50	0	22.04	21.71	21.44			
				50	28	23.09	22.95	22.55			
				50	56	21.92	21.82	21.56			
				100	0	21.95	21.62	21.45			
			16QAM	1	1	22.33	21.66	21.95	28.43	0.697	1
			64QAM	1	1	20.32	20.66	19.67	26.76	0.474	1
			256QAM	1	1	18.75	18.24	17.87	24.85	0.305	1
		CP-OFDM	QPSK	1	1	21.21	21.28	20.84	27.38	0.547	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W)= $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648334	656000	663666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3725.01 MHz)	(3840 MHz)	(3954.99 MHz)			
50	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.87	22.71	22.49	29.16	0.824	1
				1	67	23.06	22.66	22.58			
				1	131	22.56	22.35	22.61			
				64	0	22.69	22.26	21.91			
				64	35	23.01	22.66	22.51			
				64	69	22.37	22.18	22.01			
				128	0	22.61	22.37	22.16			
			QPSK	1	1	23.03	22.67	22.48	29.13	0.818	1
				1	67	22.86	22.89	22.64			
				1	131	22.57	22.51	22.37			
				64	0	21.97	21.74	21.62			
				64	35	22.98	22.94	22.73			
				64	69	21.82	21.67	21.62			
				128	0	22.11	21.79	21.41			
			16QAM	1	1	21.79	21.51	21.18	27.89	0.615	1
			64QAM	1	1	20.21	20.38	20.15	26.48	0.445	1
			256QAM	1	1	18.67	18.09	17.64	24.77	0.3	1
		CP-OFDM	QPSK	1	1	21.26	21.29	20.88	27.39	0.548	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	648668	656000	663332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3730.02 MHz)	(3840 MHz)	(3949.98 MHz)			
60	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.04	22.74	22.46	29.17	0.826	1
				1	81	23.03	22.77	22.63			
				1	160	22.74	22.55	22.57			
				81	0	22.59	22.29	22.11			
				81	41	23.07	22.84	22.69			
				81	81	22.44	22.18	22.13			
				162	0	22.54	22.27	22.12			
			QPSK	1	1	23.05	22.72	22.39	29.16	0.824	1
				1	81	23.03	22.84	22.58			
				1	160	22.74	22.55	22.49			
				81	0	22.05	21.85	21.59			
				81	41	23.06	22.91	22.69			
				81	81	21.89	21.75	21.62			
				162	0	22.02	21.76	21.58			
			16QAM	1	1	21.85	21.62	21.32	27.95	0.624	1
			64QAM	1	1	20.41	20.33	20.31	26.51	0.448	1
			256QAM	1	1	18.68	18.21	17.83	24.78	0.301	1
		CP-OFDM	QPSK	1	1	21.45	21.21	20.84	27.55	0.569	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649000	656000	663000	EIRP	EIRP	EIRP Limit
						(3735 MHz)	(3840 MHz)	(3945 MHz)	(dBm)	(W)	(W)
70	30	DFT-s-OFDM	pi/2 BPSK	1	1	23.14	22.76	22.35	29.24	0.839	1
				1	81	23.12	22.72	22.73			
				1	160	22.75	22.48	22.52			
				81	0	22.46	22.33	21.92			
				81	41	23.11	22.92	22.72			
				81	81	22.49	22.14	22.11			
				162	0	22.42	22.09	22.15			
			QPSK	1	1	23.01	22.66	22.19	29.11	0.815	1
				1	81	22.97	22.66	22.57			
				1	160	22.72	22.51	22.52			
				81	0	22.08	21.88	21.49			
				81	41	22.93	22.97	22.54			
				81	81	21.76	21.82	21.65			
				162	0	22.04	21.86	21.59			
			16QAM	1	1	21.69	21.45	21.16	27.79	0.601	1
			64QAM	1	1	20.44	20.13	20.14	26.54	0.451	1
			256QAM	1	1	18.66	18.18	17.71	24.76	0.299	1
		CP-OFDM	QPSK	1	1	21.41	21.11	20.78	27.51	0.564	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649334	656000	662666	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3740.01 MHz)	(3840 MHz)	(3939.99 MHz)			
80	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.79	22.65	22.56	28.89	0.774	1
				1	109	22.74	22.67	22.68			
				1	215	22.36	22.28	22.34			
				108	0	22.45	22.21	22.32			
				108	55	22.76	22.67	22.54			
				108	109	22.05	22.07	22.14			
				216	0	22.32	22.17	22.19			
			QPSK	1	1	22.86	22.72	22.52	28.96	0.787	1
				1	109	22.65	22.6	22.52			
				1	215	22.34	22.15	22.35			
				108	0	21.75	21.55	21.61			
				108	55	22.64	22.51	22.52			
				108	109	21.83	21.61	21.61			
				216	0	21.76	21.69	21.55			
			16QAM	1	1	21.89	21.71	21.92	28.02	0.634	1
			64QAM	1	1	20.17	20.22	20.36	26.46	0.443	1
			256QAM	1	1	18.51	18.25	17.72	24.61	0.289	1
		CP-OFDM	QPSK	1	1	21.48	21.19	20.87	27.58	0.573	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	649668	656000	662332	EIRP (dBm)	EIRP (W)	EIRP Limit (W)
						(3745.02 MHz)	(3840 MHz)	(3934.98 MHz)			
90	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.62	22.44	22.45	28.72	0.745	1
				1	123	22.53	22.43	22.49			
				1	243	22.29	22.11	22.09			
				120	0	22.21	22.04	22.1			
				120	63	22.48	22.42	22.48			
				120	125	22.01	21.93	21.98			
				243	0	22.13	22.01	22.06			
			QPSK	1	1	22.58	22.44	22.45	28.68	0.738	1
				1	123	22.56	22.51	22.44			
				1	243	22.34	22.09	22.13			
				120	0	21.69	21.55	21.58			
				120	63	22.5	22.49	22.48			
				120	125	21.51	21.45	21.45			
				243	0	21.59	21.51	21.54			
			16QAM	1	1	21.76	21.71	21.7	27.86	0.611	1
			64QAM	1	1	20.04	20.16	20.17	26.27	0.424	1
			256QAM	1	1	18.29	18.13	17.71	24.39	0.275	1
		CP-OFDM	QPSK	1	1	21.31	21.13	20.66	27.41	0.551	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

5GNR n77/n78 (3700 - 3980 MHz) Maximum Average Power (dBm)											
BW [MHz]	SCS (kHz)	OFDM	Mode	RB Size	RB Offset	650000	656000	662000	EIRP	EIRP	EIRP Limit
						(3750 MHz)	(3840 MHz)	(3930 MHz)	(dBm)	(W)	(W)
100	30	DFT-s-OFDM	pi/2 BPSK	1	1	22.96	22.39	22.09	29.06	0.805	1
				1	137	22.83	22.53	22.21			
				1	271	22.62	21.99	22.08			
				135	0	22.56	22.18	21.84			
				135	69	22.83	22.54	22.23			
				135	138	22.38	22.01	21.86			
				270	0	22.78	22.09	21.93			
			QPSK	1	1	22.74	22.37	22.08	28.87	0.771	1
				1	137	22.77	22.44	22.24			
				1	271	22.49	22.01	22.14			
				135	0	21.89	21.61	21.34			
				135	69	22.4	22.51	22.24			
				135	138	21.74	21.46	21.38			
				270	0	21.87	21.58	21.39			
			16QAM	1	1	21.96	21.39	21.4	28.06	0.64	1
			64QAM	1	1	20.41	19.99	19.74	26.51	0.448	1
			256QAM	1	1	18.27	18.02	17.75	24.37	0.274	1
		CP-OFDM	QPSK	1	1	21.33	21.08	20.82	27.43	0.553	1

Note:

1. EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - Backoff Power Factor (dB)

2. EIRP (W) = $(10^{(\text{Power(dBm)}/10)}) \cdot 10^{-3}$

Appendix B. Test Result of Occupied Bandwidth

Mode 1: 5G NR n7

Band	Bandwidth	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Measure Level (MHz)	
						99% OBW	26dB BW
n7	5 MHz	2535	BPSK	25	0	4.5150	4.929
			QPSK			4.4741	4.902
			16-QAM			4.5237	4.989
			64-QAM			4.4958	4.883
			256-QAM			4.4827	4.865
	10 MHz		BPSK	50		8.9862	9.540
			QPSK			9.0181	9.551
			16-QAM			8.9892	9.550
			64-QAM			8.9891	9.596
			256-QAM			8.9656	9.598
	15 MHz		BPSK	75		13.412	14.20
			QPSK			13.459	14.28
			16-QAM			13.454	14.30
			64-QAM			13.473	14.23
			256-QAM			13.398	14.24
	20 MHz		BPSK	100		17.901	18.91
			QPSK			17.969	18.95
			16-QAM			17.921	18.92
			64-QAM			17.909	18.95
			256-QAM			17.929	18.91
	25 MHz		BPSK	128		23.013	24.15
			QPSK			22.953	24.18
			16-QAM			22.946	24.19
			64-QAM			22.975	24.19
			256-QAM			22.992	24.18
	30 MHz		BPSK	160		28.696	30.13
			QPSK			28.645	30.21
			16-QAM			28.658	30.31
			64-QAM			28.708	30.20
			256-QAM			28.733	30.19

n7	40 MHz	2535	BPSK	216	0	38.796	40.66
			QPSK			38.718	40.66
			16-QAM			38.770	40.72
			64-QAM			38.738	40.75
			256-QAM			38.714	40.68
	50 MHz		BPSK	270		48.528	50.83
			QPSK			48.403	50.84
			16-QAM			48.395	50.86
			64-QAM			48.369	50.84
			256-QAM			48.279	50.92

Mode 2: 5G NR n41

Band	Bandwidth	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Measure Level (MHz)	
						99% OBW	26dB BW
n41	10 MHz	2592.99	BPSK	24	0	8.6473	9.508
			QPSK			8.5813	9.353
			16-QAM			8.6502	9.429
			64-QAM			8.6549	9.489
			256-QAM			8.6129	9.453
	15 MHz		BPSK	36		12.948	13.95
			QPSK			12.932	13.86
			16-QAM			12.910	13.93
			64-QAM			12.902	13.88
			256-QAM			12.874	13.92
	20 MHz		BPSK	50		17.940	19.00
			QPSK			17.924	19.09
			16-QAM			17.903	19.06
			64-QAM			17.911	19.12
			256-QAM			17.927	19.07
	30 MHz		BPSK	75		26.894	28.60
			QPSK			26.894	28.61
			16-QAM			26.867	28.59
			64-QAM			26.926	28.60
			256-QAM			26.877	28.57
	40 MHz		BPSK	100		35.853	38.00
			QPSK			35.801	37.93
			16-QAM			35.814	37.88
			64-QAM			35.772	37.88
			256-QAM			35.714	37.75
	50 MHz		BPSK	128		45.910	48.35
			QPSK			45.762	48.36
			16-QAM			45.861	48.28
			64-QAM			45.879	48.47
			256-QAM			45.921	48.46

n41	60 MHz	2592.99	BPSK	162	0	58.119	60.96
			QPSK			58.162	61.01
			16-QAM			58.101	61.06
			64-QAM			58.052	61.04
			256-QAM			57.910	60.93
	70 MHz		BPSK	180		64.787	68.23
			QPSK			64.750	68.08
			16-QAM			64.796	68.06
			64-QAM			64.879	68.19
			256-QAM			64.733	68.15
	80 MHz		BPSK	216		77.530	81.31
			QPSK			77.543	81.36
			16-QAM			77.914	81.48
			64-QAM			77.598	81.46
			256-QAM			77.701	81.40
	90 MHz		BPSK	243		87.556	91.75
			QPSK			87.626	91.76
			16-QAM			87.365	91.58
			64-QAM			87.355	91.66
			256-QAM			87.421	91.61
	100 MHz		BPSK	270		97.560	102.0
			QPSK			97.293	101.9
			16-QAM			97.155	101.9
			64-QAM			97.284	101.9
			256-QAM			97.336	101.8

Mode 3: 5G NR n77 (3450 - 3550 MHz)

Band	Bandwidth	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Measure Level (MHz)	
						99% OBW	26dB BW
n77	10 MHz	3500.01	BPSK	24	0	8.6203	9.408
			QPSK			8.6281	9.463
			16-QAM			8.5740	9.365
			64-QAM			8.6159	9.325
			256-QAM			8.6111	9.418
	15 MHz		BPSK	36		12.953	13.76
			QPSK			12.900	13.85
			16-QAM			12.942	13.91
			64-QAM			12.981	13.91
			256-QAM			12.944	13.90
	20 MHz		BPSK	50		17.962	19.10
			QPSK			17.886	19.18
			16-QAM			17.930	18.98
			64-QAM			17.890	19.01
			256-QAM			17.907	19.07
	25 MHz		BPSK	64		22.896	24.25
			QPSK			22.915	24.24
			16-QAM			22.905	24.21
			64-QAM			22.973	24.30
			256-QAM			22.927	24.35
	30 MHz		BPSK	75		27.046	28.63
			QPSK			27.018	28.70
			16-QAM			26.904	28.57
			64-QAM			26.956	28.56
			256-QAM			26.894	28.58
	40 MHz		BPSK	100		35.777	37.89
			QPSK			35.975	37.92
			16-QAM			35.922	38.05
			64-QAM			35.950	37.99
			256-QAM			35.975	37.89



n77	50 MHz	3500.01	BPSK	128	0	45.947	48.38
			QPSK			45.927	48.29
			16-QAM			45.950	48.39
			64-QAM			46.158	48.34
			256-QAM			45.804	48.27
	60 MHz		BPSK	162		57.952	60.98
			QPSK			58.088	61.12
			16-QAM			58.132	60.96
			64-QAM			57.983	60.97
			256-QAM			57.963	61.03
	70 MHz		BPSK	180		64.723	68.09
			QPSK			64.816	68.29
			16-QAM			64.687	68.15
			64-QAM			64.671	68.13
			256-QAM			64.714	68.14
	80 MHz		BPSK	216		77.598	81.15
			QPSK			77.596	81.13
			16-QAM			77.637	81.08
			64-QAM			77.545	81.11
			256-QAM			77.434	80.98
	90 MHz		BPSK	243		87.350	91.61
			QPSK			87.686	91.80
			16-QAM			87.358	91.46
			64-QAM			87.165	91.65
			256-QAM			87.592	91.70
	100 MHz		BPSK	270		97.273	101.9
			QPSK			97.061	101.7
			16-QAM			97.057	101.7
			64-QAM			96.997	101.7
			256-QAM			96.894	101.7

Mode 4: 5G NR n77(n78) (3700 - 3980 MHz)


Band	Bandwidth	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Measure Level (MHz)	
						99% OBW	26dB BW
n77(n78)	10 MHz	3840	BPSK	24	0	8.6322	9.466
			QPSK			8.5996	9.285
			16-QAM			8.6296	9.402
			64-QAM			8.6430	9.306
			256-QAM			8.6164	9.309
	15 MHz		BPSK	36		12.905	13.84
			QPSK			12.875	13.87
			16-QAM			12.905	13.90
			64-QAM			12.944	13.82
			256-QAM			12.949	13.94
	20 MHz		BPSK	50		18.024	19.02
			QPSK			17.955	19.05
			16-QAM			17.875	18.93
			64-QAM			17.943	19.08
			256-QAM			17.911	19.06
	25 MHz		BPSK	64		22.991	24.25
			QPSK			22.948	24.29
			16-QAM			23.026	24.39
			64-QAM			22.932	24.27
			256-QAM			23.050	24.22
	30 MHz		BPSK	75		26.848	28.60
			QPSK			26.928	28.59
			16-QAM			26.825	28.49
			64-QAM			26.888	28.69
			256-QAM			26.943	28.65
	40 MHz		BPSK	100		35.862	37.97
			QPSK			35.844	37.96
			16-QAM			35.948	38.07
			64-QAM			35.923	37.86
			256-QAM			36.057	37.89

n77(n78)	50 MHz	3840	BPSK	128	0	45.875	48.24
			QPSK			45.797	48.17
			16-QAM			45.994	48.37
			64-QAM			45.824	48.26
			256-QAM			45.977	48.26
	60 MHz		BPSK	162		58.202	61.03
			QPSK			58.267	60.96
			16-QAM			58.244	61.05
			64-QAM			58.054	61.02
			256-QAM			58.101	61.00
	70 MHz		BPSK	180		64.692	68.17
			QPSK			64.903	68.17
			16-QAM			64.826	68.22
			64-QAM			64.672	68.15
			256-QAM			64.631	68.17
	80 MHz		BPSK	216		77.581	81.09
			QPSK			77.651	81.33
			16-QAM			77.631	81.26
			64-QAM			77.885	81.35
			256-QAM			77.697	81.32
	90 MHz		BPSK	243		87.407	91.58
			QPSK			87.390	91.62
			16-QAM			87.255	91.66
			64-QAM			87.576	91.62
			256-QAM			87.613	91.58
	100 MHz		BPSK	270		97.139	101.7
			QPSK			97.231	101.8
			16-QAM			97.165	101.9
			64-QAM			97.310	101.9
			256-QAM			97.281	101.9


Mode 1: 5G NR n7

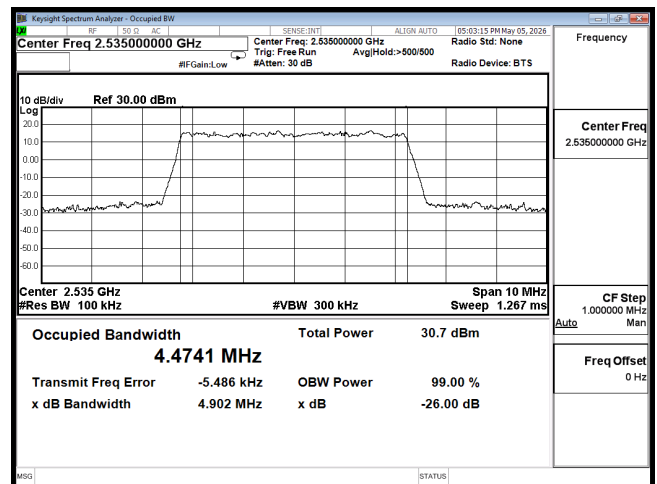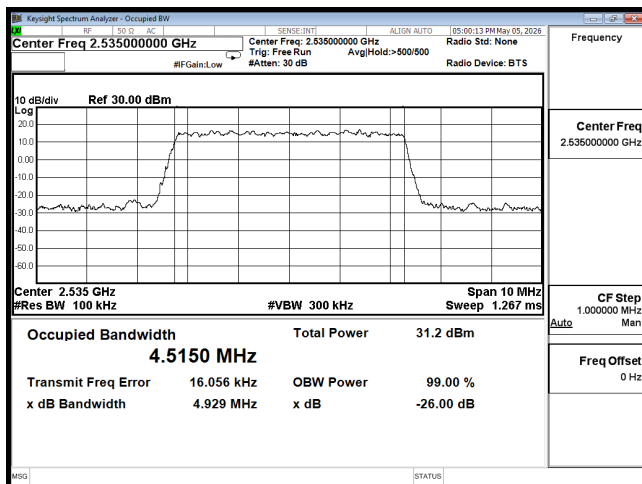


OCC n7 5M CH507000 BPSK

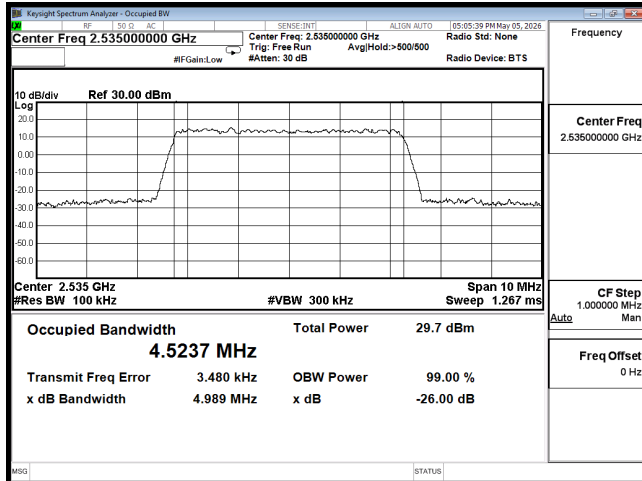


OCC n7 5M CH507000 QPSK

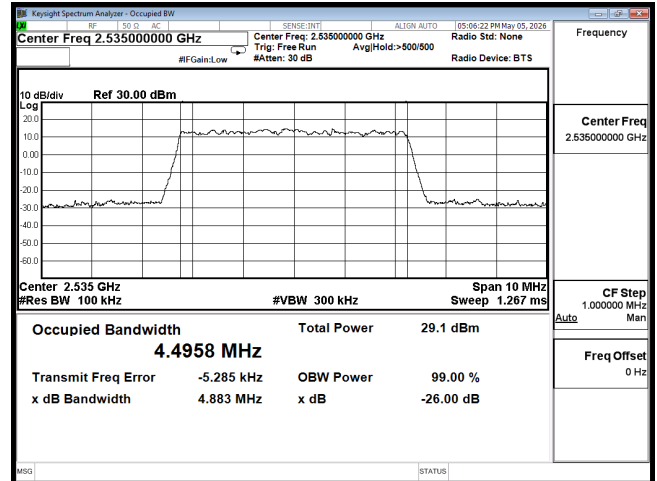

OCC n7 5M CH507000 16QAM


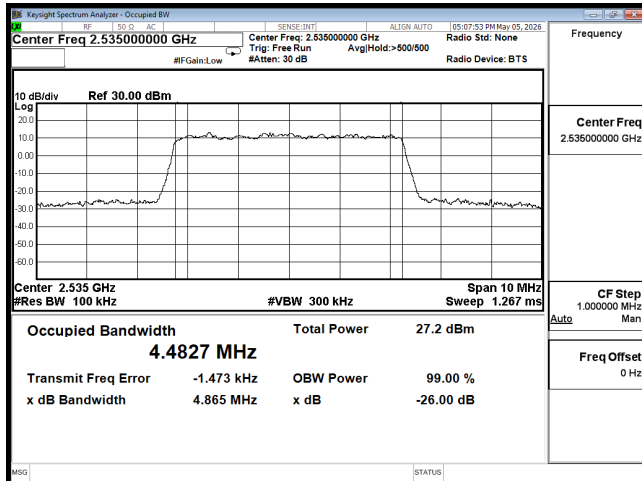


OCC n7 5M CH507000 64QAM

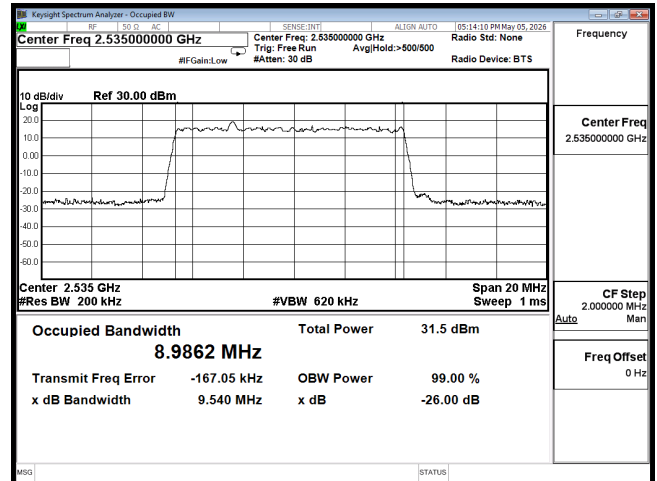


OCC n7 5M CH507000 256QAM


OCC n7 10M CH507000 BPSK

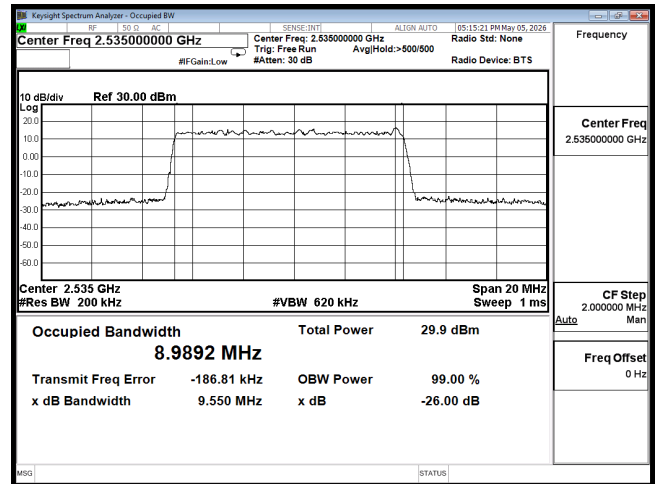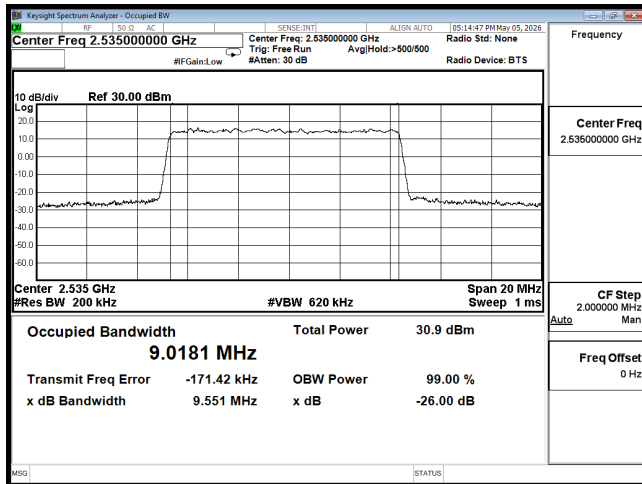


OCC n7 10M CH507000 QPSK

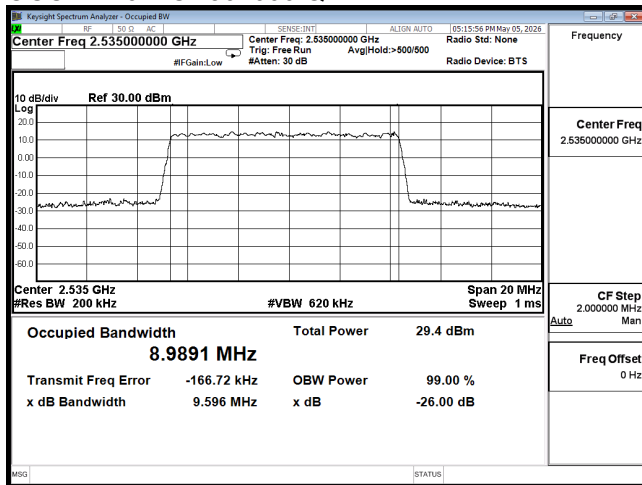


OCC n7 10M CH507000 16QAM

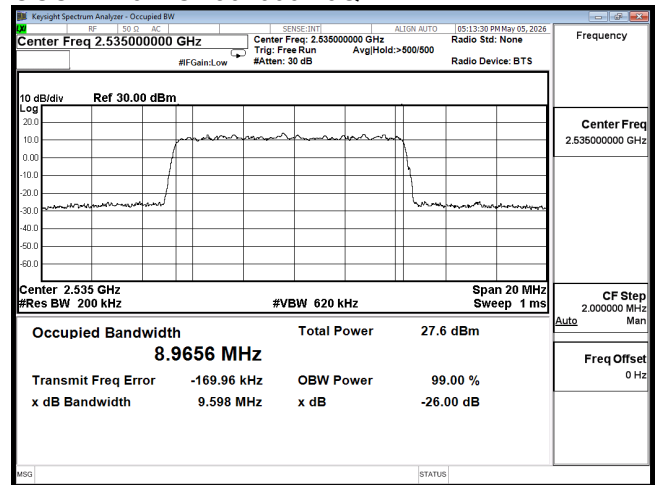

OCC n7 10M CH507000 64QAM

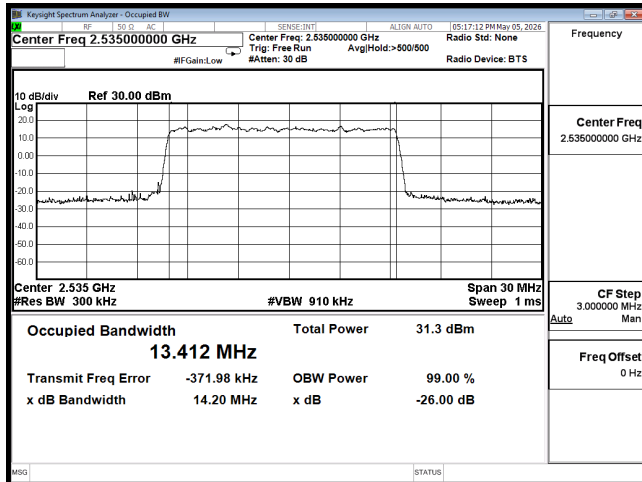


OCC n7 10M CH507000 256QAM

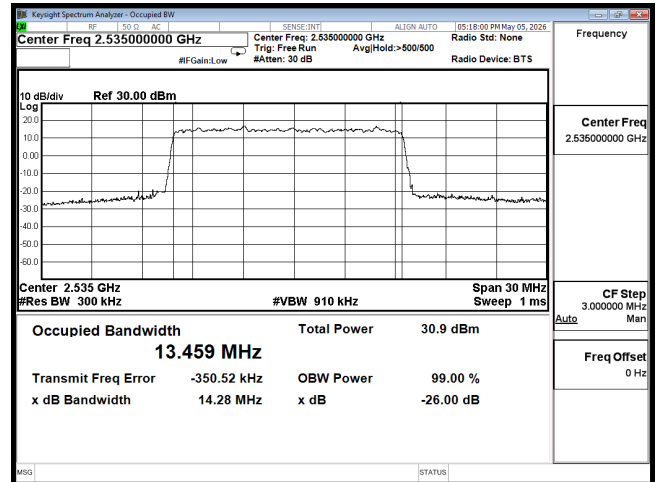


OCC n7 15M CH507000 BPSK


OCC n7 15M CH507000 QPSK

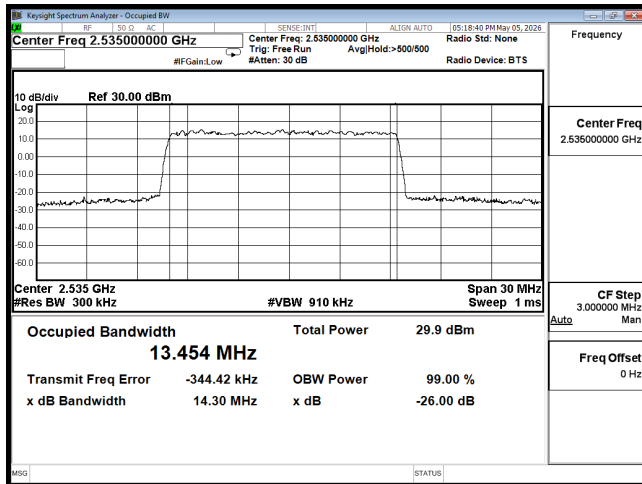


OCC n7 15M CH507000 16QAM

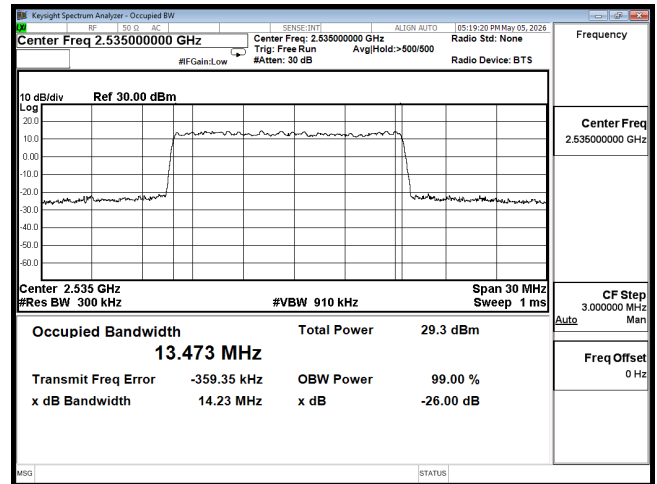


OCC n7 15M CH507000 64QAM

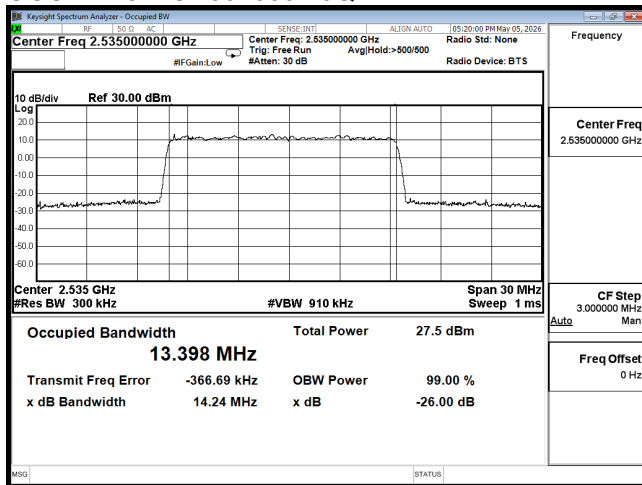


OCC n7 15M CH507000 256QAM

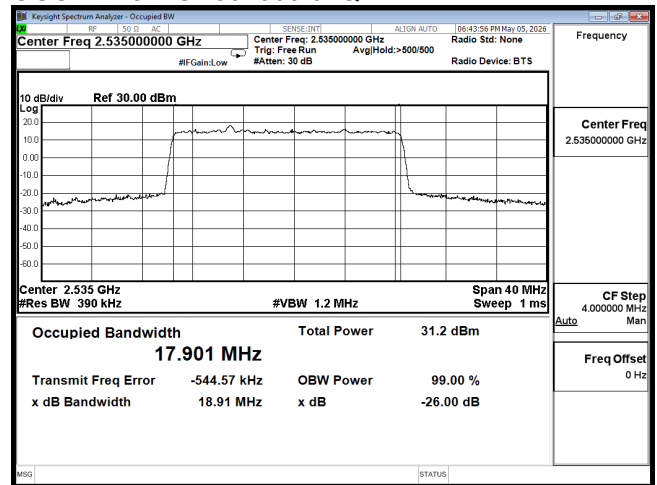



OCC n7 15M CH507000 BPSK

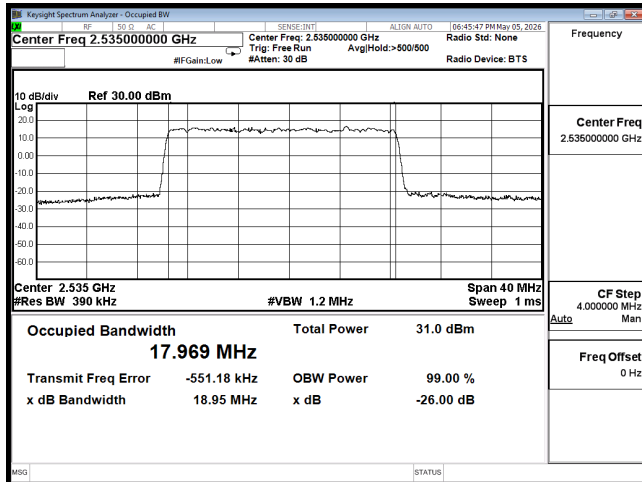


OCC n7 15M CH507000 QPSK

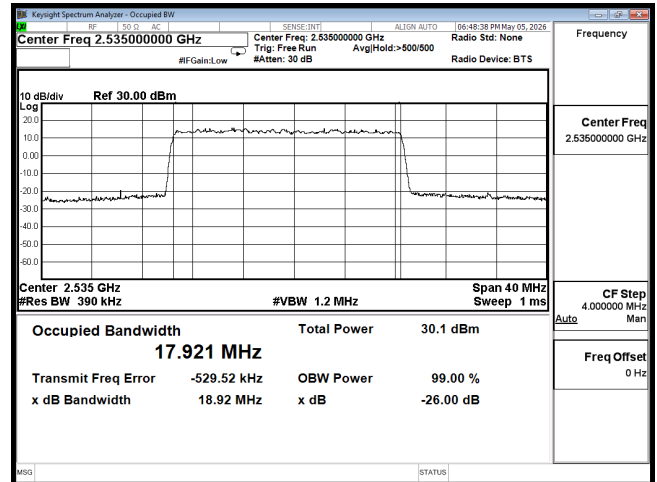


OCC n7 20M CH507000 16QAM

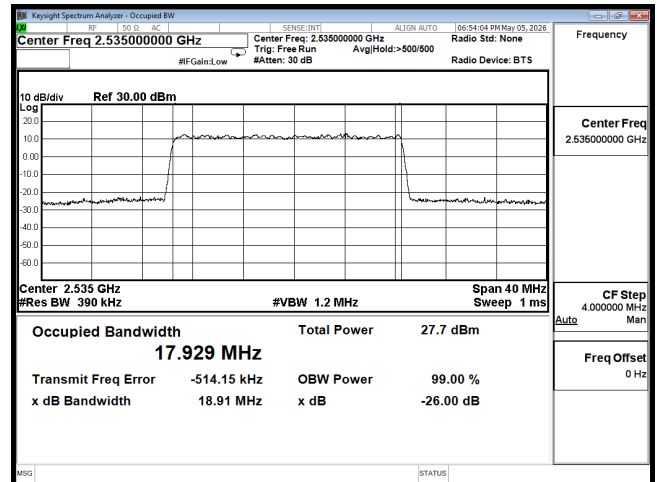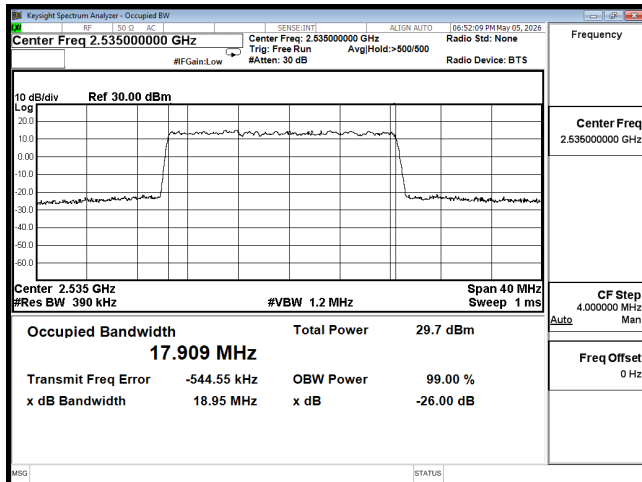


OCC n7 20M CH507000 64QAM

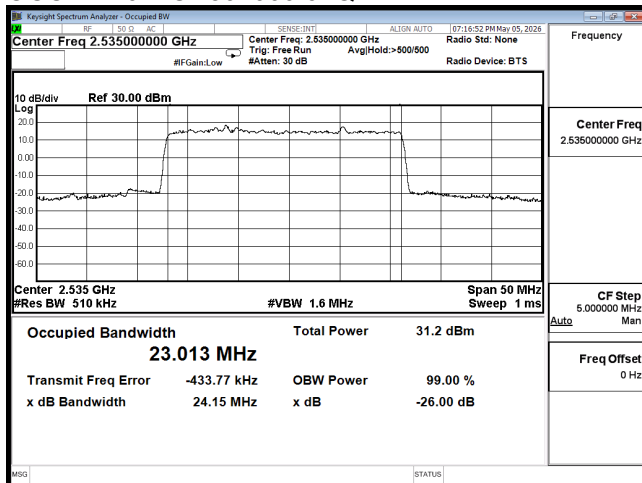


OCC n7 20M CH507000 256QAM

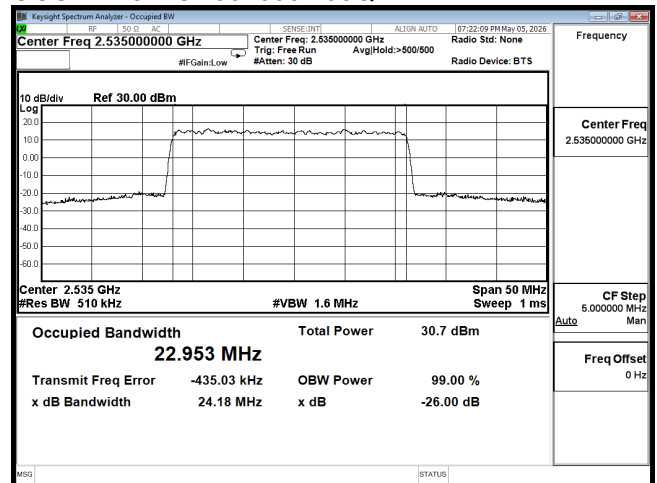

OCC n7 25M CH507000 BPSK


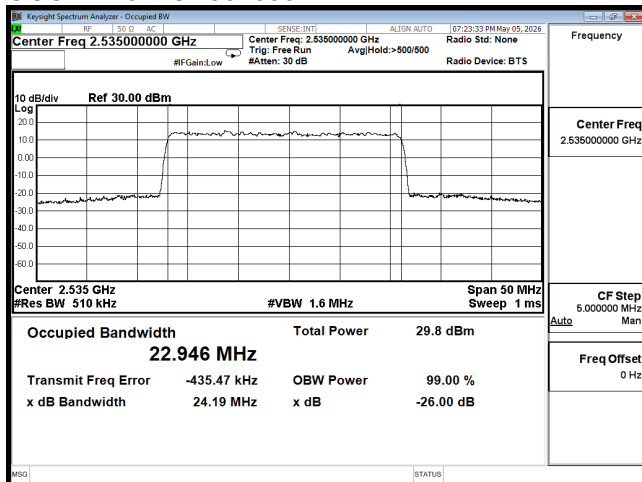


OCC n7 25M CH507000 QPSK

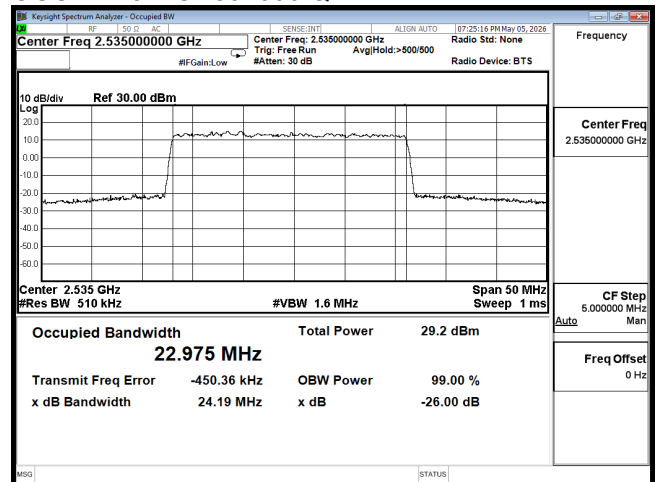


OCC n7 25M CH507000 16QAM


OCC n7 25M CH507000 64QAM

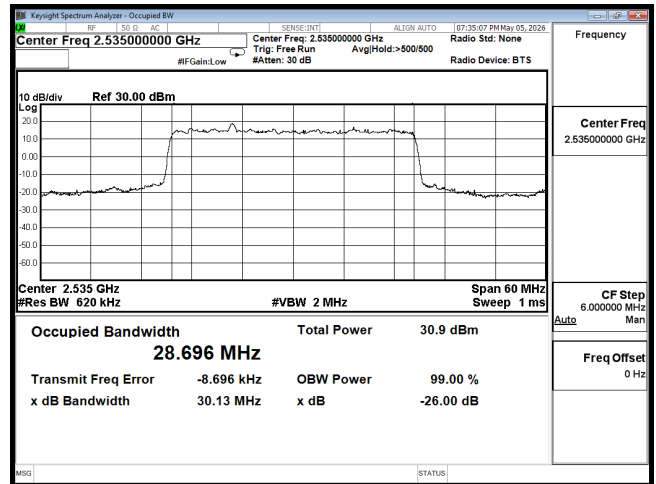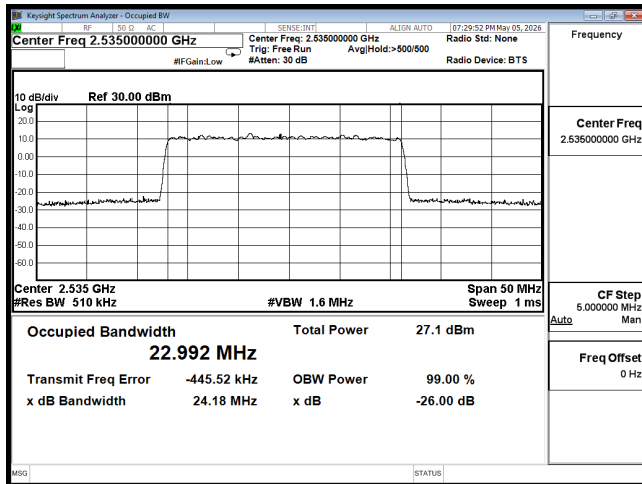


OCC n7 25M CH507000 256QAM

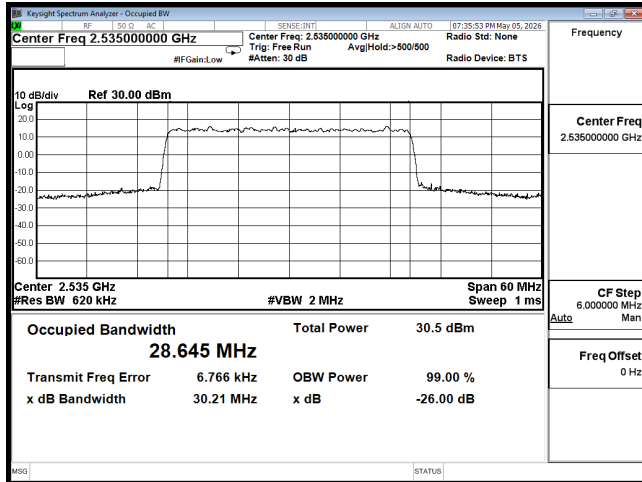


OCC n7 30M CH507000 BPSK

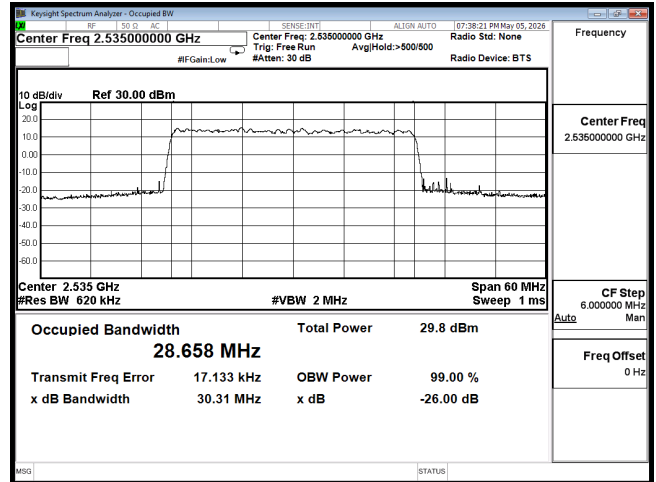

OCC n7 30M CH507000 QPSK

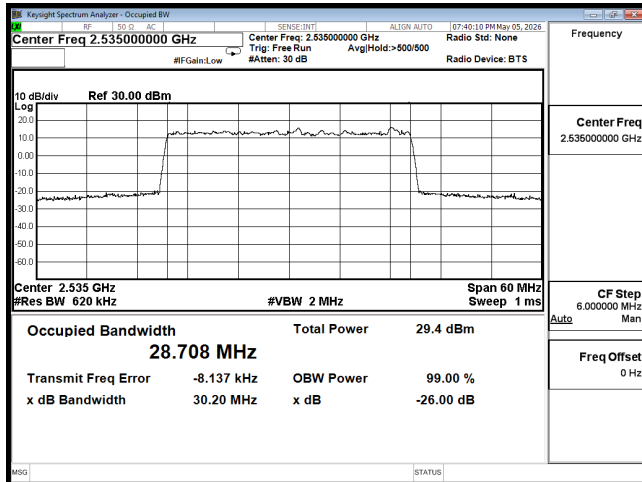


OCC n7 30M CH507000 16QAM

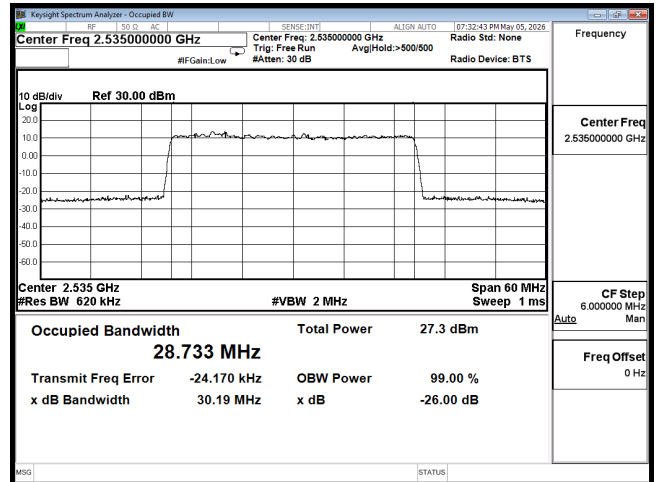


OCC n7 30M CH507000 64QAM


OCC n7 30M CH507000 256QAM

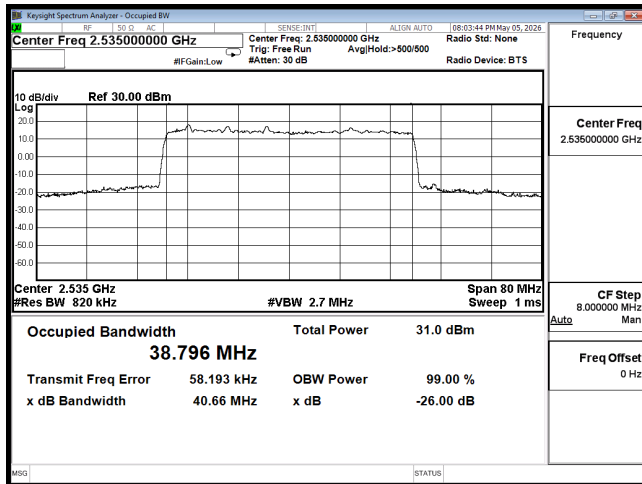


OCC n7 40M CH507000 BPSK

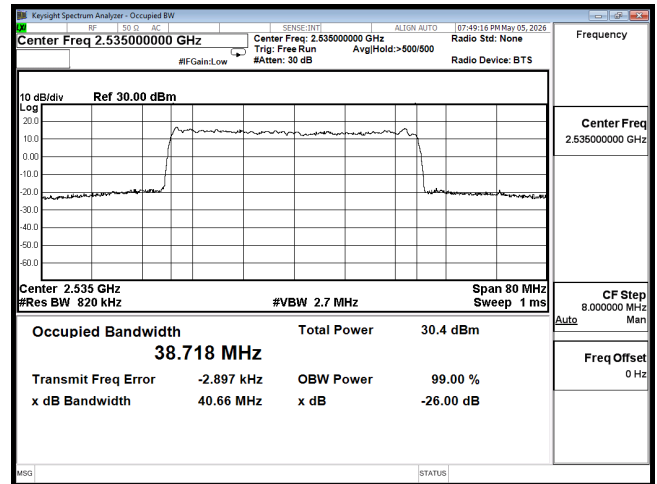


OCC n7 40M CH507000 QPSK

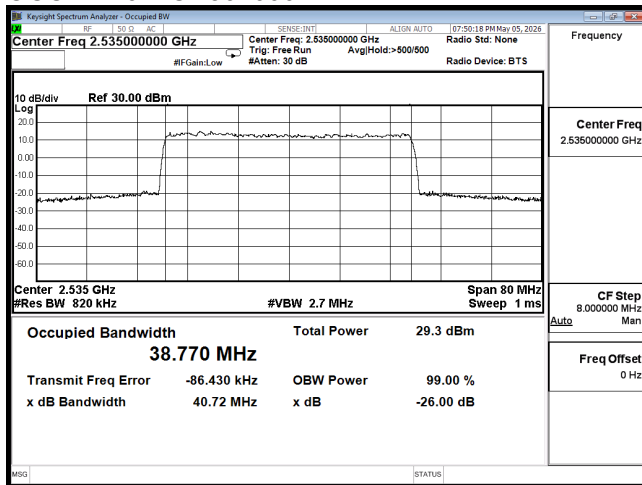


OCC n7 40M CH507000 16QAM

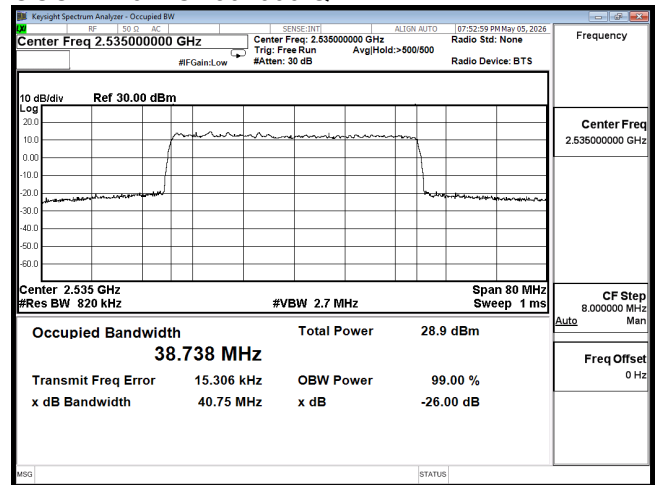


OCC n7 40M CH507000 64QAM

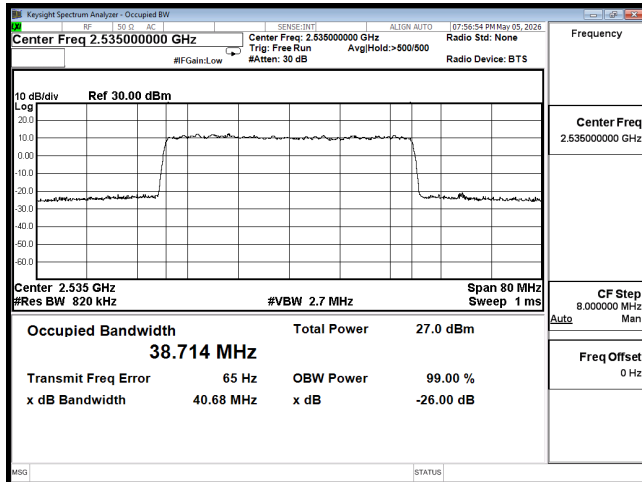


OCC n7 40M CH507000 256QAM

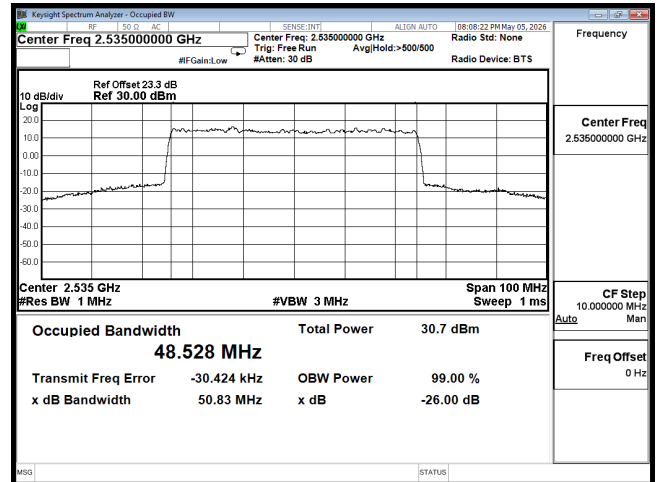


OCC n7 50M CH507000 BPSK

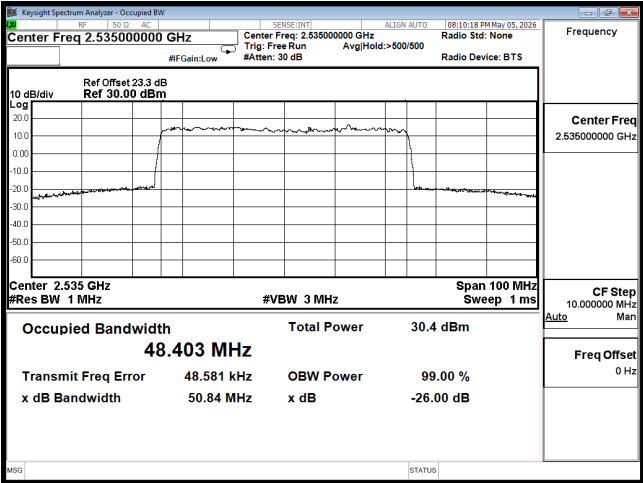


OCC n7 50M CH507000 QPSK

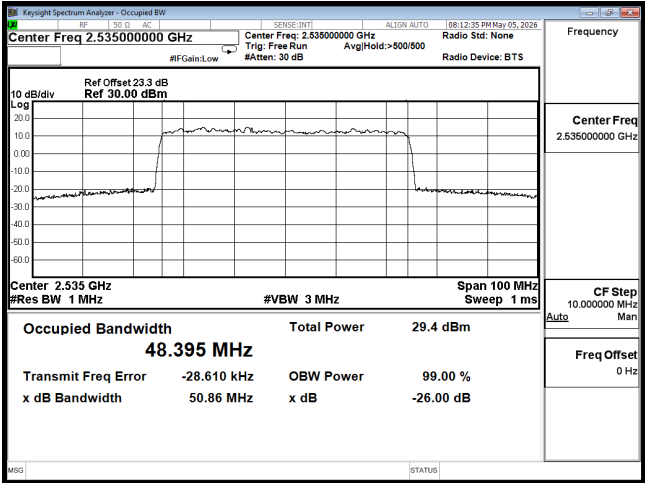

OCC n7 50M CH507000 16QAM


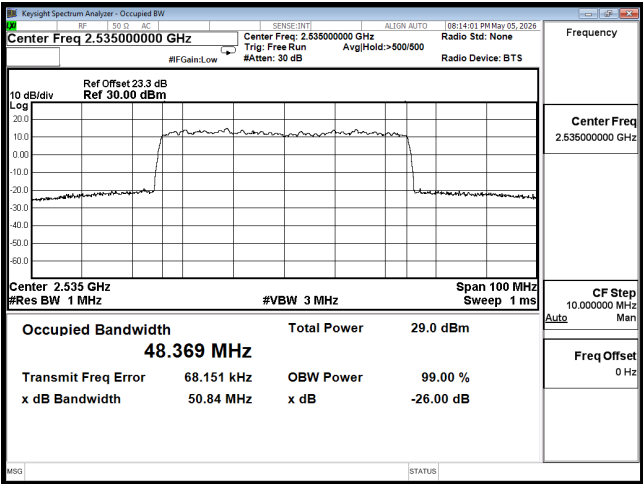


OCC n7 50M CH507000 64QAM

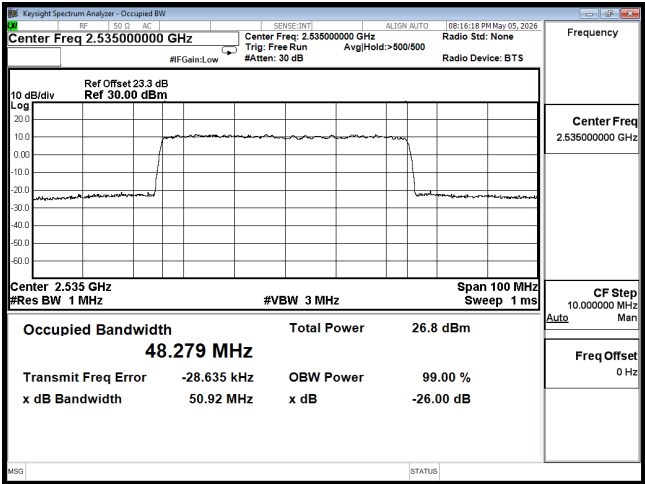


OCC n7 50M CH507000 256QAM


Mode 2: 5G NR n41

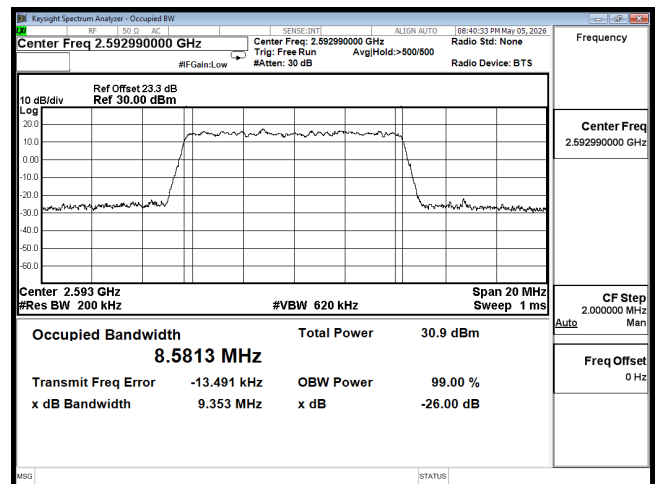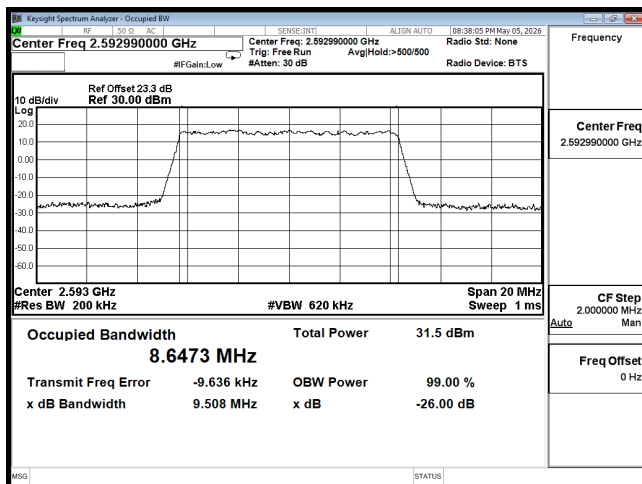


OCC n41 10M CH518598 BPSK

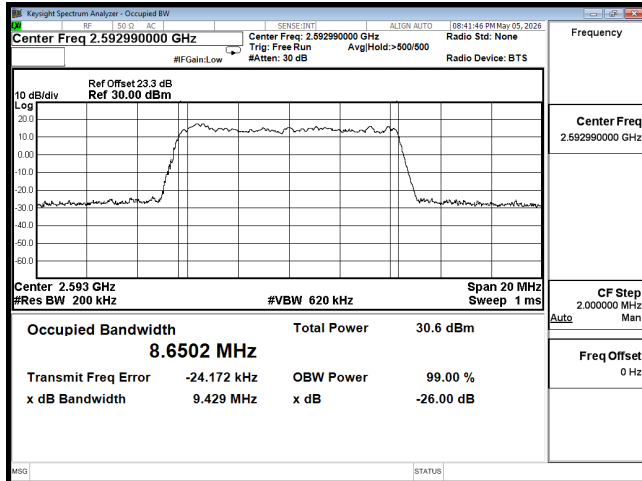


OCC n41 10M CH518598 QPSK

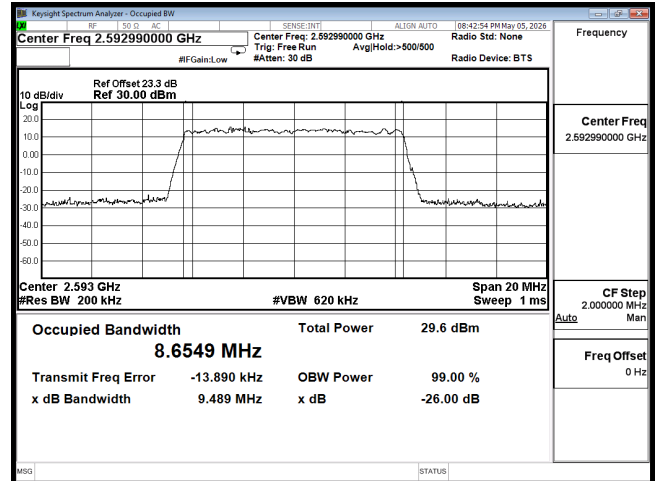

OCC n41 10M CH518598 16QAM

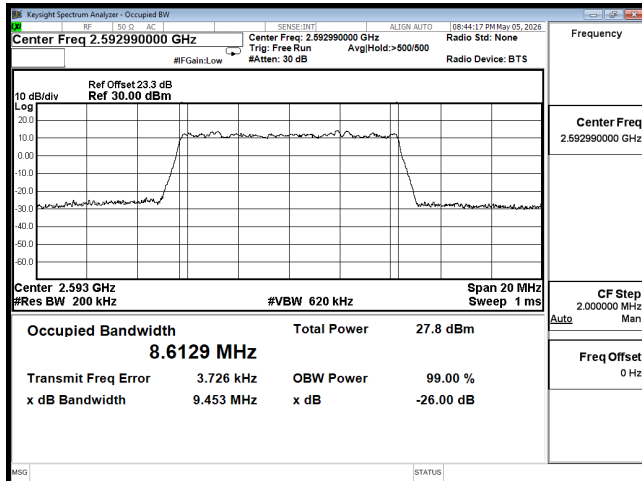


OCC n41 10M CH518598 64QAM

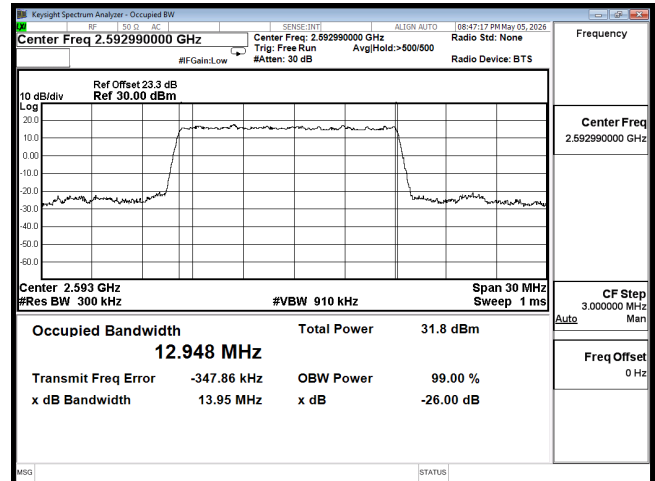


OCC n41 10M CH518598 256QAM


OCC n41 15M CH518598 BPSK

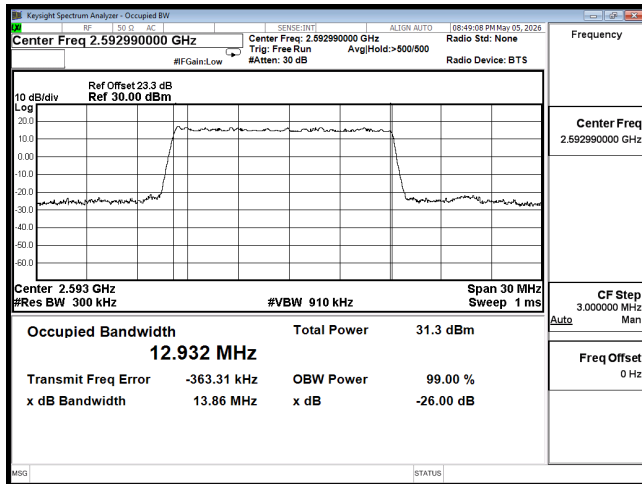


OCC n41 15M CH518598 QPSK

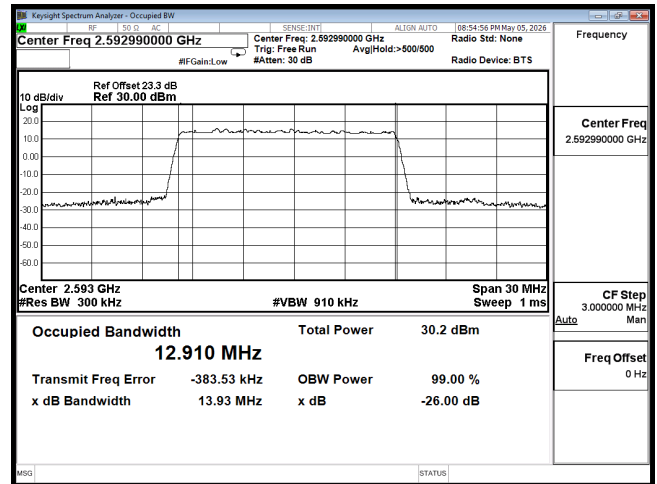


OCC n41 15M CH518598 16QAM

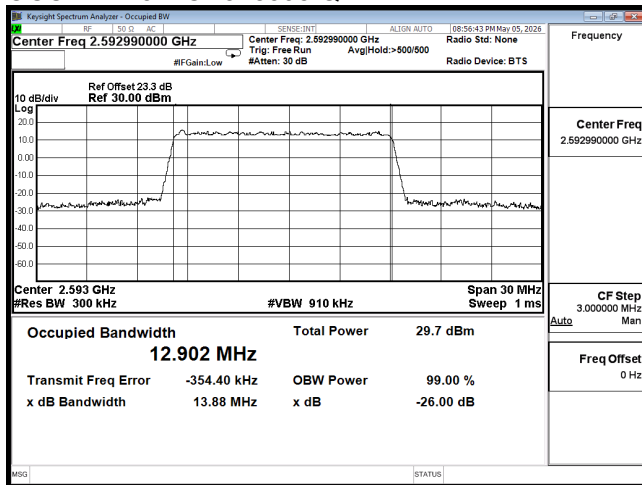


OCC n41 15M CH518598 64QAM

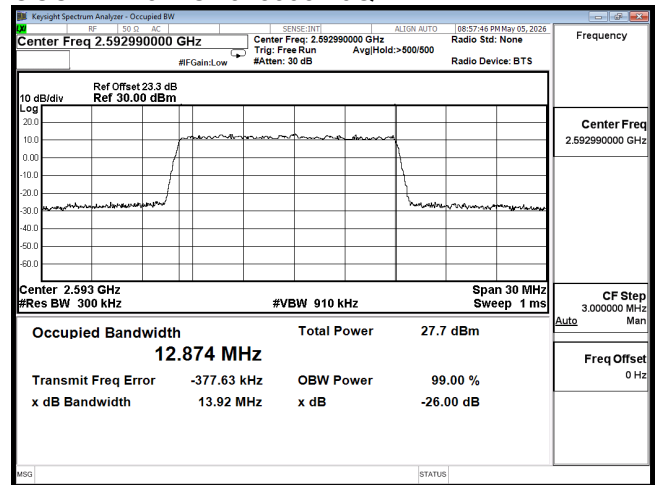


OCC n41 15M CH518598 256QAM

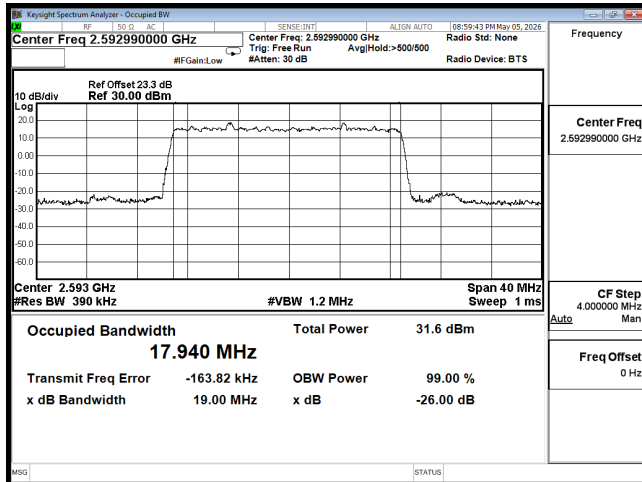


OCC n41 20M CH518598 BPSK

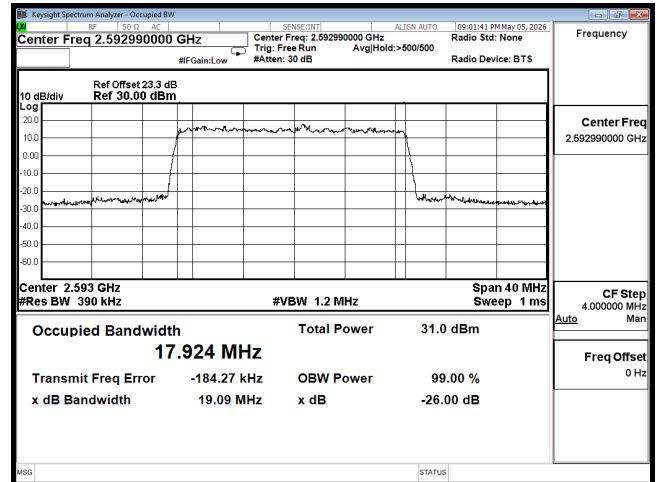


OCC n41 20M CH518598 QPSK

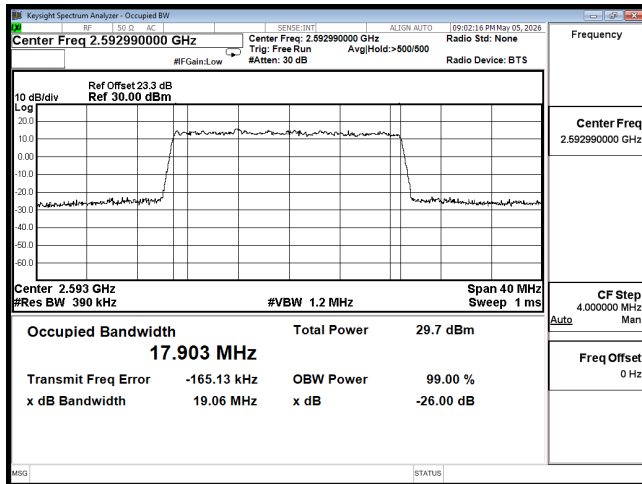


OCC n41 20M CH518598 16QAM

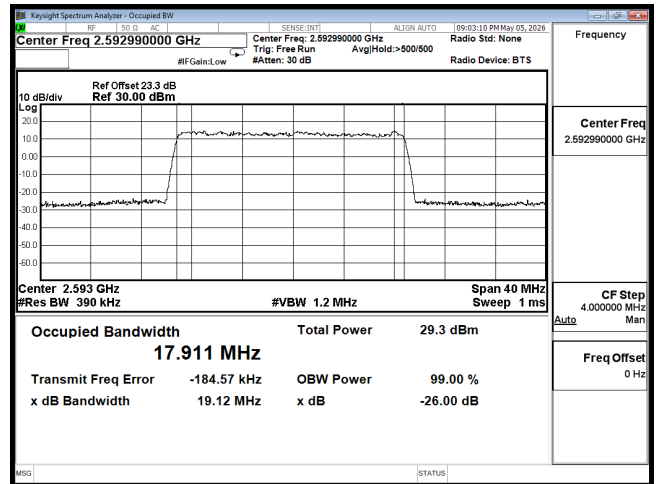


OCC n41 20M CH518598 64QAM

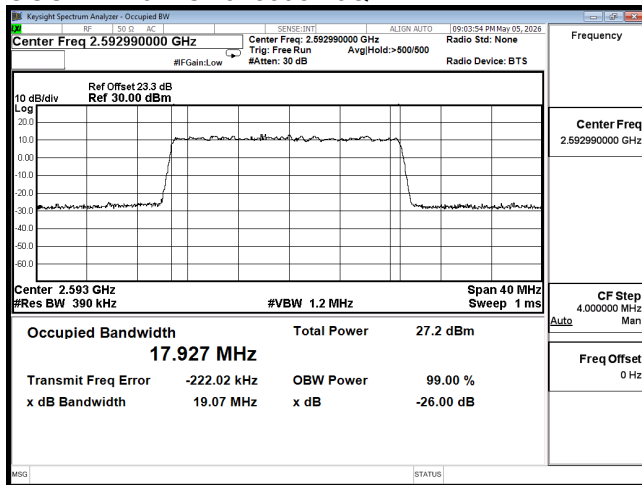


OCC n41 20M CH518598 256QAM

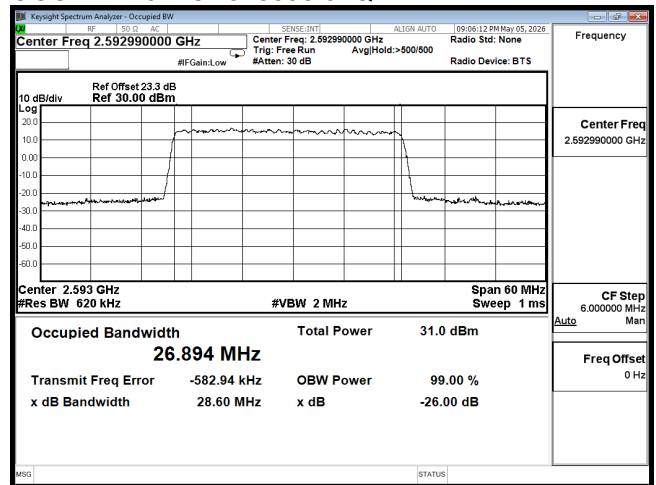


OCC n41 30M CH518598 BPSK

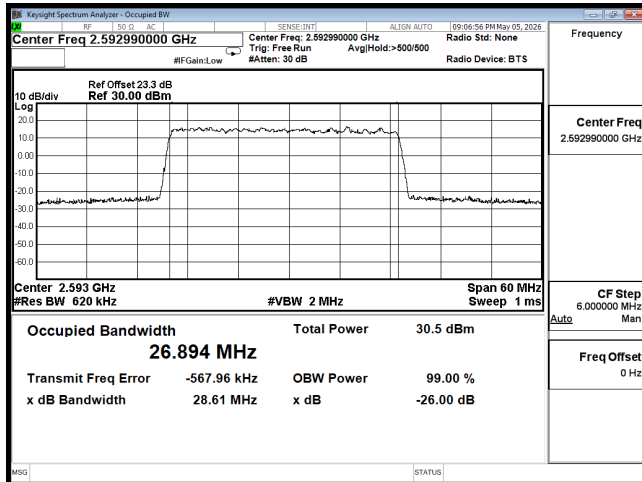


OCC n41 30M CH518598 QPSK

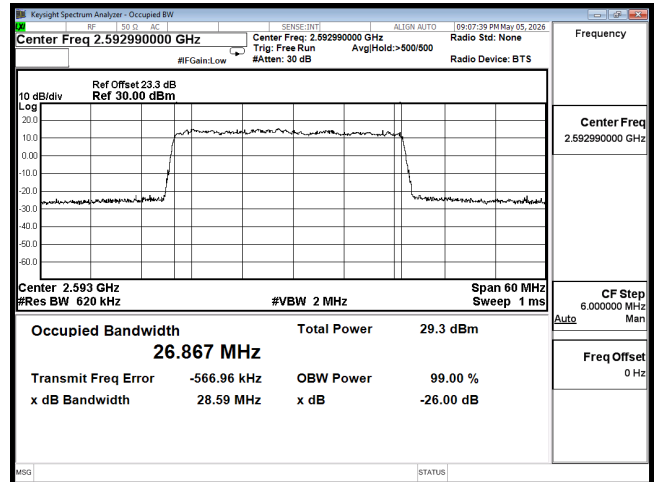


OCC n41 30M CH518598 16QAM

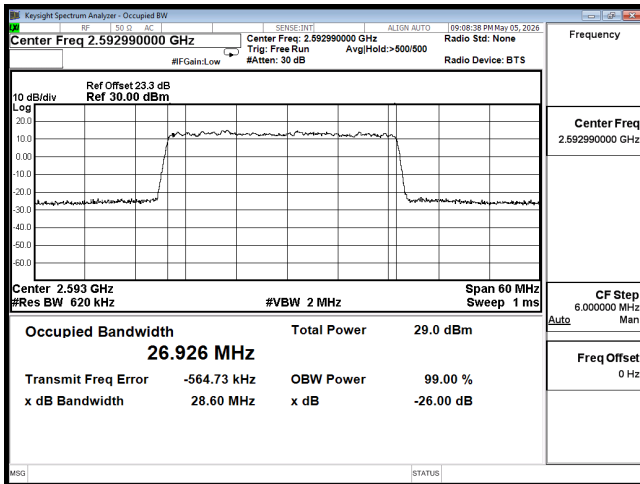


OCC n41 30M CH518598 64QAM

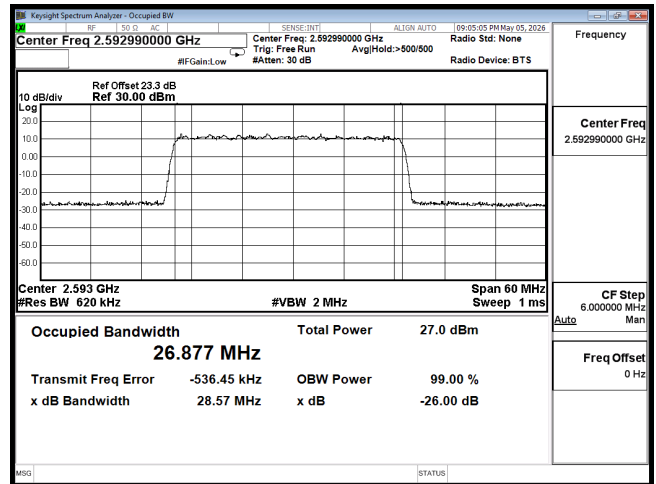


OCC n41 30M CH518598 256QAM

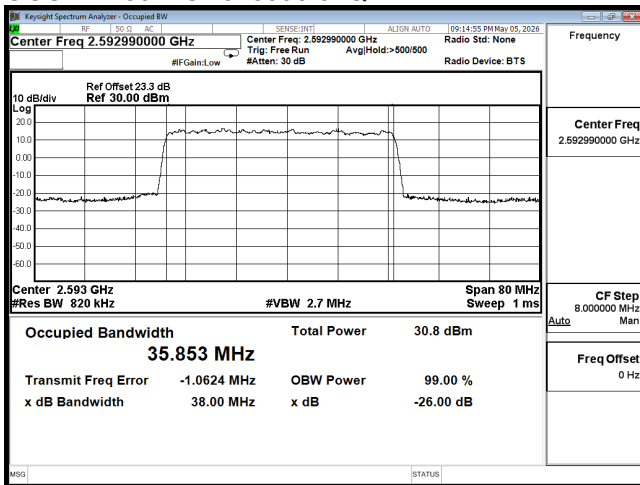


OCC n41 40M CH518598 BPSK

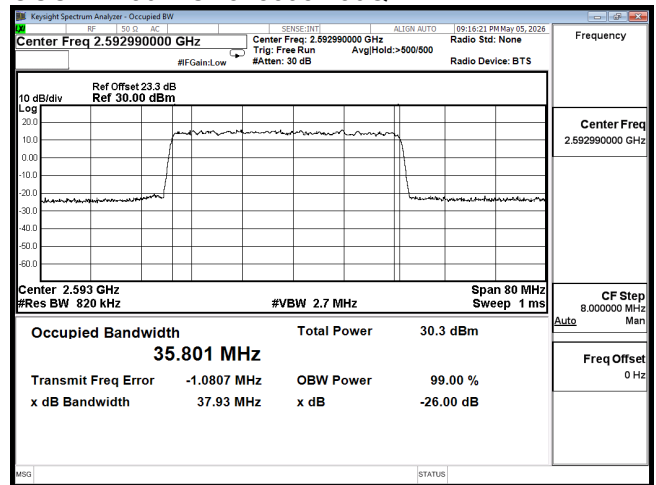


OCC n41 40M CH518598 QPSK

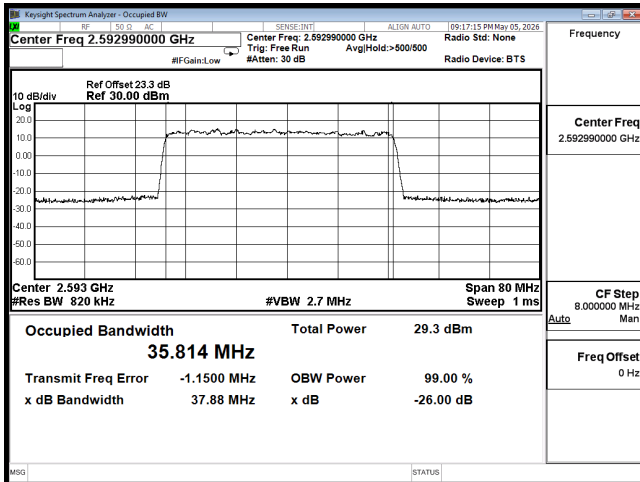


OCC n41 40M CH518598 16QAM

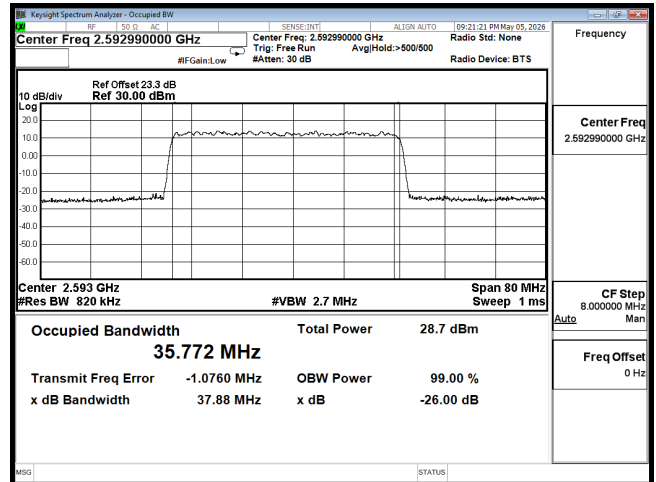


OCC n41 40M CH518598 64QAM

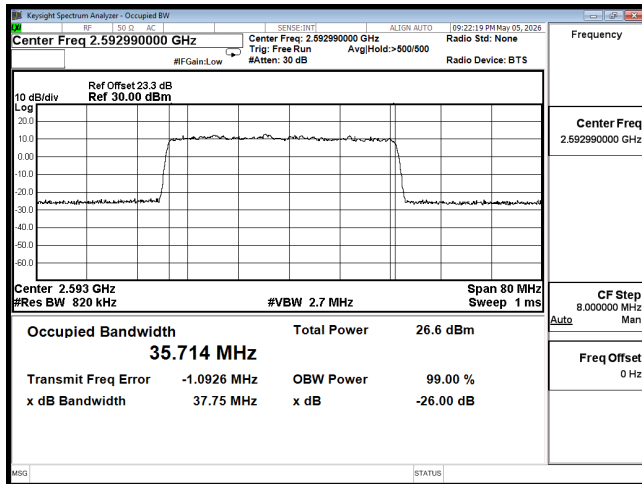


OCC n41 40M CH518598 256QAM

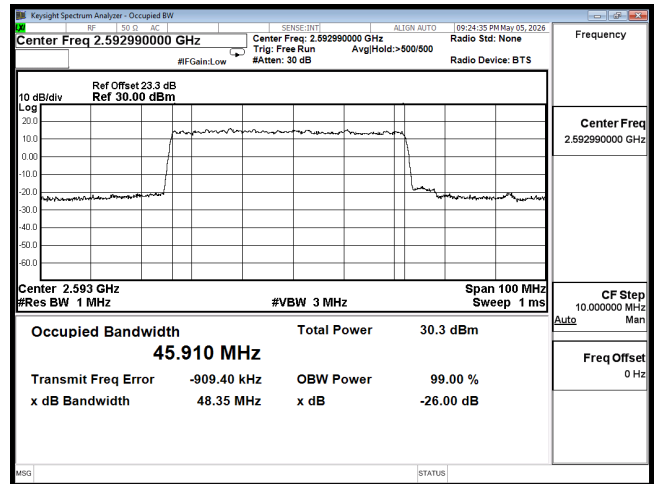


OCC n41 50M CH518598 BPSK

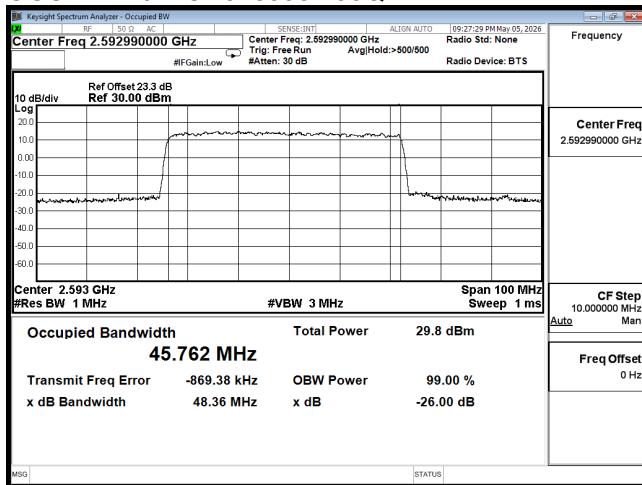


OCC n41 50M CH518598 QPSK

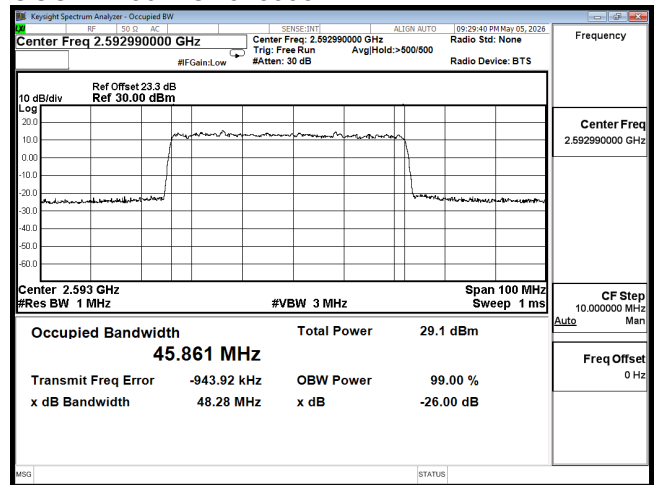


OCC n41 50M CH518598 16QAM

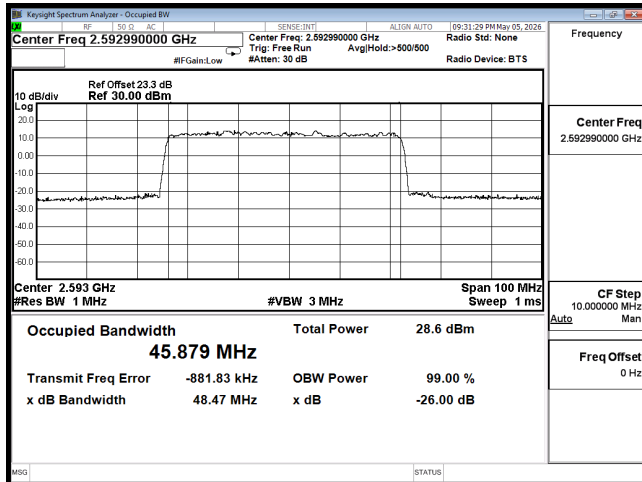


OCC n41 50M CH518598 64QAM

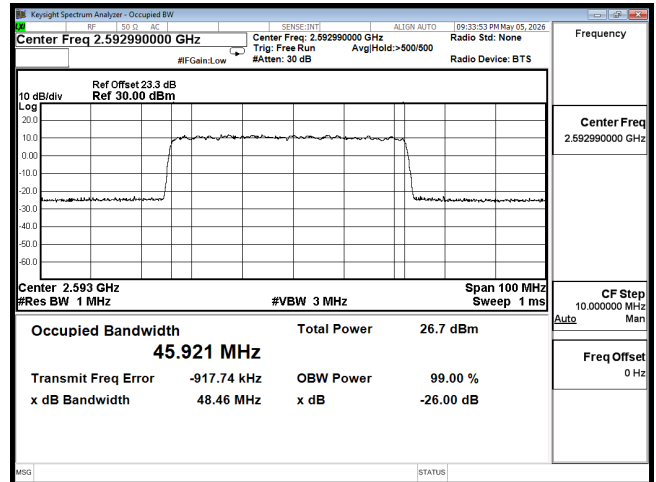


OCC n41 50M CH518598 256QAM

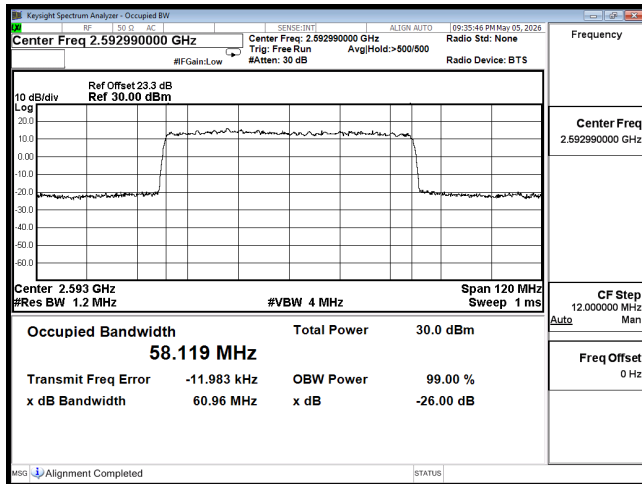


OCC n41 60M CH518598 BPSK

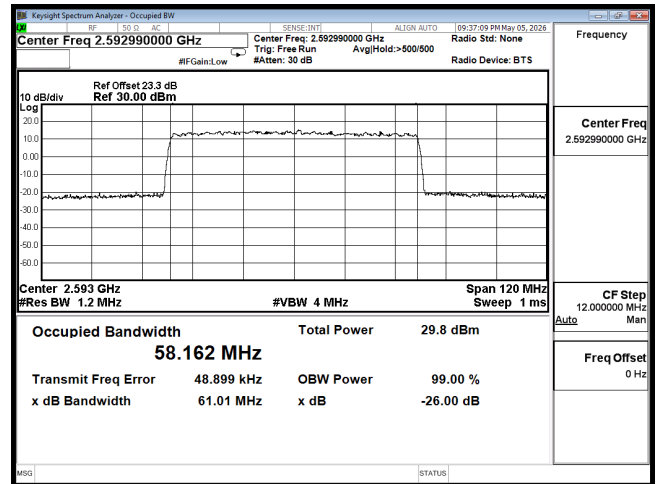


OCC n41 60M CH518598 QPSK

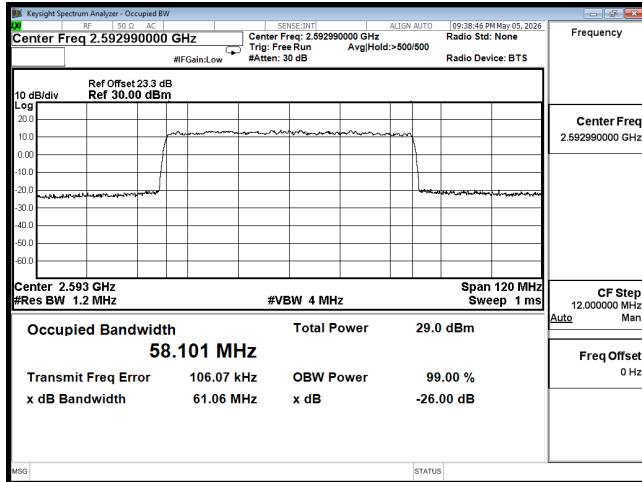


OCC n41 60M CH518598 16QAM

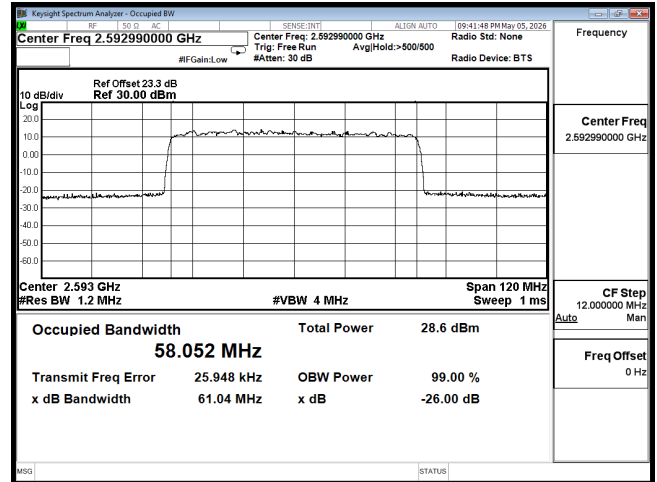


OCC n41 60M CH518598 64QAM

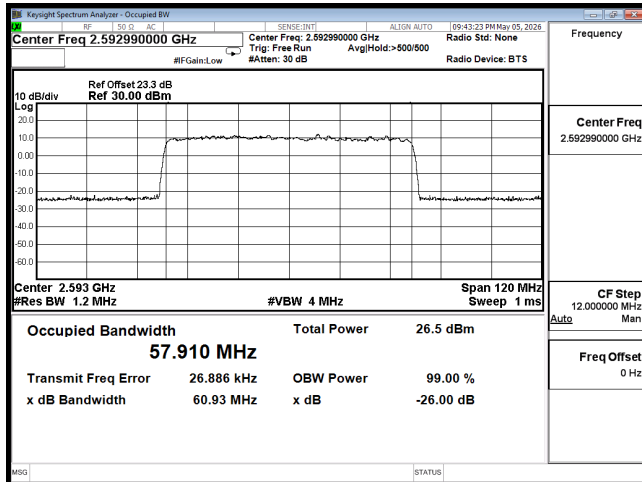


OCC n41 60M CH518598 256QAM

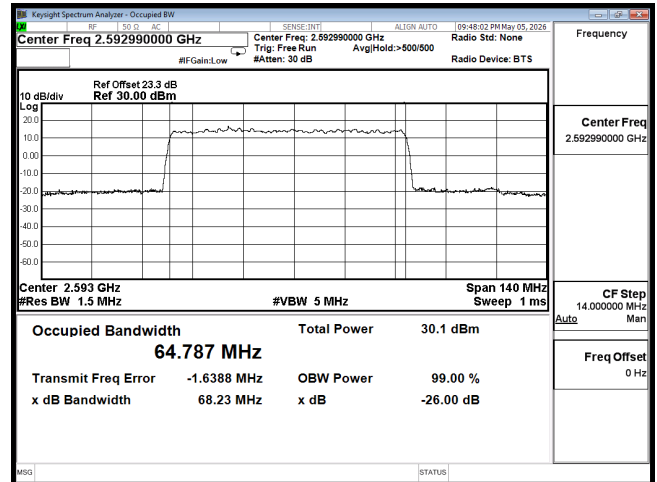


OCC n41 70M CH518598 BPSK

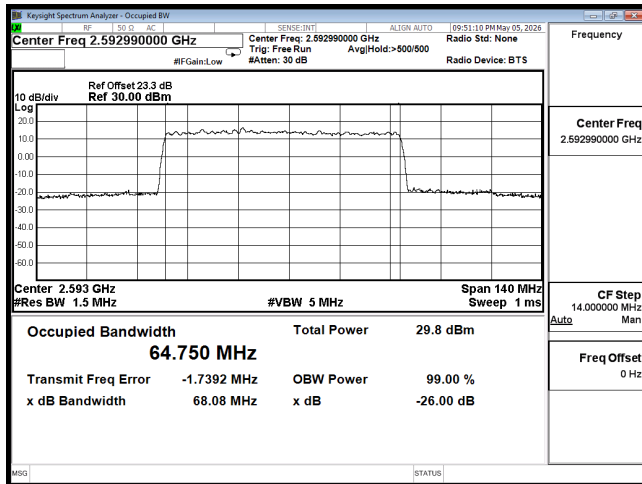


OCC n41 70M CH518598 QPSK

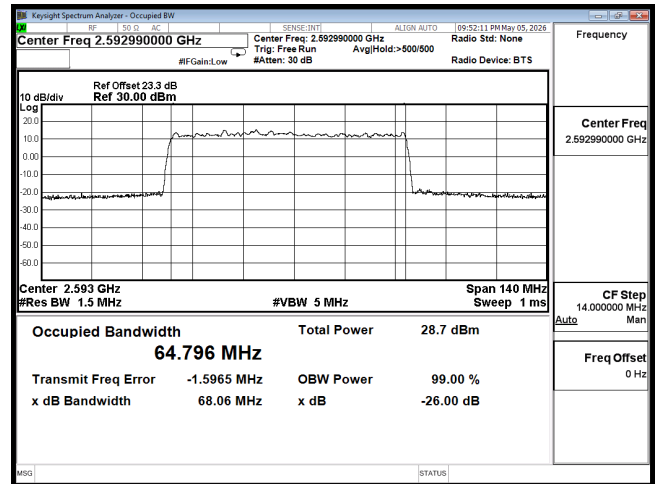


OCC n41 70M CH518598 16QAM

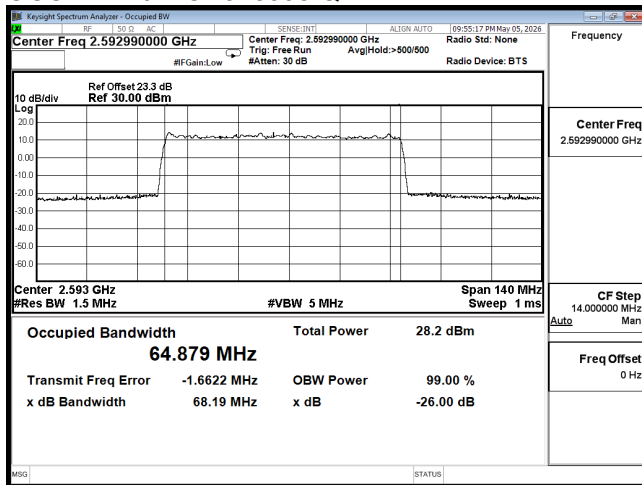


OCC n41 70M CH518598 64QAM

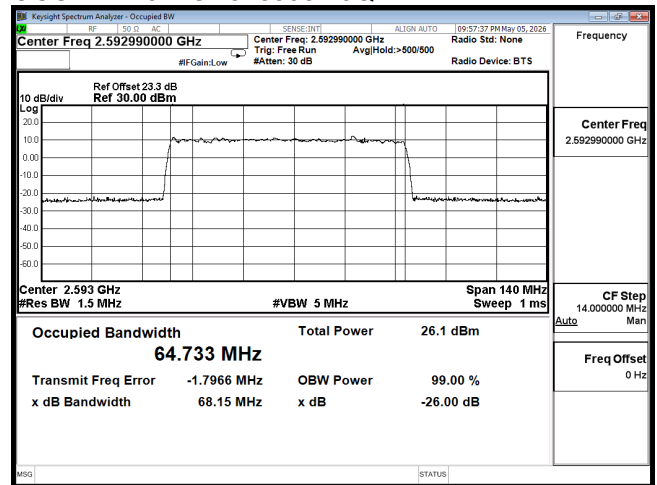


OCC n41 70M CH518598 256QAM

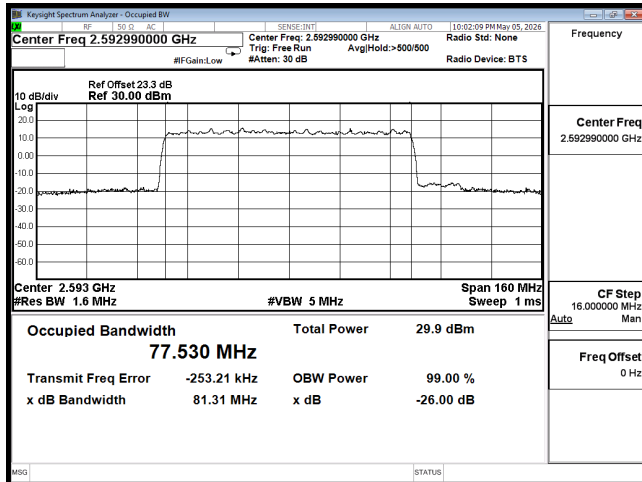


OCC n41 80M CH518598 BPSK

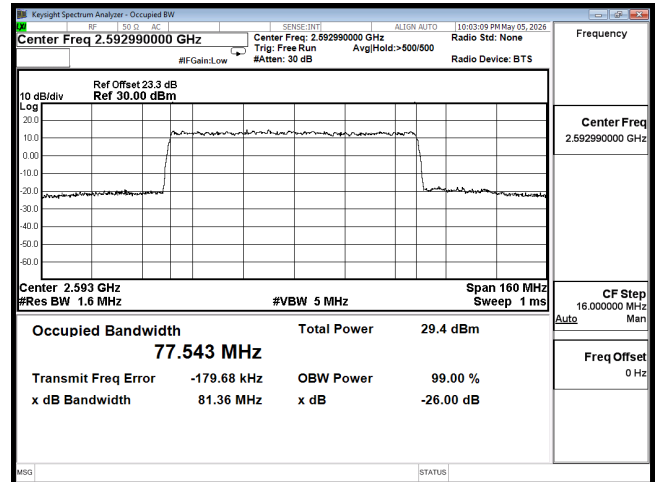


OCC n41 80M CH518598 QPSK

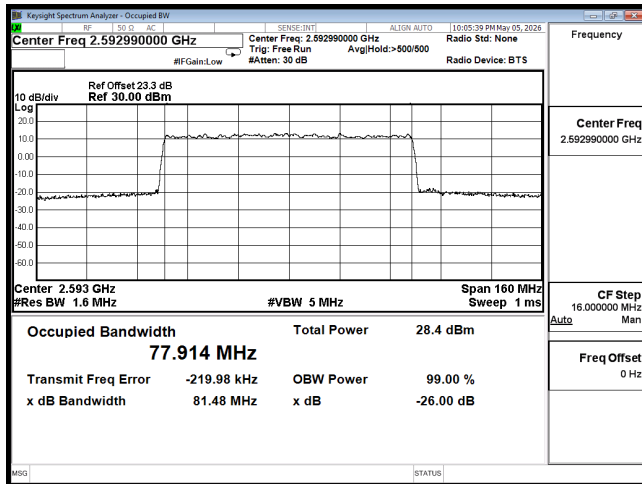


OCC n41 80M CH518598 16QAM

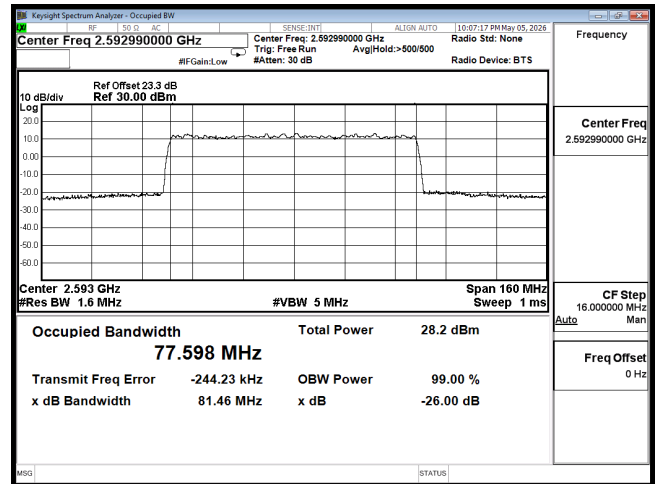


OCC n41 80M CH518598 64QAM

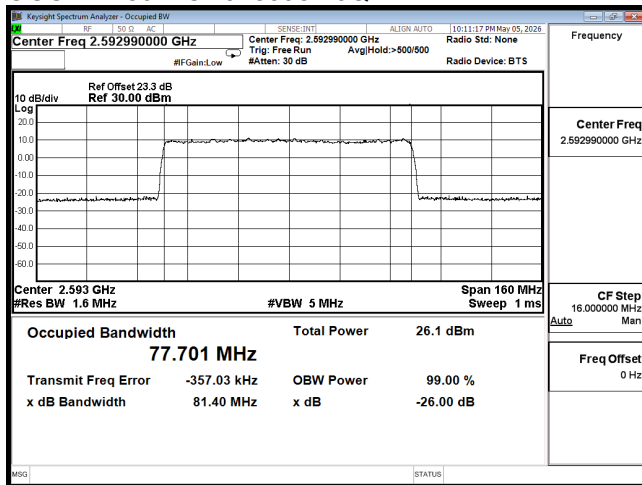


OCC n41 80M CH518598 256QAM

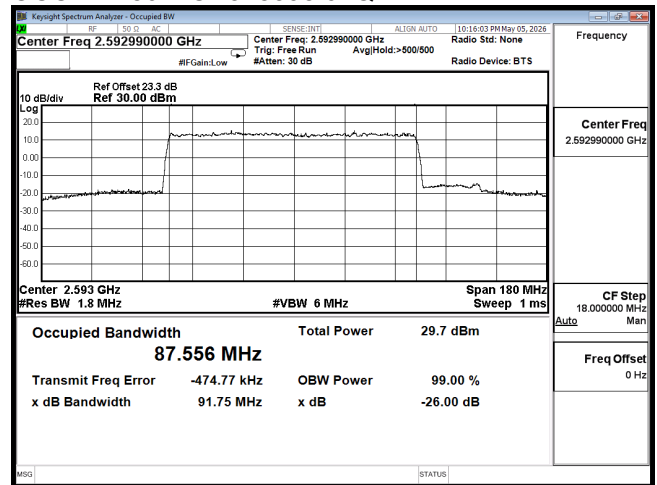


OCC n41 90M CH518598 BPSK

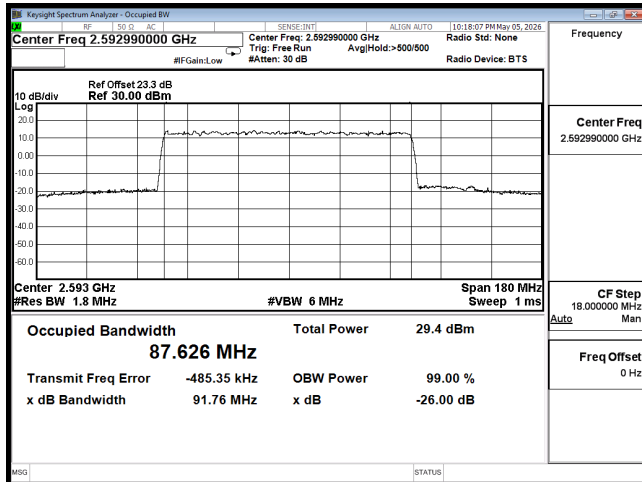


OCC n41 90M CH518598 QPSK

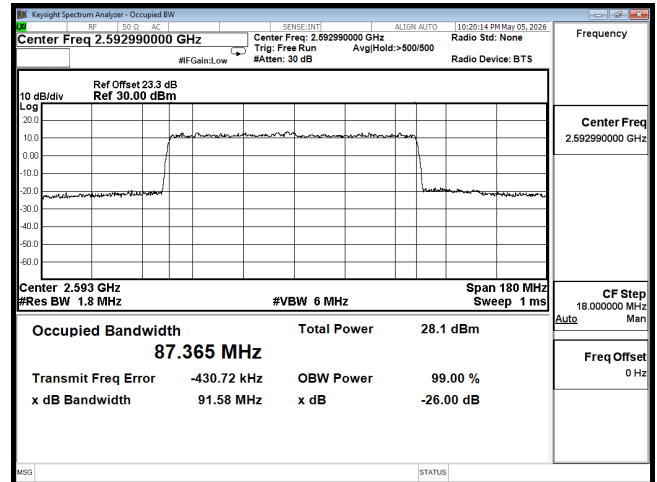


OCC n41 90M CH518598 16QAM

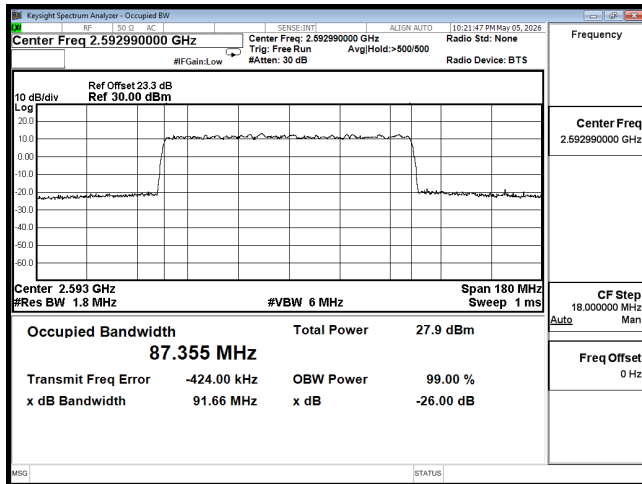


OCC n41 90M CH518598 64QAM

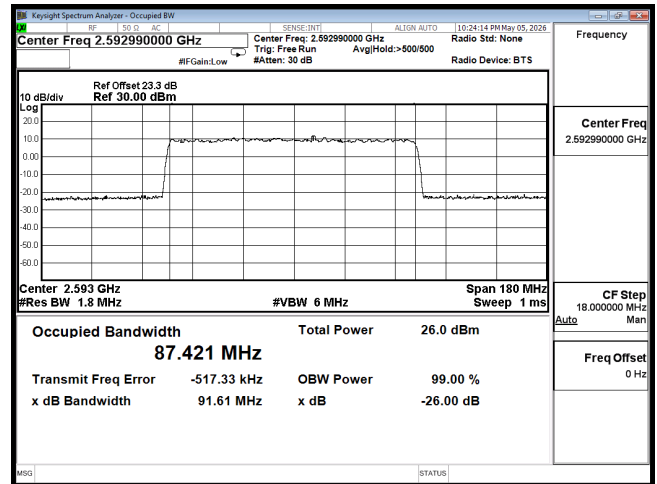


OCC n41 90M CH518598 256QAM

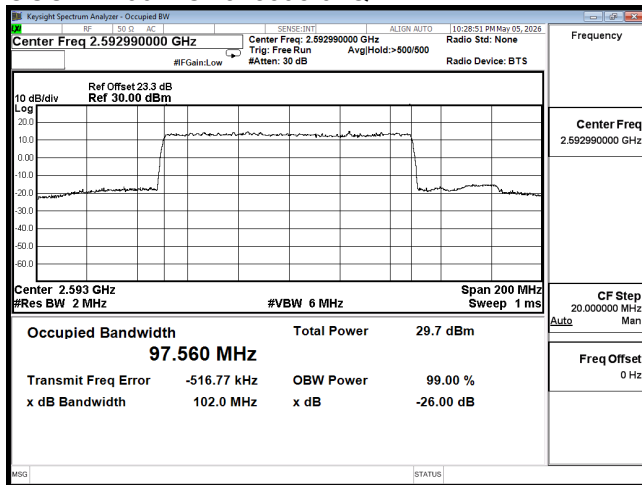


OCC n41 100M CH518598 BPSK

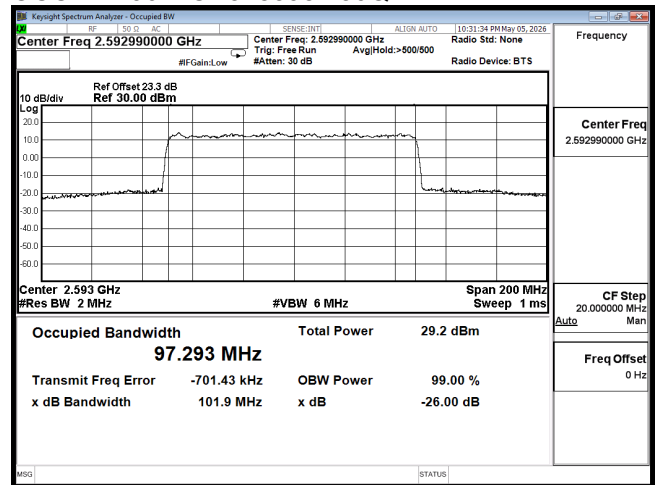


OCC n41 100M CH518598 QPSK

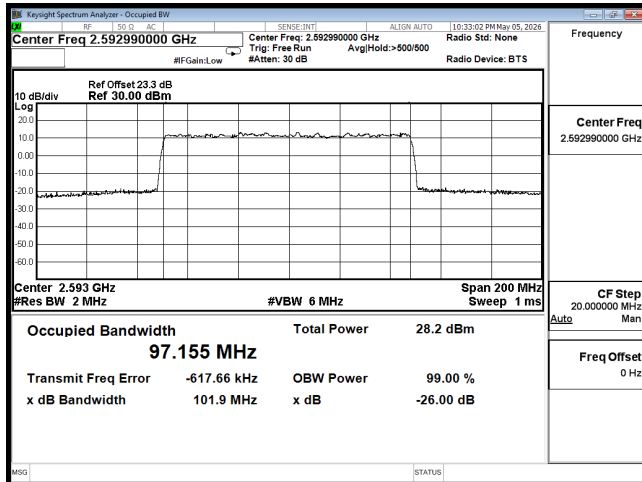







OCC n41 100M CH518598 16QAM

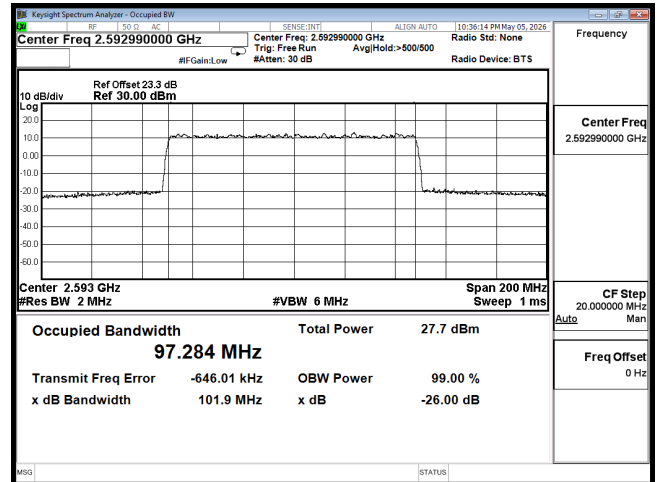


OCC n41 100M CH518598 64QAM

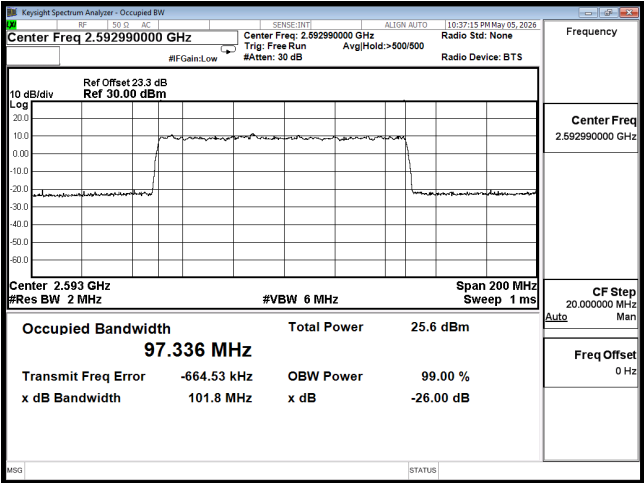


OCC n41 100M CH518598 256QAM

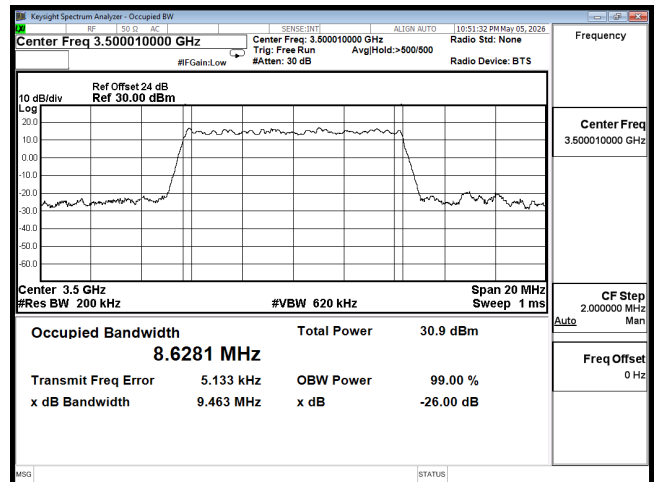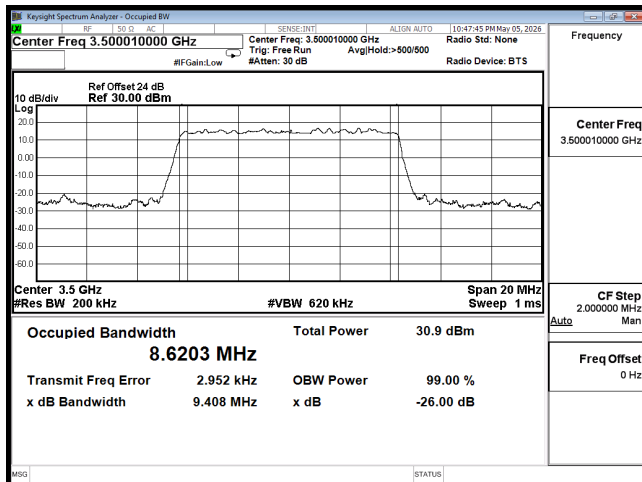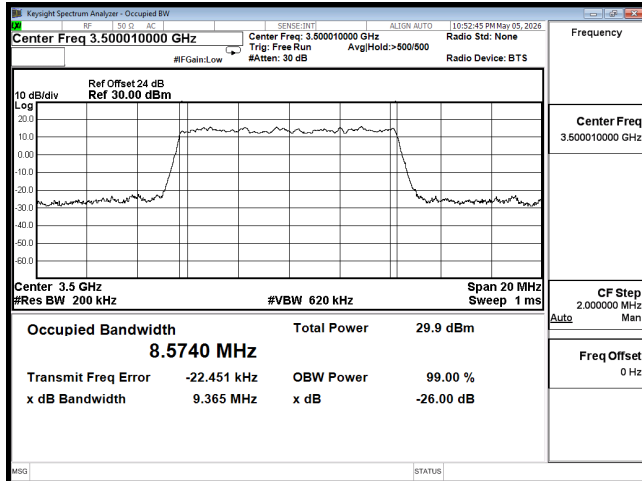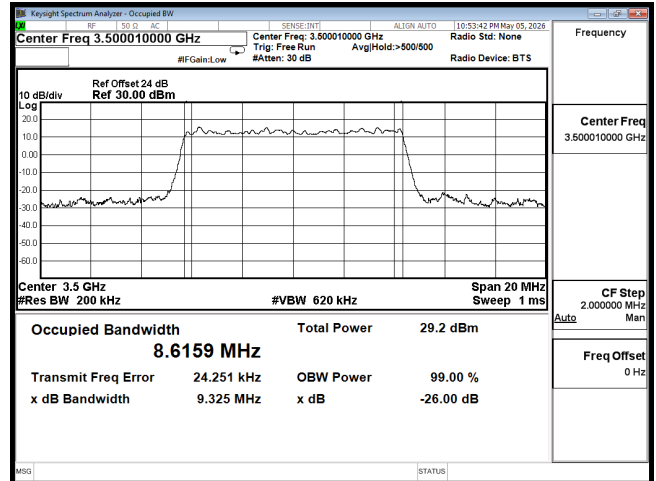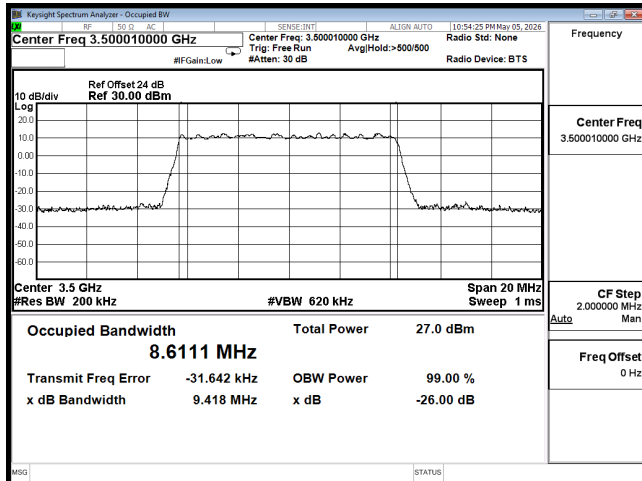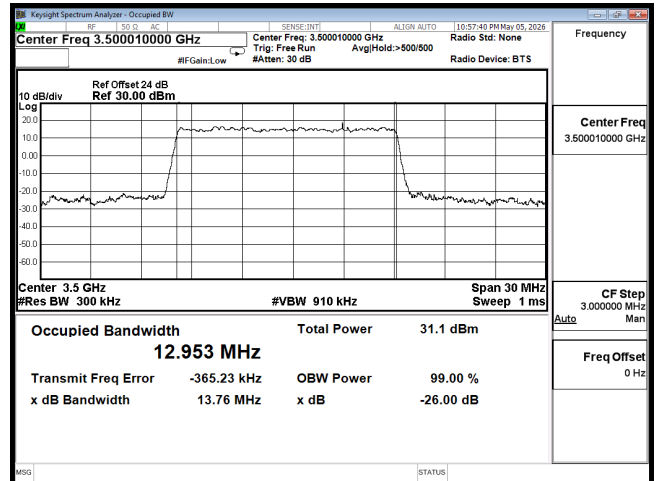
Mode 3: 5G NR n77 (3450 - 3550 MHz)**OCC n77 10M CH633334 BPSK****OCC n77 10M CH633334 QPSK****OCC n77 10M CH633334 16QAM****OCC n77 10M CH633334 64QAM****OCC n77 10M CH633334 256QAM****OCC n77 15M CH633334 BPSK**

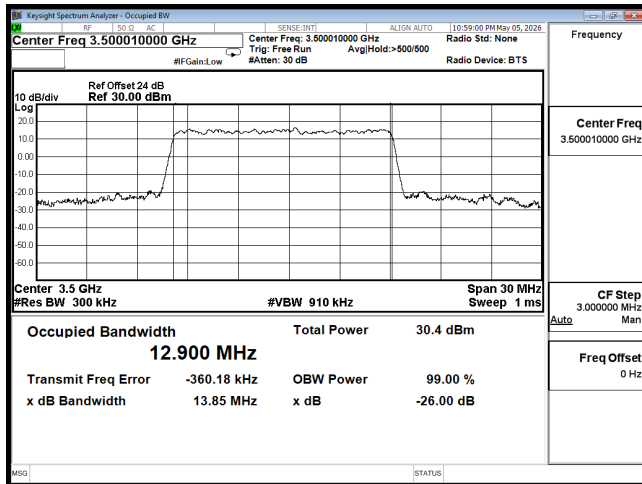


OCC n77 15M CH633334 QPSK

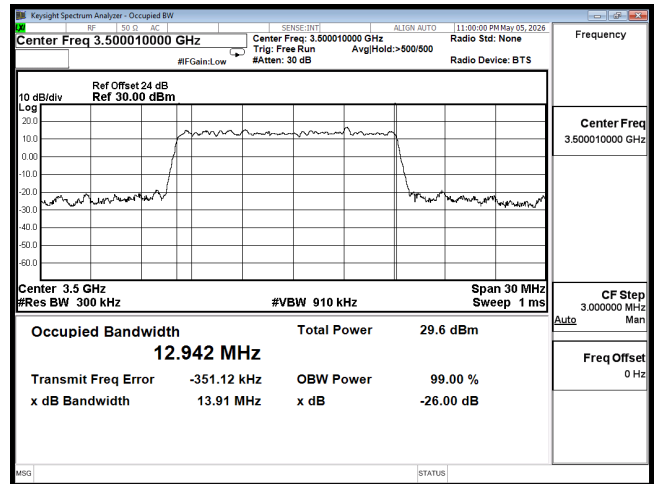


OCC n77 15M CH633334 16QAM

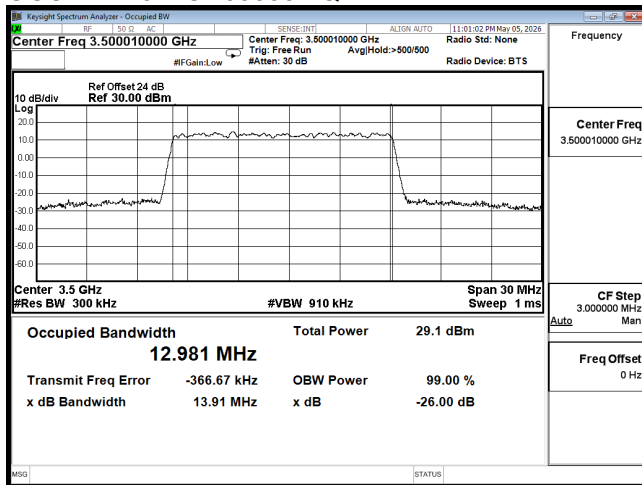


OCC n77 15M CH633334 64QAM

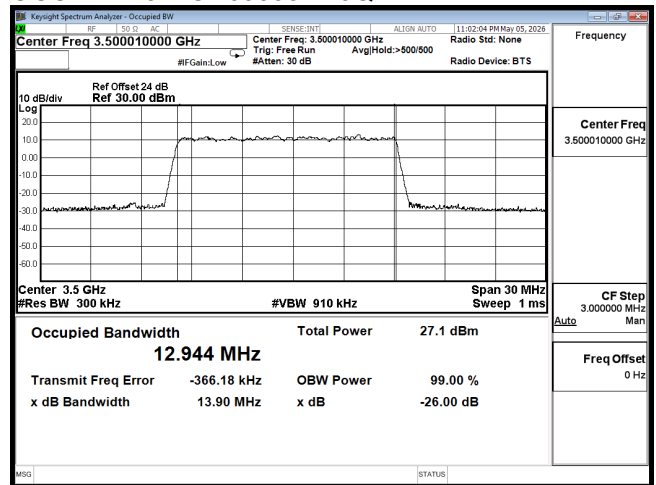


OCC n77 15M CH633334 256QAM

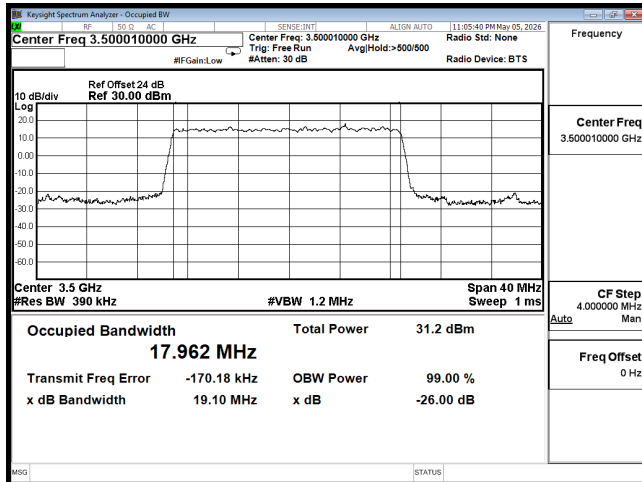


OCC n77 20M CH633334 BPSK

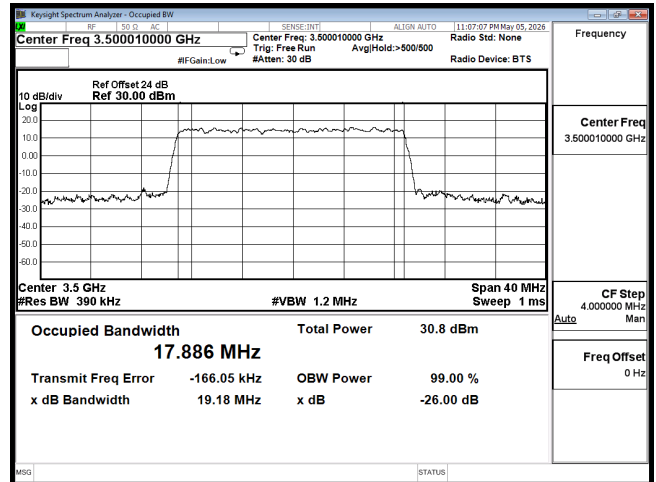


OCC n77 20M CH633334 QPSK

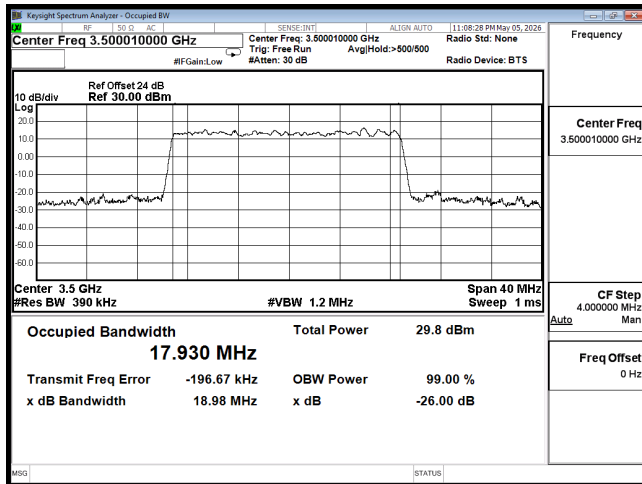


OCC n77 20M CH633334 16QAM

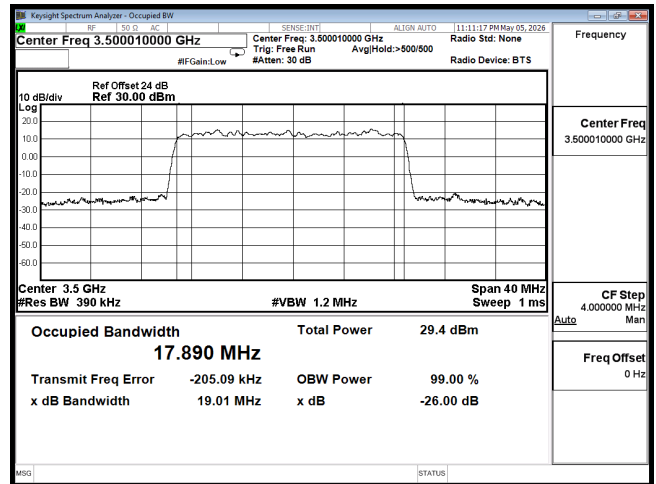


OCC n77 20M CH633334 64QAM

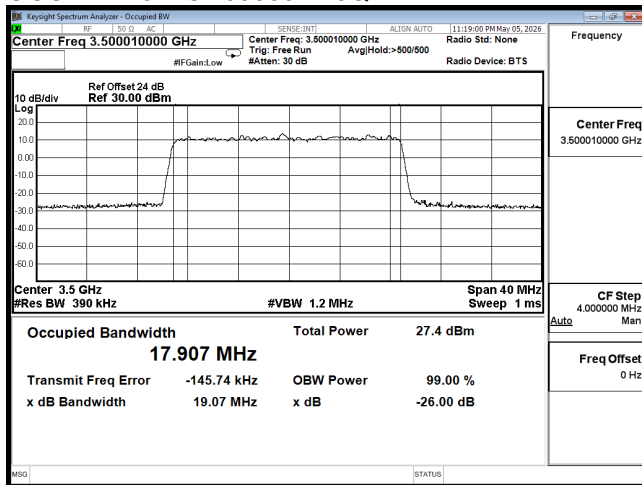


OCC n77 20M CH633334 256QAM

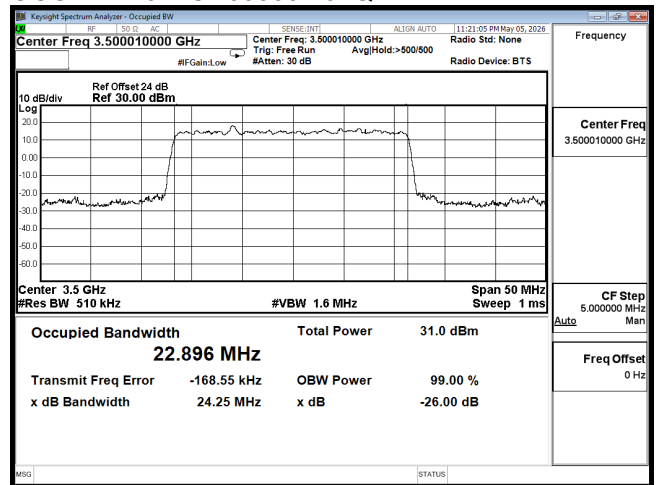


OCC n77 25M CH633334 BPSK

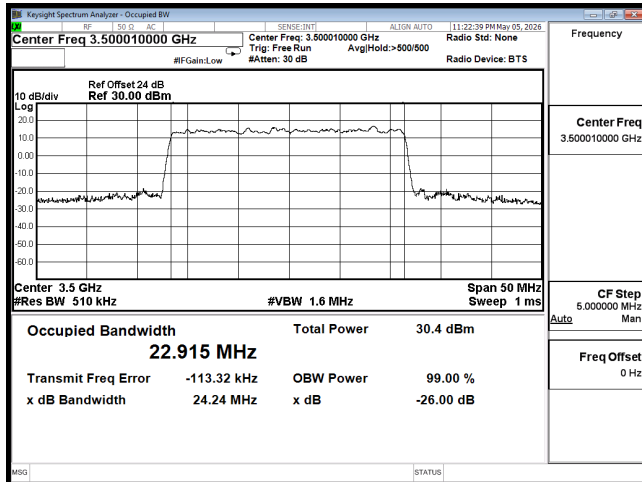


OCC n77 25M CH633334 QPSK

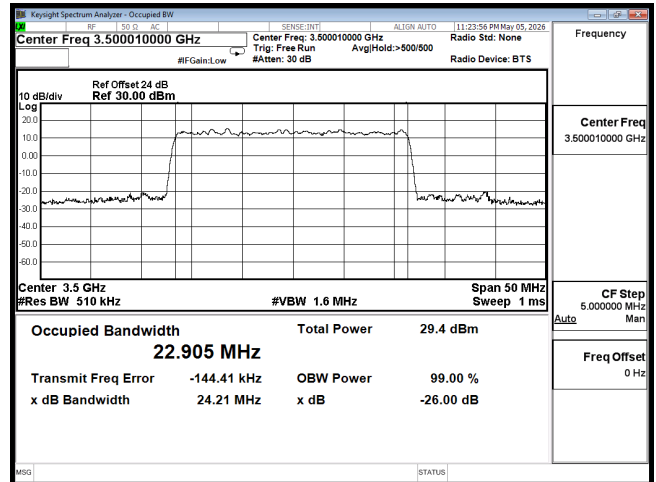


OCC n77 25M CH633334 16QAM

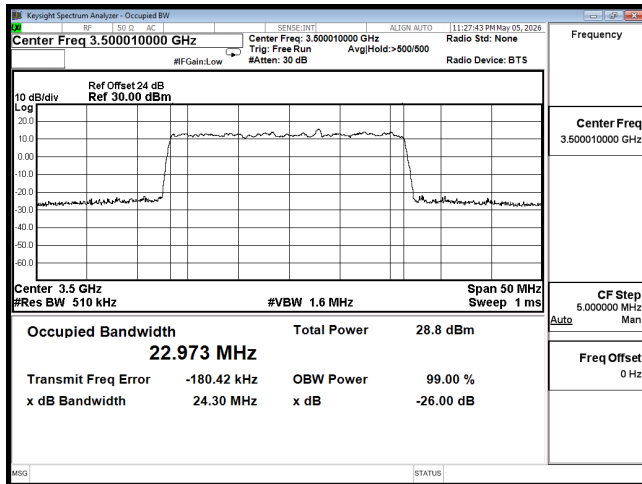


OCC n77 25M CH633334 64QAM

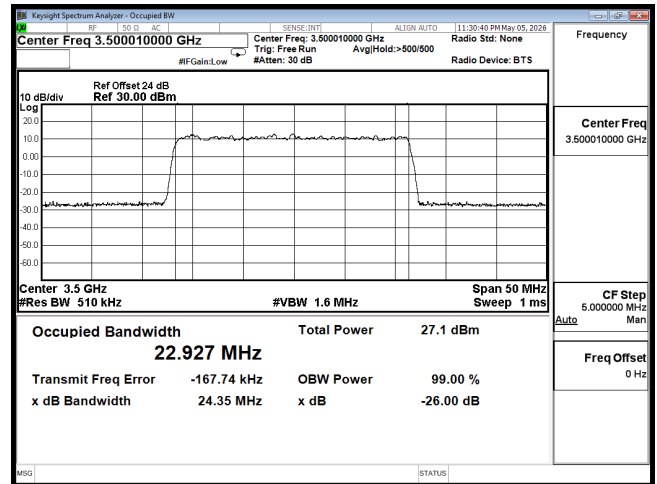


OCC n77 25M CH633334 256QAM

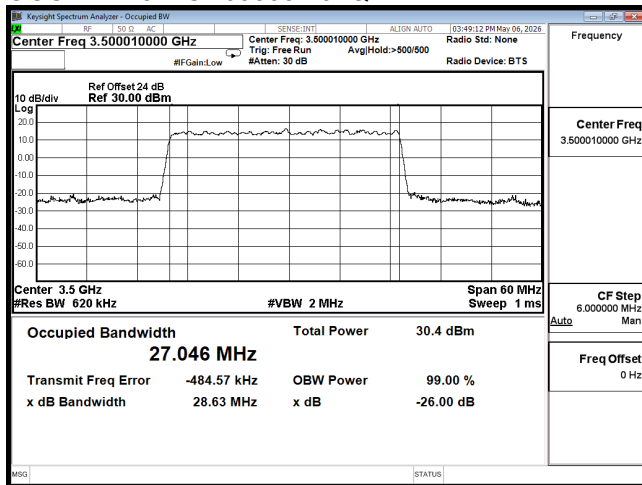


OCC n77 30M CH633334 BPSK

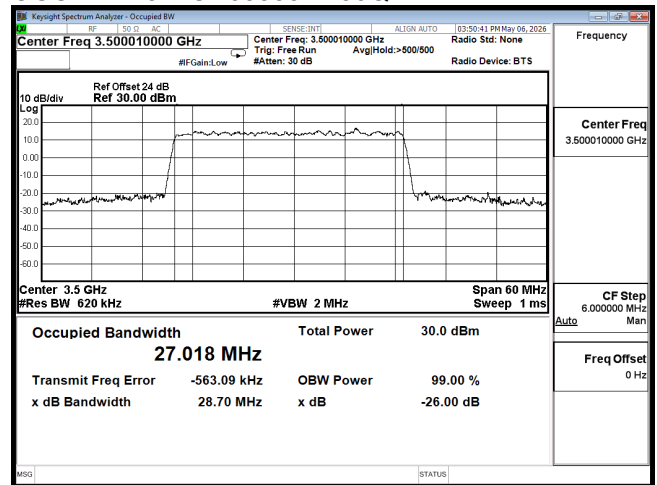

OCC n77 30M CH633334 QPSK

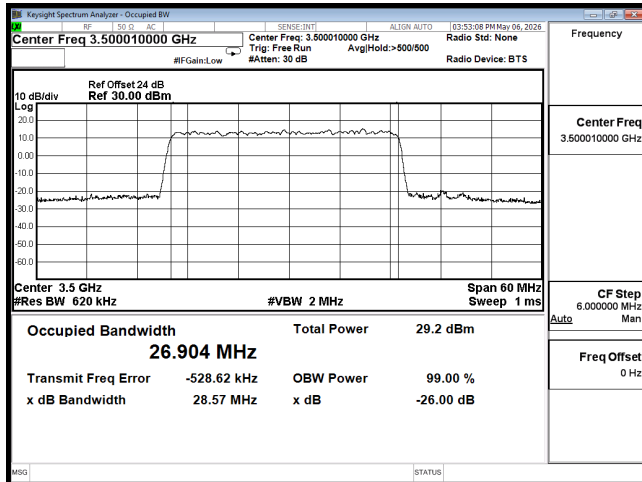

OCC n77 30M CH633334 16QAM

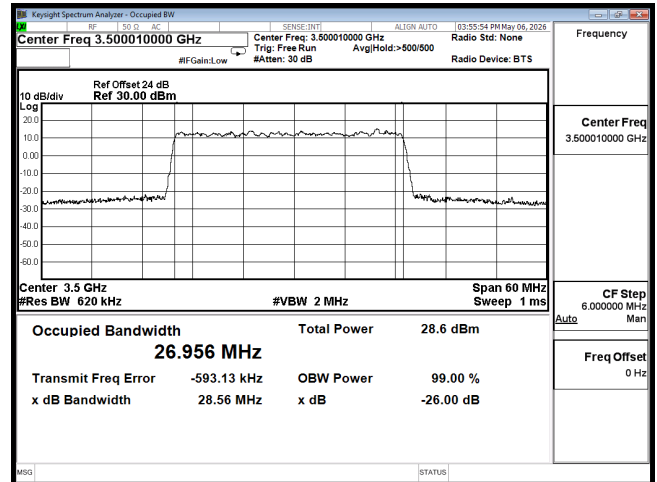

OCC n77 30M CH633334 64QAM