


Mode 11: LTE Band 7C




CSE B7 15M CH20825(1,0),10M CH20945(1,49) QPSK

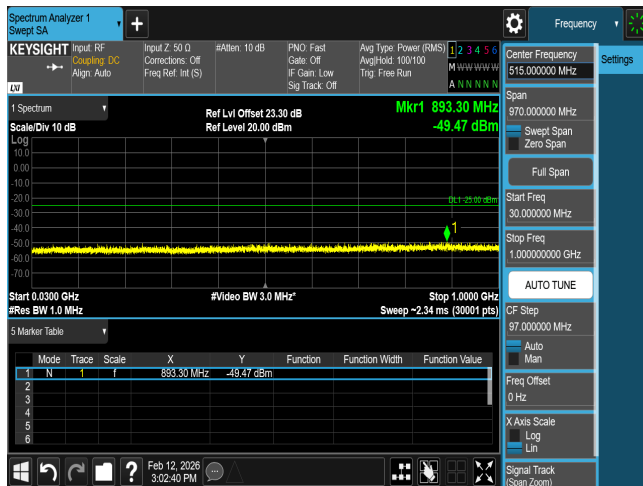


CSE B7 15M CH21051(1,0),10M CH21171(1,49) QPSK




CSE B7 15M CH21277(1,0),10M CH21397(1,49) QPSK

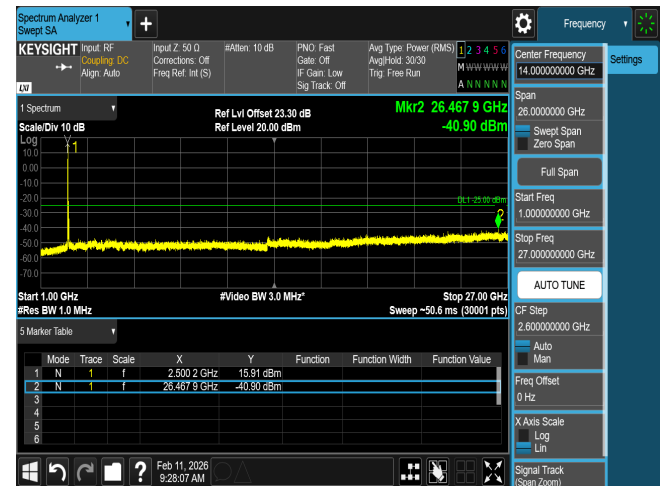


CSE B7 15M CH20825(1,0),10M CH20945(1,49) QPSK

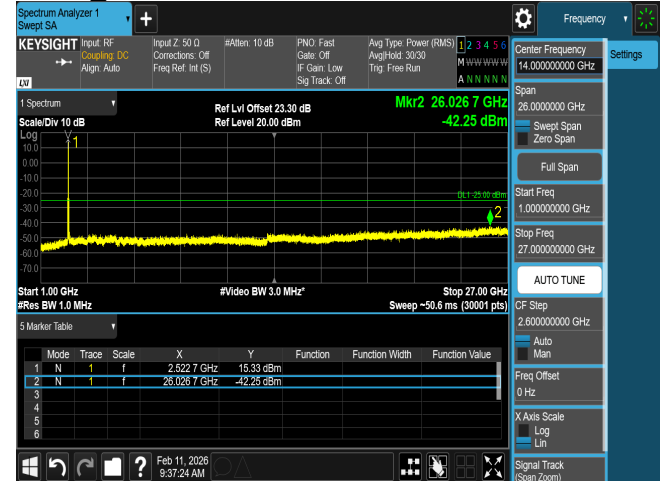


CSE B7 15M CH21051(1,0),10M CH21171(1,49) QPSK

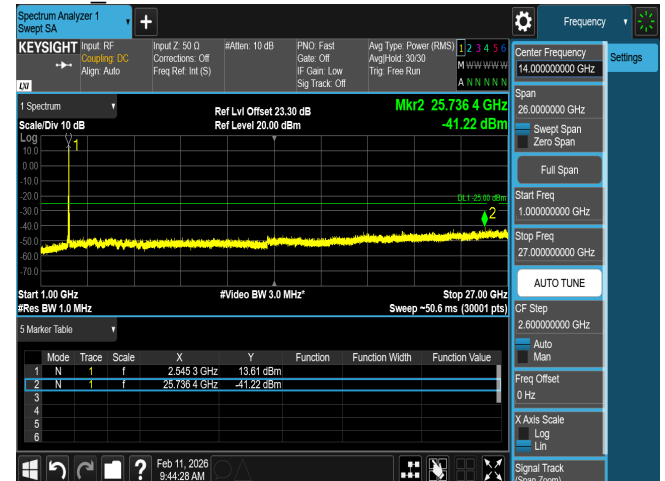


CSE B7 15M CH21277(1,0),10M CH21397(1,49) QPSK

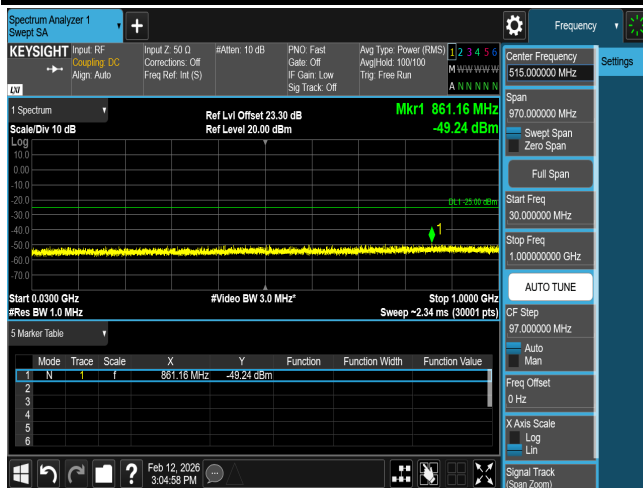


CSE B7 15M CH20825(1,74),10M CH20945(1,0) QPSK

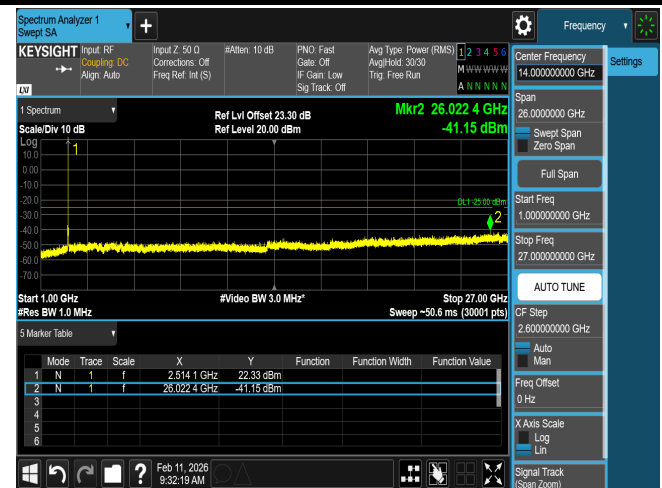


CSE B7 15M CH20825(1,74),10M CH20945(1,0) QPSK

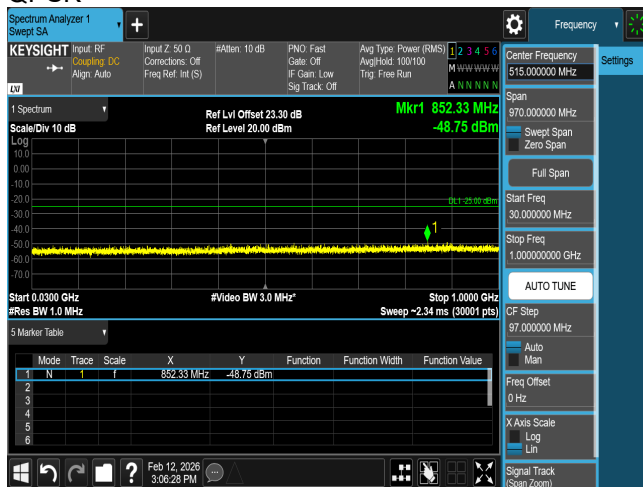


CSE B7 15M CH21051(1,74),10M CH21171(1,0) QPSK

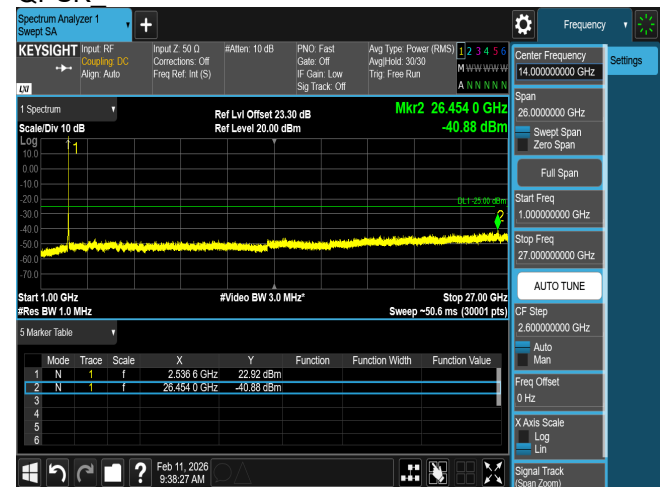


CSE B7 15M CH21051(1,74),10M CH21171(1,0) QPSK

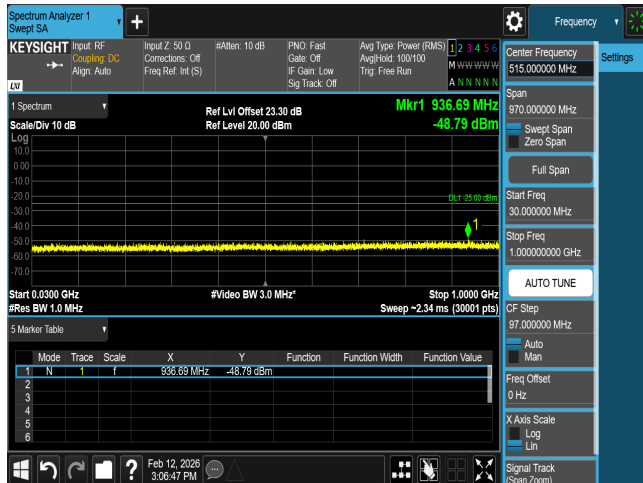

CSE B7 15M CH21277(1,74),10M CH21397(1,0) QPSK

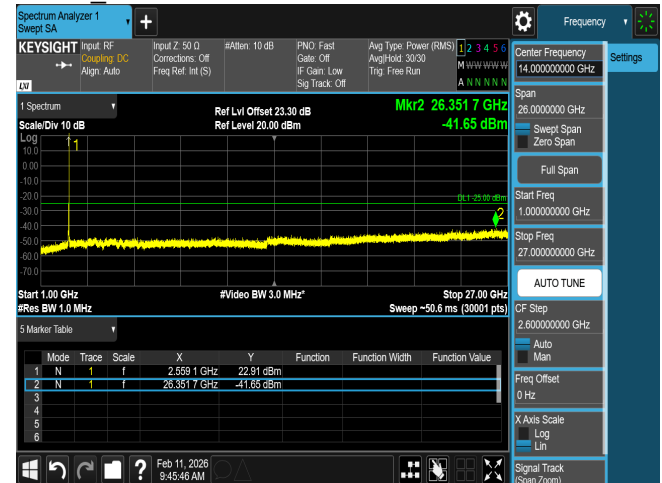


CSE B7 15M CH21277(1,74),10M CH21397(1,0) QPSK

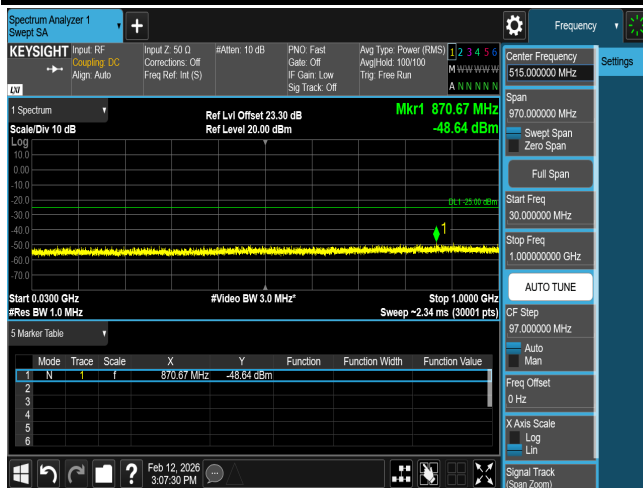


CSE B7 15M CH20825(75,0),10M CH20945(50,0) QPSK



CSE B7 15M CH20825(75,0),10M CH20945(50,0) QPSK

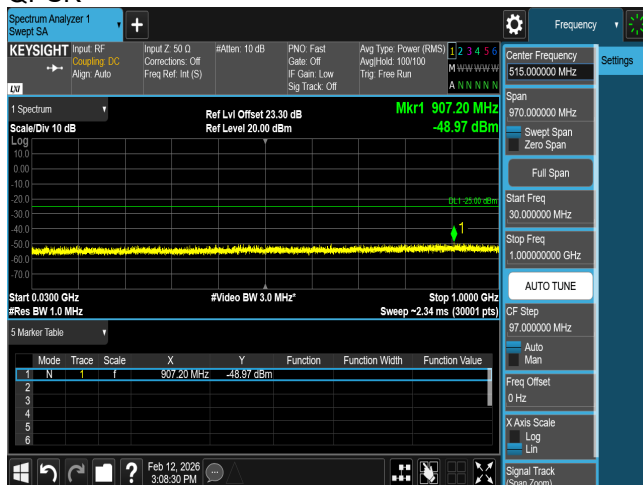


CSE B7 15M CH21051(75,0),10M CH21171(50,0) QPSK

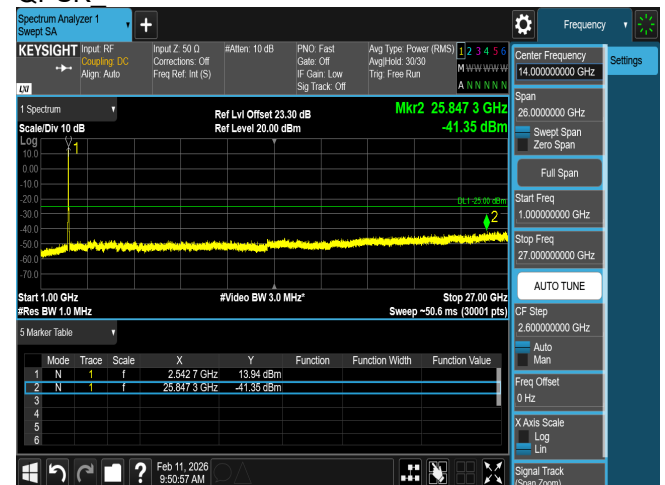


CSE B7 15M CH21051(75,0),10M CH21171(50,0) QPSK




CSE B7 15M CH21277(75,0),10M CH21397(50,0) QPSK

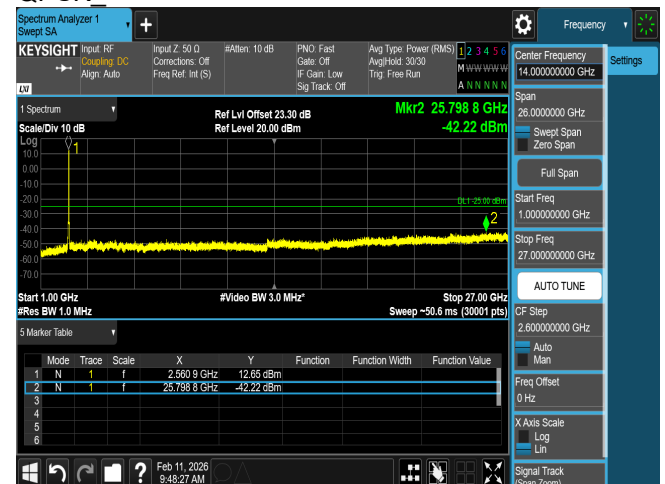


CSE B7 15M CH21277(75,0),10M CH21397(50,0) QPSK

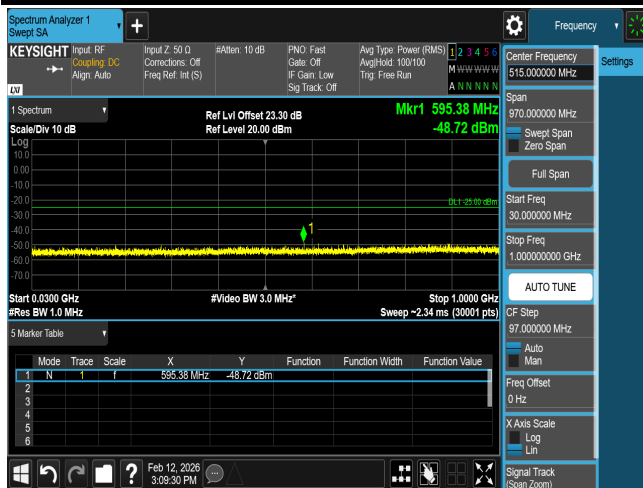


CSE B7 20M CH20850(100,0),20M CH21048(100,0) QPSK

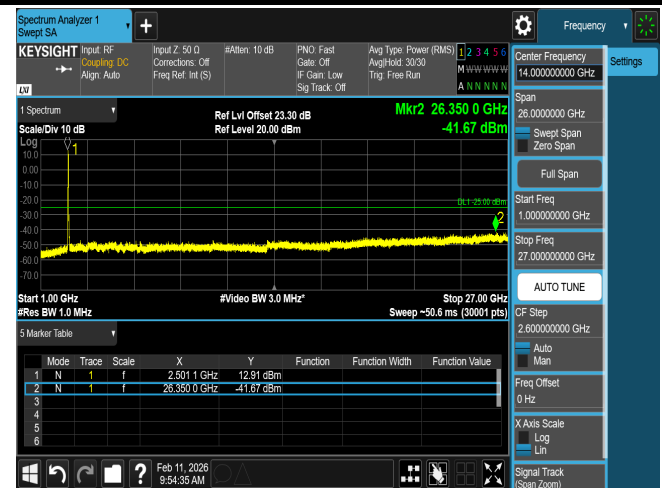


CSE B7 20M CH20850(100,0),20M CH21048(100,0) QPSK

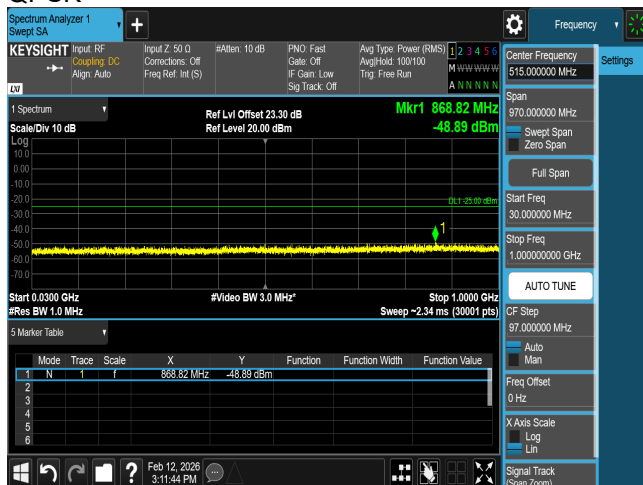


CSE B7 20M CH21001(100,0),20M CH21199(100,0) QPSK

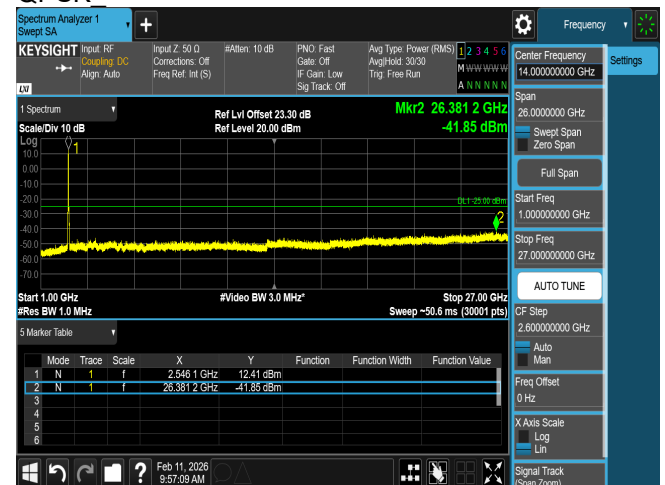

CSE B7 20M CH21001(100,0),20M CH21199(100,0) QPSK

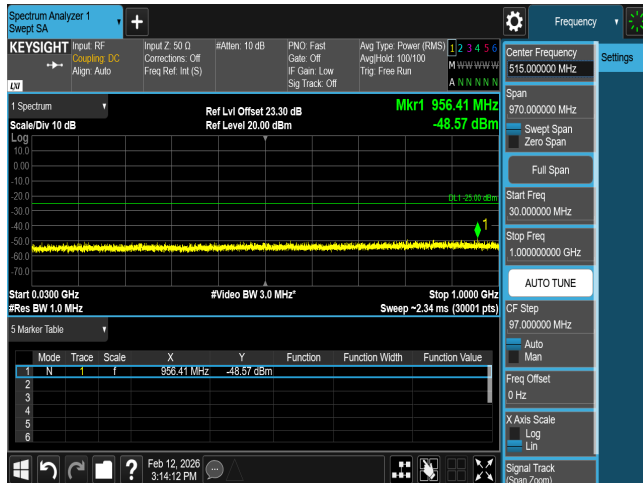

CSE B7 20M CH21152(100,0),20M CH21350(100,0) QPSK

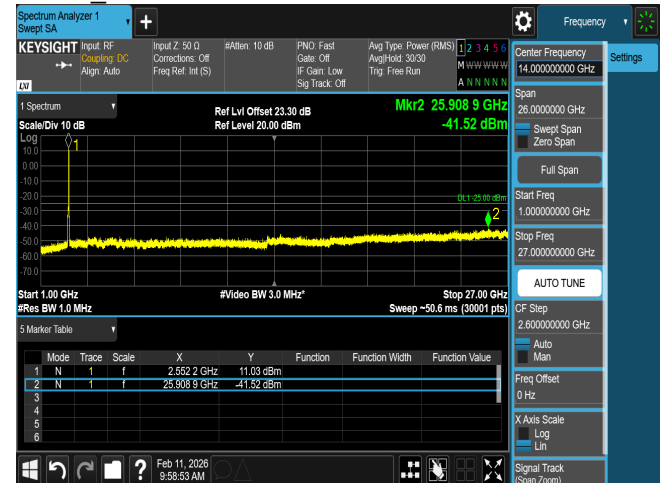


CSE B7 20M CH21152(100,0),20M CH21350(100,0) QPSK_

Appendix D.2 Test Result of Radiated Spurious Emission

Mode 1: LTE Band 25(2)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26047
Test BY :Ashton

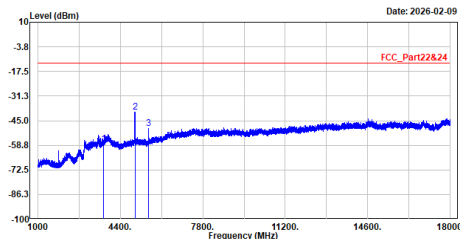


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3701.400	-58.12	-13.00	-45.12	-49.99	-8.13	Peak
2	4999.533	-40.16	-13.00	-27.16	-37.89	-2.27	Peak
3	5552.100	-49.49	-13.00	-36.49	-48.58	-0.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26047
Test BY :Ashton

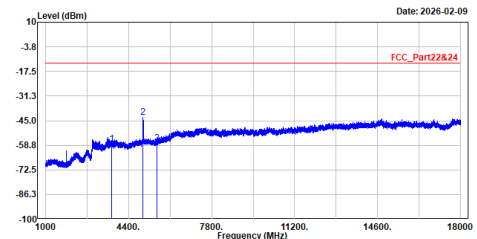


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3701.400	-57.89	-13.00	-44.89	-49.76	-8.13	Peak
2	4986.500	-43.32	-13.00	-30.32	-41.02	-2.30	Peak
3	5552.100	-57.85	-13.00	-44.85	-56.94	-0.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26365
Test BY :Ashton

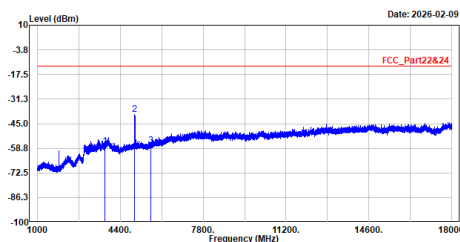


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3765.000	-57.59	-13.00	-44.59	-49.93	-7.66	Peak
2	4986.500	-39.98	-13.00	-26.98	-37.68	-2.30	Peak
3	5647.500	-57.35	-13.00	-44.35	-57.03	-0.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26365
Test BY :Ashton

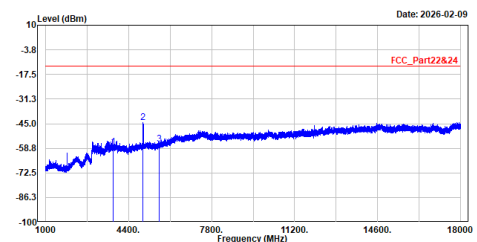


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3765.000	-58.17	-13.00	-45.17	-50.51	-7.66	Peak
2	4992.167	-44.52	-13.00	-31.52	-42.23	-2.29	Peak
3	5647.500	-56.23	-13.00	-43.23	-55.91	-0.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26683
Test BY :Ashton

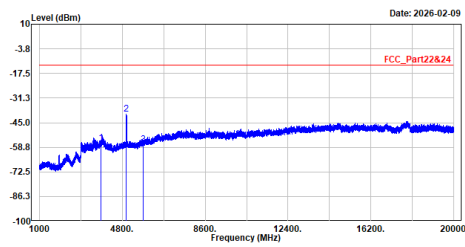


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3828.600	-56.54	-13.00	-43.54	-49.24	-7.30	Peak
2	4983.667	-40.16	-13.00	-27.16	-37.85	-2.31	Peak
3	5742.900	-57.13	-13.00	-44.13	-57.27	0.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26683
Test BY :Ashton

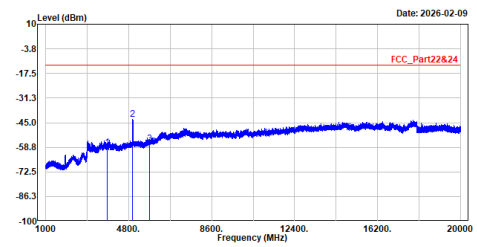


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	3828.600	-58.88	-13.00	-45.88	-51.58	-7.30	Peak
2	4983.367	-43.03	-13.00	-30.03	-40.72	-2.31	Peak
3	5742.900	-56.83	-13.00	-43.83	-56.97	0.14	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26683
Test BY :Ashton

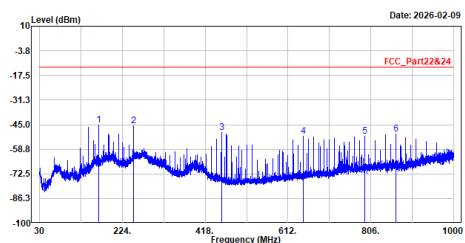


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.22	-13.00	-32.22	-32.75	-12.47	Peak
2	249.996	-45.59	-13.00	-32.59	-32.53	-13.06	Peak
3	456.121	-49.29	-13.00	-36.29	-42.18	-7.11	Peak
4	648.084	-51.41	-13.00	-38.41	-40.21	-3.20	Peak
5	792.129	-51.63	-13.00	-38.63	-50.81	-0.82	Peak
6	864.103	-50.12	-13.00	-37.12	-49.97	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B25_1.4M_QPSK_3RB2_CH26683
Test BY :Ashton

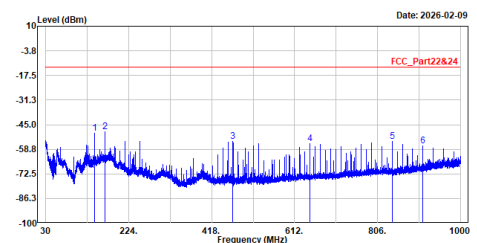


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	143.975	-49.78	-13.00	-36.78	-37.52	-12.26	Peak
2	168.031	-49.09	-13.00	-36.09	-36.62	-12.47	Peak
3	456.052	-54.21	-13.00	-41.21	-47.34	-6.87	Peak
4	648.084	-55.40	-13.00	-42.40	-52.20	-3.20	Peak
5	840.144	-54.31	-13.00	-41.31	-53.87	-0.44	Peak
6	912.215	-56.74	-13.00	-43.74	-57.10	0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Mode 2: LTE Band 66(4)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B66_15M_QPSK_1RB0_CH132047
Test BY :Ashton

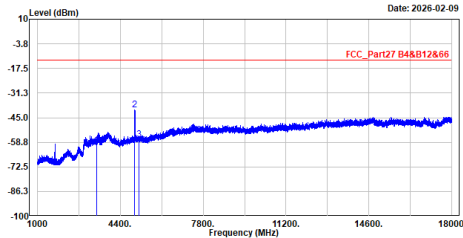


No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3435.000	-60.19	-13.00	-47.19	-50.42	-9.77	Peak
2	4988.767	-40.46	-13.00	-27.46	-38.16	-2.30	Peak
3	5152.500	-57.10	-13.00	-44.10	-54.88	-2.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B66_15M_QPSK_1RB0_CH132047
Test BY :Ashton

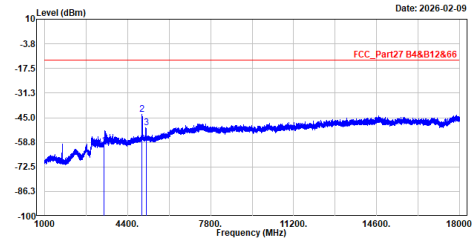


No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3435.000	-60.57	-13.00	-47.57	-50.80	-9.77	Peak
2	4987.067	-43.00	-13.00	-30.00	-40.70	-2.30	Peak
3	5152.500	-50.71	-13.00	-37.71	-48.49	-2.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B66_15M_QPSK_1RB0_CH132322
Test BY :Ashton

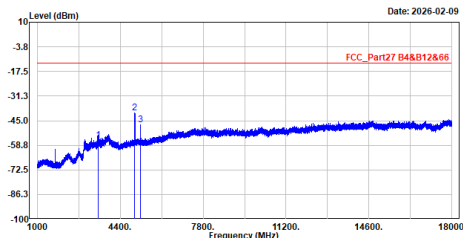


No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3490.000	-55.93	-13.00	-42.93	-46.34	-9.59	Peak
2	4995.000	-40.58	-13.00	-27.58	-38.29	-2.29	Peak
3	5235.000	-47.18	-13.00	-34.18	-45.32	-1.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B66_15M_QPSK_1RB0_CH132322
Test BY :Ashton

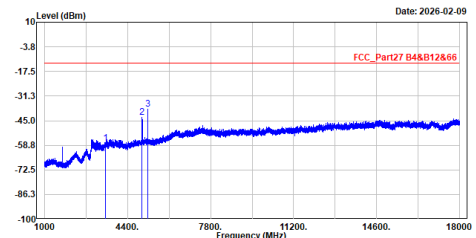


No.	Frequency	Level	Limit	Over Limit	Read Level	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	3490.000	-57.73	-13.00	-44.73	-48.14	-9.59	Peak
2	4989.333	-43.16	-13.00	-30.16	-40.86	-2.30	Peak
3	5235.000	-38.74	-13.00	-25.74	-36.88	-1.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B66_15M_QPSK_1RB0_CH132597
Test BY :Ashton

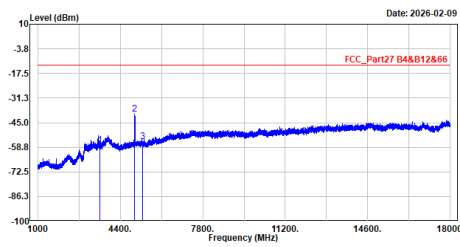


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	3545.000	-57.79	-13.00	-44.79	-48.54	-9.25	Peak
2	4988.767	-40.14	-13.00	-27.14	-37.84	-2.30	Peak
3	5317.500	-55.77	-13.00	-42.77	-53.91	-1.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B66_15M_QPSK_1RB0_CH132597
Test BY :Ashton

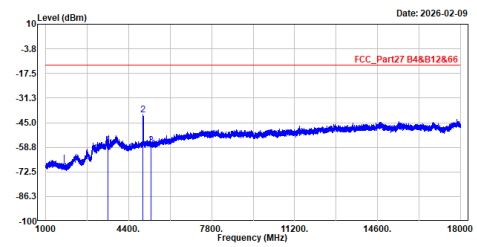


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	3545.000	-57.13	-13.00	-44.13	-47.88	-9.25	Peak
2	4988.767	-40.50	-13.00	-27.50	-38.20	-2.30	Peak
3	5317.500	-57.73	-13.00	-44.73	-55.87	-1.86	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B66_15M_QPSK_1RB0_CH132597
Test BY :Ashton

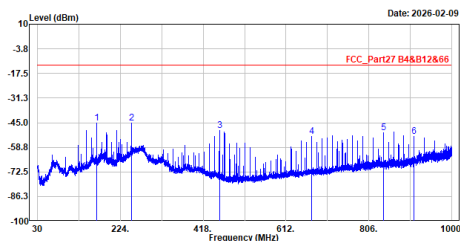


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.40	-13.00	-32.40	-32.93	-12.47	Peak
2	249.996	-45.10	-13.00	-32.10	-32.04	-13.06	Peak
3	456.121	-49.19	-13.00	-36.19	-42.08	-7.11	Peak
4	672.140	-52.74	-13.00	-39.74	-49.82	-2.92	Peak
5	840.144	-50.58	-13.00	-37.58	-50.14	-0.44	Peak
6	912.215	-52.84	-13.00	-39.84	-53.20	0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B66_15M_QPSK_1RB0_CH132597
Test BY :Ashton

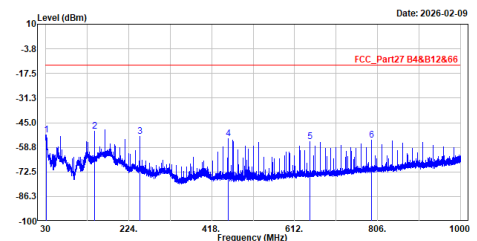


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	30.679	-51.64	-13.00	-38.64	-38.53	-13.11	Peak
2	143.975	-49.93	-13.00	-36.93	-37.67	-12.26	Peak
3	249.996	-52.84	-13.00	-39.84	-39.78	-13.06	Peak
4	456.121	-53.95	-13.00	-40.95	-46.84	-7.11	Peak
5	648.084	-55.64	-13.00	-42.64	-52.44	-3.20	Peak
6	792.129	-54.77	-13.00	-41.77	-53.95	-0.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 3: LTE Band 26(5) (Part 22)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_1R874_CH26865
Test BY :Ashton

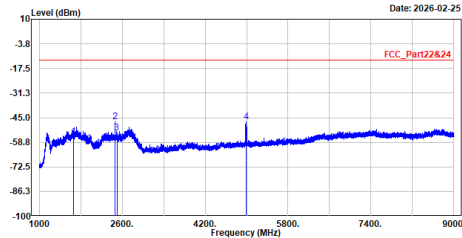


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1663.000	-55.61	-13.00	-42.61	-39.72	-15.89	Peak
2	2457.200	-47.36	-13.00	-34.36	-33.15	-14.21	Peak
3	2494.500	-53.64	-13.00	-40.64	-39.43	-14.21	Peak
4	4986.800	-47.32	-13.00	-34.32	-42.87	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_1R874_CH26865
Test BY :Ashton

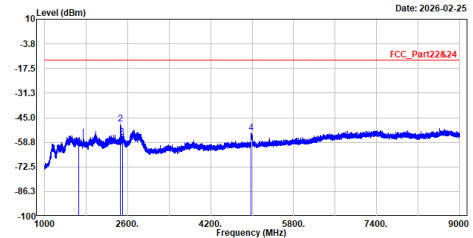


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1663.000	-61.15	-13.00	-48.15	-45.26	-15.89	Peak
2	2458.000	-48.46	-13.00	-35.46	-34.25	-14.21	Peak
3	2494.500	-55.93	-13.00	-42.93	-41.72	-14.21	Peak
4	4980.000	-53.40	-13.00	-40.40	-48.93	-4.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_1R874_CH26915
Test BY :Ashton

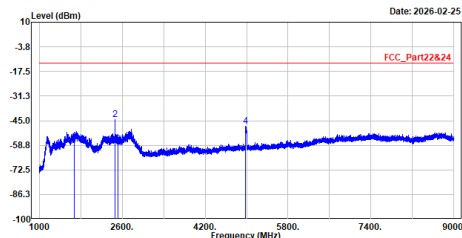


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1673.000	-56.61	-13.00	-43.61	-40.78	-15.83	Peak
2	2457.600	-44.18	-13.00	-31.18	-29.98	-14.20	Peak
3	2509.500	-58.06	-13.00	-45.06	-43.85	-14.21	Peak
4	4984.400	-48.30	-13.00	-35.30	-43.84	-4.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_1R874_CH26915
Test BY :Ashton

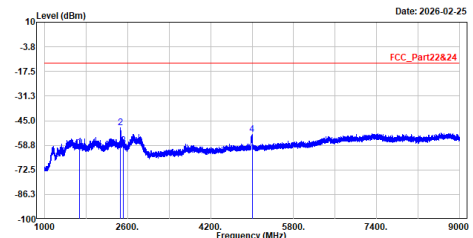


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1673.000	-59.54	-13.00	-46.54	-43.71	-15.83	Peak
2	2456.800	-48.86	-13.00	-35.86	-34.65	-14.21	Peak
3	2509.500	-58.78	-13.00	-45.78	-44.57	-14.21	Peak
4	5000.000	-52.79	-13.00	-39.79	-48.37	-4.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_1R874_CH26965
Test BY :Ashton

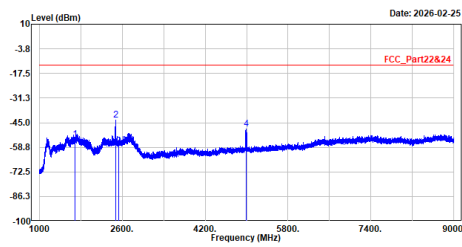


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1683.000	-54.37	-13.00	-41.37	-38.49	-15.88	Peak
2	2468.000	-43.72	-13.00	-30.72	-29.45	-14.27	Peak
3	2524.500	-58.14	-13.00	-45.14	-43.99	-14.15	Peak
4	4992.800	-48.49	-13.00	-35.49	-44.05	-4.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_1R874_CH26965
Test BY :Ashton

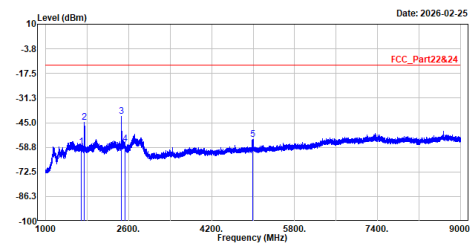


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1683.000	-58.53	-13.00	-45.53	-42.65	-15.88	Peak
2	1748.400	-44.75	-13.00	-31.75	-29.05	-15.70	Peak
3	2456.400	-41.61	-13.00	-28.61	-27.39	-14.22	Peak
4	2524.500	-57.02	-13.00	-44.02	-42.87	-14.15	Peak
5	4988.800	-54.27	-13.00	-41.27	-43.82	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_15M_QPSK_1R874_CH26915
Test BY :Ashton

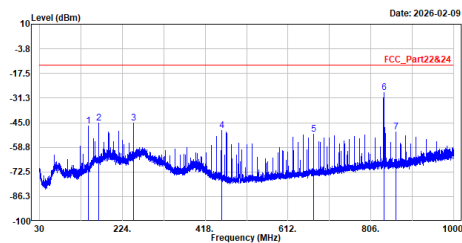


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	143.975	-46.83	-13.00	-33.83	-34.57	-12.26	Peak
2	168.031	-45.17	-13.00	-32.17	-32.70	-12.47	Peak
3	249.996	-45.30	-13.00	-32.30	-32.24	-13.06	Peak
4	456.121	-49.19	-13.00	-36.19	-42.00	-7.11	Peak
5	672.140	-51.42	-13.00	-38.42	-48.50	-2.92	Peak
6	836.652	-28.34	-13.00	-15.34	-27.83	-0.51	Peak
7	864.103	-50.23	-13.00	-37.23	-50.08	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_15M_QPSK_1R874_CH26915
Test BY :Ashton

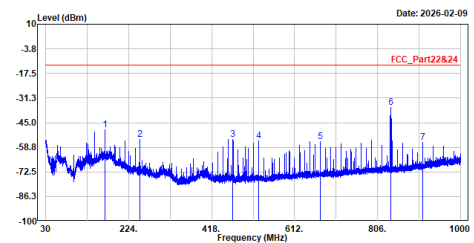


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-48.06	-13.00	-35.06	-36.39	-12.47	Peak
2	249.996	-54.39	-13.00	-41.39	-41.33	-13.06	Peak
3	468.052	-54.37	-13.00	-41.37	-47.50	-6.87	Peak
4	528.095	-55.24	-13.00	-42.24	-49.40	-5.84	Peak
5	672.140	-55.56	-13.00	-42.56	-52.64	-2.92	Peak
6	836.458	-36.42	-13.00	-23.42	-35.91	-0.51	Peak
7	912.215	-55.83	-13.00	-42.83	-56.19	0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 4: LTE Band 26 (Part 90)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_1RB14_CH24740
Test BY :Ashton

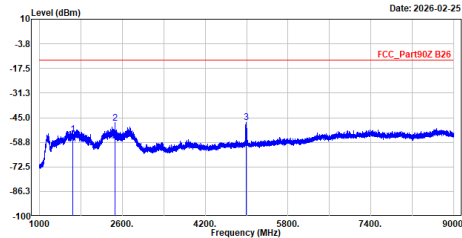


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1638.000	-54.49	-13.00	-41.49	-38.62	-15.87	Peak
2	2457.000	-47.92	-13.00	-34.92	-33.71	-14.21	Peak
3	4998.800	-47.66	-13.00	-34.66	-43.23	-4.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_1RB14_CH24740
Test BY :Ashton

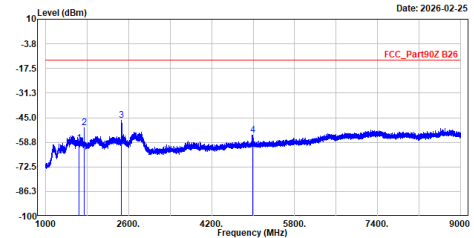


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1638.000	-59.17	-13.00	-46.17	-43.30	-15.87	Peak
2	1746.400	-50.74	-13.00	-37.74	-35.02	-15.72	Peak
3	2457.000	-46.46	-13.00	-33.46	-32.25	-14.21	Peak
4	4998.400	-54.69	-13.00	-41.69	-50.24	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_1RB14_CH26705
Test BY :Ashton

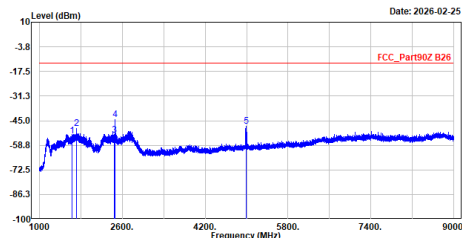


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1631.000	-53.66	-13.00	-40.66	-37.87	-15.79	Peak
2	1714.000	-49.40	-13.00	-36.40	-33.54	-15.86	Peak
3	2446.500	-53.20	-13.00	-40.20	-38.92	-14.28	Peak
4	2458.800	-44.52	-13.00	-31.52	-30.32	-14.20	Peak
5	4998.800	-48.20	-13.00	-35.20	-43.75	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_1RB14_CH26705
Test BY :Ashton

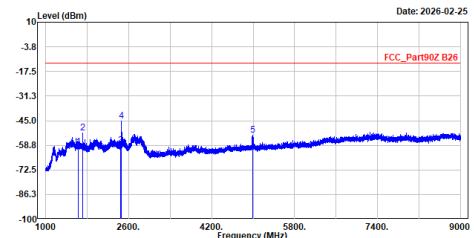


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1631.000	-59.70	-13.00	-46.70	-43.91	-15.79	Peak
2	1714.800	-51.92	-13.00	-38.92	-36.06	-15.86	Peak
3	2446.500	-58.82	-13.00	-45.82	-44.54	-14.28	Peak
4	2457.600	-45.17	-13.00	-32.17	-30.97	-14.20	Peak
5	4999.600	-52.95	-13.00	-39.95	-48.53	-4.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_1RB14_CH26775
Test BY :Ashton

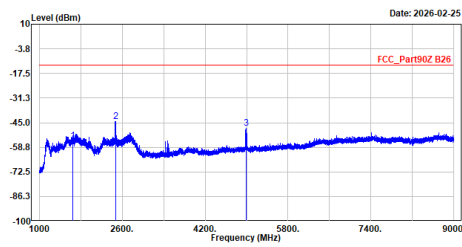


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1645.000	-55.23	-13.00	-42.23	-39.33	-15.90	Peak
2	2467.500	-44.21	-13.00	-31.21	-29.95	-14.26	Peak
3	4988.000	-48.13	-13.00	-35.13	-43.68	-4.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_1RB14_CH26775
Test BY :Ashton

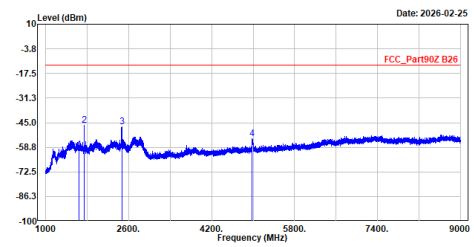


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1645.000	-60.08	-13.00	-47.08	-44.18	-15.90	Peak
2	1740.400	-46.65	-13.00	-33.65	-30.88	-15.77	Peak
3	2467.500	-47.20	-13.00	-34.20	-32.94	-14.26	Peak
4	4984.800	-54.07	-13.00	-41.07	-49.61	-4.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B26_3M_QPSK_1RB14_CH26775
Test BY :Ashton

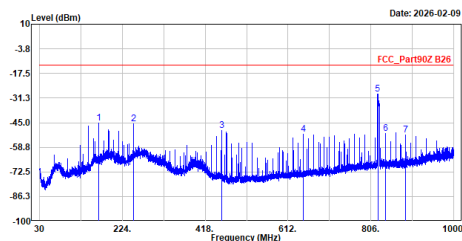


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.19	-13.00	-32.19	-32.72	-12.47	Peak
2	249.996	-45.43	-13.00	-32.43	-32.37	-13.06	Peak
3	456.121	-49.45	-13.00	-36.45	-42.34	-7.11	Peak
4	648.084	-51.41	-13.00	-38.41	-40.21	-3.20	Peak
5	822.393	-28.99	-----	-----	-28.40	-0.59	Peak
6	840.144	-50.92	-13.00	-37.92	-50.48	-0.44	Peak
7	888.159	-51.84	-13.00	-38.84	-51.79	-0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B26_3M_QPSK_1RB14_CH26775
Test BY :Ashton

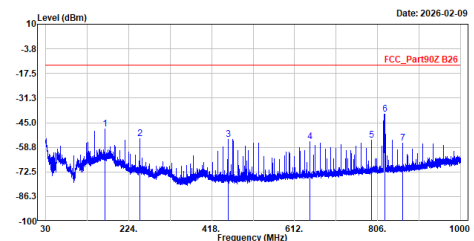


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-48.71	-13.00	-35.71	-36.24	-12.47	Peak
2	249.996	-53.86	-13.00	-40.86	-40.80	-13.06	Peak
3	456.121	-54.32	-13.00	-41.32	-47.21	-7.11	Peak
4	648.084	-55.38	-13.00	-42.38	-52.18	-3.20	Peak
5	792.129	-54.82	-13.00	-41.82	-54.00	-0.82	Peak
6	822.490	-40.11	-----	-----	-39.52	-0.59	Peak
7	864.103	-56.45	-13.00	-43.45	-56.30	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Mode 5: LTE Band 7


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB99_CH20850
Test BY :Ashton

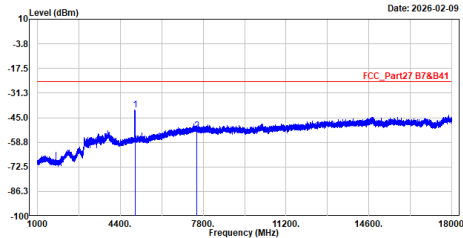

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	5020.000	-40.66	-25.00	-15.66	-38.44	-2.22	Peak
2	7530.000	-52.16	-25.00	-27.16	-56.69	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB99_CH20850
Test BY :Ashton

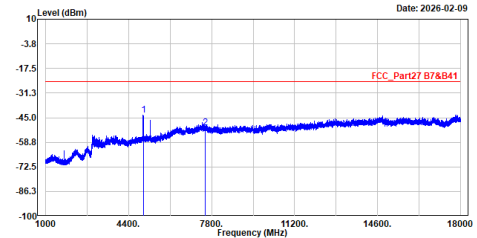

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	5020.000	-43.51	-25.00	-18.51	-41.29	-2.22	Peak
2	7530.000	-50.56	-25.00	-25.56	-55.09	4.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB99_CH21100
Test BY :Ashton

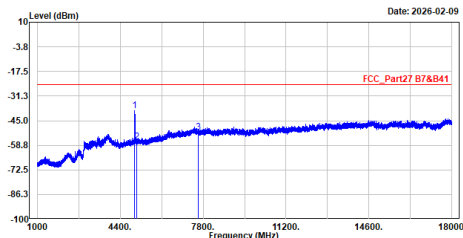

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4988.767	-39.31	-25.00	-14.31	-37.01	-2.30	Peak
2	5070.000	-56.80	-25.00	-31.80	-54.69	-2.11	Peak
3	7605.000	-51.63	-25.00	-26.63	-56.15	4.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB99_CH21100
Test BY :Ashton

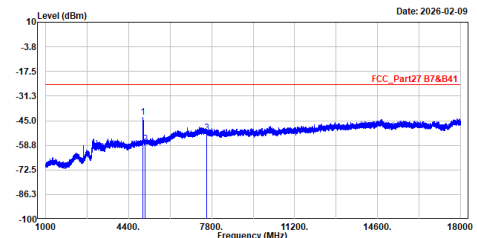

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4985.933	-43.31	-25.00	-18.31	-41.00	-2.31	Peak
2	5070.000	-57.89	-25.00	-32.89	-55.78	-2.11	Peak
3	7605.000	-52.03	-25.00	-27.03	-56.55	4.52	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB99_CH21350
Test BY :Ashton

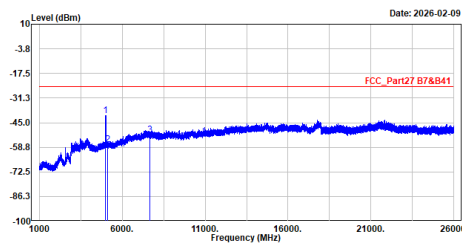


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4985.933	-40.85	-25.00	-15.85	-38.54	-2.31	Peak
2	5120.000	-57.08	-25.00	-32.08	-54.91	-2.17	Peak
3	7680.000	-51.90	-25.00	-26.90	-56.11	4.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB99_CH21350
Test BY :Ashton

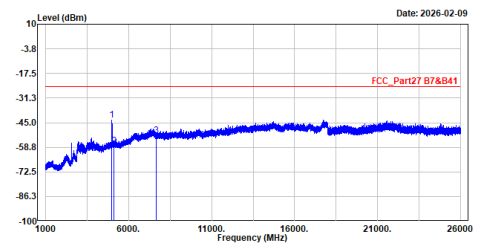


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4985.933	-43.53	-25.00	-18.53	-41.22	-2.31	Peak
2	5120.000	-57.99	-25.00	-32.99	-55.82	-2.17	Peak
3	7680.000	-52.10	-25.00	-27.10	-56.31	4.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7_20M_QPSK_1RB99_CH21350
Test BY :Ashton

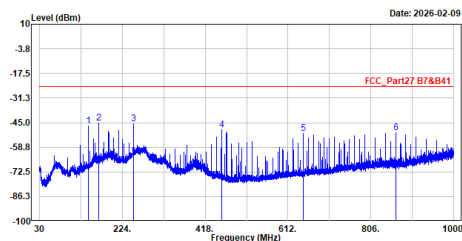


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	143.975	-47.00	-25.00	-22.00	-34.74	-12.26	Peak
2	168.031	-45.25	-25.00	-20.25	-32.78	-12.47	Peak
3	249.996	-45.45	-25.00	-20.45	-32.39	-13.06	Peak
4	456.121	-49.02	-25.00	-24.02	-41.91	-7.11	Peak
5	648.084	-51.16	-25.00	-26.16	-47.96	-3.20	Peak
6	864.103	-50.68	-25.00	-25.68	-50.53	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7_20M_QPSK_1RB99_CH21350
Test BY :Ashton

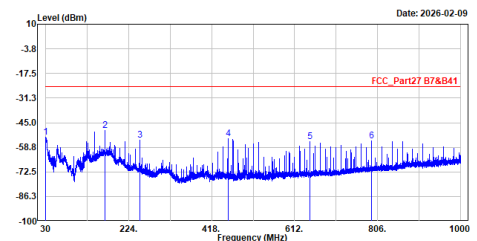


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.194	-53.25	-25.00	-28.25	-40.20	-13.05	Peak
2	168.031	-49.43	-25.00	-24.43	-36.96	-12.47	Peak
3	249.996	-54.56	-25.00	-29.56	-41.50	-13.06	Peak
4	456.121	-54.12	-25.00	-29.12	-47.01	-7.11	Peak
5	648.084	-55.76	-25.00	-30.76	-52.56	-3.20	Peak
6	792.129	-54.98	-25.00	-29.98	-54.16	-0.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Mode 6: LTE Band 12(17)

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_5M_QPSK_1RB24_CH23035
Test BY :Ashton

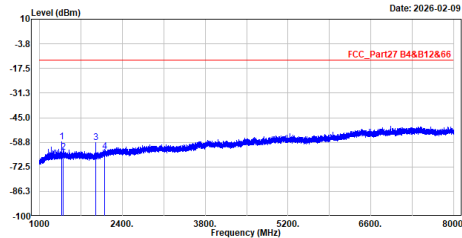


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	1375.200	-58.57	-13.00	-45.57	-44.87	-13.70	Peak
2	1403.000	-64.48	-13.00	-51.48	-50.88	-13.60	Peak
3	1951.300	-58.91	-13.00	-45.91	-46.10	-12.81	Peak
4	2104.500	-64.07	-13.00	-51.07	-51.83	-12.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuW) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_5M_QPSK_1RB24_CH23035
Test BY :Ashton

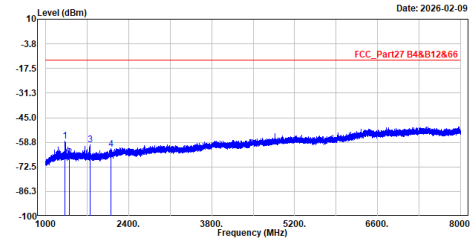


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	1327.600	-57.92	-13.00	-44.92	-44.15	-13.77	Peak
2	1403.000	-67.35	-13.00	-54.35	-53.75	-13.60	Peak
3	1748.533	-60.06	-13.00	-47.06	-46.52	-13.54	Peak
4	2104.500	-62.51	-13.00	-49.51	-50.27	-12.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuW) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_5M_QPSK_1RB24_CH23095
Test BY :Ashton

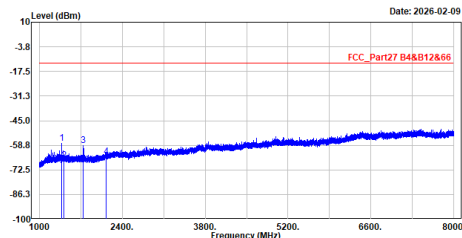


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	1374.967	-57.66	-13.00	-44.66	-43.96	-13.70	Peak
2	1415.000	-67.05	-13.00	-54.05	-53.44	-13.61	Peak
3	1742.233	-58.87	-13.00	-45.87	-45.27	-13.60	Peak
4	2122.500	-65.30	-13.00	-52.30	-53.06	-12.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuW) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_5M_QPSK_1RB24_CH23095
Test BY :Ashton

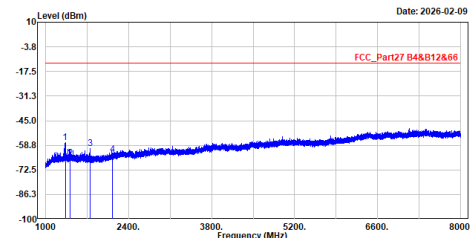


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	1330.400	-57.29	-13.00	-44.29	-43.52	-13.77	Peak
2	1415.000	-65.94	-13.00	-52.94	-52.33	-13.61	Peak
3	1753.667	-60.46	-13.00	-47.46	-46.93	-13.53	Peak
4	2122.500	-63.93	-13.00	-50.93	-51.69	-12.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuW) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_5M_QPSK_1RB24_CH23155
Test BY :Ashton

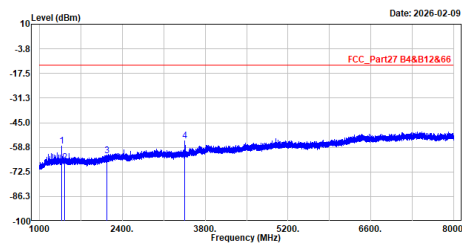


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1374.733	-58.08	-13.00	-45.08	-44.38	-13.70	Peak
2	1427.000	-67.34	-13.00	-54.34	-53.73	-13.61	Peak
3	2140.500	-63.29	-13.00	-50.29	-51.03	-12.26	Peak
4	3450.700	-55.13	-13.00	-42.13	-45.43	-9.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_5M_QPSK_1RB24_CH23155
Test BY :Ashton

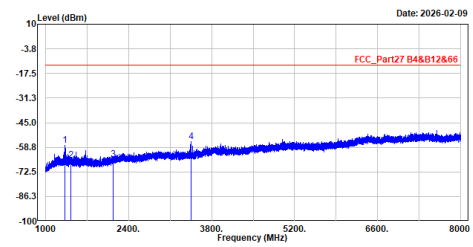


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1329.467	-57.75	-13.00	-44.75	-43.98	-13.77	Peak
2	1427.000	-66.01	-13.00	-53.01	-52.40	-13.61	Peak
3	2140.500	-65.72	-13.00	-52.72	-53.46	-12.26	Peak
4	3450.800	-55.44	-13.00	-42.44	-45.74	-9.70	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B12_5M_QPSK_1RB24_CH23035
Test BY :Ashton

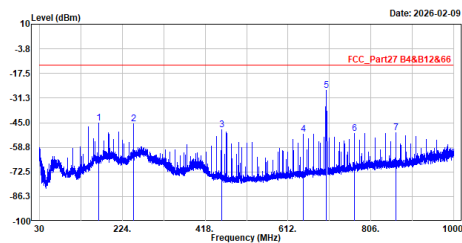


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.10	-13.00	-32.10	-32.63	-12.47	Peak
2	249.996	-45.46	-13.00	-32.46	-32.40	-13.06	Peak
3	456.121	-49.08	-13.00	-36.08	-41.97	-7.11	Peak
4	648.084	-51.31	-13.00	-38.31	-40.11	-3.20	Peak
5	791.046	-26.88	-----	-----	-24.58	-2.30	Peak
6	768.170	-51.14	-13.00	-38.14	-50.05	-1.09	Peak
7	864.103	-50.70	-13.00	-37.70	-50.55	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B12_5M_QPSK_1RB24_CH23035
Test BY :Ashton

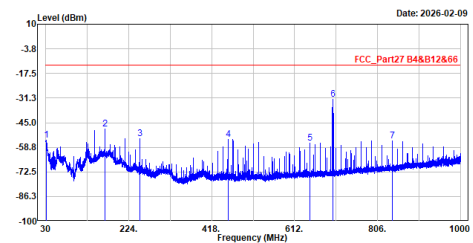


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.776	-54.65	-13.00	-41.65	-41.53	-13.12	Peak
2	168.031	-48.65	-13.00	-35.65	-36.18	-12.47	Peak
3	249.996	-54.06	-13.00	-41.06	-41.00	-13.06	Peak
4	456.121	-54.43	-13.00	-41.43	-47.32	-7.11	Peak
5	648.084	-56.25	-13.00	-43.25	-53.05	-3.20	Peak
6	701.531	-31.98	-----	-----	-29.68	-2.30	Peak
7	840.144	-55.34	-13.00	-42.34	-54.90	-0.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 7: LTE Band 13

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B13_5M_QPSK_1RB12_CH23205
Test BY :Ashton

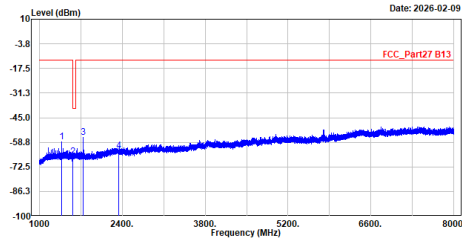


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	Line	Limit	Level	dB	
1	1375.200	-58.59	-13.00	-45.59	-44.89	-13.70	Peak
2	1559.000	-66.95	-40.00	-26.95	-53.05	-13.90	Peak
3	1736.400	-56.02	-13.00	-43.02	-42.35	-13.67	Peak
4	2338.500	-63.33	-13.00	-50.33	-51.45	-11.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B13_5M_QPSK_1RB12_CH23205
Test BY :Ashton

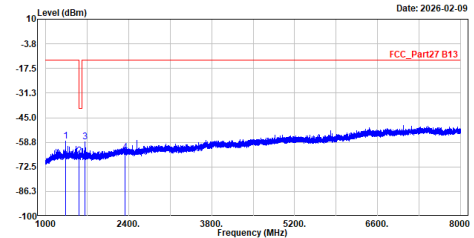


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	Line	Limit	Level	dB	
1	1330.867	-57.91	-13.00	-44.91	-44.12	-13.79	Peak
2	1559.000	-66.47	-40.00	-26.47	-52.57	-13.90	Peak
3	1667.800	-58.28	-13.00	-45.28	-44.59	-13.69	Peak
4	2338.500	-64.33	-13.00	-51.33	-52.45	-11.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B13_5M_QPSK_1RB12_CH23230
Test BY :Ashton

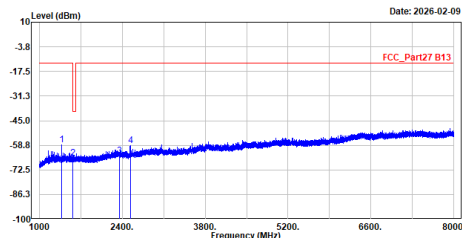


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	Line	Limit	Level	dB	
1	1374.967	-58.48	-13.00	-45.48	-44.78	-13.70	Peak
2	1564.000	-65.92	-40.00	-25.92	-52.04	-13.88	Peak
3	2346.000	-64.78	-13.00	-51.78	-52.89	-11.89	Peak
4	2534.633	-59.05	-13.00	-46.05	-47.12	-11.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B13_5M_QPSK_1RB12_CH23230
Test BY :Ashton

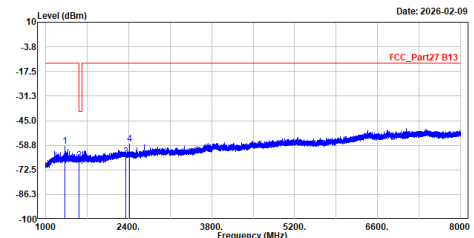


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	Line	Limit	Level	dB	
1	1326.667	-59.42	-13.00	-46.42	-45.65	-13.77	Peak
2	1564.000	-67.14	-40.00	-27.14	-53.26	-13.88	Peak
3	2346.000	-65.11	-13.00	-52.11	-53.22	-11.89	Peak
4	2410.267	-58.01	-13.00	-45.01	-46.13	-11.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B13_5M_QPSK_1RB12_CH23255
Test BY :Ashton

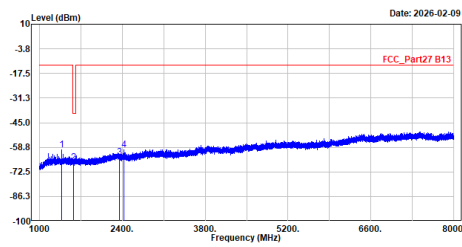


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1375.200	-60.10	-13.00	-47.10	-46.40	-13.70	Peak
2	1569.000	-67.02	-40.00	-27.02	-53.14	-13.88	Peak
3	2353.500	-64.50	-13.00	-51.50	-52.60	-11.90	Peak
4	2428.233	-60.19	-13.00	-47.19	-48.21	-11.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B13_5M_QPSK_1RB12_CH23255
Test BY :Ashton

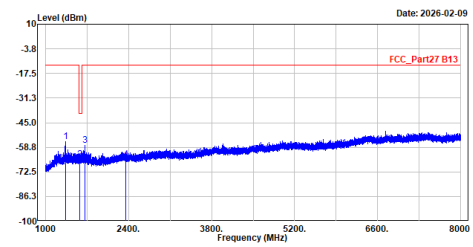


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1330.633	-55.41	-13.00	-42.41	-41.62	-13.79	Peak
2	1569.000	-65.70	-40.00	-25.70	-51.82	-13.88	Peak
3	1660.567	-57.73	-13.00	-44.73	-43.98	-13.75	Peak
4	2353.500	-65.37	-13.00	-52.37	-53.47	-11.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B13_5M_QPSK_1RB12_CH23205
Test BY :Ashton

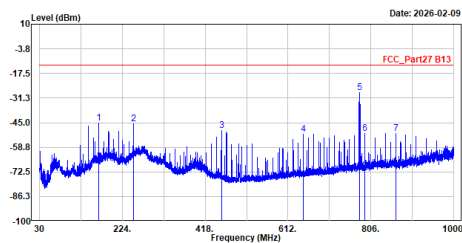


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.24	-13.00	-32.24	-32.77	-12.47	Peak
2	249.996	-45.58	-13.00	-32.58	-32.52	-13.06	Peak
3	456.121	-49.26	-13.00	-36.26	-42.15	-7.11	Peak
4	648.084	-51.50	-13.00	-38.50	-40.38	-3.20	Peak
5	779.519	-20.16	-13.00	-7.16	-27.20	-0.96	Peak
6	792.129	-51.20	-13.00	-38.20	-50.38	-0.82	Peak
7	864.103	-50.86	-13.00	-37.86	-50.71	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B13_5M_QPSK_1RB12_CH23205
Test BY :Ashton

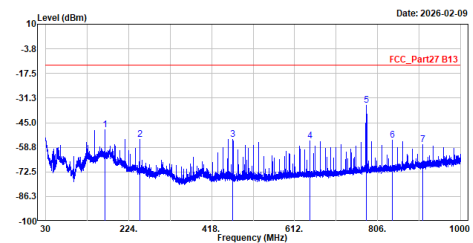


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-48.97	-13.00	-35.97	-36.50	-12.47	Peak
2	249.996	-54.38	-13.00	-41.38	-41.32	-13.06	Peak
3	456.052	-54.27	-13.00	-41.27	-47.40	-6.87	Peak
4	648.084	-55.27	-13.00	-42.27	-52.07	-3.20	Peak
5	780.101	-35.07	-13.00	-22.07	-34.12	-0.95	Peak
6	840.144	-54.74	-13.00	-41.74	-54.30	-0.44	Peak
7	912.215	-57.27	-13.00	-44.27	-57.63	0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV/m) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 8: LTE Band 38

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B38_20M_QPSK_1R850_CH37850
Test BY :Ashton

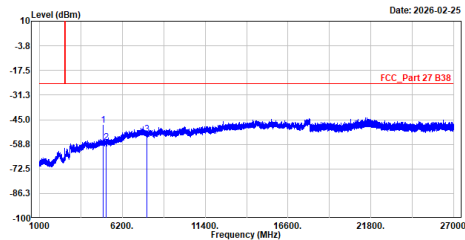


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	4987.350	-48.10	-25.00	-23.10	-45.80	-2.30	Peak
2	5160.000	-57.64	-25.00	-32.64	-55.44	-2.20	Peak
3	7740.000	-52.95	-25.00	-27.95	-57.13	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B38_20M_QPSK_1R850_CH37850
Test BY :Ashton

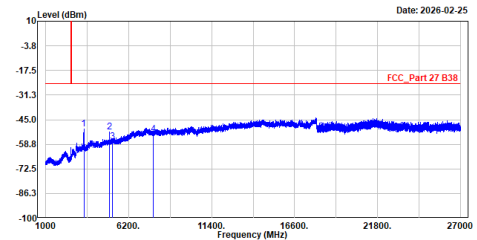


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	3389.350	-50.16	-25.00	-25.16	-40.19	-9.97	Peak
2	4983.100	-52.03	-25.00	-27.03	-49.72	-2.31	Peak
3	5160.000	-57.36	-25.00	-32.36	-55.16	-2.20	Peak
4	7740.000	-53.20	-25.00	-28.20	-57.38	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B38_20M_QPSK_1R850_CH38000
Test BY :Ashton

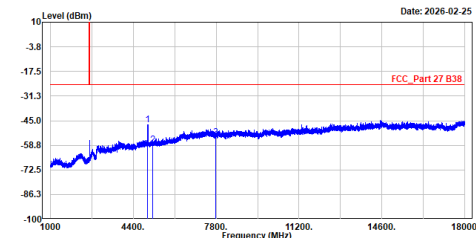


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	4995.850	-47.28	-25.00	-22.28	-44.99	-2.29	Peak
2	5190.000	-58.65	-25.00	-33.65	-56.60	-2.05	Peak
3	7785.000	-54.26	-25.00	-29.26	-58.78	4.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B38_20M_QPSK_1R850_CH38000
Test BY :Ashton

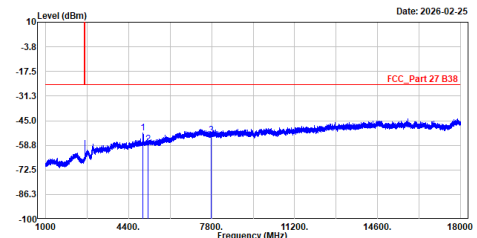


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBm	dBm	Limit	Level	dB	
1	4983.950	-52.03	-25.00	-27.03	-49.72	-2.31	Peak
2	5190.000	-57.87	-25.00	-32.87	-55.82	-2.05	Peak
3	7785.000	-53.09	-25.00	-28.09	-57.61	4.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B38_20M_QPSK_1R850_CH38150
Test BY :Ashton

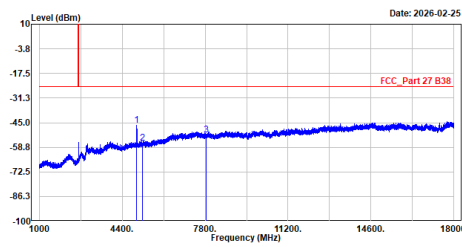


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4992.450	-46.65	-25.00	-21.65	-44.36	-2.29	Peak
2	5220.000	-56.37	-25.00	-31.37	-54.46	-1.91	Peak
3	7830.000	-51.76	-25.00	-26.76	-56.27	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B38_20M_QPSK_1R850_CH38150
Test BY :Ashton

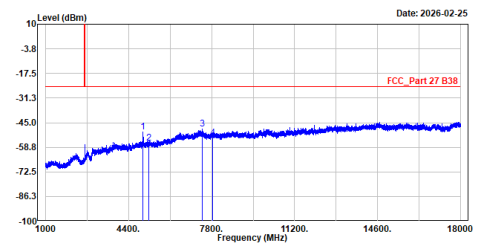


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4989.050	-50.27	-25.00	-25.27	-47.97	-2.30	Peak
2	5220.000	-56.37	-25.00	-31.37	-54.46	-1.91	Peak
3	7430.250	-48.57	-25.00	-23.57	-53.48	4.91	Peak
4	7830.000	-53.33	-25.00	-28.33	-57.84	4.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B38_20M_QPSK_1R850_CH37850
Test BY :Ashton

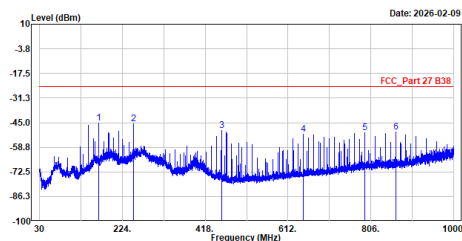


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.23	-25.00	-20.23	-32.76	-12.47	Peak
2	249.996	-45.60	-25.00	-20.60	-32.54	-13.06	Peak
3	456.121	-49.19	-25.00	-24.19	-42.08	-7.11	Peak
4	648.084	-51.33	-25.00	-26.33	-48.13	-3.20	Peak
5	792.129	-50.77	-25.00	-25.77	-49.95	-0.82	Peak
6	864.103	-50.36	-25.00	-25.36	-50.21	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B38_20M_QPSK_1R850_CH37850
Test BY :Ashton

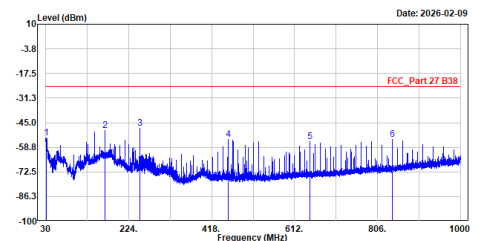


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.873	-53.60	-25.00	-28.60	-40.48	-13.12	Peak
2	168.031	-49.20	-25.00	-24.20	-36.73	-12.47	Peak
3	249.996	-48.15	-25.00	-23.15	-35.09	-13.06	Peak
4	456.121	-54.26	-25.00	-29.26	-47.15	-7.11	Peak
5	648.084	-55.74	-25.00	-30.74	-52.54	-3.20	Peak
6	840.144	-54.49	-25.00	-29.49	-54.05	-0.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) = 104.8 = 11.8 \text{ dB}$
5. The other emission levels were very low against the limit.

Mode 9: LTE Band 42

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_1RB0_CH42165
Test BY :Ashton

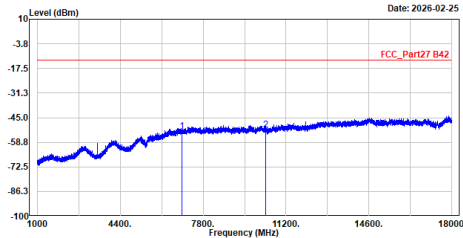


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	6915.000	-52.49	-13.00	-39.49	-56.41	3.92	Peak
2	10372.500	-51.71	-13.00	-38.71	-58.65	6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_1RB0_CH42165
Test BY :Ashton

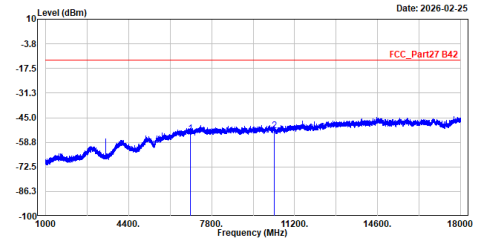


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	6915.000	-53.72	-13.00	-40.72	-57.64	3.92	Peak
2	10372.500	-52.28	-13.00	-39.28	-59.22	6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_1RB0_CH42590
Test BY :Ashton

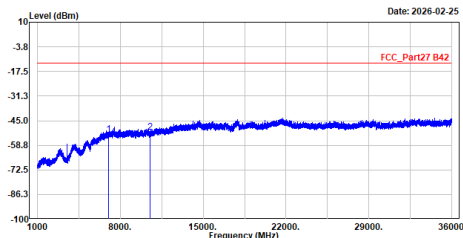


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	7000.000	-52.86	-13.00	-39.86	-56.92	4.06	Peak
2	10500.000	-51.57	-13.00	-38.57	-58.40	6.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_1RB0_CH42590
Test BY :Ashton

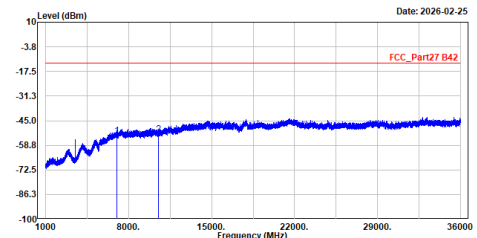


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	7000.000	-53.45	-13.00	-40.45	-57.51	4.06	Peak
2	10500.000	-52.56	-13.00	-39.56	-59.39	6.83	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_1RB0_CH43015
Test BY :Ashton

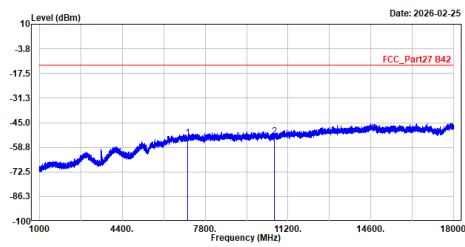

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	7085.000	-53.61	-13.00	-40.61	-57.94	4.33	Peak
2	10627.500	-52.87	-13.00	-39.87	-60.31	7.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_1RB0_CH43015
Test BY :Ashton

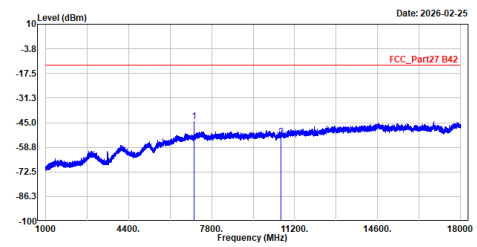

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	7085.000	-44.31	-13.00	-31.31	-48.64	4.33	Peak
2	10627.500	-53.16	-13.00	-40.16	-60.60	7.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.


Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B42_15M_QPSK_1RB0_CH42590
Test BY :Ashton

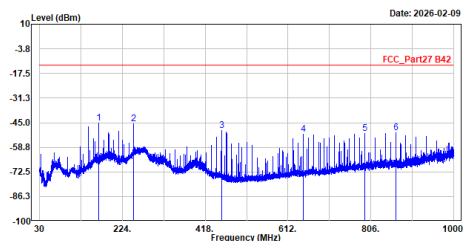

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.10	-13.00	-32.10	-32.63	-12.47	Peak
2	249.996	-45.43	-13.00	-32.43	-32.37	-13.06	Peak
3	456.121	-49.36	-13.00	-36.36	-42.25	-7.11	Peak
4	648.084	-51.33	-13.00	-38.33	-40.13	-3.20	Peak
5	792.129	-51.05	-13.00	-38.05	-50.23	-0.82	Peak
6	864.103	-50.53	-13.00	-37.53	-50.38	-0.15	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B42_15M_QPSK_1RB0_CH42590
Test BY :Ashton

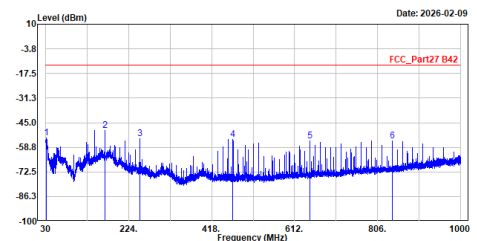


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.970	-53.68	-13.00	-40.68	-40.55	-13.13	Peak
2	168.031	-49.51	-13.00	-36.51	-37.04	-12.47	Peak
3	249.996	-53.82	-13.00	-40.82	-40.76	-13.06	Peak
4	468.052	-54.31	-13.00	-41.31	-47.44	-6.87	Peak
5	648.084	-55.23	-13.00	-42.23	-52.03	-3.20	Peak
6	840.144	-55.04	-13.00	-42.04	-54.60	-0.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 10: LTE Band 71

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B71_5M_QPSK_1RB24_CH133147
Test BY :Ashton

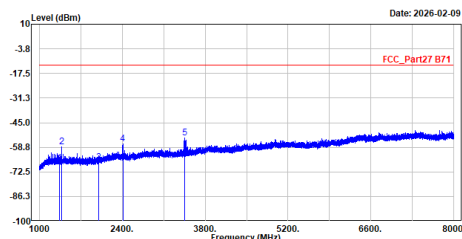


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1331.000	-67.57	-13.00	-54.57	-53.78	-13.79	Peak
2	1374.500	-58.39	-13.00	-45.39	-44.69	-13.70	Peak
3	1996.500	-67.23	-13.00	-54.23	-54.61	-12.62	Peak
4	2487.700	-56.64	-13.00	-43.64	-44.74	-11.90	Peak
5	3448.833	-53.72	-13.00	-40.72	-44.01	-9.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B71_5M_QPSK_1RB24_CH133147
Test BY :Ashton

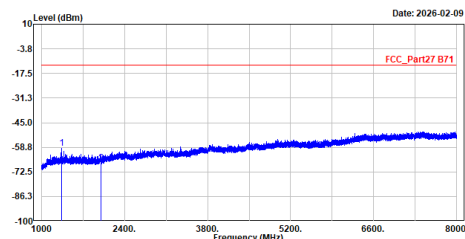


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1331.000	-59.36	-13.00	-46.36	-45.57	-13.79	Peak
2	1996.500	-67.61	-13.00	-54.61	-54.99	-12.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B71_5M_QPSK_1RB24_CH133297
Test BY :Ashton

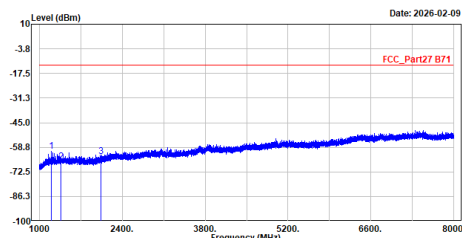


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1199.967	-60.92	-13.00	-47.92	-46.97	-13.95	Peak
2	1361.000	-66.96	-13.00	-53.96	-53.26	-13.70	Peak
3	2041.500	-64.00	-13.00	-51.00	-51.55	-12.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B71_5M_QPSK_1RB24_CH133297
Test BY :Ashton

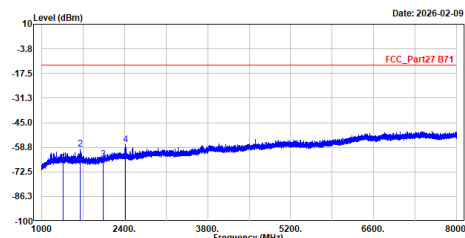


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	1361.000	-67.28	-13.00	-54.28	-53.58	-13.70	Peak
2	1654.967	-59.57	-13.00	-46.57	-45.80	-13.77	Peak
3	2041.500	-65.47	-13.00	-52.47	-53.02	-12.45	Peak
4	2413.067	-57.22	-13.00	-44.22	-45.33	-11.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVn) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B71_5M_QPSK_1RB24_CH133447
Test BY :Ashton

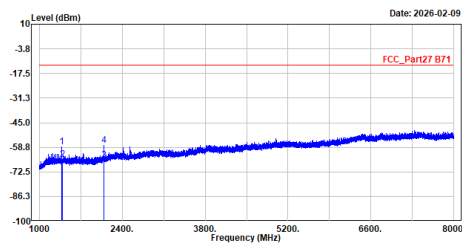


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1374.733	-58.53	-13.00	-45.53	-44.83	-13.70	Peak
2	1391.000	-65.44	-13.00	-52.44	-51.84	-13.60	Peak
3	2086.500	-65.89	-13.00	-52.89	-53.52	-12.37	Peak
4	2092.933	-57.66	-13.00	-44.66	-45.28	-12.38	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B71_5M_QPSK_1RB24_CH133447
Test BY :Ashton

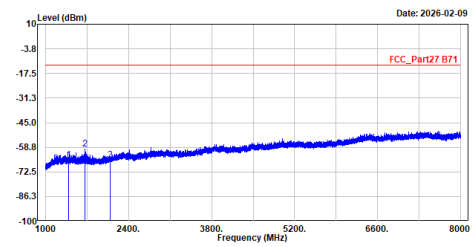


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	1391.000	-65.88	-13.00	-52.88	-52.28	-13.60	Peak
2	1665.233	-59.61	-13.00	-46.61	-45.89	-13.72	Peak
3	2086.500	-66.14	-13.00	-53.14	-53.77	-12.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B71_5M_QPSK_1RB24_CH133447
Test BY :Ashton

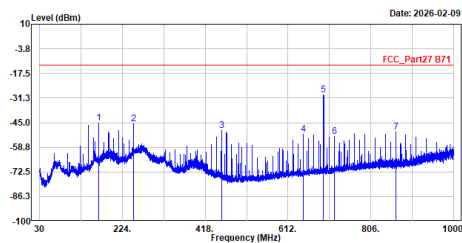


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-45.09	-13.00	-32.09	-32.62	-12.47	Peak
2	249.996	-45.50	-13.00	-32.50	-32.44	-13.06	Peak
3	456.121	-49.19	-13.00	-36.19	-42.08	-7.11	Peak
4	648.084	-51.32	-13.00	-38.32	-40.12	-3.20	Peak
5	695.420	-29.62	-13.00	-16.62	-27.20	-2.42	Peak
6	720.155	-52.59	-13.00	-39.59	-50.67	-1.92	Peak
7	864.103	-50.34	-13.00	-37.34	-50.19	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B71_5M_QPSK_1RB24_CH133447
Test BY :Ashton

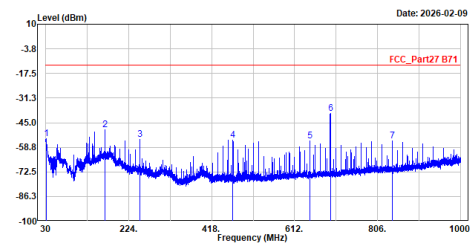


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	30.679	-53.93	-13.00	-40.93	-40.82	-13.11	Peak
2	168.031	-48.94	-13.00	-35.94	-36.47	-12.47	Peak
3	249.996	-54.29	-13.00	-41.29	-41.23	-13.06	Peak
4	468.052	-54.72	-13.00	-41.72	-47.85	-6.87	Peak
5	648.084	-55.23	-13.00	-42.23	-52.03	-3.20	Peak
6	695.711	-39.98	-13.00	-26.98	-37.56	-2.42	Peak
7	840.144	-55.03	-13.00	-42.03	-54.59	-0.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Mode 11: LTE Band 7C

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7C_QPSK_15M_1R874_CH20825+10M_1R80_CH20945
Test BY :Ashton

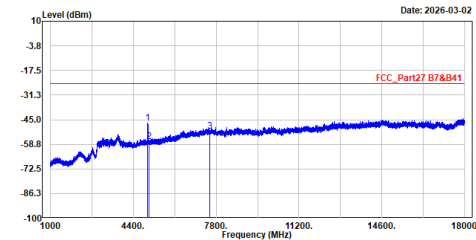


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4988.200	-46.84	-25.00	-21.84	-44.54	-2.30	Peak
2	5830.000	-57.43	-25.00	-32.43	-55.24	-2.19	Peak
3	7545.000	-51.32	-25.00	-26.32	-55.78	4.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7C_QPSK_15M_1R874_CH20825+10M_1R80_CH20945
Test BY :Ashton

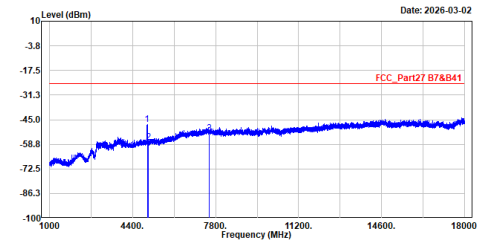


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4996.700	-47.85	-25.00	-22.85	-45.56	-2.29	Peak
2	5830.000	-57.56	-25.00	-32.56	-55.37	-2.19	Peak
3	7545.000	-52.61	-25.00	-27.61	-57.07	4.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7C_QPSK_15M_1R874_CH21051+10M_1R80_CH21171
Test BY :Ashton

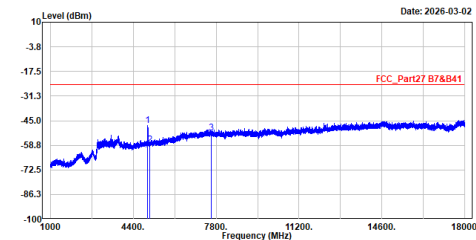


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4980.550	-47.57	-25.00	-22.57	-45.25	-2.32	Peak
2	5874.000	-58.55	-25.00	-33.55	-56.43	-2.12	Peak
3	7611.000	-51.69	-25.00	-26.69	-56.21	4.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7C_QPSK_15M_1R874_CH21051+10M_1R80_CH21171
Test BY :Ashton

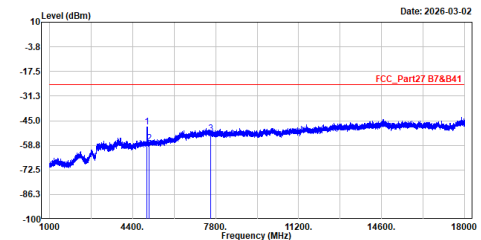


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	Line	Limit	Level	dB	
1	4989.050	-48.37	-25.00	-23.37	-46.07	-2.30	Peak
2	5874.000	-57.79	-25.00	-32.79	-55.67	-2.12	Peak
3	7611.000	-52.11	-25.00	-27.11	-56.63	4.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7C_QPSK_15M_1R874_CH21277+10M_1R80_CH21397
Test BY :Ashton

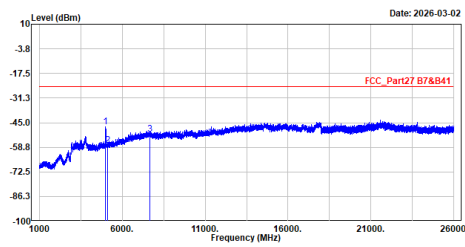


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4982.250	-47.18	-25.00	-22.18	-44.87	-2.31	Peak
2	5120.000	-57.74	-25.00	-32.74	-55.57	-2.17	Peak
3	7680.000	-51.41	-25.00	-26.41	-55.62	4.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7C_QPSK_15M_1R874_CH21277+10M_1R80_CH21397
Test BY :Ashton

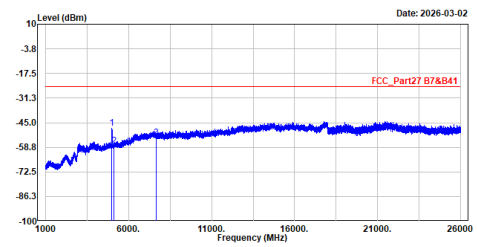


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	4994.150	-48.27	-25.00	-23.27	-45.98	-2.29	Peak
2	5120.000	-57.93	-25.00	-32.93	-55.76	-2.17	Peak
3	7680.000	-53.37	-25.00	-28.37	-57.58	4.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Horizontal
Mode :LTE_B7C_QPSK_15M_1R874_CH21277+10M_1R80_CH21397
Test BY :Ashton

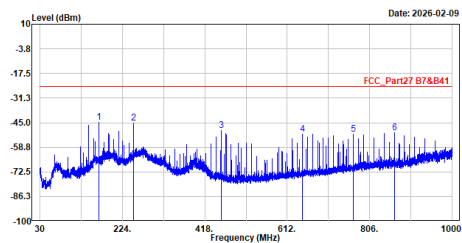


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-44.97	-25.00	-19.97	-32.50	-12.47	Peak
2	249.996	-45.09	-25.00	-20.09	-32.03	-13.06	Peak
3	456.121	-49.26	-25.00	-24.26	-42.15	-7.11	Peak
4	640.004	-51.31	-25.00	-26.31	-40.11	-3.20	Peak
5	768.170	-51.58	-25.00	-26.58	-50.49	-1.09	Peak
6	864.103	-50.56	-25.00	-25.56	-50.41	-0.15	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :LTE_B7C_QPSK_15M_1R874_CH21277+10M_1R80_CH21397
Test BY :Ashton

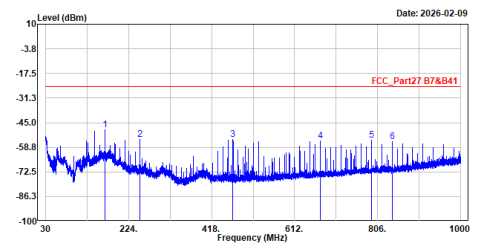



No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	Limit	Level	dB	
1	168.031	-48.74	-25.00	-23.74	-36.27	-12.47	Peak
2	249.996	-54.41	-25.00	-29.41	-41.35	-13.06	Peak
3	456.052	-54.54	-25.00	-29.54	-47.67	-6.87	Peak
4	672.140	-55.34	-25.00	-30.34	-52.42	-2.92	Peak
5	792.129	-54.79	-25.00	-29.79	-53.57	-0.82	Peak
6	840.144	-55.48	-25.00	-30.48	-55.04	-0.44	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuV) to EIRP (dBm)
= 107 + 20log(3) = 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.

Appendix E. Test Result of Conducted Band Edge


Mode 1: LTE Band 25(2)

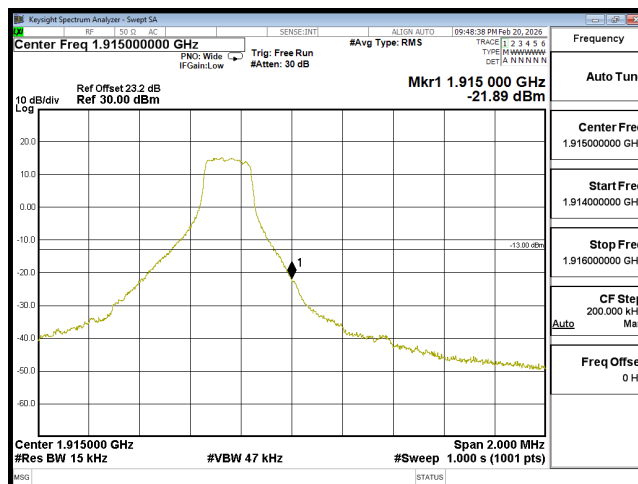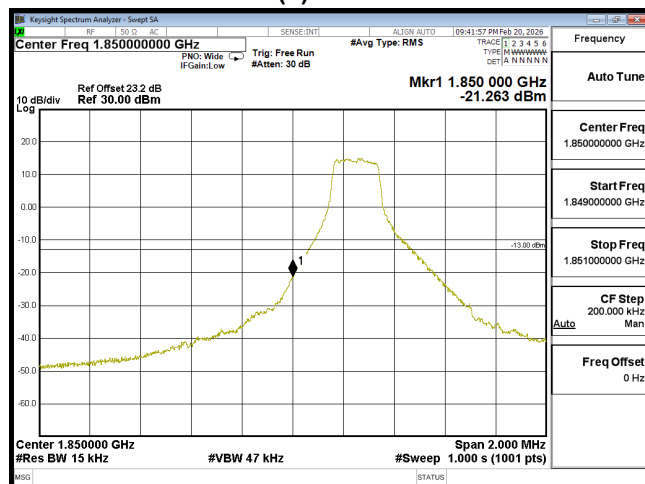


EDGE B25 1.4M CH26047 QPSK(1,0)

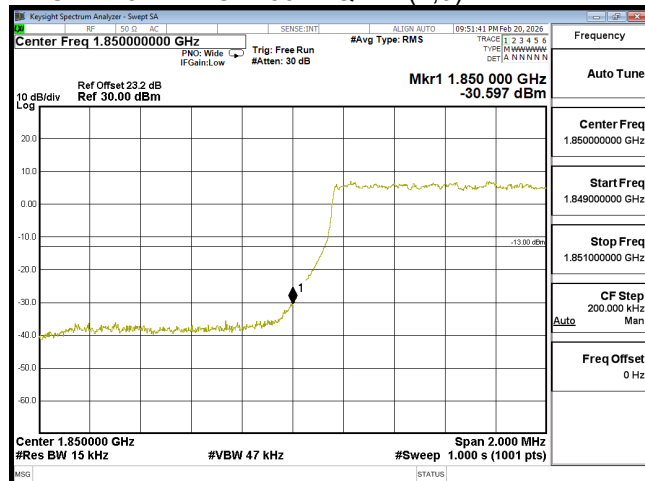


EDGE B25 1.4M CH26683 QPSK(1,5)

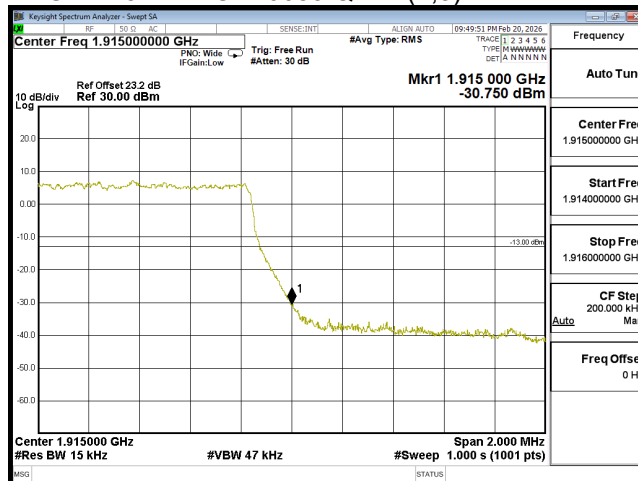

EDGE B25 1.4M CH26047 QPSK(6,0)

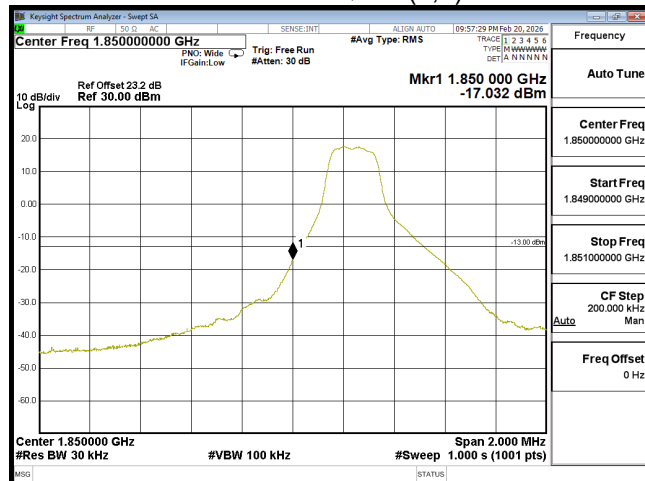


EDGE B25 1.4M CH26683 QPSK(6,0)

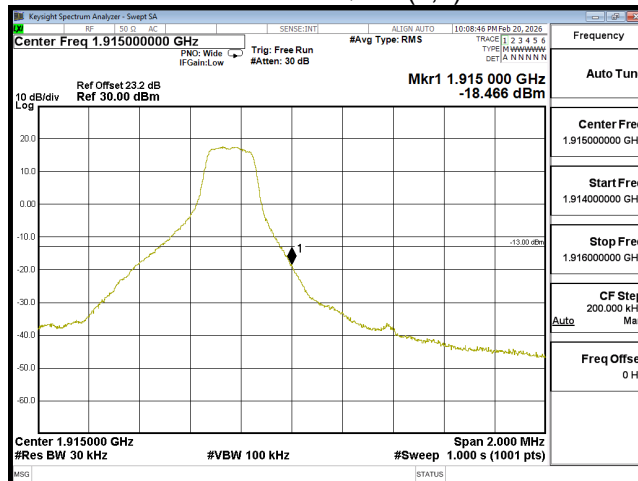


EDGE B25 3M CH26055 QPSK(1,0)


EDGE B25 3M CH26675 QPSK(1,14)

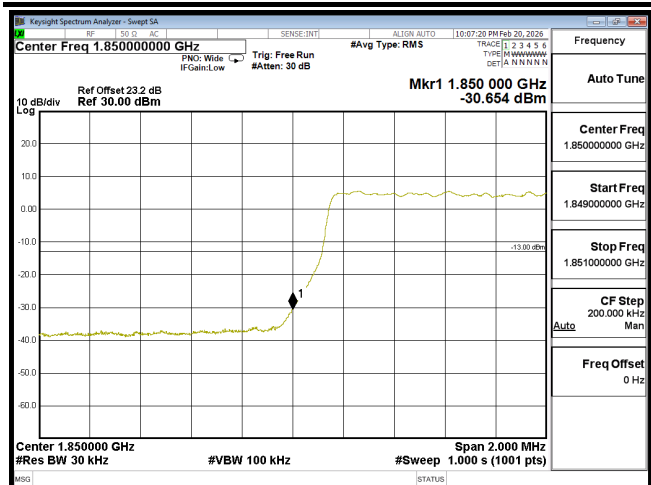


EDGE B25 3M CH26055 QPSK(15,0)

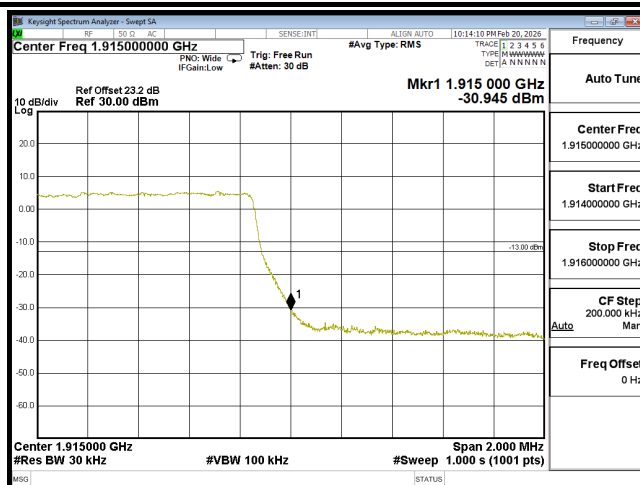


EDGE B25 3M CH26675 QPSK(15,0)

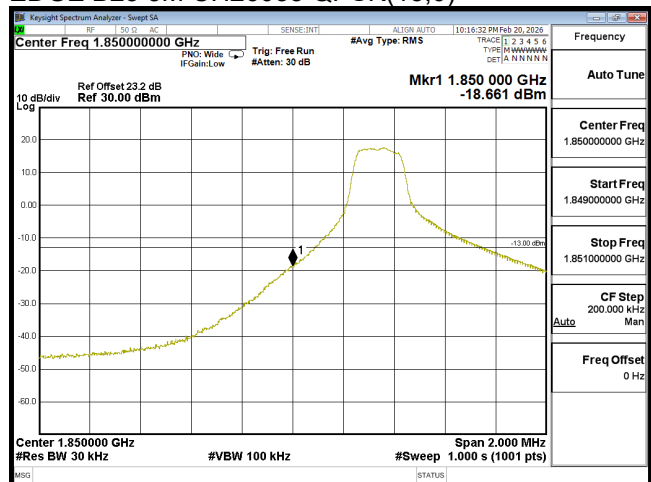


EDGE B25 5M CH26065 QPSK(1,0)

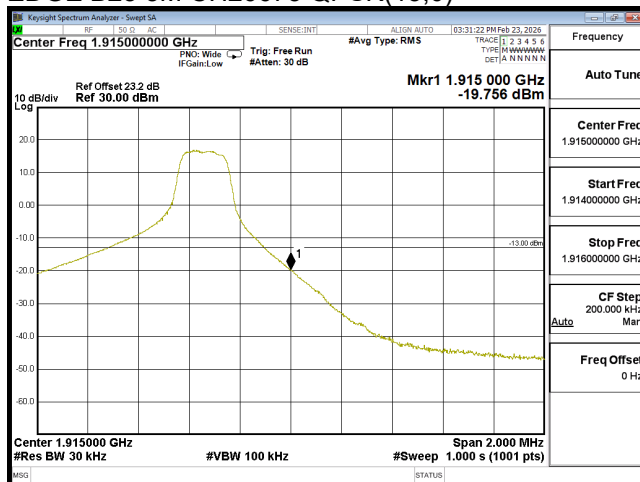

EDGE B25 5M CH26665 QPSK(1,24)

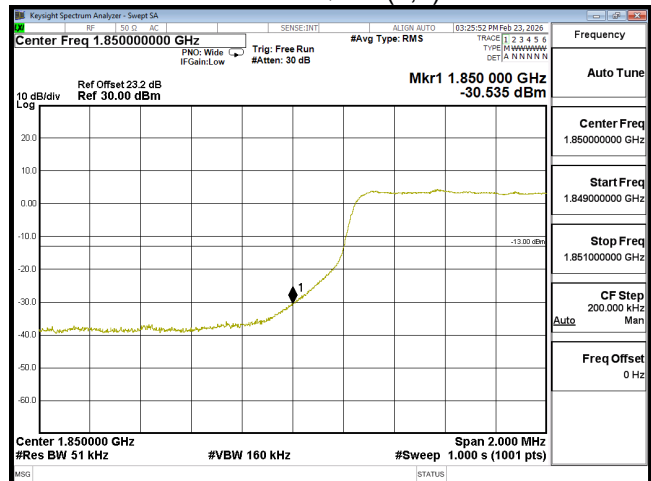

EDGE B25 5M CH26065 QPSK(25,0)

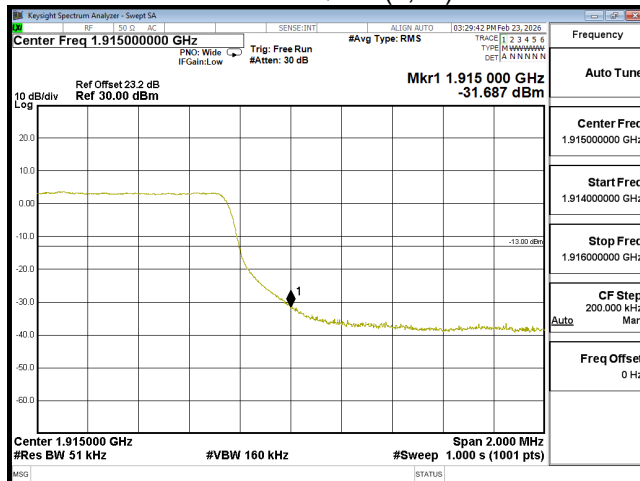

EDGE B25 5M CH26665 QPSK(25,0)