

802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)




Channel 58 (5290MHz)




Channel 106 (5530MHz)

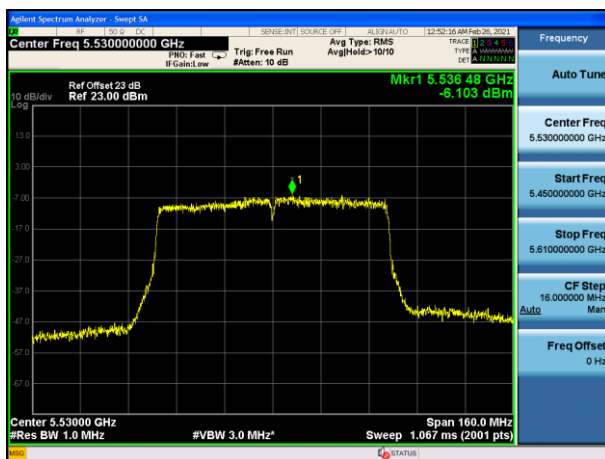


Channel 122 (5610MHz)

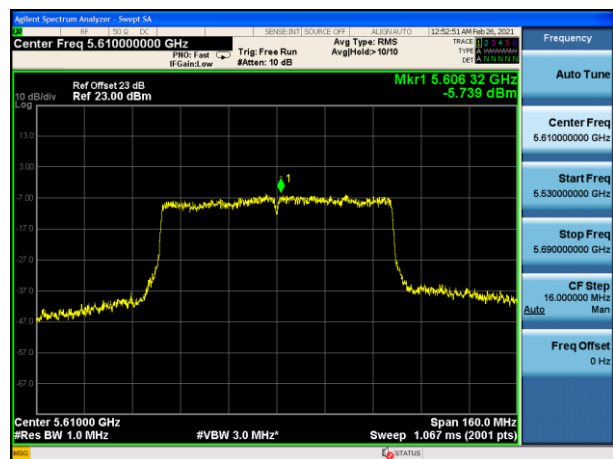

Channel 138 (5690MHz)

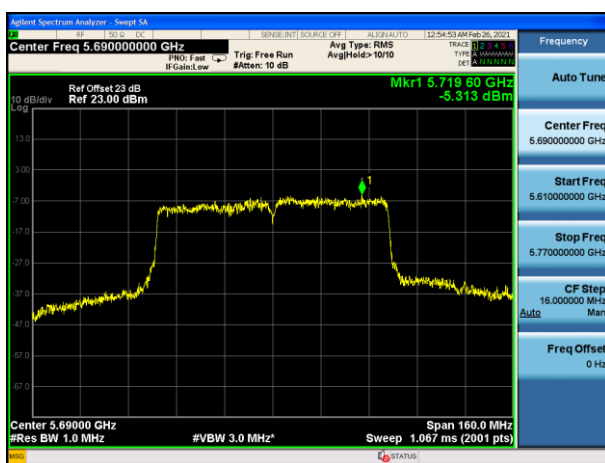


Channel 155 (5775MHz)

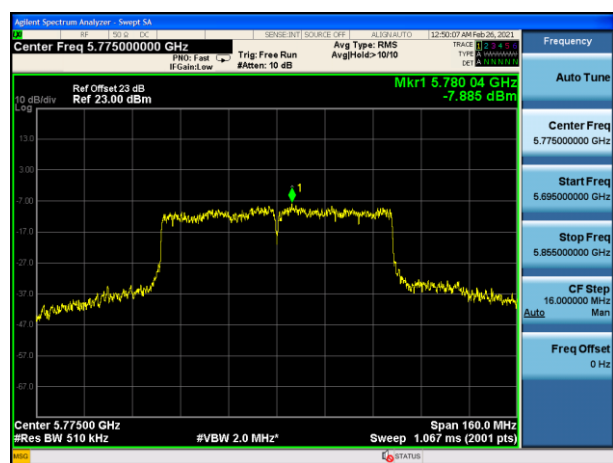


802.11a Power Spectral Density - Ant 1


Channel 36 (5180MHz)

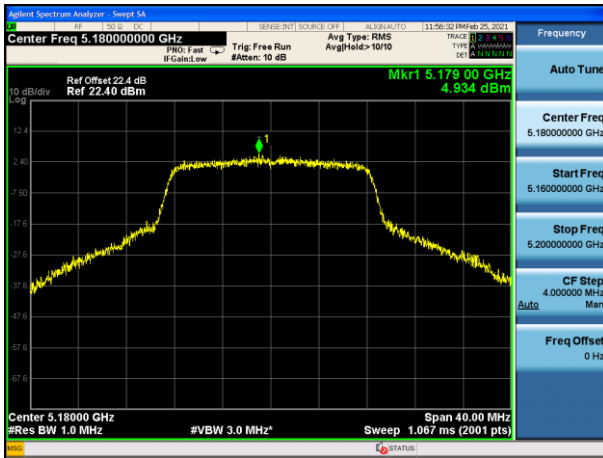


Channel 44 (5220MHz)

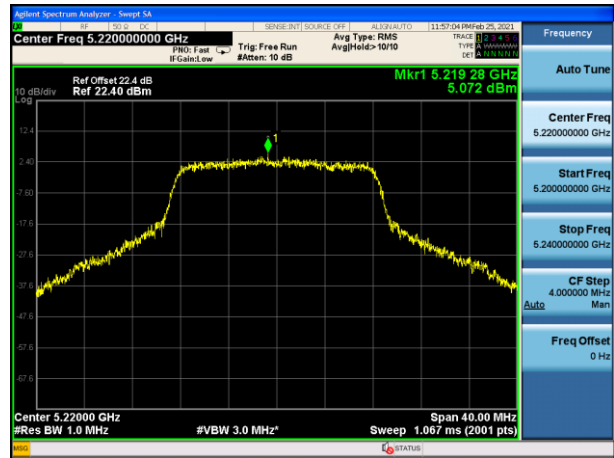


Channel 48 (5240MHz)

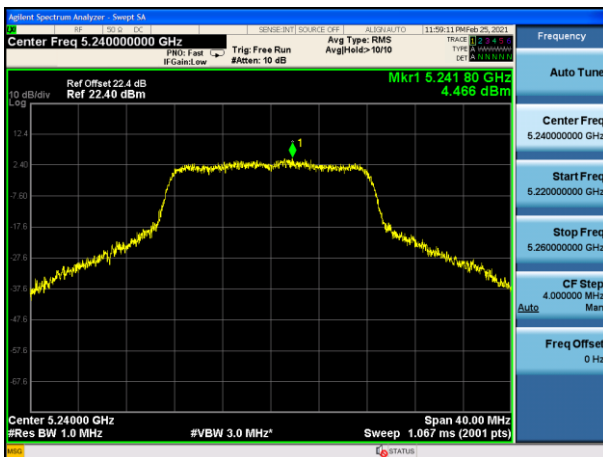


Channel 52 (5260MHz)

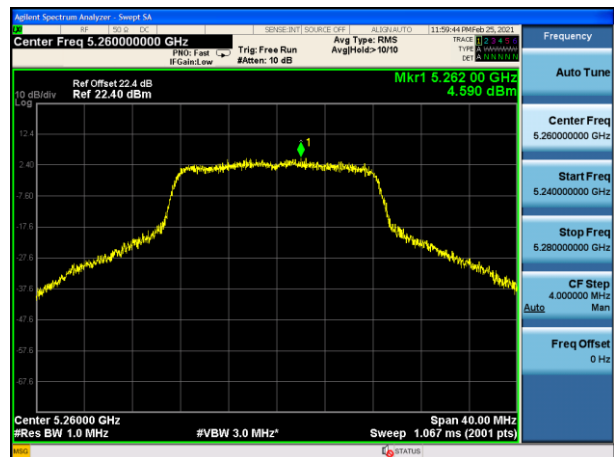


Channel 60 (5300MHz)

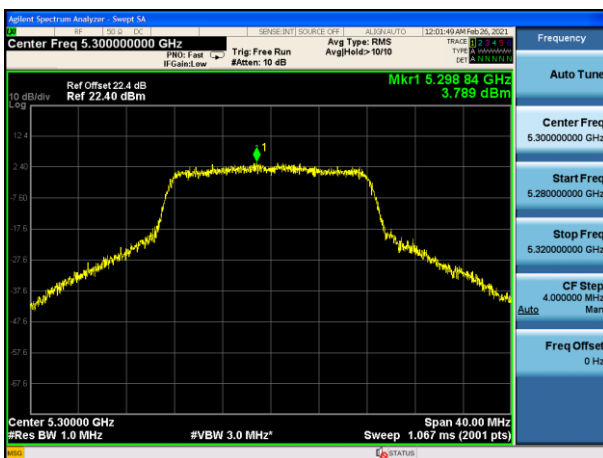


Channel 64 (5320MHz)

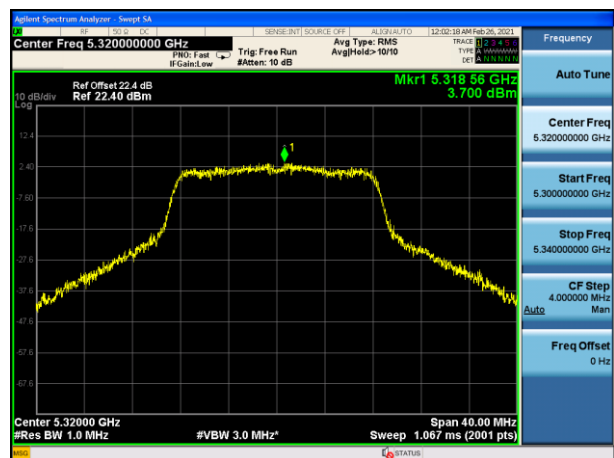


Channel 100 (5500MHz)

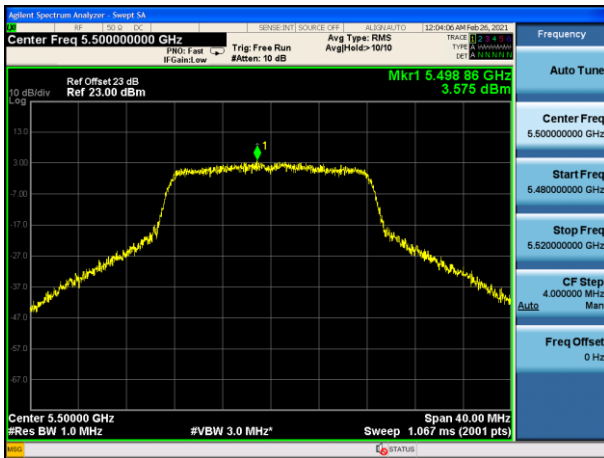


Channel 120 (5600MHz)

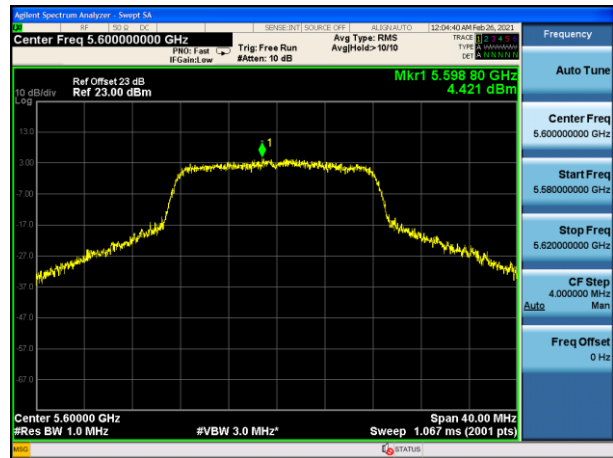


Channel 140 (5700MHz)

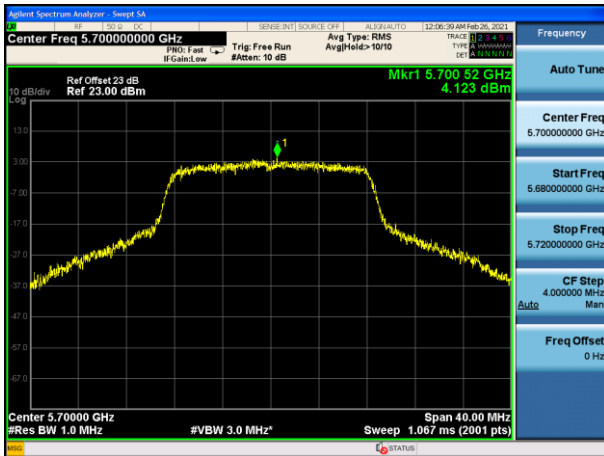


Channel 144 (5720MHz)

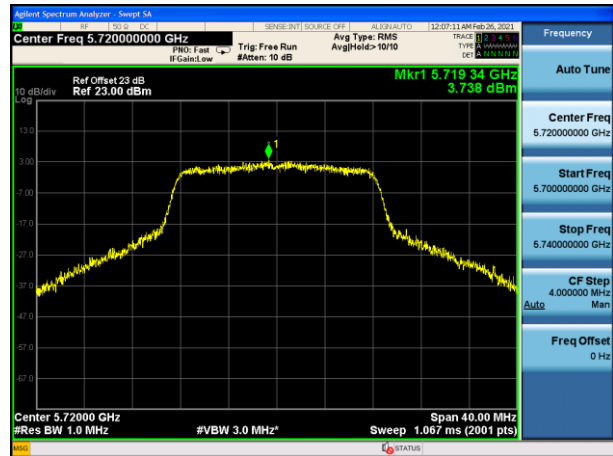


Channel 149 (5745MHz)

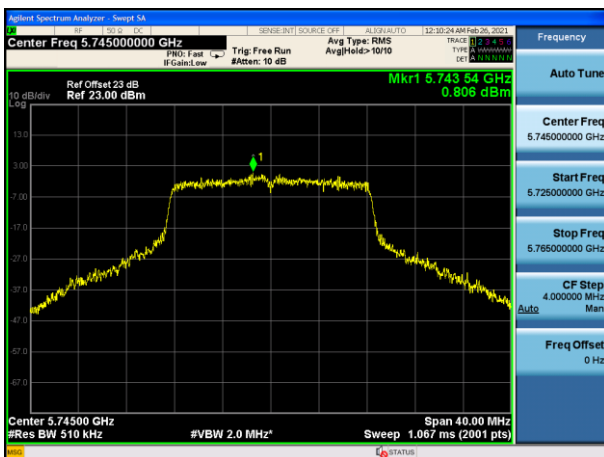

Channel 157 (5785MHz)

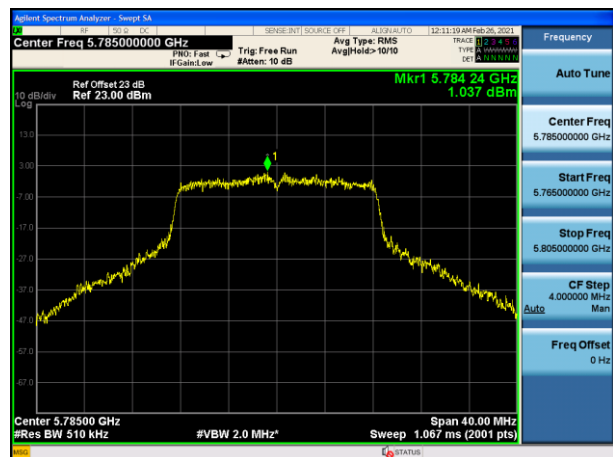


Channel 165 (5825MHz)

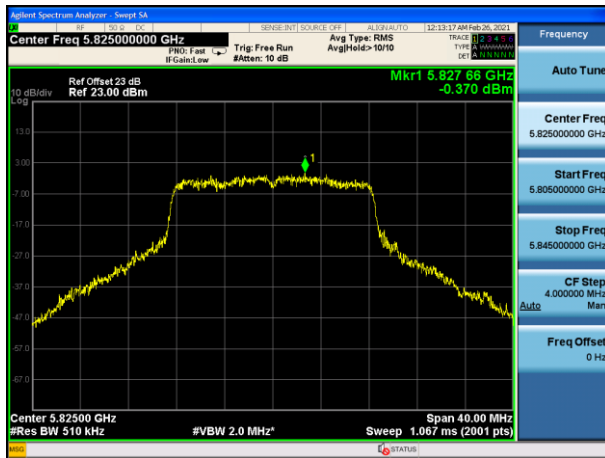


802.11n-HT20 Power Spectral Density - Ant 1


Channel 36 (5180MHz)

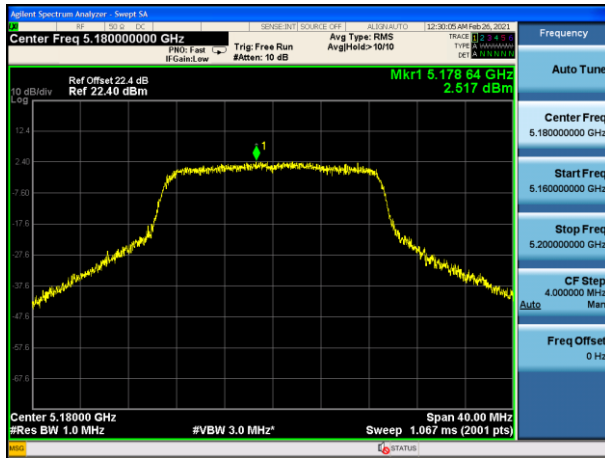


Channel 44 (5220MHz)

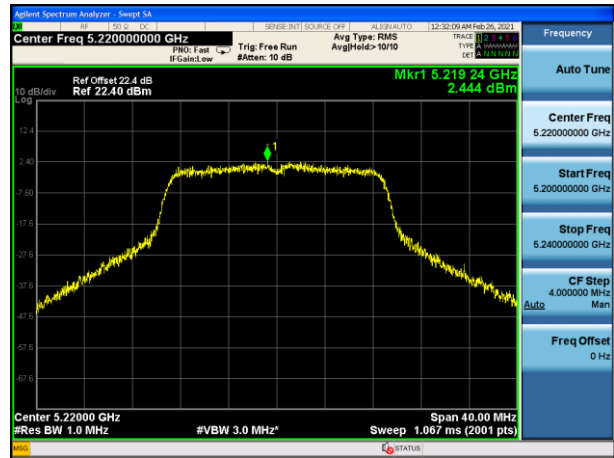


Channel 48 (5240MHz)

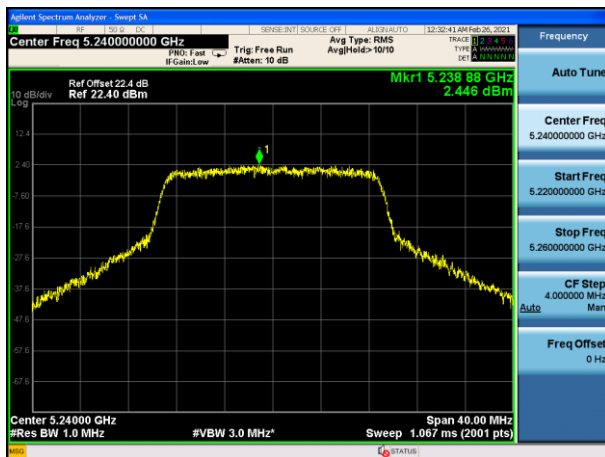


Channel 52 (5260MHz)

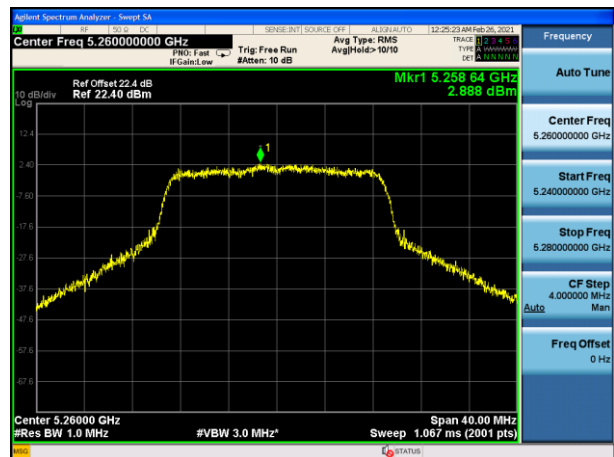


Channel 60 (5300MHz)

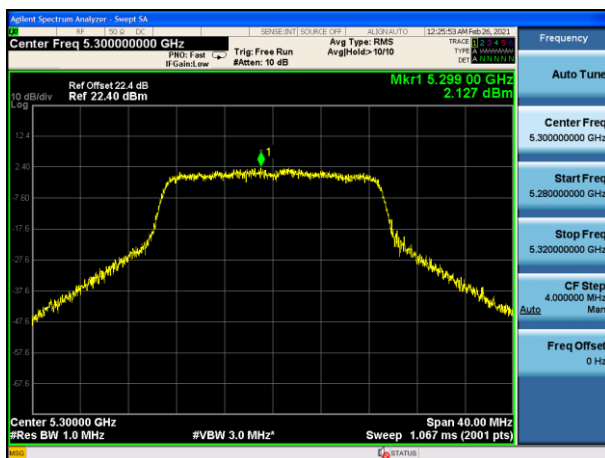


Channel 64 (5320MHz)

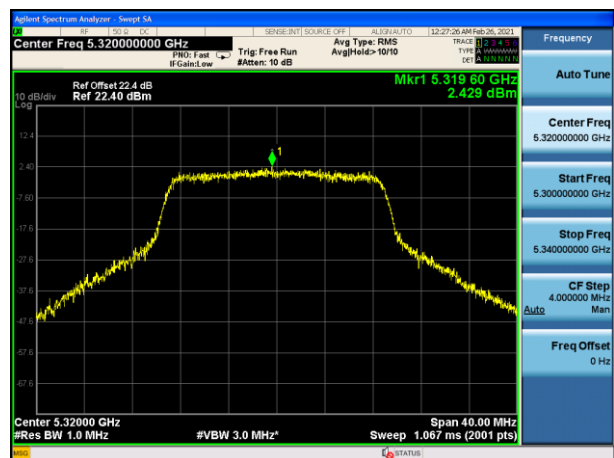


Channel 100 (5500MHz)

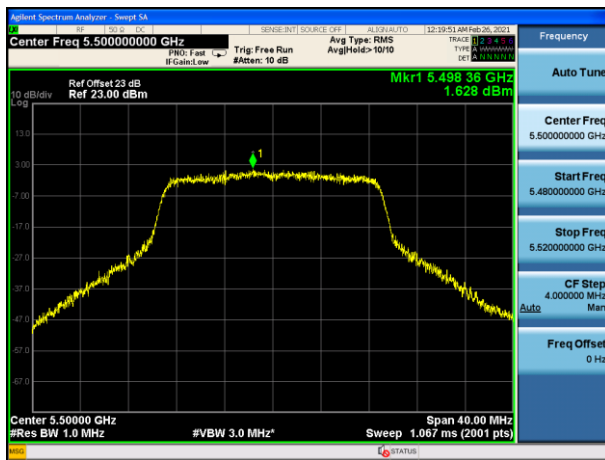


Channel 120 (5600MHz)

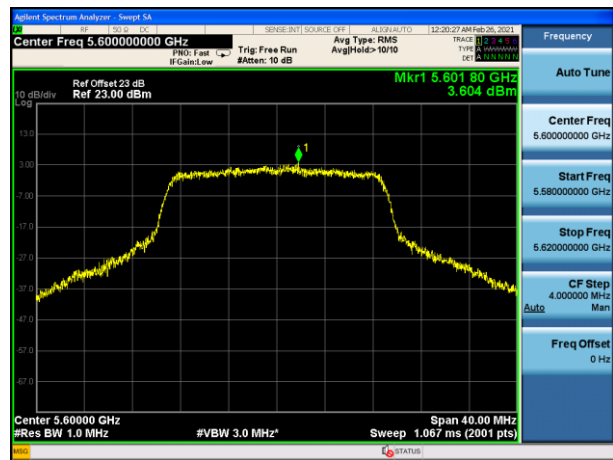


Channel 140 (5700MHz)

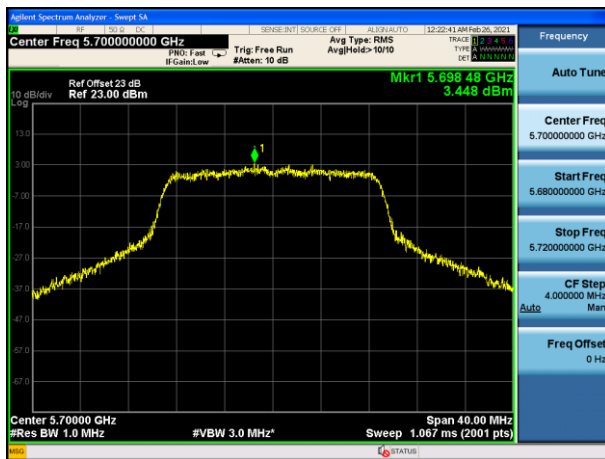


Channel 144 (5720MHz)

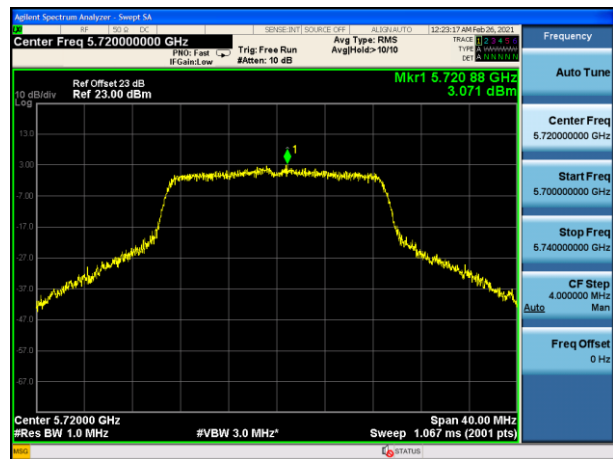


Channel 149 (5745MHz)

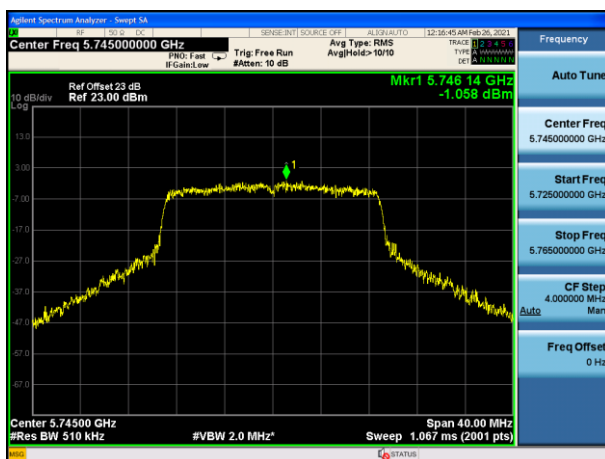

Channel 157 (5785MHz)

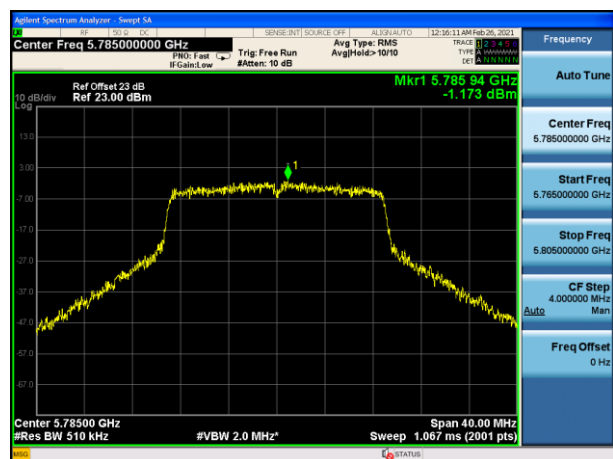


Channel 165 (5825MHz)

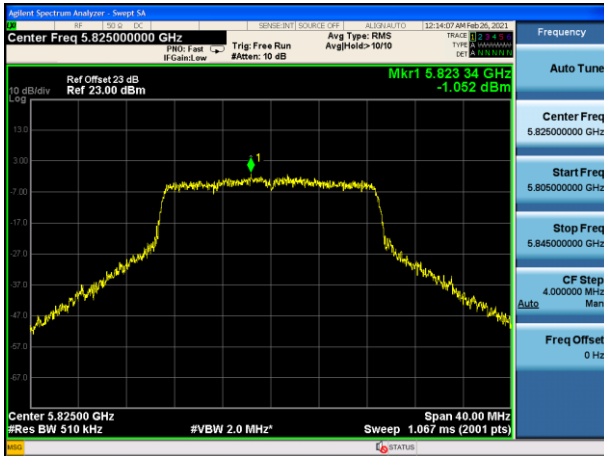


802.11n-HT40 Power Spectral Density - Ant 1


Channel 38 (5190MHz)

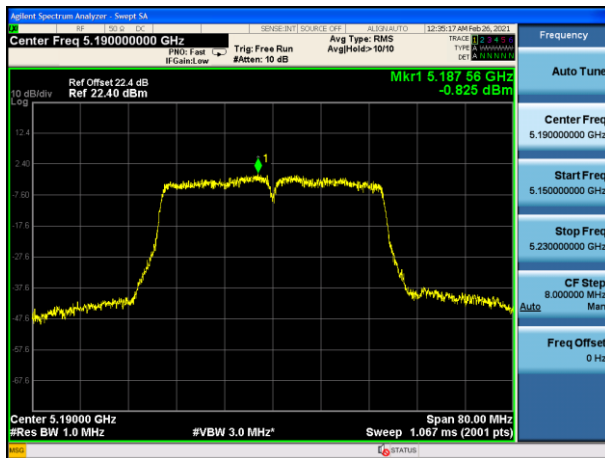

Channel 46 (5230MHz)

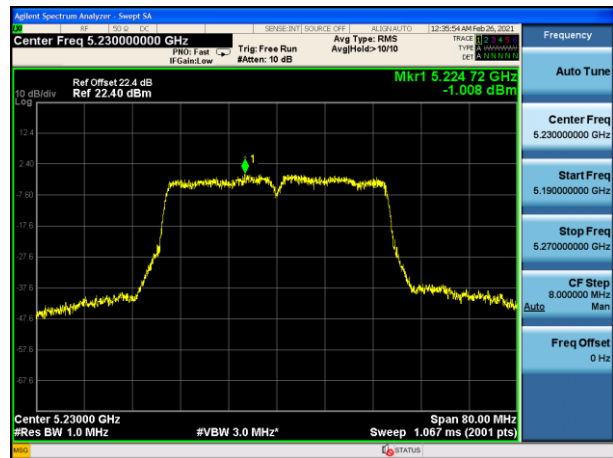


Channel 54 (5270MHz)

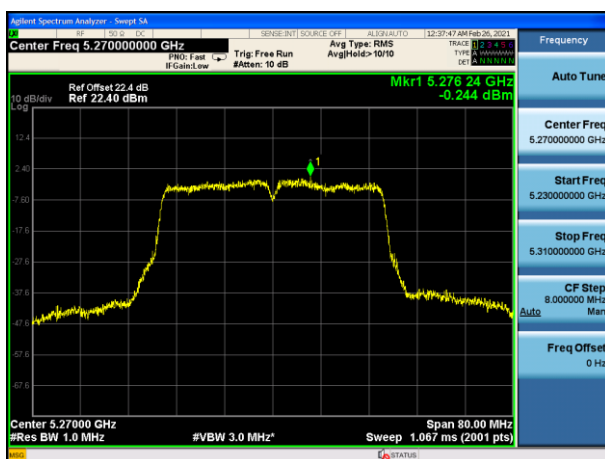


Channel 62 (5310MHz)




Channel 102 (5510MHz)

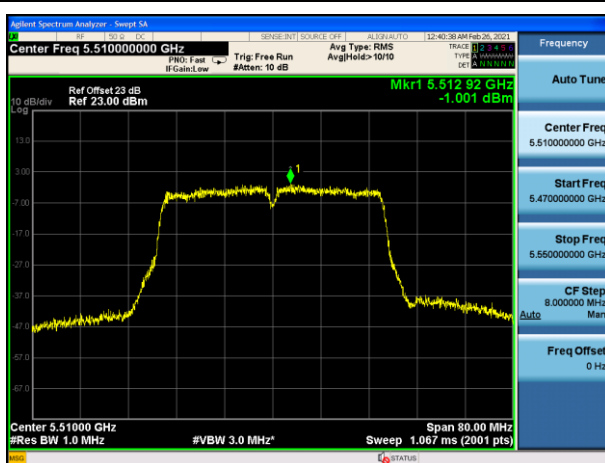


Channel 110 (5550MHz)

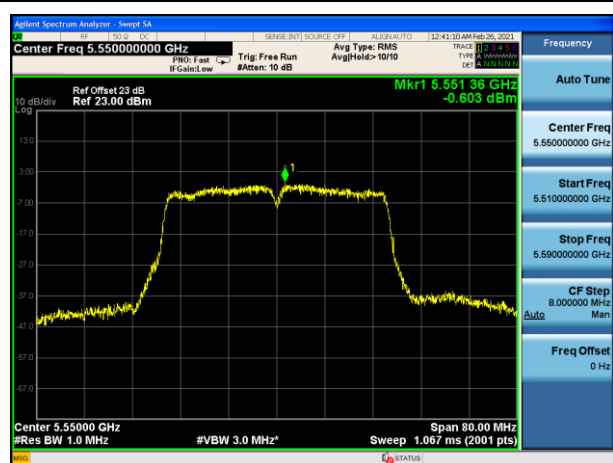


Channel 134 (5670MHz)

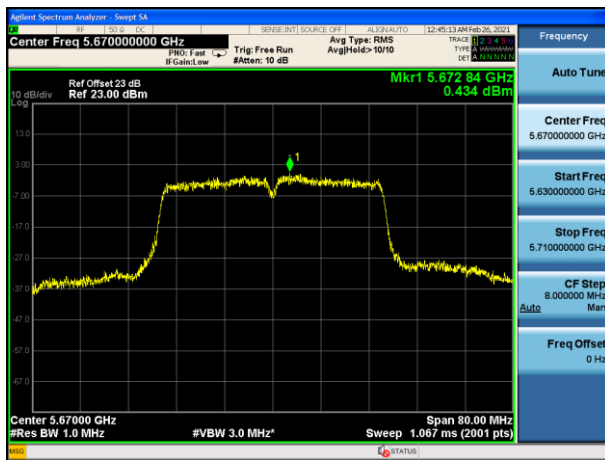

Channel 142 (5710MHz)

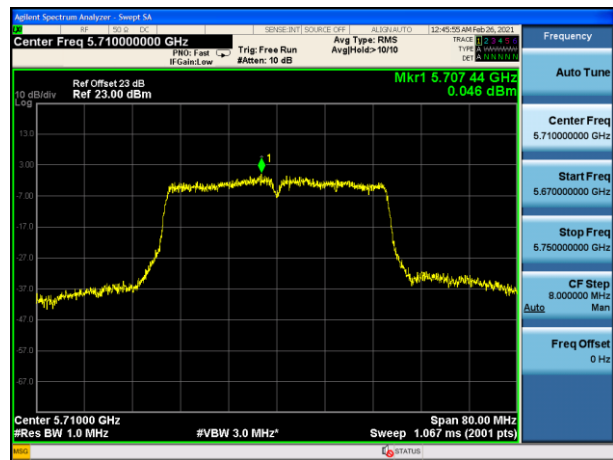

Channel 151 (5755MHz)

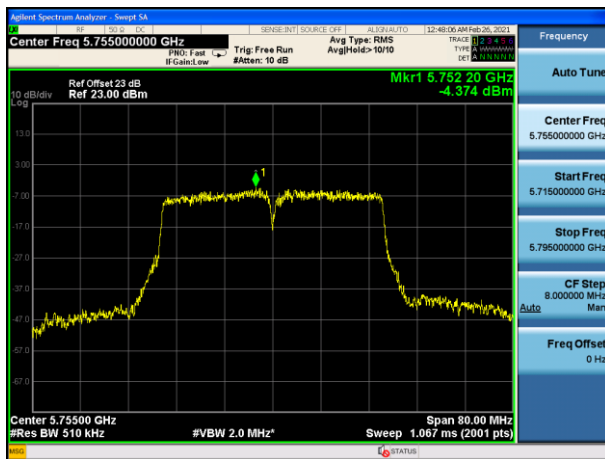


Channel 159 (5795MHz)



802.11ac-VHT80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

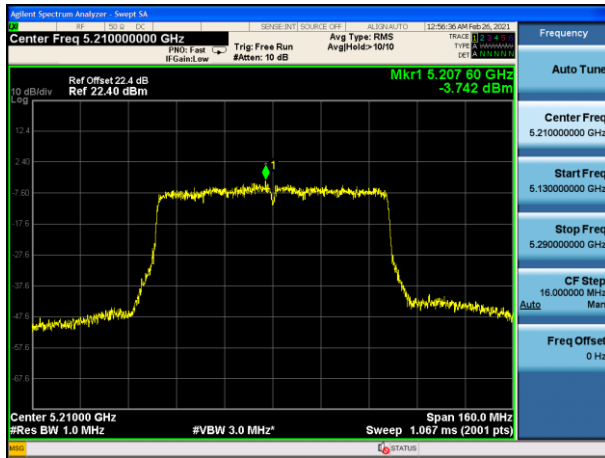


Channel 58 (5290MHz)




Channel 106 (5530MHz)

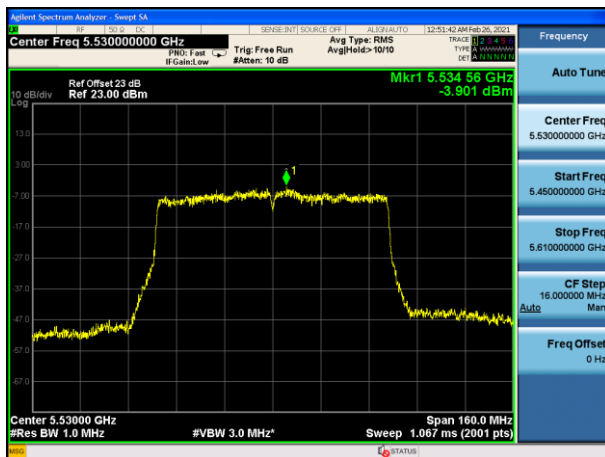


Channel 122 (5610MHz)

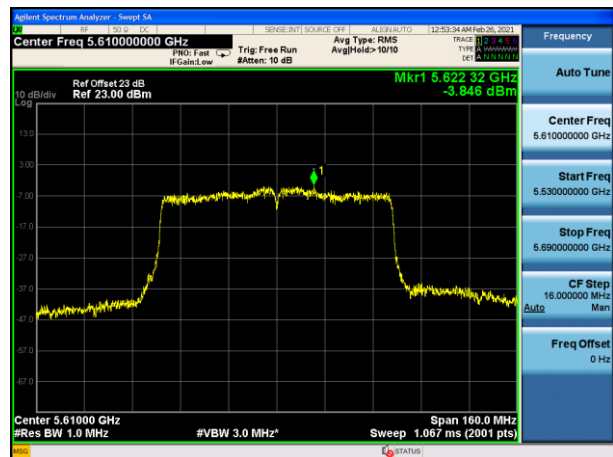

Channel 138 (5690MHz)

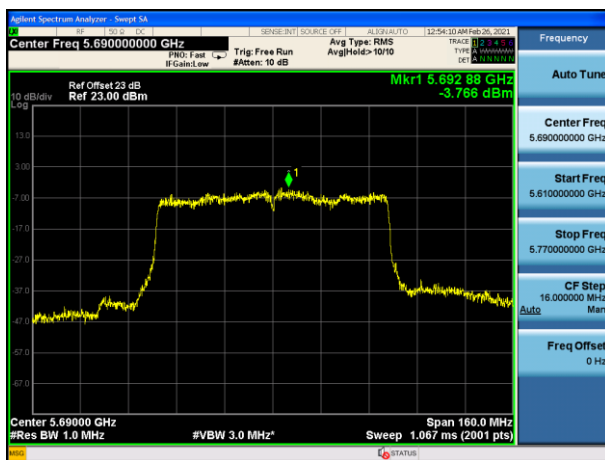

Channel 155 (5775MHz)

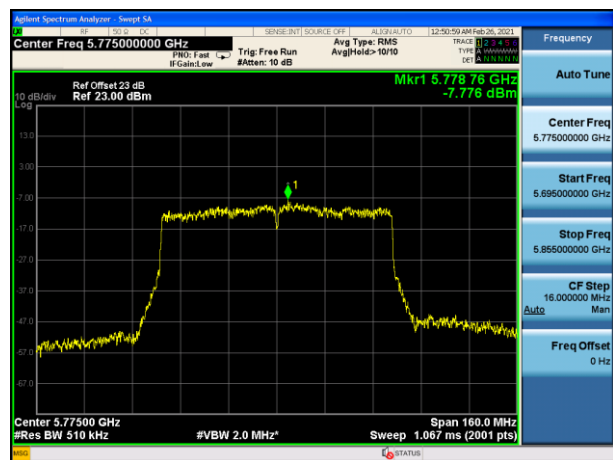

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.7.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

Quasi-Peak & Average Measurements below 30MHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 200Hz for 9kHz to 150kHz frequency; RBW = 9kHz for 0.15MHz to 30MHz frequency
4. Detector = CISPR quasi-peak or power average (Average)
5. Sweep time = auto couple
6. Trace was allowed to stabilize

7.7.4. Test Setup


9kHz ~ 30MHz Test Setup:

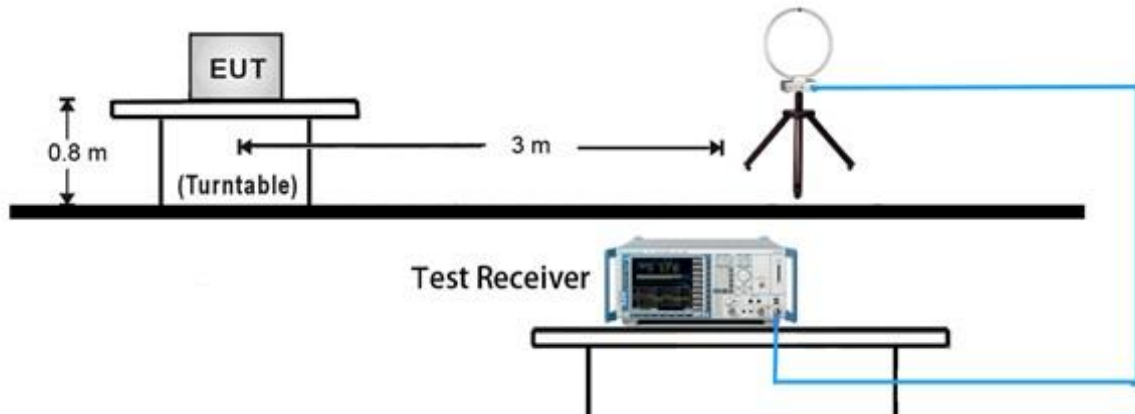


30MHz ~ 1GHz Test Setup:

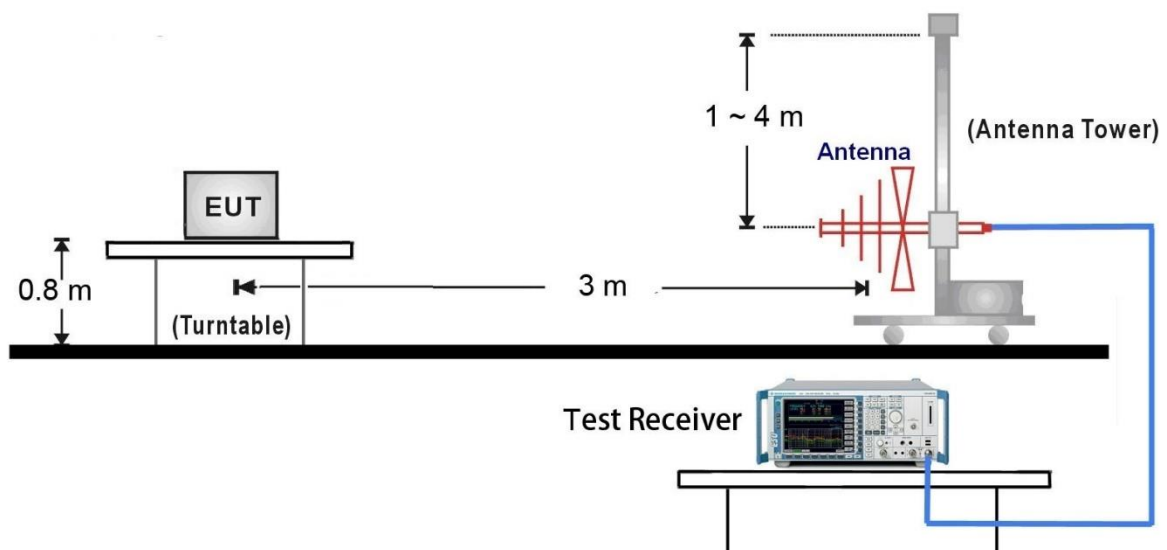

1GHz ~18GHz Test Setup:

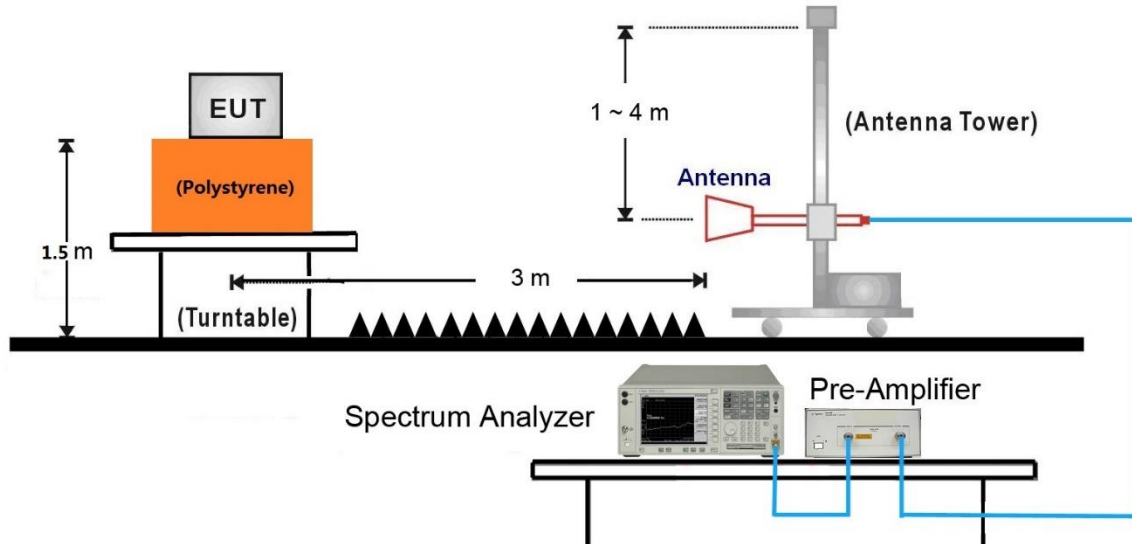


18GHz ~40GHz Test Setup:

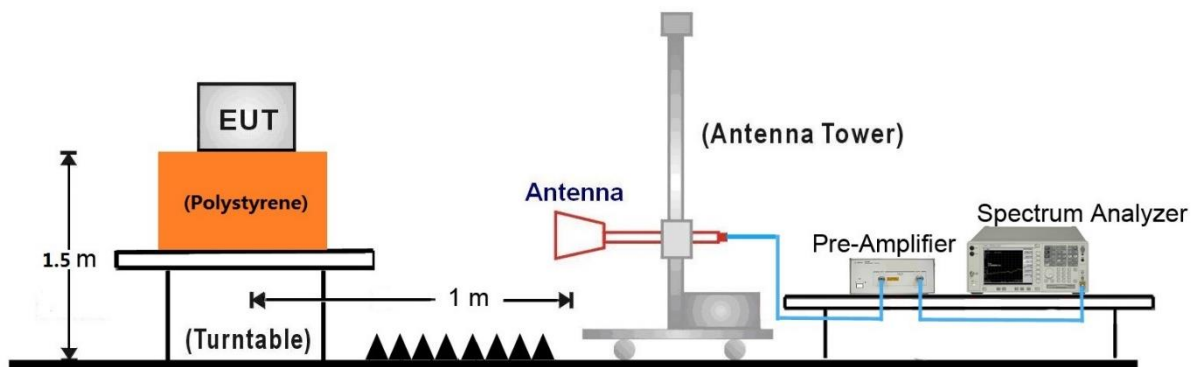

7.7.5. Test Result

EUT	Handheld Data Terminal	Date of Test	2021-01-21
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

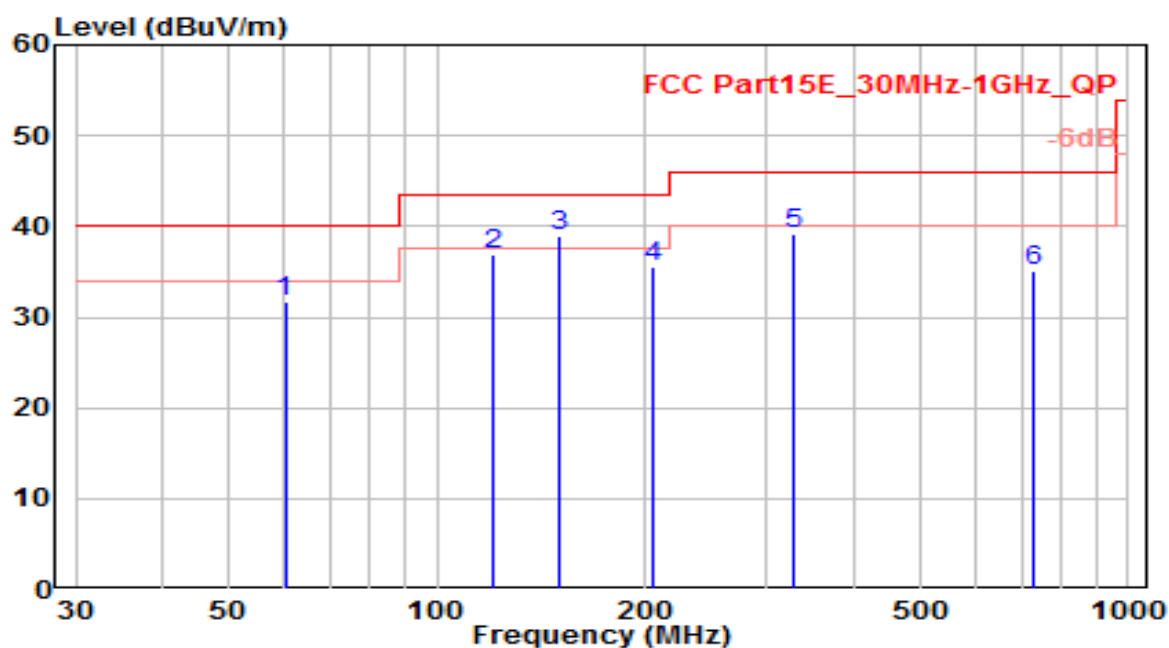


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	60.240	11.61	20.13	31.74	-8.26	40.00	100	250	QP
2	120.480	19.68	17.19	36.87	-6.63	43.50	100	240	QP
3	* 150.640	22.94	16.00	38.94	-4.56	43.50	100	210	QP
4	206.150	16.68	18.97	35.65	-7.85	43.50	100	110	QP
5	328.190	16.67	22.48	39.15	-6.85	46.00	100	220	QP
6	729.510	5.27	29.79	35.06	-10.94	46.00	100	150	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-01-21
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

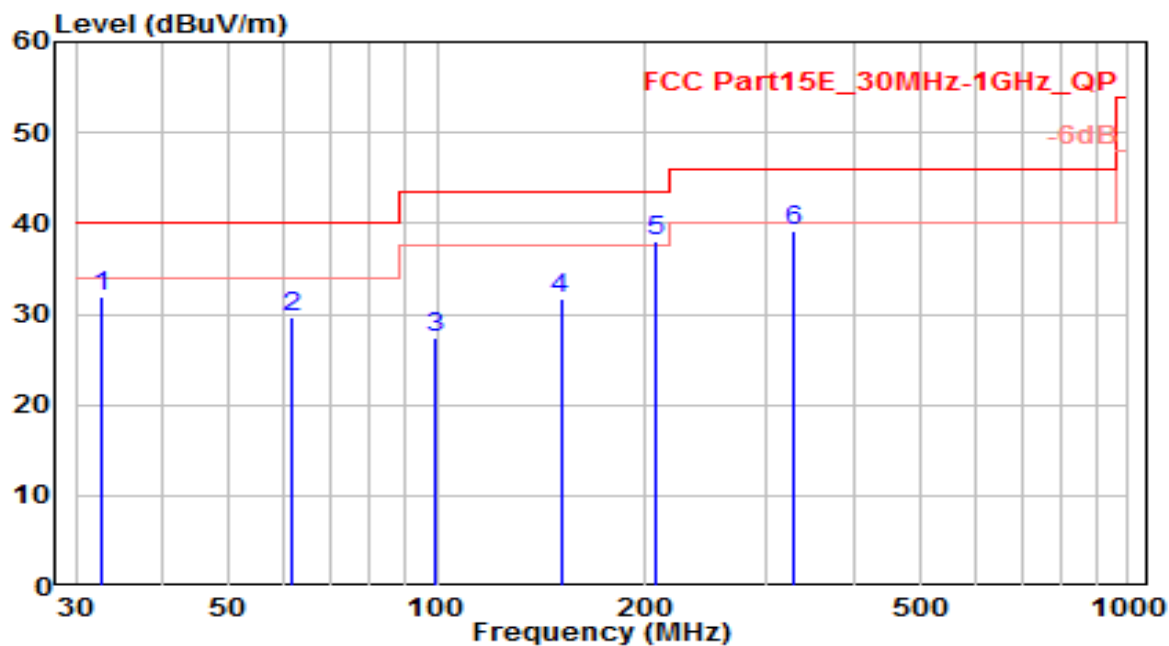


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	32.650	13.15	18.89	32.04	-7.96	40.00	100	260	QP
2	61.420	9.95	19.75	29.70	-10.30	40.00	100	150	QP
3	99.240	8.45	19.01	27.46	-16.04	43.50	100	160	QP
4	150.940	15.65	16.01	31.66	-11.84	43.50	100	210	QP
5	* 207.610	19.15	18.90	38.05	-5.45	43.50	100	310	QP
6	327.540	16.61	22.45	39.06	-6.94	46.00	100	250	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

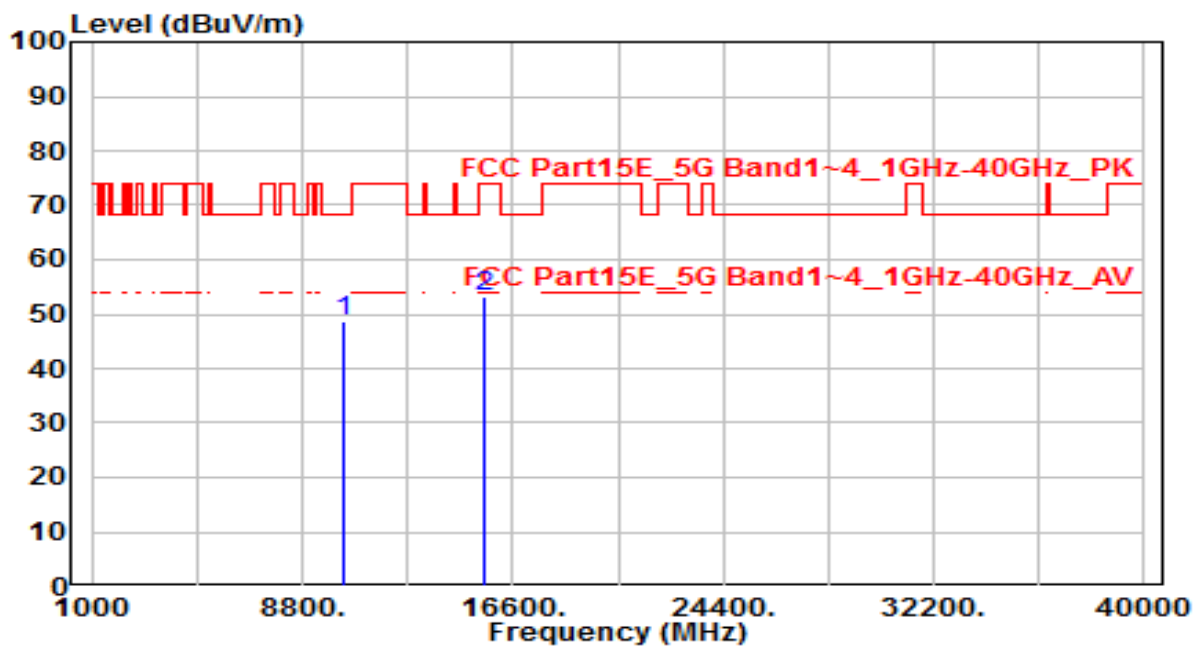


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	32.27	16.59	48.87	-19.33	68.20	150	0	Peak
2	15540.000	31.76	21.38	53.14	-20.86	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

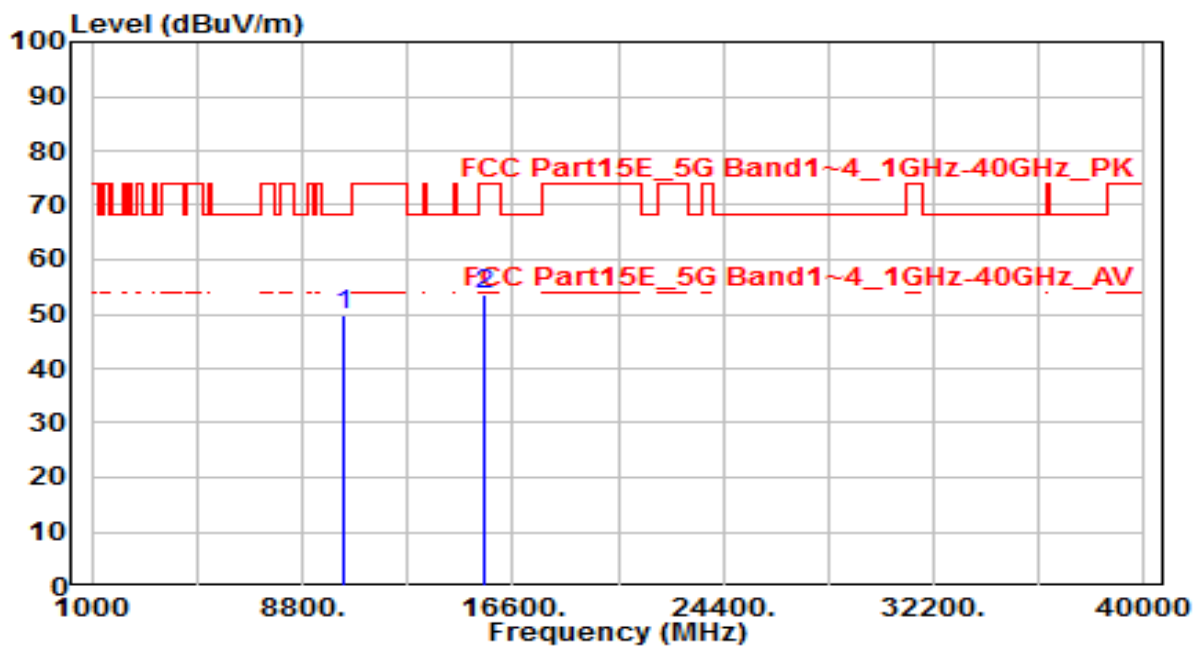


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	33.28	16.59	49.87	-18.33	68.20	150	0	Peak
2		15540.000	32.21	21.38	53.59	-20.41	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

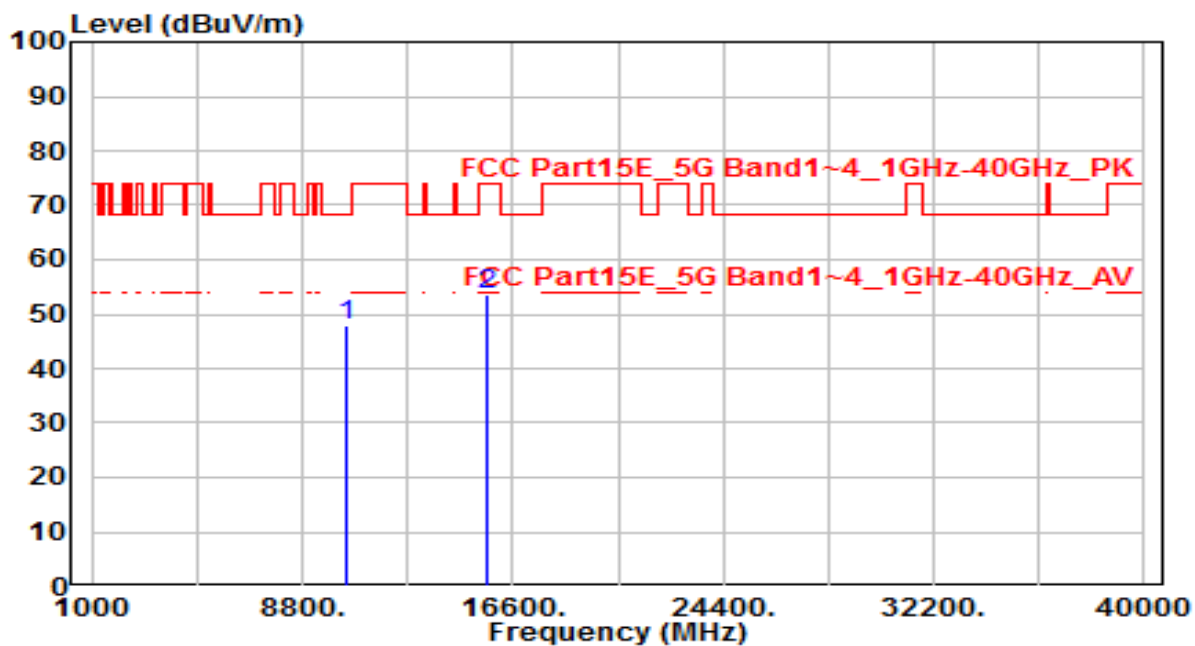


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	31.24	16.86	48.11	-20.09	68.20	150	0	Peak
2	15660.000	32.53	21.18	53.72	-20.28	74.00	150	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

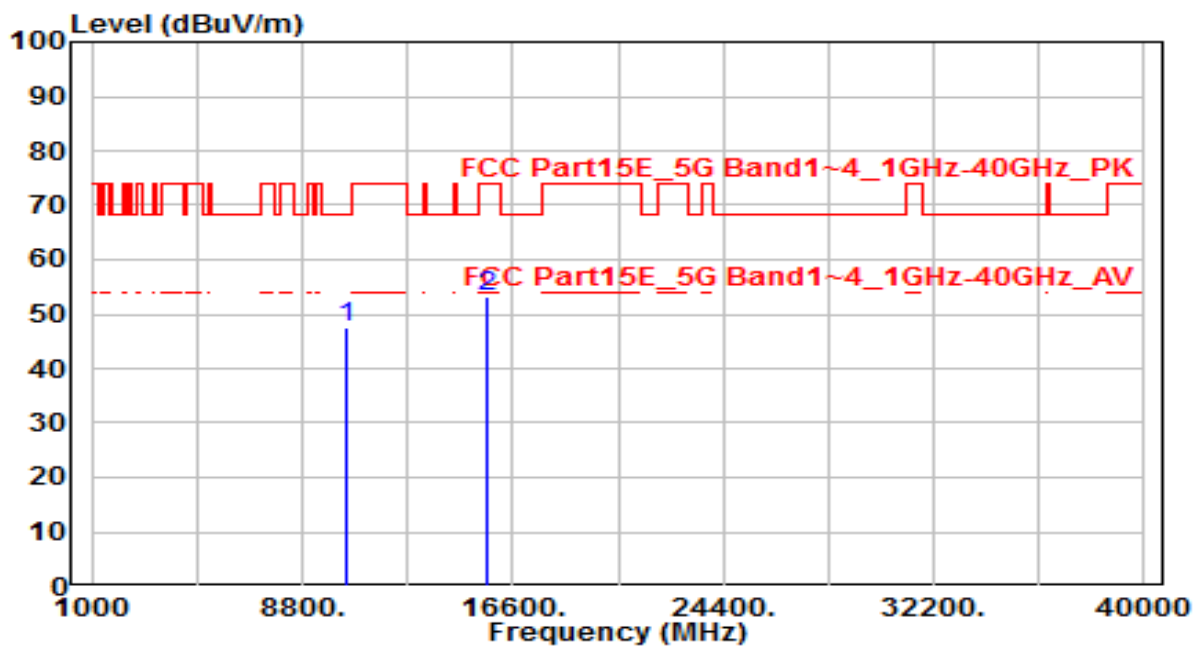


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	30.74	16.86	47.60	-20.60	68.20	150	0	Peak
2		15660.000	32.14	21.18	53.32	-20.68	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

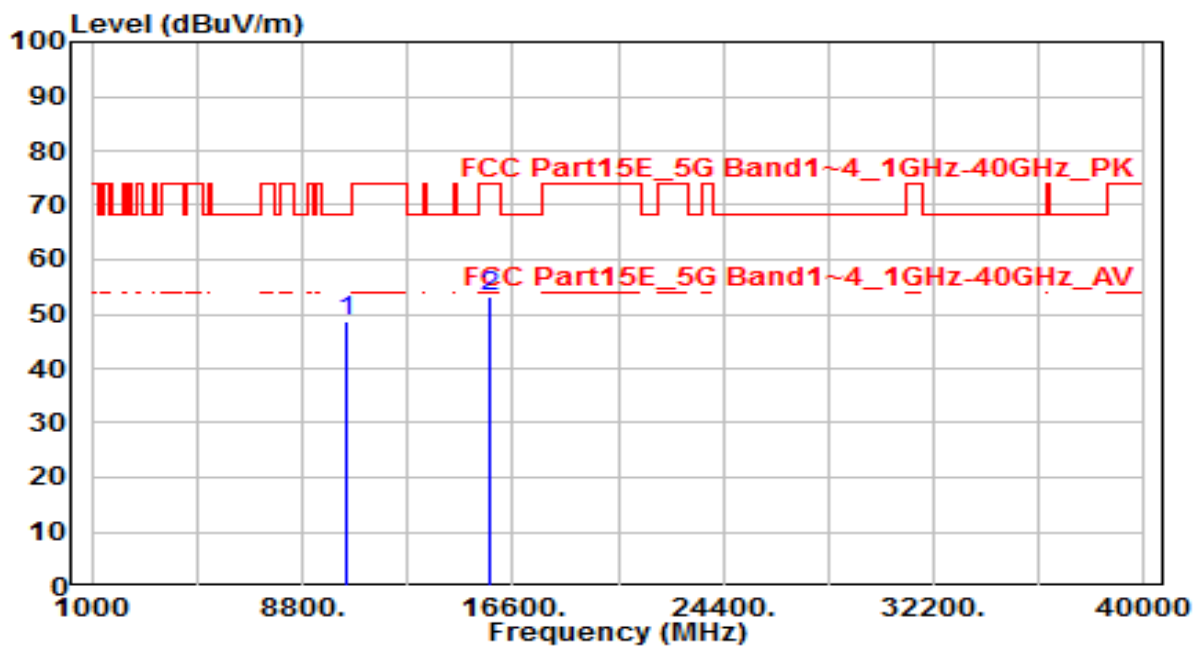


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	31.50	17.00	48.51	-19.69	68.20	150	0	Peak
2	15720.000	32.13	21.08	53.21	-20.79	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

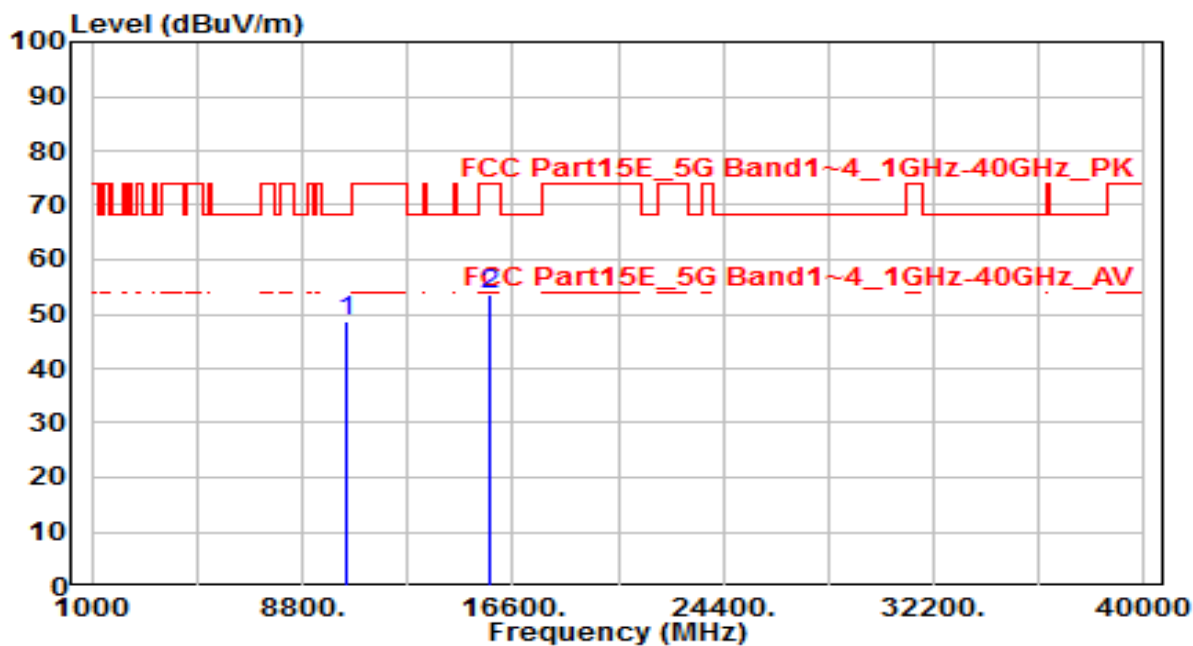


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	31.57	17.00	48.58	-19.62	68.20	150	0	Peak
2		15720.000	32.56	21.08	53.64	-20.36	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

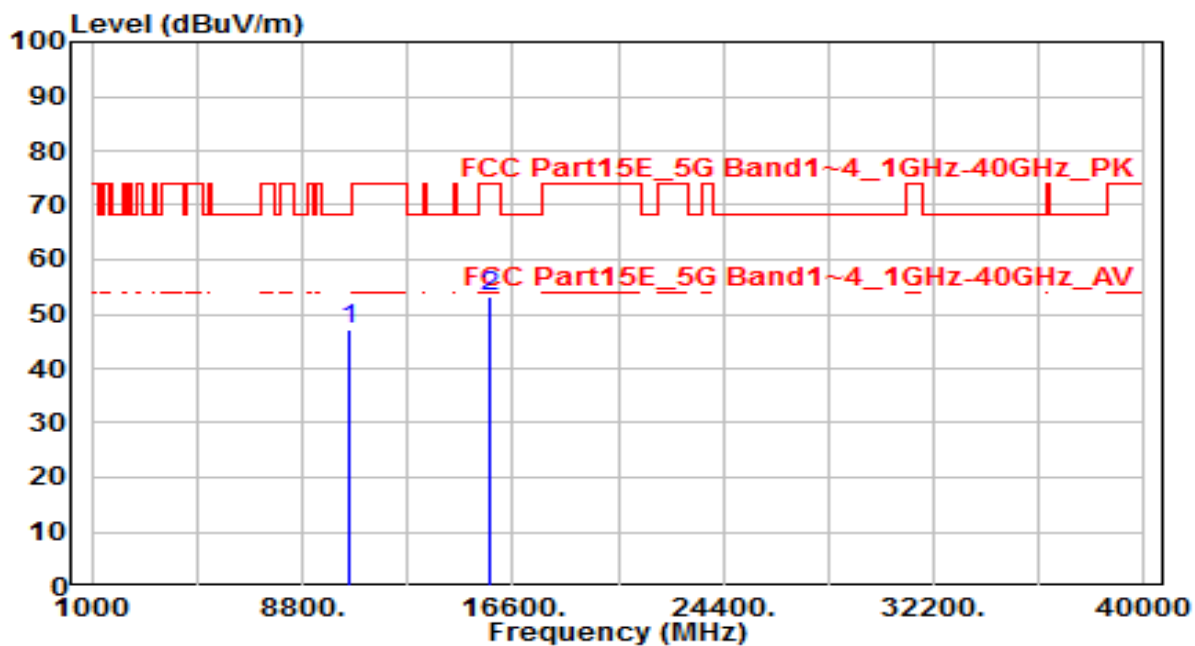


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10520.000	30.05	17.10	47.14	-21.06	68.20	150	0	Peak
2	* 15780.000	32.17	20.98	53.15	-20.85	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

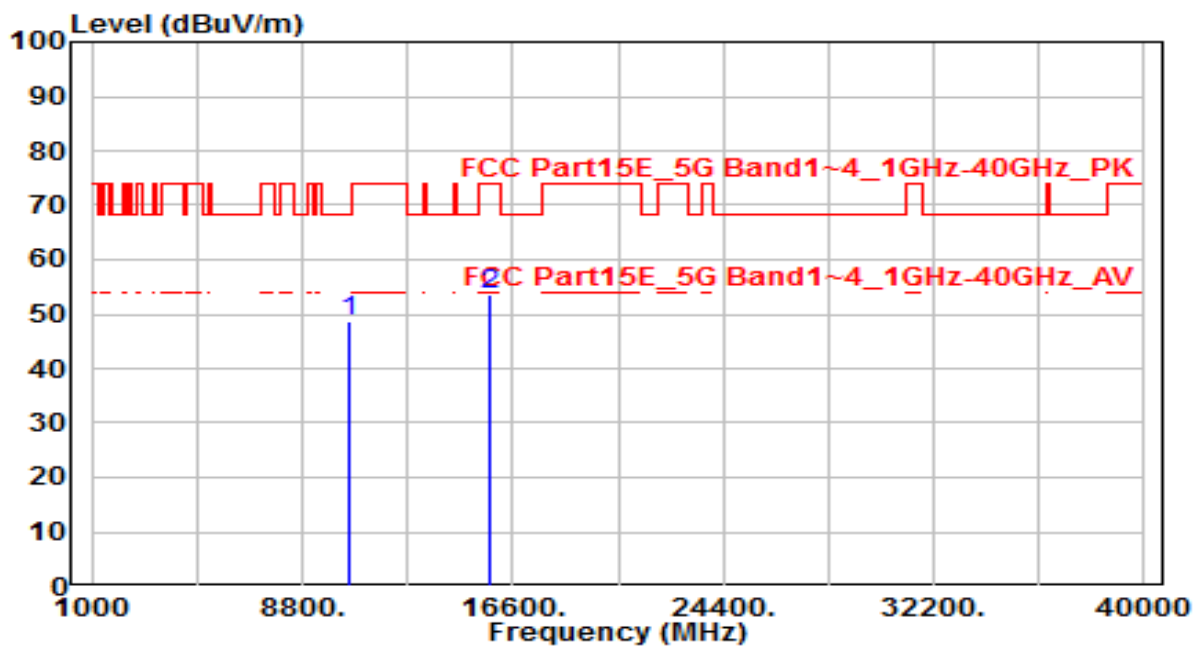


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	31.56	17.10	48.66	-19.54	68.20	150	0	Peak
2	15780.000	32.64	20.98	53.62	-20.38	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

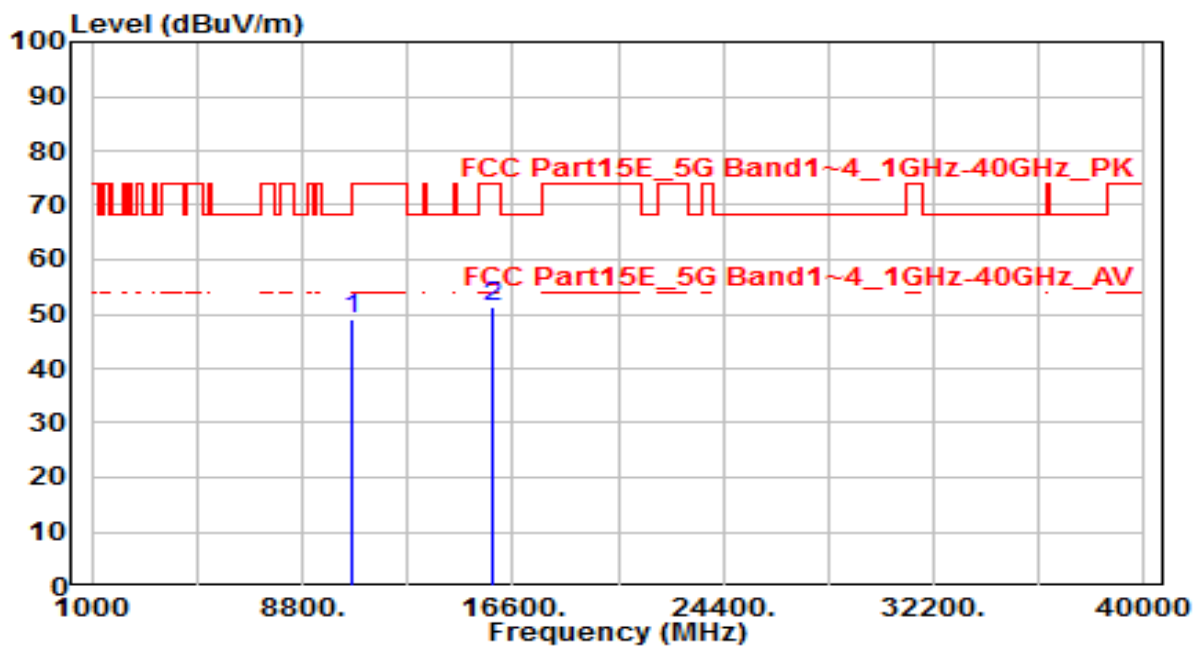


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	31.81	17.21	49.02	-19.18	68.20	150	0	Peak
2		15900.000	30.58	20.78	51.36	-22.64	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

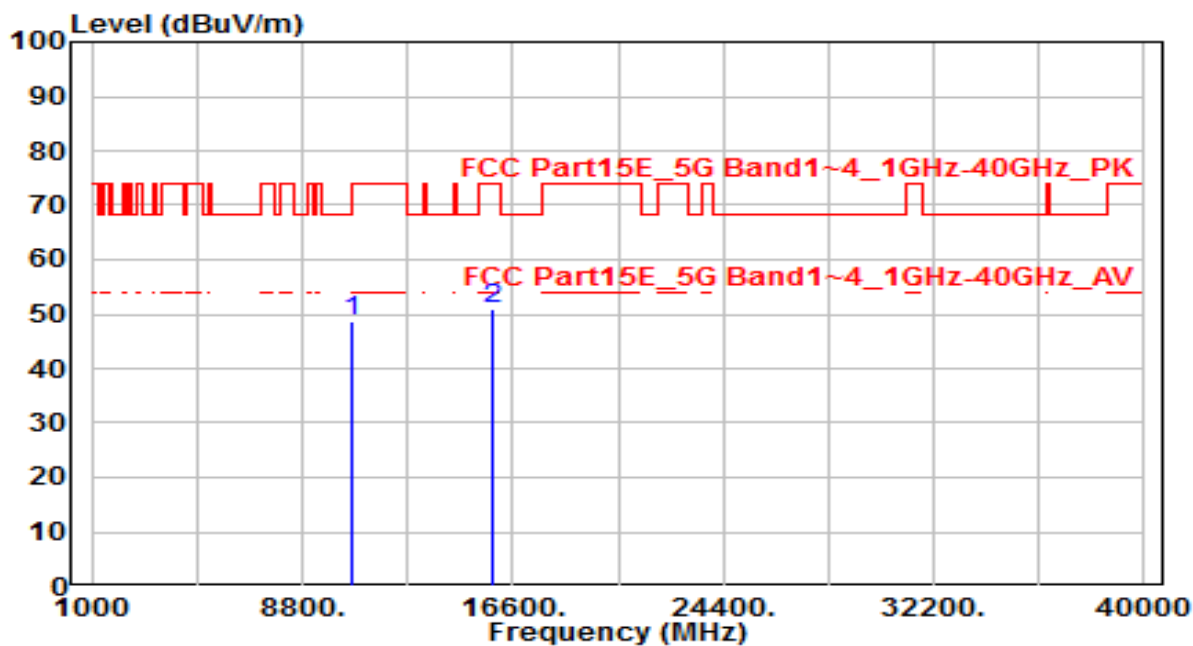


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	31.36	17.21	48.58	-19.62	68.20	150	0	Peak
2	15900.000	30.16	20.78	50.94	-23.06	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

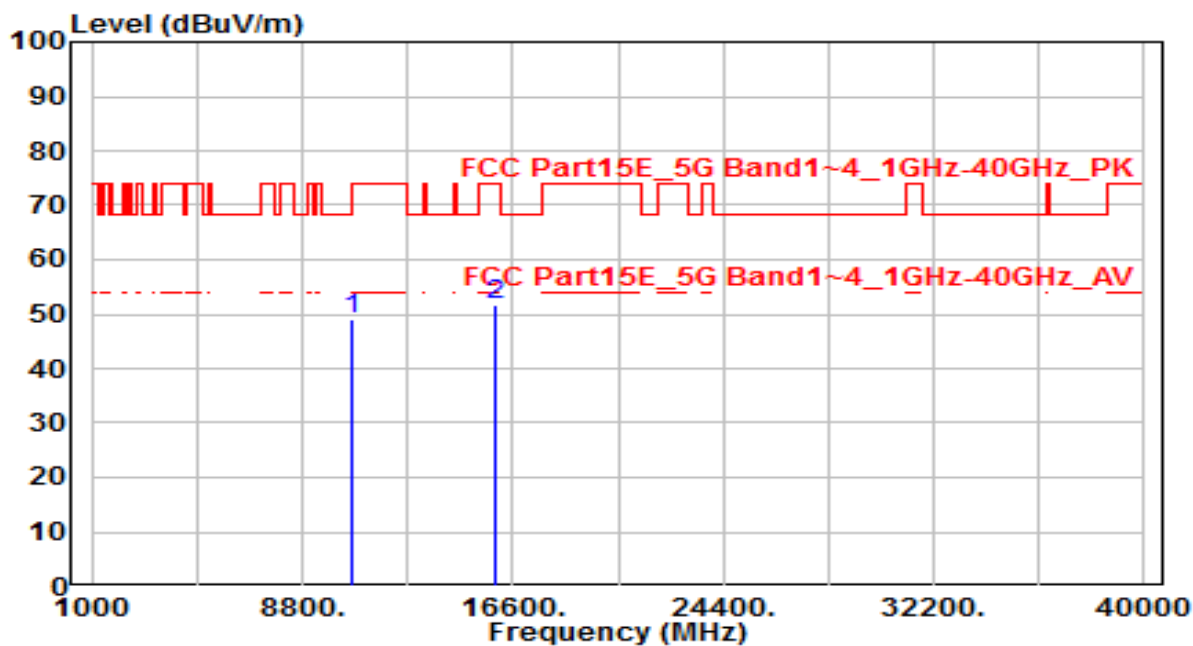


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.78	17.27	49.05	-24.95	74.00	150	0	Peak
2	* 15960.000	31.08	20.68	51.76	-22.24	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

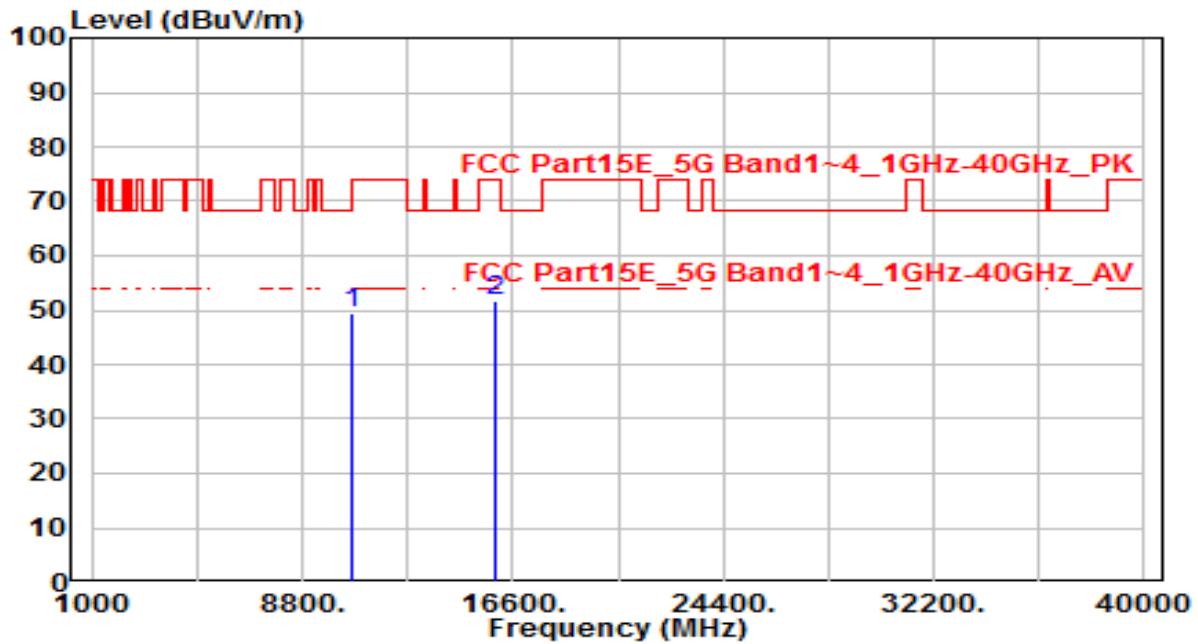


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	32.01	17.27	49.28	-24.72	74.00	150	0	Peak
2	* 15960.000	31.09	20.68	51.76	-22.24	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

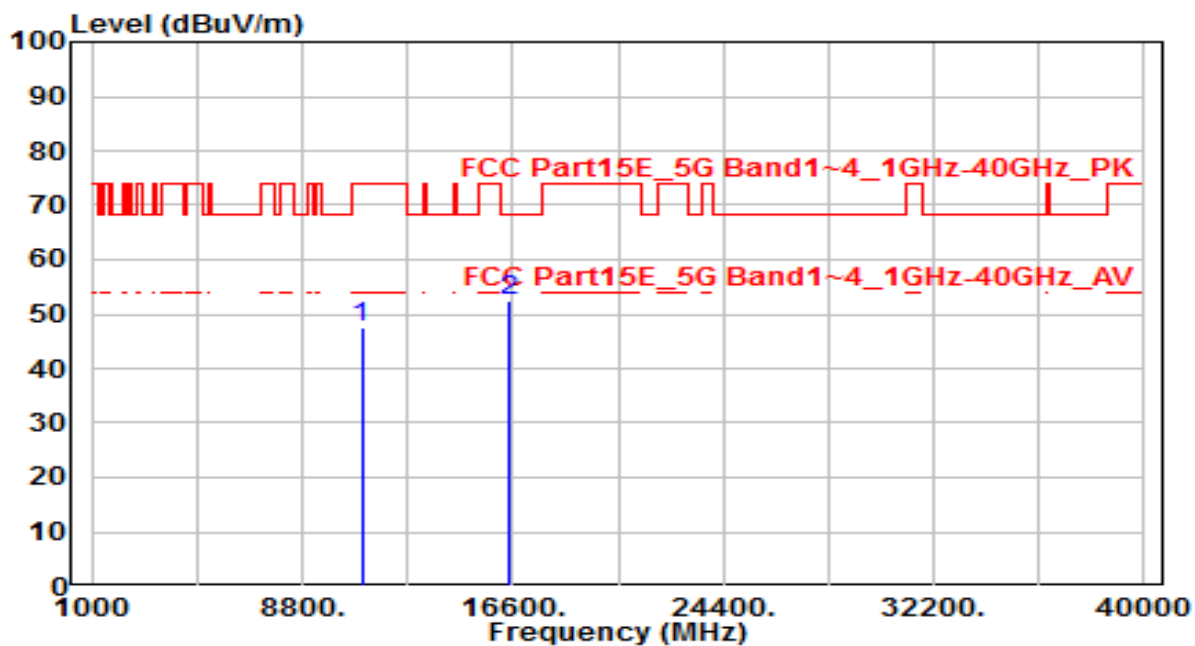


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	29.64	17.78	47.42	-26.58	74.00	150	0	Peak
2	* 16500.000	30.57	21.96	52.53	-15.67	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

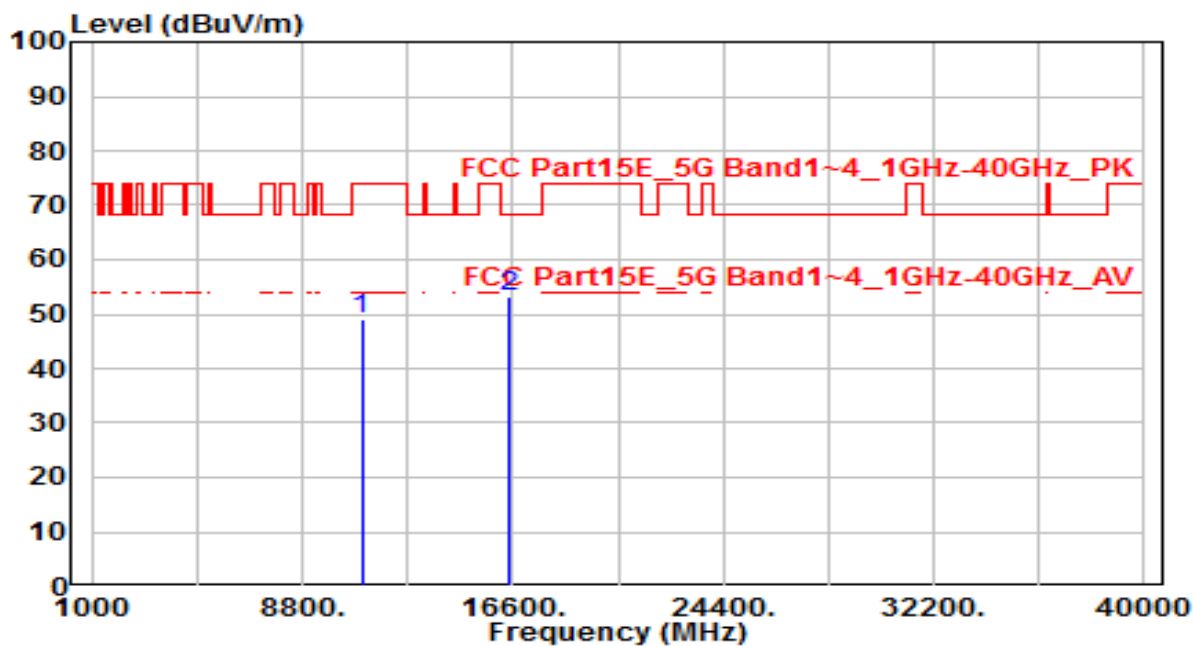


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	31.20	17.78	48.98	-25.02	74.00	150	0	Peak
2	* 16500.000	31.32	21.96	53.28	-14.92	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

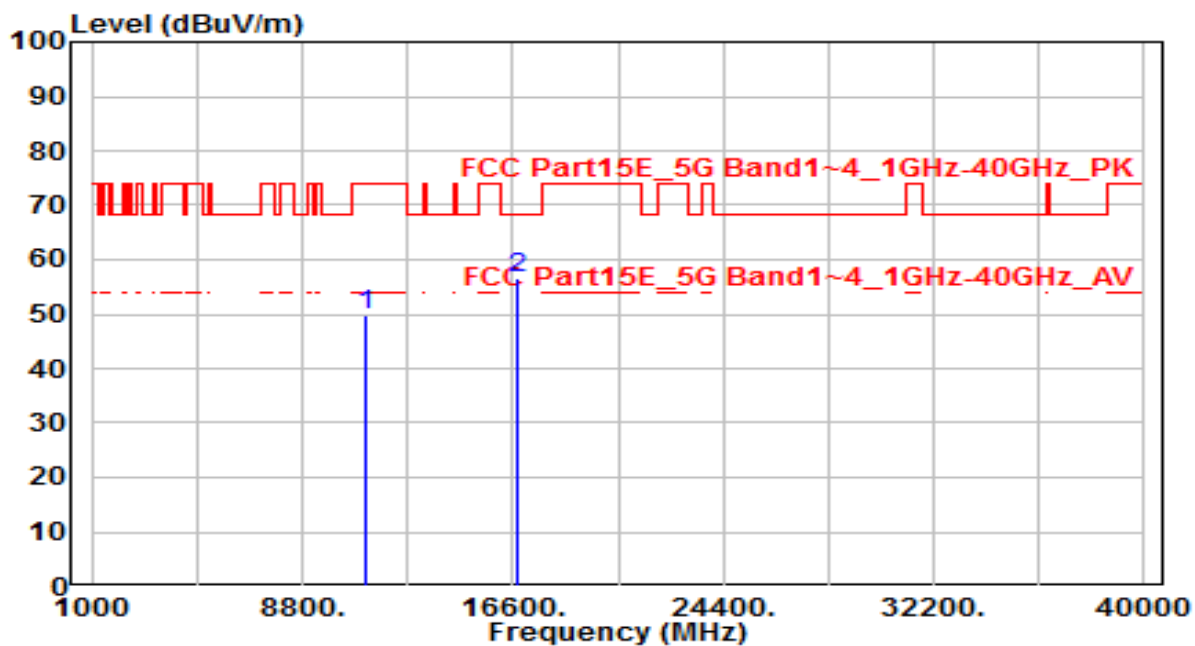


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11200.000	31.62	18.05	49.67	-24.33	74.00	150	0	Peak
2	* 16800.000	32.50	24.15	56.65	-11.55	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

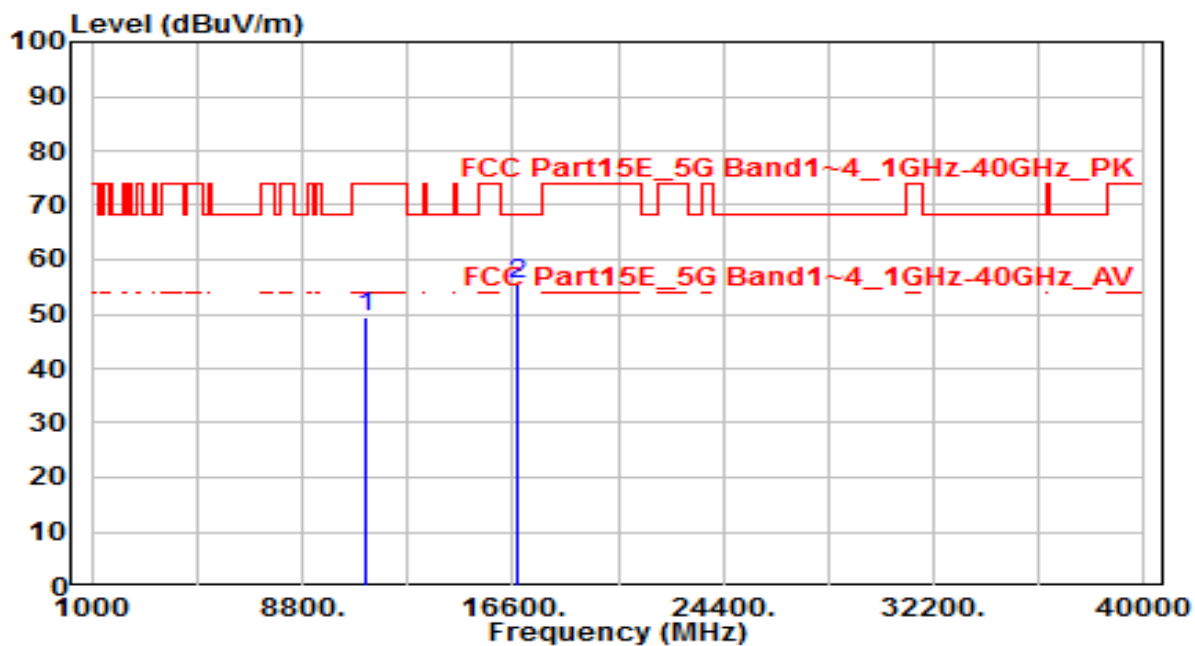


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11200.000	31.47	18.05	49.52	-24.48	74.00	150	0	Peak
2	* 16800.000	31.47	24.15	55.62	-12.58	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

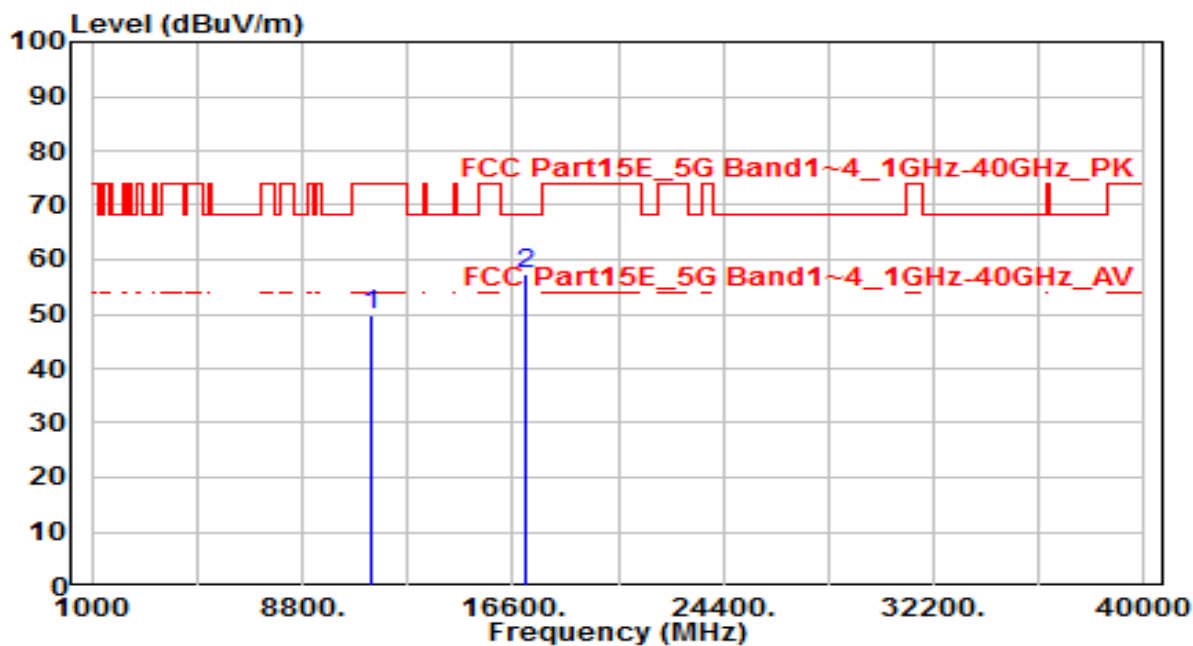


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	31.43	18.32	49.74	-24.26	74.00	150	0	Peak
2	* 17100.000	30.80	26.62	57.42	-10.78	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

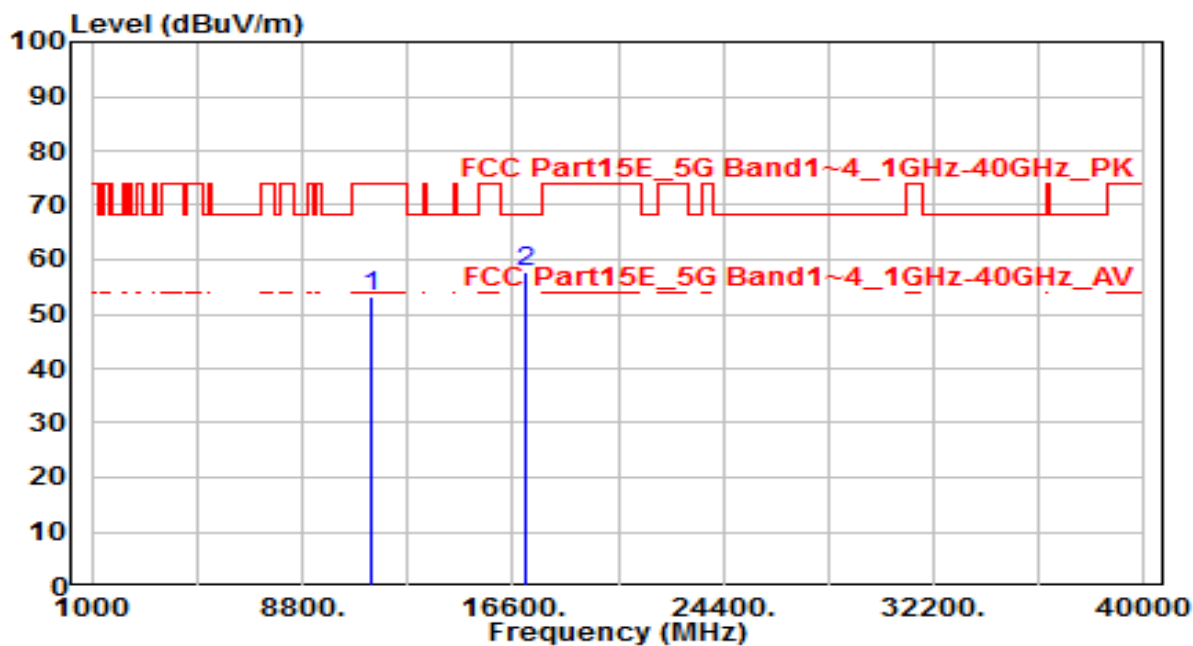


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	34.81	18.32	53.13	-20.87	74.00	150	0	Peak
2	* 17100.000	31.00	26.62	57.62	-10.58	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

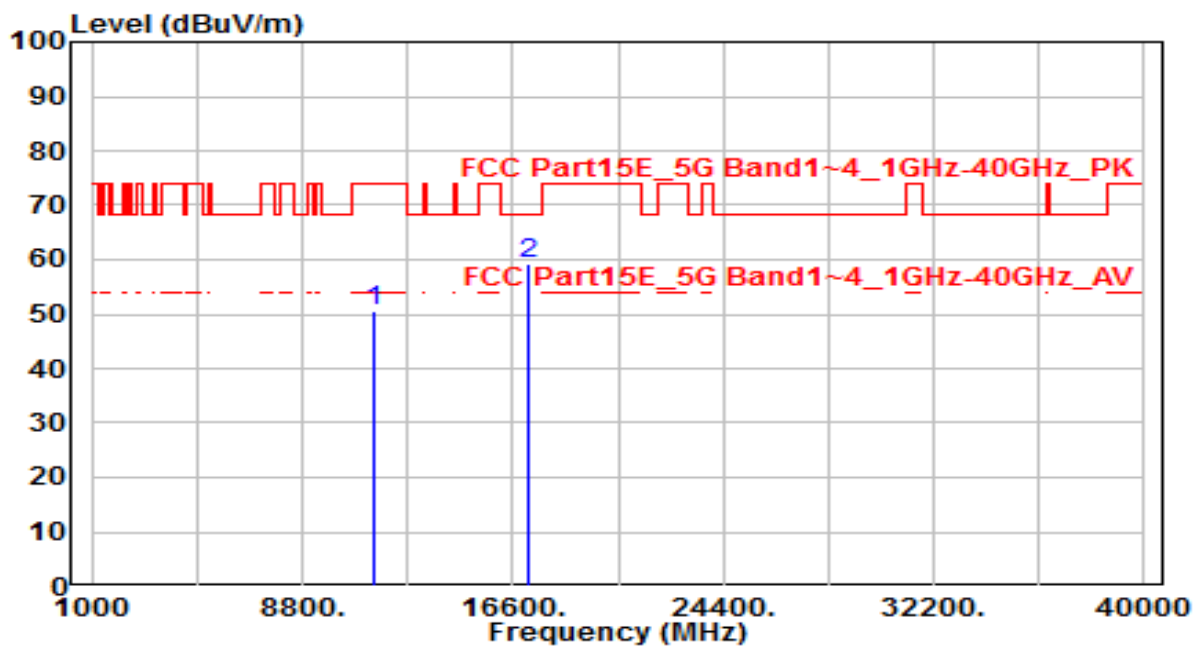


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	32.10	18.37	50.47	-23.53	74.00	150	0	Peak
2	* 17160.000	32.00	27.22	59.22	-8.98	68.20	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

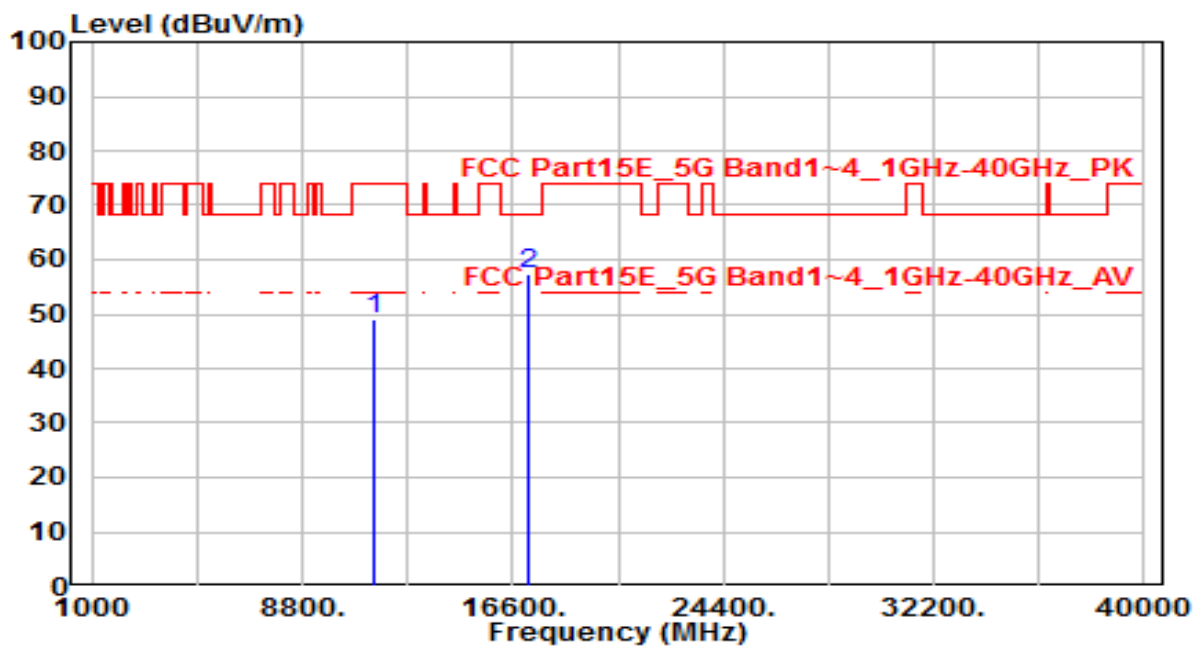


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	30.65	18.37	49.02	-24.98	74.00	150	0	Peak
2	* 17160.000	30.25	27.22	57.47	-10.73	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

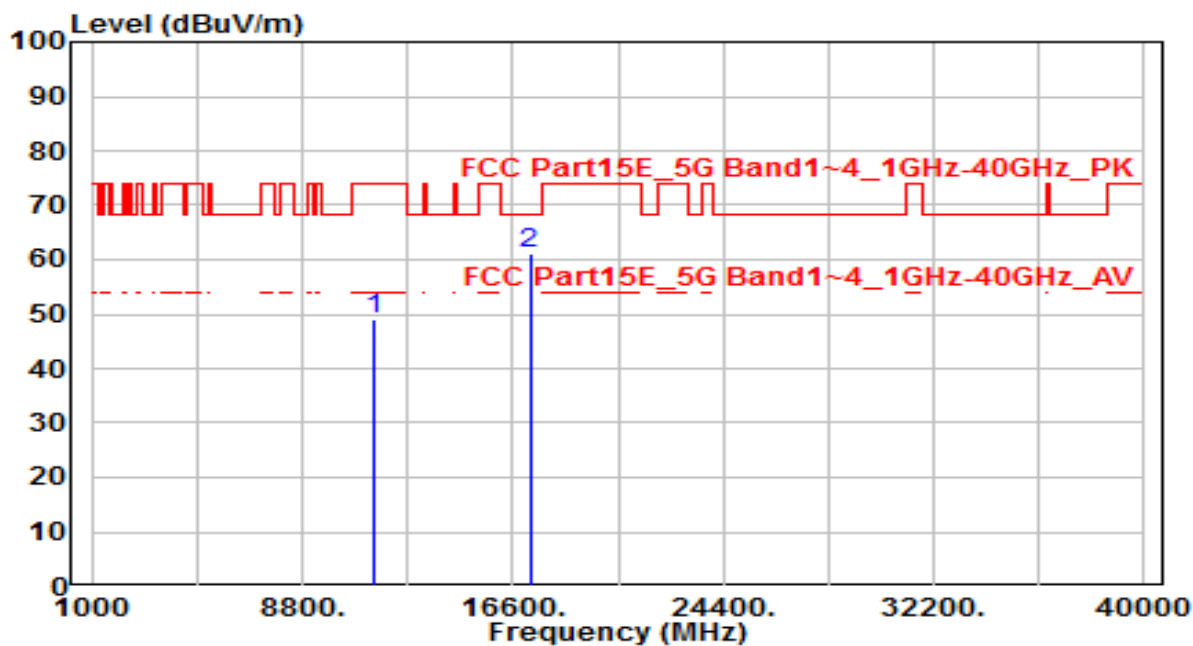


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	30.44	18.44	48.87	-25.13	74.00	150	0	Peak
2	* 17235.000	32.98	27.97	60.95	-7.25	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

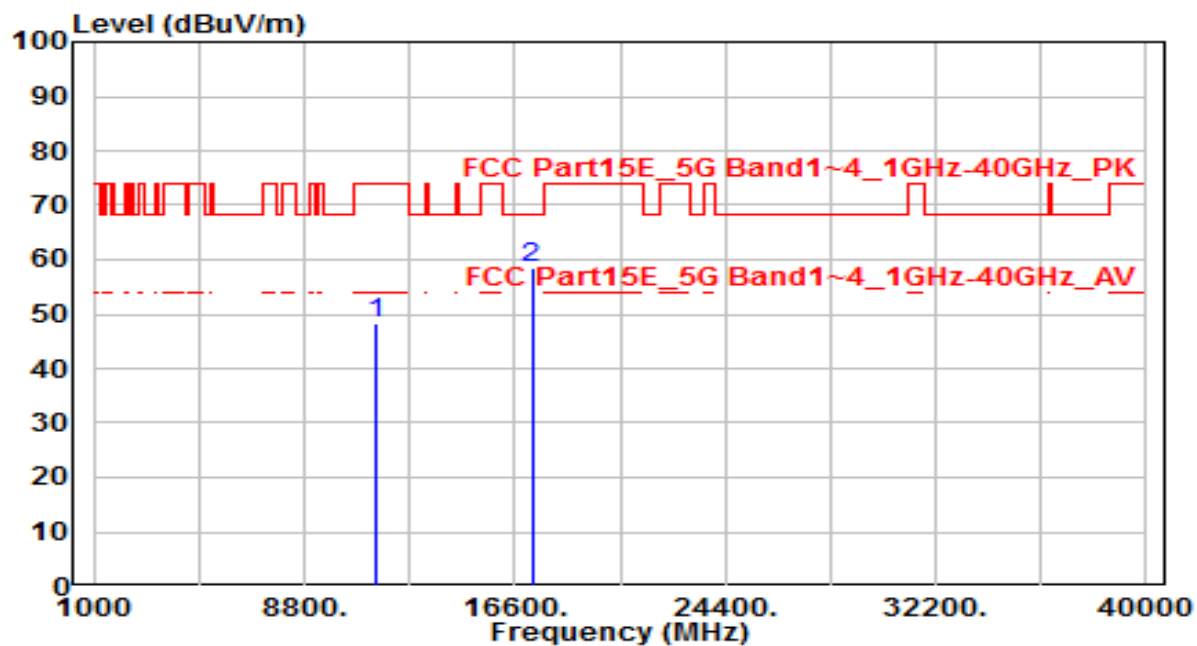


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	29.89	18.44	48.32	-25.68	74.00	150	0	Peak
2	* 17235.000	30.45	27.97	58.43	-9.77	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

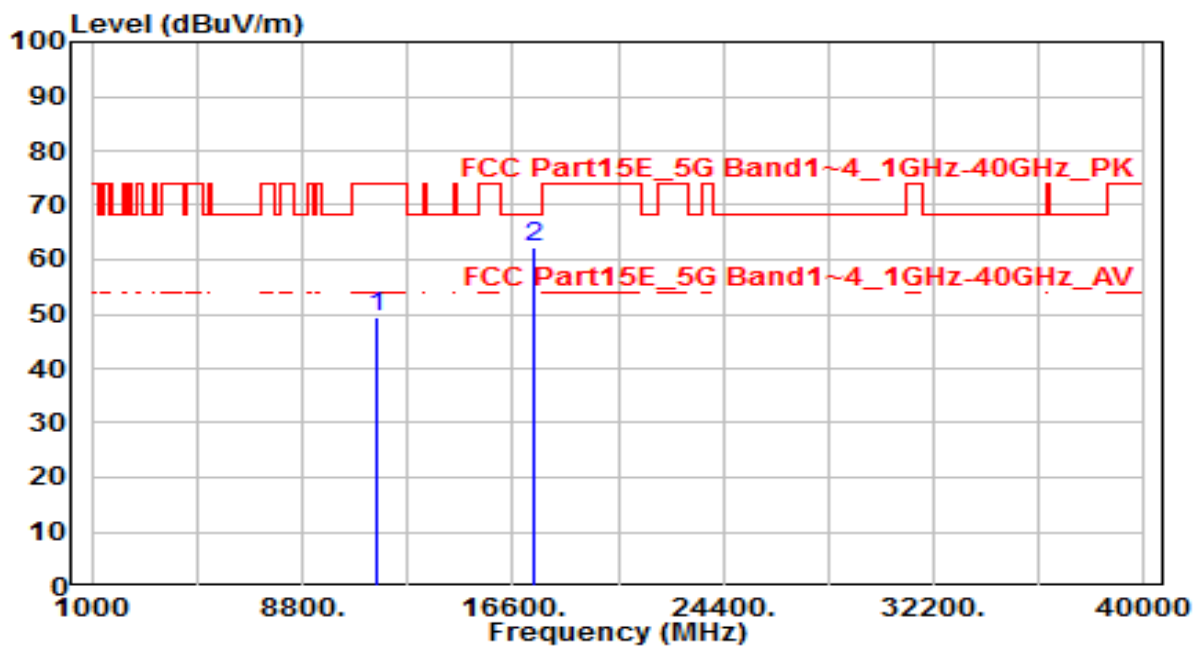


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.24	18.36	49.61	-24.39	74.00	150	0	Peak
2	* 17355.000	33.02	29.18	62.20	-6.00	68.20	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1	Test Voltage	AC 120V/60Hz

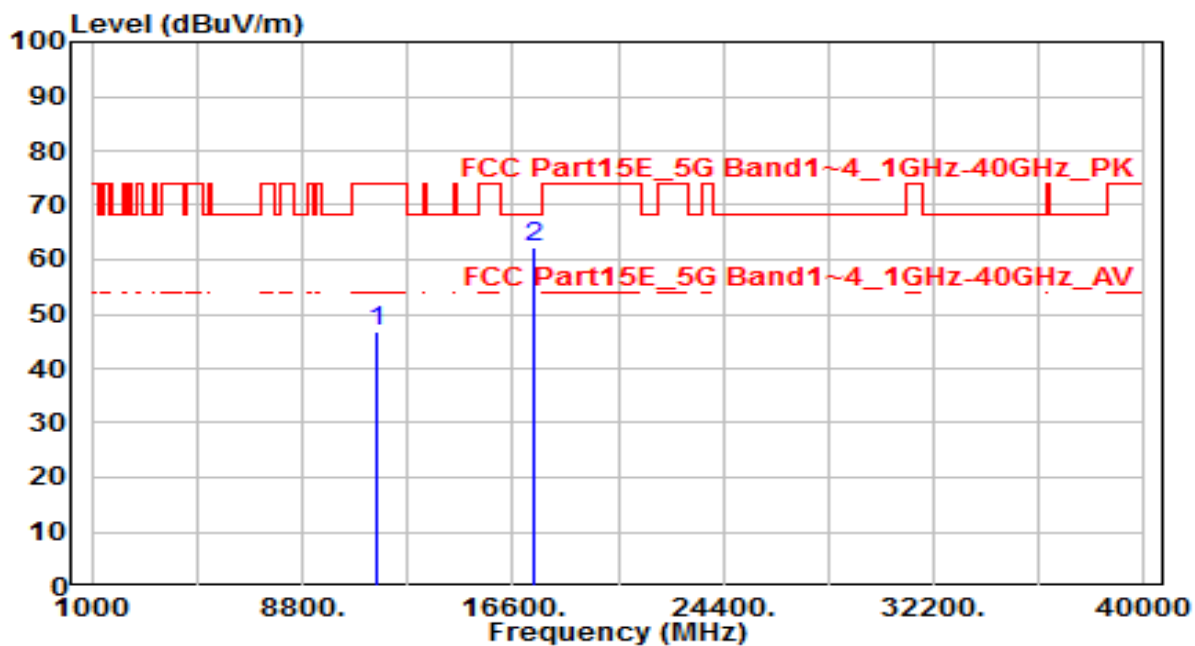


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	28.38	18.36	46.75	-27.25	74.00	150	0	Peak
2	* 17355.000	33.15	29.18	62.33	-5.87	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

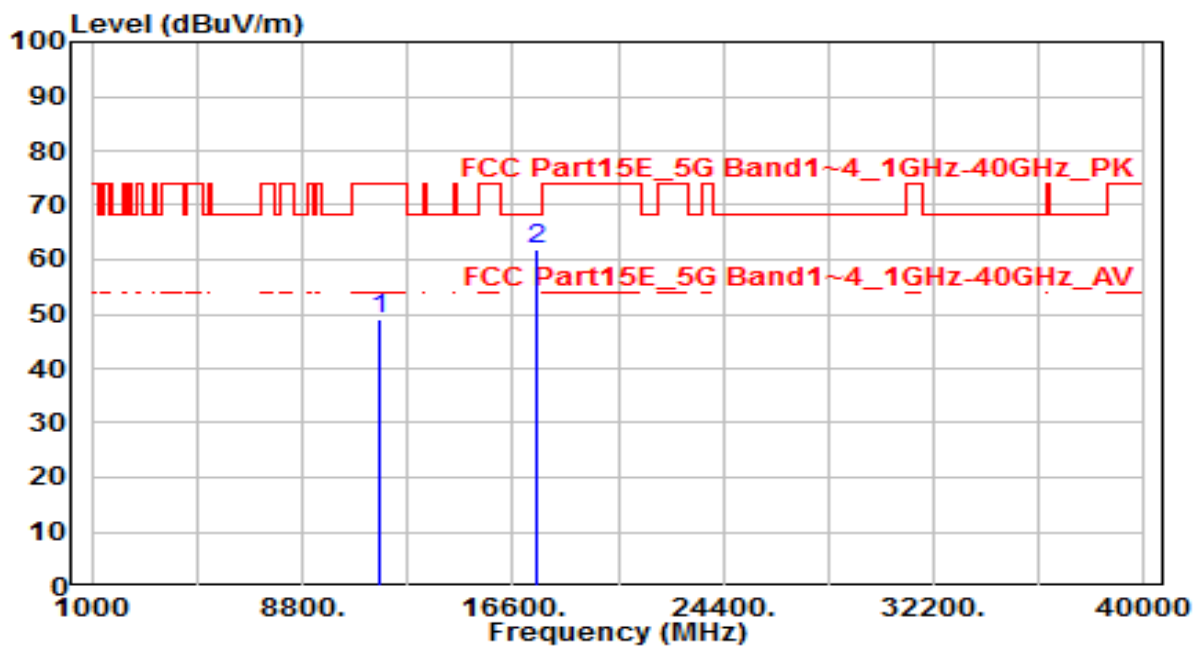


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	30.81	18.26	49.07	-24.93	74.00	150	0	Peak
2	* 17475.000	31.65	30.39	62.04	-6.16	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

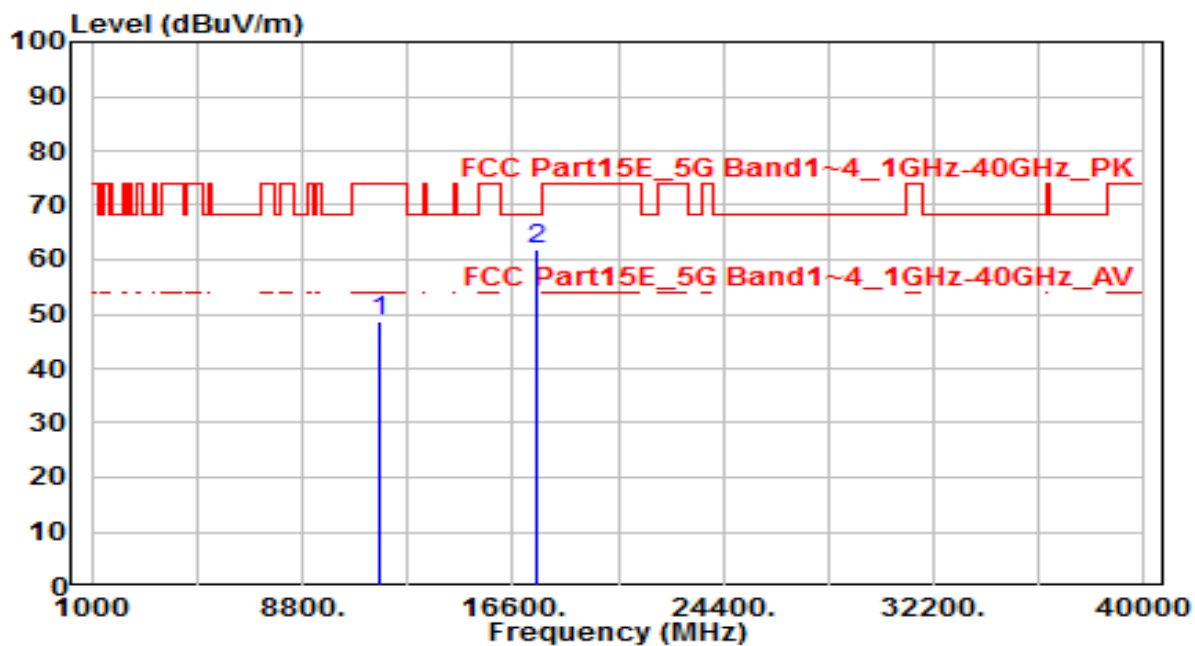


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	30.32	18.26	48.58	-25.42	74.00	150	0	Peak
2	* 17475.000	31.43	30.39	61.81	-6.39	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

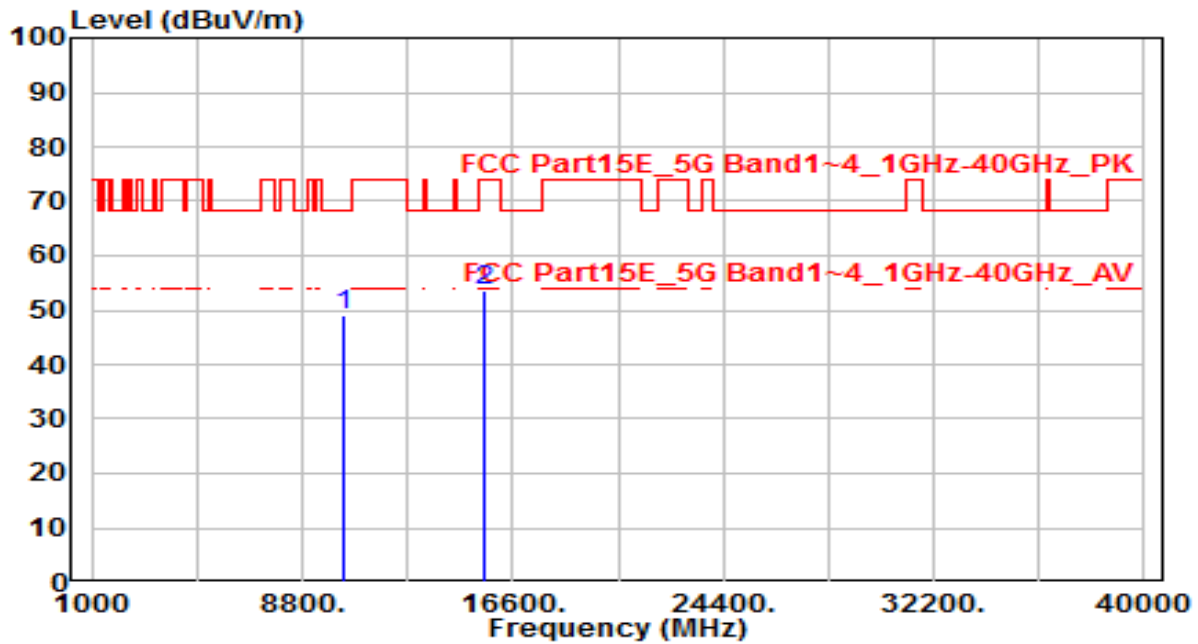


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	32.61	16.59	49.20	-19.00	68.20	150	0	Peak
2	15540.000	32.06	21.38	53.45	-20.55	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

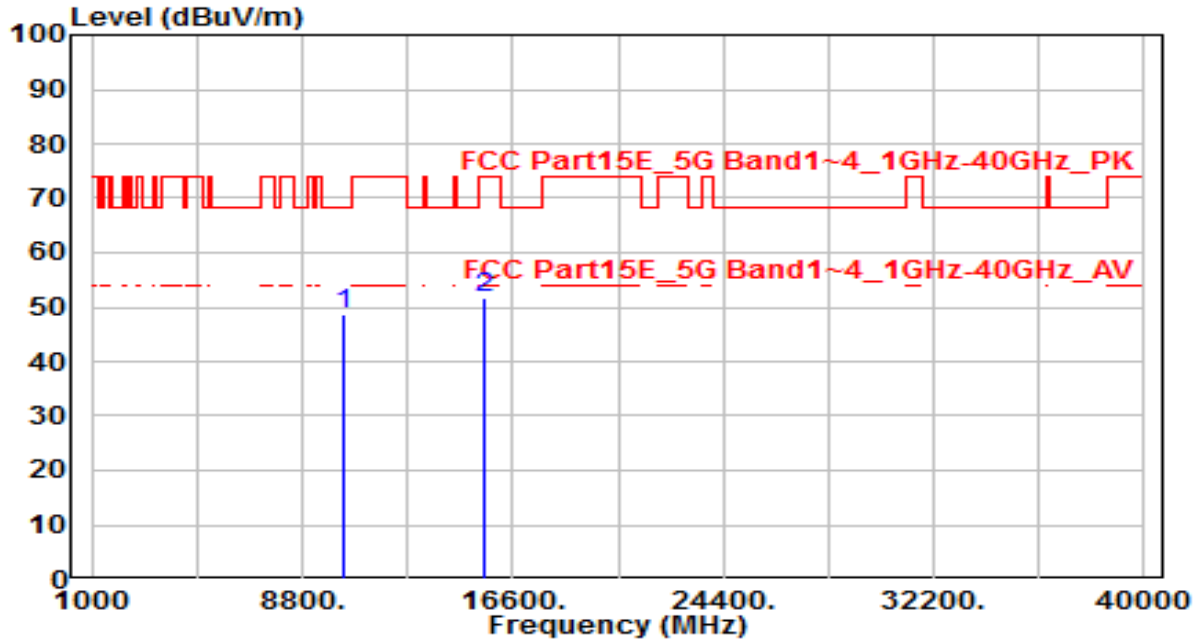


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	31.95	16.59	48.54	-19.66	68.20	150	0	Peak
2	15540.000	30.31	21.38	51.69	-22.31	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

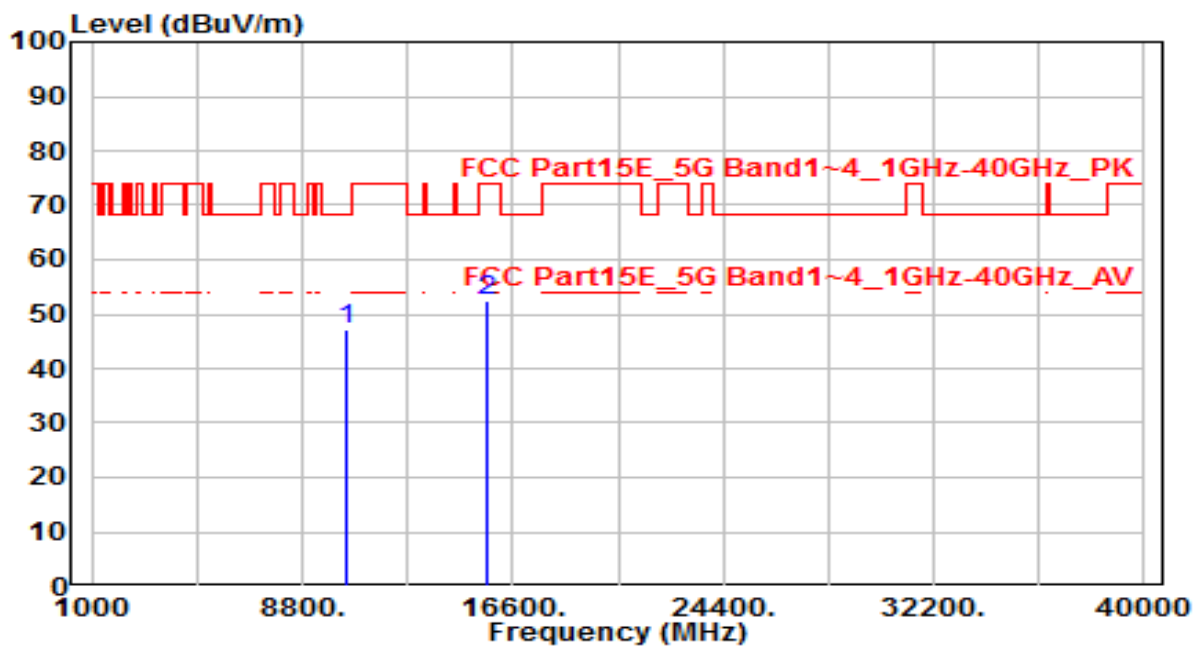


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	30.32	16.86	47.18	-21.02	68.20	150	0	Peak
2	15660.000	31.37	21.18	52.55	-21.45	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

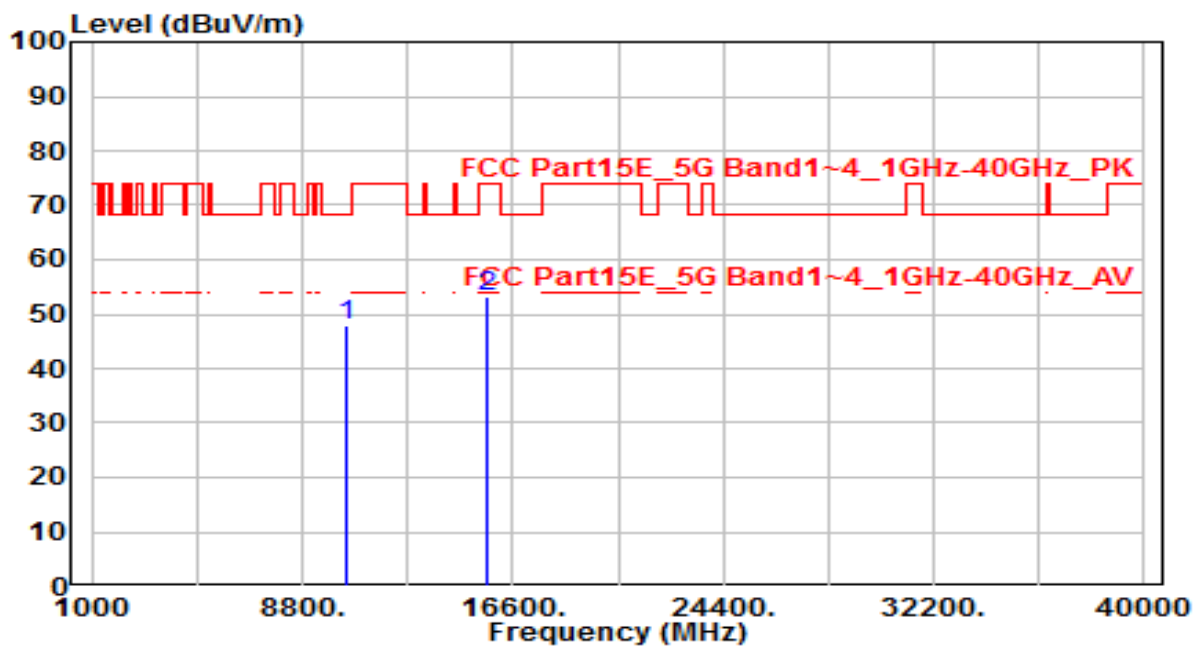


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	31.06	16.86	47.93	-20.27	68.20	150	0	Peak
2	15660.000	32.06	21.18	53.24	-20.76	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

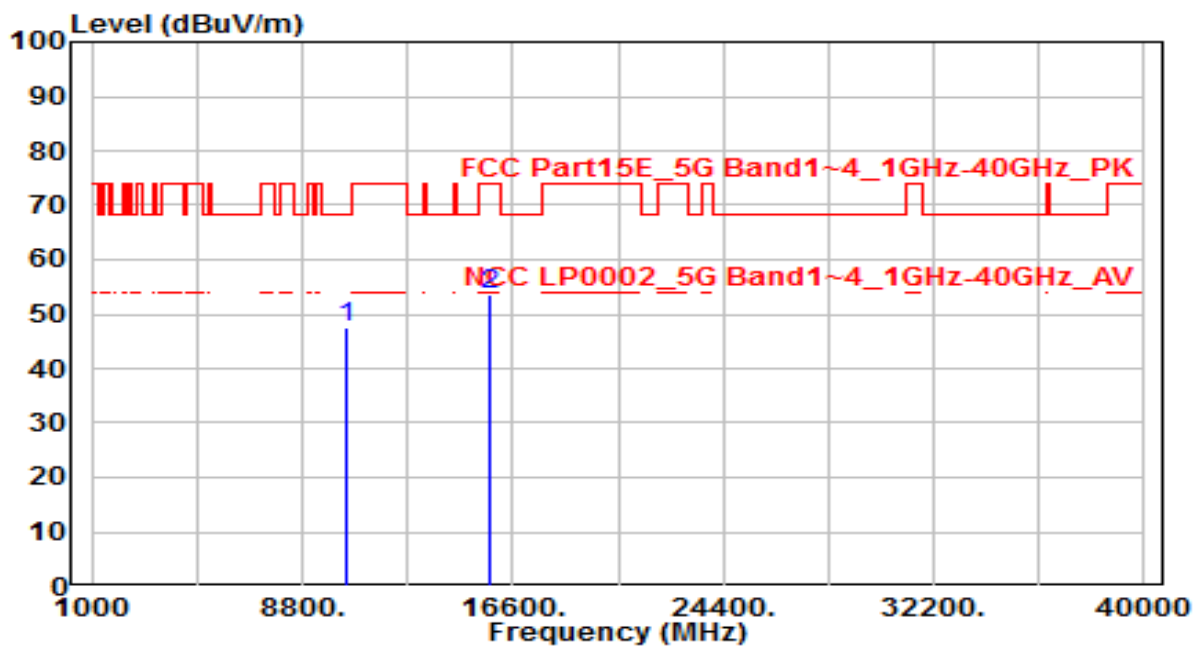


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	30.49	17.00	47.49	-20.71	68.20	150	0	Peak
2	* 15720.000	32.51	21.08	53.60	-20.40	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0+1	Test Voltage	AC 120V/60Hz

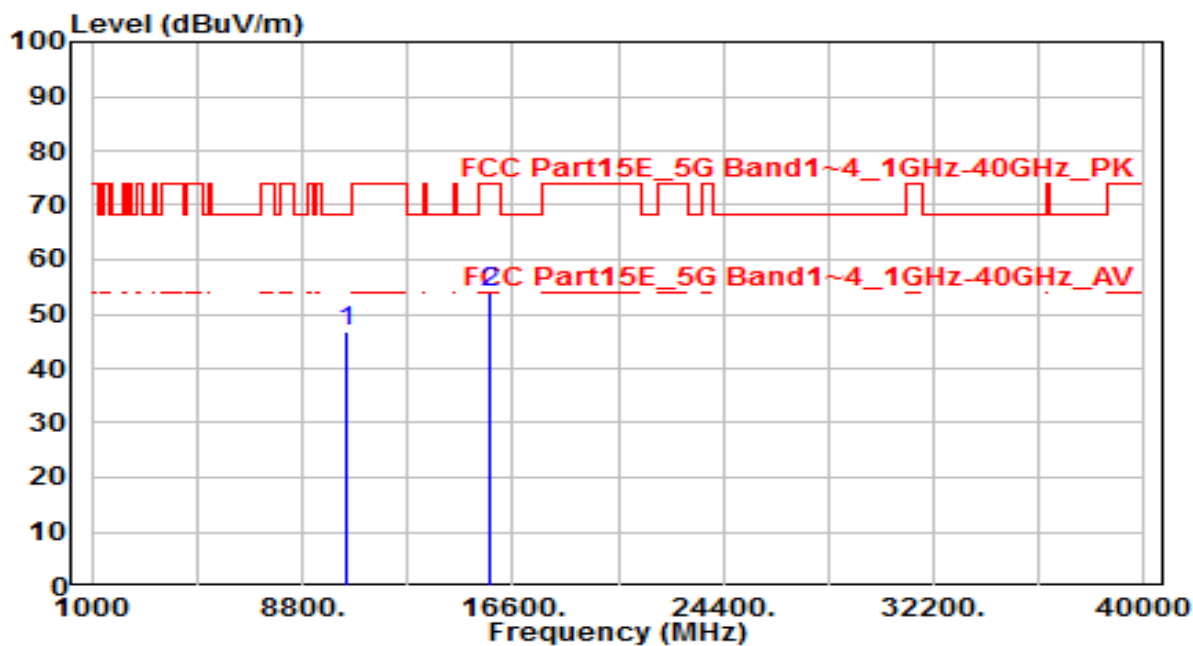


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10480.000	29.78	17.00	46.78	-21.42	68.20	150	0	Peak
2	* 15720.000	32.82	21.08	53.90	-20.10	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

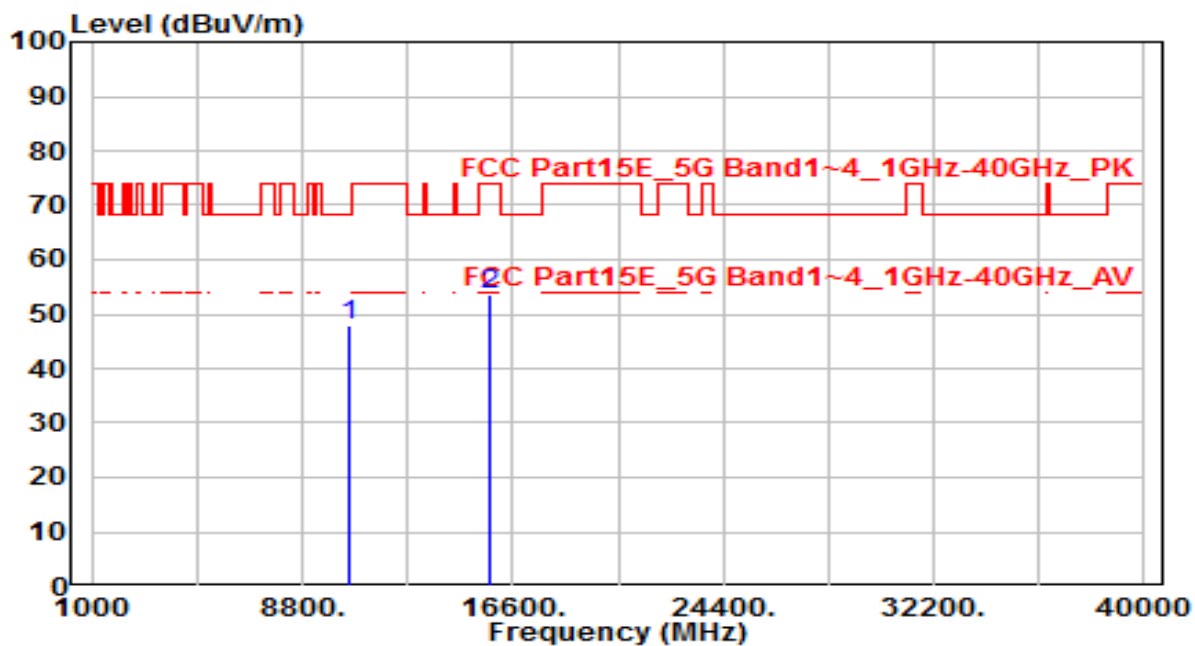


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	30.67	17.10	47.76	-20.44	68.20	150	0	Peak
2	15780.000	32.52	20.98	53.50	-20.50	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0+1	Test Voltage	AC 120V/60Hz

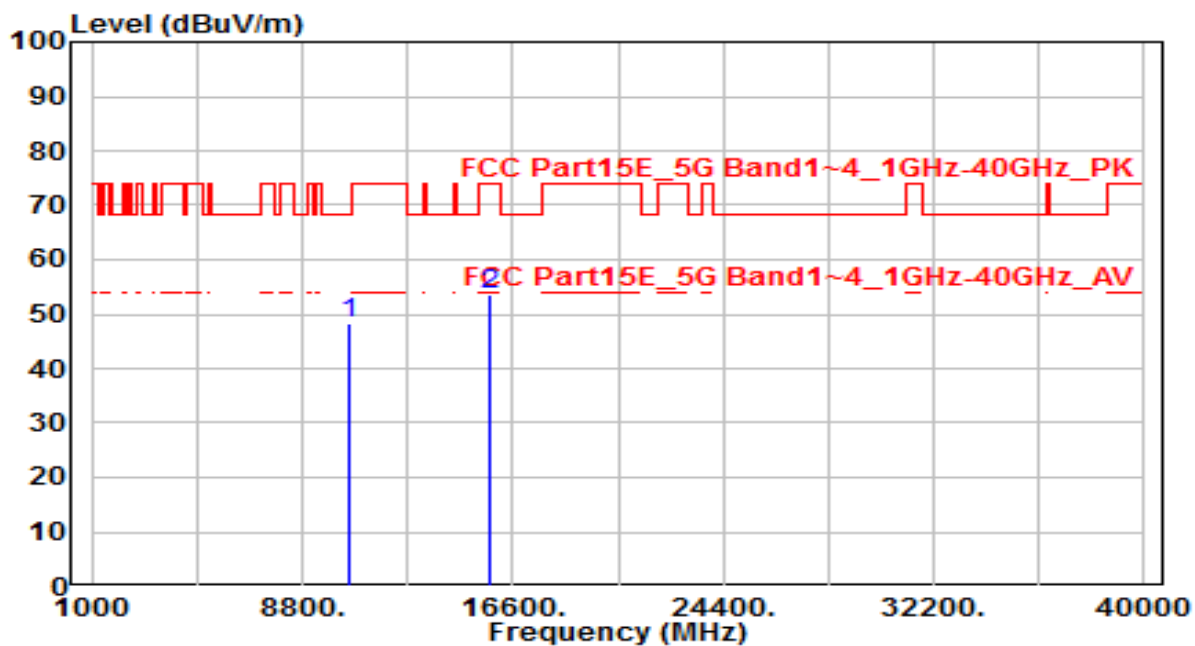


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	31.14	17.10	48.24	-19.96	68.20	150	0	Peak
2	15780.000	32.76	20.98	53.74	-20.26	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

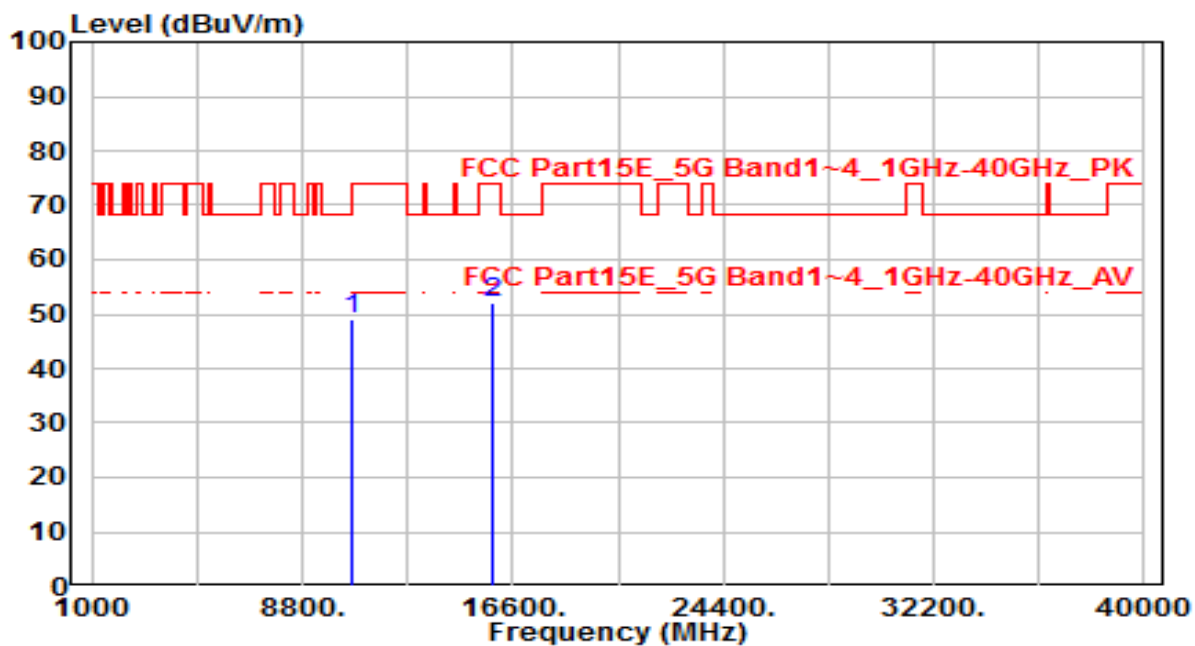


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	31.98	17.21	49.19	-19.01	68.20	150	0	Peak
2	15900.000	31.22	20.78	52.00	-22.00	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0+1	Test Voltage	AC 120V/60Hz

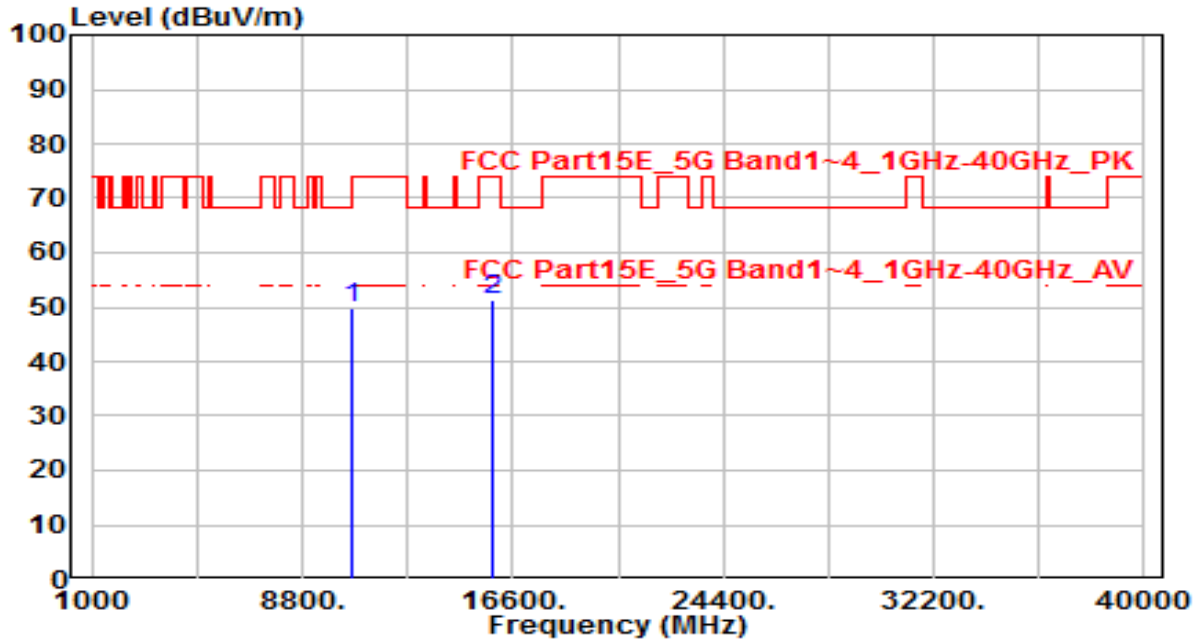


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	32.54	17.21	49.75	-18.45	68.20	150	0	Peak
2		15900.000	30.49	20.78	51.27	-22.73	74.00	150	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

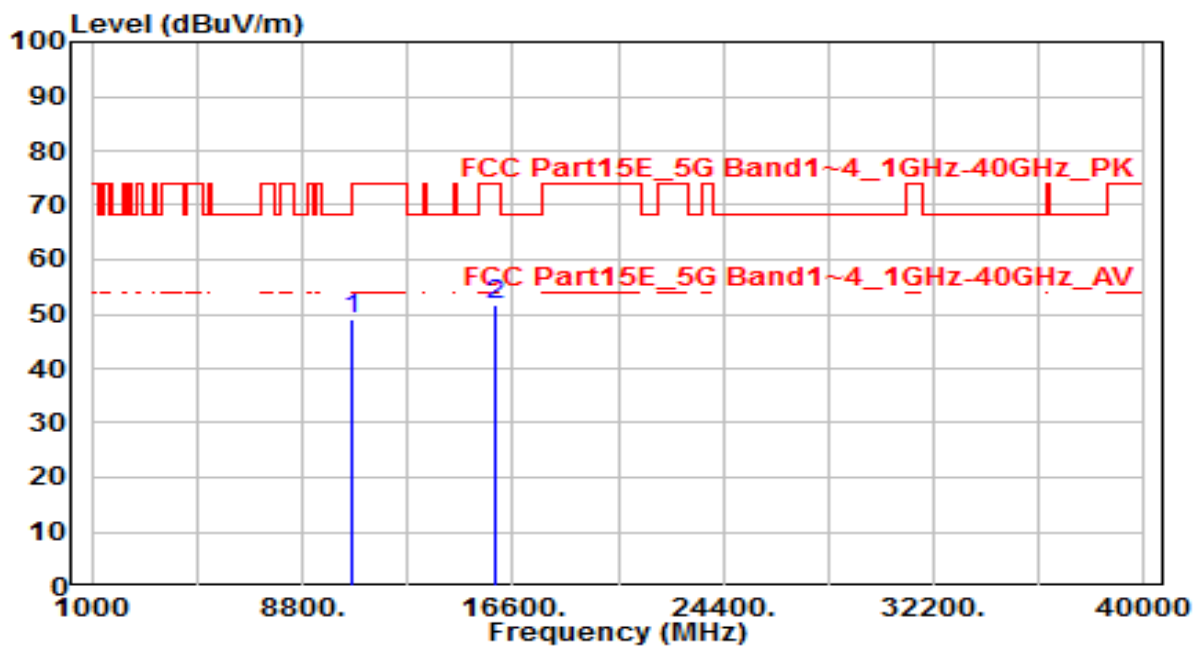


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	31.86	17.27	49.13	-24.87	74.00	150	0	Peak
2	* 15960.000	30.97	20.68	51.65	-22.35	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

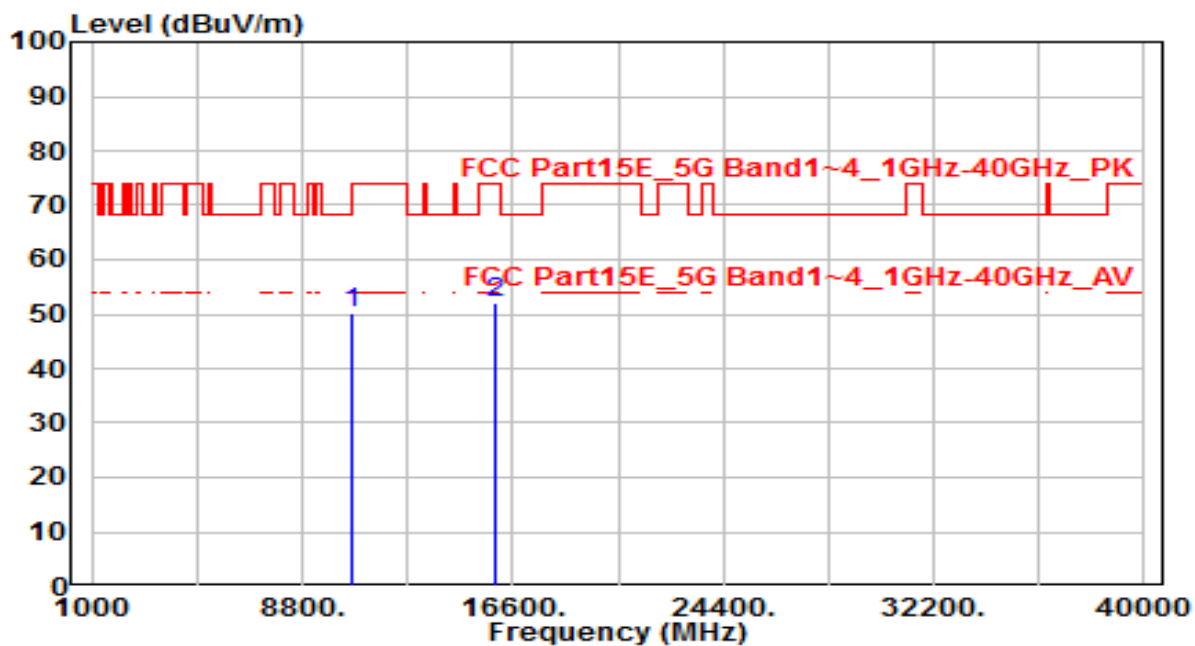


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	33.01	17.27	50.28	-23.72	74.00	150	0	Peak
2	* 15960.000	31.49	20.68	52.17	-21.83	74.00	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

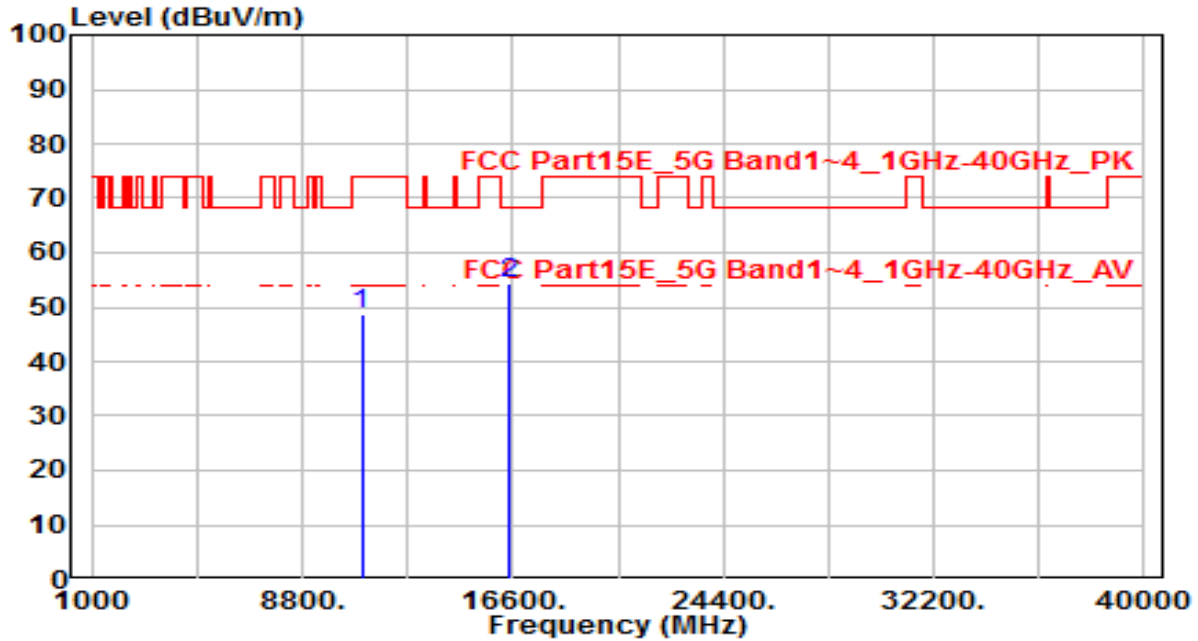


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	30.86	17.78	48.64	-25.36	74.00	150	0	Peak
2	* 16500.000	32.37	21.96	54.33	-13.87	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

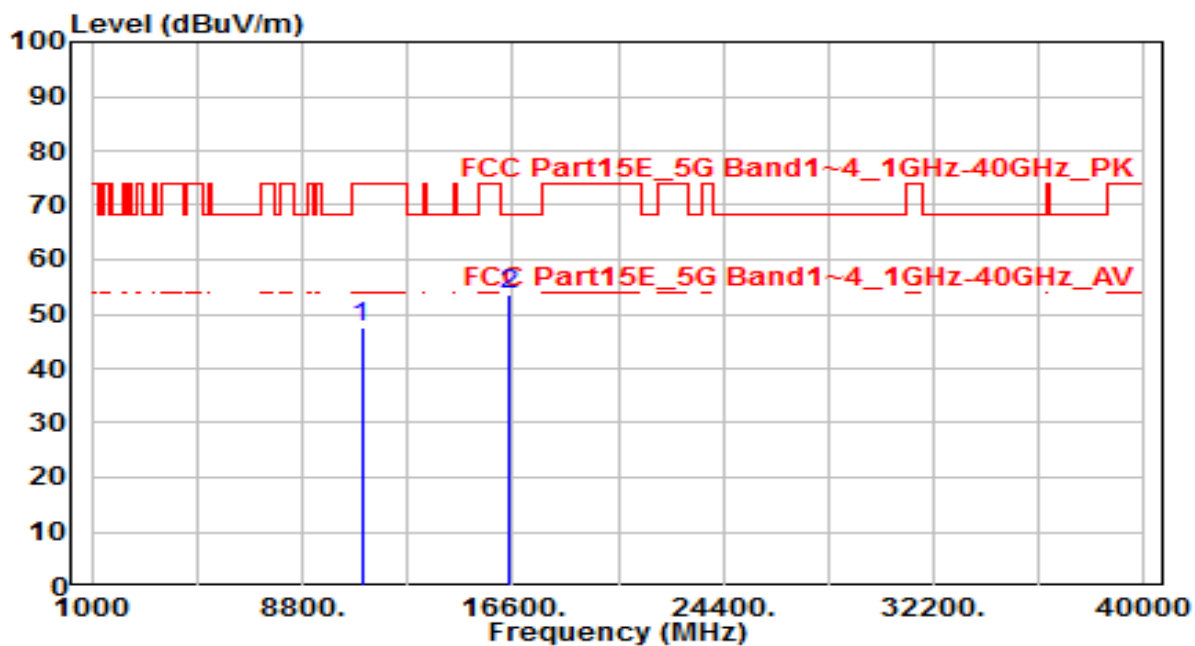


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	29.65	17.78	47.43	-26.57	74.00	150	0	Peak
2	* 16500.000	31.49	21.96	53.45	-14.75	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

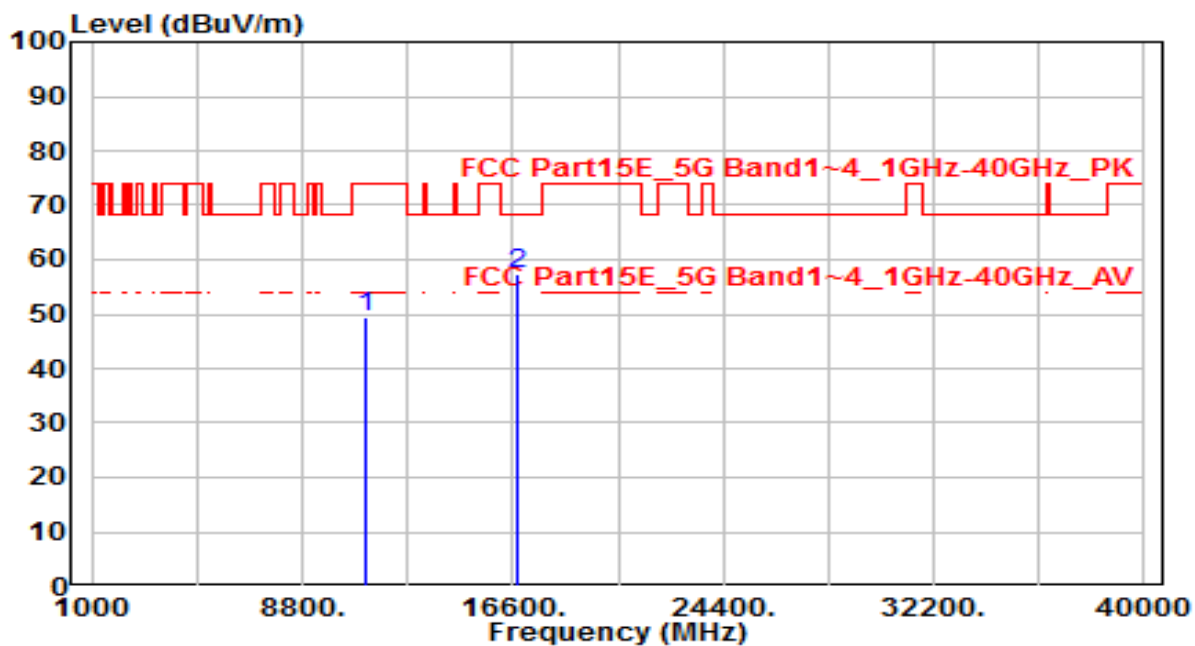


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11200.000	31.21	18.05	49.25	-24.75	74.00	150	0	Peak
2	* 16800.000	33.37	24.15	57.52	-10.68	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 120_ANT 0+1	Test Voltage	AC 120V/60Hz

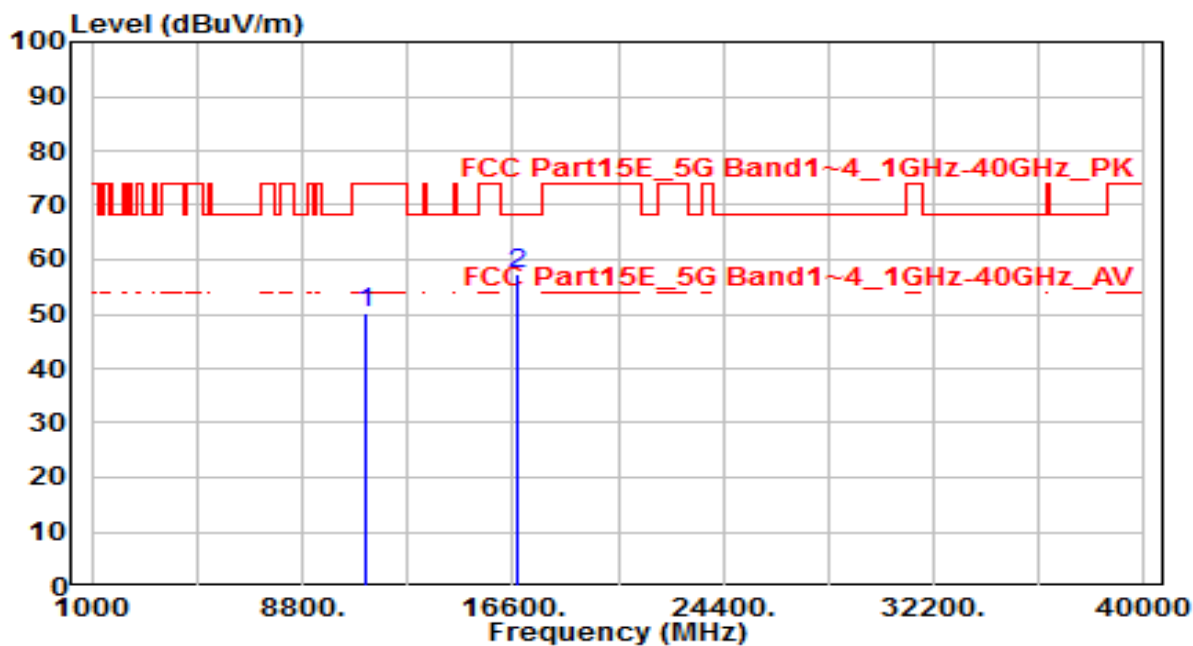


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11200.000	32.13	18.05	50.18	-23.82	74.00	150	0	Peak
2	* 16800.000	33.11	24.15	57.26	-10.94	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

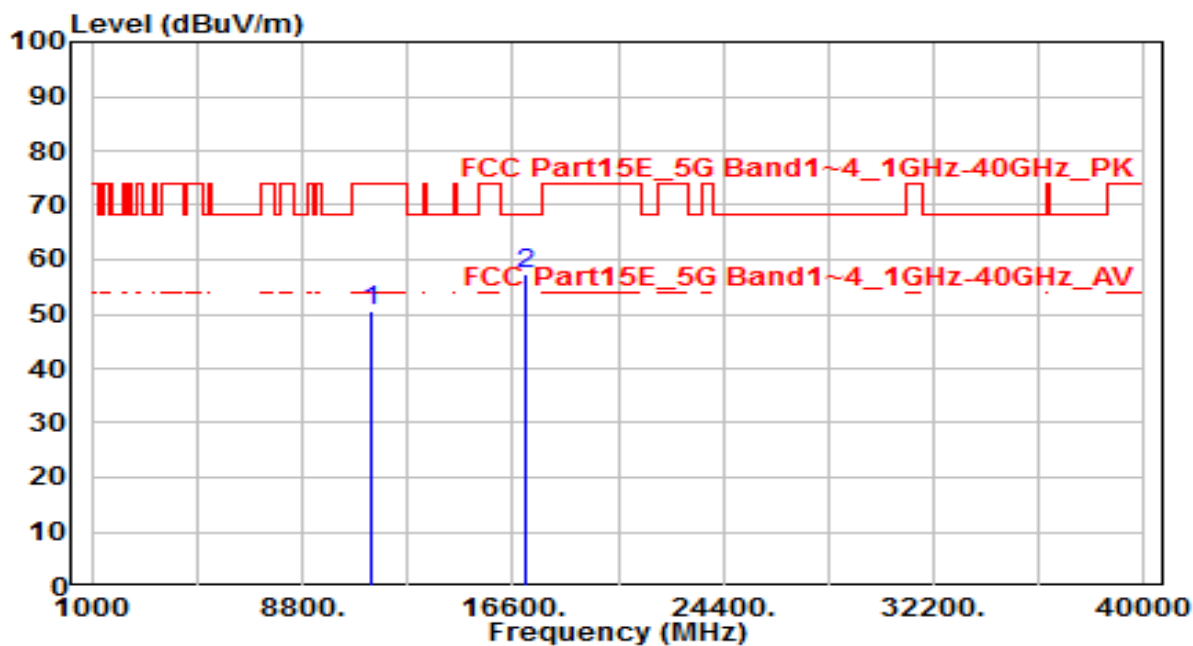


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	32.32	18.32	50.64	-23.36	74.00	150	0	Peak
2	* 17100.000	30.92	26.62	57.53	-10.67	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

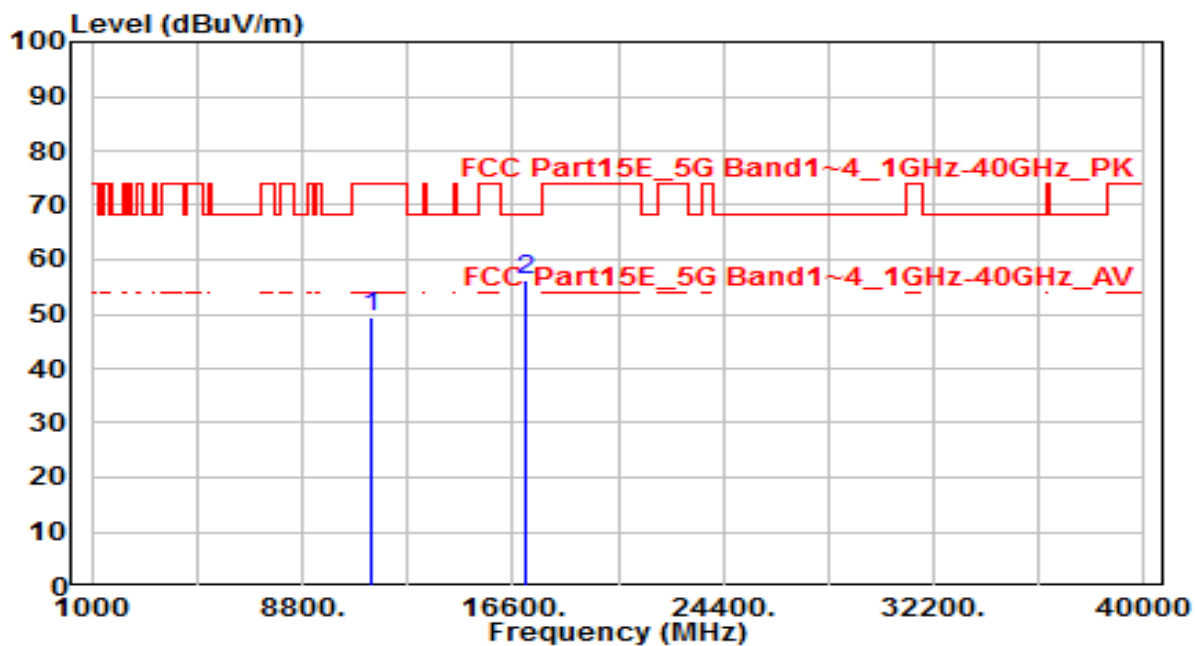


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	30.99	18.32	49.31	-24.69	74.00	150	0	Peak
2	* 17100.000	29.44	26.62	56.06	-12.14	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB) + Cable Loss (dB) – Preamplifier (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

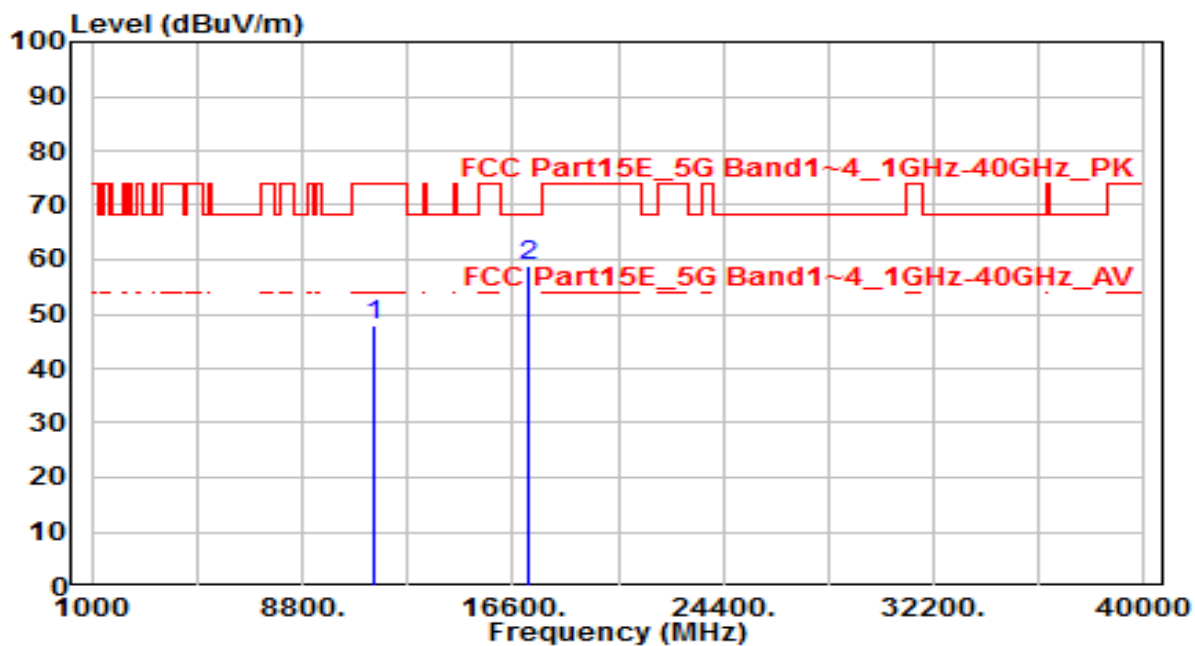


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	29.69	18.37	48.06	-25.94	74.00	150	0	Peak
2	* 17160.000	31.49	27.22	58.71	-9.49	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /62%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0+1	Test Voltage	AC 120V/60Hz

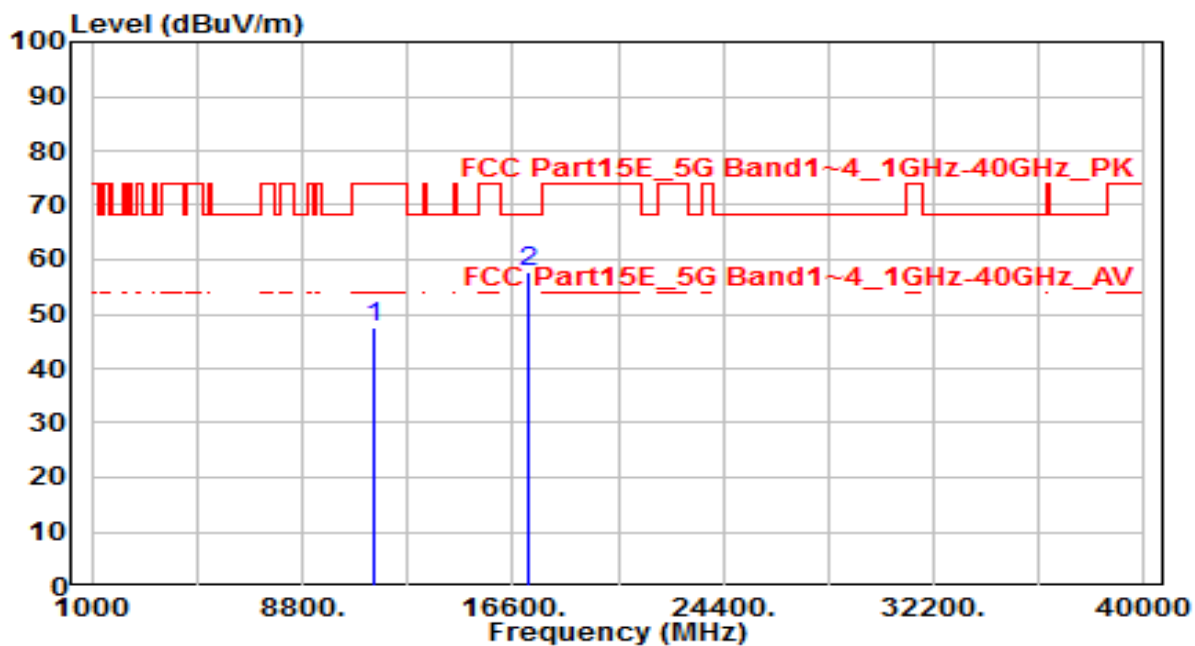


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	29.16	18.37	47.53	-26.47	74.00	150	0	Peak
2	* 17160.000	30.55	27.22	57.77	-10.43	68.20	150	0	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Handheld Data Terminal	Date of Test	2021-02-09
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C / 62%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

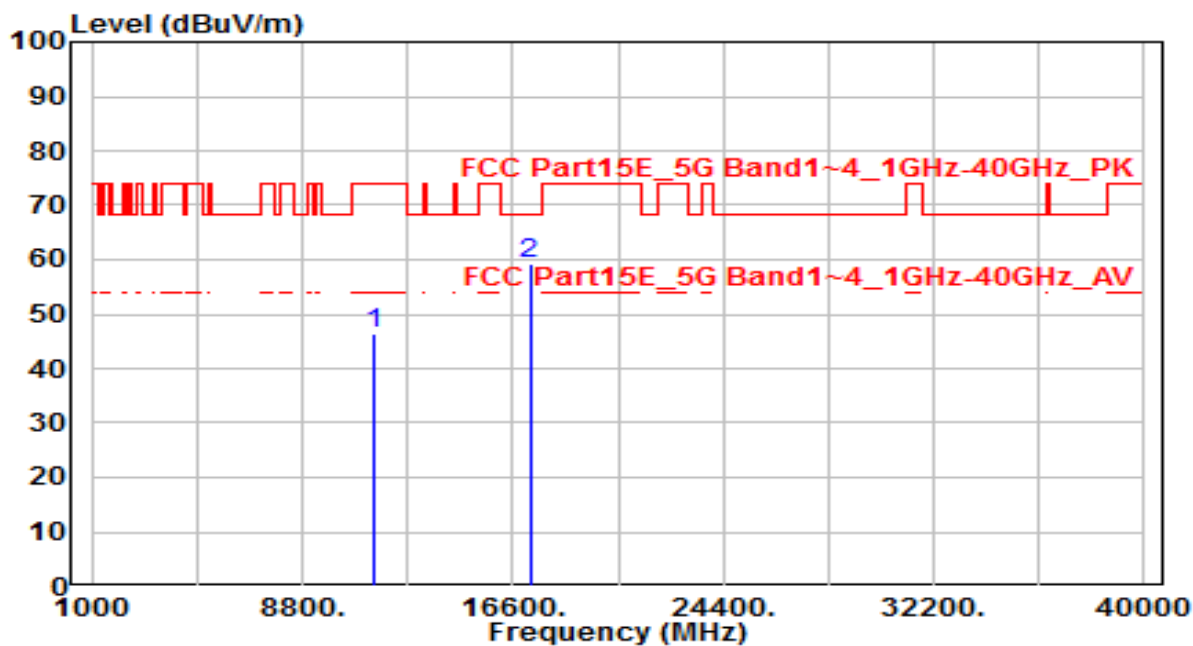

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	27.95	18.44	46.38	-27.62	74.00	150	0	Peak
2	* 17235.000	31.44	27.97	59.41	-8.79	68.20	150	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.