

Main Antenna Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_20.48.35

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax20 CH45 P=10


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

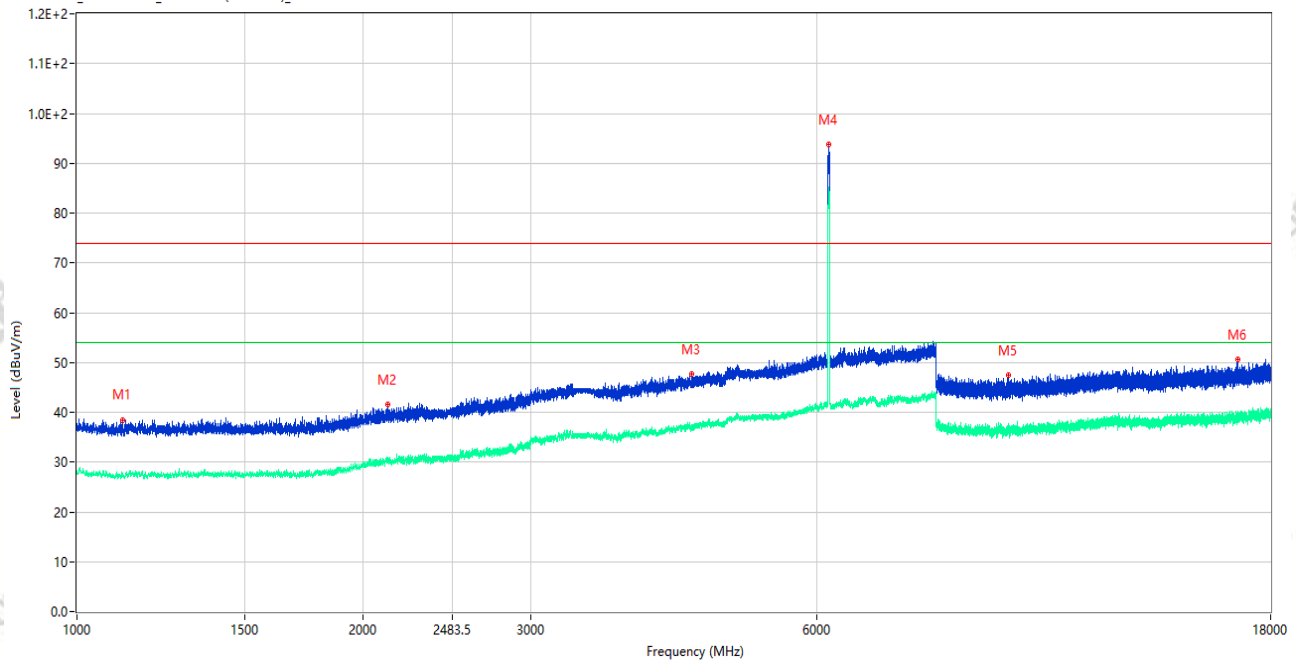


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1116.750	38.52	-15.79	74.0	35.48	Peak	360.00	150	Vertical	Pass
1**	1116.750	27.73	-15.79	54.0	26.27	AV	360.00	150	Vertical	Pass
2	2122.750	41.51	-13.29	74.0	32.49	Peak	333.00	150	Vertical	Pass
2**	2122.750	30.38	-13.29	54.0	23.62	AV	333.00	150	Vertical	Pass
3	4433.000	47.64	-3.06	74.0	26.36	Peak	268.00	150	Vertical	Pass
3**	4433.000	36.92	-3.06	54.0	17.08	AV	268.00	150	Vertical	Pass
4	6171.500	93.75	-0.42	74.0	-19.75	Peak	0.00	150	Vertical	N/A
4**	6171.500	84.47	-0.42	54.0	-30.47	AV	0.00	150	Vertical	N/A
5	9550.638	47.39	-2.51	74.0	26.61	Peak	360.00	150	Vertical	Pass
5**	9550.638	37.25	-2.51	54.0	16.75	AV	360.00	150	Vertical	Pass
6	16622.662	50.55	-1.18	74.0	23.45	Peak	284.00	150	Vertical	Pass
6**	16622.662	39.26	-1.18	54.0	14.74	AV	284.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_20.44.18

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G WIFI 11ax20 CH45 P=10
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

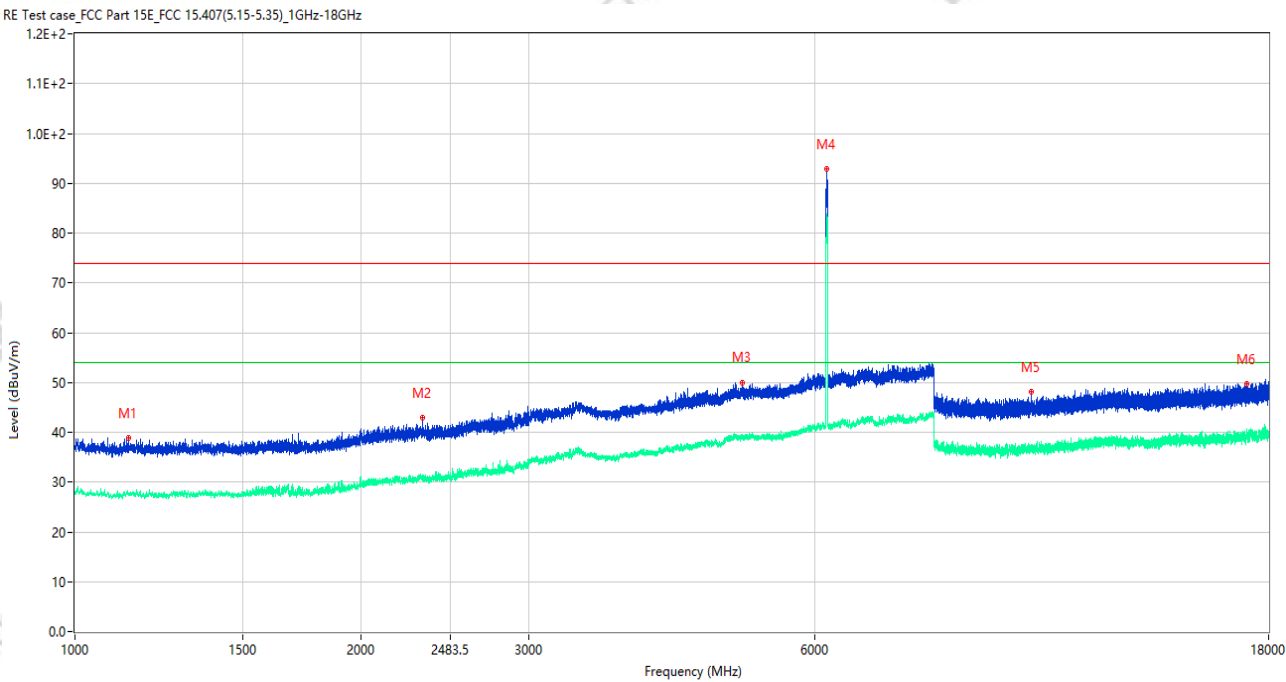

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1137.500	38.82	-15.54	74.0	35.18	Peak	145.00	150	Horizontal	Pass
1**	1137.500	27.49	-15.54	54.0	26.51	AV	145.00	150	Horizontal	Pass
2	2319.000	42.86	-12.38	74.0	31.14	Peak	145.00	150	Horizontal	Pass
2**	2319.000	30.82	-12.38	54.0	23.18	AV	145.00	150	Horizontal	Pass
3	5031.500	50.04	-2.15	74.0	23.96	Peak	248.00	150	Horizontal	Pass
3**	5031.500	39.18	-2.15	54.0	14.82	AV	248.00	150	Horizontal	Pass
4	6170.000	92.89	-0.40	74.0	-18.89	Peak	248.00	150	Horizontal	N/A
4**	6170.000	83.69	-0.40	54.0	-29.69	AV	248.00	150	Horizontal	N/A
5	10130.138	48.05	-3.89	74.0	25.95	Peak	169.00	150	Horizontal	Pass
5**	10130.138	36.83	-3.89	54.0	17.17	AV	169.00	150	Horizontal	Pass
6	17089.912	49.79	-0.71	74.0	24.21	Peak	0.00	150	Horizontal	Pass
6**	17089.912	40.08	-0.71	54.0	13.92	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_21.41.27

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax40 CH43 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

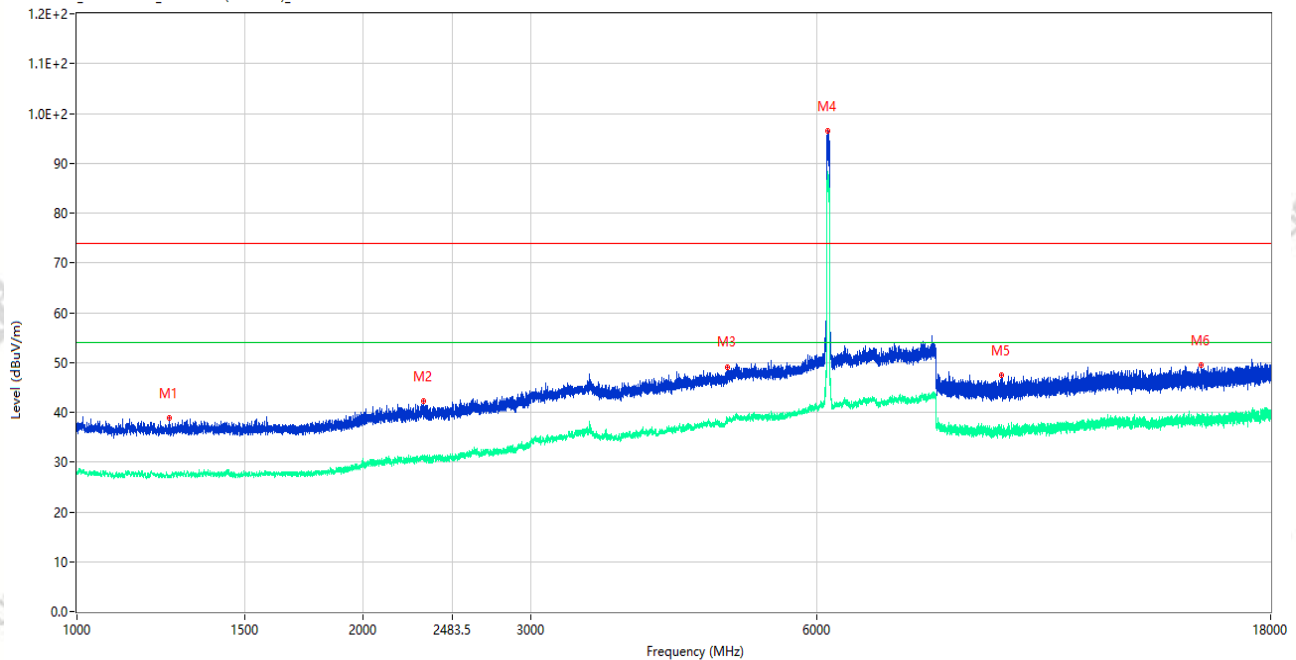

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1250.750	38.88	-16.19	74.0	35.12	Peak	360.00	150	Vertical	Pass
1**	1250.750	27.03	-16.19	54.0	26.97	AV	360.00	150	Vertical	Pass
2	2312.750	42.32	-12.41	74.0	31.68	Peak	360.00	150	Vertical	Pass
2**	2312.750	30.49	-12.41	54.0	23.51	AV	360.00	150	Vertical	Pass
3	4833.500	49.14	-2.21	74.0	24.86	Peak	111.00	150	Vertical	Pass
3**	4833.500	38.49	-2.21	54.0	15.51	AV	111.00	150	Vertical	Pass
4	6162.500	96.58	-0.29	74.0	-22.58	Peak	358.00	150	Vertical	N/A
4**	6162.500	88.02	-0.29	54.0	-34.02	AV	358.00	150	Vertical	N/A
5	9377.738	47.51	-4.67	74.0	26.49	Peak	214.00	150	Vertical	Pass
5**	9377.738	36.09	-4.67	54.0	17.91	AV	214.00	150	Vertical	Pass
6	15223.537	49.46	-1.77	74.0	24.54	Peak	360.00	150	Vertical	Pass
6**	15223.537	38.53	-1.77	54.0	15.47	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_21.47.29

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax40 CH43 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

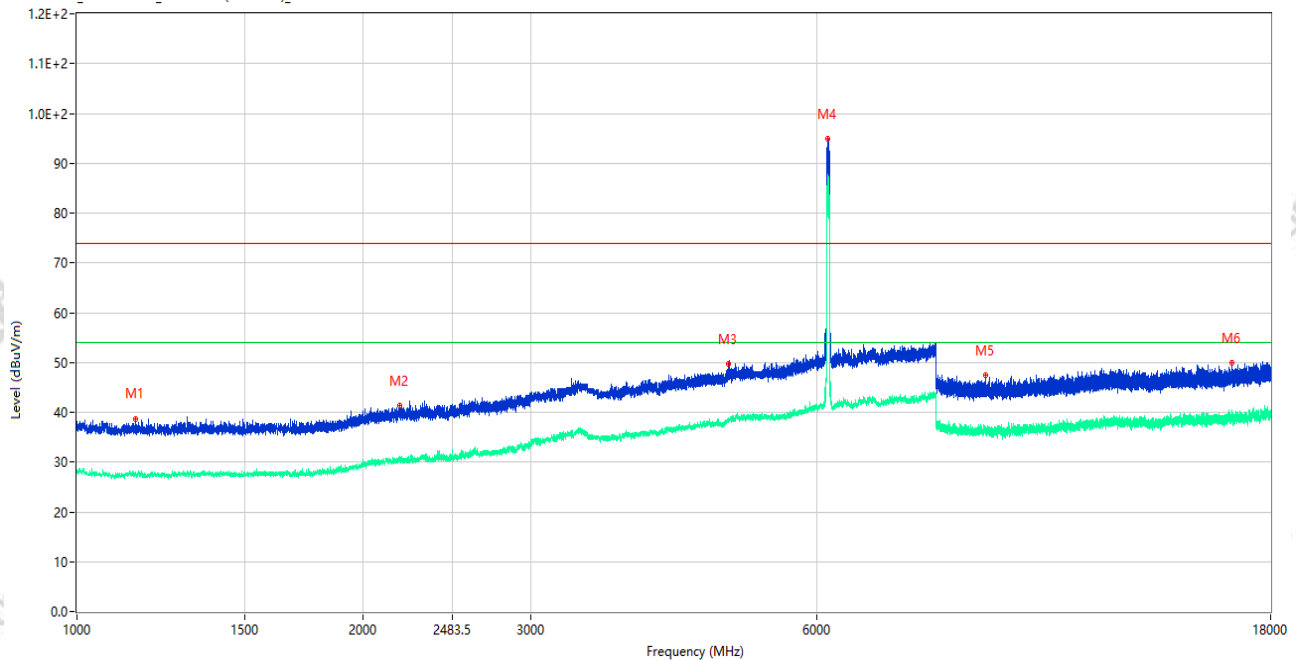

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1153.000	38.75	-15.68	74.0	35.25	Peak	360.00	150	Horizontal	Pass
1**	1153.000	27.29	-15.68	54.0	26.71	AV	360.00	150	Horizontal	Pass
2	2187.000	41.37	-13.24	74.0	32.63	Peak	6.00	150	Horizontal	Pass
2**	2187.000	30.76	-13.24	54.0	23.24	AV	6.00	150	Horizontal	Pass
3	4842.000	49.67	-1.87	74.0	24.33	Peak	109.00	150	Horizontal	Pass
3**	4842.000	38.51	-1.87	54.0	15.49	AV	109.00	150	Horizontal	Pass
4	6160.500	94.96	-0.26	74.0	-20.96	Peak	248.00	150	Horizontal	N/A
4**	6160.500	87.10	-0.26	54.0	-33.10	AV	248.00	150	Horizontal	N/A
5	9021.963	47.47	-4.40	74.0	26.53	Peak	196.00	150	Horizontal	Pass
5**	9021.963	36.60	-4.40	54.0	17.40	AV	196.00	150	Horizontal	Pass
6	16397.963	50.03	-1.34	74.0	23.97	Peak	360.00	150	Horizontal	Pass
6**	16397.963	39.13	-1.34	54.0	14.87	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.07.34

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax80 CH39 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

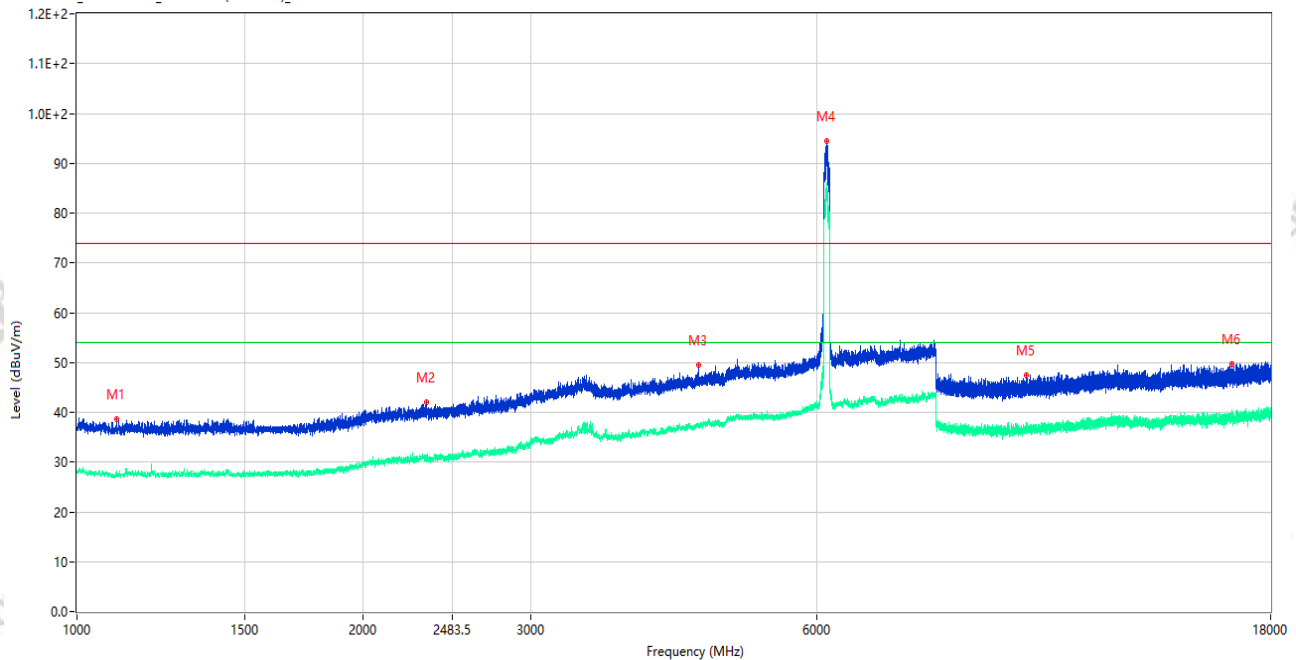

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1100.500	38.60	-15.72	74.0	35.40	Peak	346.00	150	Vertical	Pass
1**	1100.500	27.41	-15.72	54.0	26.59	AV	346.00	150	Vertical	Pass
2	2329.000	41.93	-12.03	74.0	32.07	Peak	17.00	150	Vertical	Pass
2**	2329.000	30.79	-12.03	54.0	23.21	AV	17.00	150	Vertical	Pass
3	4507.500	49.39	-3.27	74.0	24.61	Peak	0.00	150	Vertical	Pass
3**	4507.500	37.28	-3.27	54.0	16.72	AV	0.00	150	Vertical	Pass
4	6151.500	94.37	-0.18	74.0	-20.37	Peak	358.00	150	Vertical	N/A
4**	6151.500	84.27	-0.18	54.0	-30.27	AV	358.00	150	Vertical	N/A
5	9973.625	47.53	-3.66	74.0	26.47	Peak	354.00	150	Vertical	Pass
5**	9973.625	36.58	-3.66	54.0	17.42	AV	354.00	150	Vertical	Pass
6	16380.375	49.72	-1.38	74.0	24.28	Peak	82.00	150	Vertical	Pass
6**	16380.375	39.42	-1.38	54.0	14.58	AV	82.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.00.18

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G WIFI 11ax80 CH39 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

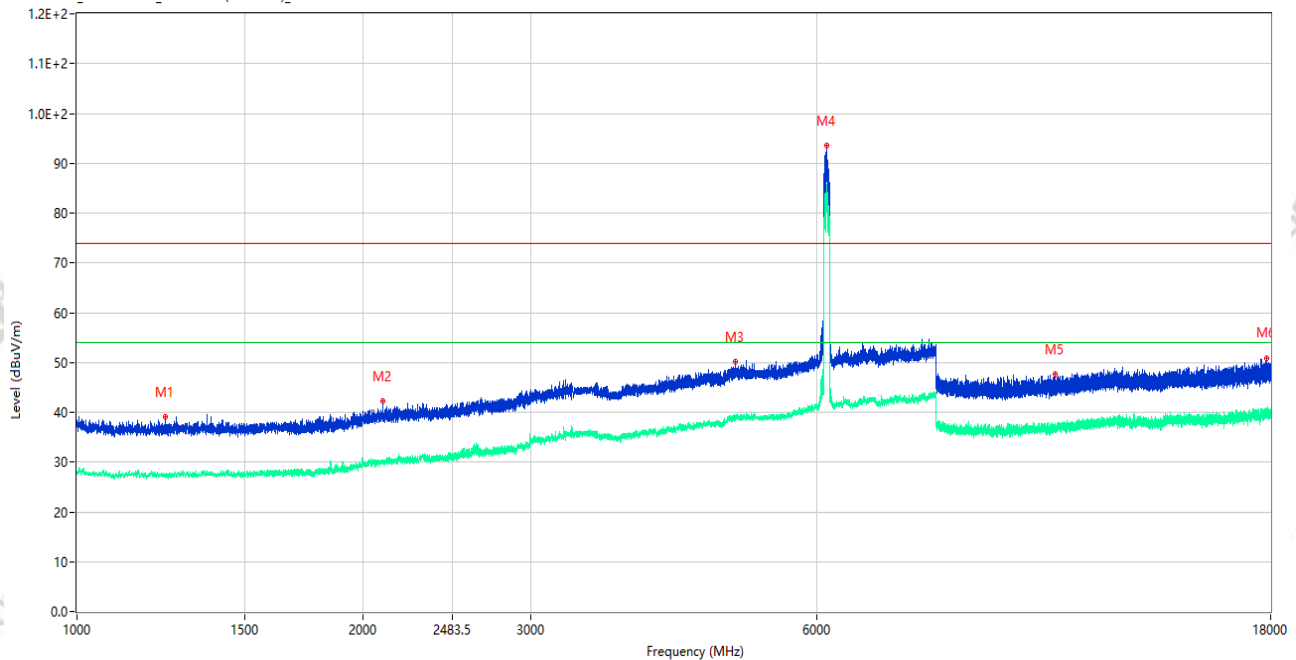

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1240.000	39.00	-16.05	74.0	35.00	Peak	54.00	150	Horizontal	Pass
1**	1240.000	27.32	-16.05	54.0	26.68	AV	54.00	150	Horizontal	Pass
2	2099.500	42.18	-13.53	74.0	31.82	Peak	135.00	150	Horizontal	Pass
2**	2099.500	30.06	-13.53	54.0	23.94	AV	135.00	150	Horizontal	Pass
3	4922.000	50.11	-2.42	74.0	23.89	Peak	80.00	150	Horizontal	Pass
3**	4922.000	38.86	-2.42	54.0	15.14	AV	80.00	150	Horizontal	Pass
4	6147.500	93.55	-0.23	74.0	-19.55	Peak	247.00	150	Horizontal	N/A
4**	6147.500	82.43	-0.23	54.0	-28.43	AV	247.00	150	Horizontal	N/A
5	10688.500	47.58	-4.09	74.0	26.42	Peak	360.00	150	Horizontal	Pass
5**	10688.500	36.38	-4.09	54.0	17.62	AV	360.00	150	Horizontal	Pass
6	17833.574	50.93	0.95	74.0	23.07	Peak	81.00	150	Horizontal	Pass
6**	17833.574	39.49	0.95	54.0	14.51	AV	81.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.42.49

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax160 CH47 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

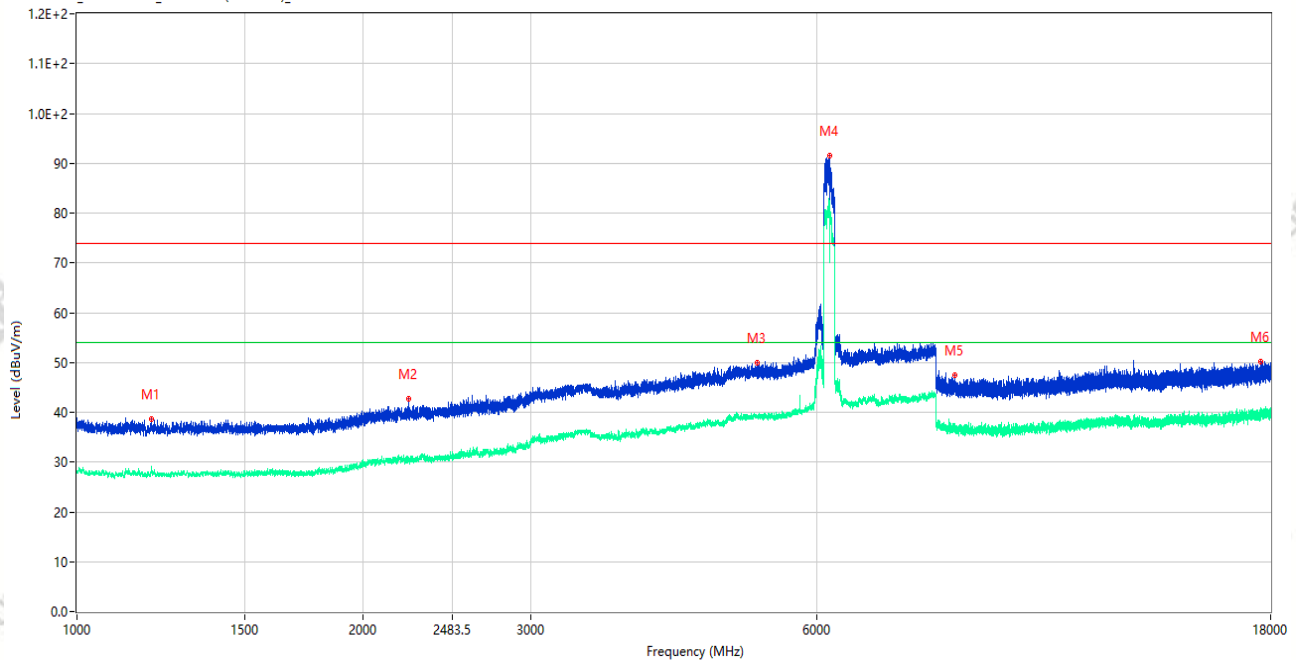

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.500	38.58	-15.72	74.0	35.42	Peak	360.00	150	Vertical	Pass
1**	1197.500	28.47	-15.72	54.0	25.53	AV	360.00	150	Vertical	Pass
2	2232.500	42.77	-13.09	74.0	31.23	Peak	360.00	150	Vertical	Pass
2**	2232.500	30.48	-13.09	54.0	23.52	AV	360.00	150	Vertical	Pass
3	5190.500	49.89	-2.33	74.0	24.11	Peak	168.00	150	Vertical	Pass
3**	5190.500	39.08	-2.33	54.0	14.92	AV	168.00	150	Vertical	Pass
4	6190.000	91.52	-0.68	74.0	-17.52	Peak	268.00	150	Vertical	N/A
4**	6190.000	81.64	-0.68	54.0	-27.64	AV	268.00	150	Vertical	N/A
5	8374.775	47.42	-4.45	74.0	26.58	Peak	26.00	150	Vertical	Pass
5**	8374.775	36.69	-4.45	54.0	17.31	AV	26.00	150	Vertical	Pass
6	17591.550	50.18	0.69	74.0	23.82	Peak	219.00	150	Vertical	Pass
6**	17591.550	40.97	0.69	54.0	13.03	AV	219.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.47.34

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax160 CH47 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

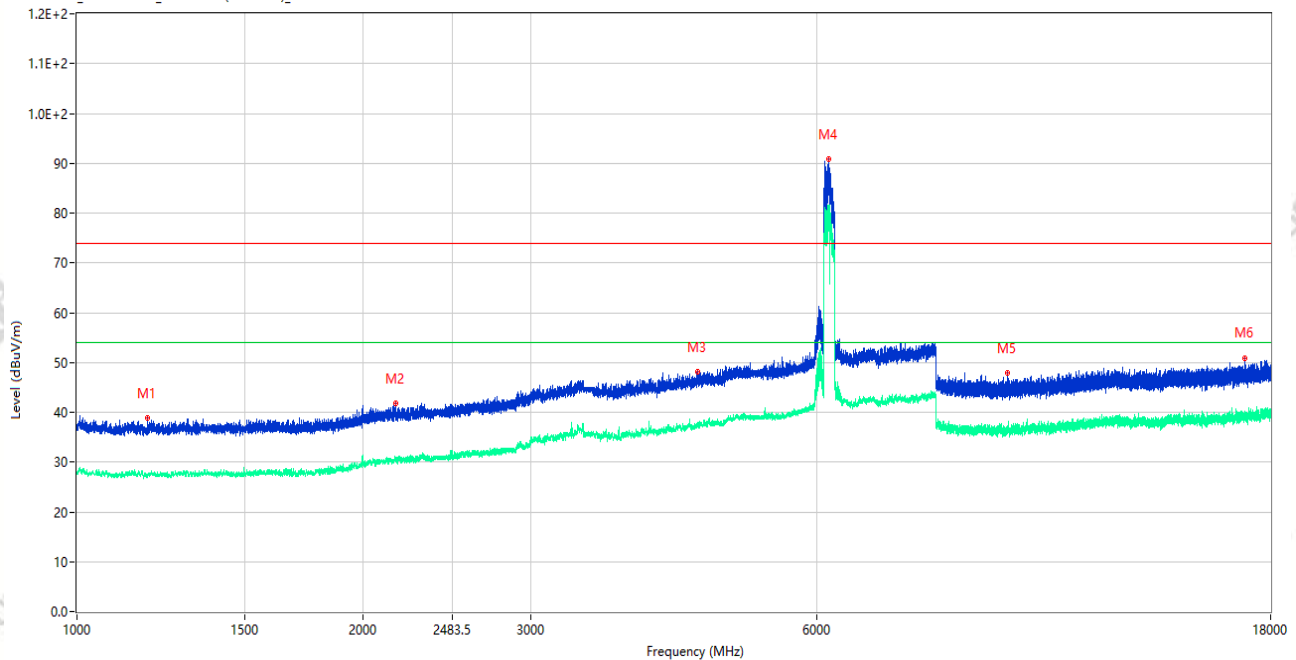


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1187.000	38.93	-15.89	74.0	35.07	Peak	169.00	150	Horizontal	Pass
1**	1187.000	27.37	-15.89	54.0	26.63	AV	169.00	150	Horizontal	Pass
2	2164.000	41.75	-13.19	74.0	32.25	Peak	197.00	150	Horizontal	Pass
2**	2164.000	30.18	-13.19	54.0	23.82	AV	197.00	150	Horizontal	Pass
3	4499.000	48.08	-3.25	74.0	25.92	Peak	280.00	150	Horizontal	Pass
3**	4499.000	37.96	-3.25	54.0	16.04	AV	280.00	150	Horizontal	Pass
4	6170.000	90.79	-0.40	74.0	-16.79	Peak	249.00	150	Horizontal	N/A
4**	6170.000	80.82	-0.40	54.0	-26.82	AV	249.00	150	Horizontal	N/A
5	9516.912	47.99	-2.90	74.0	26.01	Peak	0.00	150	Horizontal	Pass
5**	9516.912	36.85	-2.90	54.0	17.15	AV	0.00	150	Horizontal	Pass
6	16906.425	50.95	-0.77	74.0	23.05	Peak	289.00	150	Horizontal	Pass
6**	16906.425	39.42	-0.77	54.0	14.58	AV	289.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_09.17.38

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(6G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT2

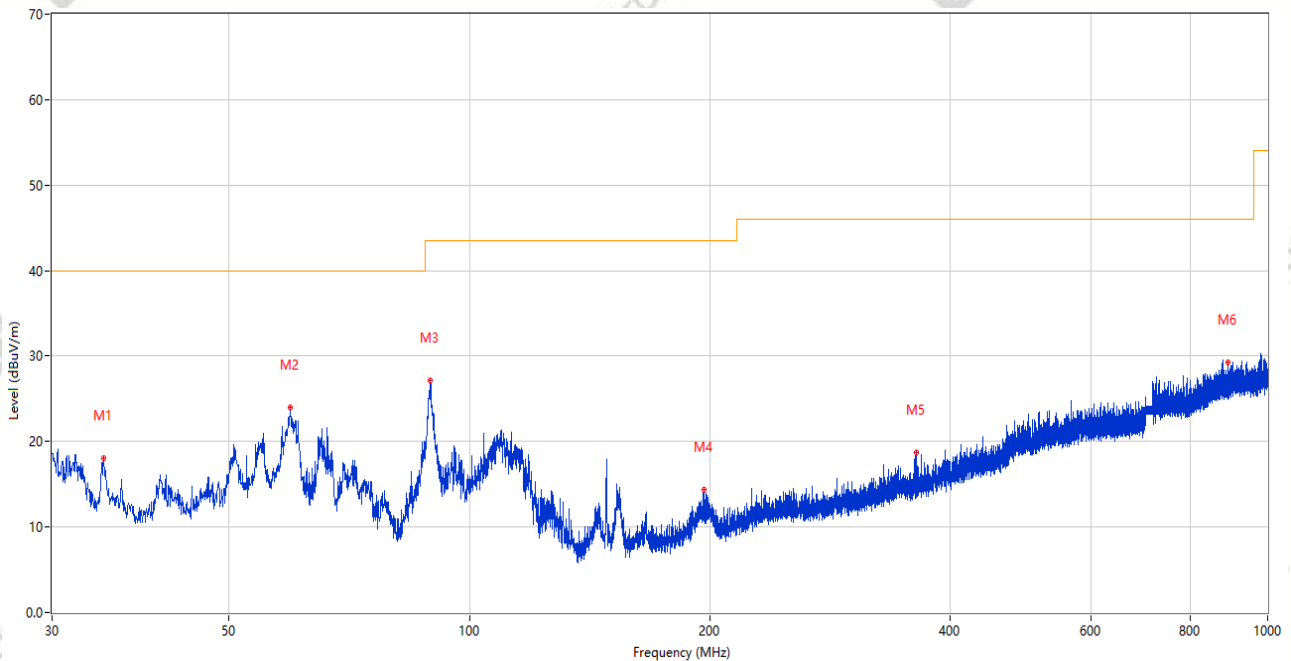

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.801	18.07	-27.90	40.0	21.93	Peak	106.00	100	Vertical	Pass
2	59.585	23.96	-26.08	40.0	16.04	Peak	262.00	100	Vertical	Pass
3	89.364	27.13	-28.44	43.5	16.37	Peak	234.00	100	Vertical	Pass
4	196.889	14.40	-25.96	43.5	29.10	Peak	201.00	200	Vertical	Pass
5	362.516	18.74	-22.15	46.0	27.26	Peak	234.00	100	Vertical	Pass
6	891.409	29.30	-10.51	46.0	16.70	Peak	234.00	100	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_09.16.09

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(6G)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT2

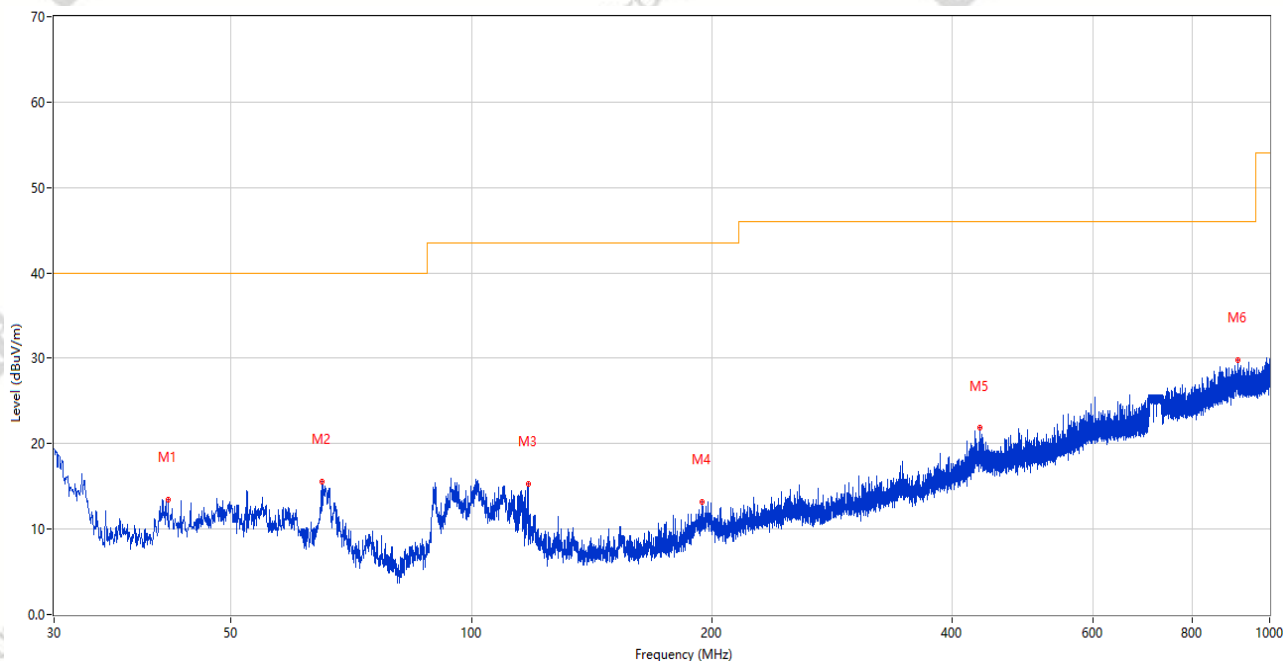

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.688	13.43	-25.49	40.0	26.57	Peak	162.00	200	Horizontal	Pass
2	65.066	15.57	-27.52	40.0	24.43	Peak	329.00	100	Horizontal	Pass
3	117.785	15.29	-27.98	43.5	28.21	Peak	306.00	200	Horizontal	Pass
4	194.754	13.14	-26.05	43.5	30.36	Peak	353.00	100	Horizontal	Pass
5	433.957	21.82	-20.15	46.0	24.18	Peak	107.00	100	Horizontal	Pass
6	913.039	29.82	-9.76	46.0	16.18	Peak	292.00	100	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_10.33.48

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G U8 WIFI 11ax20 CH213

P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

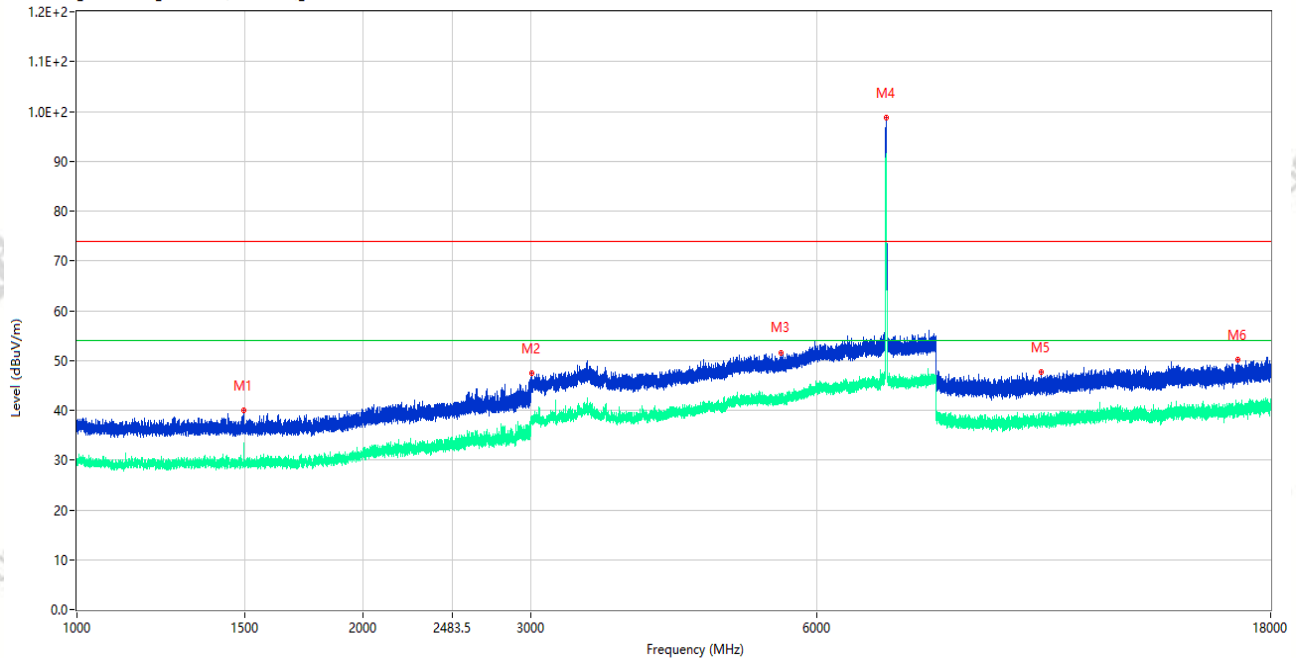


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.200	40.05	-16.14	74.0	33.95	Peak	112.00	150	Vertical	Pass
1**	1498.200	30.60	-16.14	54.0	23.40	AV	112.00	150	Vertical	Pass
2	3007.750	47.39	-8.16	74.0	26.61	Peak	145.00	150	Vertical	Pass
2**	3007.750	37.83	-8.16	54.0	16.17	AV	145.00	150	Vertical	Pass
3	5501.000	51.58	-2.54	74.0	22.42	Peak	2.00	150	Vertical	Pass
3**	5501.000	41.44	-2.54	54.0	12.56	AV	2.00	150	Vertical	Pass
4	7099.250	98.79	-0.23	74.0	-24.79	Peak	196.00	150	Vertical	N/A
4**	7099.250	90.32	-0.23	54.0	-36.32	AV	196.00	150	Vertical	N/A
5	10329.638	47.62	-3.18	74.0	26.38	Peak	360.00	150	Vertical	Pass
5**	10329.638	37.65	-3.18	54.0	16.35	AV	360.00	150	Vertical	Pass
6	16641.563	50.07	-1.02	74.0	23.93	Peak	313.00	150	Vertical	Pass
6**	16641.563	39.88	-1.02	54.0	14.12	AV	313.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-07_10.46.14

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax20 CH213 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

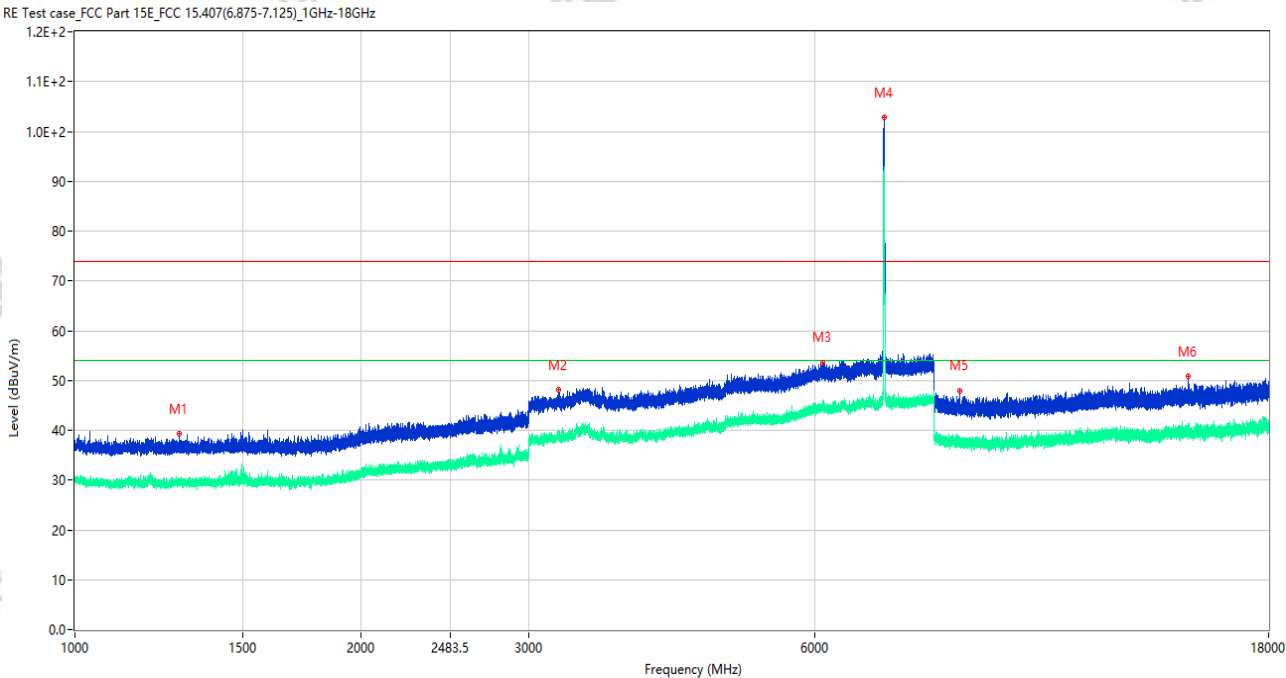


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1286.100	39.33	-15.93	74.0	34.67	Peak	298.00	150	Horizontal	Pass
1**	1286.100	30.27	-15.93	54.0	23.73	AV	298.00	150	Horizontal	Pass
2	3223.000	48.23	-6.43	74.0	25.77	Peak	296.00	150	Horizontal	Pass
2**	3223.000	39.33	-6.43	54.0	14.67	AV	296.00	150	Horizontal	Pass
3	6115.000	53.61	-0.08	74.0	20.39	Peak	243.00	150	Horizontal	Pass
3**	6115.000	44.71	-0.08	54.0	9.29	AV	243.00	150	Horizontal	Pass
4	7098.000	102.77	-0.26	74.0	-28.77	Peak	313.00	150	Horizontal	N/A
4**	7098.000	91.83	-0.26	54.0	-37.83	AV	313.00	150	Horizontal	N/A
5	8526.300	48.01	-4.88	74.0	25.99	Peak	51.00	150	Horizontal	Pass
5**	8526.300	37.14	-4.88	54.0	16.86	AV	51.00	150	Horizontal	Pass
6	14822.963	50.78	-0.13	74.0	23.22	Peak	211.00	150	Horizontal	Pass
6**	14822.963	39.34	-0.13	54.0	14.66	AV	211.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-07_11.01.32

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax40 CH211
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

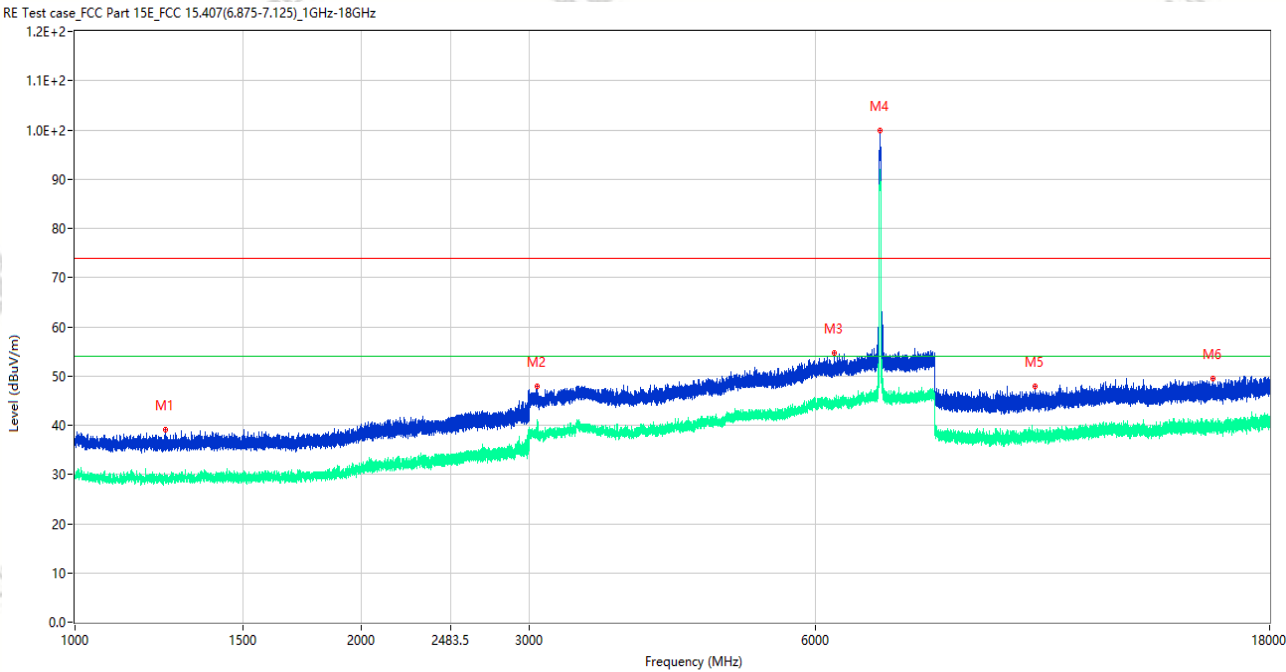


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1243.300	39.04	-16.08	74.0	34.96	Peak	87.00	150	Horizontal	Pass
1**	1243.300	29.09	-16.08	54.0	24.91	AV	87.00	150	Horizontal	Pass
2	3062.500	47.83	-7.38	74.0	26.17	Peak	81.00	150	Horizontal	Pass
2**	3062.500	40.68	-7.38	54.0	13.32	AV	81.00	150	Horizontal	Pass
3	6279.750	54.60	-0.44	74.0	19.40	Peak	360.00	150	Horizontal	Pass
3**	6279.750	44.20	-0.44	54.0	9.80	AV	360.00	150	Horizontal	Pass
4	7013.500	99.86	0.57	74.0	-25.86	Peak	213.00	150	Horizontal	N/A
4**	7013.500	90.93	0.57	54.0	-36.93	AV	213.00	150	Horizontal	N/A
5	10212.787	47.94	-3.09	74.0	26.06	Peak	99.00	150	Horizontal	Pass
5**	10212.787	38.16	-3.09	54.0	15.84	AV	99.00	150	Horizontal	Pass
6	15679.500	49.47	-1.72	74.0	24.53	Peak	221.00	150	Horizontal	Pass
6**	15679.500	39.18	-1.72	54.0	14.82	AV	221.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-07_10.52.17

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax40 CH211
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

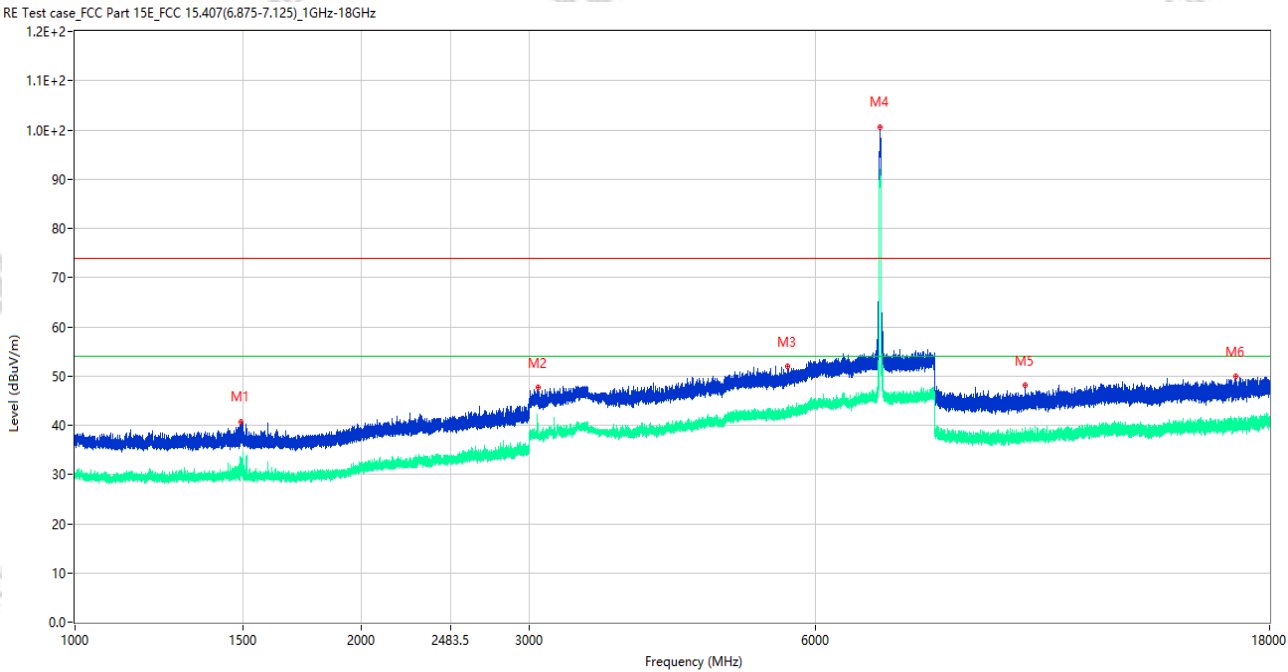

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1494.200	40.77	-16.20	74.0	33.23	Peak	0.00	150	Horizontal	Pass
1**	1494.200	31.57	-16.20	54.0	22.43	AV	0.00	150	Horizontal	Pass
2	3069.000	47.72	-7.68	74.0	26.28	Peak	111.00	150	Horizontal	Pass
2**	3069.000	37.52	-7.68	54.0	16.48	AV	111.00	150	Horizontal	Pass
3	5611.500	51.89	-2.45	74.0	22.11	Peak	60.00	150	Horizontal	Pass
3**	5611.500	42.75	-2.45	54.0	11.25	AV	60.00	150	Horizontal	Pass
4	7009.000	100.66	0.45	74.0	-26.66	Peak	261.00	150	Horizontal	N/A
4**	7009.000	88.98	0.45	54.0	-34.98	AV	261.00	150	Horizontal	N/A
5	9972.912	48.19	-3.73	74.0	25.81	Peak	0.00	150	Horizontal	Pass
5**	9972.912	38.26	-3.73	54.0	15.74	AV	0.00	150	Horizontal	Pass
6	16575.150	49.85	-0.71	74.0	24.15	Peak	40.00	150	Horizontal	Pass
6**	16575.150	40.96	-0.71	54.0	13.04	AV	40.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.12.01

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax80 CH199
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

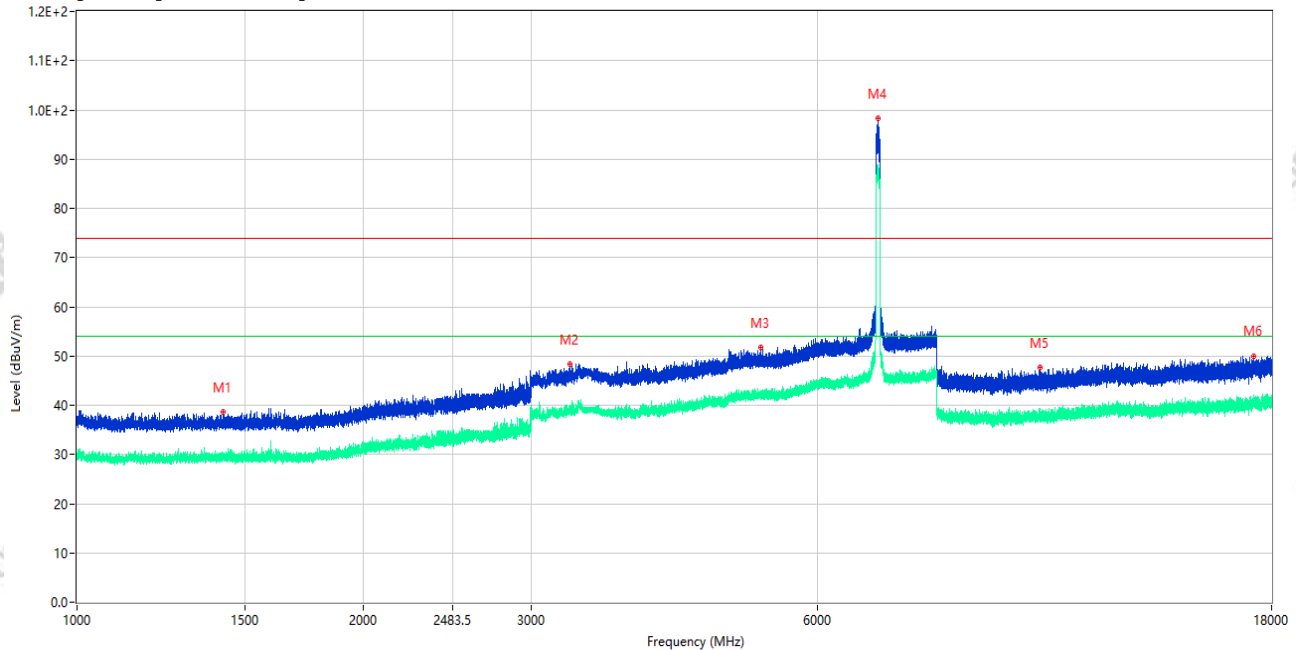

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1425.400	38.65	-15.97	74.0	35.35	Peak	4.00	150	Vertical	Pass
1**	1425.400	29.46	-15.97	54.0	24.54	AV	4.00	150	Vertical	Pass
2	3295.750	48.28	-6.82	74.0	25.72	Peak	265.00	150	Vertical	Pass
2**	3295.750	38.60	-6.82	54.0	15.40	AV	265.00	150	Vertical	Pass
3	5225.750	51.76	-2.33	74.0	22.24	Peak	0.00	150	Vertical	Pass
3**	5225.750	42.18	-2.33	54.0	11.82	AV	0.00	150	Vertical	Pass
4	6942.250	98.20	-0.11	74.0	-24.20	Peak	229.00	150	Vertical	N/A
4**	6942.250	88.71	-0.11	54.0	-34.71	AV	229.00	150	Vertical	N/A
5	10270.975	47.70	-2.96	74.0	26.30	Peak	171.00	150	Vertical	Pass
5**	10270.975	38.62	-2.96	54.0	15.38	AV	171.00	150	Vertical	Pass
6	17217.749	50.05	-0.75	74.0	23.95	Peak	115.00	150	Vertical	Pass
6**	17217.749	39.93	-0.75	54.0	14.07	AV	115.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.21.03

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G U8 WIFI 11ax80 CH199

P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

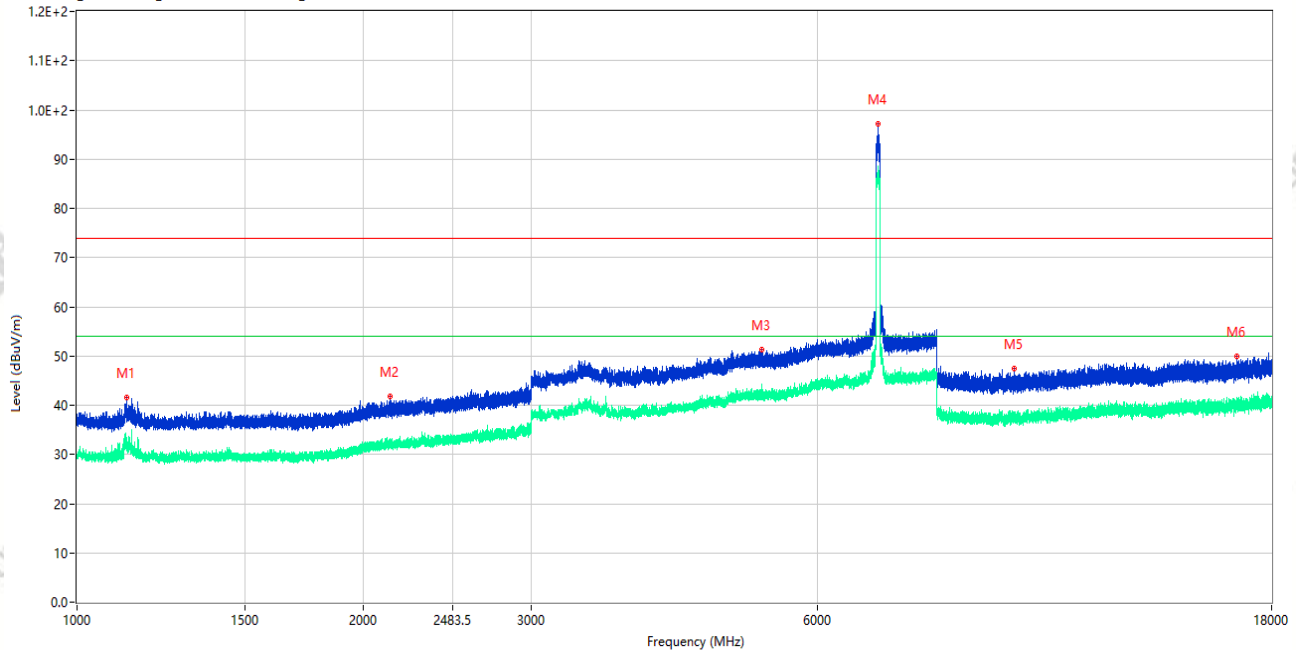


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1128.500	41.62	-15.57	74.0	32.38	Peak	199.00	150	Horizontal	Pass
1**	1128.500	31.40	-15.57	54.0	22.60	AV	199.00	150	Horizontal	Pass
2	2130.800	41.71	-13.27	74.0	32.29	Peak	142.00	150	Horizontal	Pass
2**	2130.800	32.26	-13.27	54.0	21.74	AV	142.00	150	Horizontal	Pass
3	5240.750	51.28	-2.17	74.0	22.72	Peak	0.00	150	Horizontal	Pass
3**	5240.750	41.55	-2.17	54.0	12.45	AV	0.00	150	Horizontal	Pass
4	6941.750	97.24	-0.13	74.0	-23.24	Peak	266.00	150	Horizontal	N/A
4**	6941.750	87.76	-0.13	54.0	-33.76	AV	266.00	150	Horizontal	N/A
5	9645.400	47.35	-3.32	74.0	26.65	Peak	360.00	150	Horizontal	Pass
5**	9645.400	38.60	-3.32	54.0	15.40	AV	360.00	150	Horizontal	Pass
6	16553.363	49.90	-0.87	74.0	24.10	Peak	320.00	150	Horizontal	Pass
6**	16553.363	41.57	-0.87	54.0	12.43	AV	320.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-07_11.40.12

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax160 CH207
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT2

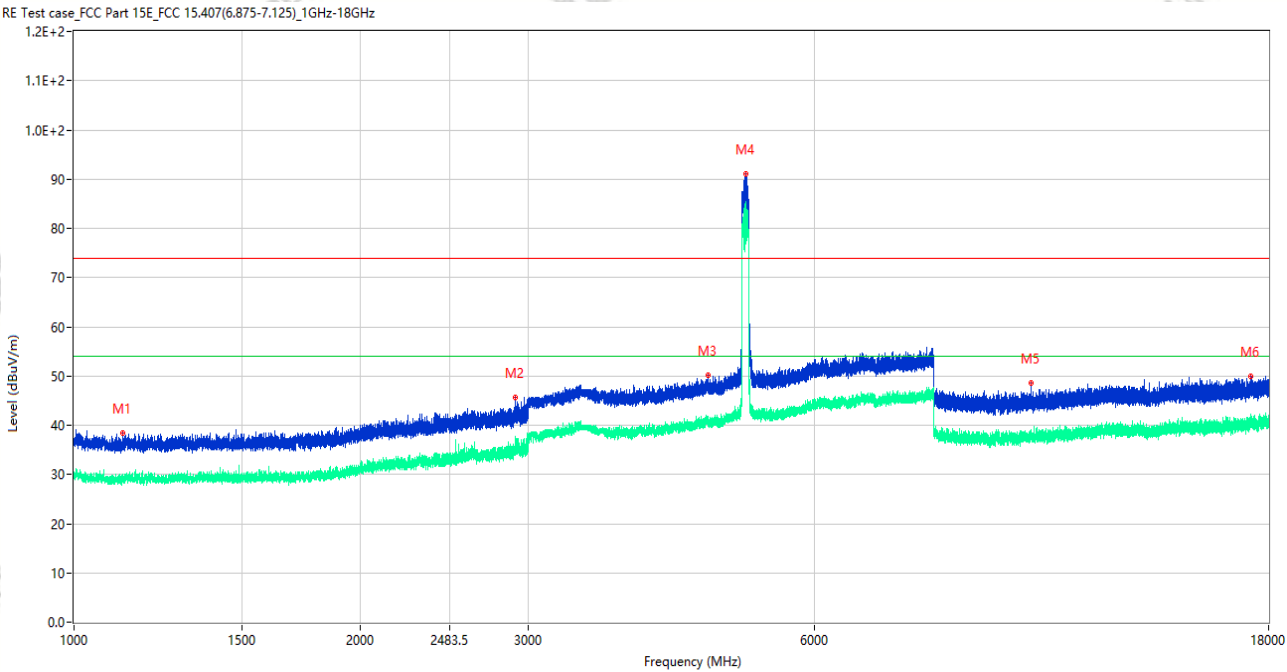

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.400	38.40	-15.62	74.0	35.60	Peak	360.00	150	Vertical	Pass
1**	1126.400	29.05	-15.62	54.0	24.95	AV	360.00	150	Vertical	Pass
2	2907.800	45.73	-9.47	74.0	28.27	Peak	104.00	150	Vertical	Pass
2**	2907.800	34.98	-9.47	54.0	19.02	AV	104.00	150	Vertical	Pass
3	4636.250	50.13	-2.93	74.0	23.87	Peak	147.00	150	Vertical	Pass
3**	4636.250	40.70	-2.93	54.0	13.30	AV	147.00	150	Vertical	Pass
4	5080.500	90.98	-2.53	74.0	-16.98	Peak	130.00	150	Vertical	N/A
4**	5080.500	85.50	-2.53	54.0	-31.50	AV	130.00	150	Vertical	N/A
5	10137.500	48.56	-3.98	74.0	25.44	Peak	360.00	150	Vertical	Pass
5**	10137.500	37.73	-3.98	54.0	16.27	AV	360.00	150	Vertical	Pass
6	17248.989	49.89	-0.64	74.0	24.11	Peak	0.00	150	Vertical	Pass
6**	17248.989	40.67	-0.64	54.0	13.33	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.31.50

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G U8 WIFI 11ax160 CH207

P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT2

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

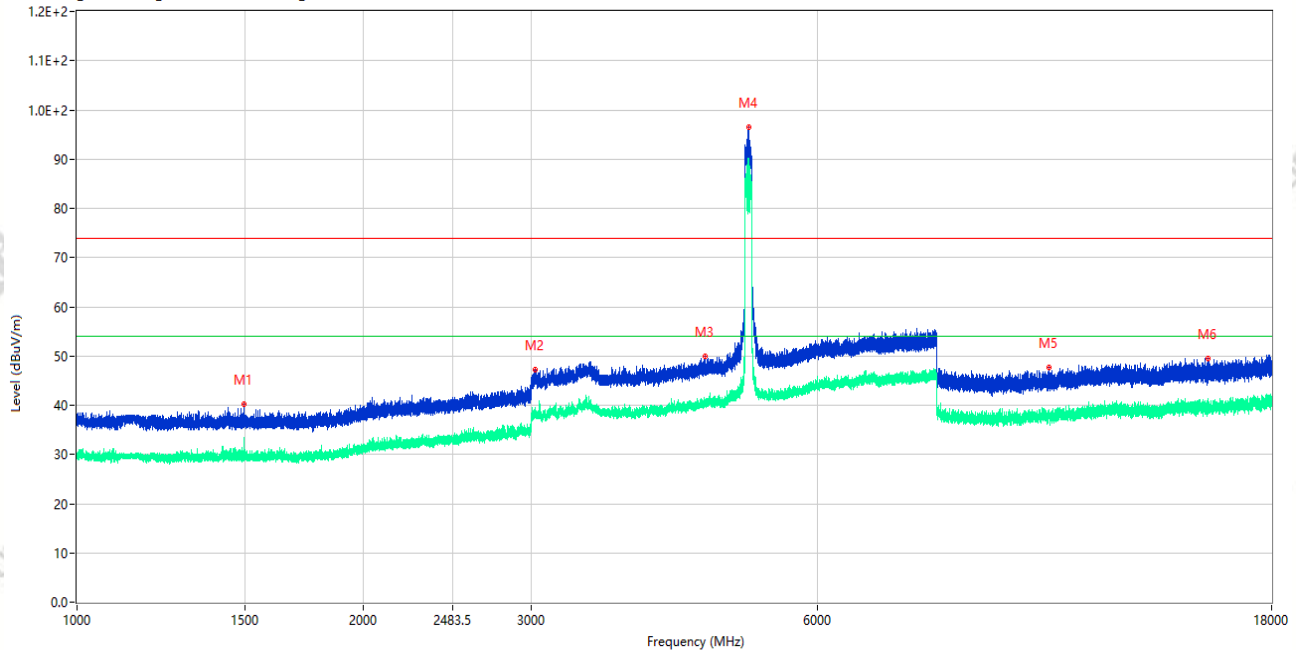

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1498.900	40.21	-16.14	74.0	33.79	Peak	360.00	150	Horizontal	Pass
1**	1498.900	29.18	-16.14	54.0	24.82	AV	360.00	150	Horizontal	Pass
2	3029.250	47.26	-7.67	74.0	26.74	Peak	181.00	150	Horizontal	Pass
2**	3029.250	38.28	-7.67	54.0	15.72	AV	181.00	150	Horizontal	Pass
3	4573.750	49.99	-3.34	74.0	24.01	Peak	31.00	150	Horizontal	Pass
3**	4573.750	39.98	-3.34	54.0	14.02	AV	31.00	150	Horizontal	Pass
4	5078.000	96.43	-2.58	74.0	-22.43	Peak	282.00	150	Horizontal	N/A
4**	5078.000	88.61	-2.58	54.0	-34.61	AV	282.00	150	Horizontal	N/A
5	10508.951	47.64	-3.34	74.0	26.36	Peak	355.00	150	Horizontal	Pass
5**	10508.951	38.99	-3.34	54.0	15.01	AV	355.00	150	Horizontal	Pass
6	15444.825	49.55	-1.74	74.0	24.45	Peak	82.00	150	Horizontal	Pass
6**	15444.825	39.70	-1.74	54.0	14.30	AV	82.00	150	Horizontal	Pass


Aux. Antenna Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_20.59.00

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G WIFI 11ax20 CH45 P=10
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

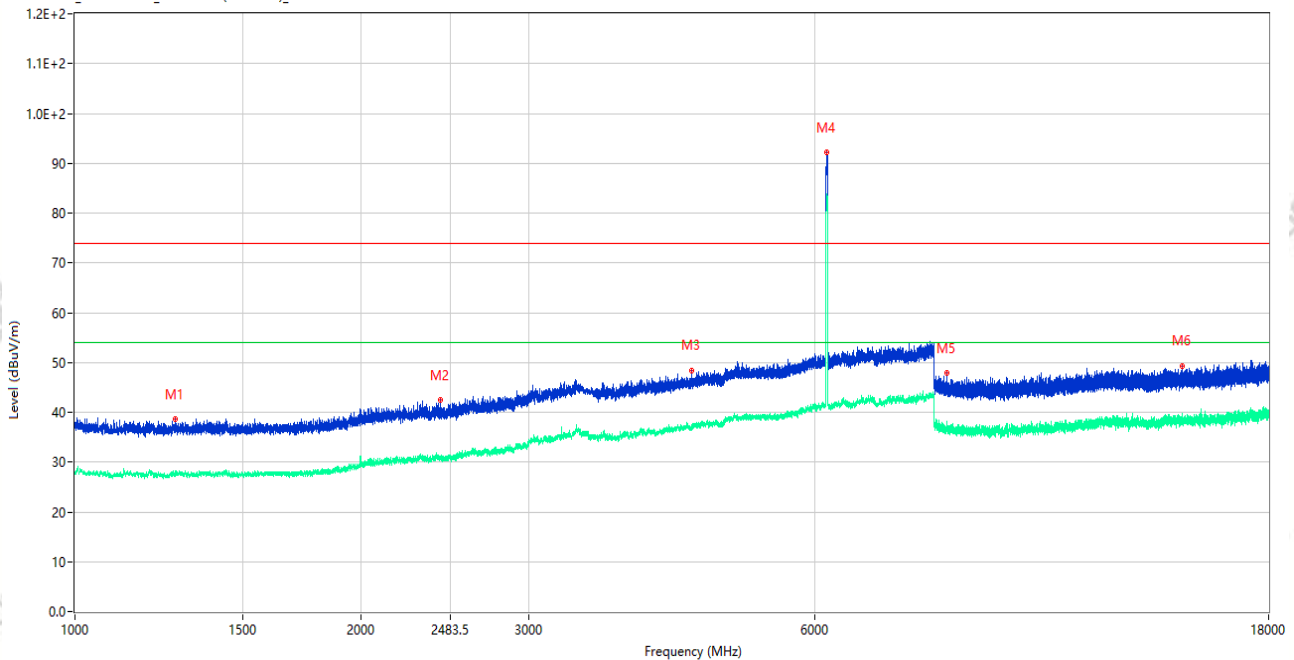


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1274.000	38.64	-15.83	74.0	35.36	Peak	303.00	150	Vertical	Pass
1**	1274.000	27.78	-15.83	54.0	26.22	AV	303.00	150	Vertical	Pass
2	2424.000	42.51	-12.29	74.0	31.49	Peak	348.00	150	Vertical	Pass
2**	2424.000	30.93	-12.29	54.0	23.07	AV	348.00	150	Vertical	Pass
3	4451.000	48.47	-3.73	74.0	25.53	Peak	354.00	150	Vertical	Pass
3**	4451.000	37.07	-3.73	54.0	16.93	AV	354.00	150	Vertical	Pass
4	6172.500	92.13	-0.44	74.0	-18.13	Peak	359.00	150	Vertical	N/A
4**	6172.500	82.74	-0.44	54.0	-28.74	AV	359.00	150	Vertical	N/A
5	8258.162	47.91	-4.49	74.0	26.09	Peak	98.00	150	Vertical	Pass
5**	8258.162	37.10	-4.49	54.0	16.90	AV	98.00	150	Vertical	Pass
6	14598.787	49.35	-2.34	74.0	24.65	Peak	219.00	150	Vertical	Pass
6**	14598.787	39.58	-2.34	54.0	14.42	AV	219.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-02_21.06.16

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G WIFI 11ax20 CH45 P=10
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

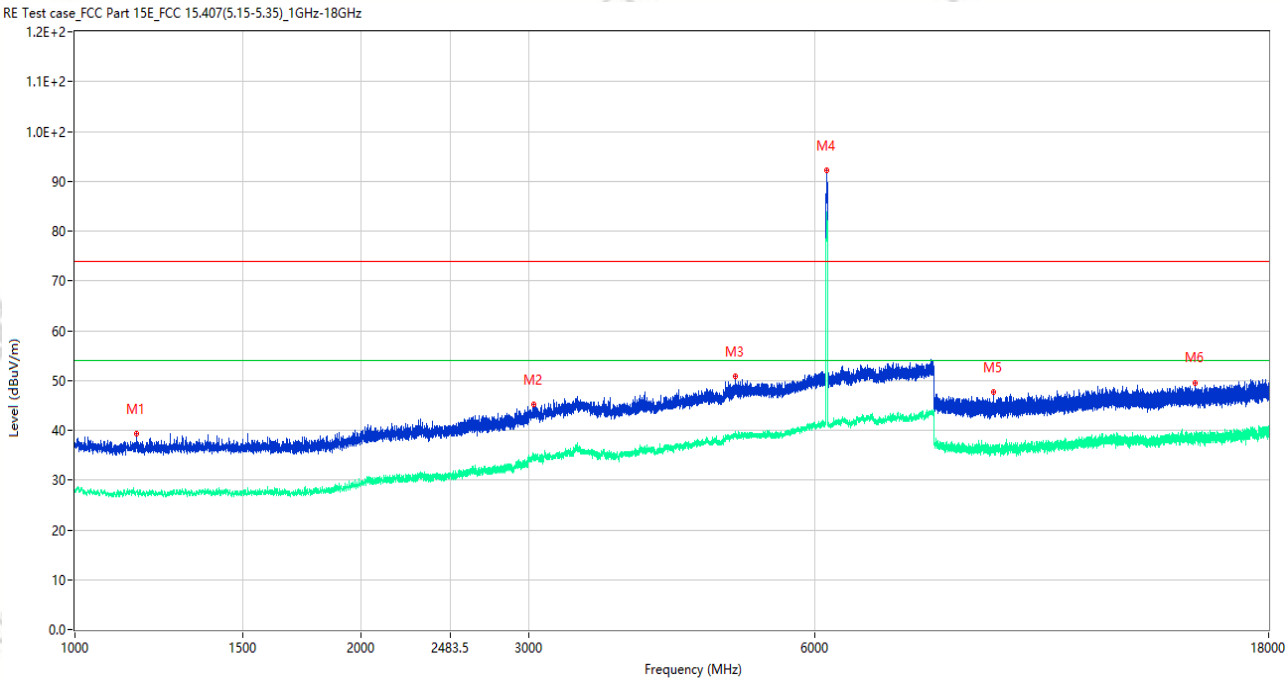

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.000	39.28	-15.46	74.0	34.72	Peak	82.00	150	Horizontal	Pass
1**	1162.000	27.80	-15.46	54.0	26.20	AV	82.00	150	Horizontal	Pass
2	3035.500	45.18	-8.06	74.0	28.82	Peak	58.00	150	Horizontal	Pass
2**	3035.500	34.82	-8.06	54.0	19.18	AV	58.00	150	Horizontal	Pass
3	4950.000	50.80	-1.71	74.0	23.20	Peak	296.00	150	Horizontal	Pass
3**	4950.000	38.87	-1.71	54.0	15.13	AV	296.00	150	Horizontal	Pass
4	6169.000	92.23	-0.38	74.0	-18.23	Peak	238.00	150	Horizontal	N/A
4**	6169.000	82.85	-0.38	54.0	-28.85	AV	238.00	150	Horizontal	N/A
5	9241.413	47.58	-5.43	74.0	26.42	Peak	360.00	150	Horizontal	Pass
5**	9241.413	36.48	-5.43	54.0	17.52	AV	360.00	150	Horizontal	Pass
6	15079.950	49.58	-1.84	74.0	24.42	Peak	82.00	150	Horizontal	Pass
6**	15079.950	38.68	-1.84	54.0	15.32	AV	82.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_21.28.59

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax40 CH43 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

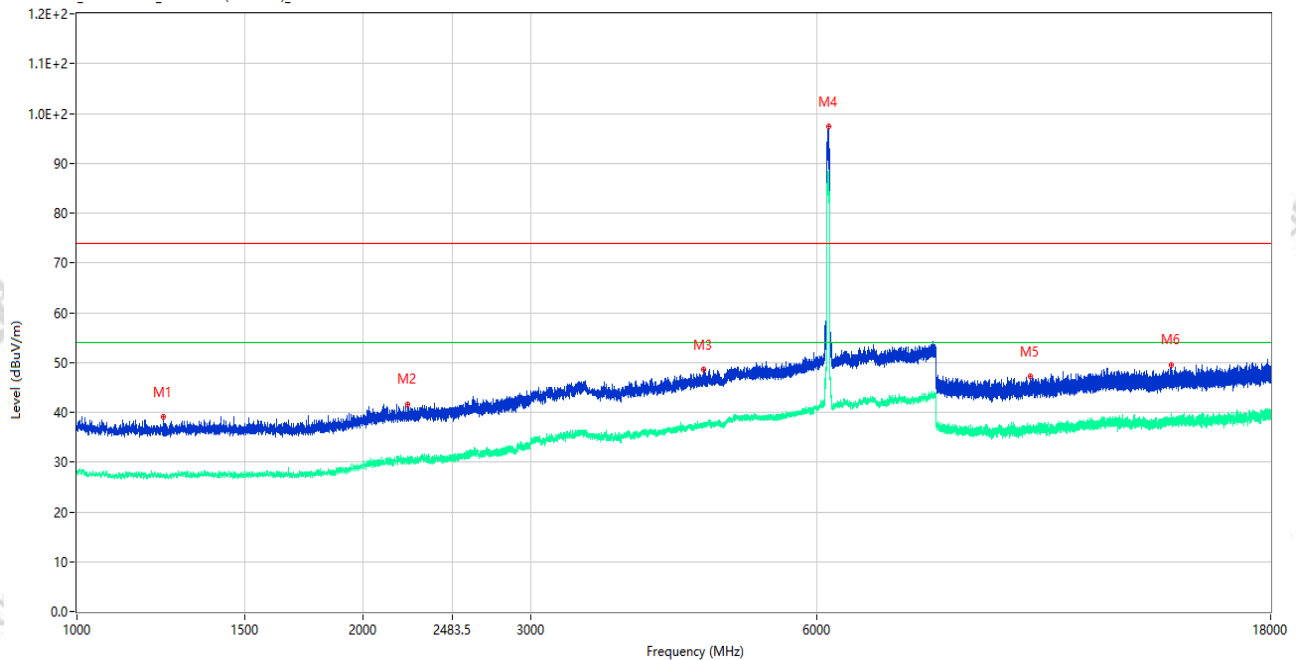

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1231.500	39.00	-16.01	74.0	35.00	Peak	5.00	150	Vertical	Pass
1**	1231.500	27.21	-16.01	54.0	26.79	AV	5.00	150	Vertical	Pass
2	2229.000	41.68	-13.09	74.0	32.32	Peak	360.00	150	Vertical	Pass
2**	2229.000	29.98	-13.09	54.0	24.02	AV	360.00	150	Vertical	Pass
3	4559.500	48.63	-2.70	74.0	25.37	Peak	139.00	150	Vertical	Pass
3**	4559.500	37.55	-2.70	54.0	16.45	AV	139.00	150	Vertical	Pass
4	6169.500	97.46	-0.39	74.0	-23.46	Peak	248.00	150	Vertical	N/A
4**	6169.500	87.14	-0.39	54.0	-33.14	AV	248.00	150	Vertical	N/A
5	10069.576	47.28	-3.89	74.0	26.72	Peak	9.00	150	Vertical	Pass
5**	10069.576	36.63	-3.89	54.0	17.37	AV	9.00	150	Vertical	Pass
6	14166.187	49.58	-1.88	74.0	24.42	Peak	114.00	150	Vertical	Pass
6**	14166.187	38.08	-1.88	54.0	15.92	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_21.20.37

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax40 CH43 P=12


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

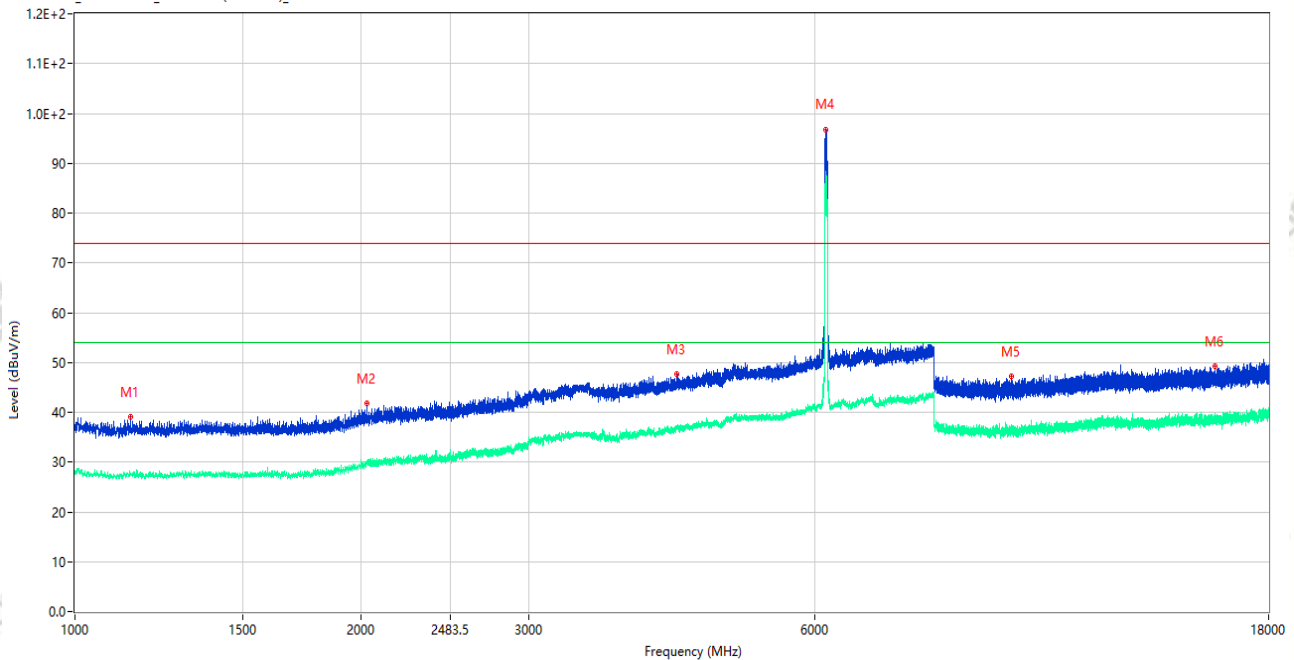

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1144.750	39.03	-15.62	74.0	34.97	Peak	262.00	150	Horizontal	Pass
1**	1144.750	27.39	-15.62	54.0	26.61	AV	262.00	150	Horizontal	Pass
2	2027.500	41.86	-13.81	74.0	32.14	Peak	360.00	150	Horizontal	Pass
2**	2027.500	30.04	-13.81	54.0	23.96	AV	360.00	150	Horizontal	Pass
3	4298.000	47.69	-3.74	74.0	26.31	Peak	0.00	150	Horizontal	Pass
3**	4298.000	36.92	-3.74	54.0	17.08	AV	0.00	150	Horizontal	Pass
4	6159.000	96.83	-0.19	74.0	-22.83	Peak	249.00	150	Horizontal	N/A
4**	6159.000	86.46	-0.19	54.0	-32.46	AV	249.00	150	Horizontal	N/A
5	9662.026	47.23	-3.13	74.0	26.77	Peak	262.00	150	Horizontal	Pass
5**	9662.026	37.30	-3.13	54.0	16.70	AV	262.00	150	Horizontal	Pass
6	15797.100	49.17	-1.57	74.0	24.83	Peak	0.00	150	Horizontal	Pass
6**	15797.100	38.81	-1.57	54.0	15.19	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.14.17

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G WIFI 11ax80 CH39 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

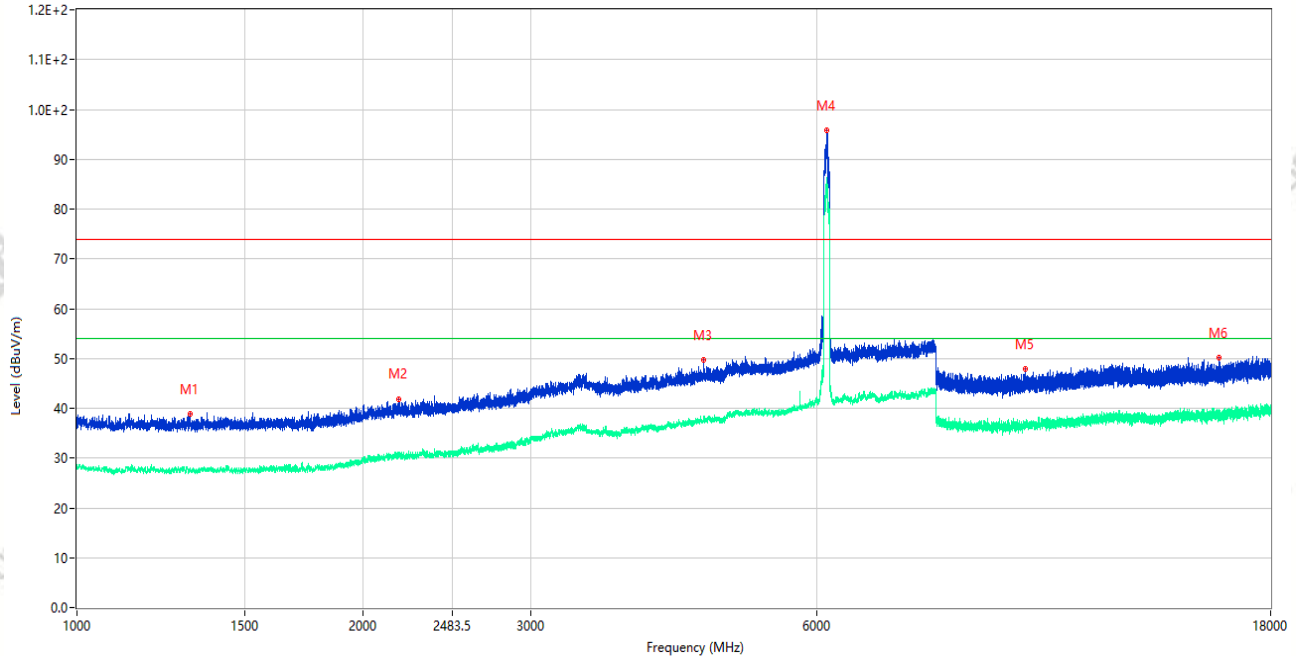

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1315.500	38.87	-15.89	74.0	35.13	Peak	9.00	150	Vertical	Pass
1**	1315.500	27.45	-15.89	54.0	26.55	AV	9.00	150	Vertical	Pass
2	2178.750	41.89	-12.87	74.0	32.11	Peak	360.00	150	Vertical	Pass
2**	2178.750	30.65	-12.87	54.0	23.35	AV	360.00	150	Vertical	Pass
3	4557.000	49.71	-2.79	74.0	24.29	Peak	120.00	150	Vertical	Pass
3**	4557.000	37.67	-2.79	54.0	16.33	AV	120.00	150	Vertical	Pass
4	6141.500	95.85	-0.33	74.0	-21.85	Peak	0.00	150	Vertical	N/A
4**	6141.500	85.44	-0.33	54.0	-31.44	AV	0.00	150	Vertical	N/A
5	9949.162	47.92	-4.00	74.0	26.08	Peak	2.00	150	Vertical	Pass
5**	9949.162	36.36	-4.00	54.0	17.64	AV	2.00	150	Vertical	Pass
6	15883.725	50.24	-1.45	74.0	23.76	Peak	360.00	150	Vertical	Pass
6**	15883.725	39.05	-1.45	54.0	14.95	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.19.26

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax80 CH39 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

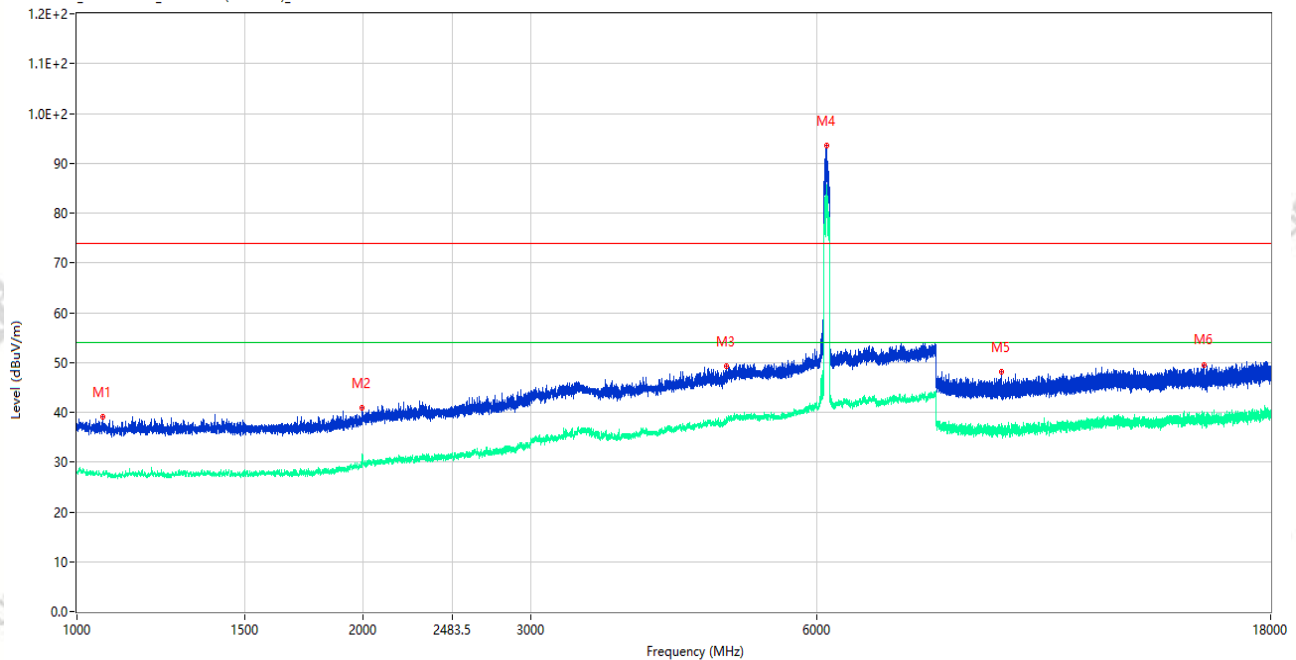

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.500	39.15	-15.23	74.0	34.85	Peak	2.00	150	Horizontal	Pass
1**	1063.500	27.89	-15.23	54.0	26.11	AV	2.00	150	Horizontal	Pass
2	1994.000	40.96	-14.60	74.0	33.04	Peak	276.00	150	Horizontal	Pass
2**	1994.000	29.94	-14.60	54.0	24.06	AV	276.00	150	Horizontal	Pass
3	4820.500	49.31	-2.52	74.0	24.69	Peak	70.00	150	Horizontal	Pass
3**	4820.500	38.54	-2.52	54.0	15.46	AV	70.00	150	Horizontal	Pass
4	6149.500	93.50	-0.19	74.0	-19.50	Peak	248.00	150	Horizontal	N/A
4**	6149.500	85.11	-0.19	54.0	-31.11	AV	248.00	150	Horizontal	N/A
5	9377.500	48.12	-4.68	74.0	25.88	Peak	0.00	150	Horizontal	Pass
5**	9377.500	36.87	-4.68	54.0	17.13	AV	0.00	150	Horizontal	Pass
6	15307.275	49.58	-2.01	74.0	24.42	Peak	13.00	150	Horizontal	Pass
6**	15307.275	38.75	-2.01	54.0	15.25	AV	13.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.34.41

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax160 CH47 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

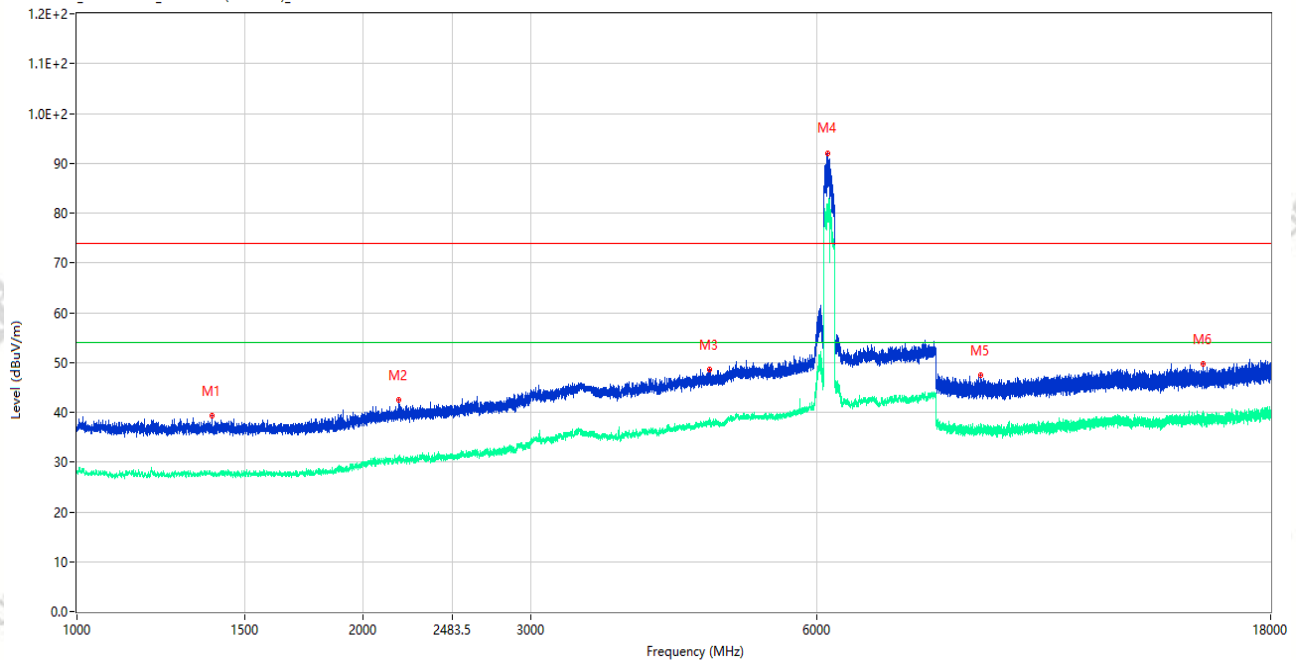

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1388.000	39.32	-15.98	74.0	34.68	Peak	289.00	150	Vertical	Pass
1**	1388.000	27.76	-15.98	54.0	26.24	AV	289.00	150	Vertical	Pass
2	2178.500	42.39	-12.86	74.0	31.61	Peak	153.00	150	Vertical	Pass
2**	2178.500	30.87	-12.86	54.0	23.13	AV	153.00	150	Vertical	Pass
3	4621.000	48.59	-2.78	74.0	25.41	Peak	241.00	150	Vertical	Pass
3**	4621.000	38.24	-2.78	54.0	15.76	AV	241.00	150	Vertical	Pass
4	6160.000	92.07	-0.23	74.0	-18.07	Peak	271.00	150	Vertical	N/A
4**	6160.000	81.76	-0.23	54.0	-27.76	AV	271.00	150	Vertical	N/A
5	8920.313	47.35	-4.74	74.0	26.65	Peak	262.00	150	Vertical	Pass
5**	8920.313	37.67	-4.74	54.0	16.33	AV	262.00	150	Vertical	Pass
6	15272.362	49.63	-1.35	74.0	24.37	Peak	359.00	150	Vertical	Pass
6**	15272.362	38.46	-1.35	54.0	15.54	AV	359.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-02_22.28.48

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G WIFI 11ax160 CH47 P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

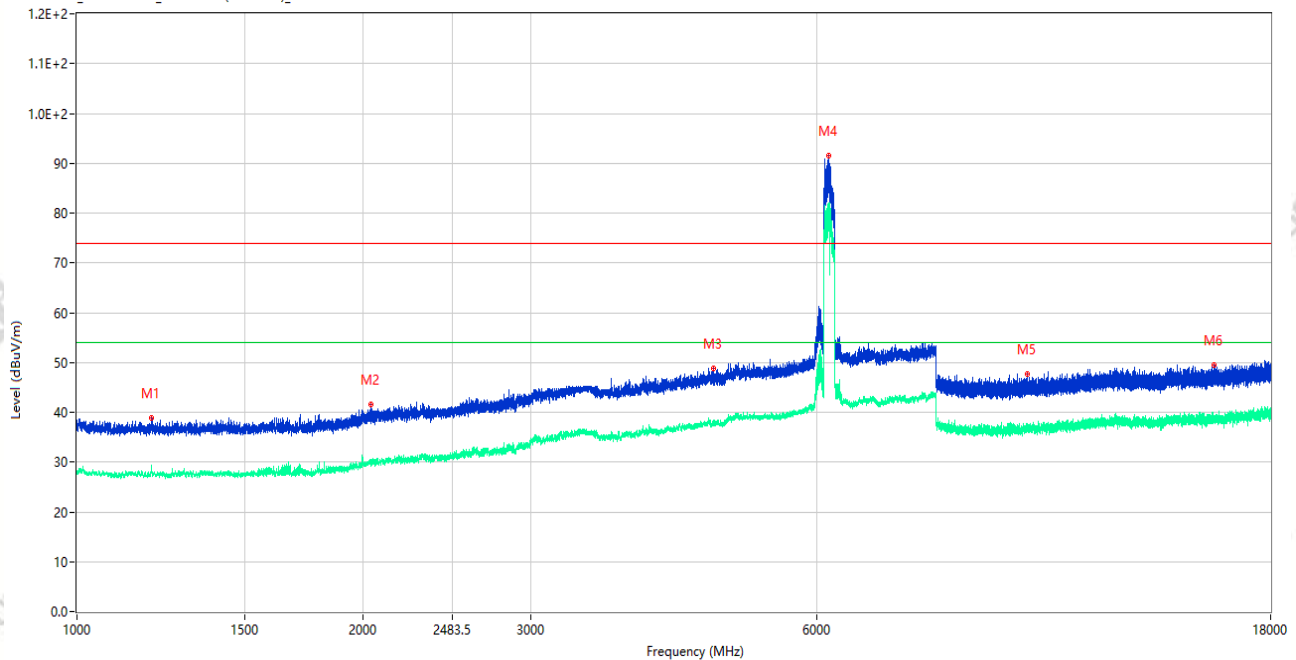


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.250	38.79	-15.72	74.0	35.21	Peak	273.00	150	Horizontal	Pass
1**	1197.250	28.89	-15.72	54.0	25.11	AV	273.00	150	Horizontal	Pass
2	2036.500	41.54	-13.32	74.0	32.46	Peak	135.00	150	Horizontal	Pass
2**	2036.500	29.67	-13.32	54.0	24.33	AV	135.00	150	Horizontal	Pass
3	4673.000	48.82	-3.62	74.0	25.18	Peak	0.00	150	Horizontal	Pass
3**	4673.000	37.86	-3.62	54.0	16.14	AV	0.00	150	Horizontal	Pass
4	6179.500	91.42	-0.67	74.0	-17.42	Peak	240.00	150	Horizontal	N/A
4**	6179.500	81.38	-0.67	54.0	-27.38	AV	240.00	150	Horizontal	N/A
5	9984.312	47.70	-3.71	74.0	26.30	Peak	360.00	150	Horizontal	Pass
5**	9984.312	36.54	-3.71	54.0	17.46	AV	360.00	150	Horizontal	Pass
6	15702.338	49.54	-2.03	74.0	24.46	Peak	348.00	150	Horizontal	Pass
6**	15702.338	39.08	-2.03	54.0	14.92	AV	348.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_09.18.52

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(6G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

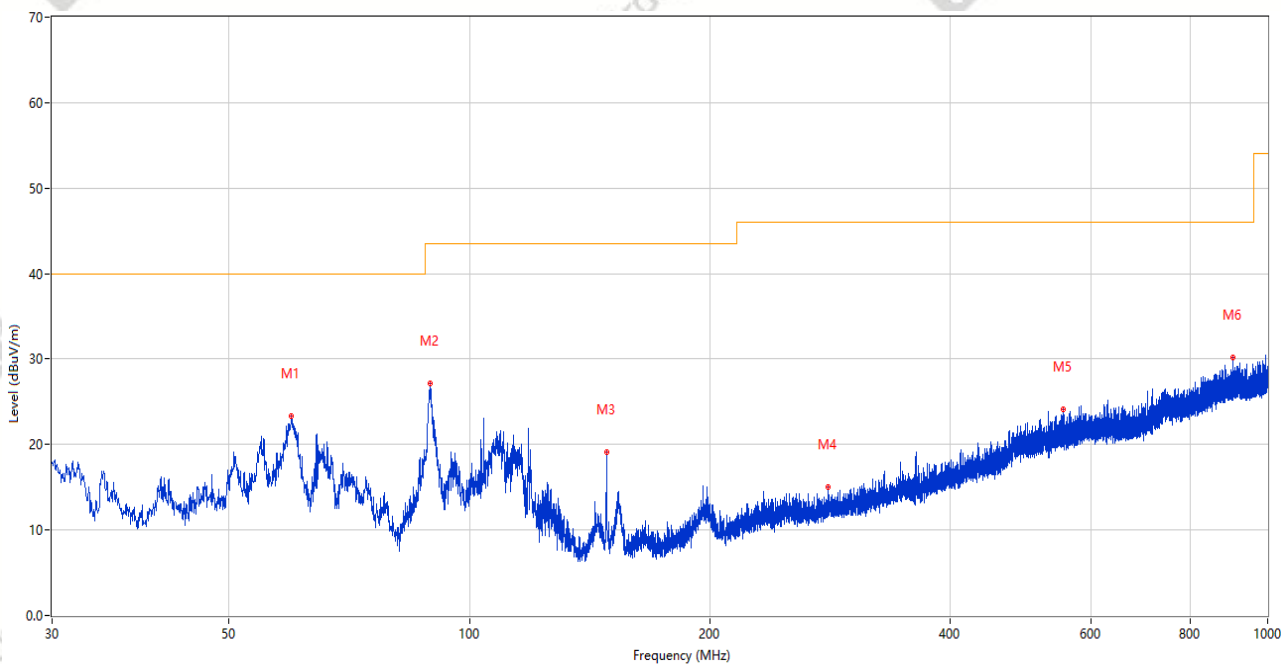


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	59.876	23.29	-26.15	40.0	16.71	Peak	45.00	100	Vertical	Pass
2	89.364	27.21	-28.44	43.5	16.29	Peak	357.00	100	Vertical	Pass
3	148.486	19.08	-29.82	43.5	24.42	Peak	329.00	100	Vertical	Pass
4	281.036	15.00	-24.09	46.0	31.00	Peak	160.00	200	Vertical	Pass
5	554.188	24.14	-17.35	46.0	21.86	Peak	298.00	100	Vertical	Pass
6	905.910	30.20	-9.86	46.0	15.80	Peak	360.00	200	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_09.20.05

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(6G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

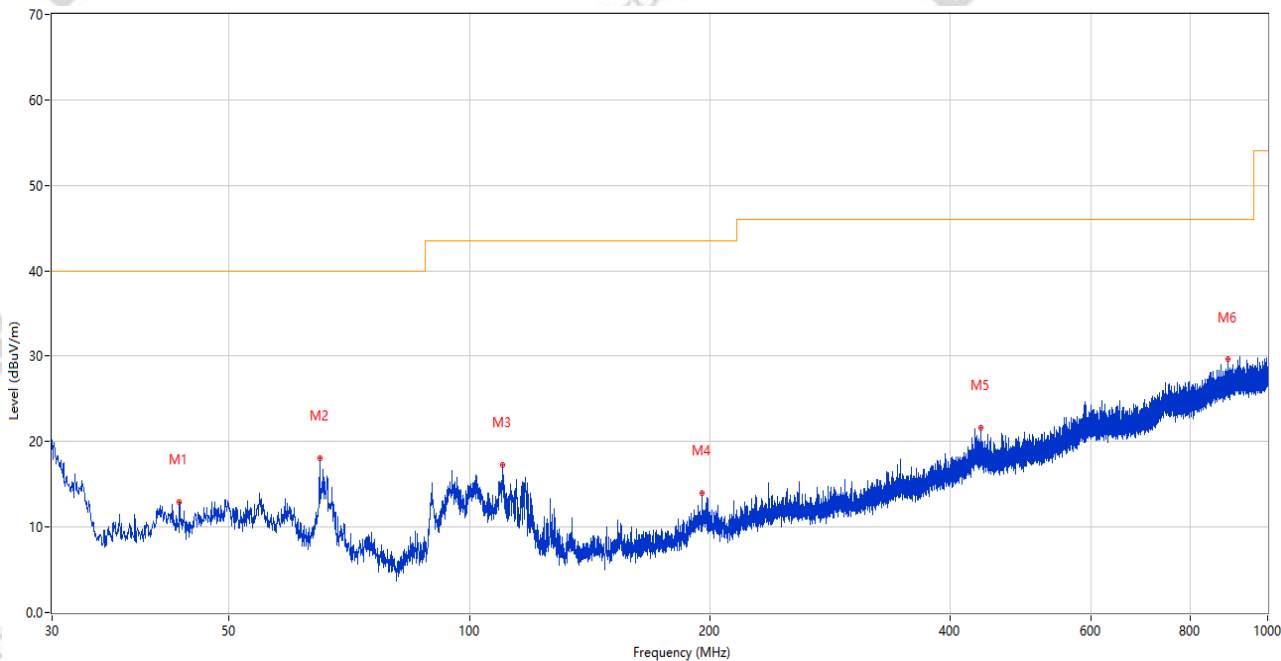

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.337	12.89	-25.14	40.0	27.11	Peak	107.00	200	Horizontal	Pass
2	64.920	18.05	-27.47	40.0	21.95	Peak	174.00	200	Horizontal	Pass
3	109.880	17.24	-26.75	43.5	26.26	Peak	212.00	100	Horizontal	Pass
4	195.628	13.93	-25.97	43.5	29.57	Peak	174.00	100	Horizontal	Pass
5	436.915	21.60	-20.13	46.0	24.40	Peak	89.00	100	Horizontal	Pass
6	890.972	29.60	-10.53	46.0	16.40	Peak	348.00	100	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_10.37.54

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax20 CH213 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

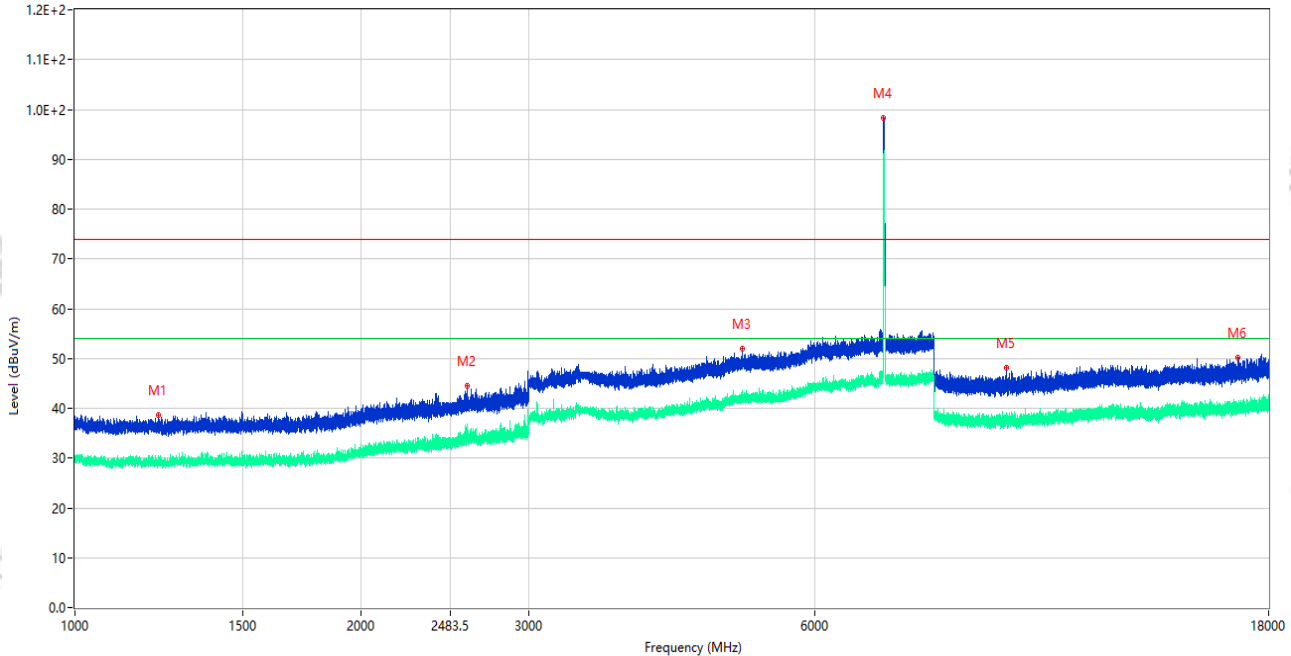

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1224.800	38.71	-15.99	74.0	35.29	Peak	0.00	150	Vertical	Pass
1**	1224.800	29.83	-15.99	54.0	24.17	AV	0.00	150	Vertical	Pass
2	2585.800	44.44	-10.53	74.0	29.56	Peak	76.00	150	Vertical	Pass
2**	2585.800	33.72	-10.53	54.0	20.28	AV	76.00	150	Vertical	Pass
3	5031.000	52.05	-2.14	74.0	21.95	Peak	42.00	150	Vertical	Pass
3**	5031.000	41.59	-2.14	54.0	12.41	AV	42.00	150	Vertical	Pass
4	7085.750	98.31	0.17	74.0	-24.31	Peak	211.00	150	Vertical	N/A
4**	7085.750	88.26	0.17	54.0	-34.26	AV	211.00	150	Vertical	N/A
5	9547.312	48.06	-2.53	74.0	25.94	Peak	0.00	150	Vertical	Pass
5**	9547.312	39.00	-2.53	54.0	15.00	AV	0.00	150	Vertical	Pass
6	16707.449	50.14	-1.61	74.0	23.86	Peak	211.00	150	Vertical	Pass
6**	16707.449	39.92	-1.61	54.0	14.08	AV	211.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_10.42.03

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax20 CH213 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(6.875-7.125)_1GHz-18GHz

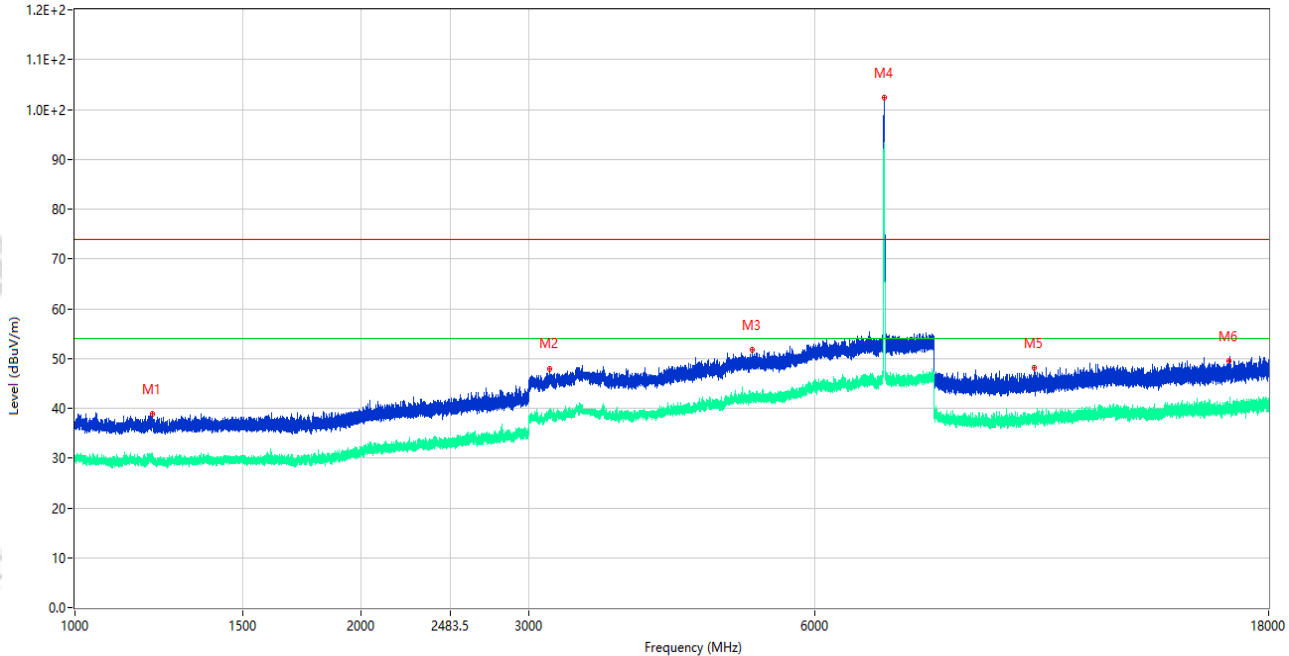

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1205.700	38.94	-15.78	74.0	35.06	Peak	0.00	150	Horizontal	Pass
1**	1205.700	30.88	-15.78	54.0	23.12	AV	0.00	150	Horizontal	Pass
2	3159.000	47.84	-7.08	74.0	26.16	Peak	164.00	150	Horizontal	Pass
2**	3159.000	38.83	-7.08	54.0	15.17	AV	164.00	150	Horizontal	Pass
3	5154.500	51.64	-2.03	74.0	22.36	Peak	360.00	150	Horizontal	Pass
3**	5154.500	42.24	-2.03	54.0	11.76	AV	360.00	150	Horizontal	Pass
4	7090.500	102.45	0.06	74.0	-28.45	Peak	314.00	150	Horizontal	N/A
4**	7090.500	92.17	0.06	54.0	-38.17	AV	314.00	150	Horizontal	N/A
5	10193.787	48.16	-3.47	74.0	25.84	Peak	215.00	150	Horizontal	Pass
5**	10193.787	37.09	-3.47	54.0	16.91	AV	215.00	150	Horizontal	Pass
6	16353.338	49.50	-1.33	74.0	24.50	Peak	360.00	150	Horizontal	Pass
6**	16353.338	39.58	-1.33	54.0	14.42	AV	360.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.06.06

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax40 CH211 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(6.875-7.125)_1GHz-18GHz

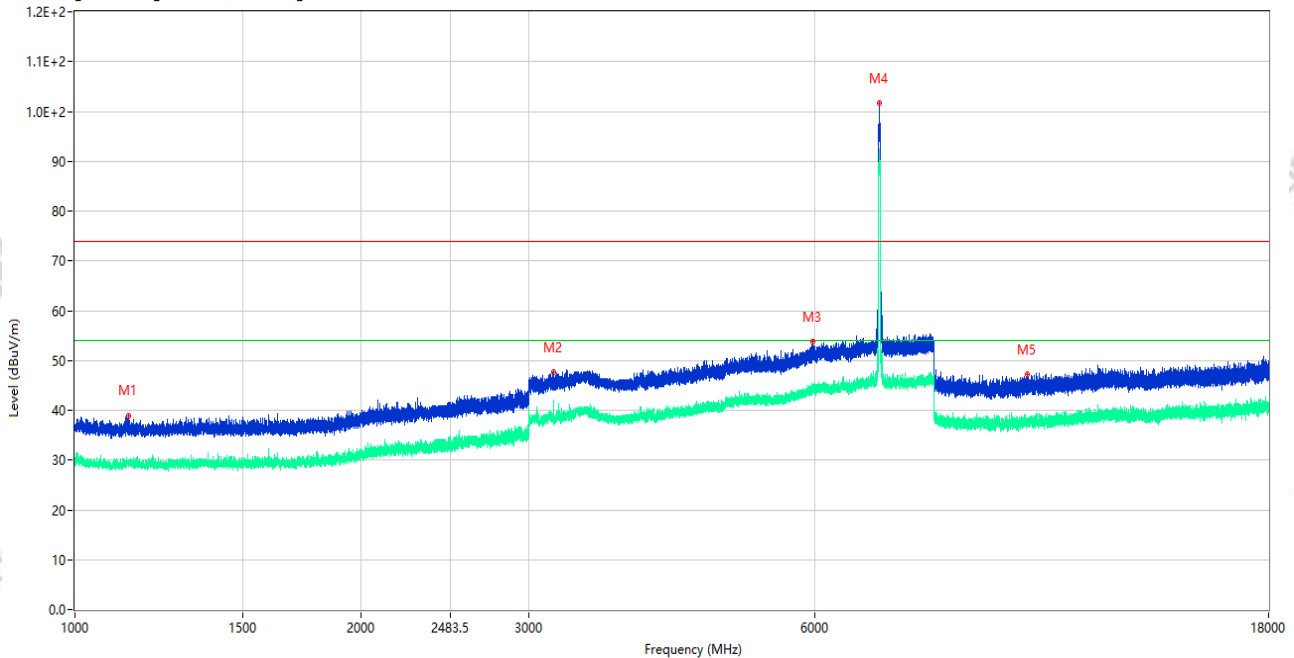


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1138.100	38.79	-15.54	74.0	35.21	Peak	60.00	150	Horizontal	Pass
1**	1138.100	29.40	-15.54	54.0	24.60	AV	60.00	150	Horizontal	Pass
2	3187.500	47.75	-7.58	74.0	26.25	Peak	47.00	150	Horizontal	Pass
2**	3187.500	41.32	-7.58	54.0	12.68	AV	47.00	150	Horizontal	Pass
3	5971.250	53.88	-0.12	74.0	20.12	Peak	32.00	150	Horizontal	Pass
3**	5971.250	44.20	-0.12	54.0	9.80	AV	32.00	150	Horizontal	Pass
4	7016.250	101.70	0.59	74.0	-27.70	Peak	198.00	150	Horizontal	N/A
4**	7016.250	90.89	0.59	54.0	-36.89	AV	198.00	150	Horizontal	N/A
5	10028.488	47.13	-4.22	74.0	26.87	Peak	217.00	150	Horizontal	Pass
5**	10028.488	36.84	-4.22	54.0	17.16	AV	217.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-07_10.56.26

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax40 CH211 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

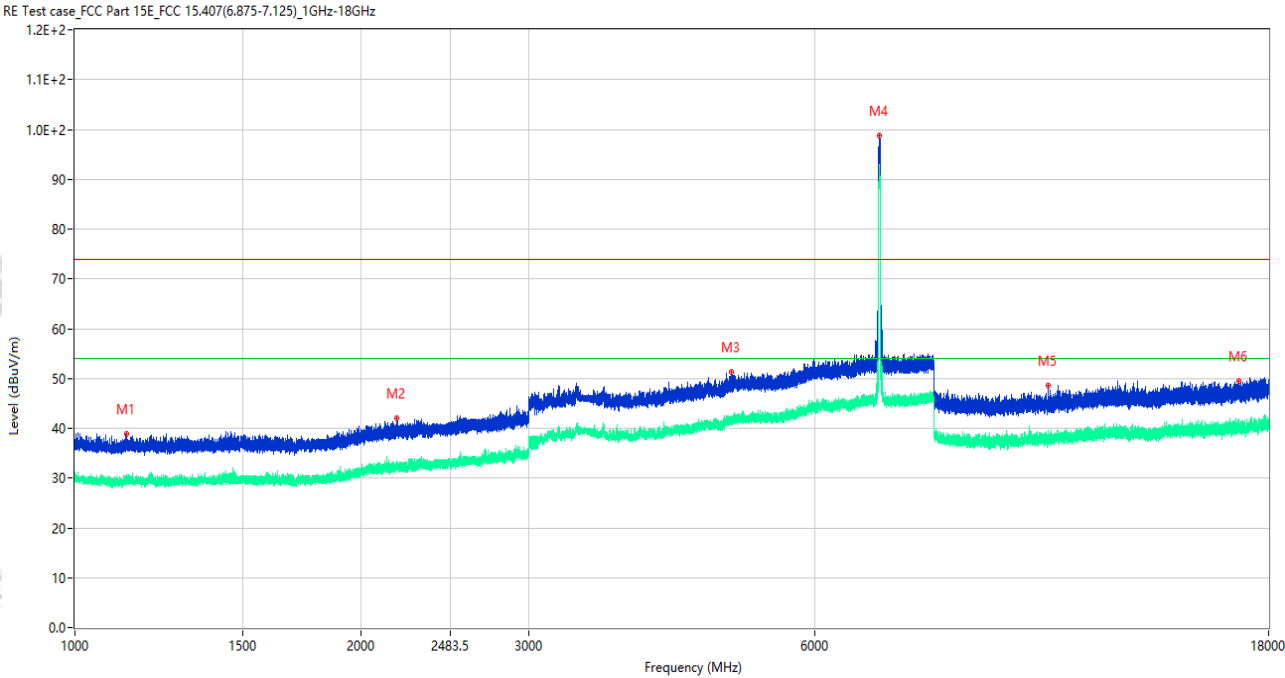

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.300	38.94	-15.55	74.0	35.06	Peak	0.00	150	Horizontal	Pass
1**	1134.300	29.68	-15.55	54.0	24.32	AV	0.00	150	Horizontal	Pass
2	2179.600	41.98	-12.91	74.0	32.02	Peak	307.00	150	Horizontal	Pass
2**	2179.600	32.15	-12.91	54.0	21.85	AV	307.00	150	Horizontal	Pass
3	4898.250	51.20	-2.22	74.0	22.80	Peak	298.00	150	Horizontal	Pass
3**	4898.250	41.62	-2.22	54.0	12.38	AV	298.00	150	Horizontal	Pass
4	7013.750	98.82	0.56	74.0	-24.82	Peak	347.00	150	Horizontal	N/A
4**	7013.750	90.38	0.56	54.0	-36.38	AV	347.00	150	Horizontal	N/A
5	10566.187	48.49	-3.22	74.0	25.51	Peak	28.00	150	Horizontal	Pass
5**	10566.187	38.56	-3.22	54.0	15.44	AV	28.00	150	Horizontal	Pass
6	16744.724	49.42	-1.77	74.0	24.58	Peak	312.00	150	Horizontal	Pass
6**	16744.724	39.62	-1.77	54.0	14.38	AV	312.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.16.44

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax80 CH199
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

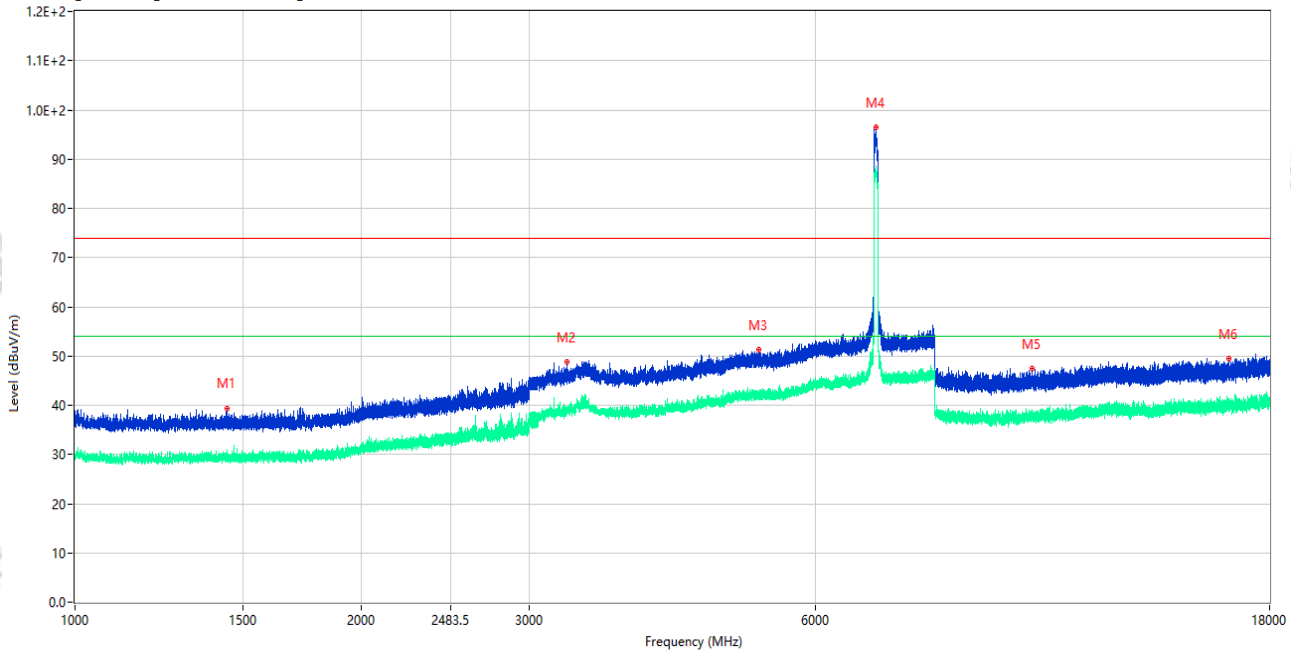

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.400	39.43	-15.93	74.0	34.57	Peak	104.00	150	Vertical	Pass
1**	1443.400	30.31	-15.93	54.0	23.69	AV	104.00	150	Vertical	Pass
2	3286.500	48.85	-6.80	74.0	25.15	Peak	146.00	150	Vertical	Pass
2**	3286.500	39.09	-6.80	54.0	14.91	AV	146.00	150	Vertical	Pass
3	5229.000	51.28	-2.32	74.0	22.72	Peak	130.00	150	Vertical	Pass
3**	5229.000	42.47	-2.32	54.0	11.53	AV	130.00	150	Vertical	Pass
4	6943.250	96.40	-0.05	74.0	-22.40	Peak	198.00	150	Vertical	N/A
4**	6943.250	87.91	-0.05	54.0	-33.91	AV	198.00	150	Vertical	N/A
5	10129.901	47.43	-3.89	74.0	26.57	Peak	0.00	150	Vertical	Pass
5**	10129.901	38.17	-3.89	54.0	15.83	AV	0.00	150	Vertical	Pass
6	16302.937	49.55	-1.48	74.0	24.45	Peak	117.00	150	Vertical	Pass
6**	16302.937	39.11	-1.48	54.0	14.89	AV	117.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.25.28

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	6G U8 WIFI 11ax80 CH199
		P=15	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

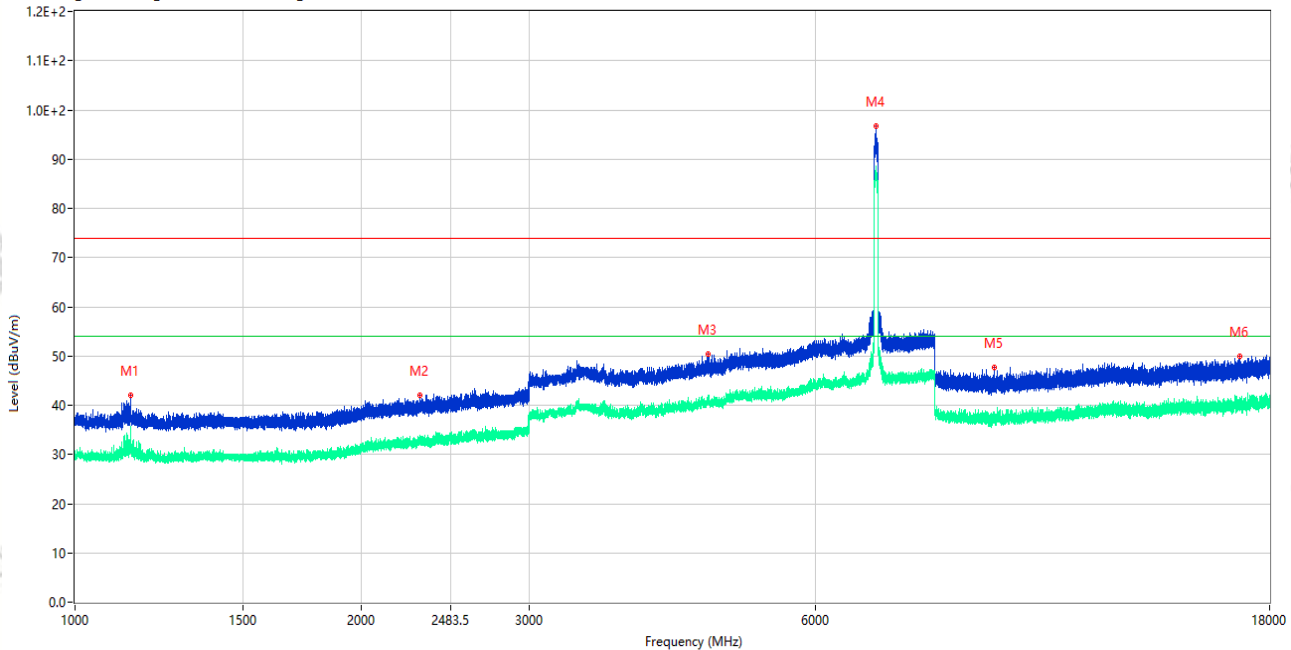

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1144.100	42.07	-15.61	74.0	31.93	Peak	318.00	150	Horizontal	Pass
1**	1144.100	30.49	-15.61	54.0	23.51	AV	318.00	150	Horizontal	Pass
2	2306.100	41.97	-12.66	74.0	32.03	Peak	360.00	150	Horizontal	Pass
2**	2306.100	32.67	-12.66	54.0	21.33	AV	360.00	150	Horizontal	Pass
3	4631.750	50.29	-2.73	74.0	23.71	Peak	14.00	150	Horizontal	Pass
3**	4631.750	40.68	-2.73	54.0	13.32	AV	14.00	150	Horizontal	Pass
4	6947.250	96.65	0.04	74.0	-22.65	Peak	297.00	150	Horizontal	N/A
4**	6947.250	87.56	0.04	54.0	-33.56	AV	297.00	150	Horizontal	N/A
5	9238.325	47.68	-5.52	74.0	26.32	Peak	240.00	150	Horizontal	Pass
5**	9238.325	38.69	-5.52	54.0	15.31	AV	240.00	150	Horizontal	Pass
6	16736.588	49.90	-1.56	74.0	24.10	Peak	249.00	150	Horizontal	Pass
6**	16736.588	39.89	-1.56	54.0	14.11	AV	249.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.44.21

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G U8 WIFI 11ax160 CH207

P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

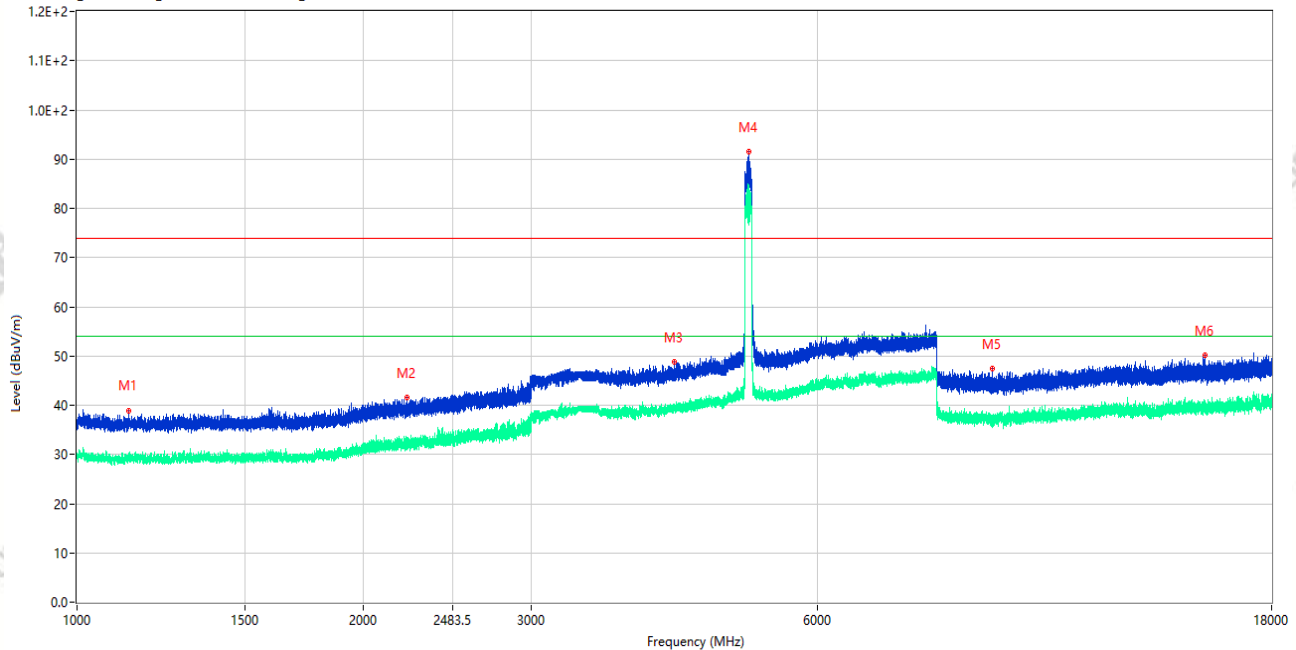

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.300	38.96	-15.55	74.0	35.04	Peak	175.00	150	Vertical	Pass
1**	1134.300	29.21	-15.55	54.0	24.79	AV	175.00	150	Vertical	Pass
2	2222.600	41.64	-13.06	74.0	32.36	Peak	360.00	150	Vertical	Pass
2**	2222.600	32.69	-13.06	54.0	21.31	AV	360.00	150	Vertical	Pass
3	4247.500	48.89	-3.59	74.0	25.11	Peak	221.00	150	Vertical	Pass
3**	4247.500	39.67	-3.59	54.0	14.33	AV	221.00	150	Vertical	Pass
4	5078.250	91.54	-2.59	74.0	-17.54	Peak	135.00	150	Vertical	N/A
4**	5078.250	84.26	-2.59	54.0	-30.26	AV	135.00	150	Vertical	N/A
5	9157.812	47.41	-5.42	74.0	26.59	Peak	360.00	150	Vertical	Pass
5**	9157.812	36.69	-5.42	54.0	17.31	AV	360.00	150	Vertical	Pass
6	15310.162	50.08	-1.88	74.0	23.92	Peak	181.00	150	Vertical	Pass
6**	15310.162	40.68	-1.88	54.0	13.32	AV	181.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-07_11.36.08

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 6G U8 WIFI 11ax160 CH207

P=15


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(6.875-7.125)_1GHz-18GHz

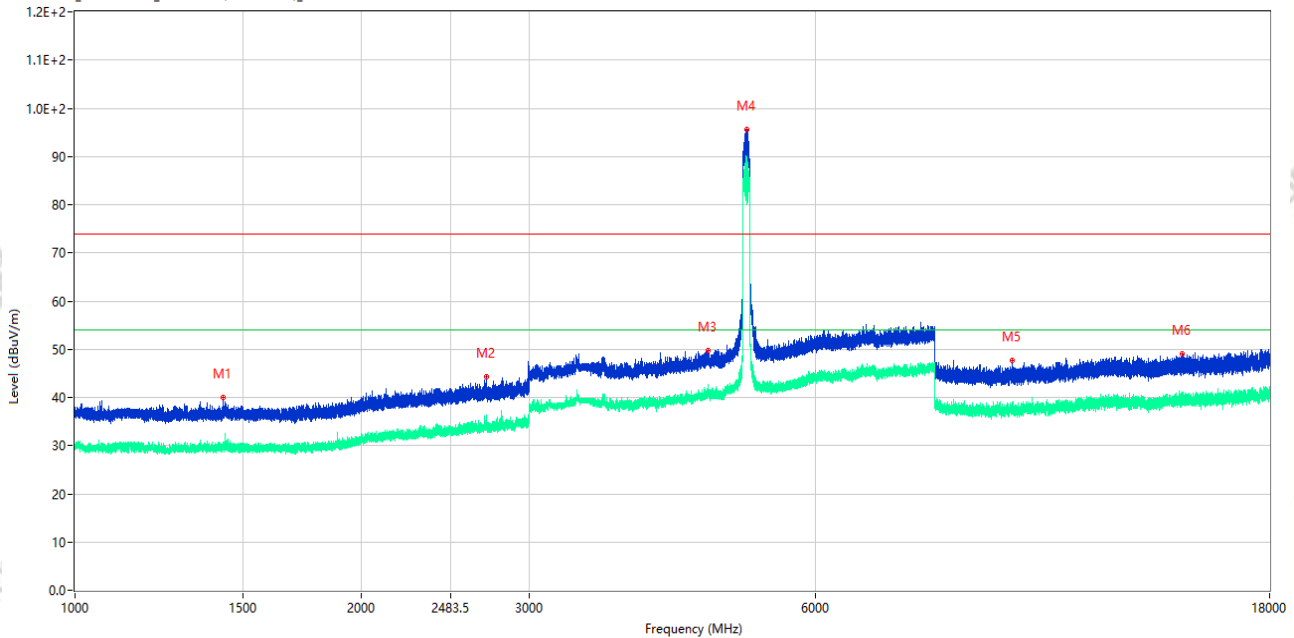

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1431.100	40.05	-15.99	74.0	33.95	Peak	196.00	150	Horizontal	Pass
1**	1431.100	29.53	-15.99	54.0	24.47	AV	196.00	150	Horizontal	Pass
2	2706.300	44.36	-10.33	74.0	29.64	Peak	1.00	150	Horizontal	Pass
2**	2706.300	34.11	-10.33	54.0	19.89	AV	1.00	150	Horizontal	Pass
3	4622.500	49.80	-2.72	74.0	24.20	Peak	0.00	150	Horizontal	Pass
3**	4622.500	40.52	-2.72	54.0	13.48	AV	0.00	150	Horizontal	Pass
4	5078.500	95.56	-2.59	74.0	-21.56	Peak	283.00	150	Horizontal	N/A
4**	5078.500	89.34	-2.59	54.0	-35.34	AV	283.00	150	Horizontal	N/A
5	9661.312	47.72	-3.14	74.0	26.28	Peak	147.00	150	Horizontal	Pass
5**	9661.312	37.63	-3.14	54.0	16.37	AV	147.00	150	Horizontal	Pass
6	14558.099	49.11	-3.01	74.0	24.89	Peak	112.00	150	Horizontal	Pass
6**	14558.099	39.37	-3.01	54.0	14.63	AV	112.00	150	Horizontal	Pass