

Aux. Antenna Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.07.35

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

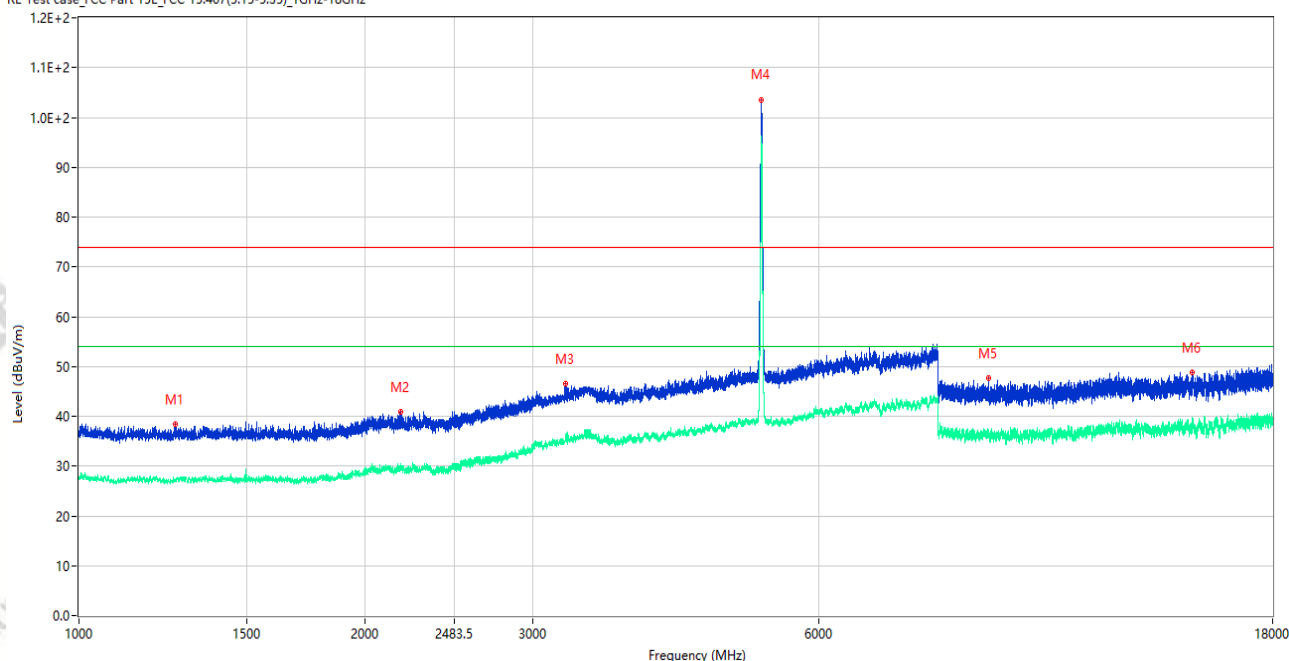

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1263.750	38.37	-16.00	74.0	35.63	Peak	354.00	150	Vertical	Pass
1**	1263.750	26.79	-16.00	54.0	27.21	AV	354.00	150	Vertical	Pass
2	2178.500	40.88	-12.86	74.0	33.12	Peak	0.00	150	Vertical	Pass
2**	2178.500	29.67	-12.86	54.0	24.33	AV	0.00	150	Vertical	Pass
3	3248.500	46.59	-7.45	74.0	27.41	Peak	320.00	150	Vertical	Pass
3**	3248.500	35.68	-7.45	54.0	18.32	AV	320.00	150	Vertical	Pass
4	5219.000	103.60	-2.36	74.0	-29.60	Peak	320.00	150	Vertical	N/A
4**	5219.000	96.35	-2.36	54.0	-42.35	AV	320.00	150	Vertical	N/A
5	9039.537	47.71	-4.35	74.0	26.29	Peak	219.00	150	Vertical	Pass
5**	9039.537	36.71	-4.35	54.0	17.29	AV	219.00	150	Vertical	Pass
6	14826.375	48.84	-0.34	74.0	25.16	Peak	74.00	150	Vertical	Pass
6**	14826.375	38.77	-0.34	54.0	15.23	AV	74.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.12.14

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

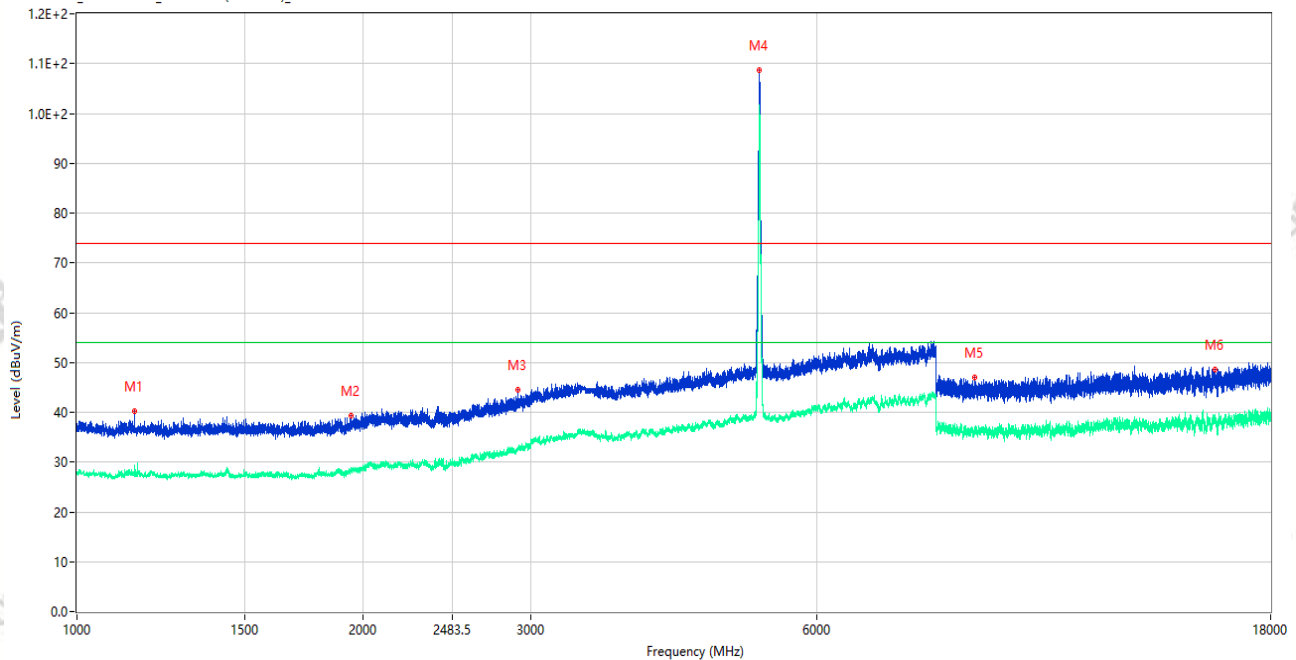

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1150.500	40.27	-15.65	74.0	33.73	Peak	155.00	150	Horizontal	Pass
1**	1150.500	27.58	-15.65	54.0	26.42	AV	155.00	150	Horizontal	Pass
2	1940.250	39.27	-14.99	74.0	34.73	Peak	286.00	150	Horizontal	Pass
2**	1940.250	28.73	-14.99	54.0	25.27	AV	286.00	150	Horizontal	Pass
3	2911.750	44.56	-9.24	74.0	29.44	Peak	113.00	150	Horizontal	Pass
3**	2911.750	32.47	-9.24	54.0	21.53	AV	113.00	150	Horizontal	Pass
4	5220.500	108.62	-2.36	74.0	-34.62	Peak	214.00	150	Horizontal	N/A
4**	5220.500	101.10	-2.36	54.0	-47.10	AV	214.00	150	Horizontal	N/A
5	8792.300	47.08	-5.16	74.0	26.92	Peak	28.00	150	Horizontal	Pass
5**	8792.300	35.91	-5.16	54.0	18.09	AV	28.00	150	Horizontal	Pass
6	15713.887	48.56	-1.81	74.0	25.44	Peak	360.00	150	Horizontal	Pass
6**	15713.887	38.57	-1.81	54.0	15.43	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.22.56

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

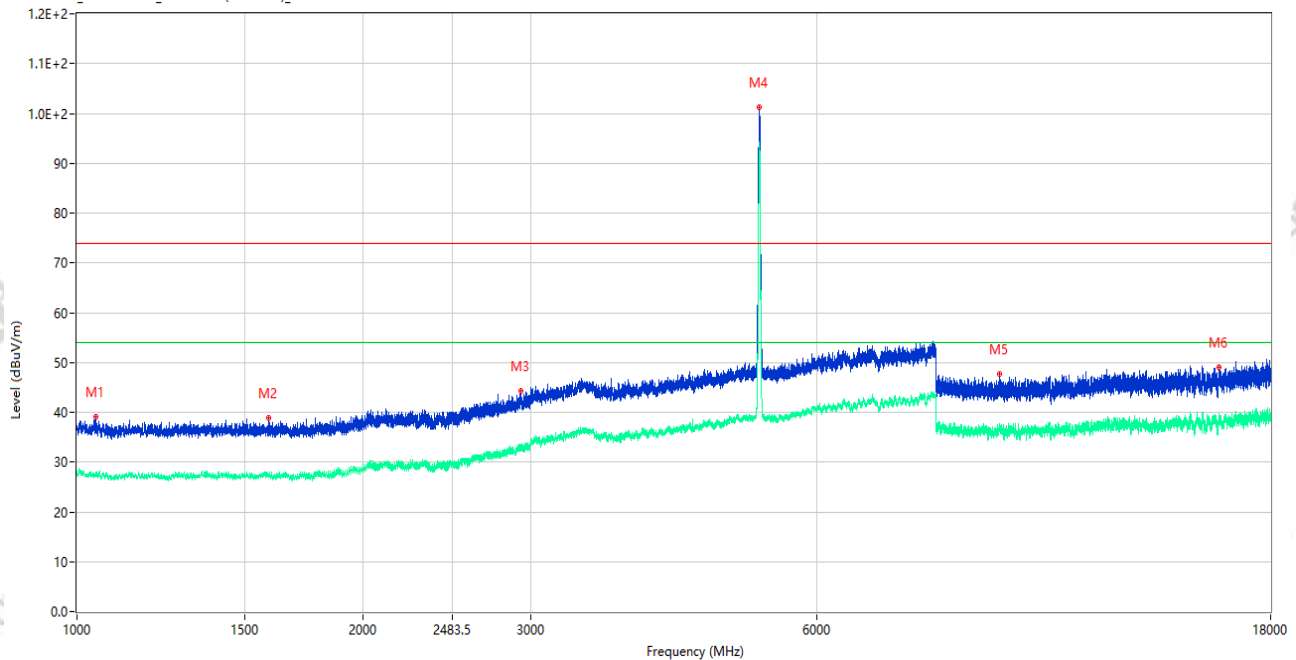

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1047.750	39.05	-15.39	74.0	34.95	Peak	102.00	150	Vertical	Pass
1**	1047.750	27.95	-15.39	54.0	26.05	AV	102.00	150	Vertical	Pass
2	1589.500	38.89	-16.18	74.0	35.11	Peak	190.00	150	Vertical	Pass
2**	1589.500	27.02	-16.18	54.0	26.98	AV	190.00	150	Vertical	Pass
3	2928.750	44.24	-7.98	74.0	29.76	Peak	33.00	150	Vertical	Pass
3**	2928.750	33.19	-7.98	54.0	20.81	AV	33.00	150	Vertical	Pass
4	5222.000	101.24	-2.36	74.0	-27.24	Peak	271.00	150	Vertical	N/A
4**	5222.000	92.49	-2.36	54.0	-38.49	AV	271.00	150	Vertical	N/A
5	9329.287	47.60	-5.03	74.0	26.40	Peak	286.00	150	Vertical	Pass
5**	9329.287	36.54	-5.03	54.0	17.46	AV	286.00	150	Vertical	Pass
6	15886.612	49.12	-1.53	74.0	24.88	Peak	360.00	150	Vertical	Pass
6**	15886.612	38.61	-1.53	54.0	15.39	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.18.43

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

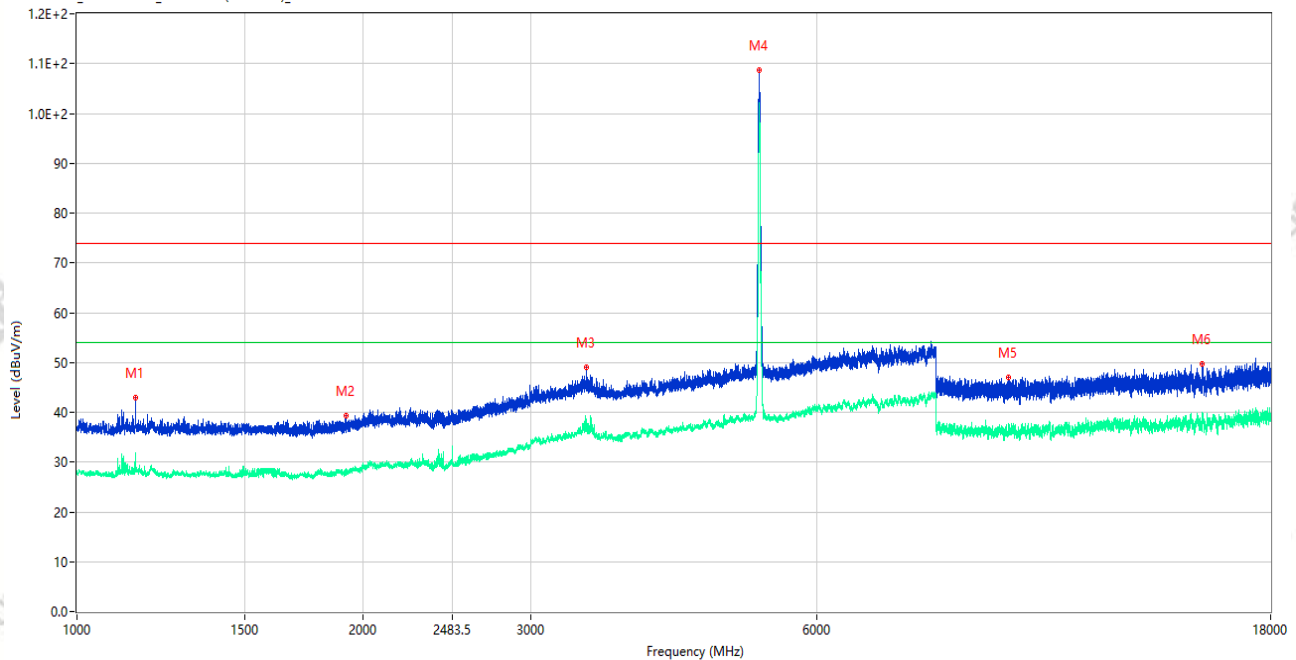

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1151.750	42.93	-15.65	74.0	31.07	Peak	154.00	150	Horizontal	Pass
1**	1151.750	31.91	-15.65	54.0	22.09	AV	154.00	150	Horizontal	Pass
2	1919.000	39.29	-15.51	74.0	34.71	Peak	242.00	150	Horizontal	Pass
2**	1919.000	27.91	-15.51	54.0	26.09	AV	242.00	150	Horizontal	Pass
3	3435.500	49.02	-5.20	74.0	24.98	Peak	161.00	150	Horizontal	Pass
3**	3435.500	37.38	-5.20	54.0	16.62	AV	161.00	150	Horizontal	Pass
4	5221.000	108.67	-2.36	74.0	-34.67	Peak	199.00	150	Horizontal	N/A
4**	5221.000	101.95	-2.36	54.0	-47.95	AV	199.00	150	Horizontal	N/A
5	9544.937	46.99	-2.63	74.0	27.01	Peak	360.00	150	Horizontal	Pass
5**	9544.937	37.40	-2.63	54.0	16.60	AV	360.00	150	Horizontal	Pass
6	15264.224	49.64	-1.02	74.0	24.36	Peak	143.00	150	Horizontal	Pass
6**	15264.224	39.20	-1.02	54.0	14.80	AV	143.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.51.24

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

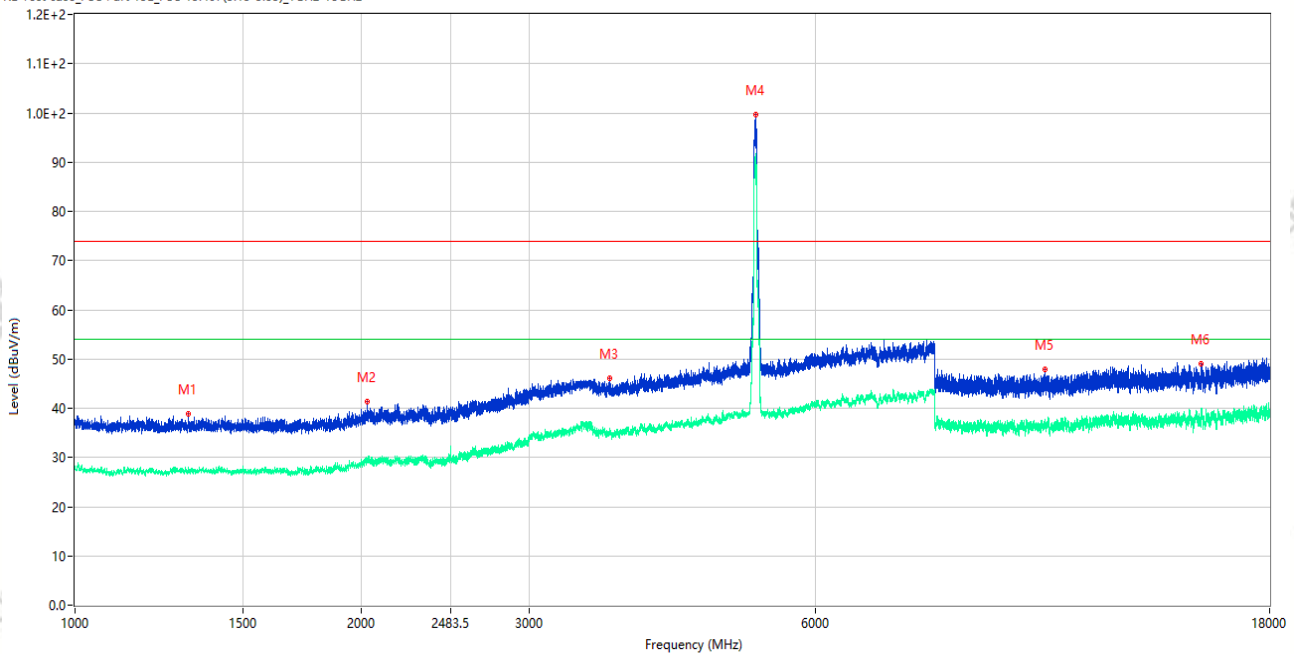

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.250	38.94	-15.87	74.0	35.06	Peak	31.00	150	Vertical	Pass
1**	1314.250	26.99	-15.87	54.0	27.01	AV	31.00	150	Vertical	Pass
2	2030.000	41.38	-13.63	74.0	32.62	Peak	98.00	150	Vertical	Pass
2**	2030.000	29.02	-13.63	54.0	24.98	AV	98.00	150	Vertical	Pass
3	3642.000	46.19	-5.54	74.0	27.81	Peak	313.00	150	Vertical	Pass
3**	3642.000	35.12	-5.54	54.0	18.88	AV	313.00	150	Vertical	Pass
4	5187.000	99.59	-2.35	74.0	-25.59	Peak	321.00	150	Vertical	N/A
4**	5187.000	91.77	-2.35	54.0	-37.77	AV	321.00	150	Vertical	N/A
5	10447.674	47.98	-3.31	74.0	26.02	Peak	262.00	150	Vertical	Pass
5**	10447.674	36.39	-3.31	54.0	17.61	AV	262.00	150	Vertical	Pass
6	15258.974	48.98	-0.98	74.0	25.02	Peak	311.00	150	Vertical	Pass
6**	15258.974	39.37	-0.98	54.0	14.63	AV	311.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_17.55.43

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

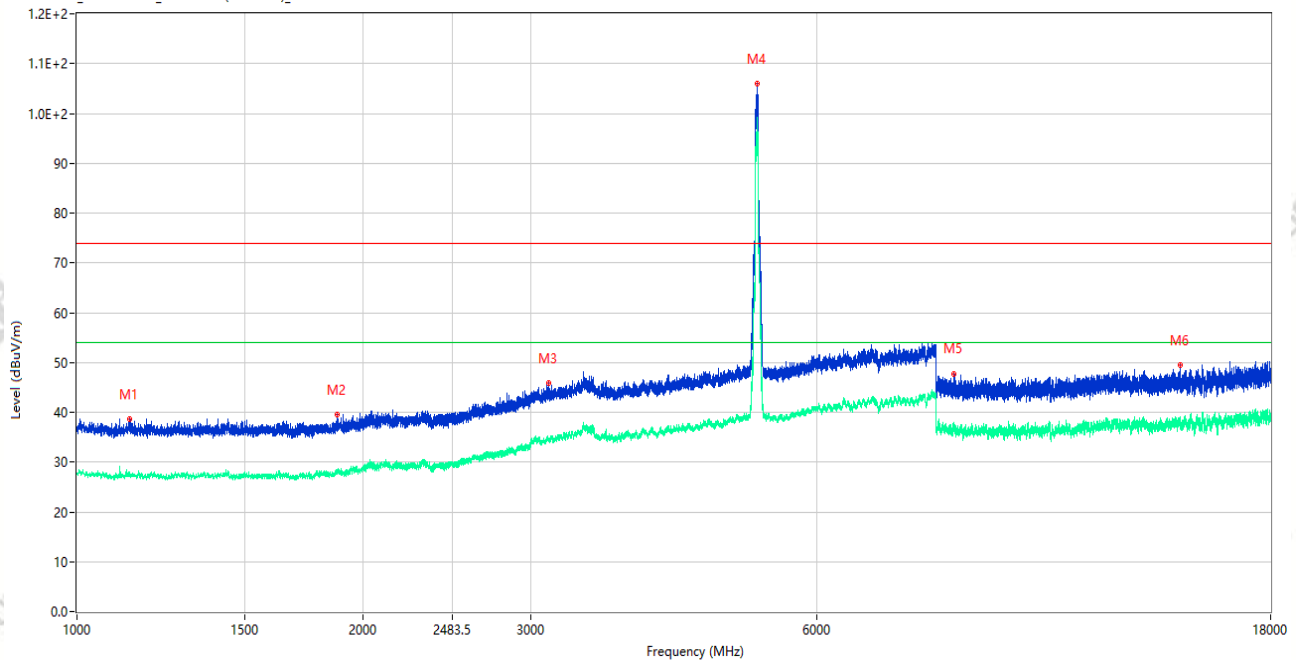

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1135.250	38.67	-15.53	74.0	35.33	Peak	335.00	150	Horizontal	Pass
1**	1135.250	27.75	-15.53	54.0	26.25	AV	335.00	150	Horizontal	Pass
2	1878.500	39.49	-15.41	74.0	34.51	Peak	145.00	150	Horizontal	Pass
2**	1878.500	27.91	-15.41	54.0	26.09	AV	145.00	150	Horizontal	Pass
3	3132.000	45.82	-7.42	74.0	28.18	Peak	251.00	150	Horizontal	Pass
3**	3132.000	34.46	-7.42	54.0	19.54	AV	251.00	150	Horizontal	Pass
4	5192.500	106.00	-2.32	74.0	-32.00	Peak	212.00	150	Horizontal	N/A
4**	5192.500	98.25	-2.32	54.0	-44.25	AV	212.00	150	Horizontal	N/A
5	8353.400	47.77	-4.63	74.0	26.23	Peak	52.00	150	Horizontal	Pass
5**	8353.400	36.47	-4.63	54.0	17.53	AV	52.00	150	Horizontal	Pass
6	14457.562	49.47	-2.70	74.0	24.53	Peak	346.00	150	Horizontal	Pass
6**	14457.562	37.52	-2.70	54.0	16.48	AV	346.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_19.48.43

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

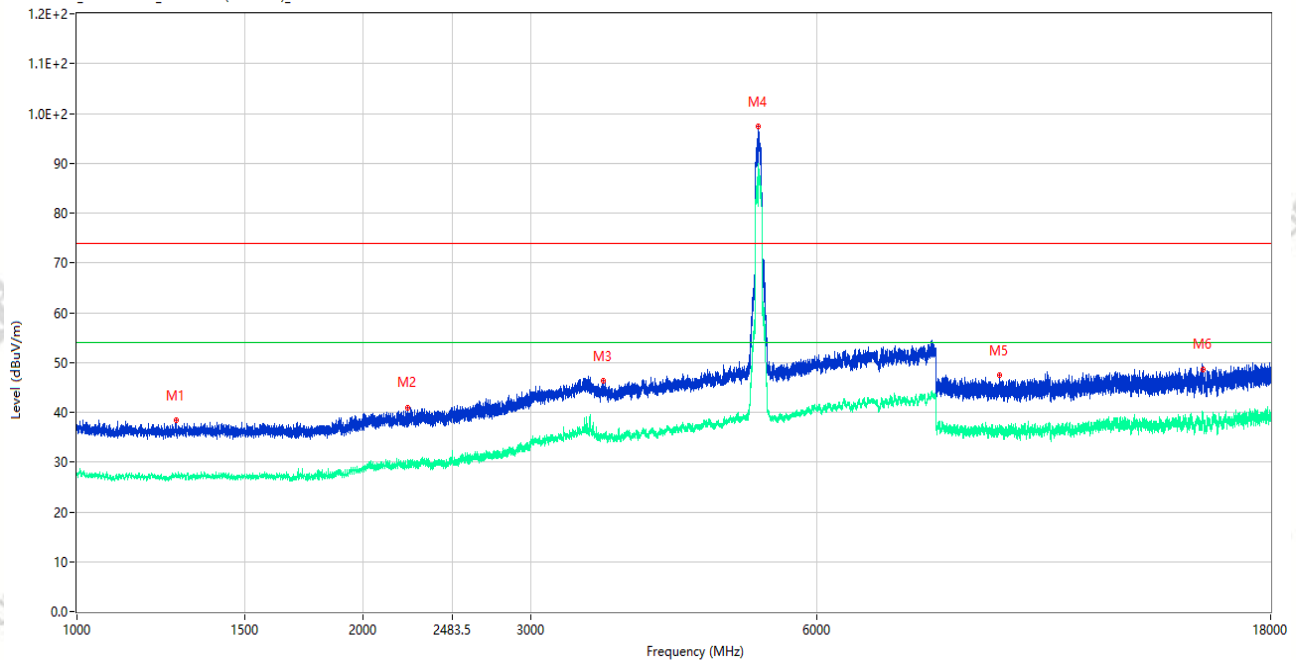

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1270.750	38.45	-15.88	74.0	35.55	Peak	355.00	150	Vertical	Pass
1**	1270.750	27.47	-15.88	54.0	26.53	AV	355.00	150	Vertical	Pass
2	2225.750	40.99	-13.05	74.0	33.01	Peak	86.00	150	Vertical	Pass
2**	2225.750	29.58	-13.05	54.0	24.42	AV	86.00	150	Vertical	Pass
3	3573.000	46.42	-6.64	74.0	27.58	Peak	229.00	150	Vertical	Pass
3**	3573.000	35.27	-6.64	54.0	18.73	AV	229.00	150	Vertical	Pass
4	5206.500	97.39	-2.33	74.0	-23.39	Peak	328.00	150	Vertical	N/A
4**	5206.500	89.89	-2.33	54.0	-35.89	AV	328.00	150	Vertical	N/A
5	9327.625	47.34	-5.13	74.0	26.66	Peak	194.00	150	Vertical	Pass
5**	9327.625	36.75	-5.13	54.0	17.25	AV	194.00	150	Vertical	Pass
6	15266.850	48.70	-1.02	74.0	25.30	Peak	0.00	150	Vertical	Pass
6**	15266.850	38.72	-1.02	54.0	15.28	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_19.44.00

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

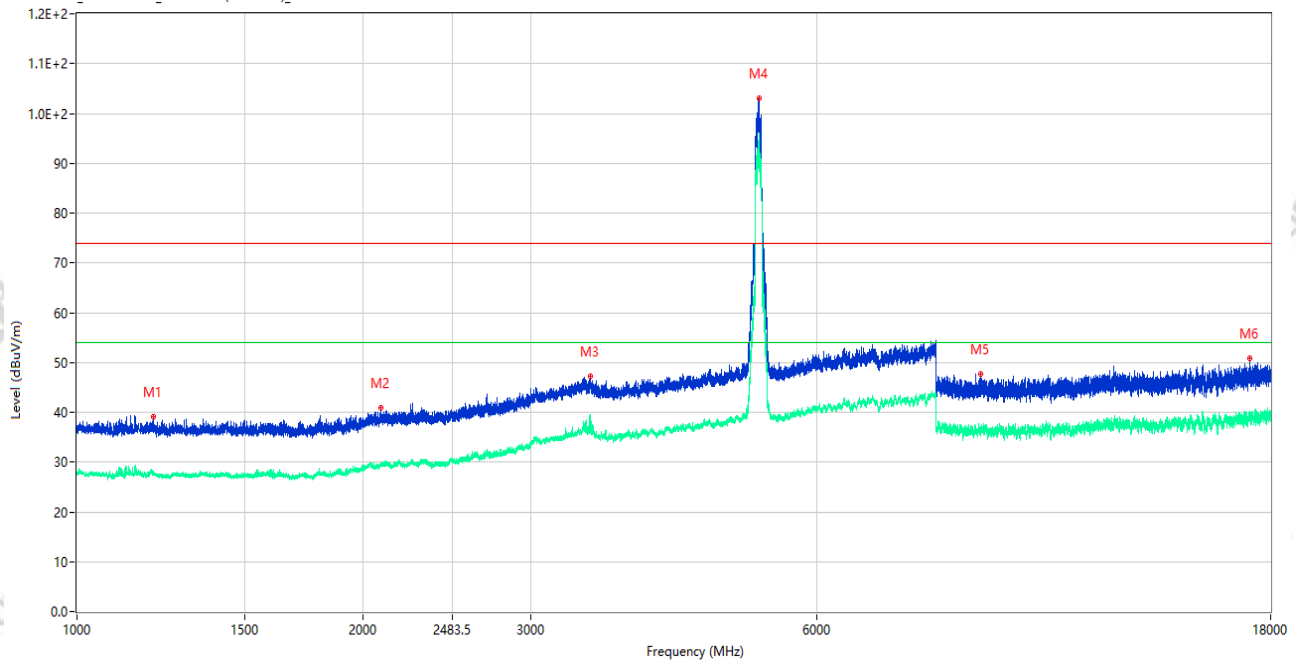

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.000	39.14	-15.75	74.0	34.86	Peak	14.00	150	Horizontal	Pass
1**	1203.000	27.77	-15.75	54.0	26.23	AV	14.00	150	Horizontal	Pass
2	2088.000	40.97	-13.69	74.0	33.03	Peak	360.00	150	Horizontal	Pass
2**	2088.000	29.42	-13.69	54.0	24.58	AV	360.00	150	Horizontal	Pass
3	3465.500	47.26	-5.12	74.0	26.74	Peak	21.00	150	Horizontal	Pass
3**	3465.500	39.00	-5.12	54.0	15.00	AV	21.00	150	Horizontal	Pass
4	5211.500	103.01	-2.35	74.0	-29.01	Peak	210.00	150	Horizontal	N/A
4**	5211.500	94.79	-2.35	54.0	-40.79	AV	210.00	150	Horizontal	N/A
5	8929.812	47.70	-4.37	74.0	26.30	Peak	9.00	150	Horizontal	Pass
5**	8929.812	36.66	-4.37	54.0	17.34	AV	9.00	150	Horizontal	Pass
6	17119.574	50.83	-0.22	74.0	23.17	Peak	216.00	150	Horizontal	Pass
6**	17119.574	39.98	-0.22	54.0	14.02	AV	216.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_19.59.25

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax20 CH44 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

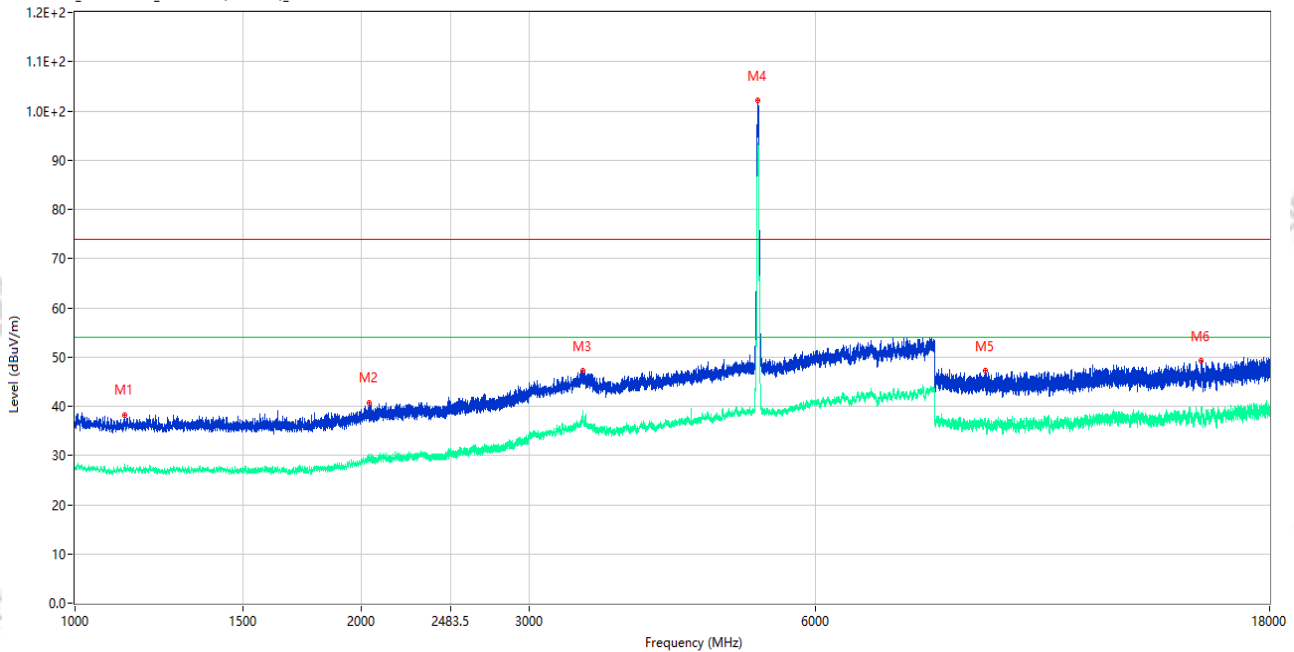


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.500	38.30	-15.62	74.0	35.70	Peak	60.00	150	Vertical	Pass
1**	1126.500	27.13	-15.62	54.0	26.87	AV	60.00	150	Vertical	Pass
2	2036.750	40.77	-13.32	74.0	33.23	Peak	0.00	150	Vertical	Pass
2**	2036.750	29.72	-13.32	54.0	24.28	AV	0.00	150	Vertical	Pass
3	3413.000	47.34	-5.27	74.0	26.66	Peak	329.00	150	Vertical	Pass
3**	3413.000	38.01	-5.27	54.0	15.99	AV	329.00	150	Vertical	Pass
4	5218.000	102.11	-2.38	74.0	-28.11	Peak	329.00	150	Vertical	N/A
4**	5218.000	93.58	-2.38	54.0	-39.58	AV	329.00	150	Vertical	N/A
5	9044.287	47.23	-4.36	74.0	26.77	Peak	6.00	150	Vertical	Pass
5**	9044.287	36.58	-4.36	54.0	17.42	AV	6.00	150	Vertical	Pass
6	15250.312	49.34	-1.25	74.0	24.66	Peak	245.00	150	Vertical	Pass
6**	15250.312	38.28	-1.25	54.0	15.72	AV	245.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-03_20.03.30

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax20 CH44 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

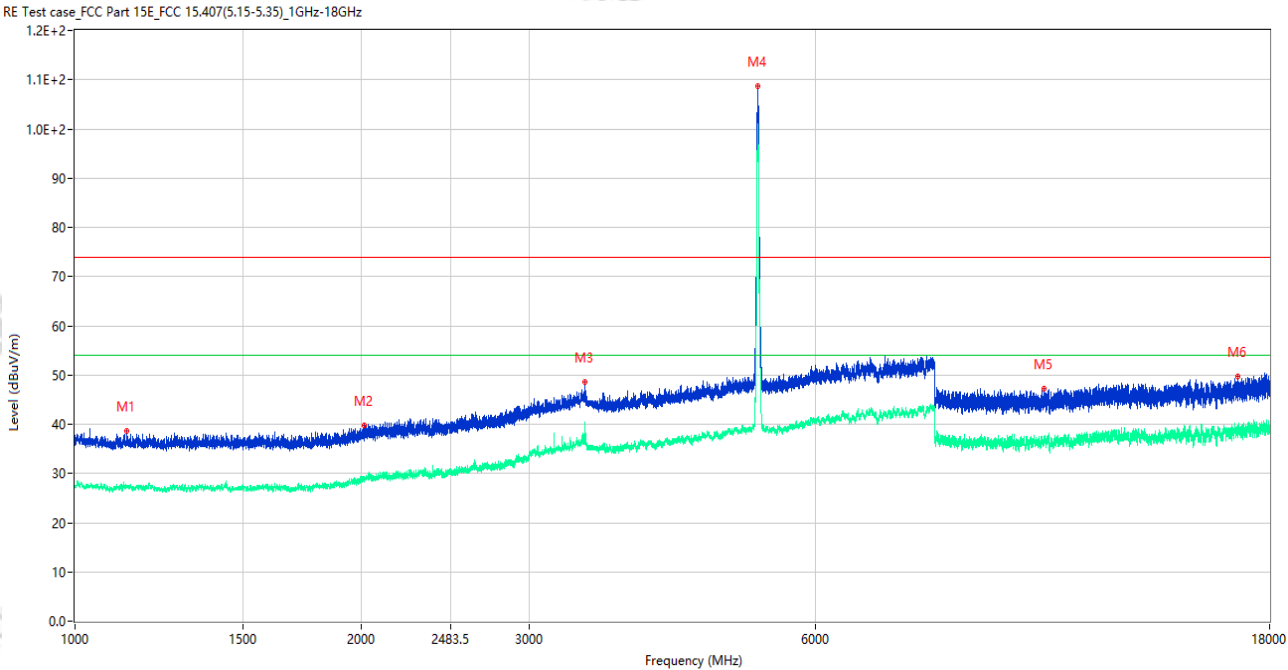

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1132.750	38.66	-15.55	74.0	35.34	Peak	69.00	150	Horizontal	Pass
1**	1132.750	27.20	-15.55	54.0	26.80	AV	69.00	150	Horizontal	Pass
2	2015.000	39.76	-14.22	74.0	34.24	Peak	237.00	150	Horizontal	Pass
2**	2015.000	29.40	-14.22	54.0	24.60	AV	237.00	150	Horizontal	Pass
3	3435.000	48.67	-5.19	74.0	25.33	Peak	240.00	150	Horizontal	Pass
3**	3435.000	37.53	-5.19	54.0	16.47	AV	240.00	150	Horizontal	Pass
4	5220.500	108.73	-2.36	74.0	-34.73	Peak	280.00	150	Horizontal	N/A
4**	5220.500	99.97	-2.36	54.0	-45.97	AV	280.00	150	Horizontal	N/A
5	10425.825	47.17	-3.49	74.0	26.83	Peak	332.00	150	Horizontal	Pass
5**	10425.825	36.15	-3.49	54.0	17.85	AV	332.00	150	Horizontal	Pass
6	16686.713	49.77	-0.90	74.0	24.23	Peak	75.00	150	Horizontal	Pass
6**	16686.713	39.12	-0.90	54.0	14.88	AV	75.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_20.46.08

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

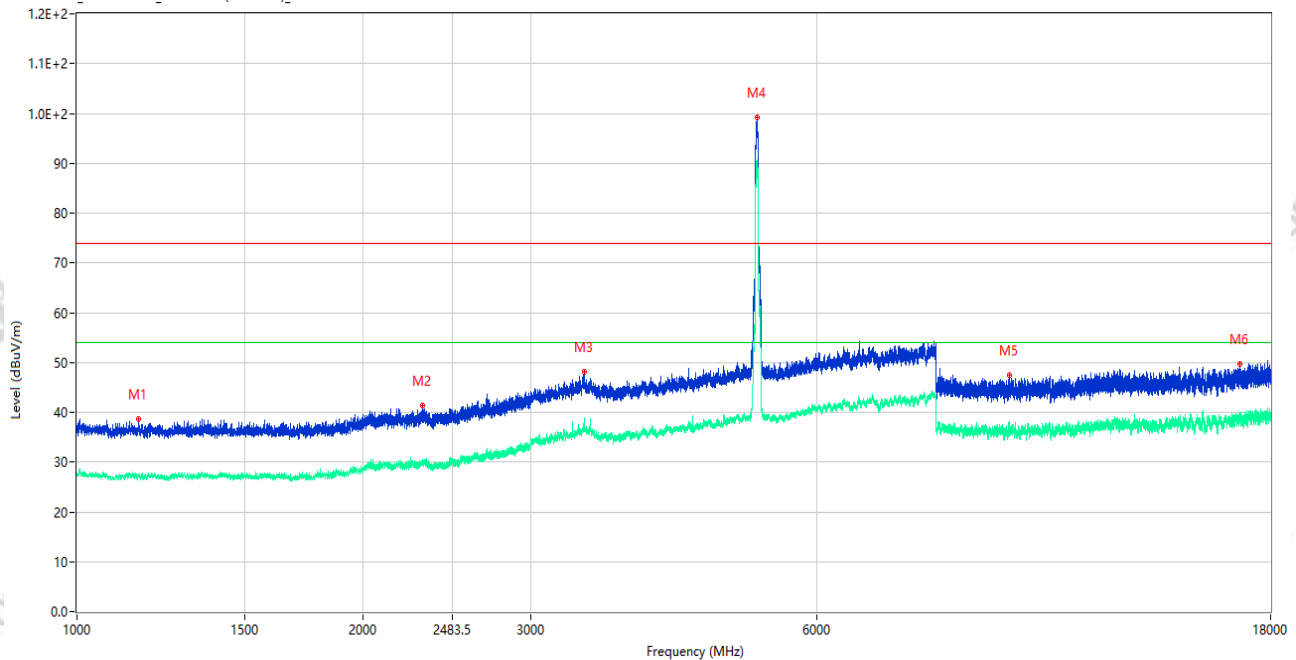

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.500	38.56	-15.47	74.0	35.44	Peak	49.00	150	Vertical	Pass
1**	1161.500	27.43	-15.47	54.0	26.57	AV	49.00	150	Vertical	Pass
2	2308.750	41.39	-12.52	74.0	32.61	Peak	2.00	150	Vertical	Pass
2**	2308.750	30.21	-12.52	54.0	23.79	AV	2.00	150	Vertical	Pass
3	3417.000	48.05	-5.12	74.0	25.95	Peak	0.00	150	Vertical	Pass
3**	3417.000	37.28	-5.12	54.0	16.72	AV	0.00	150	Vertical	Pass
4	5189.000	99.16	-2.32	74.0	-25.16	Peak	341.00	150	Vertical	N/A
4**	5189.000	89.84	-2.32	54.0	-35.84	AV	341.00	150	Vertical	N/A
5	9553.963	47.49	-2.60	74.0	26.51	Peak	25.00	150	Vertical	Pass
5**	9553.963	36.36	-2.60	54.0	17.64	AV	25.00	150	Vertical	Pass
6	16687.500	49.78	-0.99	74.0	24.22	Peak	148.00	150	Vertical	Pass
6**	16687.500	38.67	-0.99	54.0	15.33	AV	148.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_20.42.05

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH38 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

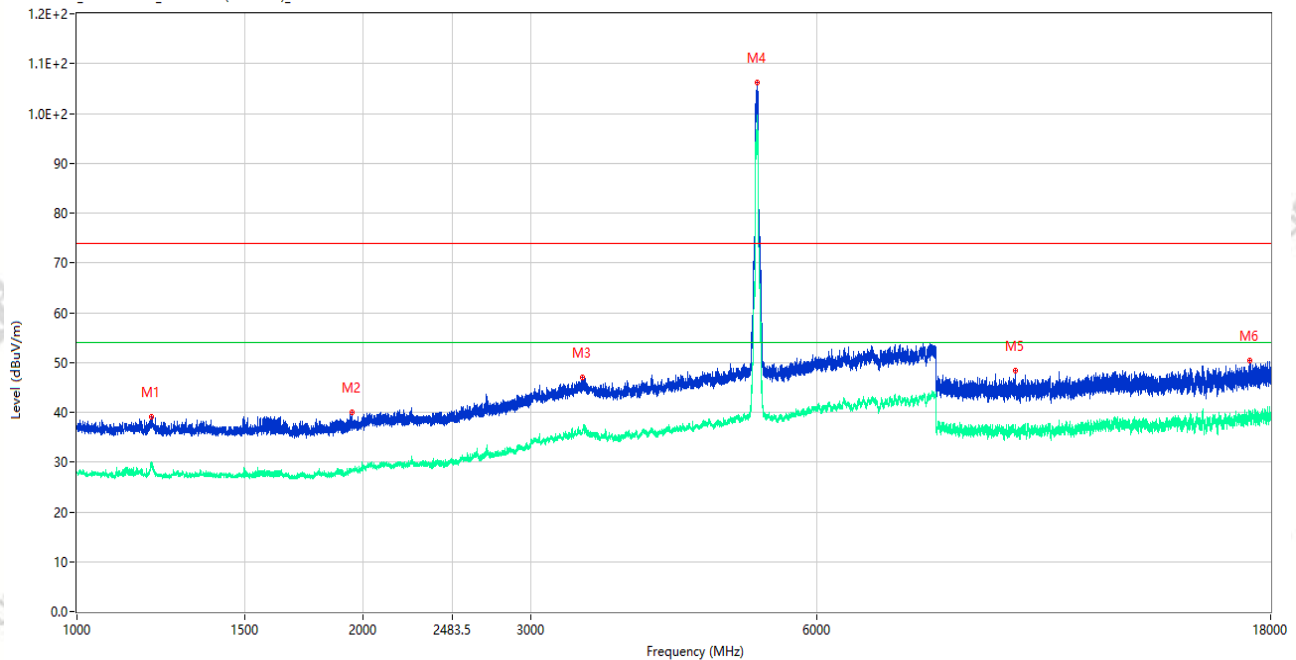

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.500	39.05	-15.72	74.0	34.95	Peak	268.00	150	Horizontal	Pass
1**	1197.500	29.51	-15.72	54.0	24.49	AV	268.00	150	Horizontal	Pass
2	1948.000	39.95	-14.87	74.0	34.05	Peak	107.00	150	Horizontal	Pass
2**	1948.000	28.40	-14.87	54.0	25.60	AV	107.00	150	Horizontal	Pass
3	3402.500	47.05	-5.56	74.0	26.95	Peak	310.00	150	Horizontal	Pass
3**	3402.500	36.64	-5.56	54.0	17.36	AV	310.00	150	Horizontal	Pass
4	5191.000	106.16	-2.32	74.0	-32.16	Peak	211.00	150	Horizontal	N/A
4**	5191.000	99.42	-2.32	54.0	-45.42	AV	211.00	150	Horizontal	N/A
5	9710.238	48.43	-3.74	74.0	25.57	Peak	169.00	150	Horizontal	Pass
5**	9710.238	36.14	-3.74	54.0	17.86	AV	169.00	150	Horizontal	Pass
6	17113.012	50.47	-0.37	74.0	23.53	Peak	0.00	150	Horizontal	Pass
6**	17113.012	39.30	-0.37	54.0	14.70	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_21.58.08

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

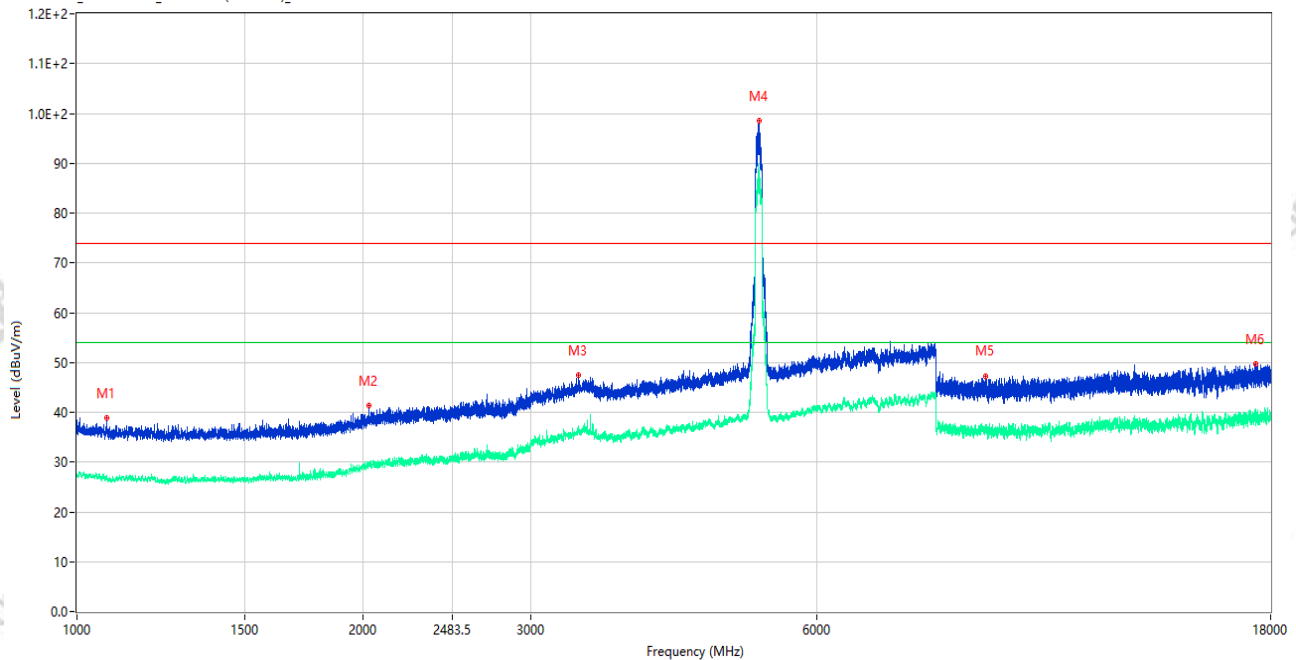

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1074.750	38.84	-15.36	74.0	35.16	Peak	96.00	150	Vertical	Pass
1**	1074.750	27.33	-15.36	54.0	26.67	AV	96.00	150	Vertical	Pass
2	2028.750	41.40	-13.74	74.0	32.60	Peak	0.00	150	Vertical	Pass
2**	2028.750	29.37	-13.74	54.0	24.63	AV	0.00	150	Vertical	Pass
3	3366.000	47.55	-5.08	74.0	26.45	Peak	310.00	150	Vertical	Pass
3**	3366.000	36.91	-5.08	54.0	17.09	AV	310.00	150	Vertical	Pass
4	5216.000	98.60	-2.32	74.0	-24.60	Peak	321.00	150	Vertical	N/A
4**	5216.000	88.49	-2.32	54.0	-34.49	AV	321.00	150	Vertical	N/A
5	9026.237	47.33	-4.28	74.0	26.67	Peak	332.00	150	Vertical	Pass
5**	9026.237	36.56	-4.28	54.0	17.44	AV	332.00	150	Vertical	Pass
6	17341.913	49.64	0.31	74.0	24.36	Peak	312.00	150	Vertical	Pass
6**	17341.913	39.47	0.31	54.0	14.53	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-03_21.53.03

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 49

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax80 CH42 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

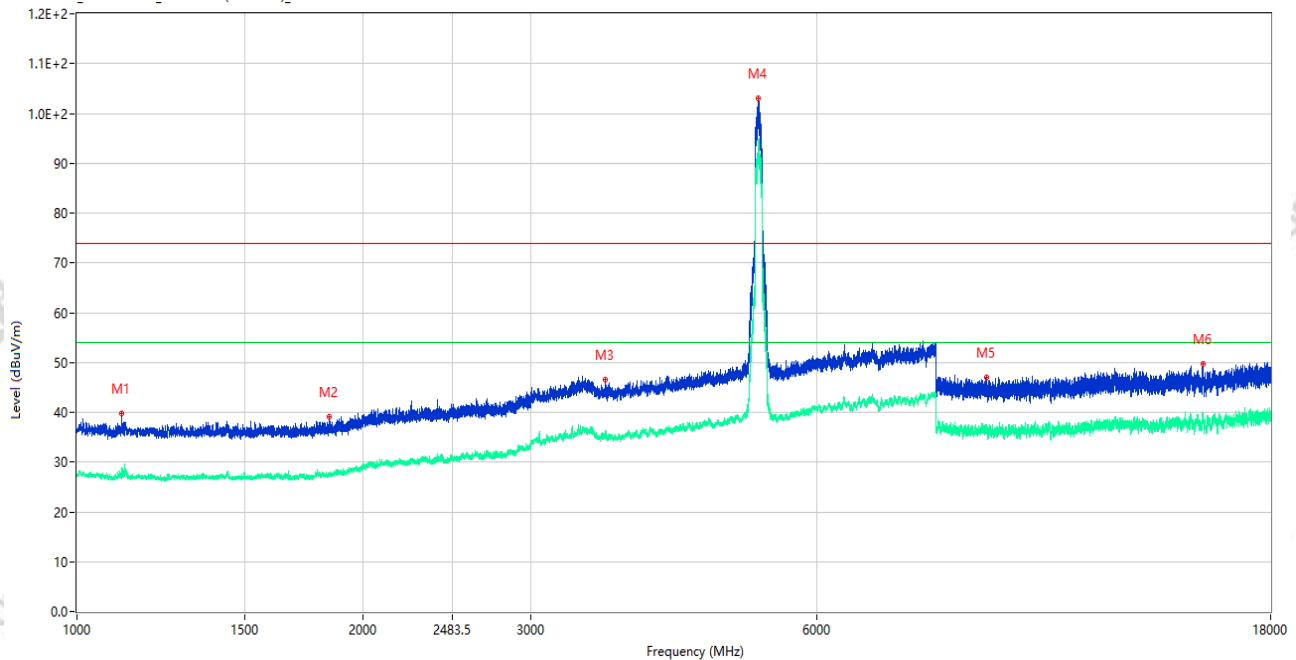


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1114.500	39.77	-15.77	74.0	34.23	Peak	0.00	150	Horizontal	Pass
1**	1114.500	29.02	-15.77	54.0	24.98	AV	0.00	150	Horizontal	Pass
2	1841.750	39.09	-15.88	74.0	34.91	Peak	268.00	150	Horizontal	Pass
2**	1841.750	27.12	-15.88	54.0	26.88	AV	268.00	150	Horizontal	Pass
3	3597.500	46.59	-5.10	74.0	27.41	Peak	132.00	150	Horizontal	Pass
3**	3597.500	35.81	-5.10	54.0	18.19	AV	132.00	150	Horizontal	Pass
4	5201.000	102.94	-2.35	74.0	-28.94	Peak	282.00	150	Horizontal	N/A
4**	5201.000	93.77	-2.35	54.0	-39.77	AV	282.00	150	Horizontal	N/A
5	9055.213	46.89	-4.62	74.0	27.11	Peak	0.00	150	Horizontal	Pass
5**	9055.213	36.76	-4.62	54.0	17.24	AV	0.00	150	Horizontal	Pass
6	15283.912	49.65	-1.79	74.0	24.35	Peak	72.00	150	Horizontal	Pass
6**	15283.912	38.73	-1.79	54.0	15.27	AV	72.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-07-28_09.13.42

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

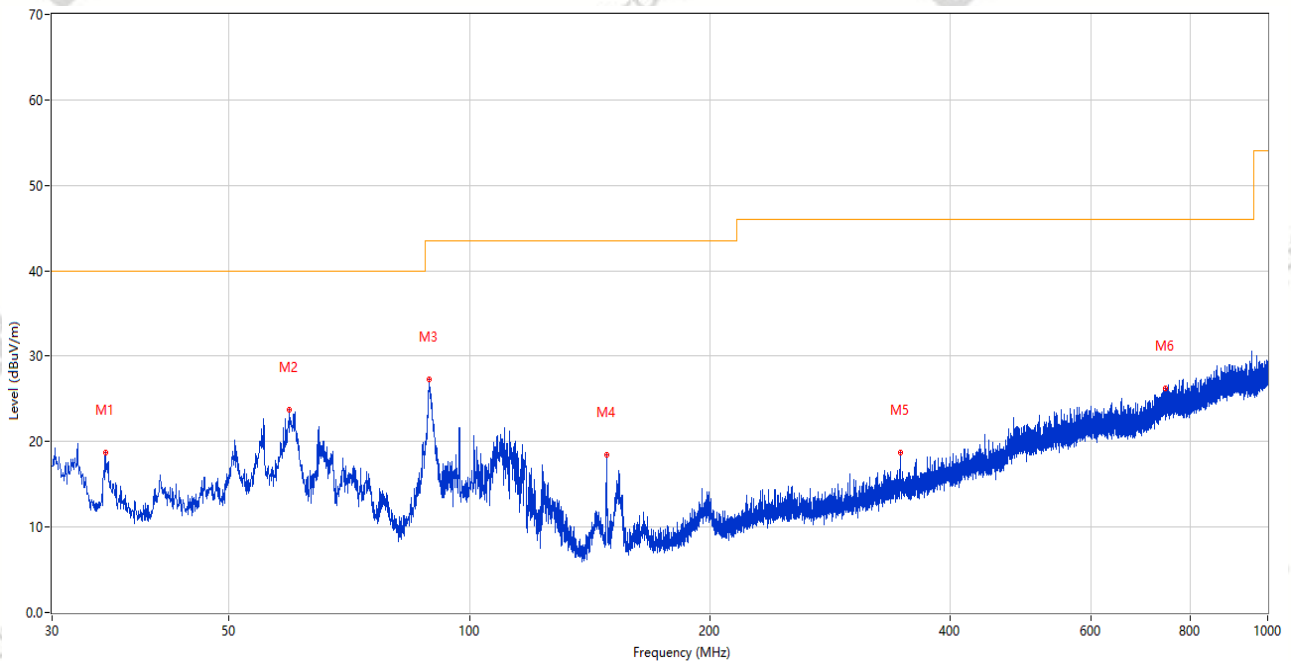


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.995	18.72	-27.83	40.0	21.28	Peak	173.00	200	Vertical	Pass
2	59.440	23.68	-26.05	40.0	16.32	Peak	116.00	100	Vertical	Pass
3	89.024	27.34	-28.56	43.5	16.16	Peak	204.00	200	Vertical	Pass
4	148.486	18.52	-29.82	43.5	24.98	Peak	1.00	100	Vertical	Pass
5	346.560	18.67	-21.84	46.0	27.33	Peak	248.00	100	Vertical	Pass
6	745.375	26.27	-12.62	46.0	19.73	Peak	350.00	100	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-07-28_09.14.58

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	49
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

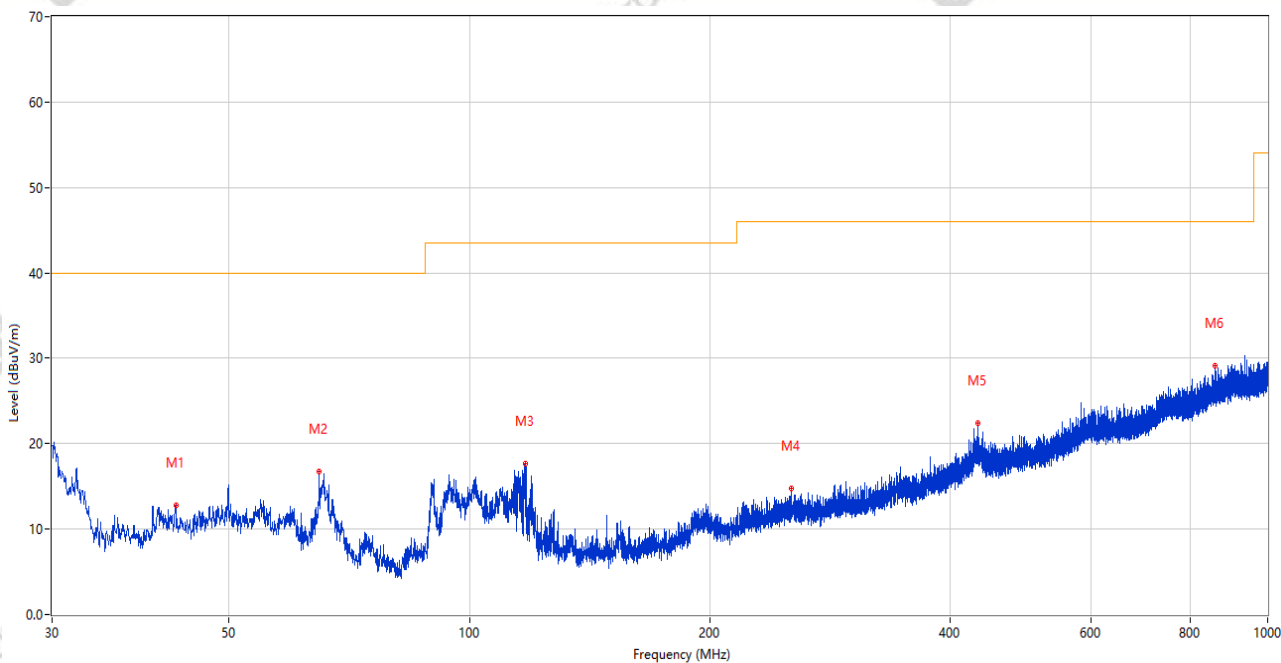

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.852	12.78	-25.20	40.0	27.22	Peak	0.00	100	Horizontal	Pass
2	64.823	16.79	-27.44	40.0	23.21	Peak	85.00	200	Horizontal	Pass
3	117.543	17.68	-27.95	43.5	25.82	Peak	246.00	100	Horizontal	Pass
4	252.809	14.74	-24.33	46.0	31.26	Peak	191.00	100	Horizontal	Pass
5	432.890	22.38	-20.14	46.0	23.62	Peak	120.00	100	Horizontal	Pass
6	860.223	29.18	-10.85	46.0	16.82	Peak	48.00	100	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.54.03

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

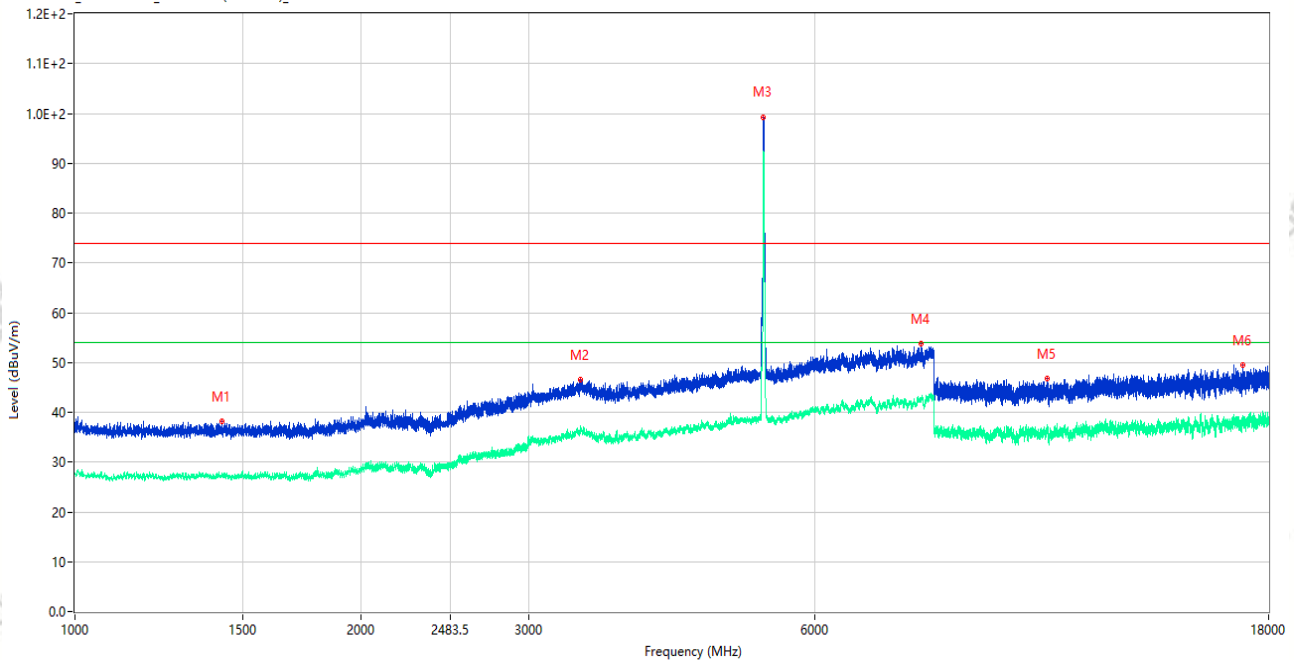

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1426.250	38.24	-15.96	74.0	35.76	Peak	5.00	150	Vertical	Pass
1**	1426.250	27.48	-15.96	54.0	26.52	AV	5.00	150	Vertical	Pass
2	3399.000	46.64	-5.71	74.0	27.36	Peak	239.00	150	Vertical	Pass
2**	3399.000	36.08	-5.71	54.0	17.92	AV	239.00	150	Vertical	Pass
3	5298.500	99.30	-2.03	74.0	-25.30	Peak	305.00	150	Vertical	N/A
3**	5298.500	91.59	-2.03	54.0	-37.59	AV	305.00	150	Vertical	N/A
4	7759.000	53.70	1.39	74.0	20.30	Peak	267.00	150	Vertical	Pass
4**	7759.000	42.27	1.39	54.0	11.73	AV	267.00	150	Vertical	Pass
5	10524.151	46.84	-3.47	74.0	27.16	Peak	309.00	150	Vertical	Pass
5**	10524.151	36.53	-3.47	54.0	17.47	AV	309.00	150	Vertical	Pass
6	16908.000	49.51	-0.74	74.0	24.49	Peak	0.00	150	Vertical	Pass
6**	16908.000	38.80	-0.74	54.0	15.20	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.49.47

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

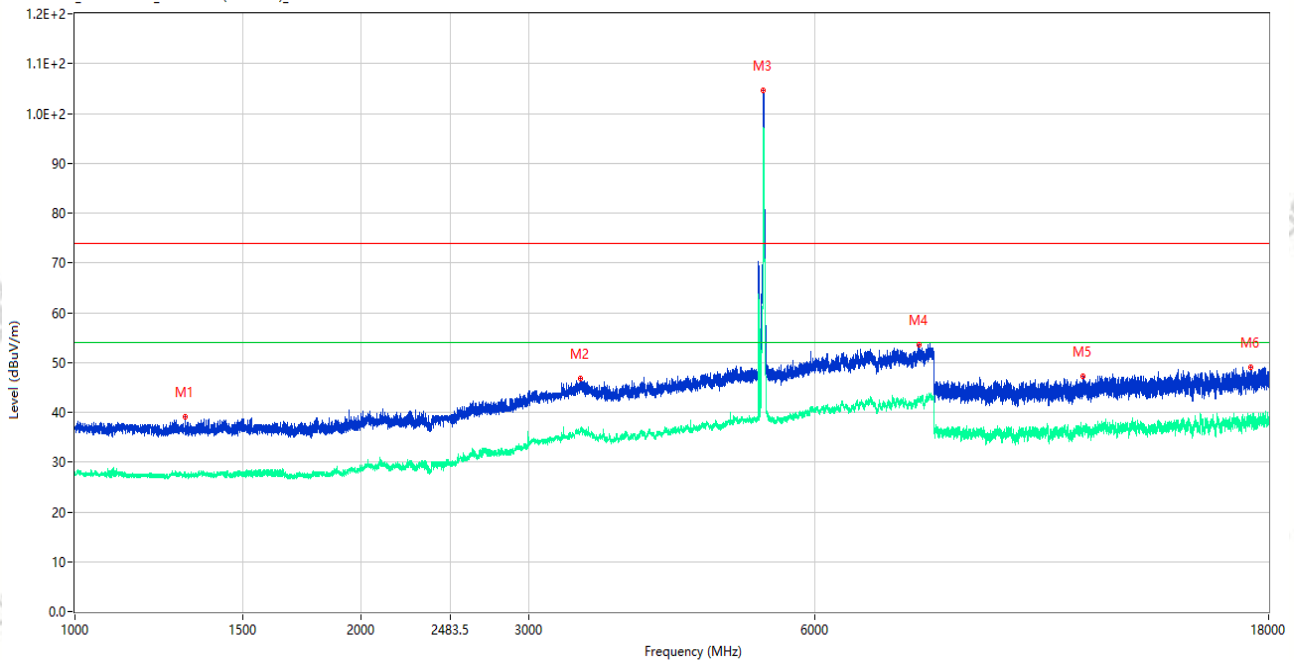

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1304.750	39.08	-15.59	74.0	34.92	Peak	64.00	150	Horizontal	Pass
1**	1304.750	27.35	-15.59	54.0	26.65	AV	64.00	150	Horizontal	Pass
2	3401.000	46.69	-5.63	74.0	27.31	Peak	4.00	150	Horizontal	Pass
2**	3401.000	36.50	-5.63	54.0	17.50	AV	4.00	150	Horizontal	Pass
3	5298.000	104.54	-2.04	74.0	-30.54	Peak	207.00	150	Horizontal	N/A
3**	5298.000	96.17	-2.04	54.0	-42.17	AV	207.00	150	Horizontal	N/A
4	7724.500	53.48	0.87	74.0	20.52	Peak	0.00	150	Horizontal	Pass
4**	7724.500	42.46	0.87	54.0	11.54	AV	0.00	150	Horizontal	Pass
5	11478.425	47.17	-3.05	74.0	26.83	Peak	2.00	150	Horizontal	Pass
5**	11478.425	35.84	-3.05	54.0	18.16	AV	2.00	150	Horizontal	Pass
6	17237.176	49.06	-0.71	74.0	24.94	Peak	182.00	150	Horizontal	Pass
6**	17237.176	39.53	-0.71	54.0	14.47	AV	182.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.05.59

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

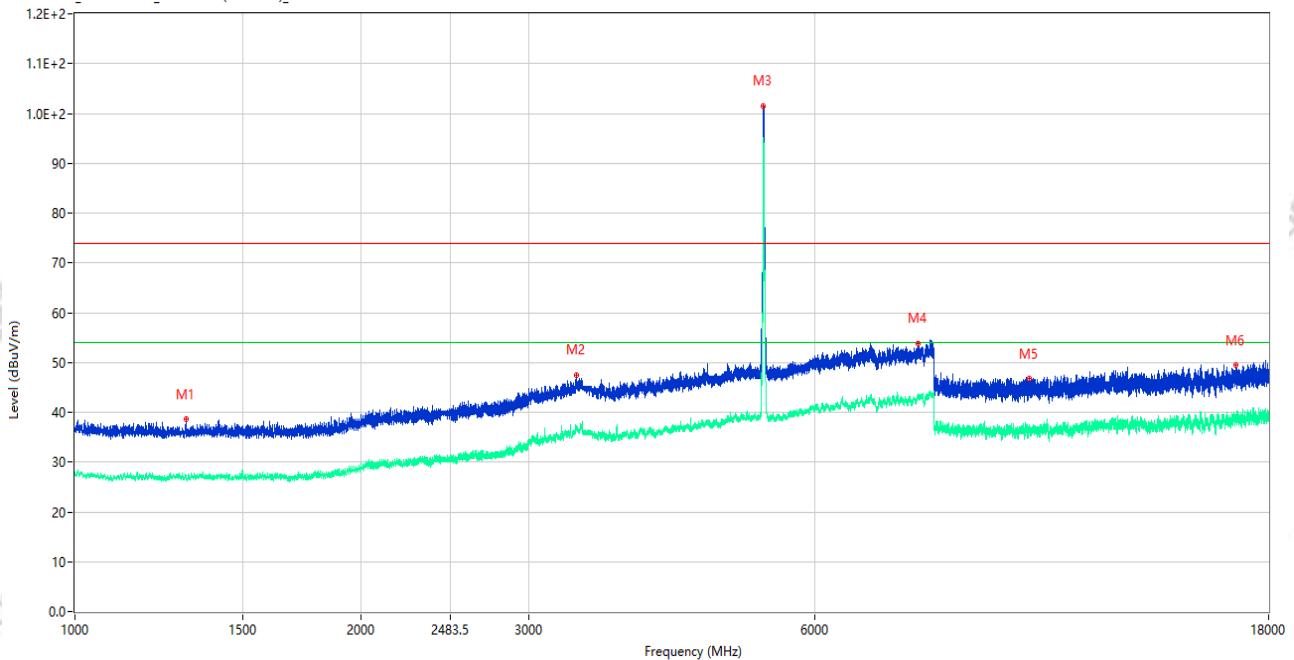

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.000	38.64	-15.67	74.0	35.36	Peak	316.00	150	Vertical	Pass
1**	1308.000	27.11	-15.67	54.0	26.89	AV	316.00	150	Vertical	Pass
2	3370.000	47.47	-4.86	74.0	26.53	Peak	354.00	150	Vertical	Pass
2**	3370.000	36.46	-4.86	54.0	17.54	AV	354.00	150	Vertical	Pass
3	5298.000	101.57	-2.04	74.0	-27.57	Peak	326.00	150	Vertical	N/A
3**	5298.000	88.08	-2.04	54.0	-34.08	AV	326.00	150	Vertical	N/A
4	7710.000	53.87	1.28	74.0	20.13	Peak	4.00	150	Vertical	Pass
4**	7710.000	43.05	1.28	54.0	10.95	AV	4.00	150	Vertical	Pass
5	10085.963	46.77	-3.97	74.0	27.23	Peak	262.00	150	Vertical	Pass
5**	10085.963	36.44	-3.97	54.0	17.56	AV	262.00	150	Vertical	Pass
6	16624.239	49.44	-1.19	74.0	24.56	Peak	15.00	150	Vertical	Pass
6**	16624.239	38.75	-1.19	54.0	15.25	AV	15.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.01.47

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH60 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

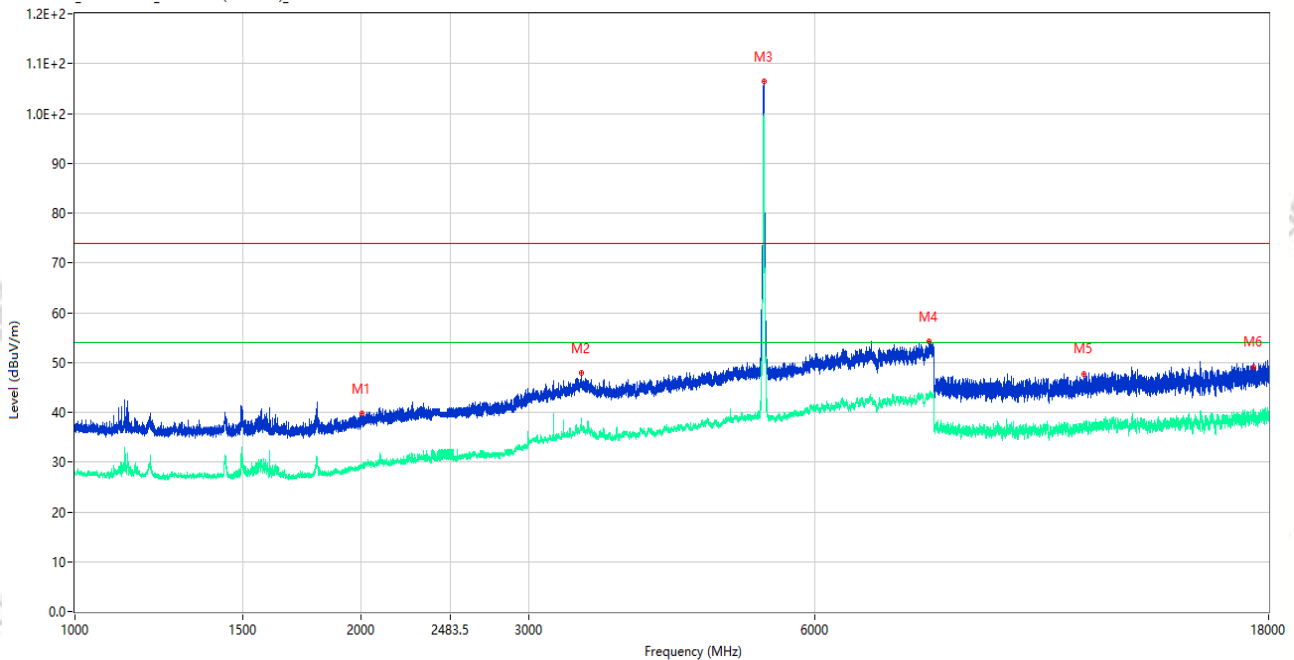

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2004.250	39.77	-14.20	74.0	34.23	Peak	2.00	150	Horizontal	Pass
1**	2004.250	29.08	-14.20	54.0	24.92	AV	2.00	150	Horizontal	Pass
2	3406.000	47.85	-5.41	74.0	26.15	Peak	156.00	150	Horizontal	Pass
2**	3406.000	38.87	-5.41	54.0	15.13	AV	156.00	150	Horizontal	Pass
3	5301.000	106.35	-2.07	74.0	-32.35	Peak	294.00	150	Horizontal	N/A
3**	5301.000	98.52	-2.07	54.0	-44.52	AV	294.00	150	Horizontal	N/A
4	7911.000	54.26	1.67	74.0	19.74	Peak	334.00	150	Horizontal	Pass
4**	7911.000	43.18	1.67	54.0	10.82	AV	334.00	150	Horizontal	Pass
5	11499.563	47.78	-2.92	74.0	26.22	Peak	360.00	150	Horizontal	Pass
5**	11499.563	37.68	-2.92	54.0	16.32	AV	360.00	150	Horizontal	Pass
6	17348.739	49.15	0.00	74.0	24.85	Peak	15.00	150	Horizontal	Pass
6**	17348.739	39.12	0.00	54.0	14.88	AV	15.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.11.44

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.2
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH54 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

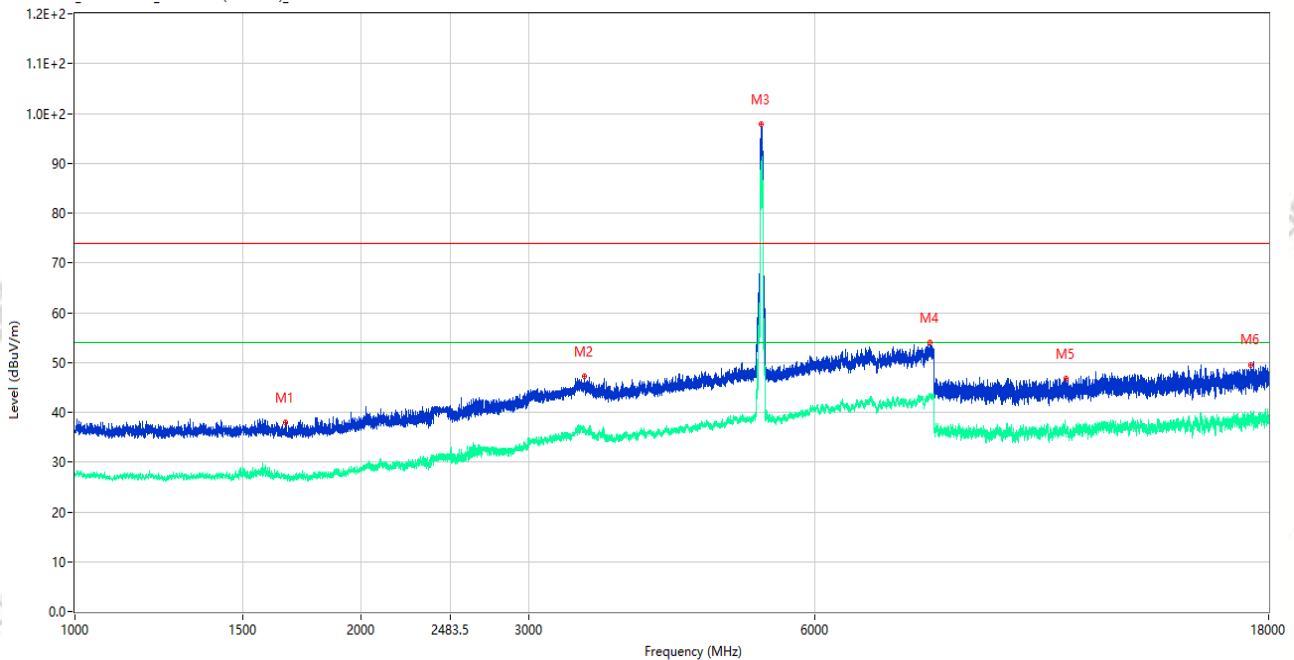

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1663.000	37.88	-16.23	74.0	36.12	Peak	302.00	150	Vertical	Pass
1**	1663.000	26.86	-16.23	54.0	27.14	AV	302.00	150	Vertical	Pass
2	3430.500	47.17	-5.02	74.0	26.83	Peak	298.00	150	Vertical	Pass
2**	3430.500	36.91	-5.02	54.0	17.09	AV	298.00	150	Vertical	Pass
3	5268.000	97.90	-2.42	74.0	-23.90	Peak	308.00	150	Vertical	N/A
3**	5268.000	89.79	-2.42	54.0	-35.79	AV	308.00	150	Vertical	N/A
4	7926.000	53.94	1.95	74.0	20.06	Peak	99.00	150	Vertical	Pass
4**	7926.000	43.67	1.95	54.0	10.33	AV	99.00	150	Vertical	Pass
5	11011.738	46.85	-3.22	74.0	27.15	Peak	216.00	150	Vertical	Pass
5**	11011.738	35.83	-3.22	54.0	18.17	AV	216.00	150	Vertical	Pass
6	17231.663	49.60	-0.39	74.0	24.40	Peak	182.00	150	Vertical	Pass
6**	17231.663	39.11	-0.39	54.0	14.89	AV	182.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.15.52

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

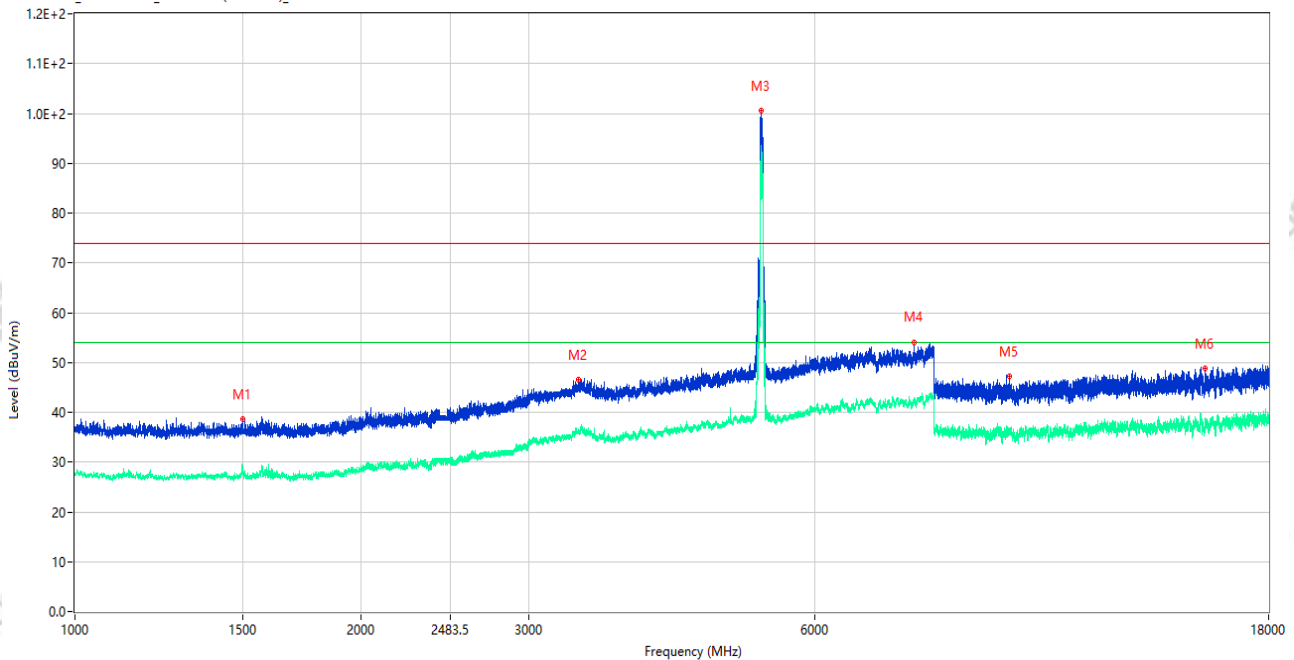

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.000	38.64	-16.14	74.0	35.36	Peak	78.00	150	Horizontal	Pass
1**	1500.000	27.88	-16.14	54.0	26.12	AV	78.00	150	Horizontal	Pass
2	3383.000	46.64	-5.25	74.0	27.36	Peak	39.00	150	Horizontal	Pass
2**	3383.000	36.16	-5.25	54.0	17.84	AV	39.00	150	Horizontal	Pass
3	5267.000	100.59	-2.39	74.0	-26.59	Peak	276.00	150	Horizontal	N/A
3**	5267.000	91.06	-2.39	54.0	-37.06	AV	276.00	150	Horizontal	N/A
4	7630.000	54.10	0.71	74.0	19.90	Peak	297.00	150	Horizontal	Pass
4**	7630.000	42.83	0.71	54.0	11.17	AV	297.00	150	Horizontal	Pass
5	9612.862	47.20	-3.25	74.0	26.80	Peak	308.00	150	Horizontal	Pass
5**	9612.862	35.89	-3.25	54.0	18.11	AV	308.00	150	Horizontal	Pass
6	15436.425	48.88	-1.75	74.0	25.12	Peak	117.00	150	Horizontal	Pass
6**	15436.425	38.00	-1.75	54.0	16.00	AV	117.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.49.09

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

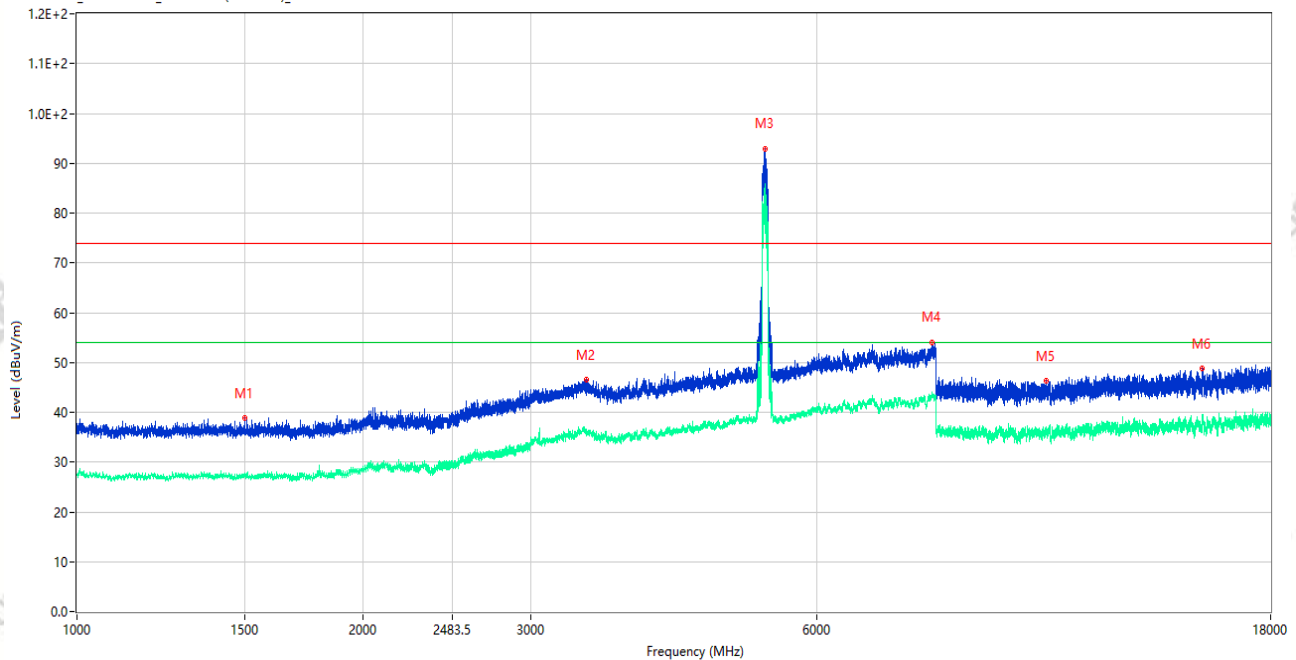

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.500	38.89	-16.13	74.0	35.11	Peak	131.00	150	Vertical	Pass
1**	1500.500	27.76	-16.13	54.0	26.24	AV	131.00	150	Vertical	Pass
2	3431.000	46.56	-5.03	74.0	27.44	Peak	0.00	150	Vertical	Pass
2**	3431.000	36.33	-5.03	54.0	17.67	AV	0.00	150	Vertical	Pass
3	5287.500	92.99	-2.07	74.0	-18.99	Peak	315.00	150	Vertical	N/A
3**	5287.500	81.80	-2.07	54.0	-27.80	AV	315.00	150	Vertical	N/A
4	7935.500	54.11	2.04	74.0	19.89	Peak	178.00	150	Vertical	Pass
4**	7935.500	43.66	2.04	54.0	10.34	AV	178.00	150	Vertical	Pass
5	10453.613	46.26	-3.38	74.0	27.74	Peak	334.00	150	Vertical	Pass
5**	10453.613	36.46	-3.38	54.0	17.54	AV	334.00	150	Vertical	Pass
6	15262.387	48.73	-1.07	74.0	25.27	Peak	82.00	150	Vertical	Pass
6**	15262.387	38.42	-1.07	54.0	15.58	AV	82.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_00.44.37

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

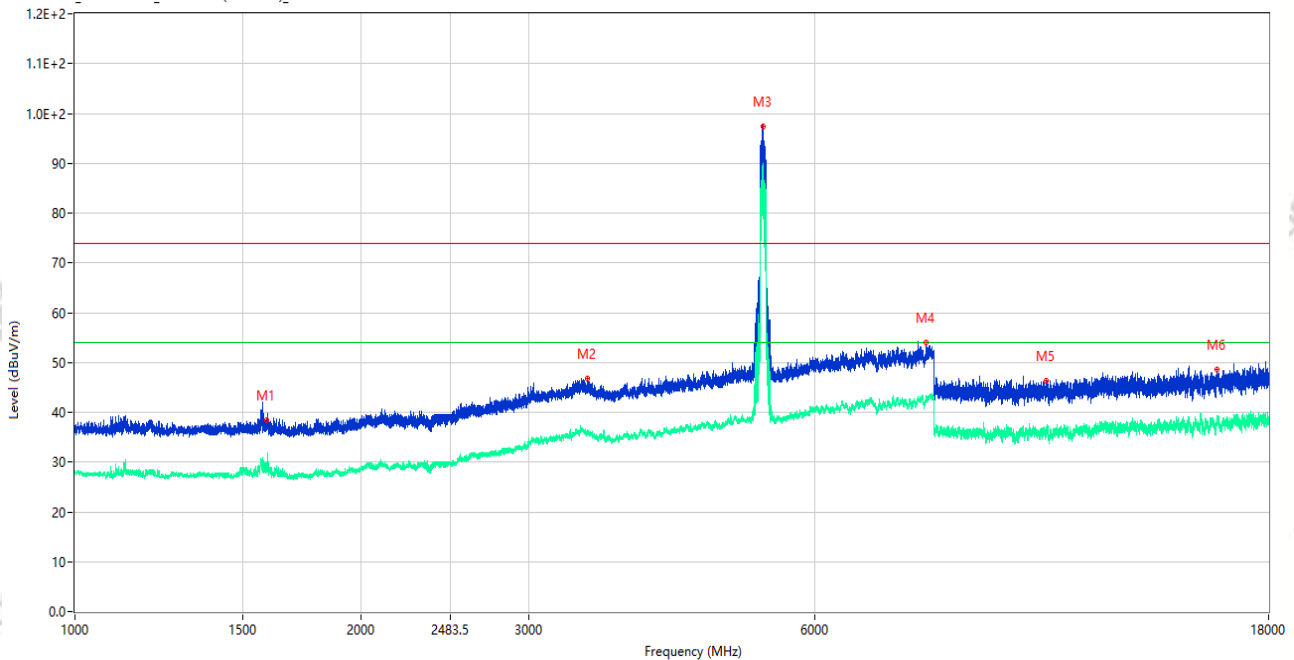

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1590.250	38.37	-16.17	74.0	35.63	Peak	202.00	150	Horizontal	Pass
1**	1590.250	27.63	-16.17	54.0	26.37	AV	202.00	150	Horizontal	Pass
2	3457.000	46.71	-4.91	74.0	27.29	Peak	50.00	150	Horizontal	Pass
2**	3457.000	35.68	-4.91	54.0	18.32	AV	50.00	150	Horizontal	Pass
3	5292.000	97.34	-1.95	74.0	-23.34	Peak	209.00	150	Horizontal	N/A
3**	5292.000	85.66	-1.95	54.0	-31.66	AV	209.00	150	Horizontal	N/A
4	7857.500	53.95	1.62	74.0	20.05	Peak	237.00	150	Horizontal	Pass
4**	7857.500	42.51	1.62	54.0	11.49	AV	237.00	150	Horizontal	Pass
5	10511.563	46.22	-3.47	74.0	27.78	Peak	192.00	150	Horizontal	Pass
5**	10511.563	36.34	-3.47	54.0	17.66	AV	192.00	150	Horizontal	Pass
6	15894.750	48.56	-1.68	74.0	25.44	Peak	80.00	150	Horizontal	Pass
6**	15894.750	38.51	-1.68	54.0	15.49	AV	80.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.38.56

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac160 CH50 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

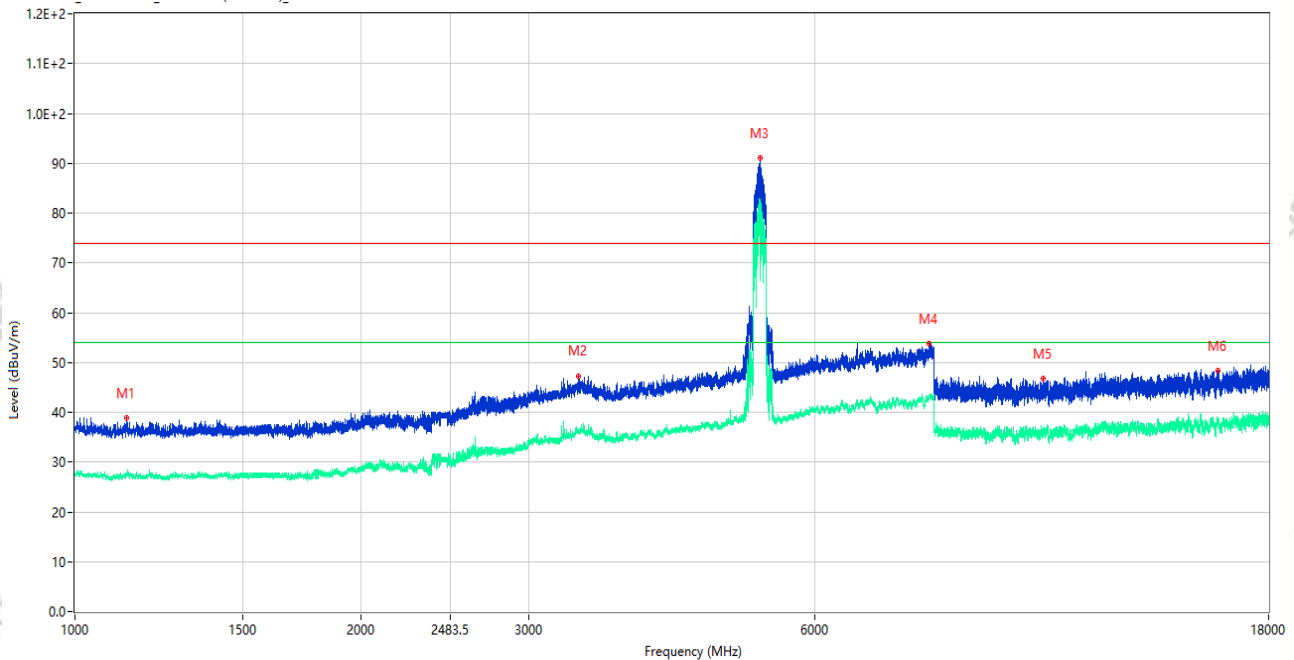

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.750	38.95	-15.57	74.0	35.05	Peak	199.00	150	Vertical	Pass
1**	1133.750	27.35	-15.57	54.0	26.65	AV	199.00	150	Vertical	Pass
2	3384.000	47.32	-5.32	74.0	26.68	Peak	272.00	150	Vertical	Pass
2**	3384.000	36.15	-5.32	54.0	17.85	AV	272.00	150	Vertical	Pass
3	5260.000	91.00	-2.16	74.0	-17.00	Peak	331.00	150	Vertical	N/A
3**	5260.000	78.97	-2.16	54.0	-24.97	AV	331.00	150	Vertical	N/A
4	7918.000	53.75	1.93	74.0	20.25	Peak	4.00	150	Vertical	Pass
4**	7918.000	43.12	1.93	54.0	10.88	AV	4.00	150	Vertical	Pass
5	10428.438	46.71	-3.45	74.0	27.29	Peak	191.00	150	Vertical	Pass
5**	10428.438	35.69	-3.45	54.0	18.31	AV	191.00	150	Vertical	Pass
6	15911.812	48.42	-2.21	74.0	25.58	Peak	346.00	150	Vertical	Pass
6**	15911.812	37.70	-2.21	54.0	16.30	AV	346.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.42.47

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac160 CH50 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

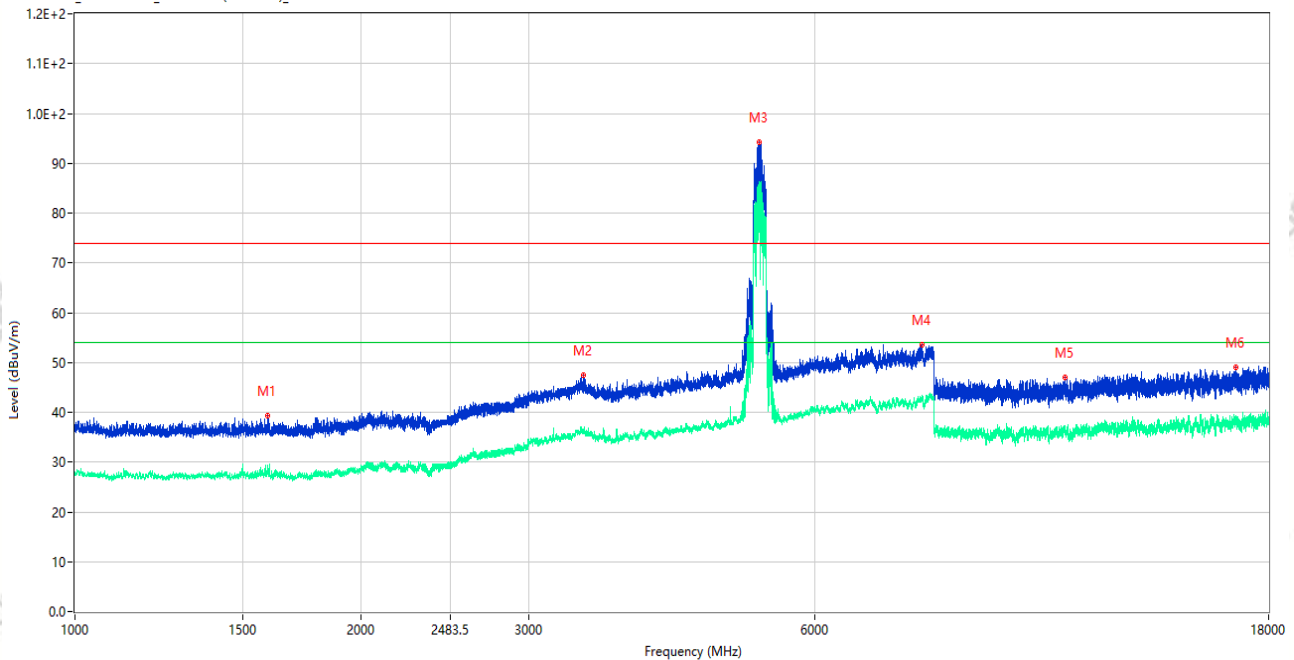

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1593.750	39.39	-16.21	74.0	34.61	Peak	90.00	150	Horizontal	Pass
1**	1593.750	28.41	-16.21	54.0	25.59	AV	90.00	150	Horizontal	Pass
2	3422.000	47.36	-4.91	74.0	26.64	Peak	263.00	150	Horizontal	Pass
2**	3422.000	35.67	-4.91	54.0	18.33	AV	263.00	150	Horizontal	Pass
3	5243.500	94.28	-2.16	74.0	-20.28	Peak	204.00	150	Horizontal	N/A
3**	5243.500	81.48	-2.16	54.0	-27.48	AV	204.00	150	Horizontal	N/A
4	7781.500	53.48	1.36	74.0	20.52	Peak	322.00	150	Horizontal	Pass
4**	7781.500	43.16	1.36	54.0	10.84	AV	322.00	150	Horizontal	Pass
5	10981.812	47.02	-3.42	74.0	26.98	Peak	0.00	150	Horizontal	Pass
5**	10981.812	36.64	-3.42	54.0	17.36	AV	0.00	150	Horizontal	Pass
6	16620.037	49.12	-1.05	74.0	24.88	Peak	108.00	150	Horizontal	Pass
6**	16620.037	38.07	-1.05	54.0	15.93	AV	108.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_01.00.17

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax20 CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

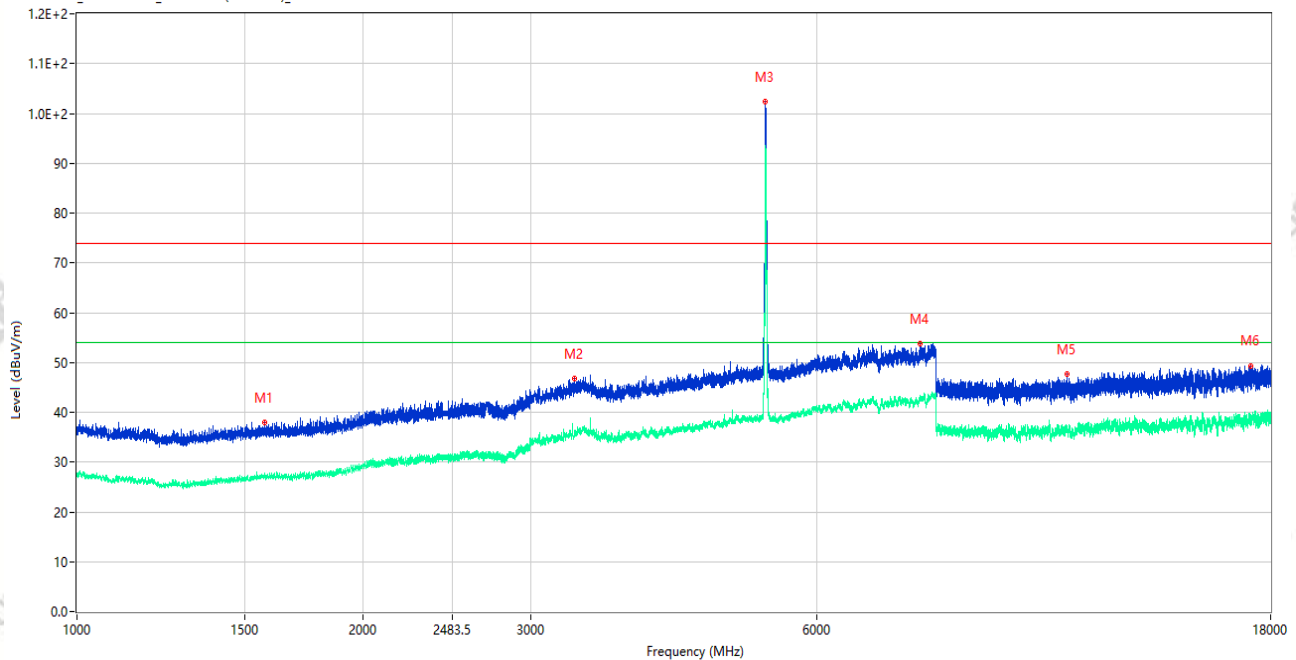

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.000	38.02	-16.10	74.0	35.98	Peak	15.00	150	Vertical	Pass
1**	1577.000	26.98	-16.10	54.0	27.02	AV	15.00	150	Vertical	Pass
2	3336.500	46.79	-6.12	74.0	27.21	Peak	28.00	150	Vertical	Pass
2**	3336.500	35.85	-6.12	54.0	18.15	AV	28.00	150	Vertical	Pass
3	5298.000	102.32	-2.04	74.0	-28.32	Peak	325.00	150	Vertical	N/A
3**	5298.000	93.51	-2.04	54.0	-39.51	AV	325.00	150	Vertical	N/A
4	7707.500	53.74	1.39	74.0	20.26	Peak	187.00	150	Vertical	Pass
4**	7707.500	42.56	1.39	54.0	11.44	AV	187.00	150	Vertical	Pass
5	10984.424	47.75	-3.45	74.0	26.25	Peak	354.00	150	Vertical	Pass
5**	10984.424	36.49	-3.45	54.0	17.51	AV	354.00	150	Vertical	Pass
6	17141.625	49.37	0.05	74.0	24.63	Peak	0.00	150	Vertical	Pass
6**	17141.625	39.01	0.05	54.0	14.99	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_01.04.10

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax20 CH60 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

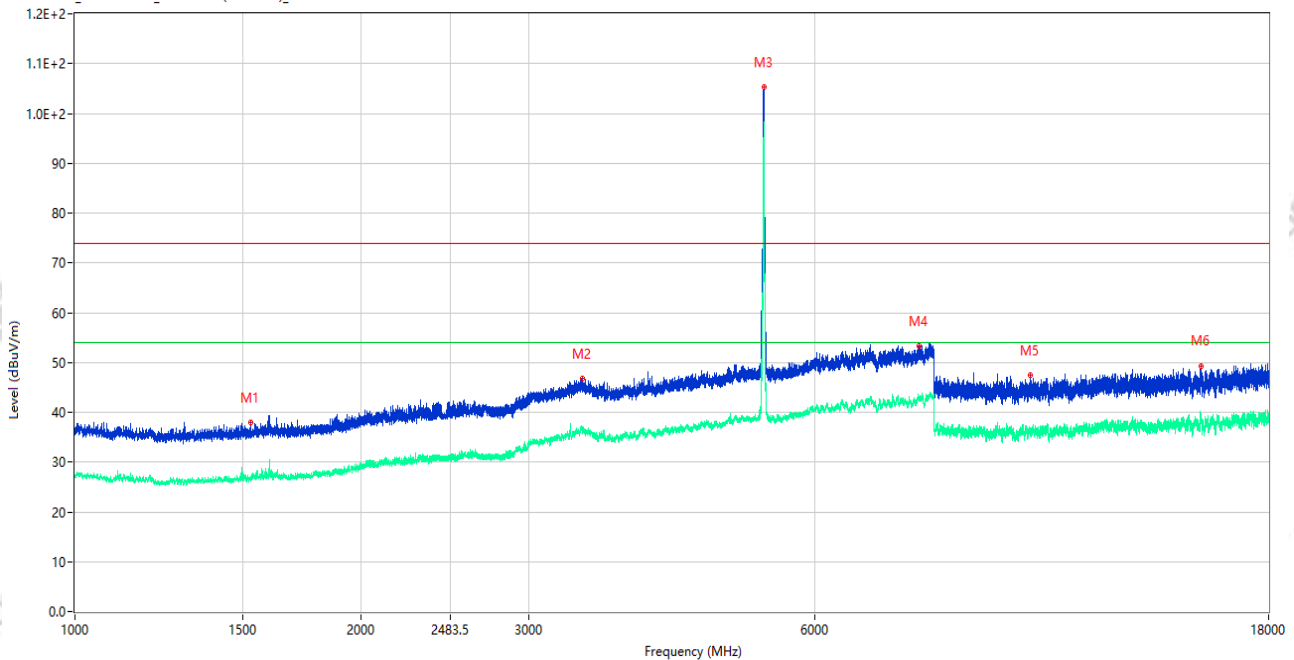

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1529.250	37.92	-16.07	74.0	36.08	Peak	25.00	150	Horizontal	Pass
1**	1529.250	26.82	-16.07	54.0	27.18	AV	25.00	150	Horizontal	Pass
2	3421.000	46.81	-4.95	74.0	27.19	Peak	0.00	150	Horizontal	Pass
2**	3421.000	36.58	-4.95	54.0	17.42	AV	0.00	150	Horizontal	Pass
3	5300.000	105.29	-2.04	74.0	-31.29	Peak	215.00	150	Horizontal	N/A
3**	5300.000	97.56	-2.04	54.0	-43.56	AV	215.00	150	Horizontal	N/A
4	7717.500	53.25	0.99	74.0	20.75	Peak	343.00	150	Horizontal	Pass
4**	7717.500	42.75	0.99	54.0	11.25	AV	343.00	150	Horizontal	Pass
5	10103.300	47.42	-3.90	74.0	26.58	Peak	360.00	150	Horizontal	Pass
5**	10103.300	36.08	-3.90	54.0	17.92	AV	360.00	150	Horizontal	Pass
6	15274.463	49.37	-1.47	74.0	24.63	Peak	0.00	150	Horizontal	Pass
6**	15274.463	38.41	-1.47	54.0	15.59	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_02.49.53

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

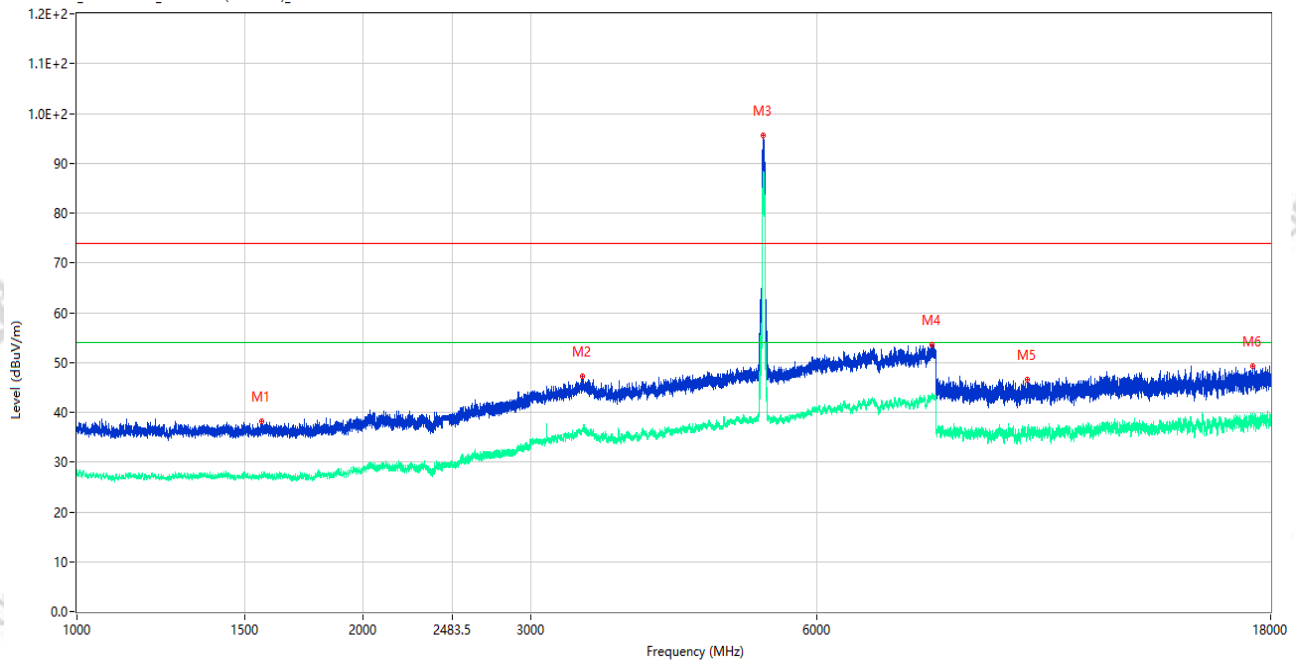

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1565.750	38.19	-16.05	74.0	35.81	Peak	100.00	150	Vertical	Pass
1**	1565.750	27.35	-16.05	54.0	26.65	AV	100.00	150	Vertical	Pass
2	3403.000	47.12	-5.54	74.0	26.88	Peak	114.00	150	Vertical	Pass
2**	3403.000	36.65	-5.54	54.0	17.35	AV	114.00	150	Vertical	Pass
3	5266.500	95.64	-2.39	74.0	-21.64	Peak	331.00	150	Vertical	N/A
3**	5266.500	86.07	-2.39	54.0	-32.07	AV	331.00	150	Vertical	N/A
4	7920.000	53.47	1.96	74.0	20.53	Peak	360.00	150	Vertical	Pass
4**	7920.000	43.27	1.96	54.0	10.73	AV	360.00	150	Vertical	Pass
5	9994.287	46.60	-3.84	74.0	27.40	Peak	28.00	150	Vertical	Pass
5**	9994.287	35.64	-3.84	54.0	18.36	AV	28.00	150	Vertical	Pass
6	17240.324	49.24	-0.98	74.0	24.76	Peak	211.00	150	Vertical	Pass
6**	17240.324	38.63	-0.98	54.0	15.37	AV	211.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_02.53.55

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax40 CH54 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

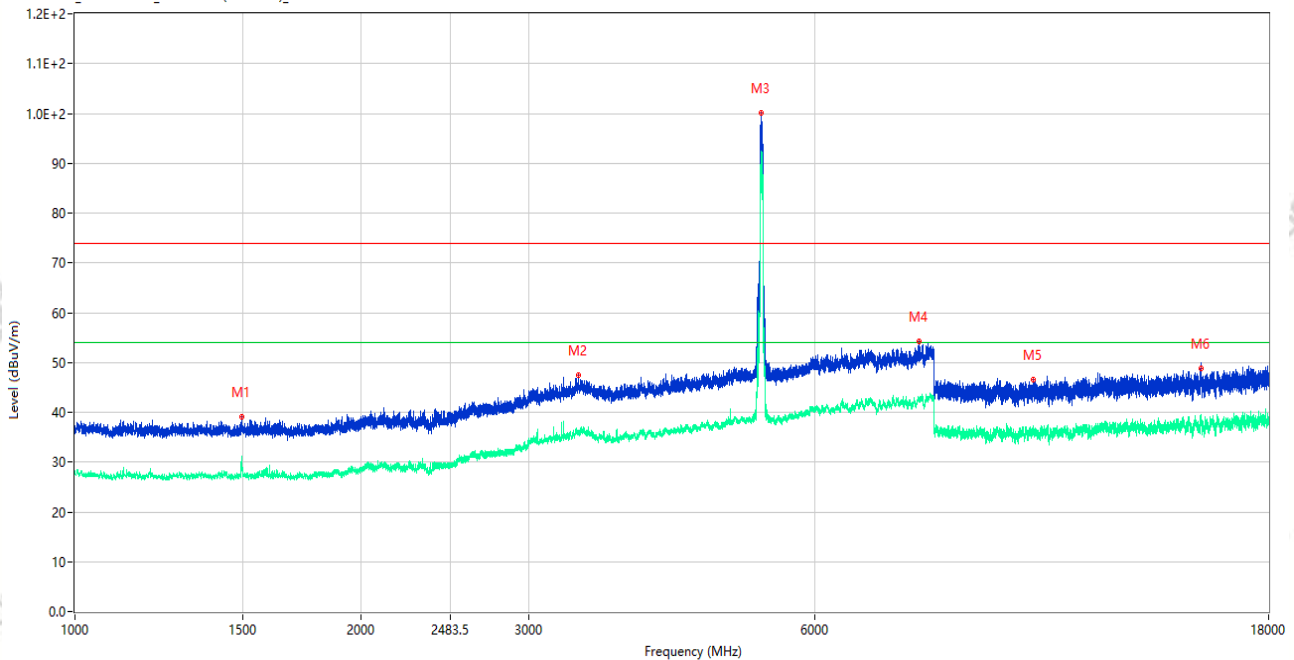

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.250	39.06	-16.17	74.0	34.94	Peak	76.00	150	Horizontal	Pass
1**	1496.250	29.75	-16.17	54.0	24.25	AV	76.00	150	Horizontal	Pass
2	3380.500	47.40	-5.13	74.0	26.60	Peak	339.00	150	Horizontal	Pass
2**	3380.500	36.11	-5.13	54.0	17.89	AV	339.00	150	Horizontal	Pass
3	5268.500	100.13	-2.44	74.0	-26.13	Peak	203.00	150	Horizontal	N/A
3**	5268.500	92.41	-2.44	54.0	-38.41	AV	203.00	150	Horizontal	N/A
4	7712.000	54.19	1.17	74.0	19.81	Peak	164.00	150	Horizontal	Pass
4**	7712.000	42.33	1.17	54.0	11.67	AV	164.00	150	Horizontal	Pass
5	10171.938	46.54	-4.02	74.0	27.46	Peak	27.00	150	Horizontal	Pass
5**	10171.938	35.41	-4.02	54.0	18.59	AV	27.00	150	Horizontal	Pass
6	15270.787	48.88	-1.29	74.0	25.12	Peak	245.00	150	Horizontal	Pass
6**	15270.787	38.44	-1.29	54.0	15.56	AV	245.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.02.43

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

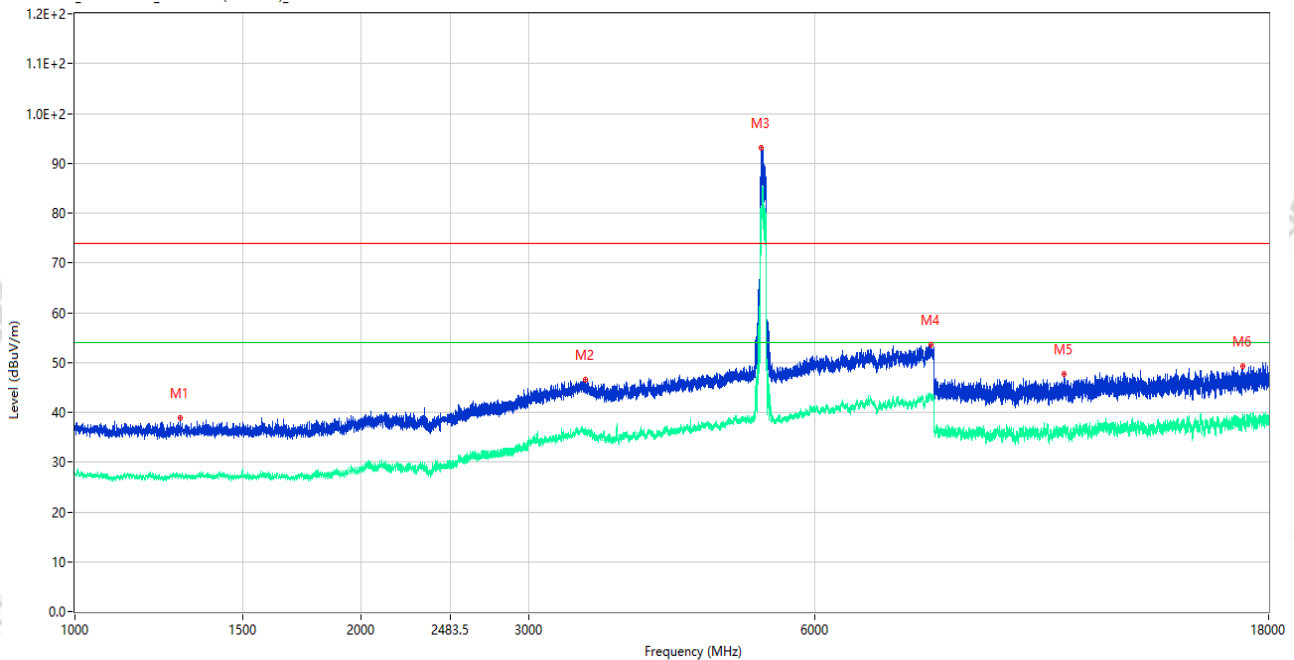

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1290.000	38.78	-15.84	74.0	35.22	Peak	266.00	150	Vertical	Pass
1**	1290.000	27.66	-15.84	54.0	26.34	AV	266.00	150	Vertical	Pass
2	3438.500	46.49	-5.30	74.0	27.51	Peak	0.00	150	Vertical	Pass
2**	3438.500	35.96	-5.30	54.0	18.04	AV	0.00	150	Vertical	Pass
3	5274.000	93.12	-2.43	74.0	-19.12	Peak	343.00	150	Vertical	N/A
3**	5274.000	78.99	-2.43	54.0	-24.99	AV	343.00	150	Vertical	N/A
4	7946.500	53.51	1.97	74.0	20.49	Peak	46.00	150	Vertical	Pass
4**	7946.500	43.29	1.97	54.0	10.71	AV	46.00	150	Vertical	Pass
5	10974.451	47.58	-3.29	74.0	26.42	Peak	0.00	150	Vertical	Pass
5**	10974.451	36.32	-3.29	54.0	17.68	AV	0.00	150	Vertical	Pass
6	16909.312	49.27	-0.66	74.0	24.73	Peak	312.00	150	Vertical	Pass
6**	16909.312	39.30	-0.66	54.0	14.70	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_02:58:01

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax80 CH58 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

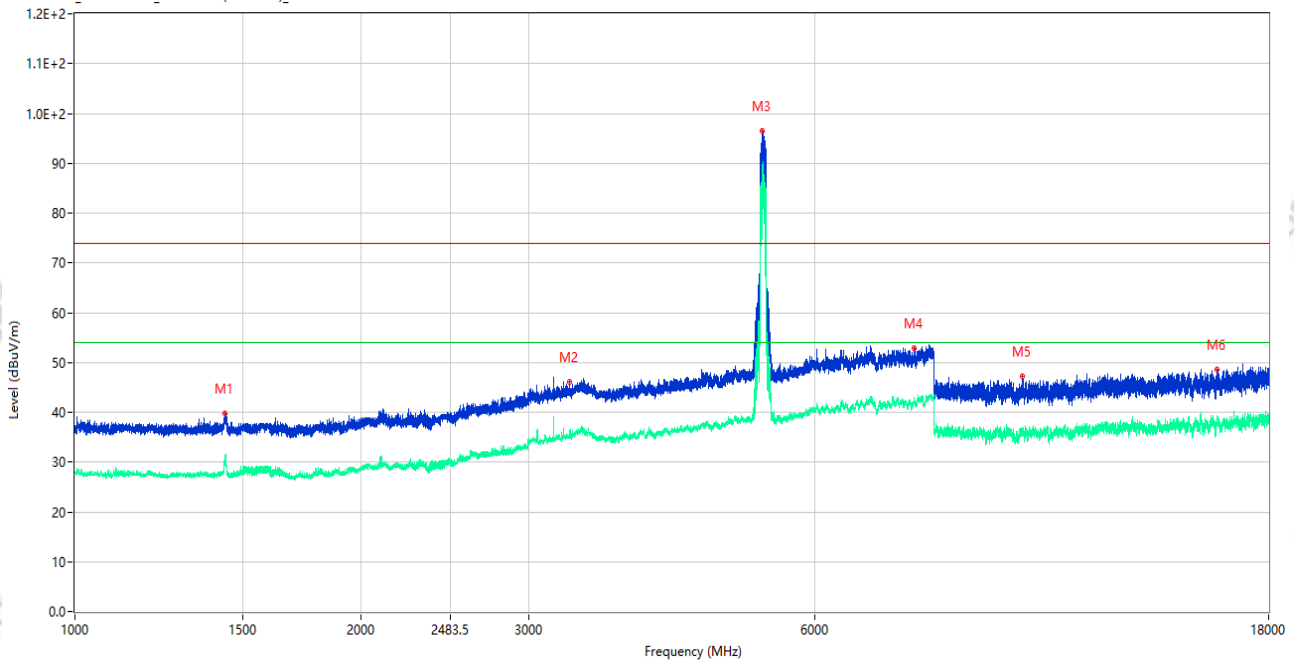

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.500	39.85	-15.97	74.0	34.15	Peak	237.00	150	Horizontal	Pass
1**	1437.500	30.59	-15.97	54.0	23.41	AV	237.00	150	Horizontal	Pass
2	3312.000	46.09	-6.59	74.0	27.91	Peak	105.00	150	Horizontal	Pass
2**	3312.000	35.41	-6.59	54.0	18.59	AV	105.00	150	Horizontal	Pass
3	5284.500	96.43	-2.16	74.0	-22.43	Peak	283.00	150	Horizontal	N/A
3**	5284.500	89.54	-2.16	54.0	-35.54	AV	283.00	150	Horizontal	N/A
4	7628.500	52.83	0.70	74.0	21.17	Peak	341.00	150	Horizontal	Pass
4**	7628.500	42.22	0.70	54.0	11.78	AV	341.00	150	Horizontal	Pass
5	9924.700	47.17	-4.18	74.0	26.83	Peak	331.00	150	Horizontal	Pass
5**	9924.700	35.71	-4.18	54.0	18.29	AV	331.00	150	Horizontal	Pass
6	15892.912	48.67	-1.59	74.0	25.33	Peak	0.00	150	Horizontal	Pass
6**	15892.912	38.67	-1.59	54.0	15.33	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.23.05

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax160 CH50 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(5.15-5.35)_1GHz-18GHz

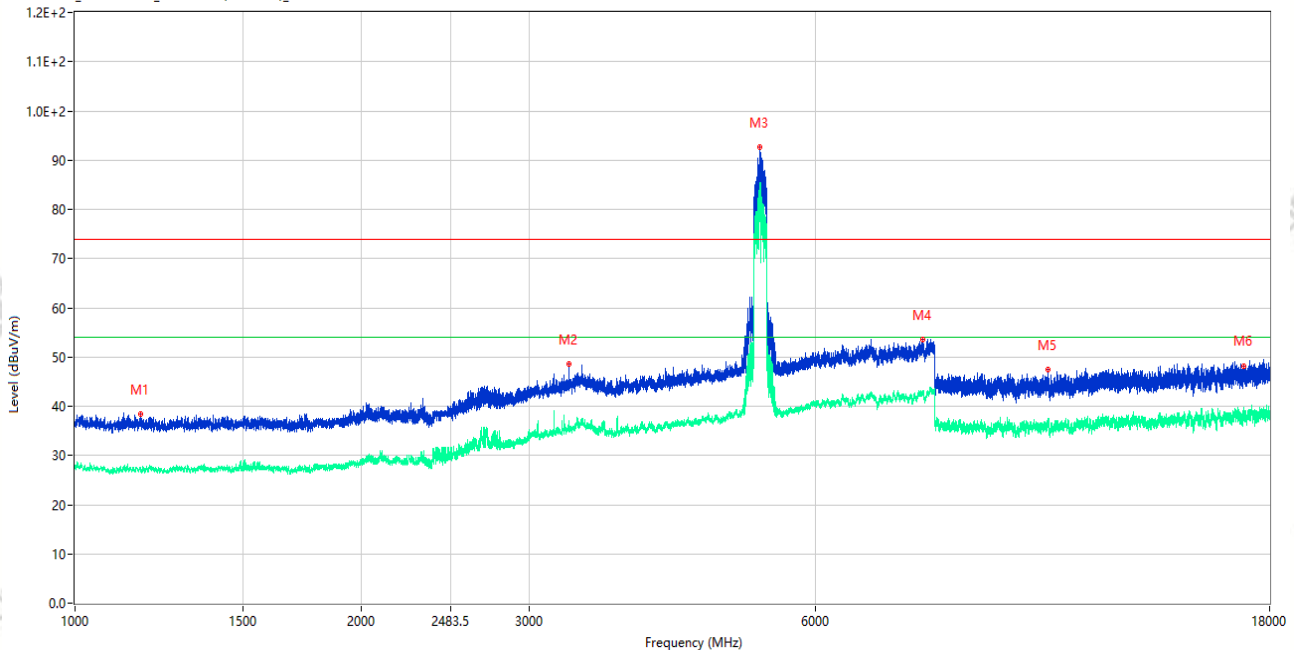

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1171.500	38.50	-15.54	74.0	35.50	Peak	1.00	150	Vertical	Pass
1**	1171.500	27.38	-15.54	54.0	26.62	AV	1.00	150	Vertical	Pass
2	3300.500	48.48	-6.92	74.0	25.52	Peak	123.00	150	Vertical	Pass
2**	3300.500	35.65	-6.92	54.0	18.35	AV	123.00	150	Vertical	Pass
3	5246.500	92.57	-2.09	74.0	-18.57	Peak	329.00	150	Vertical	N/A
3**	5246.500	82.62	-2.09	54.0	-28.62	AV	329.00	150	Vertical	N/A
4	7785.000	53.60	1.54	74.0	20.40	Peak	360.00	150	Vertical	Pass
4**	7785.000	42.88	1.54	54.0	11.12	AV	360.00	150	Vertical	Pass
5	10539.350	47.52	-3.09	74.0	26.48	Peak	75.00	150	Vertical	Pass
5**	10539.350	36.95	-3.09	54.0	17.05	AV	75.00	150	Vertical	Pass
6	16898.025	48.24	-0.76	74.0	25.76	Peak	360.00	150	Vertical	Pass
6**	16898.025	37.11	-0.76	54.0	16.89	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_03.26.53

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.2

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ax160 CH50 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

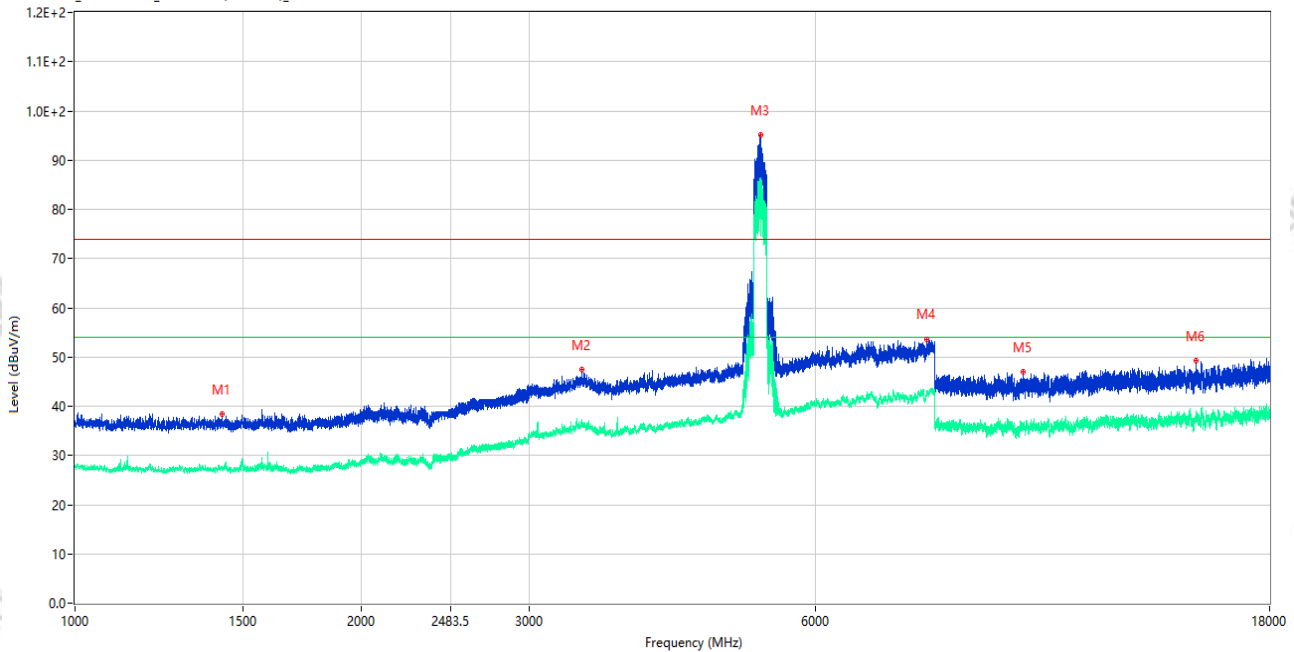

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1425.750	38.45	-15.97	74.0	35.55	Peak	262.00	150	Horizontal	Pass
1**	1425.750	27.32	-15.97	54.0	26.68	AV	262.00	150	Horizontal	Pass
2	3409.500	47.45	-5.34	74.0	26.55	Peak	360.00	150	Horizontal	Pass
2**	3409.500	36.63	-5.34	54.0	17.37	AV	360.00	150	Horizontal	Pass
3	5258.000	95.10	-2.09	74.0	-21.10	Peak	282.00	150	Horizontal	N/A
3**	5258.000	83.57	-2.09	54.0	-29.57	AV	282.00	150	Horizontal	N/A
4	7859.000	53.66	1.67	74.0	20.34	Peak	131.00	150	Horizontal	Pass
4**	7859.000	42.76	1.67	54.0	11.24	AV	131.00	150	Horizontal	Pass
5	9903.088	46.94	-4.40	74.0	27.06	Peak	28.00	150	Horizontal	Pass
5**	9903.088	35.62	-4.40	54.0	18.38	AV	28.00	150	Horizontal	Pass
6	15080.212	49.30	-1.83	74.0	24.70	Peak	360.00	150	Horizontal	Pass
6**	15080.212	37.35	-1.83	54.0	16.65	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_15.55.10

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

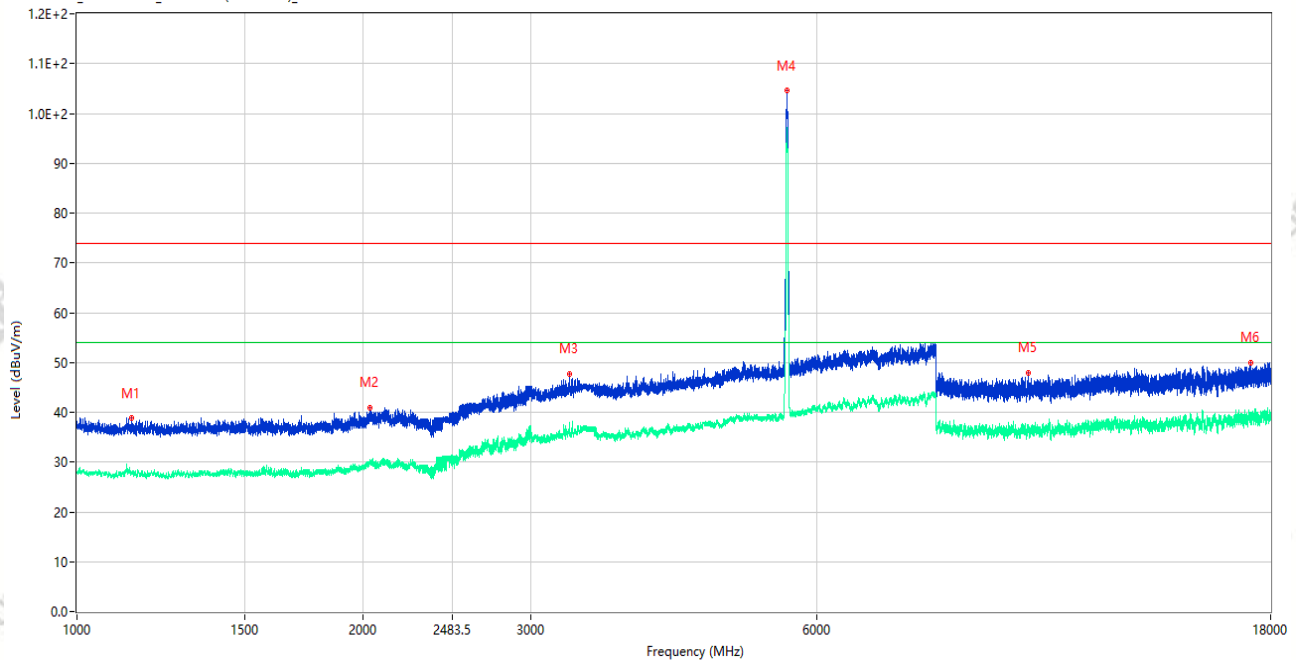

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1142.000	38.94	-15.57	74.0	35.06	Peak	193.00	150	Vertical	Pass
1**	1142.000	27.67	-15.57	54.0	26.33	AV	193.00	150	Vertical	Pass
2	2033.000	41.00	-13.45	74.0	33.00	Peak	126.00	150	Vertical	Pass
2**	2033.000	30.44	-13.45	54.0	23.56	AV	126.00	150	Vertical	Pass
3	3295.000	47.62	-6.80	74.0	26.38	Peak	119.00	150	Vertical	Pass
3**	3295.000	38.00	-6.80	54.0	16.00	AV	119.00	150	Vertical	Pass
4	5578.000	104.62	-2.89	74.0	-30.62	Peak	338.00	150	Vertical	N/A
4**	5578.000	96.11	-2.89	54.0	-42.11	AV	338.00	150	Vertical	N/A
5	10013.287	48.02	-4.12	74.0	25.98	Peak	286.00	150	Vertical	Pass
5**	10013.287	36.66	-4.12	54.0	17.34	AV	286.00	150	Vertical	Pass
6	17145.562	50.05	-0.08	74.0	23.95	Peak	348.00	150	Vertical	Pass
6**	17145.562	38.84	-0.08	54.0	15.16	AV	348.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_15.50.39

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

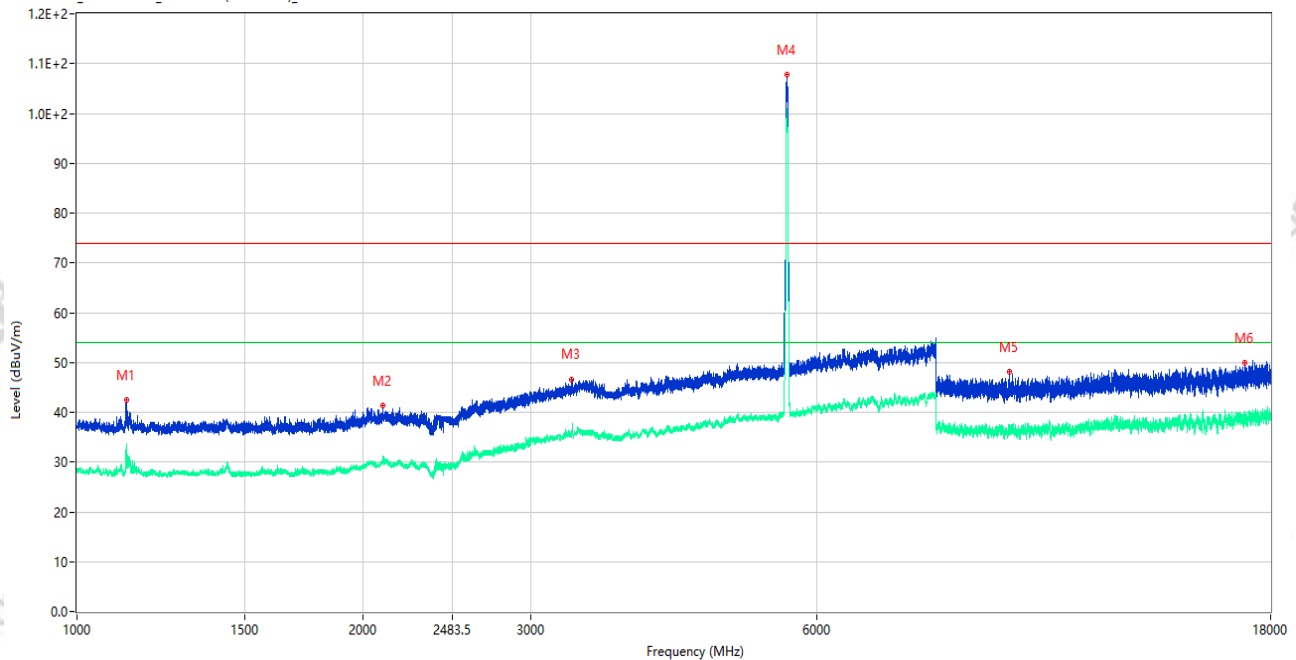

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.500	42.52	-15.62	74.0	31.48	Peak	176.00	150	Horizontal	Pass
1**	1126.500	33.74	-15.62	54.0	20.26	AV	176.00	150	Horizontal	Pass
2	2098.250	41.41	-13.58	74.0	32.59	Peak	92.00	150	Horizontal	Pass
2**	2098.250	30.12	-13.58	54.0	23.88	AV	92.00	150	Horizontal	Pass
3	3315.500	46.50	-6.41	74.0	27.50	Peak	351.00	150	Horizontal	Pass
3**	3315.500	35.96	-6.41	54.0	18.04	AV	351.00	150	Horizontal	Pass
4	5578.000	107.85	-2.89	74.0	-33.85	Peak	127.00	150	Horizontal	N/A
4**	5578.000	100.21	-2.89	54.0	-46.21	AV	127.00	150	Horizontal	N/A
5	9557.287	48.13	-2.82	74.0	25.87	Peak	144.00	150	Horizontal	Pass
5**	9557.287	36.67	-2.82	54.0	17.33	AV	144.00	150	Horizontal	Pass
6	16895.662	49.95	-0.48	74.0	24.05	Peak	0.00	150	Horizontal	Pass
6**	16895.662	39.99	-0.48	54.0	14.01	AV	0.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_16.06.03

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n20 CH116 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

RE Test case FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

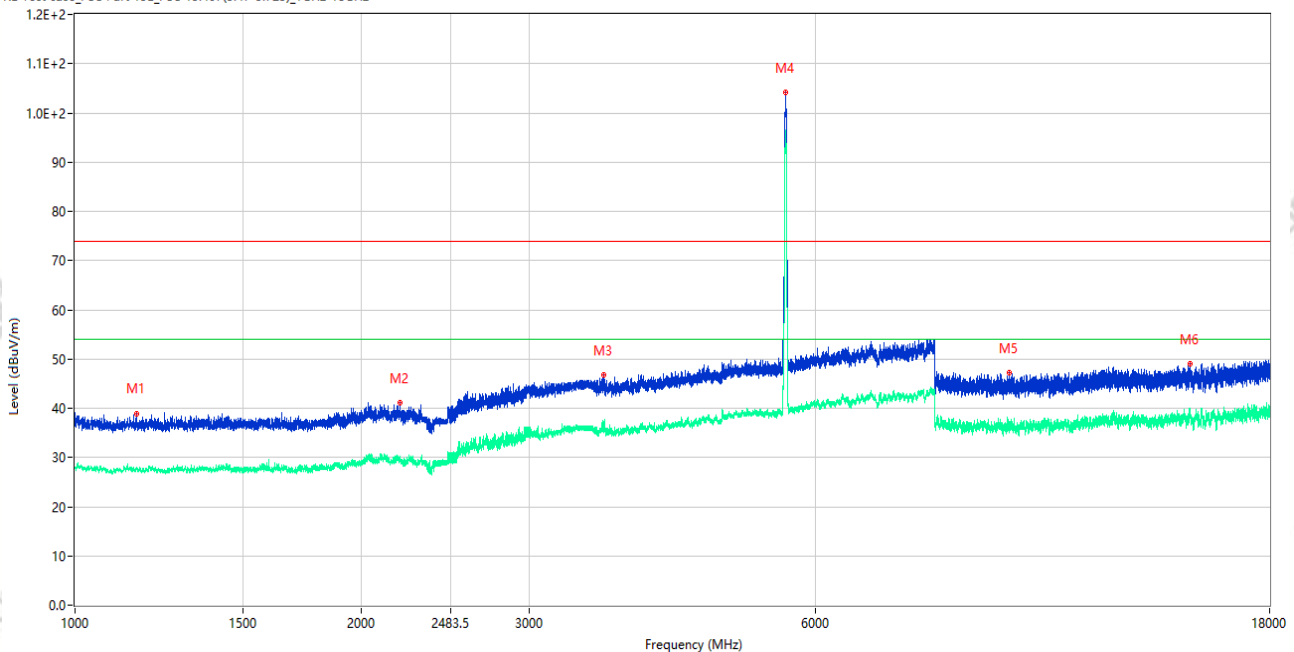

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.250	38.94	-15.47	74.0	35.06	Peak	278.00	150	Vertical	Pass
1**	1161.250	27.80	-15.47	54.0	26.20	AV	278.00	150	Vertical	Pass
2	2197.000	41.15	-13.30	74.0	32.85	Peak	7.00	150	Vertical	Pass
2**	2197.000	29.93	-13.30	54.0	24.07	AV	7.00	150	Vertical	Pass
3	3590.000	46.72	-6.18	74.0	27.28	Peak	0.00	150	Vertical	Pass
3**	3590.000	36.96	-6.18	54.0	17.04	AV	0.00	150	Vertical	Pass
4	5578.000	104.24	-2.89	74.0	-30.24	Peak	311.00	150	Vertical	N/A
4**	5578.000	95.89	-2.89	54.0	-41.89	AV	311.00	150	Vertical	N/A
5	9586.500	47.23	-3.47	74.0	26.77	Peak	215.00	150	Vertical	Pass
5**	9586.500	36.35	-3.47	54.0	17.65	AV	215.00	150	Vertical	Pass
6	14834.775	48.97	-0.30	74.0	25.03	Peak	319.00	150	Vertical	Pass
6**	14834.775	39.88	-0.30	54.0	14.12	AV	319.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_16.10.14

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

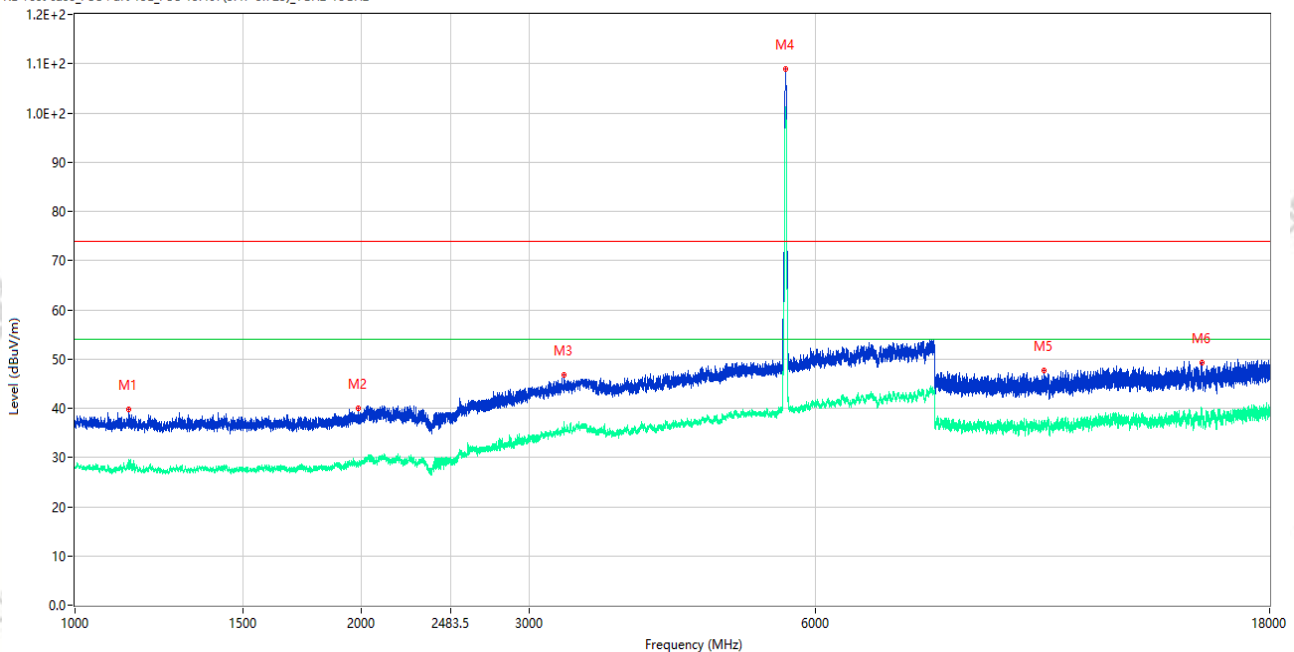

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1138.500	39.71	-15.54	74.0	34.29	Peak	166.00	150	Horizontal	Pass
1**	1138.500	29.55	-15.54	54.0	24.45	AV	166.00	150	Horizontal	Pass
2	1986.750	39.96	-14.81	74.0	34.04	Peak	276.00	150	Horizontal	Pass
2**	1986.750	28.67	-14.81	54.0	25.33	AV	276.00	150	Horizontal	Pass
3	3268.000	46.68	-6.87	74.0	27.32	Peak	168.00	150	Horizontal	Pass
3**	3268.000	36.54	-6.87	54.0	17.46	AV	168.00	150	Horizontal	Pass
4	5578.500	109.00	-2.88	74.0	-35.00	Peak	127.00	150	Horizontal	N/A
4**	5578.500	101.03	-2.88	54.0	-47.03	AV	127.00	150	Horizontal	N/A
5	10423.451	47.59	-3.42	74.0	26.41	Peak	8.00	150	Horizontal	Pass
5**	10423.451	36.69	-3.42	54.0	17.31	AV	8.00	150	Horizontal	Pass
6	15272.100	49.25	-1.34	74.0	24.75	Peak	114.00	150	Horizontal	Pass
6**	15272.100	39.38	-1.34	54.0	14.62	AV	114.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_16.42.38

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

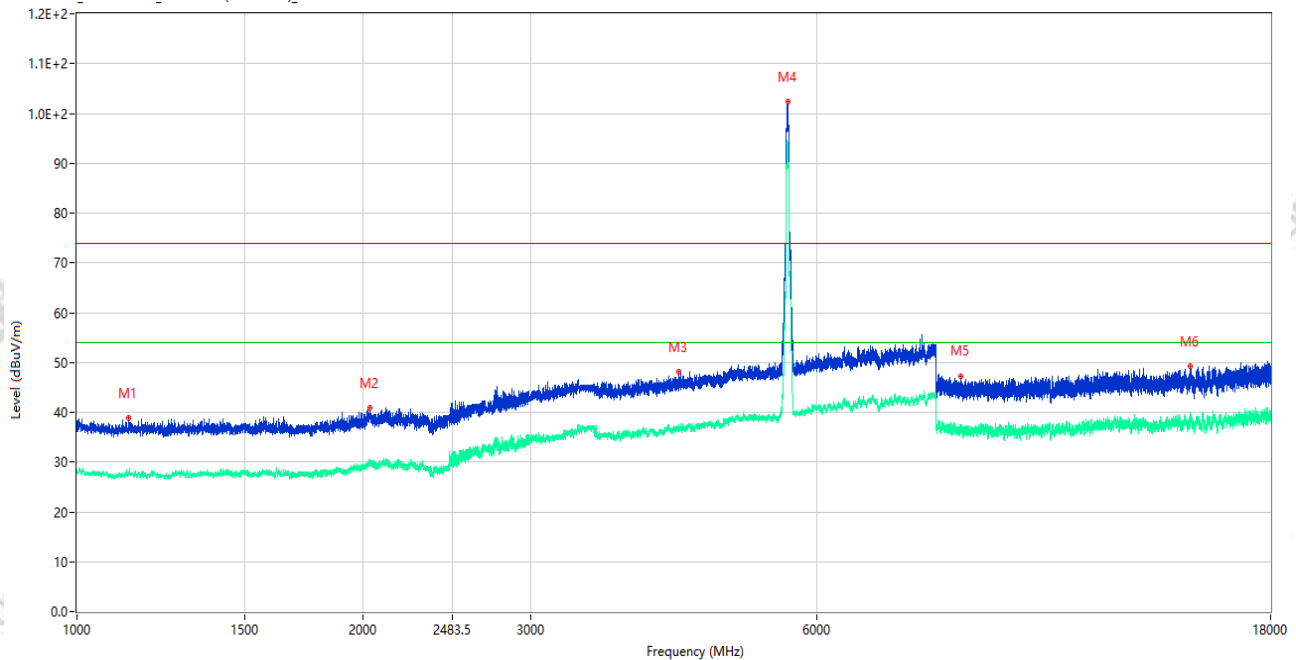

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1133.750	38.88	-15.57	74.0	35.12	Peak	222.00	150	Vertical	Pass
1**	1133.750	27.54	-15.57	54.0	26.46	AV	222.00	150	Vertical	Pass
2	2035.000	41.01	-13.39	74.0	32.99	Peak	102.00	150	Vertical	Pass
2**	2035.000	30.23	-13.39	54.0	23.77	AV	102.00	150	Vertical	Pass
3	4292.000	48.14	-4.00	74.0	25.86	Peak	197.00	150	Vertical	Pass
3**	4292.000	36.32	-4.00	54.0	17.68	AV	197.00	150	Vertical	Pass
4	5588.500	102.35	-2.79	74.0	-28.35	Peak	149.00	150	Vertical	N/A
4**	5588.500	93.85	-2.79	54.0	-39.85	AV	149.00	150	Vertical	N/A
5	8502.550	47.33	-4.65	74.0	26.67	Peak	2.00	150	Vertical	Pass
5**	8502.550	36.92	-4.65	54.0	17.08	AV	2.00	150	Vertical	Pass
6	14831.625	49.31	-0.44	74.0	24.69	Peak	359.00	150	Vertical	Pass
6**	14831.625	38.68	-0.44	54.0	15.32	AV	359.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_16.47.24

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

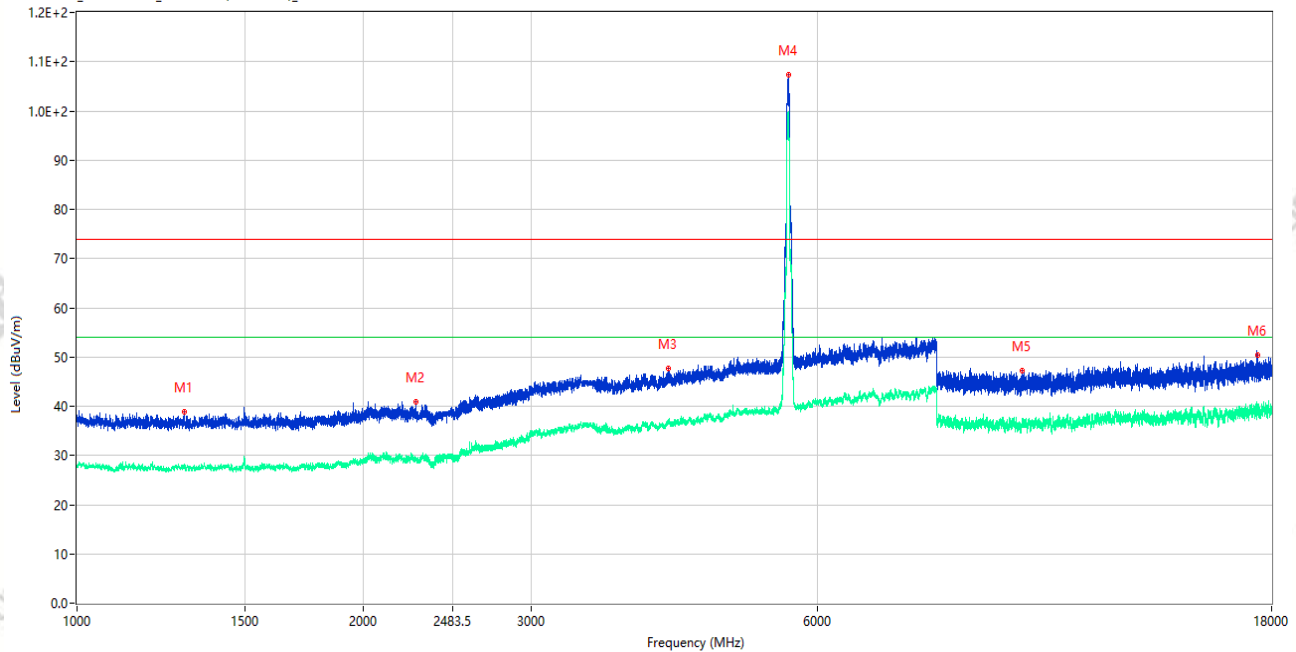

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.750	38.88	-15.68	74.0	35.12	Peak	190.00	150	Horizontal	Pass
1**	1296.750	27.86	-15.68	54.0	26.14	AV	190.00	150	Horizontal	Pass
2	2272.000	40.92	-12.97	74.0	33.08	Peak	241.00	150	Horizontal	Pass
2**	2272.000	29.18	-12.97	54.0	24.82	AV	241.00	150	Horizontal	Pass
3	4186.500	47.71	-3.83	74.0	26.29	Peak	90.00	150	Horizontal	Pass
3**	4186.500	36.82	-3.83	54.0	17.18	AV	90.00	150	Horizontal	Pass
4	5587.500	107.23	-2.84	74.0	-33.23	Peak	131.00	150	Horizontal	N/A
4**	5587.500	99.90	-2.84	54.0	-45.90	AV	131.00	150	Horizontal	N/A
5	9837.776	47.21	-3.85	74.0	26.79	Peak	218.00	150	Horizontal	Pass
5**	9837.776	36.67	-3.85	54.0	17.33	AV	218.00	150	Horizontal	Pass
6	17407.801	50.36	0.29	74.0	23.64	Peak	185.00	150	Horizontal	Pass
6**	17407.801	39.60	0.29	54.0	14.40	AV	185.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_17.24.39

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

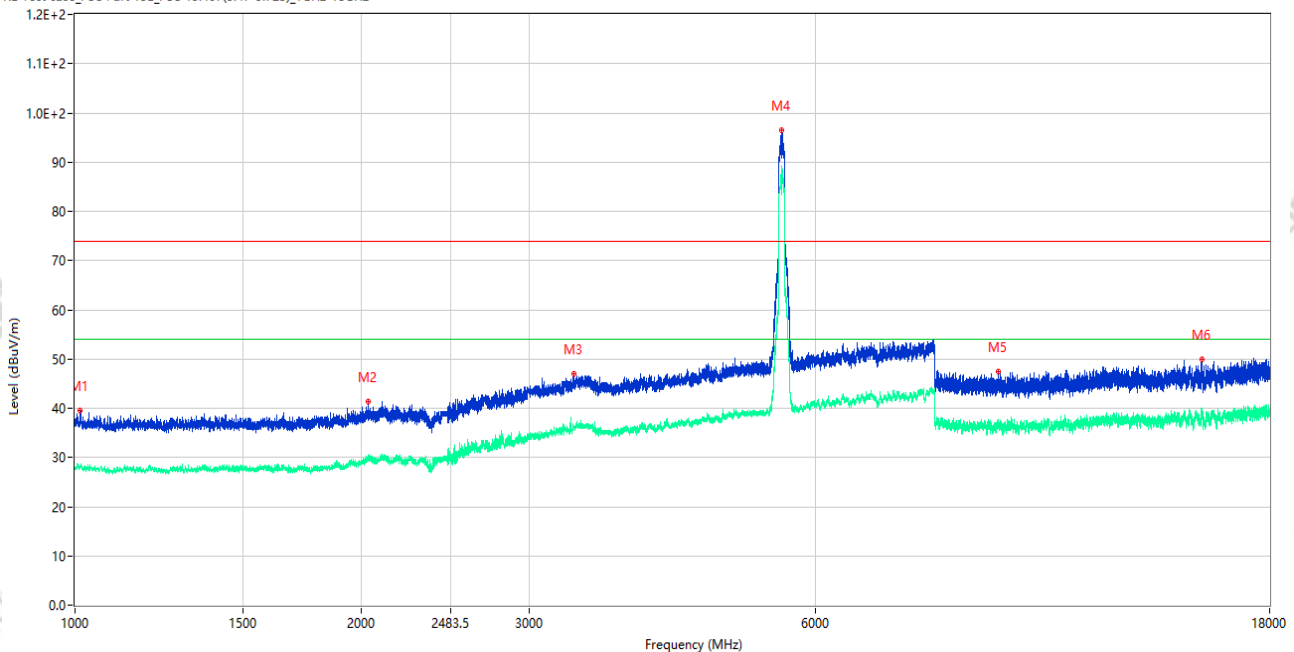


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1011.500	39.61	-14.34	74.0	34.39	Peak	360.00	150	Vertical	Pass
1**	1011.500	27.79	-14.34	54.0	26.21	AV	360.00	150	Vertical	Pass
2	2034.500	41.31	-13.41	74.0	32.69	Peak	175.00	150	Vertical	Pass
2**	2034.500	30.43	-13.41	54.0	23.57	AV	175.00	150	Vertical	Pass
3	3345.000	46.93	-6.14	74.0	27.07	Peak	333.00	150	Vertical	Pass
3**	3345.000	36.43	-6.14	54.0	17.57	AV	333.00	150	Vertical	Pass
4	5531.000	96.46	-2.53	74.0	-22.46	Peak	227.00	150	Vertical	N/A
4**	5531.000	86.57	-2.53	54.0	-32.57	AV	227.00	150	Vertical	N/A
5	9342.349	47.44	-5.23	74.0	26.56	Peak	285.00	150	Vertical	Pass
5**	9342.349	36.77	-5.23	54.0	17.23	AV	285.00	150	Vertical	Pass
6	15268.425	49.90	-1.13	74.0	24.10	Peak	0.00	150	Vertical	Pass
6**	15268.425	38.85	-1.13	54.0	15.15	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_17.29.55

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH106 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

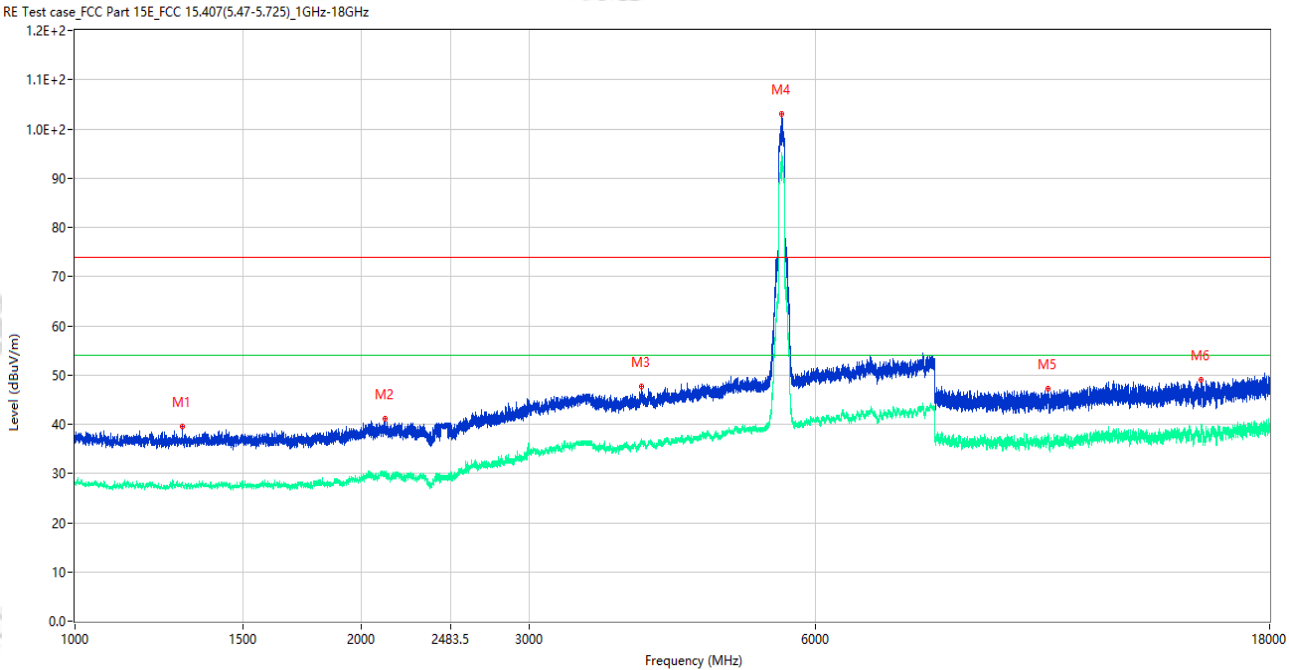


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1297.250	39.57	-15.68	74.0	34.43	Peak	32.00	150	Horizontal	Pass
1**	1297.250	27.65	-15.68	54.0	26.35	AV	32.00	150	Horizontal	Pass
2	2117.000	41.03	-13.44	74.0	32.97	Peak	360.00	150	Horizontal	Pass
2**	2117.000	30.25	-13.44	54.0	23.75	AV	360.00	150	Horizontal	Pass
3	3941.000	47.74	-4.12	74.0	26.26	Peak	51.00	150	Horizontal	Pass
3**	3941.000	36.07	-4.12	54.0	17.93	AV	51.00	150	Horizontal	Pass
4	5527.500	103.04	-2.43	74.0	-29.04	Peak	130.00	150	Horizontal	N/A
4**	5527.500	95.02	-2.43	54.0	-41.02	AV	130.00	150	Horizontal	N/A
5	10540.537	47.20	-3.04	74.0	26.80	Peak	98.00	150	Horizontal	Pass
5**	10540.537	37.19	-3.04	54.0	16.81	AV	98.00	150	Horizontal	Pass
6	15257.400	49.10	-1.10	74.0	24.90	Peak	184.00	150	Horizontal	Pass
6**	15257.400	39.38	-1.10	54.0	14.62	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-04_18.56.06

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac160 CH114 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

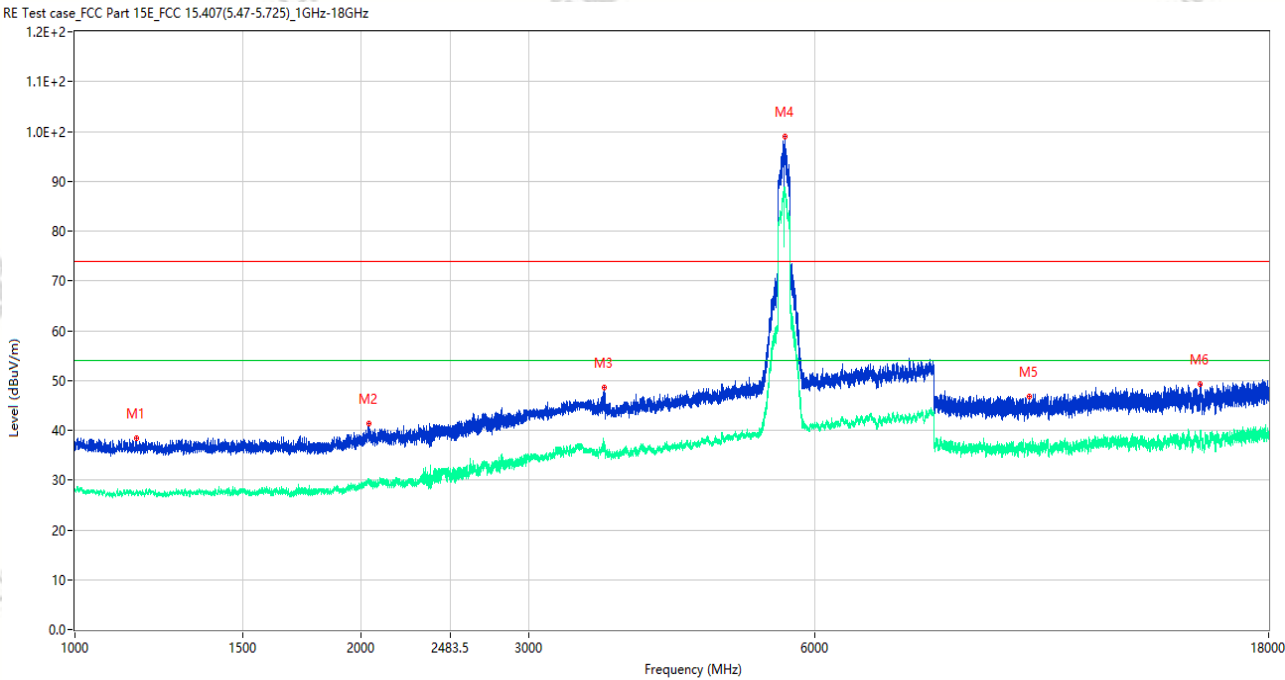

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.000	38.53	-15.47	74.0	35.47	Peak	261.00	150	Vertical	Pass
1**	1161.000	27.80	-15.47	54.0	26.20	AV	261.00	150	Vertical	Pass
2	2036.250	41.29	-13.33	74.0	32.71	Peak	102.00	150	Vertical	Pass
2**	2036.250	29.92	-13.33	54.0	24.08	AV	102.00	150	Vertical	Pass
3	3599.000	48.62	-5.03	74.0	25.38	Peak	105.00	150	Vertical	Pass
3**	3599.000	37.62	-5.03	54.0	16.38	AV	105.00	150	Vertical	Pass
4	5577.000	98.96	-2.90	74.0	-24.96	Peak	296.00	150	Vertical	N/A
4**	5577.000	88.07	-2.90	54.0	-34.07	AV	296.00	150	Vertical	N/A
5	10076.463	46.67	-3.80	74.0	27.33	Peak	124.00	150	Vertical	Pass
5**	10076.463	36.64	-3.80	54.0	17.36	AV	124.00	150	Vertical	Pass
6	15265.275	49.32	-1.02	74.0	24.68	Peak	144.00	150	Vertical	Pass
6**	15265.275	39.47	-1.02	54.0	14.53	AV	144.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.00.55

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac160 CH114

P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

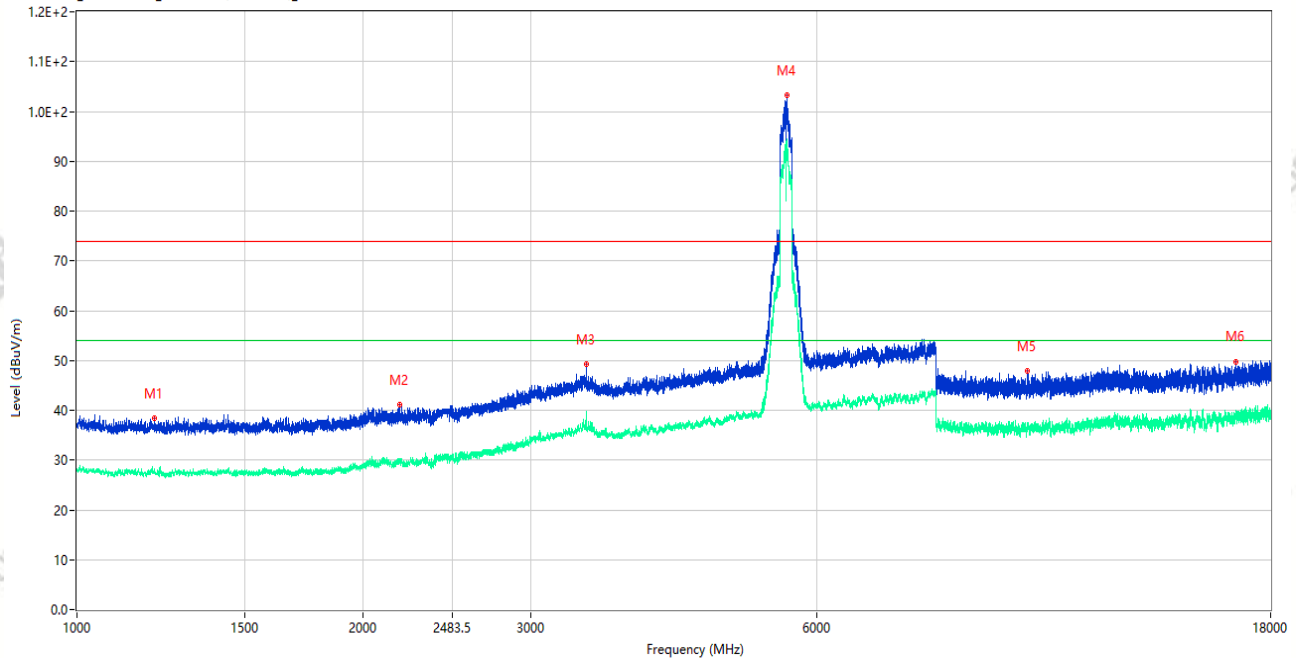

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1207.500	38.49	-15.83	74.0	35.51	Peak	303.00	150	Horizontal	Pass
1**	1207.500	27.79	-15.83	54.0	26.21	AV	303.00	150	Horizontal	Pass
2	2185.500	41.19	-13.18	74.0	32.81	Peak	39.00	150	Horizontal	Pass
2**	2185.500	29.98	-13.18	54.0	24.02	AV	39.00	150	Horizontal	Pass
3	3431.000	49.27	-5.03	74.0	24.73	Peak	286.00	150	Horizontal	Pass
3**	3431.000	38.88	-5.03	54.0	15.12	AV	286.00	150	Horizontal	Pass
4	5578.000	103.31	-2.89	74.0	-29.31	Peak	125.00	150	Horizontal	N/A
4**	5578.000	94.07	-2.89	54.0	-40.07	AV	125.00	150	Horizontal	N/A
5	9987.162	47.92	-3.74	74.0	26.08	Peak	261.00	150	Horizontal	Pass
5**	9987.162	36.87	-3.74	54.0	17.13	AV	261.00	150	Horizontal	Pass
6	16553.625	49.82	-0.87	74.0	24.18	Peak	178.00	150	Horizontal	Pass
6**	16553.625	39.27	-0.87	54.0	14.73	AV	178.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.17.19

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax20 CH116 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

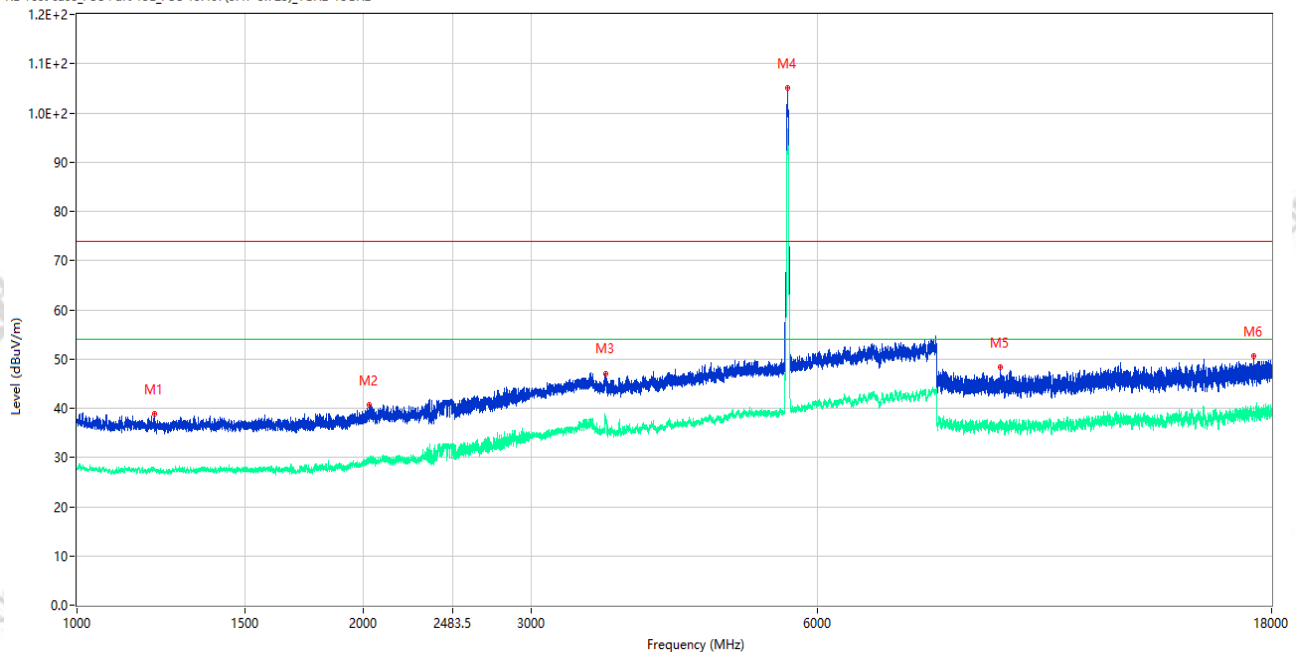


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1206.250	38.82	-15.79	74.0	35.18	Peak	222.00	150	Vertical	Pass
1**	1206.250	27.81	-15.79	54.0	26.19	AV	222.00	150	Vertical	Pass
2	2030.250	40.64	-13.61	74.0	33.36	Peak	172.00	150	Vertical	Pass
2**	2030.250	28.94	-13.61	54.0	25.06	AV	172.00	150	Vertical	Pass
3	3597.500	47.03	-5.10	74.0	26.97	Peak	297.00	150	Vertical	Pass
3**	3597.500	37.50	-5.10	54.0	16.50	AV	297.00	150	Vertical	Pass
4	5579.000	105.15	-2.87	74.0	-31.15	Peak	138.00	150	Vertical	N/A
4**	5579.000	96.07	-2.87	54.0	-42.07	AV	138.00	150	Vertical	N/A
5	9338.075	48.40	-5.14	74.0	25.60	Peak	98.00	150	Vertical	Pass
5**	9338.075	36.95	-5.14	54.0	17.05	AV	98.00	150	Vertical	Pass
6	17246.099	50.55	-0.69	74.0	23.45	Peak	310.00	150	Vertical	Pass
6**	17246.099	39.40	-0.69	54.0	14.60	AV	310.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.21.39

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ax20 CH116 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

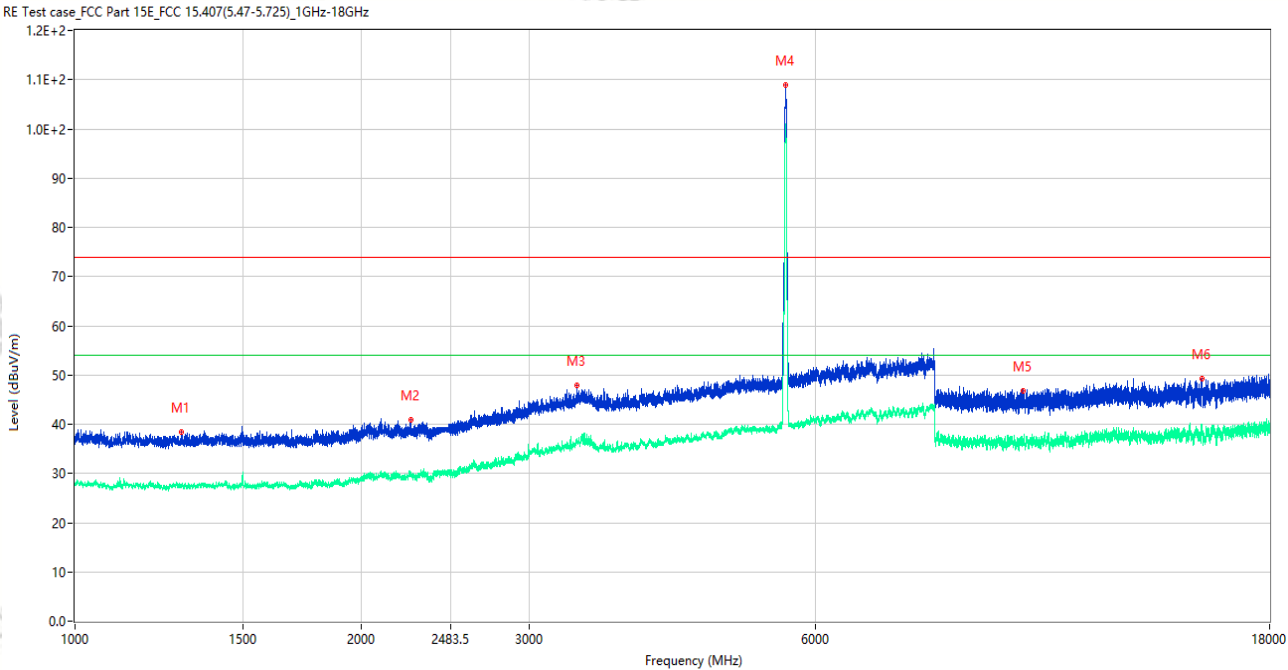


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1294.000	38.43	-15.75	74.0	35.57	Peak	0.00	150	Horizontal	Pass
1**	1294.000	27.66	-15.75	54.0	26.34	AV	0.00	150	Horizontal	Pass
2	2252.750	40.84	-12.97	74.0	33.16	Peak	147.00	150	Horizontal	Pass
2**	2252.750	30.34	-12.97	54.0	23.66	AV	147.00	150	Horizontal	Pass
3	3367.000	47.91	-5.05	74.0	26.09	Peak	8.00	150	Horizontal	Pass
3**	3367.000	36.51	-5.05	54.0	17.49	AV	8.00	150	Horizontal	Pass
4	5579.000	108.89	-2.87	74.0	-34.89	Peak	127.00	150	Horizontal	N/A
4**	5579.000	100.90	-2.87	54.0	-46.90	AV	127.00	150	Horizontal	N/A
5	9918.287	46.69	-4.30	74.0	27.31	Peak	28.00	150	Horizontal	Pass
5**	9918.287	36.23	-4.30	54.0	17.77	AV	28.00	150	Horizontal	Pass
6	15267.900	49.20	-1.08	74.0	24.80	Peak	279.00	150	Horizontal	Pass
6**	15267.900	39.27	-1.08	54.0	14.73	AV	279.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.48.44

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ax40 CH118 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

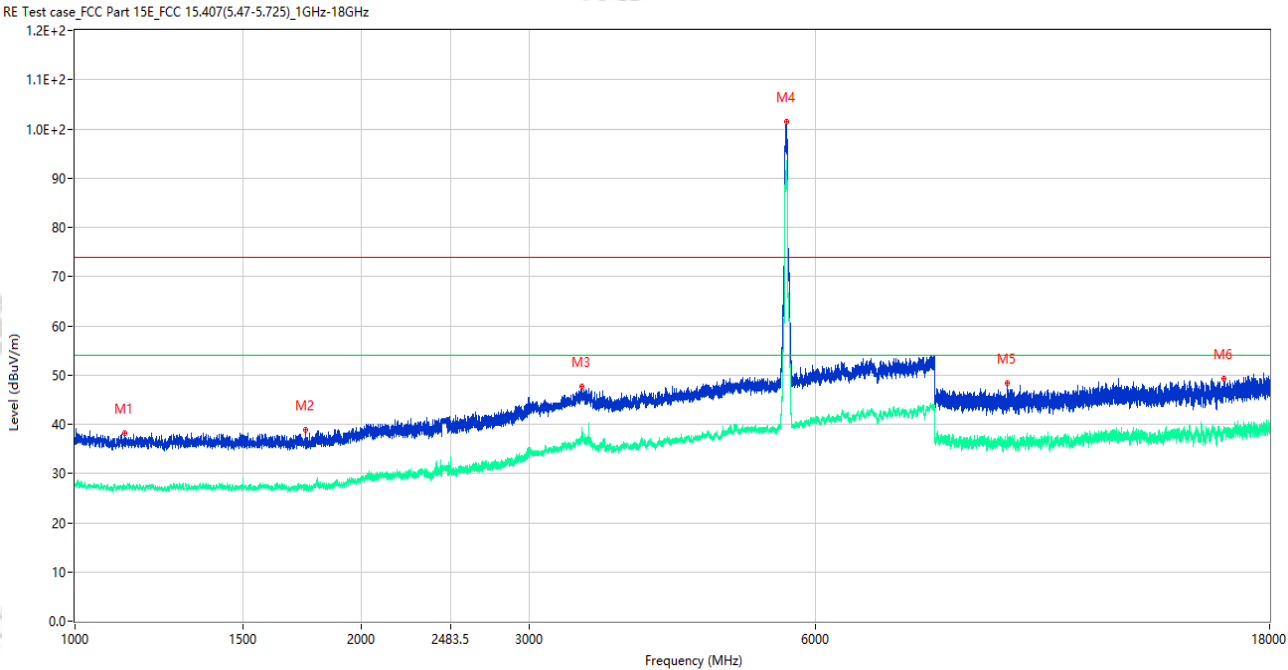

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1127.000	38.24	-15.61	74.0	35.76	Peak	12.00	150	Vertical	Pass
1**	1127.000	27.47	-15.61	54.0	26.53	AV	12.00	150	Vertical	Pass
2	1745.500	38.77	-16.05	74.0	35.23	Peak	5.00	150	Vertical	Pass
2**	1745.500	27.43	-16.05	54.0	26.57	AV	5.00	150	Vertical	Pass
3	3408.500	47.76	-5.36	74.0	26.24	Peak	270.00	150	Vertical	Pass
3**	3408.500	37.95	-5.36	54.0	16.05	AV	270.00	150	Vertical	Pass
4	5588.000	101.41	-2.82	74.0	-27.41	Peak	141.00	150	Vertical	N/A
4**	5588.000	92.52	-2.82	54.0	-38.52	AV	141.00	150	Vertical	N/A
5	9544.700	48.26	-2.65	74.0	25.74	Peak	360.00	150	Vertical	Pass
5**	9544.700	37.38	-2.65	54.0	16.62	AV	360.00	150	Vertical	Pass
6	16107.638	49.33	-1.35	74.0	24.67	Peak	360.00	150	Vertical	Pass
6**	16107.638	38.55	-1.35	54.0	15.45	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.44.20

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax40 CH118 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

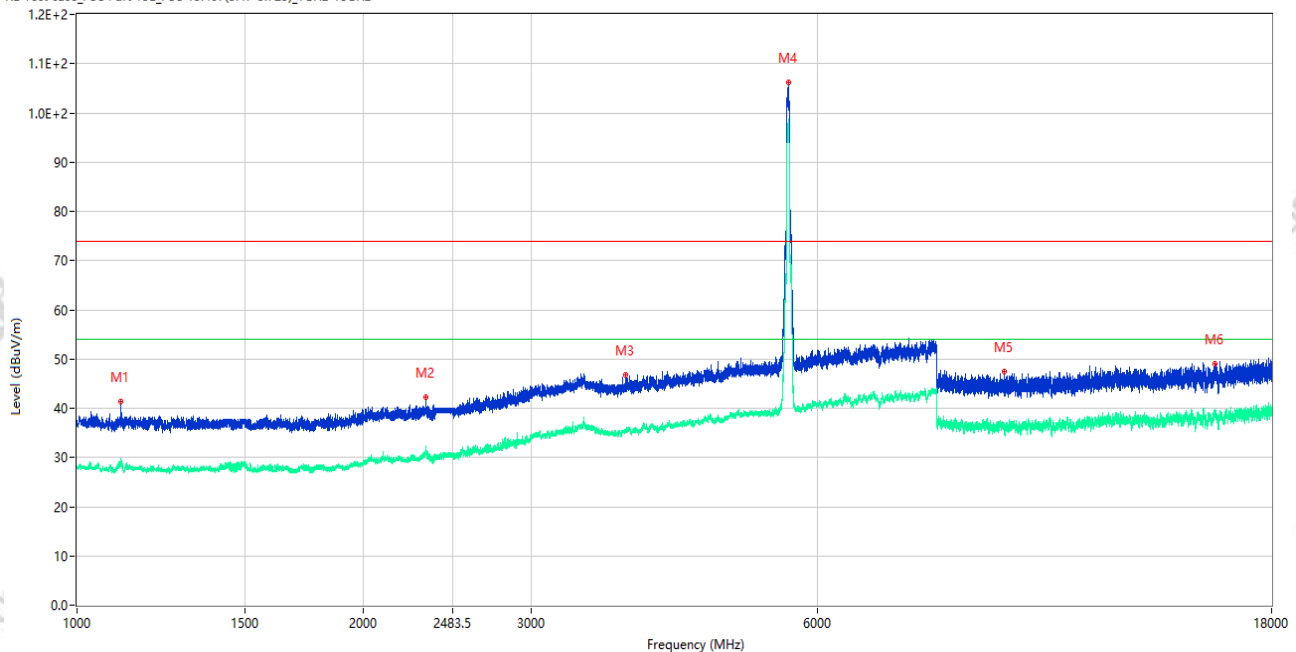

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1112.000	41.28	-15.78	74.0	32.72	Peak	243.00	150	Horizontal	Pass
1**	1112.000	28.26	-15.78	54.0	25.74	AV	243.00	150	Horizontal	Pass
2	2324.500	42.27	-12.22	74.0	31.73	Peak	0.00	150	Horizontal	Pass
2**	2324.500	32.18	-12.22	54.0	21.82	AV	0.00	150	Horizontal	Pass
3	3771.000	46.73	-4.89	74.0	27.27	Peak	297.00	150	Horizontal	Pass
3**	3771.000	35.49	-4.89	54.0	18.51	AV	297.00	150	Horizontal	Pass
4	5587.500	106.22	-2.84	74.0	-32.22	Peak	130.00	150	Horizontal	N/A
4**	5587.500	97.77	-2.84	54.0	-43.77	AV	130.00	150	Horizontal	N/A
5	9422.387	47.45	-4.24	74.0	26.55	Peak	334.00	150	Horizontal	Pass
5**	9422.387	36.11	-4.24	54.0	17.89	AV	334.00	150	Horizontal	Pass
6	15697.613	49.06	-2.02	74.0	24.94	Peak	360.00	150	Horizontal	Pass
6**	15697.613	38.10	-2.02	54.0	15.90	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.54.05

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

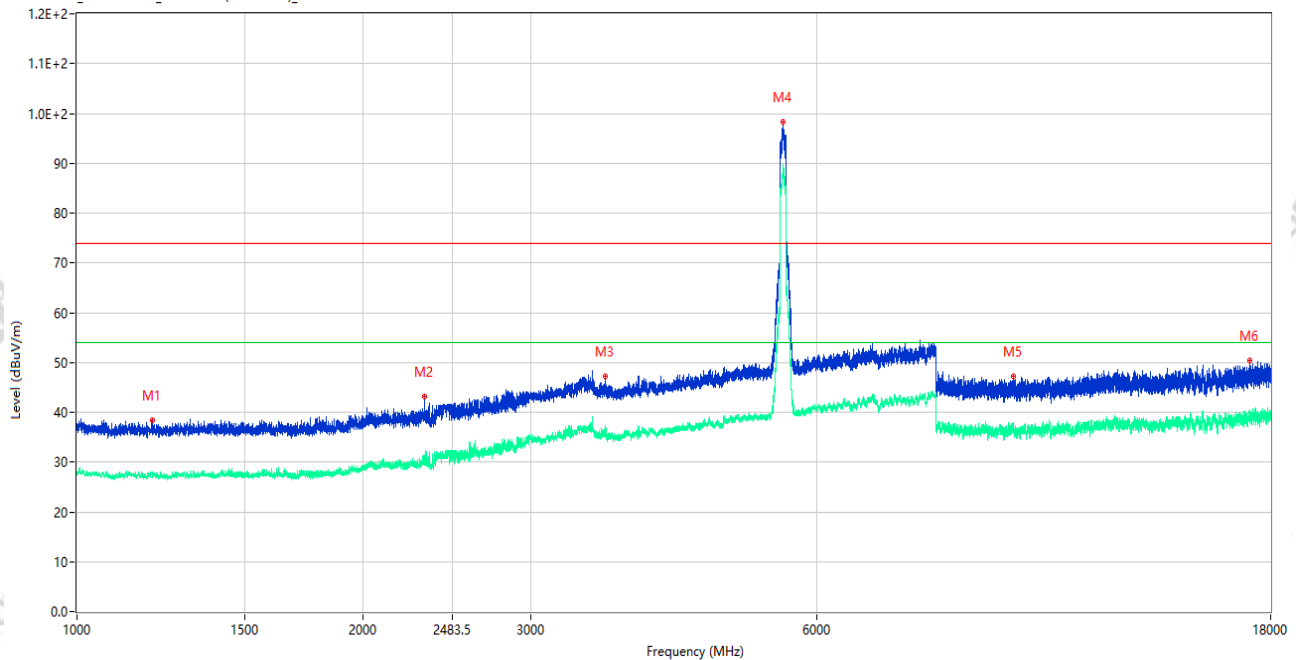

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.500	38.43	-15.75	74.0	35.57	Peak	353.00	150	Vertical	Pass
1**	1199.500	27.58	-15.75	54.0	26.42	AV	353.00	150	Vertical	Pass
2	2319.750	43.20	-12.39	74.0	30.80	Peak	131.00	150	Vertical	Pass
2**	2319.750	29.96	-12.39	54.0	24.04	AV	131.00	150	Vertical	Pass
3	3590.000	47.12	-6.18	74.0	26.88	Peak	139.00	150	Vertical	Pass
3**	3590.000	36.57	-6.18	54.0	17.43	AV	139.00	150	Vertical	Pass
4	5528.500	98.27	-2.45	74.0	-24.27	Peak	308.00	150	Vertical	N/A
4**	5528.500	89.08	-2.45	54.0	-35.08	AV	308.00	150	Vertical	N/A
5	9650.388	47.25	-3.35	74.0	26.75	Peak	147.00	150	Vertical	Pass
5**	9650.388	36.53	-3.35	54.0	17.47	AV	147.00	150	Vertical	Pass
6	17094.637	50.45	-0.65	74.0	23.55	Peak	107.00	150	Vertical	Pass
6**	17094.637	39.29	-0.65	54.0	14.71	AV	107.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_19.58.43

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax80 CH106 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

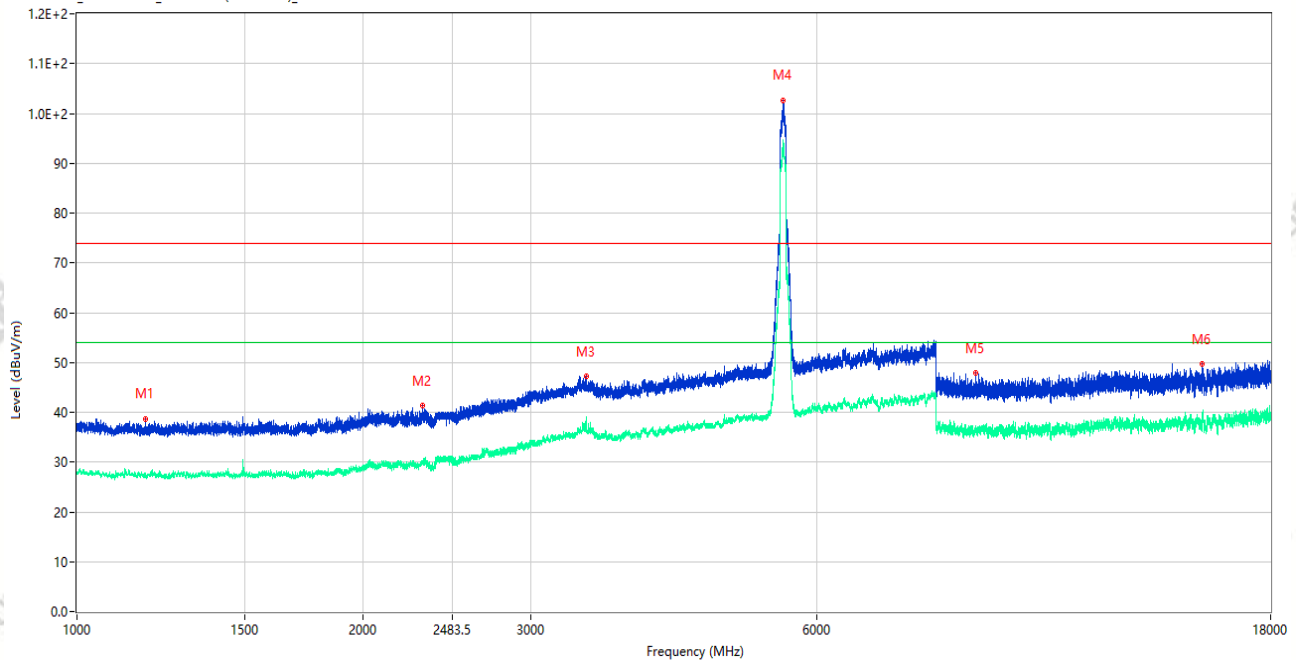


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1181.250	38.75	-15.80	74.0	35.25	Peak	213.00	150	Horizontal	Pass
1**	1181.250	27.29	-15.80	54.0	26.71	AV	213.00	150	Horizontal	Pass
2	2309.500	41.32	-12.50	74.0	32.68	Peak	288.00	150	Horizontal	Pass
2**	2309.500	30.13	-12.50	54.0	23.87	AV	288.00	150	Horizontal	Pass
3	3431.000	47.31	-5.03	74.0	26.69	Peak	29.00	150	Horizontal	Pass
3**	3431.000	38.18	-5.03	54.0	15.82	AV	29.00	150	Horizontal	Pass
4	5533.000	102.70	-2.56	74.0	-28.70	Peak	120.00	150	Horizontal	N/A
4**	5533.000	93.28	-2.56	54.0	-39.28	AV	120.00	150	Horizontal	N/A
5	8815.813	47.86	-4.54	74.0	26.14	Peak	0.00	150	Horizontal	Pass
5**	8815.813	36.60	-4.54	54.0	17.40	AV	0.00	150	Horizontal	Pass
6	15262.913	49.71	-1.06	74.0	24.29	Peak	279.00	150	Horizontal	Pass
6**	15262.913	40.00	-1.06	54.0	14.00	AV	279.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694
Test Time: 2026-08-04_20.56.44

EUT Name:	Rugged Handheld Computer	Temp.(°C):	23.1
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	50
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ax160 CH114 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhou Xu	Remark:	实验室数据线 ANT3

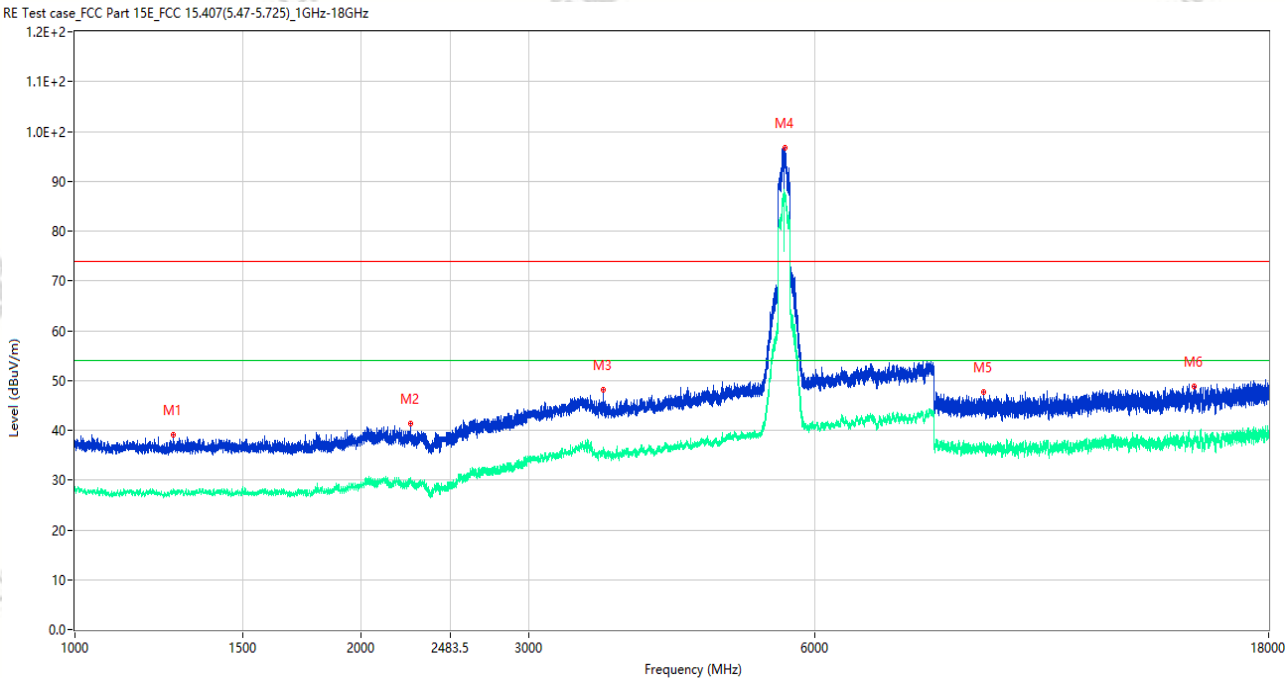

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1270.000	39.11	-15.90	74.0	34.89	Peak	294.00	150	Vertical	Pass
1**	1270.000	27.61	-15.90	54.0	26.39	AV	294.00	150	Vertical	Pass
2	2255.000	41.43	-13.08	74.0	32.57	Peak	261.00	150	Vertical	Pass
2**	2255.000	30.04	-13.08	54.0	23.96	AV	261.00	150	Vertical	Pass
3	3591.500	48.10	-6.22	74.0	25.90	Peak	47.00	150	Vertical	Pass
3**	3591.500	35.15	-6.22	54.0	18.85	AV	47.00	150	Vertical	Pass
4	5575.500	96.67	-2.95	74.0	-22.67	Peak	307.00	150	Vertical	N/A
4**	5575.500	86.68	-2.95	54.0	-32.68	AV	307.00	150	Vertical	N/A
5	9026.237	47.67	-4.28	74.0	26.33	Peak	50.00	150	Vertical	Pass
5**	9026.237	36.73	-4.28	54.0	17.27	AV	50.00	150	Vertical	Pass
6	15030.338	48.72	-2.45	74.0	25.28	Peak	345.00	150	Vertical	Pass
6**	15030.338	38.04	-2.45	54.0	15.96	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-04_20.52.16

EUT Name: Rugged Handheld Computer

Temp.(°C): 23.1

Model Number: PA768-0D6CRMPG

Humidity (%RH): 50

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ax160 CH114

P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

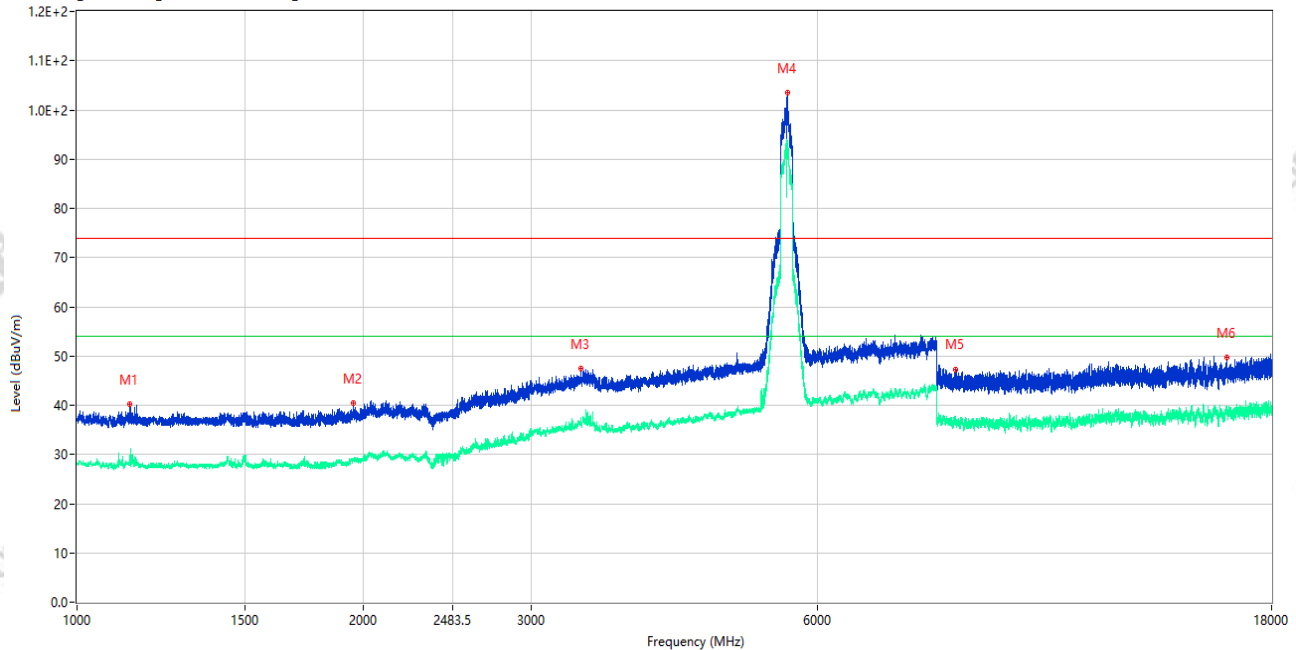

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1137.250	40.19	-15.54	74.0	33.81	Peak	88.00	150	Horizontal	Pass
1**	1137.250	28.54	-15.54	54.0	25.46	AV	88.00	150	Horizontal	Pass
2	1951.250	40.53	-14.84	74.0	33.47	Peak	139.00	150	Horizontal	Pass
2**	1951.250	28.77	-14.84	54.0	25.23	AV	139.00	150	Horizontal	Pass
3	3382.500	47.54	-5.25	74.0	26.46	Peak	209.00	150	Horizontal	Pass
3**	3382.500	36.70	-5.25	54.0	17.30	AV	209.00	150	Horizontal	Pass
4	5576.000	103.54	-2.94	74.0	-29.54	Peak	118.00	150	Horizontal	N/A
4**	5576.000	93.12	-2.94	54.0	-39.12	AV	118.00	150	Horizontal	N/A
5	8371.925	47.20	-4.41	74.0	26.80	Peak	0.00	150	Horizontal	Pass
5**	8371.925	36.82	-4.41	54.0	17.18	AV	0.00	150	Horizontal	Pass
6	16155.938	49.73	-1.26	74.0	24.27	Peak	210.00	150	Horizontal	Pass
6**	16155.938	38.84	-1.26	54.0	15.16	AV	210.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.17.18

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

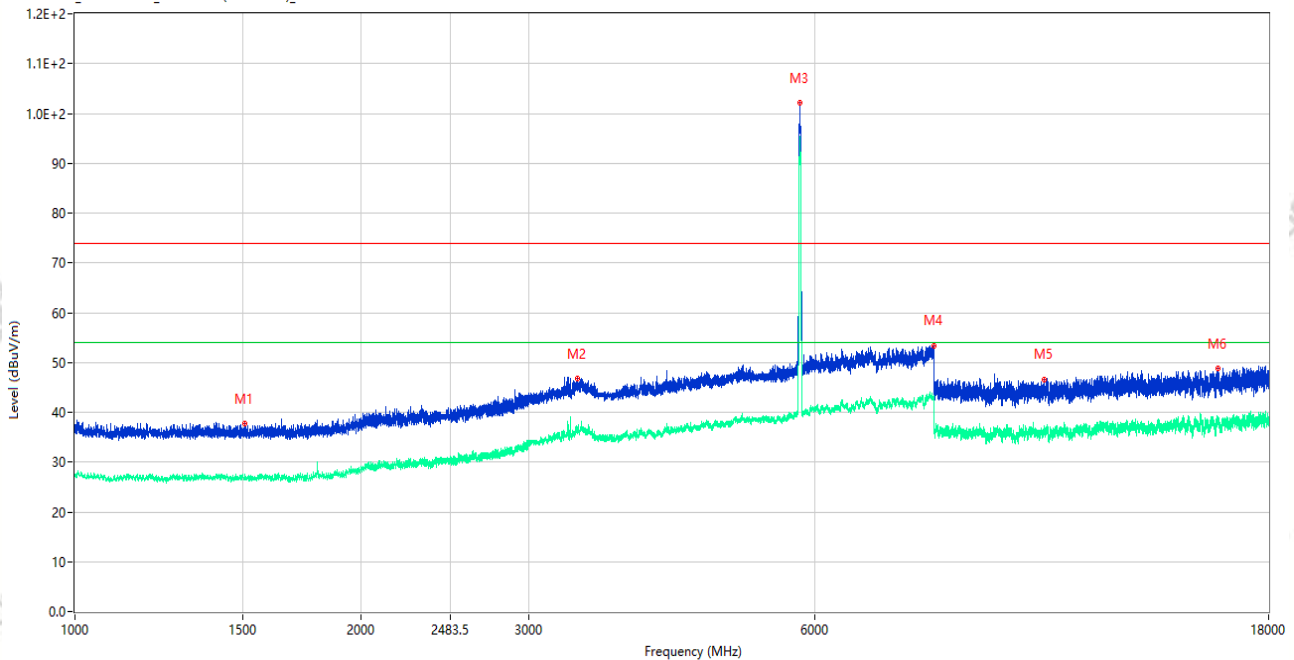

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1509.750	37.71	-16.08	74.0	36.29	Peak	170.00	150	Vertical	Pass
1**	1509.750	27.08	-16.08	54.0	26.92	AV	170.00	150	Vertical	Pass
2	3377.000	46.67	-4.92	74.0	27.33	Peak	290.00	150	Vertical	Pass
2**	3377.000	35.86	-4.92	54.0	18.14	AV	290.00	150	Vertical	Pass
3	5787.500	102.06	-1.56	74.0	-28.06	Peak	211.00	150	Vertical	N/A
3**	5787.500	94.62	-1.56	54.0	-40.62	AV	211.00	150	Vertical	N/A
4	7999.500	53.42	1.92	74.0	20.58	Peak	358.00	150	Vertical	Pass
4**	7999.500	42.76	1.92	54.0	11.24	AV	358.00	150	Vertical	Pass
5	10446.012	46.64	-3.30	74.0	27.36	Peak	193.00	150	Vertical	Pass
5**	10446.012	35.93	-3.30	54.0	18.07	AV	193.00	150	Vertical	Pass
6	15934.650	48.81	-2.31	74.0	25.19	Peak	0.00	150	Vertical	Pass
6**	15934.650	37.99	-2.31	54.0	16.01	AV	0.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.13.01

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH157 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

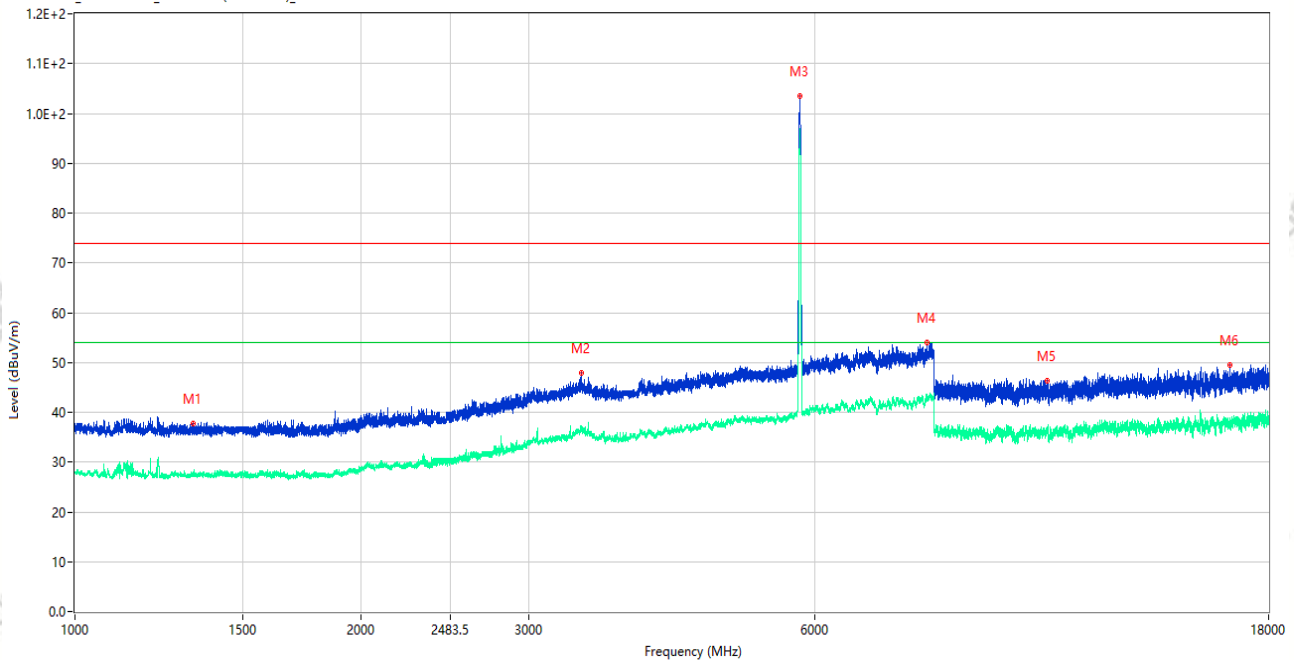


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	37.73	-15.97	74.0	36.27	Peak	77.00	150	Horizontal	Pass
1**	1330.000	27.69	-15.97	54.0	26.31	AV	77.00	150	Horizontal	Pass
2	3406.000	47.84	-5.41	74.0	26.16	Peak	21.00	150	Horizontal	Pass
2**	3406.000	36.77	-5.41	54.0	17.23	AV	21.00	150	Horizontal	Pass
3	5785.500	103.58	-1.53	74.0	-29.58	Peak	148.00	150	Horizontal	N/A
3**	5785.500	95.85	-1.53	54.0	-41.85	AV	148.00	150	Horizontal	N/A
4	7874.500	53.99	1.72	74.0	20.01	Peak	32.00	150	Horizontal	Pass
4**	7874.500	42.71	1.72	54.0	11.29	AV	32.00	150	Horizontal	Pass
5	10535.550	46.34	-3.36	74.0	27.66	Peak	360.00	150	Horizontal	Pass
5**	10535.550	36.07	-3.36	54.0	17.93	AV	360.00	150	Horizontal	Pass
6	16375.650	49.43	-1.64	74.0	24.57	Peak	360.00	150	Horizontal	Pass
6**	16375.650	37.68	-1.64	54.0	16.32	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.22.52

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac20 CH157 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

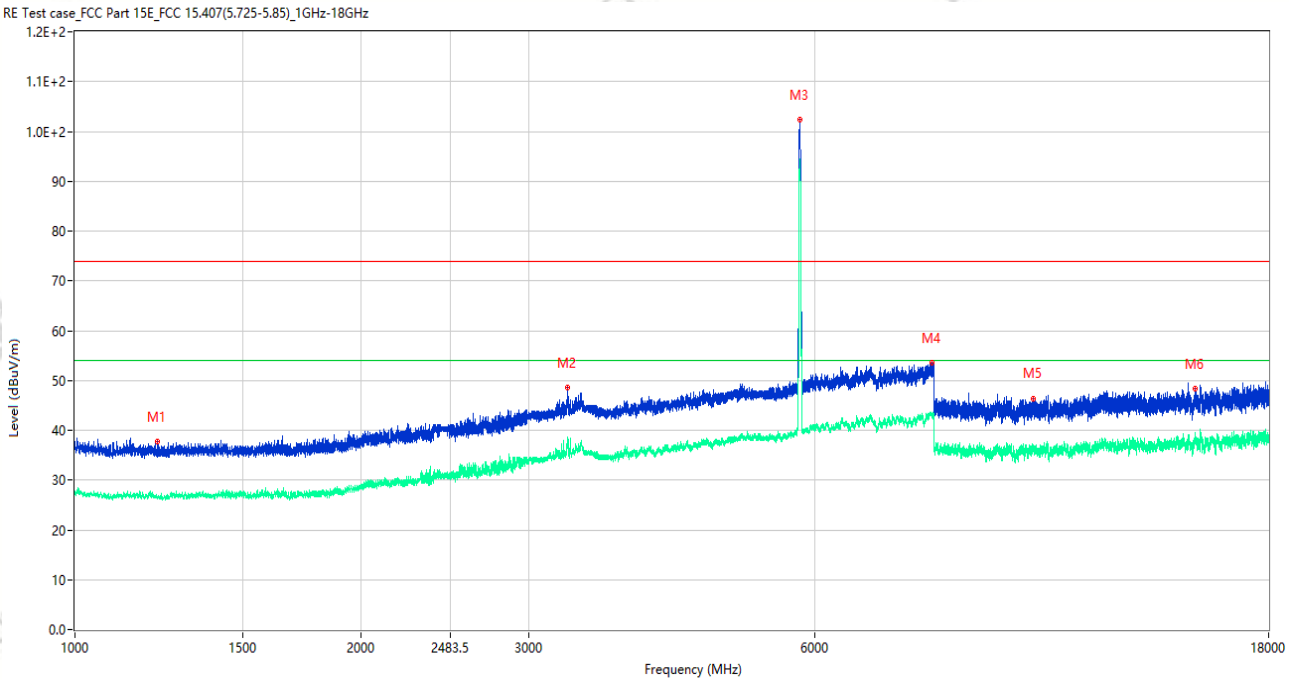

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1222.000	37.79	-16.00	74.0	36.21	Peak	207.00	150	Vertical	Pass
1**	1222.000	26.46	-16.00	54.0	27.54	AV	207.00	150	Vertical	Pass
2	3299.500	48.55	-6.90	74.0	25.45	Peak	273.00	150	Vertical	Pass
2**	3299.500	37.92	-6.90	54.0	16.08	AV	273.00	150	Vertical	Pass
3	5785.000	102.36	-1.54	74.0	-28.36	Peak	216.00	150	Vertical	N/A
3**	5785.000	93.52	-1.54	54.0	-39.52	AV	216.00	150	Vertical	N/A
4	7961.000	53.59	2.35	74.0	20.41	Peak	353.00	150	Vertical	Pass
4**	7961.000	42.76	2.35	54.0	11.24	AV	353.00	150	Vertical	Pass
5	10177.162	46.29	-3.69	74.0	27.71	Peak	333.00	150	Vertical	Pass
5**	10177.162	36.20	-3.69	54.0	17.80	AV	333.00	150	Vertical	Pass
6	15067.612	48.44	-1.84	74.0	25.56	Peak	0.00	150	Vertical	Pass
6**	15067.612	37.49	-1.84	54.0	16.51	AV	0.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.26.45

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac20 CH157 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

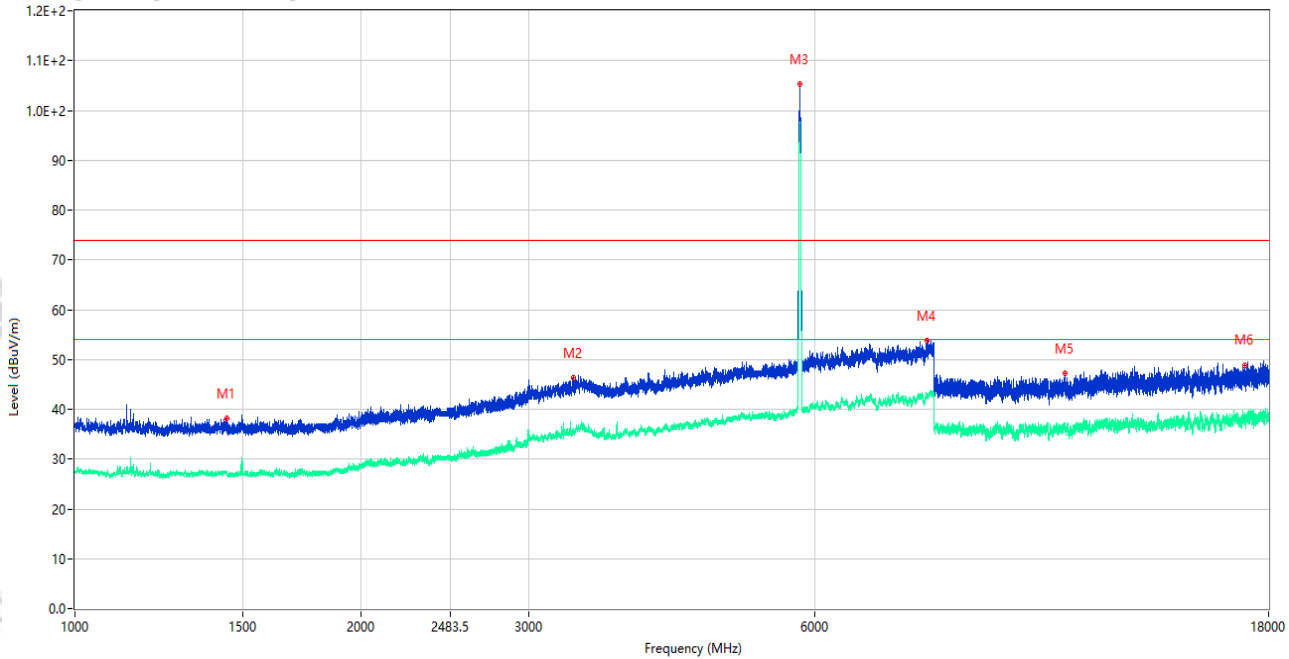

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.750	38.20	-15.93	74.0	35.80	Peak	98.00	150	Horizontal	Pass
1**	1443.750	27.02	-15.93	54.0	26.98	AV	98.00	150	Horizontal	Pass
2	3342.500	46.39	-6.01	74.0	27.61	Peak	0.00	150	Horizontal	Pass
2**	3342.500	35.67	-6.01	54.0	18.33	AV	0.00	150	Horizontal	Pass
3	5786.500	105.36	-1.53	74.0	-31.36	Peak	157.00	150	Horizontal	N/A
3**	5786.500	97.40	-1.53	54.0	-43.40	AV	157.00	150	Horizontal	N/A
4	7870.000	53.81	1.84	74.0	20.19	Peak	21.00	150	Horizontal	Pass
4**	7870.000	42.77	1.84	54.0	11.23	AV	21.00	150	Horizontal	Pass
5	10992.263	47.18	-3.12	74.0	26.82	Peak	72.00	150	Horizontal	Pass
5**	10992.263	36.56	-3.12	54.0	17.44	AV	72.00	150	Horizontal	Pass
6	16982.025	48.90	-1.14	74.0	25.10	Peak	0.00	150	Horizontal	Pass
6**	16982.025	38.53	-1.14	54.0	15.47	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.34.55

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH159 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

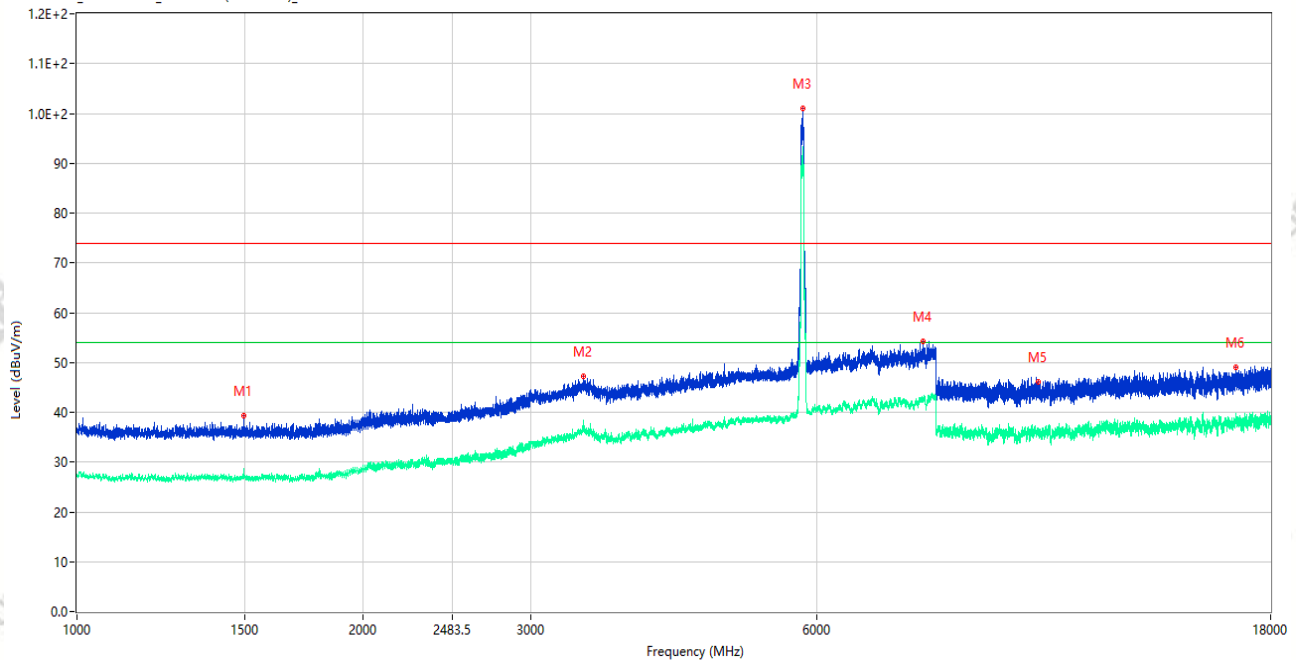

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1497.500	39.37	-16.14	74.0	34.63	Peak	131.00	150	Vertical	Pass
1**	1497.500	27.29	-16.14	54.0	26.71	AV	131.00	150	Vertical	Pass
2	3412.000	47.19	-5.29	74.0	26.81	Peak	100.00	150	Vertical	Pass
2**	3412.000	37.41	-5.29	54.0	16.59	AV	100.00	150	Vertical	Pass
3	5799.000	100.99	-1.43	74.0	-26.99	Peak	209.00	150	Vertical	N/A
3**	5799.000	93.08	-1.43	54.0	-39.08	AV	209.00	150	Vertical	N/A
4	7756.500	54.20	1.45	74.0	19.80	Peak	0.00	150	Vertical	Pass
4**	7756.500	42.81	1.45	54.0	11.19	AV	0.00	150	Vertical	Pass
5	10258.625	46.05	-3.20	74.0	27.95	Peak	354.00	150	Vertical	Pass
5**	10258.625	35.11	-3.20	54.0	18.89	AV	354.00	150	Vertical	Pass
6	16550.475	48.94	-1.05	74.0	25.06	Peak	0.00	150	Vertical	Pass
6**	16550.475	38.41	-1.05	54.0	15.59	AV	0.00	150	Vertical	Pass


Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.31.00

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac40 CH159 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

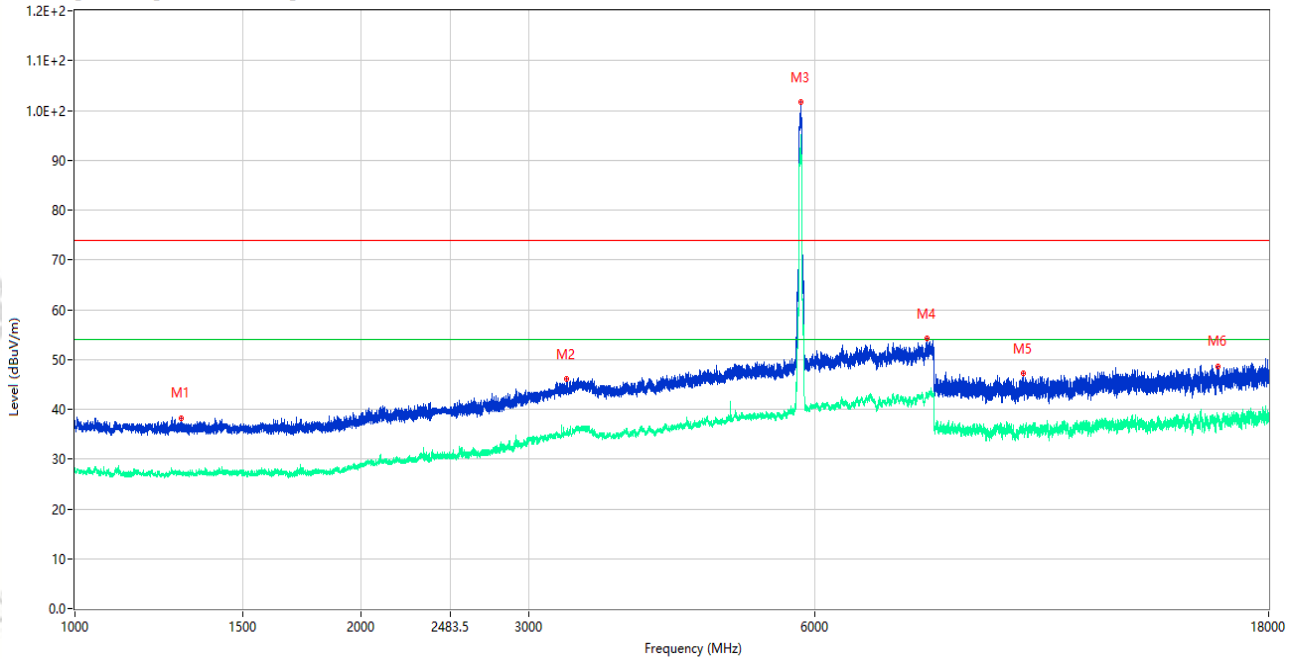

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.500	38.17	-15.76	74.0	35.83	Peak	360.00	150	Horizontal	Pass
1**	1293.500	26.90	-15.76	54.0	27.10	AV	360.00	150	Horizontal	Pass
2	3291.000	46.04	-6.77	74.0	27.96	Peak	100.00	150	Horizontal	Pass
2**	3291.000	35.66	-6.77	54.0	18.34	AV	100.00	150	Horizontal	Pass
3	5796.500	101.65	-1.41	74.0	-27.65	Peak	157.00	150	Horizontal	N/A
3**	5796.500	94.54	-1.41	54.0	-40.54	AV	157.00	150	Horizontal	N/A
4	7865.000	54.22	1.76	74.0	19.78	Peak	19.00	150	Horizontal	Pass
4**	7865.000	43.08	1.76	54.0	10.92	AV	19.00	150	Horizontal	Pass
5	9930.875	47.25	-4.05	74.0	26.75	Peak	331.00	150	Horizontal	Pass
5**	9930.875	36.97	-4.05	54.0	17.03	AV	331.00	150	Horizontal	Pass
6	15937.800	48.67	-2.38	74.0	25.33	Peak	0.00	150	Horizontal	Pass
6**	15937.800	37.67	-2.38	54.0	16.33	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.39.17

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

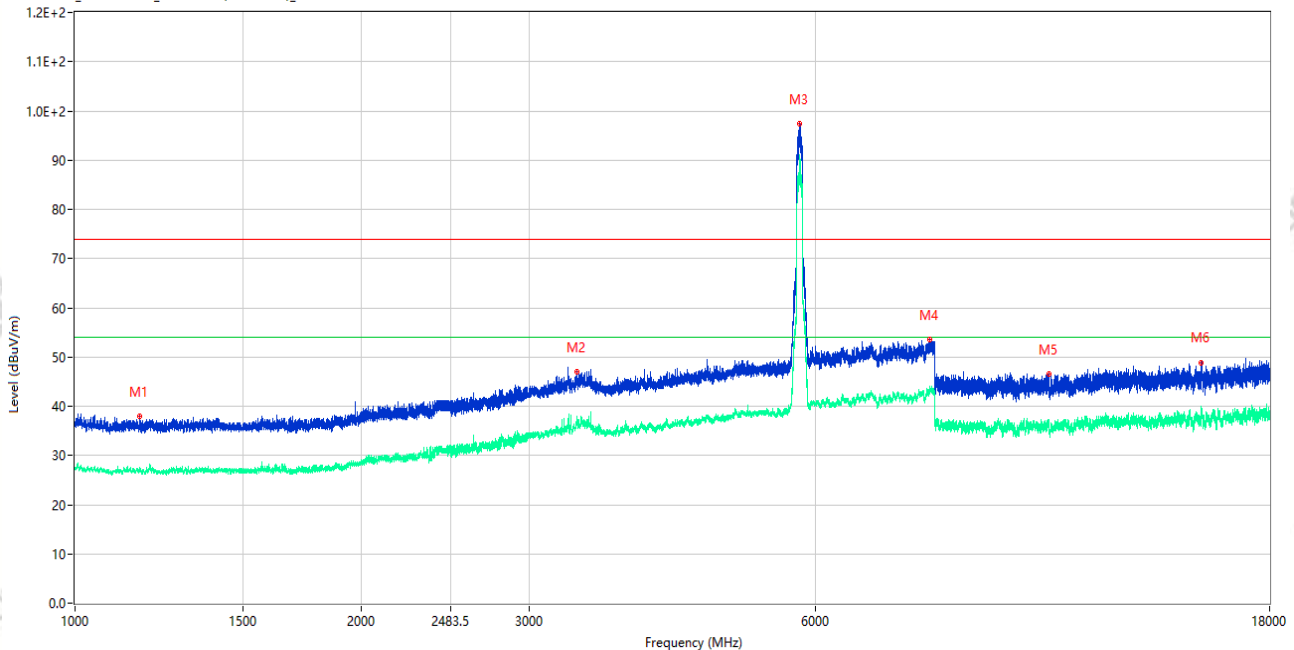

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1168.500	37.95	-15.49	74.0	36.05	Peak	113.00	150	Vertical	Pass
1**	1168.500	26.60	-15.49	54.0	27.40	AV	113.00	150	Vertical	Pass
2	3369.000	46.94	-4.90	74.0	27.06	Peak	125.00	150	Vertical	Pass
2**	3369.000	37.40	-4.90	54.0	16.60	AV	125.00	150	Vertical	Pass
3	5776.500	97.33	-1.54	74.0	-23.33	Peak	216.00	150	Vertical	N/A
3**	5776.500	89.77	-1.54	54.0	-35.77	AV	216.00	150	Vertical	N/A
4	7912.500	53.49	1.72	74.0	20.51	Peak	11.00	150	Vertical	Pass
4**	7912.500	42.52	1.72	54.0	11.48	AV	11.00	150	Vertical	Pass
5	10543.625	46.57	-3.05	74.0	27.43	Peak	13.00	150	Vertical	Pass
5**	10543.625	36.70	-3.05	54.0	17.30	AV	13.00	150	Vertical	Pass
6	15260.550	48.91	-1.01	74.0	25.09	Peak	14.00	150	Vertical	Pass
6**	15260.550	38.47	-1.01	54.0	15.53	AV	14.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_01.43.17

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

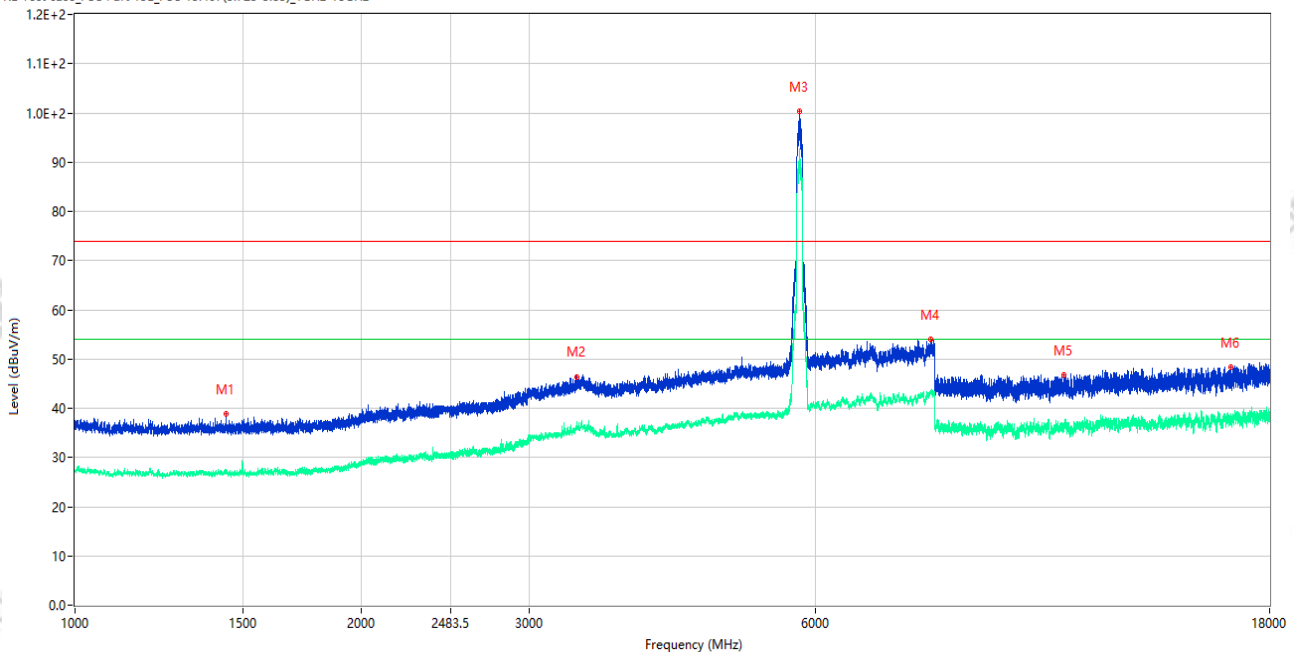

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1442.250	38.78	-15.93	74.0	35.22	Peak	193.00	150	Horizontal	Pass
1**	1442.250	27.56	-15.93	54.0	26.44	AV	193.00	150	Horizontal	Pass
2	3367.500	46.42	-5.03	74.0	27.58	Peak	0.00	150	Horizontal	Pass
2**	3367.500	35.61	-5.03	54.0	18.39	AV	0.00	150	Horizontal	Pass
3	5776.500	100.32	-1.54	74.0	-26.32	Peak	156.00	150	Horizontal	N/A
3**	5776.500	92.69	-1.54	54.0	-38.69	AV	156.00	150	Horizontal	N/A
4	7926.500	53.98	1.96	74.0	20.02	Peak	197.00	150	Horizontal	Pass
4**	7926.500	42.86	1.96	54.0	11.14	AV	197.00	150	Horizontal	Pass
5	10946.662	46.68	-3.30	74.0	27.32	Peak	360.00	150	Horizontal	Pass
5**	10946.662	36.24	-3.30	54.0	17.76	AV	360.00	150	Horizontal	Pass
6	16395.075	48.32	-1.20	74.0	25.68	Peak	0.00	150	Horizontal	Pass
6**	16395.075	37.47	-1.20	54.0	16.53	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.18.29

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

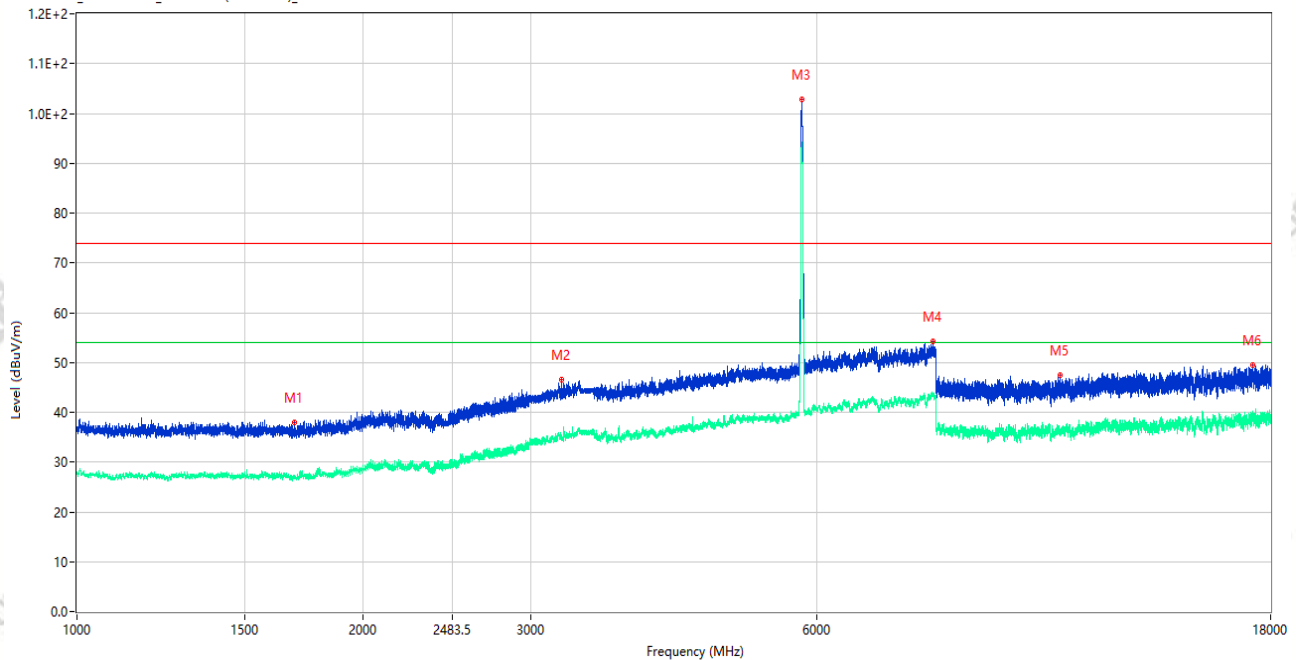

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1693.000	38.01	-16.50	74.0	35.99	Peak	327.00	150	Vertical	Pass
1**	1693.000	26.73	-16.50	54.0	27.27	AV	327.00	150	Vertical	Pass
2	3232.000	46.46	-6.83	74.0	27.54	Peak	318.00	150	Vertical	Pass
2**	3232.000	35.41	-6.83	54.0	18.59	AV	318.00	150	Vertical	Pass
3	5779.500	102.74	-1.51	74.0	-28.74	Peak	216.00	150	Vertical	N/A
3**	5779.500	92.96	-1.51	54.0	-38.96	AV	216.00	150	Vertical	N/A
4	7949.500	54.26	2.05	74.0	19.74	Peak	289.00	150	Vertical	Pass
4**	7949.500	43.42	2.05	54.0	10.58	AV	289.00	150	Vertical	Pass
5	10813.187	47.42	-3.07	74.0	26.58	Peak	289.00	150	Vertical	Pass
5**	10813.187	35.55	-3.07	54.0	18.45	AV	289.00	150	Vertical	Pass
6	17232.714	49.39	-0.44	74.0	24.61	Peak	358.00	150	Vertical	Pass
6**	17232.714	39.07	-0.44	54.0	14.93	AV	358.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.13.47

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

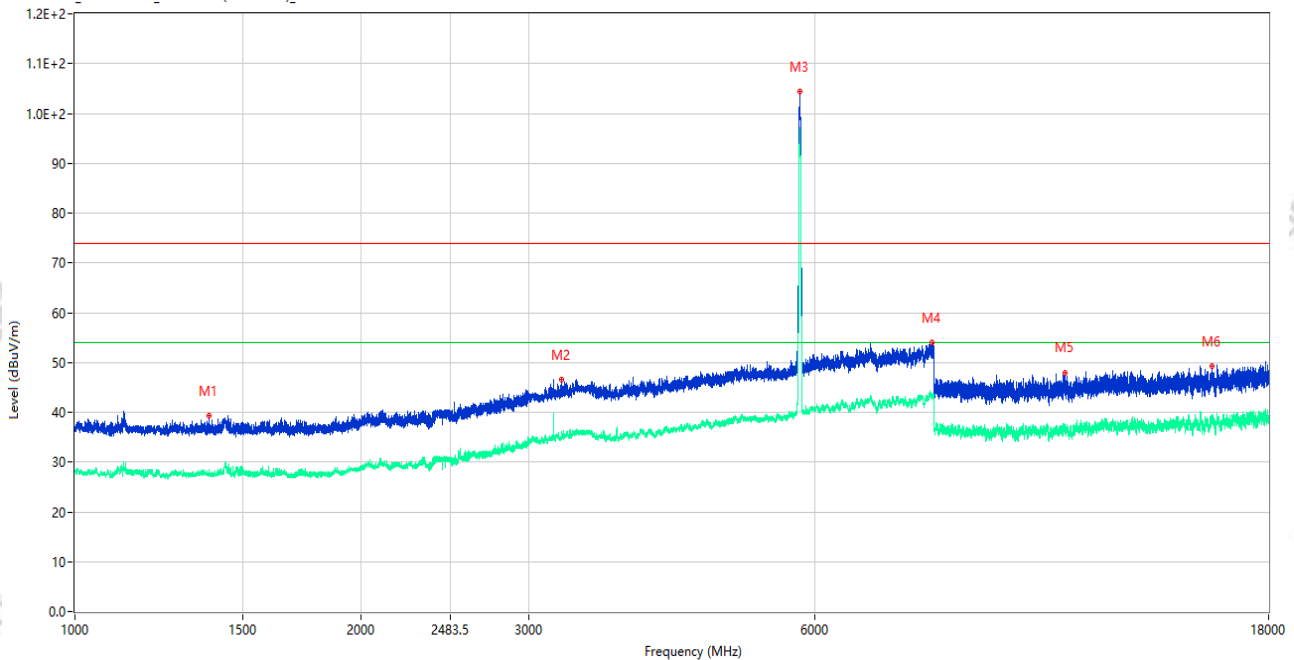


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1382.250	39.21	-15.99	74.0	34.79	Peak	126.00	150	Horizontal	Pass
1**	1382.250	27.51	-15.99	54.0	26.49	AV	126.00	150	Horizontal	Pass
2	3251.500	46.57	-7.42	74.0	27.43	Peak	62.00	150	Horizontal	Pass
2**	3251.500	35.25	-7.42	54.0	18.75	AV	62.00	150	Horizontal	Pass
3	5787.000	104.35	-1.54	74.0	-30.35	Peak	152.00	150	Horizontal	N/A
3**	5787.000	96.85	-1.54	54.0	-42.85	AV	152.00	150	Horizontal	N/A
4	7965.000	54.02	2.29	74.0	19.98	Peak	359.00	150	Horizontal	Pass
4**	7965.000	43.20	2.29	54.0	10.80	AV	359.00	150	Horizontal	Pass
5	10997.488	47.82	-2.81	74.0	26.18	Peak	175.00	150	Horizontal	Pass
5**	10997.488	37.21	-2.81	54.0	16.79	AV	175.00	150	Horizontal	Pass
6	15706.013	49.16	-1.79	74.0	24.84	Peak	14.00	150	Horizontal	Pass
6**	15706.013	37.80	-1.79	54.0	16.20	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.41.22

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ax40 CH159 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

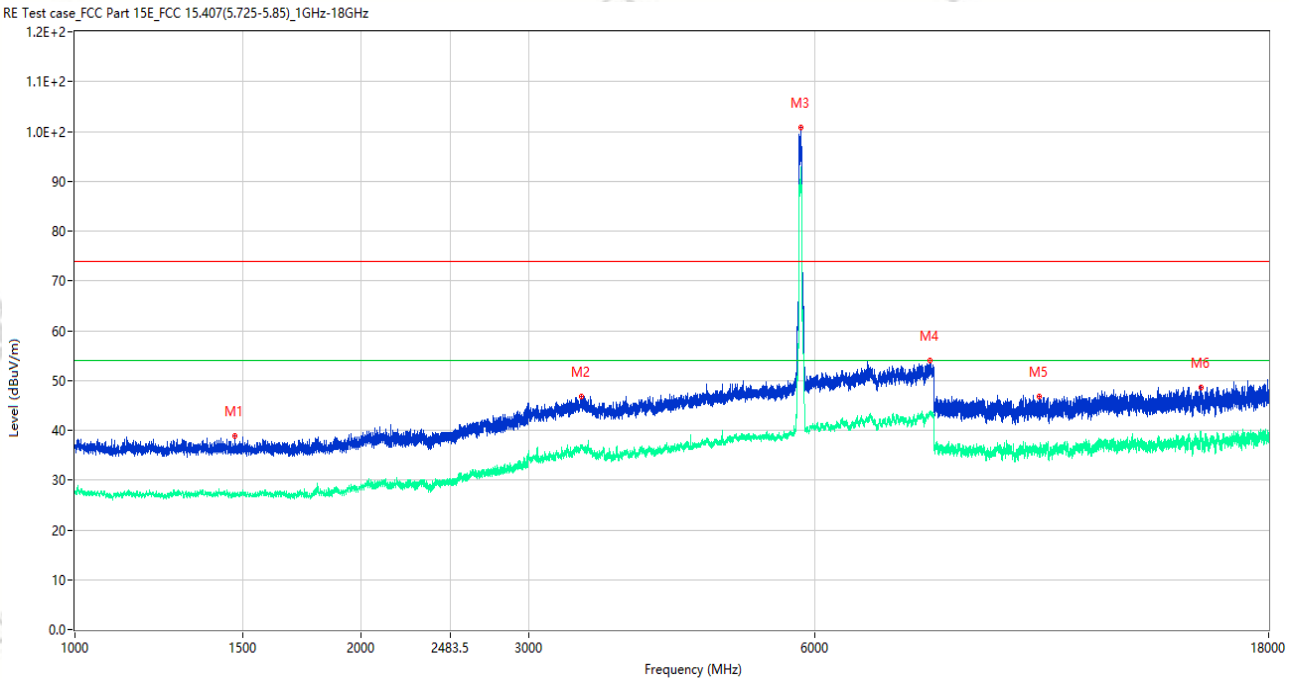

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1472.750	38.76	-16.32	74.0	35.24	Peak	28.00	150	Vertical	Pass
1**	1472.750	27.15	-16.32	54.0	26.85	AV	28.00	150	Vertical	Pass
2	3408.500	46.80	-5.36	74.0	27.20	Peak	120.00	150	Vertical	Pass
2**	3408.500	36.30	-5.36	54.0	17.70	AV	120.00	150	Vertical	Pass
3	5797.500	100.84	-1.44	74.0	-26.84	Peak	207.00	150	Vertical	N/A
3**	5797.500	92.54	-1.44	54.0	-38.54	AV	207.00	150	Vertical	N/A
4	7929.000	53.91	2.00	74.0	20.09	Peak	219.00	150	Vertical	Pass
4**	7929.000	43.31	2.00	54.0	10.69	AV	219.00	150	Vertical	Pass
5	10322.037	46.75	-3.34	74.0	27.25	Peak	0.00	150	Vertical	Pass
5**	10322.037	34.96	-3.34	54.0	19.04	AV	0.00	150	Vertical	Pass
6	15287.850	48.68	-1.72	74.0	25.32	Peak	13.00	150	Vertical	Pass
6**	15287.850	37.52	-1.72	54.0	16.48	AV	13.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.45.14

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH159 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

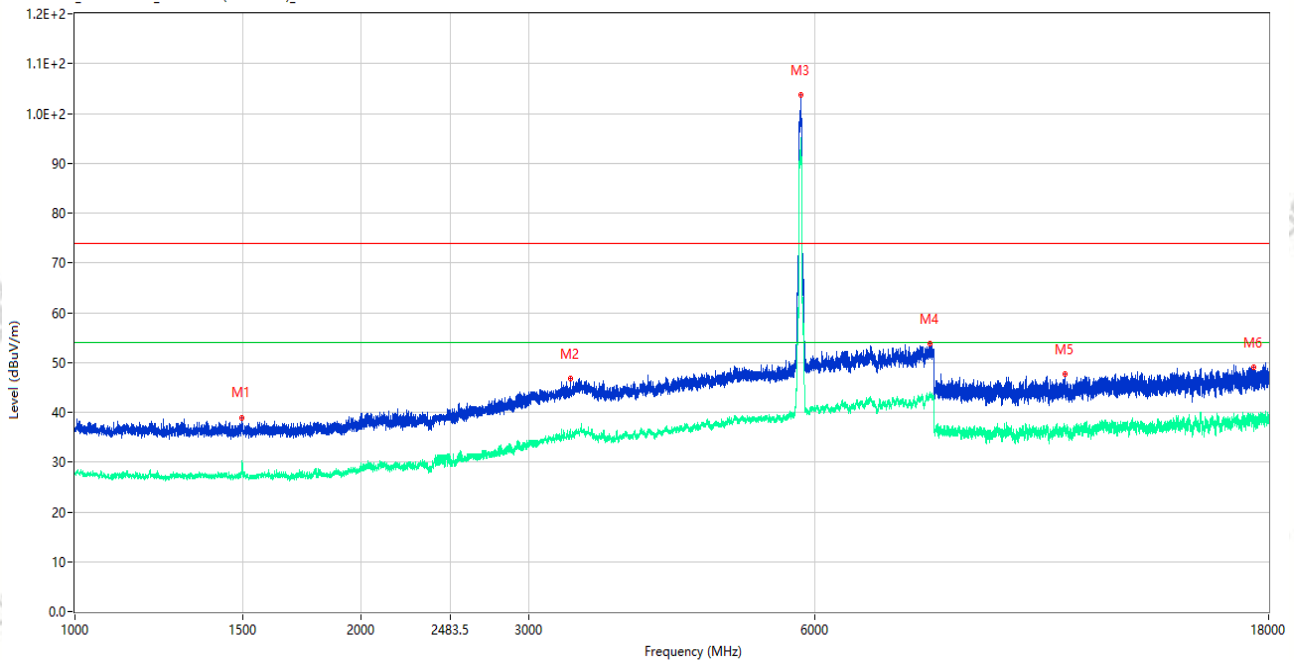


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1496.250	38.97	-16.17	74.0	35.03	Peak	20.00	150	Horizontal	Pass
1**	1496.250	27.88	-16.17	54.0	26.12	AV	20.00	150	Horizontal	Pass
2	3316.500	46.86	-6.38	74.0	27.14	Peak	0.00	150	Horizontal	Pass
2**	3316.500	36.43	-6.38	54.0	17.57	AV	0.00	150	Horizontal	Pass
3	5797.000	103.66	-1.41	74.0	-29.66	Peak	167.00	150	Horizontal	N/A
3**	5797.000	95.17	-1.41	54.0	-41.17	AV	167.00	150	Horizontal	N/A
4	7919.500	53.79	1.97	74.0	20.21	Peak	29.00	150	Horizontal	Pass
4**	7919.500	43.81	1.97	54.0	10.19	AV	29.00	150	Horizontal	Pass
5	10986.800	47.68	-3.42	74.0	26.32	Peak	360.00	150	Horizontal	Pass
5**	10986.800	36.98	-3.42	54.0	17.02	AV	360.00	150	Horizontal	Pass
6	17345.063	49.10	0.31	74.0	24.90	Peak	0.00	150	Horizontal	Pass
6**	17345.063	39.12	0.31	54.0	14.88	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.56.21

EUT Name:	Rugged Handheld Computer	Temp.(°C):	22.7
Model Number:	PA768-0D6CRMPG	Humidity (%RH):	53
Sample Number:	EE26040631-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ax80 CH155 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线 ANT3

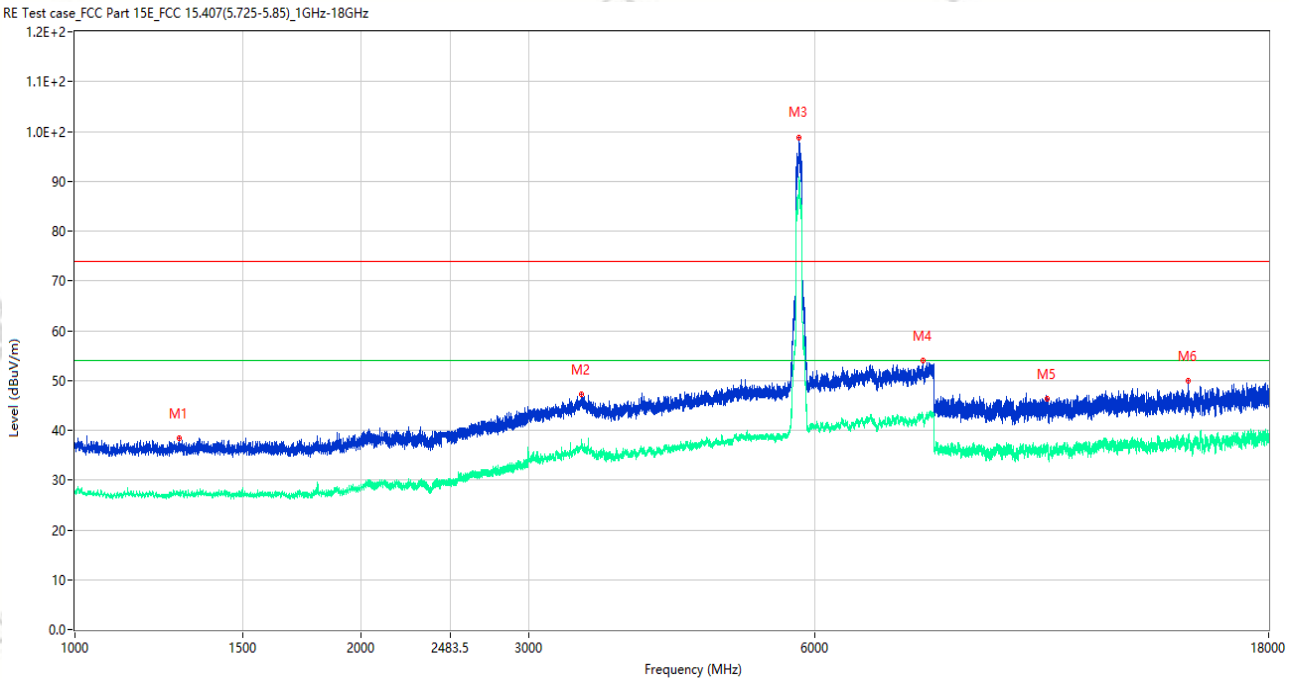

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.000	38.40	-15.92	74.0	35.60	Peak	360.00	150	Vertical	Pass
1**	1287.000	27.17	-15.92	54.0	26.83	AV	360.00	150	Vertical	Pass
2	3411.000	47.32	-5.30	74.0	26.68	Peak	39.00	150	Vertical	Pass
2**	3411.000	36.78	-5.30	54.0	17.22	AV	39.00	150	Vertical	Pass
3	5777.500	98.85	-1.52	74.0	-24.85	Peak	208.00	150	Vertical	N/A
3**	5777.500	90.94	-1.52	54.0	-36.94	AV	208.00	150	Vertical	N/A
4	7789.500	53.93	1.61	74.0	20.07	Peak	236.00	150	Vertical	Pass
4**	7789.500	42.81	1.61	54.0	11.19	AV	236.00	150	Vertical	Pass
5	10523.437	46.39	-3.44	74.0	27.61	Peak	360.00	150	Vertical	Pass
5**	10523.437	35.68	-3.44	54.0	18.32	AV	360.00	150	Vertical	Pass
6	14823.224	49.85	-0.15	74.0	24.15	Peak	148.00	150	Vertical	Pass
6**	14823.224	38.39	-0.15	54.0	15.61	AV	148.00	150	Vertical	Pass

Test Result

Project Number: P-EE26060694

Test Time: 2026-08-05_00.51.13

EUT Name: Rugged Handheld Computer

Temp.(°C): 22.7

Model Number: PA768-0D6CRMPG

Humidity (%RH): 53

Sample Number: EE26040631-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax80 CH155 P=16


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Mingyue

Remark: 实验室数据线 ANT3

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

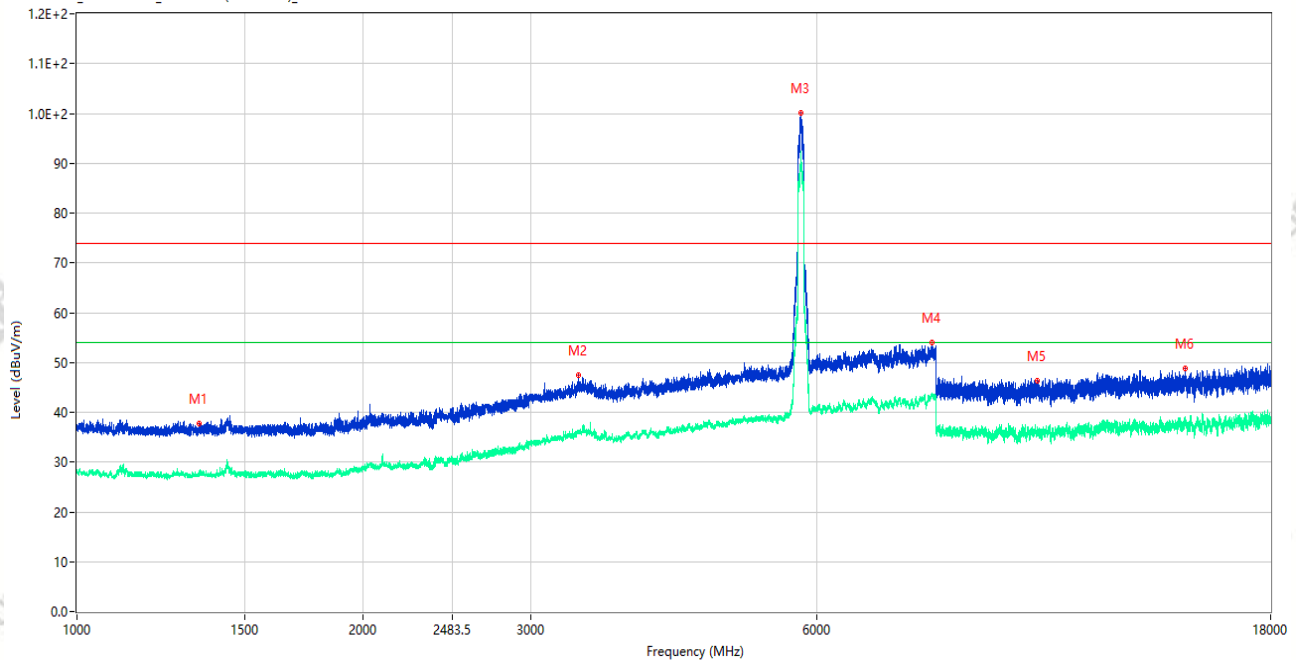

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1343.000	37.75	-16.09	74.0	36.25	Peak	159.00	150	Horizontal	Pass
1**	1343.000	27.16	-16.09	54.0	26.84	AV	159.00	150	Horizontal	Pass
2	3367.000	47.43	-5.05	74.0	26.57	Peak	12.00	150	Horizontal	Pass
2**	3367.000	36.30	-5.05	54.0	17.70	AV	12.00	150	Horizontal	Pass
3	5767.000	100.01	-1.75	74.0	-26.01	Peak	221.00	150	Horizontal	N/A
3**	5767.000	90.76	-1.75	54.0	-36.76	AV	221.00	150	Horizontal	N/A
4	7926.500	53.91	1.96	74.0	20.09	Peak	0.00	150	Horizontal	Pass
4**	7926.500	43.25	1.96	54.0	10.75	AV	0.00	150	Horizontal	Pass
5	10227.987	46.29	-3.14	74.0	27.71	Peak	355.00	150	Horizontal	Pass
5**	10227.987	35.34	-3.14	54.0	18.66	AV	355.00	150	Horizontal	Pass
6	14631.599	48.71	-2.04	74.0	25.29	Peak	149.00	150	Horizontal	Pass
6**	14631.599	38.89	-2.04	54.0	15.11	AV	149.00	150	Horizontal	Pass