

Channel 43

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17928.900	54.97	-29.55	45.95	38.57	74.00	19.03	H
17998.200	54.50	-29.55	45.95	38.10	74.00	19.50	H
14557.500	48.78	-29.81	41.90	36.69	88.20	39.42	V
14220.900	48.69	-31.02	41.75	37.96	88.20	39.51	H
11870.550	45.97	-32.13	39.15	38.95	74.00	28.03	H
12165.300	45.44	-32.14	38.90	38.68	74.00	28.56	V

Channel 91

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17906.400	54.55	-29.55	45.95	38.15	74.00	19.45	H
17968.500	54.36	-29.55	45.95	37.96	74.00	19.64	H
14600.250	49.35	-29.81	41.90	37.26	88.20	38.85	V
14609.250	49.05	-30.76	41.70	38.11	88.20	39.15	H
12651.750	46.07	-31.89	39.40	38.56	74.00	27.93	H
11866.050	46.03	-32.13	39.15	39.01	74.00	27.97	V

Channel 99

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.350	55.52	-29.55	45.95	39.12	74.00	18.48	V
17954.100	54.44	-29.55	45.95	38.04	74.00	19.56	H
14170.950	49.10	-30.97	41.70	38.37	88.20	39.10	H
14499.900	48.94	-30.35	41.90	37.39	74.00	25.06	H
12764.700	45.72	-31.94	39.65	38.01	88.20	42.48	H
11853.900	45.46	-32.13	39.15	38.44	74.00	28.54	H

Channel 107

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17977.950	54.53	-29.55	45.95	38.13	74.00	19.47	V
17964.900	54.52	-29.55	45.95	38.12	74.00	19.48	V
14567.850	49.16	-29.81	41.90	37.07	88.20	39.04	V
14068.350	48.97	-30.70	41.70	37.97	88.20	39.23	H
11827.350	46.22	-32.20	39.20	39.21	74.00	27.78	V
11790.000	45.43	-32.20	39.20	38.42	74.00	28.57	H

Channel 115

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.850	55.66	-29.55	45.95	39.26	74.00	18.34	H
17981.100	54.53	-29.55	45.95	38.13	74.00	19.47	V
14552.100	48.41	-30.71	41.90	37.22	88.20	39.79	H
14561.100	48.39	-29.81	41.90	36.30	88.20	39.81	V
12219.300	46.01	-31.97	38.90	39.08	74.00	27.99	H
13039.200	45.82	-30.95	40.15	36.62	88.20	42.38	H

Channel 123

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.150	55.27	-29.55	45.95	38.87	74.00	18.73	V
17970.750	55.00	-29.55	45.95	38.60	74.00	19.00	V
14505.750	49.45	-30.71	41.90	38.26	88.20	38.75	H
14125.950	48.58	-31.00	41.70	37.88	88.20	39.62	V
11820.600	45.98	-32.20	39.20	38.97	74.00	28.02	V
12760.200	45.98	-31.94	39.65	38.27	88.20	42.22	H

Channel 155

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17942.400	54.60	-29.55	45.95	38.20	74.00	19.40	H
17996.850	54.46	-29.55	45.95	38.06	74.00	19.54	V
14149.800	48.73	-31.00	41.70	38.03	88.20	39.47	V
14148.000	48.58	-31.00	41.70	37.88	88.20	39.62	V
11869.200	46.11	-32.13	39.15	39.09	74.00	27.89	V
12708.000	45.23	-31.50	39.50	37.23	88.20	42.97	V

Channel 179

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.650	54.30	-29.55	45.95	37.90	74.00	19.70	V
17892.450	54.11	-29.55	45.95	37.71	74.00	19.89	V
14211.000	49.06	-31.02	41.75	38.33	88.20	39.14	H
14555.700	48.38	-29.81	41.90	36.29	88.20	39.82	V
11871.000	46.69	-32.13	39.15	39.67	74.00	27.31	H
12273.750	45.14	-32.39	38.95	38.58	74.00	28.86	V

Channel 187

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.200	54.68	-29.55	45.95	38.28	74.00	19.32	V
17904.150	54.49	-29.55	45.95	38.09	74.00	19.51	V
14562.000	49.00	-29.81	41.90	36.91	88.20	39.20	V
14240.700	48.94	-31.02	41.75	38.21	88.20	39.26	V
13048.650	46.89	-30.95	40.15	37.69	88.20	41.31	V
11868.750	46.40	-32.13	39.15	39.38	74.00	27.60	H

Channel 211

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17977.500	54.77	-29.55	45.95	38.37	74.00	19.23	H
17976.600	54.32	-29.55	45.95	37.92	74.00	19.68	V
14158.800	48.60	-30.97	41.70	37.87	88.20	39.60	V
14161.050	48.45	-30.97	41.70	37.72	88.20	39.75	H
12127.950	46.85	-32.26	38.90	40.21	74.00	27.15	V
12301.200	46.31	-31.98	39.00	39.29	74.00	27.69	V

Channel 227

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17974.350	55.30	-29.55	45.95	38.90	74.00	18.70	H
17990.550	54.63	-29.55	45.95	38.23	74.00	19.37	H
14166.000	49.98	-30.97	41.70	39.25	88.20	38.22	V
14119.200	49.45	-31.00	41.70	38.75	88.20	38.75	V
7215.282	55.40	-25.94	36.20	45.14	88.20	32.80	H
7222.707	55.21	-25.94	36.20	44.95	88.20	32.99	V

802.11ax-80M full RU
Channel 7

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.800	55.70	-29.55	45.95	39.30	74.00	18.30	V
17969.850	55.05	-29.55	45.95	38.65	74.00	18.95	H
14630.400	49.23	-30.76	41.70	38.29	88.20	38.97	H
14634.900	48.97	-30.76	41.70	38.03	88.20	39.23	H
5921.872	52.24	-27.15	34.30	45.09	88.20	35.96	H
5910.952	51.85	-27.15	34.30	44.70	88.20	36.35	H

Channel 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.150	55.06	-29.55	45.95	38.66	74.00	18.94	V
17992.350	54.87	-29.55	45.95	38.47	74.00	19.13	H
14548.500	49.41	-30.71	41.90	38.22	88.20	38.79	V
14692.500	48.79	-30.35	41.50	37.64	88.20	39.41	H
12841.650	45.72	-31.97	39.90	37.79	88.20	42.48	V
12722.400	45.42	-31.50	39.50	37.42	88.20	42.78	H

Channel 87

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.400	54.79	-29.55	45.95	38.39	74.00	19.21	H
17999.100	54.76	-29.55	45.95	38.36	74.00	19.24	H
14561.100	49.07	-29.81	41.90	36.98	88.20	39.13	V
14568.300	48.76	-29.81	41.90	36.67	88.20	39.44	V
11757.150	46.29	-32.22	39.20	39.31	74.00	27.71	H
11860.650	46.21	-32.13	39.15	39.19	74.00	27.79	H

Channel 103

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17918.100	54.36	-29.55	45.95	37.96	74.00	19.64	H
17978.400	54.35	-29.55	45.95	37.95	74.00	19.65	H
14562.000	49.37	-29.81	41.90	37.28	88.20	38.83	V
14487.300	49.01	-30.35	41.90	37.46	74.00	24.99	V
12640.950	45.80	-31.89	39.40	38.29	74.00	28.20	H
12664.350	45.62	-31.89	39.40	38.11	74.00	28.38	V

Channel 119

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.450	54.66	-29.55	45.95	38.26	74.00	19.34	V
17977.950	54.16	-29.55	45.95	37.76	74.00	19.84	H
14606.550	48.42	-30.76	41.70	37.48	88.20	39.78	V
14645.700	48.28	-30.76	41.70	37.34	88.20	39.92	H
11665.800	45.43	-32.03	39.20	38.26	74.00	28.57	V
12271.050	45.07	-32.39	38.95	38.51	74.00	28.93	H

Channel 151

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17961.300	55.18	-29.55	45.95	38.78	74.00	18.82	V
17969.400	55.15	-29.55	45.95	38.75	74.00	18.85	V
14198.400	48.40	-30.97	41.70	37.67	88.20	39.80	V
13709.700	48.36	-31.08	41.00	38.44	88.20	39.84	V
12672.900	45.38	-31.89	39.40	37.87	74.00	28.62	H
13063.050	45.16	-30.95	40.15	35.96	88.20	43.04	V

Channel 183

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17969.850	54.95	-29.55	45.95	38.55	74.00	19.05	V
17997.750	54.88	-29.55	45.95	38.48	74.00	19.12	V
14139.900	49.09	-31.00	41.70	38.39	88.20	39.11	V
14071.050	48.82	-30.70	41.70	37.82	88.20	39.38	H
12681.450	45.29	-31.50	39.50	37.29	74.00	28.71	V
11785.500	45.27	-32.20	39.20	38.26	74.00	28.73	V

Channel 199

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17955.900	55.36	-29.55	45.95	38.96	74.00	18.64	V
17983.350	54.80	-29.55	45.95	38.40	74.00	19.20	H
14554.350	50.93	-30.71	41.90	39.74	88.20	37.27	V
14570.100	49.46	-29.81	41.90	37.37	88.20	38.74	H
11839.050	46.19	-32.13	39.15	39.17	74.00	27.81	H
12780.000	46.02	-31.36	39.80	37.58	88.20	42.18	V

Channel 215

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.550	54.89	-29.55	45.95	38.49	74.00	19.11	H
17957.700	54.79	-29.55	45.95	38.39	74.00	19.21	V
14103.450	48.86	-30.70	41.70	37.86	88.20	39.34	V
14557.500	48.70	-29.81	41.90	36.61	88.20	39.50	H
7189.740	55.56	-25.94	36.20	45.30	88.20	32.64	H
7179.708	55.25	-25.94	36.20	44.99	88.20	32.95	H

802.11ax-160M full RU

Channel 15

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.800	54.56	-29.55	45.95	38.16	74.00	19.44	H
17975.700	54.54	-29.55	45.95	38.14	74.00	19.46	V
14136.300	48.72	-31.00	41.70	38.02	88.20	39.48	V
14563.350	48.72	-29.81	41.90	36.63	88.20	39.48	H
5888.972	67.82	-27.12	34.20	60.74	88.20	20.38	H
5883.218	67.33	-27.12	34.20	60.25	88.20	20.87	H

Channel 47

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.750	54.76	-29.55	45.95	38.36	74.00	19.24	V
17958.150	54.34	-29.55	45.95	37.94	74.00	19.66	V
14546.700	48.81	-30.71	41.90	37.62	88.20	39.39	H
14703.750	48.68	-30.18	41.35	37.51	88.20	39.52	H
12200.850	45.84	-31.97	38.90	38.91	74.00	28.16	V
11905.200	45.42	-32.63	39.10	38.95	74.00	28.58	H

Channel 79

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17986.500	54.79	-29.55	45.95	38.39	74.00	19.21	H
17986.050	54.77	-29.55	45.95	38.37	74.00	19.23	V
14574.600	48.80	-29.81	41.90	36.71	88.20	39.40	V
14523.750	48.59	-30.71	41.90	37.40	88.20	39.61	H
13028.850	45.70	-30.95	40.15	36.50	88.20	42.50	V
12163.050	45.42	-32.14	38.90	38.66	74.00	28.58	V

Channel 143

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17962.200	54.94	-29.55	45.95	38.54	74.00	19.06	V
17966.700	54.62	-29.55	45.95	38.22	74.00	19.38	V
14524.200	48.53	-30.71	41.90	37.34	88.20	39.67	H
13649.850	48.47	-31.48	40.90	39.05	88.20	39.73	V
13010.850	44.84	-32.03	40.10	36.77	88.20	43.36	H
13072.050	44.77	-31.67	40.20	36.24	88.20	43.43	V

Channel 207

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17950.950	54.48	-29.55	45.95	38.08	74.00	19.52	V
17964.900	54.45	-29.55	45.95	38.05	74.00	19.55	V
14211.450	48.76	-31.02	41.75	38.03	88.20	39.44	H
14559.750	48.74	-29.81	41.90	36.65	88.20	39.46	V
7211.157	55.03	-25.94	36.20	44.77	88.20	33.17	V
7224.027	55.01	-25.94	36.20	44.75	88.20	33.19	V

Conclusion: PASS
Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable\ Loss+Antenna\ Factor$

A.9. Band Edges Compliance
A9.1 Band Edges - Radiated
Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407	-27 dBm/MHz

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)	Measurement distance(m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The measurement is made according to ANSI C63.10-2013 and KDB 789033

Measurement Result for full RU:

Mode	Channel	Test Results	Conclusion
802.11ax 20M	CH1	Fig.5	P
	CH233	Fig.6	P
802.11ax 40M	CH3	Fig.7	P
	CH227	Fig.8	P

802.11ax 80M	CH7	Fig.9	P
	CH215	Fig.10	P
802.11ax 160M	CH15	Fig.11	P
	CH207	Fig.12	P

Note: All SISO and MIMO emissions have been checked, only the worst cases were reported.

Conclusion: PASS

Test graphs as below:

Full Spectrum

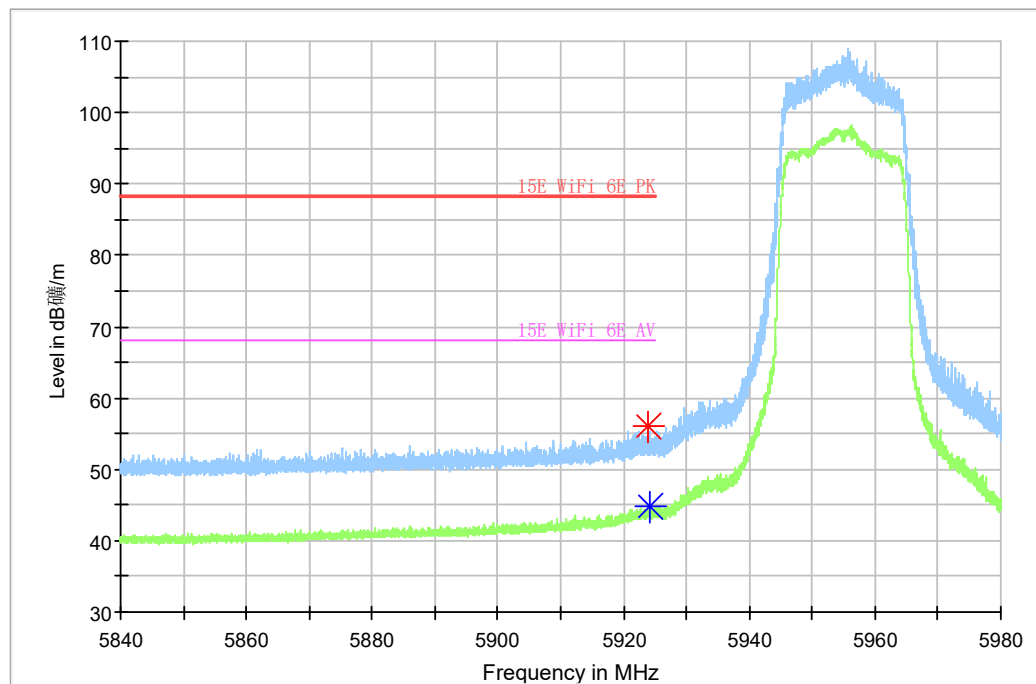


Fig.5 Band Edges (802.11ax 20M Ch1 full RU MIMO)

Full Spectrum

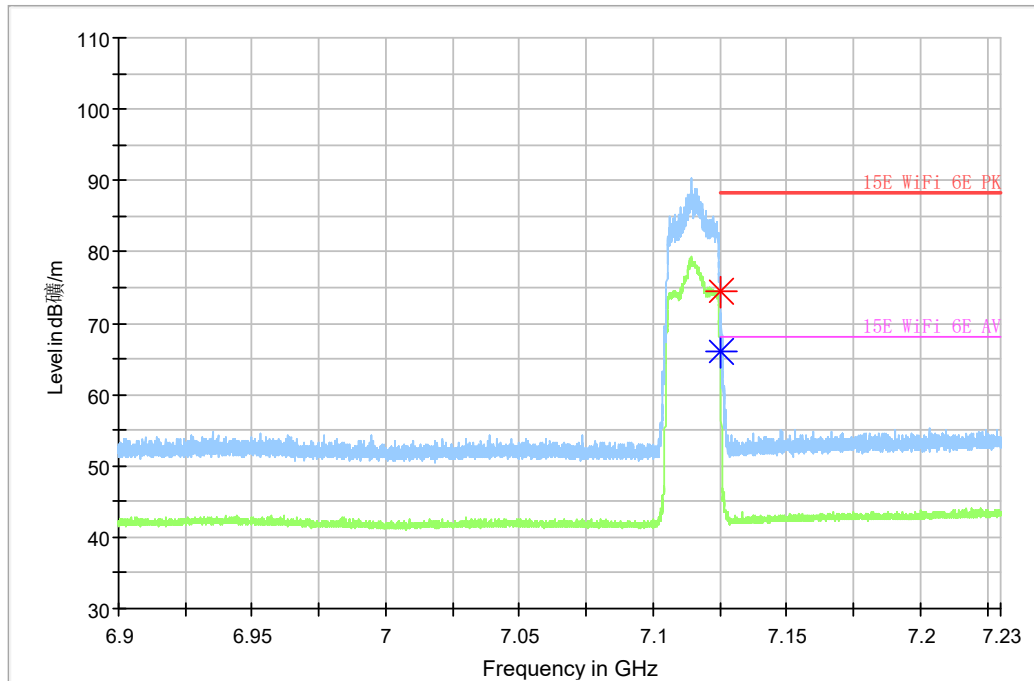


Fig.6 Band Edges (802.11ax 20M Ch233 full RU MIMO)

Full Spectrum

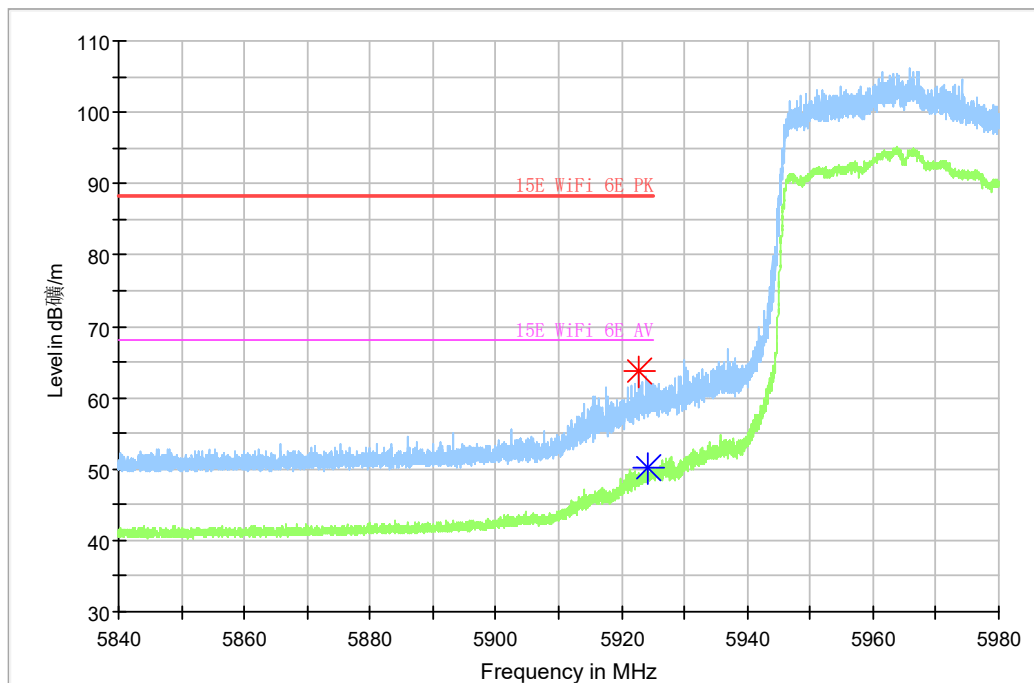


Fig.7 Band Edges (802.11ax 40M Ch3 full RU MIMO)

Full Spectrum

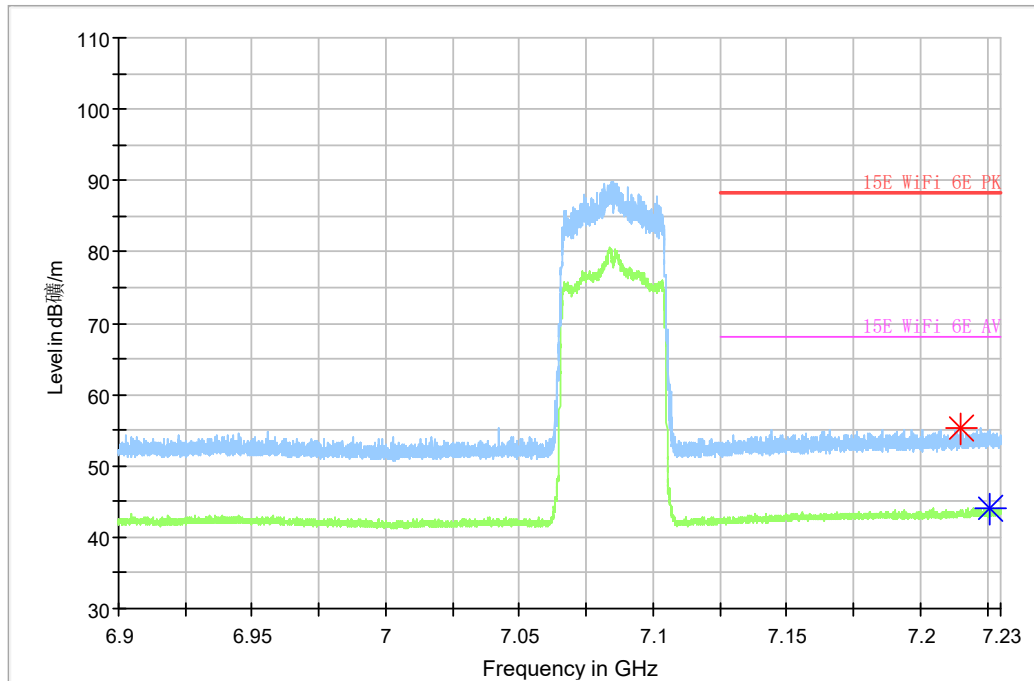


Fig.8 Band Edges (802.11ax 40M Ch227 full RU MIMO)

Full Spectrum

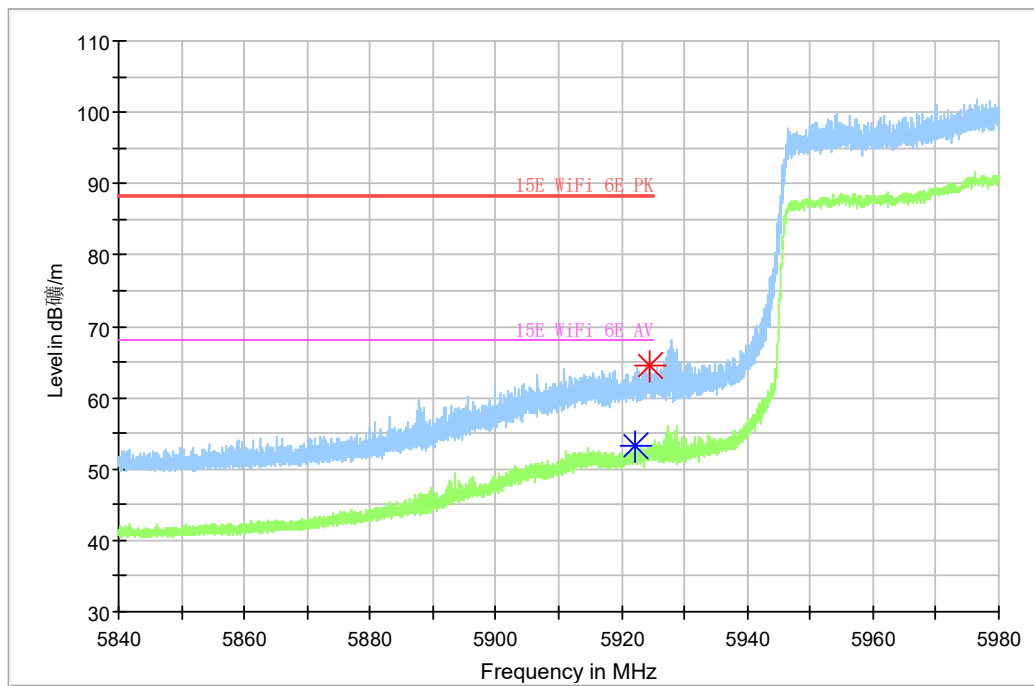


Fig.9 Band Edges (802.11ax 80M Ch7 full RU MIMO)

Full Spectrum

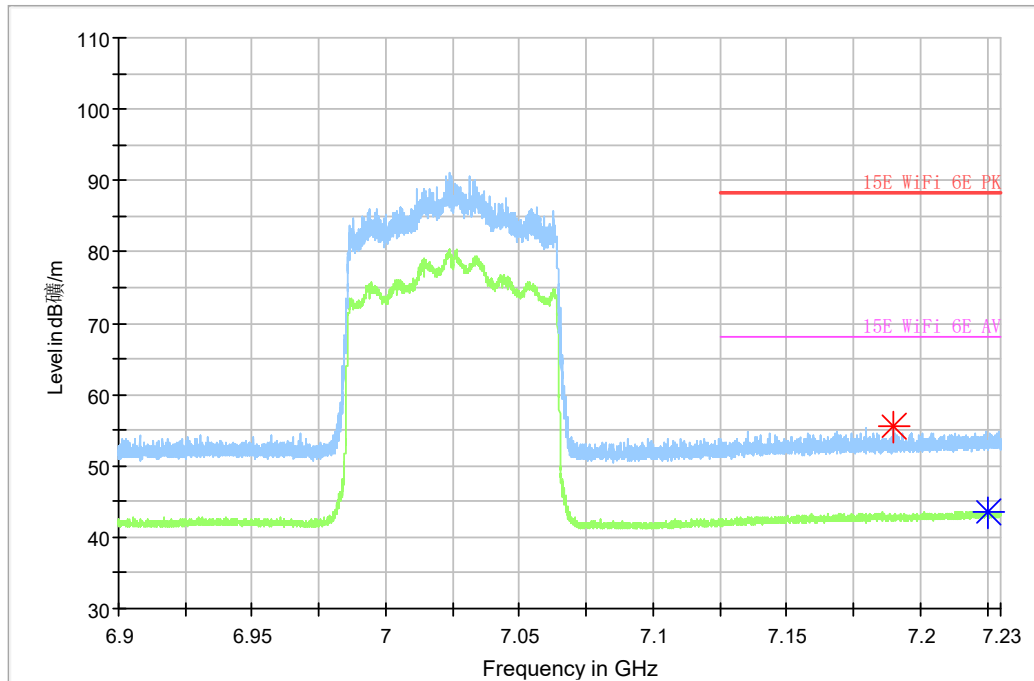


Fig.10 Band Edges (802.11ax 80M Ch215 full RU MIMO)

Full Spectrum

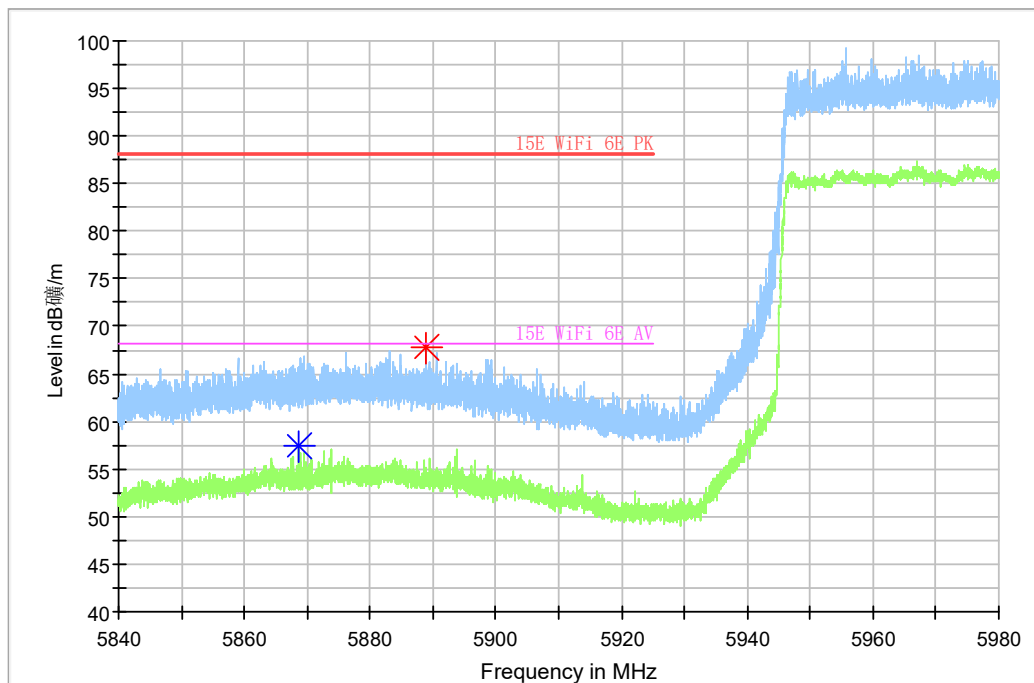


Fig.11 Band Edges (802.11ax 160M Ch15 full RU MIMO)

Full Spectrum

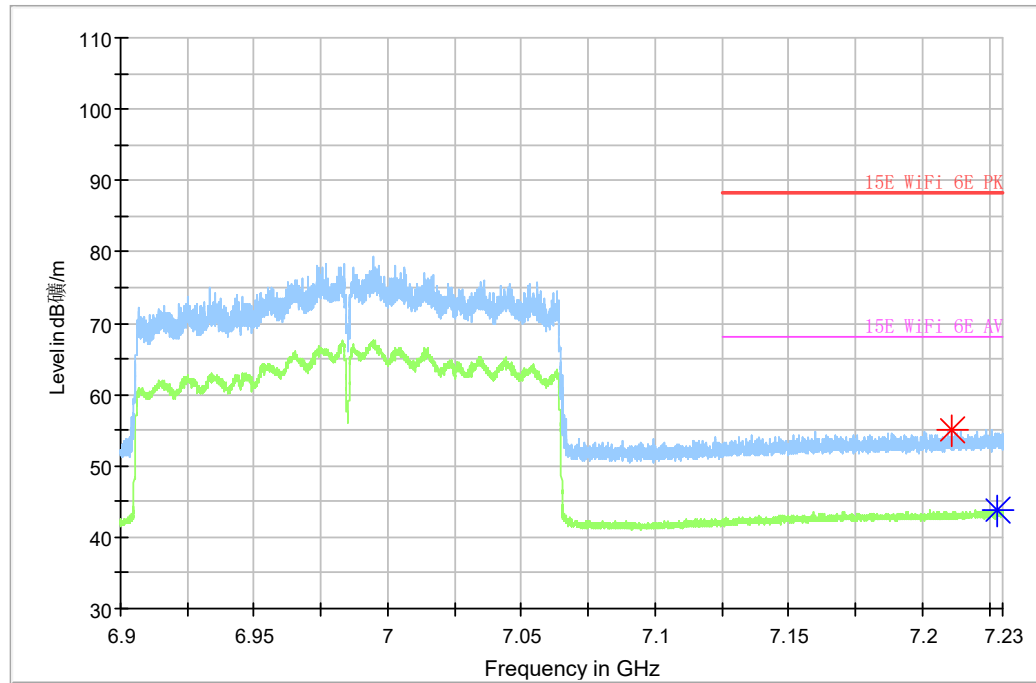


Fig.12 Band Edges (802.11ax 160M Ch207 full RU MIMO)

A.10. AC Powerline Conducted Emission (150kHz- 30MHz)

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.08dB, k=2.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11ax	Idle	
0.15 to 0.5	66 to 56	Fig.13	Fig.14	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11ax	Idle	
0.15 to 0.5	67 56 to 46	Fig.13	Fig.14	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

Traffic:

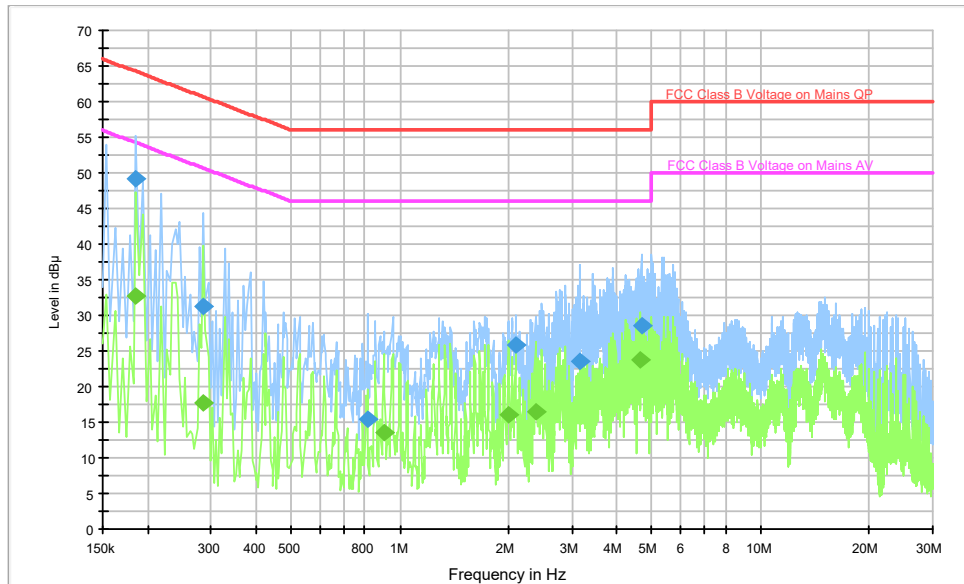


Fig.13 Conducted Emission (802.11ax, Ch1, TX)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	49.1	2000.0	9.000	On	L1	19.7	15.1	64.2
0.286000	31.3	2000.0	9.000	On	L1	19.7	29.3	60.6
0.814000	15.4	2000.0	9.000	On	L1	19.7	40.6	56.0
2.102000	25.9	2000.0	9.000	On	L1	19.6	30.1	56.0
3.154000	23.6	2000.0	9.000	On	L1	19.6	32.4	56.0
4.666000	28.5	2000.0	9.000	On	L1	19.6	27.5	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.186000	32.7	2000.0	9.000	On	L1	19.7	21.5	54.2
0.286000	17.7	2000.0	9.000	On	L1	19.7	33.0	50.6
0.902000	13.5	2000.0	9.000	On	N	19.6	32.5	46.0
2.002000	16.0	2000.0	9.000	On	L1	19.6	30.0	46.0
2.382000	16.6	2000.0	9.000	On	L1	19.6	29.4	46.0
4.618000	23.7	2000.0	9.000	On	N	19.6	22.3	46.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

Idle:

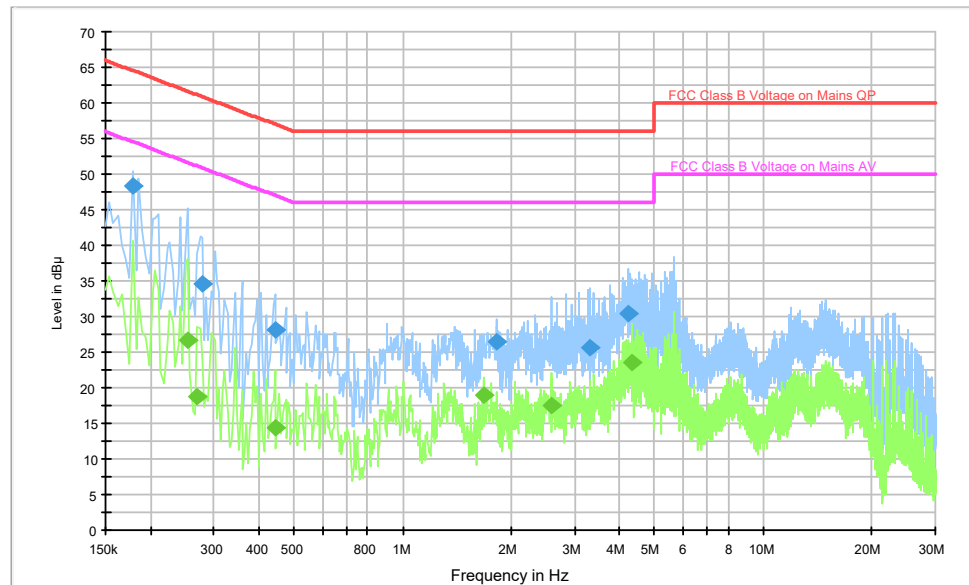


Fig.14 Conducted Emission(802.11ax, CH1 IDLE)

Note1: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.178000	48.2	2000.0	9.000	On	L1	19.7	16.3	64.6
0.278000	34.5	2000.0	9.000	On	L1	19.7	26.3	60.9
0.442000	28.2	2000.0	9.000	On	L1	19.7	28.8	57.0
1.822000	26.5	2000.0	9.000	On	L1	19.6	29.5	56.0
3.314000	25.7	2000.0	9.000	On	N	19.6	30.3	56.0
4.218000	30.5	2000.0	9.000	On	L1	19.6	25.5	56.0

Final Result 2

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.254000	26.7	2000.0	9.000	On	N	19.7	24.9	51.6
0.270000	18.8	2000.0	9.000	On	N	19.7	32.3	51.1
0.442000	14.3	2000.0	9.000	On	L1	19.7	32.7	47.0
1.670000	18.9	2000.0	9.000	On	L1	19.6	27.1	46.0
2.590000	17.4	2000.0	9.000	On	L1	19.6	28.6	46.0
4.302000	23.6	2000.0	9.000	On	N	19.6	22.4	46.0

Note2: The measurement results showed here are worst cases of the combinations of different cables and chargers

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



*** END OF REPORT BODY ***