



FCC RF Test Report

APPLICANT : Acer Incorporated
EQUIPMENT : Tablet Computer
BRAND NAME : acer
MODEL NAME : N17H1
MARKETING NAME : Switch 3
FCC ID : HLZ7265D2W
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was integrated the Wireless Module (Model Name: 7265D2W, 7265D2W AN / FCC ID: PD97265D2) during the test.

The product was received on Mar. 15, 2017 and testing was completed on Apr. 12, 2017. We, SPORTON International (ShenZhen) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON International (ShenZhen) INC., the test report shall not be reproduced except in full.

Prepared by: Eric Shih / Manager

Approved by: Jones Tsai / Manager



SPORTON International (ShenZhen) INC.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City,
Guangdong Province, China**



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Component list	6
1.6 Modification of EUT	6
1.7 Testing Location	6
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Peak Output Power Measurement	11
2.7 Radiated Band Edges and Spurious Emission Measurement	13
2.8 AC Conducted Emission Measurement	17
2.9 Antenna Requirements	21
3 LIST OF MEASURING EQUIPMENT	22
4 UNCERTAINTY OF EVALUATION	23
APPENDIX A. RADIATED TEST RESULTS	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR731501B	Rev. 01	Initial issue of report	Apr. 25, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	1
-		RSS-Gen 6.6	99% Bandwidth	-	Pass	1
2.6	15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
-	15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	1
-	15.247(d)	RSS-247 5.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	1
2.7	15.247(d)	RSS-247 5.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.46 dB at 47.460 MHz
2.8	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.38 dB at 1.000 MHz
2.9	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-
Remark 1: All conducted test items were leverage from module RF report which can refer to Report No. "FCC_7265D2W_DTS_Report".						



1 General Description

1.1 Applicant

Acer Incorporated

8F ,88, Sec.1 Xintai 5th Rd. Xizhi, New Taipei City 221, Taiwan, R.O.C

1.2 Manufacturer

Acer Incorporated

8F ,88, Sec.1 Xintai 5th Rd. Xizhi, New Taipei City 221, Taiwan, R.O.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet Computer
Brand Name	acer
Model Name	N17H1
Marketing Name	Switch 3
FCC ID	HLZ7265D2W
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR/Bluetooth v4.0 LE
HW Version	T8202_MB_V4
SW Version	14393.5
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v4.0 LE 2.60 dBm (0.0018 W)
Antenna Type / Gain	Antenna Type : PIFA Antenna with gain 1.68 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Component list

Note: There are two types of EUT, the details refer the following table. According to the difference, we choose sample 1 to perform full test.

Name	N17H1	
	Sample 1	Sample 2
PCB--MB	T8202_mainboard PCB_V4.0 (HUAXIN)	T8202_mainboard PCB_V4.0 (RED BOARD)
CPU	N4200(INTEL)	N3350(INTEL)
Memory	4G+128G	4G+64G

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON International (ShenZhen) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH03-SZ	565805/4086F

Note: The test site complies with ANSI C63.4 2014 requirement.



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth v4.0 LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link + Earphone + Adapter 1
	Mode 2: Bluetooth Link + WLAN Link + Earphone + Adapter 2
Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.	

2.3 Connection Diagram of Test System

<Bluetooth v4.0 LE Tx Mode>

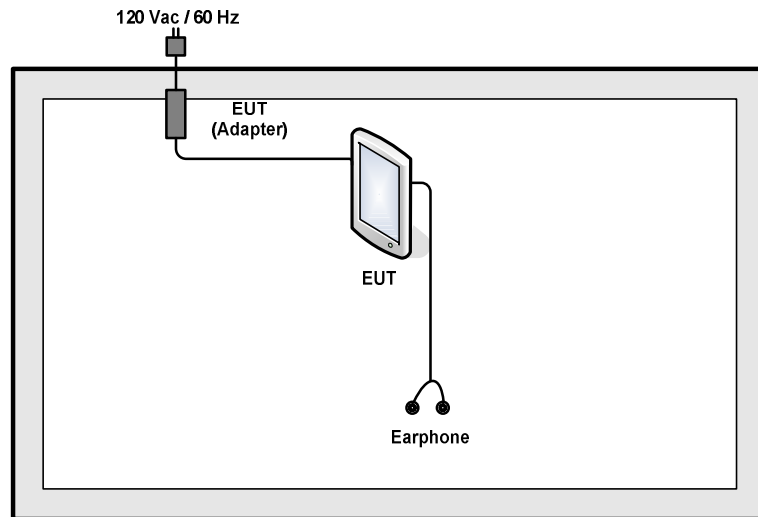

<AC Conducted Emission Mode>

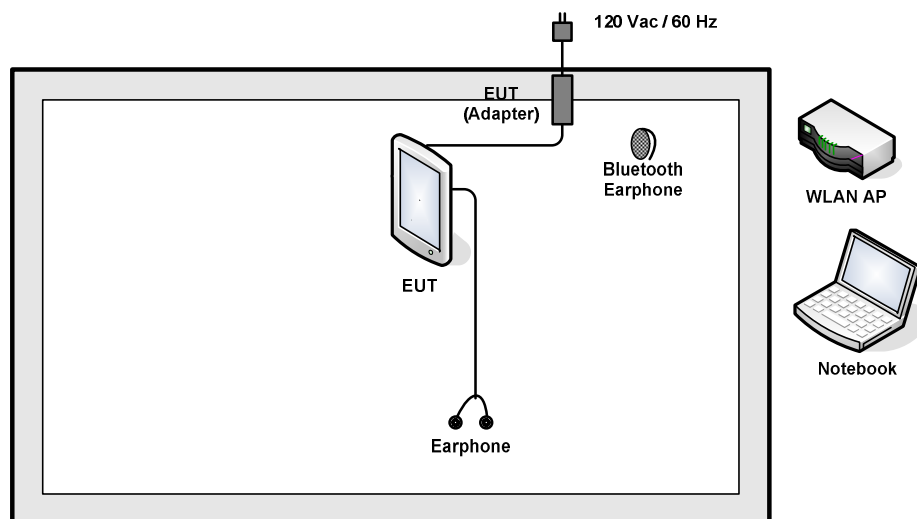

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA21R820LA1	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
4.	Earphone	Lenovo	LH102	N/A	Unshielded, 1.2m	N/A

2.5 EUT Operation Test Setup

For Bluetooth v4.0 LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Peak Output Power Measurement

2.6.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


2.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

2.6.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

2.6.4 Test Setup

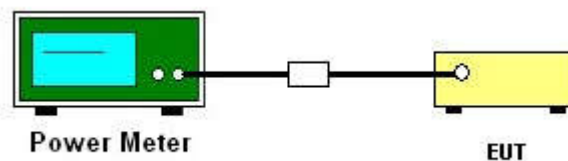

**2.6.5 Test Result of Peak Output Power**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	Pass /Fail
BLE	1Mbps	1	0	2402	1.98	30.00	1.68	Pass
BLE	1Mbps	1	19	2440	2.56	30.00	1.68	Pass
BLE	1Mbps	1	39	2480	2.60	30.00	1.68	Pass

2.7 Radiated Band Edges and Spurious Emission Measurement

2.7.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

2.7.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




2.7.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2.7.4 Test Setup


For radiated emissions below 30MHz

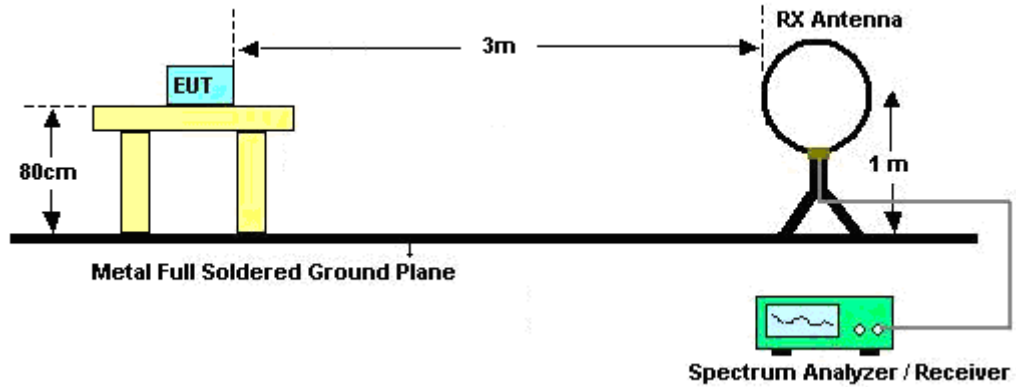

For radiated emissions from 30MHz to 1GHz

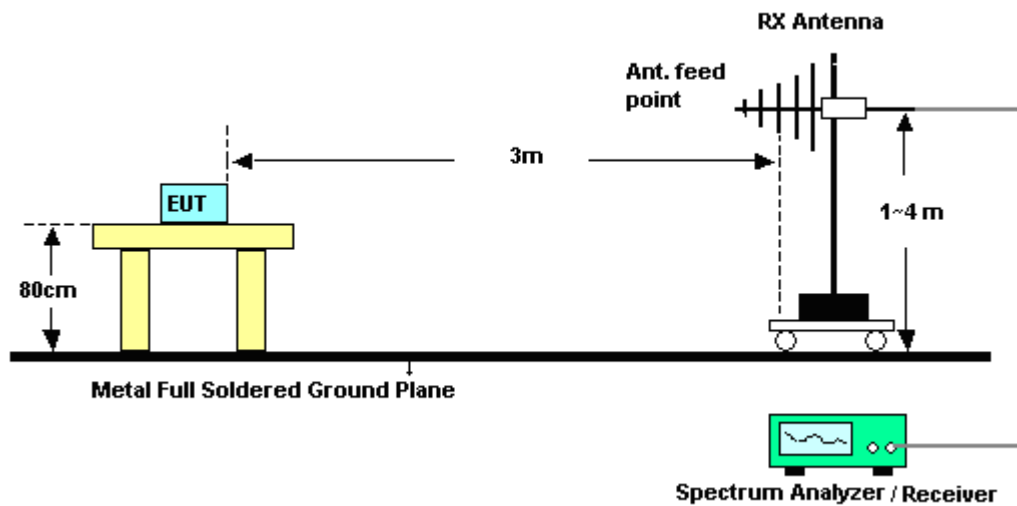

For radiated emissions above 1GHz

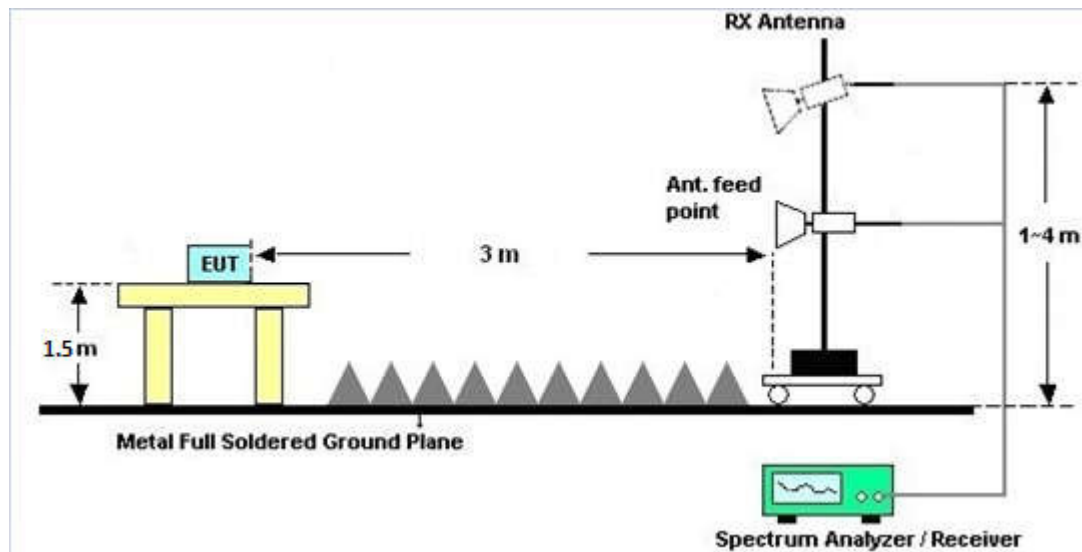

2.7.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

2.7.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

2.7.7 Duty Cycle

Please refer to Appendix B.

2.7.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

2.7.9 Test Result of Radiated Spurious Emission (Simultaneous TX)

Please refer to Appendix A.

Note: The worst case of mode (BT3.0/BLE/WLAN2.4GHz/WLAN5GHz) is tested.

2.8 AC Conducted Emission Measurement

2.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


2.8.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


2.8.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.8.4 Test Setup

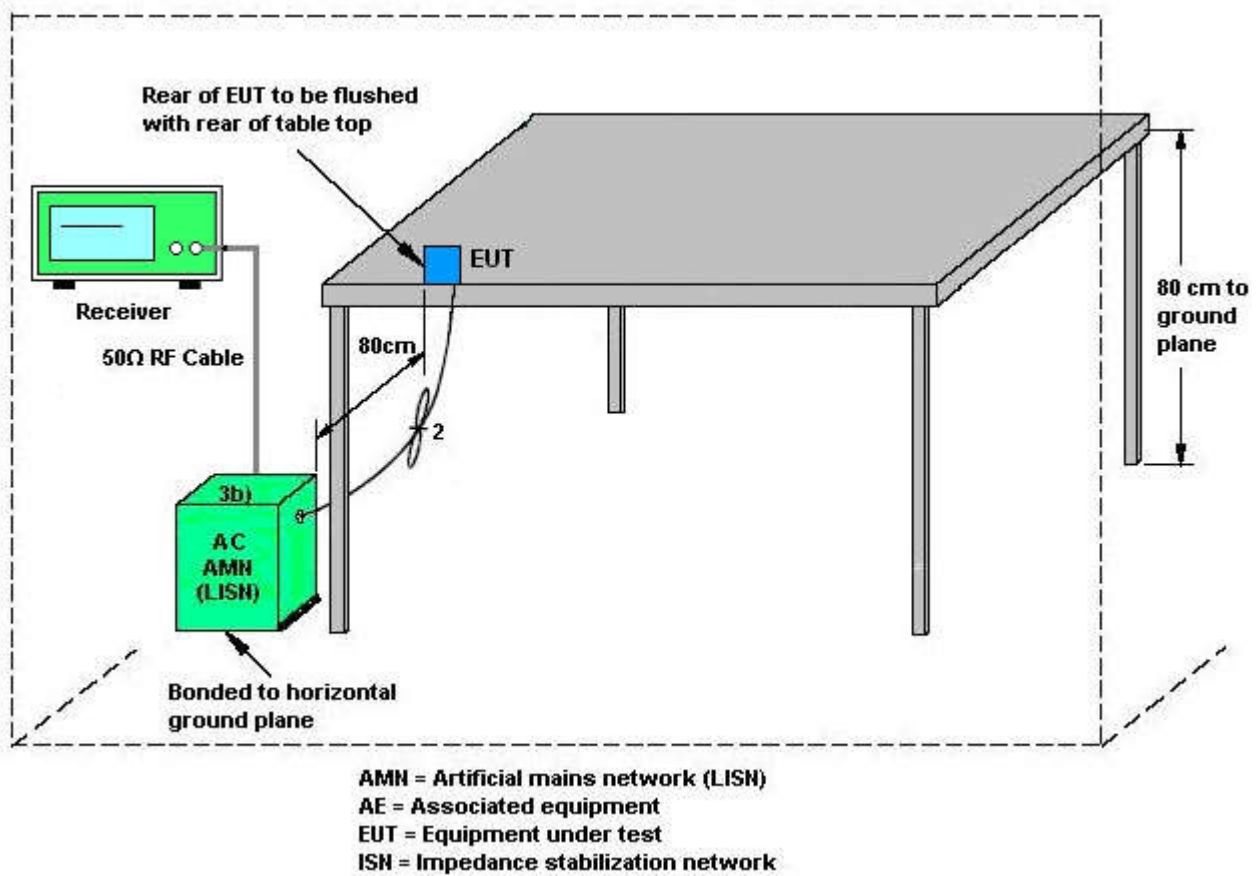


2.8.5 Test Result of AC Conducted Emission

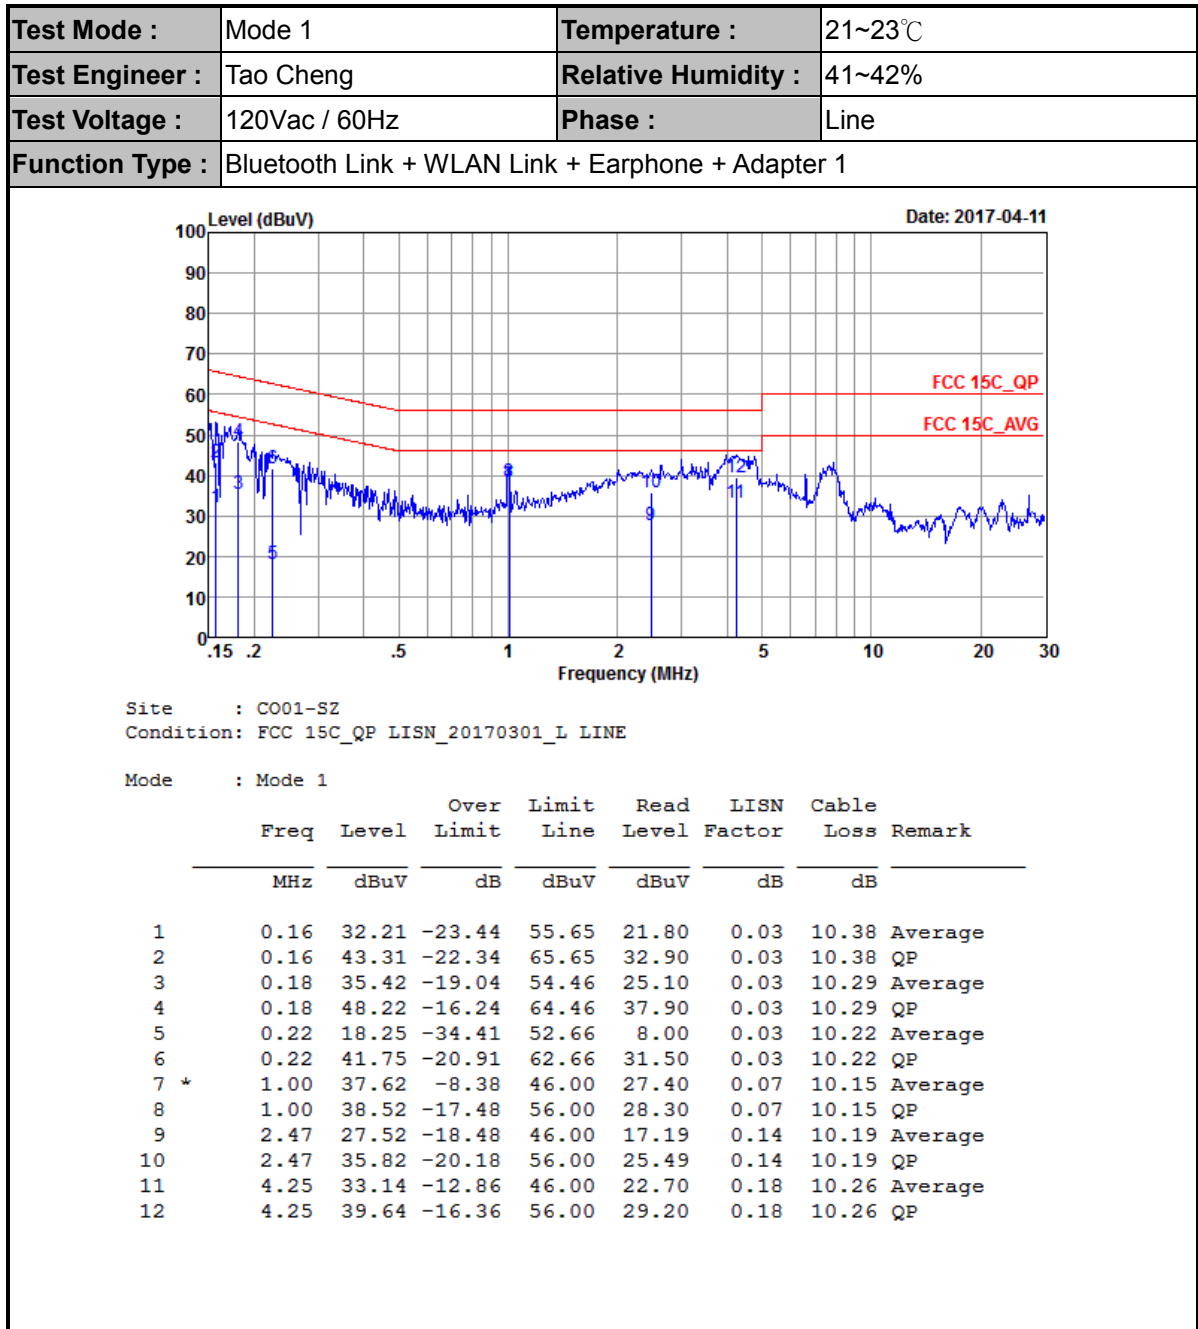



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + Earphone + Adapter 1		

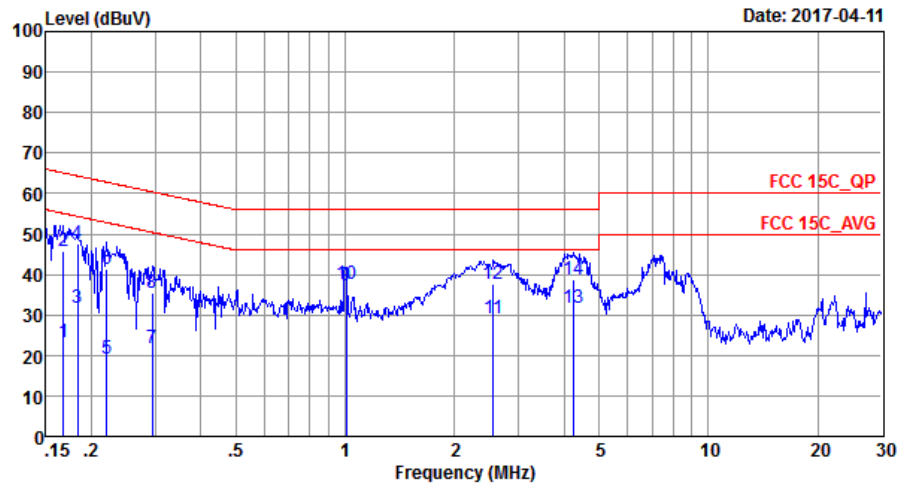

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20170301_N NEUTRAL

Mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	23.07	-32.01	55.08	12.70	0.03	10.34	Average
2	0.17	45.87	-19.21	65.08	35.50	0.03	10.34	QP
3	0.18	31.61	-22.72	54.33	21.30	0.03	10.28	Average
4	0.18	47.61	-16.72	64.33	37.30	0.03	10.28	QP
5	0.22	19.25	-33.54	52.79	9.00	0.03	10.22	Average
6	0.22	41.35	-21.44	62.79	31.10	0.03	10.22	QP
7	0.29	21.65	-28.76	50.41	11.40	0.03	10.22	Average
8	0.29	35.45	-24.96	60.41	25.20	0.03	10.22	QP
9 *	1.00	37.10	-8.90	46.00	26.90	0.05	10.15	Average
10	1.00	37.80	-18.20	56.00	27.60	0.05	10.15	QP
11	2.55	29.23	-16.77	46.00	19.00	0.04	10.19	Average
12	2.55	37.53	-18.47	56.00	27.30	0.04	10.19	QP
13	4.27	31.92	-14.08	46.00	21.60	0.06	10.26	Average
14	4.27	38.62	-17.38	56.00	28.30	0.06	10.26	QP



2.9 Antenna Requirements

2.9.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

2.9.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

2.9.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



3 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	101400	9kHz~40GHz	Jan. 06, 2017	Mar. 28, 2017~ Apr. 07, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 06, 2017	Mar. 28, 2017~ Apr. 07, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 06, 2017	Mar. 28, 2017~ Apr. 07, 2017	Jan. 05, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	May 07, 2016	Apr. 12, 2017	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz	May 07, 2016	Apr. 12, 2017	May 06, 2017	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	Apr. 12, 2017	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Apr. 12, 2017	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	Apr. 12, 2017	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 10, 2016	Apr. 12, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 11, 2016	Apr. 12, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 06, 2017	Apr. 12, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 16, 2016	Apr. 12, 2017	Jul. 15, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 12, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	Apr. 11, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	Apr. 11, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	Apr. 11, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 16, 2016	Apr. 11, 2017	Jul. 15, 2017	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 11, 2016	Apr. 11, 2017	Oct. 10, 2017	Conduction (CO01-SZ)

NCR: No Calibration Required

4 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
--	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------



Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2357.04	40.98	-33.02	74	43.24	27.3	3.77	33.33	173	51	P	H
		2377.725	30.12	-23.88	54	32.27	27.37	3.81	33.33	173	51	A	H
	*	2402	89.97	-	-	92.05	27.43	3.81	33.32	173	51	P	H
	*	2402	88.03	-	-	90.11	27.43	3.81	33.32	173	51	A	H
		2322.6	40.86	-33.14	74	43.27	27.18	3.74	33.33	150	136	P	V
		2322.075	29.95	-24.05	54	32.36	27.18	3.74	33.33	150	136	A	V
	*	2402	87.69	-	-	89.77	27.43	3.81	33.32	150	136	P	V
	*	2402	85.8	-	-	87.88	27.43	3.81	33.32	150	136	A	V
BLE CH 19 2440MHz		2318.12	40.98	-33.02	74	43.39	27.18	3.74	33.33	150	113	P	H
		2380.28	30.37	-23.63	54	32.52	27.37	3.81	33.33	150	113	A	H
	*	2440	89.55	-	-	91.41	27.61	3.84	33.31	150	113	P	H
	*	2440	87.61	-	-	89.47	27.61	3.84	33.31	150	113	A	H
		2496.71	41.16	-32.84	74	42.75	27.8	3.91	33.3	150	113	P	H
		2500	32.34	-21.66	54	33.93	27.8	3.91	33.3	150	113	A	H
		2382.24	40.21	-33.79	74	42.36	27.37	3.81	33.33	150	104	P	V
		2389.52	30.08	-23.92	54	32.17	27.43	3.81	33.33	150	104	A	V
	*	2440	90.56	-	-	92.42	27.61	3.84	33.31	150	104	P	V
	*	2440	88.64	-	-	90.5	27.61	3.84	33.31	150	104	A	V
		2499.3	41.61	-32.39	74	43.2	27.8	3.91	33.3	150	104	P	V
		2499.86	32.47	-21.53	54	34.06	27.8	3.91	33.3	150	104	A	V



BLE CH 39 2480MHz	*	2480	94.48	-	-	96.17	27.74	3.88	33.31	206	121	P	H
	*	2480	92.58	-	-	94.27	27.74	3.88	33.31	206	121	A	H
		2483.6	42.01	-31.99	74	43.7	27.74	3.88	33.31	206	121	P	H
		2483.56	32.35	-21.65	54	34.04	27.74	3.88	33.31	206	121	A	H
	*	2480	93.17	-	-	94.86	27.74	3.88	33.31	169	101	P	V
	*	2480	91.25	-	-	92.94	27.74	3.88	33.31	169	101	A	V
		2491.12	42.47	-31.53	74	44.07	27.8	3.91	33.31	169	101	P	V
		2483.52	31.55	-22.45	54	33.24	27.74	3.88	33.31	169	101	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	41.3	-32.70	74	60.63	31.44	5.87	56.64	150	148	P	H
		4804	41.76	-32.24	74	61.09	31.44	5.87	56.64	150	148	P	V
BLE CH 19 2440MHz		4880	42.16	-31.84	74	61.48	31.61	5.98	56.91	150	245	P	H
		7320	44.68	-29.32	74	59.43	36.19	6.92	57.86	184	225	P	H
		4880	42.76	-31.24	74	62.08	31.61	5.98	56.91	150	245	P	V
		7320	44.68	-29.32	74	59.43	36.19	6.92	57.86	184	225	P	V
BLE CH 39 2480MHz		4960	43.24	-30.76	74	61.58	31.82	6.09	56.25	150	135	P	H
		7440	44.38	-29.62	74	58.88	36.34	6.94	57.78	175	260	P	H
		4960	42.33	-31.67	74	60.67	31.82	6.09	56.25	150	135	P	V
		7440	44.73	-29.27	74	59.23	36.34	6.94	57.78	175	260	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	25.96	-14.04	40	31.62	26.7	1	33.36	-	-	P	H
		83.35	20.18	-19.82	40	36.15	16.28	1.14	33.39	-	-	P	H
		291.9	20.01	-25.99	46	32.19	18.93	1.94	33.05	-	-	P	H
		410.24	27.13	-18.87	46	31.88	25.77	2.22	32.74	-	-	P	H
		626.55	28.87	-17.13	46	33.09	25.21	2.64	32.07	-	-	P	H
		831.22	32.08	-13.92	46	32.73	27.84	2.99	31.48	140	80	P	H
		30	26.16	-13.84	40	31.82	26.7	1	33.36	-	-	P	V
		111.48	19.31	-24.19	43.5	32.7	18.57	1.38	33.34	-	-	P	V
		219.15	17.81	-28.19	46	32.63	16.52	1.8	33.14	-	-	P	V
		401.51	26.89	-19.11	46	31.58	25.96	2.12	32.77	-	-	P	V
		590.66	28.63	-17.37	46	33.14	25.08	2.57	32.16	-	-	P	V
		938.89	34.09	-11.91	46	32.84	29.21	3.15	31.11	180	120	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Simultaneous TX mode:

Mode	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH19 2440MHz+ 2.4G 11b CH01 2412MHZ		4824	41.04	-32.96	74	60.23	31.49	5.92	56.6	150	250	P	H
		4880	40.89	-33.11	74	60.21	31.61	5.98	56.91	150	250	P	H
		7236	44.45	-29.55	74	59.54	36.09	6.9	58.08	150	250	P	H
		7320	44.48	-29.52	74	59.23	36.19	6.92	57.86	150	250	P	H
		4824	41.93	-32.07	74	61.12	31.49	5.92	56.6	150	250	P	V
		4881	41.27	-32.73	74	60.59	31.61	5.98	56.91	150	250	P	V
		7236	43.85	-30.15	74	58.94	36.09	6.9	58.08	150	250	P	V
		7320	44.31	-29.69	74	59.06	36.19	6.92	57.86	150	250	P	V
BLE CH19 2440MHz+5 G 11a CH36 5180MHZ		4880	42.35	-31.65	74	61.67	31.61	5.98	56.91	150	212	P	H
		7320	46.05	-27.95	74	59.33	37.66	6.92	57.86	250	0	P	H
		10360	47.27	-26.73	74	56.3	39.24	8.18	56.45	250	0	P	H
		15540	51.19	-22.81	74	57.6	38.21	11.12	55.74	150	0	P	H
		15540	48.32	-5.68	54	54.73	38.21	11.12	55.74	150	0	A	H
		4880	42.38	-31.62	74	61.7	31.61	5.98	56.91	250	0	P	V
		7320	45.33	-28.67	74	58.61	37.66	6.92	57.86	250	0	P	V
		10360	46.76	-27.24	74	55.79	39.24	8.18	56.45	250	0	P	V
BLE CH19 2440MHz+5 G 11ac80 CH155 5775MHZ		15540	49.64	-24.36	74	56.05	38.21	11.12	55.74	150	0	P	V
		4880	43.81	-30.19	74	63.13	31.61	5.98	56.91	250	0	P	H
		7320	45.5	-28.5	74	58.78	37.66	6.92	57.86	250	0	P	H
		11550	49.44	-24.56	74	57.02	39.58	8.93	56.09	250	0	P	H
		17325	51.02	-17.18	68.2	55.95	38.95	11.97	55.85	150	0	P	H
		4880	45.49	-28.51	74	64.81	31.61	5.98	56.91	250	0	P	V
		7320	45.82	-28.18	74	59.1	37.66	6.92	57.86	250	0	P	V
		11550	48.74	-25.26	74	56.32	39.58	8.93	56.09	250	0	P	V
Remark		17325	50.14	-18.06	68.2	55.07	38.95	11.97	55.85	150	0	P	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

(LF)

mode	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH19 2440MHz+5G 11a CH36 5180MHZ		46.49	33.53	-6.47	40	47.58	16.97	0.65	31.67	100	360	P	H
		105.66	22.39	-21.11	43.5	36.29	16.67	0.96	31.53	-	-	P	H
		199.75	24.25	-19.25	43.5	39.18	15.1	1.17	31.2	-	-	P	H
		298.69	26.39	-19.61	46	36.65	19.47	1.44	31.17	-	-	P	H
		596.48	27.24	-18.76	46	31.62	24.95	1.94	31.27	-	-	P	H
		838.98	30.59	-15.41	46	31.94	27.65	2.26	31.26	-	-	P	H
		47.46	36.54	-3.46	40	51.01	16.55	0.65	31.67	100	0	P	V
		116.33	22.11	-21.39	43.5	35.67	16.99	0.96	31.51	-	-	P	V
		240.49	23.81	-22.19	46	36.43	17.28	1.27	31.17	-	-	P	V
		300.63	24.56	-21.44	46	34.78	19.51	1.44	31.17	-	-	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	63.38	0.391	2.556	3kHz

Bluetooth v4.0 LE

