In accordance with the requirements of Report and Order: FCC 47 CFR Part 2 (2.1093) ; RSS102 issue 5; IEC62209-2 :2010 ;IEEE 1528 :2013

SAR TEST REPORT

For

Product Name: Tablet Computer

Brand Name : acer

Model No.: A6001

Series Model: N/A

Test Report Number: C151204S02-SF

Issued for

Acer Incorporated

8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818

TESTING CERT #2541.01

Note: *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Revision History

Revision	REPORT NO.	Date	Page Revised	Contents
Original	C151204S02-SF	December 14, 2015	N/A	N/A
01	C151204S02-SF	December 19, 2015	All report	Add section 2.1 and update section 11.4

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

TABLE OF CONTENTS

1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION) 4
2. EUT DESCRIPTION 5
2.1 STATEMENT OF COMPLIANCE 6
3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC 7
4. TEST METHODOLOGY 7
5. TEST CONFIGURATION 7
6. DOSIMETRIC ASSESSMENT SETUP 8
6.1 MEASUREMENT SYSTEM DIAGRAM 9
6.2 SYSTEM COMPONENTS 10
7. EVALUATION PROCEDURES 13
8. MEASUREMENT UNCERTAINTY 17
9. EXPOSURE LIMIT 21
10. EUT ARRANGEMENT 22
10.1 BODY WORN TEST 22
11. MEASUREMENT RESULTS 23
11.1 TEST LIQUIDS CONFIRMATION 23
11.2 LIQUID MEASUREMENT RESULTS 24
11.3 SYSTEM PERFORMANCE CHECK 25
11.4 EUT TUNE-UP PROCEDURES AND TEST MODE 28
11.5 SAR TEST CONFIGURATIONS 33
11.6 BODY TEST EXCLUSION THRESHOLDS 34
11.7 EUT SETUP PHOTOS 36
11.8 BODY SAR TEST CONFIGURATION 36
11.9 REPEATED SAR MEASUREMENT 40
11.10 SAR HANDSETS MULTI XMITER ASSESSMENT 41
12. EUT PHOTO 42
13. EQUIPMENT LIST & CALIBRATION STATUS 46
14. FACILITIES 47
15. REFERENCES 47
Appendix A: Plots of Performance Check 48
Appendix B: DASY Calibration Certificate 55
Appendix C: Plots of SAR Test Result 106

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

Product Name:	Tablet Computer
Brand Name:	acer
Model Name.:	A6001
Series Model:	N/A
Device Category:	PROTABLE DEVICES
Exposure Category:	GENERAL POPULATION/UNCONTROLLED EXPOSURE
Date of Test:	December 8, 2015 to December 12, 2015
Applicant:	**Acer Incorporated** 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan
Manufacturer:	**Acer Incorporated** 8F, 88, Sec 1, Hsin Tai Wu Rd Hsichih, Taipei Hsien, 221 Taiwan
Application Type:	Certification

APPLICABLE STANDARDS AND TEST PROCEDURES	
STANDARDS AND TEST PROCEDURES	**TEST RESULT**
ANSI/IEEE C95.1-1992 RSS102 issue 5	No non-compliance noted
Deviation from Applicable Standard	
None	

The device was tested by Compliance Certification Services Inc. in accordance with the measurement methods and procedures specified in KDB 865664; RSS102 issue 5 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:	***Tested by:***
Jeff fang	Luck.Fu
Jeff Fang RF Manager Compliance Certification Services Inc.	Luck.Fu Test Engineer Compliance Certification Services Inc.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

2. EUT DESCRIPTION

Product Name:	Tablet Computer
Brand Name:	acer
Model Name.:	A6001
Series Model:	N/A
Model Discrepancy:	N/A
FCC ID:	HLZA6001
IC:	1754F-A6001
Software version	Acer_AVOLO_B1-850_RV01RB02_WW_GEN1
Hardware version	A8_V1.1
Power reduction:	NO
DTM Description:	N/A
Device Category:	Production unit
Frequency Range:	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5240 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5470 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Modulation Technique:	IEEE 802.11a: OFDM IEEE 802.11n5G HT20 MHz Mode: OFDM IEEE 802.11n5G HT40 MHz Mode: OFDM IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM (QPSK, BPSK, 16-QAM, 64-QAM) Bluetooth 3.0: GFSK + π/4DQPSK+8DPSK Bluetooth 4.0 : GFSK
Accessories:	Battery(rating): Capacitance: 4600 mAh; Rated Voltage: 3.8V
Antenna Specification:	WIFI/ Bluetooth: PIFA antenna
Operating Mode:	Maximum continuous output

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

2.1 STATEMENT OF COMPLIANCE

The maximum results of Specific Absorption Rate (SAR) found during testing for **Tablet Computer, A6001,** are as follows.

Equipment Class	Frequency Band	Highest SAR Summary
		Body 1g SAR (W/kg)
DTS	2.4GHz WLAN	1.301
NII	5.2GHz WLAN	--
	5.3GHz WLAN	1.157
	5.5GHz WLAN	1.113
	5.8GHz WLAN	0.984

exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 W/Kg for an uncontrolled environment and 8.0 W/Kg for an occupational/controlled environment as recommended by the FCC 47 CFR Part 2 (2.1093); RSS102 issue 5.

4. TEST METHODOLOGY

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

☒ FCC 47 CFR Part 2 (2.1093)
☒ RSS102 issue 5
☒ IEEE 1528: 2013
☒ IEC 62209-2:2010
☒ KDB 248227 D01v02r02 802.11 Wi-Fi SAR
☒ KDB 447498 D01v06 General RF Exposure Guidance
☒ KDB 865664 D01v01r04 Measurement 100 MHz to 6 GHz
☒ KDB 865664 D02v01r02 RF Exposure Reporting
☒ KDB 616217 D04 v01r02 SAR for laptop and tablets

5. TEST CONFIGURATION

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering test software installed on the EUT can provide continuous transmitting RF signal.

Duty cycle Form

Band	Mode	Duty cycle(100%)
2.4GHz	Bluetooth	100
	802.11b	100
	802.11g	100
	802.11n 20MHz	100
5GHz	802.11a	100
	802.11 20MHz	100
	802.11 40MHz	100

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6. DOSIMETRIC ASSESSMENT SETUP

These measurements were performed with the automated near-field scanning system DASY 5 from ATTENNESSA. The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the E-field PROBE EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [7] with accuracy of better than ±10%. The spherical isotropy was evaluated with the procedure described in [8] and found to be better than ±0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEE P1528 and IEC 62209.

The following table gives the recipes for tissue simulating liquids.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6.1 MEASUREMENT SYSTEM DIAGRAM

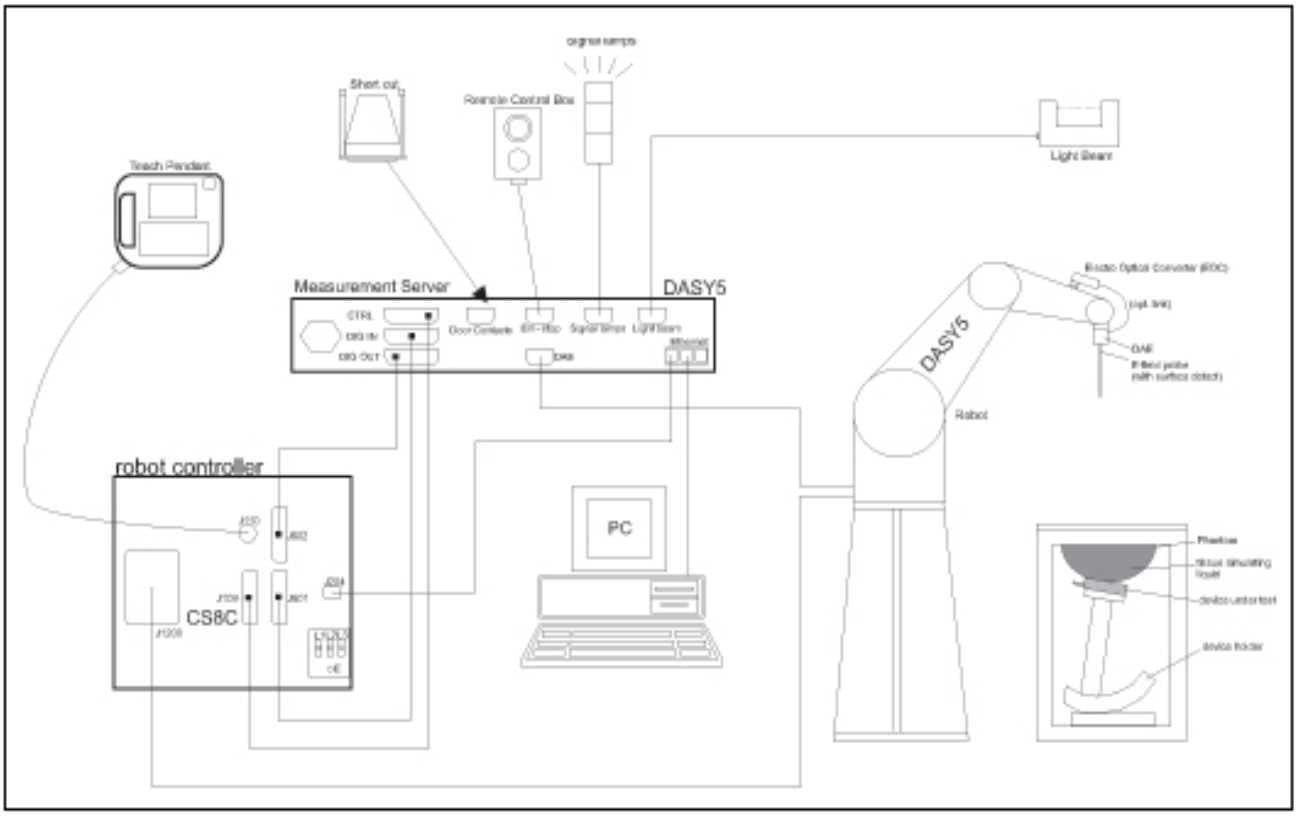

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (St¨aubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6.2 SYSTEM COMPONENTS

	The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV celeron, 128MB chip-disk and 128 MB RAM. The necessary circuits for communication with either the DAE4(or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O-board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
	The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.
Data Acquisition Electronics (DAE)	
	The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.
EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements	
	Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) **Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz. Conversion Factors (CF) for HSL 900 and HSL 1800 CF-Calibration for other liquids and frequencies upon request. **Frequency:** 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz) **Directivity:** ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in HSL (rotation normal to probe axis) **Dynamic Range:** 10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dimensions: Overall length: 337 mm (Tip: 9 mm)
Tip diameter: 2.5 mm (Body: 10 mm)
Distance from probe tip to dipole centers: 1 mm

Application: High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Interior of probe

SAM Twin Phantom

Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50360 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness: 2 ±0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 850mm; Length: 1000mm; Width: 750mm

SAM Phantom (ELI4 v4.0)

Description Construction:

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5.5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

Shell Thickness: 2.0 ± 0.2 mm (sagging: <1%)

Filling Volume: Approx. 25 liters

Dimensions: Major ellipse axis: 600 mm

Minor axis: 400 mm 500mm

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Device Holder for SAM Twin Phantom

Construction: In combination with the Twin SAM Phantom, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).

System Validation Kits for SAM Twin Phantom

Construction: Symmetrical dipole with l/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 900,1800,2450,5800 MHz

ReTune loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions:

D835V2: dipole length: 161 mm; overall height: 340 mm
D1800V2: dipole length: 72.5 mm; overall height: 300 mm
D1900V2: dipole length: 67.7 mm; overall height: 300 mm
D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300mm

System Validation Kits for ELI4 phantom

Construction: Symmetrical dipole with l/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

Frequency: 900, 1800, 2450, 5800 MHz

ReTune loss: > 20 dB at specified validation position

Power capability: > 100 W (f < 1GHz); > 40 W (f > 1GHz)

Dimensions:

D835V2: dipole length: 161 mm; overall height: 340 mm
D1800V2: dipole length: 72.5 mm; overall height: 300 mm
D1900V2: dipole length: 67.7 mm; overall height: 300 mm
D2450V2: dipole length: 51.5 mm; overall height: 290 mm
D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7. EVALUATION PROCEDURES

DATA EVALUATION

The DASY 5 post processing software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i$, a_{i0}, a_{i1}, a_{i2}
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY 5 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = Compensated signal of channel i (i = x, y, z)
U_i = Input signal of channel i (i = x, y, z)
cf = Crest factor of exciting field (DASY 5 parameter)
dcp_i = Diode compression point (DASY 5 parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \bullet ConvF}}$$

H-field probes:

$$H_i = \sqrt{Vi} \cdot \frac{a_{i10} + a_{i11} f + a_{i12} f^2}{f}$$

with V_i = Compensated signal of channel i (i = x, y, z)
$Norm_i$ = Sensor sensitivity of channel i (i = x, y, z)
$\mu V/(V/m)^2$ for E0field Probes
$ConvF$ = Sensitivity enhancement in solution
aij = Sensor sensitivity factors for H-field probes
f = Carrier frequency (GHz)
Ei = Electric field strength of channel i in V/m
Hi = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = Equivalent power density of a plane wave in mW/cm^2

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

SAR EVALUATION PROCEDURES

The procedure for assessing the peak spatial-average SAR value consists of the following steps:

- **Power Reference Measurement**

  The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

  The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY 5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

  Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

  The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY 5 software stop the measurements if this limit is exceeded.

- **Z-Scan**

  The Z Scan job measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. A user can anchor the grid to the current probe location. As with any other grids, the local Z-axis of the anchor location establishes the Z-axis of the grid.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

SPATIAL PEAK SAR EVALUATION

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g.

The DASY 5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosimetric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_o + S_b exp(-\frac{z}{a}) cos(\pi \frac{z}{\lambda})$$

Since the decay of the boundary effect dominates for small probes ($a \ll \lambda$), the cos-term can be omitted. Factors *Sb* (parameter Alpha in the DASY 5 software) and *a* (parameter Delta in the DASY 5 software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- the boundary curvature is small
- the probe axis is angled less than 30_ to the boundary normal
- the distance between probe and boundary is larger than 25% of the probe diameter
- the probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY 5 system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the measurement data extraction during post processing.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

8. MEASUREMENT UNCERTAINTY

Measurement uncertainty for 30 MHz to 3 GHz averaged over 1 gram						
Uncertainty Component	Uncertainty	Prob.	Div.	$c_{i\ (1g)}$	Std. Unc. (1-g)	$v_{i\ or\ Veff}$
Measurement System						
Probe Calibration (*k*=1)	6.00	Normal	1	1	6.00	∞
Probe Isotropy	4.70	Rectangular	√3	0.7	1.90	∞
Modulation Response	2.40	Rectangular	√3	1	1.39	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	3.88	∞
Boundary Effect	2.00	Rectangular	√3	1	1.15	∞
Linearity	4.70	Rectangular	√3	1	2.71	∞
System Detection Limit	1.00	Rectangular	√3	1	0.58	∞
Readout Electronics	0.30	Normal	1	1	0.30	∞
Response Time	0.80	Rectangular	√3	1	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1.73	∞
Probe Positioner	0.40	Rectangular	√3	1	0.23	∞
Probe Positioning	2.90	Rectangular	√3	1	1.67	∞
Max. SAR Evaluation	2.00	Rectangular	√3	1	1.15	∞
Test sample Related						
Test sample Positioning	2.9	Normal	1	1	2.9	145
Device Holder Uncertainty	3.6	Normal	1	1	3.6	5
Power drift	5	Rectangular	√3	1	2.89	∞
Power Scaling	0	Rectangular	√3	1	0.00	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	6.1	Rectangular	√3	1	3.52	∞
SAR correction	1.9	Rectangular	√3	1	1.10	∞
Liquid Conductivity (target)	5	Rectangular	√3	0.64	1.85	∞
Liquid Conductivity (meas)	-0.61	Rectangular	√3	0.78	-0.09	∞
Liquid Permittivity (target)	5	Rectangular	√3	0.6	1.73	∞
Liquid Permittivity (meas)	-1.86	Rectangular	√3	0.26	-0.84	∞
Temp. unc. - Conductivity	3.4	Rectangular	√3	0.78	1.53	∞
Temp. unc. - Permittivity	0.4	Rectangular	√3	0.23	0.05	∞
Combined Std. Uncertainty		RSS			11.45	361
Expanded STD Uncertainty		*k*=2			22. 90%	

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

System check for 30 MHz to 3 GHz averaged over 1 gram						
Uncertainty Component	Uncertainty	Prob.	Div.	$c_{i\ (1g)}$	Std. Unc. (1-g)	$v_{i\ or\ Veff}$
Measurement System						
Probe Calibration (*k*=1)	6.00	Normal	1	1	6.0	∞
Axial Isotropy	4.70	Rectangular	√3	0.7	1.9	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	3.9	∞
Boundary Effect	1.00	Rectangular	√3	1	0.6	∞
Linearity	4.70	Rectangular	√3	1	2.7	∞
System Detection Limit	1.00	Rectangular	√3	1	0.6	∞
Readout Electronics	0.30	Normal	1	1	0.3	∞
Response Time	0.80	Rectangular	√3	0	0.0	∞
Integration Time	2.60	Rectangular	√3	0	0.0	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1.7	∞
Probe Positioner	0.40	Rectangular	√3	1	0.2	∞
Probe Positioning	2.90	Rectangular	√3	1	1.7	∞
Max. SAR Evaluation	1.00	Rectangular	√3	1	0.6	∞
System validation source (dipole)						
Deviation of experimental dipole from numerical dipole	5	Normal	1	1	5.0	∞
Dipole axis to liquid distance	2	Rectangular	√3	1	1.2	∞
Input power and SAR drift	4.7	Rectangular	√3	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	4	Rectangular	√3	1	2.3	∞
SAR correction	1.9	Rectangular	1	0.84	1.6	∞
Liquid Conductivity (meas)	-0.61	Rectangular	1	0.78	-0.14	∞
Liquid Permittivity (meas)	-1.86	Rectangular	1	0.23	-1.5	∞
Temp. unc. - Conductivity	1.7	Rectangular	√3	0.78	0.77	∞
Temp. unc. - Permittivity	0.3	Rectangular	√3	0.23	0.04	∞
Combined Std. Uncertainty		RSS			10.8	361
Expanded STD Uncertainty		*k*=2			21.56%	
Expanded STD Uncertainty		*k*=2			1.70dB	

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Measurement uncertainty for 3 GHz to 6 GHz averaged over 1 gram						
Uncertainty Component	**Uncertainty**	**Prob.**	**Div.**	**$c_{i\ (1g)}$**	**Std. Unc.(1-g)**	**v_i or Veff**
Measurement System						
Probe Calibration (*k*=1)	6.55	Normal	1	1	6.55	∞
Probe Isotropy	4.70	Rectangular	√3	0.7	1.90	∞
Modulation Response	2.40	Rectangular	√3	1	1.39	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	3.88	∞
Boundary Effect	2.00	Rectangular	√3	1	1.15	∞
Linearity	4.70	Rectangular	√3	1	2.71	∞
System Detection Limit	1.00	Rectangular	√3	1	0.58	∞
Readout Electronics	0.30	Normal	1	1	0.30	∞
Response Time	0.80	Rectangular	√3	1	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1.73	∞
Probe Positioner	0.80	Rectangular	√3	1	0.46	∞
Probe Positioning	6.70	Rectangular	√3	1	3.87	∞
Max. SAR Evaluation	4.00	Rectangular	√3	1	2.31	∞
Test sample Related						
Test sample Positioning	2.9	Normal	1	1	2.9	145
Device Holder Uncertainty	3.6	Normal	1	1	3.6	5
Power drift	5	Rectangular	√3	1	2.89	∞
Power Scaling	0	Rectangular	√3	1	0.00	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	6.6	Rectangular	√3	1	3.81	∞
SAR correction	1.9	Rectangular	√3	1	1.10	∞
Liquid Conductivity (target)	5	Rectangular	√3	0.64	1.85	∞
Liquid Conductivity (meas)	-4.65	Rectangular	√3	0.78	-2.09	∞
Liquid Permittivity (target)	5	Rectangular	√3	0.6	1.73	∞
Liquid Permittivity (meas)	4.43	Rectangular	√3	0.26	0.66	∞
Temp. unc. - Conductivity	3.4	Rectangular	√3	0.78	1.53	∞
Temp. unc. - Permittivity	0.4	Rectangular	√3	0.23	0.05	∞
Combined Std. Uncertainty		RSS			12.67	748
Expanded STD Uncertainty		*k*=2			**25.35%**	

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

System check for 3G to 6 GHz averaged over 1 gram						
Uncertainty Component	**Uncertainty**	**Prob.**	**Div.**	**$c_{i\ (1g)}$**	**Std. Unc.(1-g)**	**v_i or Veff**
Measurement System						
Probe Calibration (k=1)	6.00	Normal	1	1	6.0	∞
Axial Isotropy	4.70	Rectangular	√3	0.7	1.9	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	3.9	∞
Boundary Effect	1.00	Rectangular	√3	1	0.6	∞
Linearity	4.70	Rectangular	√3	1	2.7	∞
System Detection Limit	1.00	Rectangular	√3	1	0.6	∞
Readout Electronics	0.30	Normal	1	1	0.3	∞
Response Time	0.80	Rectangular	√3	1	0.5	∞
Integration Time	2.60	Rectangular	√3	1	1.5	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1.7	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1.7	∞
Probe Positioner	0.40	Rectangular	√3	1	0.2	∞
Probe Positioning	2.90	Rectangular	√3	1	1.7	∞
Max. SAR Evaluation	1.00	Rectangular	√3	1	0.6	∞
System validation source (dipole)						
Deviation of experimental dipole from numerical dipole	5	Normal	1	1	5.0	∞
Dipole axis to liquid distance	2	Rectangular	√3	1	1.2	∞
Input power and SAR drift	4.7	Rectangular	√3	1	2.7	∞
Phantom and Tissue Parameters						
Phantom Uncertainty	4	Rectangular	√3	1	2.3	∞
SAR correction	1.9	Rectangular	1	0.84	1.6	∞
Liquid Conductivity (meas)	-4.65	Rectangular	1	0.78	3.63	∞
Liquid Permittivity (meas)	4.43	Rectangular	1	0.23	1.02	∞
Temp. unc. - Conductivity	1.7	Rectangular	√3	0.78	0.77	∞
Temp. unc. - Permittivity	0.3	Rectangular	√3	0.23	0.04	∞
Combined Std. Uncertainty		RSS			11.4	361
Expanded STD Uncertainty		k=2			**22.87%**	

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

9. EXPOSURE LIMIT

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Note: Whole-Body SAR is averaged over the entire body, **partial-body SAR** is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

10. EUT ARRANGEMENT

Please refer to IEEE1528 illustration below.

10.1 BODY WORN TEST

This EUT was tested in four different positions. They are front side, rear side, Edge 1 and Edge 2 of tablet. In these positions ,the surface of EUT is touching phantom with 0 mm.

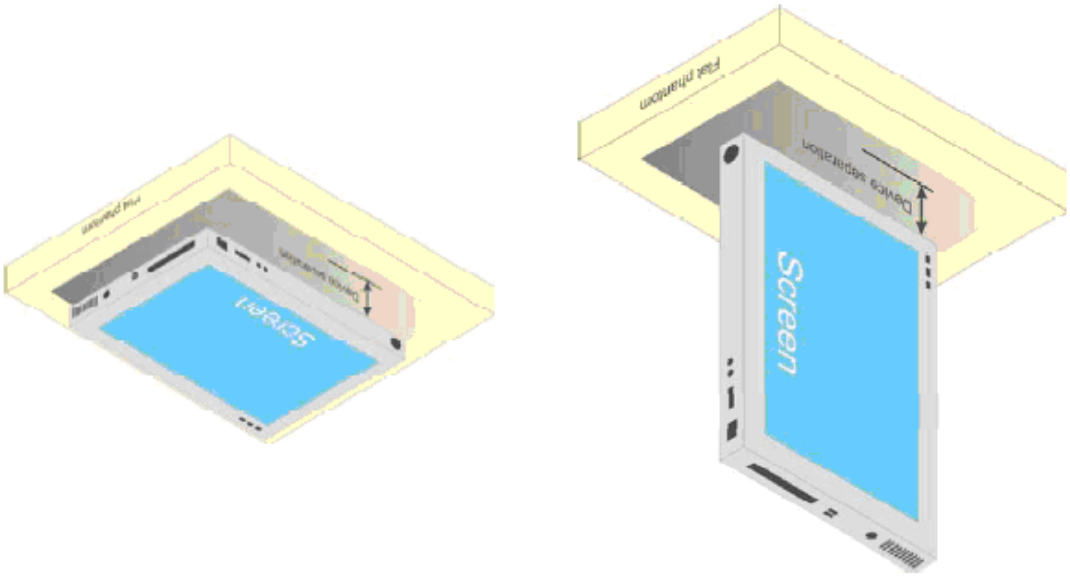

Fig Illustration for Lap-touching Position

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11. MEASUREMENT RESULTS

11.1 TEST LIQUIDS CONFIRMATION

SIMULATED TISSUE LIQUID PARAMETER CONFIRMATION

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency (MHz)	Head		Body	
	ε_r	σ (S/m)	ε_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	45.3	5.27	48.2	6.00

(ε_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m^3)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.2 LIQUID MEASUREMENT RESULTS

The following table show the measuring results for simulating liquid:

Liquid Type	Liquid Temp. (°C)	Parameters	Target	Measured	Deviation (%)	Limited (%)	Measured Date
Body2412	21.5	Permitivity(ε)	52.75	51.820	-1.76	± 5	2015-12-8
		Conductivity(σ)	1.90	1.897	-0.20	± 5	
Body2437	21.5	Permitivity(ε)	52.72	51.779	-1.78	± 5	2015-12-8
		Conductivity(σ)	1.93	1.929	-0.20	± 5	
Body2462	21.5	Permitivity(ε)	52.68	51.703	-1.86	± 5	2015-12-8
		Conductivity(σ)	1.97	1.954	-0.61	± 5	
Body5260	21.5	Permitivity(ε)	48.95	49.785	1.70	± 5	2015-12-11
		Conductivity(σ)	5.43	5.179	-4.65	± 5	
Body5320	21.5	Permitivity(ε)	48.87	50.263	2.85	± 5	2015-12-11
		Conductivity(σ)	5.49	5.496	0.17	± 5	
Body5510	21.5	Permitivity(ε)	48.60	49.804	2.47	± 5	2015-12-11
		Conductivity(σ)	5.61	5.494	-2.12	± 5	
Body5670	21.5	Permitivity(ε)	48.38	49.804	2.94	± 5	2015-12-11
		Conductivity(σ)	5.86	5.946	1.41	± 5	
Body5785	21.5	Permitivity(ε)	48.22	49.285	2.21	± 5	2015-12-12
		Conductivity(σ)	5.99	6.134	2.41	± 5	
Body5825	21.5	Permitivity(ε)	47.99	50.110	4.43	± 5	2015-12-12
		Conductivity(σ)	6.06	6.038	-0.40	± 5	

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.3 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of ±10%. The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.
System check is performed regularly on all frequency bands where tests are performed with the DASY5 system .

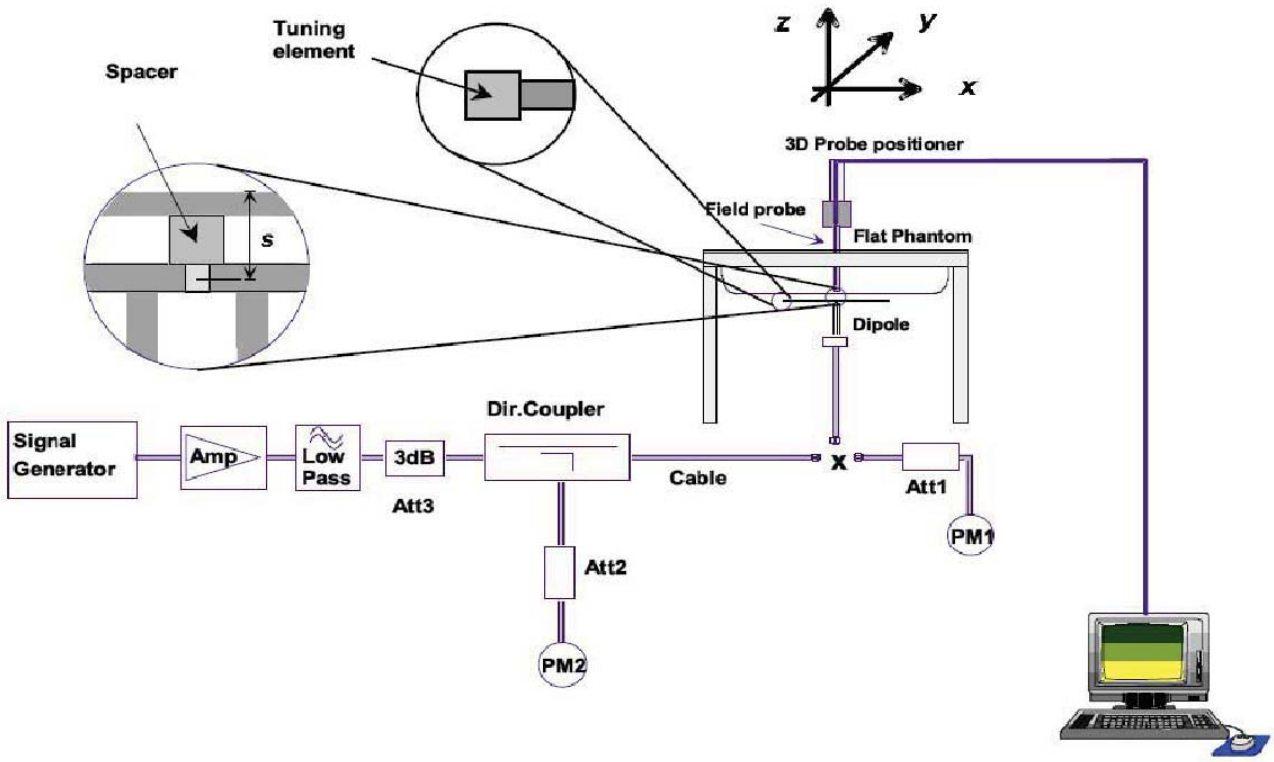

SYSTEM PERFORMANCE CHECK MEASUREMENT CONDITIONS

- The measurements were performed in the flat section of the SAM twin phantom filled with head and body simulating liquid of the following parameters.
- The DASY5 system withan E-fileld probe EX3DV4 SN: 3798 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration (dx= 5 mm, dy= 5 mm, dz= 5 mm).
- Distance between probe sensors and phantom surface was set to 2 mm.
- The dipole input power was 250mW±3%.
- The results are normalized to 1 W input power.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Depth of Liquid

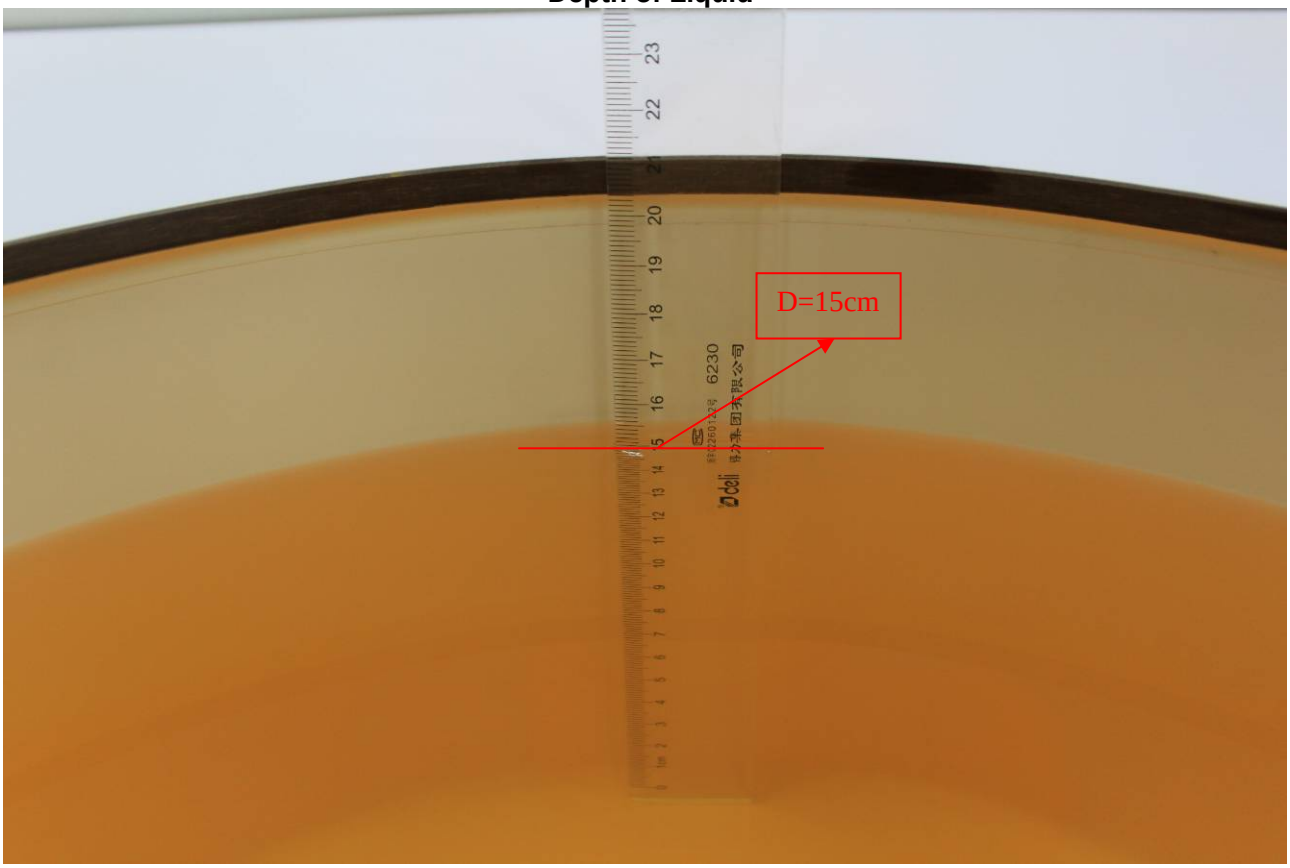

- Note: For SAR testing, the depth is 15cm shown above

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

SYSTEM PERFORMANCE CHECK RESULTS

Liquid Type	Ambient Temp. (° C)	Liquid Temp. (°C)	Input Power (W)	Measured SAR_{1g} (W/Kg)	1W Target SAR_{1g}(W/Kg)	1W Normalized SAR_{1g}(W/Kg)	Deviation (%)	Limited (%)	Date
Body2450	22	21.5	0.25	12.60	49.20	50.40	2.44	± 10	2015-12-8
Body5200	22	21.5	0.1	7.25	74.60	72.5	-2.82	± 10	2015-12-11
Body5300	22	21.5	0.1	7.53	76.00	75.3	-0.92	± 10	2015-12-11
Body5500	22	21.5	0.1	7.54	79.10	75.4	-4.68	± 10	2015-12-11
Body5600	22	21.5	0.1	7.91	77.80	79.1	1.67	± 10	2015-12-11
Body5800	22	21.5	0.1	7.63	75.00	76.3	1.73	± 10	2015-12-12

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.4 EUT TUNE-UP PROCEDURES AND TEST MODE

Conducted output power(dBm):

General Note:

1 Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

2 Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

3 For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

4 Apply the default power measurement procedures to measure maximum output power for each standalone and aggregated frequency band.

a) The maximum output power of band gap channels is limited to the lowest maximum output power certified for the adjacent bands regardless of whether band aggregation is applied for SAR testing.

b) The measured maximum output power results are used to reduce the number of channels that need testing.

WLAN 2.4G chain0

Mode	Channel	Frequence (MHZ)	Target power(dBm)	Turn up tolerance (dBm)	Maximum Turn up power (dBm)	Average power (dBm)
802.11 b	1	2412	14.5	±1	15.5	15.32
	6	2437	14.5	±1	15.5	15.45
	11	2462	14.5	±1	15.5	15.43
802.11 g	1	2412	14.5	±1	15.5	15.38
	6	2437	14.5	±1	15.5	15.11
	11	2462	14.5	±1	15.5	15.09
802.11 n 20MHz	1	2412	14	±1	15	15.00
	6	2437	14	±1	15	14.97
	11	2462	14	±1	15	14.89
802.11 n 40MHz	3	2422	13.5	±1	14.5	14.19
	6	2437	13.5	±1	14.5	14.45
	9	2452	13.5	±1	14.5	14.40

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

WLAN 5G U-NII-1

Mode	Channel	Frequence (MHZ)	Target power(dBm)	Turn up tolerance (dBm)	Maximum Turn up power (dBm)	Average Power (dBm)
802.11 a	36	5180	14	±1	15	14.83
	40	5200	14	±1	15	14.76
	44	5220	14	±1	15	14.68
	48	5240	14	±1	15	14.46
802.11 n 20MHz	36	5180	14	±1	15	14.52
	40	5200	14	±1	15	14.27
	44	5220	14	±1	15	14.21
	48	5240	14	±1	15	14.18
802.11 n 40MHz	38	5190	13.5	±1	14.5	14.13
	46	5230	13	±1	14	13.86

WLAN 5 U-NII-2A

Mode	Channel	Frequence (MHZ)	Target power(dBm)	Turn up tolerance (dBm)	Maximum Turn up power (dBm)	Average Power (dBm)
802.11 a	52	5260	14	±1	15	14.62
	56	5280	14	±1	15	14.15
	60	5300	14	±1	15	14.08
	64	5320	14	±1	15	14.86
802.11 n 20MHz	52	5260	13	±1	14	13.98
	56	5280	13.5	±1	14.5	14.09
	60	5300	13.5	±1	14.5	14.01
	64	5320	13.5	±1	14.5	14.36
802.11 n 40MHz	54	5270	13.5	±1	14.5	14.21
	62	5310	13	±1	14	13.68

WLAN 5 U-NII-2C

Mode	Channel	Frequence (MHZ)	Target power(dBm)	Turn up tolerance (dBm)	Maximum Turn up power (dBm)	Average Power (dBm)
802.11 a	100	5500	13.5	±1	14.5	14.09
	112	5560	13	±1	14	13.20
	116	5580	13	±1	14	13.45
	140	5700	13.5	±1	14.5	14.39
802.11 n 20MHz	100	5500	13.5	±1	14.5	14.24
	112	5560	12	±1	13	12.87
	116	5580	12.5	±1	13.5	13.16
	140	5700	13.5	±1	14.5	14.07
802.11 n 40MHz	102	5510	14	±1	15	14.54
	110	5550	12.5	±1	13.5	13.08
	118	5590	13	±1	14	13.58
	134	5670	13.5	±1	14.5	14.08

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

WLAN 5 U-NII-3

Mode	Channel	Frequence	Target power(dBm)	Turn up tolerance (dBm)	Maximum Turn up power (dBm)	Average power (dBm)
802.11 a	149	5745	12	±1	13	12.34
	157	5785	13	±1	14	13.68
	165	5825	13	±1	14	13.25
802.11 n 20MHz	149	5745	12	±1	13	12.41
	157	5785	12.5	±1	13.5	13.16
	165	5825	12.5	±1	13.5	13.42
802.11 n 40MHz	151	5755	12.5	±1	13.5	13.04
	159	5795	12.5	±1	13.5	13.26

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Bluetooth 3.0+EDR Conducted output power(dBm):

Channel	Frequency	Average power(dBm)		
		Date Rate		
		1Mbps	2Mbps	3Mbps
CH00	2402MHz	1.60	-0.3	-0.20
CH39	2441 MHz	1.70	-0.30	-0.10
CH78	2480 MHz	1.50	-0.20	-0.30

BLE Conducted output power (dBm):

Channel	Frequency	Average power (dBm)
		Date Rate
CH00	2402MHz	1.60
CH20	2440 MHz	1.70
CH39	2480 MHz	1.50

Note:The product Max antenna gain is 3.5dBi,So the highest RIRP result is 5.5 dBm

According to KDB447498 D01:The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
[(*max. power of channel, including tune-up tolerance, mW*)/(*min. test separation distance, mm*)] · [$\sqrt{f_{(GHz)}}$] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(GHz)}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation[25]
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below
- If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation

	Wireless Interface	Bluetooth
Tune-up Maximum power (dBm)		2
Tune-up Maximum rated power (mW)		1.585
Body	Antenna to user (mm)	5
	Frequency(GHz)	2.480
	SAR exclusion threshold	0.499

Per KDB 447498 D01 exclusion thresholds is 0.499 < 3, Bluetooth RF exposure evaluation is not required.

According to RSS102-2015 :
SAR evaluation for this device was performed with a separation distance of 5 mm. Observing the SAR evaluation exemption limit table (Table 1, see below) found in § 2.5.1 of RSS102:2015 , it was determined that the SAR exemption limit for this device is 4 mW for 2.4GHz transmission and 1 mW for 5 GHz transmission. No Wi-Fi mode qualified for test exemption as all power levels were above the stated thresholds. On the contrary, Bluetooth, with a frequency of 2480 MHz and a maximum output power of 3.548 mW (5.5 dBm, tune-up tolerance accounted for), is lower than the exemption threshold and therefore exempt from SAR evaluation for either the intended user or bystanders. So Bluetooth RF exposure evaluation is not required

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.5 SAR TEST CONFIGURATIONS

Antenna position

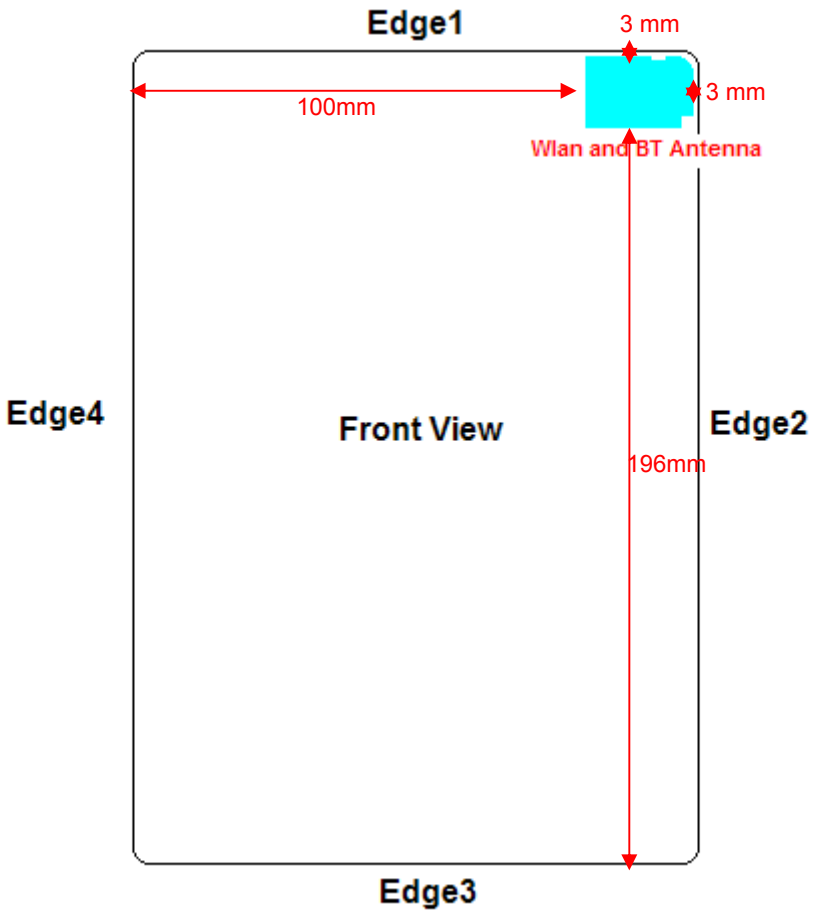

Device dimensions (H x W): 212 x 127 mm

Antennas	Wireless Interface
Bluetooth &WLAN Antenna	WLAN 2.4GHz WLAN 5.2GHz WLAN 5.3GHz WLAN 5.5GHz WLAN 5.8GHz Bluetooth

Test Mode

IEEE 802.11	Data transmission mode(802.11a; 802.11b/g 802.11n40;Bluetooth GFSK)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.6 BODY TEST EXCLUSION THRESHOLDS

The following SAR test exclusion Thresholds based on KDB 447498 D01 General RF Exposure Guidance v06) 4.3.1)

Exposure Position	Wireless Interface	WLAN 802.11 b	WLAN 802.11 a
	Maximum power	15.5	15
	Maximum rated power(mW)	35.48	31.62
Front view	Antenna to user (mm)	5	5
	SAR exclusion threshold	9.58	6.23
	SAR testing required	**Yes**	**Yes**
Rear view	Antenna to user (mm)	5	5
	SAR exclusion threshold	9.58	6.23
	SAR testing required	**Yes**	**Yes**
Edge1	Antenna to user (mm)	5	5
	SAR exclusion threshold	9.58	6.23
	SAR testing required	**Yes**	**Yes**
Edge2	Antenna to user (mm)	5	5
	SAR exclusion threshold	9.58	6.23
	SAR testing required	**Yes**	**Yes**
Edge3	Antenna to user (mm)	196	196
	SAR exclusion threshold	1556	1522.28
	SAR testing required	**No**	**No**
Edge4	Antenna to user (mm)	100	100
	SAR exclusion threshold	596	562.28
	SAR testing required	**No**	**No**

Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
2. Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
   [(*max. power of channel, including tune-up tolerance, mW*)/(*min. test separation distance, mm*)] ·[√f(GHz)] ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
   f(GHz) is the RF channel transmit frequency in GHz
   Power and distance are rounded to the nearest mW and mm before calculation
   The result is rounded to one decimal place for comparison
   For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
   This formula is [3.0] / [√f(GHz)] ·[(*min. test separation distance, mm*)] = exclusion threshold of mW.
5. Per KDB 447498 D01, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
   a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
   b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz
6. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

The following SAR test exclusion Thresholds based on RSS102 issue5 2.5.1

Exposure Position	Wireless Interface	WLAN 802.11 b	WLAN 802.11 a
	Maximum power	15.5	15
	Maximum rated power(mW)	35.48	31.62
Front view	Antenna to user (mm)	5	5
	SAR exclusion threshold	4	1
	SAR testing required	**Yes**	**Yes**
Rear view	Antenna to user (mm)	5	5
	SAR exclusion threshold	4	1
	SAR testing required	**Yes**	**Yes**
Edge1	Antenna to user (mm)	5	5
	SAR exclusion threshold	4	1
	SAR testing required	**Yes**	**Yes**
Edge2	Antenna to user (mm)	5	5
	SAR exclusion threshold	4	1
	SAR testing required	**Yes**	**Yes**
Edge3	Antenna to user (mm)	196	196
	SAR exclusion threshold	309	106
	SAR testing required	**No**	**No**
Edge4	Antenna to user (mm)	100	100
	SAR exclusion threshold	309	106
	SAR testing required	**No**	**No**

Note:
SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.7 EUT SETUP PHOTOS

11.8 BODY SAR TEST CONFIGURATION

Front in body position	Rear in body position
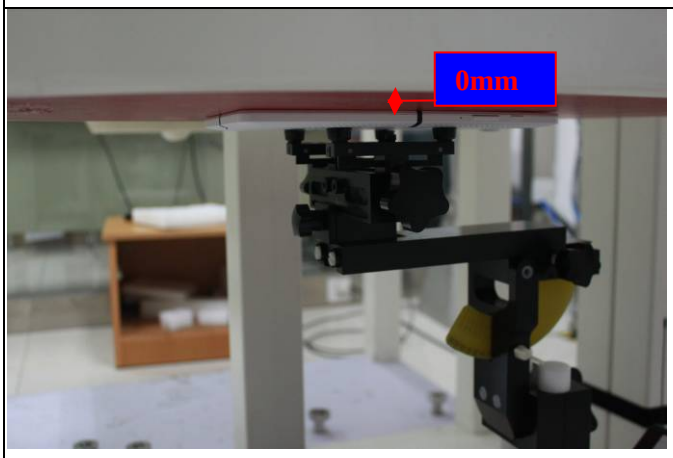	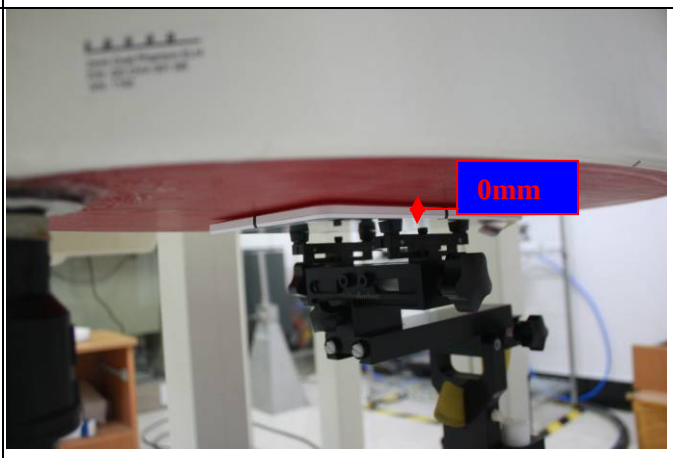
EUT Setup Configuration 1	**EUT Setup Configuration 2**
Edge1 in body position	**Edge2 in body position**
	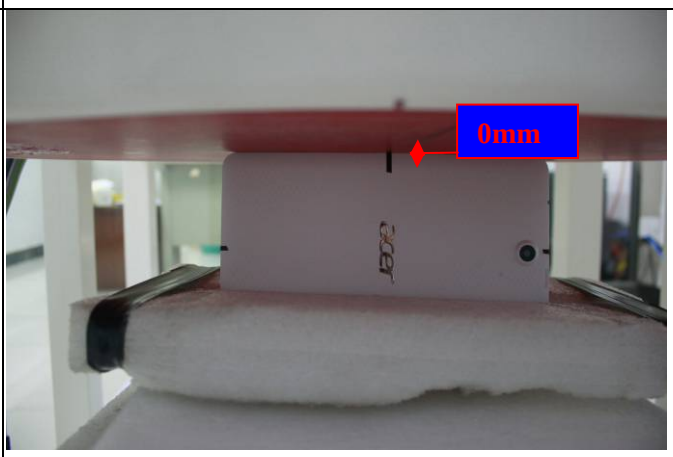
EUT Setup Configuration 3	**EUT Setup Configuration 4**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

SAR Results for Body Test Records
2.4GHz

Band	Mode	Test Position	Dist. (mm)	Freq. (MHZ)	max Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Duty Cycle Factor	SAR1g (mW/g)	Scaled SAR1g (mW/g)
WLAN 2.4Ghz	802.11b	Front	0	2412	15.32	15.5	1.042	0.05	1	1.18	1.230
		Front	0	2437	15.45	15.5	1.012	0.15	1	1.26	1.275
		Front	0	2462	15.43	15.5	1.016	0.14	1	1.28	1.301
		Rear	0	2412	15.32	15.5	1.042	0.10	1	0.950	0.990
		Rear	0	2437	15.45	15.5	1.012	-0.03	1	1.1	1.113
		Rear	0	2462	15.43	15.5	1.016	0.13	1	1.14	1.159
		Edge1	0	2437	15.45	15.5	1.012	0.18	1	0.067	0.068
		Edge2	0	2437	15.45	15.5	1.012	-0.19	1	0.462	0.467
WLAN 2.4Ghz	802.11g	Front	0	2412	15.38	15.5	1.028	0.05	1	0.762	0.783
		Rear	0	2412	15.38	15.5	1.028	0.10	1	0.852	0.876
		Edge1	0	2412	15.38	15.5	1.028	0.12	1	0.053	0.054
		Edge2	0	2412	15.38	15.5	1.028	0.13	1	0.346	0.356

Remark: SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
   The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is > 1.2 W/kg. So 2.4 GHz OFDM mode is require.
3) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

5GHz

Band	Mode	Test Position	Dist. (mm)	Freq. (MHZ)	max Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Duty Cycle Factor	SAR1g (mW/g)	Scaled SAR1g (mW/g)
U-NII-2A	WLAN 5GHz a	Front	0	5320	14.86	15	1.033	0.11	1	0.982	1.014
		Rear	0	5260	14.62	15	1.091	0.19	1	0.875	0.955
		Rear	0	5320	14.86	15	1.033	0.00	1	1.12	1.157
		Edge1	0	5320	14.86	15	1.033	0.06	1	0.517	0.534
		Edge2	0	5320	14.86	15	1.033	-0.15	1	0.351	0.362
U-NII-2C	WLAN 5GHz n40	Front	0	5510	14.44	14.5	1.014	0.00	1	0.972	0.986
		Front	0	5670	14.08	14.5	1.102	-0.13	1	0.956	1.053
		Rear	0	5510	14.44	14.5	1.014	-0.14	1	1.08	1.095
		Rear	0	5670	14.08	14.5	1.102	0.00	1	1.01	1.113
		Edge1	0	5510	14.44	14.5	1.014	0.08	1	0.419	0.425
		Edge2	0	5510	14.44	14.5	1.014	0.12	1	0.446	0.452
U-NII-3	WLAN 5GHz	Front	0	5785	13.16	13.5	1.081	0.00	1	0.549	0.594
		Rear	0	5785	13.16	13.5	1.081	0.00	1	0.910	0.984
		Rear	0	5825	13.26	13.5	1.057	0.00	1	0.885	0.935
		Edge1	0	5785	13.16	13.5	1.081	0.13	1	0.525	0.568
		Edge2	0	5785	13.16	13.5	1.081	0.16	1	0.504	0.545

Remark: For devices that operate in both U-NII-1 and U-NII-2A bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following

1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

The highest reported SAR for is adjusted by the ratio of U-NII-1 to U-NII-2A specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg . So U-NII-1 mode is require.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Repeated SAR Test Records

Band	Mode	Test Position	Dist. (mm)	Freq. (MHZ)	max Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Duty Cycle Factor	SAR1g (mW/g)	Scaled SAR1g (mW/g)
WLAN 2.4Ghz	802.11b	Front	0	2462	15.43	15.5	1.016	0.02	1	1.28	1.301
WLAN 2.4Ghz	802.11g	Rear	0	2412	15.38	15.5	1.028	0.12	1	0.808	0.831
WLAN 5Ghz	U-NII-2A	Rear	0	5320	14.86	15	1.033	-0.08	1	1.04	1.074
WLAN 5Ghz	U-NII-2C	Rear	0	5510	14.44	14.5	1.014	0.18	1	0.963	0.976
WLAN 5Ghz	U-NII-3	Rear	0	5785	13.16	13.5	1.081	0.11	1	0.806	0.872

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.9 REPEATED SAR MEASUREMENT

Band	Mode	Test Position	Dist. (mm)	Freq. (MHZ)	Original Measured SAR1g (mW/g)	1st Repeated SAR1g (mW/g)	Ratio	Original Measured SAR1g (mW/g)	2nd Repeated SAR1g (mW/g)	Ratio
WLAN 2.4Ghz	802.11b	Front	0	2462	1.28	1.28	1.000	--	--	--
WLAN 2.4Ghz	802.11g	Rear	0	2412	0.852	0.808	1.054	--	--	--
WLAN 5Ghz	U-NII-2A	Rear	0	5320	1.12	1.04	1.077	--	--	--
WLAN 5Ghz	U-NII-2C	Rear	0	5510	1.08	0.963	1.121	--	--	--
WLAN 5Ghz	U-NII-3	Rear	0	5785	0.910	0.806	1.129	--	--	--

Note:

1. Per KDB 865664 D01v01,for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8W/Kg

Per KDB 865664 D01v01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤1.2 and the measured SAR ＜1.45W/Kg,only one repeated measurement is required.

2. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg
3. The ratio is the difference in percentage between original and repeated measured SAR.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

11.10 SAR HANDSETS MULTI XMITER ASSESSMENT

No.	Applicable Simultaneous Transmission Combination
1	N/A

Note:

1. 2.4GHz WLAN and BT share the same antenna, and cannot transmit simultaneously.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

12. EUT PHOTO

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

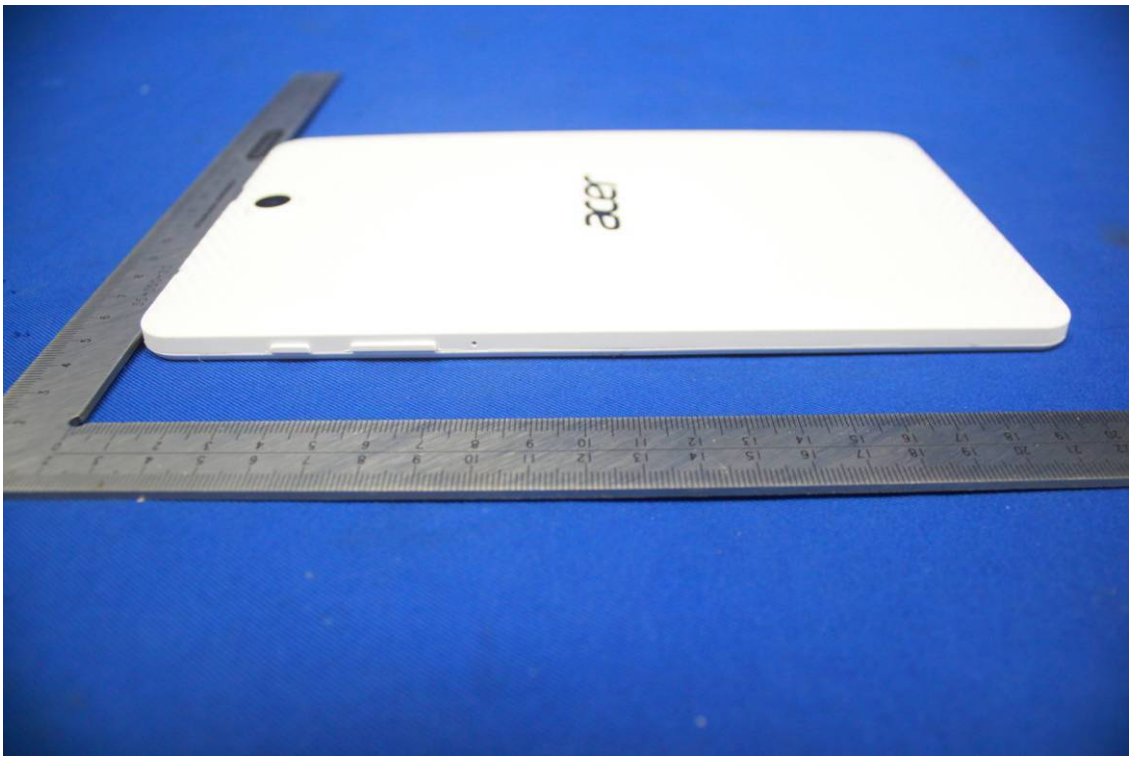

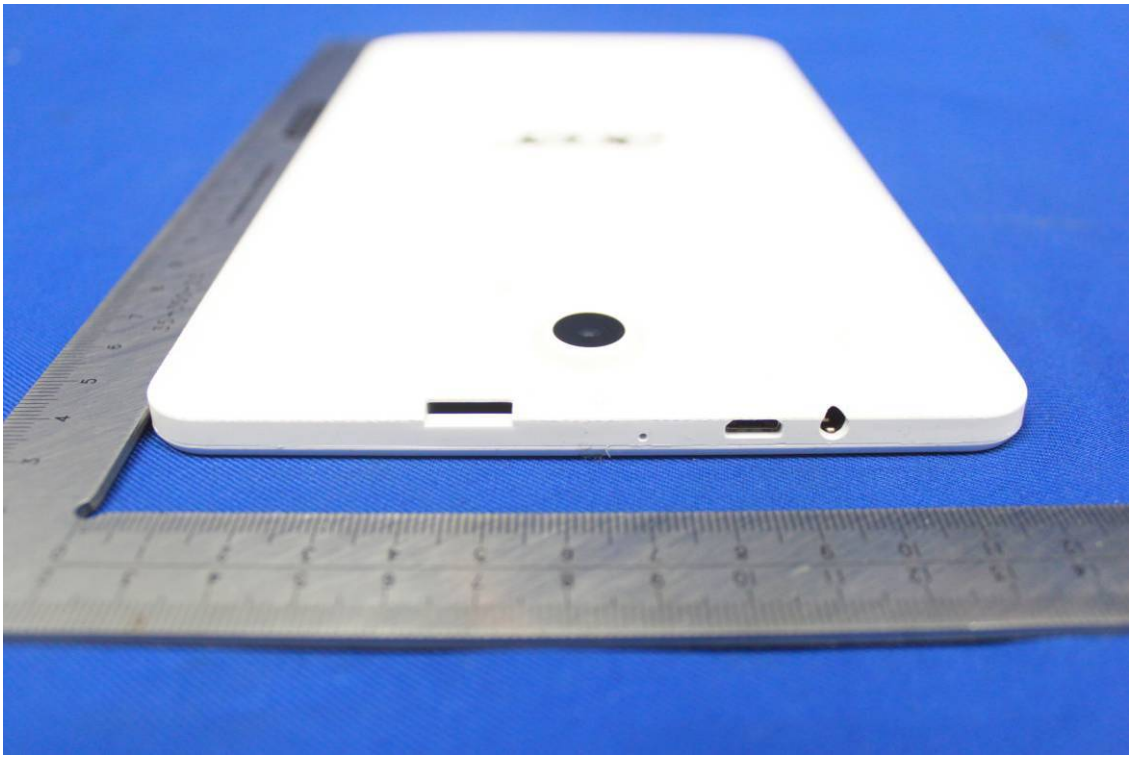

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

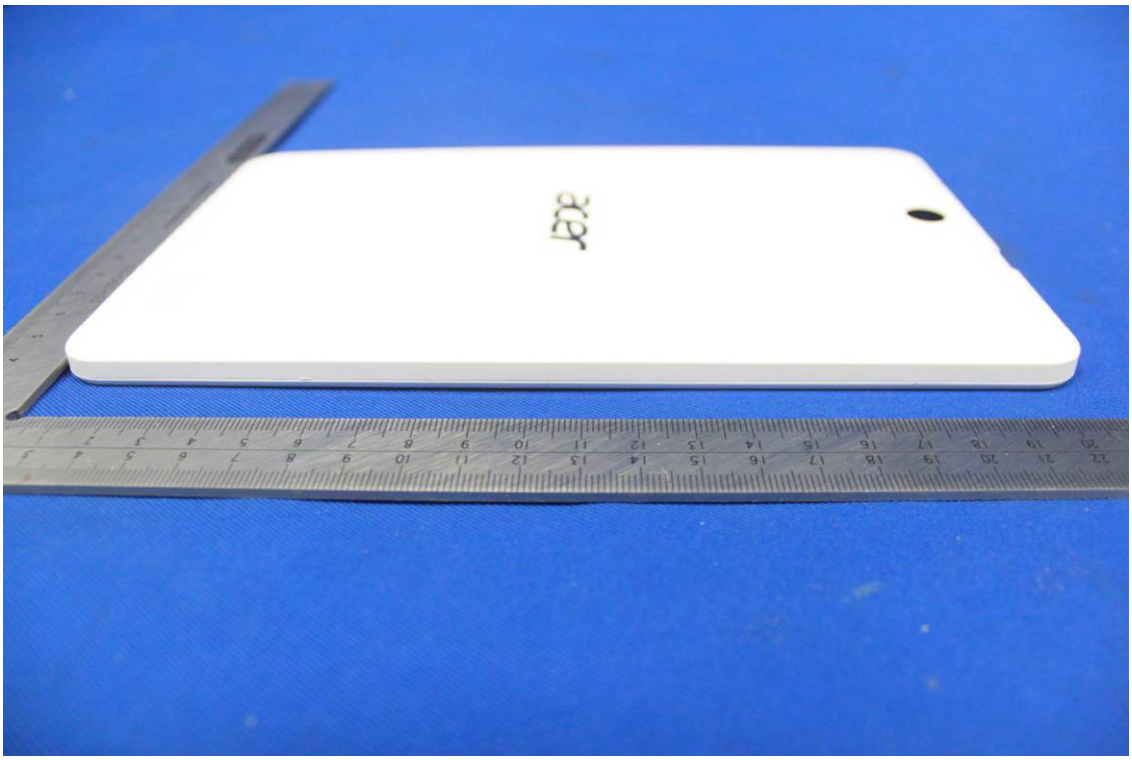

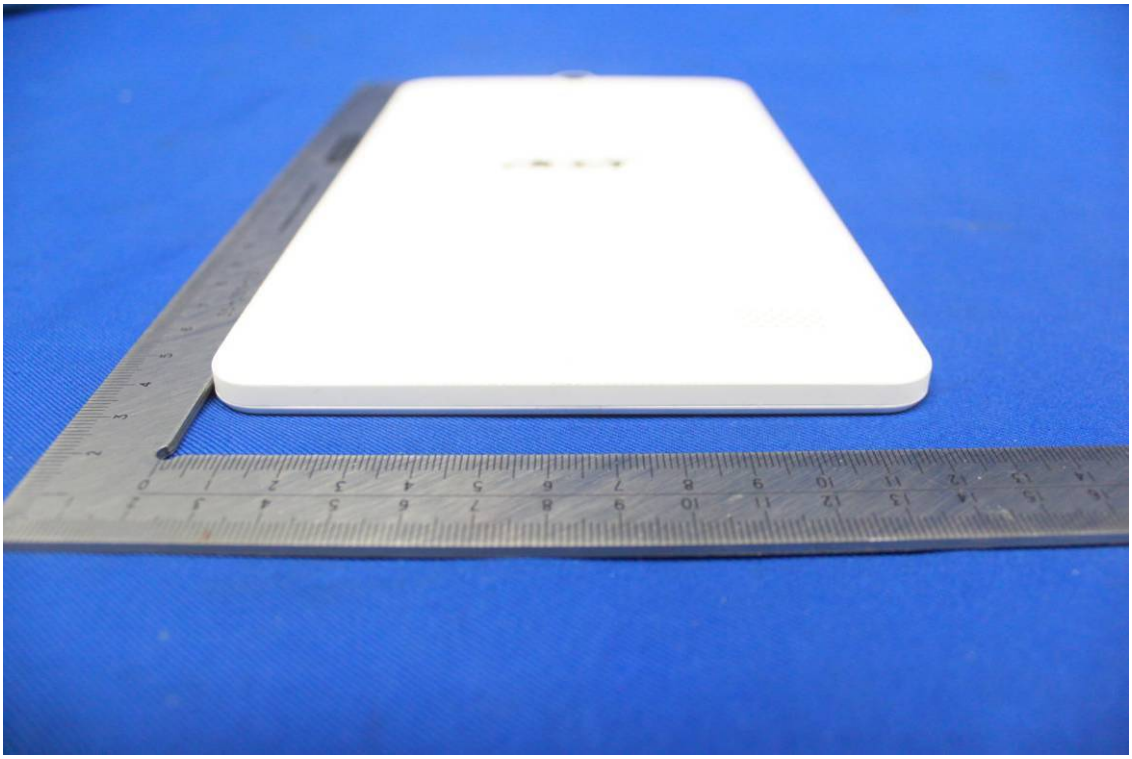

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

13. EQUIPMENT LIST & CALIBRATION STATUS

Name of Equipment	Manufacturer	Type/Model	Serial Number	Last Calibration	Calibration Due
P C	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A
Signal Generator	Agilent	E8257C	MY43321570	11/20/2015	11/19/2016
S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	03/03/2015	03/02/2016
Wireless Communication Test Set	R&S	CMU200	SN:109525	01/12/2015	01/11/2016
Power Meter	Agilent	E4416A	GB41292714	03/03/2015	03/02/2016
Peak & Average sensor	Agilent	E9327A	us40441788	03/03/2015	03/02/2016
Power meter	Anritsu	ML2495A	1445010	03/03/2015	03/02/2016
Power sensor	Anritsu	MA2411B	1339220	03/03/2015	03/02/2016
E-field PROBE	SPEAG	EX3DV4	3798	07/24/2015	07/23/2016
DAE	SPEAG	DEA4	1245	07/22/2015	07/21/2016
DIPOLE 2450MHZ ANTENNA	SPEAG	D2450V2	817	07/31/2013	07/28/2016
DIPOLE 5GHZ ANTENNA	SPEAG	D5GHzV2	1095	05/31/2013	05/28/2016
DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A
SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A
Twin SAM Phantom	SPEAG	QD000P40CD	1609	N/A	N/A
ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A
ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A
LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

14. FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.

15. REFERENCES

[1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environ-mental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.

[2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commision, O_ce of Engineering & Technology, Washington, DC, 1997.

[3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.

[4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.

[5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz – 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.

[6] ANSI, ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.

[7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-_eld probes in tissue simulating liquids at mobile communications frequencies", in ICECOM _ 97, Dubrovnik, October 15{17, 1997, pp. 120{124.

[8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-_eld probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.

[9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions onMicrowave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.

[10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.

[11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.

[12] W. H. Press, S. A. Teukolsky,W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992..Dosimetric Evaluation of Sample device, month 1998 9

[13] NIS81 NAMAS, \The treatment of uncertainity in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.

[14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

APPENDIX A: PLOTS OF PERFORMANCE CHECK

The plots are showing as followings.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/8/2015

System Performance Check-D2450 Body

DUT: Dipole 2450 MHz D2450V2; Type: D24500V2; Serial: 817

Communication System: UID 0, CW; Communication System Band: D2450 (2450.0 MHz);
Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; σ = 1.942 S/m; ε_r = 51.768; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/24/2015;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies above 1 GHz/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 17.0 W/kg

System Performance Check at Frequencies above 1 GHz/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.03 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 26.5 W/kg
SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.76 W/kg
Maximum value of SAR (measured) = 19.4 W/kg

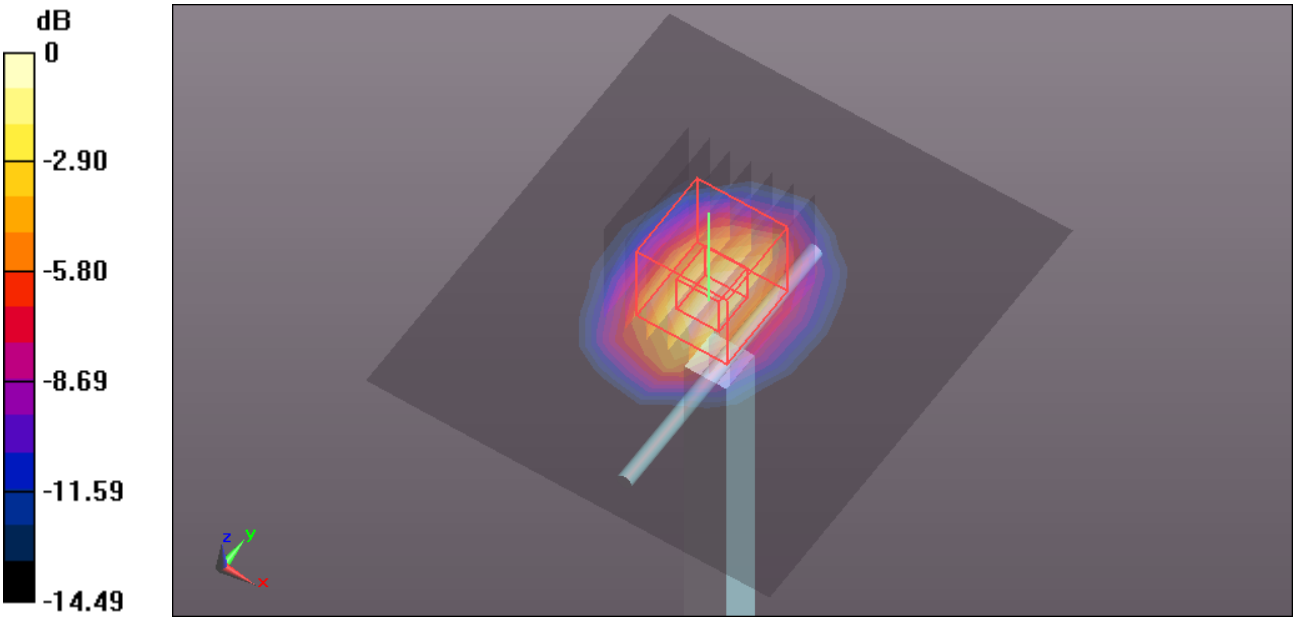

0 dB = 19.4 W/kg = 12.88 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/11/2015
System Performance Check-D5200 Body
DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095
Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: f = 5200 MHz; σ = 5.298 S/m; ε_r = 50.698; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.64, 4.64, 4.64); Calibrated: 7/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz 20/Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 13.9 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5200 MHz 20/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.57 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 31.6 W/kg
SAR(1 g) = 7.25 W/kg; SAR(10 g) = 2.05 W/kg
Maximum value of SAR (measured) = 17.8 W/kg

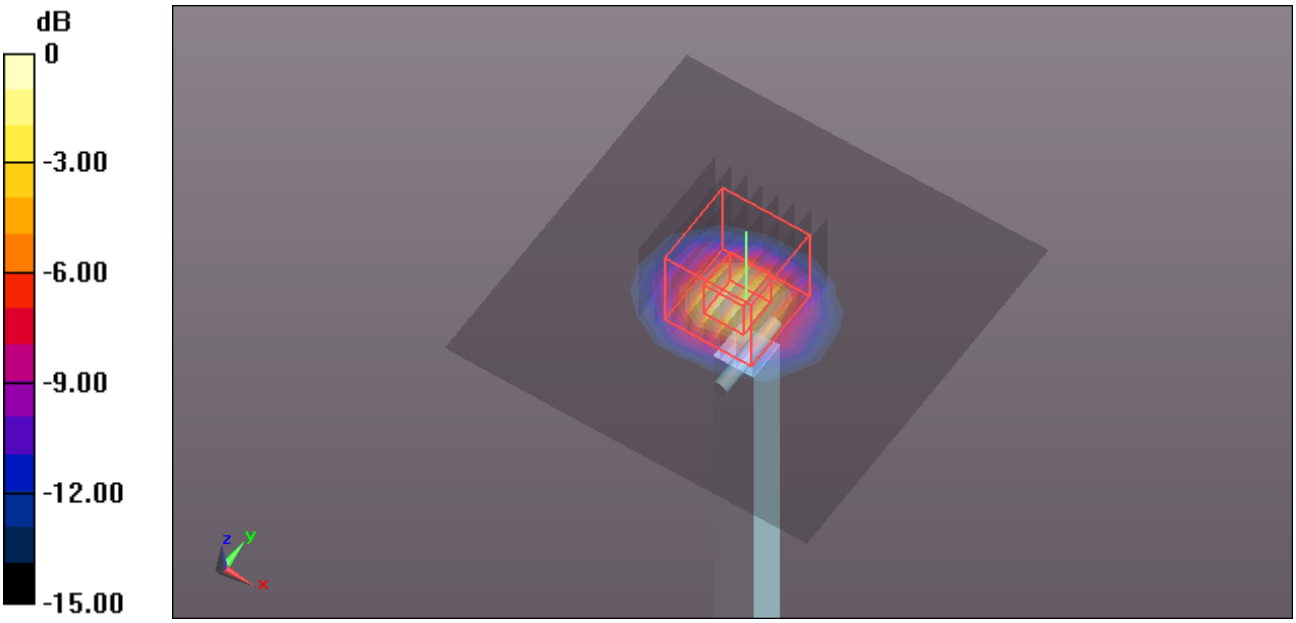

0 dB = 17.8 W/kg = 12.50 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/11/2015
SystemPerformanceCheck-D5300 Body
DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095
Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5300 MHz;Duty Cycle: 1:1
Medium parameters used: f = 5300 MHz; σ = 5.462 S/m; ε_r = 50.141; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.42, 4.42, 4.42); Calibrated: 7/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz 19.6/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 16.7 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5300 MHz 19.6/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.76 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 34.0 W/kg
SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.1 W/kg
Maximum value of SAR (measured) = 18.8 W/kg

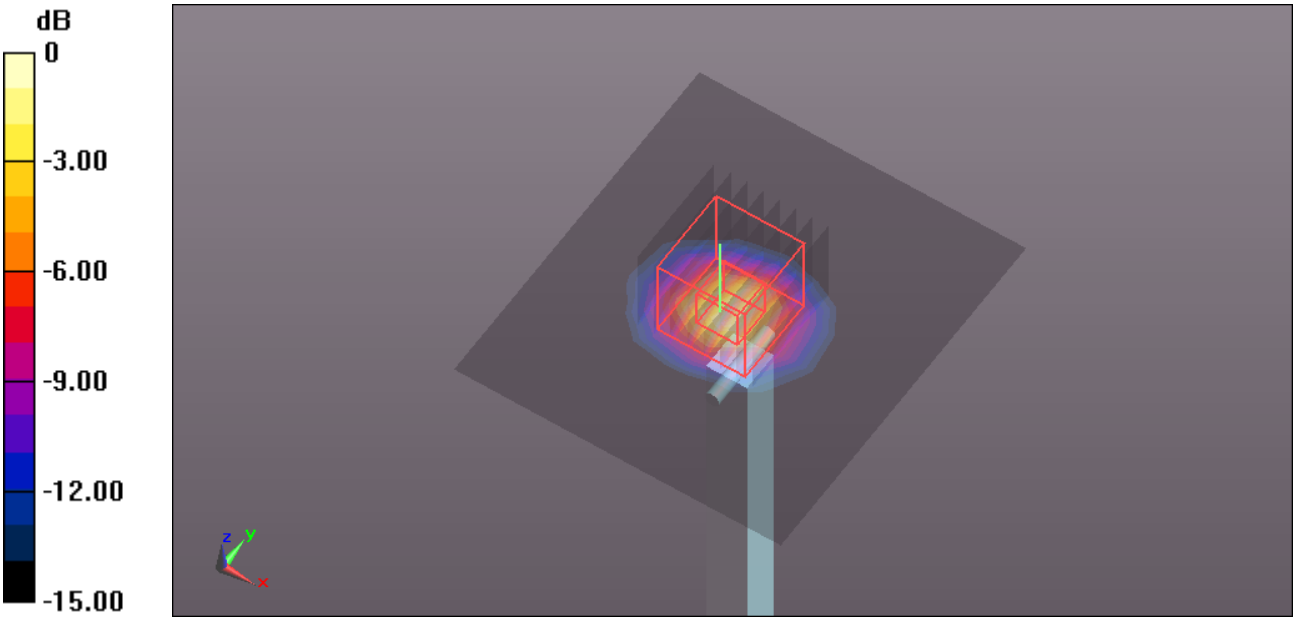

0 dB = 18.8 W/kg = 12.74 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/11/2015
SystemPerformanceCheck-D5500 Body
DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095
Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5500 MHz;Duty Cycle: 1:1
Medium parameters used: f = 5500 MHz; σ = 5.42 S/m; ε_r = 49.966; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.01, 4.01, 4.01); Calibrated: 7/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5500 MHz/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 16.4 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5500 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 66.53 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 32.2 W/kg
SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.03 W/kg
Maximum value of SAR (measured) = 18.2 W/kg

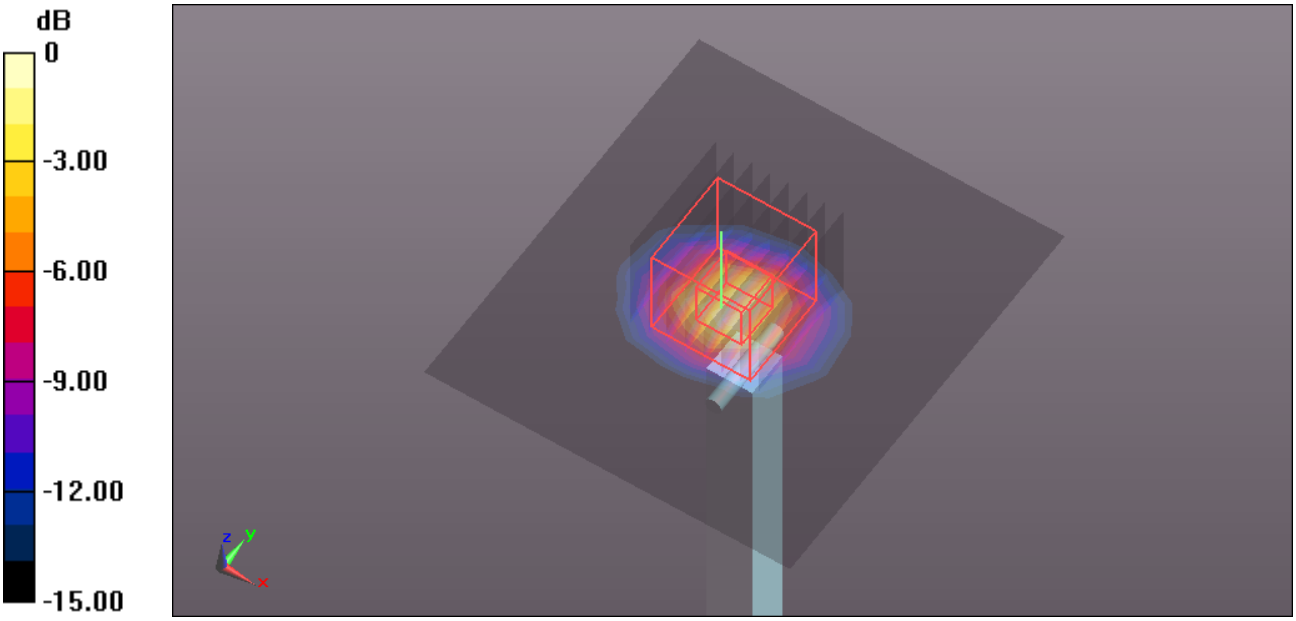

0 dB = 18.2 W/kg = 12.60 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/11/2015
SystemPerformanceCheck-D5600 Body
DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095
Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium parameters used: f = 5600 MHz; σ = 5.744 S/m; ε_r = 49.987; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(3.9, 3.9, 3.9); Calibrated: 7/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 18.0 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 67.26 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 36.5 W/kg
SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.2 W/kg
Maximum value of SAR (measured) = 20.3 W/kg

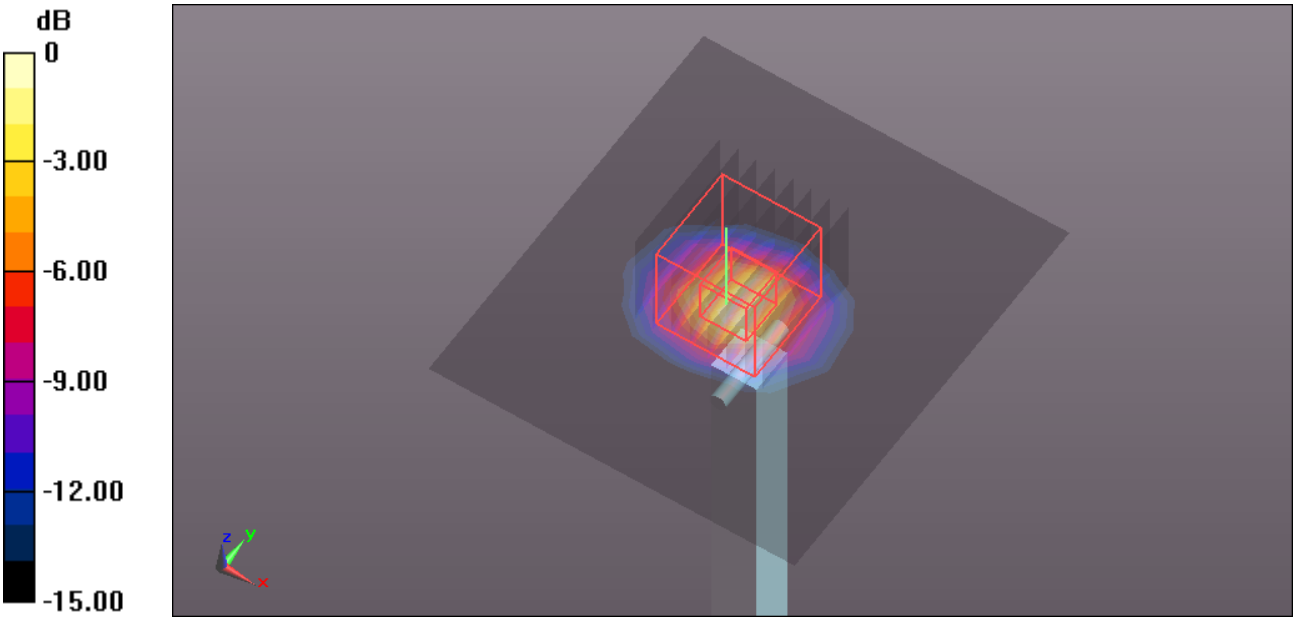

0 dB = 20.3 W/kg = 13.07 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Laboratory: Compliance Certification Services Inc. Date: 12/12/2015
SystemPerformanceCheck-D5800 Body
DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095
Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz;Duty Cycle: 1:1
Medium parameters used: f = 5800 MHz; σ = 6.214 S/m; ε_r = 49.822; ρ = 1000 kg/m^3
Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)
DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.16, 4.16, 4.16); Calibrated: 7/24/2015;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2015
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 17.5 W/kg

System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.11 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 36.7 W/kg
SAR(1 g) = 7.63 W/kg; SAR(10 g) = 2.14 W/kg
Maximum value of SAR (measured) = 19.6 W/kg

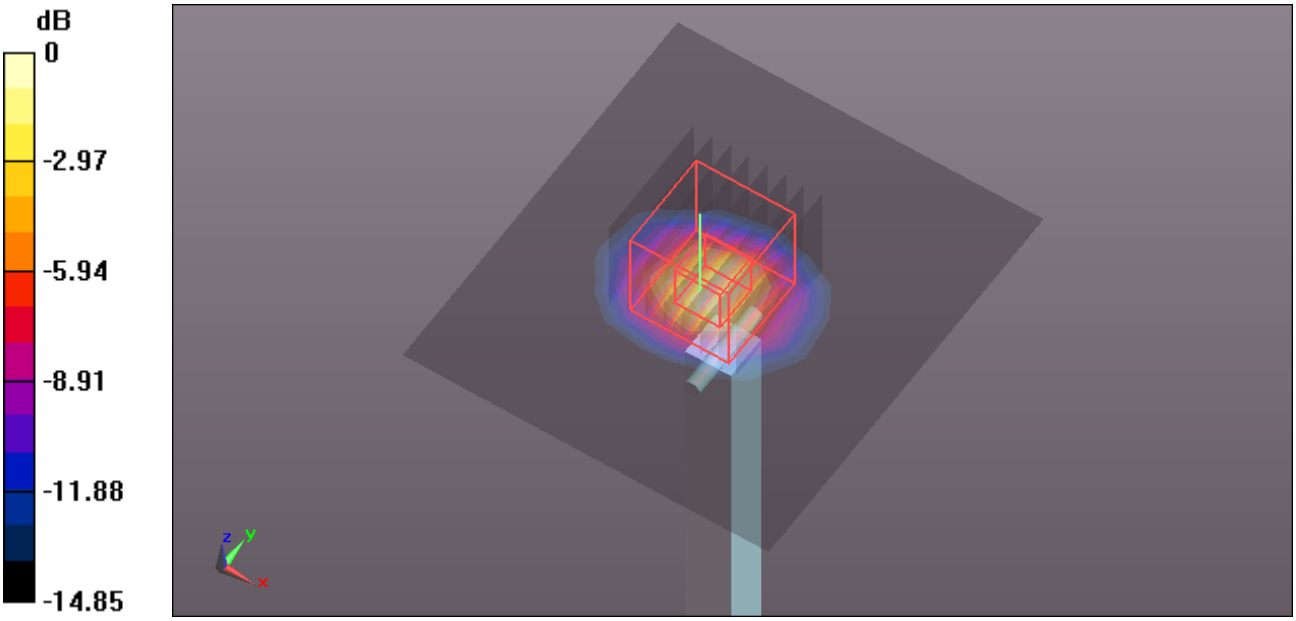

0 dB = 19.6 W/kg = 12.92 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

APPENDIX B: DASY CALIBRATION CERTIFICATE

The DASY Calibration Certificates are showing as followings .

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client CCS-CN (Auden)

Certificate No: D2450V2-817_Jul13

CALIBRATION CERTIFICATE

Object	D2450V2 - SN: 817
Calibration procedure(s)	QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz
Calibration date:	July 31, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Israe El-Naouq	Laboratory Technician	Israe El-Naouq
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D2450V2-817_Jul13 Page 1 of 8

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.8 ± 6 %	1.81 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**52.6 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**24.5 W/kg ± 16.5 % (k=2)**

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.5 ± 6 %	2.01 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**49.2 W/kg ± 17.0 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.87 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**23.1 W/kg ± 16.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.5 Ω + 2.9 jΩ
Return Loss	- 27.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.7 Ω + 4.5 jΩ
Return Loss	- 27.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 23, 2007

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY5 Validation Report for Head TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 1.81 S/m; ε_r = 37.8; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 99.781 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 27.7 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.18 W/kg
Maximum value of SAR (measured) = 16.8 W/kg

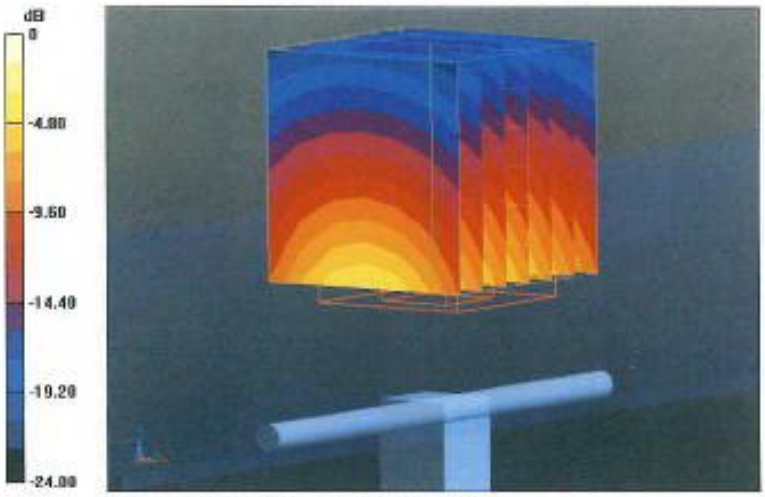

0 dB = 16.8 W/kg = 12.25 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Impedance Measurement Plot for Head TSL

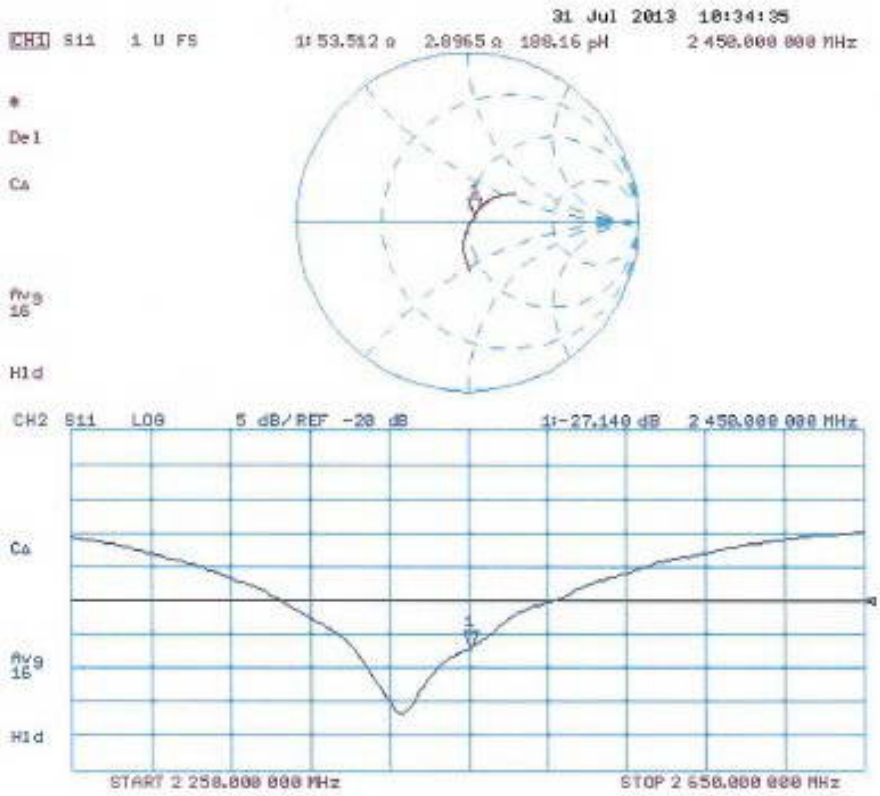

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY5 Validation Report for Body TSL

Date: 31.07.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817

Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: f = 2450 MHz; σ = 2.01 S/m; ε_r = 50.5; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.151 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 26.3 W/kg
SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.87 W/kg
Maximum value of SAR (measured) = 16.7 W/kg

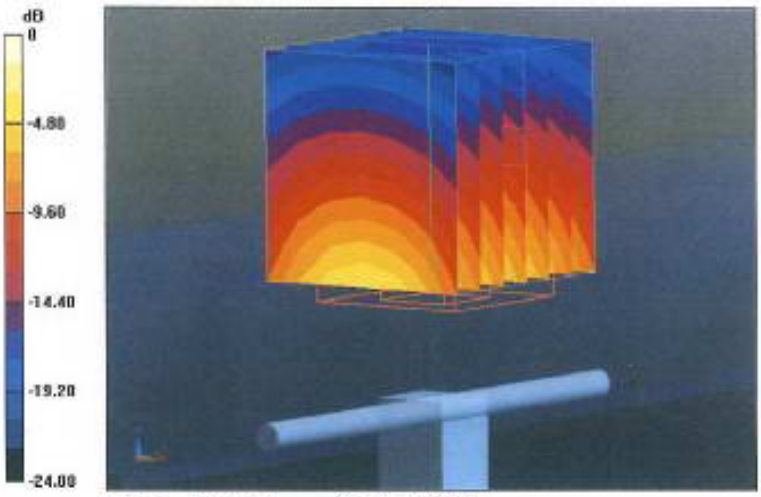

0 dB = 16.7 W/kg = 12.23 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Impedance Measurement Plot for Body TSL

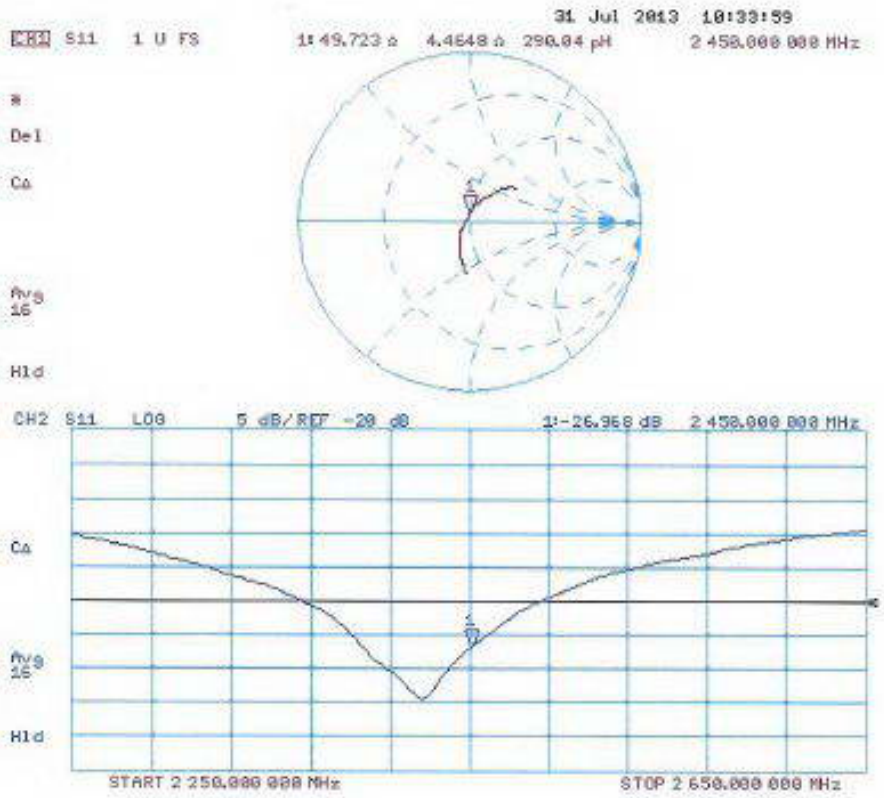

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

D2450V2, Serial No.817 Extended Dipole Calibrations

Per IEEE Std 1528-2003,the dipole should have a return loss better than -20dB at the test frequency to reduce uncertainty in the power measurement.
Per KDB 865664 D01,if dipoles are verified in return loss(<-20dB,within 20% of prior calibration),and in impedance (within 5 ohm of prior calibration),the annual calibration is not necessary and the calibration interval can be extended.

Justification of the extended calibration

D2450V2 Serial No.817						
2450 Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
7.31.2013	-27.140	--	53.512	--	2.897	--
7.30.2014	-26.620	1.92	52.828	0.684	3.898	0.911

D2450V2 Serial No.817						
2450 Body						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
7.31.2013	-26.968	--	49.723	--	4.465	--
7.30.2014	-25.469	5.56	49.237	0.486	5.234	0.769

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Verification Data D2450V2 Serial No.817
2450 MHz-Head

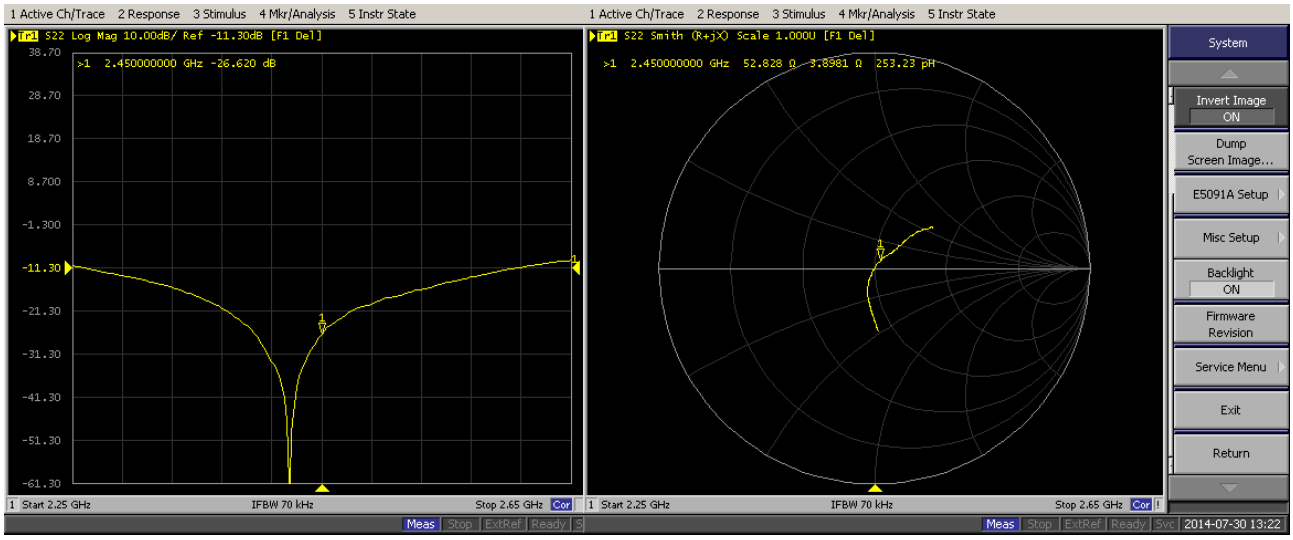

2450 MHz-Body

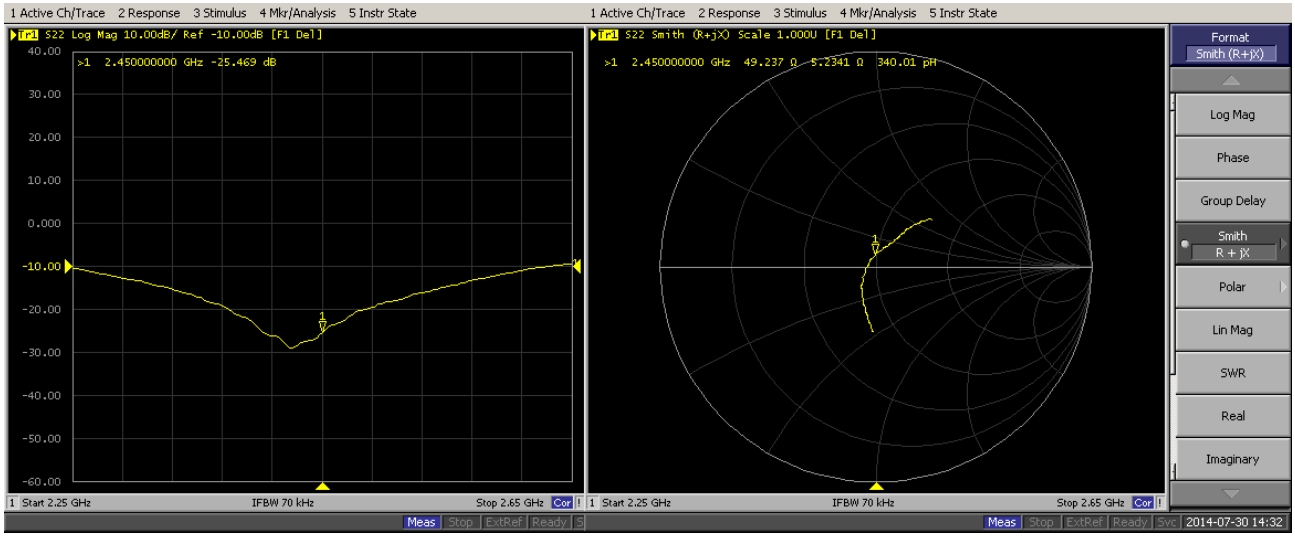

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Per IEEE Std 1528-2003,the dipole should have a return loss better than -20dB at the test frequency to reduce uncertainty in the power measurement.
Per KDB 865664 D01,if dipoles are verified in return loss(<-20dB,within 20% of prior calibration),and in impedance (within 5 ohm of prior calibration),the annual calibration is not necessary and the calibration interval can be extended.

Justification of the extended calibration

D2450V2 Serial No.817						
2450 Head						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
7.31.2013	-27.140	--	53.512	--	2.897	--
7.30.2014	-26.620	1.92	52.828	0.684	3.898	0.911
7.29.2015	-25.93	2.59	53.086	0.258	4.095	0.197

D2450V2 Serial No.817						
2450 Body						
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
7.31.2013	-26.968	--	49.723	--	4.465	--
7.30.2014	-25.469	5.56	49.237	0.486	5.234	0.769
7.29.2015	-25.139	1.30	49.31	0.073	5.419	0.185

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Verification Data D2450V2 Serial No.817
2450 MHz-Head

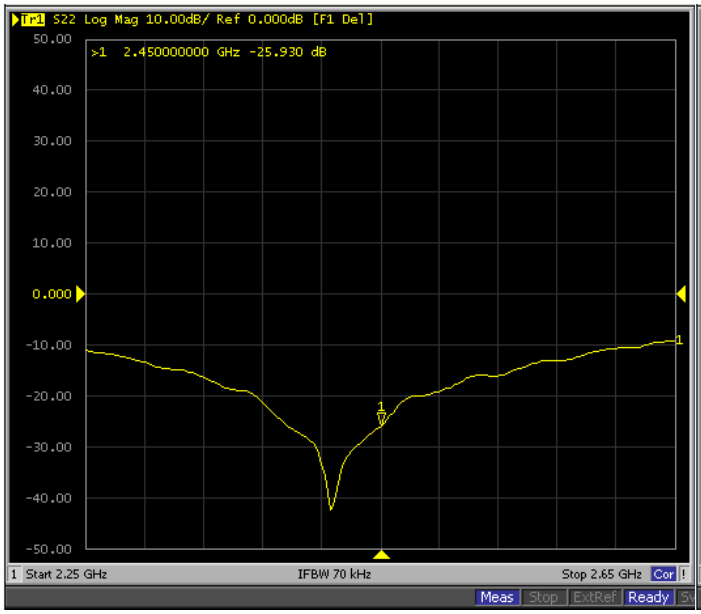

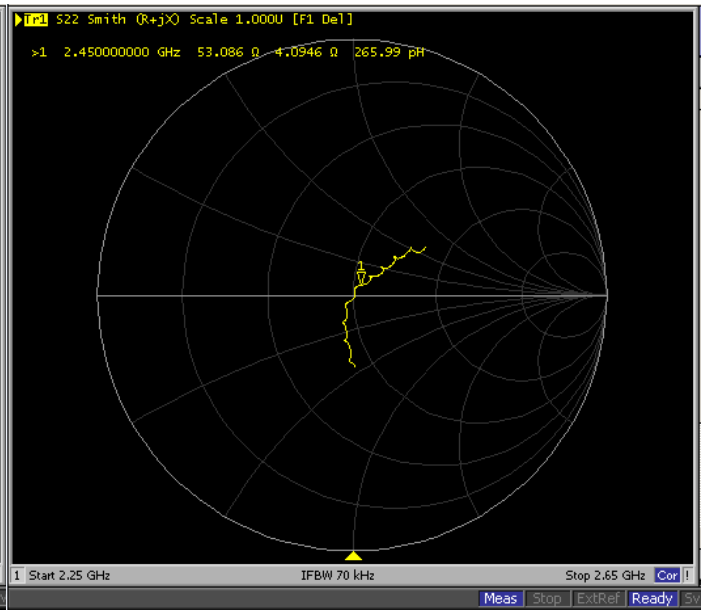

2450 MHz-Body

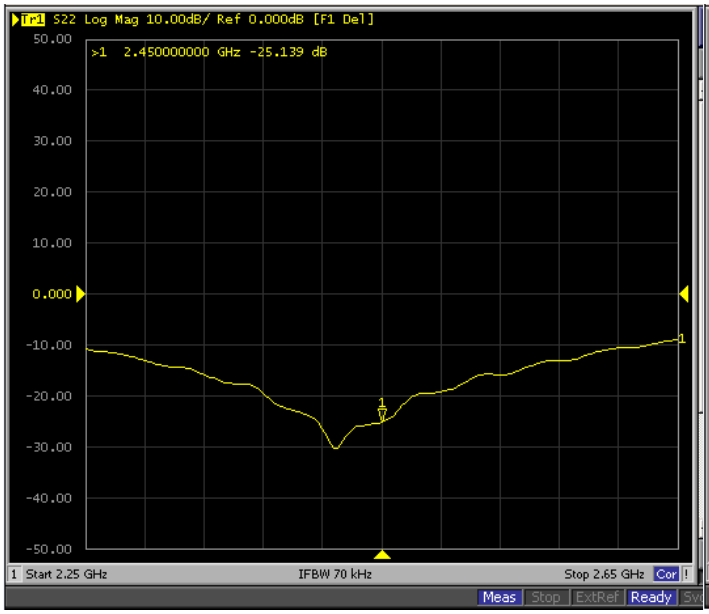

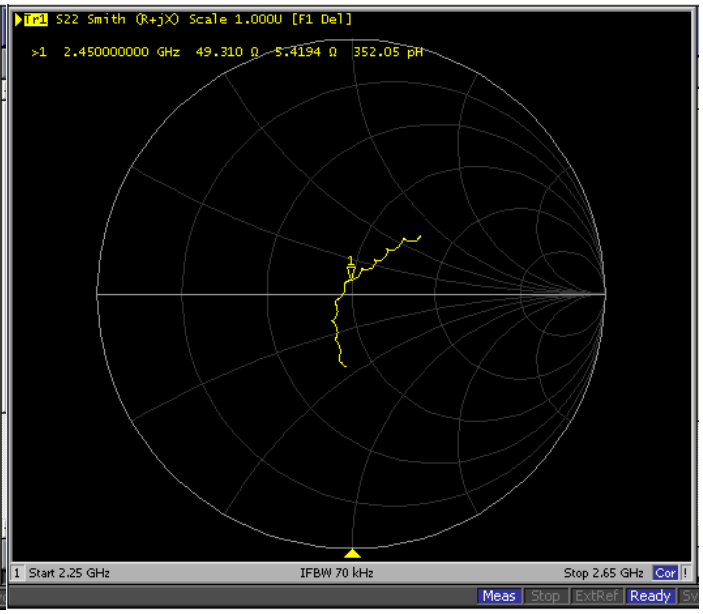

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client CCS-CN (Auden)

Certificate No: D5GHzV2-1095_May13

CALIBRATION CERTIFICATE

Object	D5GHzV2 - SN: 1095
Calibration procedure(s)	QA CAL-22.v2 Calibration procedure for dipole validation kits between 3-6 GHz
Calibration date:	May 31, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37292783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 06327	04-Apr-13 (No. 217-01739)	Apr-14
Reference Probe EX3DV4	SN: 3503	28-Dec-12 (No. EX3-3503_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: May 31, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D5GHzV2-1095_May13 Page 1 of 16

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC 62209-2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", March 2010

b) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.5 ± 6 %	4.50 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.94 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**79.6 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**22.7 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Head TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.3 ± 6 %	4.60 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**83.1 W / kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**23.7 W/kg ± 19.5 % (k=2)**

Head TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.1 ± 6 %	4.79 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5500 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**84.3 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**24.0 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	4.89 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.24 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**82.5 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**23.4 W/kg ± 19.5 % (k=2)**

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.7 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm^3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.86 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**78.7 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.23 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	**22.3 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Body TSL parameters at 5200 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.6 ± 6 %	5.41 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.44 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**74.6 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**20.9 W/kg ± 19.5 % (k=2)**

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.4 ± 6 %	5.53 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**76.0 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.12 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**21.3 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Body TSL parameters at 5500 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.1 ± 6 %	5.80 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5500 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.89 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**79.1 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.19 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**22.0 W/kg ± 19.5 % (k=2)**

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	49.0 ± 6 %	5.80 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.76 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**77.8 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**21.6 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Body TSL parameters at 5800 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.6 ± 6 %	6.24 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm^3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**75.0 W/kg ± 19.9 % (k=2)**

SAR averaged over 10 cm^3 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.06 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	**20.7 W/kg ± 19.5 % (k=2)**

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Appendix

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	50.2 Ω - 6.4 jΩ
Return Loss	- 23.9 dB

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	50.2 Ω - 3.3 jΩ
Return Loss	- 29.6 dB

Antenna Parameters with Head TSL at 5500 MHz

Impedance, transformed to feed point	53.2 Ω - 2.2 jΩ
Return Loss	- 28.5 dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	56.0 Ω - 1.1 jΩ
Return Loss	- 24.8 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.4 Ω - 2.8 jΩ
Return Loss	- 24.8 dB

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	50.7 Ω - 5.3 jΩ
Return Loss	- 25.5 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	50.8 Ω - 1.5 jΩ
Return Loss	- 35.5 dB

Antenna Parameters with Body TSL at 5500 MHz

Impedance, transformed to feed point	53.8 Ω - 1.2 jΩ
Return Loss	- 28.4 dB

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	56.2 Ω + 1.1 jΩ
Return Loss	- 24.5 dB

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	55.6 Ω + 0.3 jΩ
Return Loss	- 25.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.208 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	September 24, 2010

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY5 Validation Report for Head TSL

Date: 30.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; σ = 4.5 S/m; ε_r = 36.5; ρ = 1000 kg/m^3 , Medium parameters used: f = 5300 MHz; σ = 4.6 S/m; ε_r = 36.3; ρ = 1000 kg/m^3 , Medium parameters used: f = 5500 MHz; σ = 4.79 S/m; ε_r = 36.1; ρ = 1000 kg/m^3 , Medium parameters used: f = 5600 MHz; σ = 4.89 S/m; ε_r = 36; ρ = 1000 kg/m^3 , Medium parameters used: f = 5800 MHz; σ = 5.11 S/m; ε_r = 35.7; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.41, 5.41, 5.41); Calibrated: 28.12.2012, ConvF(5.1, 5.1, 5.1); Calibrated: 28.12.2012, ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.76, 4.76, 4.76); Calibrated: 28.12.2012, ConvF(4.81, 4.81, 4.81); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.153 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 29.3 W/kg
SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg
Maximum value of SAR (measured) = 18.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.596 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 31.2 W/kg
SAR(1 g) = 8.3 W/kg; SAR(10 g) = 2.37 W/kg
Maximum value of SAR (measured) = 19.3 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.084 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 33.1 W/kg
SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.4 W/kg
Maximum value of SAR (measured) = 20.0 W/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.341 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 32.9 W/kg
SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.34 W/kg
Maximum value of SAR (measured) = 19.9 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 61.473 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 32.8 W/kg
SAR(1 g) = 7.86 W/kg; SAR(10 g) = 2.23 W/kg
Maximum value of SAR (measured) = 19.2 W/kg

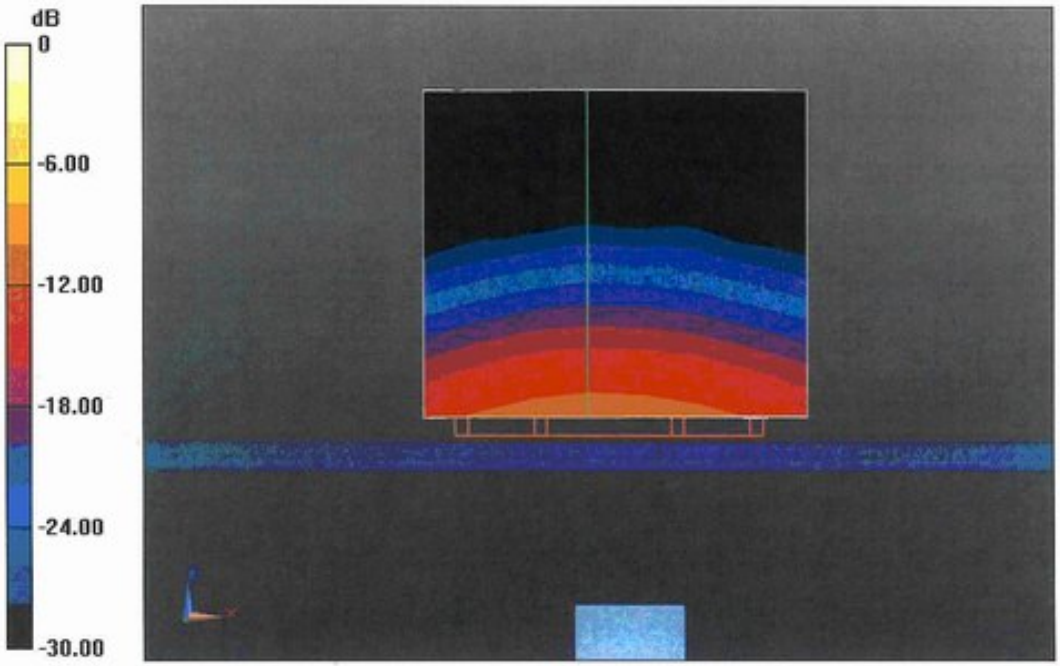

0 dB = 19.2 W/kg = 12.83 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Impedance Measurement Plot for Head TSL

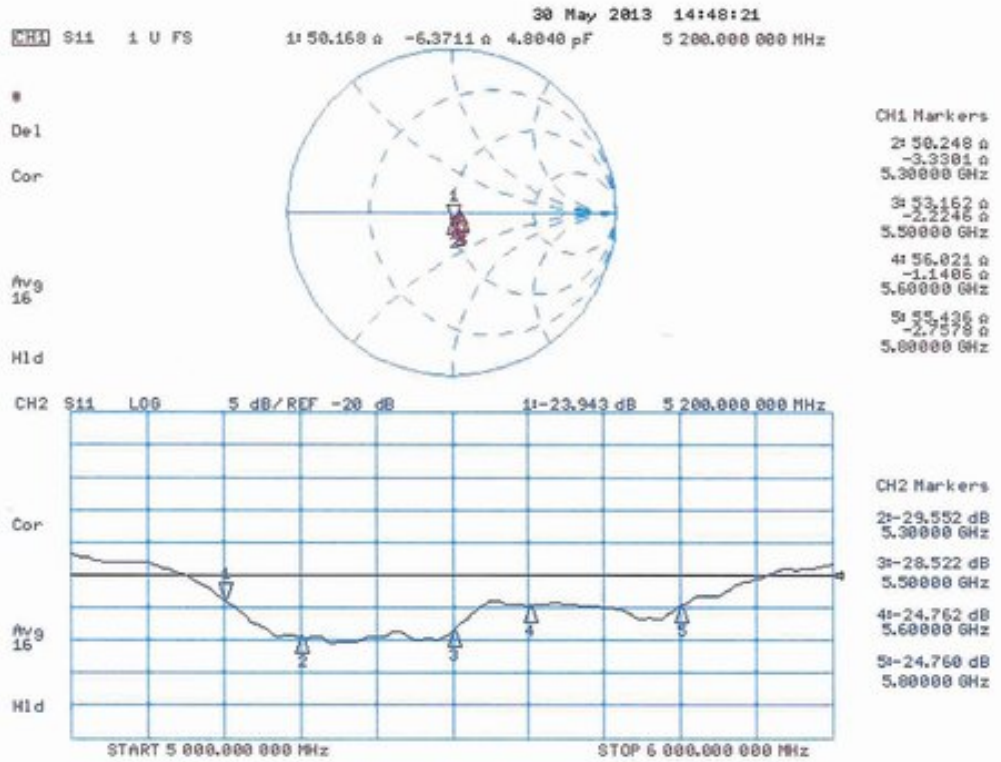

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY5 Validation Report for Body TSL

Date: 31.05.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095

Communication System: UID 0 - CW ; Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5500 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz
Medium parameters used: f = 5200 MHz; σ = 5.41 S/m; ε_r = 49.6; ρ = 1000 kg/m^3 , Medium parameters used: f = 5300 MHz; σ = 5.53 S/m; ε_r = 49.4; ρ = 1000 kg/m^3 , Medium parameters used: f = 5500 MHz; σ = 5.8 S/m; ε_r = 49.1; ρ = 1000 kg/m^3 , Medium parameters used: f = 5600 MHz; σ = 5.8 S/m; ε_r = 49; ρ = 1000 kg/m^3 , Medium parameters used: f = 5800 MHz; σ = 6.24 S/m; ε_r = 48.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.91, 4.91, 4.91); Calibrated: 28.12.2012, ConvF(4.67, 4.67, 4.67); Calibrated: 28.12.2012, ConvF(4.43, 4.43, 4.43); Calibrated: 28.12.2012, ConvF(4.22, 4.22, 4.22); Calibrated: 28.12.2012, ConvF(4.38, 4.38, 4.38); Calibrated: 28.12.2012;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.744 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 29.0 W/kg
SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.08 W/kg
Maximum value of SAR (measured) = 17.0 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.871 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 30.4 W/kg
SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.12 W/kg
Maximum value of SAR (measured) = 17.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.666 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 33.6 W/kg
SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.19 W/kg
Maximum value of SAR (measured) = 18.7 W/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 58.108 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 34.2 W/kg
SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.15 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 55.451 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 34.6 W/kg
SAR(1 g) = 7.47 W/kg; SAR(10 g) = 2.06 W/kg
Maximum value of SAR (measured) = 18.2 W/kg

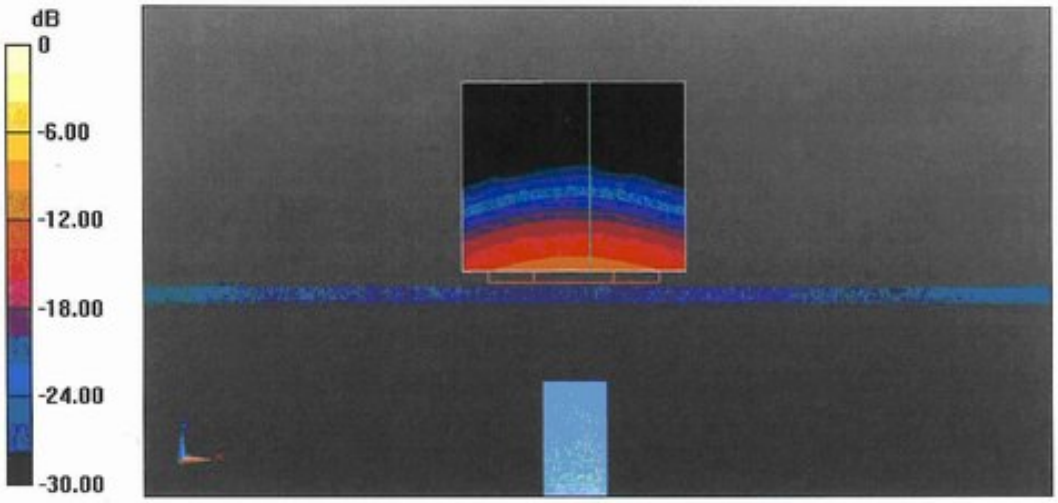

0 dB = 18.2 W/kg = 12.60 dBW/kg

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Impedance Measurement Plot for Body TSL

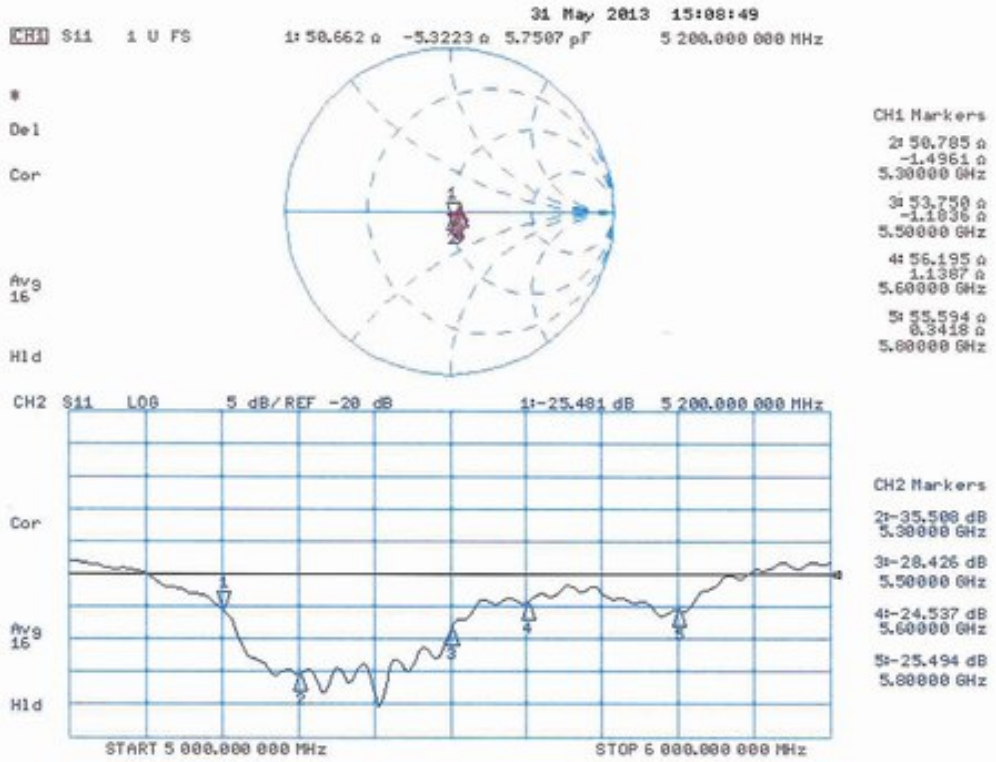

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

D5GHzV2,Serial No.1095 Extended Dipole Calibrations

Per IEEE Std 1528-2003,the dipole should have a return loss better than -20dB at the test frequency to reduce uncertainty in the power measurement
Per KDB 865664 D01,if dipoles are verified in return loss(<-20dB,within 20% of prior calibration),and in impedance (within 5 ohm of prior calibration),the annual calibration is not necessary and the calibration interval can be extended.

Justification of the extended calibration

D5GHzV2 Serial No.1095							
Head							
Date of Measurement		Return Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
5200MHz	5.31.2013	-23.943	--	50.168	--	-6.371	--
	5.29.2014	-23.425	2.16	50.749	0.581	-6.752	0.381
5300MHz	5.31.2013	-29.552	--	50.248	--	-3.330	--
	5.29.2014	-27.170	8.06	49.802	0.446	-4.424	1.094
5500MHz	5.31.2013	-28.522	--	53.162	--	-2.225	--
	5.29.2014	-29.647	3.94	52.249	0.913	-2.350	0.125
5600MHz	5.31.2013	-24.762	--	56.021	--	-1.141	--
	5.29.2014	-26.263	6.06	54.956	1.065	-1.291	0.150
5800MHz	5.31.2013	-24.760	--	55.436	--	-2.758	--
	5.29.2014	-24.078	2.75	56.550	1.114	-1.310	1.448

D5GHzV2 Serial No.1095							
Body							
Date of Measurement		Return Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
5200MHz	5.31.2013	-25.481	--	50.662	--	-5.322	--
	5.29.2014	-23.945	6.03	50.975	0.313	-6.336	1.014
5300MHz	5.31.2013	-35.508	--	50.785	--	-1.496	--
	5.29.2014	-31.173	12.21	49.992	0.793	-2.732	1.236
5500MHz	5.31.2013	-28.426	--	53.750	--	-1.184	--
	5.29.2014	-28.353	0.26	52.867	0.883	-2.742	1.558
5600MHz	5.31.2013	-24.537	--	56.195	--	1.139	--
	5.29.2014	-24.330	0.84	56.344	0.149	0.347	0.792
5800MHz	5.31.2013	-25.494	--	55.594	--	0.342	--
	5.29.2014	-24.908	2.30	55.887	0.293	-1.203	1.545

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration.Therefore the verification result should support extended calibration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Verification Data D5GHzV2 Serial No.1095

D5GHzV2-Head

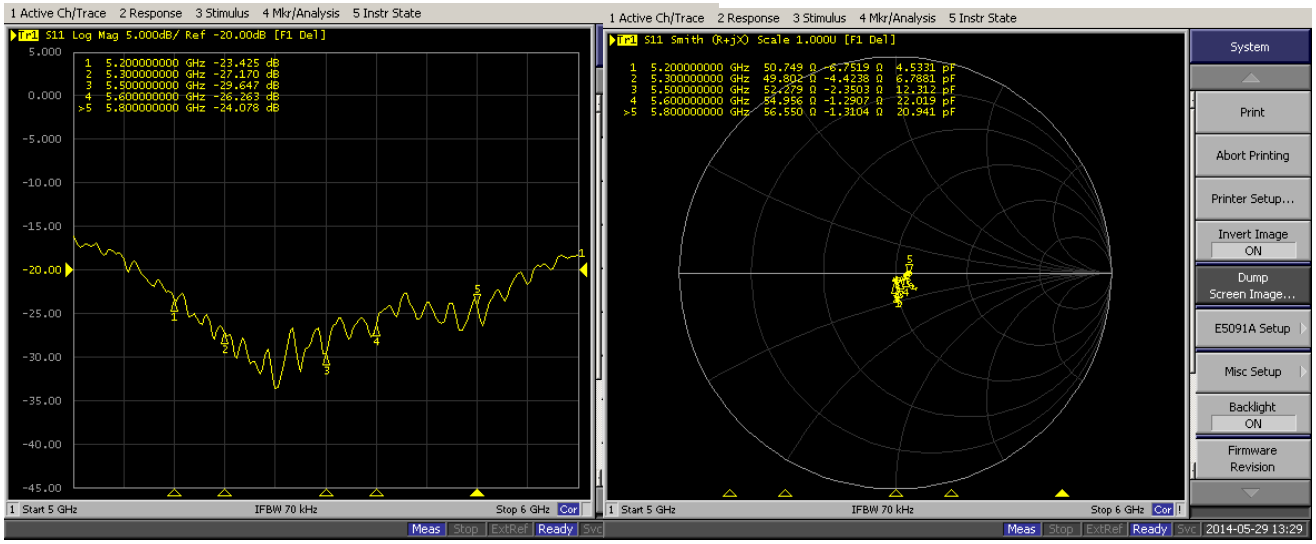

D5GHzV2-Body

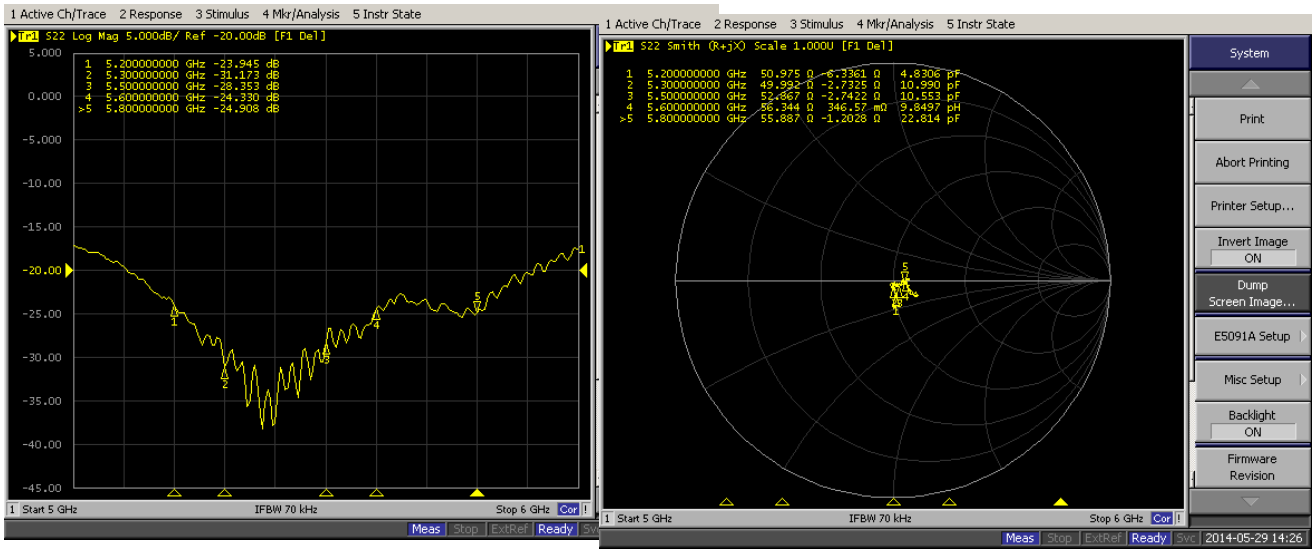

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Per IEEE Std 1528-2003,the dipole should have a return loss better than -20dB at the test frequency to reduce uncertainty in the power measurement
Per KDB 865664 D01,if dipoles are verified in return loss(<-20dB,within 20% of prior calibration),and in impedance (within 5 ohm of prior calibration),the annual calibration is not necessary and the calibration interval can be extended.

Justification of the extended calibration

D5GHzV2 Serial No.1095							
Head							
Date of Measurement		Return Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
5200MHz	5.31.2013	-23.943	--	50.168	--	-6.371	--
	5.29.2014	-23.425	2.16	50.749	0.581	-6.752	0.381
	5.28.2015	-23.192	0.99	50.909	0.16	-6.980	0.228
5300MHz	5.31.2013	-29.552	--	50.248	--	-3.330	--
	5.29.2014	-27.170	8.06	49.802	0.446	-4.424	1.094
	5.28.2015	-28.187	3.74	49.973	0.171	-3.953	0.471
5500MHz	5.31.2013	-28.522	--	53.162	--	-2.225	--
	5.29.2014	-29.647	3.94	52.249	0.913	-2.350	0.125
	5.28.2015	-27.742	6.43	52.976	0.727	-2.962	0.612
5600MHz	5.31.2013	-24.762	--	56.021	--	-1.141	--
	5.29.2014	-26.263	6.06	54.956	1.065	-1.291	0.150
	5.28.2015	-25.523	2.82	55.487	0.531	0.283	1.008
5800MHz	5.31.2013	-24.760	--	55.436	--	-2.758	--
	5.29.2014	-24.078	2.75	56.550	1.114	-1.310	1.448
	5.28.2015	-25.841	7.32	55.187	1.363	-1.813	0.503

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

D5GHzV2 Serial No.1095							
Body							
Date of Measurement		Return Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
5200MHz	5.31.2013	-25.481	--	50.662	--	-5.322	--
	5.29.2014	-23.945	6.03	50.975	0.313	-6.336	1.014
	5.28.2015	-24.992	4.37	50.975	0	-5.587	0.749
5300MHz	5.31.2013	-35.508	--	50.785	--	-1.496	--
	5.29.2014	-31.173	12.21	49.992	0.793	-2.732	1.236
	5.28.2015	-32.699	4.90	49.852	0.14	-2.406	0.326
5500MHz	5.31.2013	-28.426	--	53.750	--	-1.184	--
	5.29.2014	-28.353	0.26	52.867	0.883	-2.742	1.558
	5.28.2015	-30.006	5.83	52.895	0.028	-1.424	1.318
5600MHz	5.31.2013	-24.537	--	56.195	--	1.139	--
	5.29.2014	-24.330	0.84	56.344	0.149	0.347	0.792
	5.28.2015	-25.266	3.85	55.666	0.678	0.746	0.399
5800MHz	5.31.2013	-25.494	--	55.594	--	0.342	--
	5.29.2014	-24.908	2.30	55.887	0.293	-1.203	1.545
	5.28.2015	-24.266	2.58	56.492	0.605	-0.292	0.911

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Dipole Verification Data D5GHzV2 Serial No.1095

D5GHzV2-Head

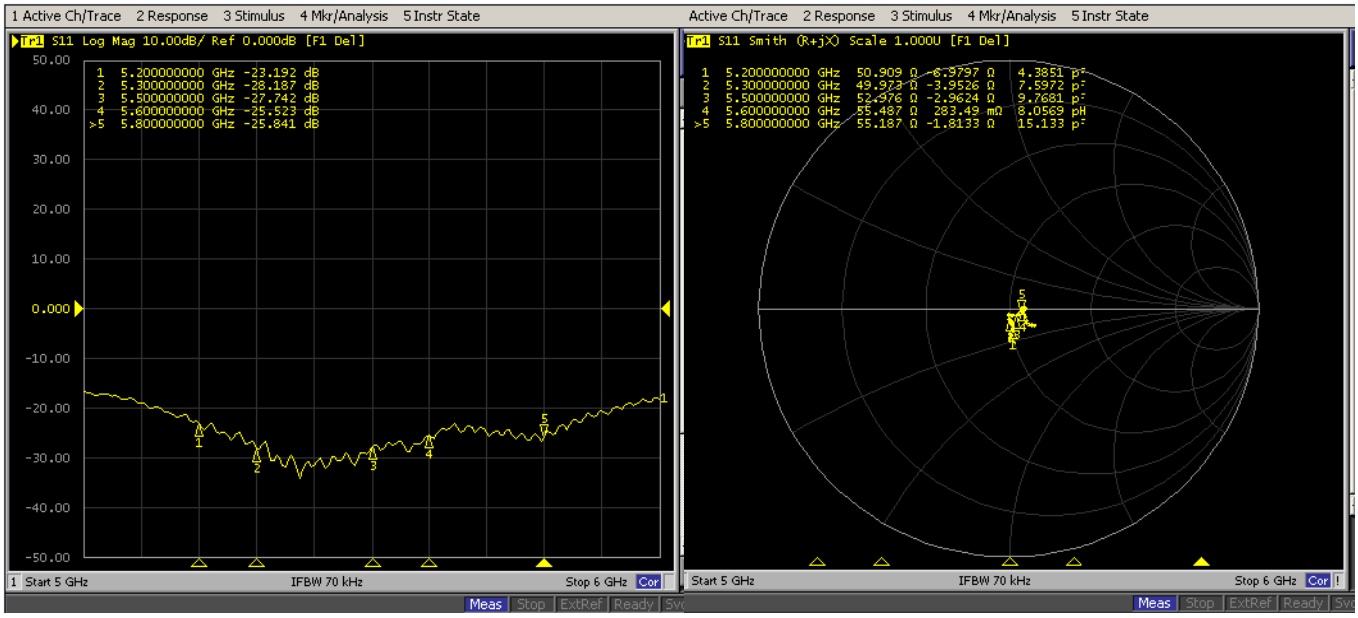

D5GHzV2-Body

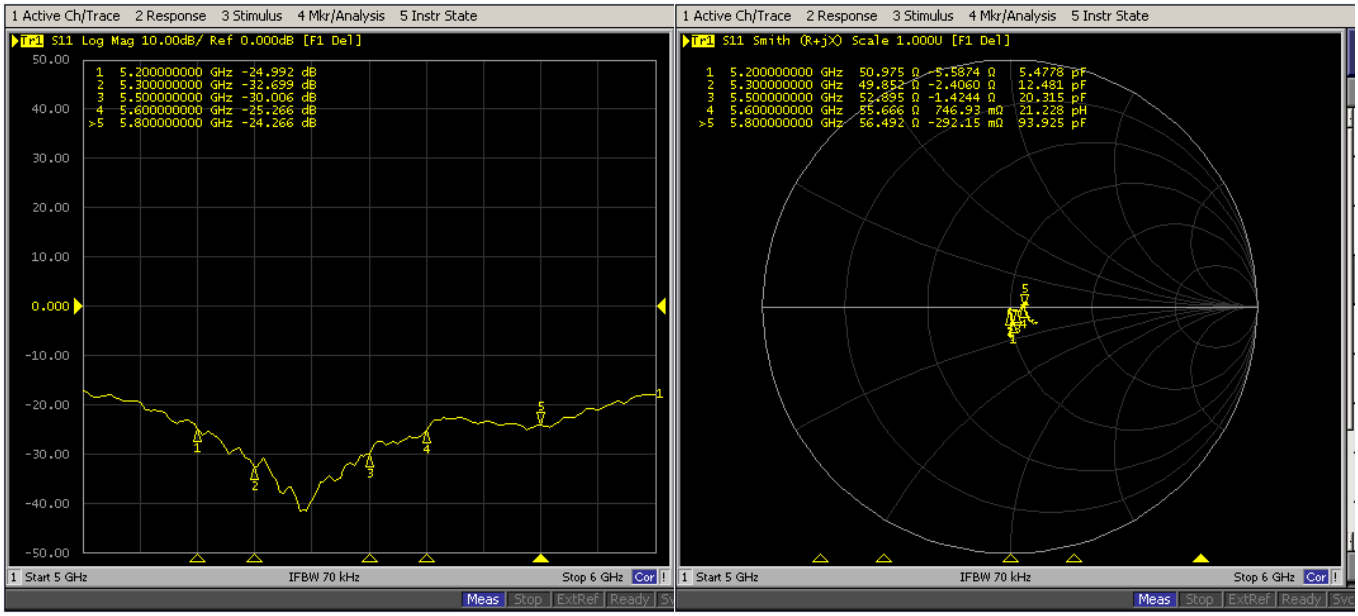

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

1245

IMPORTANT NOTICE

USAGE OF THE DAE 4

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

Important Note:
Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:
Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:
To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

Schmid & Partner Engineering

TN_BR040315AD DAE4.doc 11.12.2009

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client CCS - CN (Auden)

Certificate No: DAE4-1245_Jul15

CALIBRATION CERTIFICATE

Object	DAE4 - SD 000 D04 BM - SN: 1245
Calibration procedure(s)	QA CAL-06.v29 Calibration procedure for the data acquisition electronics (DAE)
Calibration date:	July 22, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-14 (No:15573)	Oct-15
Secondary Standards	**ID #**	**Check Date (in house)**	**Scheduled Check**
Auto DAE Calibration Unit	SE UWS 053 AA 1001	06-Jan-15 (in house check)	In house check: Jan-16
Calibrator Box V2.1	SE UMS 006 AA 1002	06-Jan-15 (in house check)	In house check: Jan-16

	Name	Function	Signature
Calibrated by:	Eric Hainfeld	Technician	
Approved by:	Fin Bomholt	Deputy Technical Manager	

Issued: July 22, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-1245_Jul15 Page 1 of 5

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range:	1LSB =	6.1μV ,	full range =	-100...+300 mV
Low Range:	1LSB =	61nV ,	full range =	-1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.968 ± 0.02% (k=2)	404.691 ± 0.02% (k=2)	405.828 ± 0.02% (k=2)
Low Range	4.00326 ± 1.50% (k=2)	3.98439 ± 1.50% (k=2)	4.02655 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	28.5 ° ± 1 °

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	200028.69	-6.39	-0.00
Channel X	+ Input	20006.54	1.92	0.01
Channel X	- Input	-20003.38	1.71	-0.01
Channel Y	+ Input	200030.86	-3.89	-0.00
Channel Y	+ Input	20003.32	-1.15	-0.01
Channel Y	- Input	-20004.69	0.56	-0.00
Channel Z	+ Input	200028.63	-11.14	-0.01
Channel Z	+ Input	20003.37	-0.96	-0.00
Channel Z	- Input	-20004.54	0.81	-0.00

Low Range		Reading (µV)	Difference (µV)	Error (%)
Channel X	+ Input	2000.94	0.10	0.01
Channel X	+ Input	200.71	-0.31	-0.15
Channel X	- Input	-199.09	-0.05	0.03
Channel Y	+ Input	2000.77	-0.04	-0.00
Channel Y	+ Input	200.24	-0.79	-0.39
Channel Y	- Input	-199.48	-0.35	0.18
Channel Z	+ Input	2001.26	0.43	0.02
Channel Z	+ Input	199.86	-1.00	-0.50
Channel Z	- Input	-201.97	-2.76	1.38

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-7.52	-8.59
	- 200	10.21	8.63
Channel Y	200	-7.45	-7.28
	- 200	6.40	6.24
Channel Z	200	-5.86	-6.35
	- 200	4.39	3.77

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	3.60	-3.27
Channel Y	200	9.38	-	3.62
Channel Z	200	9.93	6.83	-

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15877	17010
Channel Y	16451	16190
Channel Z	15943	17349

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10MΩ

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.17	-0.54	2.46	0.56
Channel Y	0.34	-0.62	1.45	0.44
Channel Z	-0.68	-1.73	0.92	0.51

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client CCS-CN (Auden)

Certificate No: EX3-3798_Jul15

CALIBRATION CERTIFICATE

Object	EX3DV4 - SN:3798
Calibration procedure(s)	QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6 Calibration procedure for dosimetric E-field probes
Calibration date	July 24, 2015

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Claudio Leubler	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: July 24, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3798_Jul15 Page 1 of 11

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., ϑ = 0 is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- *NORMx,y,z*: Assessed for E-field polarization ϑ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E^2-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)x,y,z = NORMx,y,z * frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORMx,y,z * ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Probe EX3DV4

SN:3798

Manufactured: April 5, 2011
Calibrated: July 24, 2015

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu V/(V/m)^2$)[A]	0.54	0.51	0.59	± 10.1 %
DCP (mV)[B]	101.3	100.9	102.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB√µV	C	D dB	VR mV	Unc[E] (k=2)
0	CW	X	0.0	0.0	1.0	0.00	140.4	±3.5 %
		Y	0.0	0.0	1.0		136.3	
		Z	0.0	0.0	1.0		128.7	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

[A] The uncertainties of Norm X,Y,Z do not affect the E^2-field uncertainty inside TSL (see Pages 5 and 6).
[B] Numerical linearization parameter: uncertainty not required.
[E] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha [G]	Depth [G] (mm)	Unc (k=2)
835	41.5	0.90	9.13	9.13	9.13	0.38	0.97	± 12.0 %
900	41.5	0.97	8.88	8.88	8.88	0.23	1.50	± 12.0 %
1810	40.0	1.40	7.68	7.68	7.68	0.38	0.80	± 12.0 %
1900	40.0	1.40	7.63	7.63	7.63	0.42	0.81	± 12.0 %
2450	39.2	1.80	6.97	6.97	6.97	0.36	0.84	± 12.0 %
5200	36.0	4.66	5.08	5.08	5.08	0.35	1.80	± 13.1 %
5300	35.9	4.76	4.84	4.84	4.84	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.81	4.81	4.81	0.35	1.80	± 13.1 %
5600	35.5	5.07	4.59	4.59	4.59	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.67	4.67	4.67	0.40	1.80	± 13.1 %

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) [C]	Relative Permittivity [F]	Conductivity (S/m) [F]	ConvF X	ConvF Y	ConvF Z	Alpha [G]	Depth [G] (mm)	Unc (k=2)
835	55.2	0.97	8.87	8.87	8.87	0.30	1.10	± 12.0 %
900	55.0	1.05	8.59	8.59	8.59	0.29	1.11	± 12.0 %
1810	53.3	1.52	7.40	7.40	7.40	0.39	0.81	± 12.0 %
1900	53.3	1.52	7.29	7.29	7.29	0.30	0.96	± 12.0 %
2450	52.7	1.95	7.08	7.08	7.08	0.25	0.80	± 12.0 %
5200	49.0	5.30	4.64	4.64	4.64	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.42	4.42	4.42	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.01	4.01	4.01	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.90	3.90	3.90	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.16	4.16	4.16	0.50	1.90	± 13.1 %

[C] Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.
[F] At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
[G] Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

EX3DV4– SN:3798 July 24, 2015

Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)

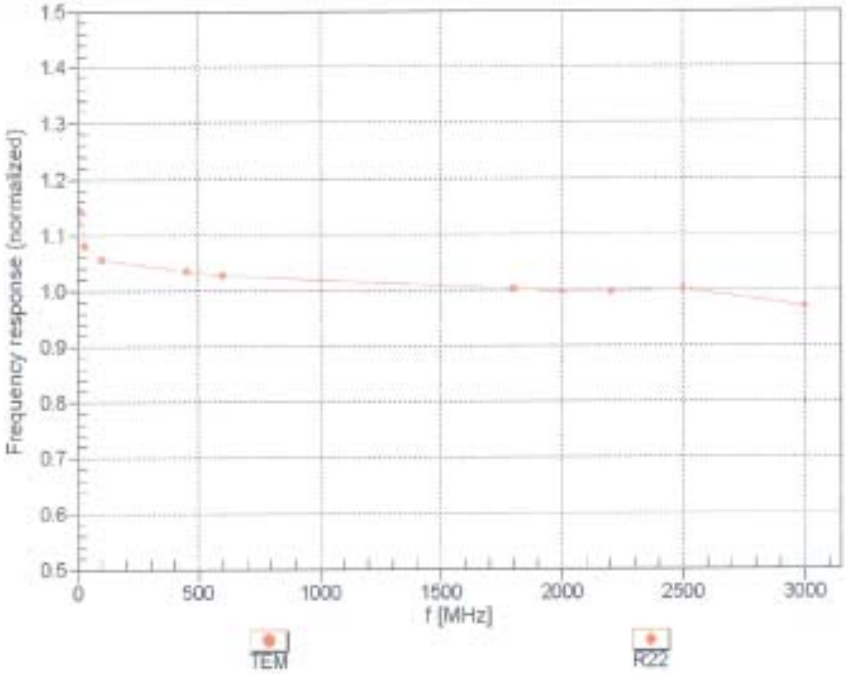

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

EX3DV4– SN:3798 July 24, 2015

Receiving Pattern (ϕ), ϑ = 0°

f=600 MHz,TEM

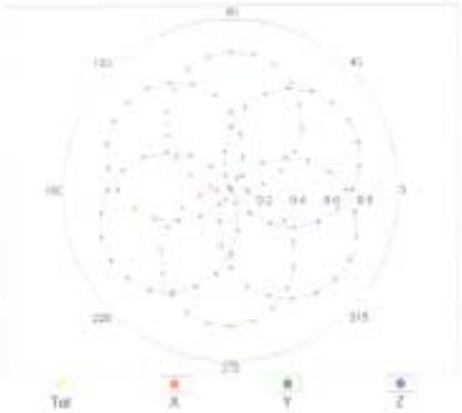

f=1800 MHz,R22

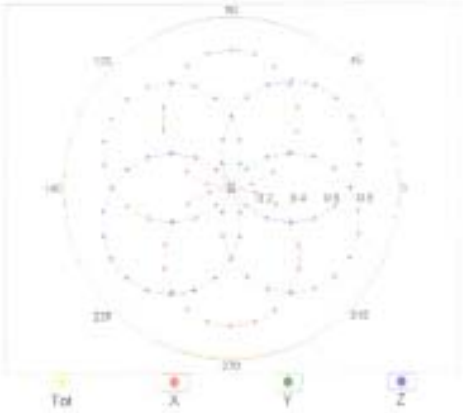

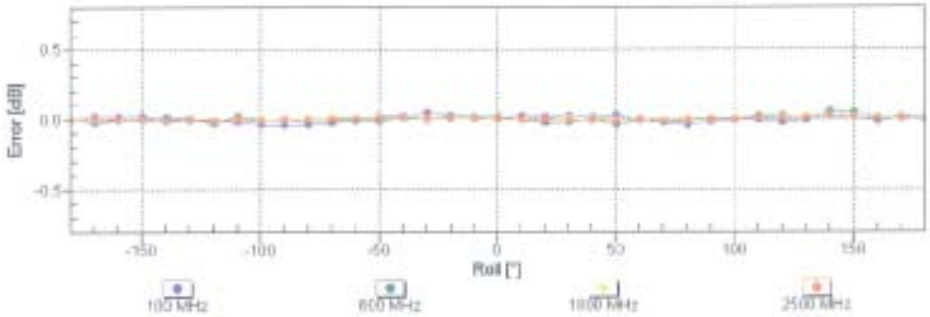

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

EX3DV4– SN:3798 July 24, 2015

Dynamic Range f(SAR$_{head}$)
(TEM cell , f_{eval}= 1900 MHz)

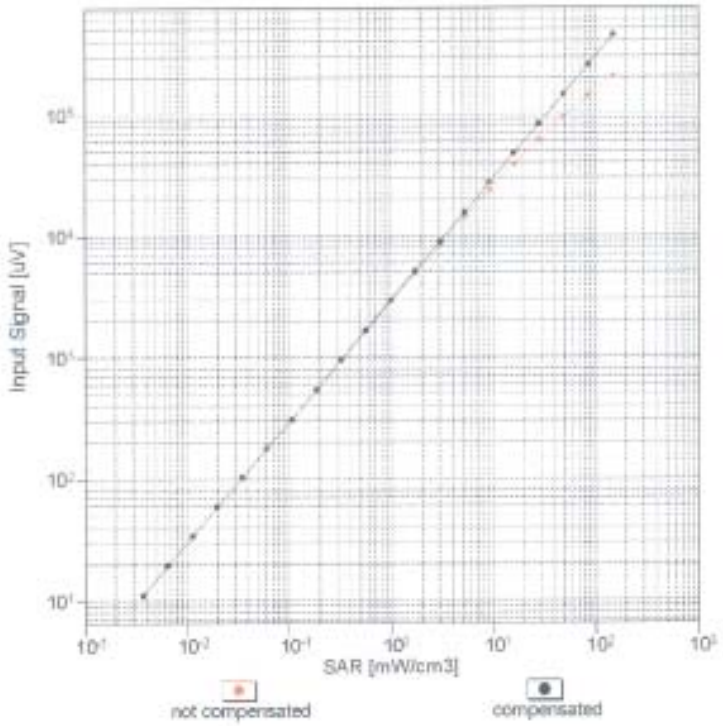

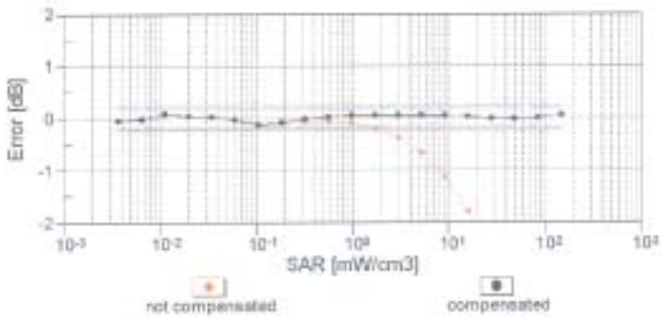

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-3798_Jul15 Page 9 of 11

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

EX3DV4– SN:3798 July 24, 2015

Conversion Factor Assessment

f = 835 MHz,WGLS R9 (H_convF) f = 1900 MHz,WGLS R22 (H_convF)

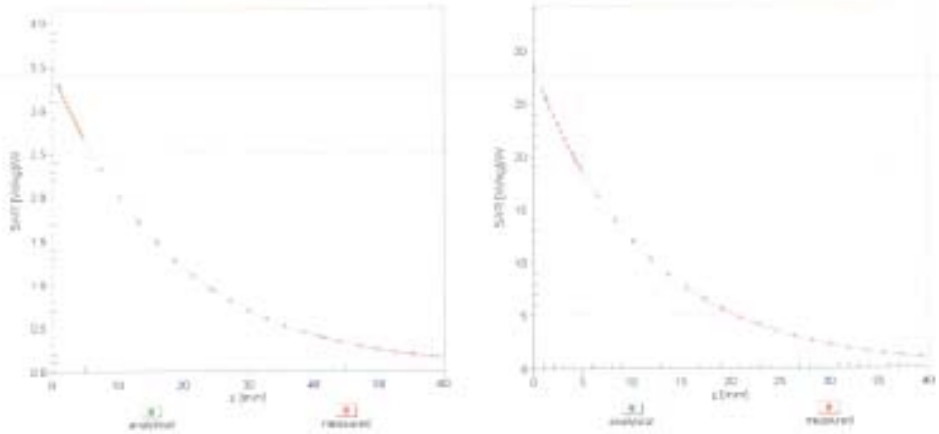

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

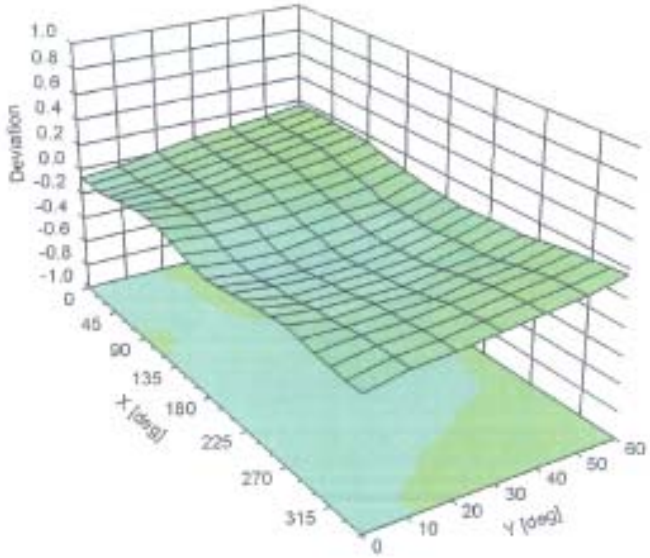

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: EX3-3798_Jul15 Page 10 of 11

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3798

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	140.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

APPENDIX C: PLOTS OF SAR TEST RESULT

The plots are showing in the file named Appendix C Plots of SAR Test Result

END REPORT

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.