

APPENDIX A

Graph Results (WIFI 2.4GHz & WIFI 5GHz)

WIFI 2.4GHz (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH1(2412MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2412

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx = 1.500$ mm, $dy = 1.500$ mm

Maximum value of SAR (interpolated) = 0.142 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx = 8$ mm, $dy = 8$ mm, $dz = 5$ mm

Reference Value = 6.575 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

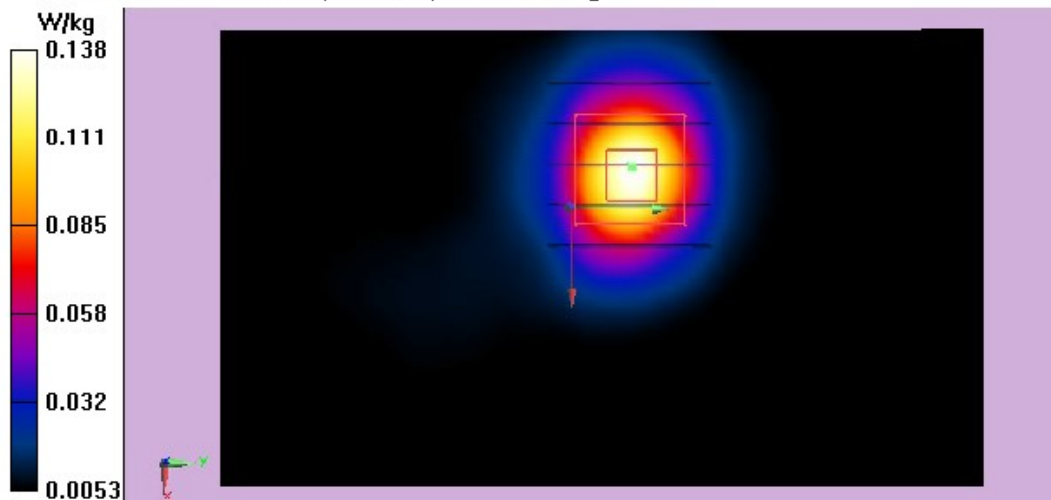

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH1(2412MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.841 \text{ S/m}$; $\epsilon_r = 38.849$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH1(2412MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.19 W/kg

Configuration/CH1(2412MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.250 V/m ; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 0.519 W/kg ; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

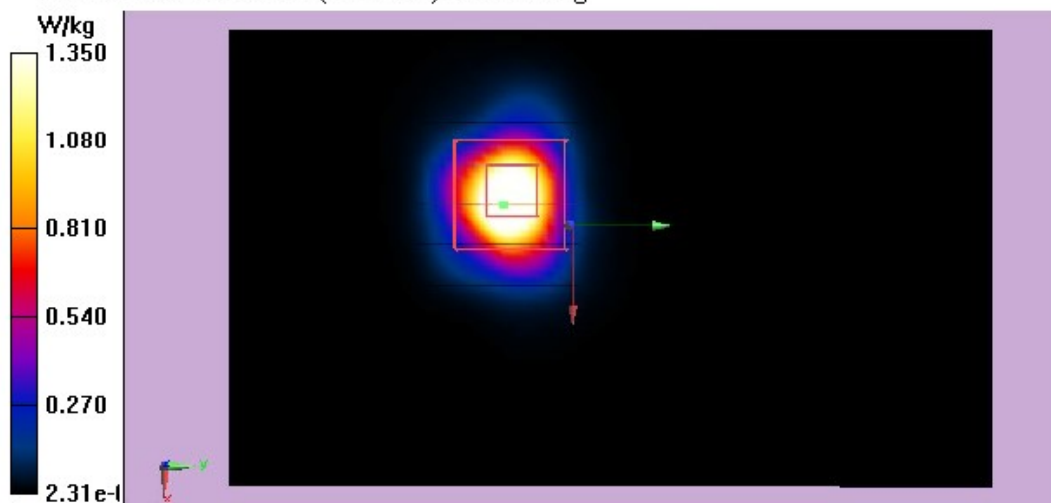

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH7(2442MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH7(2442MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.25 W/kg

Configuration/CH7(2442MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.240 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.537 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

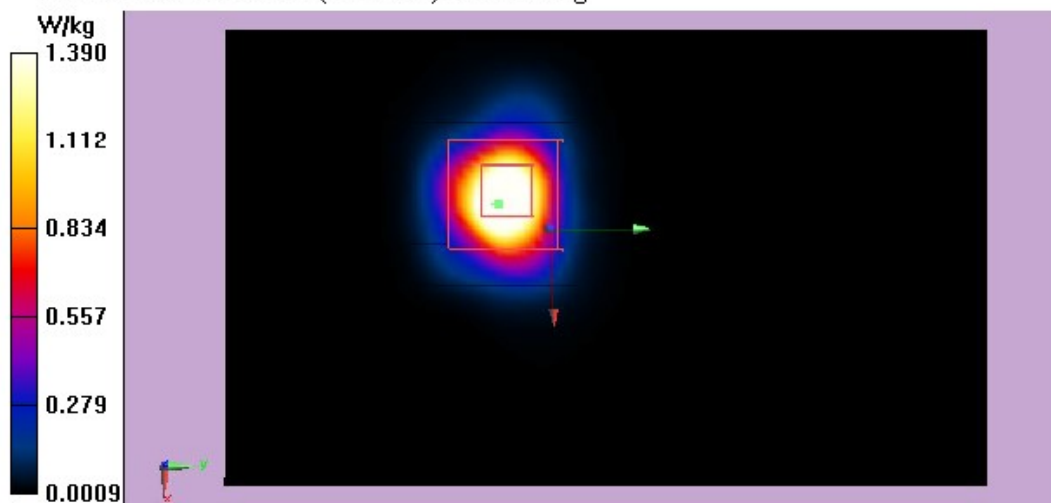

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH13(2472MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH13(2472MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.42 W/kg

Configuration/CH13(2472MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.125 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

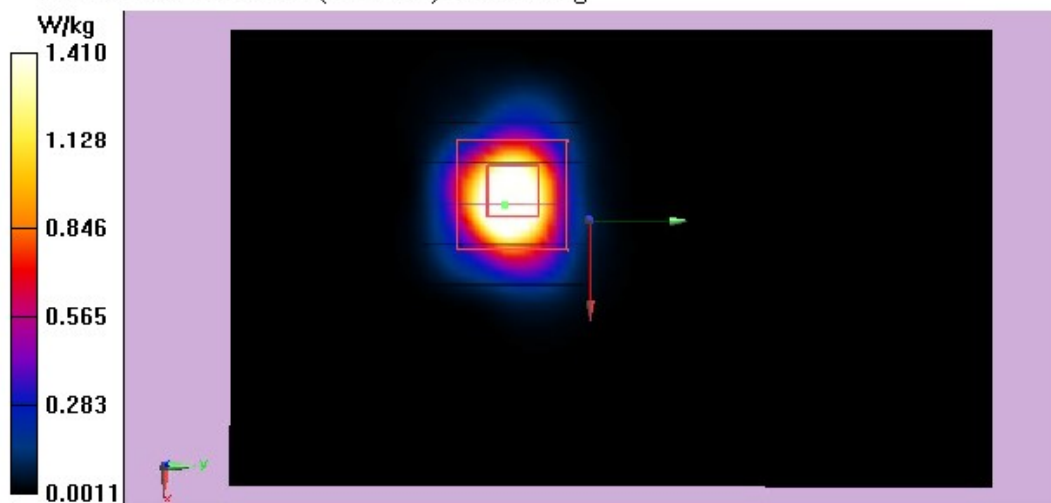

WIFI 2.4GHz (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH1(2412MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2412

MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx = 1.500$ mm, $dy = 1.500$ mm

Maximum value of SAR (interpolated) = 0.0666 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx = 8$ mm, $dy = 8$ mm, $dz = 5$ mm

Reference Value = 5.448 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0506 W/kg

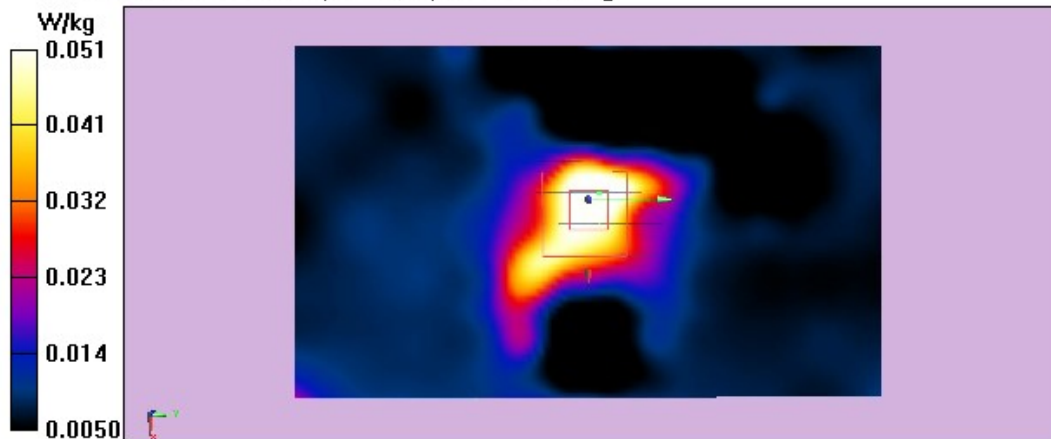

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH1(2412MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 38.849$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH1(2412MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.55 W/kg

Configuration/CH1(2412MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.31 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

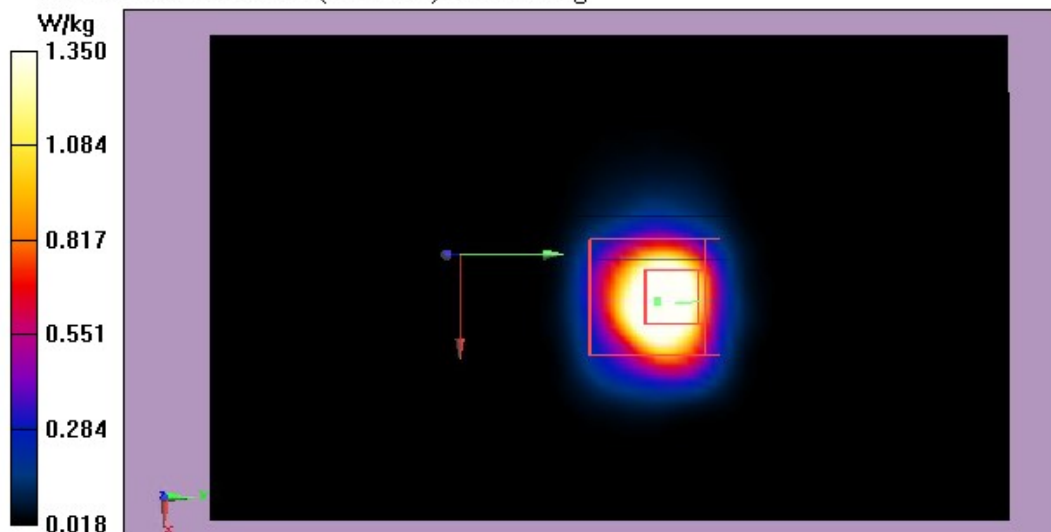

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH7(2442MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2442 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH7(2442MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.16 W/kg

Configuration/CH7(2442MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.63 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 0.481 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

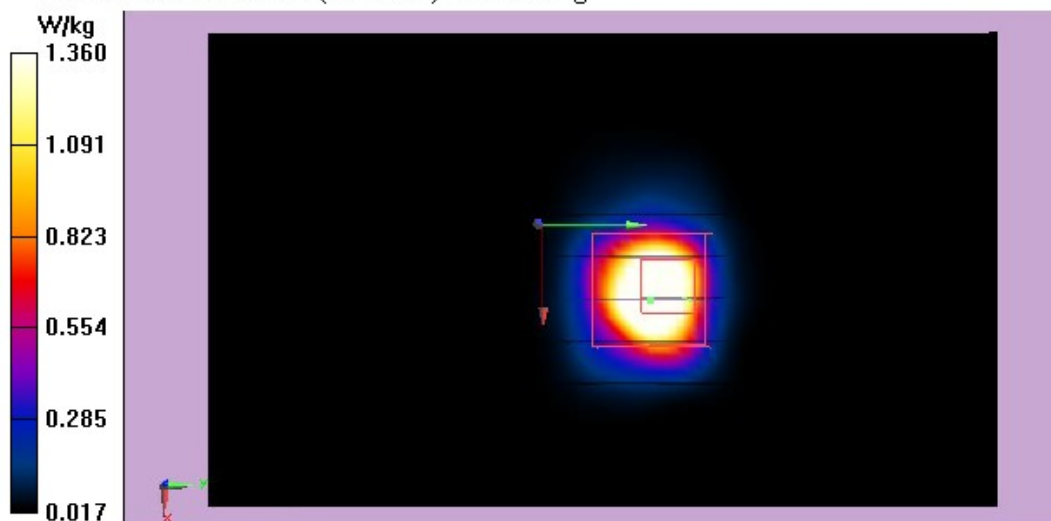

Test Laboratory: Audix SAR Lab

Date: 07/03/2026

CH13(2472MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency: 2472 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.908$ S/m; $\epsilon_r = 38.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH13(2472MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.06 W/kg

Configuration/CH13(2472MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.84 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 2.87 W/kg

SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.230 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

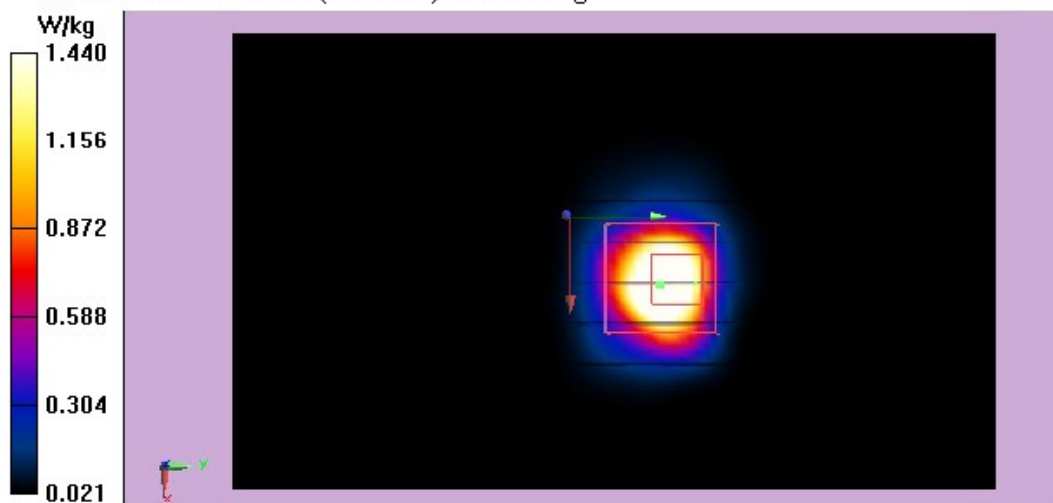

WIFI 5GHz Band 1 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH36(5180MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.525 \text{ S/m}$; $\epsilon_r = 37.179$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH36(5180MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.13 W/kg

Configuration/CH36(5180MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.090 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.82 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

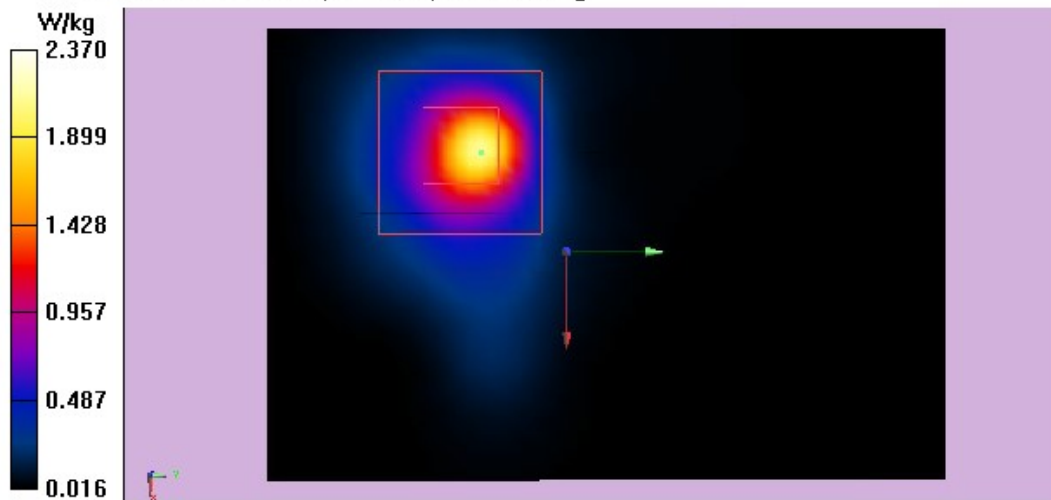

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH40(5200MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.51 \text{ S/m}$; $\epsilon_r = 35.53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH40(5200MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.17 W/kg

Configuration/CH40(5200MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.058 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.84 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 2.38 W/kg

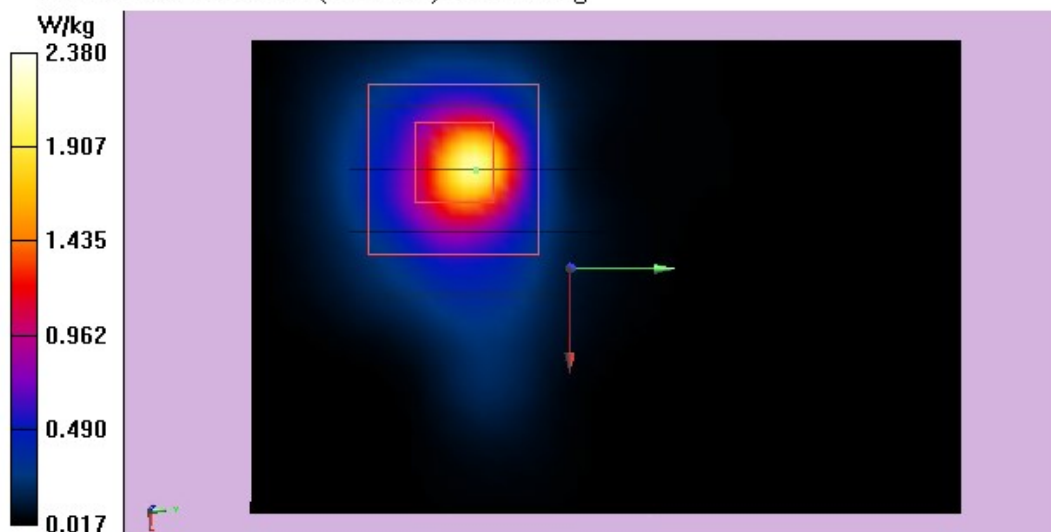

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH48(5240MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.535 \text{ S/m}$; $\epsilon_r = 37.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.167 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.034 V/m ; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.153 W/kg ; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

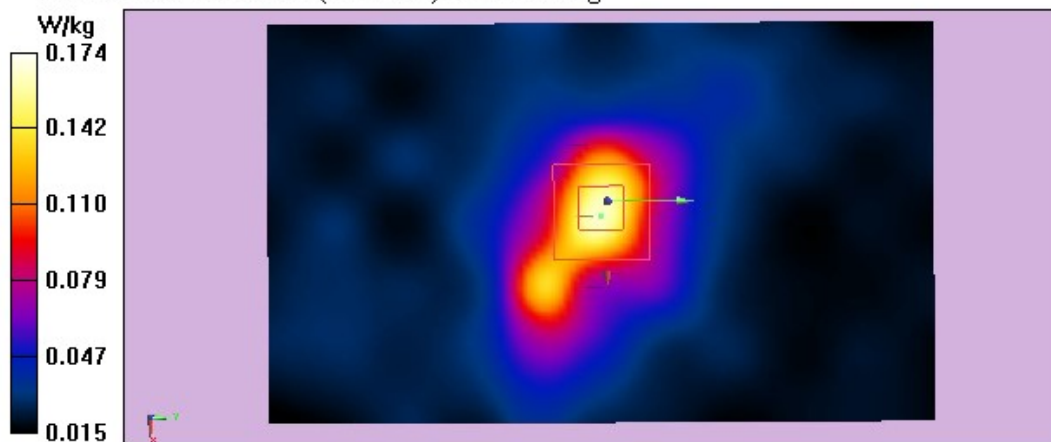

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH48(5240MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.535 \text{ S/m}$; $\epsilon_r = 37.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH48(5240MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.15 W/kg

Configuration/CH48(5240MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.287 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 4.83 W/kg

SAR(1 g) = 0.384 W/kg ; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 2.18 W/kg

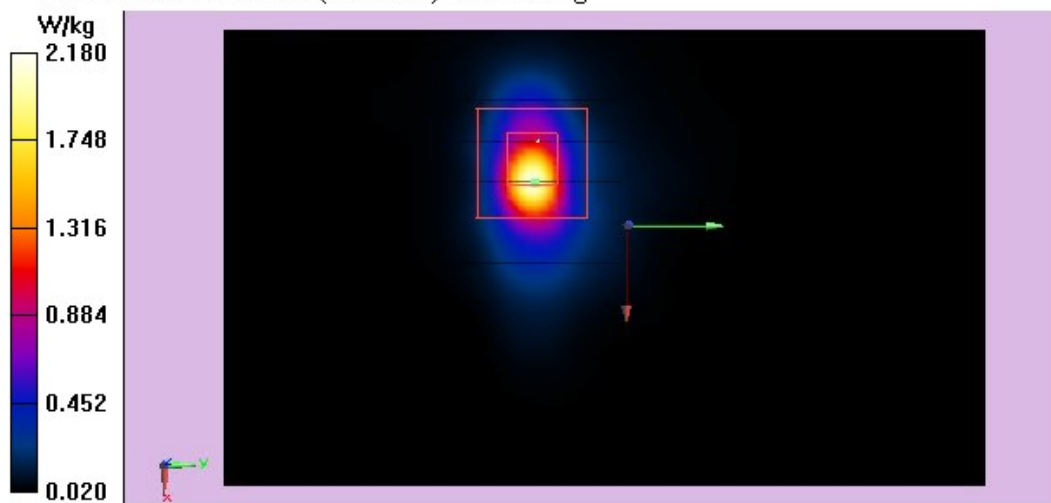

WIFI 5GHz Band 1 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH36(5180MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System
Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication System PAR: 0
dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.525 \text{ S/m}$; $\epsilon_r = 37.179$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH36(5180MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.99 W/kg

Configuration/CH36(5180MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.40 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.12 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 3.32 W/kg

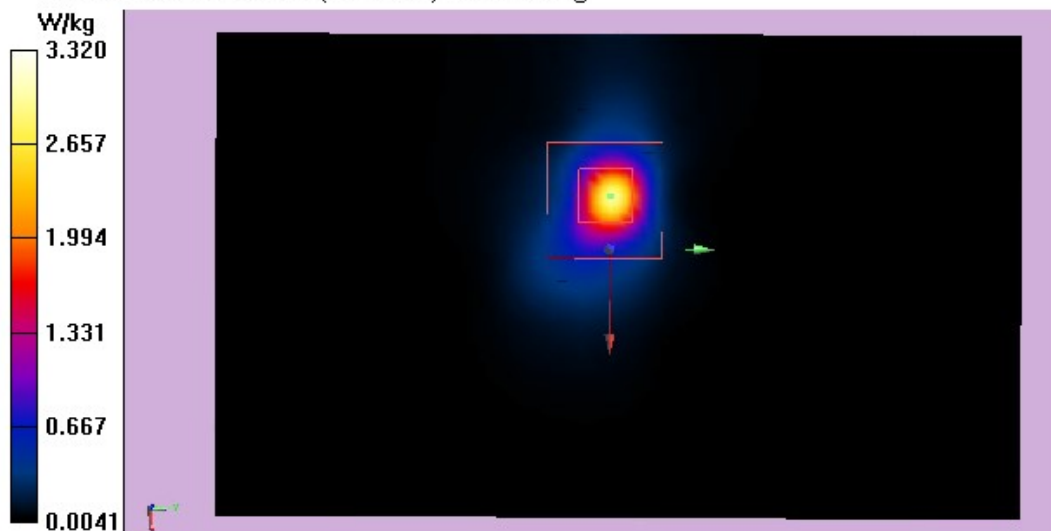

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH40(5200MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.51 \text{ S/m}$; $\epsilon_r = 35.53$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH40(5200MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.09 W/kg

Configuration/CH40(5200MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.12 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 6.09 W/kg

SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 3.31 W/kg

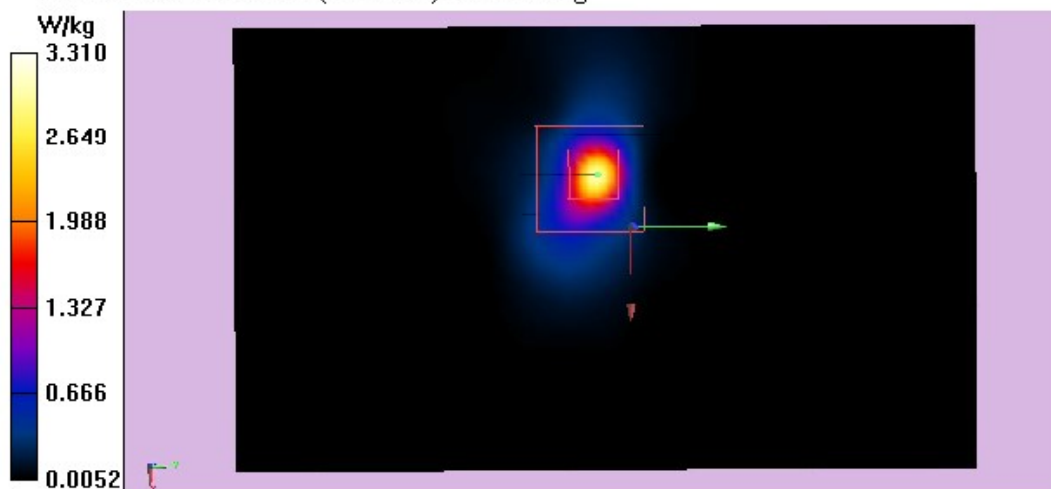

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH48(5240MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.535$ S/m; $\epsilon_r = 37.13$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.200 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.453 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

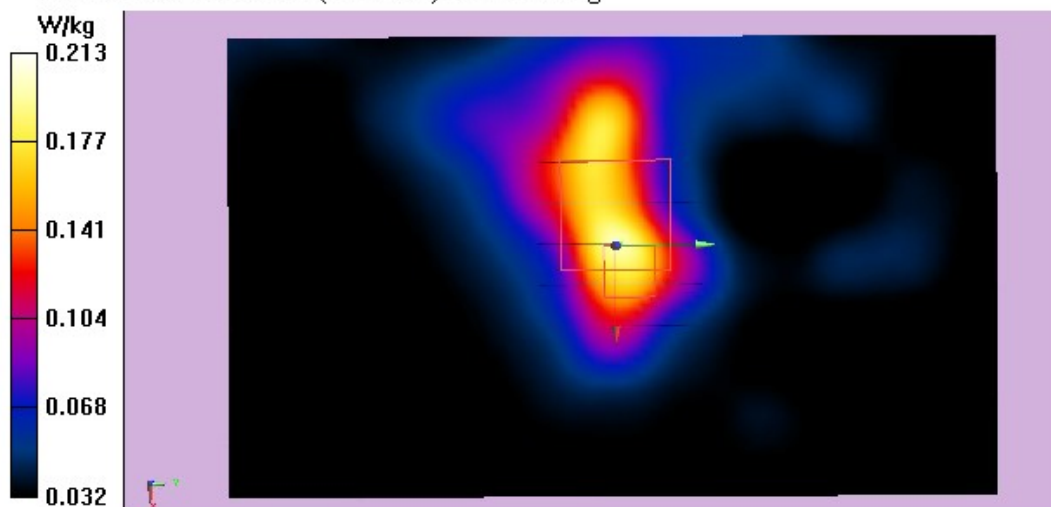

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH48(5240MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.535 \text{ S/m}$; $\epsilon_r = 37.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH48(5240MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.12 W/kg

Configuration/CH48(5240MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.35 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 3.42 W/kg

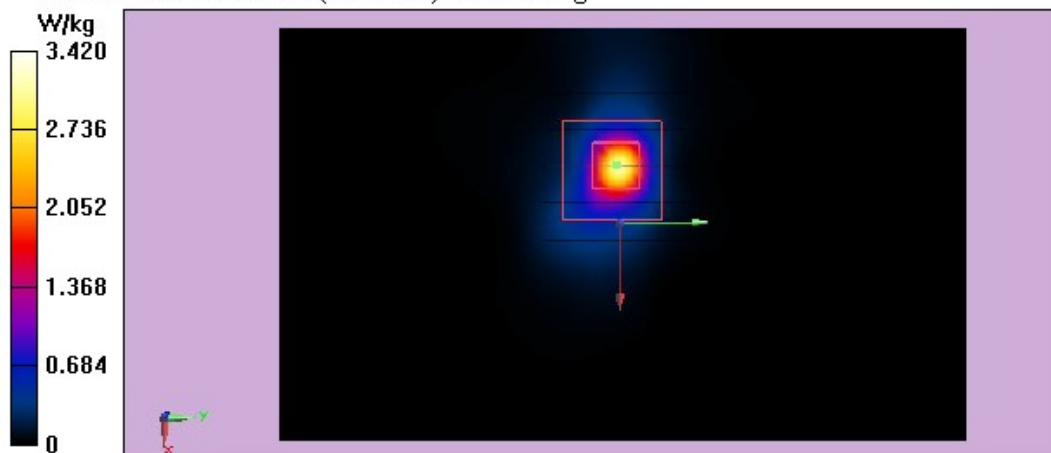

WIFI 5GHz Band 2 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH52(5260MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System
Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0
dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.62 \text{ S/m}$; $\epsilon_r = 37.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH52(5260MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.34 W/kg

Configuration/CH52(5260MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.055 V/m ; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 0.405 W/kg ; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 2.25 W/kg

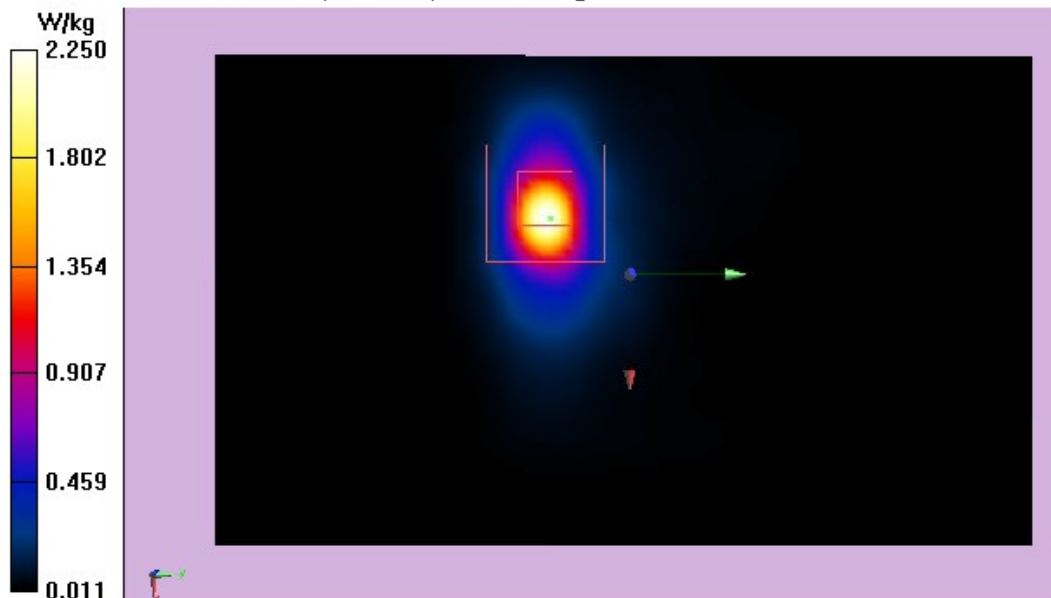

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH60(5300MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.592 \text{ S/m}$; $\epsilon_r = 37.057$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH60(5300MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.42 W/kg

Configuration/CH60(5300MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.130 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 5.13 W/kg

SAR(1 g) = 0.402 W/kg ; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 2.30 W/kg

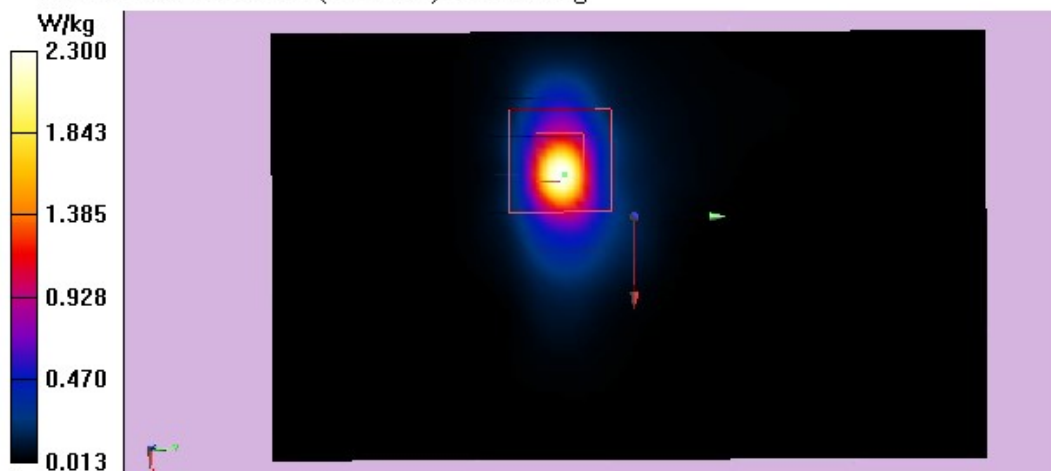

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.61 \text{ S/m}$; $\epsilon_r = 37.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.173 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.153 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.155 W/kg ; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

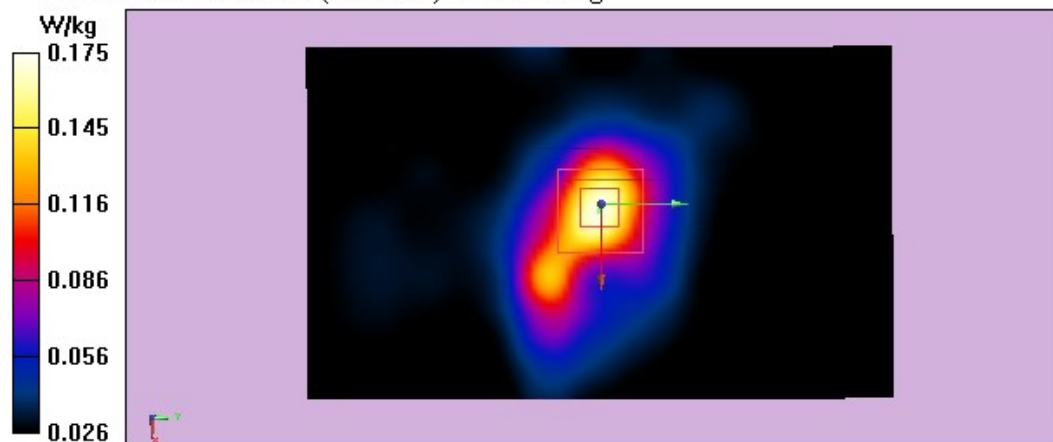

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH64(5320MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System

Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.61 \text{ S/m}$; $\epsilon_r = 37.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH64(5320MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.38 W/kg

Configuration/CH64(5320MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.499 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.23 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 2.33 W/kg

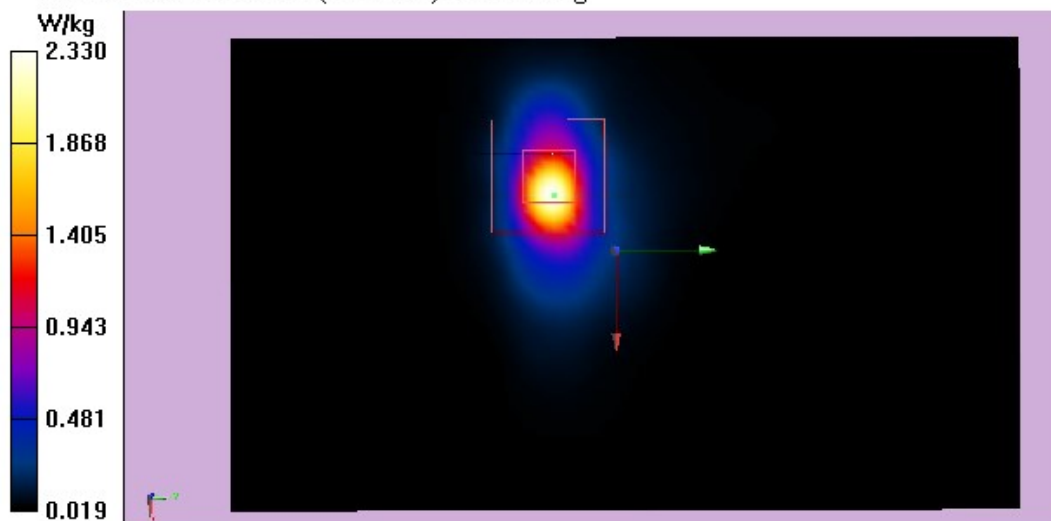

WIFI 5GHz Band 2 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH52(5260MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System
Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0
dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.62 \text{ S/m}$; $\epsilon_r = 37.037$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH52(5260MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.73 W/kg

Configuration/CH52(5260MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.150 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.156 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

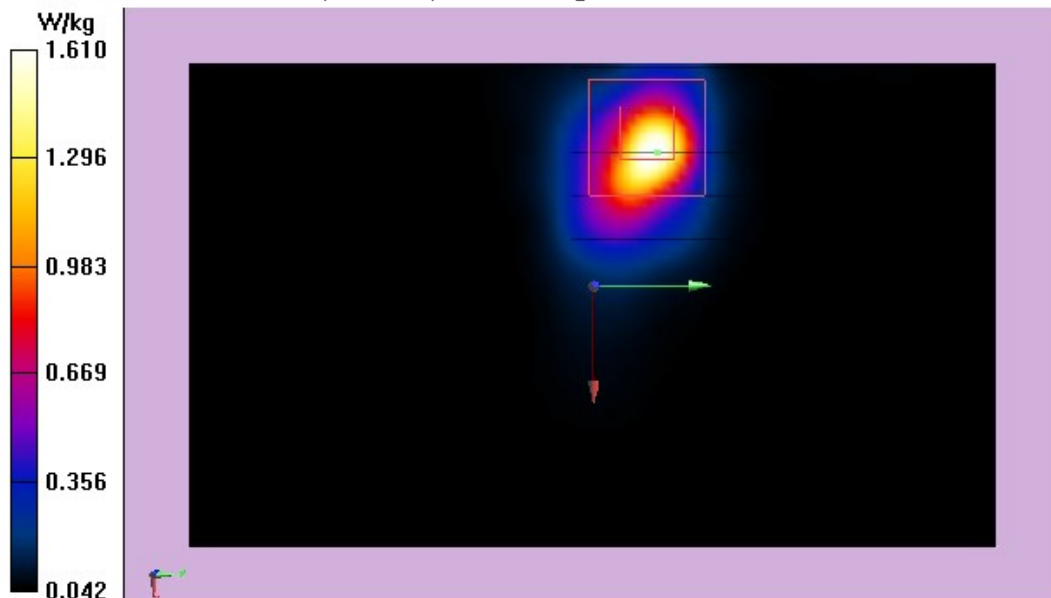

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH60(5300MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.592 \text{ S/m}$; $\epsilon_r = 37.057$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH60(5300MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.80 W/kg

Configuration/CH60(5300MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.152 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 4.02 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 1.68 W/kg

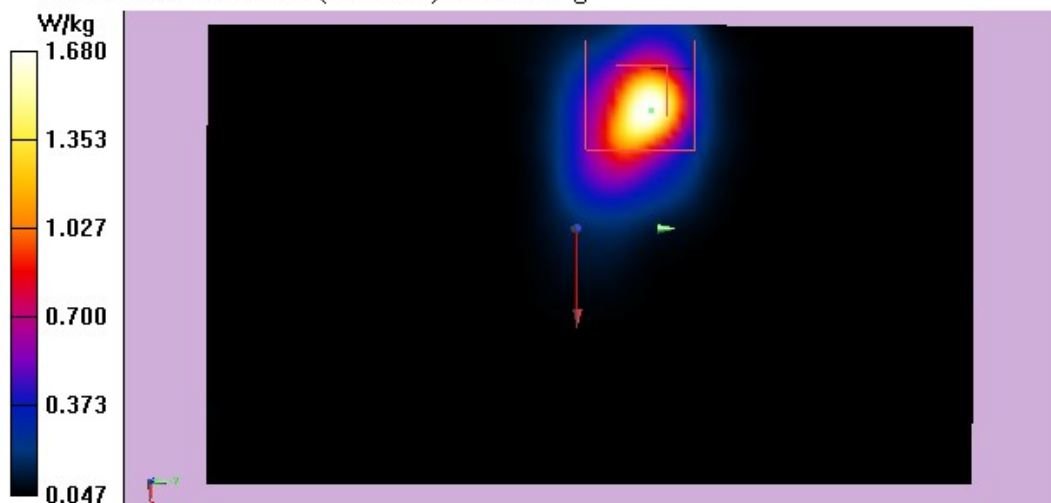

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH64(5320MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.61 \text{ S/m}$; $\epsilon_r = 37.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.197 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.546 V/m ; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.214 W/kg

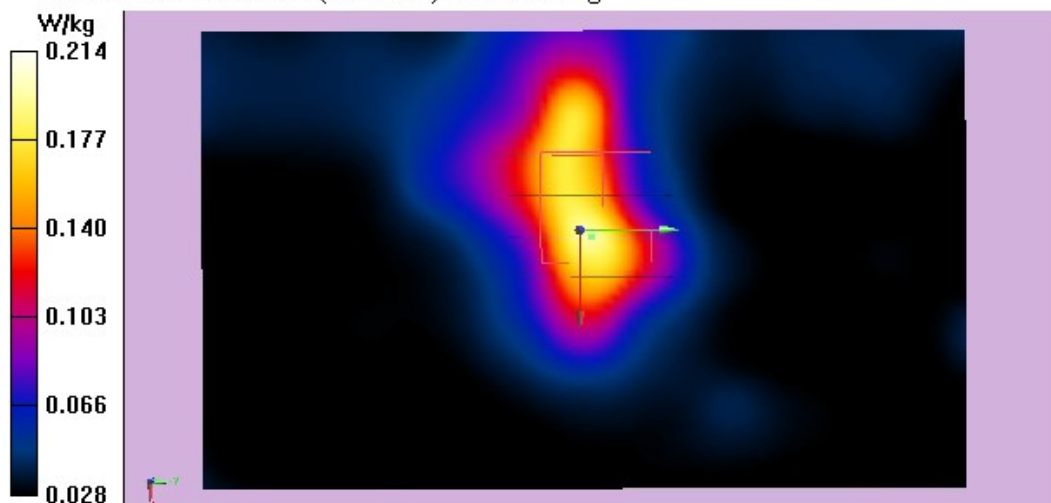

Test Laboratory: Audix SAR Lab

Date: 08/03/2026

CH64(5320MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.61 \text{ S/m}$; $\epsilon_r = 37.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH64(5320MHz Front)/Area Scan (61x101x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.16 W/kg

Configuration/CH64(5320MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.05 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 6.54 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.22 W/kg

Maximum value of SAR (measured) = 3.52 W/kg

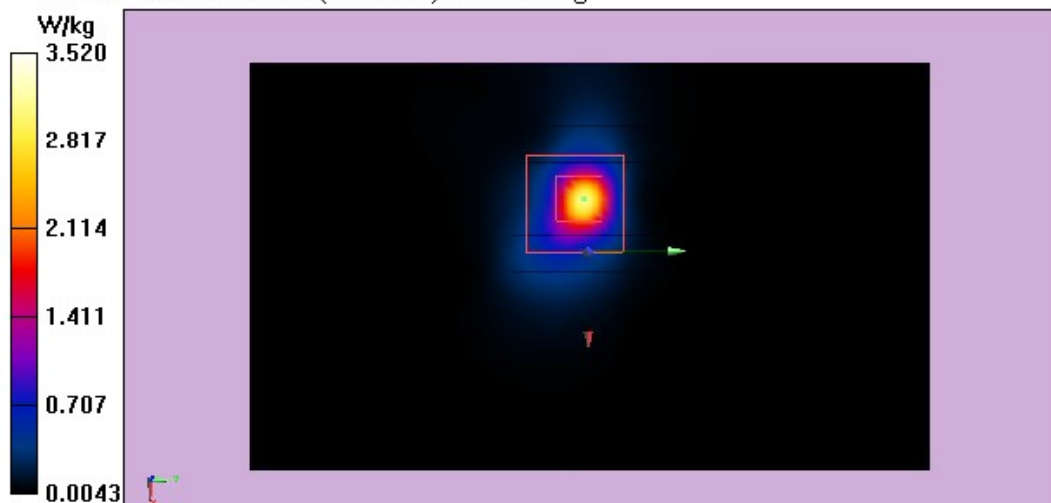

WIFI 5GHz Band 3 (ANT 1):

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH100(5500MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System
Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0
dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.733 \text{ S/m}$; $\epsilon_r = 35.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH100(5500MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.40 W/kg

Configuration/CH100(5500MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.296 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 6.02 W/kg

SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 3.16 W/kg

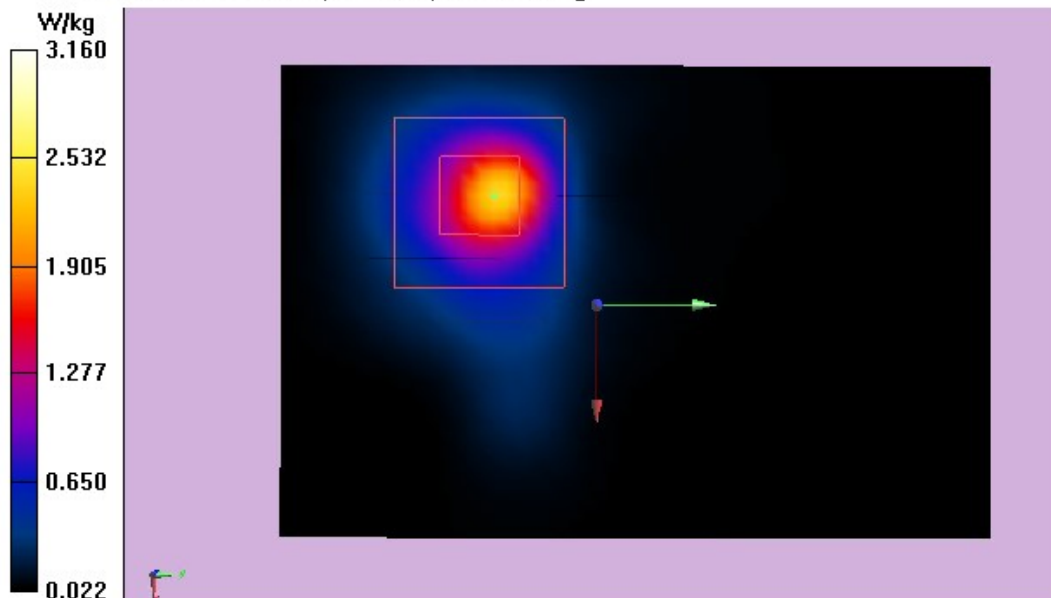

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH120(5600MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 4.831 \text{ S/m}$; $\epsilon_r = 35.131$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH120(5600MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.41 W/kg

Configuration/CH120(5600MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.119 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 6.00 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 3.18 W/kg

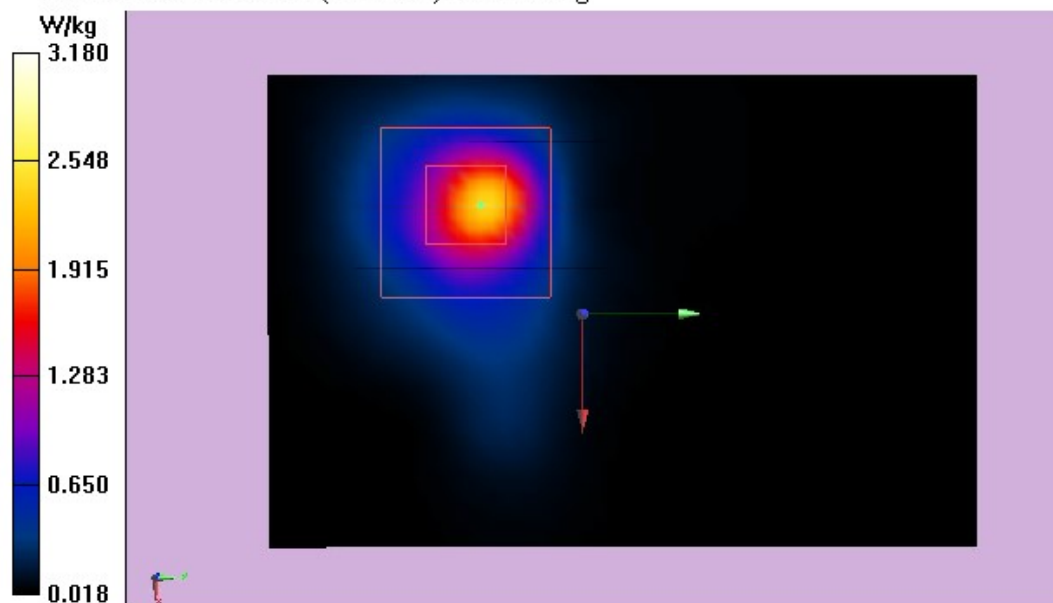

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 4.831 \text{ S/m}$; $\epsilon_r = 35.131$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.216 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.385 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

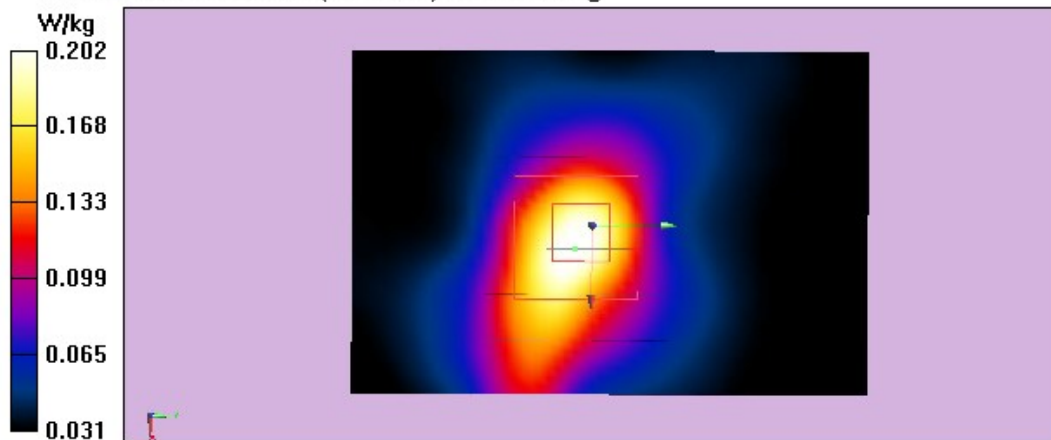

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH140(5700MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 4.912 \text{ S/m}$; $\epsilon_r = 34.791$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH140(5700MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 2.56 W/kg

Configuration/CH140(5700MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.362 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.35 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 3.33 W/kg

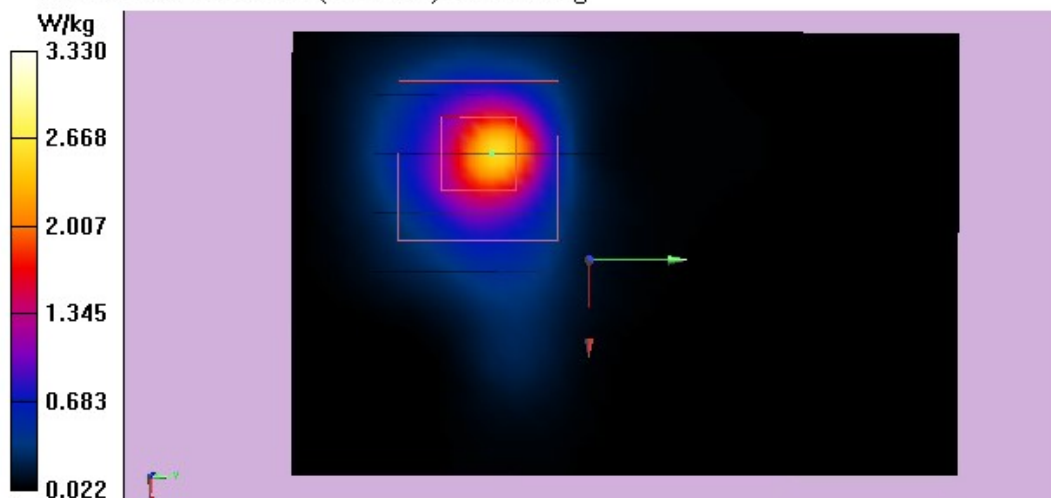

WIFI 5GHz Band 3 (ANT 2):

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH100(5500MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System
Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0
dB

Medium parameters used: $f = 5500$ MHz; $\sigma = 4.733$ S/m; $\epsilon_r = 35.891$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH100(5500MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx = 1.500$ mm, $dy = 1.500$ mm

Maximum value of SAR (interpolated) = 3.05 W/kg

Configuration/CH100(5500MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx = 8$ mm, $dy = 8$ mm, $dz = 5$ mm

Reference Value = 5.274 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 6.54 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 3.36 W/kg

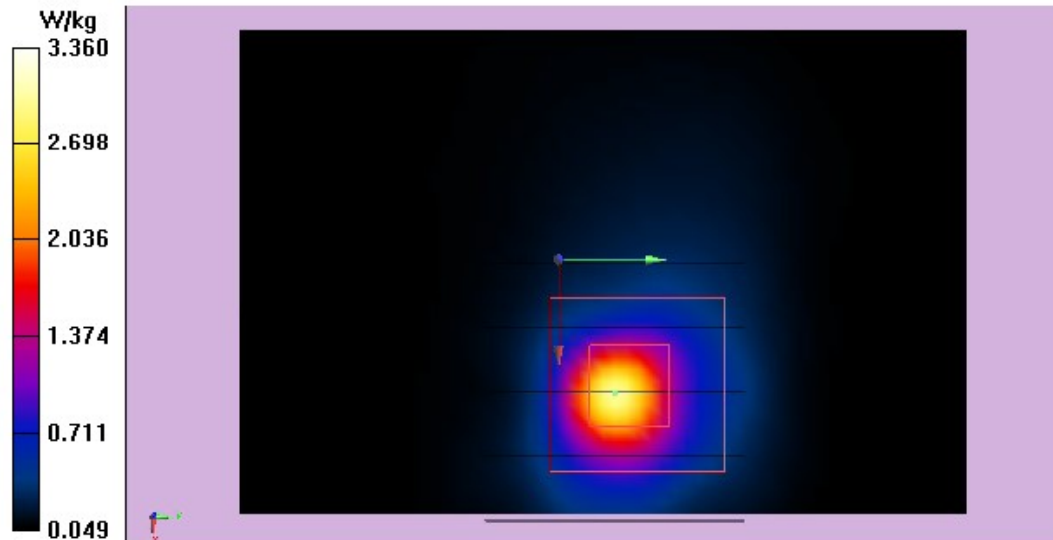

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH120(5600MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 4.831 \text{ S/m}$; $\epsilon_r = 35.131$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH120(5600MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.04 W/kg

Configuration/CH120(5600MHz Front)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.431 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.54 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 3.33 W/kg

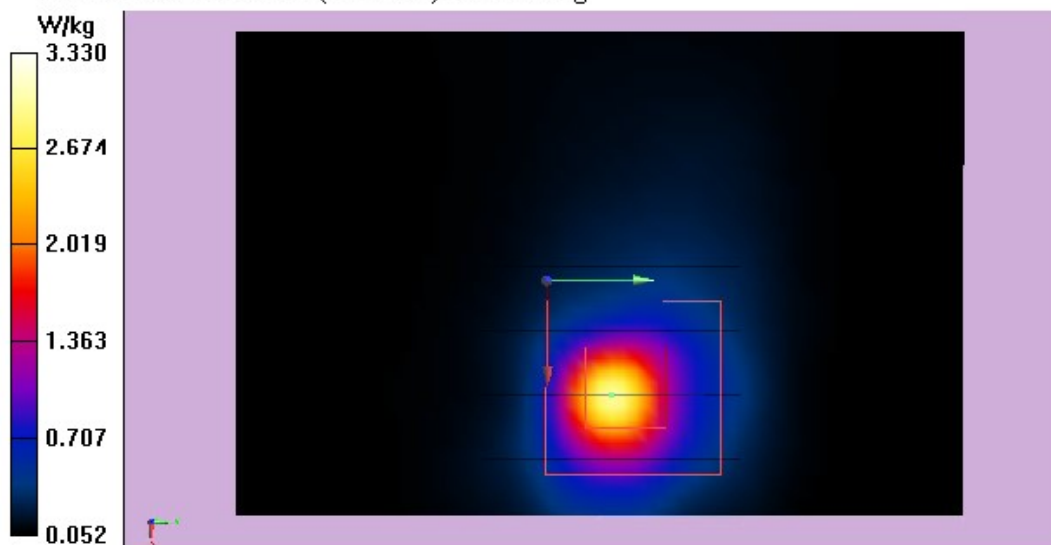

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 4.831 \text{ S/m}$; $\epsilon_r = 35.131$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.248 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.525 V/m ; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.211 W/kg ; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

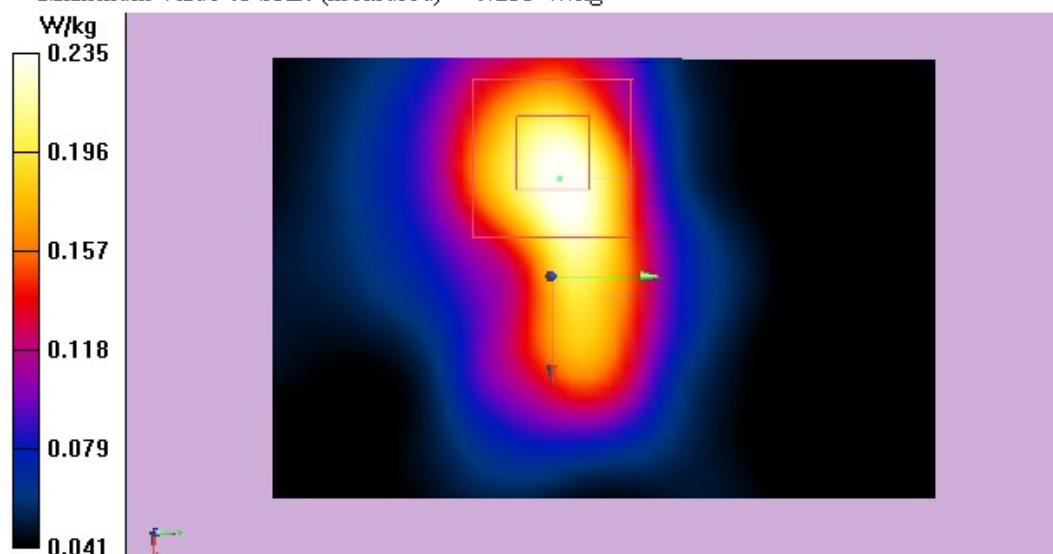

Test Laboratory: Audix SAR Lab

Date: 09/03/2026

CH140(5700MHz Front)

DUT: Notebook Computer M/N:N25WB5

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.831$ S/m; $\epsilon_r = 35.131$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3); Calibrated: 06/10/2025;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 19/06/2025
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/CH140(5700MHz Front)/Area Scan (41x61x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 3.01 W/kg

Configuration/CH140(5700MHz Front)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.310 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 6.54 W/kg

SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.244 W/kg

Maximum value of SAR (measured) = 3.31 W/kg

