

APPENDIX A

Graph Results (WIFI 2.4GHz & WIFI 5GHz)

WIFI 2.4GHz

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH1(2412MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2412 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.841 \text{ S/m}$; $\epsilon_r = 38.849$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2412 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0686 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.623 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.0528 W/kg

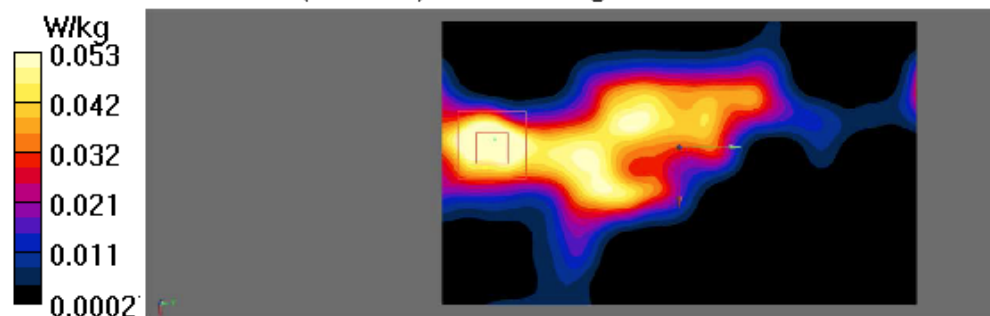

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH7(2442MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0557 W/kg

Configuration/CH7(2442MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.607 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.0556 W/kg

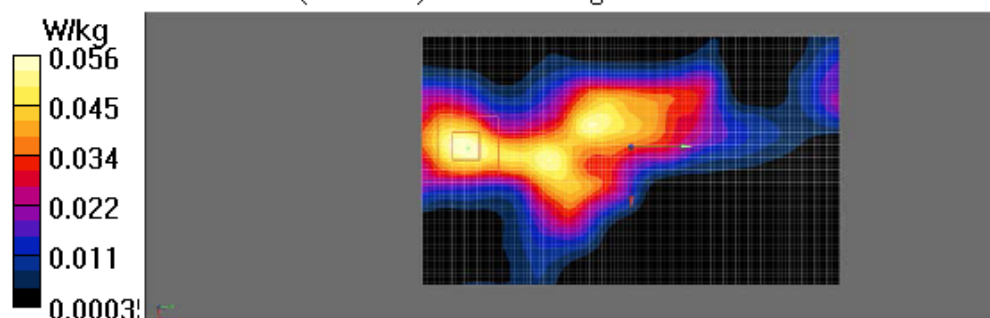

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.908 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0567 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.756 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.0528 W/kg

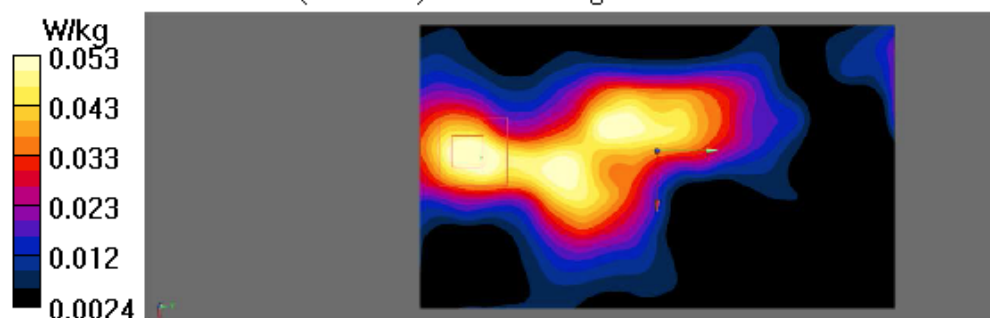

WIFI 2.4GHz

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH1(2412MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2412 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.841 \text{ S/m}$; $\epsilon_r = 38.849$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2412 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH1(2412MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.30 W/kg

Configuration/CH1(2412MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.13 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.453 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 1.13 W/kg

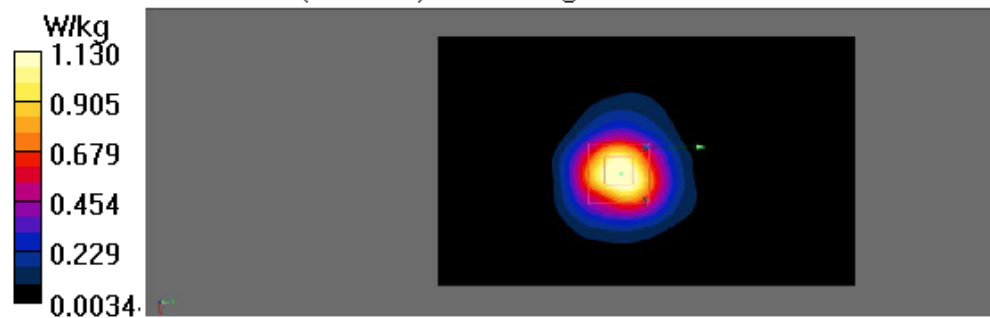

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH7(2442MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2442 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2442 \text{ MHz}$; $\sigma = 1.879 \text{ S/m}$; $\epsilon_r = 38.731$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2442 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH7(2442MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.34 W/kg

Configuration/CH7(2442MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.11 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 2.47 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.18 W/kg

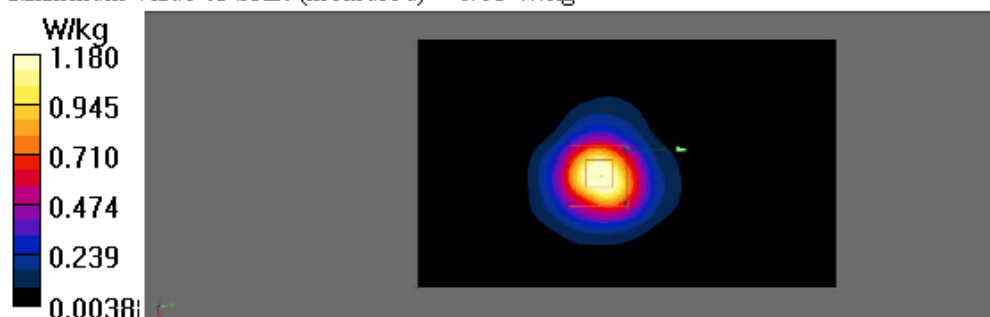

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.908 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.38 W/kg

Configuration/CH13(2472MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.05 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.474 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 1.21 W/kg

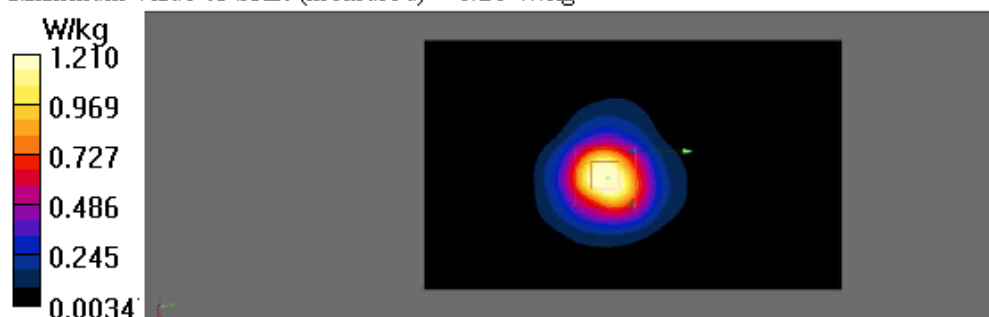

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Bottom)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.908 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.296 W/kg

Configuration/CH13(2472MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.20 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.297 W/kg

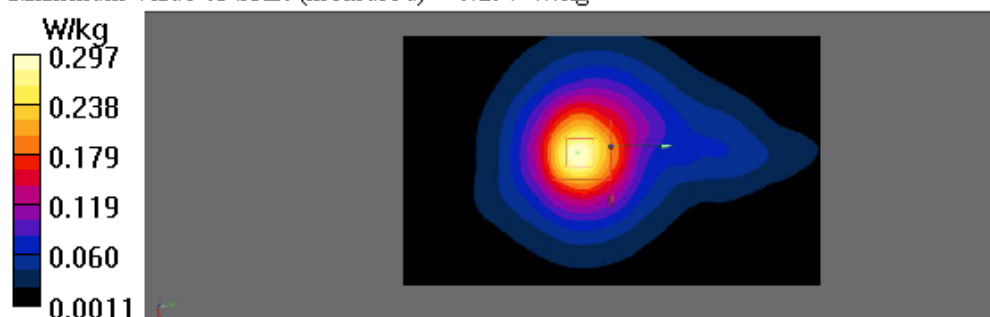

Test Laboratory: Audix SAR Lab

Date: 06/05/2026

CH13(2472MHz Right)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) (0);

Communication System Band: ISM 2.4GHz Band (2400.0-2483.5MHz); Frequency:

2472 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 2472 \text{ MHz}$; $\sigma = 1.908 \text{ S/m}$; $\epsilon_r = 38.627$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(7.1, 7.27, 7.53) @ 2472 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH13(2472MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.392 W/kg

Configuration/CH13(2472MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.716 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.409 W/kg

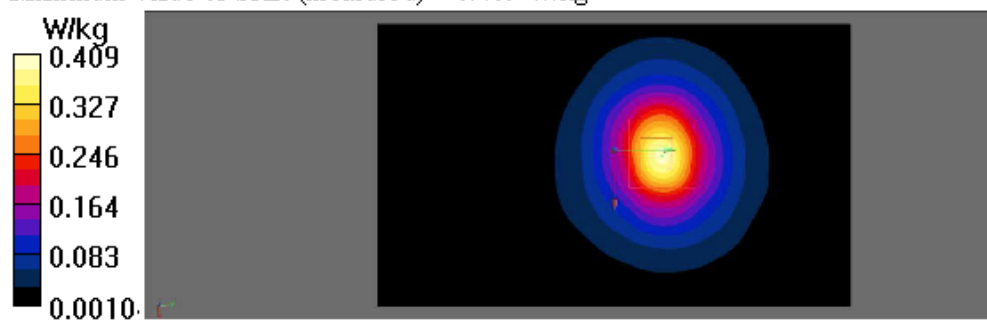

WIFI 5GHz Band 1

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH36(5180MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.349 W/kg

Configuration/CH36(5180MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.148 V/m ; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.230 W/kg ; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.271 W/kg

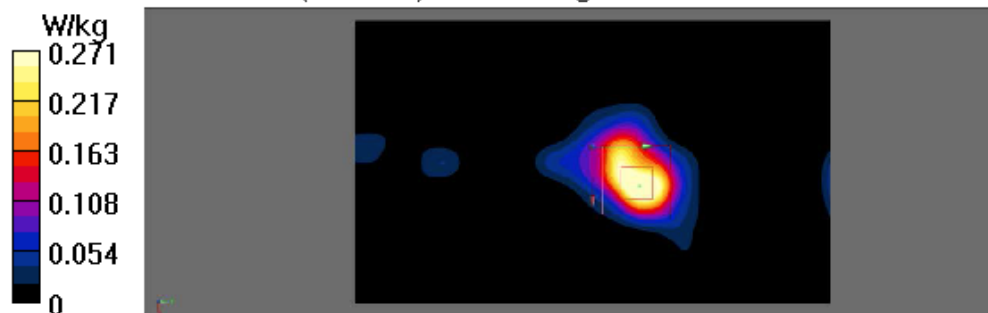

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH40(5200MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.424 W/kg

Configuration/CH40(5200MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.683 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.239 W/kg

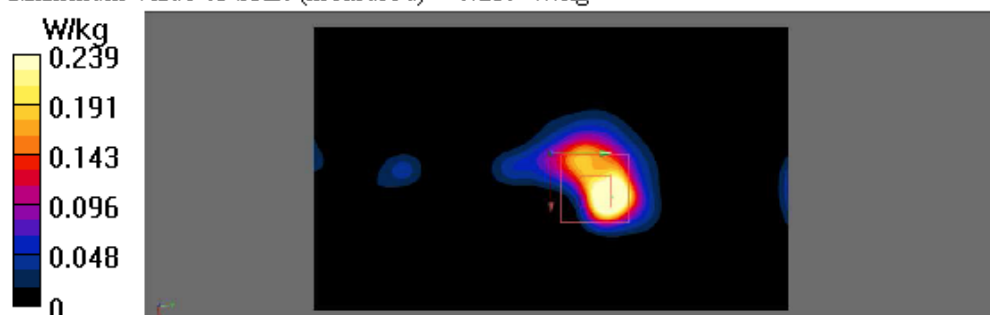

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5280MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.401 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.670 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.219 W/kg

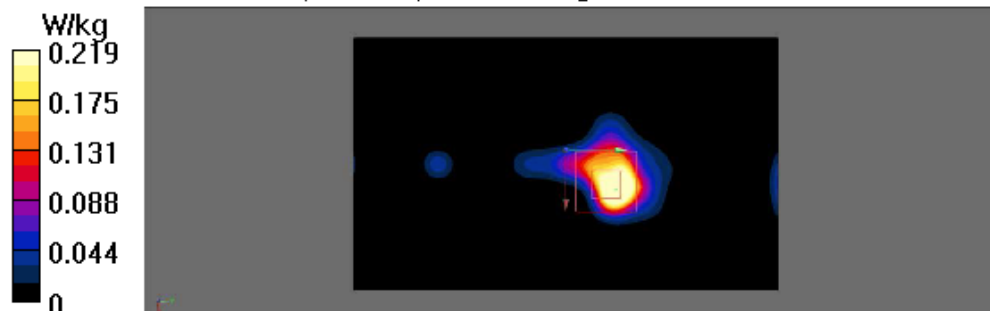

WIFI 5GHz Band 2

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH52(5260MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.445 W/kg

Configuration/CH52(5260MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.073 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.233 W/kg

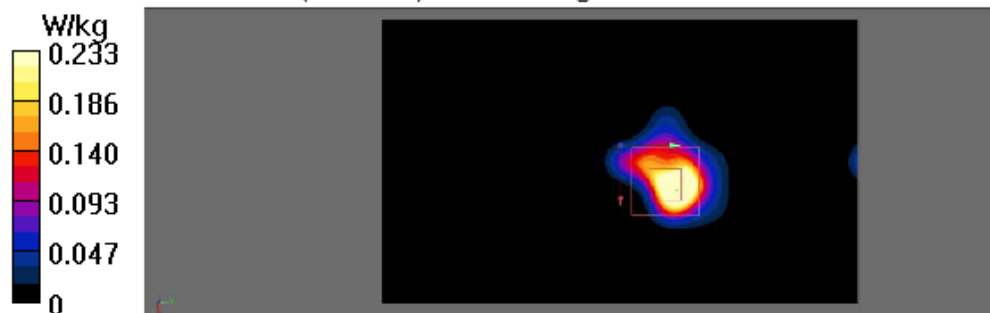

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH60(5300MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Back)/Area Scan (61x101x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.303 W/kg

Configuration/CH60(5300MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.985 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.267 W/kg

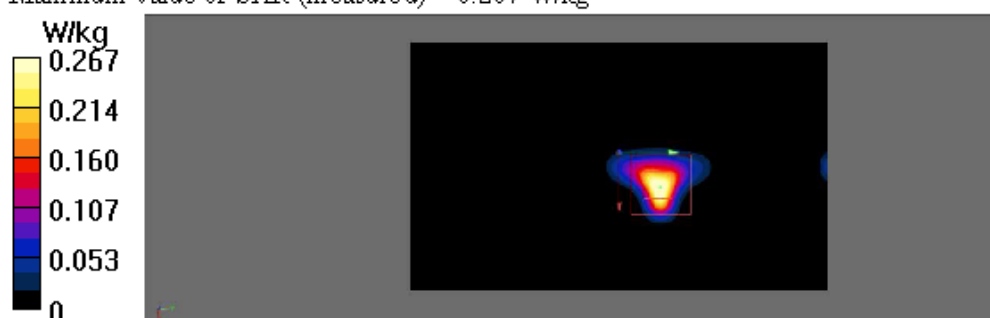

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.322 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.764 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%

Maximum value of SAR (measured) = 0.293 W/kg

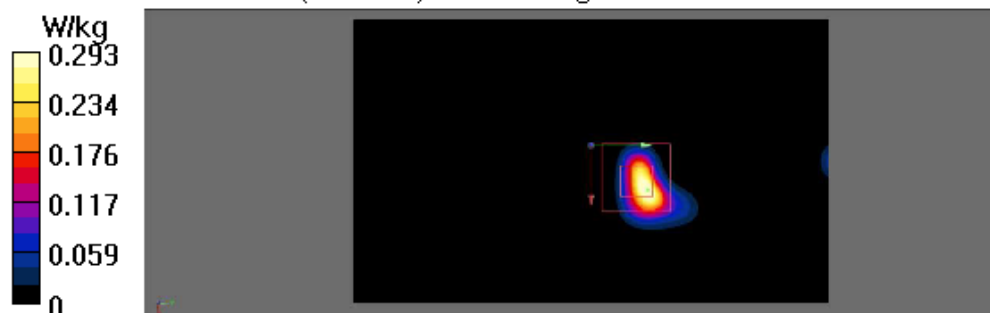

WIFI 5GHz Band 3

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.086$ S/m; $\epsilon_r = 36.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.346 W/kg

Configuration/CH100(5500MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.505 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 0.263 W/kg

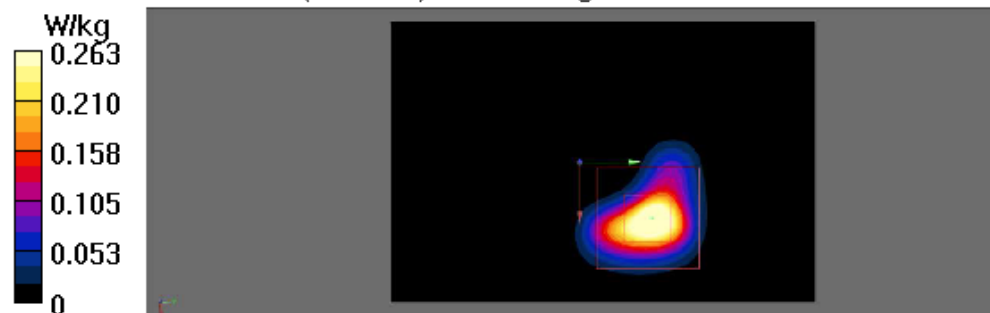

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH120(5600MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.329 W/kg

Configuration/CH120(5600MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.817 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 0.289 W/kg

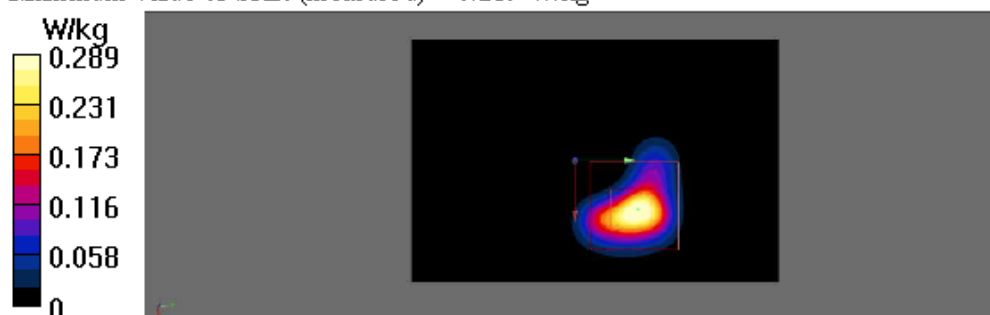

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.331 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.729 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.888 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.299 W/kg

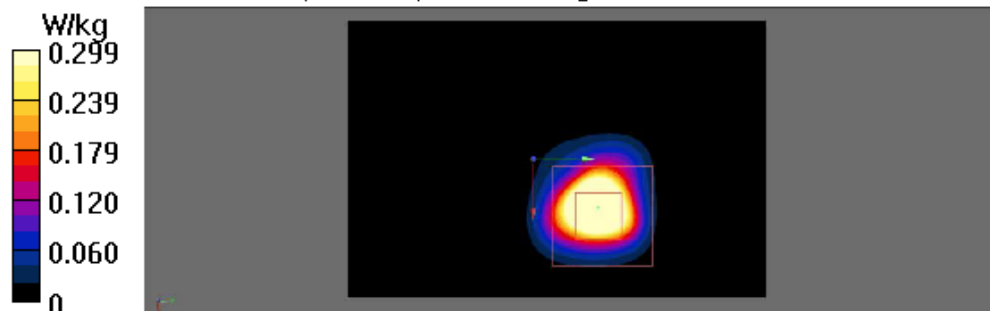

WIFI 5GHz Band 4

Ant 1:

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.747 W/kg

Configuration/CH149(5745MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.928 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.305 W/kg

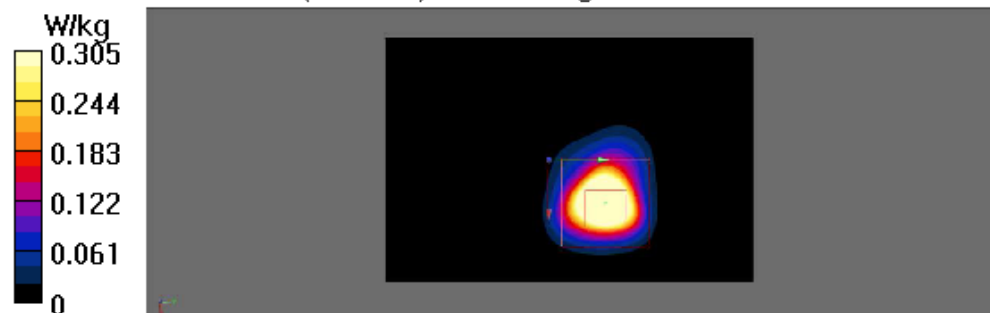

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH157(5785MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5785 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.419 \text{ S/m}$; $\epsilon_r = 35.836$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5785 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Back)/Area Scan (41x61x1): Interpolated

grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.245 W/kg

Configuration/CH157(5785MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.297 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.292 W/kg

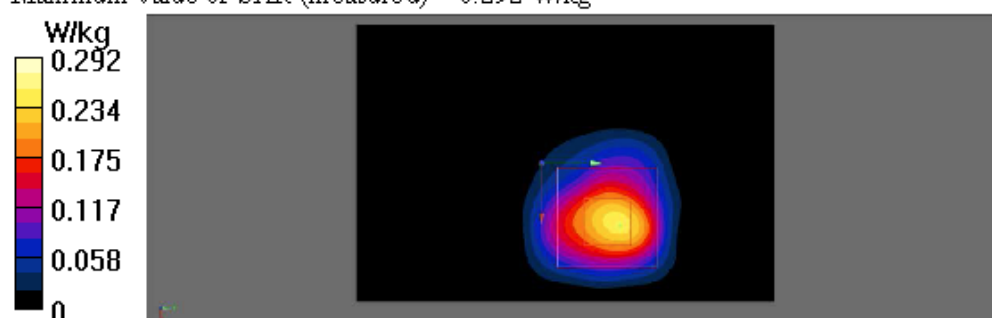

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.229 W/kg

Configuration/CH165(5825MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.956 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.304 W/kg

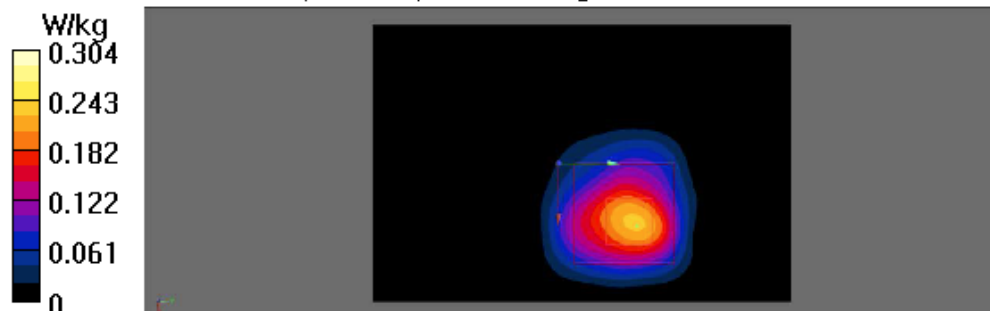

WIFI 5GHz Band 1

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH36(5180MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5180 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.155$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5180 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH36(5180MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.547 W/kg

Configuration/CH36(5180MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.119 V/m ; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.465 W/kg ; SAR(10 g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.532 W/kg

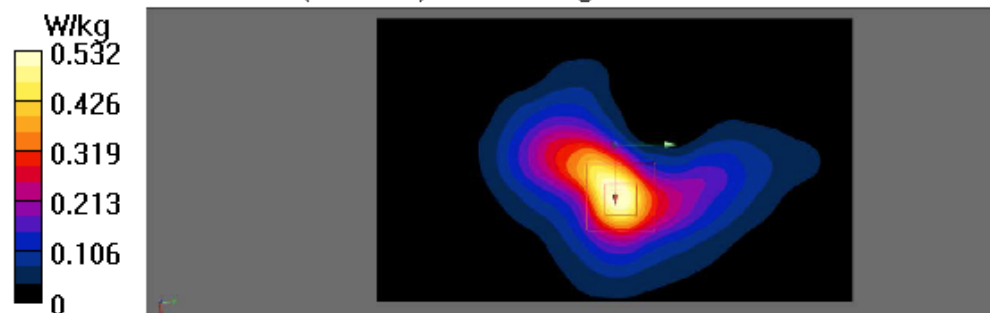

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH40(5200MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5200 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.705 \text{ S/m}$; $\epsilon_r = 37.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5200 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH40(5200MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.544 W/kg

Configuration/CH40(5200MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.081 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 0.559 W/kg

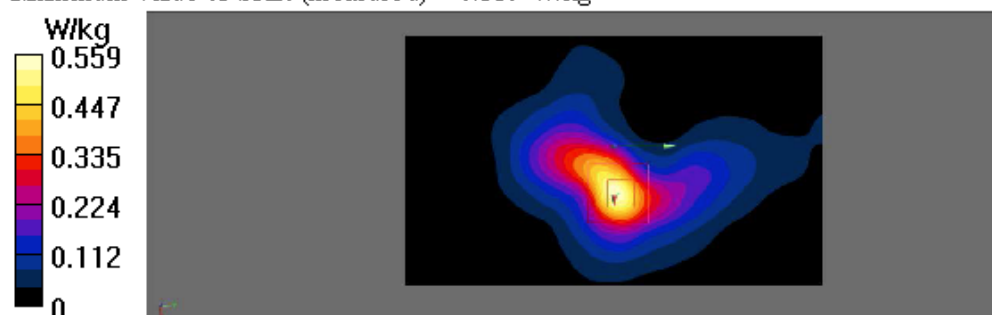

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.568 W/kg

Configuration/CH48(5240MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.081 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.558 W/kg

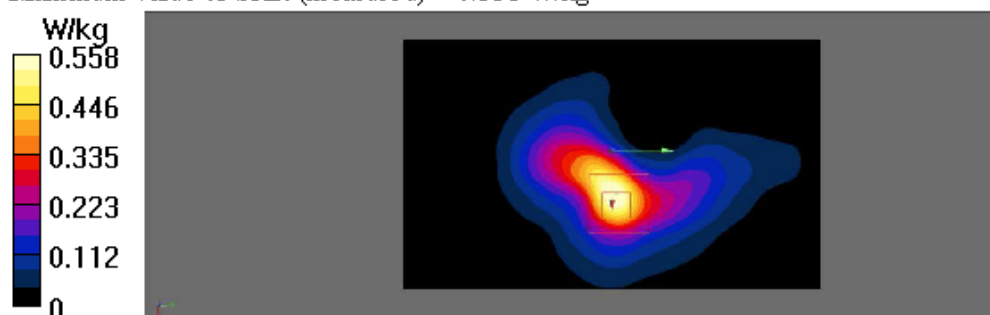

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Bottom)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.637 W/kg

Configuration/CH48(5240MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.85 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.957 W/kg

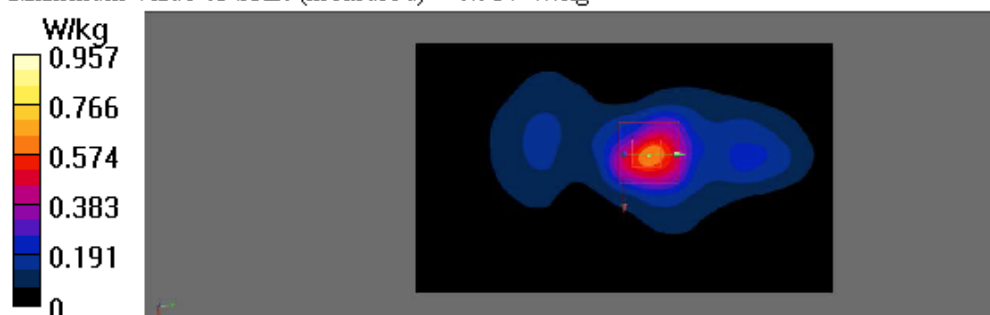

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH48(5240MHz Righth)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.2GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.2GHz; Frequency: 5240 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.753 \text{ S/m}$; $\epsilon_r = 37.005$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.44, 5.57, 5.77) @ 5240 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH48(5240MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.239 W/kg

Configuration/CH48(5240MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.104 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.252 W/kg

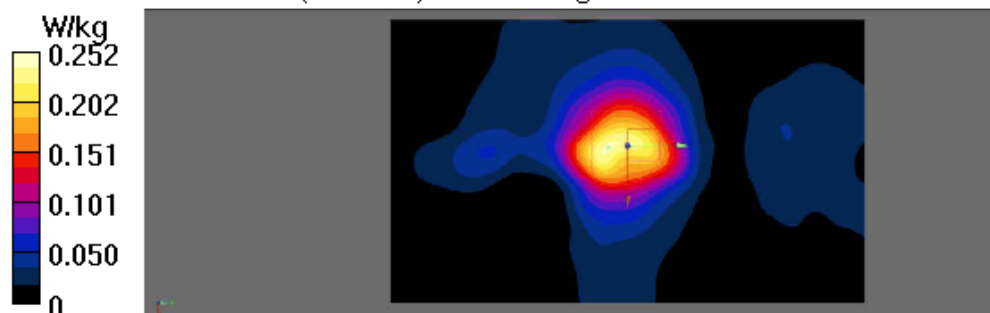

WIFI 5GHz Band 2

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH52(5260MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5260 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.784 \text{ S/m}$; $\epsilon_r = 36.955$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5260 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH52(5260MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.575 W/kg

Configuration/CH52(5260MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.147 V/m ; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.488 W/kg ; SAR(10 g) = 0.183 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.555 W/kg

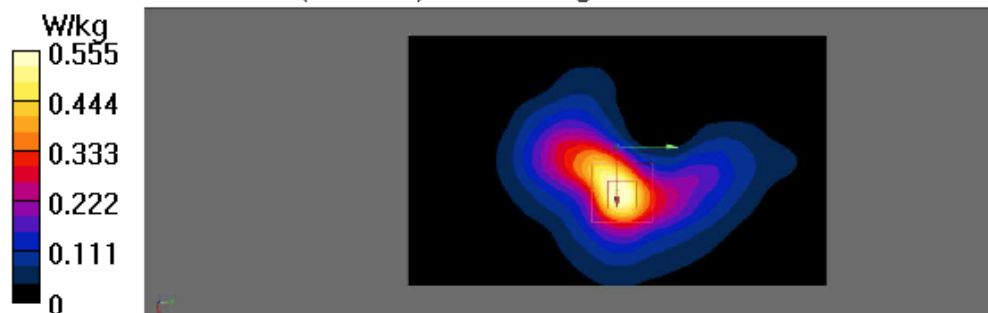

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH60(5300MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5300 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.828 \text{ S/m}$; $\epsilon_r = 36.891$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5300 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH60(5300MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.593 W/kg

Configuration/CH60(5300MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.322 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.590 W/kg

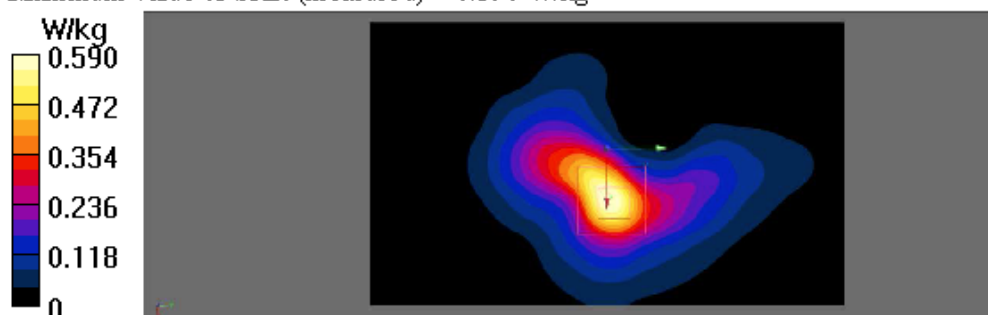

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Back)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.576 W/kg

Configuration/CH64(5320MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.512 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.599 W/kg

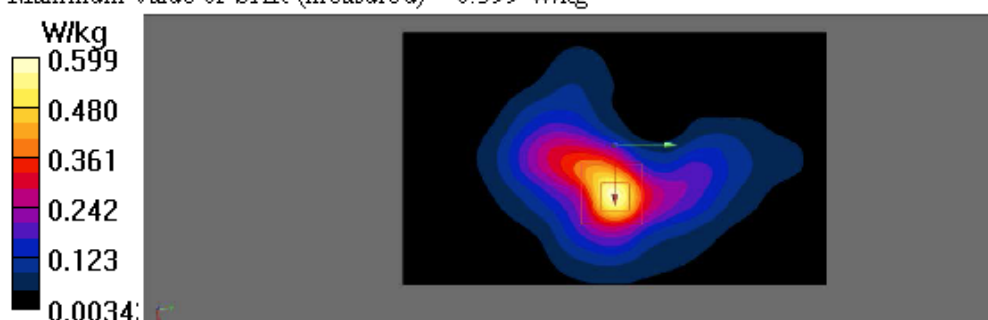

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Bottom)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Bottom)/Area Scan (61x101x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.673 W/kg

Configuration/CH64(5320MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.81 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 1.00 W/kg

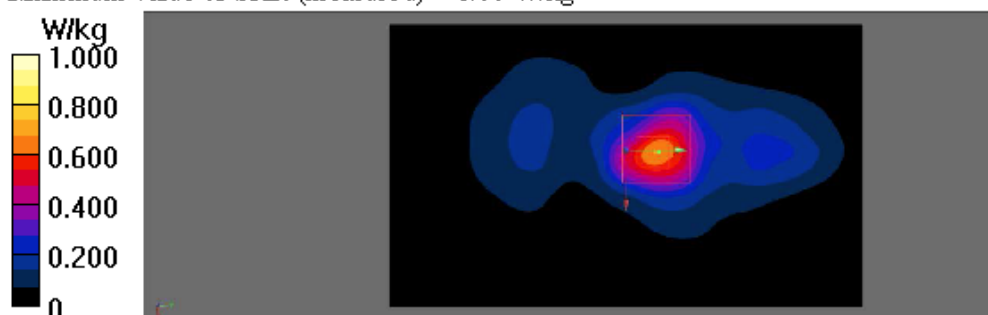

Test Laboratory: Audix SAR Lab

Date: 07/05/2026

CH64(5320MHz Right)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.3GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.3GHz ; Frequency: 5320 MHz;Communication

System PAR: 0 dB

Medium parameters used: $f = 5320 \text{ MHz}$; $\sigma = 4.853 \text{ S/m}$; $\epsilon_r = 36.837$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(5.17, 5.29, 5.49) @ 5320 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH64(5320MHz Right)/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.308 W/kg

Configuration/CH64(5320MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.195 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.295 W/kg

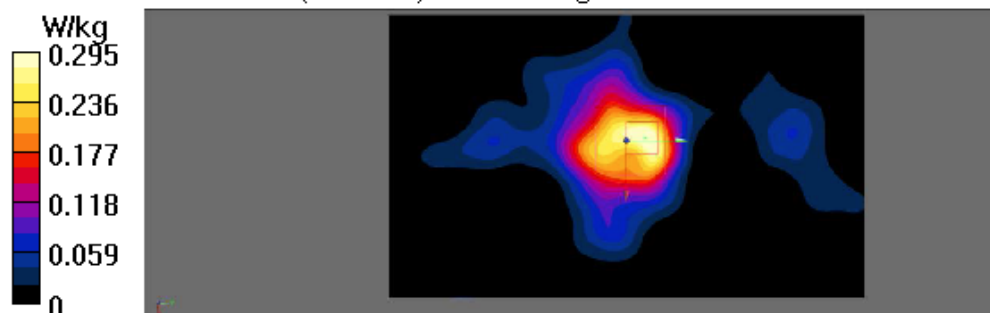

WIFI 5GHz Band 3

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.540 W/kg

Configuration/CH100(5500MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.793 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.631 W/kg

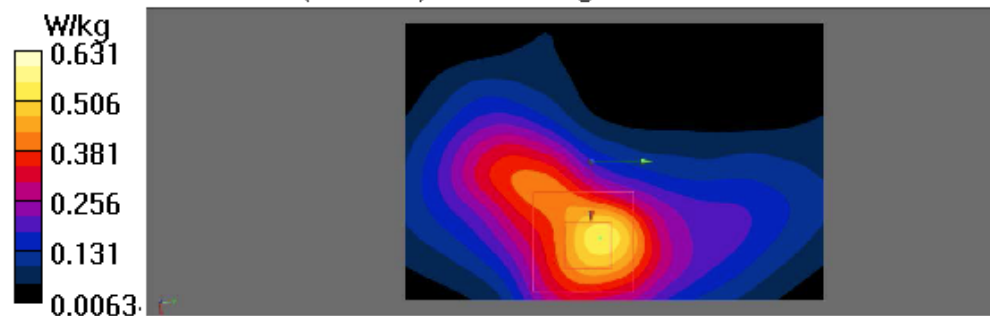

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Bottom)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.14 W/kg

Configuration/CH100(5500MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.05 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 1.11 W/kg

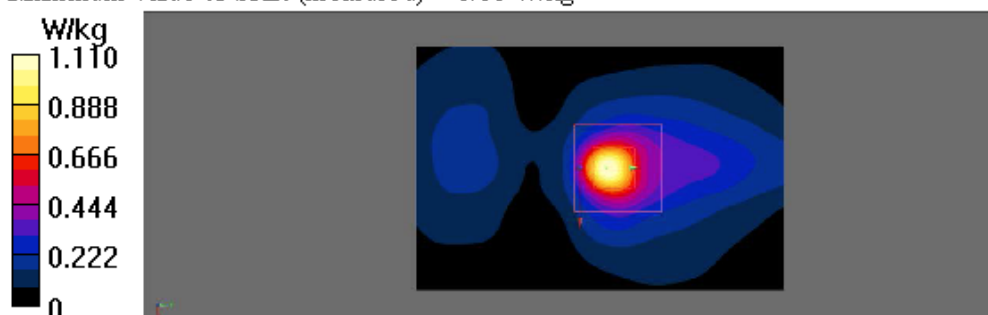

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH100(5500MHz Right)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5500 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 5.086 \text{ S/m}$; $\epsilon_r = 36.47$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.91, 5.02, 5.2) @ 5500 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH100(5500MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.373 W/kg

Configuration/CH100(5500MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.363 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.815 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 0.314 W/kg

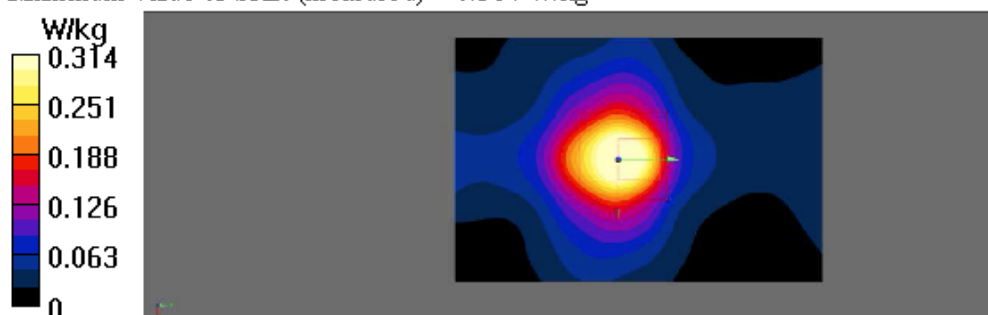

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH120(5600MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5600 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 36.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5600 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH120(5600MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.537 W/kg

Configuration/CH120(5600MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.923 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.643 W/kg

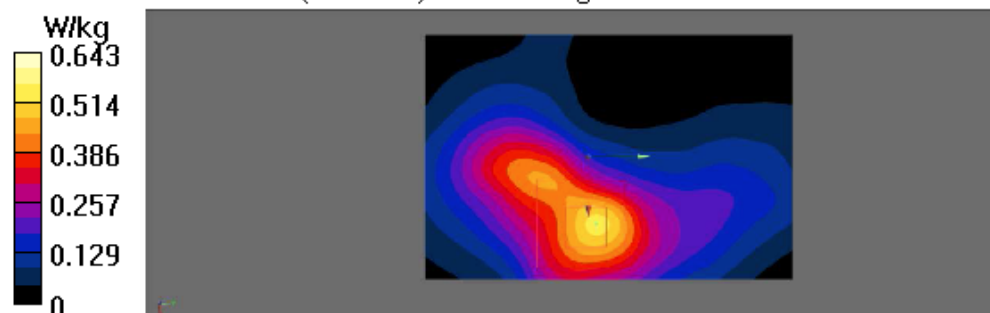

Test Laboratory: Audix SAR Lab

Date: 08/05/2026

CH140(5700MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.5GHz (0); Communication System Band: IEEE 802.11a WiFi 5.5GHz; Frequency: 5700 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.331 \text{ S/m}$; $\epsilon_r = 35.995$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.99, 5.11, 5.3) @ 5700 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH140(5700MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.586 W/kg

Configuration/CH140(5700MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.927 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.591 W/kg; SAR(10 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.675 W/kg

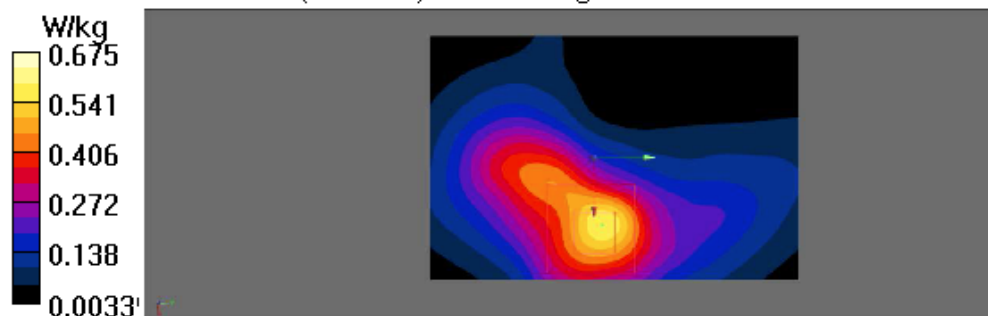

WIFI 5GHz Band 4

Ant 2:

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.554 W/kg

Configuration/CH149(5745MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.515 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.670 W/kg

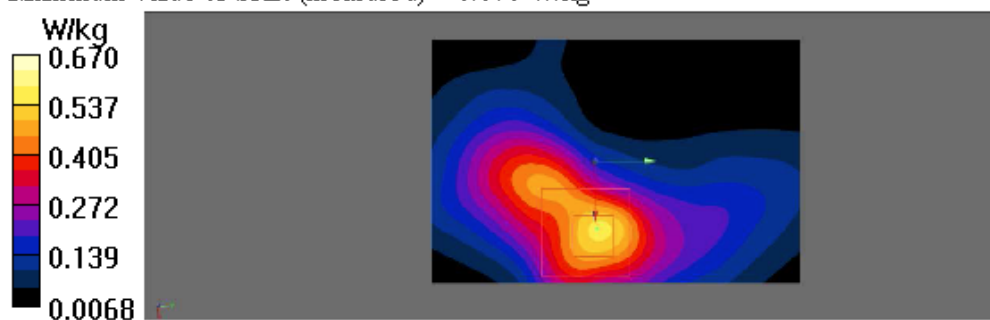

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Bottom)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Bottom)/Area Scan (41x61x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.26 W/kg

Configuration/CH149(5745MHz Bottom)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.28 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 1.24 W/kg

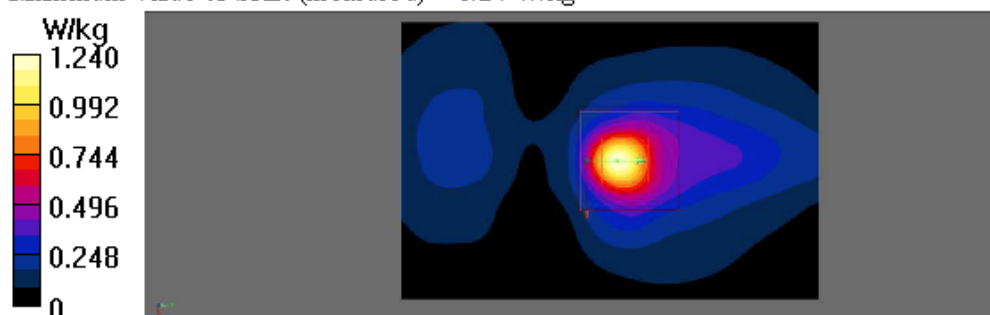

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH149(5745MHz Right)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5745 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.379 \text{ S/m}$; $\epsilon_r = 35.957$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5745 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH149(5745MHz Right)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.394 W/kg

Configuration/CH149(5745MHz Right)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.353 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.344 W/kg

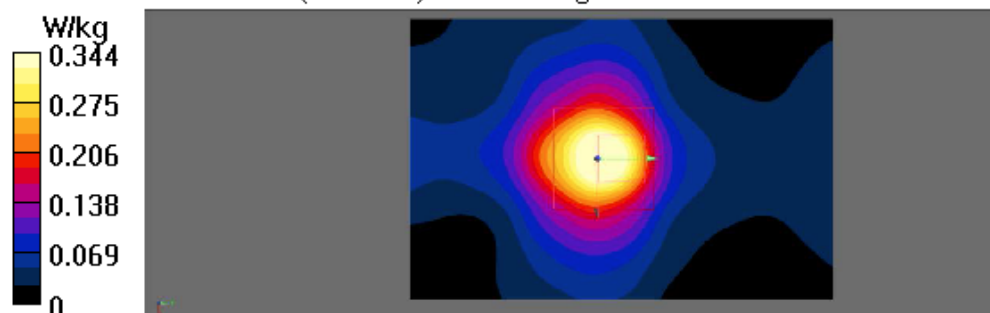

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH157(5785MHz Back)

DUT:Notebook Computer M/N:N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz;Communication System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH157(5785MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.569 W/kg

Configuration/CH157(5785MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.596 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.660 W/kg

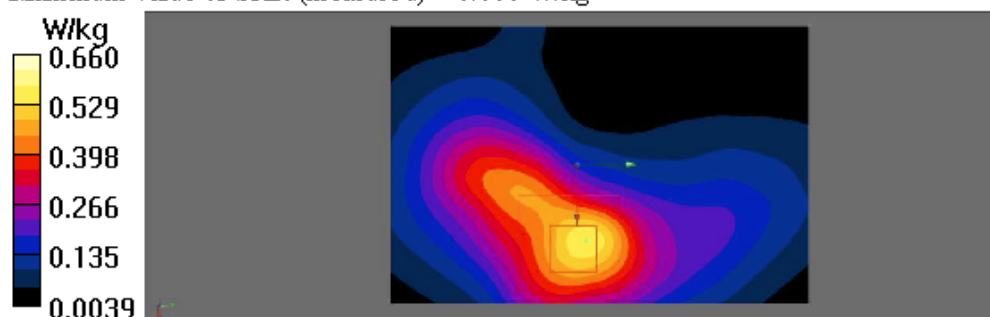

Test Laboratory: Audix SAR Lab

Date: 09/05/2026

CH165(5825MHz Back)

DUT: Notebook Computer M/N: N24G3

Communication System: UID 0, IEEE 802.11a WiFi 5.8GHz (0); Communication

System Band: IEEE 802.11a WiFi 5.8GHz ; Frequency: 5825 MHz; Communication

System PAR: 0 dB

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.491 \text{ S/m}$; $\epsilon_r = 35.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7957; ConvF(4.84, 4.95, 5.13) @ 5825 MHz; Calibrated: 2025/10/6
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn899; Calibrated: 2025/6/19
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/CH165(5825MHz Back)/Area Scan (41x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.567 W/kg

Configuration/CH165(5825MHz Back)/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.682 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.681 W/kg

