Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

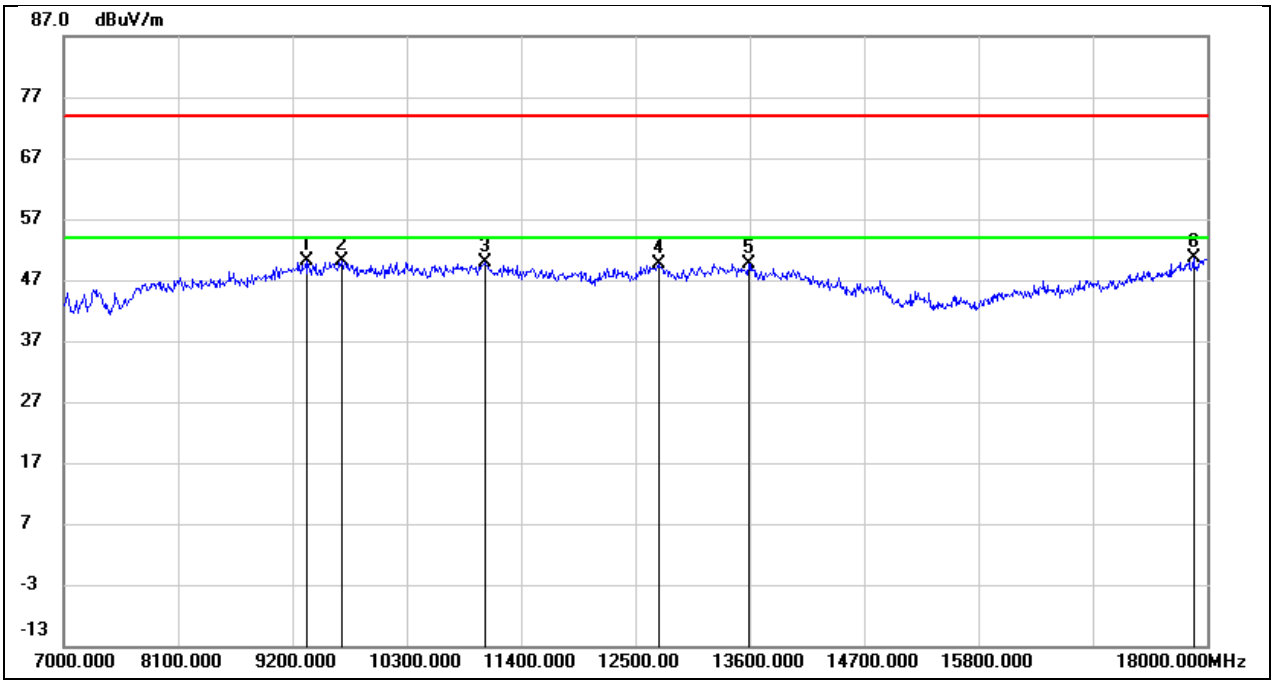

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.25	11.99	50.24	74.00	-23.76	peak
2	9673.000	36.65	13.58	50.23	74.00	-23.77	peak
3	11048.000	34.52	15.33	49.85	74.00	-24.15	peak
4	12731.000	29.85	19.70	49.55	74.00	-24.45	peak
5	13589.000	27.43	22.20	49.63	74.00	-24.37	peak
6	17868.000	22.46	28.21	50.67	74.00	-23.33	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

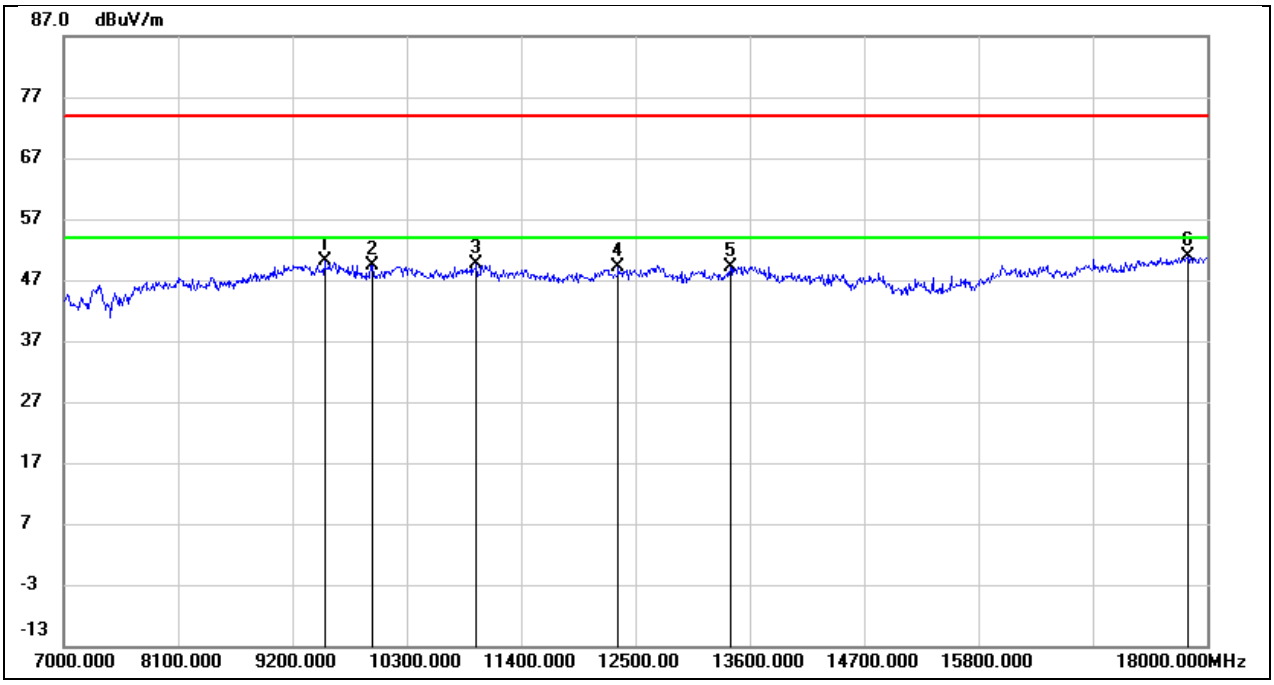

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.29	12.90	50.19	74.00	-23.81	peak
2	9970.000	36.64	12.75	49.39	74.00	-24.61	peak
3	10971.000	35.33	14.20	49.53	74.00	-24.47	peak
4	12335.000	31.26	17.93	49.19	74.00	-24.81	peak
5	13413.000	29.17	20.08	49.25	74.00	-24.75	peak
6	17813.000	24.60	26.24	50.84	74.00	-23.16	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

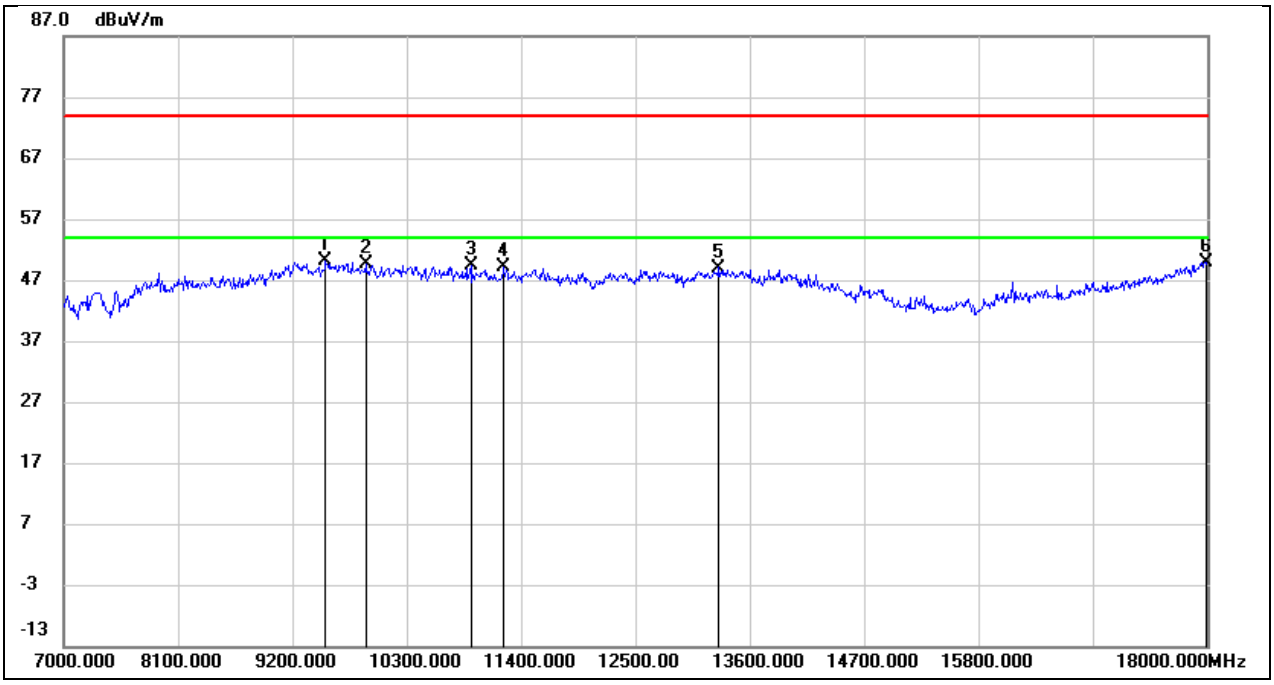

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.17	12.97	50.14	74.00	-23.86	peak
2	9904.000	35.96	13.56	49.52	74.00	-24.48	peak
3	10916.000	34.68	14.79	49.47	74.00	-24.53	peak
4	11235.000	32.68	16.38	49.06	74.00	-24.94	peak
5	13303.000	27.71	21.29	49.00	74.00	-25.00	peak
6	17989.000	20.47	29.49	49.96	74.00	-24.04	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

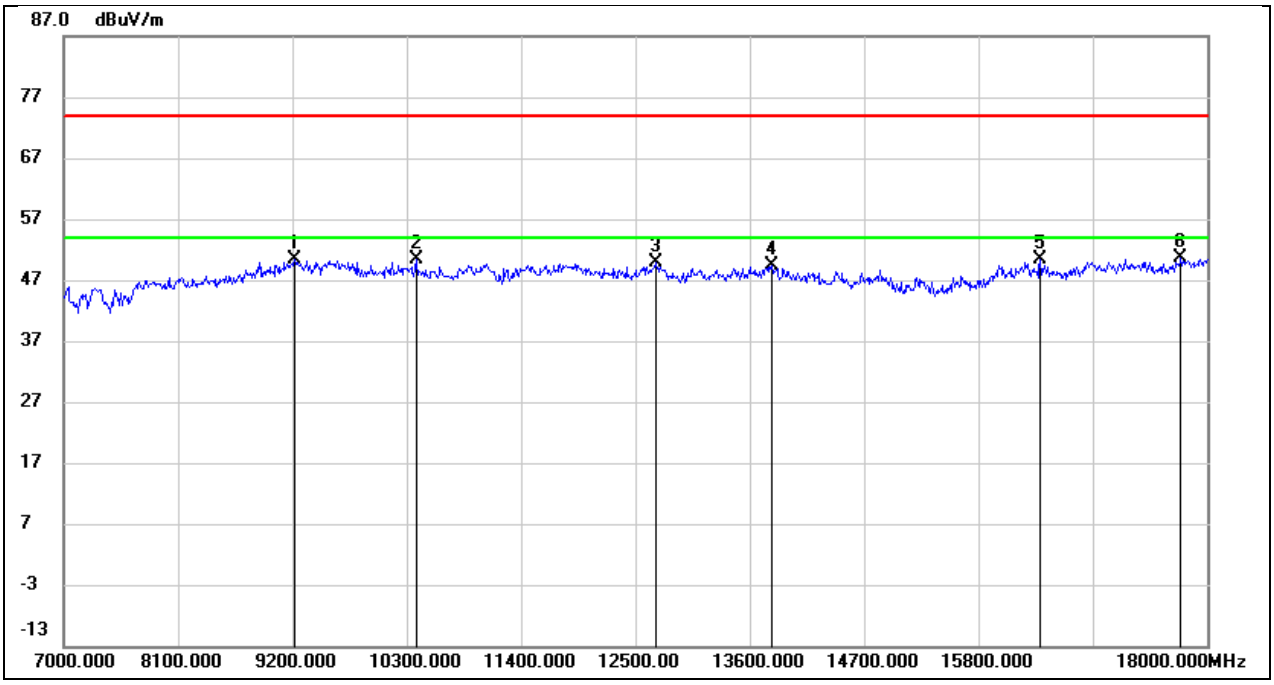

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.43	11.86	50.29	74.00	-23.71	peak
2	10388.000	37.46	13.02	50.48	74.00	-23.52	peak
3	12698.000	31.41	18.54	49.95	74.00	-24.05	peak
4	13809.000	28.19	21.19	49.38	74.00	-24.62	peak
5	16394.000	26.79	23.61	50.40	74.00	-23.60	peak
6	17747.000	24.81	25.89	50.70	74.00	-23.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

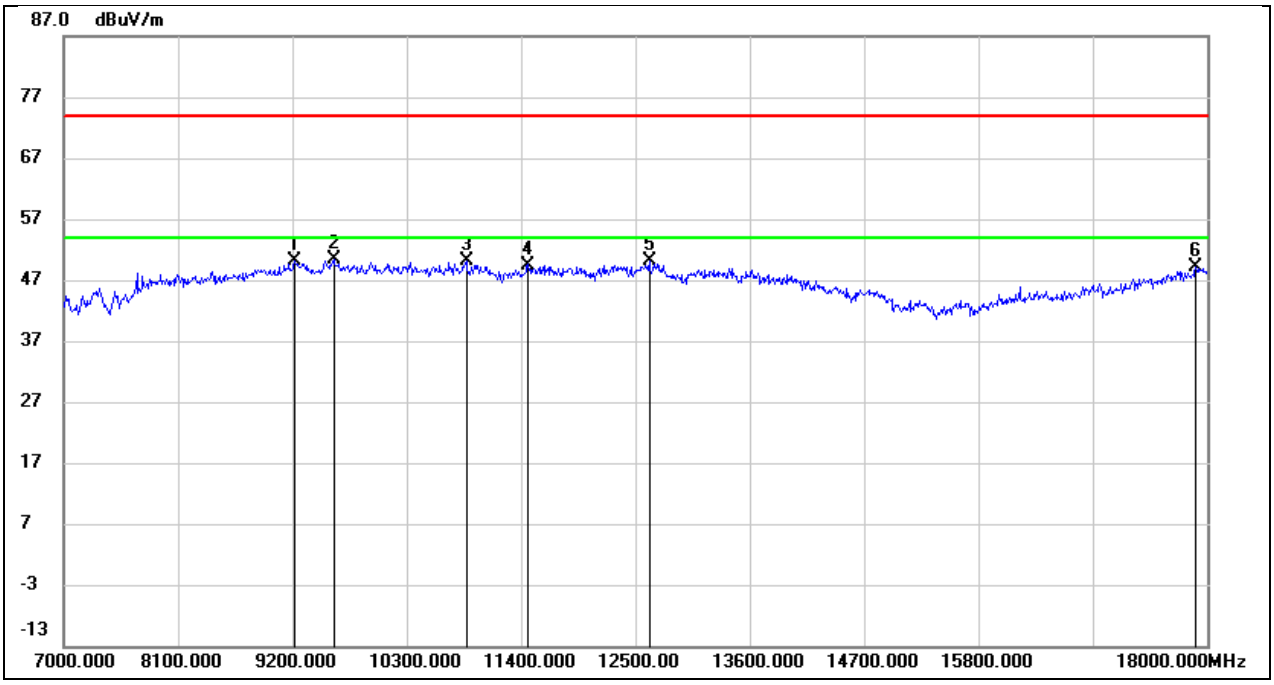

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.60	11.64	50.24	74.00	-23.76	peak
2	9596.000	37.00	13.44	50.44	74.00	-23.56	peak
3	10872.000	35.48	14.65	50.13	74.00	-23.87	peak
4	11466.000	31.82	17.68	49.50	74.00	-24.50	peak
5	12632.000	30.86	19.29	50.15	74.00	-23.85	peak
6	17890.000	20.76	28.43	49.19	74.00	-24.81	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

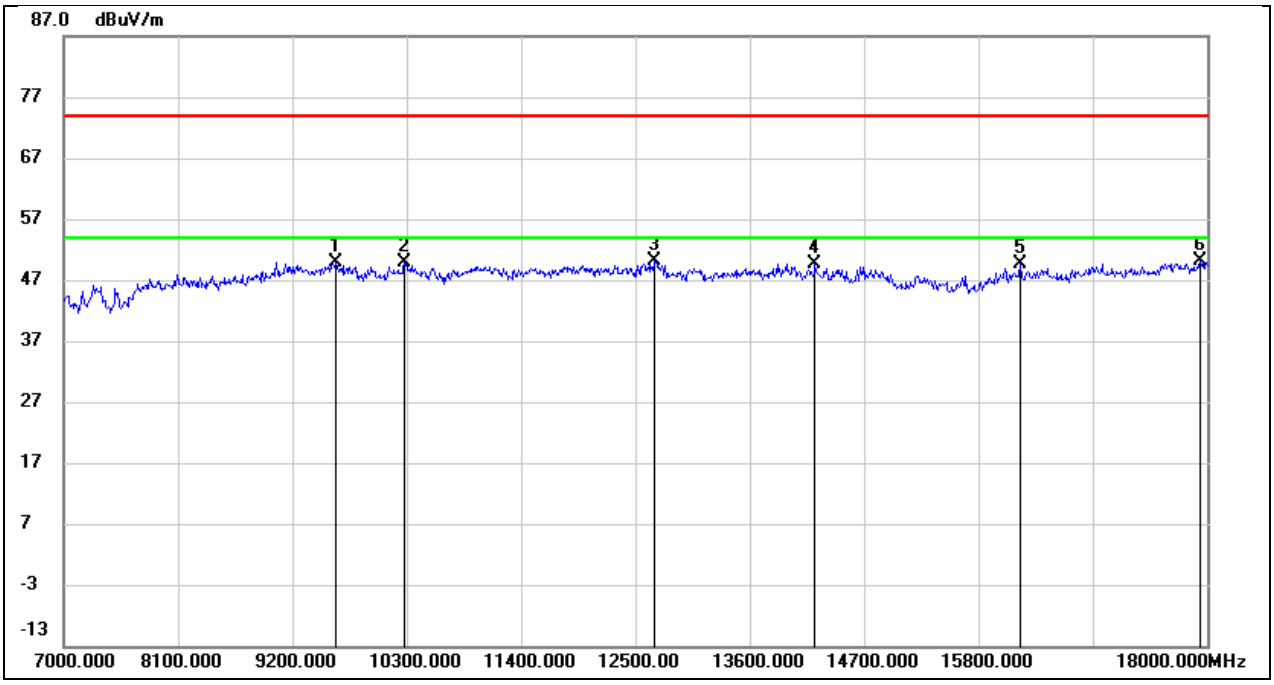

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9618.000	36.57	13.32	49.89	74.00	-24.11	peak
2	10278.000	37.04	12.82	49.86	74.00	-24.14	peak
3	12687.000	31.71	18.51	50.22	74.00	-23.78	peak
4	14227.000	27.90	21.61	49.51	74.00	-24.49	peak
5	16196.000	25.46	24.13	49.59	74.00	-24.41	peak
6	17934.000	23.16	27.00	50.16	74.00	-23.84	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

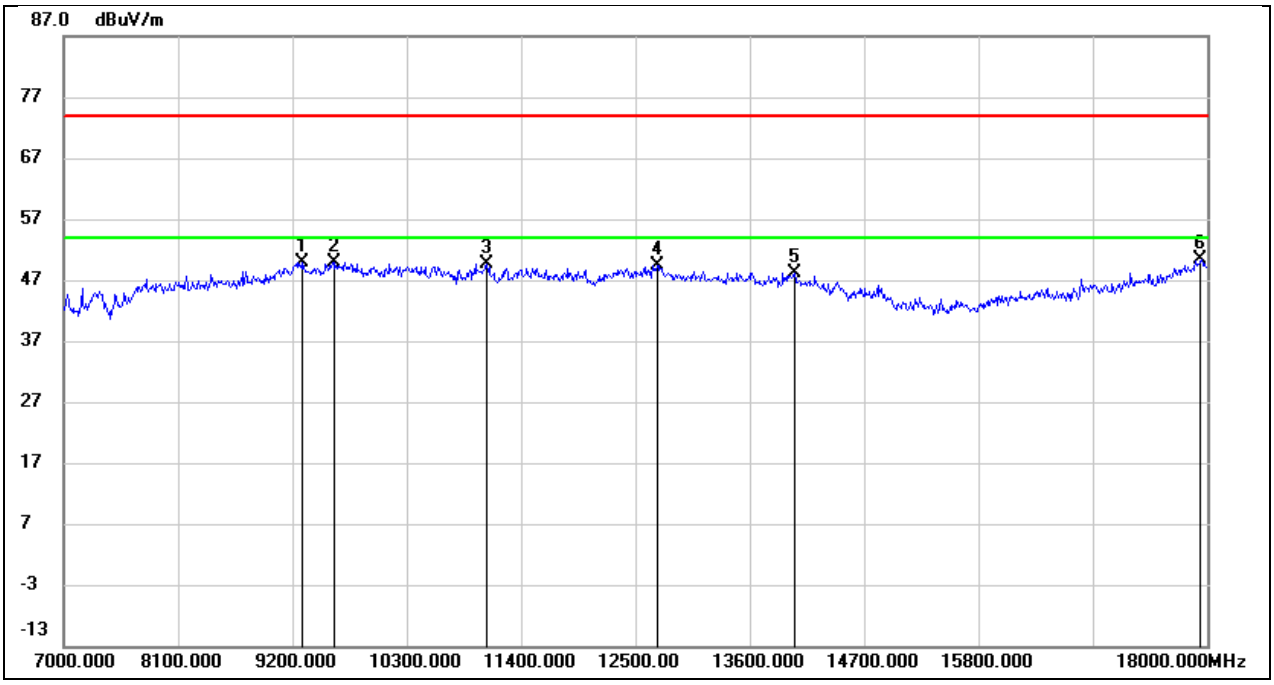

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	38.05	11.84	49.89	74.00	-24.11	peak
2	9596.000	36.54	13.44	49.98	74.00	-24.02	peak
3	11070.000	34.12	15.44	49.56	74.00	-24.44	peak
4	12709.000	29.78	19.60	49.38	74.00	-24.62	peak
5	14029.000	24.58	23.49	48.07	74.00	-25.93	peak
6	17934.000	21.54	28.91	50.45	74.00	-23.55	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

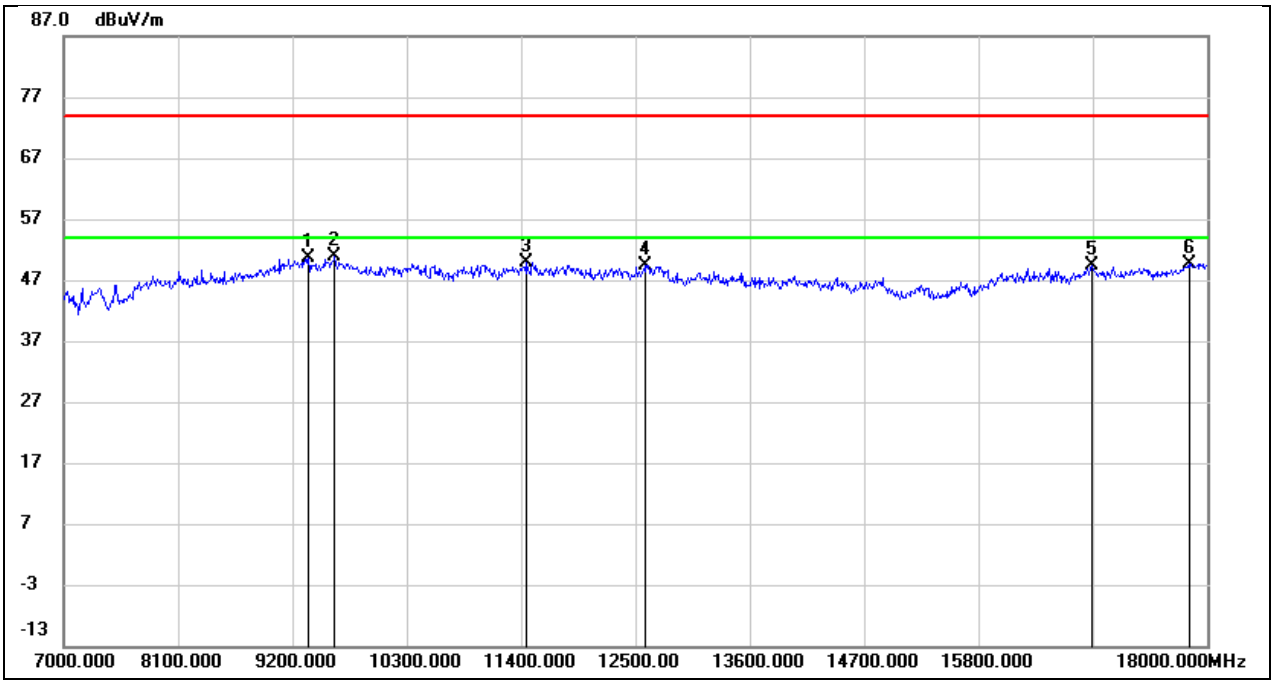

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	38.50	12.17	50.67	74.00	-23.33	peak
2	9607.000	37.44	13.33	50.77	74.00	-23.23	peak
3	11455.000	33.78	16.18	49.96	74.00	-24.04	peak
4	12588.000	31.19	18.19	49.38	74.00	-24.62	peak
5	16889.000	25.18	24.21	49.39	74.00	-24.61	peak
6	17824.000	23.42	26.31	49.73	74.00	-24.27	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

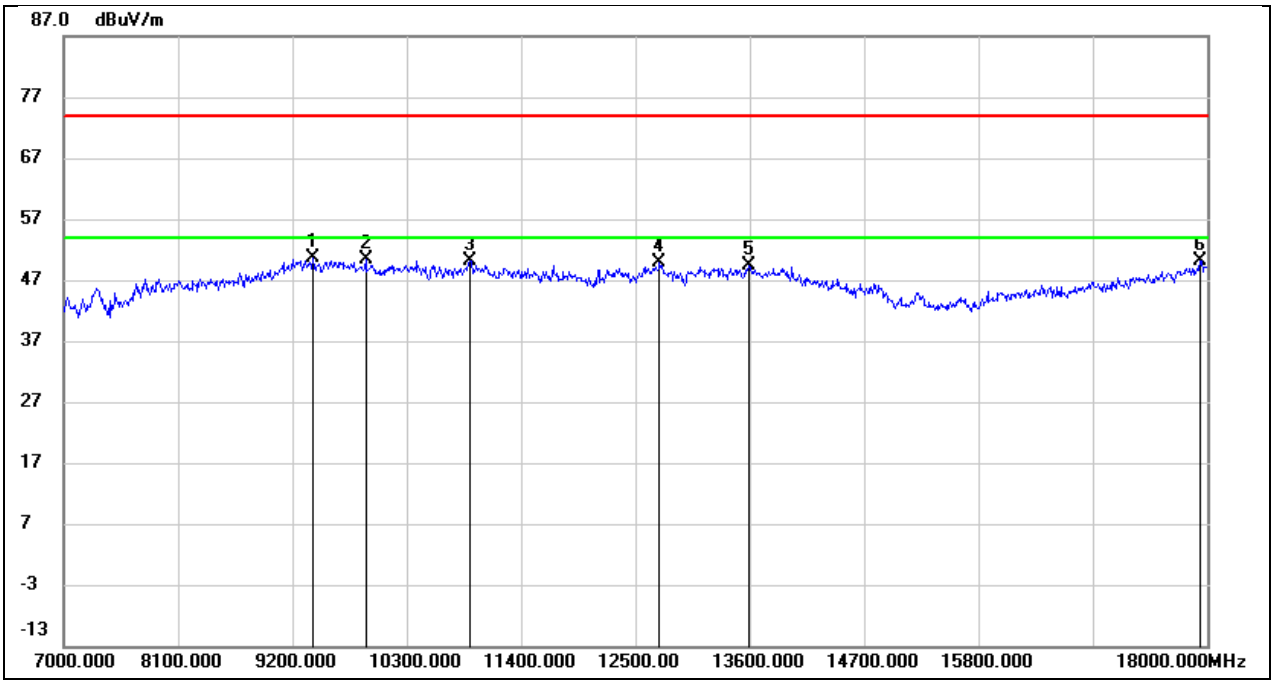

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9398.000	38.51	12.21	50.72	74.00	-23.28	peak
2	9904.000	36.79	13.56	50.35	74.00	-23.65	peak
3	10905.000	35.50	14.75	50.25	74.00	-23.75	peak
4	12731.000	30.21	19.70	49.91	74.00	-24.09	peak
5	13589.000	27.14	22.20	49.34	74.00	-24.66	peak
6	17934.000	21.23	28.91	50.14	74.00	-23.86	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

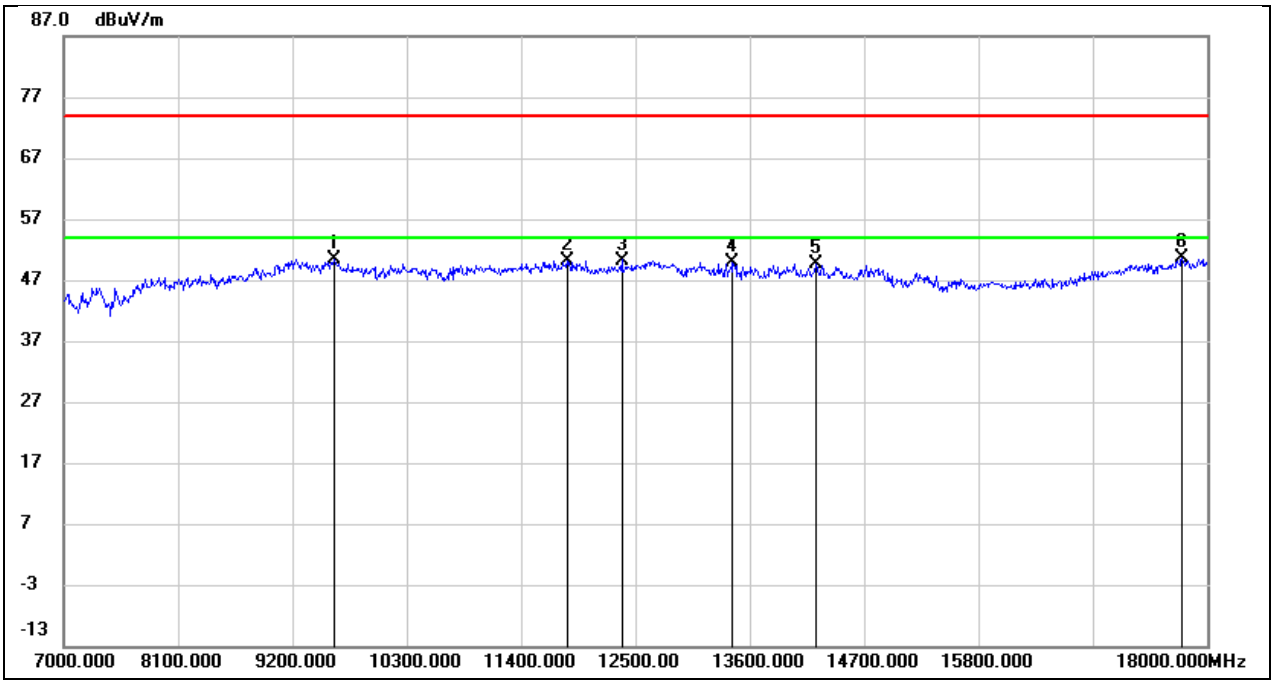

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	37.09	13.33	50.42	74.00	-23.58	peak
2	11840.000	33.38	16.86	50.24	74.00	-23.76	peak
3	12368.000	32.27	17.98	50.25	74.00	-23.75	peak
4	13435.000	29.82	20.15	49.97	74.00	-24.03	peak
5	14238.000	28.08	21.58	49.66	74.00	-24.34	peak
6	17758.000	24.57	25.94	50.51	74.00	-23.49	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

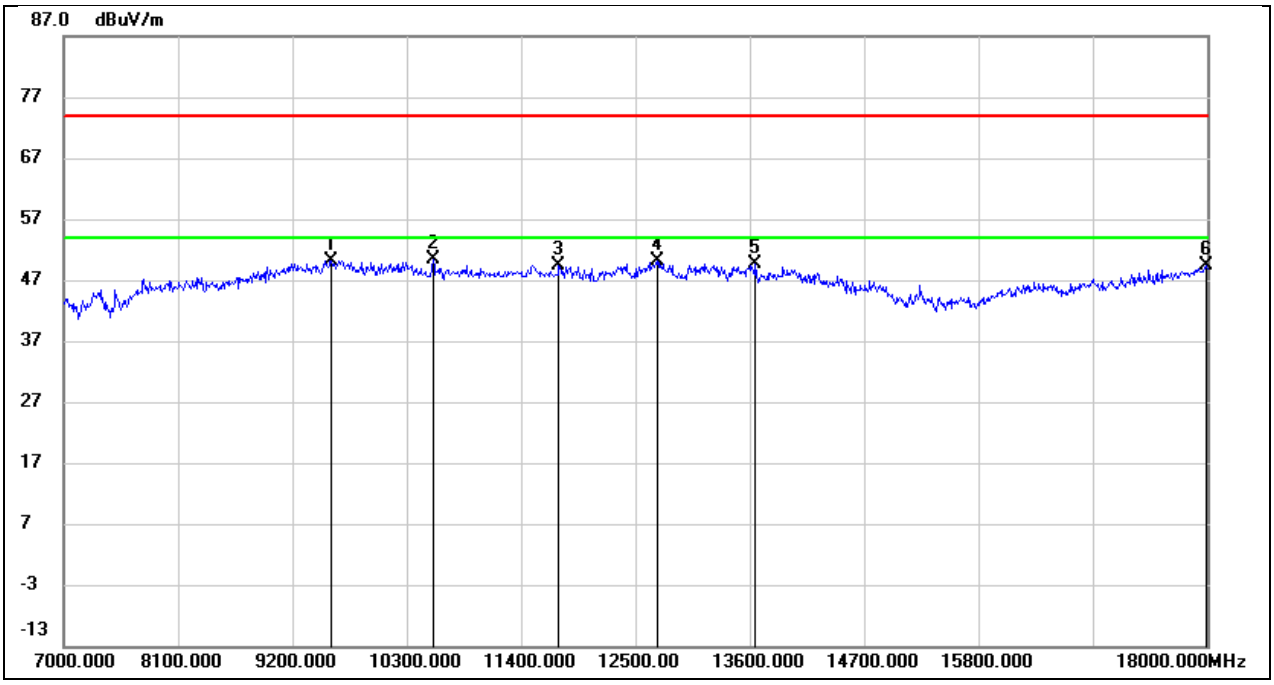

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	36.92	13.31	50.23	74.00	-23.77	peak
2	10553.000	36.71	13.70	50.41	74.00	-23.59	peak
3	11763.000	31.47	18.00	49.47	74.00	-24.53	peak
4	12709.000	30.52	19.60	50.12	74.00	-23.88	peak
5	13655.000	27.14	22.38	49.52	74.00	-24.48	peak
6	17989.000	19.98	29.49	49.47	74.00	-24.53	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

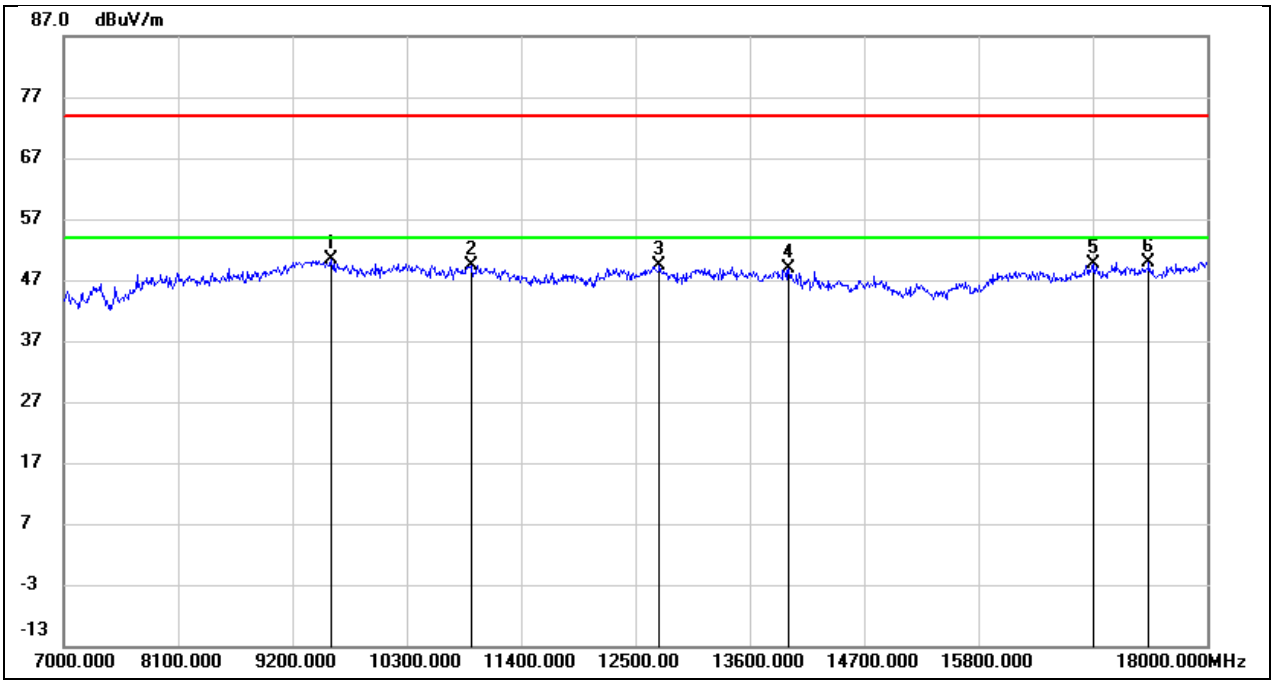

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	37.09	13.21	50.30	74.00	-23.70	peak
2	10916.000	35.37	14.09	49.46	74.00	-24.54	peak
3	12731.000	30.64	18.66	49.30	74.00	-24.70	peak
4	13974.000	26.97	21.89	48.86	74.00	-25.14	peak
5	16900.000	25.36	24.24	49.60	74.00	-24.40	peak
6	17439.000	24.89	25.02	49.91	74.00	-24.09	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

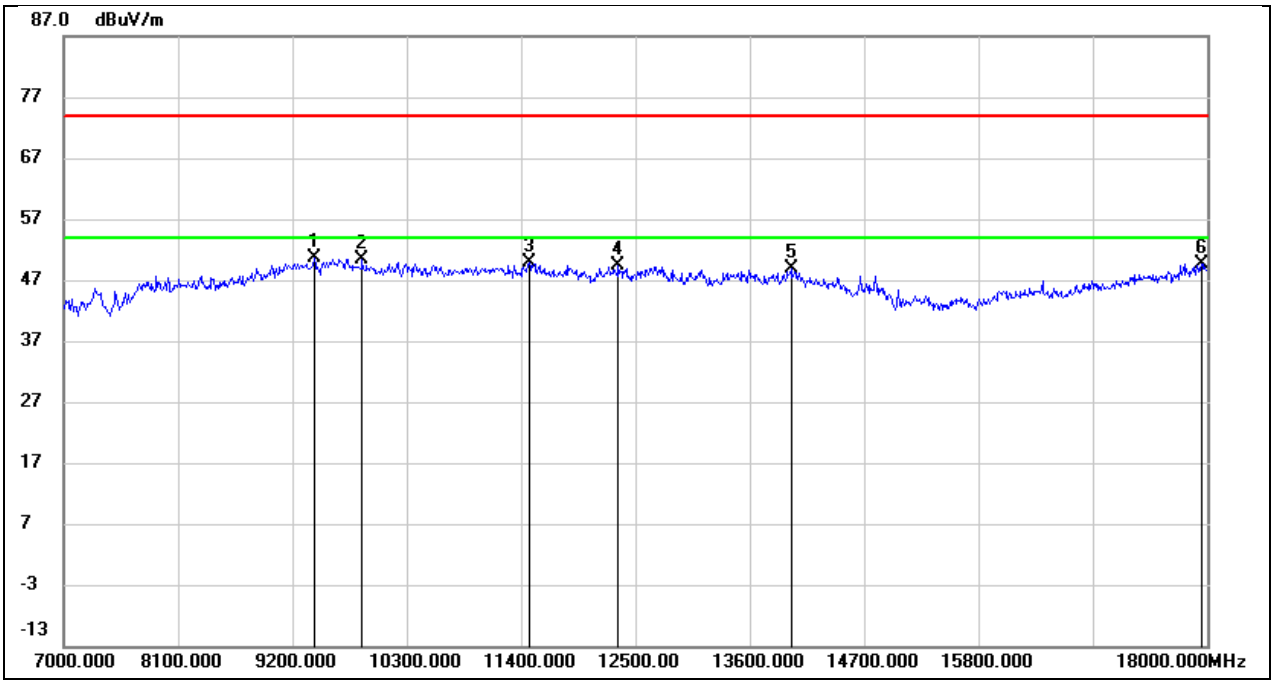

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9409.000	38.31	12.26	50.57	74.00	-23.43	peak
2	9871.000	36.65	13.63	50.28	74.00	-23.72	peak
3	11477.000	32.08	17.73	49.81	74.00	-24.19	peak
4	12335.000	30.49	18.89	49.38	74.00	-24.62	peak
5	13996.000	25.25	23.59	48.84	74.00	-25.16	peak
6	17945.000	20.72	29.03	49.75	74.00	-24.25	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

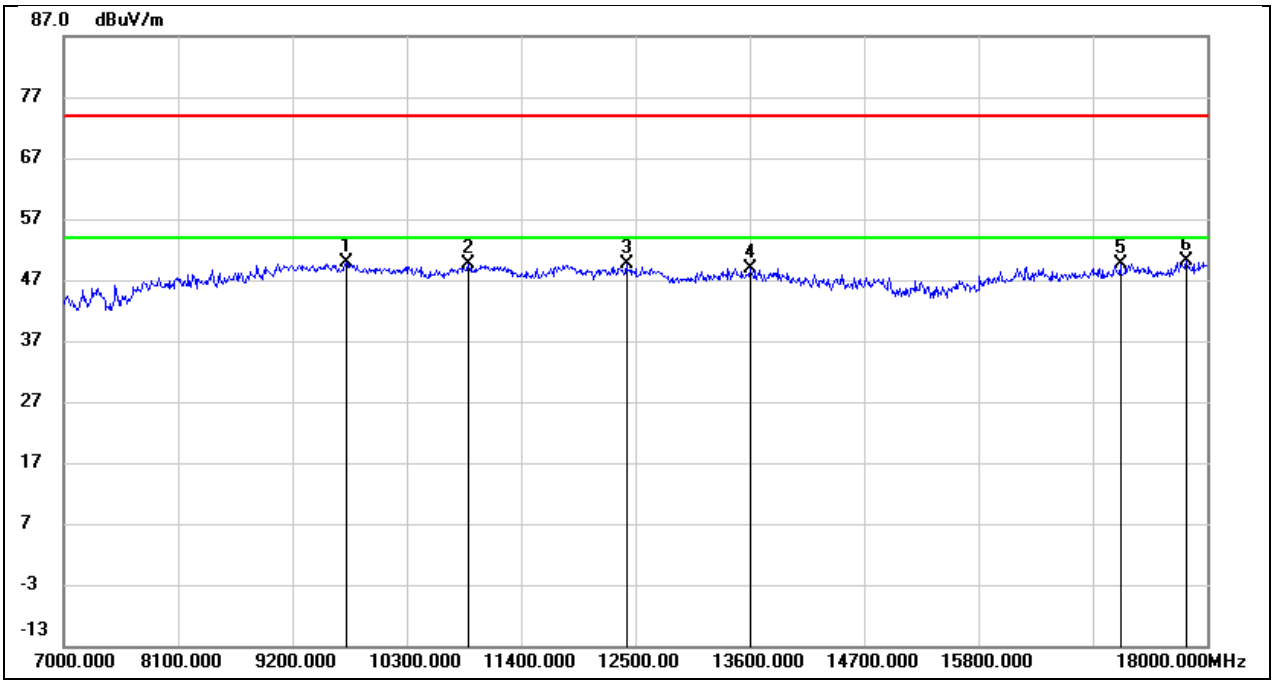

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9717.000	36.53	13.35	49.88	74.00	-24.12	peak
2	10894.000	35.56	14.05	49.61	74.00	-24.39	peak
3	12412.000	31.48	18.04	49.52	74.00	-24.48	peak
4	13600.000	28.44	20.54	48.98	74.00	-25.02	peak
5	17164.000	24.73	24.82	49.55	74.00	-24.45	peak
6	17802.000	23.92	26.18	50.10	74.00	-23.90	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

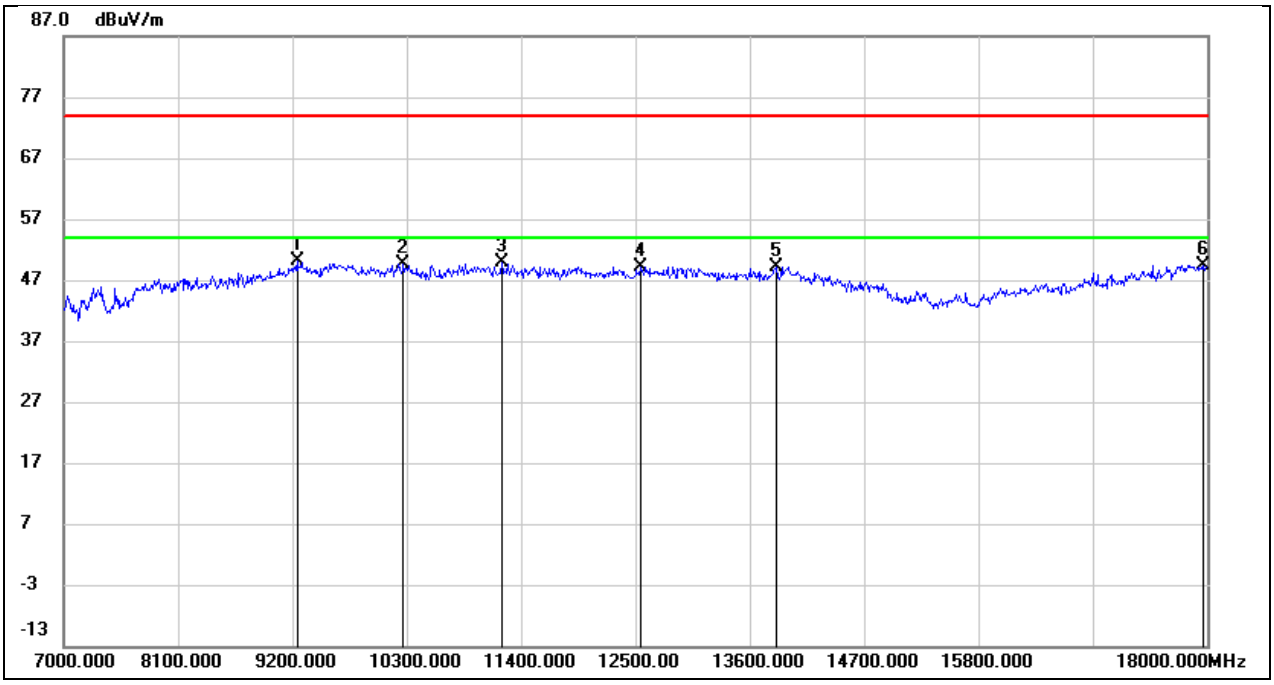

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.33	11.71	50.04	74.00	-23.96	peak
2	10267.000	36.48	13.23	49.71	74.00	-24.29	peak
3	11213.000	33.56	16.24	49.80	74.00	-24.20	peak
4	12544.000	30.15	19.06	49.21	74.00	-24.79	peak
5	13853.000	26.19	23.01	49.20	74.00	-24.80	peak
6	17956.000	20.34	29.14	49.48	74.00	-24.52	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

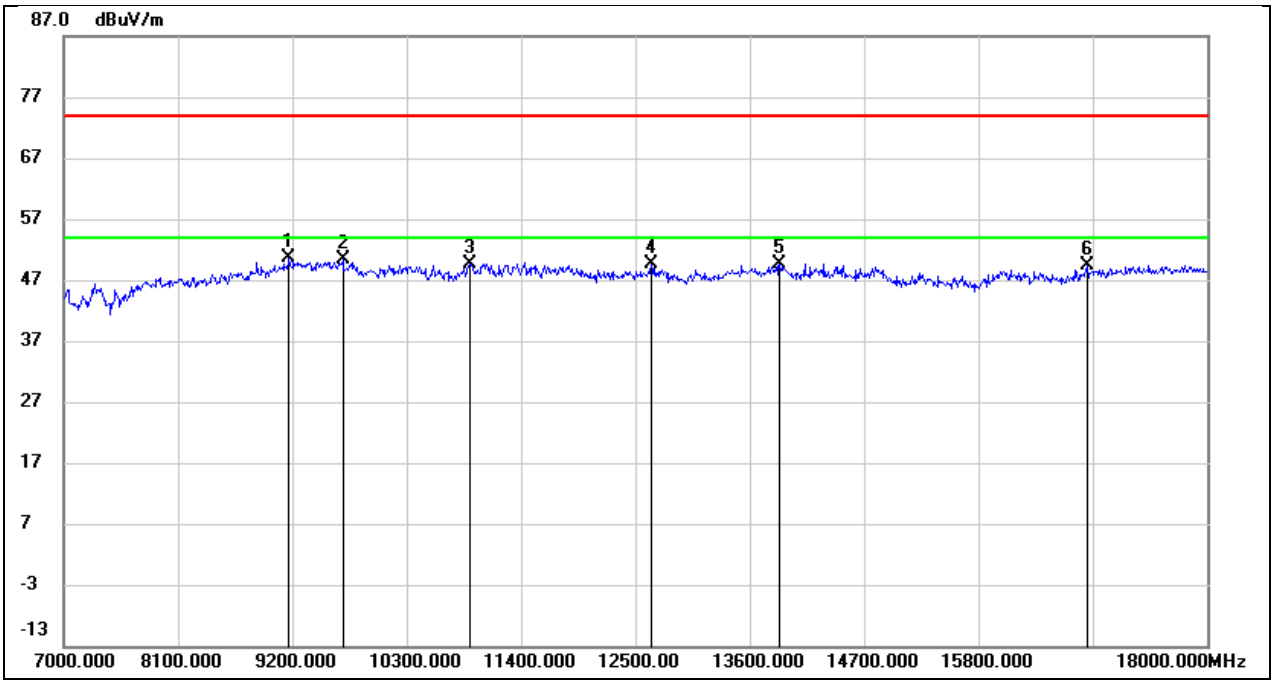

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	38.95	11.68	50.63	74.00	-23.37	peak
2	9684.000	37.14	13.35	50.49	74.00	-23.51	peak
3	10905.000	35.64	14.06	49.70	74.00	-24.30	peak
4	12654.000	31.33	18.39	49.72	74.00	-24.28	peak
5	13886.000	28.08	21.53	49.61	74.00	-24.39	peak
6	16845.000	25.18	24.14	49.32	74.00	-24.68	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

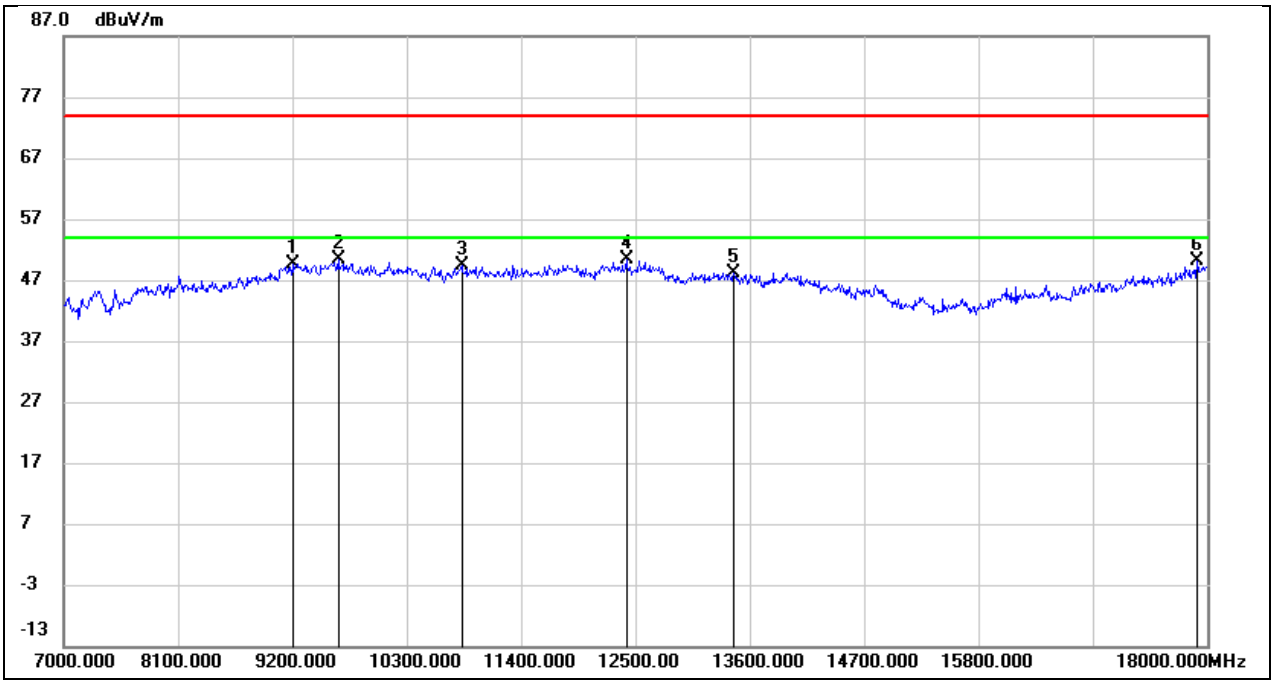

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.08	11.56	49.64	74.00	-24.36	peak
2	9640.000	36.94	13.53	50.47	74.00	-23.53	peak
3	10828.000	34.91	14.51	49.42	74.00	-24.58	peak
4	12412.000	31.30	18.98	50.28	74.00	-23.72	peak
5	13446.000	26.39	21.82	48.21	74.00	-25.79	peak
6	17901.000	21.60	28.56	50.16	74.00	-23.84	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

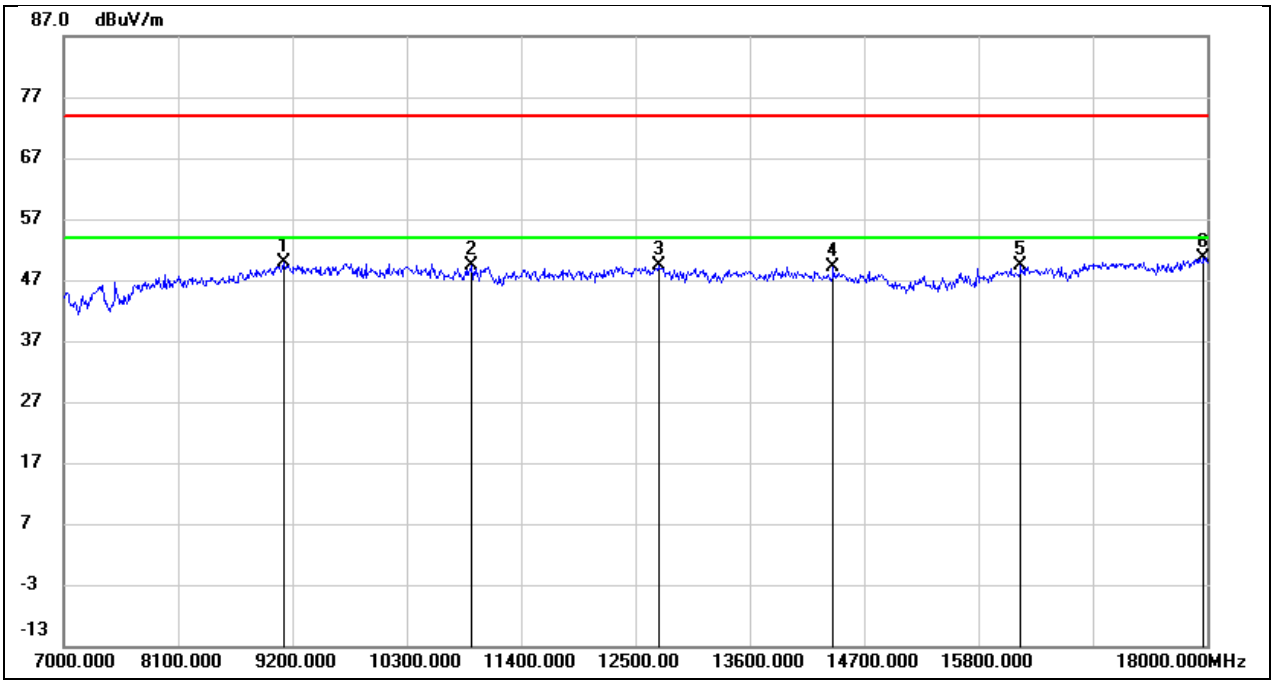

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.32	11.52	49.84	74.00	-24.16	peak
2	10927.000	35.31	14.11	49.42	74.00	-24.58	peak
3	12720.000	30.75	18.62	49.37	74.00	-24.63	peak
4	14403.000	28.15	21.00	49.15	74.00	-24.85	peak
5	16207.000	25.31	24.14	49.45	74.00	-24.55	peak
6	17967.000	23.43	27.20	50.63	74.00	-23.37	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

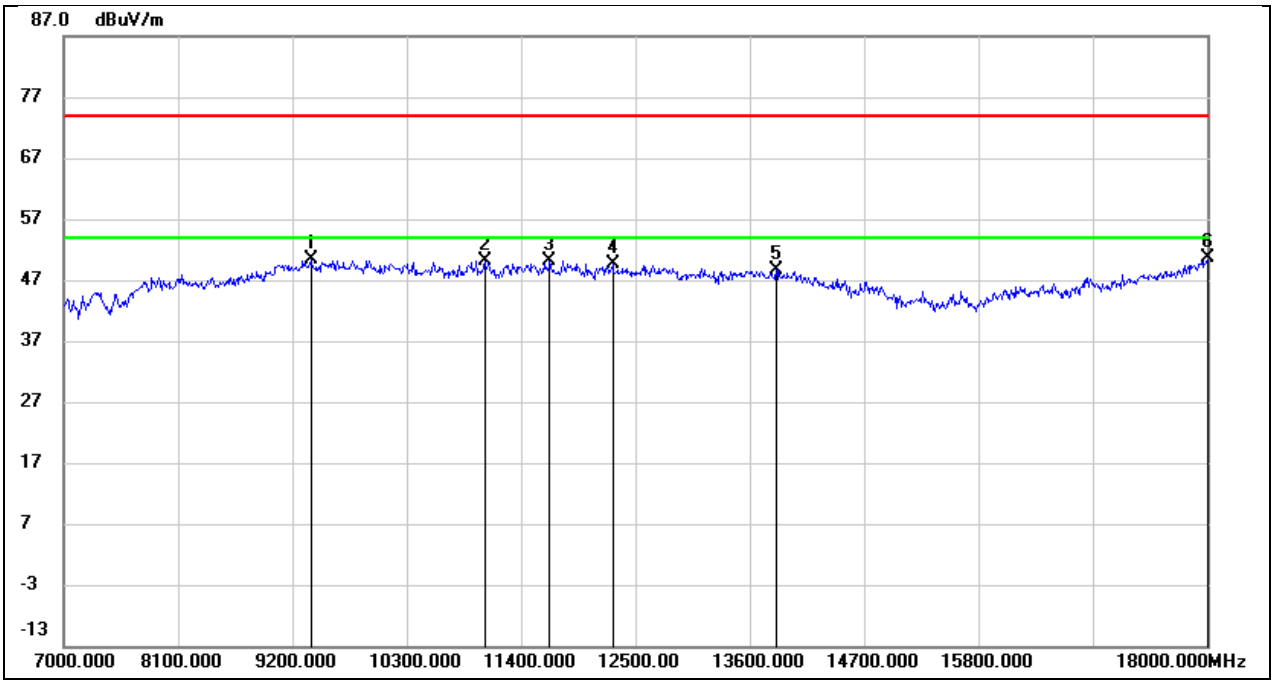

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	38.14	12.13	50.27	74.00	-23.73	peak
2	11048.000	34.75	15.33	50.08	74.00	-23.92	peak
3	11675.000	32.18	18.06	50.24	74.00	-23.76	peak
4	12280.000	30.81	18.82	49.63	74.00	-24.37	peak
5	13853.000	25.74	23.01	48.75	74.00	-25.25	peak
6	18000.000	20.93	29.61	50.54	74.00	-23.46	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

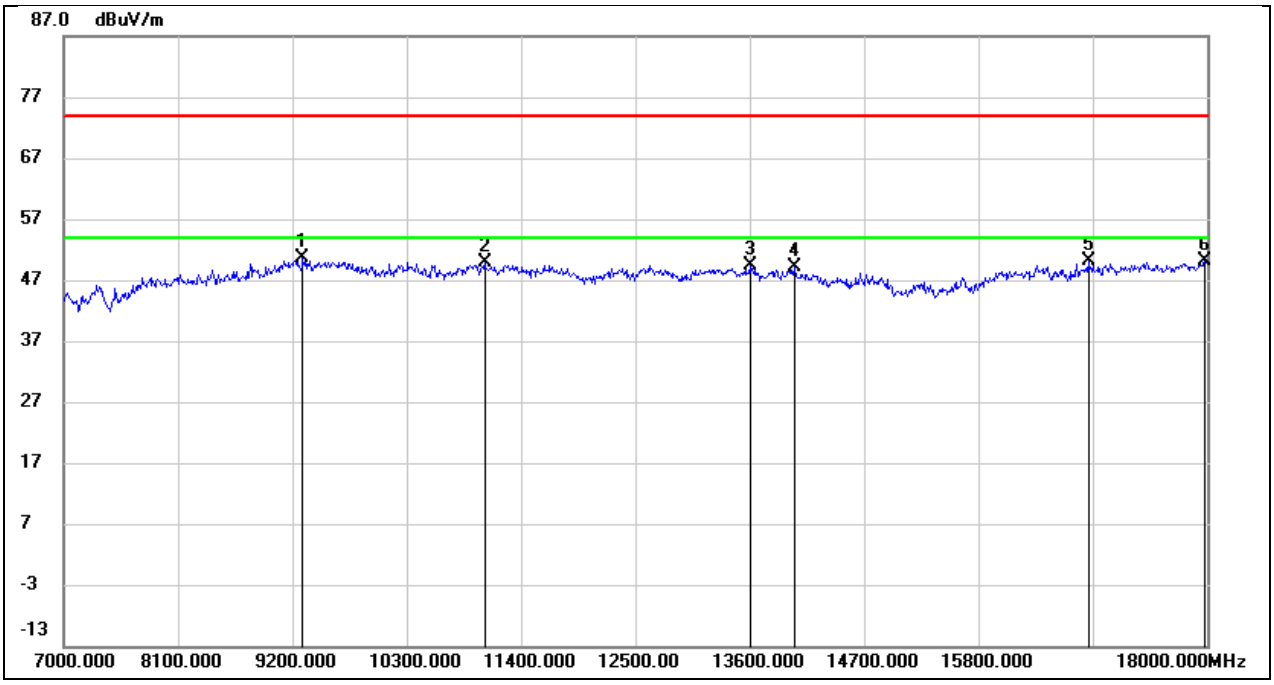

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	38.65	12.04	50.69	74.00	-23.31	peak
2	11048.000	35.47	14.46	49.93	74.00	-24.07	peak
3	13600.000	28.78	20.54	49.32	74.00	-24.68	peak
4	14029.000	27.28	21.96	49.24	74.00	-24.76	peak
5	16856.000	25.96	24.14	50.10	74.00	-23.90	peak
6	17978.000	22.86	27.28	50.14	74.00	-23.86	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

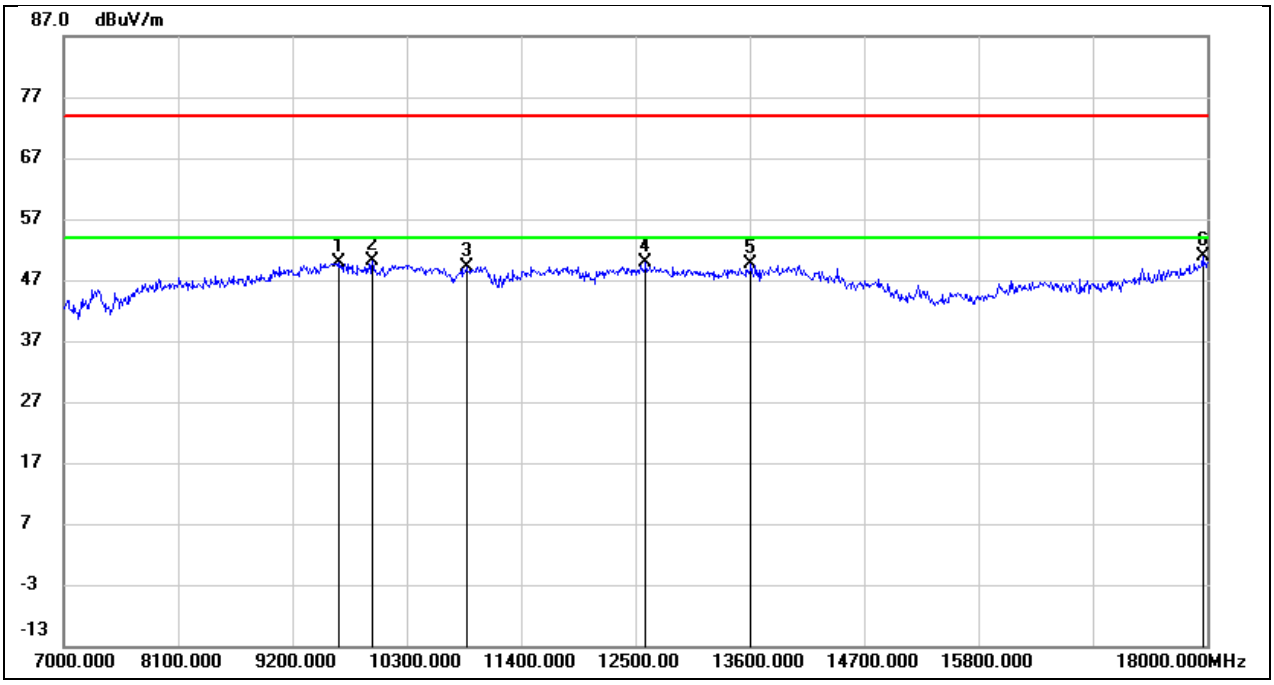

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9651.000	36.39	13.55	49.94	74.00	-24.06	peak
2	9970.000	36.80	13.41	50.21	74.00	-23.79	peak
3	10872.000	34.47	14.65	49.12	74.00	-24.88	peak
4	12599.000	30.71	19.16	49.87	74.00	-24.13	peak
5	13611.000	27.26	22.25	49.51	74.00	-24.49	peak
6	17956.000	21.67	29.14	50.81	74.00	-23.19	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

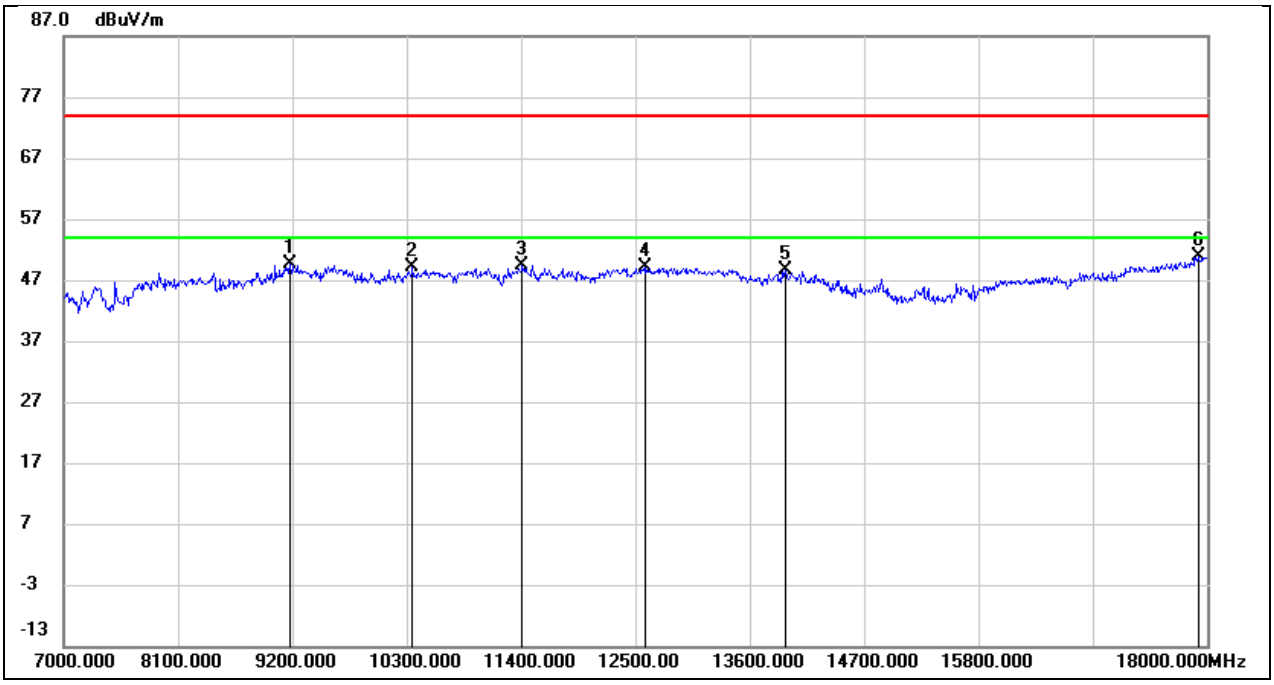

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.92	11.71	49.63	74.00	-24.37	peak
2	10355.000	36.17	12.97	49.14	74.00	-24.86	peak
3	11411.000	33.41	16.04	49.45	74.00	-24.55	peak
4	12599.000	30.83	18.20	49.03	74.00	-24.97	peak
5	13941.000	26.94	21.76	48.70	74.00	-25.30	peak
6	17912.000	23.99	26.87	50.86	74.00	-23.14	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

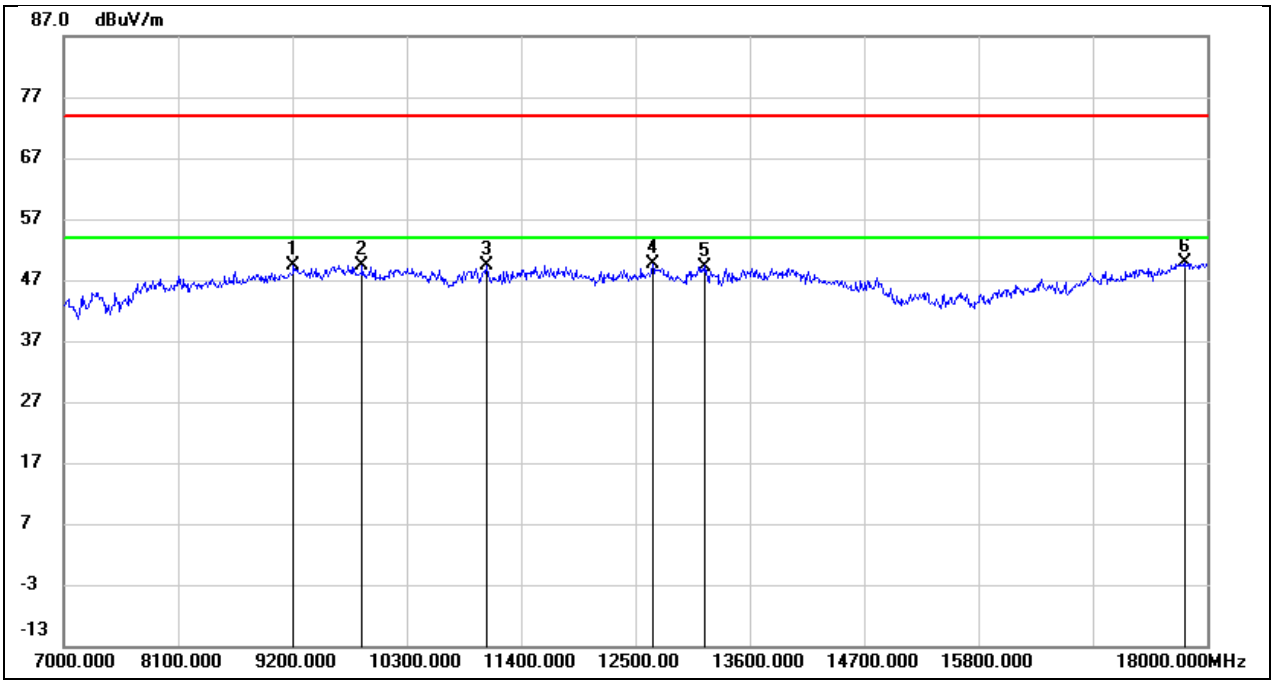

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.83	11.59	49.42	74.00	-24.58	peak
2	9871.000	35.80	13.63	49.43	74.00	-24.57	peak
3	11070.000	33.84	15.44	49.28	74.00	-24.72	peak
4	12665.000	30.33	19.42	49.75	74.00	-24.25	peak
5	13171.000	28.46	20.79	49.25	74.00	-24.75	peak
6	17780.000	22.49	27.29	49.78	74.00	-24.22	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

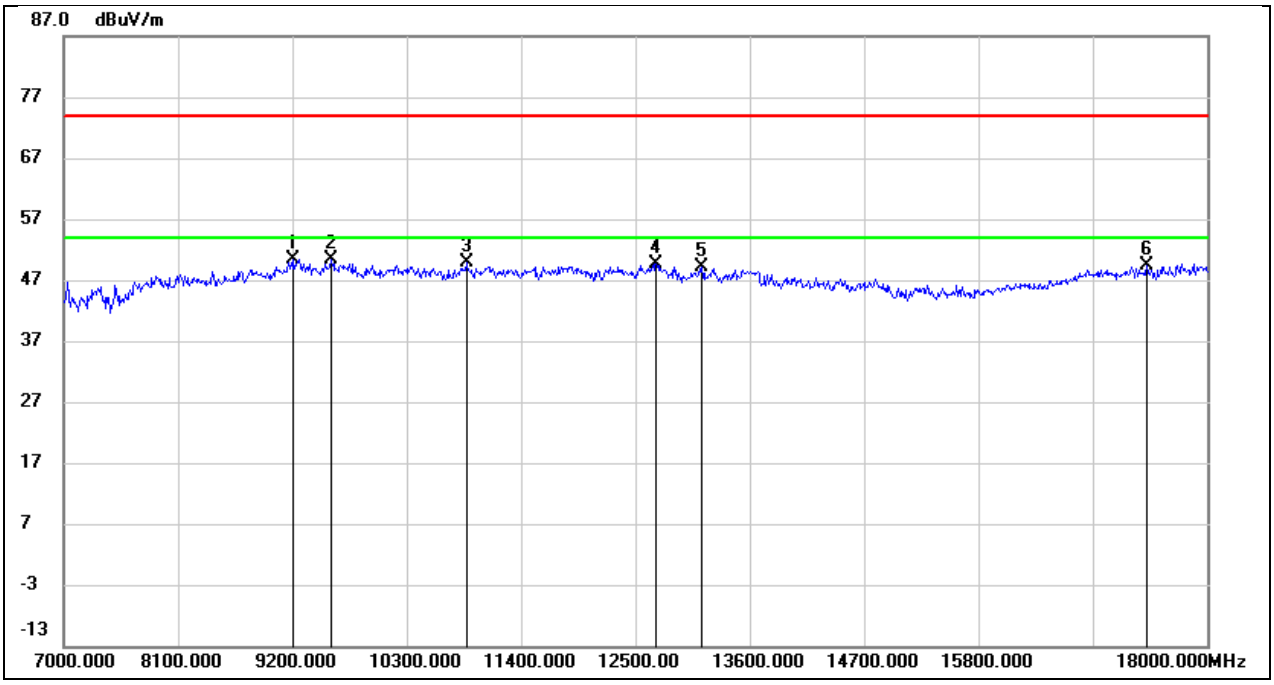

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.62	11.82	50.44	74.00	-23.56	peak
2	9574.000	37.17	13.21	50.38	74.00	-23.62	peak
3	10872.000	35.94	14.00	49.94	74.00	-24.06	peak
4	12698.000	31.00	18.54	49.54	74.00	-24.46	peak
5	13138.000	29.74	19.31	49.05	74.00	-24.95	peak
6	17417.000	24.29	25.04	49.33	74.00	-24.67	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

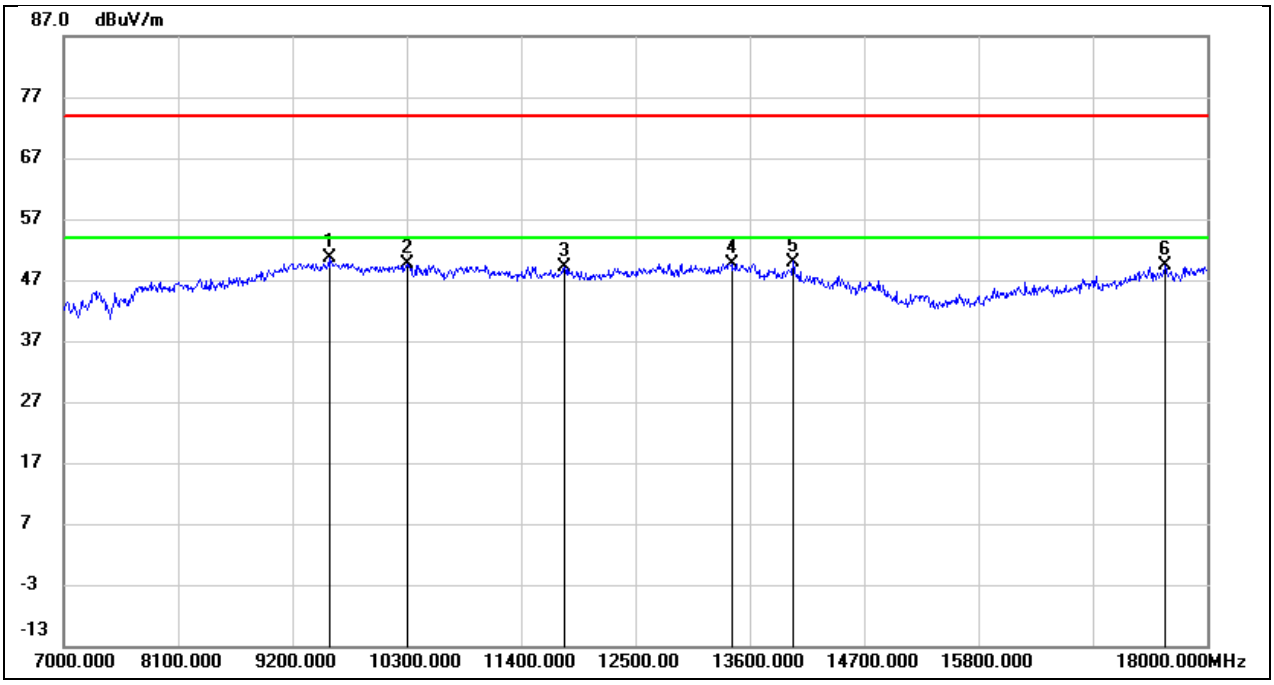

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	37.48	13.17	50.65	74.00	-23.35	peak
2	10311.000	36.32	13.28	49.60	74.00	-24.40	peak
3	11818.000	31.10	18.03	49.13	74.00	-24.87	peak
4	13424.000	27.98	21.73	49.71	74.00	-24.29	peak
5	14018.000	26.46	23.54	50.00	74.00	-24.00	peak
6	17593.000	23.85	25.51	49.36	74.00	-24.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

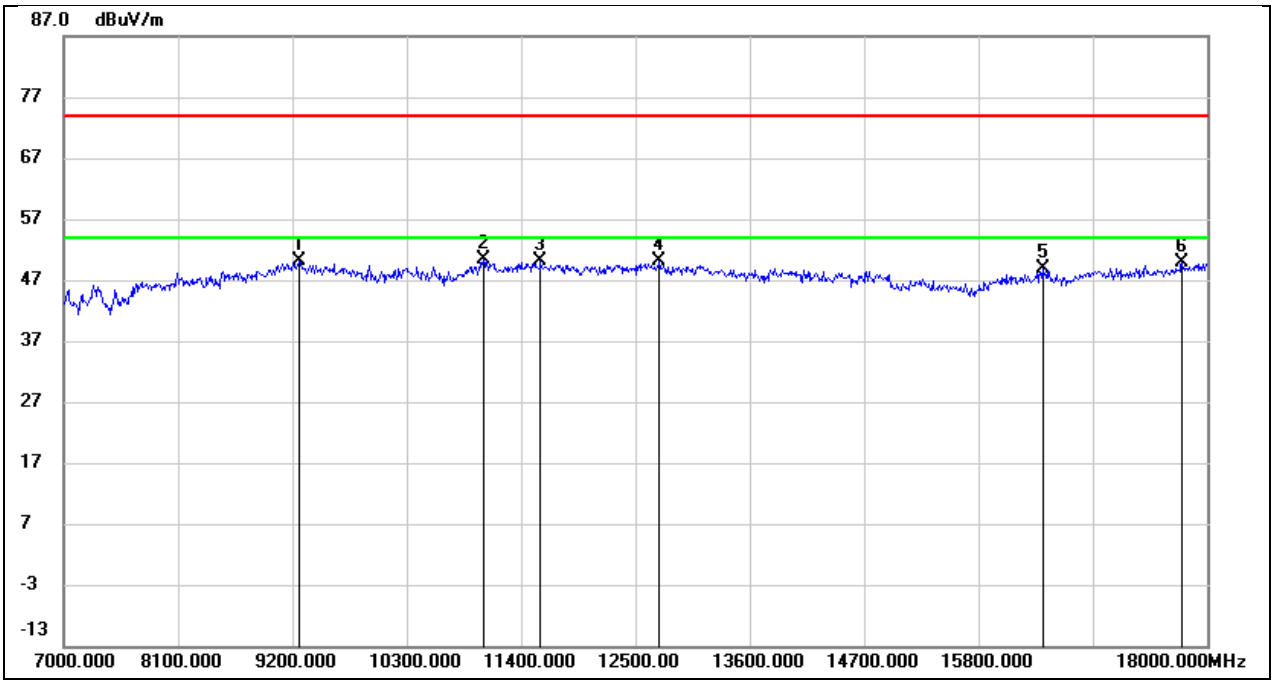

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.26	11.96	50.22	74.00	-23.78	peak
2	11037.000	35.92	14.42	50.34	74.00	-23.66	peak
3	11587.000	33.57	16.64	50.21	74.00	-23.79	peak
4	12731.000	31.38	18.66	50.04	74.00	-23.96	peak
5	16416.000	25.16	23.60	48.76	74.00	-25.24	peak
6	17758.000	23.98	25.94	49.92	74.00	-24.08	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

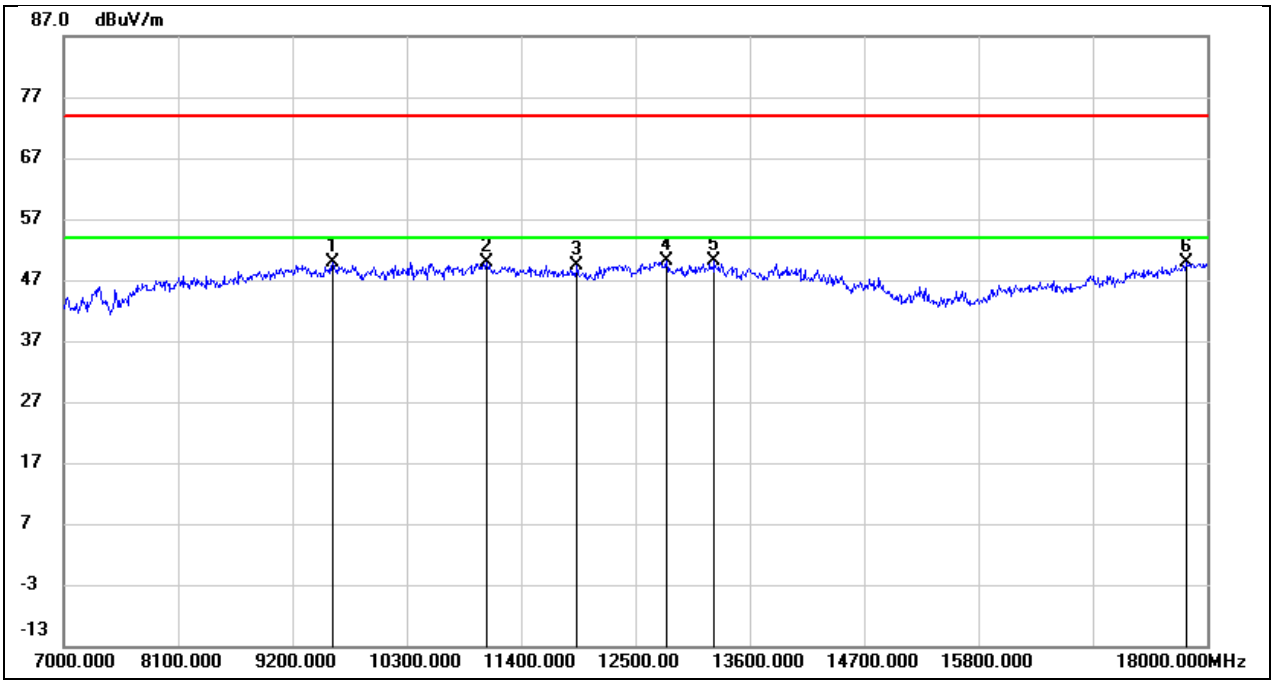

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	36.40	13.38	49.78	74.00	-24.22	peak
2	11070.000	34.55	15.44	49.99	74.00	-24.01	peak
3	11939.000	31.00	18.34	49.34	74.00	-24.66	peak
4	12797.000	30.25	19.97	50.22	74.00	-23.78	peak
5	13259.000	28.91	21.13	50.04	74.00	-23.96	peak
6	17802.000	22.29	27.51	49.80	74.00	-24.20	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

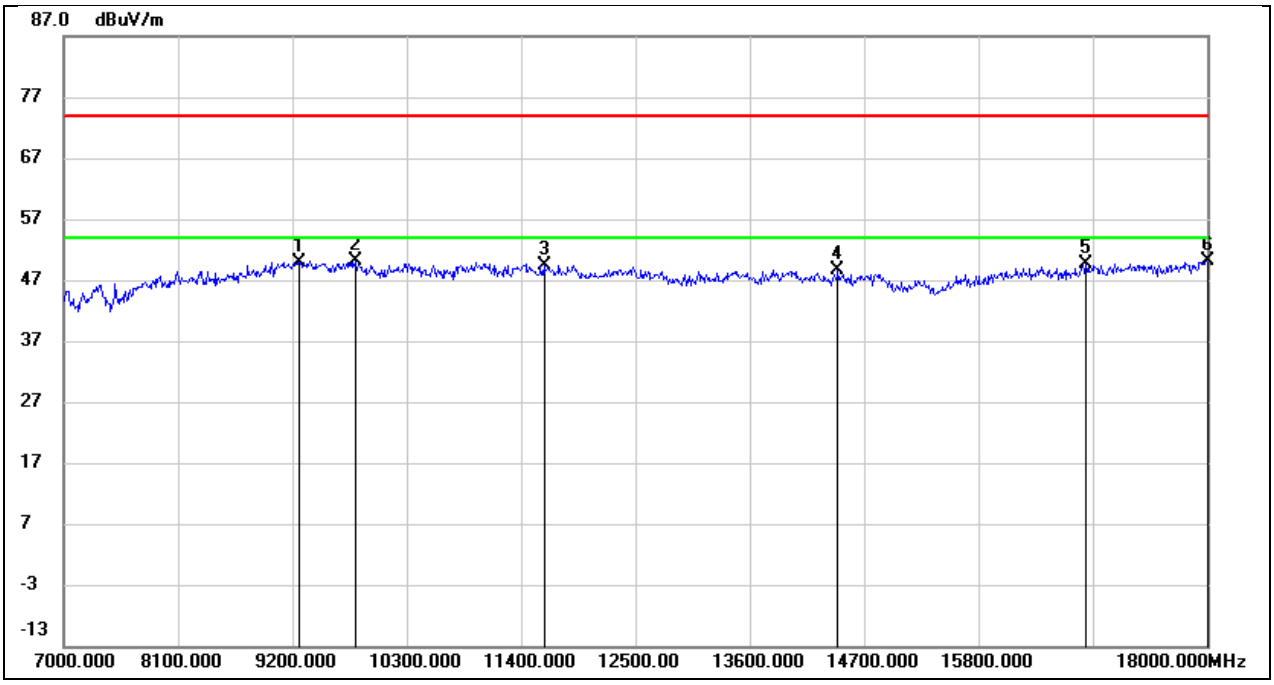

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.99	11.96	49.95	74.00	-24.05	peak
2	9805.000	36.71	13.37	50.08	74.00	-23.92	peak
3	11620.000	32.64	16.68	49.32	74.00	-24.68	peak
4	14447.000	27.61	20.97	48.58	74.00	-25.42	peak
5	16834.000	25.62	24.11	49.73	74.00	-24.27	peak
6	18000.000	22.66	27.41	50.07	74.00	-23.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

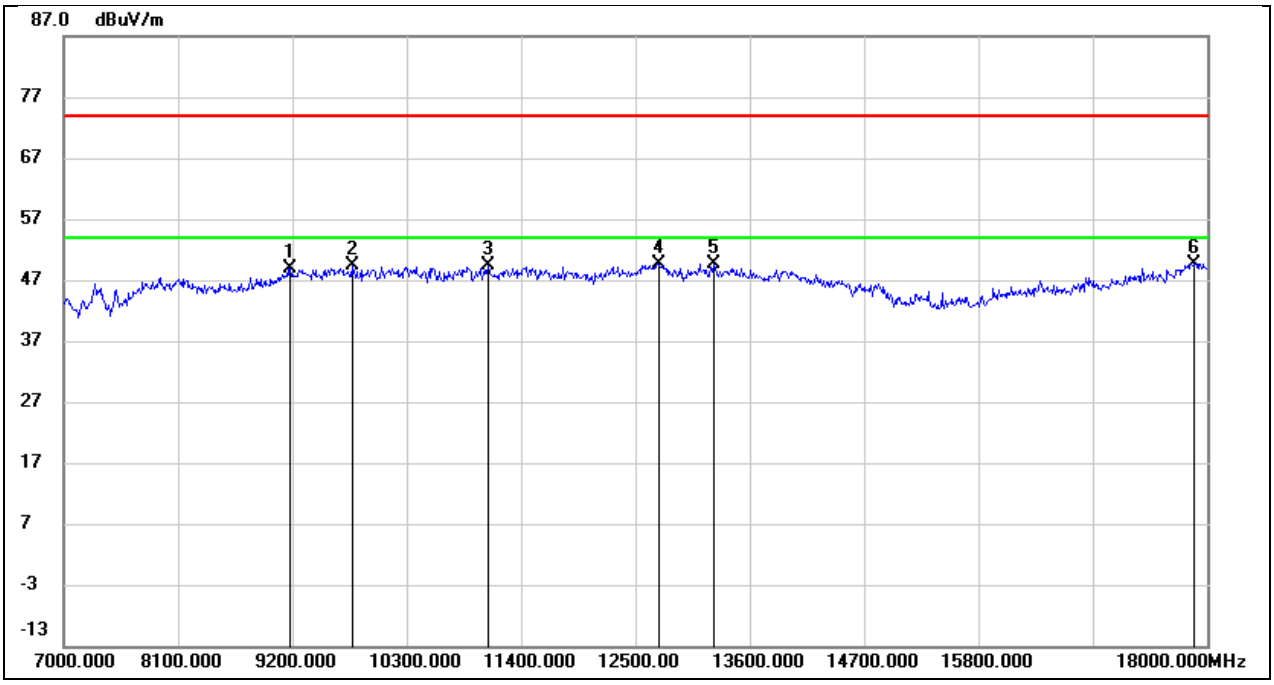

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.44	11.45	48.89	74.00	-25.11	peak
2	9772.000	35.60	13.75	49.35	74.00	-24.65	peak
3	11081.000	33.83	15.51	49.34	74.00	-24.66	peak
4	12720.000	30.09	19.65	49.74	74.00	-24.26	peak
5	13248.000	28.66	21.09	49.75	74.00	-24.25	peak
6	17868.000	21.49	28.21	49.70	74.00	-24.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

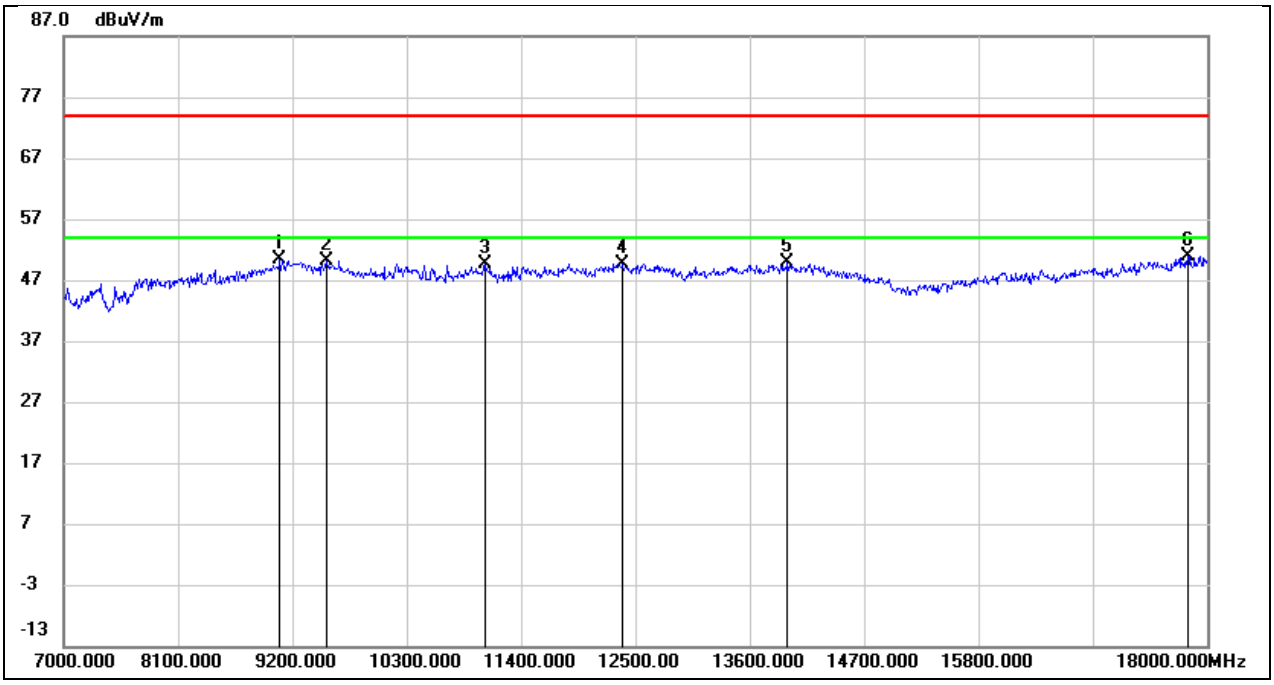

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	39.05	11.35	50.40	74.00	-23.60	peak
2	9530.000	37.14	13.00	50.14	74.00	-23.86	peak
3	11048.000	35.06	14.46	49.52	74.00	-24.48	peak
4	12379.000	31.71	18.01	49.72	74.00	-24.28	peak
5	13963.000	27.96	21.85	49.81	74.00	-24.19	peak
6	17813.000	24.58	26.24	50.82	74.00	-23.18	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

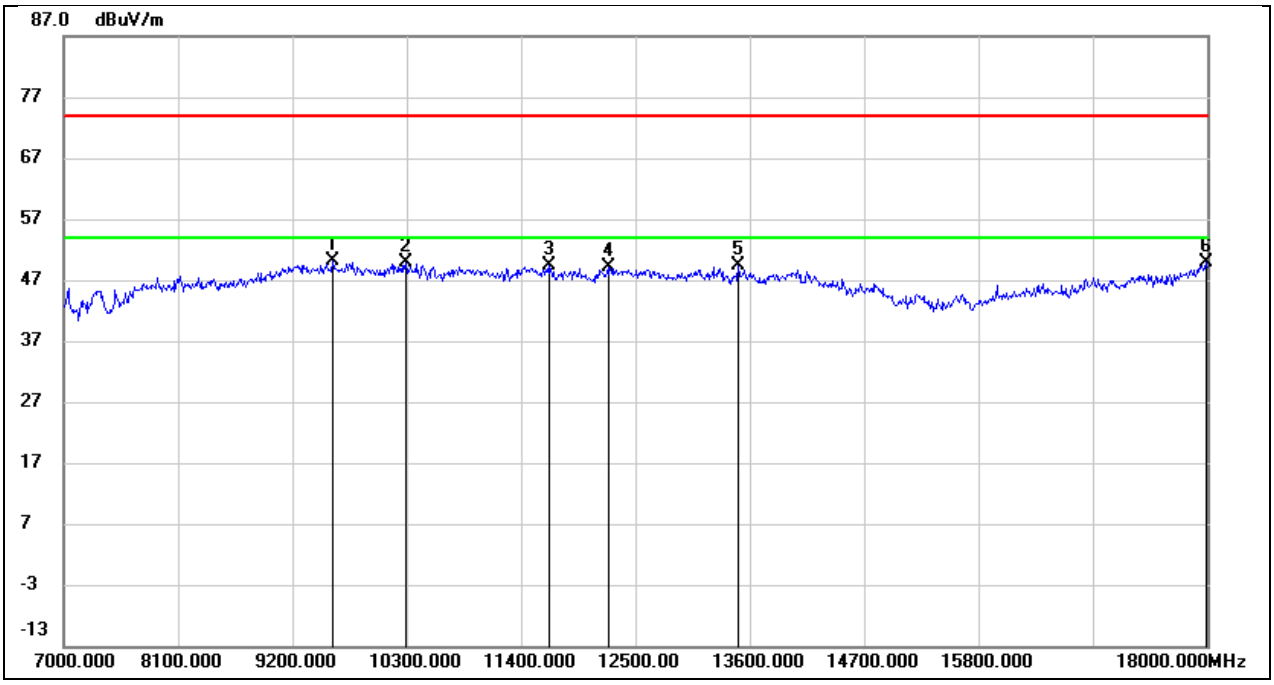

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	36.76	13.38	50.14	74.00	-23.86	peak
2	10289.000	36.58	13.25	49.83	74.00	-24.17	peak
3	11664.000	31.43	18.05	49.48	74.00	-24.52	peak
4	12236.000	30.26	18.76	49.02	74.00	-24.98	peak
5	13490.000	27.26	22.00	49.26	74.00	-24.74	peak
6	17989.000	20.33	29.49	49.82	74.00	-24.18	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

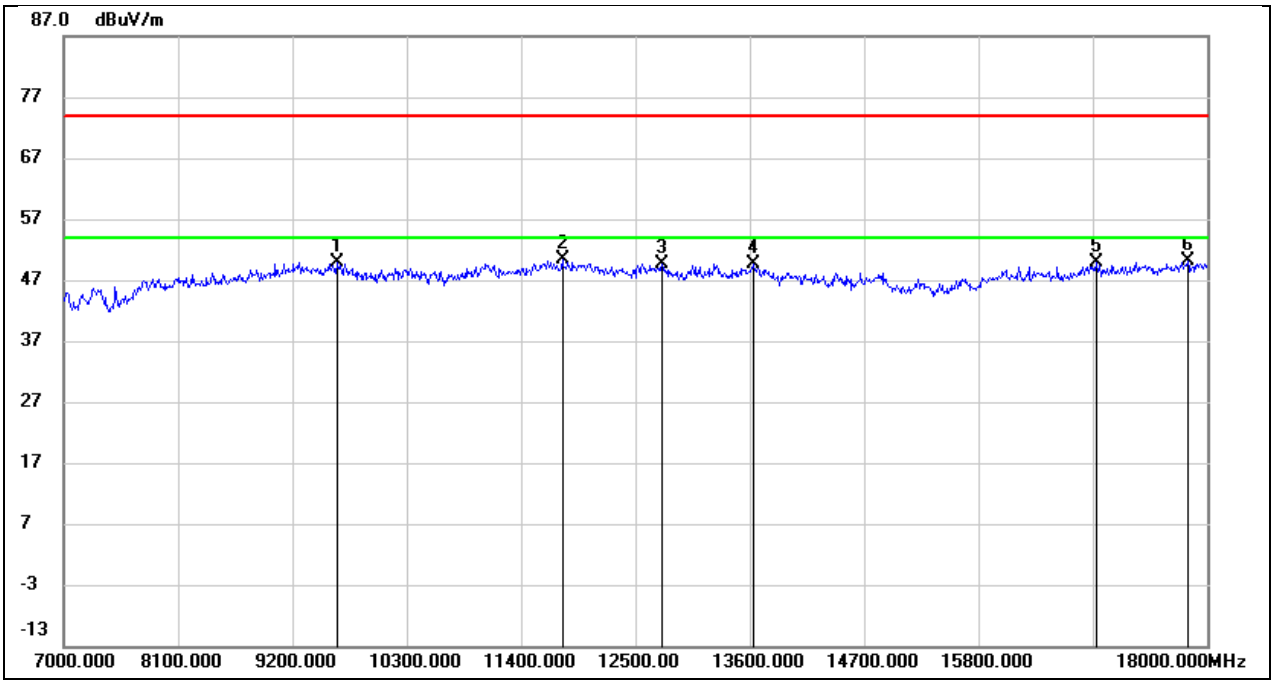

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9629.000	36.59	13.33	49.92	74.00	-24.08	peak
2	11796.000	33.74	16.73	50.47	74.00	-23.53	peak
3	12753.000	30.93	18.73	49.66	74.00	-24.34	peak
4	13633.000	28.96	20.64	49.60	74.00	-24.40	peak
5	16933.000	25.51	24.30	49.81	74.00	-24.19	peak
6	17813.000	23.79	26.24	50.03	74.00	-23.97	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

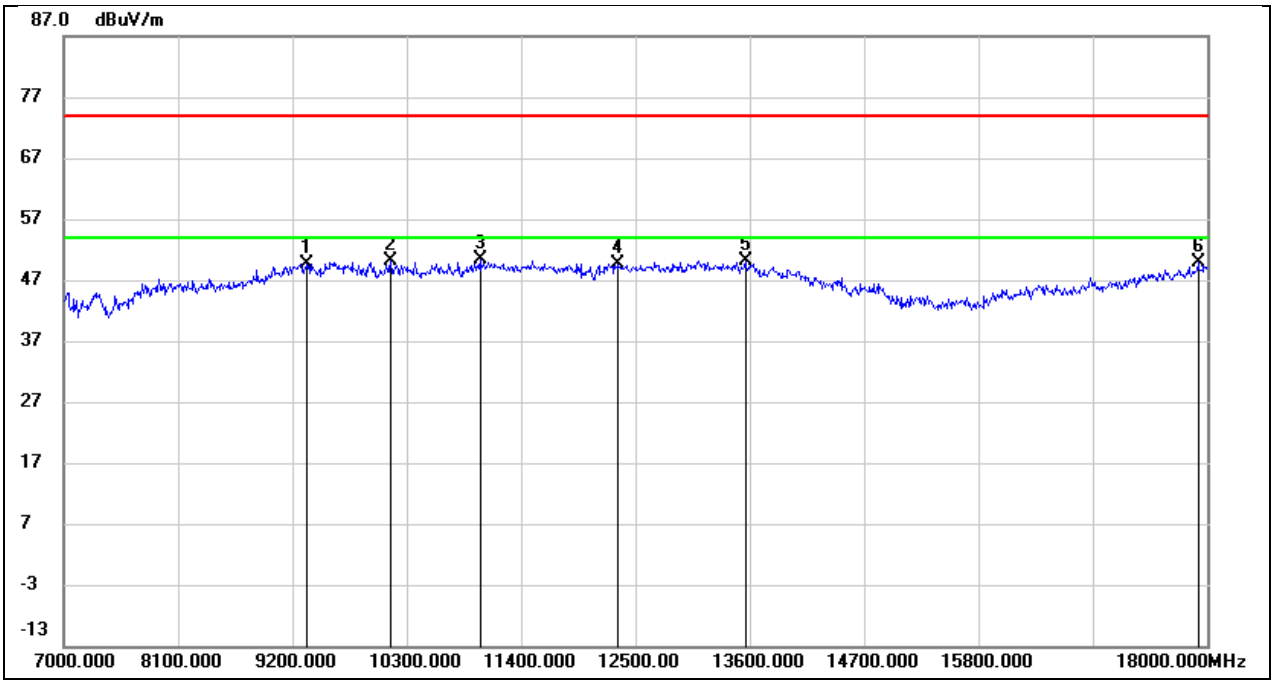

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.69	12.03	49.72	74.00	-24.28	peak
2	10146.000	36.80	13.22	50.02	74.00	-23.98	peak
3	11004.000	35.23	15.08	50.31	74.00	-23.69	peak
4	12335.000	30.81	18.89	49.70	74.00	-24.30	peak
5	13556.000	27.92	22.14	50.06	74.00	-23.94	peak
6	17912.000	21.19	28.68	49.87	74.00	-24.13	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

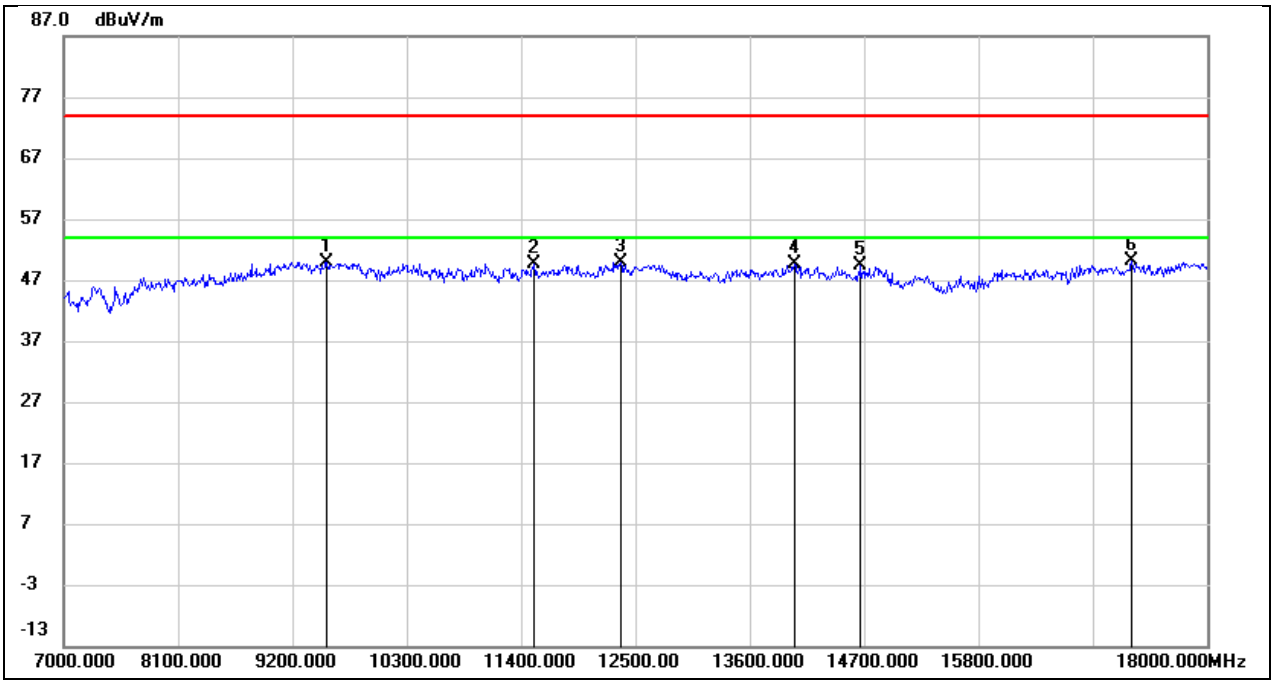

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9530.000	36.99	13.00	49.99	74.00	-24.01	peak
2	11521.000	33.21	16.40	49.61	74.00	-24.39	peak
3	12357.000	32.02	17.96	49.98	74.00	-24.02	peak
4	14029.000	27.72	21.96	49.68	74.00	-24.32	peak
5	14667.000	28.69	20.77	49.46	74.00	-24.54	peak
6	17274.000	25.07	24.97	50.04	74.00	-23.96	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

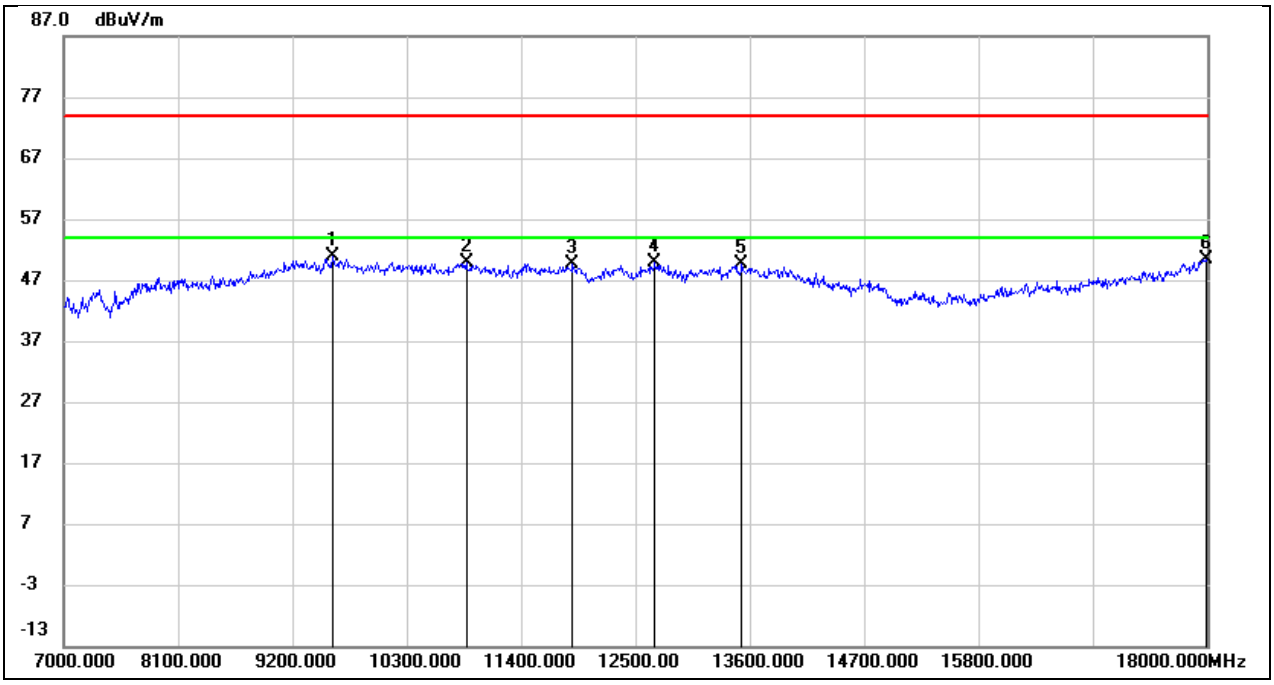

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.38	13.38	50.76	74.00	-23.24	peak
2	10872.000	35.13	14.65	49.78	74.00	-24.22	peak
3	11895.000	31.34	18.23	49.57	74.00	-24.43	peak
4	12687.000	30.27	19.52	49.79	74.00	-24.21	peak
5	13523.000	27.46	22.08	49.54	74.00	-24.46	peak
6	17989.000	20.96	29.49	50.45	74.00	-23.55	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

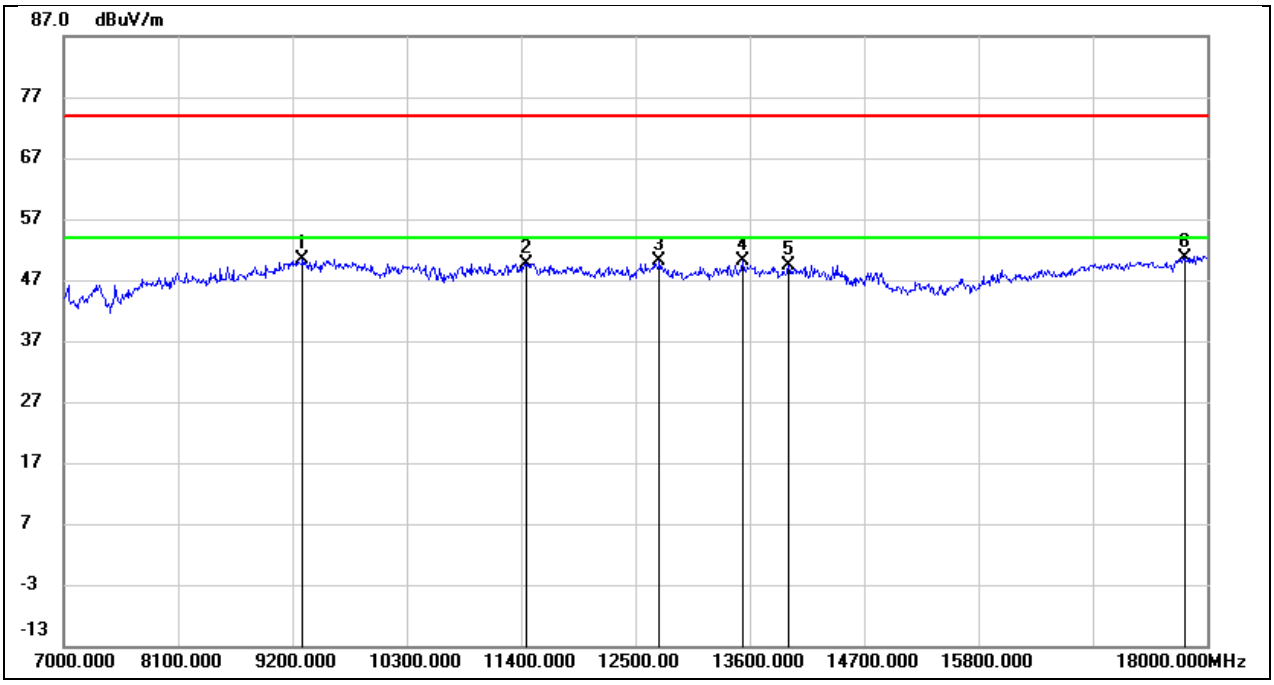

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	38.37	12.04	50.41	74.00	-23.59	peak
2	11444.000	33.60	16.15	49.75	74.00	-24.25	peak
3	12731.000	31.55	18.66	50.21	74.00	-23.79	peak
4	13534.000	29.60	20.41	50.01	74.00	-23.99	peak
5	13974.000	27.47	21.89	49.36	74.00	-24.64	peak
6	17780.000	24.64	26.06	50.70	74.00	-23.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

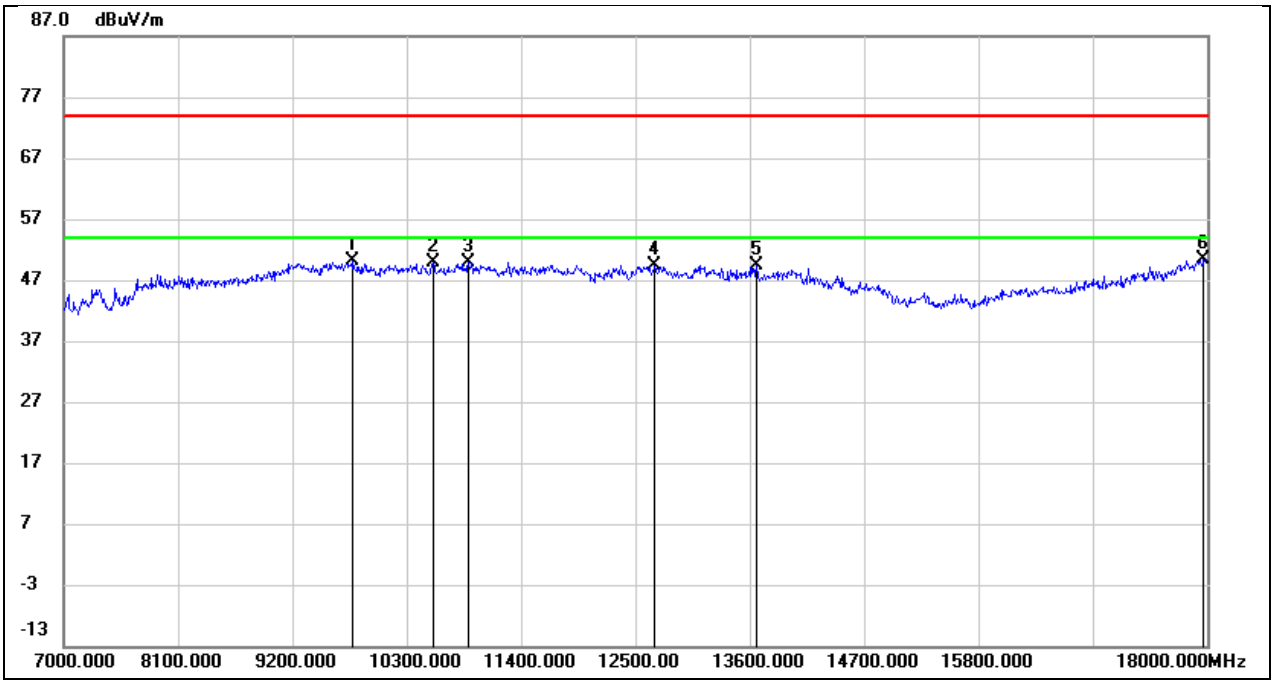

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9783.000	36.25	13.77	50.02	74.00	-23.98	peak
2	10553.000	36.17	13.70	49.87	74.00	-24.13	peak
3	10894.000	35.20	14.72	49.92	74.00	-24.08	peak
4	12687.000	29.86	19.52	49.38	74.00	-24.62	peak
5	13666.000	26.90	22.41	49.31	74.00	-24.69	peak
6	17967.000	21.10	29.26	50.36	74.00	-23.64	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

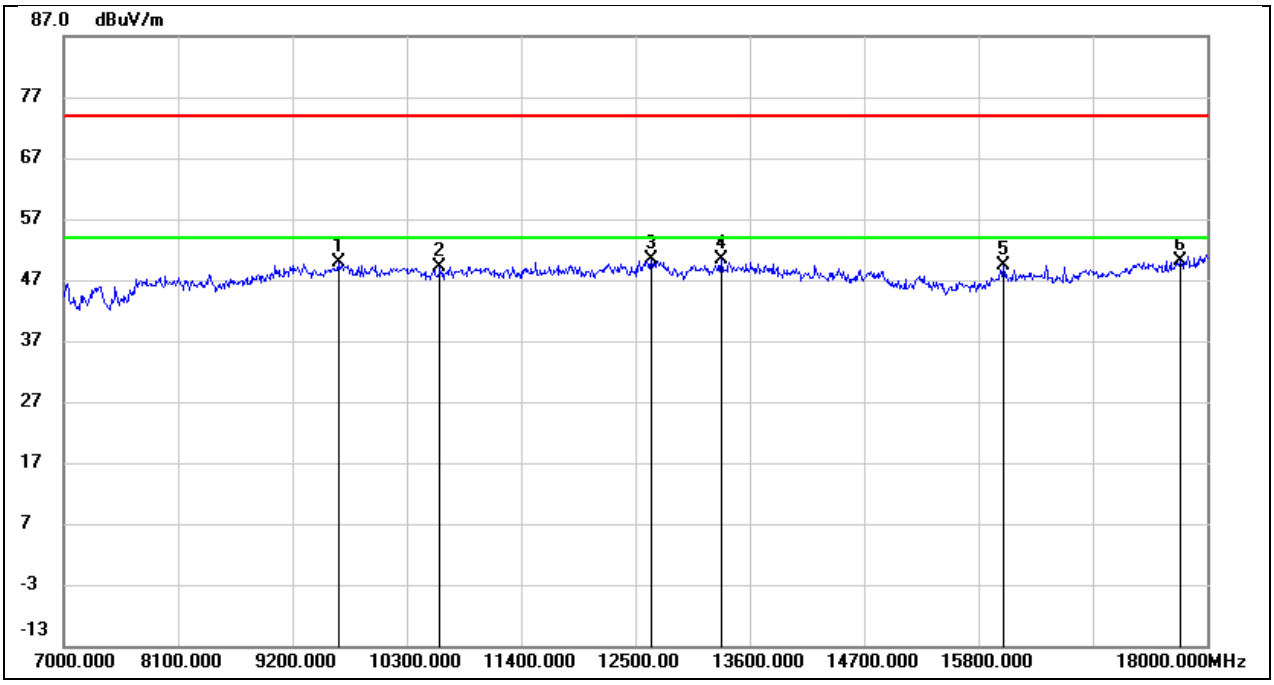

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	36.47	13.33	49.80	74.00	-24.20	peak
2	10619.000	35.64	13.54	49.18	74.00	-24.82	peak
3	12654.000	32.02	18.39	50.41	74.00	-23.59	peak
4	13325.000	30.53	19.84	50.37	74.00	-23.63	peak
5	16042.000	26.26	23.15	49.41	74.00	-24.59	peak
6	17736.000	24.41	25.83	50.24	74.00	-23.76	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

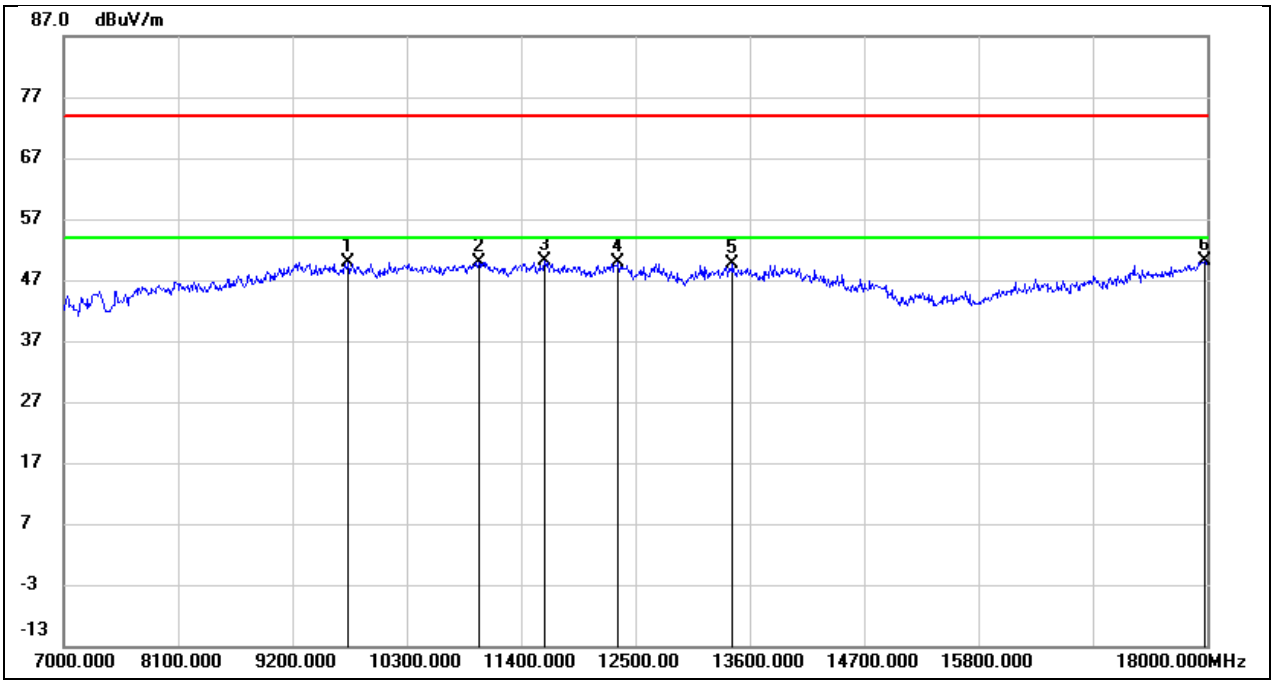

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9739.000	36.21	13.70	49.91	74.00	-24.09	peak
2	10993.000	34.91	15.04	49.95	74.00	-24.05	peak
3	11631.000	32.15	18.08	50.23	74.00	-23.77	peak
4	12335.000	30.87	18.89	49.76	74.00	-24.24	peak
5	13435.000	27.87	21.79	49.66	74.00	-24.34	peak
6	17978.000	20.73	29.38	50.11	74.00	-23.89	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

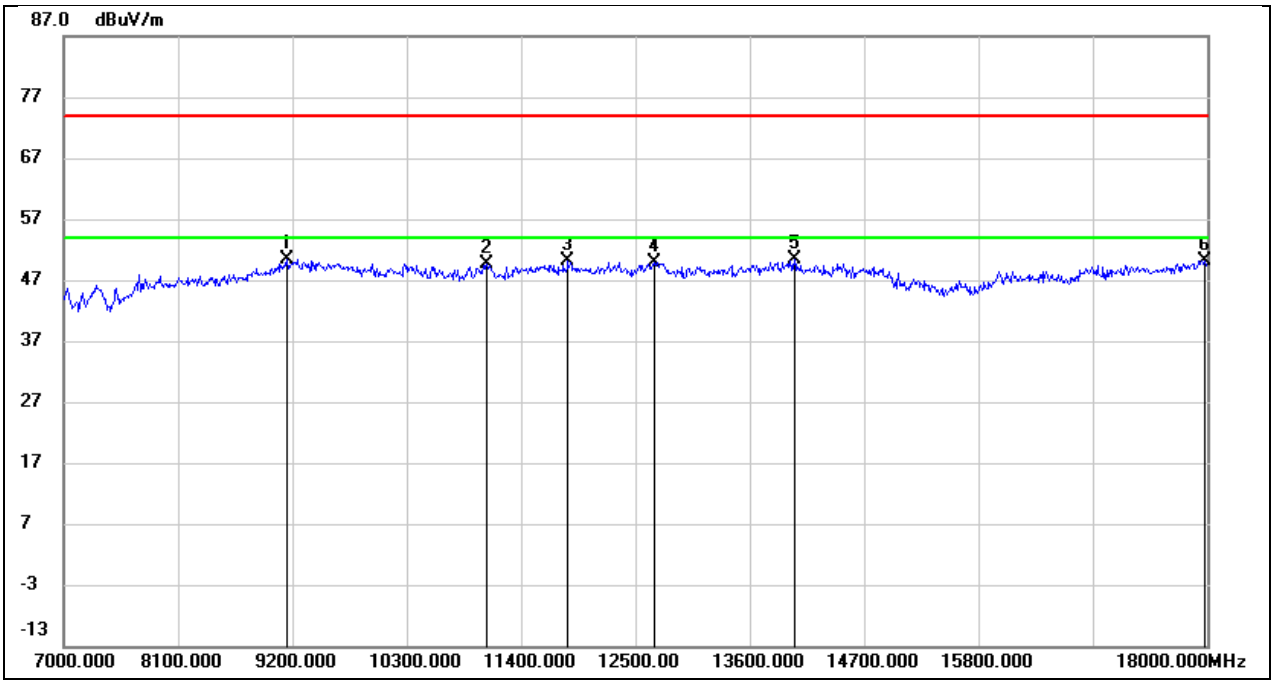

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.82	11.60	50.42	74.00	-23.58	peak
2	11070.000	35.05	14.55	49.60	74.00	-24.40	peak
3	11851.000	33.27	16.89	50.16	74.00	-23.84	peak
4	12676.000	31.49	18.47	49.96	74.00	-24.04	peak
5	14029.000	28.43	21.96	50.39	74.00	-23.61	peak
6	17978.000	22.91	27.28	50.19	74.00	-23.81	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

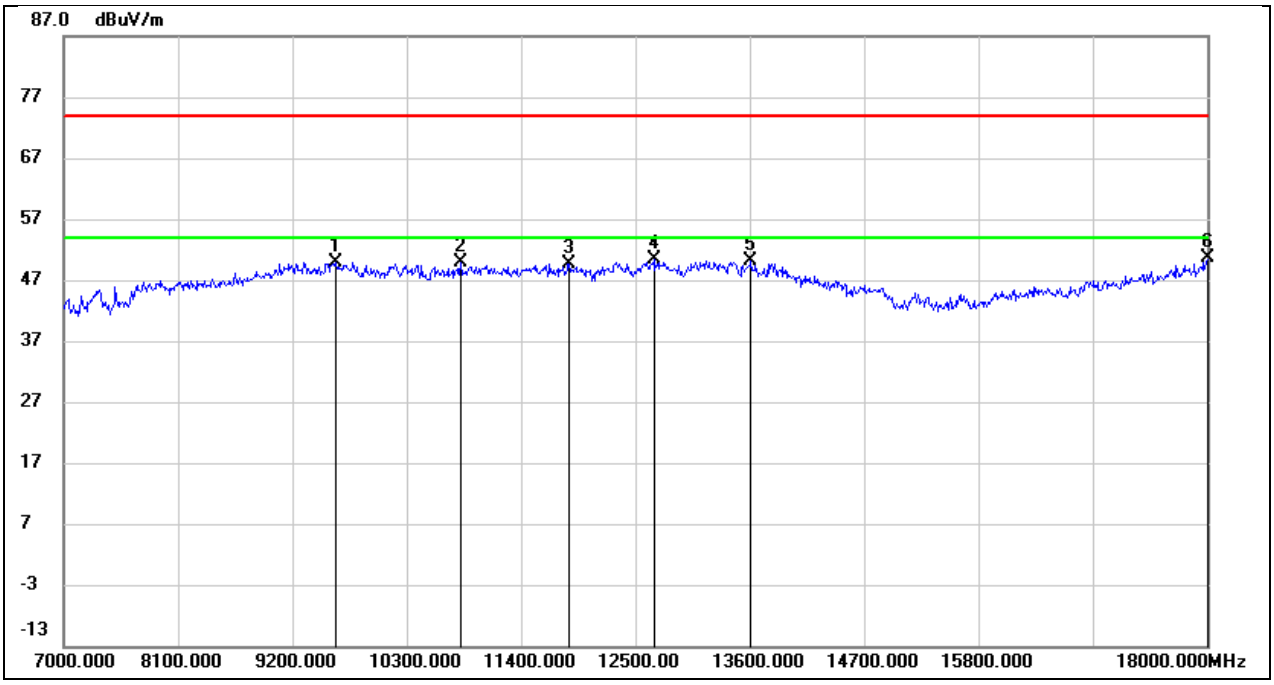

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9618.000	36.45	13.49	49.94	74.00	-24.06	peak
2	10817.000	35.31	14.48	49.79	74.00	-24.21	peak
3	11862.000	31.48	18.14	49.62	74.00	-24.38	peak
4	12676.000	30.84	19.48	50.32	74.00	-23.68	peak
5	13611.000	27.98	22.25	50.23	74.00	-23.77	peak
6	18000.000	20.97	29.61	50.58	74.00	-23.42	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

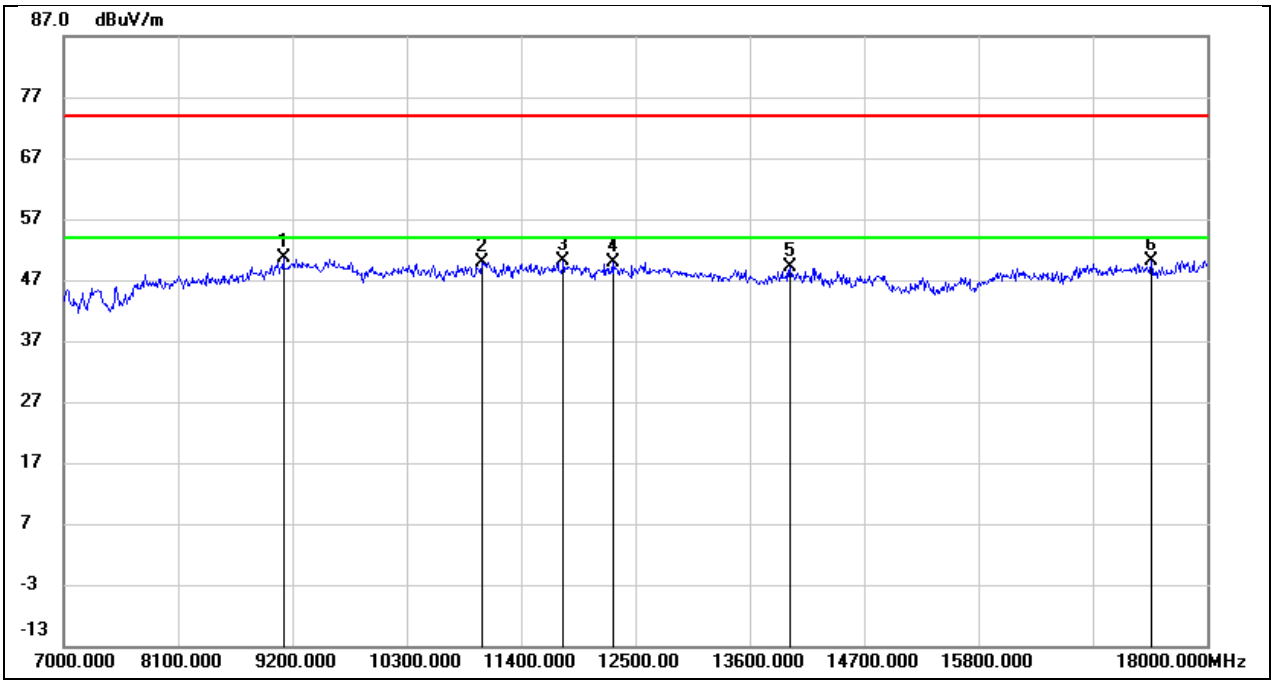

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	39.04	11.48	50.52	74.00	-23.48	peak
2	11026.000	35.51	14.37	49.88	74.00	-24.12	peak
3	11807.000	33.38	16.75	50.13	74.00	-23.87	peak
4	12280.000	32.00	17.84	49.84	74.00	-24.16	peak
5	13985.000	27.07	21.95	49.02	74.00	-24.98	peak
6	17461.000	25.04	25.00	50.04	74.00	-23.96	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

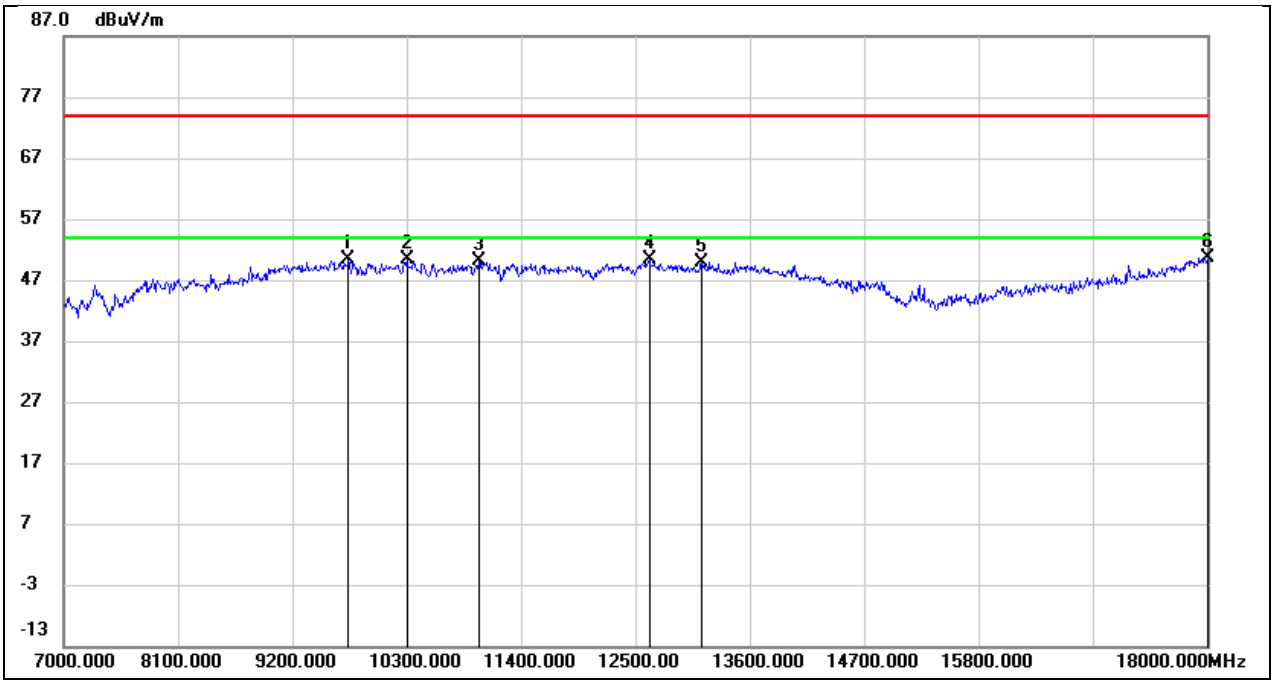

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9739.000	36.57	13.70	50.27	74.00	-23.73	peak
2	10300.000	37.02	13.26	50.28	74.00	-23.72	peak
3	10993.000	35.00	15.04	50.04	74.00	-23.96	peak
4	12632.000	31.04	19.29	50.33	74.00	-23.67	peak
5	13138.000	29.33	20.64	49.97	74.00	-24.03	peak
6	18000.000	21.05	29.61	50.66	74.00	-23.34	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

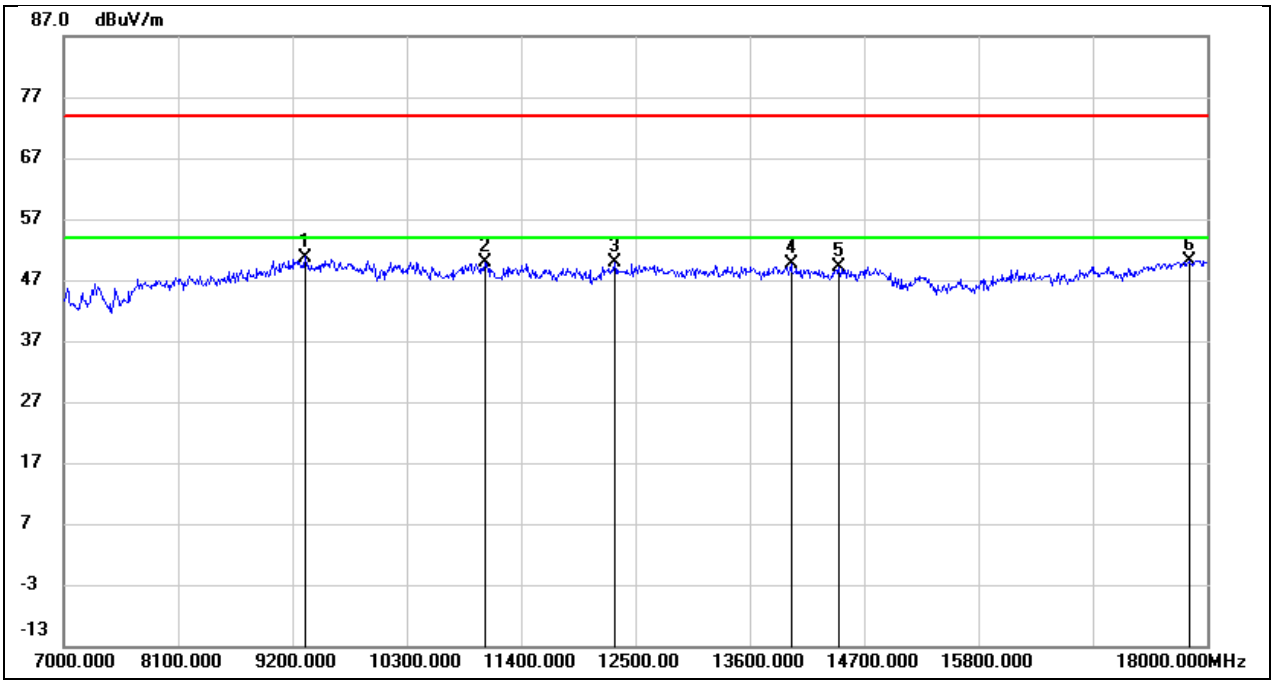

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	38.65	12.10	50.75	74.00	-23.25	peak
2	11059.000	35.25	14.51	49.76	74.00	-24.24	peak
3	12302.000	31.96	17.87	49.83	74.00	-24.17	peak
4	13996.000	27.59	21.99	49.58	74.00	-24.42	peak
5	14458.000	28.26	20.98	49.24	74.00	-24.76	peak
6	17835.000	23.76	26.38	50.14	74.00	-23.86	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

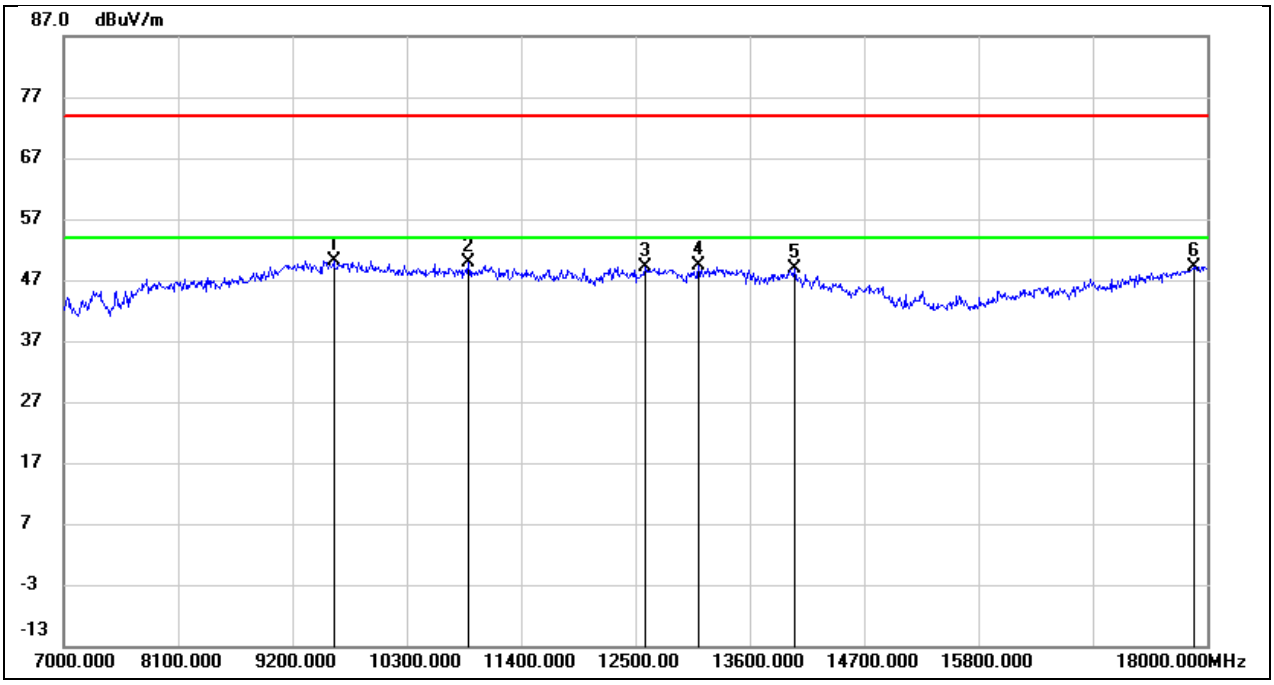

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.68	13.44	50.12	74.00	-23.88	peak
2	10894.000	35.07	14.72	49.79	74.00	-24.21	peak
3	12599.000	29.89	19.16	49.05	74.00	-24.95	peak
4	13105.000	28.90	20.50	49.40	74.00	-24.60	peak
5	14029.000	25.46	23.49	48.95	74.00	-25.05	peak
6	17879.000	20.91	28.32	49.23	74.00	-24.77	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

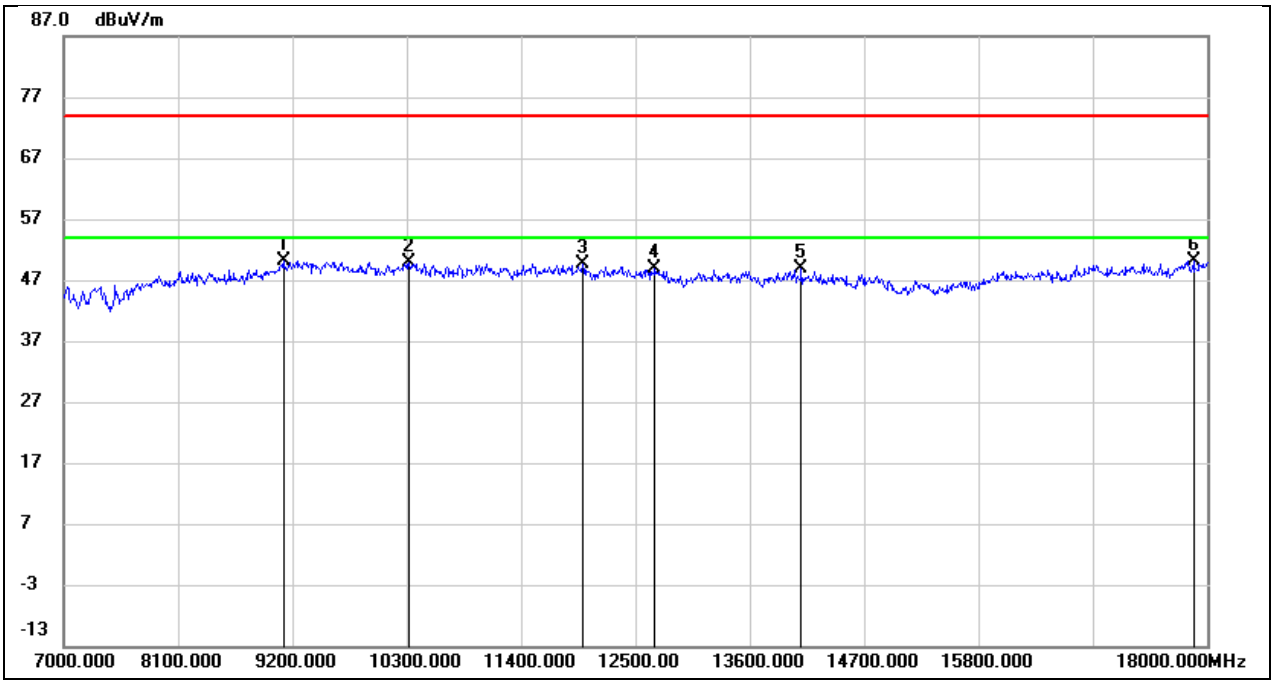

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	38.74	11.48	50.22	74.00	-23.78	peak
2	10322.000	37.08	12.91	49.99	74.00	-24.01	peak
3	11994.000	32.25	17.37	49.62	74.00	-24.38	peak
4	12687.000	30.37	18.51	48.88	74.00	-25.12	peak
5	14095.000	26.98	21.86	48.84	74.00	-25.16	peak
6	17868.000	23.58	26.59	50.17	74.00	-23.83	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

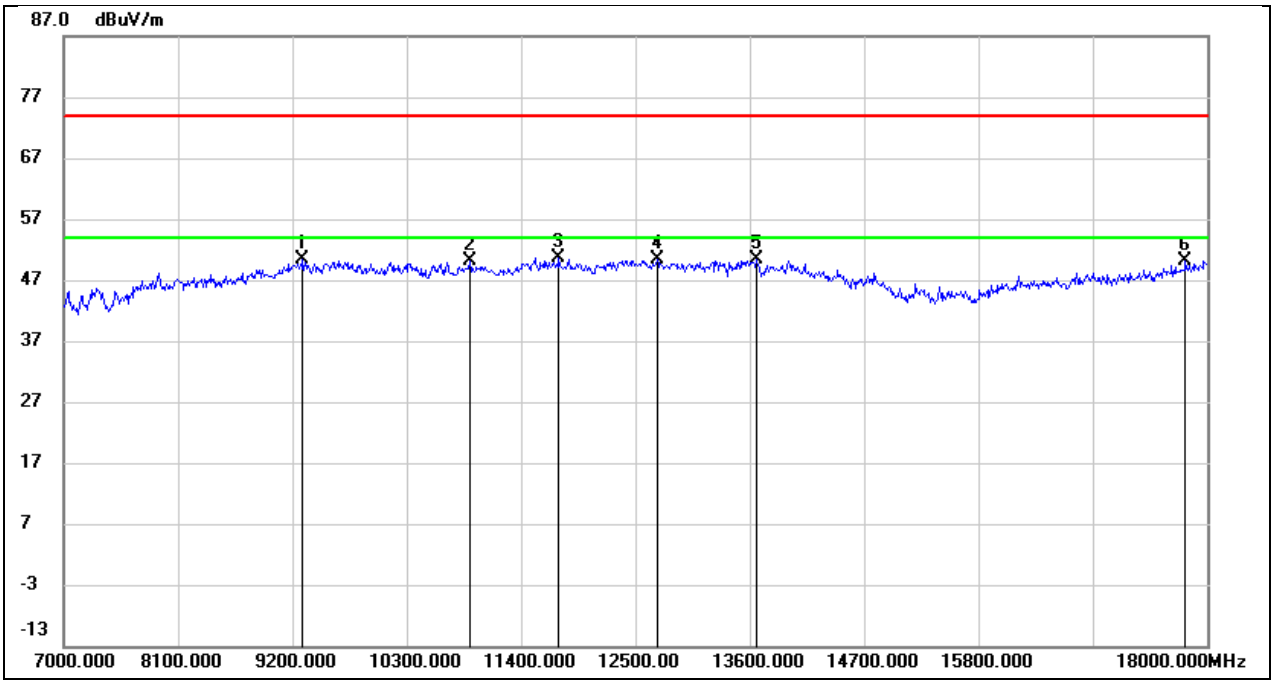

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	38.59	11.88	50.47	74.00	-23.53	peak
2	10905.000	35.31	14.75	50.06	74.00	-23.94	peak
3	11763.000	32.59	18.00	50.59	74.00	-23.41	peak
4	12709.000	30.86	19.60	50.46	74.00	-23.54	peak
5	13666.000	27.86	22.41	50.27	74.00	-23.73	peak
6	17791.000	22.82	27.39	50.21	74.00	-23.79	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

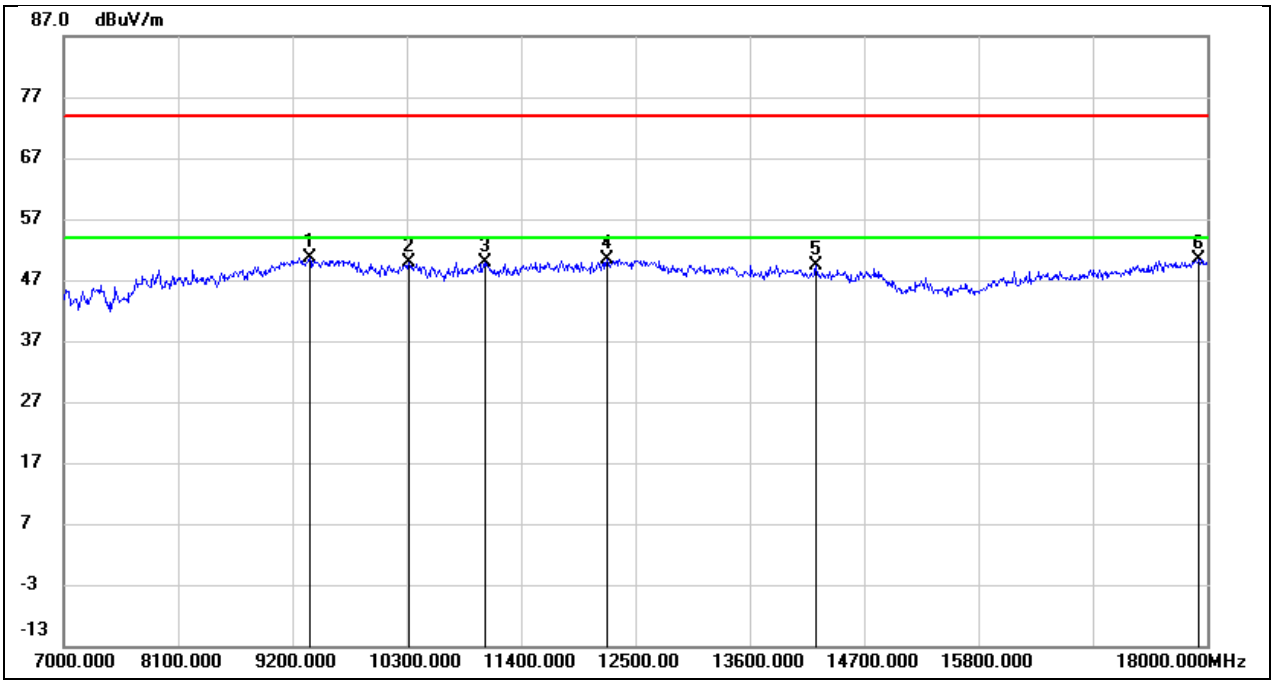

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	38.35	12.20	50.55	74.00	-23.45	peak
2	10322.000	36.90	12.91	49.81	74.00	-24.19	peak
3	11059.000	35.44	14.51	49.95	74.00	-24.05	peak
4	12225.000	32.55	17.74	50.29	74.00	-23.71	peak
5	14238.000	27.75	21.58	49.33	74.00	-24.67	peak
6	17923.000	23.41	26.92	50.33	74.00	-23.67	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

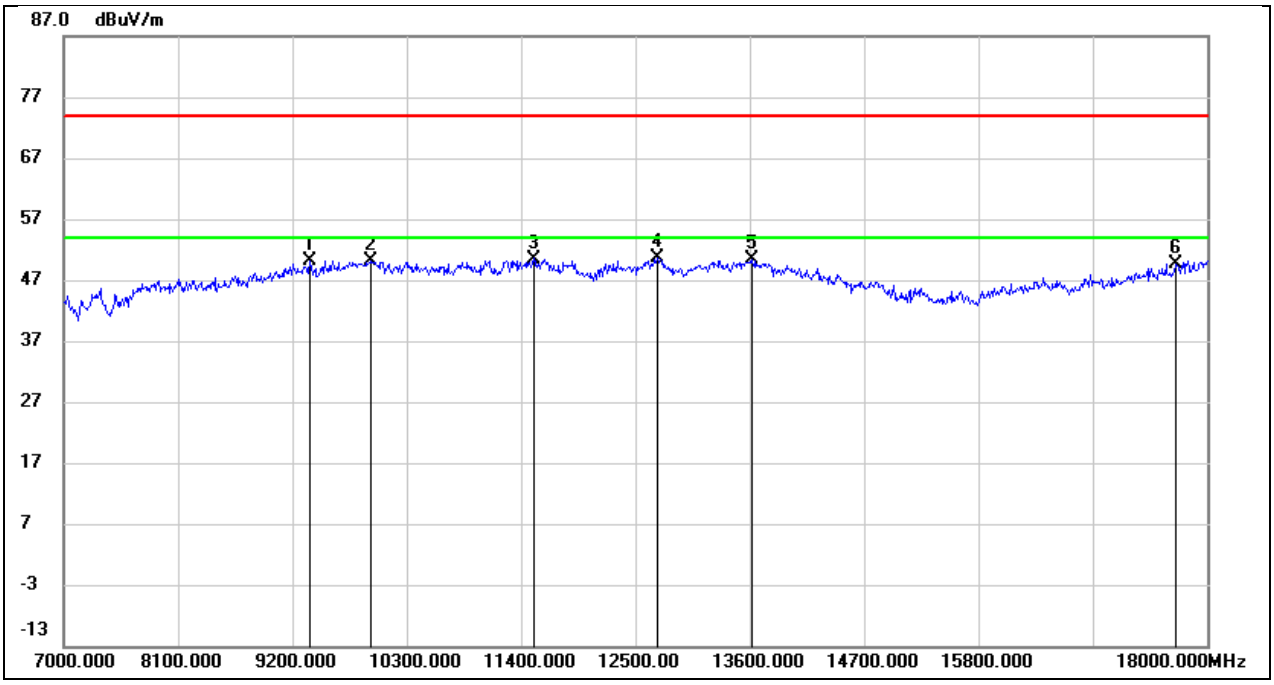

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	37.95	12.09	50.04	74.00	-23.96	peak
2	9959.000	36.58	13.44	50.02	74.00	-23.98	peak
3	11521.000	32.62	17.88	50.50	74.00	-23.50	peak
4	12709.000	30.91	19.60	50.51	74.00	-23.49	peak
5	13622.000	28.06	22.28	50.34	74.00	-23.66	peak
6	17692.000	23.18	26.44	49.62	74.00	-24.38	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

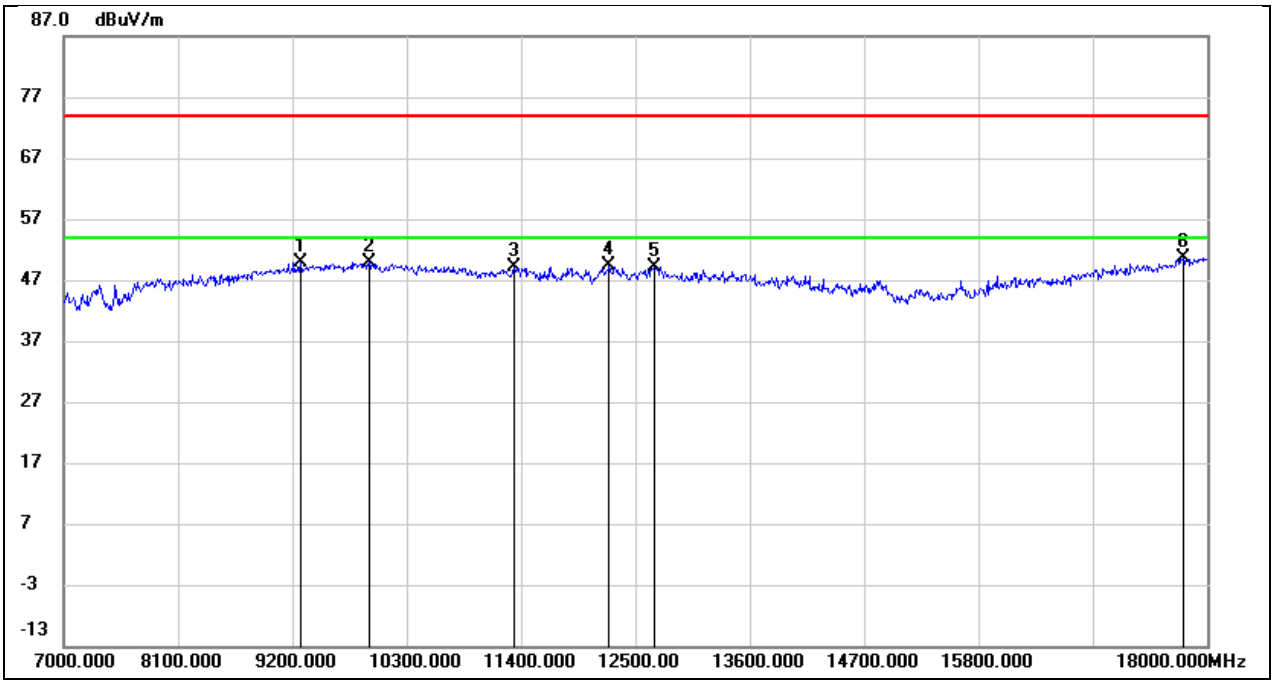

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	37.96	11.99	49.95	74.00	-24.05	peak
2	9937.000	36.95	12.88	49.83	74.00	-24.17	peak
3	11334.000	33.41	15.70	49.11	74.00	-24.89	peak
4	12247.000	31.49	17.77	49.26	74.00	-24.74	peak
5	12676.000	30.71	18.47	49.18	74.00	-24.82	peak
6	17769.000	24.60	26.00	50.60	74.00	-23.40	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

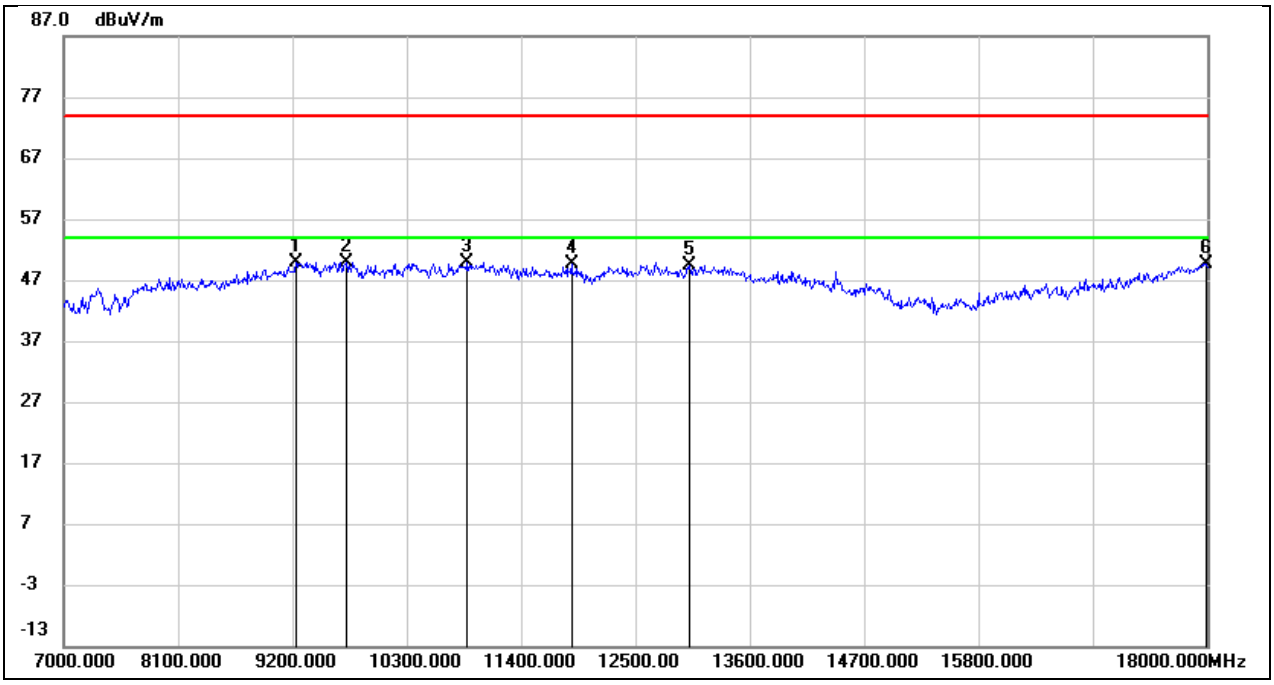

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.11	11.66	49.77	74.00	-24.23	peak
2	9717.000	36.23	13.66	49.89	74.00	-24.11	peak
3	10883.000	35.08	14.68	49.76	74.00	-24.24	peak
4	11884.000	31.44	18.20	49.64	74.00	-24.36	peak
5	13017.000	29.23	20.13	49.36	74.00	-24.64	peak
6	17989.000	20.21	29.49	49.70	74.00	-24.30	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

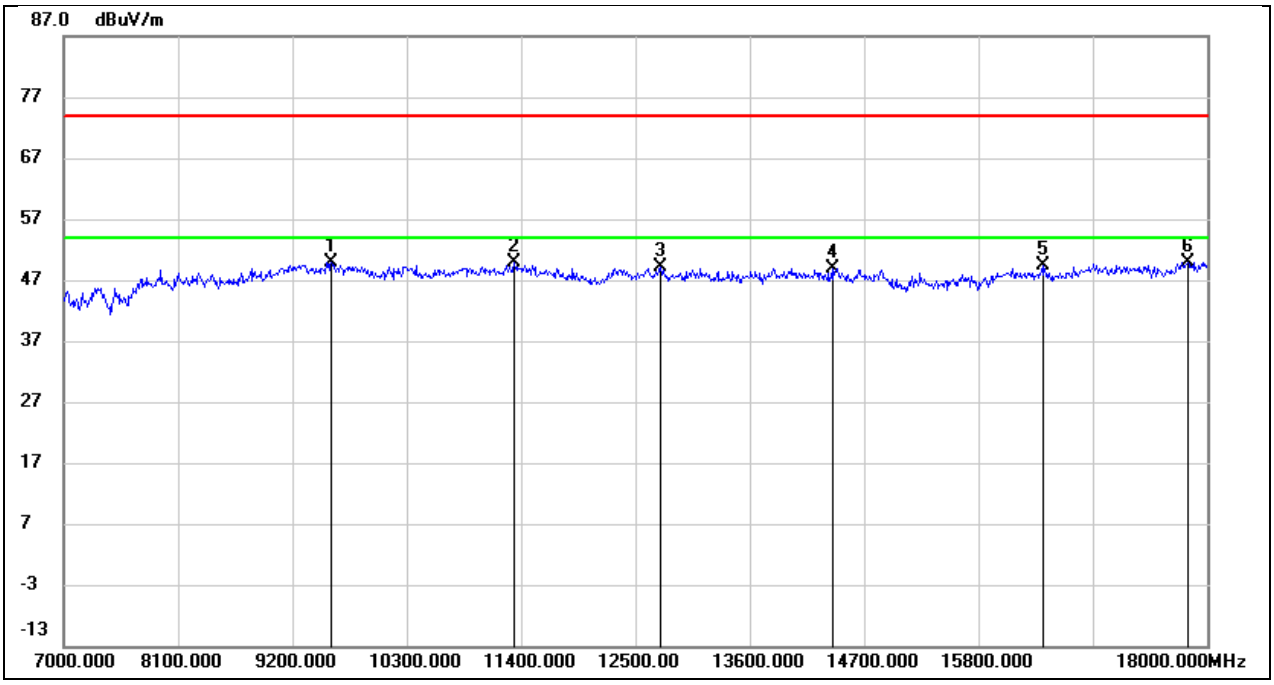

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	36.78	13.21	49.99	74.00	-24.01	peak
2	11334.000	34.30	15.70	50.00	74.00	-24.00	peak
3	12742.000	30.51	18.70	49.21	74.00	-24.79	peak
4	14392.000	27.86	21.03	48.89	74.00	-25.11	peak
5	16416.000	25.71	23.60	49.31	74.00	-24.69	peak
6	17813.000	23.73	26.24	49.97	74.00	-24.03	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

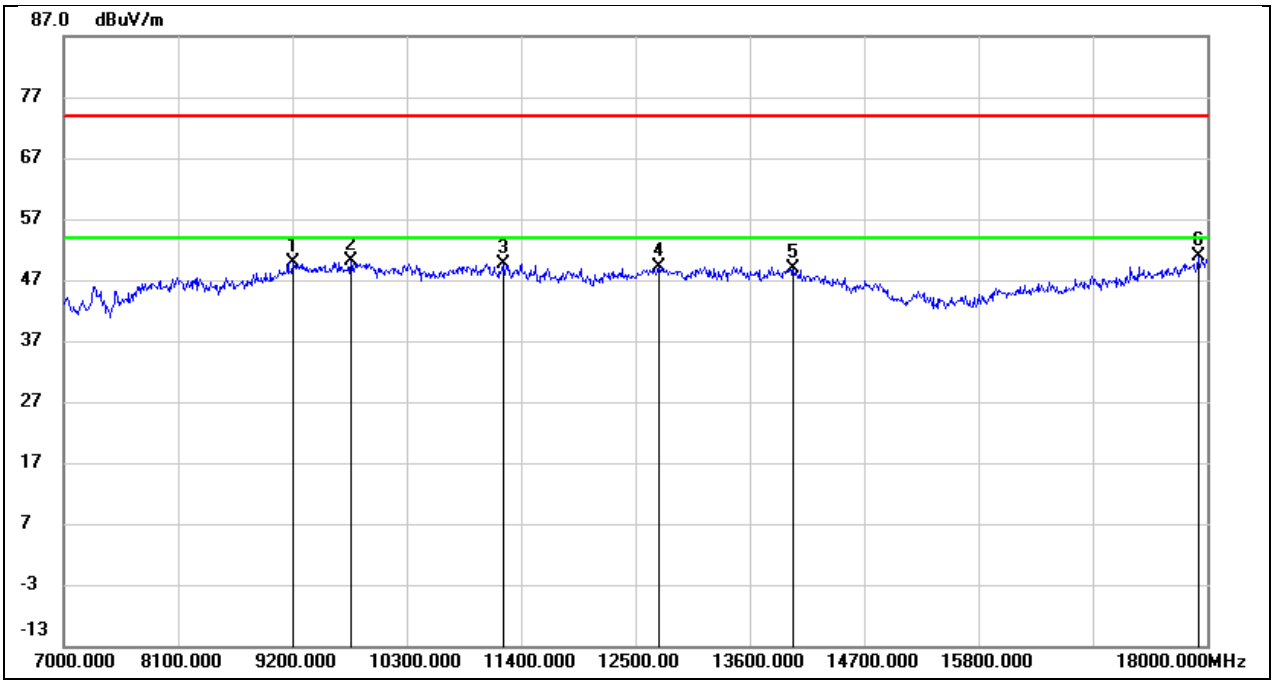

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.44	11.56	50.00	74.00	-24.00	peak
2	9761.000	36.36	13.73	50.09	74.00	-23.91	peak
3	11224.000	33.40	16.30	49.70	74.00	-24.30	peak
4	12720.000	29.46	19.65	49.11	74.00	-24.89	peak
5	14018.000	25.30	23.54	48.84	74.00	-25.16	peak
6	17912.000	22.12	28.68	50.80	74.00	-23.20	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

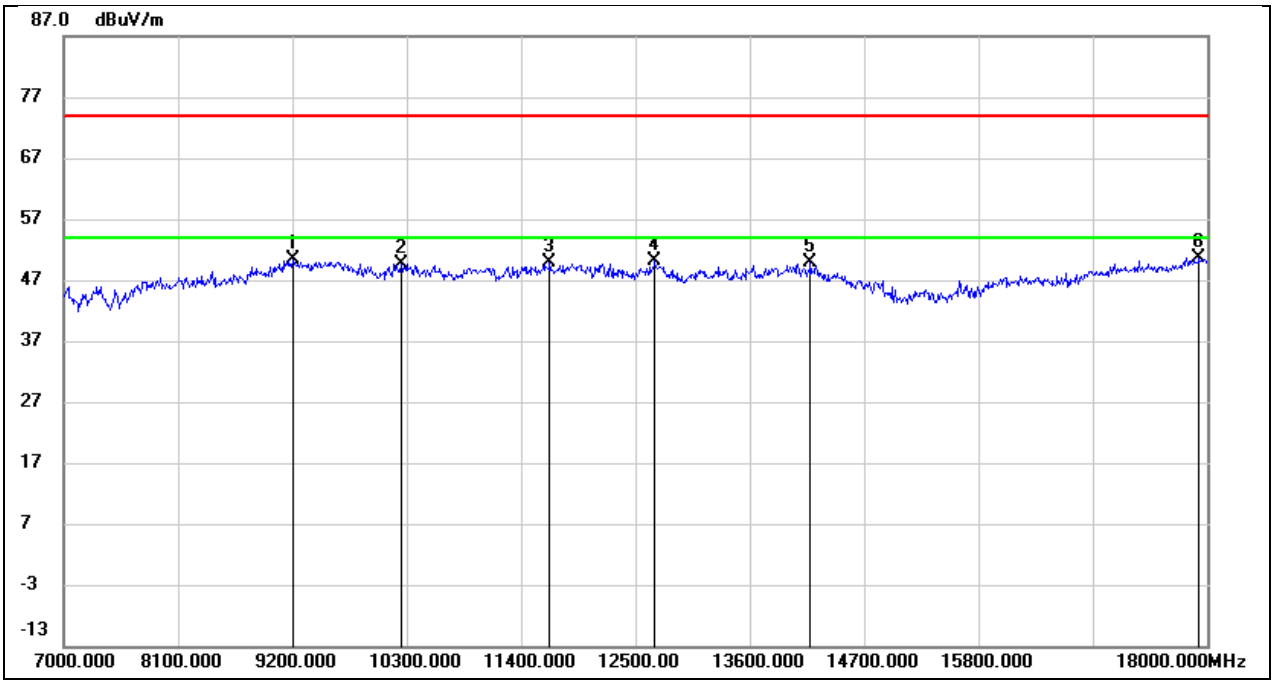

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.64	11.80	50.44	74.00	-23.56	peak
2	10245.000	36.96	12.76	49.72	74.00	-24.28	peak
3	11675.000	33.10	16.69	49.79	74.00	-24.21	peak
4	12687.000	31.59	18.51	50.10	74.00	-23.90	peak
5	14183.000	28.11	21.73	49.84	74.00	-24.16	peak
6	17923.000	23.69	26.92	50.61	74.00	-23.39	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

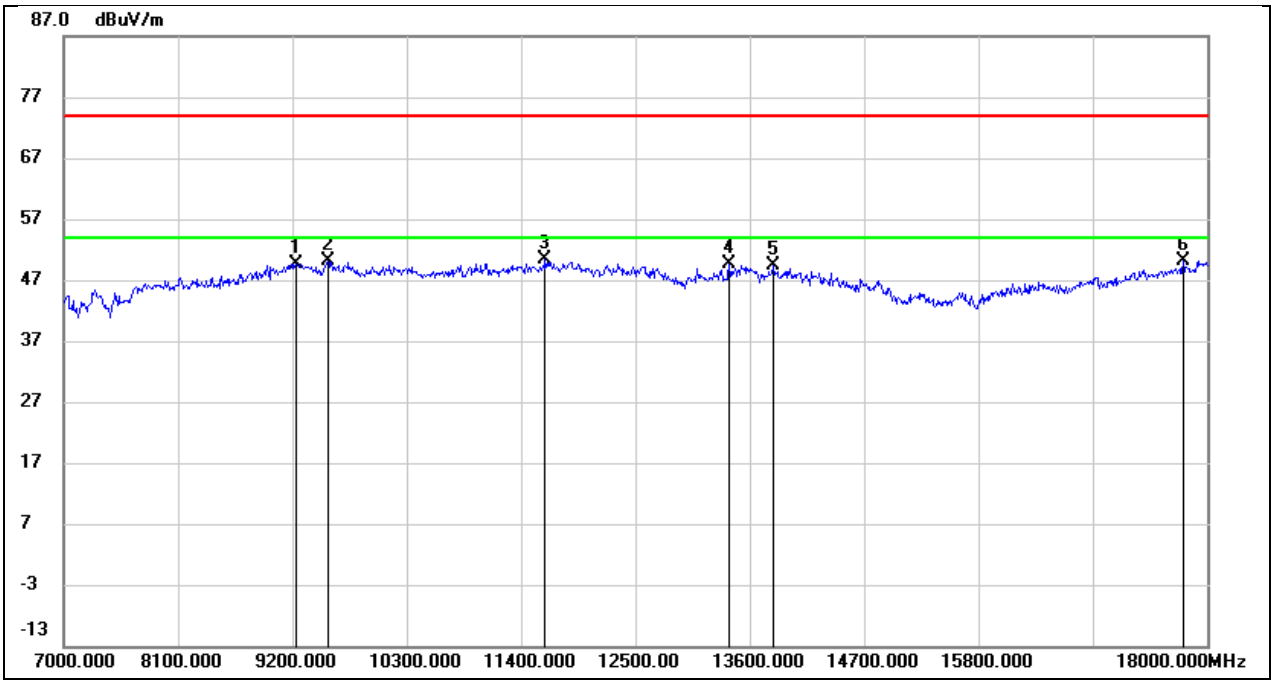

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.08	11.66	49.74	74.00	-24.26	peak
2	9541.000	37.11	13.10	50.21	74.00	-23.79	peak
3	11631.000	32.36	18.08	50.44	74.00	-23.56	peak
4	13402.000	27.88	21.64	49.52	74.00	-24.48	peak
5	13831.000	26.39	22.93	49.32	74.00	-24.68	peak
6	17769.000	23.06	27.18	50.24	74.00	-23.76	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

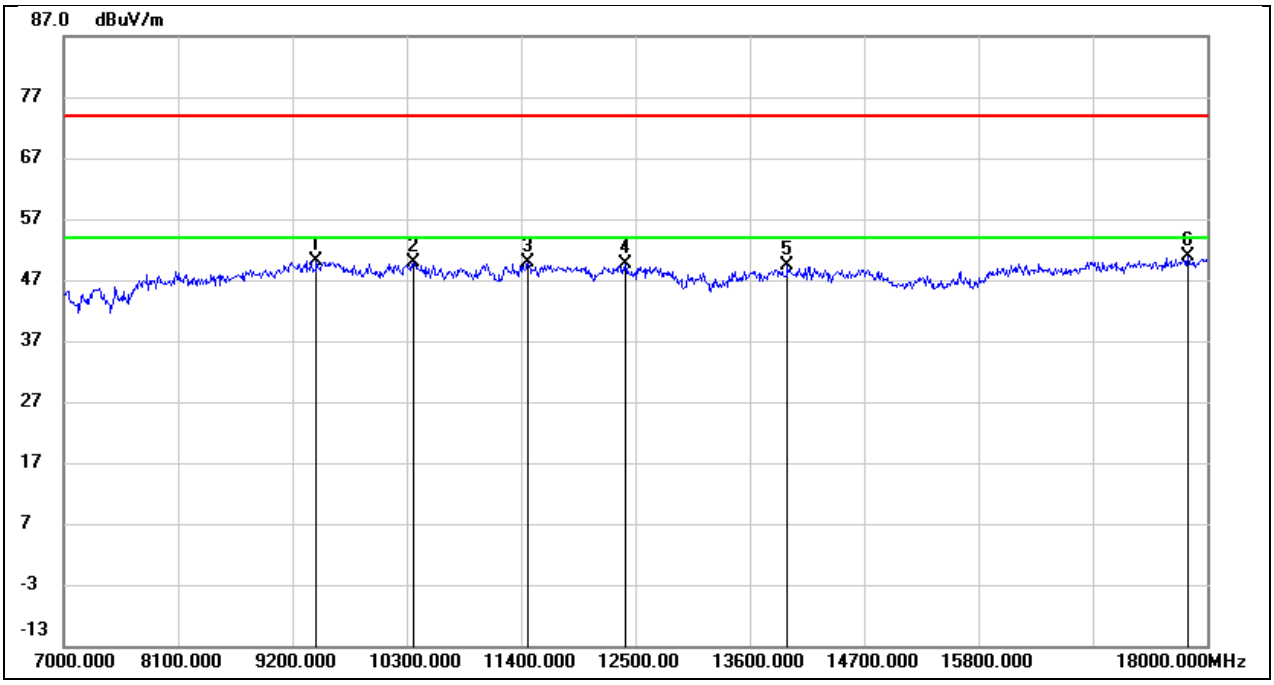

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	37.67	12.46	50.13	74.00	-23.87	peak
2	10366.000	36.88	12.99	49.87	74.00	-24.13	peak
3	11466.000	33.61	16.22	49.83	74.00	-24.17	peak
4	12401.000	31.49	18.04	49.53	74.00	-24.47	peak
5	13963.000	27.48	21.85	49.33	74.00	-24.67	peak
6	17813.000	24.70	26.24	50.94	74.00	-23.06	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

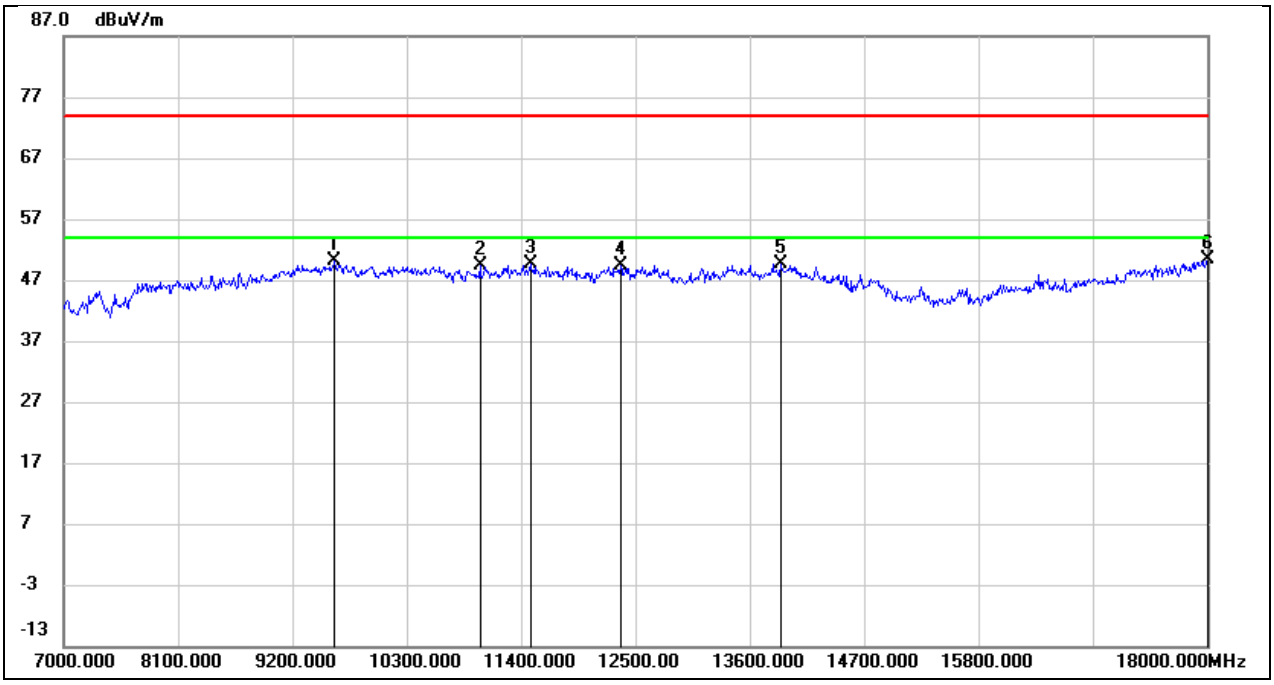

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	36.70	13.48	50.18	74.00	-23.82	peak
2	11004.000	34.37	15.08	49.45	74.00	-24.55	peak
3	11488.000	31.83	17.77	49.60	74.00	-24.40	peak
4	12357.000	30.45	18.92	49.37	74.00	-24.63	peak
5	13897.000	26.48	23.19	49.67	74.00	-24.33	peak
6	18000.000	20.77	29.61	50.38	74.00	-23.62	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

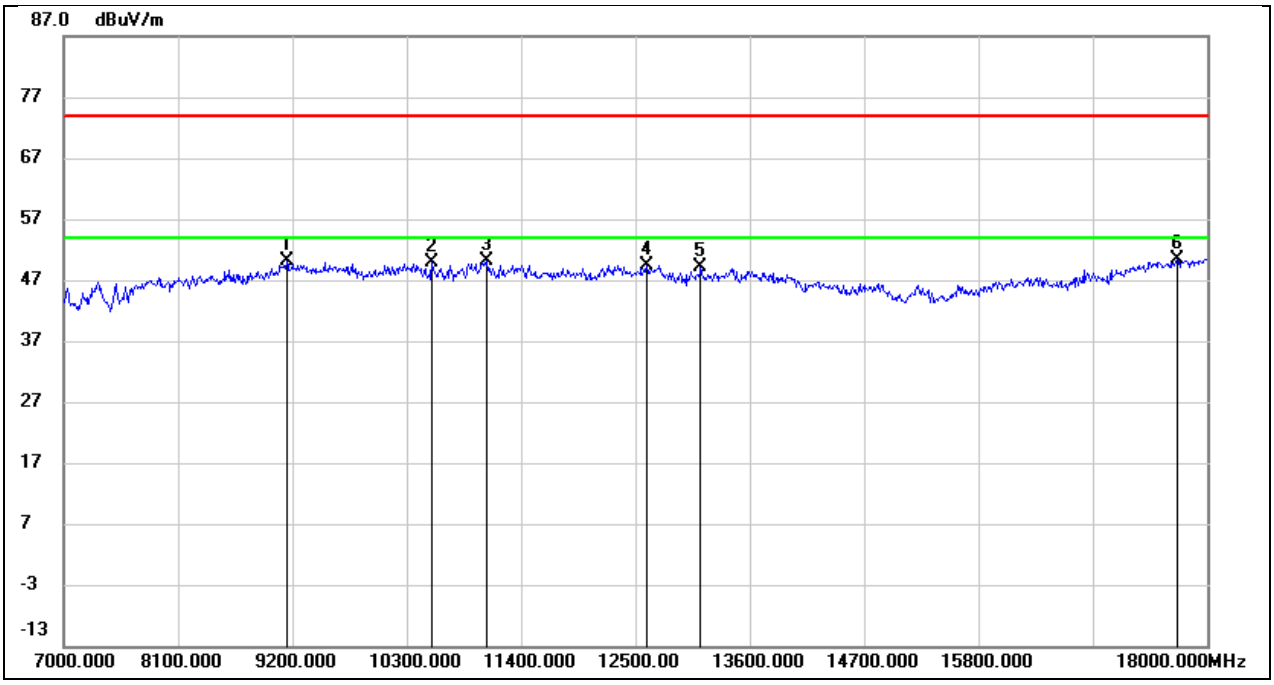

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.41	11.60	50.01	74.00	-23.99	peak
2	10542.000	36.39	13.41	49.80	74.00	-24.20	peak
3	11070.000	35.63	14.55	50.18	74.00	-23.82	peak
4	12610.000	31.25	18.24	49.49	74.00	-24.51	peak
5	13127.000	29.79	19.27	49.06	74.00	-24.94	peak
6	17714.000	24.71	25.71	50.42	74.00	-23.58	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

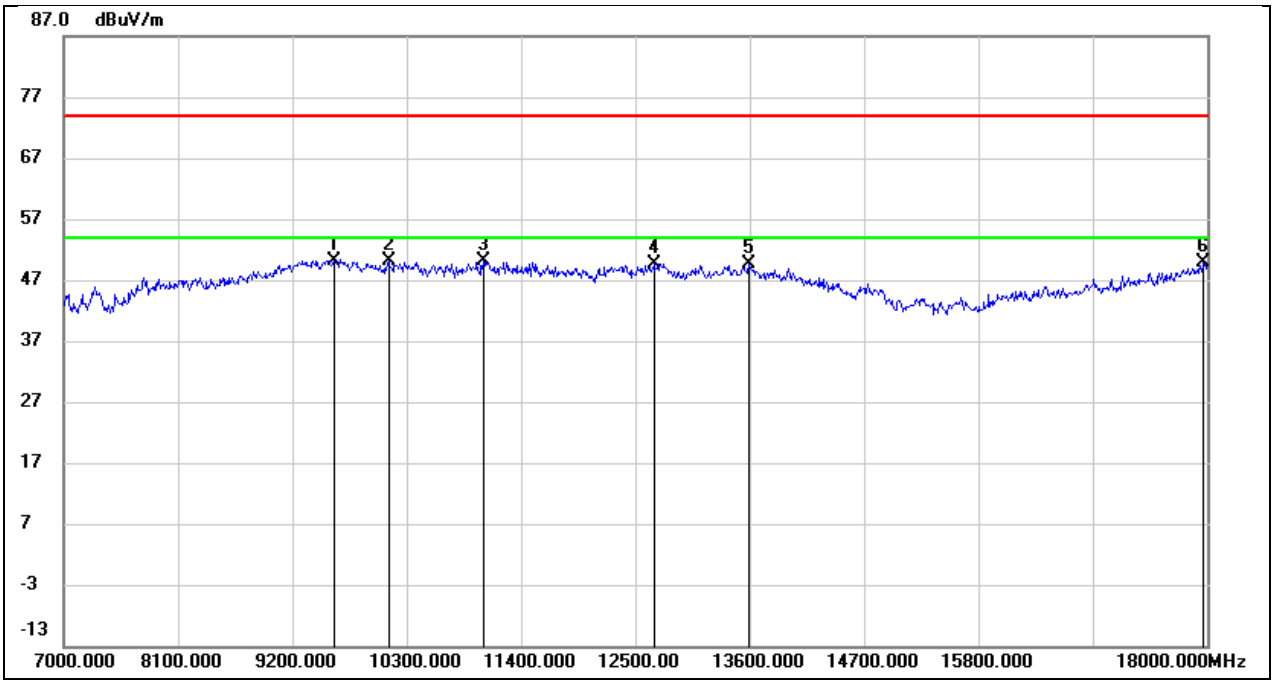

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.80	13.44	50.24	74.00	-23.76	peak
2	10124.000	36.96	13.23	50.19	74.00	-23.81	peak
3	11037.000	34.78	15.27	50.05	74.00	-23.95	peak
4	12676.000	30.18	19.48	49.66	74.00	-24.34	peak
5	13589.000	27.32	22.20	49.52	74.00	-24.48	peak
6	17967.000	20.51	29.26	49.77	74.00	-24.23	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

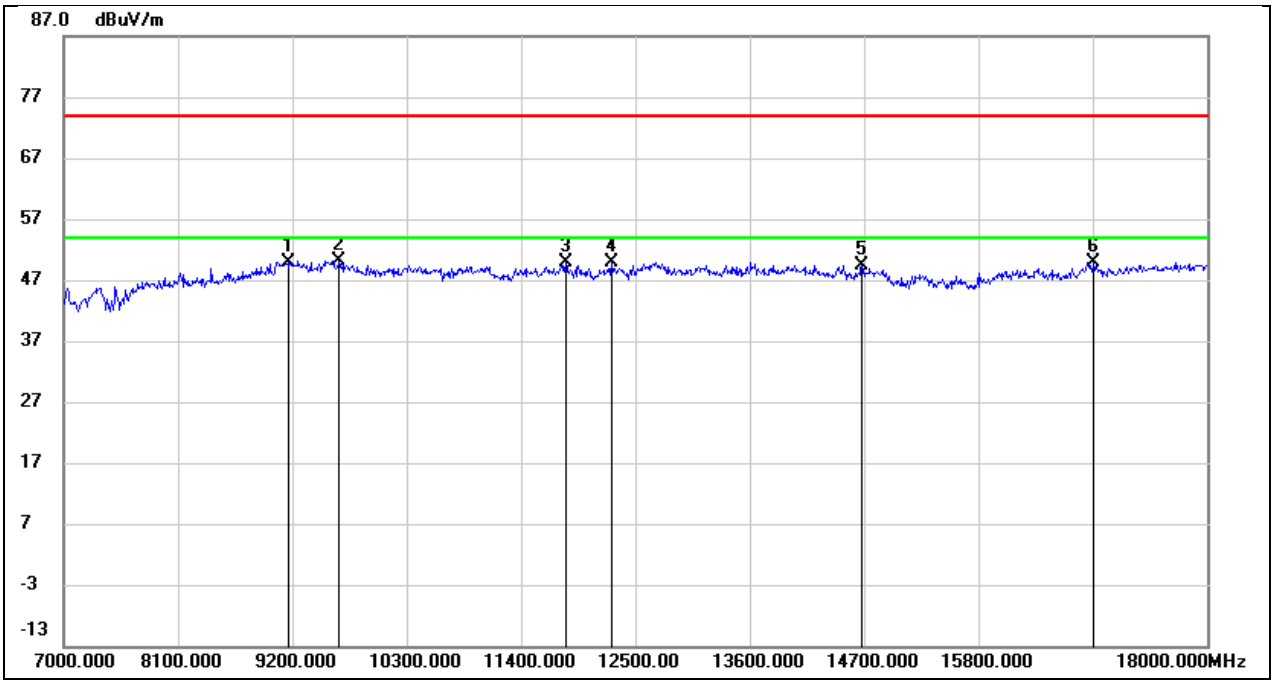

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9156.000	38.27	11.63	49.90	74.00	-24.10	peak
2	9651.000	36.77	13.34	50.11	74.00	-23.89	peak
3	11829.000	32.98	16.82	49.80	74.00	-24.20	peak
4	12269.000	31.98	17.80	49.78	74.00	-24.22	peak
5	14678.000	28.69	20.75	49.44	74.00	-24.56	peak
6	16911.000	25.53	24.26	49.79	74.00	-24.21	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

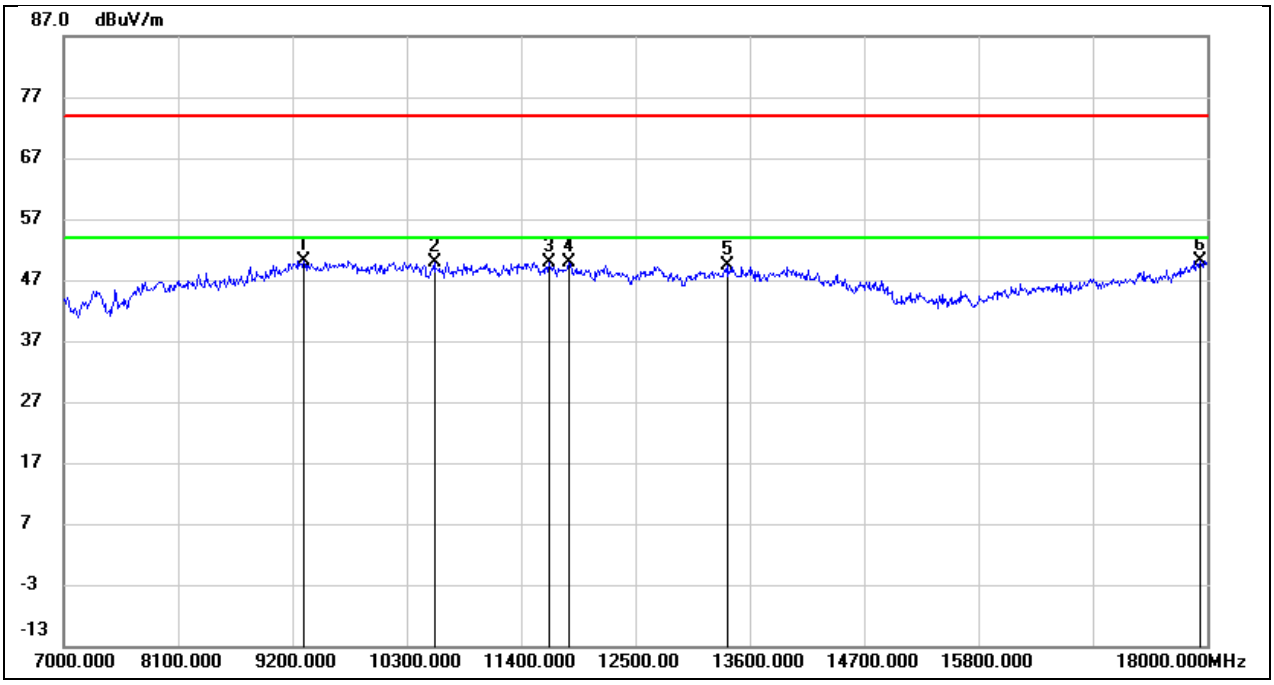

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	38.12	11.92	50.04	74.00	-23.96	peak
2	10564.000	36.20	13.72	49.92	74.00	-24.08	peak
3	11664.000	31.94	18.05	49.99	74.00	-24.01	peak
4	11862.000	31.63	18.14	49.77	74.00	-24.23	peak
5	13380.000	27.81	21.57	49.38	74.00	-24.62	peak
6	17934.000	21.26	28.91	50.17	74.00	-23.83	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

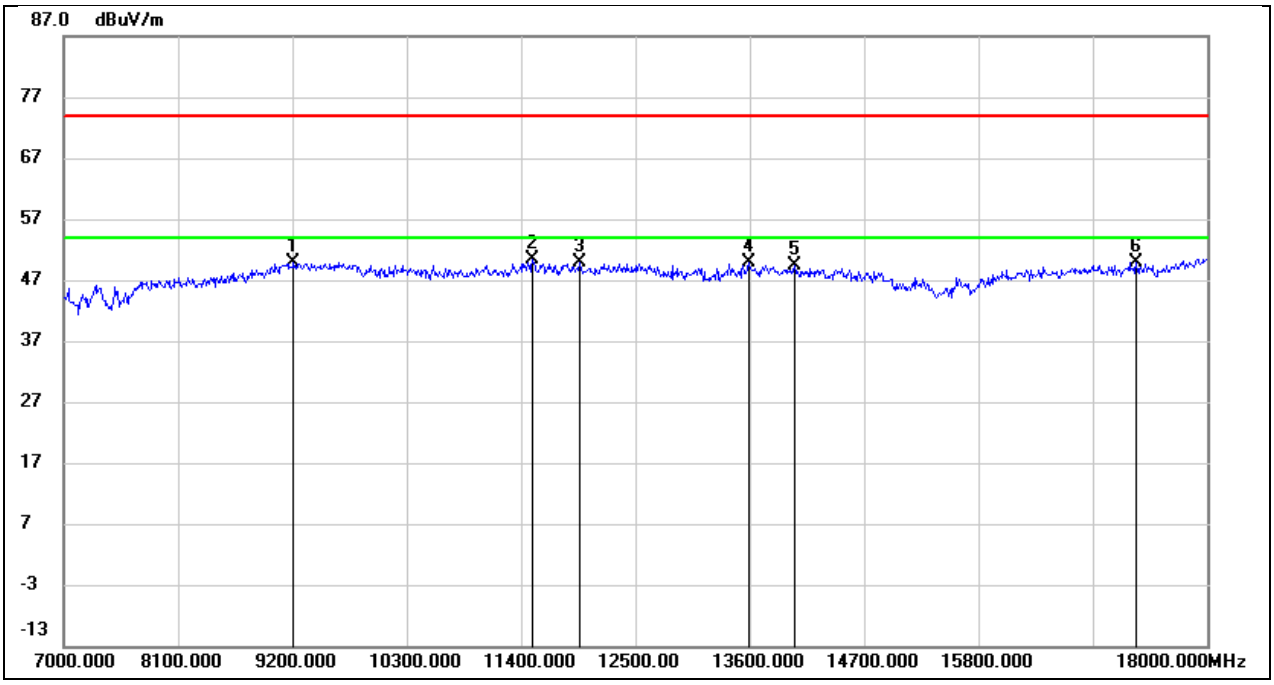

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.03	11.82	49.85	74.00	-24.15	peak
2	11510.000	34.07	16.37	50.44	74.00	-23.56	peak
3	11961.000	32.54	17.27	49.81	74.00	-24.19	peak
4	13589.000	29.27	20.52	49.79	74.00	-24.21	peak
5	14029.000	27.33	21.96	49.29	74.00	-24.71	peak
6	17318.000	24.90	24.99	49.89	74.00	-24.11	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

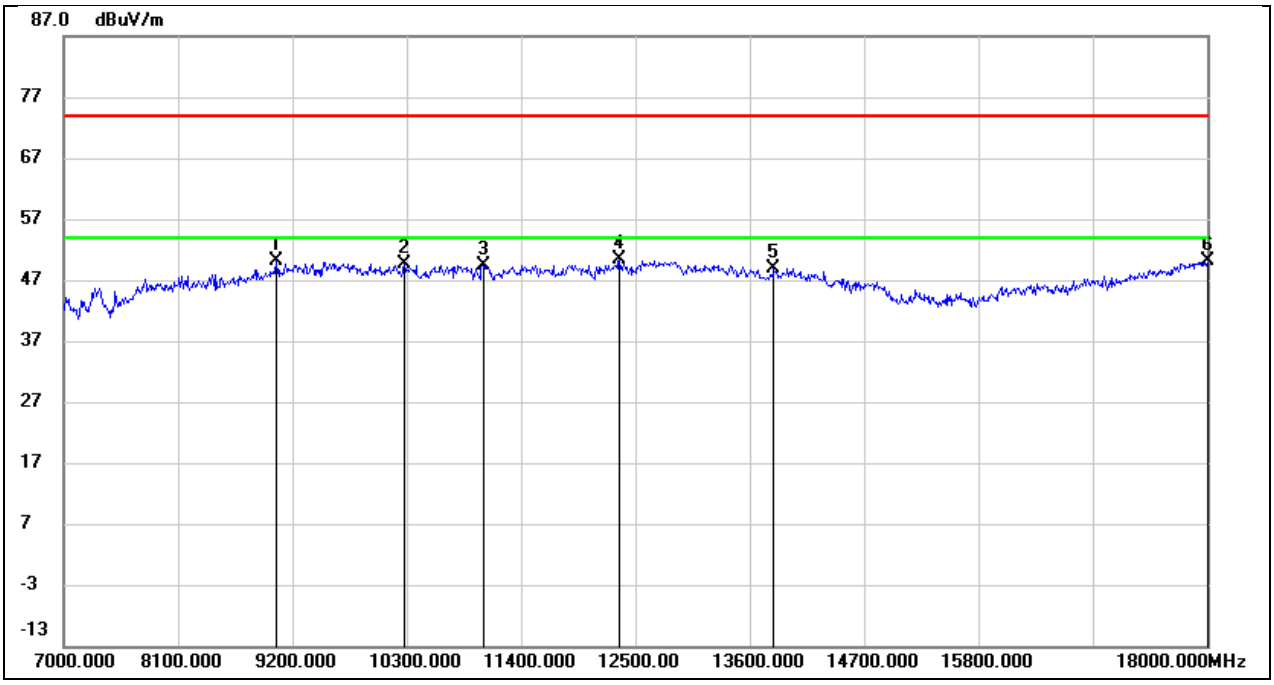

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9046.000	39.36	10.86	50.22	74.00	-23.78	peak
2	10278.000	36.32	13.25	49.57	74.00	-24.43	peak
3	11037.000	34.18	15.27	49.45	74.00	-24.55	peak
4	12346.000	31.49	18.91	50.40	74.00	-23.60	peak
5	13831.000	26.03	22.93	48.96	74.00	-25.04	peak
6	18000.000	20.61	29.61	50.22	74.00	-23.78	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

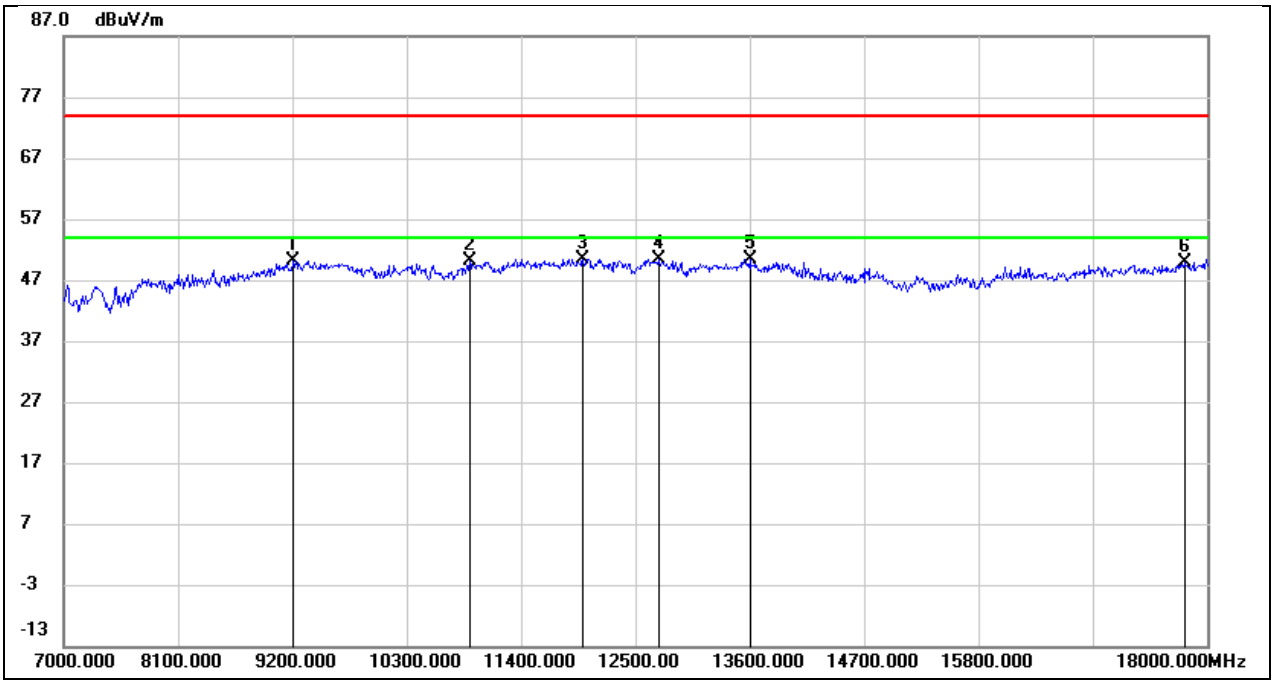

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.35	11.82	50.17	74.00	-23.83	peak
2	10905.000	35.95	14.06	50.01	74.00	-23.99	peak
3	11994.000	33.12	17.37	50.49	74.00	-23.51	peak
4	12720.000	31.82	18.62	50.44	74.00	-23.56	peak
5	13600.000	29.92	20.54	50.46	74.00	-23.54	peak
6	17780.000	23.88	26.06	49.94	74.00	-24.06	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

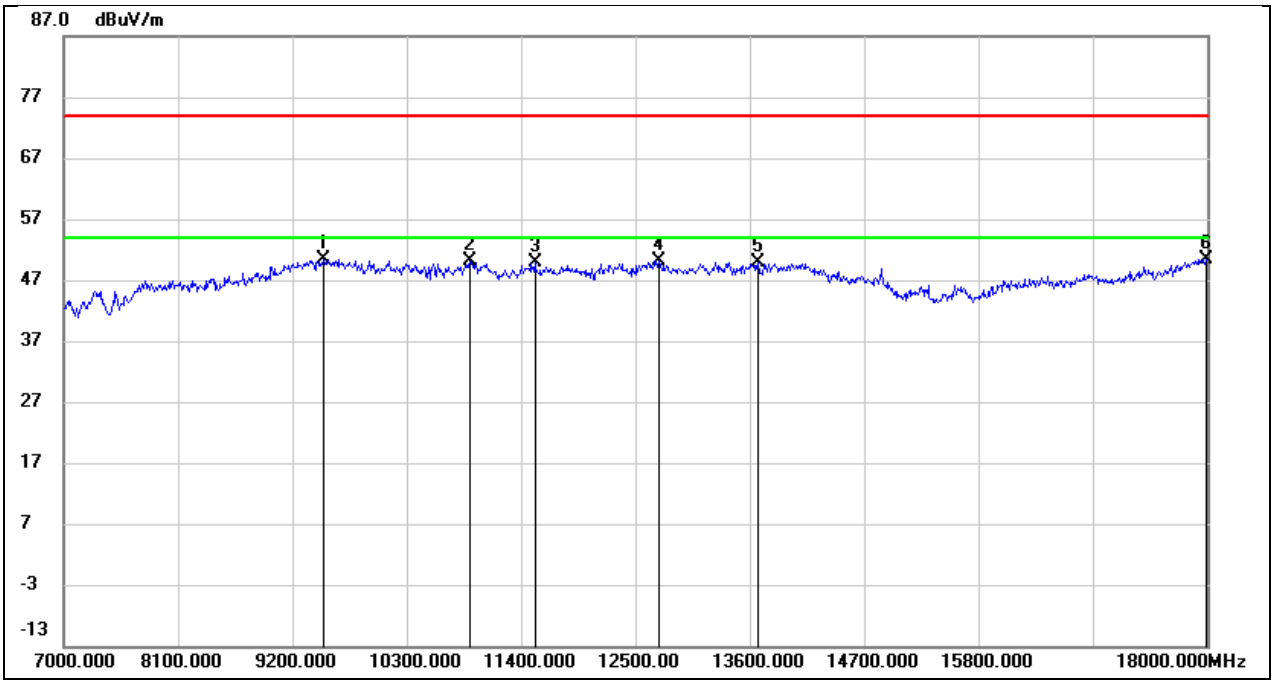

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9497.000	37.52	12.85	50.37	74.00	-23.63	peak
2	10905.000	35.30	14.75	50.05	74.00	-23.95	peak
3	11532.000	31.93	17.92	49.85	74.00	-24.15	peak
4	12720.000	30.58	19.65	50.23	74.00	-23.77	peak
5	13677.000	27.55	22.44	49.99	74.00	-24.01	peak
6	17989.000	20.97	29.49	50.46	74.00	-23.54	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

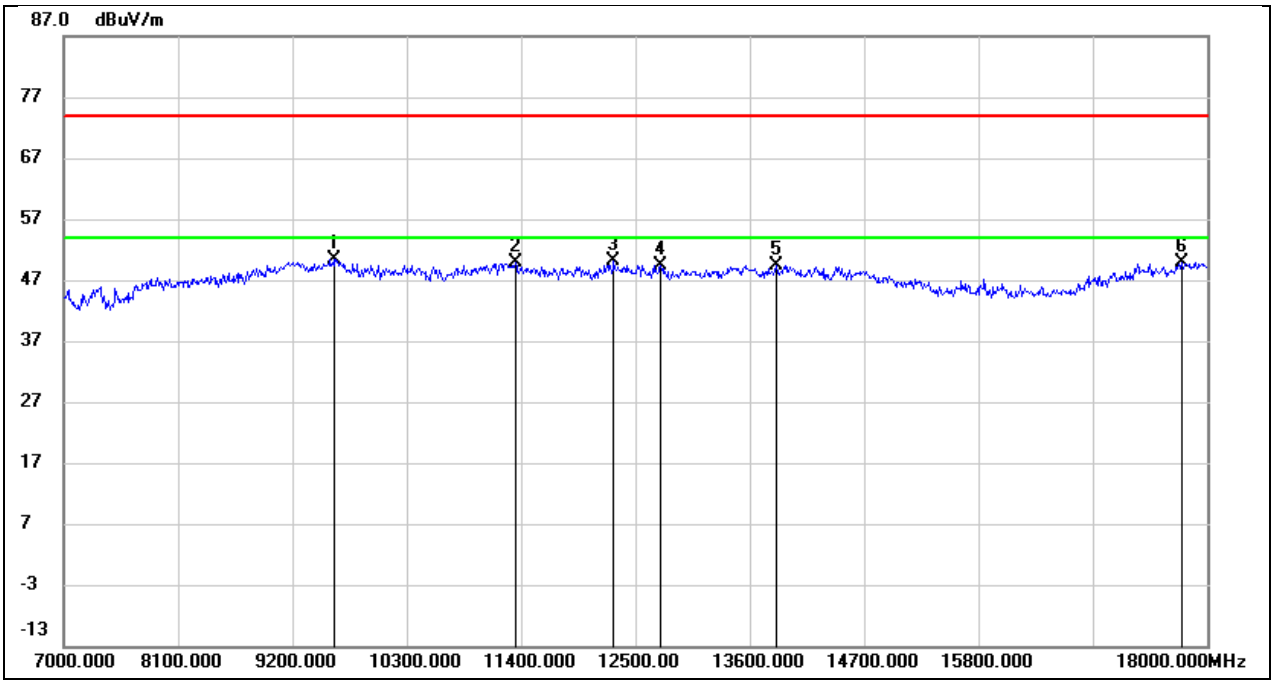

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	37.17	13.30	50.47	74.00	-23.53	peak
2	11345.000	34.06	15.76	49.82	74.00	-24.18	peak
3	12291.000	32.19	17.85	50.04	74.00	-23.96	peak
4	12742.000	30.58	18.70	49.28	74.00	-24.72	peak
5	13853.000	28.03	21.38	49.41	74.00	-24.59	peak
6	17758.000	23.82	25.94	49.76	74.00	-24.24	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

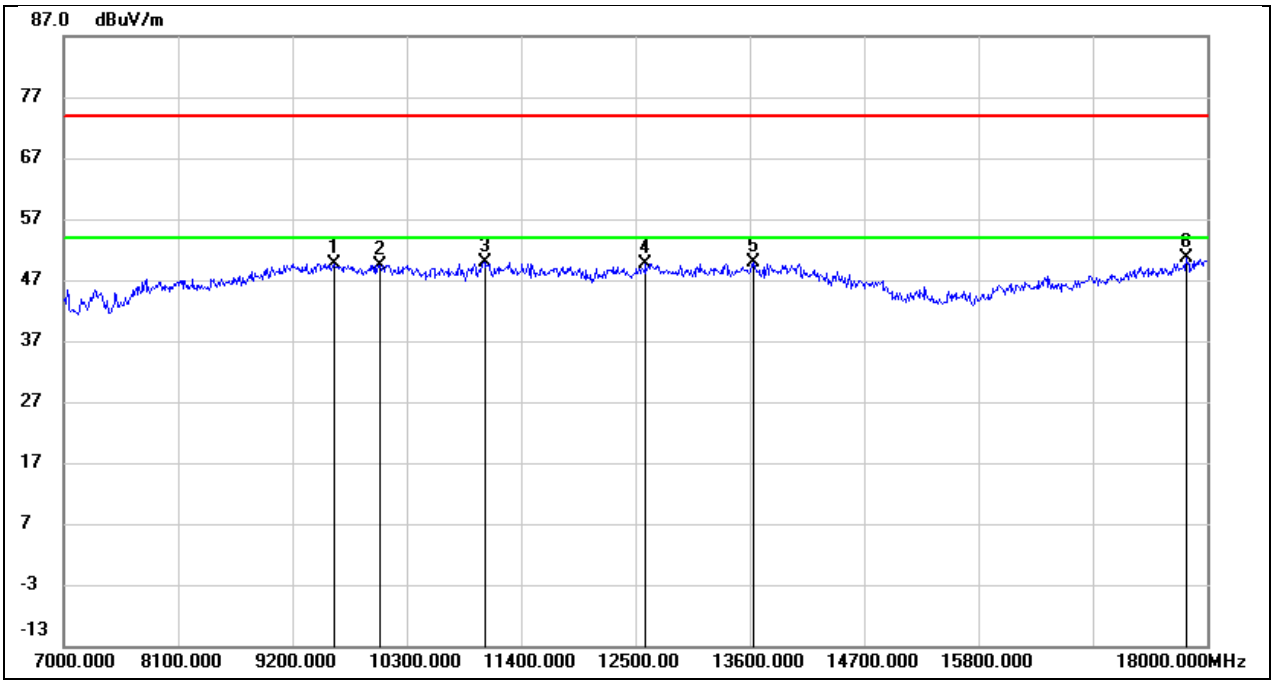

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.28	13.44	49.72	74.00	-24.28	peak
2	10047.000	36.17	13.30	49.47	74.00	-24.53	peak
3	11048.000	34.57	15.33	49.90	74.00	-24.10	peak
4	12599.000	30.48	19.16	49.64	74.00	-24.36	peak
5	13633.000	27.45	22.31	49.76	74.00	-24.24	peak
6	17802.000	23.00	27.51	50.51	74.00	-23.49	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

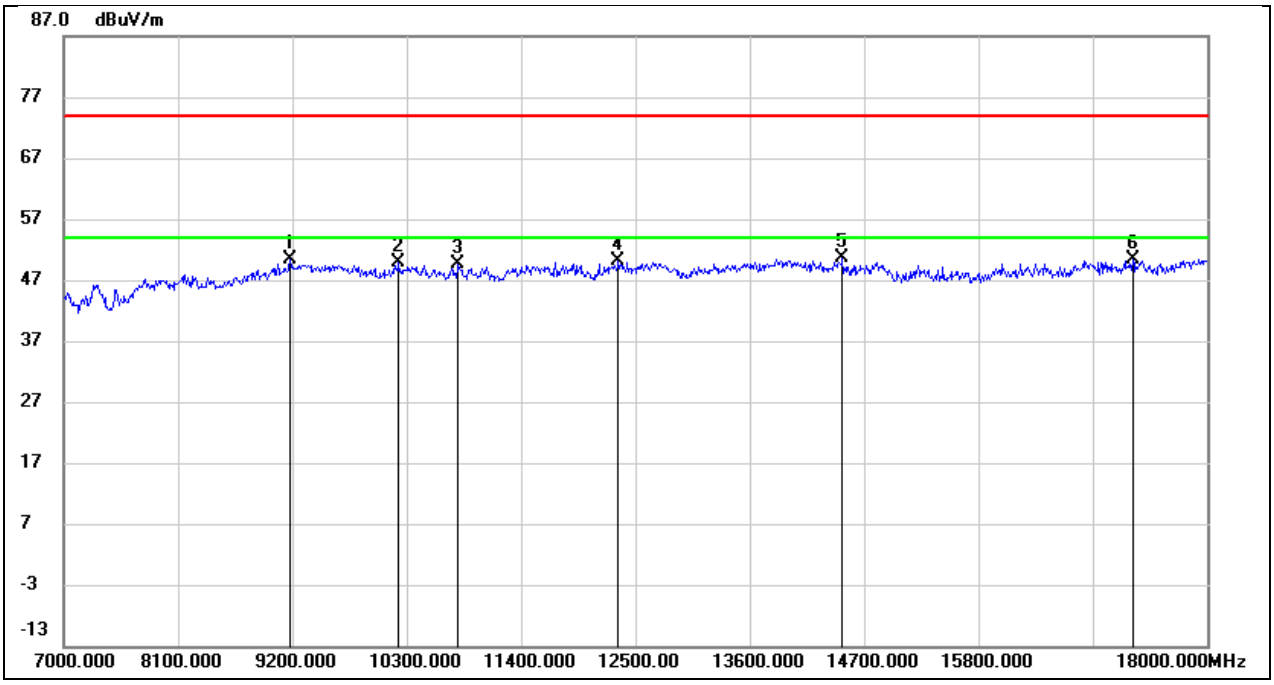

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	38.60	11.71	50.31	74.00	-23.69	peak
2	10223.000	37.12	12.72	49.84	74.00	-24.16	peak
3	10795.000	35.66	13.86	49.52	74.00	-24.48	peak
4	12335.000	32.11	17.93	50.04	74.00	-23.96	peak
5	14491.000	29.78	20.96	50.74	74.00	-23.26	peak
6	17285.000	25.32	24.97	50.29	74.00	-23.71	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

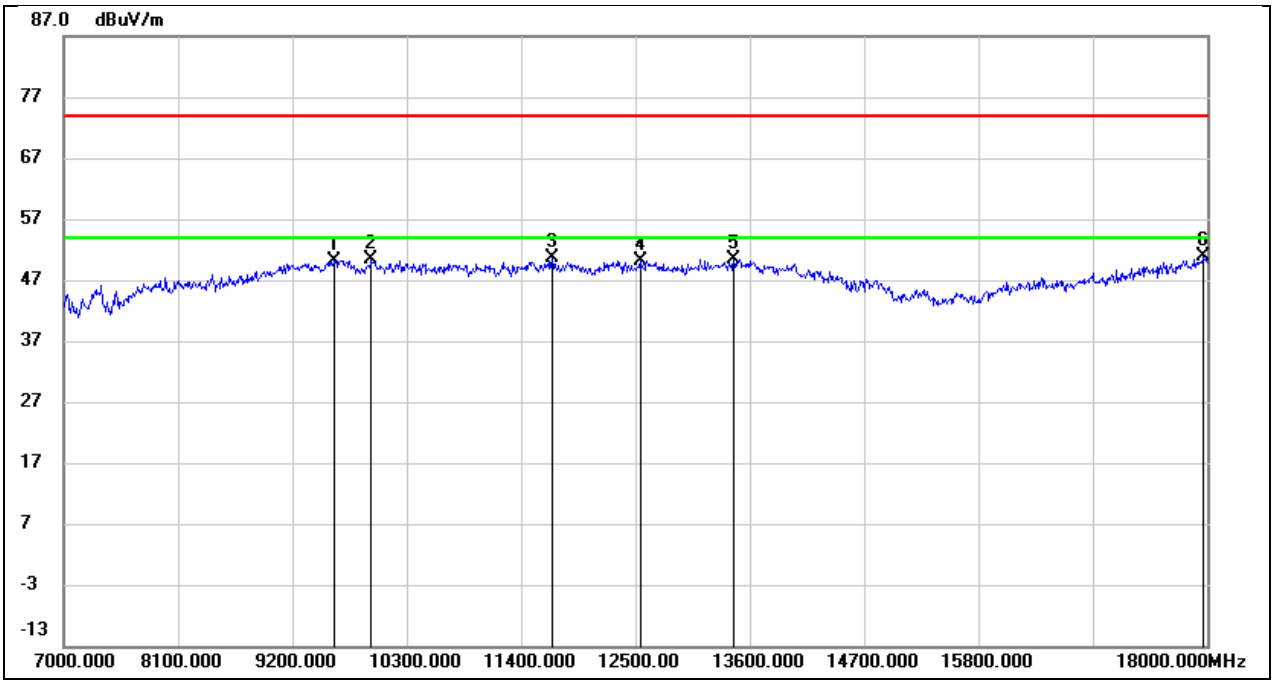

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.75	13.44	50.19	74.00	-23.81	peak
2	9959.000	36.95	13.44	50.39	74.00	-23.61	peak
3	11697.000	32.53	18.05	50.58	74.00	-23.42	peak
4	12544.000	31.04	19.06	50.10	74.00	-23.90	peak
5	13446.000	28.51	21.82	50.33	74.00	-23.67	peak
6	17967.000	21.63	29.26	50.89	74.00	-23.11	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

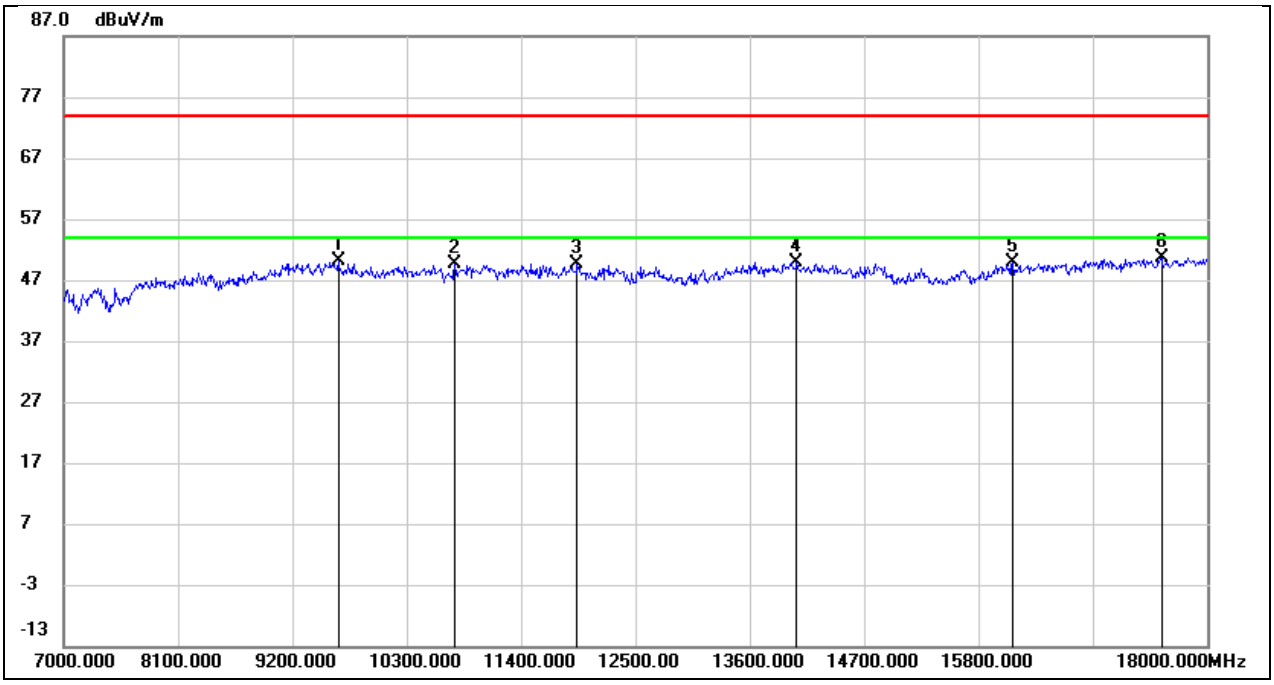

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	36.74	13.33	50.07	74.00	-23.93	peak
2	10762.000	35.78	13.80	49.58	74.00	-24.42	peak
3	11939.000	32.52	17.19	49.71	74.00	-24.29	peak
4	14051.000	27.92	21.93	49.85	74.00	-24.15	peak
5	16130.000	26.14	23.71	49.85	74.00	-24.15	peak
6	17560.000	25.68	25.05	50.73	74.00	-23.27	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

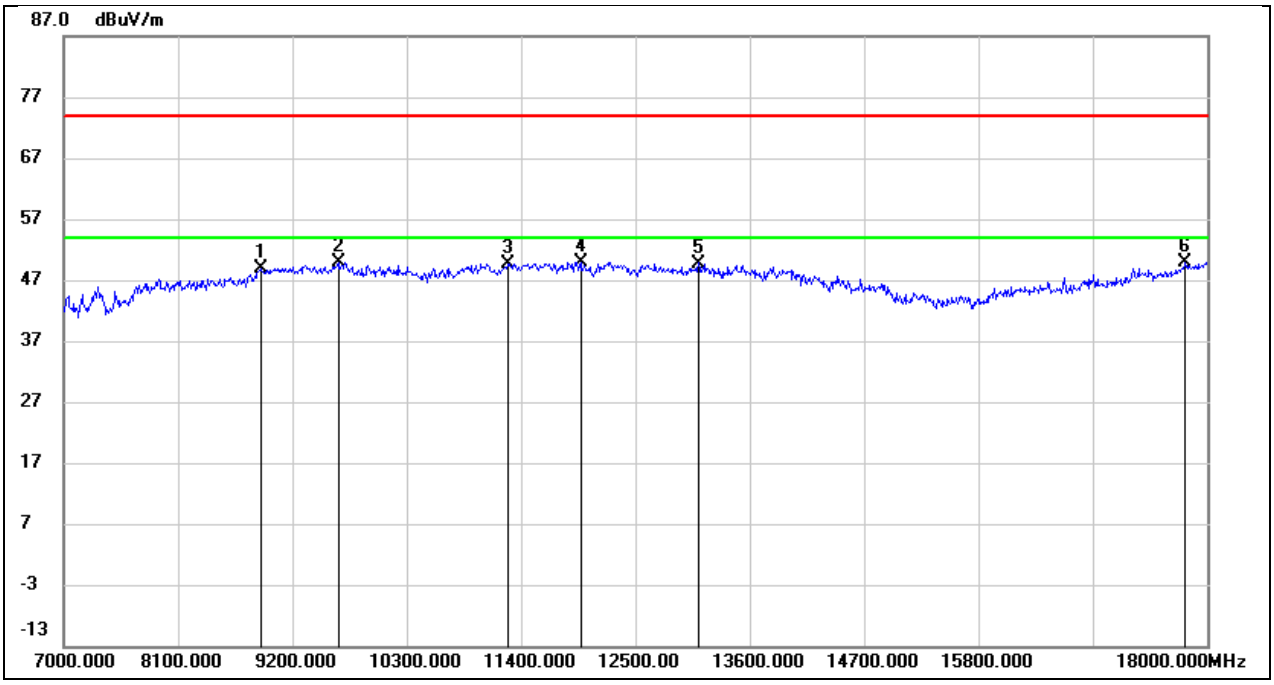

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	38.81	10.17	48.98	74.00	-25.02	peak
2	9640.000	36.29	13.53	49.82	74.00	-24.18	peak
3	11268.000	33.17	16.57	49.74	74.00	-24.26	peak
4	11972.000	31.50	18.42	49.92	74.00	-24.08	peak
5	13105.000	29.25	20.50	49.75	74.00	-24.25	peak
6	17791.000	22.61	27.39	50.00	74.00	-24.00	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

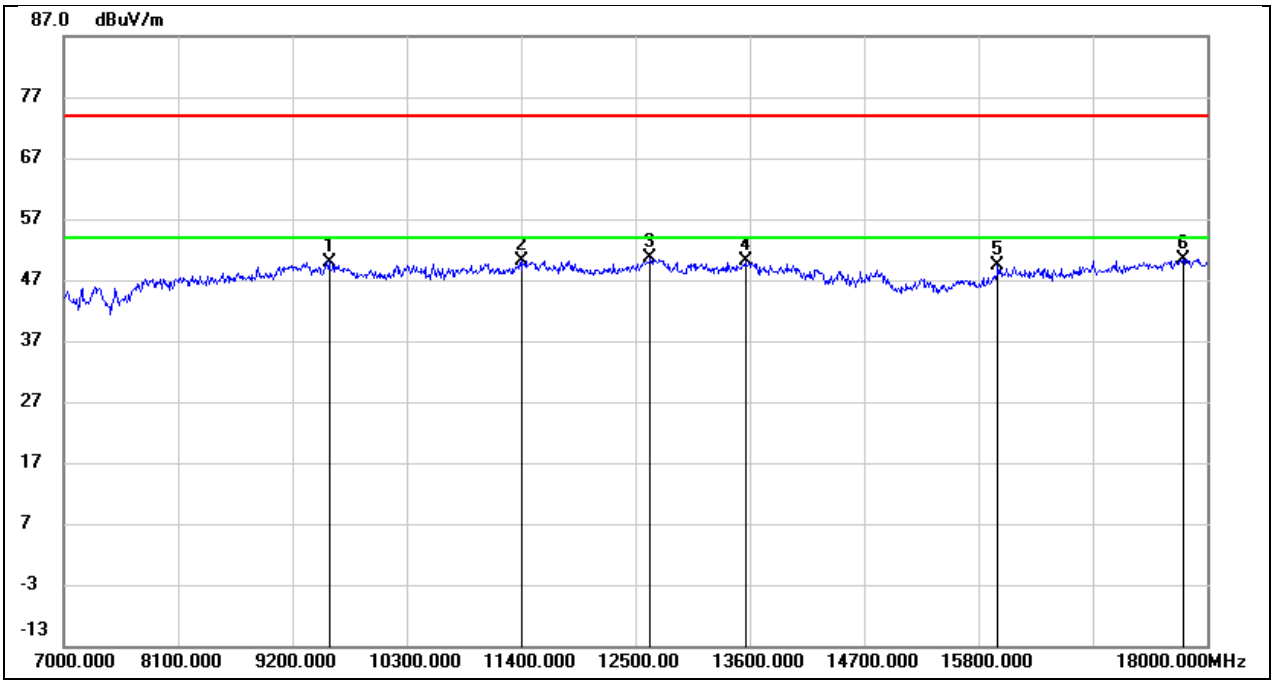

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	36.90	13.10	50.00	74.00	-24.00	peak
2	11411.000	34.17	16.04	50.21	74.00	-23.79	peak
3	12643.000	32.27	18.35	50.62	74.00	-23.38	peak
4	13556.000	29.59	20.45	50.04	74.00	-23.96	peak
5	15987.000	26.58	22.78	49.36	74.00	-24.64	peak
6	17769.000	24.43	26.00	50.43	74.00	-23.57	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

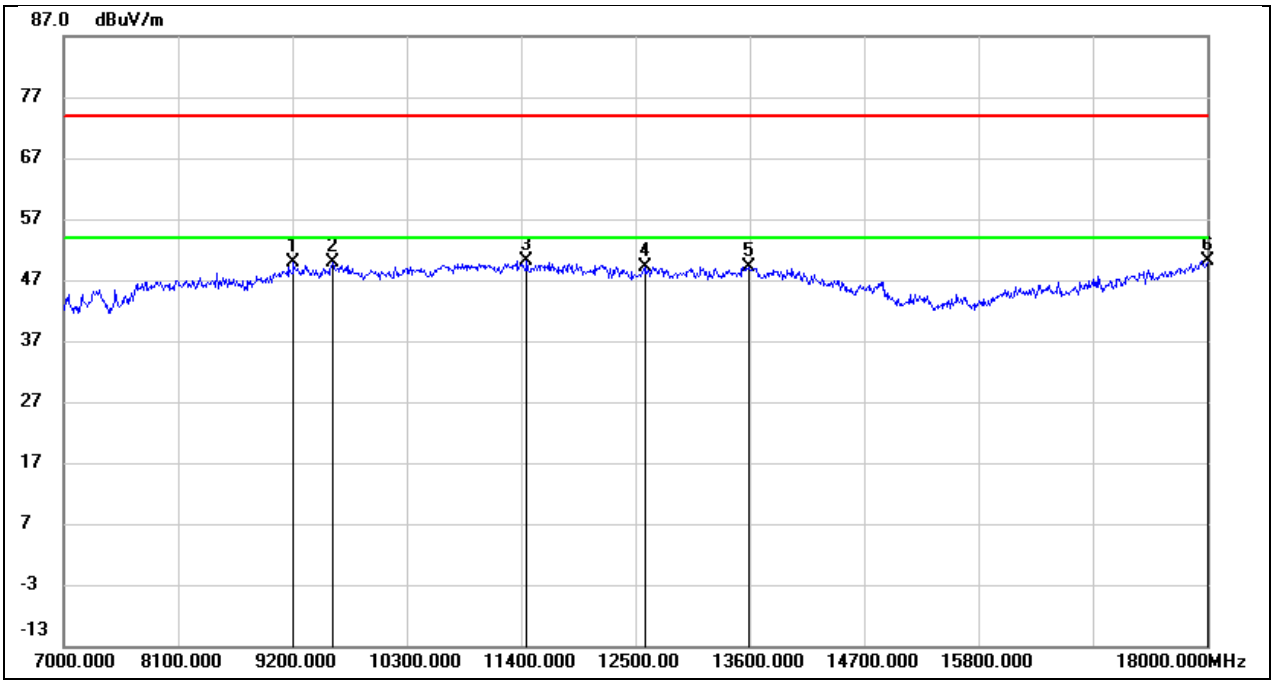

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.19	11.59	49.78	74.00	-24.22	peak
2	9585.000	36.40	13.38	49.78	74.00	-24.22	peak
3	11455.000	32.50	17.62	50.12	74.00	-23.88	peak
4	12599.000	30.01	19.16	49.17	74.00	-24.83	peak
5	13589.000	27.01	22.20	49.21	74.00	-24.79	peak
6	18000.000	20.48	29.61	50.09	74.00	-23.91	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

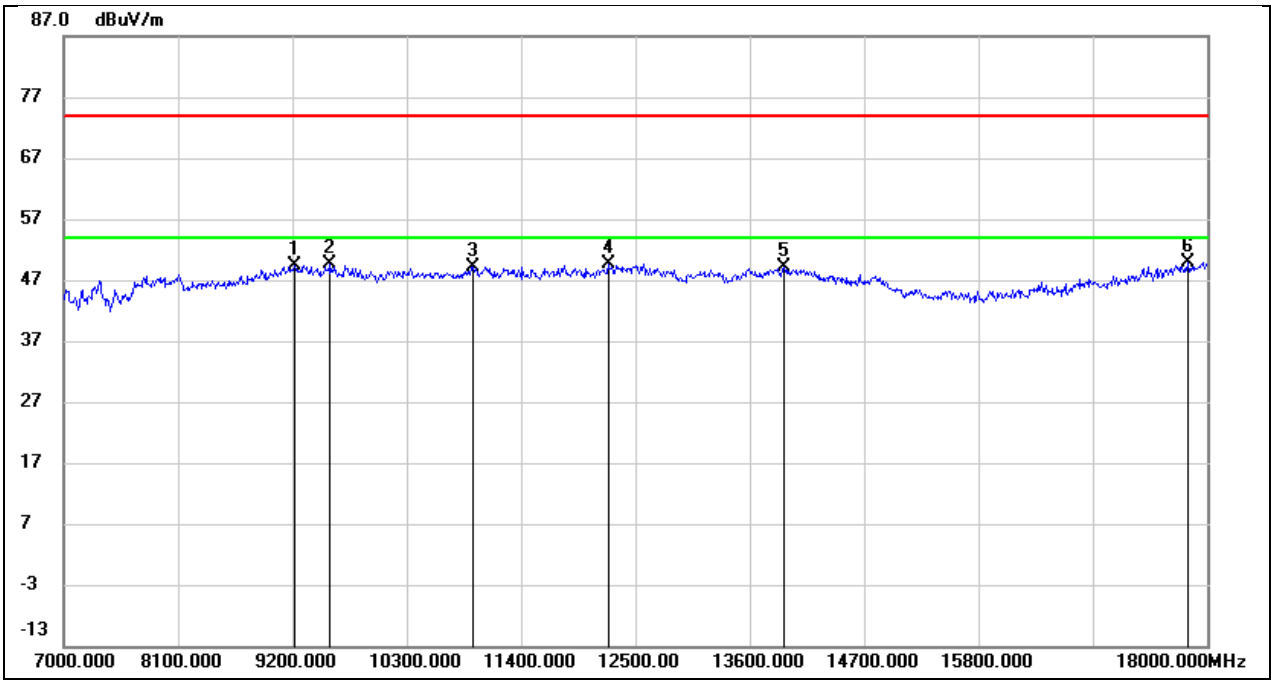

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.41	11.86	49.27	74.00	-24.73	peak
2	9563.000	36.59	13.14	49.73	74.00	-24.27	peak
3	10938.000	34.99	14.13	49.12	74.00	-24.88	peak
4	12236.000	31.91	17.76	49.67	74.00	-24.33	peak
5	13930.000	27.48	21.71	49.19	74.00	-24.81	peak
6	17813.000	23.70	26.24	49.94	74.00	-24.06	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

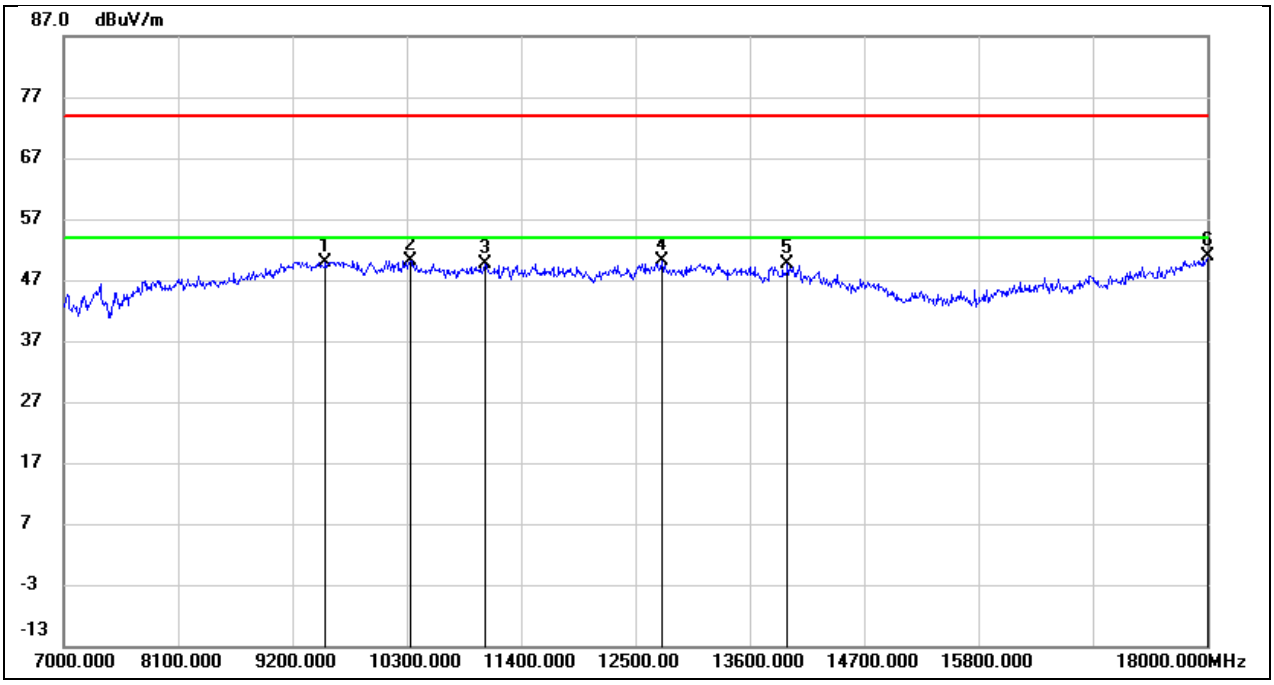

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.01	12.97	49.98	74.00	-24.02	peak
2	10333.000	36.94	13.30	50.24	74.00	-23.76	peak
3	11048.000	34.25	15.33	49.58	74.00	-24.42	peak
4	12753.000	30.42	19.78	50.20	74.00	-23.80	peak
5	13963.000	26.13	23.46	49.59	74.00	-24.41	peak
6	18000.000	21.37	29.61	50.98	74.00	-23.02	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

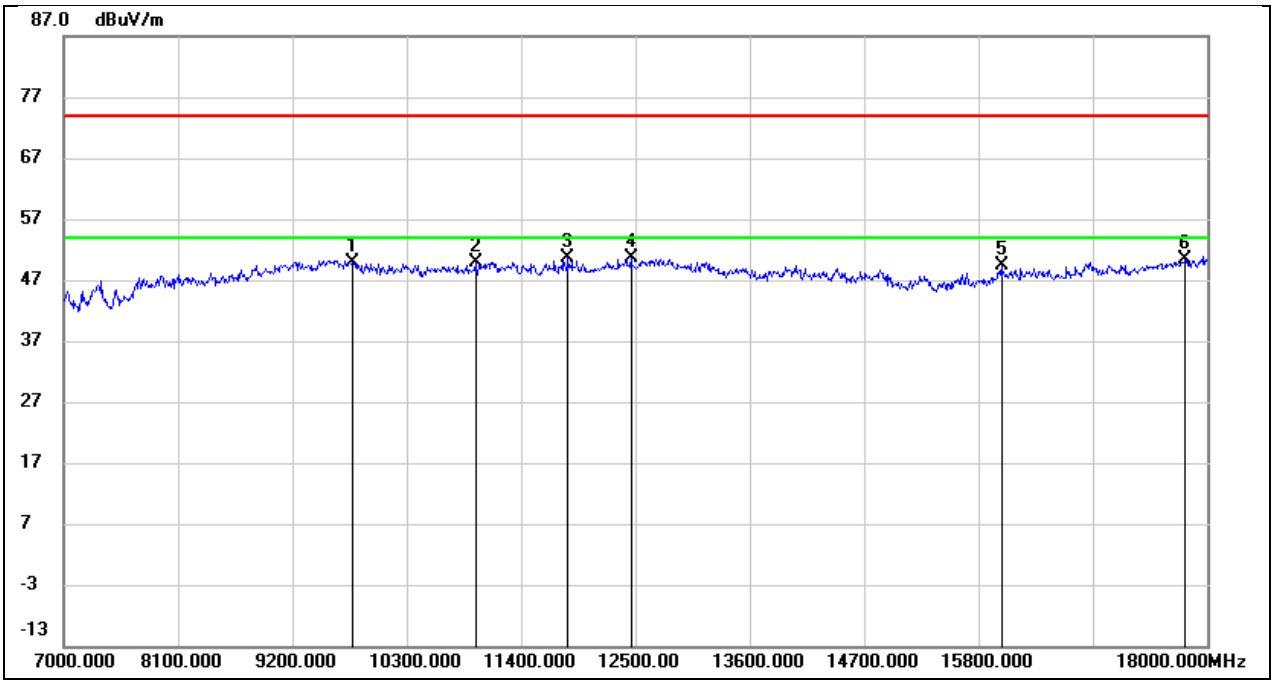

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9783.000	36.54	13.38	49.92	74.00	-24.08	peak
2	10960.000	35.73	14.18	49.91	74.00	-24.09	peak
3	11851.000	33.73	16.89	50.62	74.00	-23.38	peak
4	12456.000	32.62	18.07	50.69	74.00	-23.31	peak
5	16020.000	26.27	23.00	49.27	74.00	-24.73	peak
6	17791.000	24.26	26.11	50.37	74.00	-23.63	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

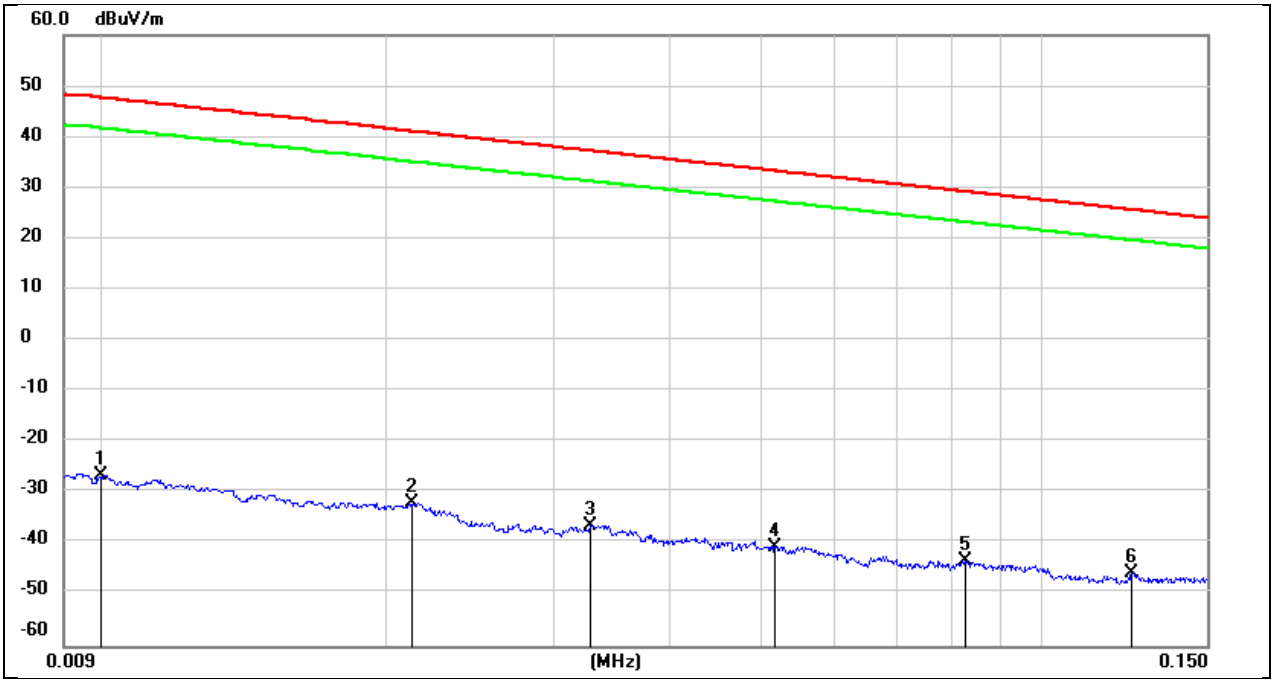

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	74.72	-101.40	-26.68	47.60	-74.28	peak
2	0.0212	69.29	-101.35	-32.06	41.07	-73.13	peak
3	0.0328	64.98	-101.40	-36.42	37.28	-73.70	peak
4	0.0517	60.87	-101.49	-40.62	33.33	-73.95	peak
5	0.0826	58.32	-101.65	-43.33	29.26	-72.59	peak
6	0.1246	55.89	-101.72	-45.83	25.70	-71.53	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

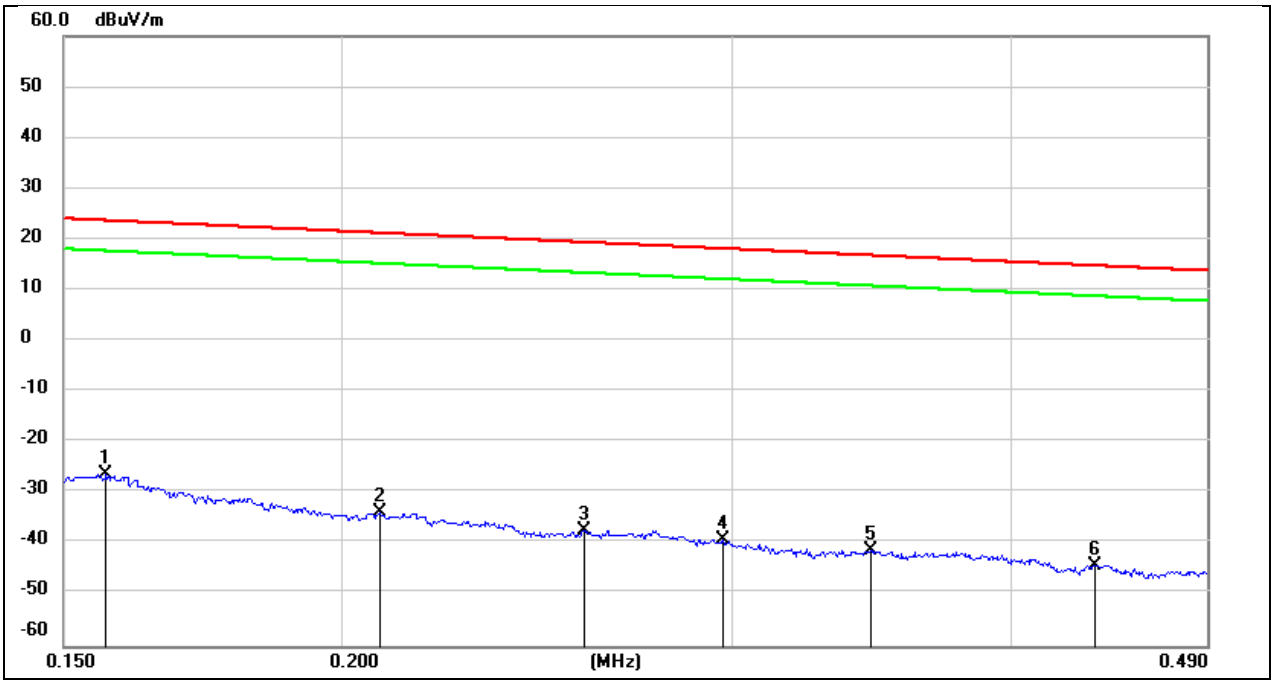

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1567	75.45	-101.65	-26.20	23.70	-49.90	peak
2	0.2081	68.12	-101.73	-33.61	21.23	-54.84	peak
3	0.2570	64.35	-101.80	-37.45	19.40	-56.85	peak
4	0.2968	62.83	-101.85	-39.02	18.15	-57.17	peak
5	0.3462	60.74	-101.90	-41.16	16.81	-57.97	peak
6	0.4364	57.86	-101.99	-44.13	14.80	-58.93	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

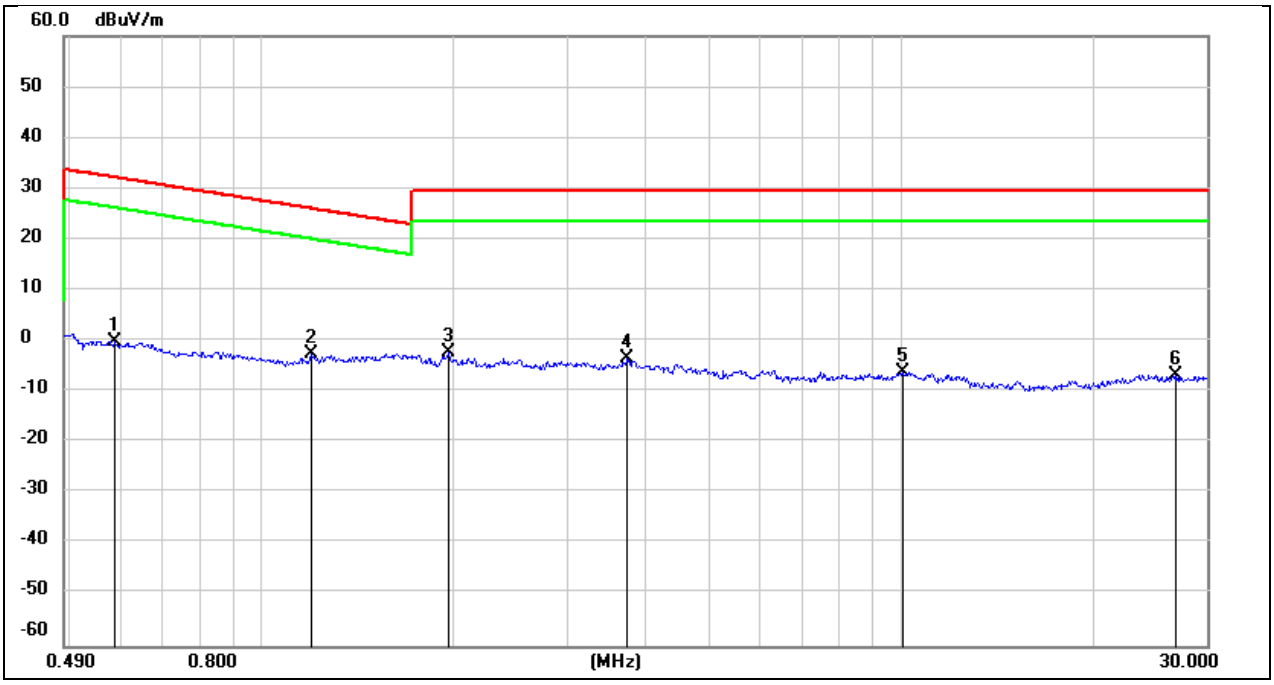

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5872	61.98	-62.08	-0.10	32.23	-32.33	peak
2	1.1915	59.57	-62.18	-2.61	26.08	-28.69	peak
3	1.9516	59.61	-61.84	-2.23	29.54	-31.77	peak
4	3.7360	57.83	-61.40	-3.57	29.54	-33.11	peak
5	10.0510	54.75	-60.80	-6.05	29.54	-35.59	peak
6	26.8719	53.54	-60.27	-6.73	29.54	-36.27	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

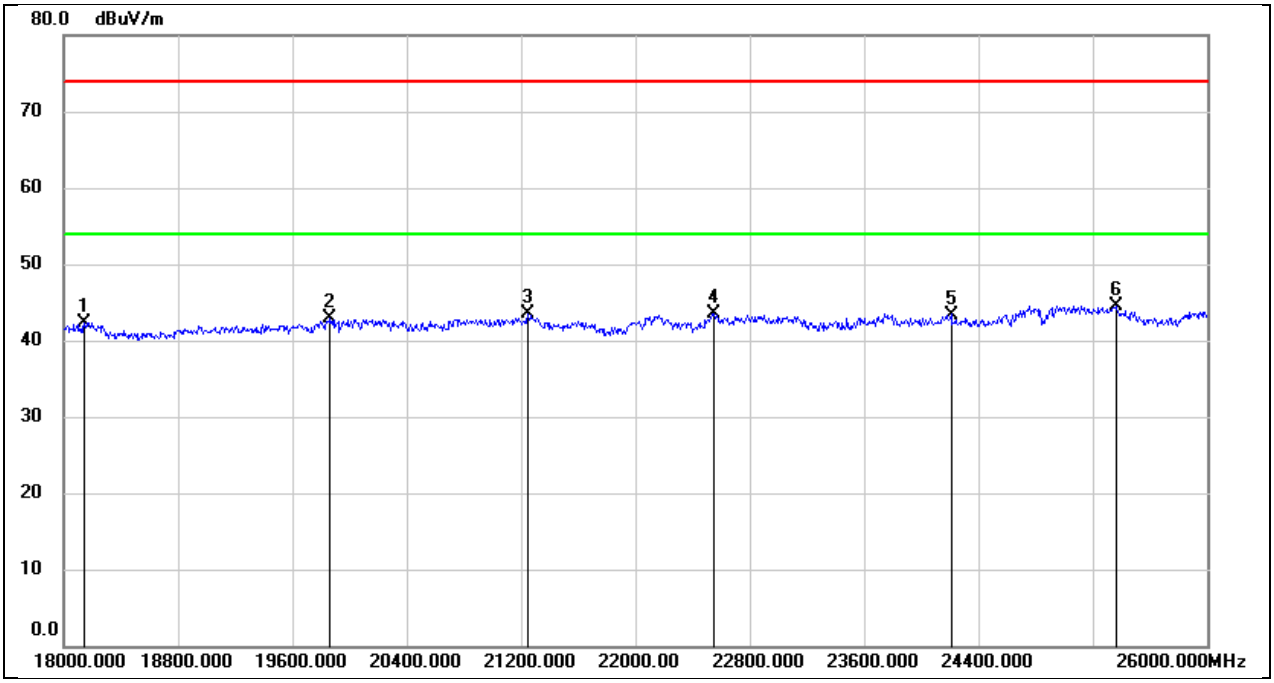

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18144.000	47.77	-5.48	42.29	74.00	-31.71	peak
2	19864.000	48.29	-5.34	42.95	74.00	-31.05	peak
3	21248.000	48.29	-4.77	43.52	74.00	-30.48	peak
4	22552.000	47.28	-3.84	43.44	74.00	-30.56	peak
5	24208.000	46.21	-2.81	43.40	74.00	-30.60	peak
6	25360.000	46.18	-1.72	44.46	74.00	-29.54	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

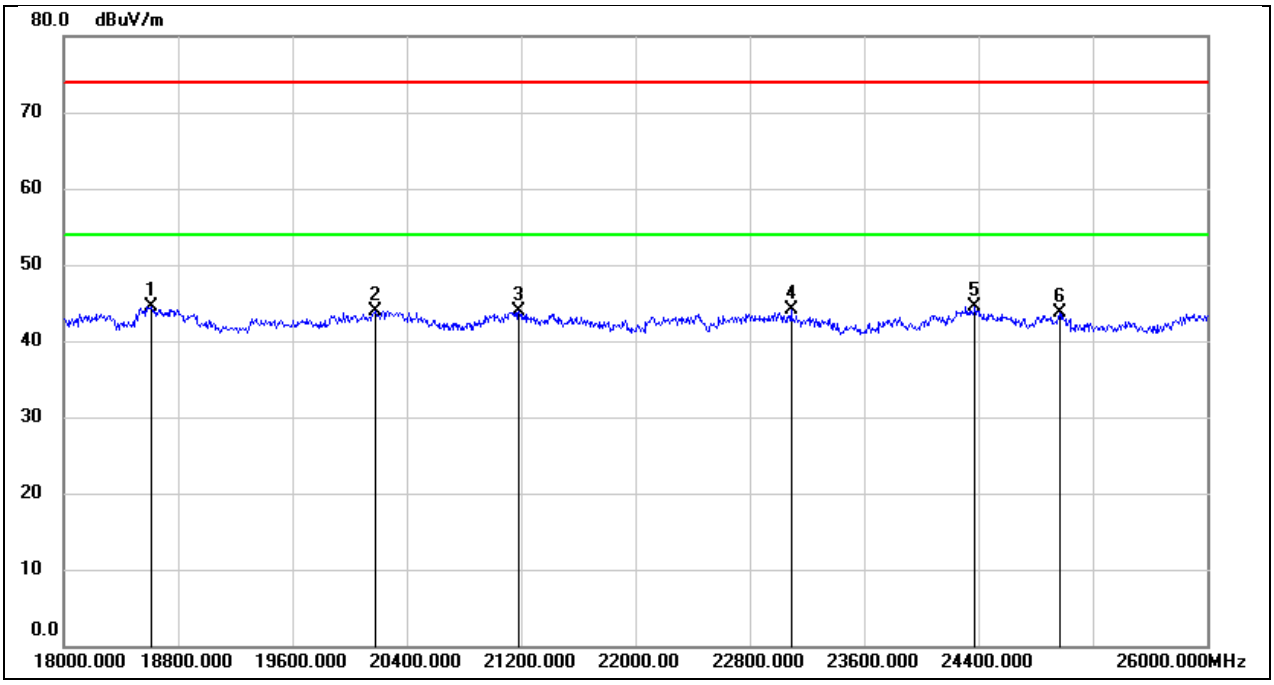

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	49.89	-5.34	44.55	74.00	-29.45	peak
2	20184.000	49.44	-5.56	43.88	74.00	-30.12	peak
3	21184.000	48.69	-4.79	43.90	74.00	-30.10	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24376.000	47.12	-2.57	44.55	74.00	-29.45	peak
6	24968.000	45.76	-2.14	43.62	74.00	-30.38	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

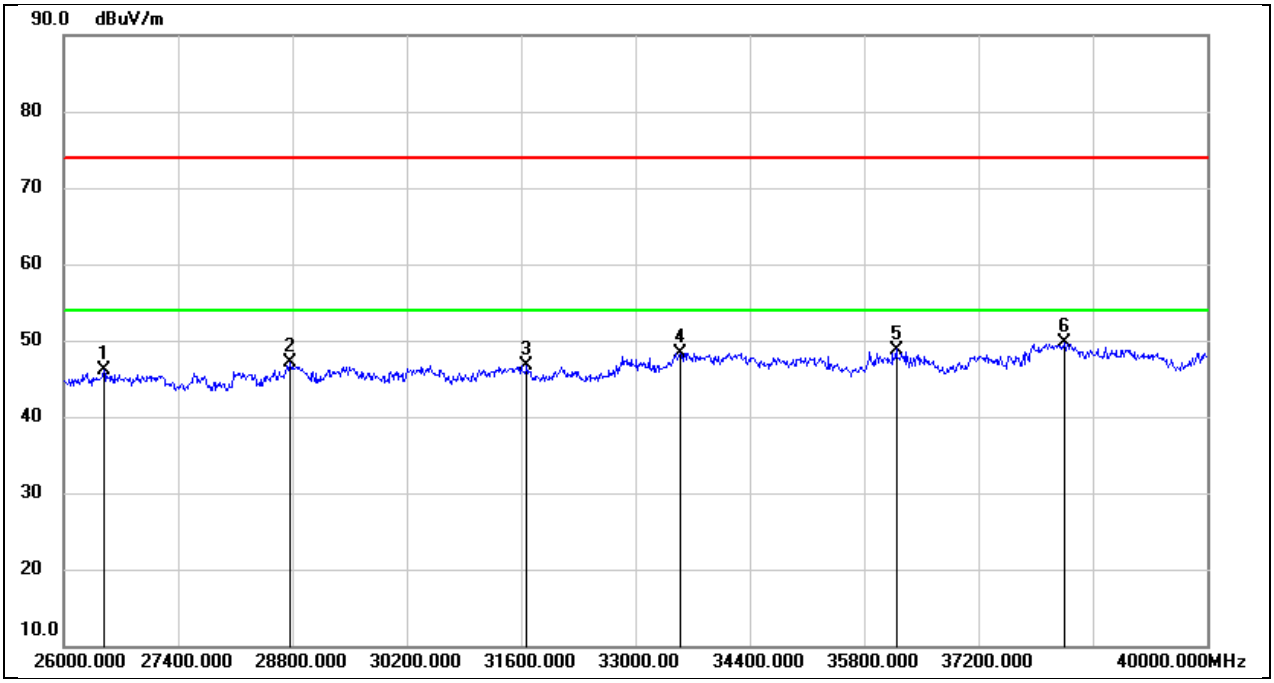

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	50.79	-4.74	46.05	74.00	-27.95	peak
2	28772.000	47.67	-0.59	47.08	74.00	-26.92	peak
3	31670.000	47.86	-1.21	46.65	74.00	-27.35	peak
4	33546.000	47.75	0.53	48.28	74.00	-25.72	peak
5	36192.000	45.37	3.43	48.80	74.00	-25.20	peak
6	38250.000	45.80	3.86	49.66	74.00	-24.34	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

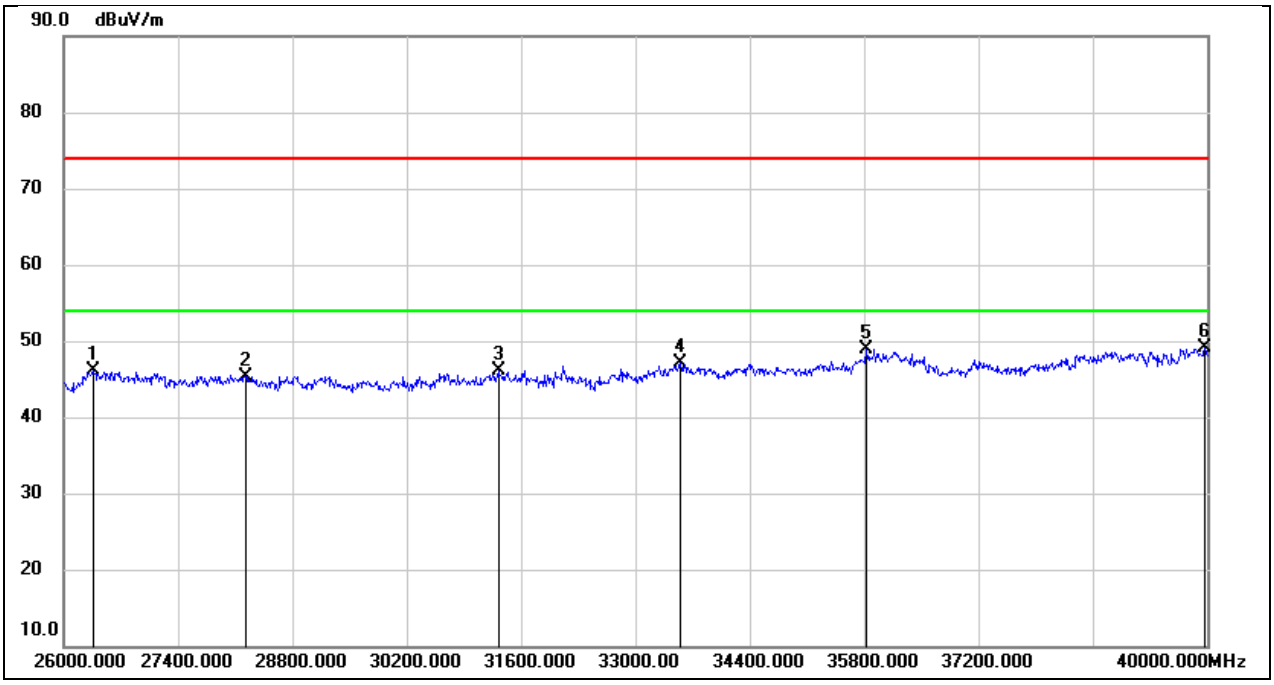

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26364.000	51.14	-5.06	46.08	74.00	-27.92	peak
2	28226.000	47.91	-2.55	45.36	74.00	-28.64	peak
3	31320.000	47.11	-0.93	46.18	74.00	-27.82	peak
4	33546.000	46.49	0.53	47.02	74.00	-26.98	peak
5	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
6	39972.000	43.95	5.13	49.08	74.00	-24.92	peak

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

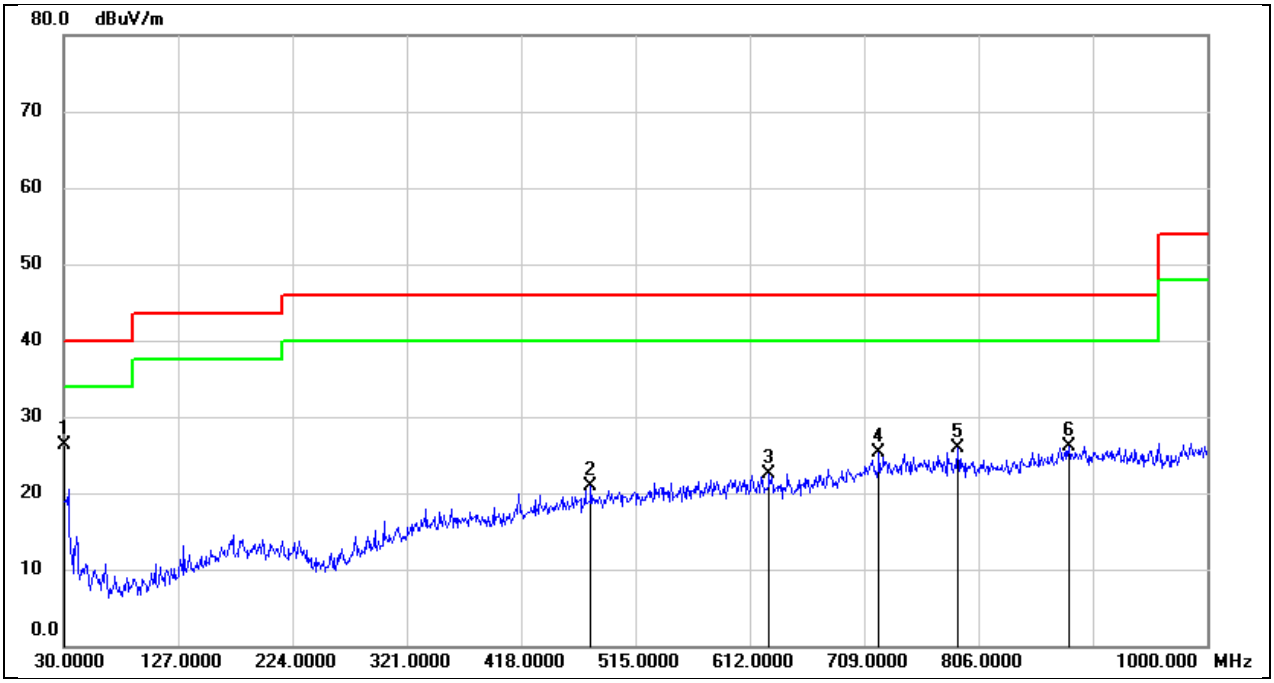

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	40.27	-14.06	26.21	40.00	-13.79	QP
2	477.1700	27.49	-6.64	20.85	46.00	-25.15	QP
3	628.4900	27.27	-4.75	22.52	46.00	-23.48	QP
4	721.6100	27.56	-2.18	25.38	46.00	-20.62	QP
5	788.5400	27.23	-1.25	25.98	46.00	-20.02	QP
6	882.6300	26.43	-0.23	26.20	46.00	-19.80	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

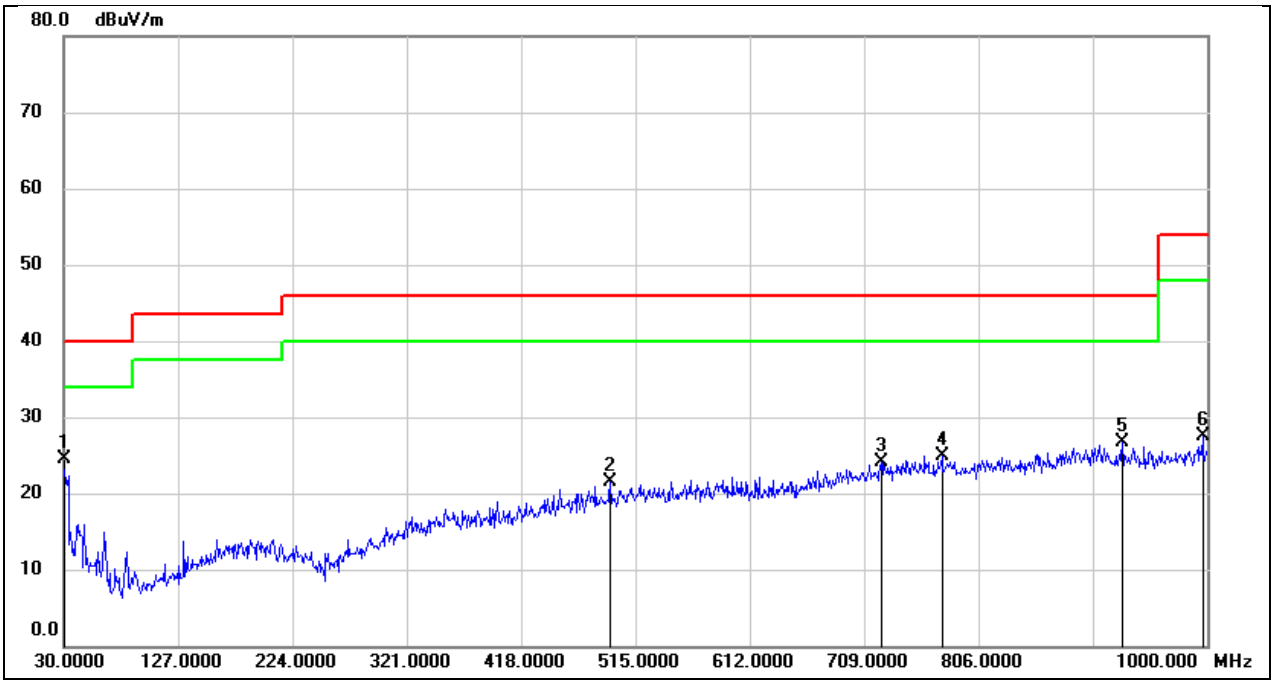

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	38.66	-14.06	24.60	40.00	-15.40	QP
2	493.6600	27.84	-6.32	21.52	46.00	-24.48	QP
3	723.5500	26.19	-2.11	24.08	46.00	-21.92	QP
4	774.9600	26.13	-1.23	24.90	46.00	-21.10	QP
5	928.2200	26.89	-0.17	26.72	46.00	-19.28	QP
6	996.1200	27.26	0.21	27.47	54.00	-26.53	QP

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

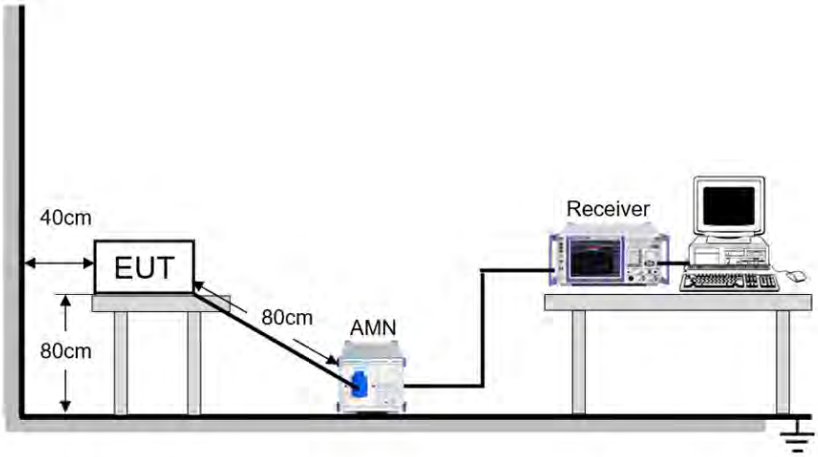

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

TEST ENVIRONMENT

Temperature	23.4℃	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	December 25, 2024	Test By	Fanny Huang

TEST RESULTS

Test Mode:	802.11a	Frequency(MHz):	5180
Line:	Line		

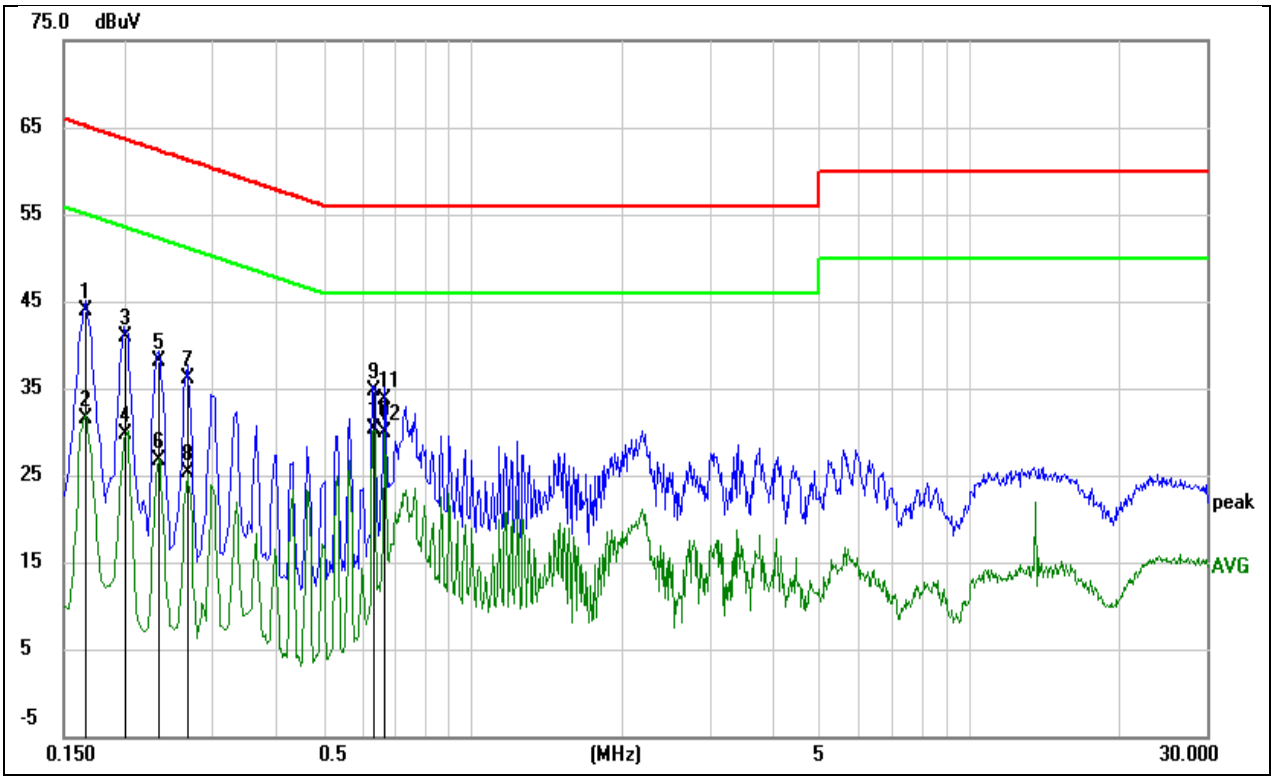

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1661	34.25	9.71	43.96	65.15	-21.19	QP
2	0.1661	21.84	9.71	31.55	55.15	-23.60	AVG
3	0.1997	31.17	9.64	40.81	63.62	-22.81	QP
4	0.1997	20.01	9.64	29.65	53.62	-23.97	AVG
5	0.2326	28.54	9.64	38.18	62.36	-24.18	QP
6	0.2326	17.10	9.64	26.74	52.36	-25.62	AVG
7	0.2660	26.49	9.64	36.13	61.24	-25.11	QP
8	0.2660	15.74	9.64	25.38	51.24	-25.86	AVG
9	0.6318	25.08	9.63	34.71	56.00	-21.29	QP
10	0.6318	20.69	9.63	30.32	46.00	-15.68	AVG
11	0.6659	24.06	9.63	33.69	56.00	-22.31	QP
12	0.6659	20.30	9.63	29.93	46.00	-16.07	AVG

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Mode:	802.11a	Frequency(MHz):	5180
Line:	Neutral		

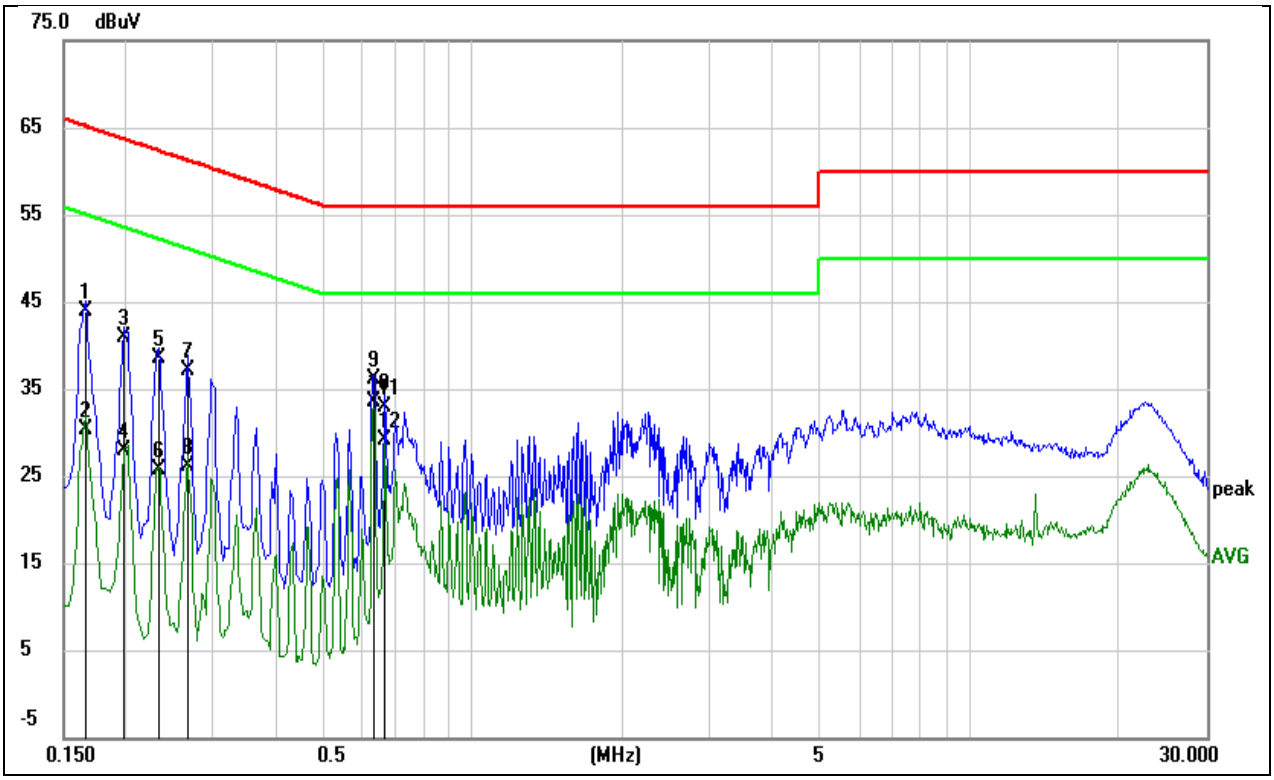

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1662	34.26	9.64	43.90	65.15	-21.25	QP
2	0.1662	20.72	9.64	30.36	55.15	-24.79	AVG
3	0.1990	31.26	9.64	40.90	63.65	-22.75	QP
4	0.1990	18.34	9.64	27.98	53.65	-25.67	AVG
5	0.2332	28.83	9.64	38.47	62.33	-23.86	QP
6	0.2332	16.12	9.64	25.76	52.33	-26.57	AVG
7	0.2666	27.52	9.64	37.16	61.22	-24.06	QP
8	0.2666	16.51	9.64	26.15	51.22	-25.07	AVG
9	0.6317	26.55	9.63	36.18	56.00	-19.82	QP
10	0.6317	23.78	9.63	33.41	46.00	-12.59	AVG
11	0.6651	23.27	9.63	32.90	56.00	-23.10	QP
12	0.6651	19.43	9.63	29.06	46.00	-16.94	AVG

Note:
1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)
For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

11. TEST DATA

Appendix A:Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
a	105	105	1.0000	100.00	0.00	0.01	0.01
n20	105	105	1.0000	100.00	0.00	0.01	0.01
n40	105	105	1.0000	100.00	0.00	0.01	0.01
ac80	105	105	1.0000	100.00	0.00	0.01	0.01
ax20	105	105	1.0000	100.00	0.00	0.01	0.01
ax40	105	105	1.0000	100.00	0.00	0.01	0.01
ax80	105	105	1.0000	100.00	0.00	0.01	0.01

Note:
Duty Cycle Correction Factor=10log (1/x).
Where: x is Duty Cycle (Linear)
Where: T is On Time
If that calculated VBW is not available on the analyzer then the next higher value should be used.

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Graphs

Duty Cycle NVNT a 5180MHz Sum

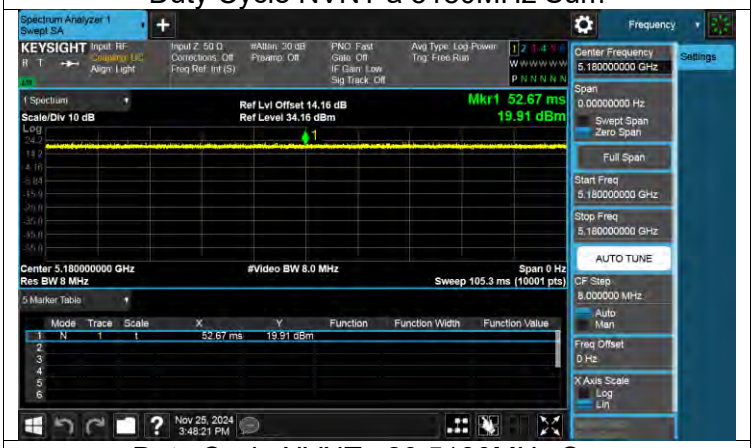

Duty Cycle NVNT n20 5180MHz Sum

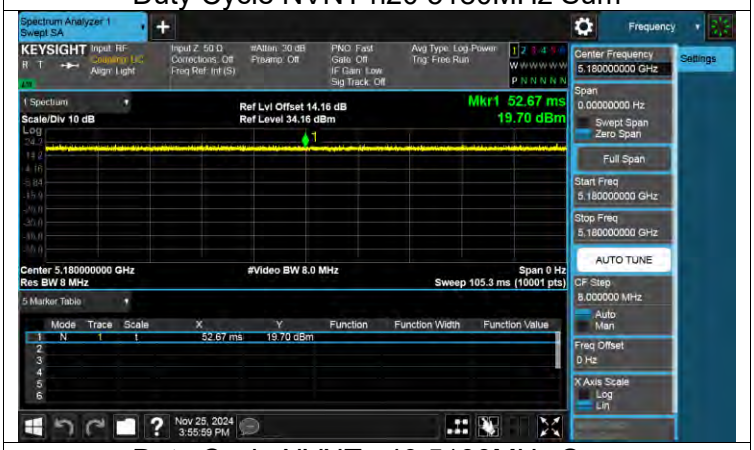

Duty Cycle NVNT n40 5190MHz Sum

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Duty Cycle NVNT ac80 5210MHz Sum

Duty Cycle NVNT ax20 5180MHz Sum

Duty Cycle NVNT ax40 5190MHz Sum

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Duty Cycle NVNT ax80 5210MHz Sum

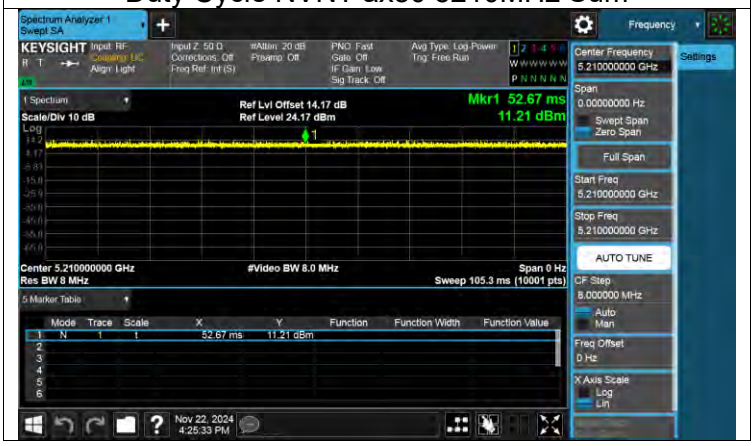

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Appendix B:-6dB Bandwidth

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5720	Ant1	3.24	⩾0.5	Pass
a	5720	Ant2	3.28	⩾0.5	Pass
a	5745	Ant1	16.47	⩾0.5	Pass
a	5745	Ant2	16.55	⩾0.5	Pass
a	5785	Ant1	16.47	⩾0.5	Pass
a	5785	Ant2	16.42	⩾0.5	Pass
a	5825	Ant1	16.4	⩾0.5	Pass
a	5825	Ant2	16.39	⩾0.5	Pass
n20	5720	Ant1	3.92	⩾0.5	Pass
n20	5720	Ant2	3.88	⩾0.5	Pass
n20	5745	Ant1	17.77	⩾0.5	Pass
n20	5745	Ant2	17.71	⩾0.5	Pass
n20	5785	Ant1	17.79	⩾0.5	Pass
n20	5785	Ant2	17.69	⩾0.5	Pass
n20	5825	Ant1	17.69	⩾0.5	Pass
n20	5825	Ant2	17.62	⩾0.5	Pass
n40	5710	Ant1	2.6	⩾0.5	Pass
n40	5710	Ant2	2.76	⩾0.5	Pass
n40	5755	Ant1	36.33	⩾0.5	Pass
n40	5755	Ant2	35.68	⩾0.5	Pass
n40	5795	Ant1	36.33	⩾0.5	Pass
n40	5795	Ant2	35.91	⩾0.5	Pass
ac80	5690	Ant1	3.4	⩾0.5	Pass
ac80	5690	Ant2	3.24	⩾0.5	Pass
ac80	5775	Ant1	76.51	⩾0.5	Pass
ac80	5775	Ant2	76.36	⩾0.5	Pass
ax20	5720	Ant1	4.52	⩾0.5	Pass
ax20	5720	Ant2	4.48	⩾0.5	Pass
ax20	5745	Ant1	19.02	⩾0.5	Pass
ax20	5745	Ant2	19.04	⩾0.5	Pass
ax20	5785	Ant1	19.09	⩾0.5	Pass
ax20	5785	Ant2	19	⩾0.5	Pass
ax20	5825	Ant1	19.03	⩾0.5	Pass
ax20	5825	Ant2	19.06	⩾0.5	Pass
ax40	5710	Ant1	2.92	⩾0.5	Pass
ax40	5710	Ant2	3.56	⩾0.5	Pass
ax40	5755	Ant1	37.87	⩾0.5	Pass
ax40	5755	Ant2	37.85	⩾0.5	Pass
ax40	5795	Ant1	37.67	⩾0.5	Pass
ax40	5795	Ant2	38.06	⩾0.5	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

ax80	5690	Ant1	4.04	⩾0.5	Pass
ax80	5690	Ant2	4.04	⩾0.5	Pass
ax80	5775	Ant1	78.09	⩾0.5	Pass
ax80	5775	Ant2	77.78	⩾0.5	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Graphs

-6dB Bandwidth NVNT a 5720MHz Ant1

-6dB Bandwidth NVNT a 5720MHz Ant2

-6dB Bandwidth NVNT a 5745MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT a 5745MHz Ant2

-6dB Bandwidth NVNT a 5785MHz Ant1

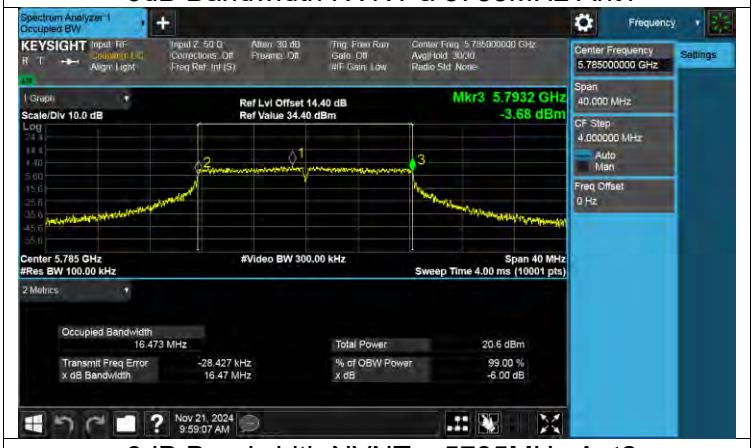

-6dB Bandwidth NVNT a 5785MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT a 5825MHz Ant1

-6dB Bandwidth NVNT a 5825MHz Ant2

-6dB Bandwidth NVNT n20 5720MHz Ant1

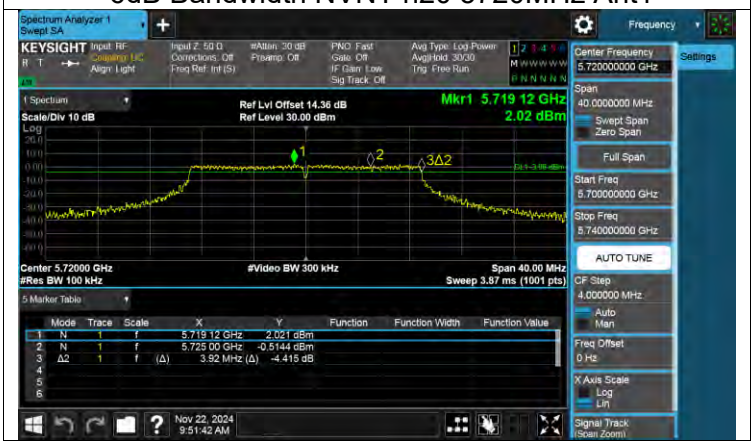

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT n20 5720MHz Ant2

-6dB Bandwidth NVNT n20 5745MHz Ant1

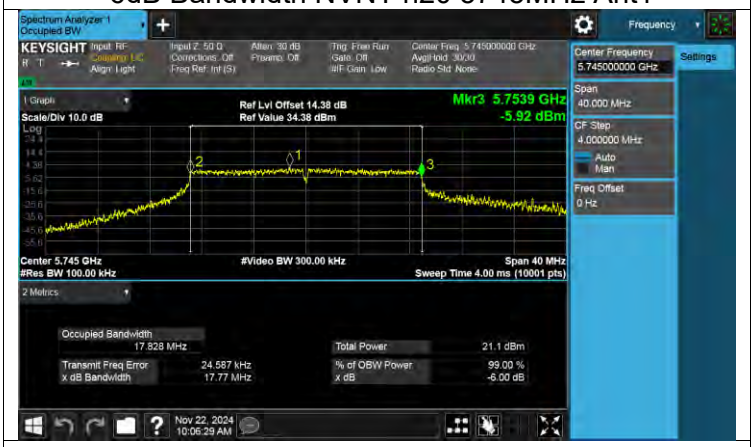

-6dB Bandwidth NVNT n20 5745MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT n20 5785MHz Ant1

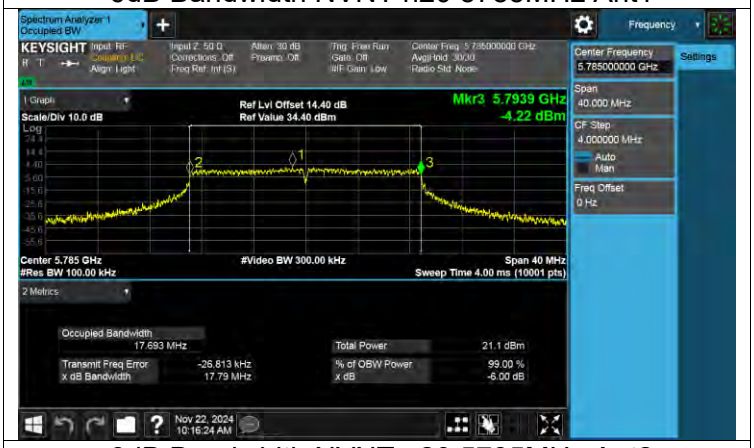

-6dB Bandwidth NVNT n20 5785MHz Ant2

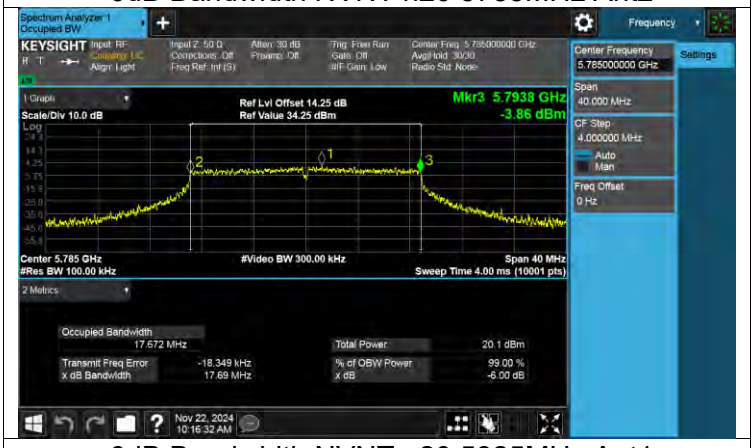

-6dB Bandwidth NVNT n20 5825MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT n20 5825MHz Ant2

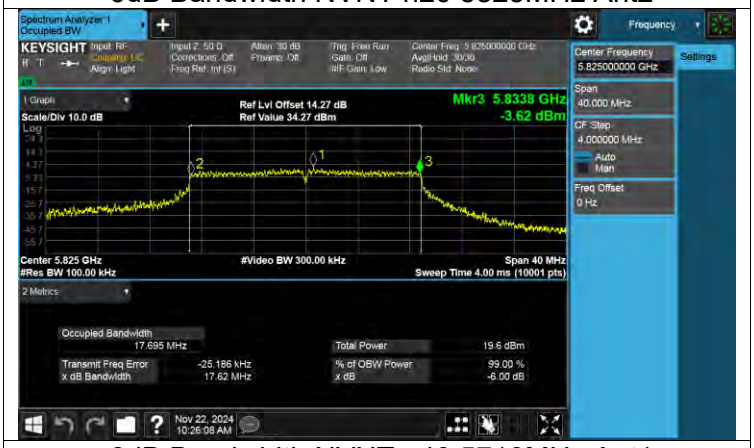

-6dB Bandwidth NVNT n40 5710MHz Ant1

-6dB Bandwidth NVNT n40 5710MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT n40 5755MHz Ant1

-6dB Bandwidth NVNT n40 5755MHz Ant2

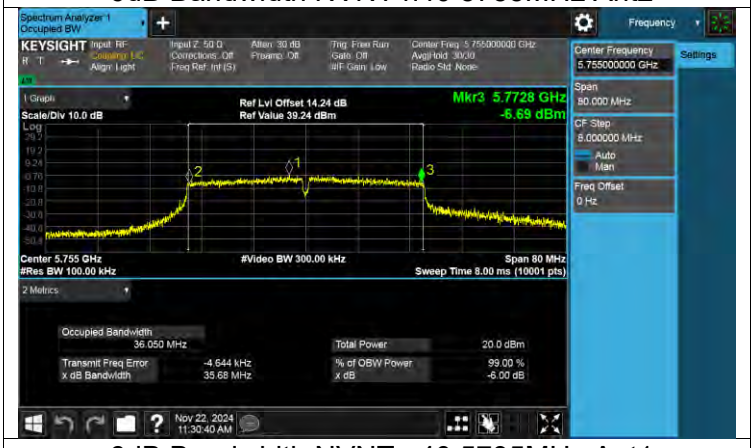

-6dB Bandwidth NVNT n40 5795MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT n40 5795MHz Ant2

-6dB Bandwidth NVNT ac80 5690MHz Ant1

-6dB Bandwidth NVNT ac80 5690MHz Ant2

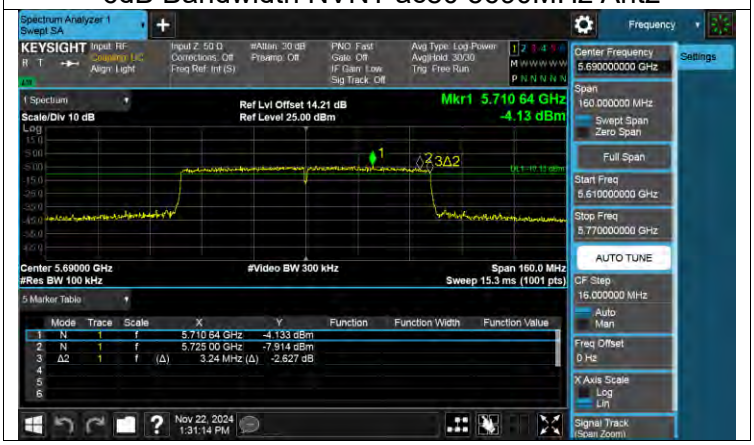

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ac80 5775MHz Ant1

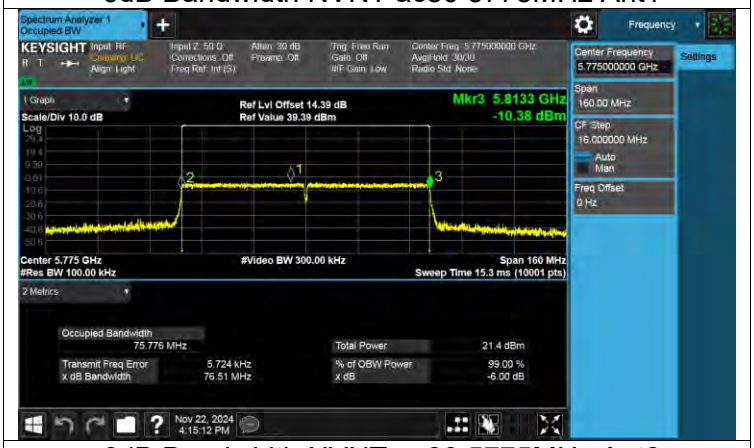

-6dB Bandwidth NVNT ac80 5775MHz Ant2

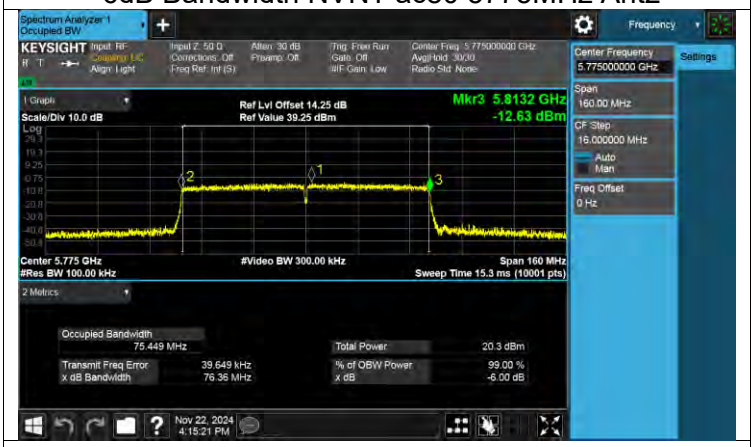

-6dB Bandwidth NVNT ax20 5720MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax20 5720MHz Ant2

-6dB Bandwidth NVNT ax20 5745MHz Ant1

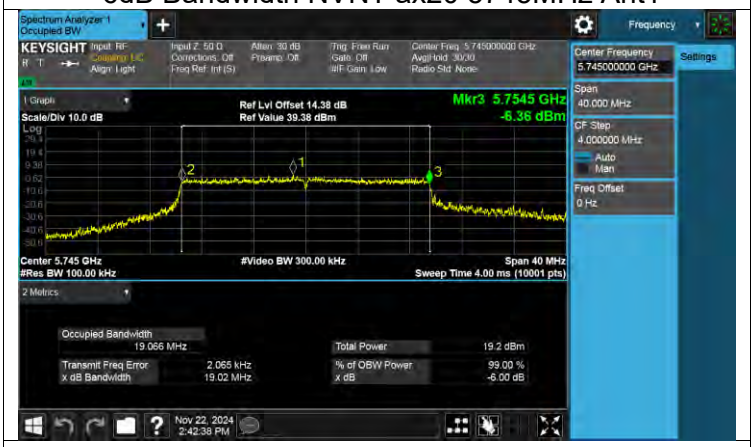

-6dB Bandwidth NVNT ax20 5745MHz Ant2

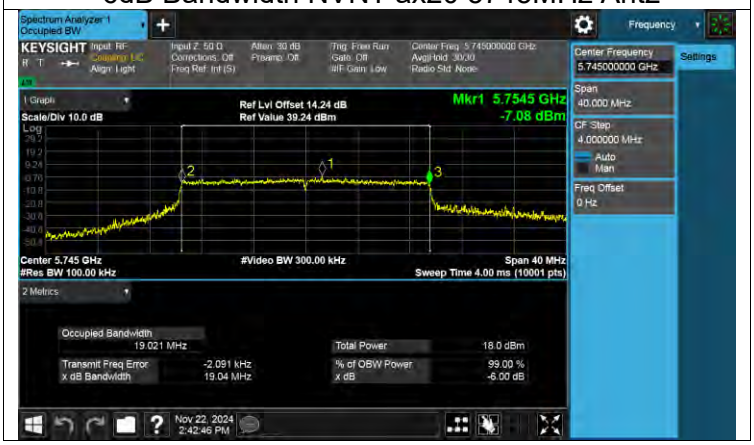

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax20 5785MHz Ant1

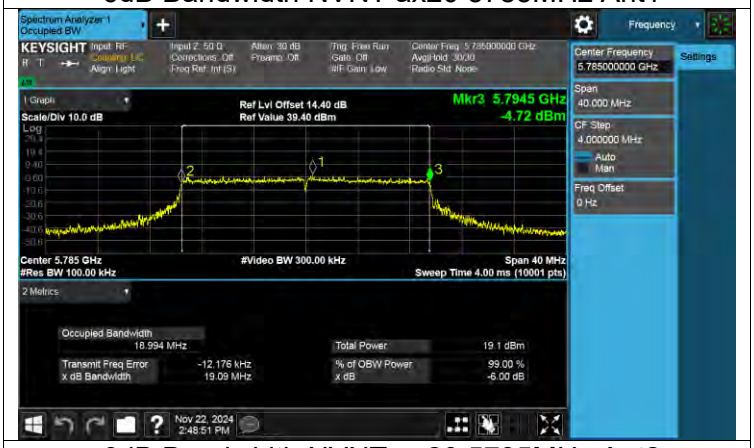

-6dB Bandwidth NVNT ax20 5785MHz Ant2

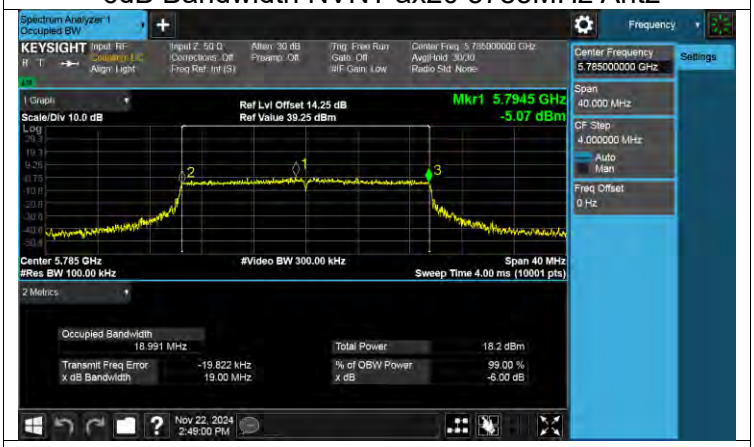

-6dB Bandwidth NVNT ax20 5825MHz Ant1

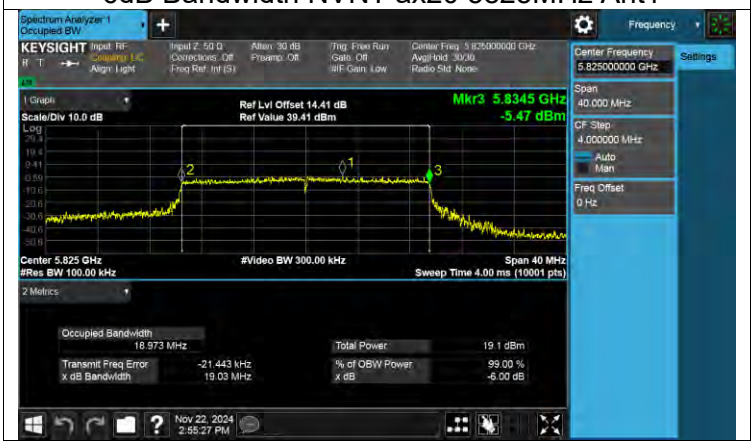

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax20 5825MHz Ant2

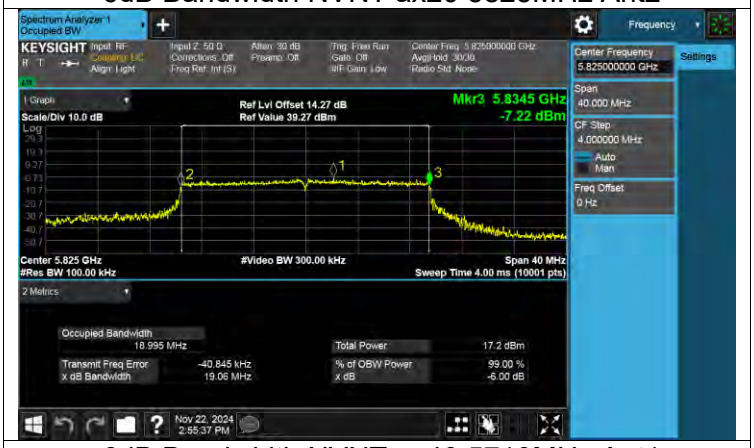

-6dB Bandwidth NVNT ax40 5710MHz Ant1

-6dB Bandwidth NVNT ax40 5710MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax40 5755MHz Ant1

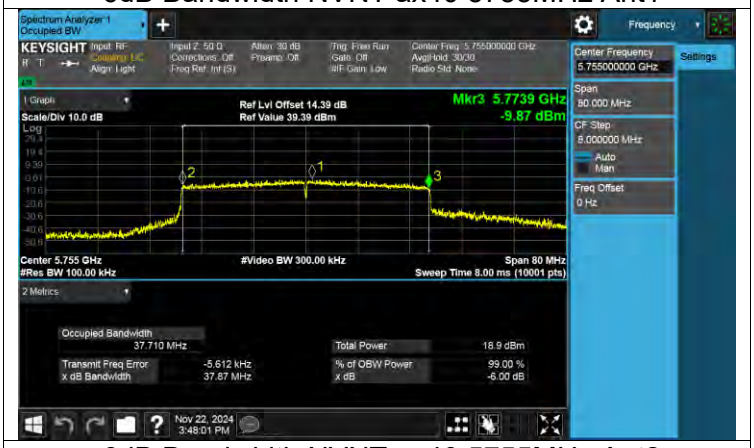

-6dB Bandwidth NVNT ax40 5755MHz Ant2

-6dB Bandwidth NVNT ax40 5795MHz Ant1

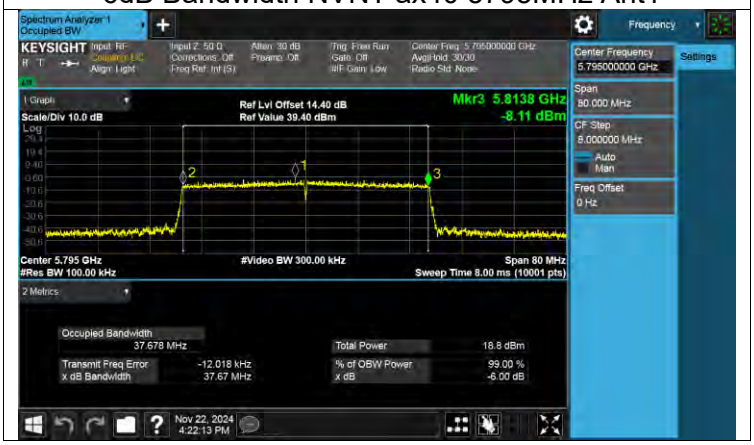

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax40 5795MHz Ant2

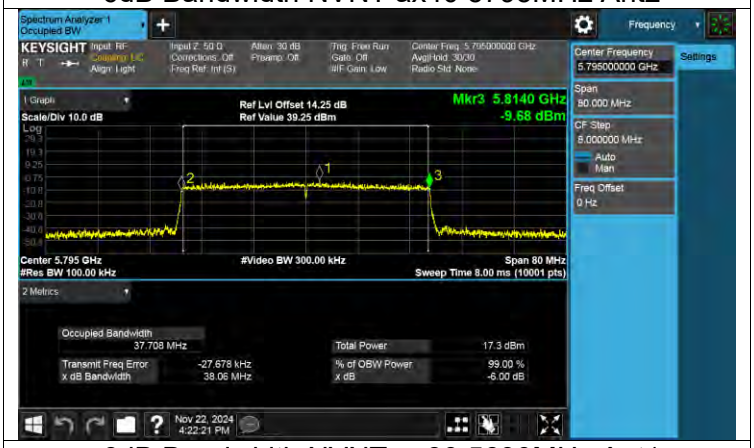

-6dB Bandwidth NVNT ax80 5690MHz Ant1

-6dB Bandwidth NVNT ax80 5690MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-6dB Bandwidth NVNT ax80 5775MHz Ant1

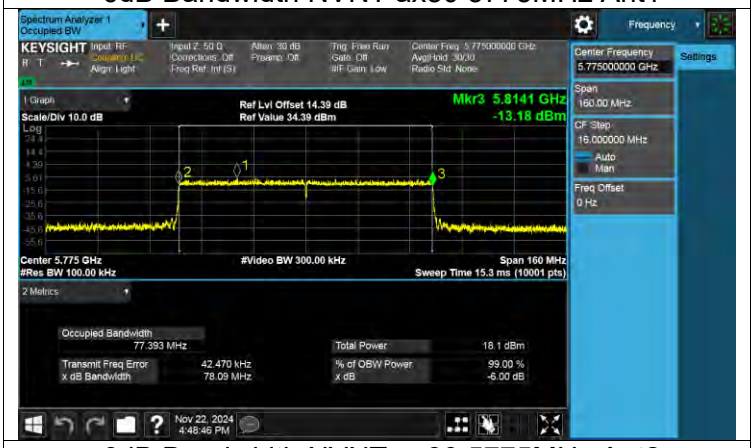

-6dB Bandwidth NVNT ax80 5775MHz Ant2

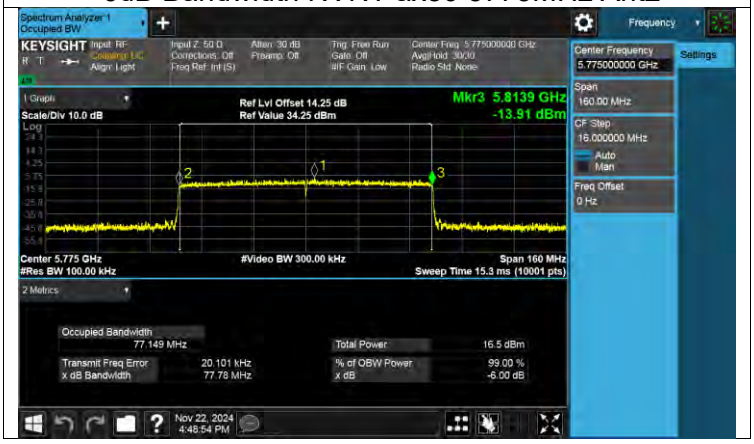

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Appendix C:-26dB Bandwidth

Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
a	5180	Ant1	28	Pass
a	5180	Ant2	29.08	Pass
a	5200	Ant1	29.76	Pass
a	5200	Ant2	27.6	Pass
a	5240	Ant1	20.93	Pass
a	5240	Ant2	21.01	Pass
a	5260	Ant1	19.86	Pass
a	5260	Ant2	20.81	Pass
a	5280	Ant1	20.54	Pass
a	5280	Ant2	22.31	Pass
a	5320	Ant1	29.81	Pass
a	5320	Ant2	30.04	Pass
a	5500	Ant1	29.4	Pass
a	5500	Ant2	30.67	Pass
a	5580	Ant1	21.02	Pass
a	5580	Ant2	20.92	Pass
a	5700	Ant1	28.73	Pass
a	5700	Ant2	28.83	Pass
a	5720 Low	Ant1	15.92	Pass
a	5720 High	Ant1	5.88	Pass
a	5720 Low	Ant2	16.44	Pass
a	5720 High	Ant2	5.64	Pass
a	5745	Ant1	25.11	Pass
a	5745	Ant2	26.38	Pass
a	5785	Ant1	21.63	Pass
a	5785	Ant2	20.85	Pass
a	5825	Ant1	21.01	Pass
a	5825	Ant2	20.73	Pass
n20	5180	Ant1	29.52	Pass
n20	5180	Ant2	29.66	Pass
n20	5200	Ant1	29.36	Pass
n20	5200	Ant2	28.15	Pass
n20	5240	Ant1	22.57	Pass
n20	5240	Ant2	21.58	Pass
n20	5260	Ant1	22.12	Pass
n20	5260	Ant2	22.01	Pass
n20	5280	Ant1	21.8	Pass
n20	5280	Ant2	21.84	Pass
n20	5320	Ant1	31.78	Pass
n20	5320	Ant2	32.16	Pass
n20	5500	Ant1	30.03	Pass
n20	5500	Ant2	28.4	Pass
n20	5580	Ant1	22.32	Pass
n20	5580	Ant2	22.58	Pass
n20	5700	Ant1	28.69	Pass
n20	5700	Ant2	27.8	Pass
n20	5720 Low	Ant1	16.24	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

n20	5720 High	Ant1	6.16	Pass
n20	5720 Low	Ant2	16.24	Pass
n20	5720 High	Ant2	6.16	Pass
n20	5745	Ant1	26.4	Pass
n20	5745	Ant2	26.74	Pass
n20	5785	Ant1	22.71	Pass
n20	5785	Ant2	21.77	Pass
n20	5825	Ant1	23.66	Pass
n20	5825	Ant2	24.48	Pass
n40	5190	Ant1	47.1	Pass
n40	5190	Ant2	46.51	Pass
n40	5230	Ant1	40.09	Pass
n40	5230	Ant2	39.52	Pass
n40	5270	Ant1	40.05	Pass
n40	5270	Ant2	39.69	Pass
n40	5310	Ant1	51.54	Pass
n40	5310	Ant2	49.44	Pass
n40	5510	Ant1	50.94	Pass
n40	5510	Ant2	43.31	Pass
n40	5550	Ant1	40.63	Pass
n40	5550	Ant2	39.56	Pass
n40	5670	Ant1	59.06	Pass
n40	5670	Ant2	41.49	Pass
n40	5710 Low	Ant1	34.68	Pass
n40	5710 High	Ant1	4.68	Pass
n40	5710 Low	Ant2	34.2	Pass
n40	5710 High	Ant2	4.12	Pass
n40	5755	Ant1	45.85	Pass
n40	5755	Ant2	39.66	Pass
n40	5795	Ant1	40.69	Pass
n40	5795	Ant2	38.78	Pass
ac80	5210	Ant1	119.29	Pass
ac80	5210	Ant2	92.88	Pass
ac80	5290	Ant1	119.88	Pass
ac80	5290	Ant2	101.77	Pass
ac80	5530	Ant1	112.37	Pass
ac80	5530	Ant2	96.64	Pass
ac80	5610	Ant1	79.74	Pass
ac80	5610	Ant2	79.2	Pass
ac80	5690 Low	Ant1	75	Pass
ac80	5690 High	Ant1	5	Pass
ac80	5690 Low	Ant2	75	Pass
ac80	5690 High	Ant2	4.84	Pass
ac80	5775	Ant1	79.79	Pass
ac80	5775	Ant2	79.6	Pass
ax20	5180	Ant1	28.16	Pass
ax20	5180	Ant2	28.34	Pass
ax20	5200	Ant1	32.69	Pass
ax20	5200	Ant2	32.11	Pass
ax20	5240	Ant1	22.65	Pass
ax20	5240	Ant2	21.62	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

ax20	5260	Ant1	21.98	Pass
ax20	5260	Ant2	22.05	Pass
ax20	5280	Ant1	21.64	Pass
ax20	5280	Ant2	22.08	Pass
ax20	5320	Ant1	32.62	Pass
ax20	5320	Ant2	31.48	Pass
ax20	5500	Ant1	29.76	Pass
ax20	5500	Ant2	28.17	Pass
ax20	5580	Ant1	21.98	Pass
ax20	5580	Ant2	22.89	Pass
ax20	5700	Ant1	27.55	Pass
ax20	5700	Ant2	31.86	Pass
ax20	5720 Low	Ant1	16.76	Pass
ax20	5720 High	Ant1	6.36	Pass
ax20	5720 Low	Ant2	16.28	Pass
ax20	5720 High	Ant2	5.76	Pass
ax20	5745	Ant1	26.02	Pass
ax20	5745	Ant2	25.12	Pass
ax20	5785	Ant1	22.06	Pass
ax20	5785	Ant2	22.01	Pass
ax20	5825	Ant1	21.52	Pass
ax20	5825	Ant2	21.55	Pass
ax40	5190	Ant1	46.02	Pass
ax40	5190	Ant2	43.47	Pass
ax40	5230	Ant1	39.12	Pass
ax40	5230	Ant2	39.06	Pass
ax40	5270	Ant1	39.38	Pass
ax40	5270	Ant2	39.17	Pass
ax40	5310	Ant1	42.79	Pass
ax40	5310	Ant2	48.86	Pass
ax40	5510	Ant1	46.05	Pass
ax40	5510	Ant2	41.21	Pass
ax40	5550	Ant1	39.55	Pass
ax40	5550	Ant2	39.51	Pass
ax40	5670	Ant1	48.06	Pass
ax40	5670	Ant2	46.28	Pass
ax40	5710 Low	Ant1	34.6	Pass
ax40	5710 High	Ant1	4.68	Pass
ax40	5710 Low	Ant2	34.68	Pass
ax40	5710 High	Ant2	4.52	Pass
ax40	5755	Ant1	40.28	Pass
ax40	5755	Ant2	43.43	Pass
ax40	5795	Ant1	39.59	Pass
ax40	5795	Ant2	39.28	Pass
ax80	5210	Ant1	91.92	Pass
ax80	5210	Ant2	79.9	Pass
ax80	5290	Ant1	95.08	Pass
ax80	5290	Ant2	80.62	Pass
ax80	5530	Ant1	97.14	Pass
ax80	5530	Ant2	80.09	Pass
ax80	5610	Ant1	79.88	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

ax80	5610	Ant2	79.78	Pass
ax80	5690 Low	Ant1	75.32	Pass
ax80	5690 High	Ant1	5.16	Pass
ax80	5690 Low	Ant2	74.84	Pass
ax80	5690 High	Ant2	5	Pass
ax80	5775	Ant1	80.08	Pass
ax80	5775	Ant2	79.72	Pass

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

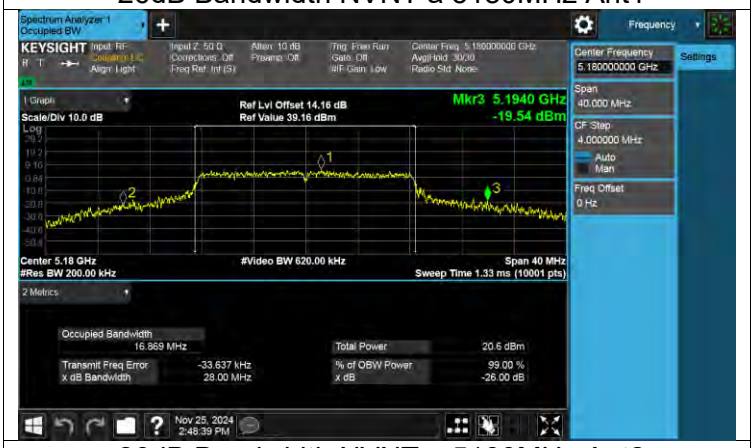

-26dB Bandwidth NVNT a 5180MHz Ant2

-26dB Bandwidth NVNT a 5200MHz Ant1

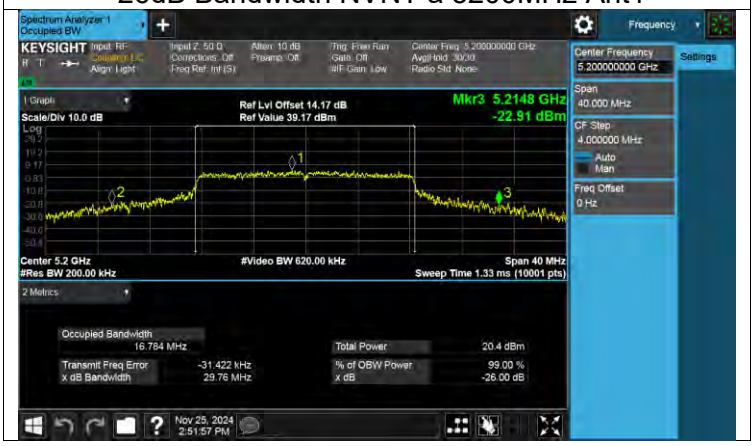

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5200MHz Ant2

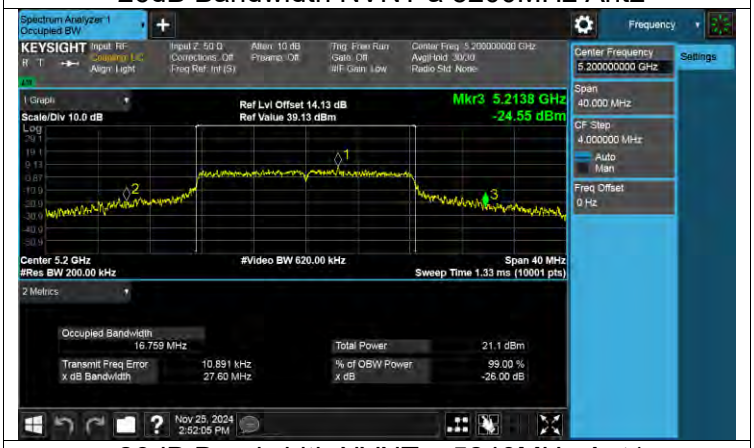

-26dB Bandwidth NVNT a 5240MHz Ant1

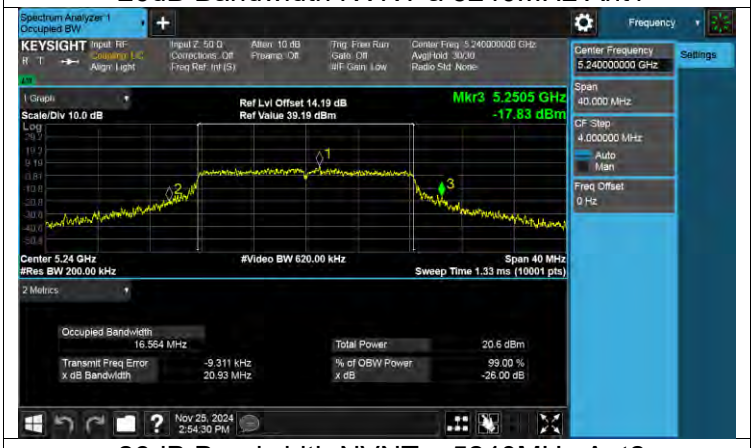

-26dB Bandwidth NVNT a 5240MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5260MHz Ant1

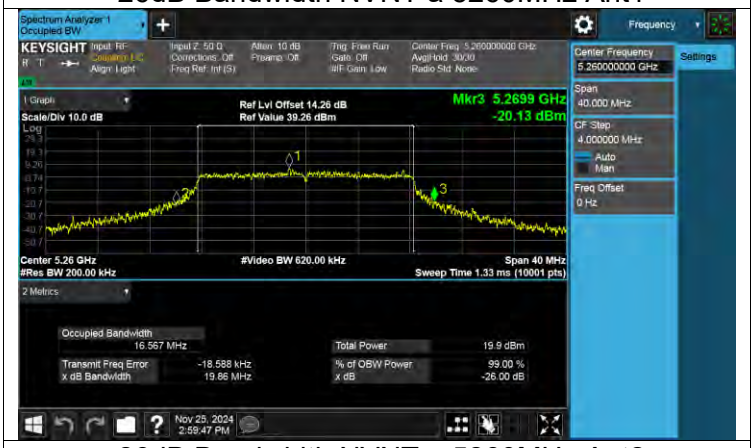

-26dB Bandwidth NVNT a 5260MHz Ant2

-26dB Bandwidth NVNT a 5280MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5280MHz Ant2

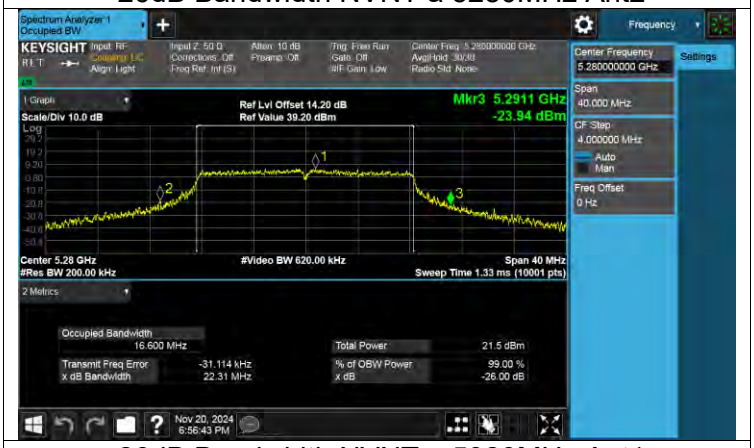

-26dB Bandwidth NVNT a 5320MHz Ant1

-26dB Bandwidth NVNT a 5320MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5500MHz Ant1

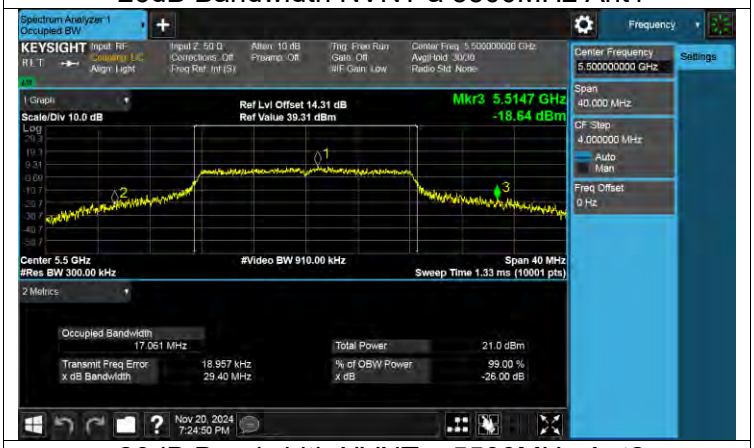

-26dB Bandwidth NVNT a 5500MHz Ant2

-26dB Bandwidth NVNT a 5580MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5580MHz Ant2

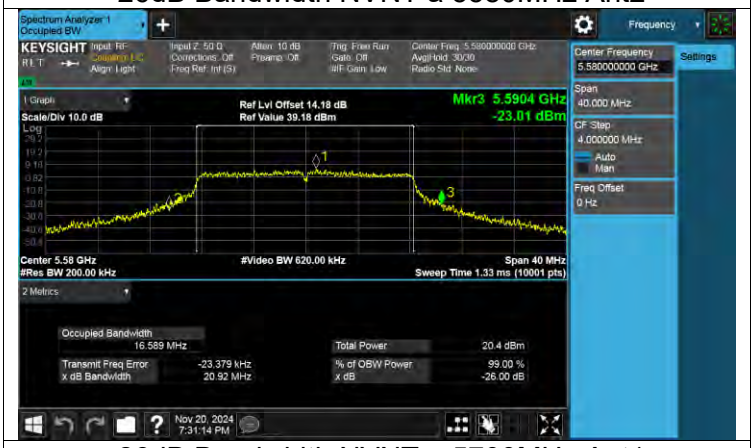

-26dB Bandwidth NVNT a 5700MHz Ant1

-26dB Bandwidth NVNT a 5700MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5720MHz Ant1

-26dB Bandwidth NVNT a 5720MHz Ant2

-26dB Bandwidth NVNT a 5745MHz Ant1

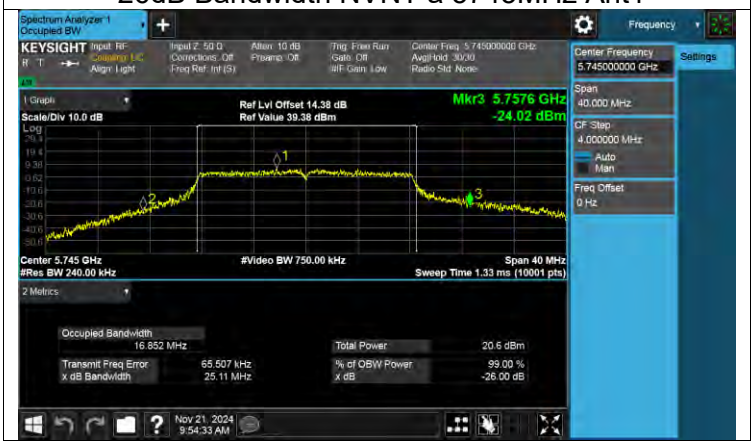

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5745MHz Ant2

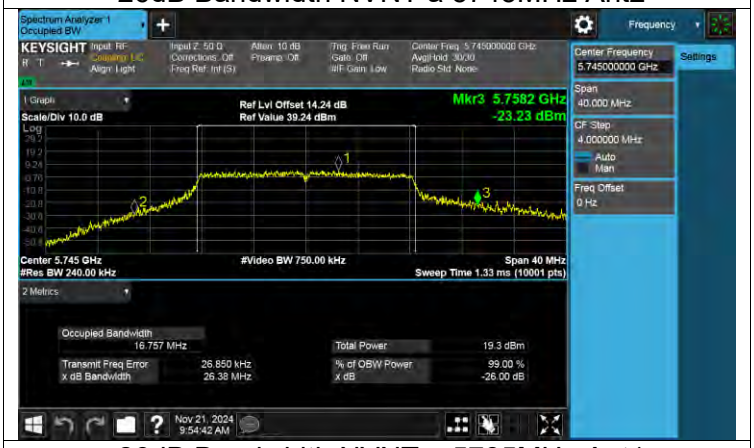

-26dB Bandwidth NVNT a 5785MHz Ant1

-26dB Bandwidth NVNT a 5785MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT a 5825MHz Ant1

-26dB Bandwidth NVNT a 5825MHz Ant2

-26dB Bandwidth NVNT n20 5180MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5180MHz Ant2

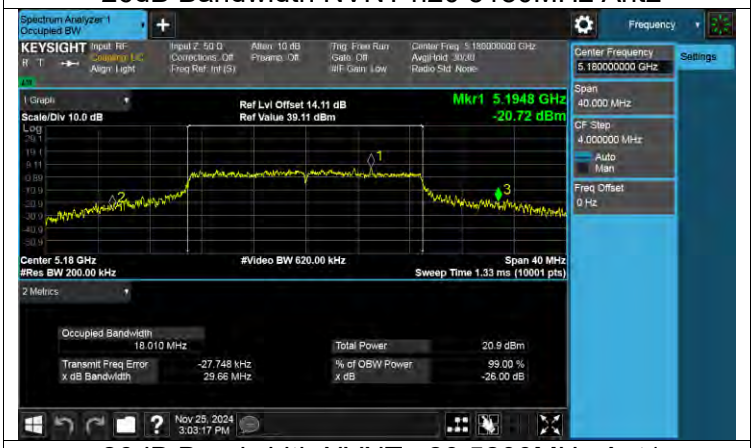

-26dB Bandwidth NVNT n20 5200MHz Ant1

-26dB Bandwidth NVNT n20 5200MHz Ant2

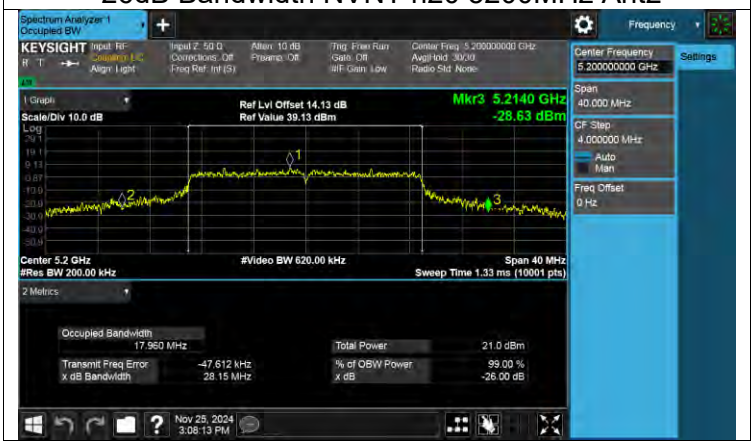

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5240MHz Ant1

-26dB Bandwidth NVNT n20 5240MHz Ant2

-26dB Bandwidth NVNT n20 5260MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5260MHz Ant2

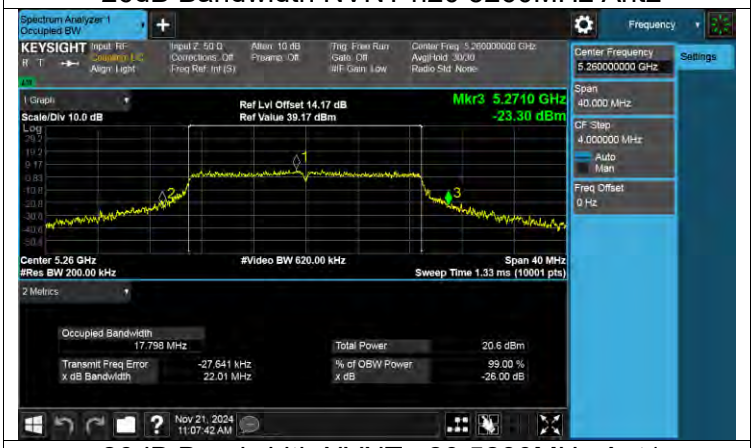

-26dB Bandwidth NVNT n20 5280MHz Ant1

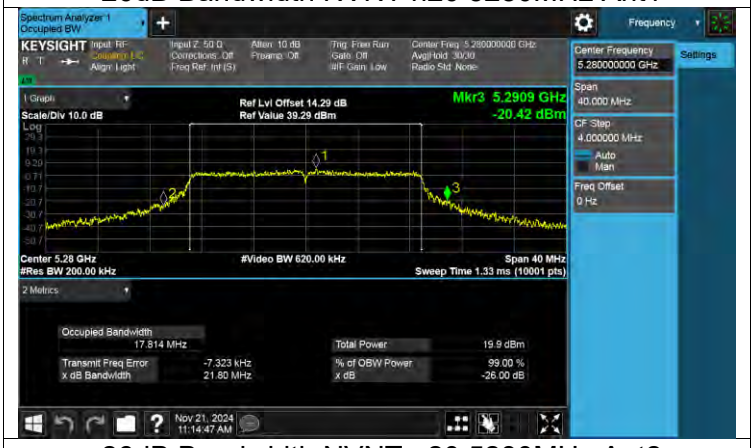

-26dB Bandwidth NVNT n20 5280MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5320MHz Ant1

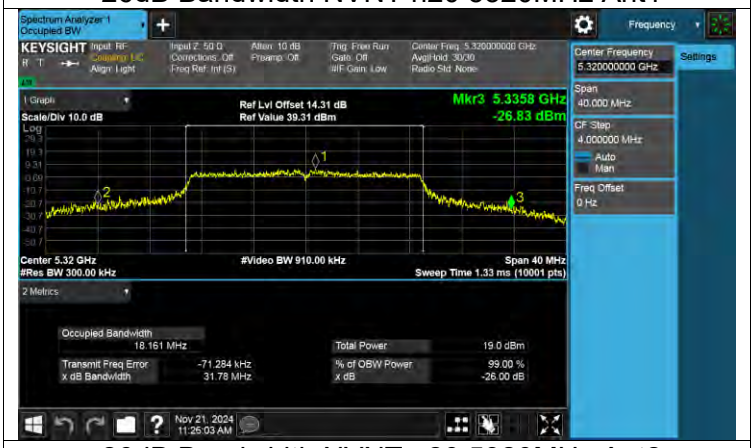

-26dB Bandwidth NVNT n20 5320MHz Ant2

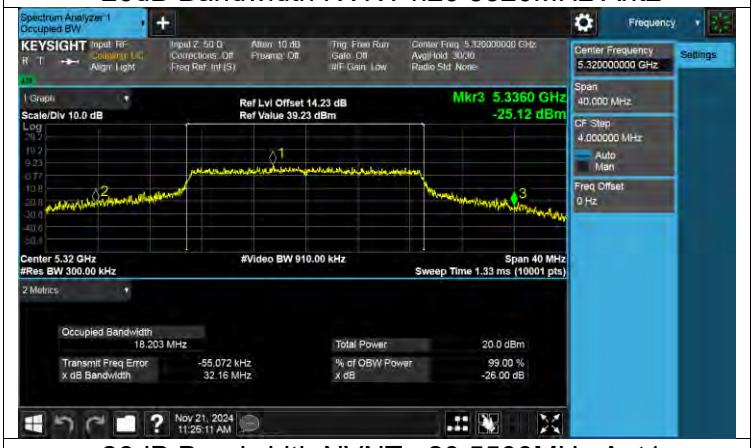

-26dB Bandwidth NVNT n20 5500MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5500MHz Ant2

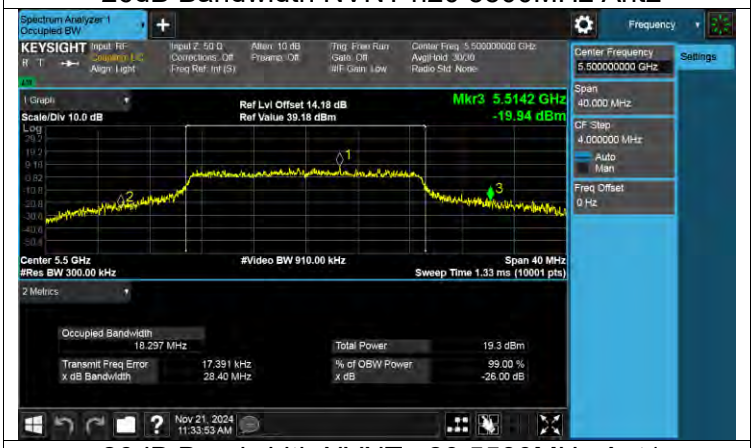

-26dB Bandwidth NVNT n20 5580MHz Ant1

-26dB Bandwidth NVNT n20 5580MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5700MHz Ant1

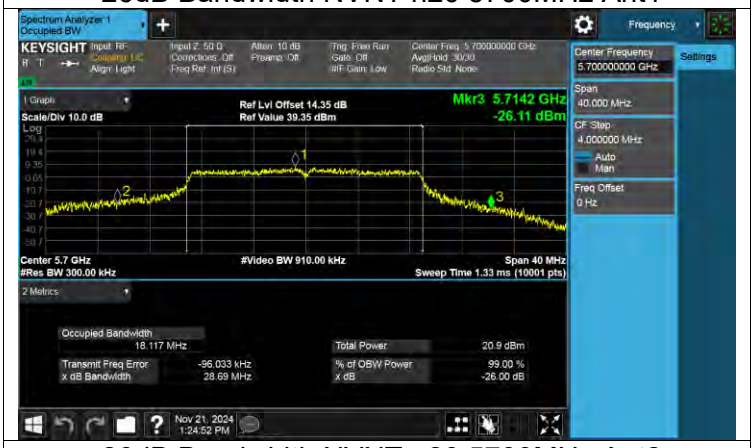

-26dB Bandwidth NVNT n20 5700MHz Ant2

-26dB Bandwidth NVNT n20 5720MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5720MHz Ant2

-26dB Bandwidth NVNT n20 5745MHz Ant1

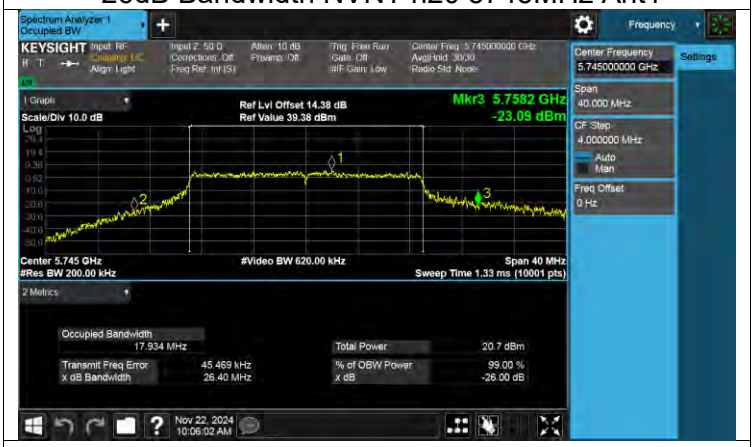

-26dB Bandwidth NVNT n20 5745MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5785MHz Ant1

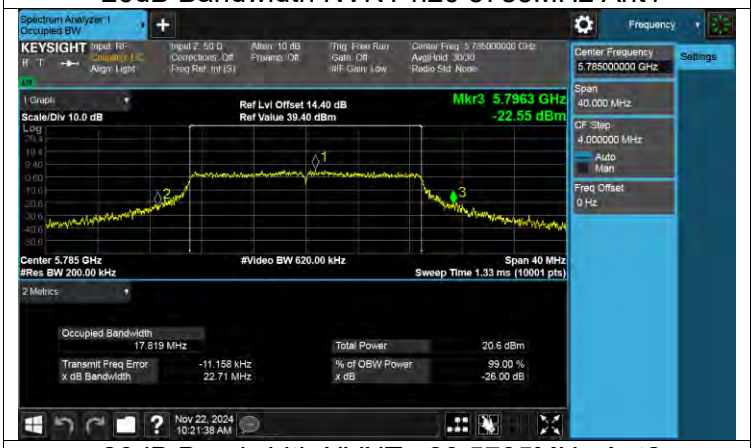

-26dB Bandwidth NVNT n20 5785MHz Ant2

-26dB Bandwidth NVNT n20 5825MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n20 5825MHz Ant2

-26dB Bandwidth NVNT n40 5190MHz Ant1

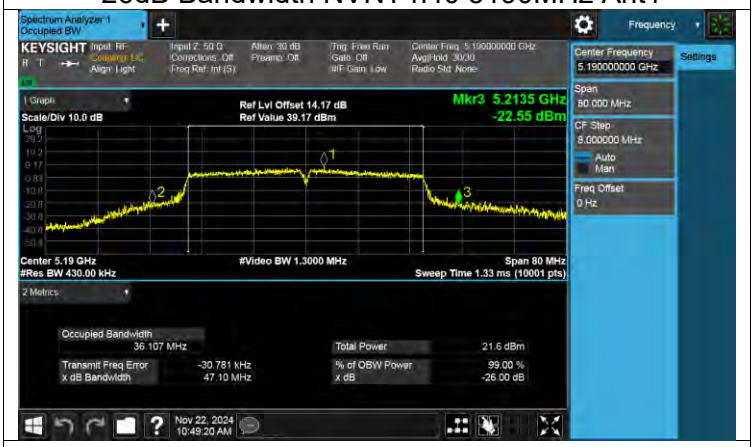

-26dB Bandwidth NVNT n40 5190MHz Ant2

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n40 5230MHz Ant1

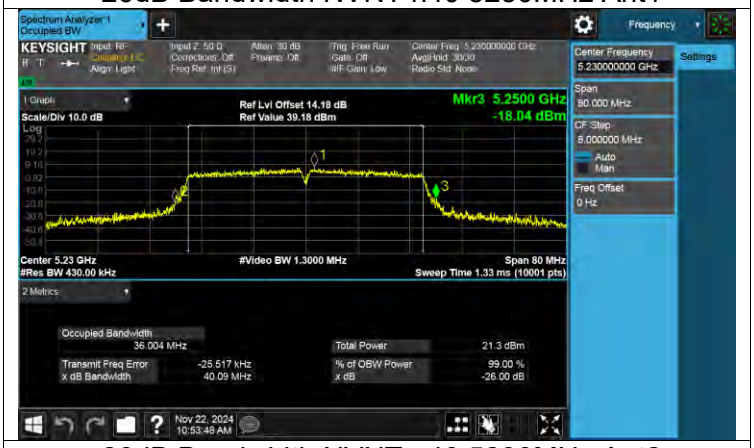

-26dB Bandwidth NVNT n40 5230MHz Ant2

-26dB Bandwidth NVNT n40 5270MHz Ant1

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.

-26dB Bandwidth NVNT n40 5270MHz Ant2

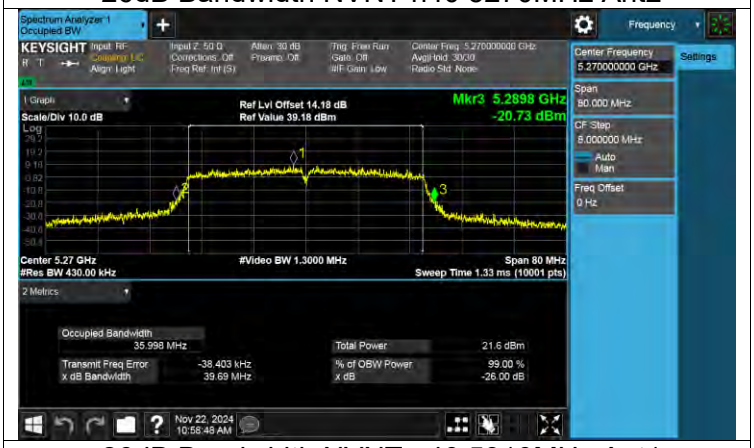

-26dB Bandwidth NVNT n40 5310MHz Ant1

-26dB Bandwidth NVNT n40 5310MHz Ant2

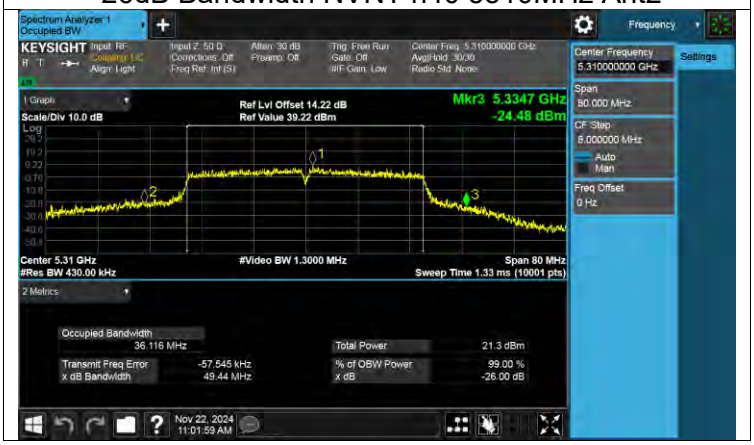

This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.