

# **Class II Permissive Change Test Report**

**FOR**

**FCC Part 15 Subpart B & C**

*of*

**Wireless LAN Module**

*Model/ Type/ Machine Type*

**MPCI-101**

*Applied by:*

Acer Inc.  
21th Fl., 88, Sec.1, Hsin Tai Wu Rd.,  
Hsichih, Taipei Hsien 221,  
Taiwan, R.O.C.



(NVLAP Lab. Code: 200234-0)

*Test Performed by:*

**International Standards Laboratory**

No. 65, Ku Dai Keng St.  
Hsichih, Taipei Hsien 22117  
Taiwan, R.O.C.

Tel:(02)2646-2550  
Fax:(02)2646-4641

## Contents of Report

|           |                                                                                  |    |
|-----------|----------------------------------------------------------------------------------|----|
| <u>1.</u> | <u>General</u>                                                                   | 1  |
| 1.1       | <u>Certification of Accuracy of Test Data</u>                                    | 1  |
| 1.2       | <u>Description of Equipment Under Test (EUT)</u>                                 | 2  |
| 1.3       | <u>Description of EUT and Support Equipment Included in Tests</u>                | 3  |
| 1.4       | <u>Test Standards and Procedure</u>                                              | 3  |
| 1.5       | <u>Frequency and Channel</u>                                                     | 4  |
| 1.6       | <u>List of Measurements</u>                                                      | 4  |
| 1.7       | <u>General Test Conditions</u>                                                   | 4  |
| <u>2.</u> | <u>Power Line Conducted Emissions [Section 15.207]</u>                           | 5  |
| 2.1       | <u>EUT Configuration</u>                                                         | 5  |
| 2.2       | <u>Test Procedure</u>                                                            | 5  |
| 2.3       | <u>EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)</u> | 5  |
| 2.4       | <u>Test Data :</u>                                                               | 6  |
| <u>3.</u> | <u>RF Exposure Measurement [Section 15.247(b)(4) &amp; 1.1307(b)(1) MPE ]</u>    | 7  |
| 3.1       | <u>Limits for Maximum Permissible Exposure (MPE)</u>                             | 7  |
| 3.2       | <u>RF Exposure Calculations:</u>                                                 | 7  |
| <u>4.</u> | <u>Radiated Emission Measurement [Section [15.247(c)(4)]</u>                     | 8  |
| 4.1       | <u>EUT Configuration</u>                                                         | 8  |
| 4.2       | <u>Test Procedure</u>                                                            | 8  |
| 4.3       | <u>EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)</u> | 8  |
| 4.4       | <u>Test Data :</u>                                                               | 9  |
| <u>5.</u> | <u>Appendix</u>                                                                  | 14 |
| 5.1       | <u>Appendix A: Warning Labels</u>                                                | 14 |
| 5.2       | <u>Appendix B: Warning Statement</u>                                             | 15 |
| 5.3       | <u>Appendix C: Measurement Procedure for Power Line Conducted Emissions</u>      | 16 |
| 5.4       | <u>Appendix D: Test Procedure for Radiated Emissions</u>                         | 17 |
| 5.5       | <u>Appendix E: Description of Open Field Test Site</u>                           | 18 |
| 5.6       | <u>Appendix F: Test Equipment</u>                                                | 19 |
| 5.6.1     | <u>Test Equipment List</u>                                                       | 19 |
| 5.6.2     | <u>Software for Controlling Spectrum/Receiver and Calculating Test Data</u>      | 20 |
| 5.7       | <u>Appendix G: Layout of EUT and Support Equipment</u>                           | 21 |
| 5.7.1     | <u>General Conducted Test Configuration</u>                                      | 21 |
| 5.7.2     | <u>General Radiation Test Configuration</u>                                      | 22 |
| 5.8       | <u>Appendix H: Description of Support Equipment</u>                              | 23 |
| 5.8.1     | <u>Description of Support Equipment</u>                                          | 23 |
| 5.8.2     | <u>Software for Controlling Support Unit</u>                                     | 26 |
| 5.8.3     | <u>I/O Cable Condition of EUT and Support Units</u>                              | 27 |
| 5.9       | <u>Appendix I: Accuracy of Measurement</u>                                       | 28 |
| 5.10      | <u>Appendix J: Photographs of EUT Configuration Test Set Up</u>                  | 29 |
| 5.11      | <u>Appendix K: Antenna Spec.</u>                                                 | 31 |

# 1. General

## 1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the technical requirement specified in CFR 47 Part 15 Subpart C (Section 15.247), Subpart B and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

**Equipment Tested:** Wireless LAN Module  
Model/ Type/ Machine Type: MPCI-101  
Applied by Acer Inc.

**Sample received Date:** 2002/03/28


**Final test Date :** 2002/04/19

Temperature 20°C(Conduction Test); 24°C (Radiation Test)  
Humidity: 42% (Conduction Test); 90% (Radiation Test)

**Test Engineer:** Alan Tsai

The results show that the sample equipment tested as described in this report is in compliance the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B; and the limits of FCC Part 15 Subpart C (Section 15.247).

Approve & Signature

  
-----  
L. Y. Soong/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions.  
This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 33 pages, including 1 cover page, 1 contents page, and 31 pages for the test description.  
This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard.  
International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

## 1.2 Description of Equipment Under Test (EUT)

|                                    |                                                                                                                                                       |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description:                       | Wireless LAN Module                                                                                                                                   |
| Model No.:                         | MPCI-101                                                                                                                                              |
| Permissive Changes:                | Built-in a New Acer Notebook PC , Model: MS2101 and Change new Antenna, type TM100(Barbet)                                                            |
| Frequency Range:                   | 2.412~2.462 GHz                                                                                                                                       |
| Support channel:                   | 11 Channels                                                                                                                                           |
| Modulation Skill                   | DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps)                                                                                                           |
| Style Interface:                   | MINI-PCI                                                                                                                                              |
| Antenna Connected:<br>Construction | The antenna is used to connected with the PCB inside the notebook. The user is not possible to change the antenna without disassembling the notebook. |
| FCC Part 15 subpart B:             | Declaration of Conformity                                                                                                                             |
| FCC Part 15 subpart C:             | Certification                                                                                                                                         |
| Power Type:                        | 5V DC (from Notebook PC)                                                                                                                              |
| Applicant:                         | Acer Inc.<br>7 Hsin Ann Rd., Science-Based Industrial Park<br>Hsinchu 30077<br>Taiwan, R. O. C.                                                       |

A more detailed, technical description of the EUT is contained in appendix H.

### 1.3 Description of EUT and Support Equipment Included in Tests

The EUT is a Wireless LAN Module (Model: MPCI-101). and was built in Acer Notebook **MS2101**, EUT was tested with the following support units:

- |                                            |                  |
|--------------------------------------------|------------------|
| 1. Sony Digital Video Camera               | Model: DCR-PC100 |
| 2. Acer USB Mouse                          | Model: MUSXT     |
| 3. KOKA Microphone                         | Model: DM-510    |
| 4. Acer Speaker                            | Model: PS033761  |
| 5. Acer Monitor                            | Model: 7377xe    |
| 6. IBM Personal Computer                   | Model: IBM2170   |
| 7. Acer Wireless LAN/Broadband/ISDN Router | Model: 914I      |
| 8. AOpen External USB CD-ROM Drive         | Model: SC-924U   |
| 9. Acer Notebook PC                        | Model: MS2101    |

A more detailed technical description of the support equipment is contained in Appendix F.

### 1.4 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart B and/or CISPR 22/EN55022, RSS210

Test procedure: ANSI C63.4, CFR 47 Sec. 15.247 as detailed in Appendices A , B.

## 1.5 Frequency and Channel

| Channel | Frequency (GHz) |
|---------|-----------------|
| 1       | 2.412           |
| 2       | 2.417           |
| 3       | 2.422           |
| 4       | 2.427           |
| 5       | 2.432           |
| 6       | 2.437           |
| 7       | 2.442           |
| 8       | 2.447           |
| 9       | 2.452           |
| 10      | 2.457           |
| 11      | 2.462           |

Note: The operating frequencies are in 2.412 GHz to 2.462GHz. According to FCC Part 15 Sec. 15.31 (m), all the items as followed in this testing report are need to test three frequencies: top: channel 1; middle: channel 6; bottom: channel 11.

## 1.6 List of Measurements

| Clause       | Test Parameter                    | Test Needed (Yes/No) |
|--------------|-----------------------------------|----------------------|
| 15.207       | Power Line Conducted Emission     | Y                    |
| 15.247(a)(2) | Bandwidth of DSSS equipment       | N (See Note 1)       |
| 15.247(b)(1) | Output power                      | N (See Note 1)       |
| 15.247(b)(4) | RF exposure measurement           | N (See Note 2)       |
| 15.247(c)    | Radiated Emissions Measurement    | Y                    |
| 15.247 (d)   | Power Spectral Density            | N (See Note 1)       |
| 15.247 (e)   | Processing Gain of DSSS equipment | N (See Note 1,3)     |

Note 1: The only changes of EUT are antenna and the Notebook used with. Because these changes will not affect the characteristic of EUT which are limited by 15.247(a), 15.247(b), 15.247(d) and 15.247(e) listed above, it is not necessary to retest these Parameter.

Note 2: Since the host equipment is a notebook computer and the transmitting antenna is installed

on the top of LCD , the normal use distance is more than 20cm, the suitable standrad for RF exporsure is §1.1307(b)(1) MPE test. The MPE evaluation data is listed in 3.2.

Note 3: The output power of EUT is less than 100mW. It is not necessary to comply the Requirement of 15.247(e).

## 1.7 General Test Conditions

During the test, the EUT was set in high power and continuously transmitting mode that Controlled by notebook computer. The channel 1, 6, 11 of EUT were all tested.

## 2. Power Line Conducted Emissions [Section 15.207]

### 2.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-1992, CFR 47 Part 15 Subpart B; or EN55022:1998; CISPR 22:1997 and RSS210.

The EUT was set up in the shielded room on the non-conductive table which is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-1992.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides a 50 OHM terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

### 2.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

### 2.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

|                             |               |
|-----------------------------|---------------|
| Frequency Range:            | 450KHz--30MHz |
| Detector Function:          | Quasi-Peak    |
| Resolution Bandwidth (RBW): | 9KHz          |

## 2.4 Test Data :

**Table 2.5.1 Power Line Conducted Emissions (Hot) Channel 1, 6, 11**

| Frequency<br>(KHz/MHz) | LISN                   | Quasi-Peak          |                 |                |
|------------------------|------------------------|---------------------|-----------------|----------------|
|                        | Insertion Loss<br>(dB) | Amplitude<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) |
| 575.13KH<br>Z          | 0.28                   | 41.22               | 48.00           | -6.78          |
| 789.56KH<br>Z          | 0.32                   | 39.49               | 48.00           | -8.51          |
| 862.03KH<br>Z          | 0.34                   | 39.81               | 48.00           | -8.19          |
| 1.0771MH<br>Z          | 0.38                   | 39.68               | 48.00           | -8.32          |
| 1.2925MH<br>Z          | 0.39                   | 39.03               | 48.00           | -8.97          |
| 1.5086MH<br>Z          | 0.41                   | 38.09               | 48.00           | -9.91          |
| 1.5801MH<br>Z          | 0.42                   | 37.80               | 48.00           | -10.20         |
| 1.7973MH<br>Z          | 0.43                   | 37.08               | 48.00           | -10.92         |

**Table 2.5.2 Power Line Conducted Emissions (Neutral) Channel 1, 6, 11**

| Frequency<br>(KHz/MHz) | LISN                   | Quasi-Peak          |                 |                |
|------------------------|------------------------|---------------------|-----------------|----------------|
|                        | Insertion Loss<br>(dB) | Amplitude<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) |
| 573.98KH<br>Z          | 0.35                   | 40.72               | 48.00           | -7.28          |
| 861.43KH<br>Z          | 0.36                   | 39.32               | 48.00           | -8.68          |
| 1.077MHZ               | 0.38                   | 39.26               | 48.00           | -8.74          |
| 1.293MHZ               | 0.39                   | 38.72               | 48.00           | -9.28          |
| 1.5078MH<br>Z          | 0.41                   | 37.83               | 48.00           | -10.37         |
| 1.5796MH<br>Z          | 0.42                   | 37.78               | 48.00           | -10.24         |
| 1.7961MH<br>Z          | 0.43                   | 37.45               | 48.00           | -10.55         |

\* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels.

Margin = Amplitude + Insertion Loss- Limit

A margin of -8dB means that the emission is 8dB below the limit

### 3. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)(1) MPE ]

#### 3.1 Limits for Maximum Permissible Exposure (MPE)

##### A. Limits for Occupational/Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength(V/m) | Magnetic Field Strength (A/m) | Power Density (S) (mW/cm <sup>2</sup> ) | Averaging Time (Minutes) |
|-----------------------|------------------------------|-------------------------------|-----------------------------------------|--------------------------|
| 300-1500              | ----                         | -----                         | f/300                                   | 30                       |
| 1500-100,000          | ----                         | -----                         | 5                                       | 30                       |

##### B. Limits for Occupational/Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength(V/m) | Magnetic Field Strength (A/m) | Power Density (S) (mW/cm <sup>2</sup> ) | Averaging Time (Minutes) |
|-----------------------|------------------------------|-------------------------------|-----------------------------------------|--------------------------|
| 300-1500              | ----                         | -----                         | f/1500                                  | 30                       |
| 1500-100,000          | ----                         | -----                         | 1.0                                     | 30                       |

#### 3.2 RF Exposure Calculations:

Since the host equipment is notebook computer and the transmitting antenna of EUT is installed on the top of LCD, the normal use distance is more than 20cm, the suitable standard for RF exposure is §1.1307(b)(1) MPE test. According to the result of 4.3.1, the calculated minimum allowance distance of EUT is listed below:

From FCC 1.1310, the maximum permissible RF exposure for an uncontrolled environment is 1 mW/cm<sup>2</sup>.

The Minimum Allowable Distance, R, of EUT is calculated as follows:

$$\begin{aligned} \text{Friis Transmission Formula: } P_d &= (P_{\text{out}} * G) / (4 * \pi * R^2) \\ R &= [(P_{\text{out}} * G) / (4 * \pi * P_d)]^{1/2} \\ R &= [(P_{\text{out e.i.r.p.}}) / (4 * \pi * P_d)]^{1/2} \end{aligned}$$

Where  $P_d$  = power density in mW/cm<sup>2</sup> = 1mW/ cm<sup>2</sup>

$g$  = EUT Transmit antenna peak gain = 3 dBi

$G$  = EUT antenna numeric gain =  $\text{Log}^{-1}(g/10) = 1.995$

$P_{\text{out}}$  = output power to antenna in mW (Refer to original grant of EUT)  
= 3.1416

The  $P_{\text{out}}$  of EUT is: 16.21dBm (41.78mW)

The  $P_{\text{out e.i.r.p.}}$  of EUT is: 19.21dBm e.i.r.p. (83.35mW e.i.r.p.)

The MPE minimum allowance distance of EUT is : **2.58cm.**

The minimum allowable distance is very close to the enclosure of the antenna and also very far away from the human being under normal use condition. So, the RF exposure warning or SAR Measurement is not needed.

## 4. Radiated Emission Measurement [Section [15.247(c)(4)]

### 4.1 EUT Configuration

The radiated emissions test setups are in accordance with Figs 10(c) and 10(d) of ANSI C63.4-1992, CFR 47 Part 15 Subpart C; or EN55022:1998; CISPR 22:1997.

The equipment under test was set up on the 10 meter open field test non-conductive table 80cm above ground, same as conducted Excess data cable was folded back and forth to form a 30cm by 40cm bundle.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the host equipment of EUT is a Notebook Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

### 4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1G to 25GHz: The highest emissions between 1GHz to 25GHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

### 4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

|                    |                        |
|--------------------|------------------------|
| Frequency Range A: | 30MHz--1000MHz         |
| Detector Function: | Quasi-Peak Mode        |
| Bandwidth (RBW):   | 120KHz                 |
| Frequency Range B: | 1GHz—25GHz             |
| Detector Function: | Peak Mode/Average mode |
| Bandwidth (RBW):   | 1 MHz                  |

**4.4 Test Data :.****Table 3.5.1 30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1,6,11**

| Meter Reading  |                 | Correction Factor |               |                   | Corrected Emissions |                   |                 | Antenna        | Turntable       |
|----------------|-----------------|-------------------|---------------|-------------------|---------------------|-------------------|-----------------|----------------|-----------------|
| Freq.<br>(MHz) | Ampl.<br>(dBuV) | Ant.<br>(dB/m)    | Cable<br>(dB) | Pre-Ampl.<br>(dB) | Ampl.<br>(dBuV/m)   | Limit<br>(dBuV/m) | Margin*<br>(dB) | Height<br>(cm) | Position<br>(°) |
| 95.90<br>2     | 25.80           | 9.68              | 1.30          | 0.00              | 36.78               | 43.50             | -6.72           | 250.0<br>0     | 167.0<br>0      |
| 108.0<br>2     | 21.70           | 11.46             | 1.40          | 0.00              | 34.56               | 43.50             | -8.94           | 182.0<br>0     | 91.00           |
| 167.9<br>9     | 24.55           | 8.72              | 1.83          | 0.00              | 35.10               | 43.50             | -8.40           | 302.0<br>0     | 213.0<br>0      |
| 180.0<br>2     | 25.30           | 8.60              | 2.03          | 0.00              | 35.93               | 43.50             | -7.57           | 295.0<br>0     | 319.0<br>0      |
| 192.0          | 25.40           | 8.62              | 2.08          | 0.00              | 36.10               | 43.50             | -7.40           | 320.0<br>0     | 67.00           |
| 204.0<br>4     | 25.80           | 8.46              | 2.19          | 0.00              | 36.44               | 43.50             | -7.06           | 280.0<br>0     | 266.0<br>0      |
| 210.9<br>9     | 26.20           | 8.13              | 2.23          | 0.00              | 36.56               | 43.50             | -6.94           | 264.0<br>0     | 255.0<br>0      |
| 243.2<br>9     | 27.90           | 11.36             | 2.44          | 0.00              | 41.70               | 46.00             | -4.30           | 230.0<br>0     | 106.0<br>0      |
| 300.5<br>7     | 26.14           | 13.01             | 2.82          | 0.00              | 41.97               | 46.00             | -4.03           | 249.0<br>0     | 280.0<br>0      |
| 309.7          | 24.00           | 13.23             | 2.86          | 0.00              | 40.09               | 46.00             | -5.91           | 223.0<br>0     | 89.00           |
| 332.8          | 24.91           | 13.79             | 3.00          | 0.00              | 40.70               | 46.00             | -5.30           | 179.0<br>0     | 336.0<br>0      |
| 391.2<br>2     | 22.20           | 15.77             | 3.37          | 0.00              | 41.33               | 46.00             | -4.67           | 182.0<br>0     | 155.0<br>0      |
| 397.2<br>3     | 21.12           | 15.99             | 3.41          | 0.00              | 40.52               | 46.00             | -5.48           | 302.0<br>0     | 16.00           |
| 420.3<br>4     | 19.60           | 16.22             | 3.62          | 0.00              | 39.44               | 46.00             | -6.56           | 295.0<br>0     | 12.00           |
| 429.4          | 21.00           | 16.28             | 3.69          | 0.00              | 40.97               | 46.00             | -5.03           | 199.0<br>0     | 116.0<br>0      |
| 484.7<br>4     | 19.20           | 17.09             | 4.01          | 0.00              | 40.30               | 46.00             | -5.70           | 207.0<br>0     | 119.0<br>0      |
| 744.4<br>9     | 16.35           | 19.91             | 5.77          | 0.00              | 41.04               | 46.00             | -4.96           | 122.0<br>0     | 308.0<br>0      |
| 947.5<br>4     | 11.88           | 20.99             | 7.08          | 0.00              | 39.95               | 46.00             | -6.05           | 272.0<br>0     | 68.00           |

**Table 3.5.2 30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1,6,11**

| Meter Reading  |                 | Correction Factor |               |                   | Corrected Emissions |                   |                 | Antenna        | Turntable       |
|----------------|-----------------|-------------------|---------------|-------------------|---------------------|-------------------|-----------------|----------------|-----------------|
| Freq.<br>(MHz) | Ampl.<br>(dBuV) | Ant.<br>(dB/m)    | Cable<br>(dB) | Pre-Ampl.<br>(dB) | Ampl.<br>(dBuV/m)   | Limit<br>(dBuV/m) | Margin*<br>(dB) | Height<br>(cm) | Position<br>(°) |
| 78.27          | 29.10           | 6.56              | 1.10          | 0.00              | 36.76               | 40.00             | -3.24           | 183.0<br>0     | 227.0<br>0      |
| 95.90<br>2     | 25.90           | 9.68              | 1.30          | 0.00              | 36.88               | 43.50             | -6.62           | 100.0<br>0     | 55.00           |
| 108.5<br>2     | 23.50           | 11.52             | 1.41          | 0.00              | 36.43               | 43.50             | -7.07           | 105.0<br>0     | 248.0<br>0      |
| 121.7          | 23.09           | 11.93             | 1.50          | 0.00              | 36.52               | 43.50             | -7.48           | 103.0<br>0     | 321.0<br>0      |
| 168.0          | 25.80           | 8.72              | 1.83          | 0.00              | 36.35               | 43.50             | -7.15           | 100.0          | 276.0           |

|       |       |       |      |      |       |       |       |       |       |
|-------|-------|-------|------|------|-------|-------|-------|-------|-------|
| 192.0 | 26.30 | 8.62  | 2.08 | 0.00 | 37.00 | 43.50 | -6.50 | 110.0 | 263.0 |
| 195.5 | 25.90 | 8.66  | 2.12 | 0.00 | 36.67 | 43.50 | -6.83 | 100.0 | 0.00  |
| 209.2 | 26.50 | 8.15  | 2.22 | 0.00 | 36.87 | 43.50 | -6.63 | 135.0 | 274.0 |
| 243.2 | 27.70 | 11.36 | 2.44 | 0.00 | 41.50 | 46.00 | -4.50 | 100.0 | 29.00 |
| 300.6 | 26.10 | 13.01 | 2.82 | 0.00 | 41.93 | 46.00 | -4.07 | 104.0 | 360.0 |
| 332.7 | 23.90 | 13.79 | 3.00 | 0.00 | 40.69 | 46.00 | -5.31 | 100.0 | 89.00 |
| 364.9 | 23.20 | 14.77 | 3.22 | 0.00 | 41.19 | 46.00 | -4.81 | 114.0 | 93.00 |
| 420.3 | 22.10 | 16.22 | 3.62 | 0.00 | 41.94 | 46.00 | -4.06 | 100.0 | 120.0 |
| 429.3 | 20.70 | 16.28 | 3.69 | 0.00 | 40.67 | 46.00 | -5.33 | 157.0 | 0.00  |
| 551.0 | 18.00 | 18.70 | 4.45 | 0.00 | 41.15 | 46.00 | -4.85 | 280.0 | 341.0 |
| 744.4 | 14.77 | 19.91 | 5.77 | 0.00 | 40.45 | 46.00 | -5.55 | 264.0 | 227.0 |
| 947.5 | 13.70 | 20.99 | 7.08 | 0.00 | 41.77 | 46.00 | -4.23 | 176.0 | 32.00 |

\* NOTE: Margin = Corrected Amplitude – Limit  
Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain  
A margin of -8dB means that the emission is 8dB below the limit  
BILOG Antenna Distance: 3 meter, Frequency: under 1000MHz  
Horn Antenna Distance: 3 meter, Frequency: 1GHz—25GHz

**Table 3.5.3 1GHz~ 25GHz Open Field Radiated Emissions (Horizontal) Channel 1**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |
| 4823.40       | 39.90        | 33.07             | 8.90       | 44.50          | 37.37               | 54.00          | -16.63       | 100.00      | 135.00       |
| 7236.20       | 40.70        | 35.85             | 11.30      | 42.80          | 44.05               | 54.00          | -8.95        | 100.00      | 120.00       |

**Table 3.5.4 1GHz~25GHz Open Field Radiated Emissions (Vertical) Channel 1**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |

\* NOTE: Margin = Corrected Amplitude – Limit  
Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain  
A margin of -8dB means that the emission is 8dB below the limit  
BILOG Antenna Distance: 3 meter, Frequency: under 1000MHz  
Horn Antenna Distance: 3 meter, Frequency: 1GHz—25GHz

**Table 3.5.5 1GHz~ 25GHz Open Field Radiated Emissions (Horizontal) Channel 6**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |
| 4873.50       | 44.70        | 33.07             | 9.00       | 44.5           | 42.06               | 54.00          | -11.94       | 100.00      | 130.00       |
| 7311.30       | 41.50        | 35.85             | 11.40      | 42.8           | 46.94               | 54.00          | -7.06        | 100.00      | 120.00       |

**Table 3.5.6 1GHz~25GHz Open Field Radiated Emissions (Vertical) Channel 6**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |
| 4873.50       | 47.80        | 33.07             | 9.00       | 44.5           | 45.16               | 54.00          | -8.84        | 100.00      | 102.00       |
| 7311.30       | 43.60        | 35.85             | 11.40      | 42.8           | 47.85               | 54.00          | -6.15        | 100.00      | 114.00       |

\* NOTE:      Margin = Corrected Amplitude – Limit  
                   Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable  
                                                                                          Loss - Pre-Amplifier Gain  
                   A margin of -8dB means that the emission is 8dB below the limit  
                   BILOG Antenna Distance: 3 meter, Frequency: under 1000MHz  
                   Horn Antenna Distance: 3 meter, Frequency: 1GHz—25GHz

**Table 3.5.7 1GHz~ 25GHz Open Field Radiated Emissions (Horizontal) Channel 11**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |
| 4923.50       | 44.50        | 33.07             | 9.10       | 44.50          | 41.76               | 54.00          | -12.24       | 100.00      | 139.00       |
| 7386.30       | 41.60        | 35.85             | 11.50      | 42.80          | 45.75               | 54.00          | -8.25        | 100.00      | 122.00       |

**Table 3.5.8 1GHz~25GHz Open Field Radiated Emissions (Vertical) Channel 11**

| Meter Reading |              | Correction Factor |            |                | Corrected Emissions |                |              | Antenna     | Turntable    |
|---------------|--------------|-------------------|------------|----------------|---------------------|----------------|--------------|-------------|--------------|
| Freq. (MHz)   | Ampl. (dBuV) | Ant. (dB/m)       | Cable (dB) | Pre-Ampl. (dB) | Ampl. (dBuV/m)      | Limit (dBuV/m) | Margin* (dB) | Height (cm) | Position (°) |
| 4923.60       | 46.90        | 33.07             | 9.10       | 44.50          | 44.16               | 54.00          | -9.84        | 100.00      | 95.00        |
| 7386.30       | 45.30        | 35.85             | 11.50      | 42.80          | 49.45               | 54.00          | -4.55        | 100.00      | 112.00       |

\* NOTE:     Margin = Corrected Amplitude – Limit  
               Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain  
               A margin of -8dB means that the emission is 8dB below the limit  
               BILOG Antenna Distance: 3 meter, Frequency: under 1000MHz  
               Horn Antenna Distance: 3 meter, Frequency: 1GHz—25GHz

## 5. Appendix

### 5.1 Appendix A: Warning Labels

#### Label Requirements

An intentional radiator device subject to certification by the FCC shall carry a warning label which includes the following statement:

The sample label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

|                                                                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC ID: HLZMPCI-101                                                                                                                                                                                                                                                                       |
| This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:<br>(1) this device may not cause harmful interference,<br>and (2) this device must accept any interference received, including interference that may cause undesired operation. |

## 5.2 Appendix B: Warning Statement

### Statement Requirements

The operators manual for a Class B digital device shall contain the following statements or their equivalent:

#### **\* \* \* W A R N I N G \* \* \***

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

**\* \* \* \* \***

If the EUT was tested with special shielded cables the operators manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.

### 5.3 Appendix C: Measurement Procedure for Power Line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-1992, CFR 47 Part 15 Subpart B; or EN55022:1994/A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1997. The measurements are performed in a 3.5 x 3.4 x 2.5 (m) shielded room. The EUT was placed on a non-conduction 1.0 x 1.5 (m) table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-1992. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-1992, CFR 47 Part 15 Subpart B; or EN55022:1994/A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1997. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

## **5.4 Appendix D: Test Procedure for Radiated Emissions**

### **Preliminary Measurements in the Anechoic Chamber**

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUTs are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°C. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be preselected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

### **Measurements on the Open Site**

The radiated emissions test will then be repeated on the open site to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUTs are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both readings are recorded with the quasi-peak detector and with the 120 kHz bandwidth. For frequency between 30 MHz and 1000MHz, the readings are recorded with peak detector and with the 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-1992, and/or EN55022:1994/A1:1995/A2:1997 / CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

During the open site measurements, the peaks are selected, the scan frequency span width is reduced to 0--1MHz, the audible modulation is monitored with a loudspeaker and the quasi-peak reading or peak is recorded at the indicated frequency and at the specified bandwidth.

## **5.5 Appendix E: Description of Open Field Test Site**

The open field test site is located on a valley in Hsichih Chen and adjacent to Taipei City. The direct distance to Taipei City is about 12 Km. It is surrounded by hills measuring about 100 meters high.

The test platform is located on the top of the office building, approximately 12 meters wide and 17 meters long. The platform is located on the top of a very large ground metal plane to enhance a homogeneous reflective surface according to ANSI C63.4-1992, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The office building houses the test laboratory, the shielded room, for performing Line conducted test, test personal and other support staff.

## 5.6 Appendix F: Test Equipment

### 5.6.1 Test Equipment List

| Equipment                  | Brand     | Model                                   | Start Service Date | Last Cal. Date | Next Cal. Date |
|----------------------------|-----------|-----------------------------------------|--------------------|----------------|----------------|
| EMI Receiver               | R&S       | ESMI; rev. 02.80<br>S/N: 849182/003     | Nov. 09, 1999      | June. 13, 2001 | June. 13, 2002 |
| EMI Receiver               | HP        | 8546A;<br>S/N: 3520A00236               | Oct. 28, 2000      | Oct. 27, 2001  | Oct. 27, 2002  |
| BILOG Antenna              | Chase     | CBL6112B<br>S/N: 2487                   | Nov. 23, 1998      | Nov. 03, 2001  | Nov. 02, 2002  |
| Horn Antenna               | EMCO      | 3115<br>S/N: 9504-4462                  | Nov. 06, 1999      | Dec. 02, 2001  | Dec.01, 2002   |
| Pre Amplifier              | R&S       | ESMI-Z7                                 | 1045.5020          | Apr. 06, 2001  | Apr. 06, 2002  |
| Coaxial Cables             | RICHTEC   | TWB4001<br>S/N: 3F-10M                  | Aug. 31, 1995      | Jul. 24, 2001  | Jul. 24, 2002  |
| Coaxial Cables             | RICHTEC   | 9913<br>S/N: 3F-3M                      | Dec. 20, 1998      | Jan. 18, 2002  | Jan. 18, 2003  |
| Thermo-Hygro Meter         | CRECER    | HD-30<br>S/N: ISL-C-001                 | Nov. 26, 1999      | Nov. 28, 2001  | Nov. 27, 2002  |
| Horn Antenna               | COM-Power | AH-826<br>S/N: 1088                     | Oct. 21, 200       | Sep. 27, 2001  | Sep. 27, 2002  |
| RF Preamplifier            | MITEQ     | AFS44-00102650-40-10P-44<br>S/N: 728229 | Mar. 21, 2001      | Mar. 14, 2001  | Mar. 14, 2002  |
| EMI Receiver               | HP        | 8546A;<br>S/N: 3441A00208               | Sep. 08, 1997      | Dec. 13, 2001  | Dec. 13, 2002  |
| LISN 1                     | R & S     | ESH2-Z5<br>S/N: 890485/013              | Dec. 15, 1988      | Oct. 27, 2001  | Oct. 27, 2002  |
| LISN 2                     | EMCO      | 3825/2<br>S/N: 1407                     | Oct. 20, 1990      | Oct. 27, 2001  | Oct. 27, 2002  |
| Terminator                 | RICHTEC   | S/N: ISL-T-001                          | Oct. 19, 1999      | Apr. 29, 2001  | Apr. 28, 2002  |
| Terminator                 | RICHTEC   | S/N: ISL-T-002                          | Oct. 19, 1999      | Apr. 29, 2001  | Apr. 28, 2002  |
| ISN                        | Schaffner | ISN T400                                | Mar. 13, 2001      | Sep. 11, 2001  | Sep. 11, 2002  |
| Coaxial Cables             | RICHTEC   | RG400<br>S/N: 1F-C1                     | Aug. 31, 1995      | Feb. 28, 2001  | Feb. 28, 2002  |
| Coaxial Cables             | RICHTEC   | RG400<br>S/N: 1F-C2                     | Aug. 31, 1995      | Feb. 28, 2001  | Feb. 28, 2002  |
| Digital Thermo-Hygro Meter | MICROLIFE | S/N: ISL-C-002                          | Nov. 26, 1999      | Nov. 27, 2001  | Nov. 27, 2002  |


Note: Calibration traceable to NIST or national or international standards.

### 5.6.2 Software for Controlling Spectrum/Receiver and Calculating Test Data



| <b>Radiation/Conduction</b> | <b>Filename</b> | <b>Version</b> | <b>Issued Date</b> |
|-----------------------------|-----------------|----------------|--------------------|
| Conduction                  | Tile.exe        | 1.12E          | 7/7/2000           |
| Radiation                   | Tile.exe        | 1.12C          | 6/16/2000          |

## 5.7 Appendix G: Layout of EUT and Support Equipment

### 5.7.1 General Conducted Test Configuration

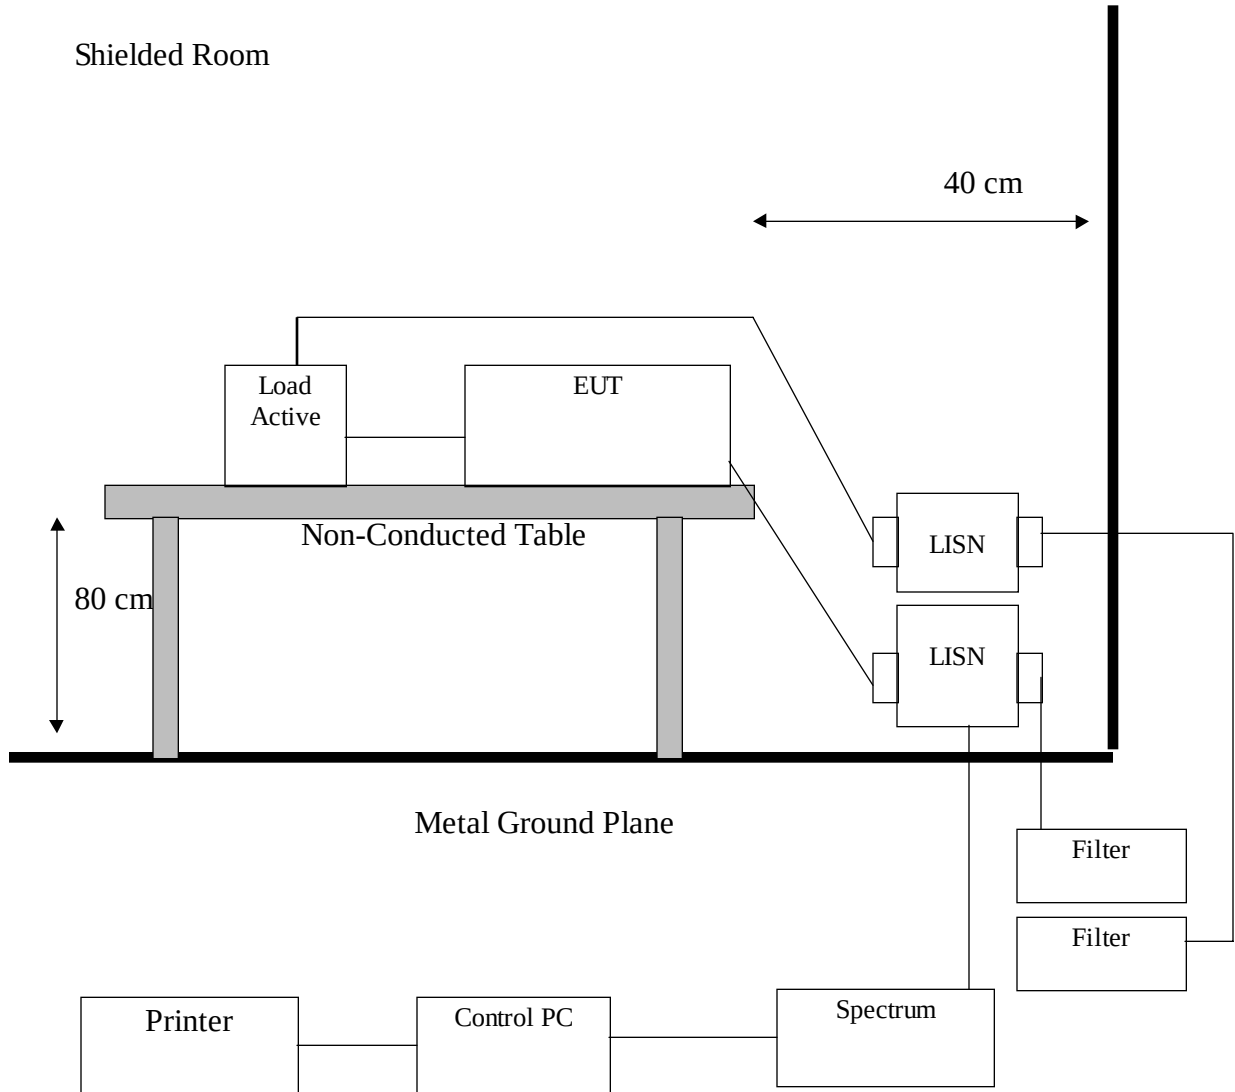

### 5.7.2 General Radiation Test Configuration

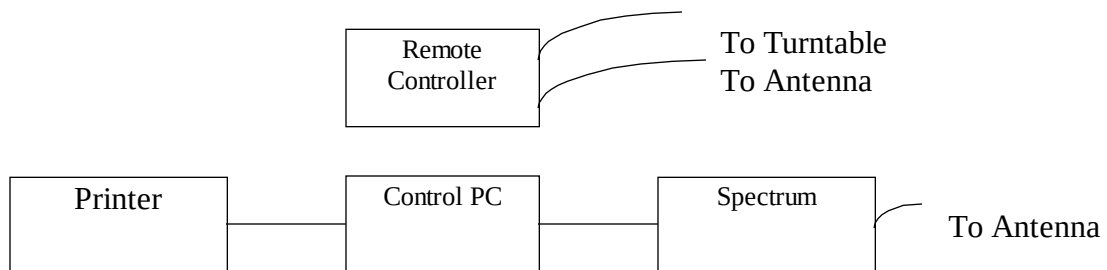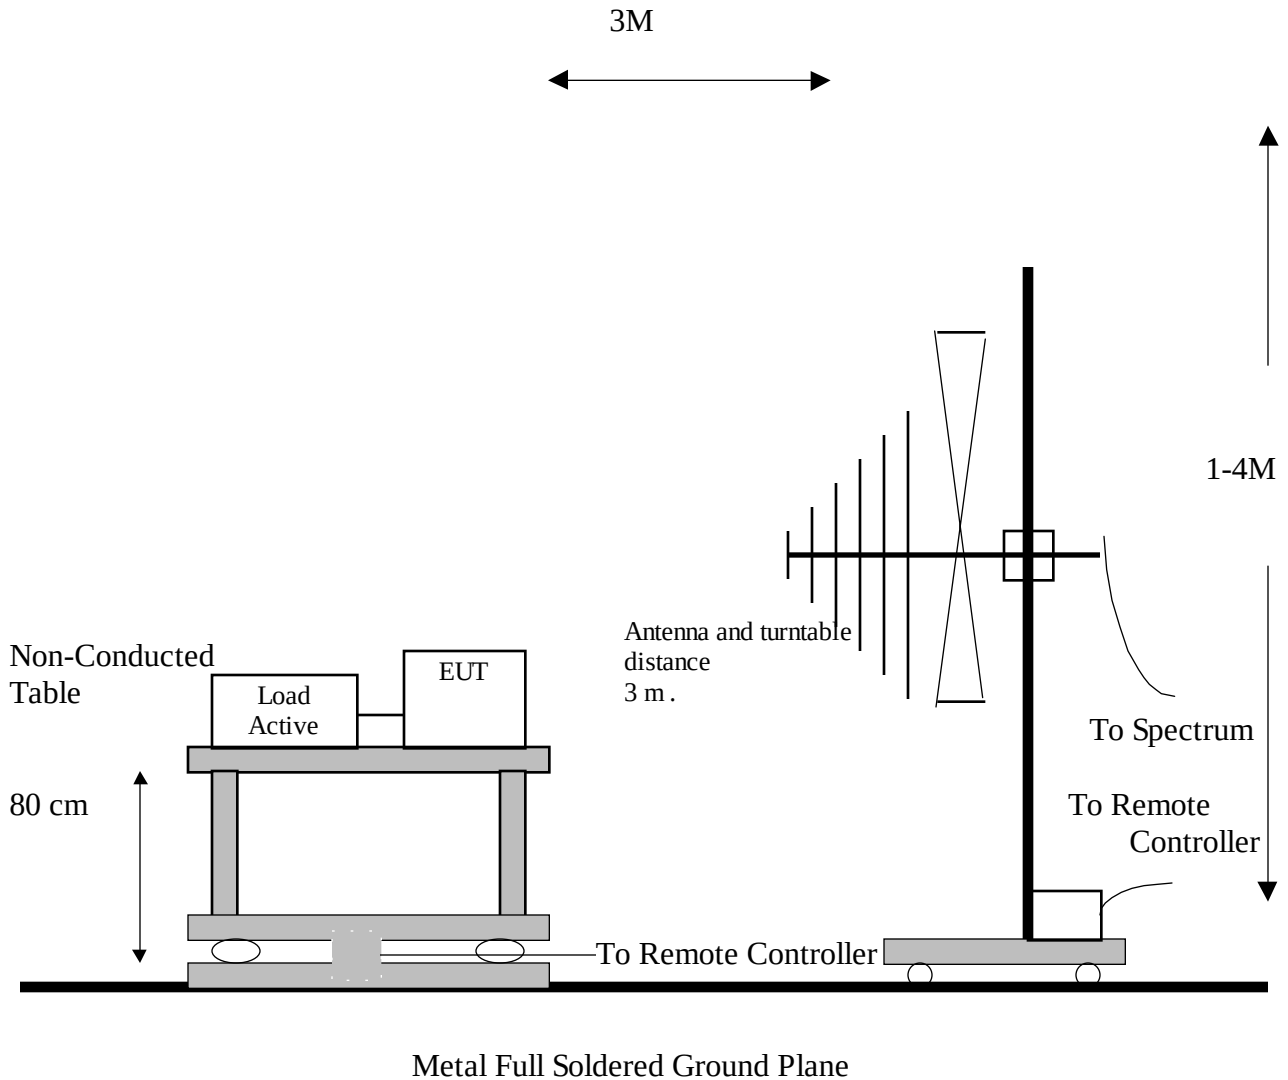

## 5.8 Appendix H: Description of Support Equipment

### 5.8.1 Description of Support Equipment

#### Support Unit 1.

|                    |                                            |
|--------------------|--------------------------------------------|
| Description:       | Digital Video Camera                       |
| Model:             | DCR-PC100                                  |
| Serial Number:     | 173009                                     |
| Power Supply Type: | AC Power Adaptor<br>(SONY, Model: AC-L10A) |
| Power Cord:        | Nonshielded, Detachable                    |
| FCC ID:            | (Comply with FCC DOC)                      |

#### Support Unit 2.

|                    |                       |
|--------------------|-----------------------|
| Description:       | Acer USB Mouse        |
| Model Number:      | MUSXT                 |
| Serial Number:     | 81130159              |
| Power Supply Type: | N/A                   |
| Power Cord:        | N/A                   |
| FCC ID:            | (comply with FCC DOC) |

#### Support Unit 3.

|                    |                 |
|--------------------|-----------------|
| Description:       | KOKA Microphone |
| Model Number:      | DM-510          |
| Serial Number:     | N/A             |
| Power Supply Type: | N/A             |
| Power Cord:        | N/A             |
| FCC ID:            | N/A             |

#### Support Unit 4.

|                    |              |
|--------------------|--------------|
| Description:       | Acer Speaker |
| Model Number:      | PS033761     |
| Serial Number:     | 970701496    |
| Power Supply Type: | N/A          |
| Power Cord:        | N/A          |
| FCC ID:            | N/A          |

#### Support Unit 5.

|                    |                            |
|--------------------|----------------------------|
| Description:       | Acer Monitor               |
| Model:             | 7377xe                     |
| Serial Number:     | 999027100501700055P644E1 P |
| Power Supply Type: | Switching                  |
| Power Cord:        | Nonshielded, Detachable    |
| FCC ID:            | (Comply with FCC DOC)      |

## Support Unit 6.

|                        |                                |
|------------------------|--------------------------------|
| Description:           | Personal Computer              |
| Model:                 | IBM 2170                       |
| Serial No.:            | N/A                            |
| Power Supply Type :    | Switching                      |
|                        | Delta (Model: DPS-145PB-80A)   |
| Hard Disk Drive:       | Maxtor (Model: 91303D6) 13.3GB |
| Floppy Driver:         | Panasonic (Model: JU256A276P ) |
| CD-ROM Drive:          | AOpen (Model: CD-940E/TKU PRO) |
| ZIP Driver:            | Iomega (Model:Z100ATAPI)       |
| LAN Card               | Accton (Model: EN1207D-TX1)    |
| FDD/HDD Controller and |                                |
| VGA port/ Parallel/    |                                |
| Serial port:           | Built on Motherboard           |
| VGA port:              | one 15-pin                     |
| Parallel Port:         | one 25-pin                     |
| Serial Port:           | one 9-pin                      |
| Keyboard Connector:    | 6-pin                          |
| Mouse Connector:       | 6-pin                          |
| USB Connector:         | two 4-pin                      |
| Game Port:             | one 15-pin                     |
| Speaker Port:          | one                            |
| Microphone Port:       | one                            |
| Line In Port:          | one                            |
| Power Cord:            | Nonshielded, Detachable        |
| FCC ID:                | N/A (comply with FCC DOC)      |

## Support Unit 7.

|                |                                         |
|----------------|-----------------------------------------|
| Description:   | Acer Wireless LAN/Broadband/ISDN Router |
| Model:         | 914I                                    |
| Serial Number: | N/A                                     |
| AC-AC Adaptor: | OEM (Model: AA-091ABM) 2-pin            |
| Power Cord:    | Non-shielded, Detachable                |

## Support Unit 8.

|                |                                 |
|----------------|---------------------------------|
| Description:   | AOpen External USB CD-ROM Drive |
| Model:         | SC-924U                         |
| Serial Number: | N/A                             |
| AC Adaptor:    | AOpen (Model:A10P1-05MP)        |
| Power Cord :   | Nonshielded, Detachable         |
| Power IN Port: | One                             |
| USB Port:      | One                             |
| Data Cable:    | USB A/B Cable 0.8M              |

## Support Unit 9.

|                     |                                                                                                                                                 |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Description:        | Notebook Personal Computer                                                                                                                      |
| Model:              | MS2101                                                                                                                                          |
| Serial Number:      | N/A                                                                                                                                             |
| Power Supply Type:  | Switching AC Adapter<br>LiteOn (Model: PA-1500-02) or<br>IBM (Model: IC25N010ATDF80199) 10.0 GB or<br>INFINEON (Model:HYS64V16220GDL-7.5) 128MB |
| Hard Disk Driver:   | one                                                                                                                                             |
| SDRAM:              | two 4-pin                                                                                                                                       |
| Power In Port:      | one 15-pin                                                                                                                                      |
| USB Connector:      | one                                                                                                                                             |
| VGA Port:           | one                                                                                                                                             |
| Line Out Port:      | one                                                                                                                                             |
| Line In Port:       | one                                                                                                                                             |
| Modem Module:       | Ambit (Model: T60M283.00 3A)                                                                                                                    |
| LAN Connector:      | one 8-pin                                                                                                                                       |
| Modem Connector:    | one 4-pin                                                                                                                                       |
| 1394 Port:          | one 4-pin                                                                                                                                       |
| PCMCIA:             | one 68-pin                                                                                                                                      |
| LCD:                | TOSHIBA 10.4" (Model: TLM10C321K)                                                                                                               |
| Display:            | LCD & CRT (1024 X 768)                                                                                                                          |
| Maximum Resolution: | LCD & CRT (1024 X 768)                                                                                                                          |
| Battery:            | SANYO (Model: BTP-42C1)                                                                                                                         |
| Power Cord:         | Shielded, Detachable (3 pins)                                                                                                                   |

### 5.8.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. Capture image from digital video camera than transfer to display (CCD).
- C. Receive audio signal from the microphone.
- D. Send audio signal to the speaker.
- E. Send H pattern to the video port device (Monitor).
- F. Send signal form EUT to server through LAN port.
- G. Repeat the above steps.

|                      | Filename     | Issued Date |
|----------------------|--------------|-------------|
| LAN                  | EMC.exe      | 11/22/1996  |
| Monitor              | HH.bat       | 8/20/1991   |
| TV                   | HH.bat       | 8/20/1991   |
| Printer1             | Wordpad.exe  | 11/11/1999  |
| Digital Camera       | Acer Cap.exe | 8/10/1998   |
| Digital Video Camera | Divpcam.exe  | 12/10/1998  |
| Router Console Port  | Commtest.exe | 8/20/2001   |
| Router LAN Port      | Ping.exe     | 5/5/1999    |
| Wireless Router      | Ping.exe     | 5/5/1999    |

### 5.8.3 I/O Cable Condition of EUT and Support Units

| Description                          | Path                                        | Cable Length | Cable Type                    | Connector Type                         |
|--------------------------------------|---------------------------------------------|--------------|-------------------------------|----------------------------------------|
| AC Power Cord                        | 110V (~240V) to AC Power Cord Inlet (3-pin) | 1.8M         | Nonshielded, Detachable       | Plastic Head<br>Plastic Hood           |
| Server Data Cable                    | Server to EUT LAN port                      | 33 feet      | Nonshielded, Detachable       | RJ-45, with Plastic Head, Plastic Hood |
| Monitor Data Cable                   | Monitor to PC VGA port                      | 1.6M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| TV Data Cable                        | TV to PC S Terminal                         | 1.6M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| Printer Data Cable                   | Printer to PC Parallel port                 | 1.5M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| Audio-in Data Cable                  | Walkman to PC Audio-In Port                 | 1.5M         | Nonshielded, Detachable to PC | Metal Head<br>Plastic Hood             |
| Headphone Data Cable                 | Headphone to Line-out jack of PC            | 1.5M         | Nonshielded, Undetachable     | Metal Head without Hood                |
| USB Mouse Data Cable                 | USB Mouse to PC USB port                    | 1.8M         | Shielded, Undetachable        | Metal Head without Hood                |
| USB CCD Data Cable                   | Digital camera to PC USB port               | 1.6M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| Digital Video Camera 1394 Data Cable | Digital Video Camera to 1394 port of PC     | 1.0M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| Console Cable                        | EUT RS232 port to Router Console Port.      | 1.0M         | Shielded, Detachable          | Metal Head<br>Plastic Hood             |
| LAN Data Cable                       | EUT LAN Port to Router LAN Port.            | 1.0M         | Nonshielded, Detachable       | RJ-45, with Plastic Head, Plastic Hood |

### 5.9 Appendix I: Accuracy of Measurement

| Contribution                                                    | Contribution | Uncertainties |       |            |         |
|-----------------------------------------------------------------|--------------|---------------|-------|------------|---------|
|                                                                 |              | Radiation     |       | Conduction |         |
|                                                                 |              | 3 m           | 10 m  | Phase      | Neutral |
| System Repeatability<br>(assessment from 20 repeat observation) | Normal (K=2) | ±0.56         | ±0.5  | ±0.20      | ±0.20   |
| Random<br>(assessment from 20 random observation)               | Normal (K=2) | ±1.28         | ±1.14 | ±0.54      | ±0.58   |
| Receiver Specification                                          | Rectangular  | ±1            | ±1    | ±1         | ±1      |
| Antenna Factor Calibration                                      | Normal (K=2) | ±2            | ±2    | NA         | NA      |
| Cable Loss Calibration                                          | Rectangular  | ±0.5          | ±0.5  | ±0.5       | ±0.5    |
| Combined Standard Uncertainty $U_c(y)$                          | Normal       | ±1.38         | ±1.34 | ±0.70      | ±0.71   |
| Total Uncertainty @95% min. confidence probability (U)          | Normal (K=2) | ±2.76         | ±2.68 | ±1.40      | ±1.42   |

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :  
The treatment of Uncertainty in EMC Measurement.

## 5.10 Appendix J: Photographs of EUT Configuration Test Set Up

The Front View of Highest Conducted Set-up For EUT



The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT



5.11 Appendix K: Antenna Spec.

*Antenna Spec*

**TM100 (Barbet)**

***Wistron NeWeb Corp.***

*WNC Confidential*

