

Specific Absorption Rate (SAR) Test Report

for

Acer Incorporated

on the


Notebook PC**Model Number: MS2161, TravelMate C310**

Test Report: EME-050554

Issue date: June 6, 2005

Total No of Pages Contained in this Report: 88

Accredited for testing to FCC Part 15

Tested by: Kevin Chen	
Reviewed by: Jerry Liu	

Review Date: June 6, 2005

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, Taiwan Ltd.

Table of Contents

1.0 General information:	3
1.1 Client Information	3
1.2 Equipment under test (EUT)	4
1.3 Test plan reference	4
1.4 Test configuration	5
1.4.1 Support equipment & EUT antenna position	5
1.4.2 Test Condition	6
1.5 Modifications required for compliance	6
2.0 SAR Evaluation	7
2.1 SAR Limits	7
2.2 Configuration Photographs	8
2.3 SAR measurement system	15
2.4 SAR measurement system validation	16
2.4.1 System Validation result	17
2.4.2 System Performance Check result	19
2.5 Test Result	21
3.0 Test Equipment	23
3.1 Equipment List	23
3.2 Tissue Simulating Liquid	24
3.2.1 Body Tissue Simulating Liquid for evaluation test	24
3.2.2 Head Tissue Simulating Liquid for System performance Check test	24
3.2.3 Body Liquid results	25
3.2.4 Head Liquid results	26
3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration	27
4.0 Measurement Uncertainty	28
5.0 WARNING LABEL INFORMATION - USA	30
6.0 REFERENCES	31
7.0 Document Revision Record	32
APPENDIX A - SAR Evaluation Data	33
APPENDIX B - Photographs	62
APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration Data	65

1.0 General information:

The device was tested at the Intertek Testing Services facility in Hsinchu, Taiwan. The maximum output power declared by the Acer.

EUT model # MS2161, TravelMate C310 was evaluated accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01) and meet the SAR requirement, the phantom employed was the box phantom of 2mm thick in one wall. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be $\pm 20.6\%$, the dosimetry assessment system INDEXSAR SARA2 was used.

In summary, the maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Position (worst case)	SAR_{1g}, W/kg
2mm thick box phantom wall	EUT rear to the phantom, 0 mm separation.	0.250 W/kg

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for body configurations.

1.1 Client Information

The MS2161, TravelMate C310 has been tested at the request of:

Applicant: **Acer Incorporated**
8F, 88, Sec.1 Hsin Tai Wu Rd.,
Hsichih Taipei Hsien,
Taiwan

1.2 Equipment under test (EUT)**Product Descriptions:**

Equipment	Notebook PC		
Trade Name	acer	Model No:	MS2161, TravelMate C310
FCC ID	HLZMS2161BG	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band	2412 – 2462 MHz	System	DSSS, OFDM

EUT Antenna Description			
Type	PIFA	Configuration	Fixed
Dimensions	42 x 7 mm	Gain	2.42 dBi
Location	Embedded		

Use of Product : **Wireless Data Communication**

Manufacturer: **Acer Incorporated**

Production is planned: ☒ Yes, ☐ No

EUT receive date: June 1, 2005

EUT status: Normal operating condition

Test start date: June 2, 2005

Test end date: June 2, 2005

1.3 Test plan reference


FCC Rule: Part 2.1093, FCC's OET Bulletin 65, Supplement C (Edition 01-01) and IEEE 1528

1.4 Test configuration

Please refer to section 2.2 figure 2 ~ 13

1.4.1 Support equipment & EUT antenna position

Support Equipment				
Item #	Equipment	Brand	Model No.	S/N
1	N/A	N/A	N/A	N/A

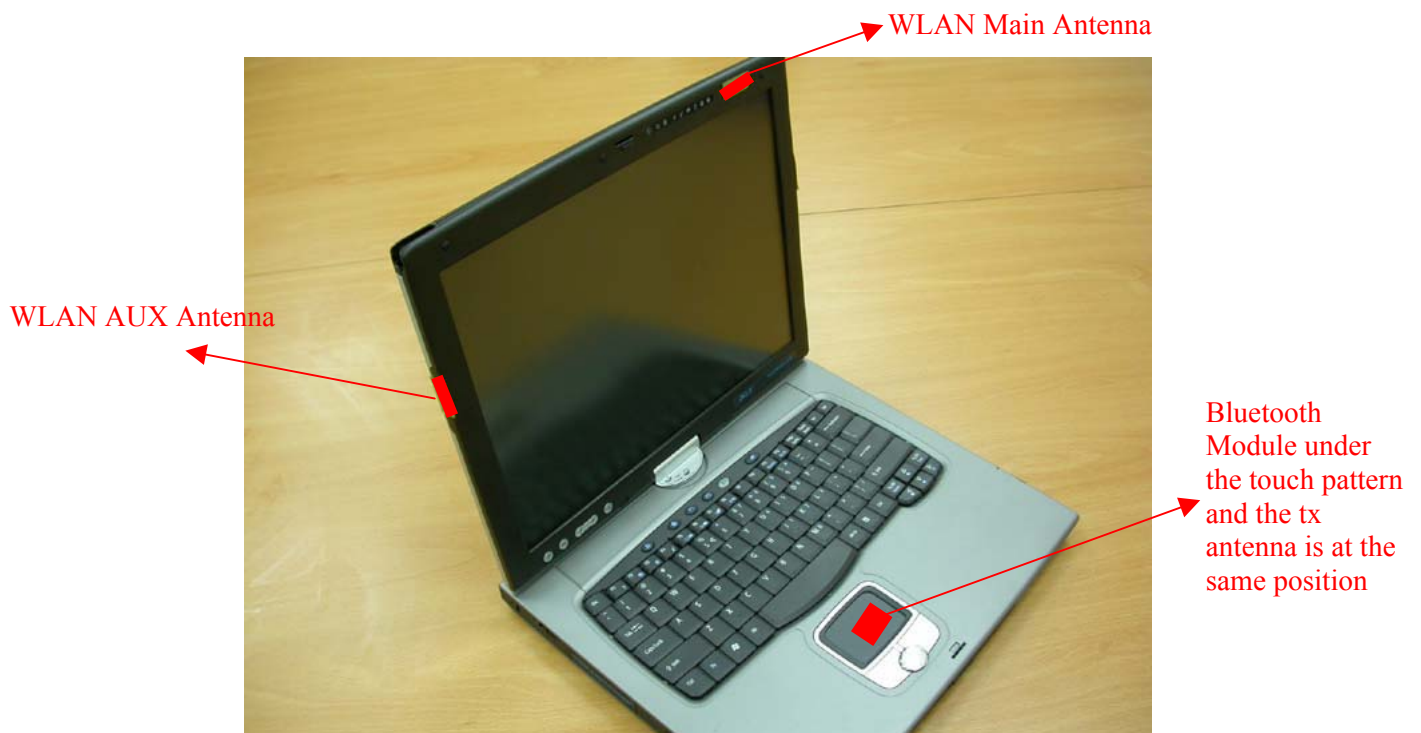

1.4.2 Test Condition

During tests the worst-case data (max RF coupling) was determined with following conditions:

Usage	Operates with a portable computer	Distance between antenna axis at the joint and the liquid surface:	Laptop is touching the Phantom in top position, separating 0mm and 15mm, in right and rear position, separating 0mm and 15mm	
Simulating human Head/ Body/Hand	Body	EUT Battery	Device is powered from host computer through battery.	
802.11b Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	15.91	-
	Mid Channel - 6	2437	15.54	15.53
	High Channel- 11	2462	15.67	-
802.11g Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel – 1	2412	16.97	-
	Mid Channel – 6	2437	16.75	16.74
	High Channel- 11	2462	16.58	-

The spatial peak SAR values were assessed for lowest, middle and highest operating channels, defined by the manufacturer.

The conducted output power was measured before and after the test using a wideband peak power meter.

Run the test program “CRTU-II” under Windows OS. The EUT was transmitted continuously during the test.

The EUT has two modules, which are WLAN and Bluetooth. The two modules transmitted at the same time during the test. For the WLAN module, it contains 802.11b and 802.11g functions, after verify, the maximum of output power was occurred at 1Mbps data rate in 802.11b function and 6Mbps data rate in 802.11g functions. All the test data were performed under the above transmission rate.

There are two antennas included in the WLAN module, Main and Aux antenna. The SAR test has been performed close to the main antenna.

1.5 Modifications required for compliance

The EUT has no modifications during test.

2.0 SAR Evaluation

The evaluation of the result analysis was based on software: SARA2 Version 2.33VPM (Virtual Probe Miniaturization).

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

EXPOSURE (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

2.2 Configuration Photographs

SAR Measurement Test Setup

Figure 1: Test System



SAR Measurement Test Setup

Figure: 2 EUT top to phantom, 0 mm separation



Figure: 3 EUT top to phantom, 0 mm separation– Zoom In



SAR Measurement Test Setup

Figure: 4 EUT top to phantom, 15 mm separation



Figure: 5 EUT top to phantom, 15 mm separation – Zoom In



SAR Measurement Test Setup

Figure: 6 EUT rear to phantom, 0 mm separation


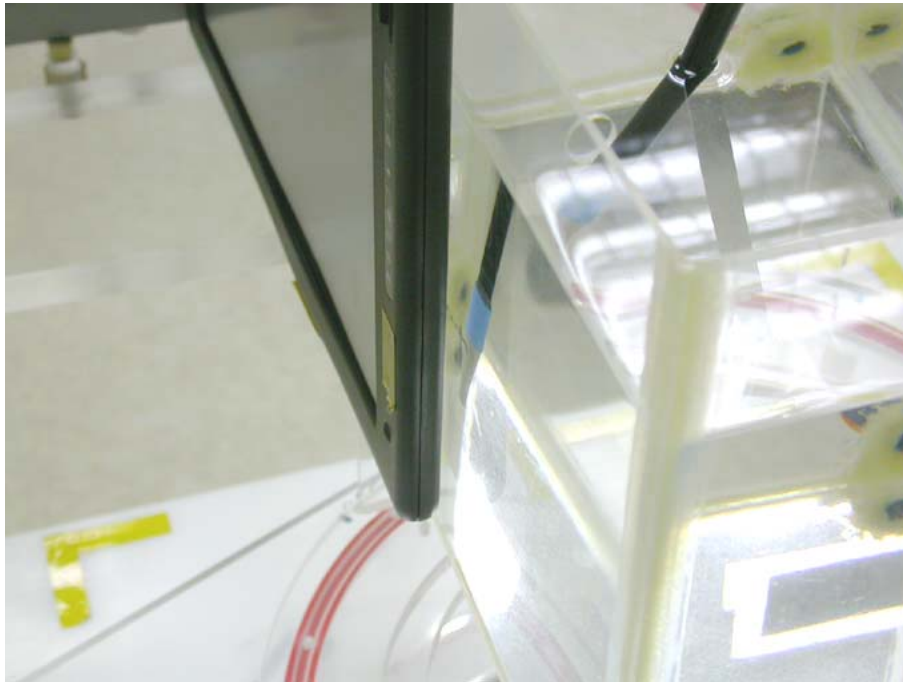


Figure: 7 EUT rear to phantom, 0 mm separation– Zoom In

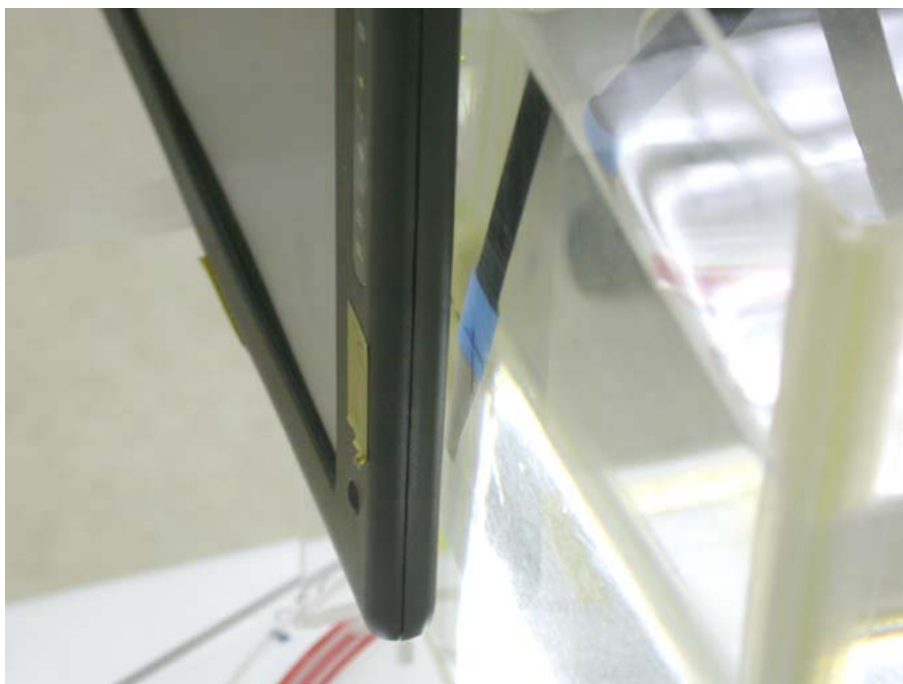

SAR Measurement Test Setup
Figure: 8 EUT rear to phantom, 15 mm separation


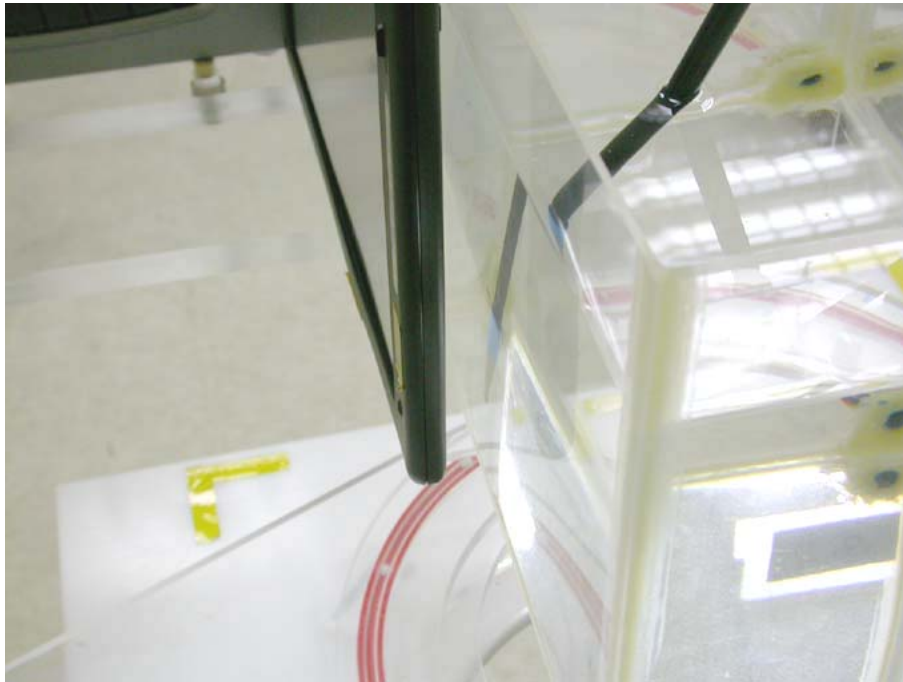


Figure: 9 EUT rear to phantom, 15 mm separation– Zoom In

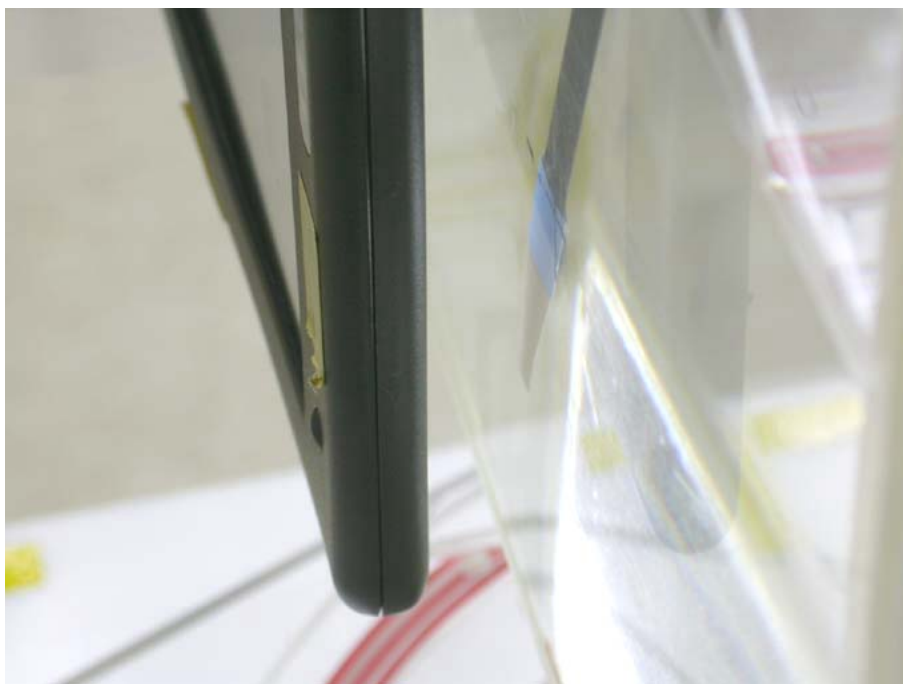

SAR Measurement Test Setup
Figure: 10 EUT right to phantom, 0 mm separation

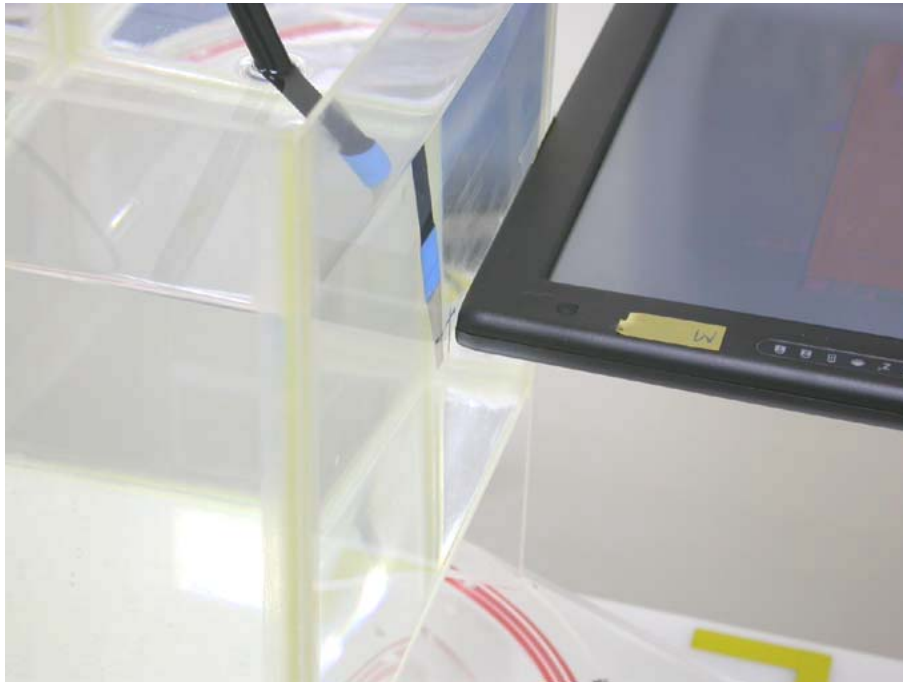


Figure: 11 EUT right to phantom, 0 mm separation– Zoom In



SAR Measurement Test Setup

Figure: 12 EUT right to phantom, 15 mm separation



Figure: 13 EUT right to phantom, 15 mm separation– Zoom In



2.3 SAR measurement system

Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

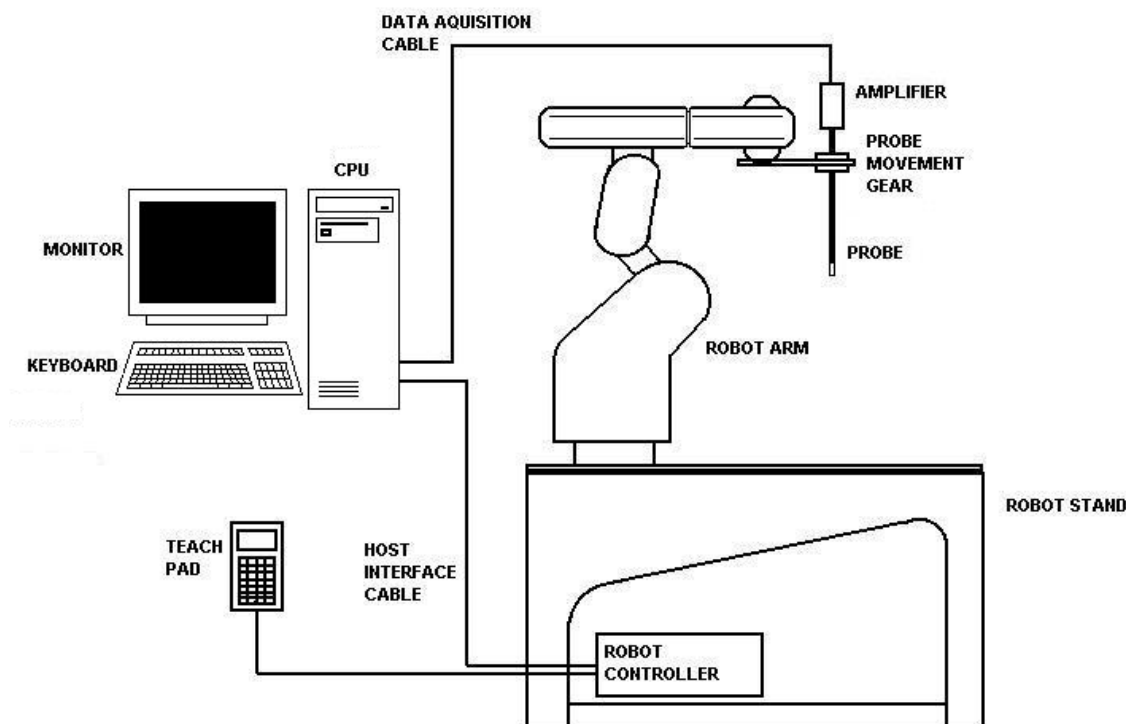


Figure 1: Schematic diagram of the SAR measurement system

The position and digitized shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitized using a Mitutoyo CMM machine to a precision of 0.02mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell. In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan central at that point to determine volume averaged SAR level.

The first 2 measurements points in a direction perpendicular to the surface of the phantom during the zoom scan and closest to the phantom surface, were only 3.5mm and the probe is kept at greater than half a diameter from the surface.

2.4 SAR measurement system validation

Prior to the assessment, the system was verified to the $\pm 10\%$ of the specifications by using the system validation equipments. The validation was performed at 2450 MHz on the bottom side of box phantom.

Procedures

The SAR evaluation was performed with the following procedures:

- a. The SAR distribution was measured at the exposed side of the bottom of the box phantom and was measured at a distance of 8 mm from the inner surface of the shell. The feed power was 1/5 W.
- b. The dimension for this cube is 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 5 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

The test scans procedure for system validation also applies to the general scan procedure except for the set-up position. For general scan, the EUT was placed at the side of phantom. For validation scan, the standard dipole antenna was placed at the bottom of phantom

2.4.1 System Validation result

System Validation (2450 MHz Head)				
Frequency MHz	Operating Mode	Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Deviation (±10%)
2450	CW	52.4	52.8	0.76%

Please see the plot below:

Date:	2005/6/1	Position:	Bottom of the Phantom
Filename:	2450 system validation.txt	Phantom:	HeadBox2-val..csv
Device Tested:	SARA2 system validation	Head Rotation:	0
Antenna:	2450 STD Dipole Antenna	Test Frequency:	2450MHz
Shape File:	none.csv	Power Level:	23dBm /CW


Probe: 0114
Cal File: SN0114_2450_CW_HEAD

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.508	.508	.508

Amp Gain: 2
Averaging: 1
Batteries Replaced: -

Liquid: 15.5cm
Type: 2450MHz Head
Conductivity: 1.8441
Relative Permittivity: 38.562
Liquid Temp (deg C): 23
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

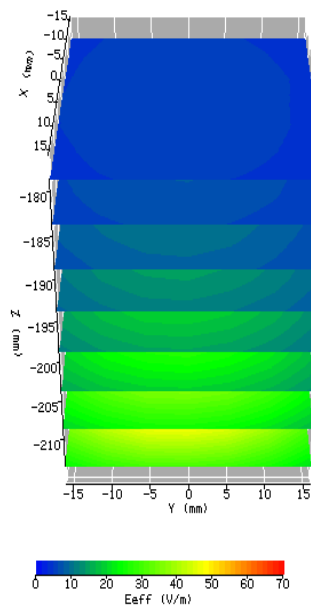

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
	0.663	0.663

Change during Scan (%) 0.02

Max E-field (V/m): 64.91

Max SAR (W/kg)	1g	10g
	10.560	4.938

Location of Max (mm):	X	Y	Z
	-1.3	-1.3	-221.7

Normalized to an input power of 1W
Averaged over 1 cm³ (1g) of tissue
52.8W/kg

2.4.2 System Performance Check result

System performance check (2450 MHz Head)				
Frequency MHz	Operating Mode	Target SAR _{Ig} (W/kg)	Measured SAR _{Ig} (W/kg)	Deviation (±10%)
2450	CW	52.4	82.8	0.76%

Please see the plot below:


Date:	2005/6/1	Position:	Bottom of the Phantom
Filename:	2450 system validation.txt	Phantom:	HeadBox2-val..csv
Device Tested:	SARA2 system validation	Head Rotation:	0
Antenna:	2450 STD Dipole Antenna	Test Frequency:	2450MHz
Shape File:	none.csv	Power Level:	23 dBm

Probe: 0114
Cal File: SN0114_2450_CW_HEAD

	X	Y	Z
Cal Factors: Air	438	359	403
DCP	20	20	20
Lin	.508	.508	.508

Amp Gain: 2
Averaging: 1
Batteries Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Head
Conductivity: 1.8441
Relative Permittivity: 38.5623
Liquid Temp (deg C): 23
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

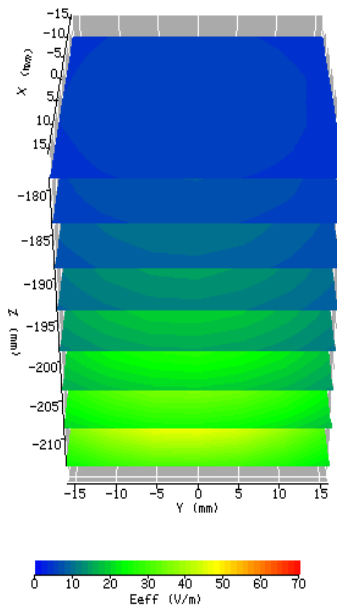

ZOOM SCAN RESULTS:

	Start Scan	End Scan
Spot SAR (W/kg):	0.663	0.663

Change during Scan (%): 0.02

Max E-field (V/m): 64.91

	1g	10g
Max SAR (W/kg)	10.560	4.938

	X	Y	Z
Location of Max (mm):	-1.3	-1.3	-221.7

Normalized to an input power of 1W
Averaged over 1 cm³ (1g) of tissue
52.8W/kg

2.5 Test Result

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

Measurement Results

Trade Name:	acer	Model No.:	MS2161, TravelMate C310
Serial No.:	Not Labeled	Test Engineer:	Kevin Chen
TEST CONDITIONS			
Ambient Temperature	23 °C	Relative Humidity	50 %
Test Signal Source	Test Mode	Signal Modulation	DSSS, OFDM
Output Power Before SAR Test	See section 1.4.2	Output Power After SAR Test	See section 1.4.2
Test Duration	23 min. each scan	Number of Battery Change	1

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR_{1g} (W/kg)	Plot Number
2437	DSSS	1	NB display rear side to phantom	0	0.250	1
2437	DSSS	1	NB display rear side to phantom	15	Note 1	2
2437	DSSS	1	NB display right side to phantom	0	0.130	3
2437	DSSS	1	NB display right side to phantom	15	Note 1	4
2437	DSSS	1	NB display top side to phantom-1	0	0.135	5
2437	DSSS	1	NB display top side to phantom-2	0	0.086	6
2437	DSSS	1	NB display top side to phantom	15	0.031	7

Note: 1. The measurement was only performed in Area Scan due to scanning system couldn't continue performing Zoom Scan with such a low SAR distribution.
2. Configuration at middle channel with more than -3dB of applicable limit.

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR _{1g} (W/kg)	Plot Number
2437	OFDM	1	NB display rear side to phantom	0	0.125	8
2437	OFDM	1	NB display rear side to phantom	15	Note 1	9
2437	OFDM	1	NB display right side to phantom	0	0.066	10
2437	OFDM	1	NB display right side to phantom	15	Note 1	11
2437	OFDM	1	NB display top side to phantom-1	0	0.063	12
2437	OFDM	1	NB display top side to phantom-2	0	0.041	13
2437	OFDM	1	NB display top side to phantom	15	Note 1	14

Note: 1. The measurement was only performed in Area Scan due to scanning system couldn't continue performing Zoom Scan with such a low SAR distribution.
2. Configuration at middle channel with more than -3dB of applicable limit.

3.0 Test Equipment

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the INDEXSAR SARA2 SYSTEM.

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	Intertek ID No.	LAST CAL. DATE
Balanced Validation dipole	2450MHz	EC381-4	03/2005
Controller	Mitsubishi CR-E116	EP320-1	N/A
Robot	Mitsubishi RV-E2	EP320-2	N/A
	Repeatability: $\pm 0.04\text{mm}$; Number of Axes: 6		
E-Field Probe	IXP-050	EC356	03/2005
	Frequency Range: Probe outer diameter: 5.2 mm; Length: 350 mm; Distance between the probe tip and the dipole center: 2.7 mm		
Data Acquisition	SARA2	N/A	N/A
	Processor: Pentium 4; Clock speed: 1.5GHz; OS: Windows XP; I/O: two RS232; Software: SARA2 ver. 2.33VPM (Virtual Probe Minaturisation)		
Phantom	2mm wall thickness box phantom	N/A	N/A
	Shell Material: clear Perspex; Thickness: $2 \pm 0.1\text{ mm}$; Capacity: 152.5 x 225.5 x 200 (W x L x D) mm^3 ; Dielectric constant: less than 2.85 above 500MHz;		
Device holder	Material: clear Perspex; Dielectric constant: less than 2.85 above 500MHz	N/A	N/A
Simulated Tissue	Mixture	N/A	06/01/2005
	Please see section 3.2 for details		
Wideband Peak Power Meter/ Sensor	Anritsu ML2487A with MA2491A power sensor	EC396	10/19/2004
	Frequency Range: 100MHz~18GHz		
Vector Network Analyzer	HP 8753B HP 85046A	EC375	08/19/2004
	Frequency Range: 300k to 3GHz		
Signal Generator	R&S SMR27	EC354	08/16/2004
	Frequency Range: 10M to 27GHz, <120dBuV		

3.2 Tissue Simulating Liquid

The head and body tissue parameters should be used to test operating frequency band of transmitters. When a transmission band overlaps with one of the target frequencies, the tissue dielectric parameters of the tissue medium at the middle of a device transmission band should be within $\pm 5\%$ of the parameters specified at that target frequency.

3.2.1 Body Tissue Simulating Liquid for evaluation test

Body Ingredients Frequency (2.45 GHz)	
DGBE (Dilethylene Glycol Butyl Ether)	26.7%
Salt	0.04%
Water	73.2%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Frequency (MHz)	Temp. (°C)	ϵ_r / Relative Permittivity			σ / Conductivity (mho/m)			ρ^* (kg/m ³)
		measured	target	$\Delta(\pm 5\%)$	measured	target	$\Delta(\pm 5\%)$	
2450	22.6	50.72	52.7	-3.76%	1.89	1.95	-3.08%	1000

* Worst-case assumption

3.2.2 Head Tissue Simulating Liquid for System performance Check test

Head Ingredients Frequency (2.45 GHz)	
DGBE (Dilethylene Glycol Butyl Ether)	53.3%
Water	46.7%


The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Frequency (MHz)	Temp. (°C)	ϵ_r / Relative Permittivity			σ / Conductivity (mho/m)			ρ^* (kg/m ³)
		measured	target	$\Delta(\pm 5\%)$	measured	target	$\Delta(\pm 5\%)$	
2450	23.3	38.56	39.2	-1.63%	1.84	1.84	0%	1000

* Worst-case assumption


3.2.3 Body Liquid results

Date: 01 June 2005	Temperature: 22.6 °C	Type: 2450 MHz/ body	Tested by: Kevin
2410, 49.8336519755, -1.9034445282 2411, 49.8611640008, -1.8917515623 2412, 49.8582923837, -1.8929615409 2413, 49.8414117372, -1.8933344711 2414, 49.841956753, -1.885387091 2415, 49.8637966419, -1.8847090915 2416, 49.8601007194, -1.8883537926 2417, 49.874069992, -1.8811406123 2418, 49.8626180181, -1.8783622151 2419, 49.9078917208, -1.8784259146 2420, 49.9348805226, -1.8778828088 2421, 49.9480878418, -1.877056422 2422, 49.9512249498, -1.8783373158 2423, 49.9736591741, -1.8706507028 2424, 49.9926228918, -1.8673526361 2425, 50.0178889821, -1.86643075 2426, 50.0257895292, -1.8693022139 2427, 50.0735840974, -1.8669505496 2428, 50.0833188456, -1.8628054705 2429, 50.113403049, -1.865174091 2430, 50.1207706064, -1.8636018009 2431, 50.1718252715, -1.8638400749 2432, 50.206792327, -1.8596125204 2433, 50.2186437789, -1.8619283136 2434, 50.2642407419, -1.8617129779 2435, 50.2550193513, -1.8606693191 2436, 50.2926423883, -1.8628270023 2437, 50.3438721277, -1.8654900254 2438, 50.3557559376, -1.8661171841 2439, 50.3841071548, -1.8619704952 2440, 50.4050638915, -1.8612462047 2441, 50.448377895, -1.8650716174 2442, 50.472144874, -1.8664740753 2443, 50.4992731454, -1.8707914205 2444, 50.5397021171, -1.876687025 2445, 50.5821731036, -1.8749551898 2446, 50.5702267453, -1.8776532469 2447, 50.6273168676, -1.8804569976 2448, 50.6426086203, -1.8815761138 2449, 50.67371140918, -1.8827890642 2450, 50.7167043581, -1.8895002894 2451, 50.7143011673, -1.8885323579 2452, 50.7509831286, -1.9003245176 2453, 50.7801121404, -1.8974643939 2454, 50.7877443244, -1.9026752925 2455, 50.8227516147, -1.9088510718 2456, 50.8495122943, -1.9105644787 2457, 50.8356498372, -1.9142761457 2458, 50.8916990316, -1.9139773075 2459, 50.8954705971, -1.9220689685 2460, 50.8994650779, -1.9234741695 2461, 50.9281224133, -1.9307825534 2462, 50.9536384403, -1.933717913 2463, 50.9834412597, -1.9405357572 2464, 50.971400131, -1.9469954532 2465, 50.9958225502, -1.9450568549 2466, 51.0208145836, -1.9537394009 2467, 51.0057899177, -1.957870166 2468, 51.0596072153, -1.9597665537 2469, 51.0351450507, -1.9656174469 2470, 51.0560375989, -1.9703368297 2471, 51.0541766063, -1.9778200181 2472, 51.0565958288, -1.9818748387 2473, 51.0705093993, -1.9894737126 2474, 51.0391237851, -1.9931854155 2475, 51.0829826479, -1.9927717924 2476, 51.0799848175, -2.0088628459 2477, 51.0611585351, -2.0083635235 2478, 51.0774935677, -2.0142009957 2479, 51.1120964784, -2.0203289243 2480, 51.0355911854, -2.0258013858 2481, 51.0557022996, -2.0314068072 2482, 51.0275219639, -2.0464061217 2483, 51.0389903309, -2.0372216452 2484, 51.0496725188, -2.0458047661 2485, 51.0534557917, -2.0517462875 2486, 51.0624132872, -2.057324343 2487, 51.0190278012, -2.0612033543 2488, 51.0195856943, -2.0612496129 2489, 51.0488688731, -2.0715336006 2490, 51.0024587529, -2.0724414138			

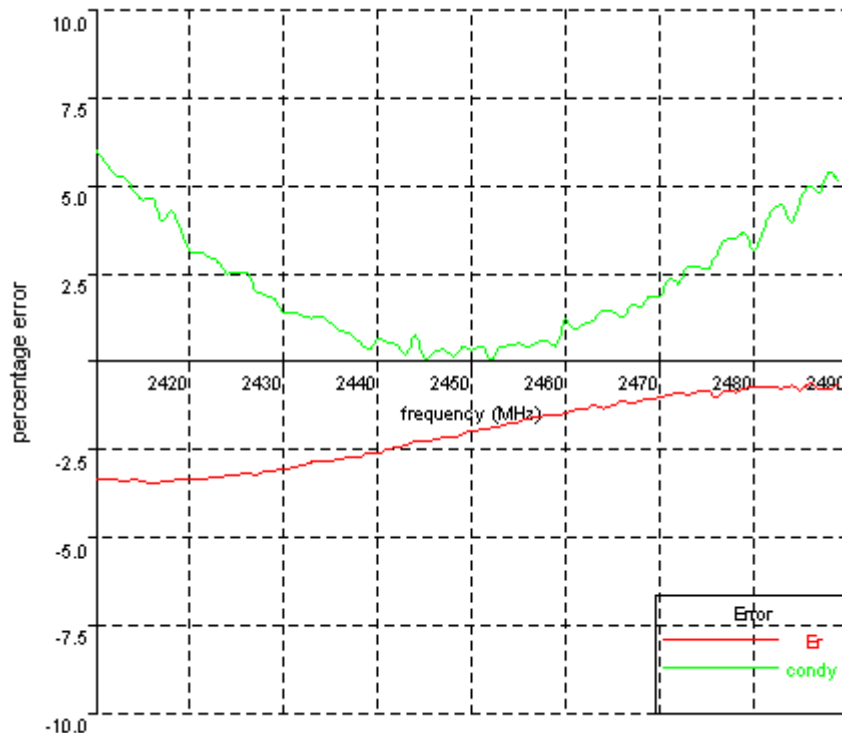

3.2.4 Head Liquid results

Date: 01 June 2005	Temperature: 23.3 °C	Type: 2450 MHz/ head	Tested by: Kevin
2410, 37.9881321803, -1.8939458105 2411, 37.9214837783, -1.8960936726 2412, 37.9391002332, -1.8940891592 2413, 37.9419118864, -1.8878102036 2414, 37.9632738809, -1.8877588622 2415, 37.9538927936, -1.8896041499 2416, 37.9628519148, -1.8808411463 2417, 37.9656653281, -1.8784987102 2418, 37.9740734865, -1.8734335463 2419, 37.9349404156, -1.8728411575 2420, 37.9558834329, -1.8718642564 2421, 37.9622938459, -1.8700415275 2422, 37.9887515167, -1.8630816483 2423, 37.9947520083, -1.8655227998 2424, 37.9943365357, -1.8681438673 2425, 38.0320224874, -1.8598661719 2426, 38.0138017129, -1.8548284354 2427, 38.0533560391, -1.8547535917 2428, 38.0551592126, -1.8515025396 2429, 38.0601990982, -1.8521773336 2430, 38.091933026, -1.8501258916 2431, 38.1124070577, -1.8493820527 2432, 38.1376705765, -1.8496181957 2433, 38.1123814344, -1.8430622632 2434, 38.1282338765, -1.8352126198 2435, 38.1557806526, -1.8370694443 2436, 38.1525353345, -1.8417487418 2437, 38.2158452601, -1.8400643621 2438, 38.2519383394, -1.838624682 2439, 38.2745630432, -1.846616028 2440, 38.2854119984, -1.8374773079 2441, 38.3219898266, -1.8425738087 2442, 38.3448693477, -1.8374238993 2443, 38.3760013363, -1.8415599328 2444, 38.3684939882, -1.8409365394 2445, 38.3882771079, -1.8446988011 2446, 38.4387001403, -1.8473533194 2447, 38.4637593473, -1.8456136276 2448, 38.4820485088, -1.8488132851 2449, 38.5226517395, -1.8434600911 2450, 38.5623138583, -1.8440559726 2451, 38.5466961212, -1.8493117195 2452, 38.5641348234, -1.851197779 2453, 38.6176039658, -1.8538594856 2454, 38.6138971199, -1.862118267 2455, 38.6313662242, -1.859267585 2456, 38.6607578065, -1.858649992 2457, 38.6769792847, -1.8617111052 2458, 38.7111089701, -1.8664053486 2459, 38.7083806965, -1.8697330438 2460, 38.6992386578, -1.8691788682 2461, 38.7125128491, -1.8720968115 2462, 38.7747732685, -1.876786457 2463, 38.7880733689, -1.8807283351 2464, 38.8056212713, -1.8830881367 2465, 38.7744871466, -1.8856796986 2466, 38.8339563304, -1.8878007157 2467, 38.8945208834, -1.8880789181 2468, 38.858169205, -1.9035306012 2469, 38.8772128172, -1.9007299105 2470, 38.9272372314, -1.9053695063 2471, 38.8785584428, -1.9090365661 2472, 38.9028440603, -1.9133183311 2473, 38.9057271362, -1.9135495879 2474, 38.9147690113, -1.9214230414 2475, 38.9253737798, -1.9239239468 2476, 38.9621369756, -1.9248649771 2477, 38.9535494025, -1.9277865965 2478, 38.937773215, -1.9340795724 2479, 38.9281513196, -1.940463502 2480, 38.9234215492, -1.9517523935 2481, 38.9348801722, -1.9558008009 2482, 38.9176929441, -1.9554165043 2483, 38.9348737342, -1.9613929101 2484, 38.9405978498, -1.9723863511 2485, 39.0276442331, -1.9606665818 2486, 38.9413446201, -1.969101318 2487, 38.9814378163, -1.9743584215 2488, 38.9594958821, -1.9731168576 2489, 38.9263937125, -1.9825010107 2490, 39.0035027253, -1.9942516977			

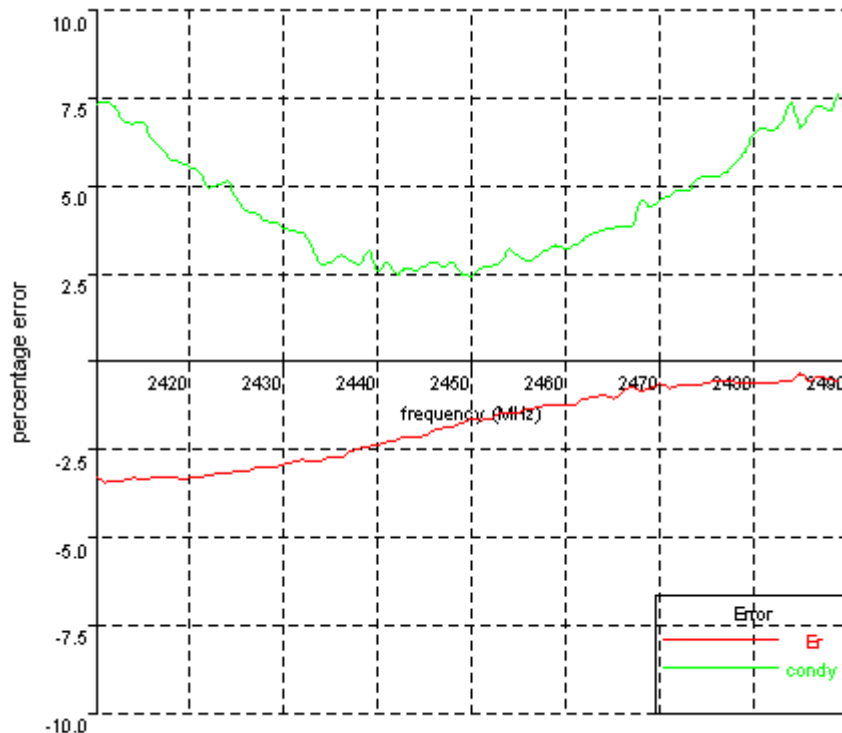

3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration

Probe calibration factors and dipole antenna calibration are included in Appendix C.

4.0 Measurement Uncertainty

The uncertainty budget has been determined for the INDEXSAR SARA2 measurement system according to IEEE P1528 documents [3] and is given in the following table. The extended uncertainty (95% confidence level) was assessed to be 20.6 % for SAR measurement, and the extended uncertainty (95% confidence level) was assessed to be 20.2 % for system performance check.

Table 1 Exposure Assessment Uncertainty

Example of measurement uncertainty assessment SAR measurement

(blue entries are site-specific)

a	b			c	d	e		f	g	h	i
Uncertainty Component	Sec.	Tol. (+/-)			Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g
		(dB)		(%)							
Measurement System											
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50
Axial Isotropy	E2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0	0.00	0.00
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	1	6.30	6.30
Boundary effect	E2.3		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Linearity	E2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	1	0.53	0.53
System Detection Limits	E2.5		1	1.00	R	$\sqrt{3}$	1.73	1	1	0.58	0.58
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00
Response time	E2.7		0	0.00	R	$\sqrt{3}$	1.73	1	1	0.00	0.00
Integration time	E2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	1	0.81	0.81
RF Ambient Conditions	E6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	1	0.35	0.35
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
SAR Evaluation Algorithms	E5		8	8.00	R	$\sqrt{3}$	1.73	1	1	4.62	4.62
Test Sample Related											
Test Sample Positioning	E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00
Device Holder Uncertainty	E4.1		2	2.00	N	1	1.00	1	1	2.00	2.00
Output Power Variation	6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	1	2.89	2.89
Phantom and Tissue Parameters											
Phantom Uncertainty (shape and thickness)	E3.1		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	0.43	1.85	1.24
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	0.49	1.73	1.41
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54
Combined standard uncertainty					RSS					10.5	10.3
Expanded uncertainty	(95% Confidence Level)				k=2					20.6	20.3

Table 2 System Check (Verification)

Example of measurement uncertainty assessment for system performance check

(blue entries are site-specific)

a	b			c	d	e		f	g	h	i
Uncertainty Component	Sec.	Tol. (+/-)			Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g
		(dB)		(%)							
Measurement System											
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50
Axial Isotropy	E2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0	0.00	0.00
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	1	6.30	6.30
Boundary effect	E2.3		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Linearity	E2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	1	0.53	0.53
System Detection Limits	E2.5		1	1.00	R	$\sqrt{3}$	1.73	1	1	0.58	0.58
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00
Response time	E2.7		0	0.00	R	$\sqrt{3}$	1.73	1	1	0.00	0.00
Integration time	E2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	1	0.81	0.81
RF Ambient Conditions	E6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	1	0.35	0.35
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
SAR Evaluation Algorithms	E5		8	8.00	R	$\sqrt{3}$	1.73	1	1	4.62	4.62
Dipole											
Dipole axis to liquid distance	8, E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00
Input power and SAR drift measurement	8, 6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	1	2.89	2.89
Phantom and Tissue Parameters											
Phantom Uncertainty (thickness)	E3.1		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	0.43	1.85	1.24
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	0.49	1.73	1.41
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54
Combined standard uncertainty					RSS					10.3	10.1
Expanded uncertainty	(95% Confidence Level)				k=2					20.2	19.9

5.0 WARNING LABEL INFORMATION - USA

See user manual.

6.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1999

- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Supplement C to OET Bulletin 65, Washington, D.C. 20554, 1997

- [3] IEEE Standards Coordinating Committee 34, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", IEEE Std 1528TM-2003

7.0 Document Revision Record

Revision/ Job Number	Writer Initials	Date	Change
N/A	I.C.	June 6, 2005	Original document

APPENDIX A - SAR Evaluation Data

Power drift: Power drift is the measurement of power drift of the device over one complete SAR scan.

To assess the drift of the power of the device under test, a SAR measurement was made in the middle of the zoom scan volume at the start of the scan and a measurement at this point was then also made after the measurement scan. The difference between the two measurements should be less than 5%.

Plot #1 (1/2)


Date: 2005/6/2	Position: NB display rear side to phantom 0mm
Filename: 11b_mid-rear0.txt	Phantom: HeadBox2-test.csv
Device Tested: MS2161, Travel Mate C310	Head Rotation: 0
Antenna: PIFA Antenna	Test Frequency: 11b_2437MHz
Shape File: c300-new-rear.csv	Power Level: 15.54 dBm

Probe: 0114
Cal File: SN0114_2450_CW_BODY

	X	Y	Z
Cal Factors:			
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

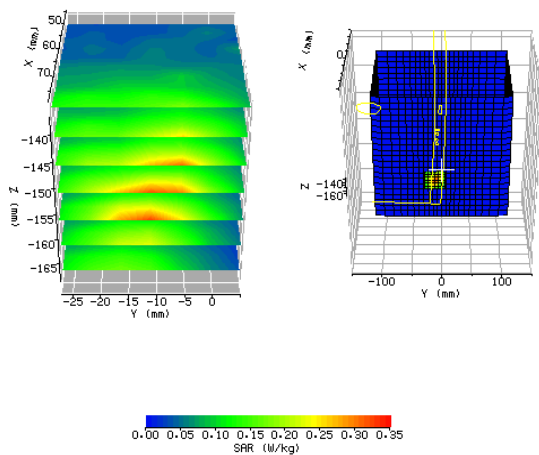

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.058	0.057	
Change during Scan (%)	-1.48		
Max E-field (V/m):	13.09		
Max SAR (W/kg)	1g	10g	
	0.250	0.135	
Location of Max (mm):	X	Y	Z
	78.1	-27.0	-153.9

Plot #1 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

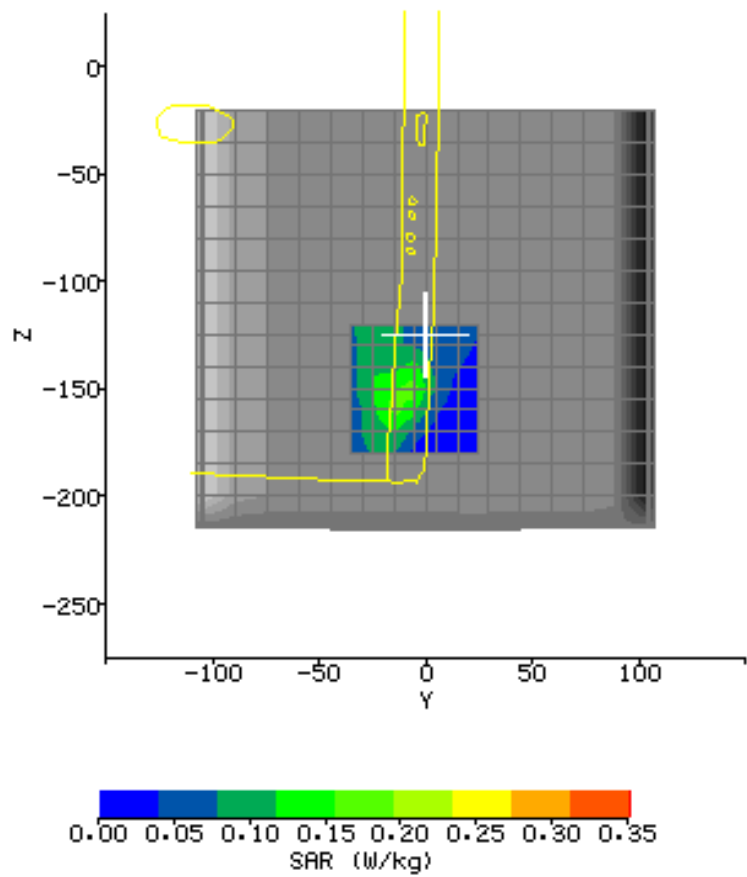

Plot #2 (1/2)

Date:	2005/6/2	Position:	NB display rear side to phantom 15mm
Filename:	11b_mid-rear15a.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11b_2437MHz
Shape File:	c300-new-rear.csv	Power Level:	15.54 dBm

Probe:	0114			
Cal File:	SN0114_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	438	359	403
	DCP	20	20	20
	Lin	.585	.585	.585
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	-			


Liquid:	15.5cm
Type:	2450 MHz Body
Conductivity:	1.8895
Relative Permittivity:	50.7167
Liquid Temp (deg C):	22
Ambient Temp (deg C):	23
Ambient RH (%):	55
Density (kg/m3):	1000
Software Version:	2.33VPM
Crest Factor = 1	

Plot #2 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

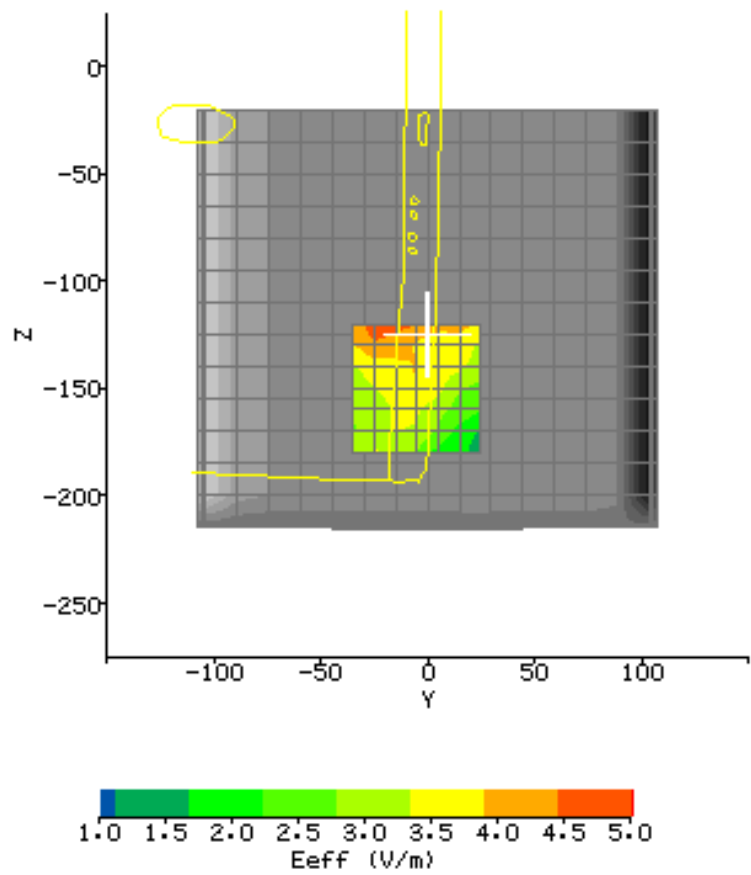

Plot #3 (1/2)

Date:	2005/6/2	Position:	NB display right side to phantom 0mm
Filename:	11b_mid-right0.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11b_2437MHz
Shape File:	c300-new-right.csv	Power Level:	15.54 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

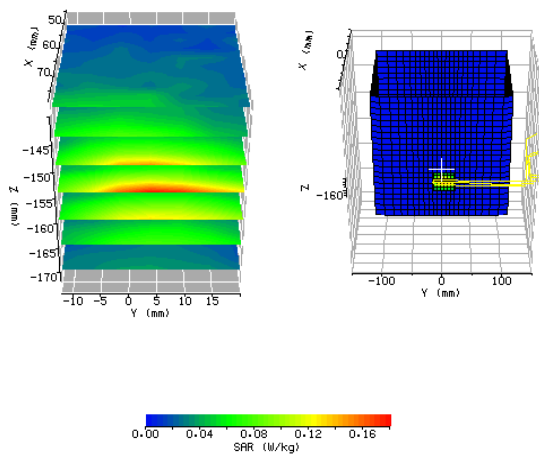

ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.031	0.032

Change during Scan (%): 1.19

Max E-field (V/m): 9.71

Max SAR (W/kg)

1g	10g
0.130	0.065

Location of Max (mm):


X	Y	Z
78.1	-12.0	-155.1

Plot #3 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

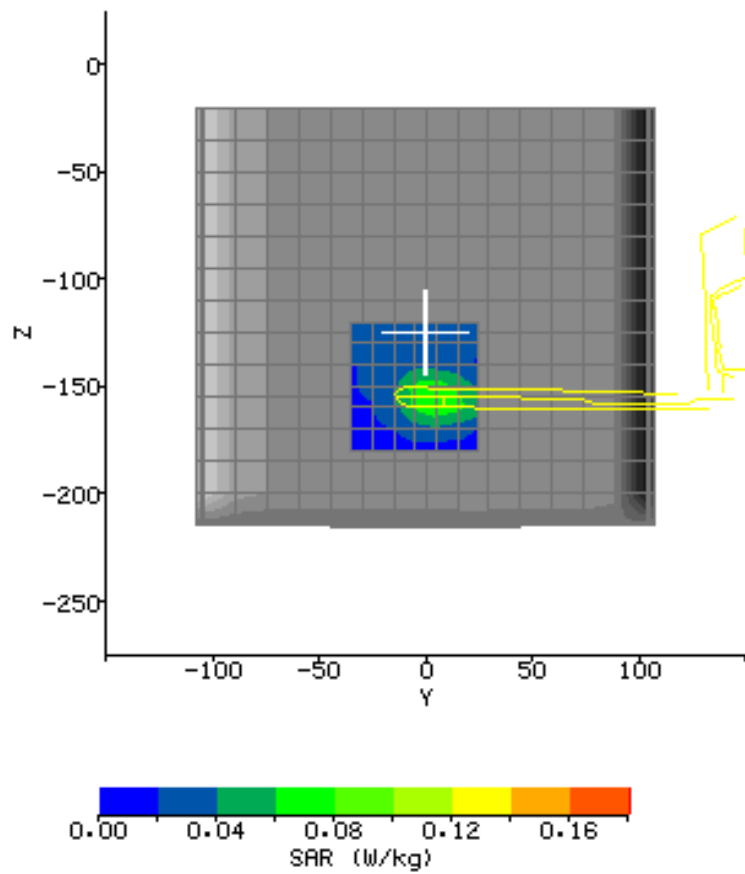

Plot #4 (1/2)

Date:	2005/6/2	Position:	NB display right side to phantom 15mm
Filename:	11b_mid-right15a.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11b_2437MHz
Shape File:	c300-new-right.csv	Power Level:	15.54 dBm


Probe:	0114	Liquid:	15.5cm
Cal File:	SN0114_2450_CW_BODY	Type:	2450 MHz Body
Cal Factors:		Conductivity:	1.8895
	Air	Relative Permittivity:	50.7167
	DCP	Liquid Temp (deg C):	22
	Lin	Ambient Temp (deg C):	23
Amp Gain:	2	Ambient RH (%):	55
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	-	Software Version:	2.33VPM
		Crest Factor = 1	

Plot #4 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

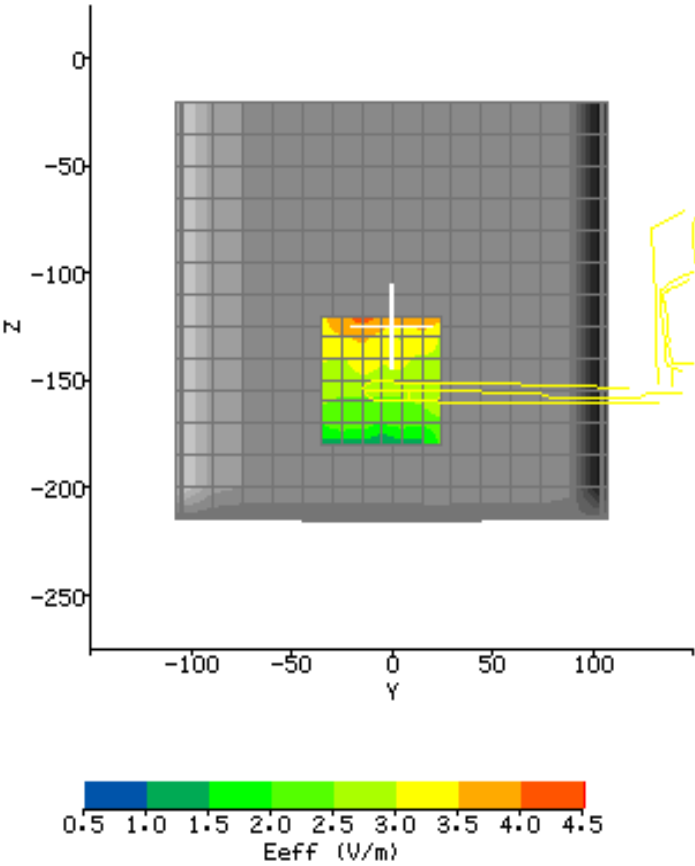

Plot #5 (1/2)

Date:	2005/6/2	Position:	NB display top side to phantom 0mm-1
Filename:	11b_mid-top0-1.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11b_2437MHz
Shape File:	c300-new-top.csv	Power Level:	15.54 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

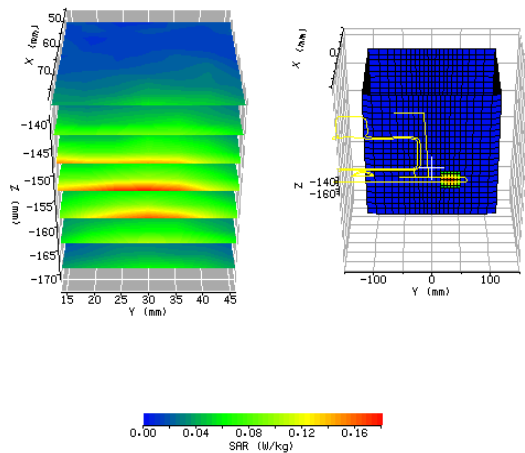

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.035	0.033	
Change during Scan (%)	-3.67		
Max E-field (V/m):	9.69		
Max SAR (W/kg)	1g	10g	
	0.135	0.069	
Location of Max (mm):	X	Y	Z
	78.0	14.0	-156.1

Plot #5 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-175.0	-130.0	5.0

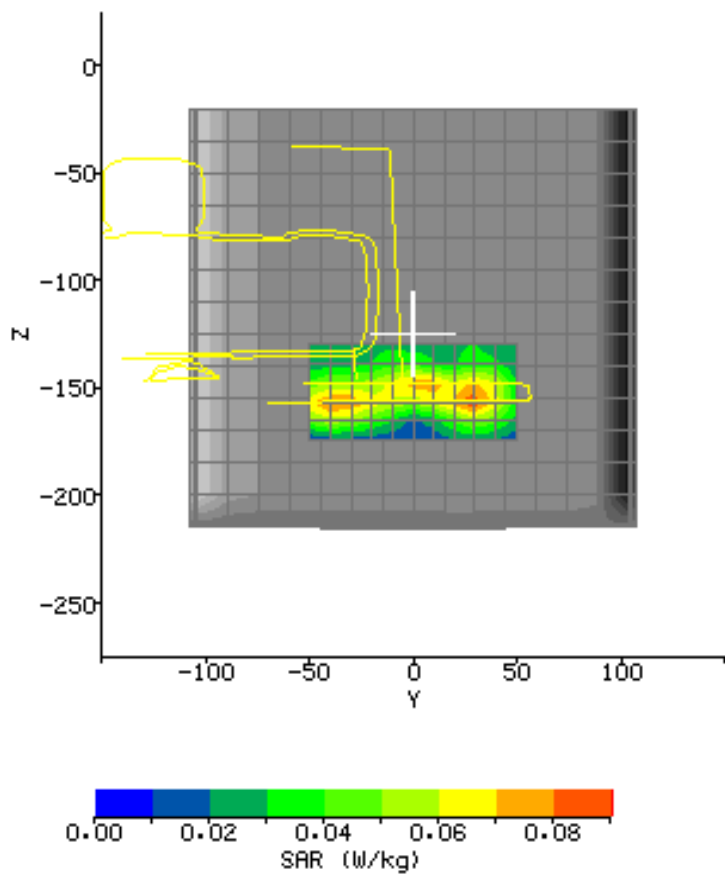

Plot #6 (1/2)

Date: 2005/6/2	Position: NB display top side to phantom 0mm-2
Filename: 11b_mid-top0-2.txt	Phantom: HeadBox2-test.csv
Device Tested: MS2161, Travel Mate C310	Head Rotation: 0
Antenna: PIFA Antenna	Test Frequency: 11b_2437MHz
Shape File: c300-new-top.csv	Power Level: 15.54 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Cal Factors:

Amp Gain: 2
Averaging: 1
Batteries -
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

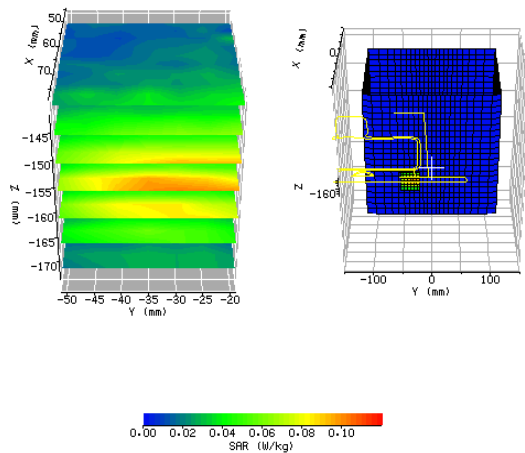

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan
	0.028	0.027
Change during Scan (%)	-3.44	
Max E-field (V/m):	7.33	
Max SAR (W/kg)	1g	10g
	0.086	0.051
Location of Max (mm):	X	Y
	78.1	-51.0
		Z
		-157.0

Plot #6 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-60.0	-10.0	5.0
Z	-175.0	-130.0	5.0

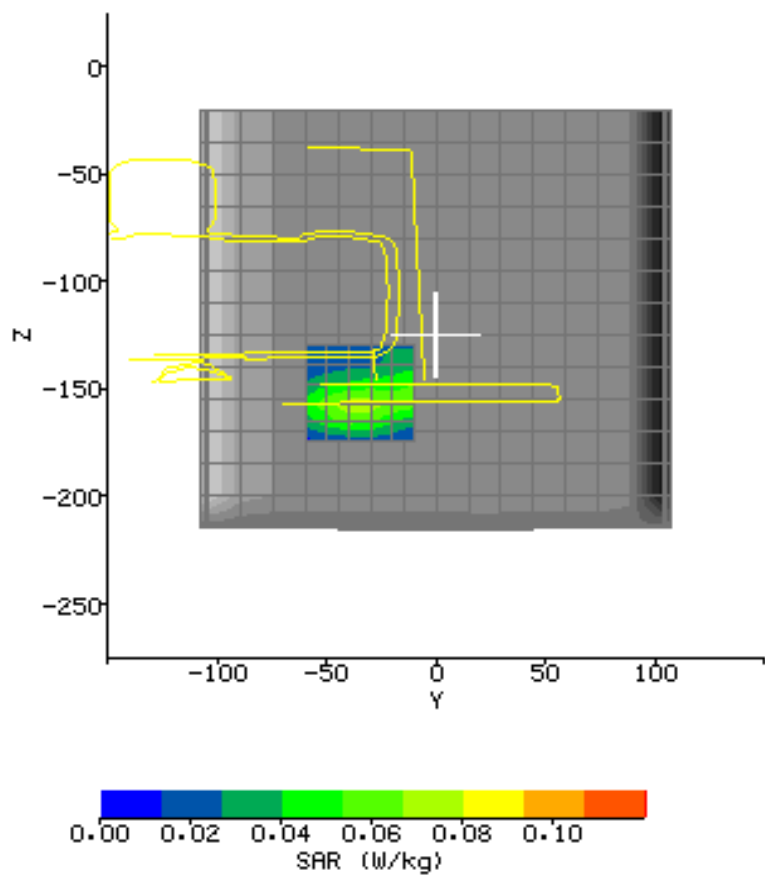

Plot #7 (1/2)


Date:	2005/6/2	Position:	NB display top side to phantom 15mm
Filename:	11b_mid-top15.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11b_2437MHz
Shape File:	c300-new-top.csv	Power Level:	15.54 dBm

Probe: 0114
Cal File: SN0114_2450_CW_BODY

	X	Y	Z
Cal Factors:			
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

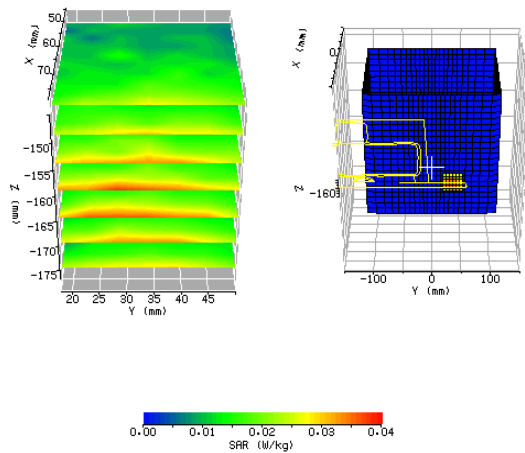

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.013	0.013	
Change during Scan (%)	0		
Max E-field (V/m):	4.47		
Max SAR (W/kg)	1g	10g	
	0.031	0.019	
Location of Max (mm):	X	Y	Z
	78.1	18.0	-162.8

Plot #7 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-180.0	-130.0	5.0

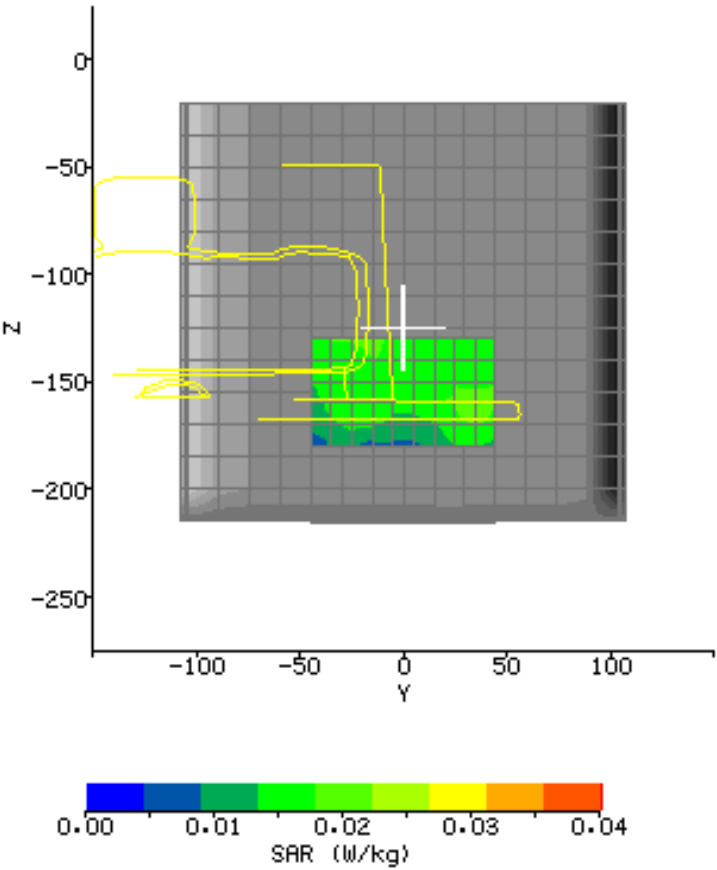

Plot #8 (1/2)

Date:	2005/6/2	Position:	NB display rear side to phantom 0mm
Filename:	11g_mid-rear0.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-rear.csv	Power Level:	16.75 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

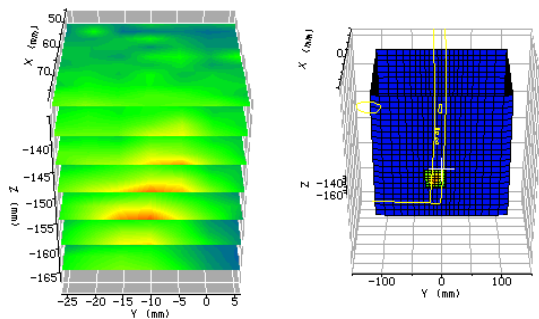

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.039	0.040	
Change during Scan (%)	3.66		
Max E-field (V/m):	9.26		
Max SAR (W/kg)	1g	10g	
	0.125	0.074	
Location of Max (mm):	X	Y	Z
	78.1	-26.0	-153.7

Plot #8 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

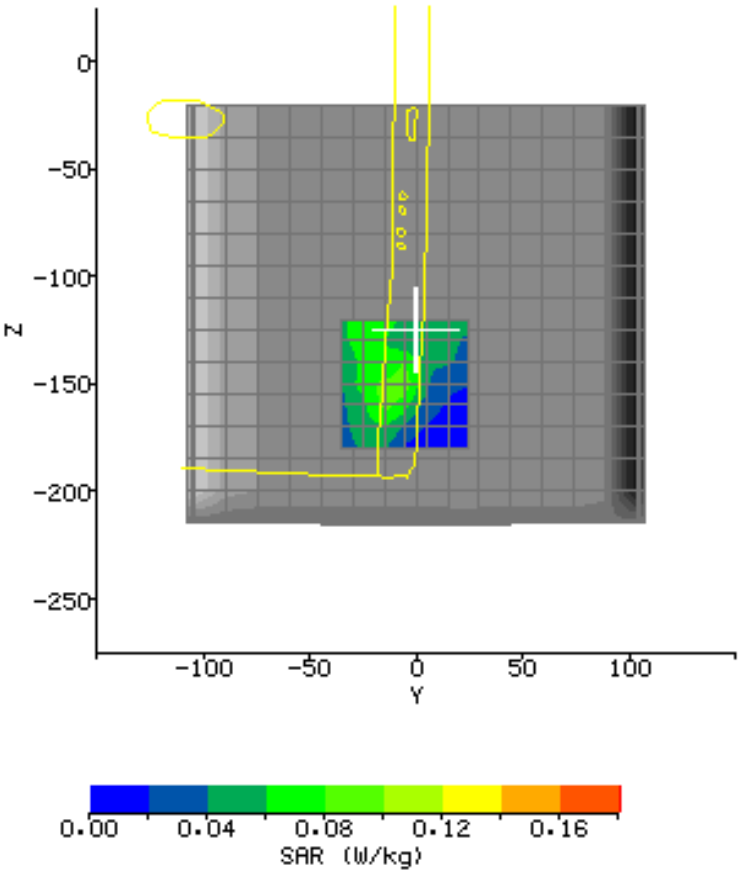

Plot #9 (1/2)

Date:	2005/6/2	Position:	NB display rear side to phantom 15mm
Filename:	11g_mid-rear15a.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-rear.csv	Power Level:	16.75 dBm


Probe:	0114	Liquid:	15.5cm
Cal File:	SN0114_2450_CW_BODY	Type:	2450 MHz Body
Cal Factors:		Conductivity:	1.8895
	Air	Relative Permittivity:	50.7167
	DCP	Liquid Temp (deg C):	22
	Lin	Ambient Temp (deg C):	23
Amp Gain:	2	Ambient RH (%):	55
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	-	Software Version:	2.33VPM
		Crest Factor = 1	

Plot #9 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

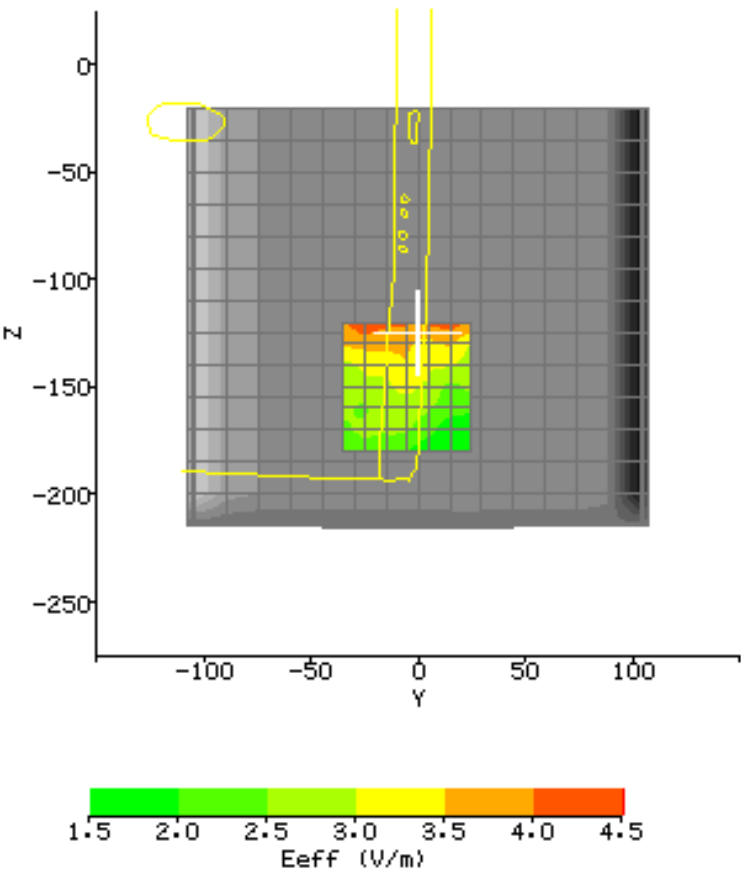

Plot #10 (1/2)

Date:	2005/6/2	Position:	NB display right side to phantom 0mm
Filename:	11g_mid-right0.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-right.csv	Power Level:	16.75 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

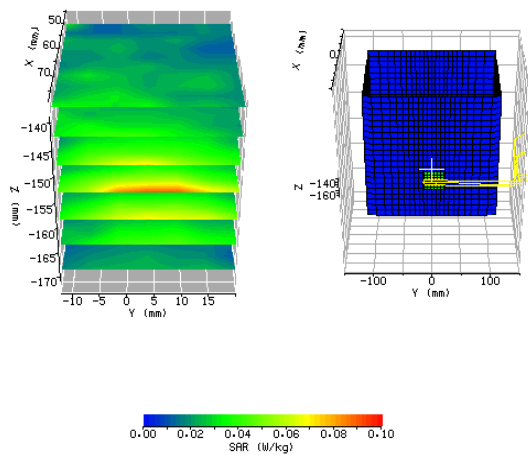

ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.016	0.019

Change during Scan (%) 1.21

Max E-field (V/m): 6.91

Max SAR (W/kg)

1g	10g
0.066	0.036

Location of Max (mm):


X	Y	Z
78.1	-12.0	-155.0

Plot #10 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

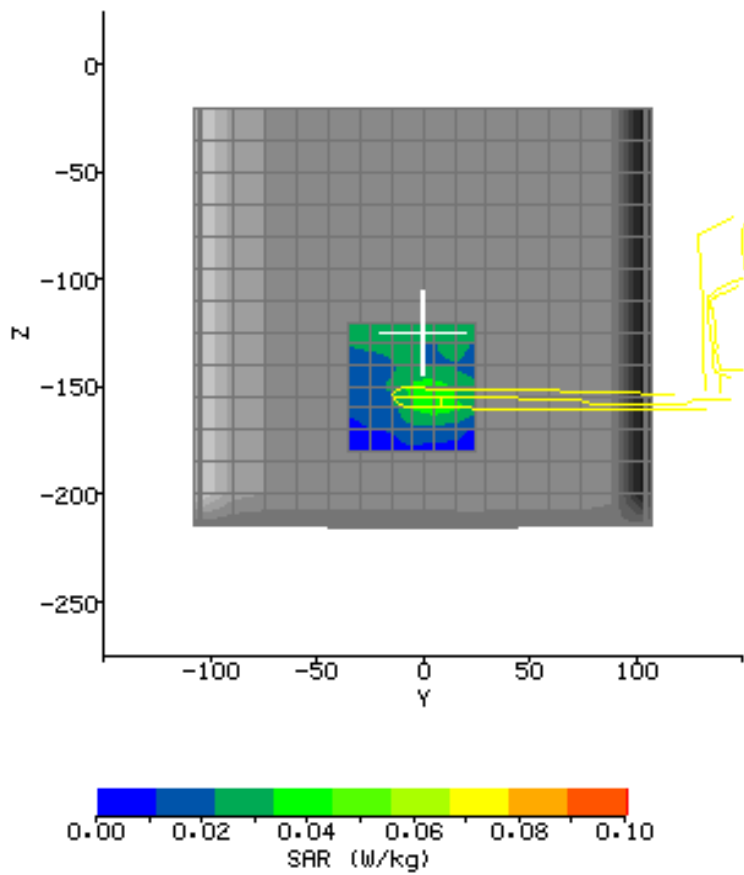

Plot #11 (1/2)

Date:	2005/6/2	Position:	NB display right side to phantom 15mm
Filename:	11g_mid-right15a.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-right.csv	Power Level:	16.75 dBm

Probe:	0114																
Cal File:	SN0114_2450_CW_BODY																
Cal Factors:	<table border="1"> <thead> <tr> <th></th><th>X</th><th>Y</th><th>Z</th></tr> </thead> <tbody> <tr> <td>Air</td><td>438</td><td>359</td><td>403</td></tr> <tr> <td>DCP</td><td>20</td><td>20</td><td>20</td></tr> <tr> <td>Lin</td><td>.585</td><td>.585</td><td>.585</td></tr> </tbody> </table>		X	Y	Z	Air	438	359	403	DCP	20	20	20	Lin	.585	.585	.585
	X	Y	Z														
Air	438	359	403														
DCP	20	20	20														
Lin	.585	.585	.585														
Amp Gain:	2																
Averaging:	1																
Batteries Replaced:	-																


Liquid:	15.5cm
Type:	2450 MHz Body
Conductivity:	1.8895
Relative Permittivity:	50.7167
Liquid Temp (deg C):	22
Ambient Temp (deg C):	23
Ambient RH (%):	55
Density (kg/m3):	1000
Software Version:	2.33VPM
Crest Factor = 1	

Plot #11 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	25.0	6.0
Z	-180.0	-120.0	6.0

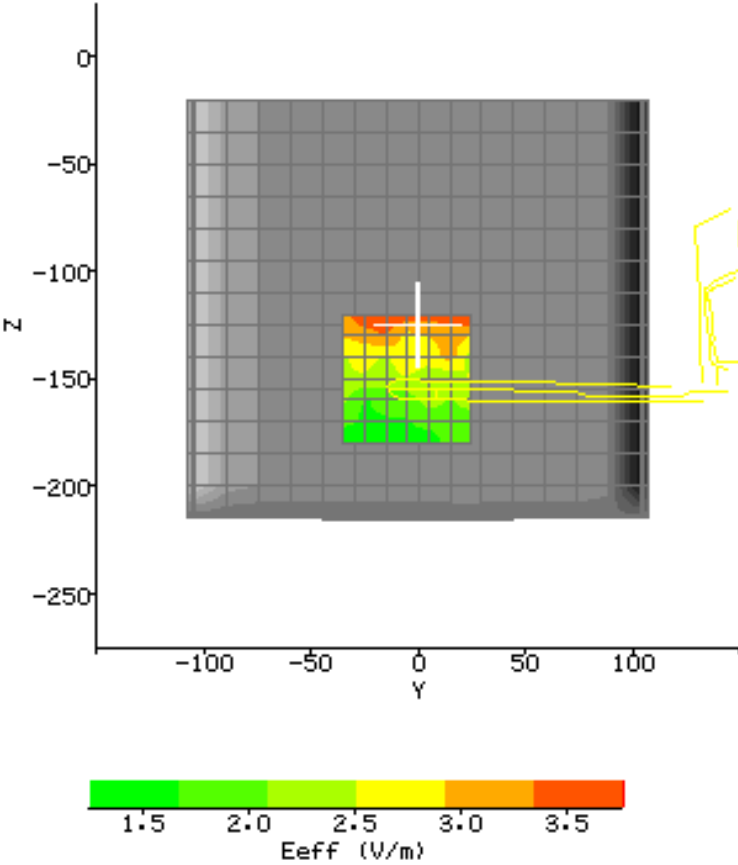

Plot #12 (1/2)

Date:	2005/6/2	Position:	NB display top side to phantom 0mm-1
Filename:	11g_mid-top0-1.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-top.csv	Power Level:	16.75 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

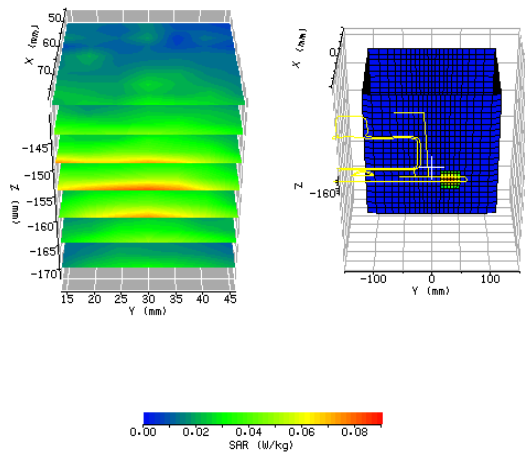

ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.018	0.016

Change during Scan (%): -2.82

Max E-field (V/m): 6.59

Max SAR (W/kg)

1g	10g
0.063	0.034

Location of Max (mm):


X	Y	Z
78.0	14.0	-156.1

Plot #12 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-175.0	-130.0	5.0

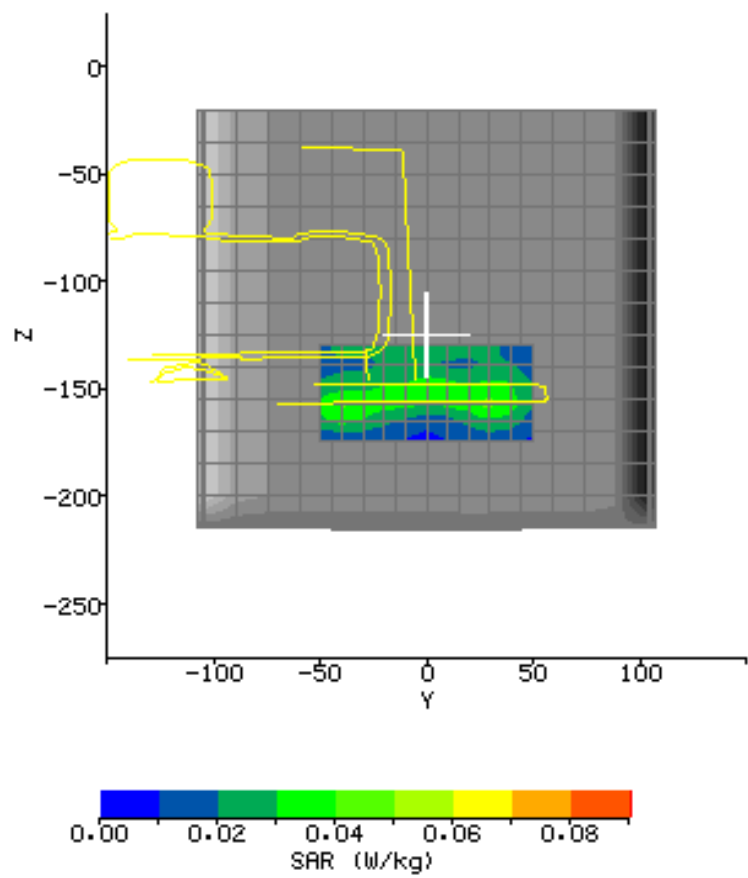

Plot #13 (1/2)

Date: 2005/6/2	Position: NB display top side to phantom 0mm-2
Filename: 11g_mid-top0-2.txt	Phantom: HeadBox2-test.csv
Device Tested: MS2161, Travel Mate C310	Head Rotation: 0
Antenna: PIFA Antenna	Test Frequency: 11g_2437MHz
Shape File: c300-new-top.csv	Power Level: 16.75 dBm


Probe: 0114
Cal File: SN0114_2450_CW_BODY

Cal Factors:

	X	Y	Z
Air	438	359	403
DCP	20	20	20
Lin	.585	.585	.585

Amp Gain: 2
Averaging: 1
Batteries
Replaced: -

Liquid: 15.5cm
Type: 2450 MHz Body
Conductivity: 1.8895
Relative Permittivity: 50.7167
Liquid Temp (deg C): 22
Ambient Temp (deg C): 23
Ambient RH (%): 55
Density (kg/m3): 1000
Software Version: 2.33VPM
Crest Factor = 1

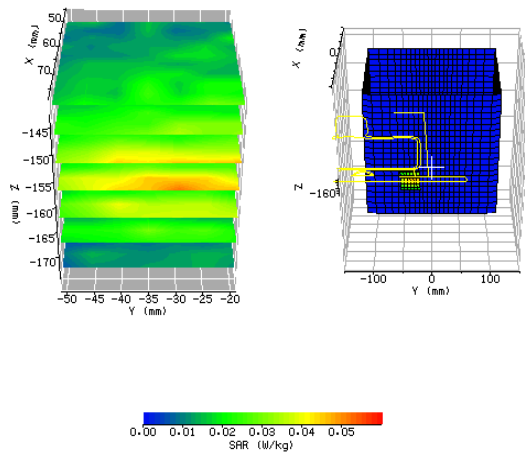

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.012	0.014	
Change during Scan (%)	3.50		
Max E-field (V/m):	5.25		
Max SAR (W/kg)	1g	10g	
	0.041	0.026	
Location of Max (mm):	X	Y	Z
	78.1	-51.0	-157.9

Plot #13 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-60.0	-10.0	5.0
Z	-175.0	-130.0	5.0

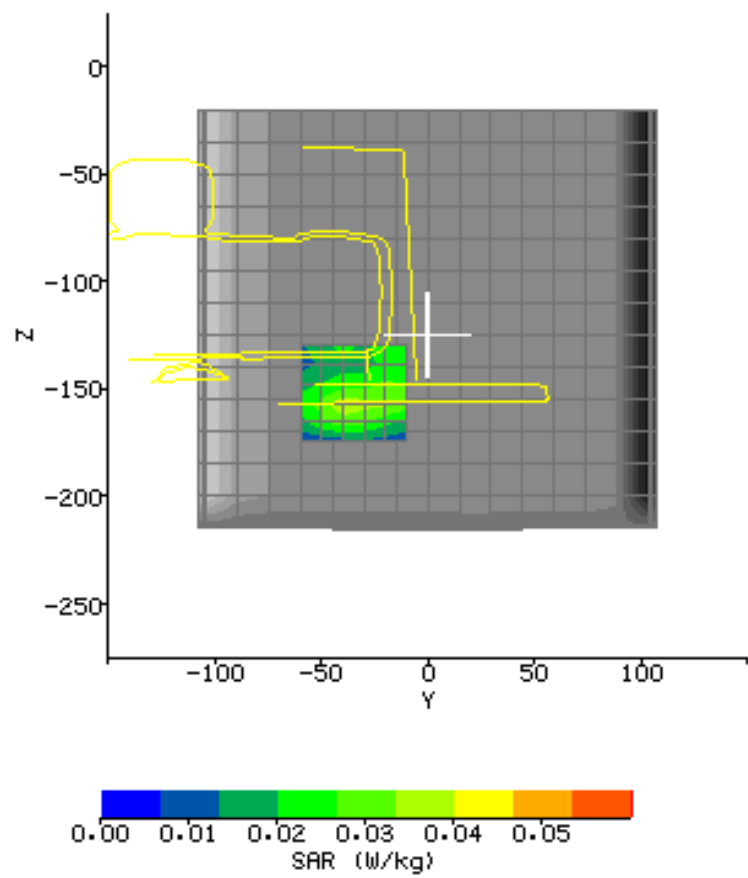

Plot #14 (1/2)

Date:	2005/6/2	Position:	NB display top side to phantom 15mm
Filename:	11g_mid-top15a.txt	Phantom:	HeadBox2-test.csv
Device Tested:	MS2161, Travel Mate C310	Head Rotation:	0
Antenna:	PIFA Antenna	Test Frequency:	11g_2437MHz
Shape File:	c300-new-top.csv	Power Level:	16.75 dBm


Probe:	0114	Liquid:	15.5cm
Cal File:	SN0114_2450_CW_BODY	Type:	2450 MHz Body
Cal Factors:		Conductivity:	1.8895
	Air	Relative Permittivity:	50.7167
	DCP	Liquid Temp (deg C):	22
	Lin	Ambient Temp (deg C):	23
Amp Gain:	2	Ambient RH (%):	55
Averaging:	1	Density (kg/m3):	1000
Batteries Replaced:	-	Software Version:	2.33VPM
		Crest Factor = 1	

Plot #14 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-45.0	45.0	9.0
Z	-175.0	-130.0	5.0

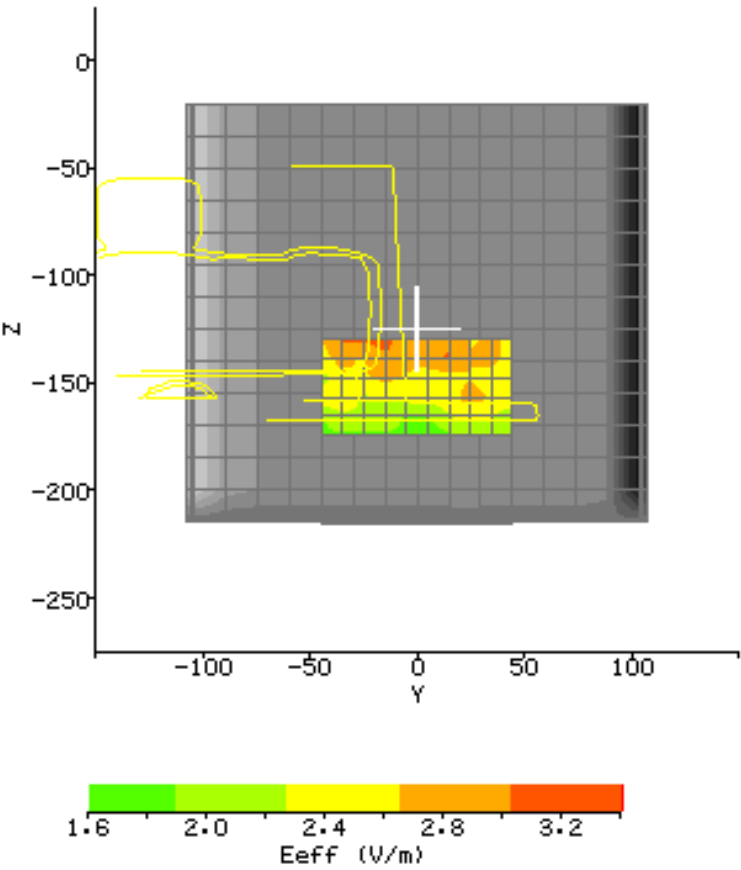

APPENDIX B - Photographs

Main Antenna



AUX Antenna



RF Module




RF Module



RF Module



RF Module

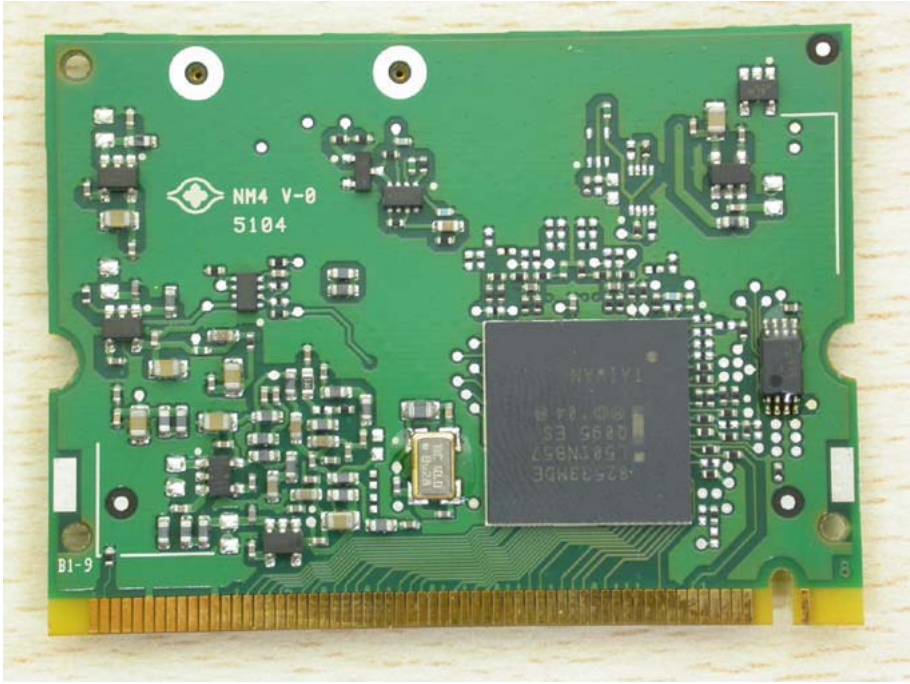

APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration Data -



IMMERSIBLE SAR PROBE

CALIBRATION REPORT

Part Number: IXP – 050

S/N 0114

March 2005



**Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5BG
Tel: +44 (0) 1306 632 870
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com**

INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0114) and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of CENELEC [1] and IEEE [2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors).

Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalized power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

CALIBRATION PROCEDURE

1. Objectives

The calibration process comprises the following stages

- 1) Determination of the channel sensitivity factors which optimise the probe's overall rotational isotropy in 1800MHz brain fluid
- 2) At each frequency of interest, application of these channel sensitivity factors to model the exponential decay of SAR in a sensitivity factors to model the exponential decay of SAR in a at that frequency
- 3) Determination of the effective tip radius and angular offset of the X channel which together optimise the probe's spherical isotropy in 900MHz brain fluid
- 4) If requested by the Customer, determination of the probe's response to GSM pulsed modulation

2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where U_{lin} is the linearised signal, $U_{o/p}$ is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of U_{lin} versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are V*200).

In turn, measurements of E-field are determined using the following equation (where output voltages are also in units of V*200):

$$E_{\text{liq}}^2 (\text{V/m}) = U_{\text{linx}} * \text{Air Factor}_x * \text{Liq Factor}_x \\ + U_{\text{liny}} * \text{Air Factor}_y * \text{Liq Factor}_y \\ + U_{\text{linz}} * \text{Air Factor}_z * \text{Liq Factor}_z \quad (3)$$

Here, “Air Factor” represents each channel’s sensitivity, while “Liq Factor” represents the enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

3. Selecting channel sensitivity factors to optimise isotropic response

After manufacture, the first stage of the calibration process is to balance the three channels’ Air Factor values, thereby optimising the probe’s overall axial response (“rotational isotropy”).

To do this, an 1800MHz waveguide containing head-fluid simulant is selected.

Like all waveguides used during probe calibration, this particular waveguide contains two distinct sections: an air-filled launcher section, and a liquid cell section, separated by a dielectric matching window designed to minimize reflections at the air-liquid interface.

The waveguide stands in an upright position and the liquid cell section is filled with 1800MHz brain fluid to within 10 mm of the open end. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects.

During the measurement, a TE_{01} mode is launched into the waveguide by means of an N-type-to-waveguide adapter. The probe is then lowered vertically into the liquid until the tip is exactly 10mm above the centre of the dielectric window. This particular separation ensures that the probe is operating in a part of the waveguide where boundary corrections are not necessary.

Care must also be taken that the probe tip is centred while rotating.

The exact power applied to the input of the waveguide during this stage of the probe calibration is immaterial since only relative values are of interest while the probe rotates. However, the power must be sufficiently above the noise floor and free from drift.

The dedicated Indexsar calibration software rotates the probe in 10 degree steps about its axis, and at each position, an Indexsar ‘Fast’ amplifier samples the probe channels 500 times per second for 0.4 s. The raw $U_{o/p}$ data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable. U_{linx} , U_{liny} and U_{linz} are derived from the raw $U_{o/p}$ values and written to an Excel template.

Once data have been collected from a full probe rotation, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the rotational isotropy. This automated approach to optimisation removes the effect of human bias.

Figure 5 represents the output from each diode sensor as a function of probe rotation angle. The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format, a representative image of which is shown in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

4. Determination of Conversion (“Liquid”) Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with height above a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance (z) from the dielectric separator is given by Equation 4:

$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

Here, the density ρ is conventionally assumed to be 1000 kg/m^3 , ab is the cross-sectional area of the waveguide, and P_f and P_b are the forward and reflected power inside the lossless section of the waveguide, respectively.

The penetration depth δ (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[\text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_o(\sigma + j\omega\epsilon_o\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

where σ is the conductivity of the tissue-simulant liquid in S/m, ϵ_r is its relative permittivity, and ω is the radial frequency (rad/s). Values for σ and ϵ_r are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2]. σ and ϵ_r are both temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at $22 \pm 2.0^\circ\text{C}$; if this is not possible, the values of σ and ϵ_r should reflect the actual temperature. Values employed for calibration are listed in the tables below.

By ensuring the liquid height in the waveguide is at least three penetration depths, reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 835/900MHz, 1800/1900MHz, 2450MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

During calibration, the probe is lowered carefully until it is just touching the cross-sectional centre of the dielectric window. 200 samples are then taken and written to an Excel template file before moving the probe vertically upwards. This cycle is repeated 50 times. The vertical separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 1mm steps at low frequency, through 0.5mm at 2450MHz, down to 0.2mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimizes the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.

5. Measurement of Spherical Isotropy

The setup for measuring the probe's spherical isotropy is shown in Figure 2.

A box phantom containing 900MHz head fluid is irradiated by a vertically- polarised, tuned dipole, mounted to the side of the phantom on the robot's seventh axis. During calibration, the spherical response is generated by rotating the probe about its axis in 20 degree steps and changing the dipole polarisation in 10 degree steps.

By using the VPM technique discussed below, an allowance can also be made for the effect of E-field gradient across the probe's spatial extent. This permits values for the probe's effective tip radius and X-channel angular offset to be modelled until the overall spherical isotropy figure is optimised.

The dipole is connected to a signal generator and amplifier via a directional coupler and power meter. As with the determination of rotational isotropy, the absolute power level is not important as long as it is stable.

The probe is positioned within the fluid so that its sensors are at the same vertical height as the centre of the source dipole. The line joining probe to dipole should be perpendicular to the phantom wall, while the horizontal separation between the two should be small enough for VPM corrections to be applicable, without encroaching near the boundary layer of the phantom wall.

VPM corrections require a knowledge of the fluid skin depth. This is measured during the calibration by recording the E-field strength while systematically moving the probe away from the dipole in 2mm steps over a 20mm range.

6. Response to Modulated Signals

To measure the response of the probe and amplifier to quickly-changing, modulated signals, the probe is mounted vertically in air, approximately 50mm from a vertically-polarised 900MHz dipole.

The test sequence involves manually stepping the power fed to the dipole up in regular (e.g. 2 dB) steps from the lowest power that gives a measurable reading on the SAR probe up to the maximum that the amplifiers can deliver.

At each power level, the individual channel outputs from the SAR probe are recorded at CW and then recorded again with the modulation setting. The results are entered into a spreadsheet also containing channel sensitivity factors for the probe. Equations (1) and (3) relate the channel output voltages to the three components of E-field, and Equation (6), below, converts these E-field values to measured SAR values.

$$\text{SAR (W/kg)} = E_{\text{liq}}^2 \text{ (V/m)} * \sigma \text{ (S/m)} / 1000 \quad (6)$$

Where σ is the conductivity of the simulant liquid employed.

In the spreadsheet, it is possible to derive an optimum DCP value for each channel which yields a SAR value 1/8 of the CW value (for GSM modulation).

The ratio of “GSM SAR” to “CW SAR” is shown in Figure 7 as a function of input power. At the optimum DCP value for modulated signals, this response remains flat for SAR values approaching 2 W/kg. The corresponding DCP values are listed in the summary page of the calibration factors for each probe.

Additional tests have shown that the modulation response is similar at 1800MHz and is not affected by the orientation between the source and the probe.

VPM (Virtual Probe Miniaturisation)

SAR probes with 3 diode-sensors in an orthogonal arrangement are designed to display an isotropic response when exposed to a uniform field. However, the probes are ordinarily used for measurements in non-uniform fields and isotropy is not assured when the field gradients are significant compared to the dimensions of the tip containing the three orthogonally-arranged dipole sensors.

It becomes increasingly important to assess the effects of field gradients on SAR probe readings when higher frequencies are being used. For Indexsar IXP-050 probes, which are of 5mm tip diameter, field gradient effects are minor at GSM frequencies, but are major above 5GHz. Smaller probes are less affected by field gradients and so probes, which are significantly less than 5mm diameter, would be better for applications above 5GHz.

The IndexSAR report IXS0223 describes theoretical and experimental studies to evaluate the issues associated with the use of probes at arbitrary angles to surfaces and field directions. Based upon these studies, the procedures and uncertainty analyses referred to in P1528 are addressed for the full range of probe presentation angles.

In addition, generalized procedures for correcting for the finite size of immersible SAR probes are developed. Use of these procedures enables application of schemes for virtual probe miniaturization (VPM) – allowing probes of a specific size to be used where physically-smaller probes would otherwise be required.


Given the typical dimensions of 3-channel SAR probes presently available, use of the VPM technique extends the satisfactory measurement range to higher frequencies.

CALIBRATION FACTORS MEASURED FOR PROBE S/N 0114

The probe was calibrated at 835, 900, 1800, 1900, 2450, 5200 and 5800 MHz in liquid samples representing both brain liquid and body fluid at these frequencies. The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 8).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

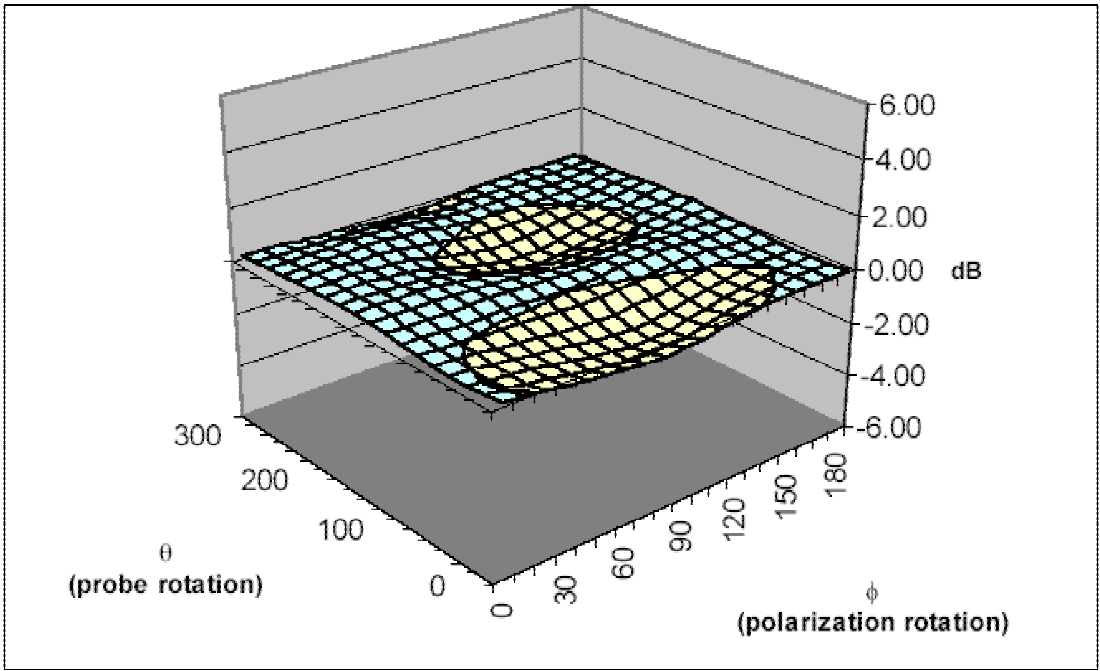

Surface Isotropy diagram of IXP-050 Probe S/N 0114 at 900MHz after VPM (rotational isotropy at side +/-0.07dB, spherical isotropy +/-0.56dB)

Probe tip radius	1.24
X Ch. Angle to red dot	-5

	Head		Body	
Frequency	Bdy. Corn. - f(0)	Bdy. Corn. - d(mm)	Bdy. Corn. - f(0)	Bdy. Corn. - d(mm)
900	0.49	3.0	1.00	1.3
1800	0.63	1.8	0.51	2.3
1900	0.66	1.7	0.46	2.5
2450	0.91	1.4	0.59	2.0

SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0114

Spherical isotropy measured at 900MHz	0.56	(+/-) dB
---------------------------------------	------	----------

	X	Y	Z	
Air Factors	438	359	403	(V*200)
CW DCPs	20	20	20	(V*200)
GSM DCPs	3.5	5.3	3.6	(V*200)

Freq (MHz)	Axial Isotropy		SAR ConvF		Notes
	(+/- dB)		(liq/air)		
	Head	Body	Head	Body	1,2
900	-	-	0.424	0.397	1,2
1800	0.07	-	0.467	0.501	1,2
1900	-	-	0.472	0.524	1,2
2450	-	-	0.508	0.585	1,2

Notes	
1)	Calibrations done at 22°C +/-2°C
2)	Waveguide calibration

PROBE SPECIFICATIONS

Indexsar probe 0114, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

Dimensions	S/N 0114	CENELEC [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

Dimensions	S/N 0114	CENELEC [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg)	>100	>100	100
N.B. only measured to > 100 W/kg on representative probes			

Isotropy (measured at 900MHz)	S/N 0114	CENELEC [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB)	0.07 Max (See table above)	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.56	1.0	0.50

Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
Chemical resistance	Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.

REFERENCES

- [1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.
- [2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.

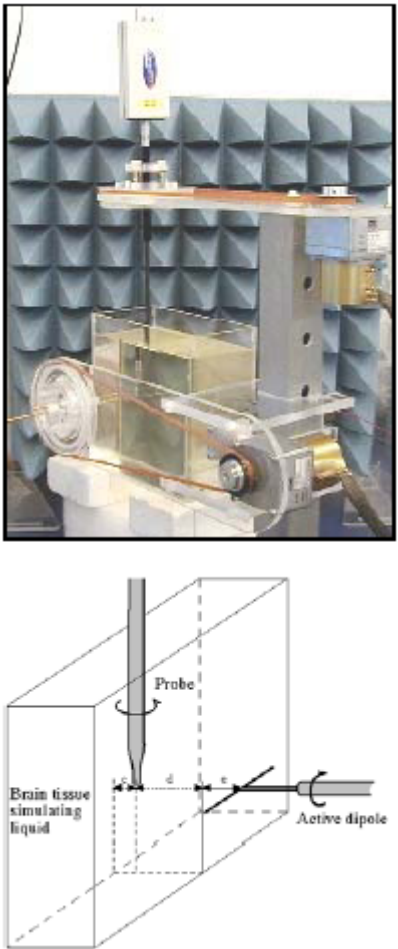


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

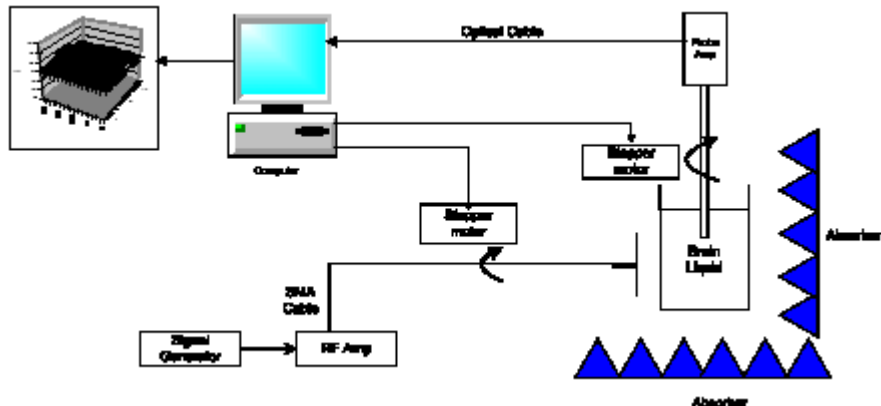


Figure 2. Schematic diagram of the test geometry used for isotropy determination

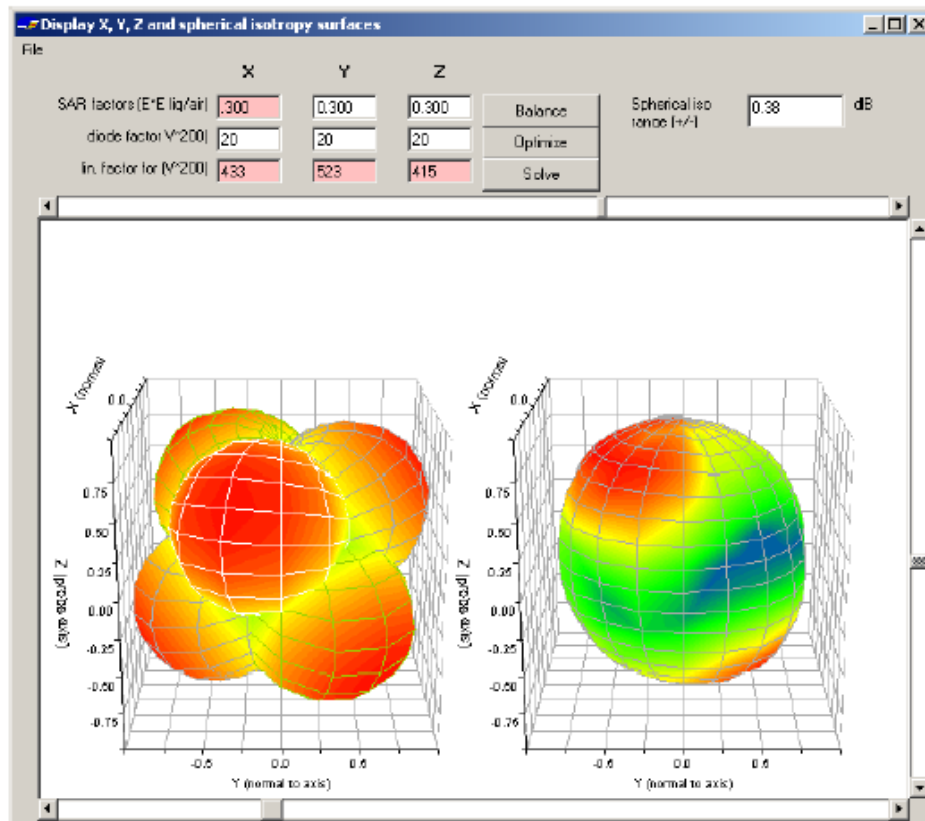


Figure 3. Graphical representation of a probe's response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For the probe S/N 0114, this range is (+/-) 0.56 dB.

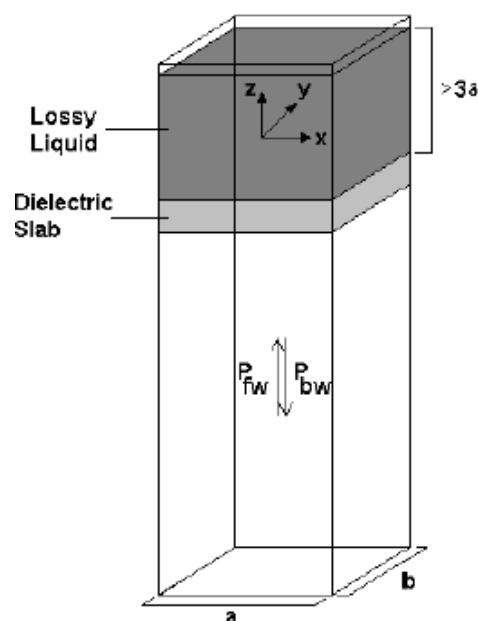


Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

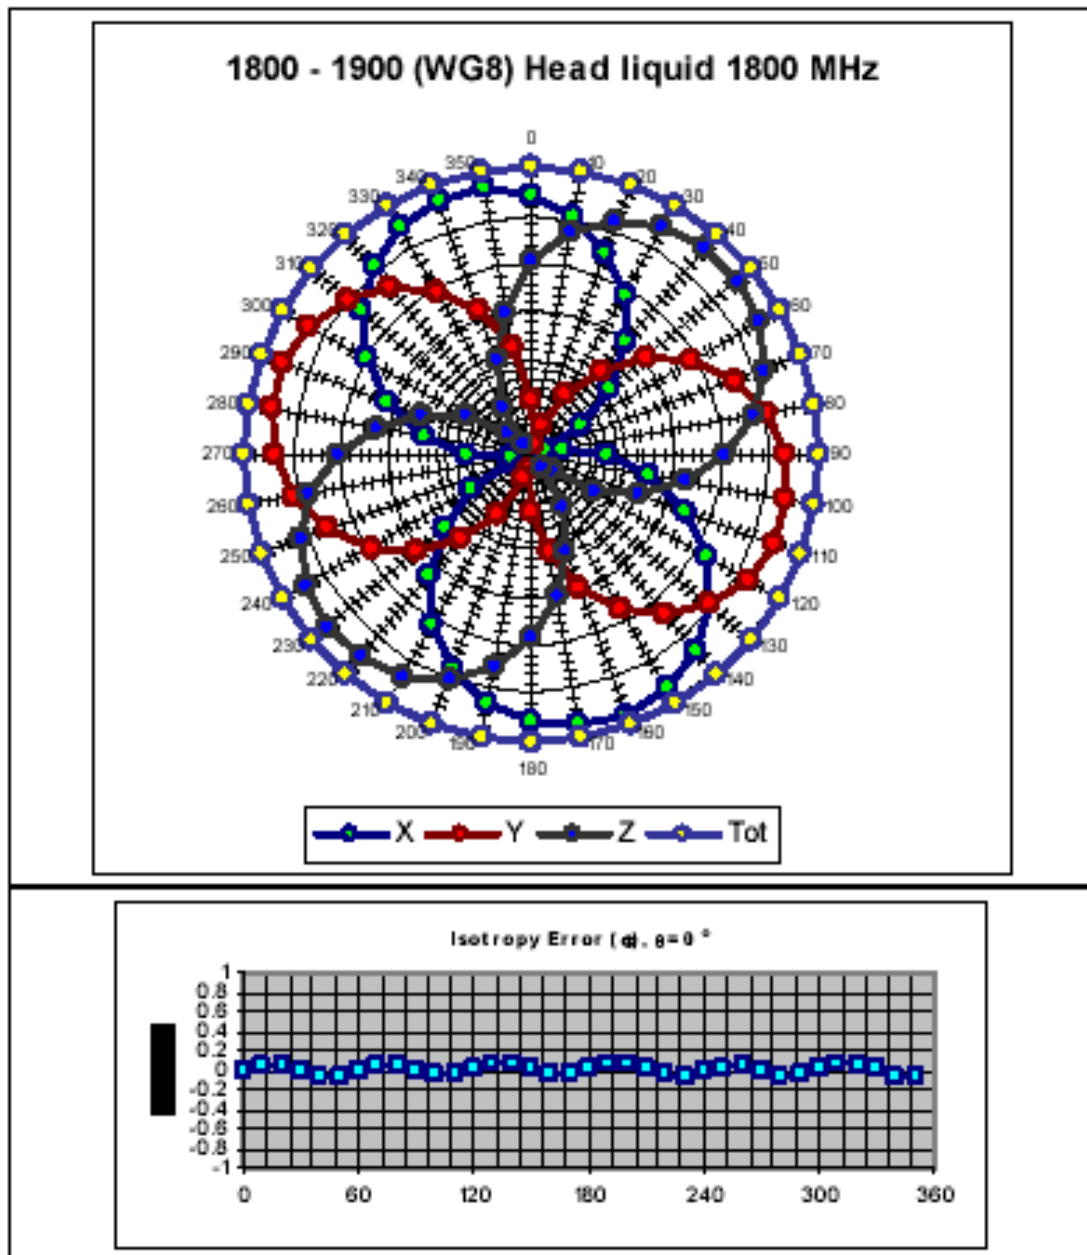
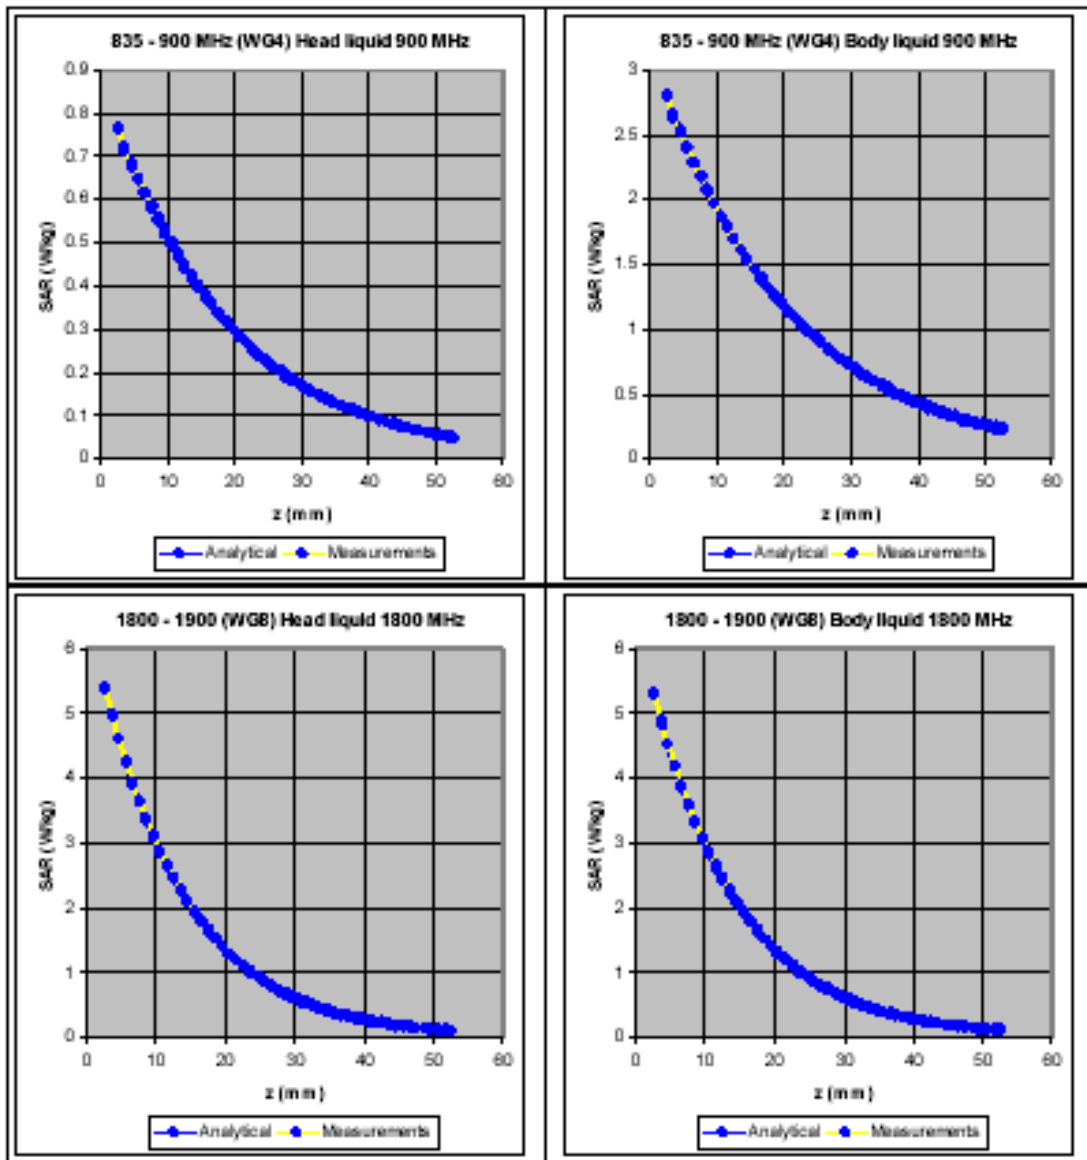


Figure 5. The rotational isotropy of probe S/N 0114 obtained by rotating the probe in a liquid-filled waveguide at 1800 MHz.



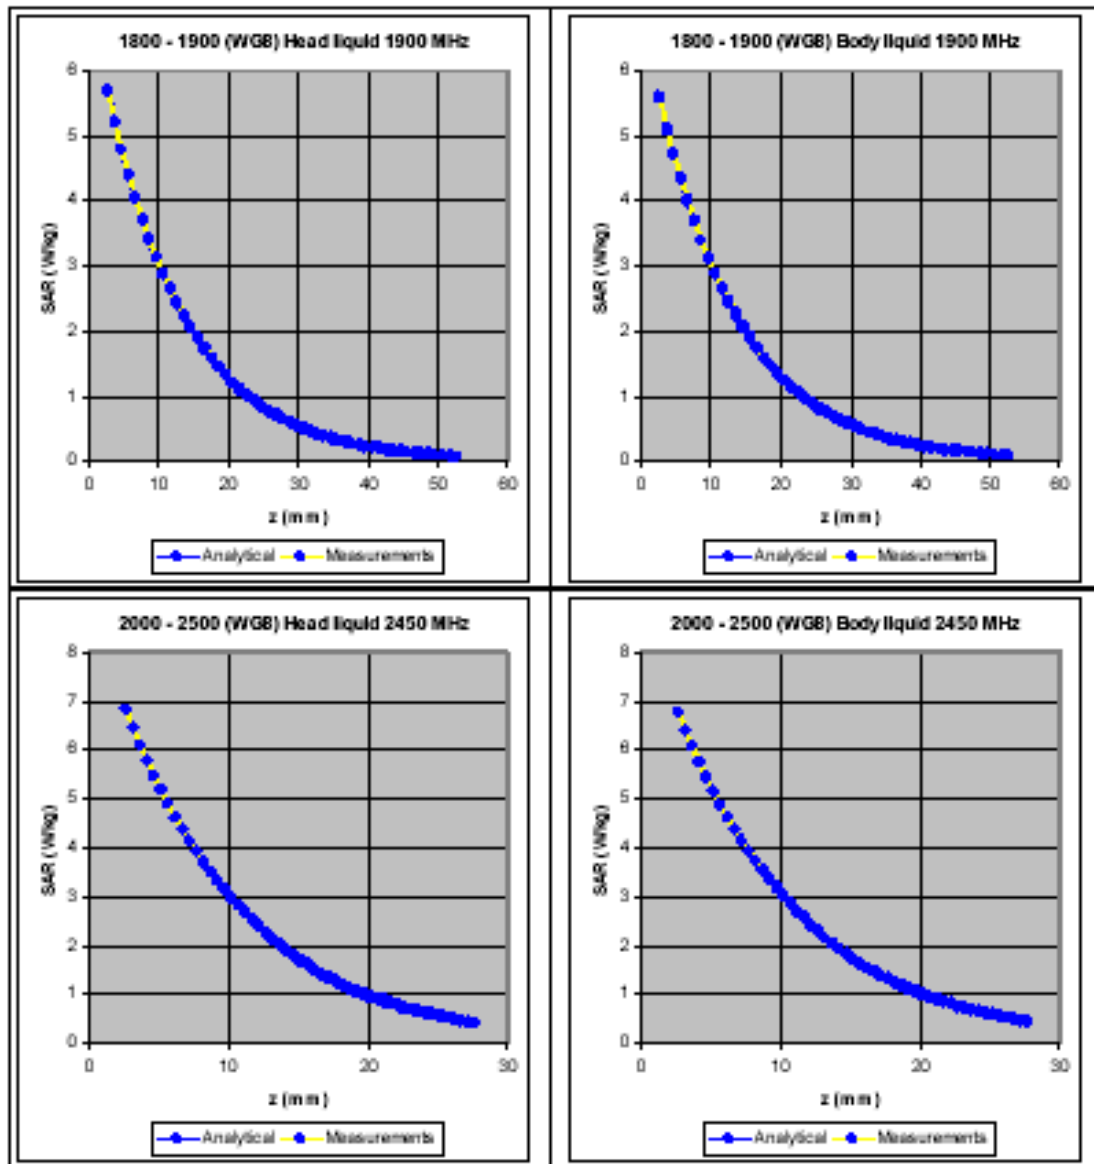


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

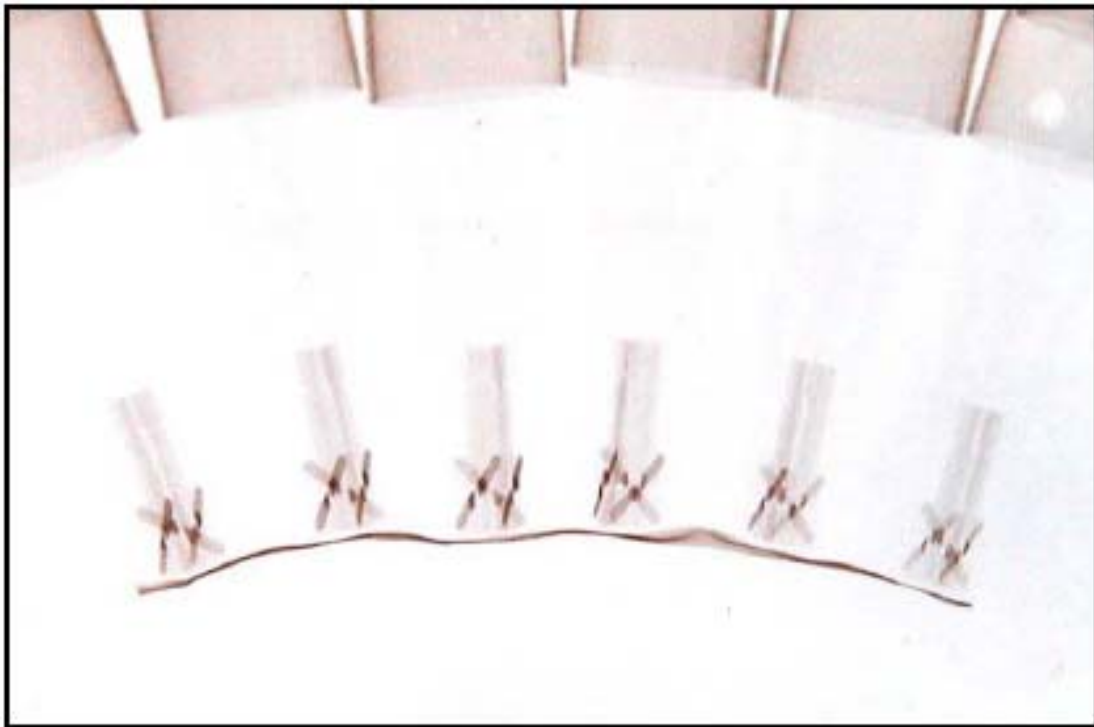


Figure 7 X-ray positive image of 5mm probes

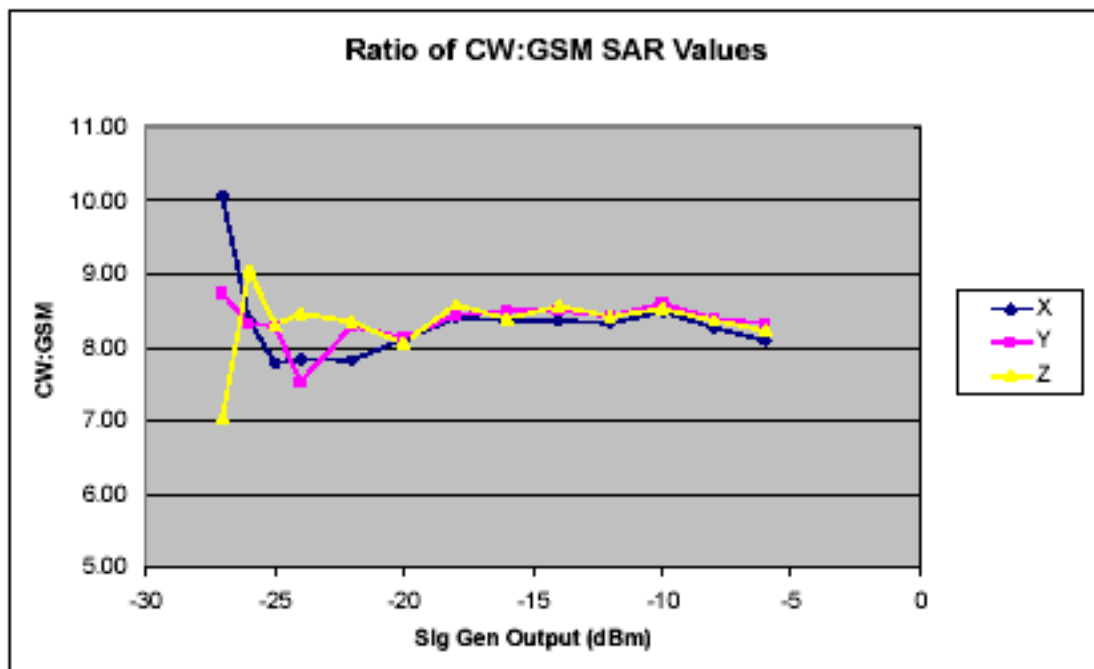


Figure 8 Response of probe to GSM-modulated signals over a range of powers

Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

Liquid used	Relative permittivity (measured)	Conductivity (S/m) (measured)
900 MHz BRAIN	39.40	0.93
900 MHz BODY	56.33	1.01
1800 MHz BRAIN	40.10	1.36
1800 MHz BODY	54.39	1.55
1900 MHz BRAIN	39.70	1.46
1900 MHz BODY	54.07	1.65
2450 MHz BRAIN	39.38	1.89
2450 MHz BODY	54.00	2.14




Report No. SN0048_2450
March 2005

INDEXSAR
2450MHz validation Dipole
Type IXD-245 S/N 0048

Performance measurements

- *MI Manning*

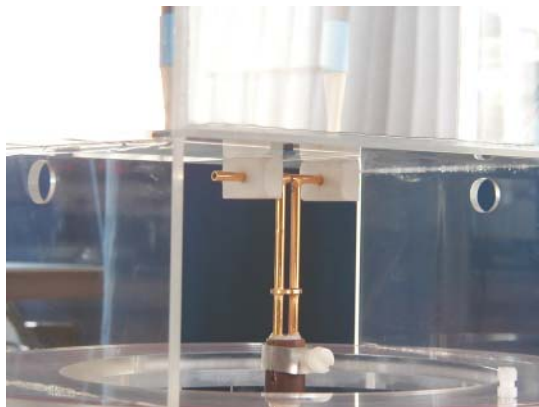

**Indexsar, Oakfield House, Cudworth Lane,
Newdigate, Surrey RH5 5DR. UK.**
Tel: +44 (0) 1306 631233 Fax: +44 (0) 1306 631834
e-mail: enquiries@indexsar.com

**Calibration / Conformance statement**
Balanced Validation dipole

Type:	IXD-245 2450MHz
-------	------------------------

Manufacturer:	IndexSAR, UK
---------------	---------------------

Serial Number:	0048
----------------	-------------

Place of Calibration:	IndexSAR, UK
-----------------------	---------------------

IndexSAR Limited hereby declares that the IXD series dipole named above has been checked for conformity to the specifications given in the draft IEEE 1528 and CENELEC En 50361 standards on the date shown below.

Date of Calibration/Check:	March 2005
----------------------------	-------------------

The dipole named above should be periodically re-checked using the procedures set out in the dipole calibration document. It is important that the cautions regarding handling of the dipoles (given in the calibration document) are adhered to.

Next Calibration Date:	March 2007
------------------------	-------------------

The calibration measurements were carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated By:	
----------------	---

Approved By:	
--------------	---

1. Tests on Validation Dipole

Tests have been performed on a balanced dipole made for 2450MHz application according to the construction guidelines, dimensions and tolerances given in the draft IEEE1528 standard [1]. Measurements have been made of the impedance and return loss when positioned against the liquid-filled phantom and a validation test has been performed according to the procedures set out in IEEE 1528 [1].

2. Measurement Conditions

Measurements were performed using a box-shaped phantom made of PMMA with dimensions designed to meet the accuracy criteria for reasonably-sized phantoms that do not have liquid capacities substantially in excess of the volume of liquid required to fill the Indexsar upright SAM phantoms used for SAR testing of handsets against the ear.

An HP 8753B vector network analyser was used for the return loss measurements.

The dipole was placed in a special holder made of low-permittivity, low-loss materials. This holder enables the dipole to be positioned accurately in the centre of the base of the Indexsar box-phantom used for flat-surface testing and validation checks.

The validation dipoles are supplied with special spacers made from a low-permittivity, low-loss foam material. These spacers are fitted to the dipole arms to ensure that, when the dipole is offered up to the phantom surface, the spacing between the dipole and the liquid surface is accurately aligned according to the guidance in the relevant standards documentation. The spacers are rectangular with a central hole equal to the dipole arm diameter and dimensioned so that the longer side can be used to ensure a spacing of 15mm from the liquid in the phantom (for tests at 900MHz and below) and the shorter side can be used for tests at 1800MHz and above to ensure a spacing of 10mm from the liquid in the phantom. The spacers are made on a CNC milling machine with an accuracy of $1/40^{\text{th}}$ mm but they may suffer wear and tear and need to be replaced periodically. The material used is Rohacell, which has a relative permittivity of approx. 1.05 and a negligible loss tangent.

The apparatus supplied by Indexsar for dipole validation tests thus includes:

Balanced dipoles for each frequency required are dimensioned according to the guidelines given in IEEE 1528 [1]. The dipoles are made from semi-rigid 50 Ohm co-ax, which is joined by soldering and is gold-plated subsequently. The constructed dipoles are easily deformed, if mis-handled, and periodic checks need to be made of their symmetry.

Rohacell foam spacers designed for presenting the dipoles to 2mm thick PMMA box phantoms. These components also suffer wear and tear and should be replaced when the central hole is a loose-fit on the dipole arms or if the edges are too worn to ensure accurate alignment. The standard spacers are dimensioned for use with 2mm wall thickness (additional spacers are available for 4mm wall thickness).

3. SAR Validation Measurement


A SAR validation check was performed with the box-phantom located on the SARA2 phantom support base on the SARA2 robot system. Tests were then conducted at a feed power level of approx. 0.25W. The actual power level was recorded and used to normalise the results obtained to the standard input power conditions of 1W (forward power). The ambient temperature was 24°C.

The phantom was filled with a 2450MHz brain liquid using a recipe from [1], which was measured using an Indexsar DiLine kit at 2450MHz. Measurements were taken at 23°C and 30°C and interpolation was used to find the properties at 24°C which were as below:

Relative Permittivity **39.221**
Conductivity **1.8714 S/m**

The SARA2 software version 0.420N was used with an Indexsar probe previously calibrated using waveguide techniques.

The 3D measurement made using the dipole at the bottom of the phantom box is shown below:

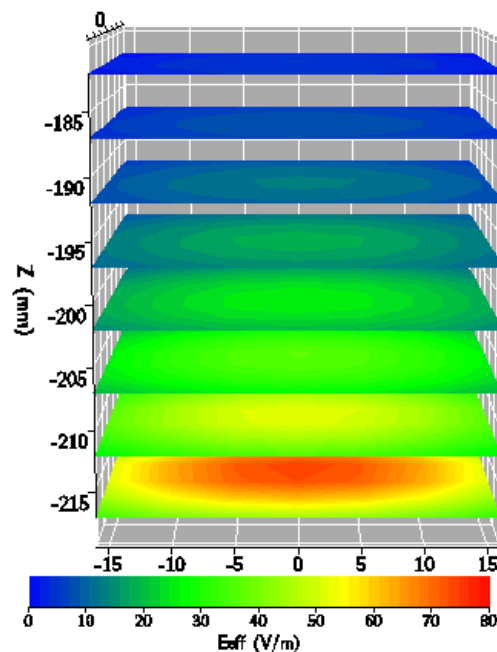

The volume-averaged SAR results, normalised to an input power of 1W (forward power) are:

Averaged over 1 cm³ (1g) of tissue **51.376 W/kg**
Averaged over 10cm³ (10g) of tissue **23.888 W/kg**

These results can be compared with Table 8.1 in [1]. The agreement is within 10%.


4. Dipole impedance and return loss

The dipoles are designed to have low return loss ONLY when presented against a lossy-phantom at the specified distance. A Vector Network Analyser (VNA) was used to perform a return loss measurement on the specific dipole when in the measurement-location against the box phantom. The distance was as specified in the standard i.e. 10mm from the liquid (for 2450MHz). The Indexsar foam spacers (described above) were used to ensure this condition during measurement.

The impedance was measured at the SMA-connector with the network analyser.
The following parameters were measured:

Dipole impedance at 2450 MHz $\text{Re}\{Z\} = 44.814 \Omega$
 $\text{Im}\{Z\} = -5.3359 \Omega$

Return loss at 2450MHz **-22.122 dB**

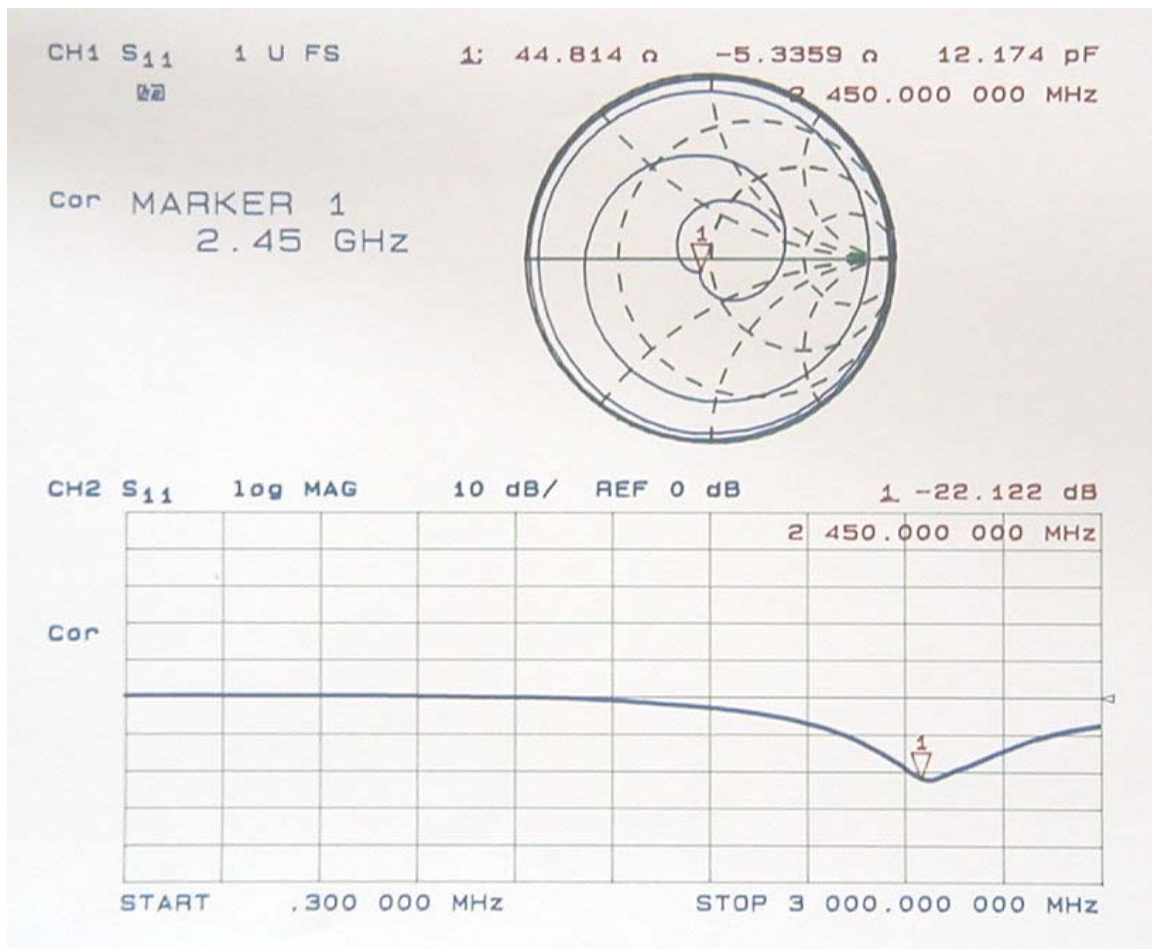

5. Dipole handling

The dipoles are made from standard, copper-sheathed coaxial cable. In assembly, the sections are joined using ordinary soft-soldering. This is necessary to avoid excessive heat input in manufacture, which would destroy the polythene dielectric used for the cable. The consequence of the construction material and the assembly technique is that the dipoles are fragile and can be deformed by rough handling. Conversely, they can be straightened quite easily as described in this report.

If a dipole is suspected of being deformed, a normal workshop lathe can be used as an alignment jig to restore the symmetry. To do this, the dipole is first placed in the headstock of the lathe (centred on the plastic or brass spacers) and the headstock is rotated by hand (do NOT use the motor). A marker (lathe tool or similar) is brought up close to the end of one dipole arm and then the headstock is rotated by 0.5 rev. to check the opposing arm. If they are not balanced, judicious deformation of the arms can be used to restore the symmetry.

If a dipole has a failed solder joint, the dipole can be fixed down in such a way that the arms are co-linear and the joint re-soldered with a reasonably-powerful electrical soldering iron. Do not use gas soldering irons. After such a repair, electrical tests must be performed as described below.

Please note that, because of their construction, the dipoles are short-circuited for DC signals.

6. Tuning the dipole

The dipole dimensions are based on calculations that assumed specific liquid dielectric properties. If the liquid dielectric properties are somewhat different, the dipole tuning will also vary. A pragmatic way of accounting for variations in liquid properties is to 'tune' the dipole (by applying minor variations to its effective length). For this purpose, Indexsar can supply short brass tube lengths to extend the length of the dipole and thus 'tune' the dipole. It cannot be made shorter without removing a bit from the arm. An alternative way to tune the dipole is to use copper shielding tape to extend the effective length of the dipole. Do both arms equally.

It should be possible to tune a dipole as described, whilst in place in the measurement position as long as the user has access to a VNA for determining the return loss.

7. Reference

[1] Draft recommended practice for determining the peak spatial-average specific absorption rate (SAR) in the human body due to wireless communications devices: Measurement Techniques. Draft CD1.1 – December 29, 2002.