
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2024/08/05

7_WLAN2.4GHz_802.11b-1M_CH1_Top(PAD)_0mm_ANT Main**DUT: Notebook PC; Type: N23H7**

Communication System: UID 0, WLAN 2.4G; Frequency: 2412 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.15, 7.15, 7.15) @ 2412 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.744 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.254 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.866 W/kg

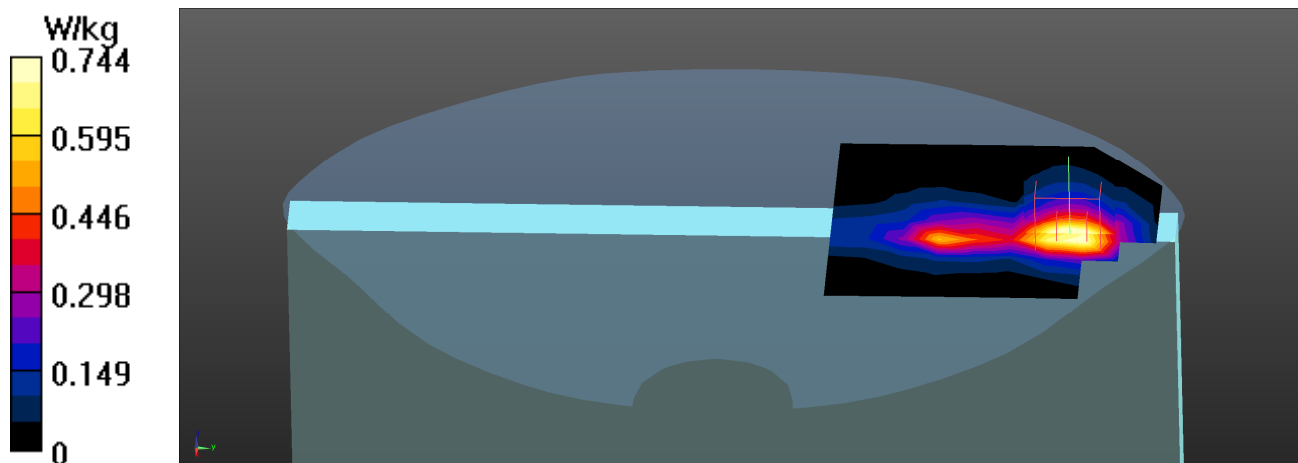

Test Laboratory: DEKRA

Date: 2024/08/05

31_Bluetooth_BT-1M_CH39_Top(PAD)_0mm_ANT Aux**DUT: Notebook PC; Type: N23H7**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(7.15, 7.15, 7.15) @ 2441 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.290 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.525 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 0.305 W/kg

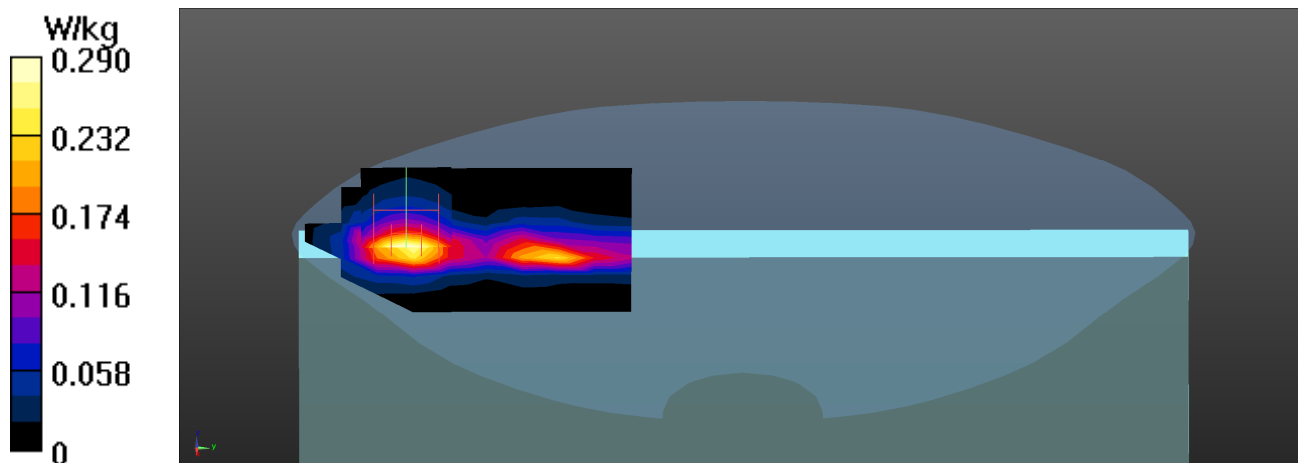

Test Laboratory: DEKRA

Date: 2024/08/06

12_WLAN5GHz_802.11n40-HT0_CH54_Top(PAD)_0mm_ANT Aux**DUT: Notebook PC; Type: N23H7**

Communication System: UID 0, WLAN 5G; Frequency: 5270 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.71, 4.71, 4.71) @ 5270 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.644 W/kg

Configuration/Flat/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.160 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 67.5%

Maximum value of SAR (measured) = 0.645 W/kg

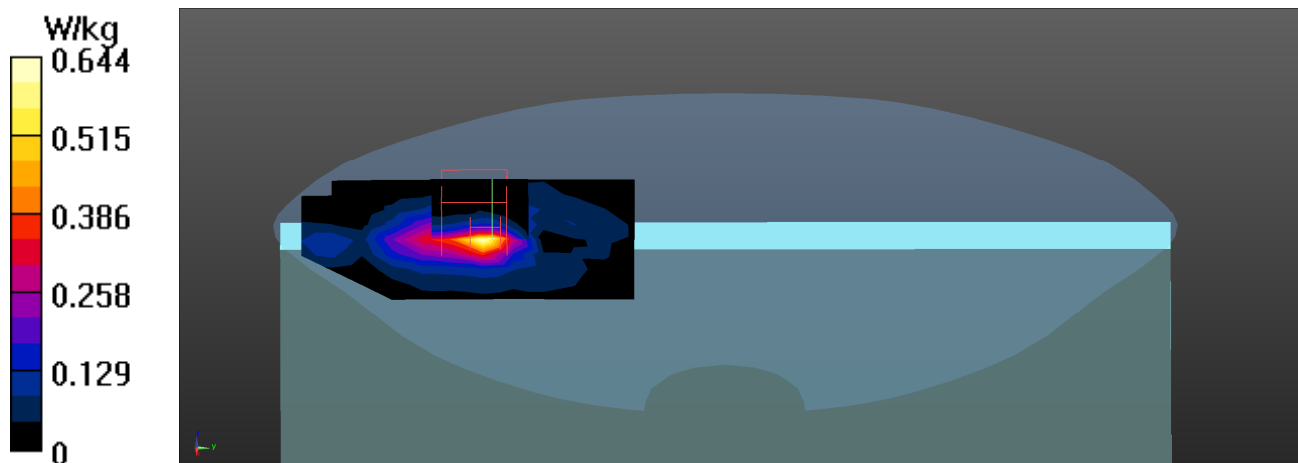

Test Laboratory: DEKRA

Date: 2024/08/06

24_WLAN5GHz_802.11c80-VHT0_CH138_Top(PAD)_0mm_ANT Aux**DUT: Notebook PC; Type: N23H7**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.25$ S/m; $\epsilon_r = 35.31$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.41, 4.41, 4.41) @ 5690 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.950 W/kg

Configuration/Flat/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.22 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.6%

Maximum value of SAR (measured) = 1.44 W/kg

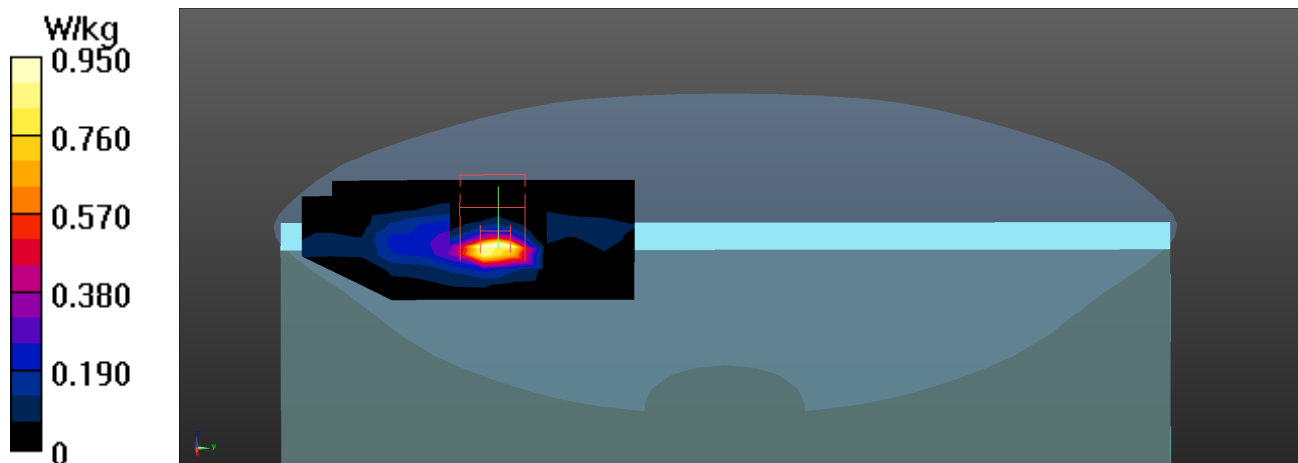

Test Laboratory: DEKRA

Date: 2024/08/06

14_WLAN5GHz_802.11c80-VHT0_CH155_Top(PAD)_0mm_ANT Aux**DUT: Notebook PC; Type: N23H7**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 35.07$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3698; ConvF(4.6, 4.6, 4.6) @ 5775 MHz; Calibrated: 2023/11/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1207; Calibrated: 2023/11/22
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.760 W/kg

Configuration/Flat/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.59 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.911 W/kg

