


How to Activate Sensor



- 1 Select "TPMS" icon from the main menu.

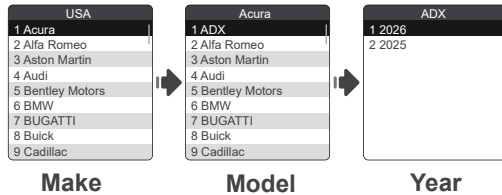


- 2 Select the make, model and year of the vehicle.



Correct Position



- 3 Place the tool near the tire to ensure activation and decoding.



- 4 Select "Trigger Sensor," choose the correct wheel, and press "Wi-Fi" to activate the TPMS. The sensor ID will appear on the screen once the signal is received.

How to Update Tool

Ensure that a user ID account is created and a stable Wi-Fi connection is available before updating the tool.

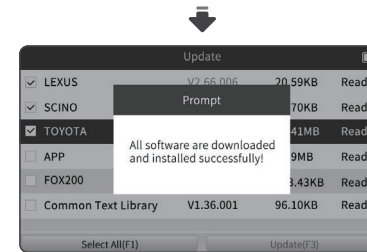

- 1 After select "Update" icon from the main menu, you will enter the update screen.
- 2 Complete the tool update process according to the system's automatic instructions.
- 3 Once the update is complete, the tool will display "Software update successful."

Battery Charging

The tool has a built-in rechargeable battery. The device can be charged via a USB Type-C cable.




USB Type-C cable



TPMS Programming Tool IC:2831A-TT05

How to Find the Serial Number

- 1 Check the product label on the back of the tool.

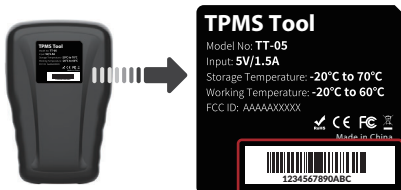

- 2 Go to the tool's "Settings" and check the "About" section.



How to Program Sensor



Select the "TPMS" icon from the main menu, and then choose your vehicle model. After the data is loaded, click "Sensor Program".

1 Create Sensor




If you only want to program one TPMS sensor, select "Create Sensor." Choose "Create Sensor" from the menu, place the new sensor close to the tool,

2 Create Set




If you want to program more than one TPMS sensor at the same time, select "Create Set." Choose "Create Set" from the menu, place the new sensors close to the tool, and press OK to start programming.

3 Manual Create




Select "Manual Create" to enter the sensor ID directly, then press OK to start the programming process.

4 Clone by Trigger



Select "Clone by Trigger." Place the tool near the original sensor to copy the sensor ID, then bring four new sensors close to the tool and press OK to start programming.

5 Clone by OBD

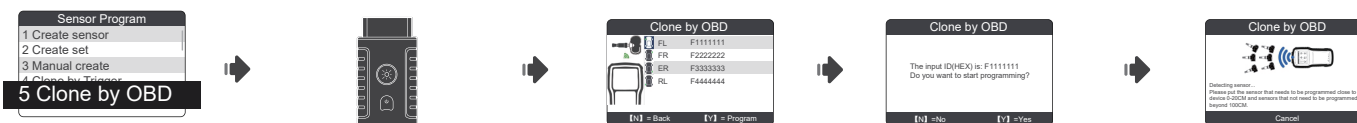

Vehicle Communication Interface(VCI)
IC:2831A-TT05VCI

Select "Clone by OBD," please plug VCI dongle with the vehicle and turn the ignition on, select the sensor ID to reading original sensor ID from vehicle, after successful reading the sensor ID then press OK to programming the new sensor. Select "Clone by OBD." Connect the VCI dongle to the vehicle and switch.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

For TPMS Programming Tool

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.

For VCI

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

ISED Statement

- English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux CNR exempts de licence d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

(1) Cet appareil ne doit pas causer d'interférences.

(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

For TPMS Programming Tool

This equipment should be installed and operated with minimum distance 0cm between the radiator & your body.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec une distance minimale de 0 cm entre le radiateur et votre corps.

The device for operation in the band 5150–5250 MHz is only for indoor use to

reduce the potential for harmful interference to co-channel mobile satellite systems.

L'appareil destiné à fonctionner dans la bande 5150-5250 MHz est uniquement destiné à une utilisation en intérieur afin de réduire le potentiel d'interférences nuisibles aux systèmes mobiles par satellite co-canaux.

For VCI

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé.

Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.