



Prüfbericht-Nr.: Test report no.:	CN22V0IL (P15C-BLE) 001	Auftrags-Nr.: Order no.:	238524547	Seite 1 von 24 Page 1 of 24
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-11-23	
Auftraggeber: Client:	Ademco Inc 1985 Douglas Drive N, Golden Valley, USA			
Prüfgegenstand: Test item:	L1 WiFi Water Leak and Freeze Detector			
Bezeichnung / Typ-Nr.: Identification / Type no.:	RWLD3001-001, RWLD3002-001, CHW3610W8001, YCHW3000W3003			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (BLE)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2022-05-25			
Prüfmuster-Nr.: Test sample no:	A003267737-002 A003267737-001			
Prüfzeitraum: Testing period:	2022-06-01 - 2022-06-22			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
zusammengestellt von: compiled by:	genehmigt von: authorized by:			
Datum: Date: 2022-08-17	 Ryan Chen		 Brenda Chen	
Stellung / Position:	Senior Project Manager	Ausstellungsdatum: Issue date: 2022-08-17	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
-	15.207	Mains Conducted Emission	N/A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	13
5. TEST RESULTS	14
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1 Antenna Requirement	14
5.1.2 Peak Output Power	15
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	17
5.1.4 Power Spectral Density.....	18
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....	19
5.1.6 Radiated Spurious Emissions and Band Edges	20

Prüfbericht - Nr.: CN22V0IL (P15C-BLE) 001
Test Report No.

Seite 4 von 24
Page 4 of 24

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN22V0IL (P15C-BLE) 001
Test Report No.

Seite 5 von 24
Page 5 of 24

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN22V0IL (P15C-BLE) 001	Original Release	2022-08-17

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a L1 WiFi Water Leak and Freeze Detector. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	L1 WiFi Water Leak and Freeze Detector
Type Identification	RWLD3001-001, RWLD3002-001, CHW3610W8001, YCHW3000W3003
Trademark	Resideo
FCC ID	HS9-RWLD3L1

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	3 Vdc (AA Battery*2)
Modulation	GFSK
Maximum Output Power (mW)	1.43
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

1. All models are listed as below.

Main model	Series model	Difference
RWLD3001-001	RWLD3002-001	All models are electrically identical, different model names are for marketing purpose.
	CHW3610W8001	
	YCHW3000W3003	

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	Default
2440	Default
2480	Default

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with Uart interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	RTLBTAPP v5.2.2.36
---------------	--------------------

The samples were used as follows:

A003267737-002

A003267737-001

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	-	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.8-24.2 °C	61.2-67.3 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	23.9-24.8 °C	53-54 %	Ivan Chiang
Radiated Spurious Emissions below 1 GHz	23.9-24.8 °C	53-54 %	Ivan Chiang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit

Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
A	Uart	MODULES	CP2102	N/A	-	-	-	--
B	Fixture Cable	Dexatek-001	Dexatek-001	N/A	NO	NO	31	--
1	NB	HP	15s-du0007TX	CND93662VF	-	-	-	--
2	USB Cable	TUV-001	TUV-001	N/A	YES	NO	300	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

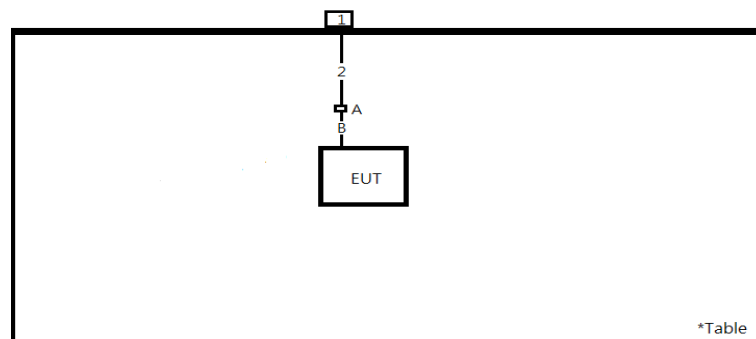

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only


According to the manufacturer declaration, the EUT has an antenna with a directional gain of 4.10 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2022/3/15	2023/3/14	2022/6/1	2022/6/1
Power Sensor	Anritsu	MA2411B	1725269	2022/3/15	2023/3/14	2022/6/1	2022/6/1

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	1.55	1.43	30
Middle Channel	2440	0.68	1.17	30
High Channel	2480	0.96	1.25	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	1.47	1.40	30
Middle Channel	2440	0.65	1.16	30
High Channel	2480	0.88	1.22	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	1.29	1.35
Middle Channel	2440	0.43	1.10
High Channel	2480	0.69	1.17

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	1.22	1.32
Middle Channel	2440	0.37	1.09
High Channel	2480	0.62	1.15

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/6/1	2022/6/1

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/6/1	2022/6/1

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/6/1	2022/6/1

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

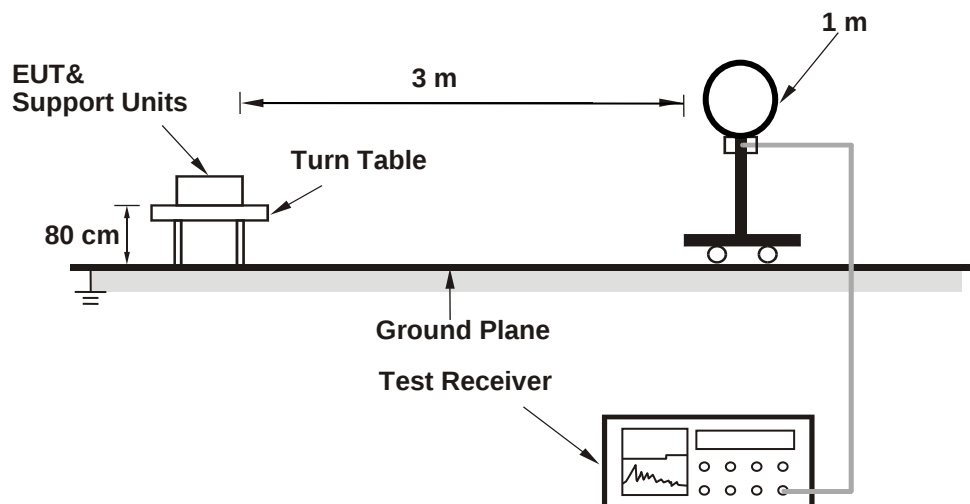

<Radiated Emissions 30 MHz to 1 GHz>

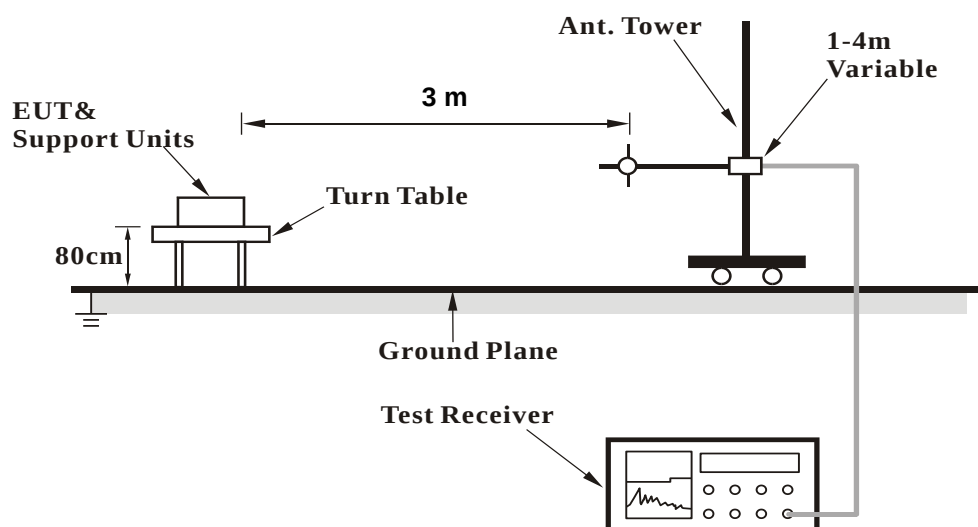

<Radiated Emissions above 1 GHz>

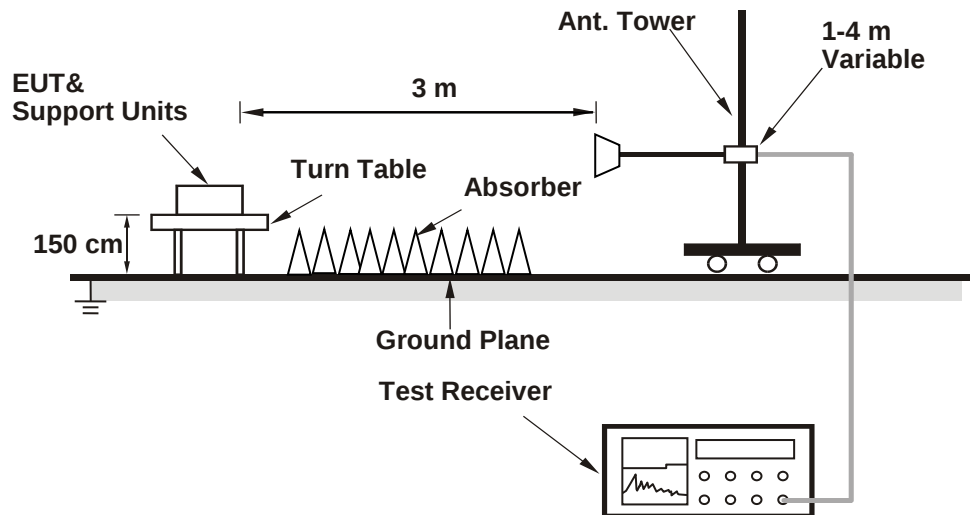

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN22V0IL (P15C-BLE) 001
Test Report No.
Seite 22 von 24
Page 22 of 24
Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23
Horn Antenna	ETS-Lindgren	3117	00218929	2021/11/25	2022/11/24
HF-AMP + AC source	EMCI	EMC051845SE	980635	2022/1/20	2023/1/19
HF-AMP + AC source	EMCI	EMC184045SE	980656	2022/1/20	2023/1/19
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2022/5/6	2023/5/5
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2022/4/6	2023/4/5
LF-AMP	Agilent	8447D	2727A05146	2022/2/16	2023/2/15
Below 30 MHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2021/12/8	2022/12/7

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: CN22V0IL (P15C-BLE) 001
Test Report No.

Seite 24 von 24
Page 24 of 24

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	659.3	> 500	Pass
Middle Channel	2440	654.3	> 500	Pass
High Channel	2480	654.3	> 500	Pass


Low Channel

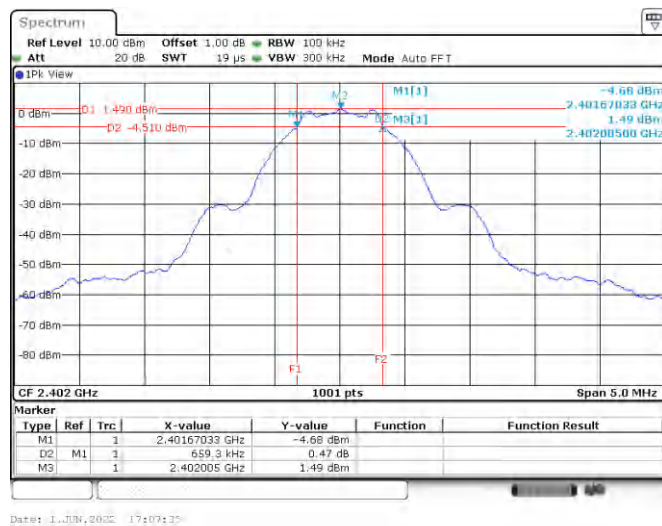

Middle Channel

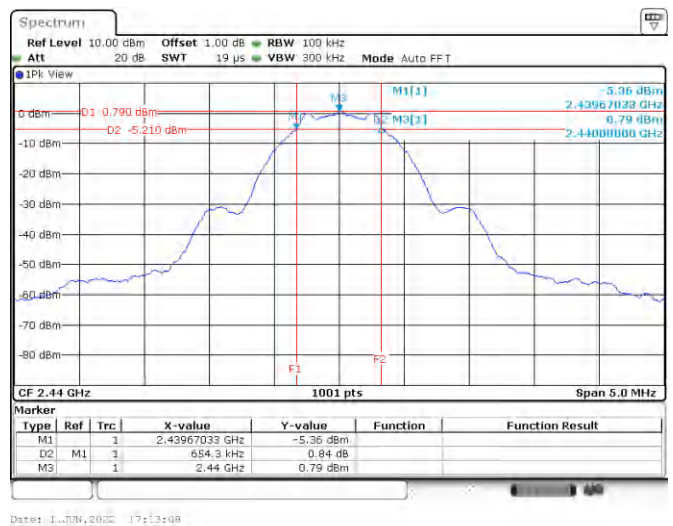


High Channel

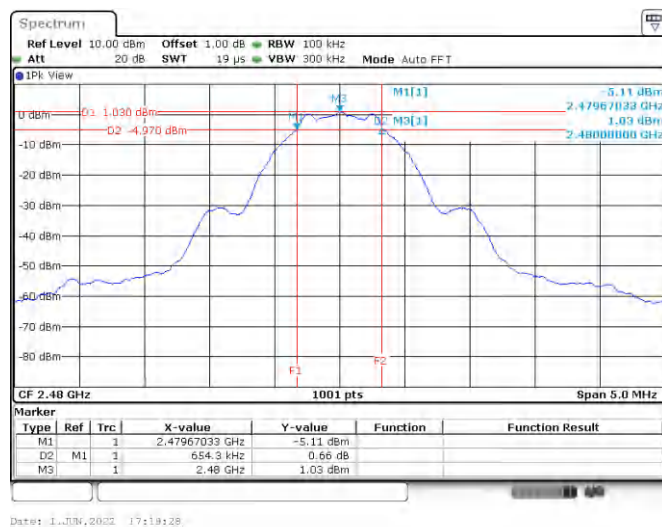


BLE_2M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1118.9	> 500	Pass
Middle Channel	2440	1118.9	> 500	Pass
High Channel	2480	1118.9	> 500	Pass


Low Channel

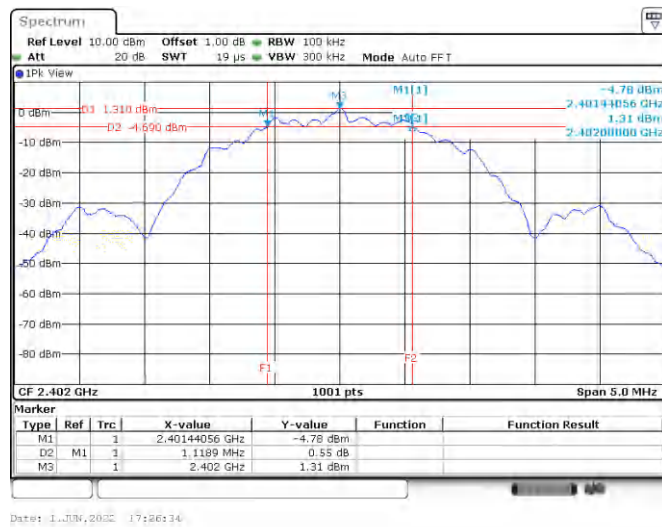

Middle Channel

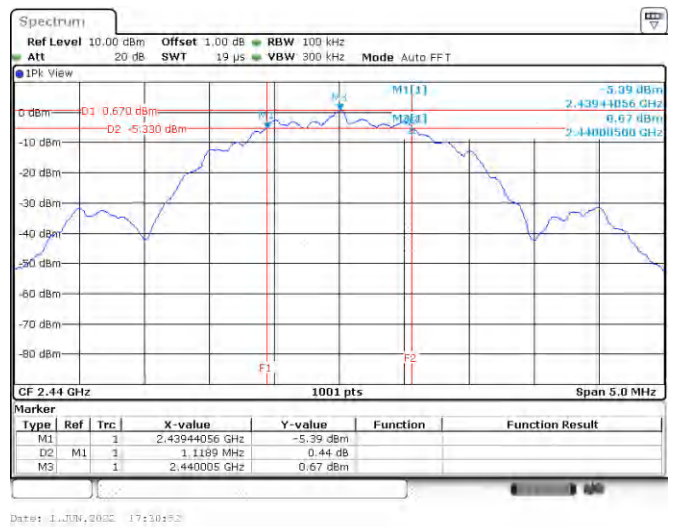

High Channel

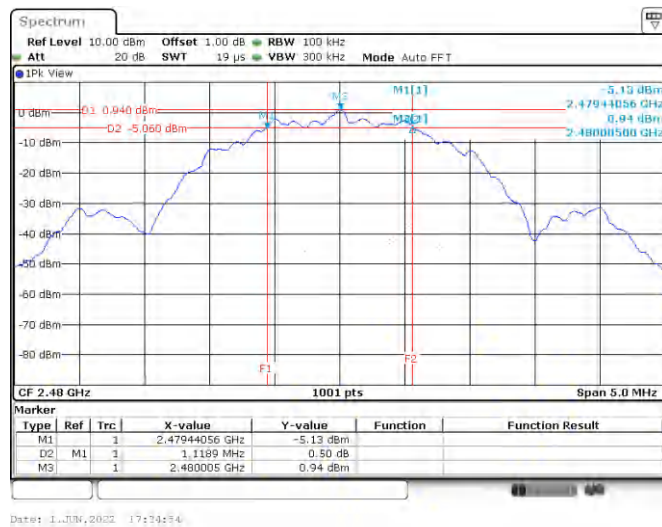


Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.02
Middle Channel	2440	1.02
High Channel	2480	1.02


Low Channel

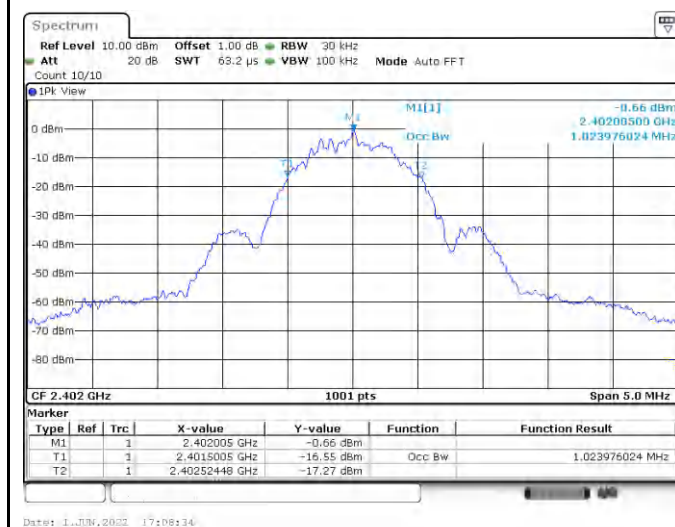

Middle Channel

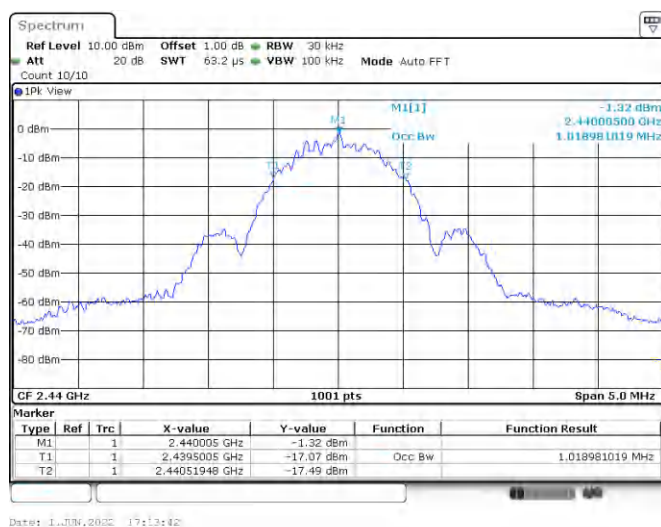


High Channel

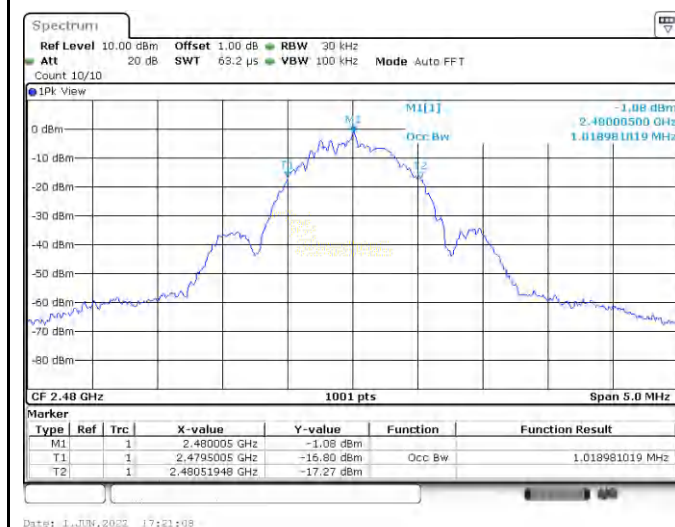


BLE_2M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	2.04
Middle Channel	2440	2.04
High Channel	2480	2.04


Low Channel

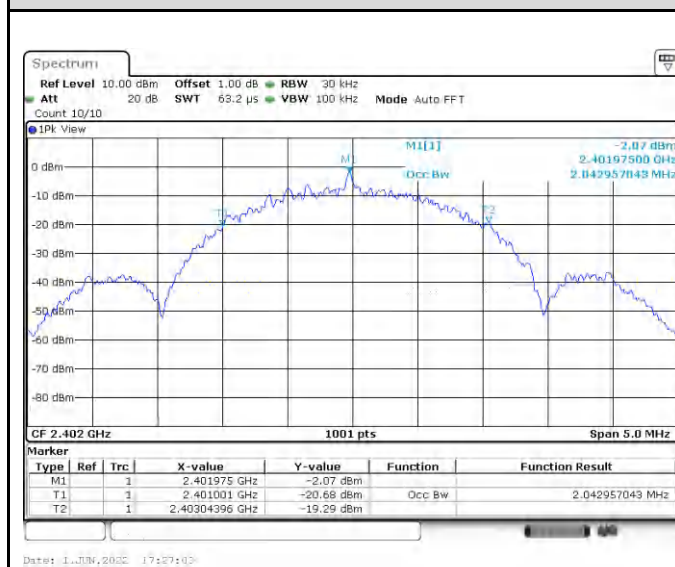

Middle Channel

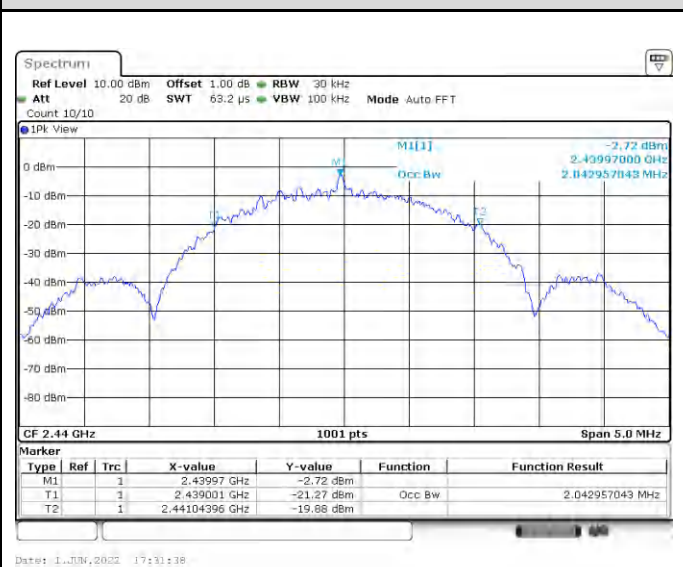

High Channel

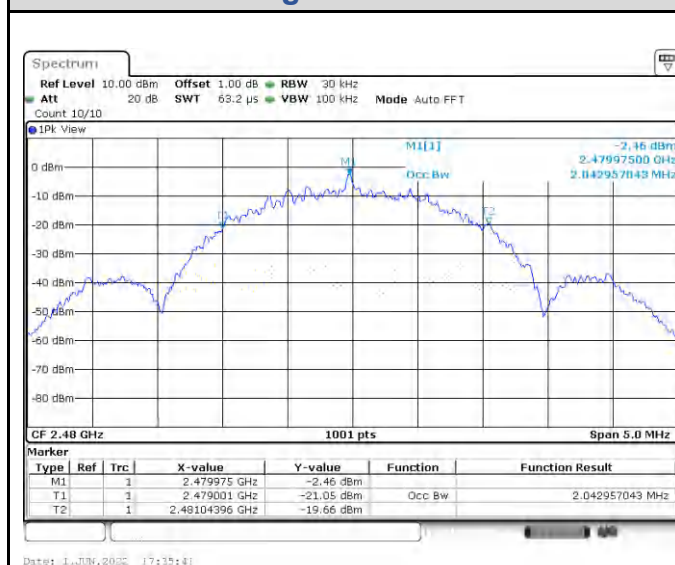


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-14.73	8	Pass
Middle Channel	2440	-14.45	8	Pass
High Channel	2480	-14.10	8	Pass


Low Channel

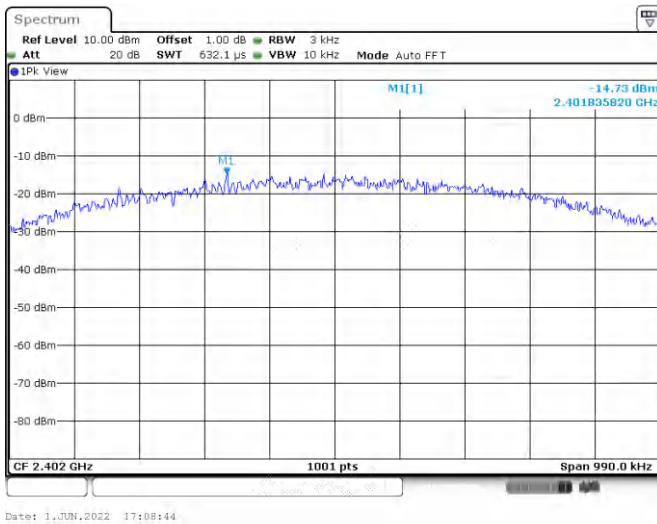

Middle Channel



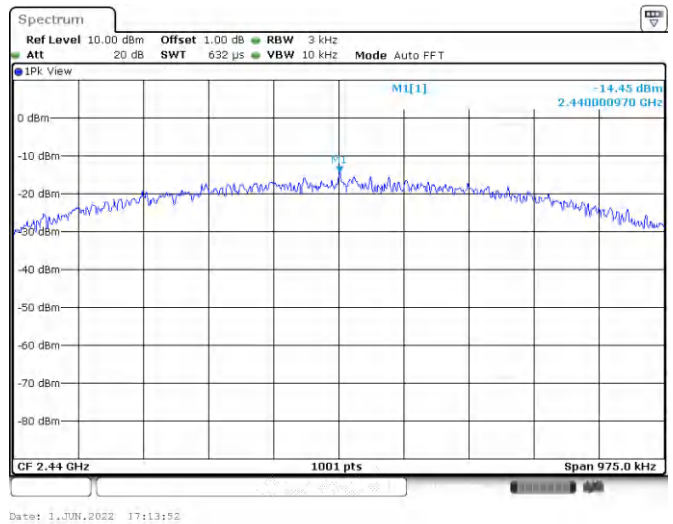


High Channel

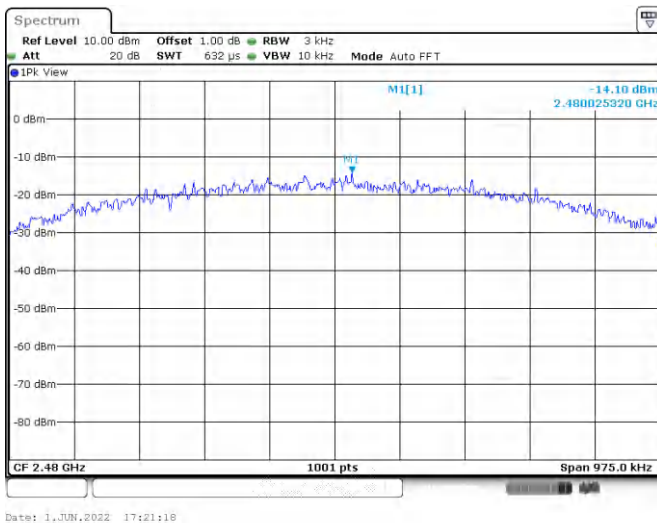

BLE_2M


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-15.69	8	Pass
Middle Channel	2440	-17.46	8	Pass
High Channel	2480	-16.53	8	Pass

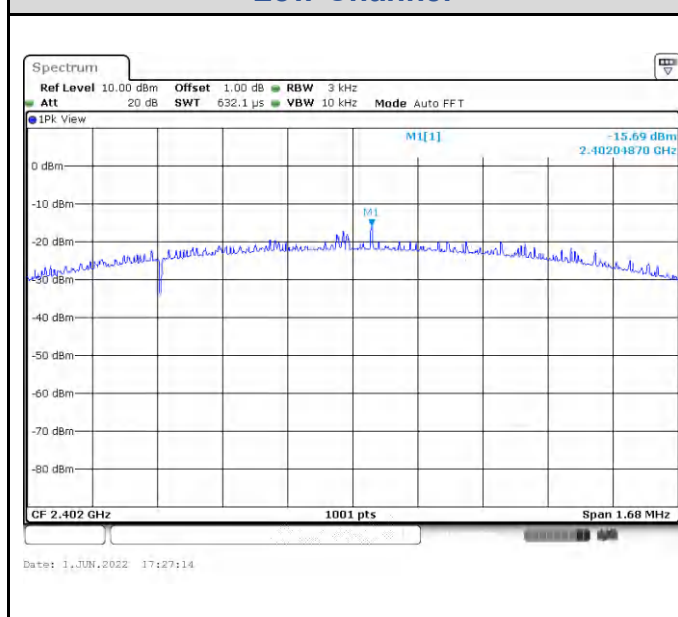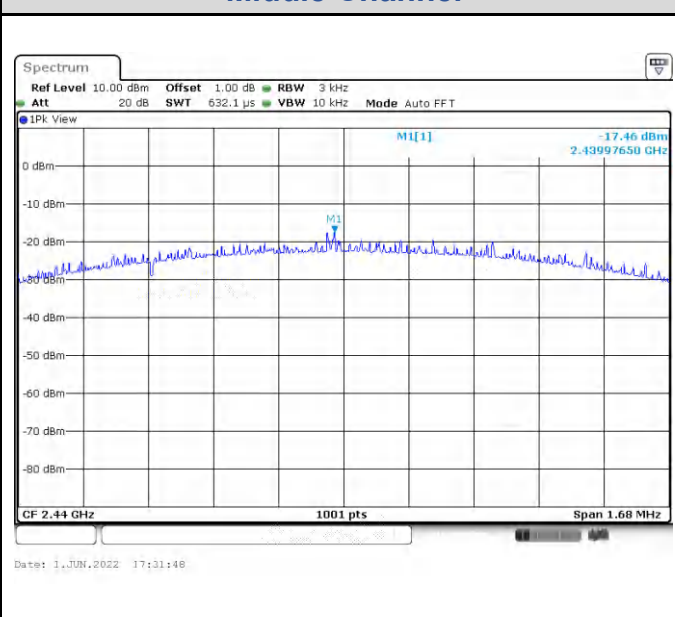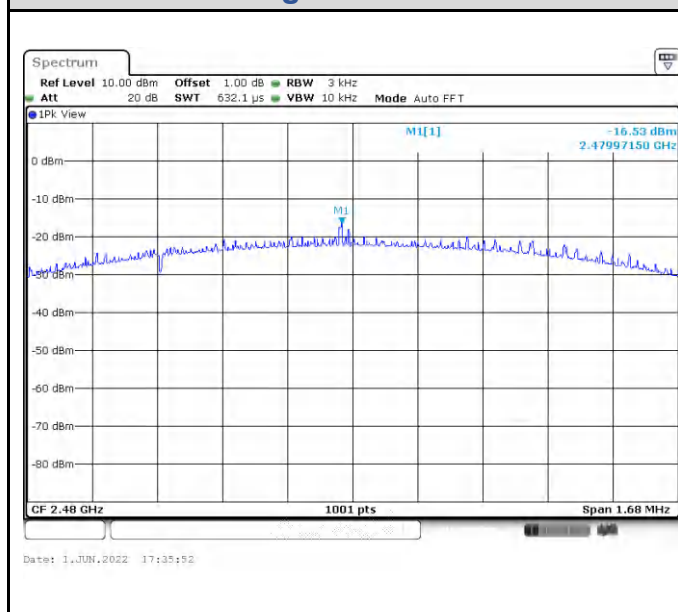Low Channel

Middle Channel

High Channel


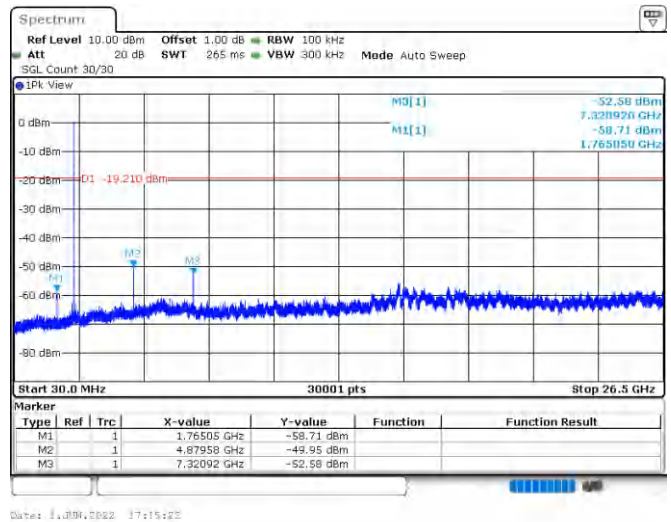
Test Result of Conducted Spurious Emissions, Tx Mode

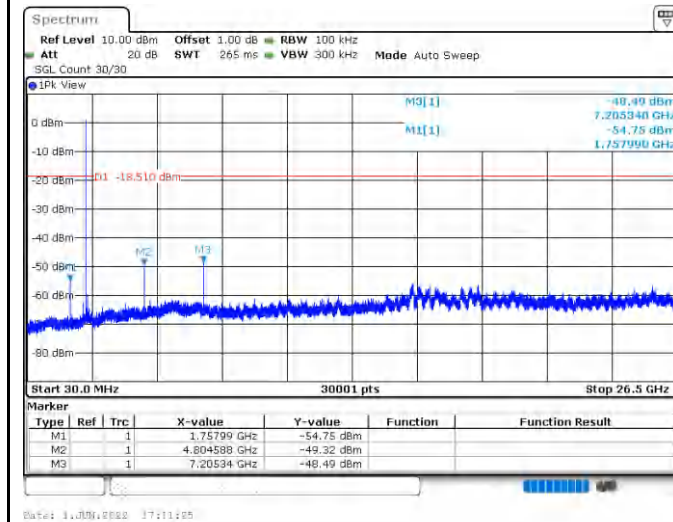BLE_1M


Low Channel



Middle Channel




High Channel

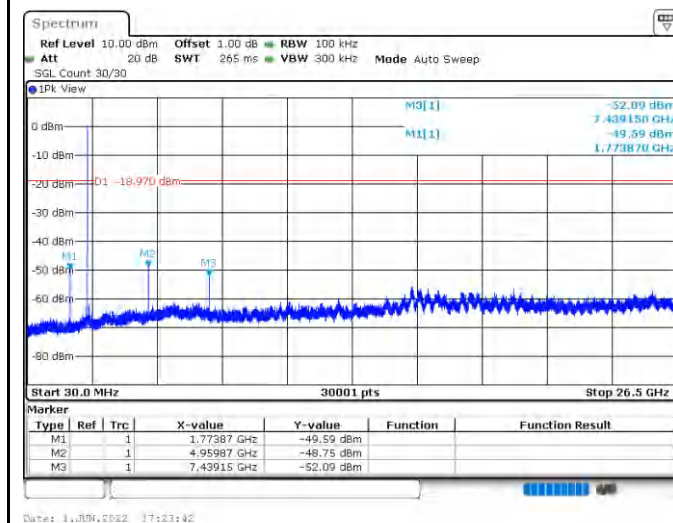


BLE_2M


Low Channel

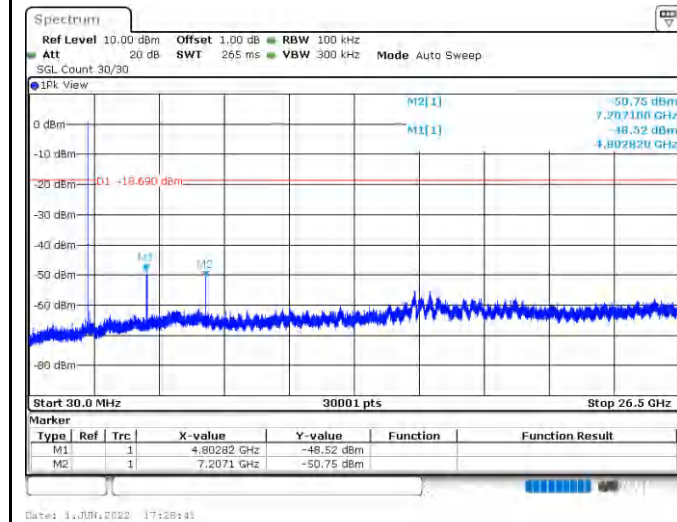

Middle Channel

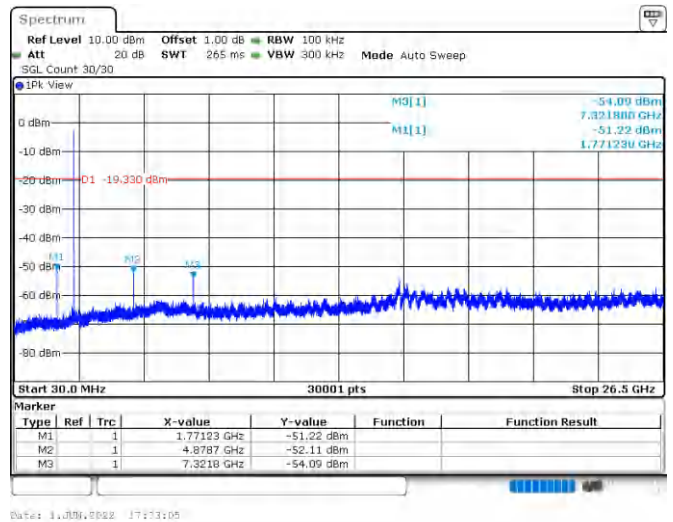


High Channel

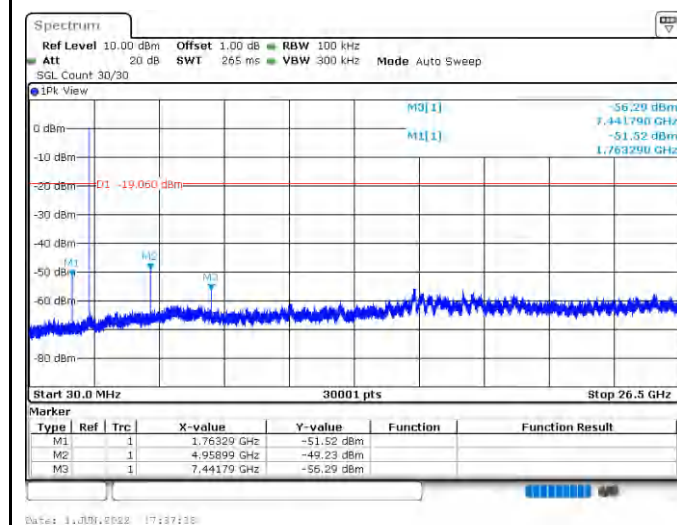


Test Result of Conducted Band Edge, Tx Mode

BLE_1M

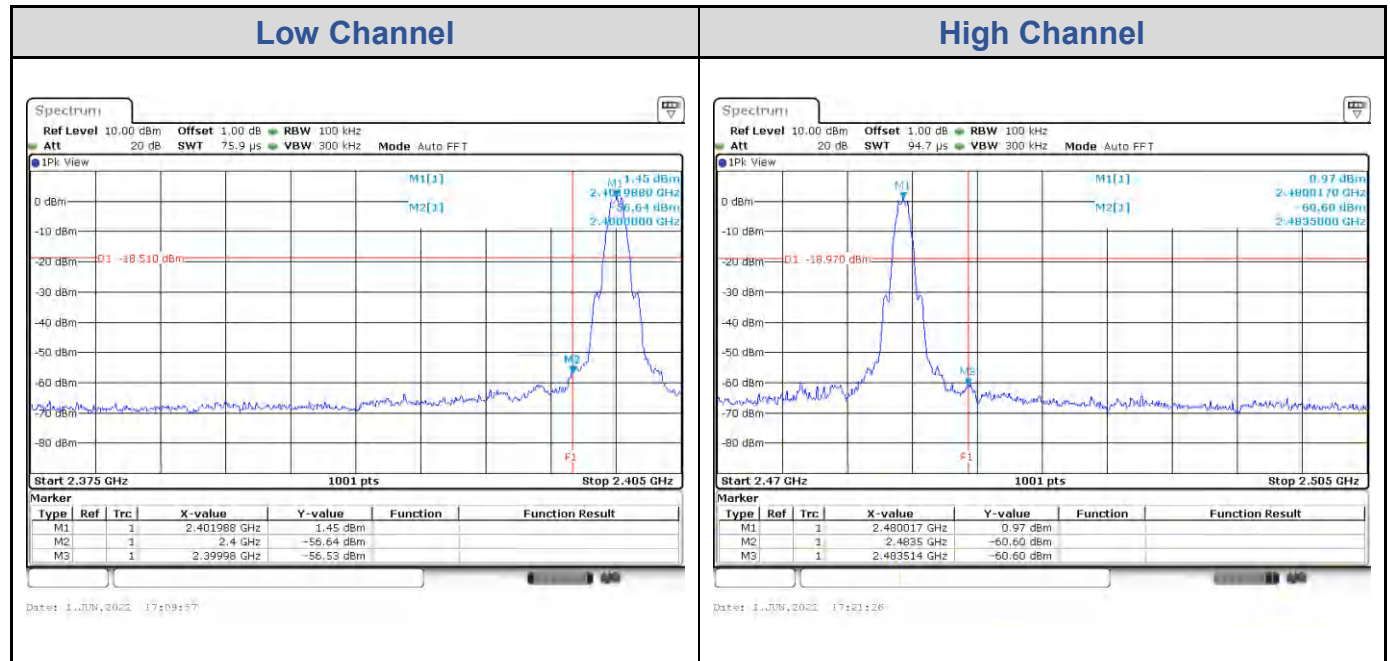

BLE_2M


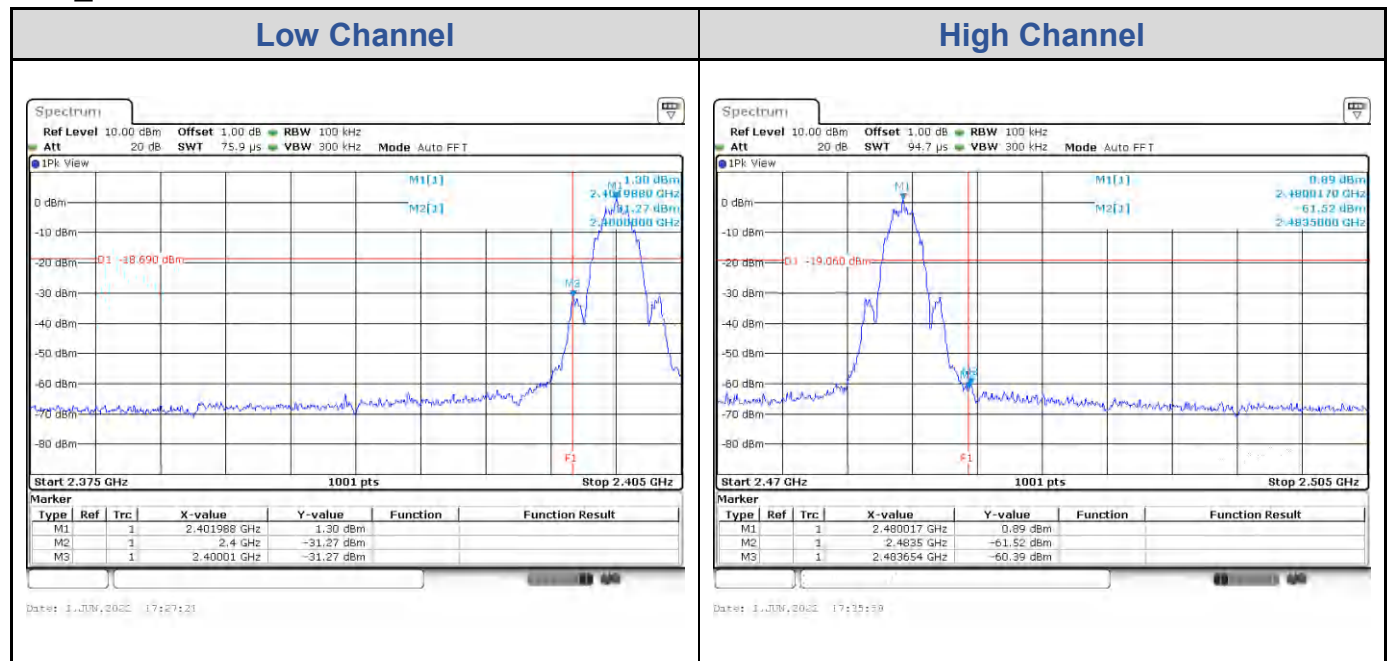


Appendix B: Test Results of Radiated Spurious Emissions

Band Edges, 2.31GHz ~ 2.9GHz



BLE_1M

Low Channel (Horizontal) Peak

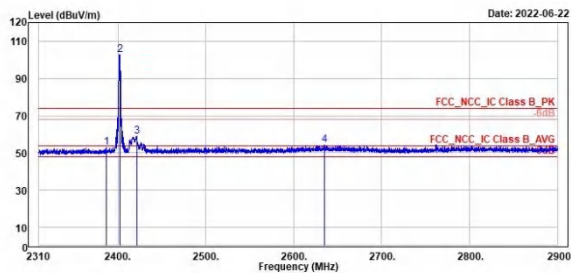

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2386.70	52.81	15.24	37.57	74.00	-21.19	318	164	Peak	Horizontal	
2 *	2402.00	102.72	65.19	37.62	74.00	28.72	318	164	Peak	Horizontal	
3	2421.27	58.83	21.19	37.64	74.00	-15.17	318	164	Peak	Horizontal	
4	2635.33	54.45	16.26	38.19	74.00	-19.55	318	164	Peak	Horizontal	

Low Channel (Vertical) Peak

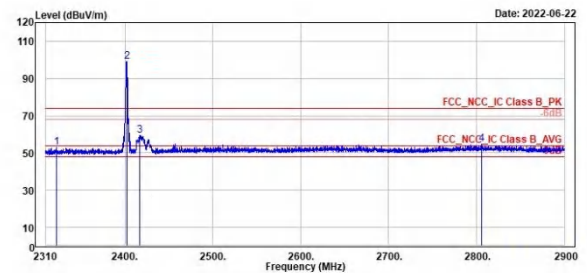


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2322.39	52.78	15.73	37.05	74.00	-21.22	283	217	Peak	Vertical	
2 *	2402.00	99.20	61.68	37.52	74.00	25.20	283	217	Peak	Vertical	
3	2417.14	59.54	22.18	37.36	74.00	-14.46	283	217	Peak	Vertical	
4	2805.95	54.62	16.44	38.18	74.00	-19.38	283	217	Peak	Vertical	

BLE_1M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

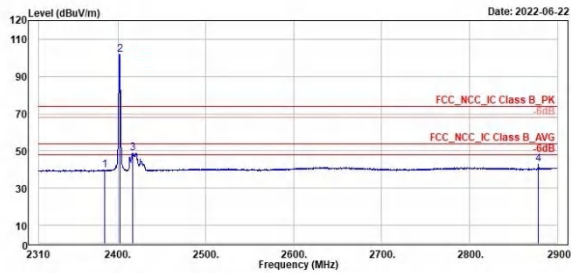


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2384.93	39.84	2.27	37.57	54.00	-14.16	318	164	Average	Horizontal	
2 *	2402.00	101.00	64.18	37.62	54.00	47.00	318	164	Average	Horizontal	
3 †	2416.79	48.73	11.10	37.63	54.00	-5.27	318	164	Average	Horizontal	
4	2878.05	42.86	4.68	38.18	54.00	-11.14	318	164	Average	Horizontal	

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322


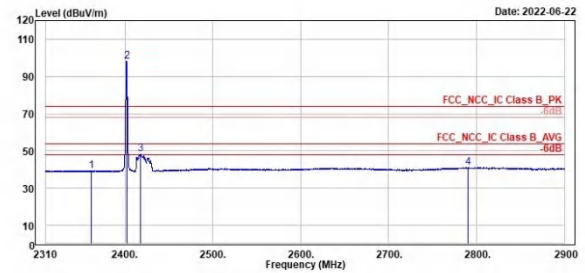


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2362.04	39.46	2.19	37.27	54.00	-14.54	283	217	Average	Vertical	
2 *	2402.00	98.30	60.98	37.32	54.00	44.30	283	217	Average	Vertical	
3 †	2417.50	48.18	10.82	37.36	54.00	-5.82	283	217	Average	Vertical	
4	2790.61	41.05	2.90	38.15	54.00	-12.95	283	217	Average	Vertical	

BLE_1M

High Channel (Horizontal) Peak

High Channel (Vertical) Peak

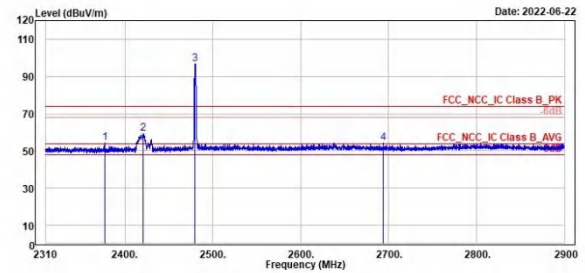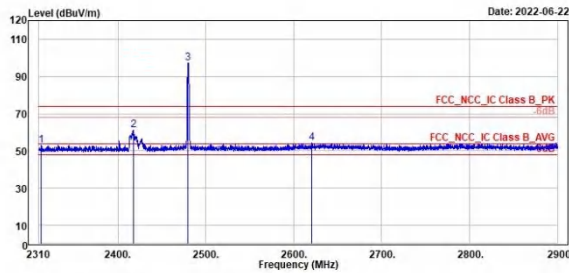

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2312.95	52.85	15.51	37.34	74.00	-21.15	324	342	Peak	Horizontal	
2	2417.50	60.92	23.29	37.63	74.00	-13.08	324	342	Peak	Horizontal	
3 *	2480.00	97.34	59.75	37.59	74.00	23.34	324	342	Peak	Horizontal	
4	2620.81	54.45	16.28	38.17	74.00	-19.55	324	342	Peak	Horizontal	


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2376.91	54.09	16.00	37.29	74.00	-19.91	159	120	Peak	Vertical	
2	2420.92	59.28	21.90	37.38	74.00	-14.72	159	120	Peak	Vertical	
3 *	2480.00	96.92	59.23	37.69	74.00	22.92	159	120	Peak	Vertical	
4	2694.21	54.49	16.44	38.05	74.00	-19.51	159	120	Peak	Vertical	

BLE_1M

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

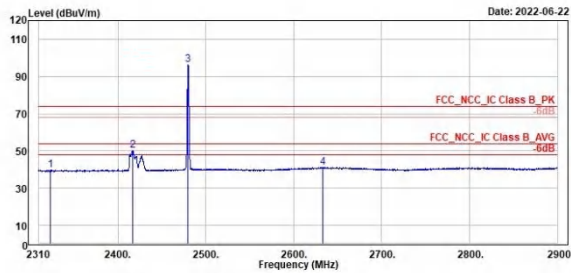


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2322.86	39.77	2.40	37.37	54.00	-14.23	324	342	Average	Horizontal	
2	2416.91	50.28	12.65	37.63	54.00	-3.72	324	342	Average	Horizontal	
3	2480.00	96.36	58.77	37.59	54.00	42.36	324	342	Average	Horizontal	
4	2633.08	41.05	2.87	38.18	54.00	-12.95	324	342	Average	Horizontal	

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

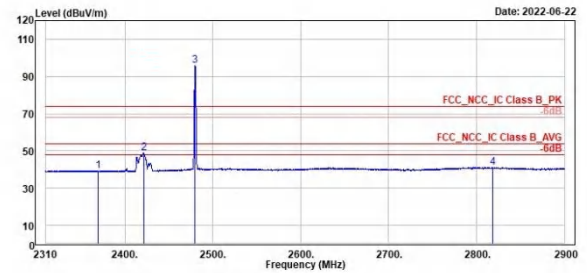


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2369.71	39.43	2.15	37.28	54.00	-14.57	159	120	Average	Vertical	
2	2421.39	48.67	11.29	37.38	54.00	-5.33	159	120	Average	Vertical	
3	2480.00	95.94	58.25	37.69	54.00	41.94	159	120	Average	Vertical	
4	2817.87	41.01	2.81	38.20	54.00	-12.99	159	120	Average	Vertical	

BLE_2M

Low Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

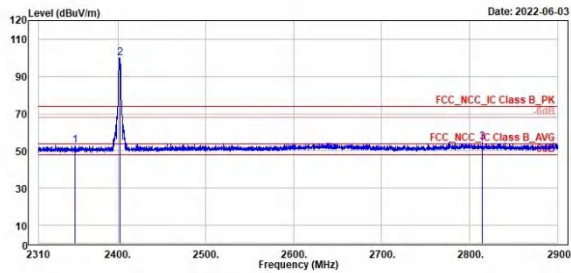

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2358.95	53.13	15.67	37.46	74.00	-20.87	149	164	Peak	Horizontal		
2 *	2402.00	99.00	62.18	37.62	74.00	25.00	149	164	Peak	Horizontal		
3	2814.69	54.64	16.57	38.07	74.00	-19.36	149	164	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

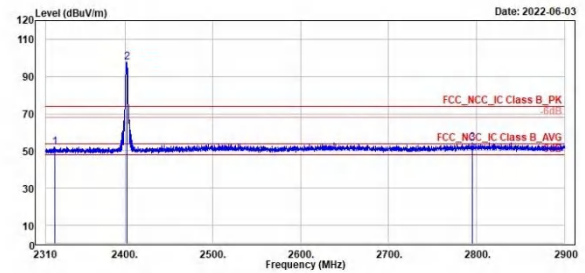


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2320.27	52.16	15.12	37.04	74.00	-21.84	305	234	Peak	Vertical		
2 *	2402.00	97.65	60.33	37.32	74.00	23.65	305	234	Peak	Vertical		
3	2795.22	54.36	16.20	38.16	74.00	-19.64	305	234	Peak	Vertical		

BLE_2M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

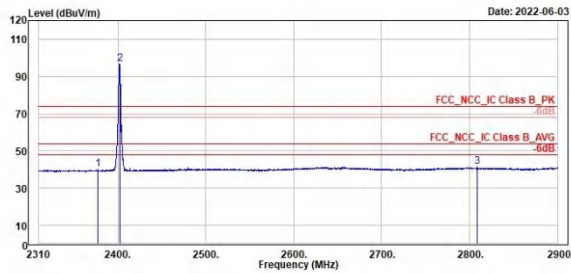


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2377.02	39.92	2.38	37.54	54.00	-14.08	149	164	Average	Horizontal		
2 *	2402.00	96.70	59.08	37.62	54.00	42.70	149	164	Average	Horizontal		
3	2808.43	41.33	3.26	38.07	54.00	-12.67	149	164	Average	Horizontal		

Low Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

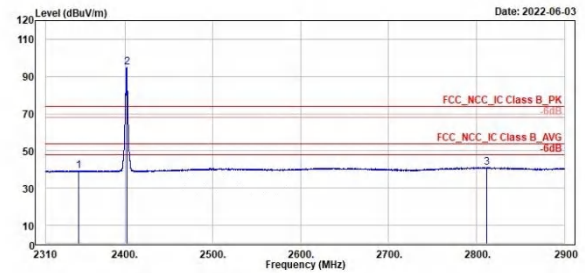


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2347.41	39.45	2.22	37.23	54.00	-14.55	305	234	Average	Vertical		
2 *	2402.00	94.78	57.46	37.32	54.00	40.78	305	234	Average	Vertical		
3	2811.15	41.05	2.86	38.19	54.00	-12.95	305	234	Average	Vertical		

BLE_2M

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

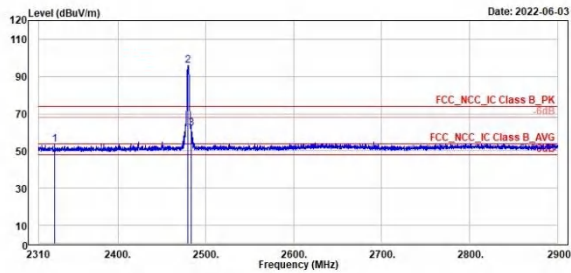

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2328.53	53.36	15.97	37.39	74.00	-20.64	366		1 Peak	Horizontal	
2 *	2480.00	95.98	58.39	37.59	74.00	21.98	366		1 Peak	Horizontal	
3	2483.46	62.18	24.60	37.58	74.00	-11.82	366		1 Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

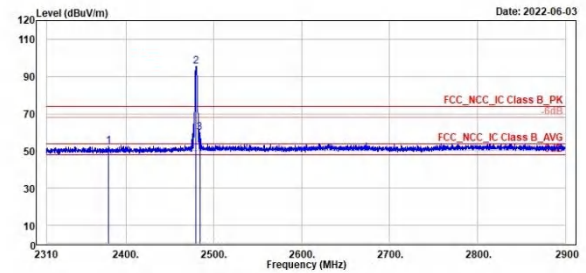


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2388.56	52.41	15.12	37.29	74.00	-21.59	279	259 Peak	Vertical		
2 *	2480.00	95.58	57.81	37.69	74.00	21.58	279	259 Peak	Vertical		
3	2483.93	59.79	22.08	37.71	74.00	-14.21	279	259 Peak	Vertical		

BLE_2M

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

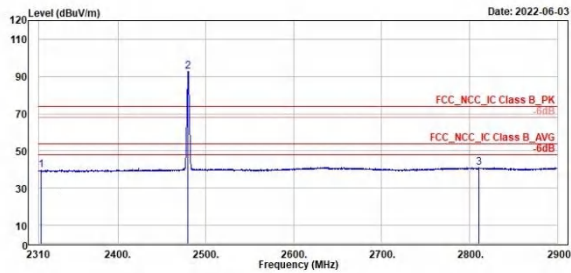


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2312.71	39.75	2.41	37.34	54.00	-14.25	366			1 Average	Horizontal	
2 *	2480.00	92.00	55.21	37.59	54.00	38.00	366			1 Average	Horizontal	
3	2810.91	41.05	2.98	38.07	54.00	-12.95	366			1 Average	Horizontal	

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

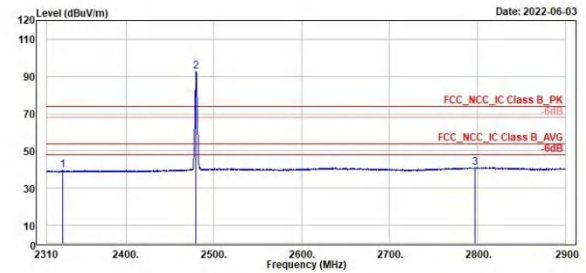

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2328.29	39.50	2.40	37.10	54.00	-14.50	279			259 Average	Vertical	
2 *	2480.00	92.00	54.92	37.69	54.00	38.61	279			259 Average	Vertical	
3	2796.63	41.04	2.88	38.16	54.00	-12.96	279			259 Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_1M

Low Channel (Open) 9kHz~150kHz

Low Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenjiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

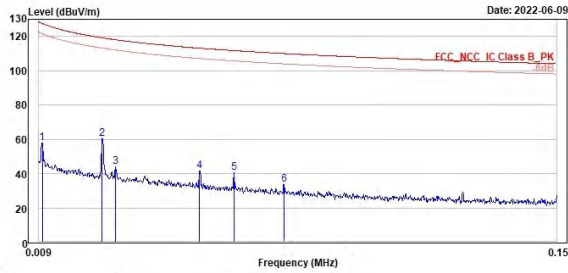

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	58.04	40.33	17.71	127.60	-69.56	100	201	QP	Open	
2	0.03	60.32	41.14	19.18	119.18	-58.86	100	224	QP	Open	
3	0.03	44.00	24.49	19.51	118.05	-74.05	100	45	QP	Open	
4	0.05	41.65	22.40	19.25	113.13	-71.48	100	13	QP	Open	
5	0.06	40.42	21.38	19.04	111.72	-71.30	100	222	QP	Open	
6	0.08	33.47	14.73	18.74	110.00	-76.53	100	314	QP	Open	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenjiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

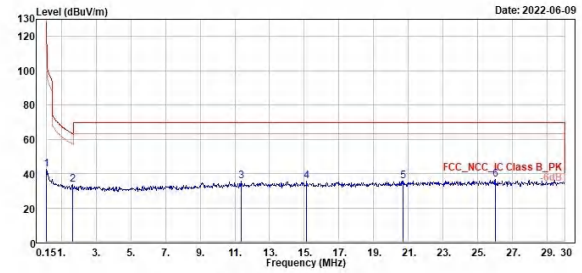


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	42.49	24.09	18.40	104.88	-61.59	100	6	QP	Open	
2	1.64	33.71	14.38	19.33	63.29	-29.58	100	341	QP	Open	
3	11.34	35.37	13.88	21.49	69.50	-34.13	100	171	QP	Open	
4	15.13	35.55	13.81	21.74	69.50	-33.95	100	268	QP	Open	
5	20.69	35.82	13.73	22.09	69.50	-33.68	100	250	QP	Open	
6	26.00	36.77	14.48	22.29	69.50	-32.73	100	203	QP	Open	

BLE_1M

Low Channel (Close) 9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

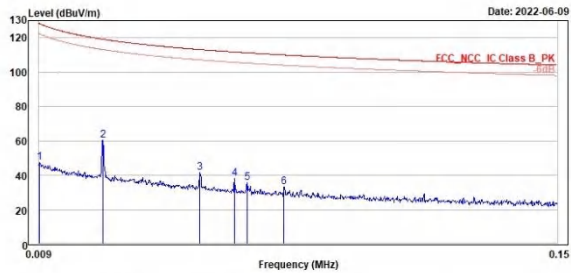

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	47.40	29.47	17.93	128.23	-88.83	100	32	QP	Close	
2	0.03	60.40	41.21	19.19	119.13	-58.73	100	65	QP	Close	
3	0.05	41.58	22.33	19.25	113.13	-71.55	100	71	QP	Close	
4	0.06	38.20	19.16	19.04	111.72	-73.52	100	37	QP	Close	
5	0.07	35.56	16.60	18.96	111.25	-75.69	100	328	QP	Close	
6	0.08	33.26	14.52	18.74	110.61	-76.75	100	88	QP	Close	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

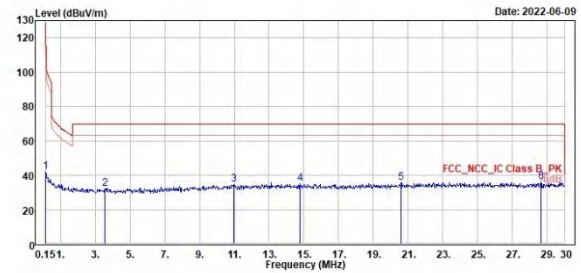

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	41.96	23.56	18.40	104.80	-62.12	100	136	QP	Close	
2	3.55	32.35	12.91	19.44	69.50	-37.15	100	36	QP	Close	
3	10.99	34.68	13.21	21.47	69.50	-34.82	100	244	QP	Close	
4	14.78	35.34	13.62	21.72	69.50	-34.16	100	318	QP	Close	
5	20.60	35.62	13.54	22.08	69.50	-33.88	100	58	QP	Close	
6	28.63	35.89	13.50	22.39	69.50	-33.61	100	173	QP	Close	

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

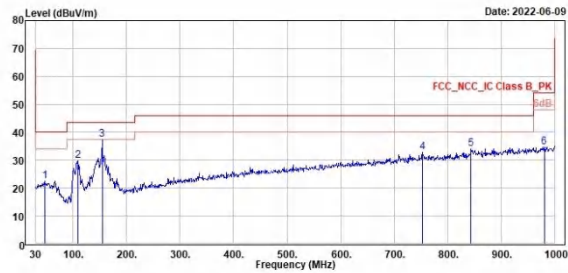

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	46.49	22.62	28.44	-5.82	40.00	-17.38	100	170 QP	Horizontal	
2	108.57	29.84	39.51	-9.67	43.50	-13.66	200	245 QP	Horizontal	
3	154.16	37.54	43.43	-5.89	43.50	-5.96	100	272 QP	Horizontal	
4	752.65	32.76	29.96	2.80	46.00	-13.24	100	79 QP	Horizontal	
5	843.83	34.16	30.15	4.01	46.00	-11.84	303	360 QP	Horizontal	
6	980.60	34.77	28.78	5.99	54.00	-19.23	400	256 QP	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

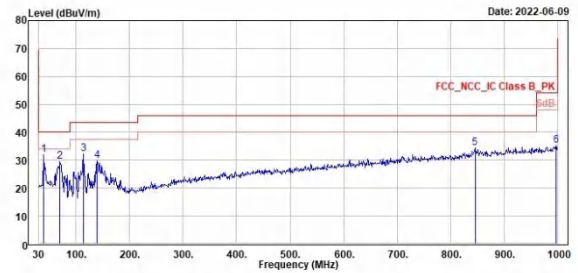

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	39.70	32.03	38.45	-6.42	40.00	-7.97	100	340 QP	Vertical	
2	69.77	29.55	38.16	-8.61	40.00	-10.45	100	264 QP	Vertical	
3	113.42	32.37	41.47	-9.10	43.50	-11.13	100	233 QP	Vertical	
4	138.64	29.68	35.86	-6.18	43.50	-13.82	100	114 QP	Vertical	
5	845.77	34.40	30.37	4.03	46.00	-11.60	400	302 QP	Vertical	
6	997.09	35.21	29.02	6.19	54.00	-18.79	100	197 QP	Vertical	

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_1M

Low Channel (Horizontal)


Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

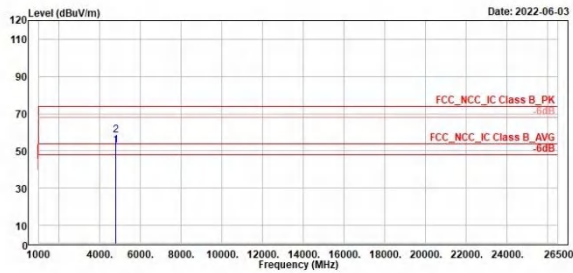

TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

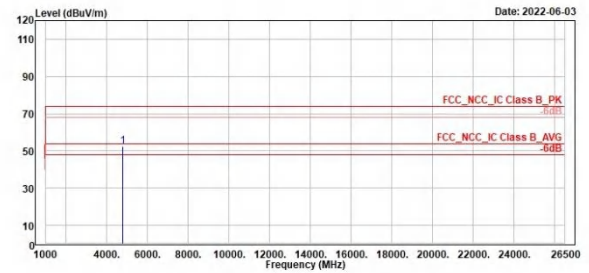


BLE_1M

Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

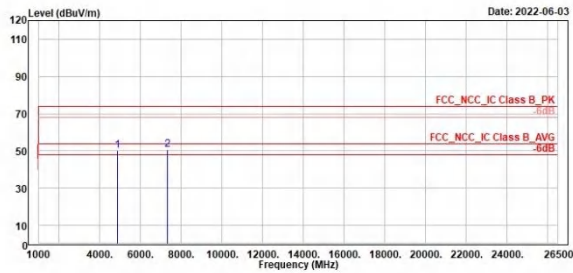


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4880.00	50.25	59.25	-9.00	74.00	-23.75	100	269	Peak	Horizontal		
2	7320.00	50.71	57.22	-6.51	74.00	-23.29	386	360	Peak	Horizontal		

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

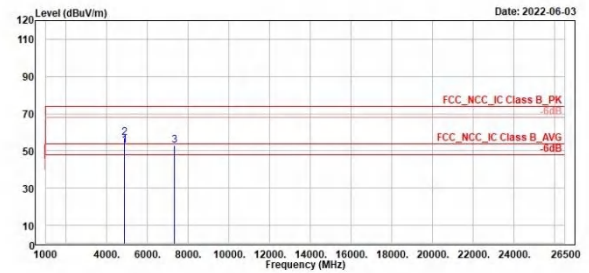

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	4880.00	52.99	62.35	-9.36	54.00	-1.01	203	281	Average	Vertical		
2	4880.00	56.83	66.19	-9.36	74.00	-17.17	203	281	Peak	Vertical		
3	7320.00	53.00	59.63	-6.63	74.00	-21.00	100	33	Peak	Vertical		


BLE_1M

High Channel (Horizontal)


High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

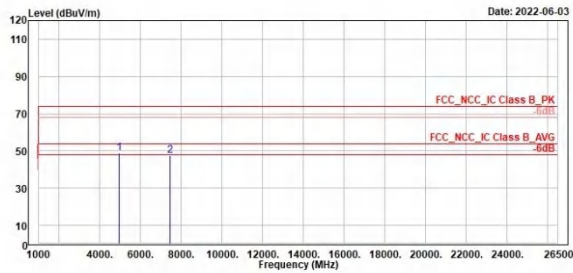

TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

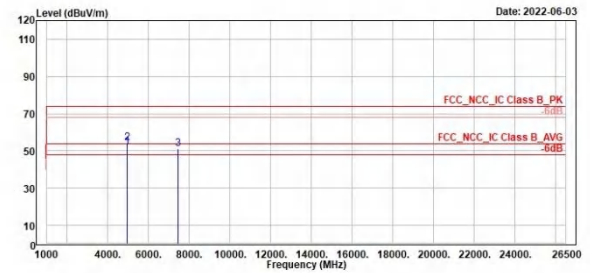


BLE_2M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

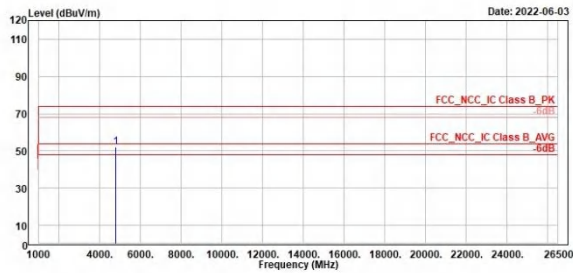

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4884.00	52.11	61.13	-9.02	74.00	-21.89	296	133	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

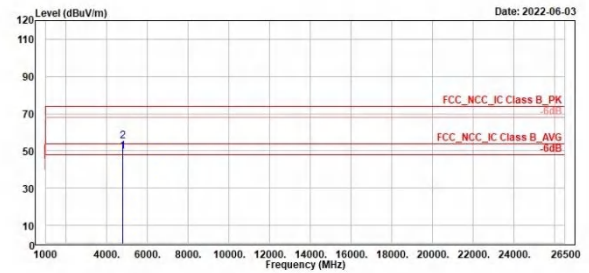

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4884.00	49.91	59.32	-9.41	54.00	-4.09	185	282	Average	Vertical	
2	4884.00	55.10	64.51	-9.41	74.00	-18.90	185	282	Peak	Vertical	


BLE_2M

Middle Channel (Horizontal)


Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

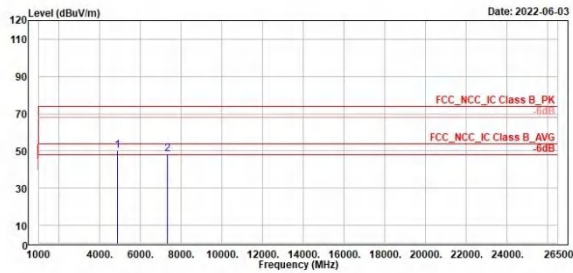

TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

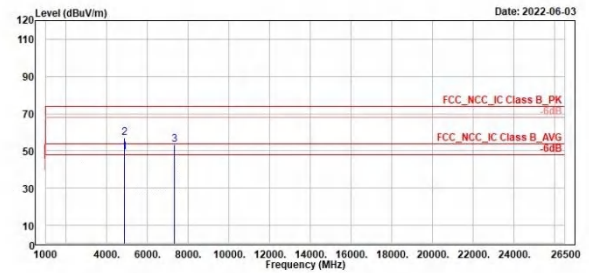


BLE_2M

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

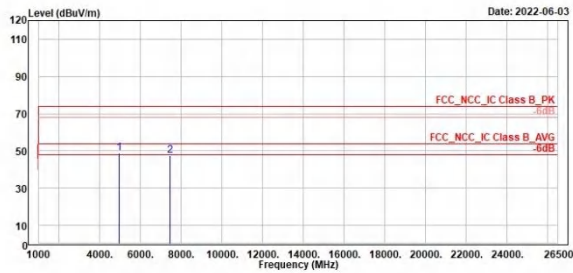

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4968.00	48.87	57.76	-8.89	74.00	-25.13	315	132	Peak	Horizontal	
2	7440.00	47.34	53.57	-6.23	74.00	-26.66	300	38	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

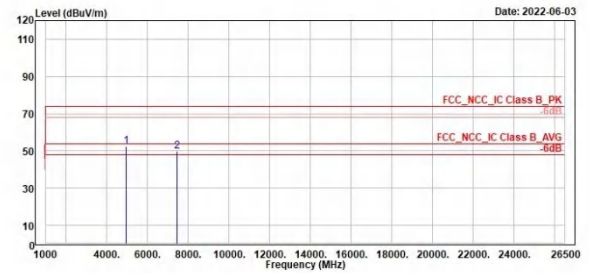

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4968.00	52.67	61.94	-9.27	74.00	-21.33	200	289	Peak	Vertical	
2	7440.00	49.70	56.29	-6.59	74.00	-24.30	100	42	Peak	Vertical	