

*Testing Tomorrow's Technology*

## **Permissive Change Application**

**For**

**Certification for an Intentional Radiator per  
Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247  
and  
Innovation Science and Economic Development Canada  
Certification per  
RSS-Gen General Requirements for Radio Apparatus  
and  
RSS-247 Digital Transmission Systems (DTS), Frequency Hopping Systems  
(FHSS) and License-Exempt Local Area Network (LE-LAN) Devices**

**For the**

**Murata Electronics North America  
Model: CCT24**

**FCC ID: HSW-CCT24  
IC: 4492A-CCT24  
UST Project: 17-0439  
Issue Date: April 9, 2018**

Total Pages in This Report: 75

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
[www.ustech-lab.com](http://www.ustech-lab.com)**



*Testing Tomorrow's Technology*

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Compliance Engineer – President

Date April 9, 2018



TESTING  
NVLAP LAB CODE 200162-0

**This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.**

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
[www.ustech-lab.com](http://www.ustech-lab.com)**

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## MEASUREMENT TECHNICAL REPORT

**COMPANYS NAME:** Murata Electronics North America

**MODEL:** CCT24

**FCC ID:** HSW-CCT24

**IC:** 4492A-CCT24

**DATE:** April 5, 2018

This report concerns (check one): Original grant  
Class II change ☒

Equipment type: DTS Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes \_\_\_\_\_ No X

If Yes, defer until: N/A  
date

agrees to notify the Commission by N/A  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech  
3505 Francis Circle  
Alpharetta, GA 30004

Phone Number: (770) 740-0717

Fax Number: (770) 740-1508

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## **Table of Contents**

| <b><u>Paragraph</u></b> | <b><u>Title</u></b>                                                                               | <b><u>Page</u></b> |
|-------------------------|---------------------------------------------------------------------------------------------------|--------------------|
| <b>1</b>                | <b>General Information.....</b>                                                                   | <b>8</b>           |
| 1.1                     | Purpose of this Report.....                                                                       | 8                  |
| 1.2                     | Characterization of Test Sample .....                                                             | 9                  |
| 1.3                     | Product Description .....                                                                         | 9                  |
| 1.4                     | Configuration of Tested System .....                                                              | 10                 |
| 1.5                     | Test Facility .....                                                                               | 10                 |
| 1.6                     | Related Submittals .....                                                                          | 10                 |
| <b>2</b>                | <b>Tests and Measurements .....</b>                                                               | <b>12</b>          |
| 2.1                     | Test Equipment .....                                                                              | 12                 |
| 2.2                     | Modifications to EUT Hardware.....                                                                | 13                 |
| 2.3                     | Number of Measurements for Intentional Radiators (15.31(m)) .....                                 | 13                 |
| 2.4                     | Frequency Range of Radiated Measurements (Part 15.33) .....                                       | 13                 |
| 2.4.1                   | Intentional Radiator.....                                                                         | 13                 |
| 2.5                     | Measurement Detector Function and Bandwidth (CFR 15.35).....                                      | 14                 |
| 2.6                     | EUT Antenna Requirements (CFR 15.203).....                                                        | 15                 |
| 2.7                     | Restricted Bands of Operation (Part 15.205).....                                                  | 16                 |
| 2.8                     | Intentional Radiator, Emissions Measurements (CFR 15.209, 15.247(d)) .....                        | 16                 |
| 2.9                     | Six (6) dB Bandwidth per CFR 15.247(a)(2).....                                                    | 35                 |
| 2.10                    | Maximum Peak Conducted Output Power (CFR 15.247 (b) (3)) .....                                    | 38                 |
| 2.11                    | Band Edge Measurements – (CFR 15.247 (d)).....                                                    | 43                 |
| 2.12                    | Unintentional Radiator and Intentional Radiator, Radiated Emissions (CFR 15.109 and 15.209) ..... | 72                 |
| 2.13                    | Measurement Uncertainty .....                                                                     | 75                 |
| 2.12.1                  | Conducted Emissions Measurement Uncertainty .....                                                 | 75                 |
| 2.12.2                  | Radiated Emissions Measurement Uncertainty .....                                                  | 75                 |
| <b>3</b>                | <b>Conclusions .....</b>                                                                          | <b>75</b>          |

## List of Figures

| <u>Figures</u> | <u>Title</u>                                                   | <u>Page</u> |
|----------------|----------------------------------------------------------------|-------------|
| Figure 1.      | Block Diagram of Test Configuration .....                      | 11          |
| Figure 2.      | Antenna Conducted Emissions Low Channel, 30 MHz – 1 GHz.....   | 17          |
| Figure 3.      | Antenna Conducted Emissions Low Channel, 1 GHz – 3 GHz.....    | 18          |
| Figure 4.      | Antenna Conducted Emissions Low Channel, 3 GHz – 25 GHz.....   | 19          |
| Figure 5.      | Antenna Conducted Emissions Mid Channel, 30 MHz – 1 GHz .....  | 20          |
| Figure 6.      | Antenna Conducted Emissions Mid Channel, 1 GHz – 3 GHz.....    | 21          |
| Figure 7.      | Antenna Conducted Emissions Mid Channel, 3 GHz – 25 GHz .....  | 22          |
| Figure 8.      | Antenna Conducted Emissions High Channel, 30 MHz – 1 GHz.....  | 23          |
| Figure 9.      | Antenna Conducted Emissions High Channel, 1 GHz – 3 GHz.....   | 24          |
| Figure 10.     | Antenna Conducted Emissions High Channel, 3 GHz – 25 GHz ..... | 25          |
| Figure 11.     | Six (6) dB Bandwidth– Low Channel .....                        | 36          |
| Figure 12.     | Six (6) dB Bandwidth – Mid Channel .....                       | 37          |
| Figure 13.     | Six (6) dB Bandwidth – High Channel.....                       | 38          |
| Figure 14.     | Peak Antenna Conducted Output Power, Low Channel .....         | 40          |
| Figure 15.     | Peak Antenna Conducted Output Power, Mid Channel.....          | 41          |
| Figure 16.     | Peak Antenna Conducted Output Power, High Channel .....        | 42          |
| Figure 17.     | Band Edge Compliance, Low Channel Delta – Peak.....            | 44          |
| Figure 18.     | Band Edge Compliance, Low Channel Delta – Average.....         | 45          |
| Figure 19.     | Antenna 1 Restricted Band Measurements .....                   | 48          |
| Figure 20.     | Antenna 1 Restricted Band Measurements .....                   | 49          |
| Figure 21.     | Antenna 2 Restricted Band Measurements .....                   | 50          |
| Figure 22.     | Antenna 2 Restricted Band Measurements .....                   | 51          |
| Figure 23.     | Antenna 3 Restricted Band Measurements .....                   | 52          |
| Figure 24.     | Antenna 3 Restricted Band Measurements .....                   | 53          |
| Figure 25.     | Antenna 4 Restricted Band Measurements .....                   | 54          |
| Figure 26.     | Antenna 4 Restricted Band Measurements .....                   | 55          |
| Figure 27.     | Antenna 5 Restricted Band Measurements .....                   | 56          |
| Figure 28.     | Antenna 5 Restricted Band Measurements .....                   | 57          |
| Figure 29.     | Antenna 6 Restricted Band Measurements .....                   | 58          |
| Figure 30.     | Antenna 6 Restricted Band Measurements .....                   | 59          |
| Figure 31.     | Antenna 1 Restricted Band Measurements .....                   | 60          |
| Figure 32.     | Antenna 1 Restricted Band Measurements .....                   | 61          |
| Figure 33.     | Antenna 2 Restricted Band Measurements .....                   | 62          |
| Figure 34.     | Antenna 2 Restricted Band Measurements .....                   | 63          |
| Figure 35.     | Antenna 3 Restricted Band Measurements .....                   | 64          |
| Figure 36.     | Antenna 3 Restricted Band Measurements .....                   | 65          |
| Figure 37.     | Antenna 4 Restricted Band Measurements .....                   | 66          |
| Figure 38.     | Antenna 4 Restricted Band Measurements .....                   | 67          |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

|                                                         |    |
|---------------------------------------------------------|----|
| Figure 39. Antenna 5 Restricted Band Measurements ..... | 68 |
| Figure 40. Antenna 5 Restricted Band Measurements ..... | 69 |
| Figure 41. Antenna 6 Restricted Band Measurements ..... | 70 |
| Figure 42. Antenna 6 Restricted Band Measurements ..... | 71 |

### **List of Tables**

| <b><u>Table</u></b> | <b><u>Title</u></b>                                                | <b><u>Page</u></b> |
|---------------------|--------------------------------------------------------------------|--------------------|
| Table 1.            | EUT and Peripherals.....                                           | 11                 |
| Table 2.            | Test Instruments .....                                             | 12                 |
| Table 3.            | Number of Test Frequencies for Intentional Radiators.....          | 13                 |
| Table 4.            | Allowed Antenna(s).....                                            | 15                 |
| Table 5.            | Spurious Radiated Emissions 150 kHz-30MHz (CFR 15.209).....        | 26                 |
| Table 6.            | Spurious Radiated Emissions (CFR 15.209), 30 MHz to 1000 MHz ..... | 27                 |
| Table 7.            | Spurious Radiated Emissions (CFR 15.209) 1 GHz to 25 GHz .....     | 28                 |
| Table 8.            | Radiated Fundamental & Harmonic Emissions - ANTENNA 1.....         | 29                 |
| Table 9.            | Radiated Fundamental & Harmonic Emissions - ANTENNA 2.....         | 30                 |
| Table 10.           | Radiated Fundamental & Harmonic Emissions - ANTENNA 3.....         | 31                 |
| Table 11.           | Radiated Fundamental & Harmonic Emissions- ANTENNA 4.....          | 32                 |
| Table 12.           | Radiated Fundamental & Harmonic Emissions- ANTENNA 5.....          | 33                 |
| Table 13.           | Radiated Fundamental & Harmonic Emissions - ANTENNA 6.....         | 34                 |
| Table 14.           | 6 dB Bandwidth and 99% Occupied Bandwidth .....                    | 35                 |
| Table 15.           | Peak Antenna Conducted Output Power per Part 15.247 (b) (3) .....  | 39                 |
| Table 16.           | Antenna 1 Restricted Band Data (Peak)- Low Channel .....           | 48                 |
| Table 17.           | Antenna 1 Restricted Band Data (AVG)- Low Channel.....             | 49                 |
| Table 18.           | Antenna 2 Restricted Band Data (Peak)- Low Channel .....           | 50                 |
| Table 19.           | Antenna 2 Restricted Band Data (AVG)- Low Channel.....             | 51                 |
| Table 20.           | Antenna 3 Restricted Band Data (Peak)- Low Channel .....           | 52                 |
| Table 21.           | Antenna 3 Restricted Band Data (AVG)- Low Channel.....             | 53                 |
| Table 22.           | Antenna 4 Restricted Band Data (Peak)- Low Channel .....           | 54                 |
| Table 23.           | Antenna 4 Restricted Band Data (AVG)- Low Channel.....             | 55                 |
| Table 24.           | Antenna 5 Restricted Band Data (Peak)- Low Channel .....           | 56                 |
| Table 25.           | Antenna 5 Restricted Band Data (AVG)- Low Channel.....             | 57                 |
| Table 26.           | Antenna 6 Restricted Band Data (Peak)- Low Channel .....           | 58                 |
| Table 27.           | Antenna 6 Restricted Band Data (AVG)- Low Channel.....             | 59                 |
| Table 28.           | Antenna 1 Restricted Band Data (Peak)- High Channel .....          | 60                 |
| Table 29.           | Antenna 1 Restricted Band Data (AVG)- High Channel.....            | 61                 |
| Table 30.           | Antenna 2 Restricted Band Data (Peak)- High Channel .....          | 62                 |
| Table 31.           | Antenna 2 Restricted Band Data (AVG)- High Channel.....            | 63                 |
| Table 32.           | Antenna 3 Restricted Band Data (Peak)- High Channel .....          | 64                 |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

|                                                                                     |    |
|-------------------------------------------------------------------------------------|----|
| Table 33. Antenna 3 Restricted Band Data (AVG)- High Channel .....                  | 65 |
| Table 34. Antenna 4 Restricted Band Data (Peak)- High Channel .....                 | 66 |
| Table 35. Antenna 4 Restricted Band Data (AVG)- High Channel .....                  | 67 |
| Table 36. Antenna 5 Restricted Band Data (Peak)- High Channel .....                 | 68 |
| Table 37. Antenna 5 Restricted Band Data (AVG)- High Channel .....                  | 69 |
| Table 38. Antenna 6 Restricted Band Data (Peak)- High Channel .....                 | 70 |
| Table 39. Antenna 6 Restrict Band Data (AVG)- High Channel .....                    | 71 |
| Table 40. Spurious Radiated Emissions (CFR 15.109/15.209), 30 MHz to 1000 MHz ..... | 73 |
| Table 41. Spurious Radiated Emissions (CFR 15.109/15.209) 1 GHz to 25 GHz ...       | 74 |

### **List of Attachments**

Permissive Change Letter  
Agency Agreement  
Application Forms  
Letter of Confidentiality  
Block Diagram(s)  
Schematic(s)  
Test Configuration Photographs  
Internal Photographs  
External Photographs  
Antenna Photographs  
RF Exposure  
User's Manual

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---

## **1 General Information**

### **1.1 Purpose of this Report**

The purpose of this report is to file for a Class II permissive change. The reason for the Class II permissive change is due to the following:

- EUT PCB modifications (no circuits in the transmit path changed)
- EUT shielding improvements
- Transmitter Frequency shifted from originally approved frequencies (software level changes only)

The PCB changes consist of moving the up/down converter IC and associated passive components to the bottom of the board. Filtering was added to the receive path of this IC which is also placed on the back of the board. A 9 dB attenuator following the up/down converter was changed to a 0 dB attenuator and a 16 dB attenuator now precedes the up/down convertor. No other circuit changes were made. There were no changes made to the circuit in the transmit path. The transmit path remains unchanged.

The shielding changes include installing a single piece shield on the back of the board in addition to the shielding that was originally in place.

The transmit channels were moved a block down in frequency, 2.95 MHz. Formerly, channel 0 (lowest channel) was at 2409.55 MHz and channel 25 (highest channel) was at 2479.85 MHz. Now, channel 0 is 2406.6 MHz and channel 25 is 2476.9 MHz. Spacing and channel bandwidth has not been altered. This is a software change only; no hardware changes and no changes to the basic frequency determining and stabilization circuits, frequency multiplication stages, basic modulator circuit or maximum output power levels.

Due to the changes, the following test were performed to show that the EUT continues to comply with the relevant subpart:

- Spurious conducted emissions
- Spurious radiated emissions
- Occupied Bandwidth
- Conducted output power
- Bandedge measurements
- Restricted band measurements

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on October 6, 2017 and March 14, 2018 in good operating condition.

## 1.3 Product Description

The Equipment Under Test (EUT) is the Murata Electronics North America, Model CCT24. The EUT is a 2.4 GHz transceiver designed for use in industrial and commercial monitoring and control markets.

### Technical Information:

| Detail                   | Description                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------|
| Frequency Range          | 2406.60 – 2476.90 MHz                                                                                        |
| Number of Channels       | 38                                                                                                           |
| Modulation Format        | FSK                                                                                                          |
| Data Rate(s)             | 362kbps                                                                                                      |
| Operating Voltage        | 3.3VDC – 5.5VDC                                                                                              |
| Number of Inputs/Outputs | 2(Tx/Rx Diversity)                                                                                           |
| Antenna Type / Gain      | Corner Reflector / 14dBi<br>PIFA / 4dBi<br>CP Beam / 14dBi<br>Patch / 12dBi<br>Omni / 9dBi<br>Yagi / 13.9dBi |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---

## 1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* for the intentional radiator aspect of the device and *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for the unintentional radiator aspect of the device as well as FCC subpart B and C of Part 15 and per FCC KDB Publication number 558074 v04 for Digital Transmission Systems Operating Under section 15.247.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided as separate exhibits.

## 1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

## 1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.247 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.


US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

**Table 1. EUT and Peripherals**

| EUT/<br>MANUFACTURER                    | MODEL<br>NUMBER | SERIAL<br>NUMBER | FCC ID/IC                | CABLES<br>P/D          |
|-----------------------------------------|-----------------|------------------|--------------------------|------------------------|
| Radio Module<br>Murata                  | CCT24           | 000252           | HSW-CCT24<br>4492A-CCT24 | N/A                    |
| PERIPHERAL/<br>MANUFACTURER             | MODEL<br>NUMBER | SERIAL<br>NUMBER | FCC ID/IC                | CABLES<br>P/D          |
| Evaluation Board/<br>Murata             | 801039 REV A    | E208126          | None                     | 1.5 m U P<br>1.5 m U D |
| Power Supply<br>Adapter/<br>GlobTek Inc | GT-41052-1509   | None             | None                     | 1.8 m U P              |
| Antenna                                 | Various         | Various          | None                     | N/A                    |

U= Unshielded S= Shielded  
P= Power D= Data

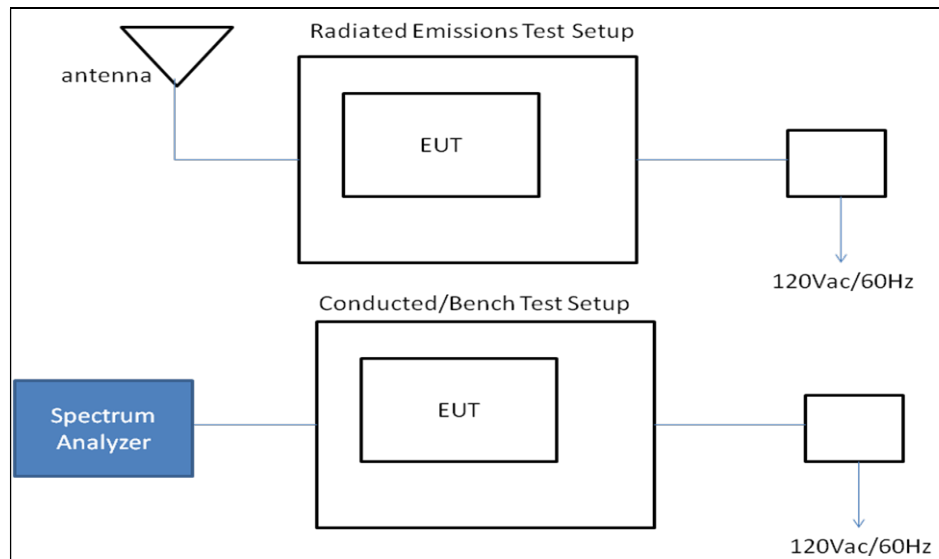

**Figure 1. Block Diagram of Test Configuration**

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

**Table 2. Test Instruments**

| TEST INSTRUMENT   | MODEL NUMBER | MANUFACTURER    | SERIAL NUMBER | CALIBRATION DUE DATE |
|-------------------|--------------|-----------------|---------------|----------------------|
| SPECTRUM ANALYZER | 8593E        | HEWLETT-PACKARD | 3205A00124    | 10/25/2018           |
| SPECTRUM ANALYZER | N9342CN      | AGILENT         | SG05310114    | 7/21/2018            |
| SPECTRUM ANALYZER | E4407B       | AGILENT         | US41442935    | 6/22/2018            |
| HORN ANTENNA      | 3115         | EMCO            | 9107-3723     | 9/22/2018<br>2 yr.   |
| PRE-AMPLIFIER     | 8449B        | HEWLETT-PACKARD | 3008A00480    | 12/01/2018           |

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

## 2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

**Table 3. Number of Test Frequencies for Intentional Radiators**

| Frequency Range over which the device operates | Number of Frequencies | Location in the Range of operation           |
|------------------------------------------------|-----------------------|----------------------------------------------|
| 1 MHz or less                                  | 1                     | Middle                                       |
| 1 to 10 MHz                                    | 2                     | 1 near the Top<br>1 near the Bottom          |
| Greater than 10 MHz                            | 3                     | 1 near Top<br>1 near Middle<br>1 near Bottom |

Because the EUT operates at 2400 MHz to 2483.5 MHz, 3 test frequencies were used.

## 2.4 Frequency Range of Radiated Measurements (Part 15.33)

### 2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---

## **2.5 Measurement Detector Function and Bandwidth (CFR 15.35)**

The radiated and conducted emissions limits shown herein are based on the following the following:

### **Detector Function and Associated Bandwidth**

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

### **Corresponding Peak and Average Requirements**

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

### **Pulsed Transmitter Averaging (Duty Cycle)**

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

For average radiated measurements, using a 5.083% duty cycle, the measured level was reduced by a factor -25.88dB. The duty cycle correction factor is determined using the formula  $20\log(5.083/100) = -25.88\text{dB}$ .

Detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the original application for certification.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

**Table 4. Allowed Antenna(s)**

| REPORT REFERENCE | MANUFACTURER       | TYPE OF ANTENNA  | MODEL               | GAIN dBi | TYPE OF CONNECTOR |
|------------------|--------------------|------------------|---------------------|----------|-------------------|
| Antenna 1        | RF Venue           | CP Beam          | 2.4 GHz CP Beam     | 14.0     | RP-SMA to u.fl    |
| Antenna 2        | Murata             | Patch            | Patch<br>P/N 800485 | 12.0     | MMCX to u.fl      |
| Antenna 3        | World Products Inc | PIFA             | WPANT100<br>80-S1A  | 4.0      | u.fl              |
| Antenna 4        | Cushcraft          | Yagi             | PC2415              | 13.9     | N type to u.fl    |
| Antenna 5        | Mobile Mark        | Corner Reflector | SCR14-<br>2400CT    | 14.0     | N type to u.fl    |
| Antenna 6        | Mobile Mark        | Dipole           | OD9-2400            | 9.0      | N Type to u.fl    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---

## **2.7 Restricted Bands of Operation (Part 15.205)**

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement in the sections below.


## **2.8 Intentional Radiator, Emissions Measurements (CFR 15.209, 15.247(d))**

### **2.8.1 Conducted Spurious emissions**

The EUT was put into a continuous-transmit mode of operation and tested per ANSI C63.10:2013 and KDB 558074 v04, clause 11 for conducted out of band emissions in non restricted bands emanating from the antenna port over the frequency range of 30 MHz to 25 GHz. The measurements were performed on the EUT to identify and record the spurious signals that were related to the transmitter to show that all spurious emissions were at least 20 dB below the fundamental frequency.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

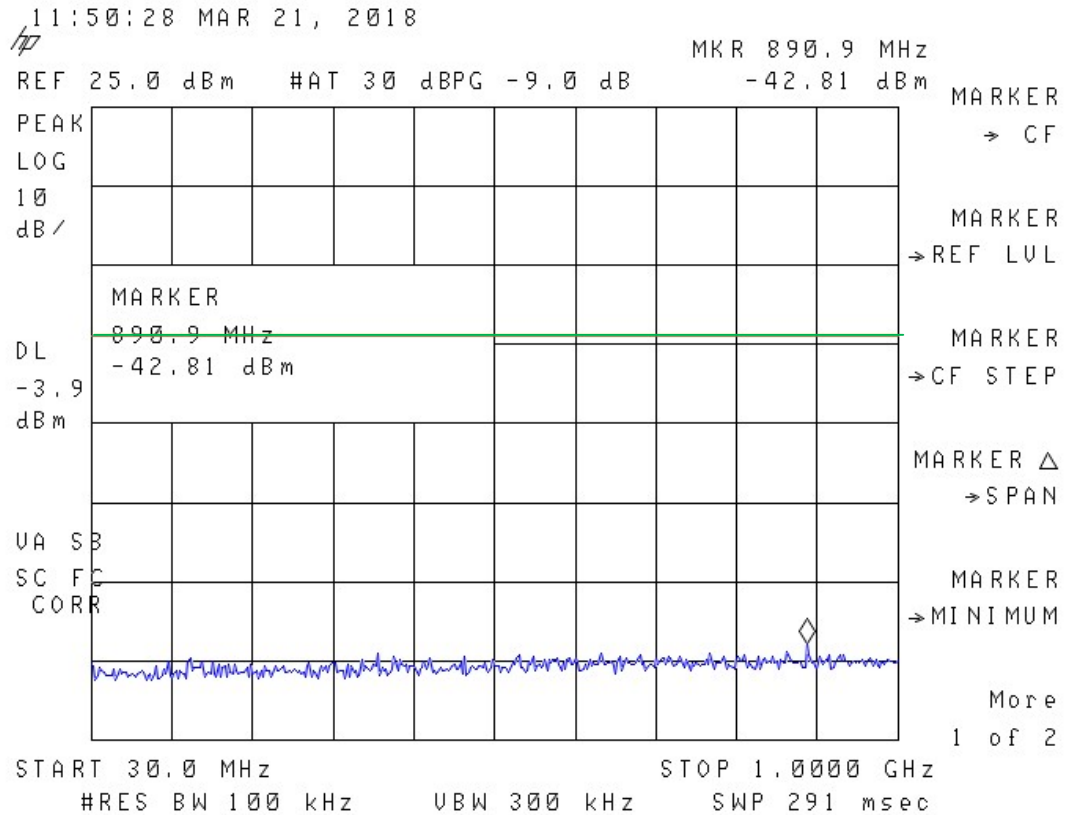

**Figure 2. Antenna Conducted Emissions Low Channel, 30 MHz – 1 GHz**  
Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

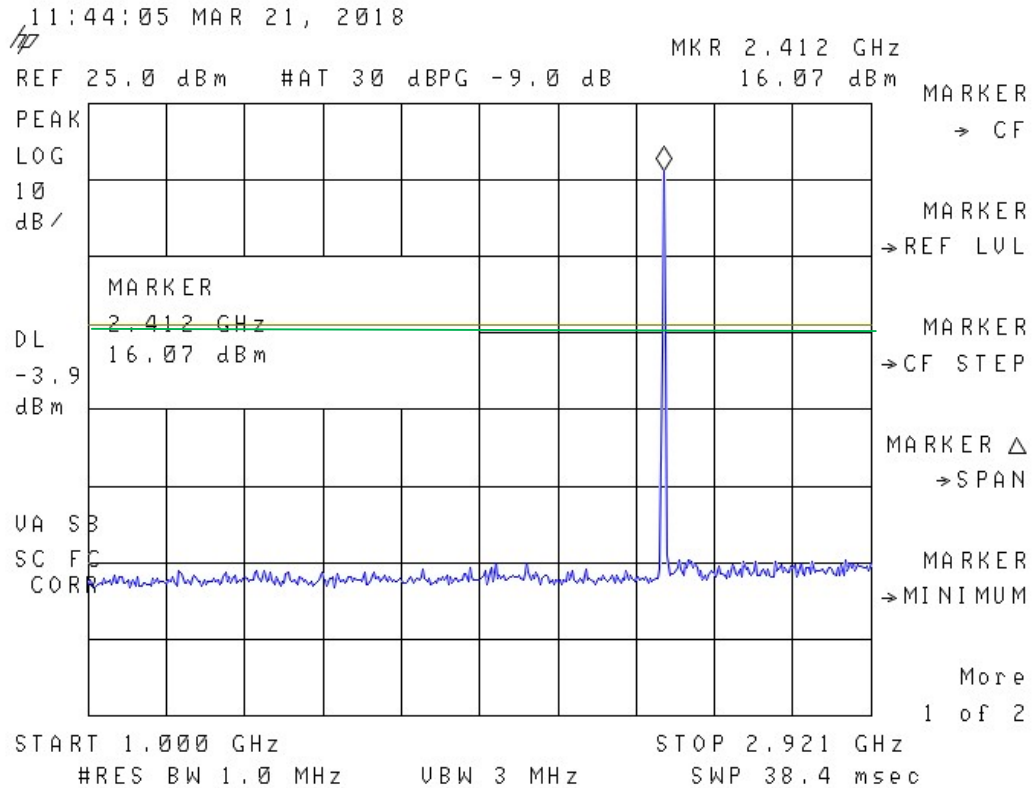

**Figure 3. Antenna Conducted Emissions Low Channel, 1 GHz – 3 GHz**  
Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

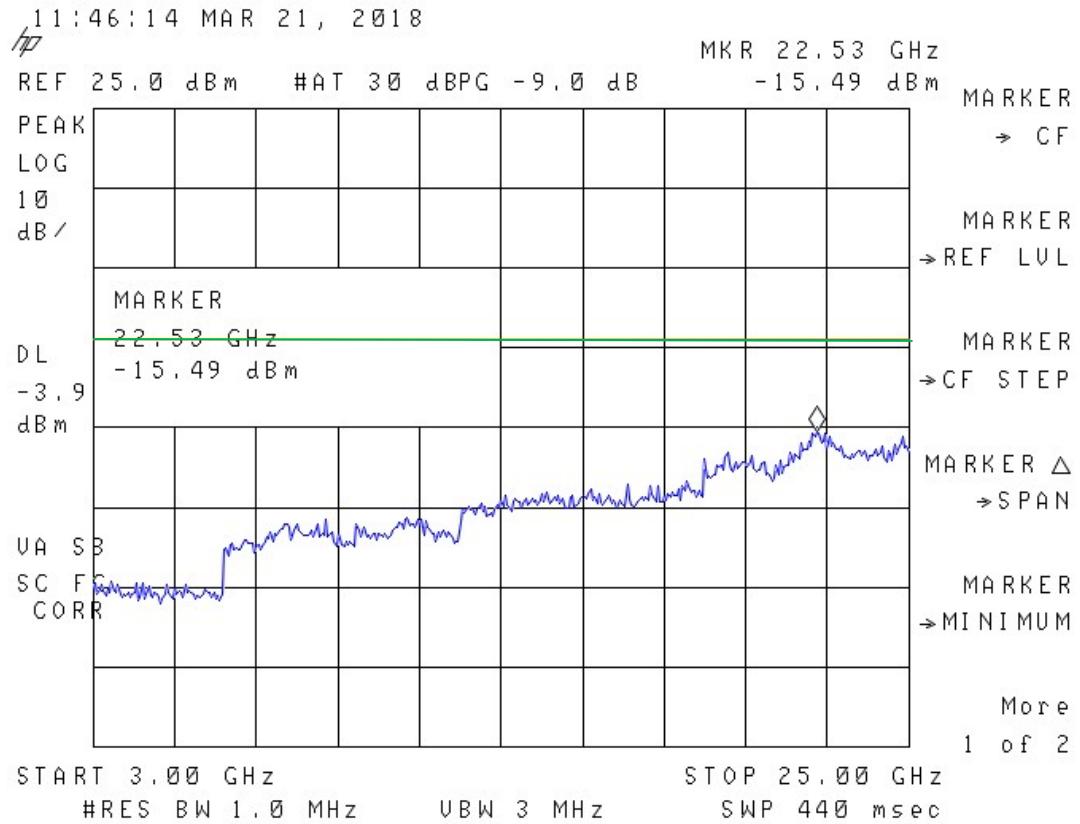

**Figure 4. Antenna Conducted Emissions Low Channel, 3 GHz – 25 GHz**  
Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

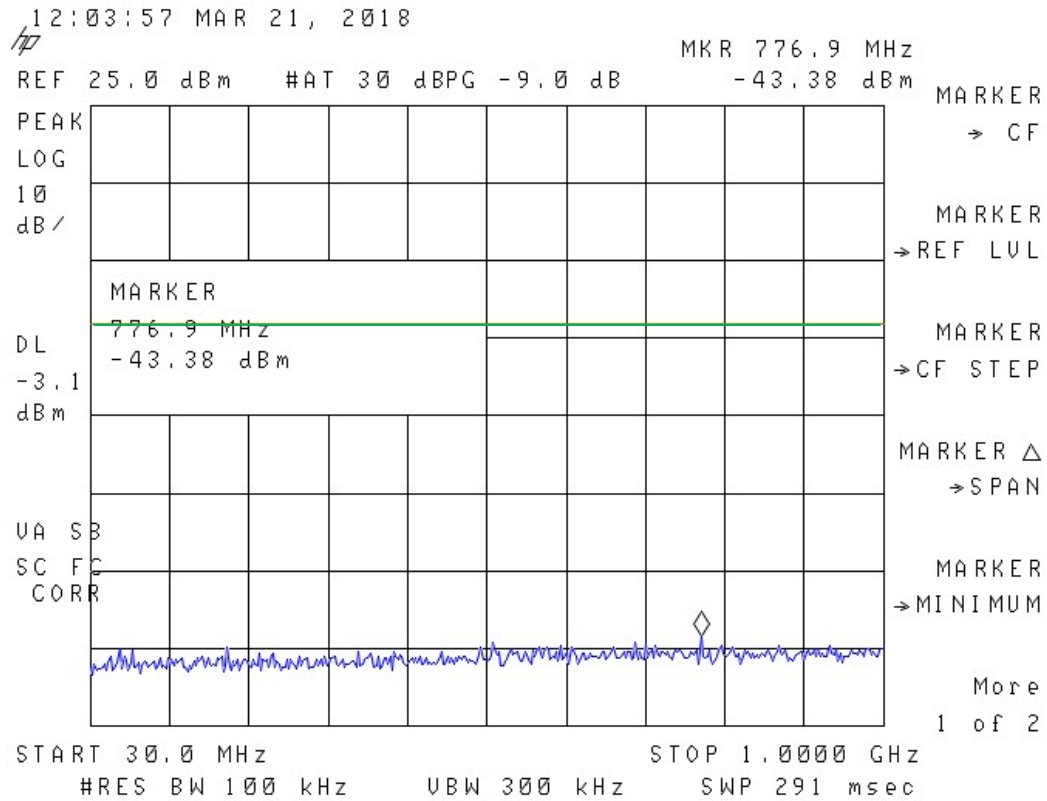

**Figure 5. Antenna Conducted Emissions Mid Channel, 30 MHz – 1 GHz**  
Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

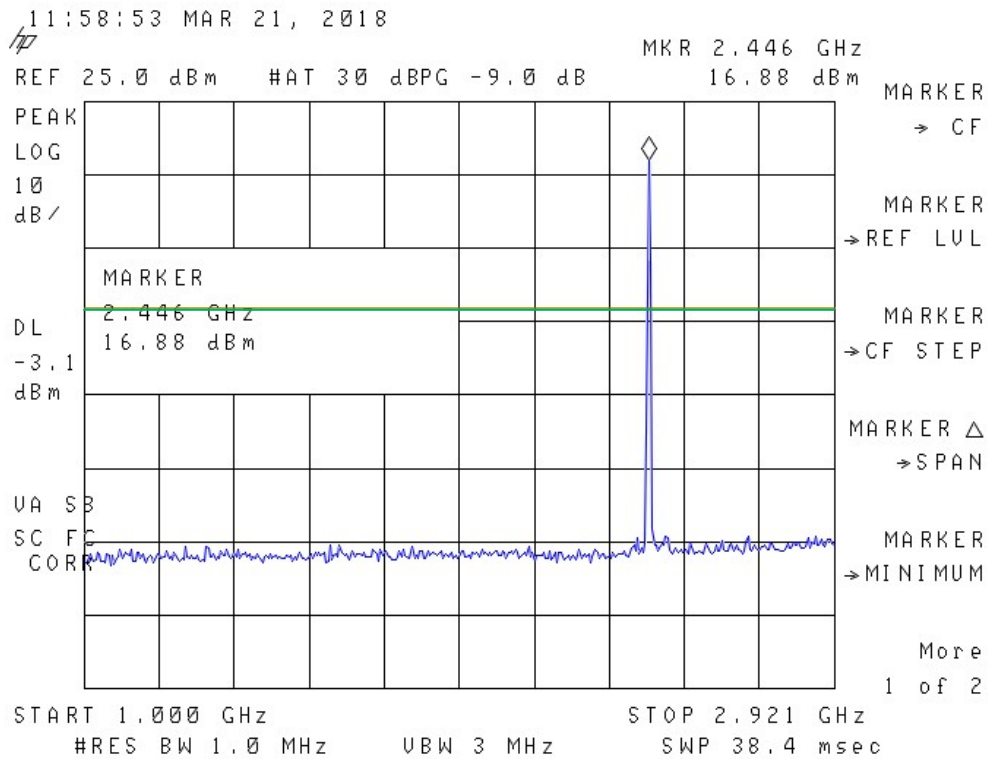

**Figure 6. Antenna Conducted Emissions Mid Channel, 1 GHz – 3 GHz**  
Green Line= Limit line

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

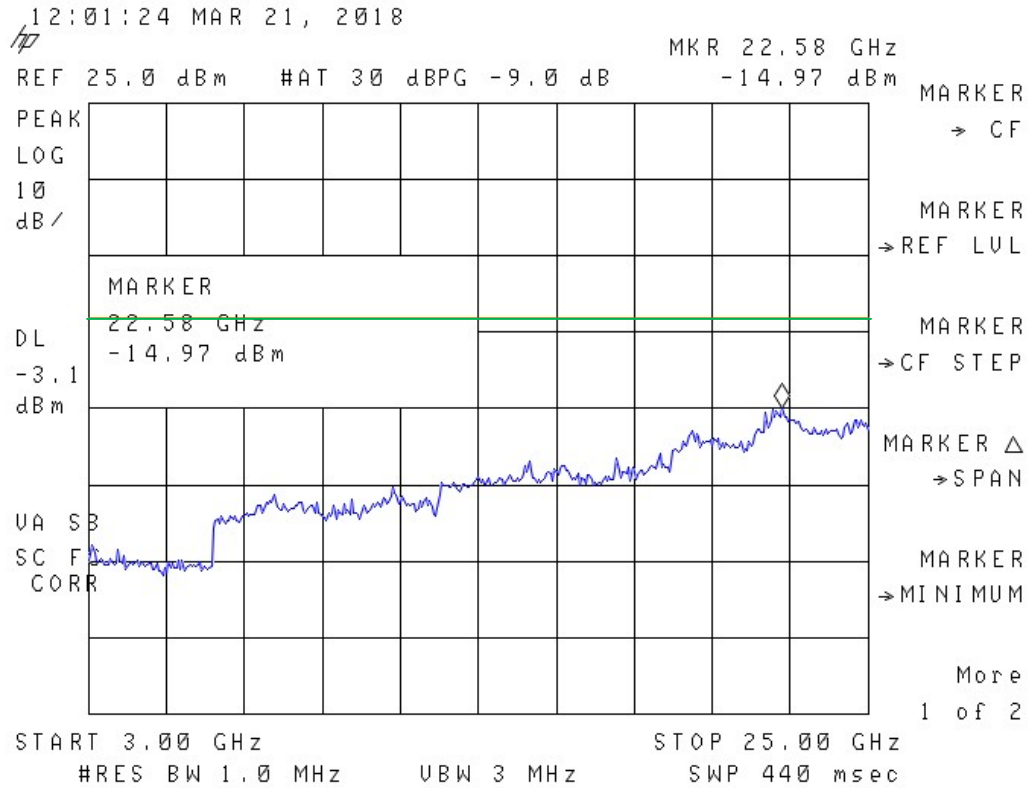

**Figure 7. Antenna Conducted Emissions Mid Channel, 3 GHz – 25 GHz**  
 Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

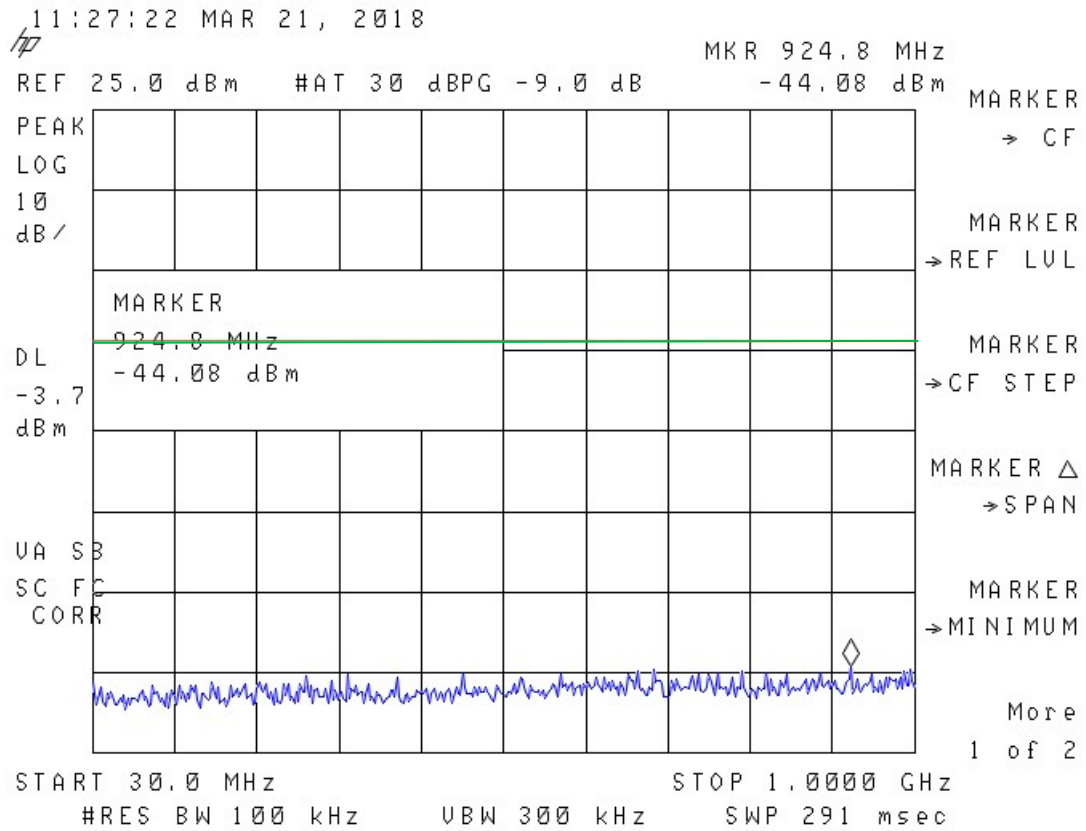

**Figure 8. Antenna Conducted Emissions High Channel, 30 MHz – 1 GHz**  
Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

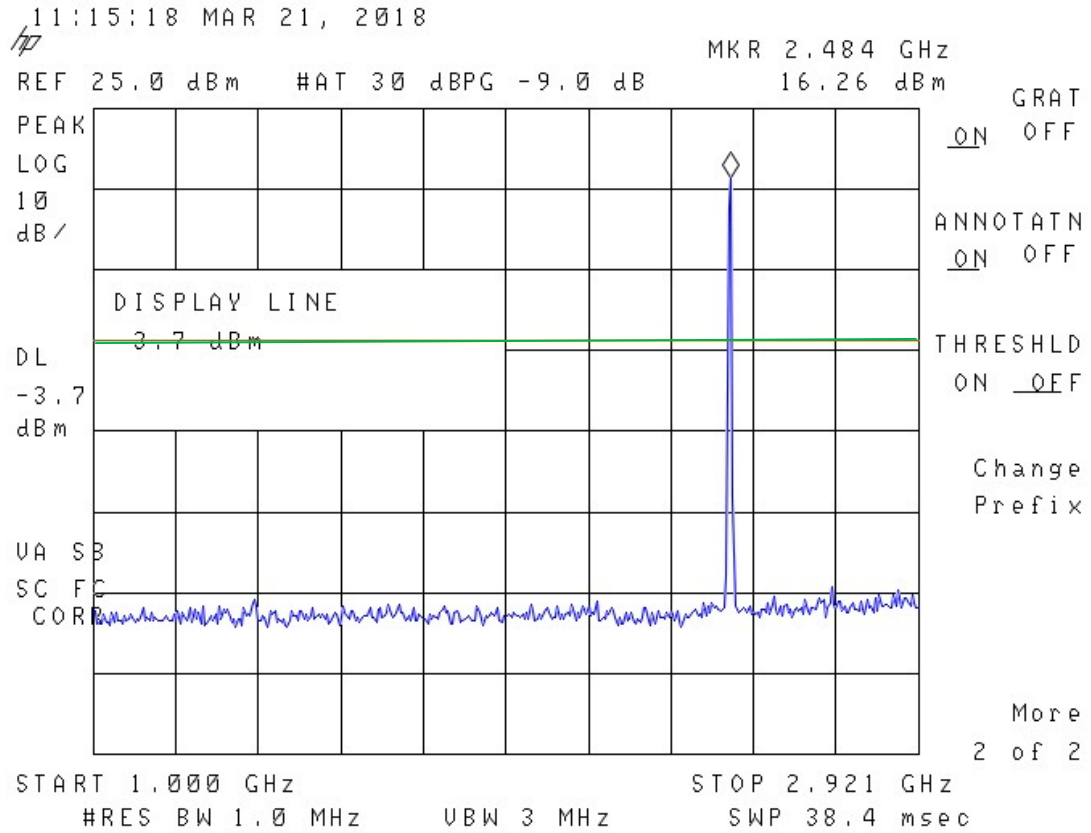

**Figure 9. Antenna Conducted Emissions High Channel, 1 GHz – 3 GHz**  
Green Line= Limit line

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

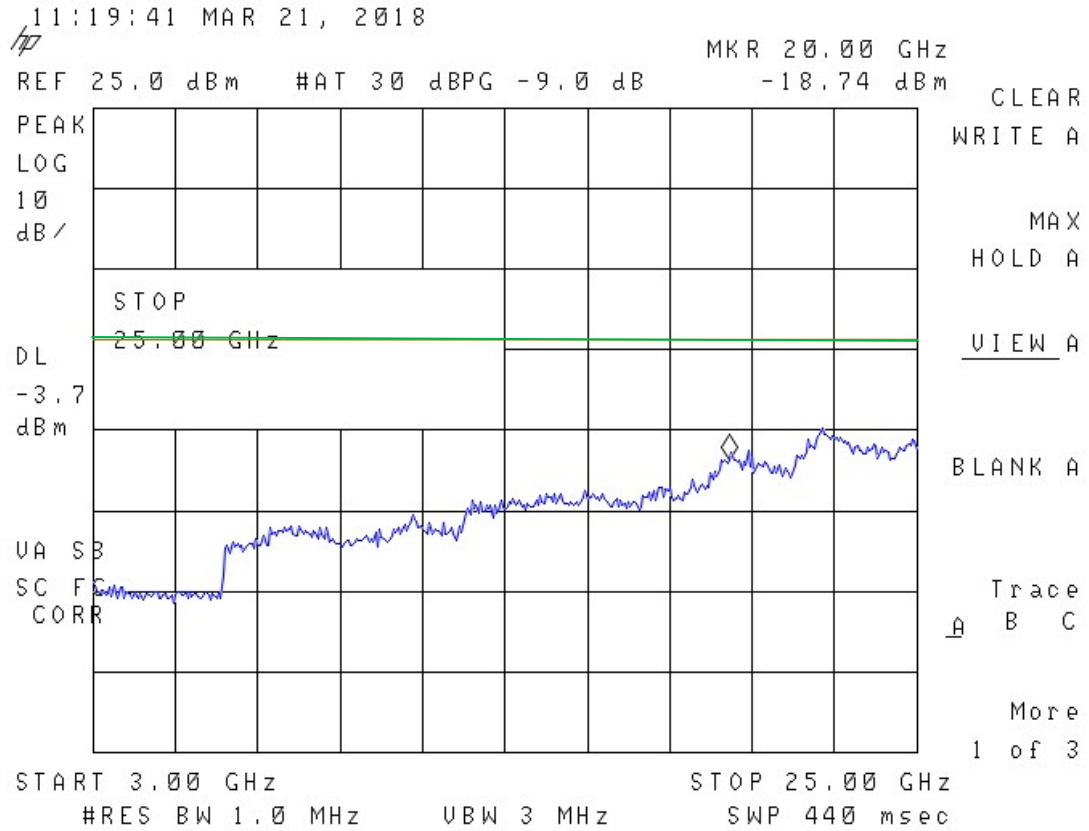

**Figure 10. Antenna Conducted Emissions High Channel, 3 GHz – 25 GHz**  
 Green Line= Limit line

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 2.8.2 Radiated Spurious Emissions

The EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per ANSI C63.10:2013. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the device. A preliminary scan was performed on the EUT to find the worse case results. The EUT was tested in X, Y, and Z axes or in the orientation of normal operation if the device is designed to operate in a fixed position. For spurious emissions other than fundamental and harmonic emissions, spurious emissions emanating from the EUT enclosure, the antenna port was terminated with a 50 ohm load during testing. For fundamental and harmonic emissions the EUT was tested with each of the antennas reference in Table 4 above.

**Table 5. Spurious Radiated Emissions 150 kHz-30MHz (CFR 15.209)**


| Test By:<br>JF                  | Test: FCC Part 15.209 |                  |                     | Client: Murata     |                            |                |                            |
|---------------------------------|-----------------------|------------------|---------------------|--------------------|----------------------------|----------------|----------------------------|
|                                 | Project: 17-0439      |                  |                     | Model: CCT24       |                            |                |                            |
| Frequency<br>(MHz)              | Test Data<br>(dBuV)   | AF+CL-PA<br>(dB) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | DETECTOR<br>PK /<br>QP/AVG |
| This test was not re-evaluated. |                       |                  |                     |                    |                            |                |                            |

SAMPLE CALCULATION: N/A

Test Date: March 19, 2018

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24


**Table 6. Spurious Radiated Emissions (CFR 15.209), 30 MHz to 1000 MHz**

| 30 MHz to 1000 MHz       |                  |                        |                  |                  |                    |                                |             |                    |
|--------------------------|------------------|------------------------|------------------|------------------|--------------------|--------------------------------|-------------|--------------------|
| Test: Radiated Emissions |                  |                        |                  | Client: Murata   |                    |                                |             |                    |
| Project: 17-0439         |                  |                        |                  | Model: CCT24     |                    |                                |             |                    |
| Frequency (MHz)          | Test Data (dBuV) | Additional Factor (dB) | AF+CA-AMP (dB/m) | Results (dBuV/m) | QP Limits (dBuV/m) | Antenna Distance/ Polarization | Margin (dB) | Detector PK, or QP |
| 39.14                    | 31.92            | --                     | -13.81           | 18.11            | 40.0               | 3m./HORZ                       | 21.9        | PK                 |
| 133.08                   | 43.16            | --                     | -14.73           | 28.43            | 43.5               | 3m./HORZ                       | 15.1        | PK                 |
| 51.03                    | 39.71            | --                     | -17.17           | 22.54            | 40.0               | 3m./VERT                       | 17.5        | PK                 |
| 124.50                   | 39.99            | --                     | -14.82           | 25.17            | 43.5               | 3m./VERT                       | 18.3        | PK                 |
| 201.00                   | 33.88            | --                     | -13.59           | 20.29            | 43.5               | 3m./HORZ                       | 23.2        | PK                 |
| 264.36                   | 34.98            | --                     | -11.83           | 23.15            | 46.0               | 3m./HORZ                       | 22.8        | PK                 |
| 965.40                   | 29.95            | --                     | -1.30            | 28.65            | 54.0               | 3m./HORZ                       | 25.3        | PK                 |
| 201.00                   | 32.98            | --                     | -13.89           | 19.09            | 43.5               | 3m./VERT                       | 24.4        | PK                 |
| 262.50                   | 33.80            | --                     | -12.32           | 21.48            | 46.0               | 3m./VERT                       | 24.5        | PK                 |
| 981.60                   | 29.80            | --                     | -2.19            | 27.61            | 54.0               | 3m./VERT                       | 26.4        | PK                 |

SAMPLE CALCULATION at: 39.14 MHz

|                                                           |        |        |
|-----------------------------------------------------------|--------|--------|
| Magnitude of Measured Frequency                           | 31.92  | dBuV   |
| +Additional Factor (Distance Extrapolation)               | 0.0    | dB     |
| +Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle | -13.81 | dB/m   |
| Corrected Result                                          | 18.11  | dBuV/m |

Test Date: March 19, 2018

Tested By  
 Signature: 

Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

**Table 7. Spurious Radiated Emissions (CFR 15.209) 1 GHz to 25 GHz**


| 1 GHz to 25 GHz, Part 15.209 Limits                                                                                   |                        |                     |                     |                           |                                      |                |                           |
|-----------------------------------------------------------------------------------------------------------------------|------------------------|---------------------|---------------------|---------------------------|--------------------------------------|----------------|---------------------------|
| Test: Radiated Emissions                                                                                              |                        |                     |                     | Client: Murata            |                                      |                |                           |
| Project: 17-0439                                                                                                      |                        |                     |                     | Model: CCT24              |                                      |                |                           |
| Frequency<br>(MHz)                                                                                                    | Test<br>Data<br>(dBuv) | AF+CA-AMP<br>(dB/m) | Results<br>(dBuV/m) | AVG<br>Limits<br>(dBuV/m) | Antenna<br>Distance/<br>Polarization | Margin<br>(dB) | Detector<br>PK, or<br>AVG |
| Besides the emissions reported in the table below, all other emissions were at least 20 dB from the applicable limit. |                        |                     |                     |                           |                                      |                |                           |

SAMPLE CALCULATION at: N/A

Test Date: March 19, 2018

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 8. Radiated Fundamental & Harmonic Emissions - ANTENNA 1**


| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 87.86            |             | 31.26             | 119.12           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 81.28            |             | 31.26             | 112.54           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 46.68            |             | 5.58              | 52.26            | 74.0                                     | 3.0m./HORZ                     | 21.7        | PK            |
| 4813.2*                                   | 38.36            |             | 5.58              | 43.94            | 54.0                                     | 3.0m./HORZ                     | 10.1        | AVG           |
| 2440.80                                   | 85.24            |             | 31.26             | 116.50           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80                                   | 78.85            |             | 31.26             | 110.11           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 45.49            |             | 5.52              | 51.01            | 74.0                                     | 3.0m./HORZ                     | 23.0        | PK            |
| 4881.60*                                  | 38.45            |             | 5.52              | 43.97            | 54.0                                     | 3.0m./HORZ                     | 10.0        | AVG           |
| 2476.90                                   | 84.37            |             | 31.26             | 115.63           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 78.62            |             | 31.26             | 109.88           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 45.57            |             | 5.81              | 51.38            | 74.0                                     | 3.0m./HORZ                     | 22.6        | PK            |
| 4953.80*                                  | 38.48            |             | 5.81              | 44.29            | 54.0                                     | 3.0m./HORZ                     | 9.7         | AVG           |

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 46.68 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 5.58  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.0   | dB     |
| Corrected Result                             | 52.26 | dBuV/m |

Test Date: November 6, 2017

Tested By  
 Signature: 

Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 9. Radiated Fundamental & Harmonic Emissions - ANTENNA 2**

| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 90.88            |             | 31.26             | 122.14           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 85.18            |             | 31.26             | 116.44           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 46.14            |             | 6.91              | 53.05            | 74.0                                     | 3.0m./HORZ                     | 20.9        | PK            |
| 4813.2*                                   | 37.76            |             | 6.91              | 44.67            | 54.0                                     | 3.0m./HORZ                     | 9.3         | AVG           |
| 2440.80                                   | 90.43            |             | 31.26             | 121.69           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80                                   | 84.69            |             | 31.26             | 115.95           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 45.64            |             | 6.75              | 52.39            | 74.0                                     | 3.0m./HORZ                     | 21.6        | PK            |
| 4881.60*                                  | 38.47            |             | 6.75              | 45.22            | 54.0                                     | 3.0m./HORZ                     | 8.8         | AVG           |
| 2476.90                                   | 91.05            |             | 31.26             | 122.31           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 85.28            |             | 31.26             | 116.54           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 46.58            |             | 6.90              | 53.48            | 74.0                                     | 3.0m./HORZ                     | 20.5        | PK            |
| 4953.80*                                  | 38.70            |             | 6.90              | 45.60            | 54.0                                     | 3.0m./HORZ                     | 8.4         | AVG           |

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 46.14 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 6.91  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.0   | dB     |
| Corrected Result                             | 53.05 | dBuV/m |

Test Date: November 6, 2017

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 10. Radiated Fundamental & Harmonic Emissions - ANTENNA 3**

| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 78.50            |             | 31.26             | 109.76           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 72.84            |             | 31.26             | 104.10           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 46.28            |             | 6.91              | 53.19            | 74.0                                     | 3.0m./HORZ                     | 20.8        | PK            |
| 4813.2*                                   | 37.74            |             | 6.91              | 44.65            | 54.0                                     | 3.0m./HORZ                     | 9.3         | AVG           |
| 2440.80                                   | 78.98            |             | 31.26             | 110.24           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80*                                  | 73.49            |             | 31.26             | 104.75           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 45.51            |             | 6.75              | 52.26            | 74.0                                     | 3.0m./HORZ                     | 21.7        | PK            |
| 4881.60*                                  | 37.65            |             | 6.75              | 44.40            | 54.0                                     | 3.0m./HORZ                     | 9.6         | AVG           |
| 2476.90                                   | 80.87            |             | 31.26             | 112.13           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 73.18            |             | 31.26             | 104.44           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 45.93            |             | 6.90              | 52.83            | 74.0                                     | 3.0m./HORZ                     | 21.2        | PK            |
| 4953.80*                                  | 37.13            |             | 6.90              | 44.03            | 54.0                                     | 3.0m./HORZ                     | 10.0        | AVG           |

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR 15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.


Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 46.28 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 6.91  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.00  | dB     |
| Corrected Result                             | 53.19 | dBuV/m |

Test Date: November 6, 2017

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 11. Radiated Fundamental & Harmonic Emissions- ANTENNA 4**

| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 84.55            |             | 31.26             | 115.81           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 78.96            |             | 31.26             | 110.22           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 46.94            |             | 5.58              | 52.52            | 74.0                                     | 3.0m./HORZ                     | 21.5        | PK            |
| 4813.2*                                   | 37.75            |             | 5.58              | 43.33            | 54.0                                     | 3.0m./HORZ                     | 10.7        | AVG           |
| 2440.80                                   | 87.41            |             | 31.26             | 118.67           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80                                   | 81.74            |             | 31.26             | 113.00           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 45.29            |             | 5.52              | 50.81            | 74.0                                     | 3.0m./HORZ                     | 23.2        | PK            |
| 4881.60*                                  | 38.35            |             | 5.52              | 43.87            | 54.0                                     | 3.0m./HORZ                     | 10.1        | AVG           |
| 2476.90                                   | 88.04            |             | 31.26             | 119.30           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 81.79            |             | 31.26             | 113.05           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 46.03            |             | 5.81              | 51.84            | 74.0                                     | 3.0m./HORZ                     | 22.2        | PK            |
| 4953.80*                                  | 38.39            |             | 5.81              | 44.20            | 54.0                                     | 3.0m./HORZ                     | 9.8         | AVG           |

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR 15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.


Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 46.94 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 5.58  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.0   | dB     |
| Corrected Result                             | 52.52 | dBuV/m |

Test Date: November 6, 2017

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 12. Radiated Fundamental & Harmonic Emissions- ANTENNA 5**

| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 91.07            |             | 30.07             | 121.14           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 84.80            |             | 30.07             | 114.87           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 50.42            |             | 3.79              | 54.21            | 74.0                                     | 3.0m./HORZ                     | 19.8        | PK            |
| 4813.2*                                   | 41.42            |             | 3.79              | 45.21            | 54.0                                     | 3.0m./HORZ                     | 8.8         | AVG           |
| 2440.80                                   | 89.84            |             | 30.11             | 119.95           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80                                   | 84.17            |             | 30.11             | 114.28           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 46.37            |             | 3.75              | 50.12            | 74.0                                     | 3.0m./HORZ                     | 23.9        | PK            |
| 4881.60*                                  | 37.24            |             | 3.75              | 40.99            | 54.0                                     | 3.0m./HORZ                     | 13.0        | AVG           |
| 2476.90                                   | 89.89            |             | 30.13             | 120.02           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 84.17            |             | 30.13             | 114.30           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 46.56            |             | 4.08              | 50.64            | 74.0                                     | 3.0m./HORZ                     | 23.4        | PK            |
| 4953.80*                                  | 38.32            |             | 4.08              | 42.40            | 54.0                                     | 3.0m./HORZ                     | 11.6        | AVG           |


1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 50.42 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 3.79  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.00  | dB     |
| Corrected Result                             | 54.21 | dBuV/m |

Test Date: November 6, 2017

Tested By

Signature: 

Name: John Freeman

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

**Table 13. Radiated Fundamental & Harmonic Emissions - ANTENNA 6**


| Test: FCC Part 15, Para 15.209, 15.247(d) |                  |             |                   |                  | Client: Murata Electronics North America |                                |             |               |
|-------------------------------------------|------------------|-------------|-------------------|------------------|------------------------------------------|--------------------------------|-------------|---------------|
| Project: 17-0439                          |                  |             |                   |                  | Model: CCT24                             |                                |             |               |
| Frequency (MHz)                           | Test Data (dBuV) | Factor (dB) | AF+CA -AMP (dB/m) | Results (dBuV/m) | Limits (dBuV/m)                          | Antenna Distance/ Polarization | Margin (dB) | Detector Mode |
| 2406.6                                    | 84.17            |             | 31.26             | 115.43           |                                          | 3.0m./HORZ                     |             | PK            |
| 2406.6                                    | 77.89            |             | 31.26             | 109.15           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4813.2*                                   | 45.79            |             | 5.58              | 51.37            | 74.0                                     | 3.0m./HORZ                     | 22.6        | PK            |
| 4813.2*                                   | 38.05            |             | 5.58              | 43.63            | 54.0                                     | 3.0m./HORZ                     | 10.4        | AVG           |
| 2440.80                                   | 84.87            |             | 31.26             | 116.13           |                                          | 3.0m./HORZ                     |             | PK            |
| 2440.80                                   | 79.36            |             | 31.26             | 110.62           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4881.60*                                  | 46.48            |             | 5.52              | 52.00            | 74.0                                     | 3.0m./HORZ                     | 22.0        | PK            |
| 4881.60*                                  | 38.17            |             | 5.52              | 43.69            | 54.0                                     | 3.0m./HORZ                     | 10.3        | AVG           |
| 2476.90                                   | 82.68            |             | 31.26             | 113.94           |                                          | 3.0m./HORZ                     |             | PK            |
| 2476.90                                   | 77.09            |             | 31.26             | 108.35           |                                          | 3.0m./HORZ                     |             | AVG           |
| 4953.80*                                  | 45.30            |             | 5.81              | 51.11            | 74.0                                     | 3.0m./HORZ                     | 22.9        | PK            |
| 4953.80*                                  | 38.33            |             | 5.81              | 44.14            | 54.0                                     | 3.0m./HORZ                     | 9.9         | AVG           |

1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.247
2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
3. Measurements taken at 1 meter were extrapolated to 3 meter using a factor of (-9.5 dB).
4. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4813.20 MHz:

|                                              |       |        |
|----------------------------------------------|-------|--------|
| Magnitude of Measured Frequency              | 45.79 | dBuV   |
| +Antenna Factor + Cable Loss+ Amplifier Gain | 5.58  | dB/m   |
| 1 meter to 3 meter extrapolation             | 0.0   | dB     |
| Corrected Result                             | 51.37 | dBuV/m |

Test Date: November 6, 2017

Tested By  
 Signature: 

Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## 2.9 Six (6) dB Bandwidth per CFR 15.247(a)(2)

The EUT antenna port was connected to a spectrum analyzer having a 50 $\Omega$  input impedance. Measurements were performed following the guidelines of ANSI C63.10:2013.

**Table 14. 6 dB Bandwidth and 99% Occupied Bandwidth**

| Frequency<br>(MHz) | 6 dB Bandwidth<br>(MHz) | Minimum FCC<br>Bandwidth<br>(MHz) | 99% Occupied<br>Bandwidth<br>(MHz) |
|--------------------|-------------------------|-----------------------------------|------------------------------------|
| 2406.60            | 1.273                   | 0.5                               | 1.4032                             |
| 2440.80            | 1.263                   | 0.5                               | 1.4178                             |
| 2476.90            | 1.261                   | 0.5                               | 1.4299                             |

Test Date: March 23, 2018

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

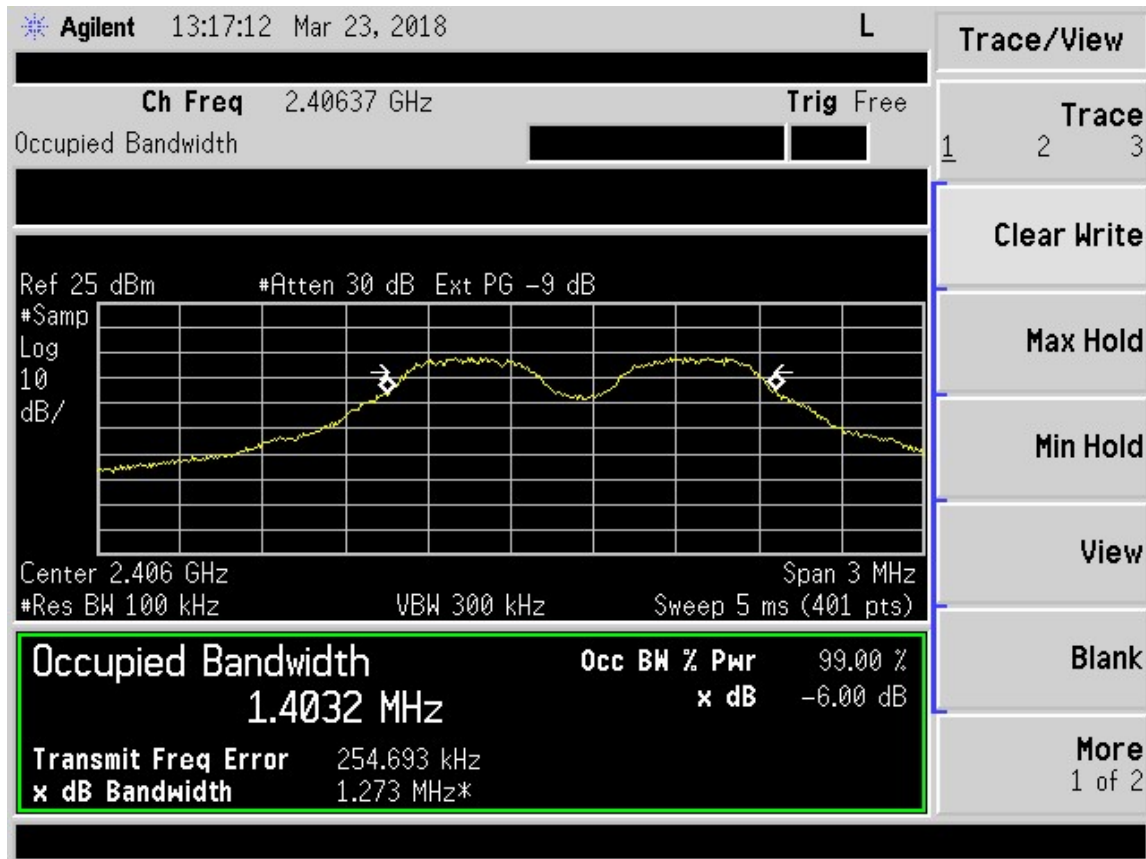


Figure 11. Six (6) dB Bandwidth– Low Channel

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

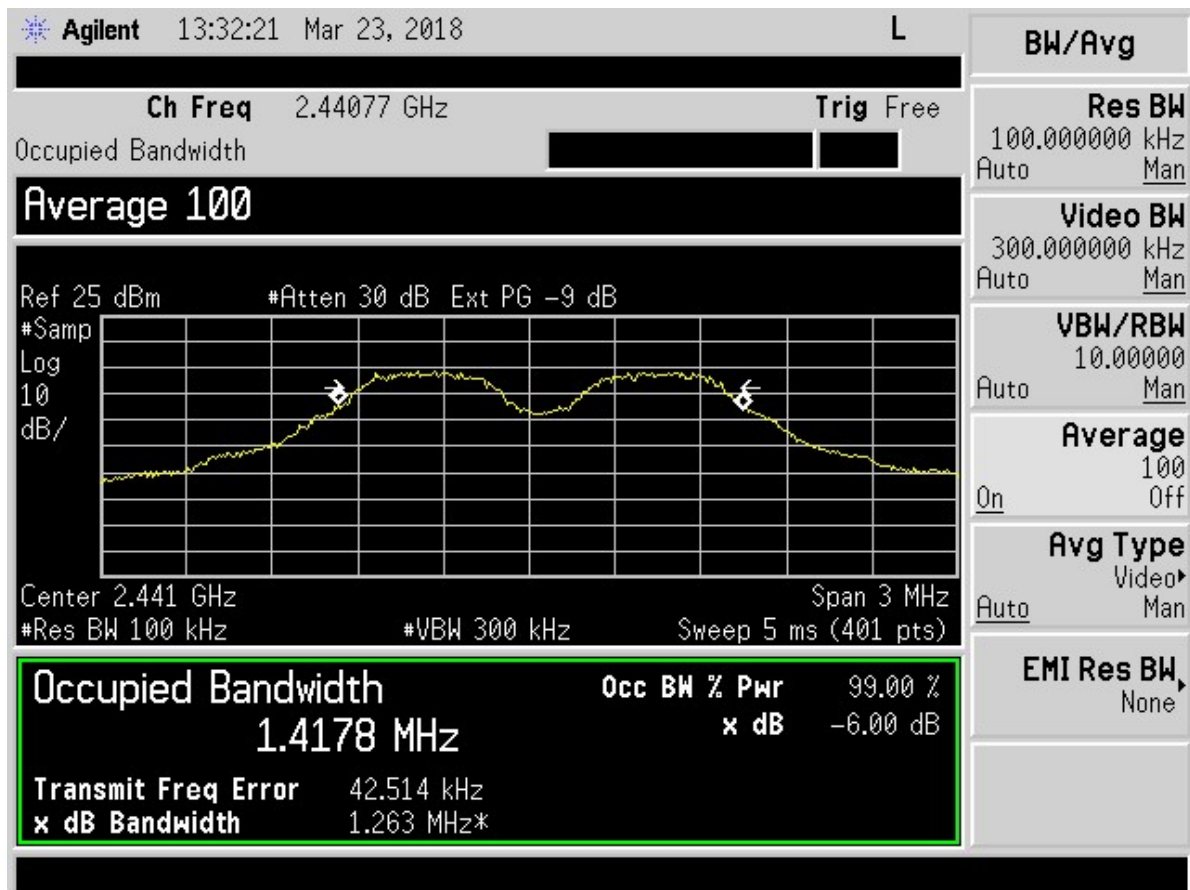


Figure 12. Six (6) dB Bandwidth – Mid Channel

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

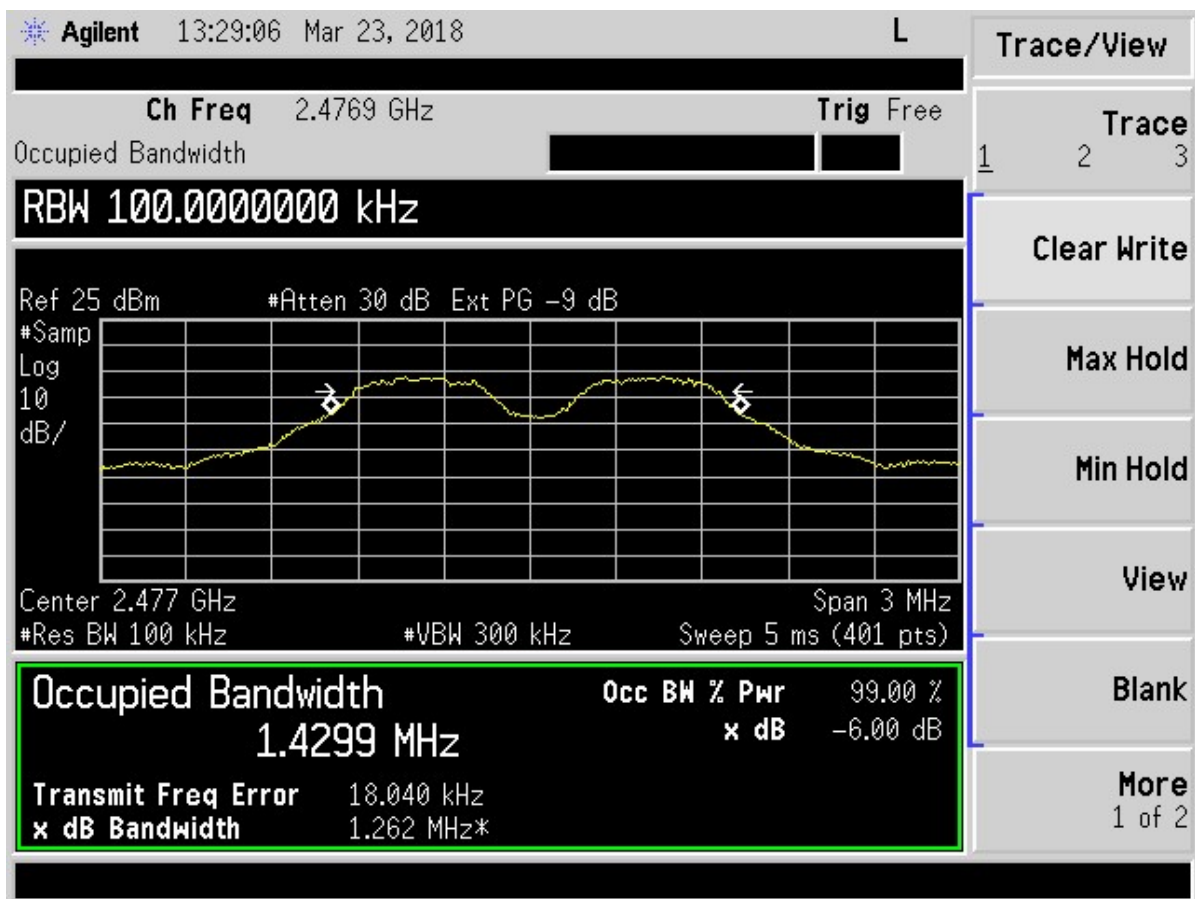


Figure 13. Six (6) dB Bandwidth – High Channel

## 2.10 Maximum Peak Conducted Output Power (CFR 15.247 (b) (3))

Peak power within the band 2400 MHz to 2483.5 MHz was measured per FCC KDB Publication 558074 v04 and ANSI C63.10:2013 as an Antenna Conducted test with a spectrum analyzer by connecting the spectrum analyzer directly, via a short RF cable, and attenuators to the antenna output terminals on the EUT. The spectrum analyzer was set for an impedance of 50  $\Omega$  with the RBW set greater than the 6 dB bandwidth of the EUT, and the VBW  $\geq$  RBW. Peak antenna conducted output power is tabulated in the table following.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

**Table 15. Peak Antenna Conducted Output Power per Part 15.247 (b) (3)**


| Frequency of Fundamental (MHz) | Measured Data dBm | Converted Data (mW) | FCC Limit (mW Maximum) |
|--------------------------------|-------------------|---------------------|------------------------|
| 2406.60                        | 17.37             | 54.57               | 158.50 (22 dBm)        |
| 2440.80                        | 17.68             | 58.61               | 158.50 (22 dBm)        |
| 2476.90                        | 17.12             | 51.52               | 158.50 (22 dBm)        |

Note: Antenna gain exceeds 6.0 dBi by a maximum value of 8.0 dB, therefore the output power limit is reduced by 8.0 dB per Part 15.247(b)(4).

Test Date: March 21, 2018

Tested By


Signature:



Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

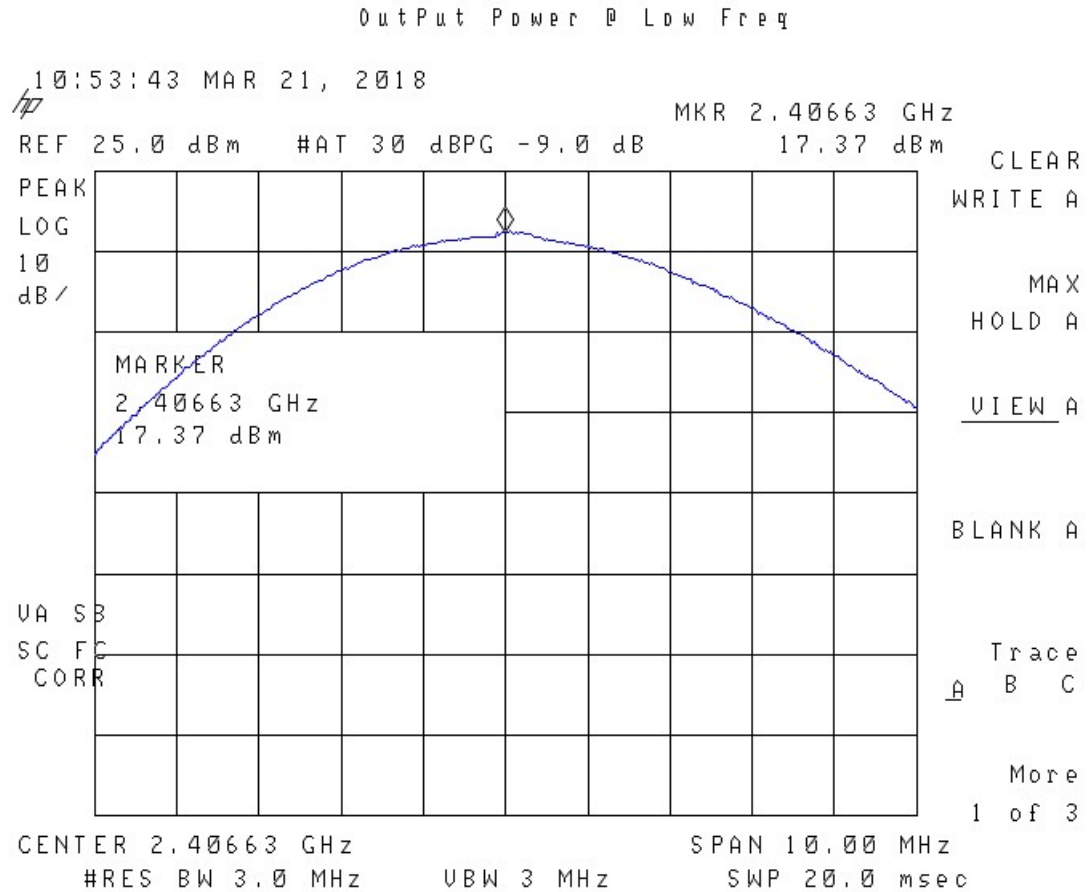

**Figure 14. Peak Antenna Conducted Output Power, Low Channel**

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

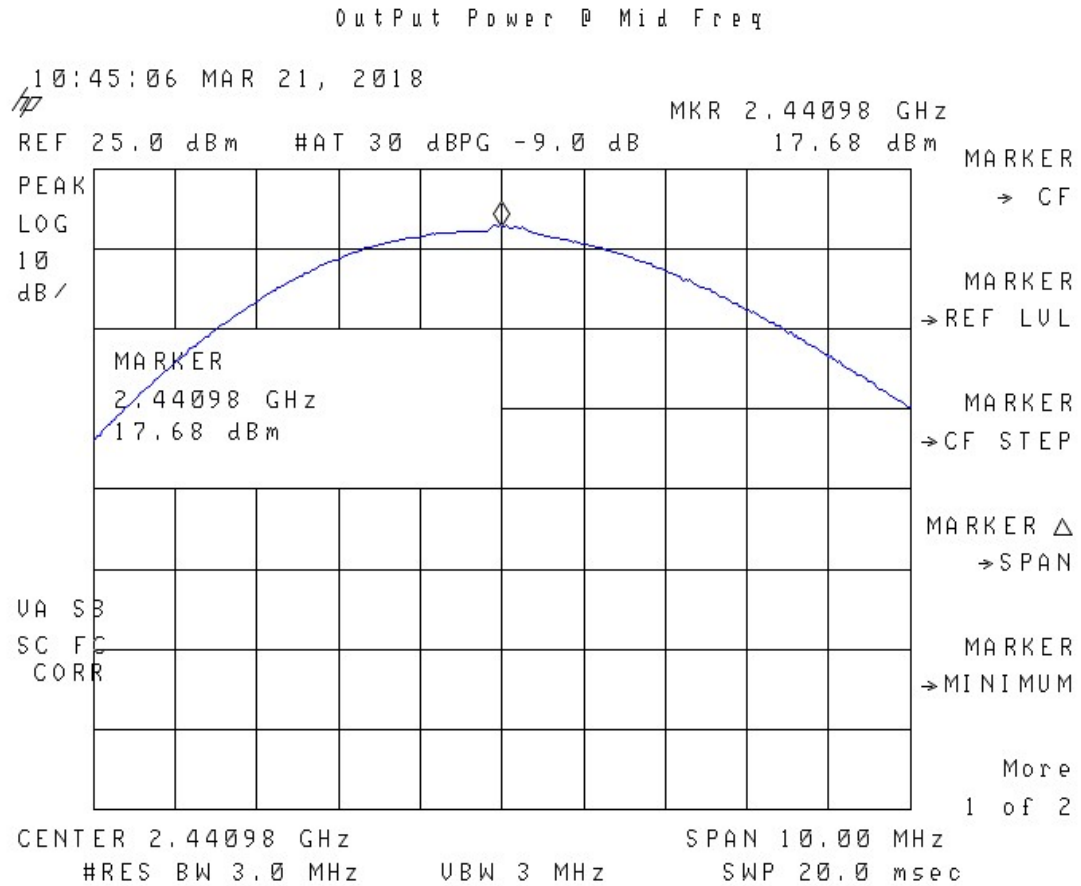


Figure 15. Peak Antenna Conducted Output Power, Mid Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

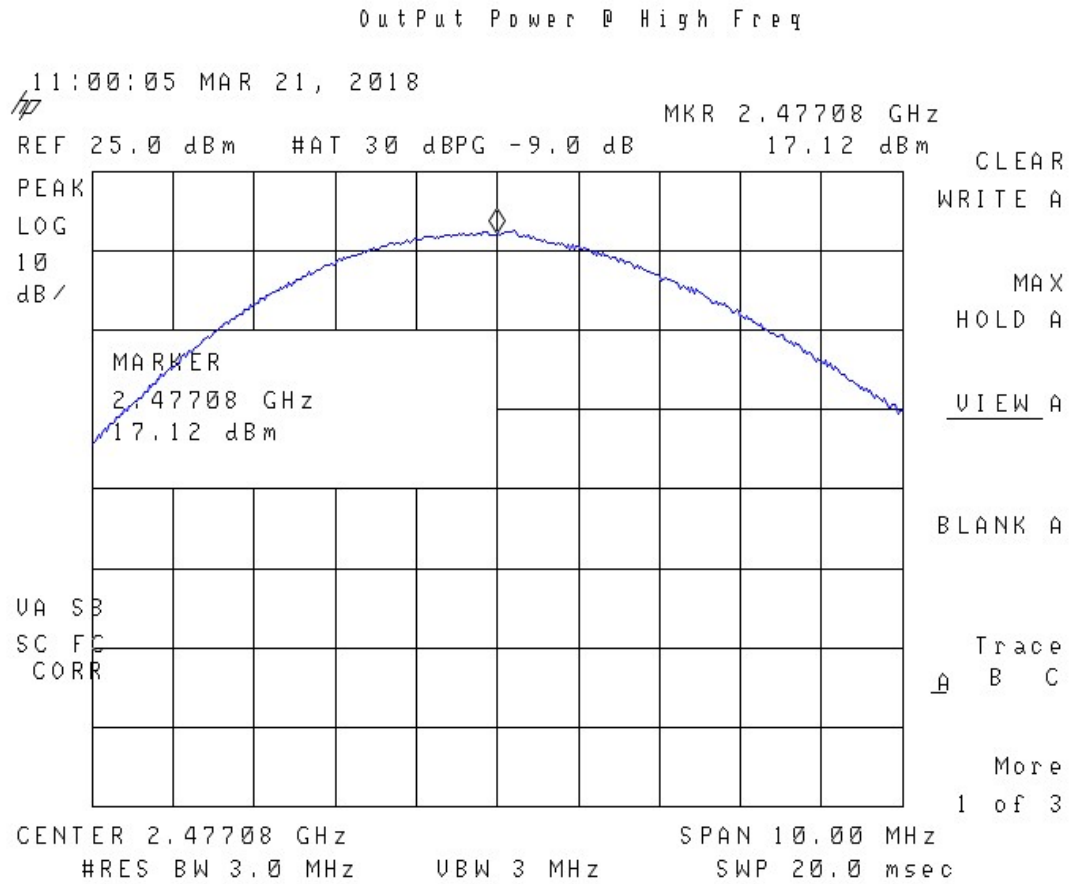


Figure 16. Peak Antenna Conducted Output Power, High Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---


## **2.11 Band Edge Measurements – (CFR 15.247 (d))**

Band Edge measurements are made following the guidelines in ANSI C63.10:2013 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Antenna port conducted measurements are performed to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge set the Spectrum Analyzer frequency span large enough (usually around 3 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Conducted measurements are performed with RBW  $\geq 1\%$  of the frequency span. In all cases, the VBW is set  $\geq$  RBW. See figure and calculations below for more detail. This measurement was performed with the EUT continuously transmitting on the low and high channels as well as in normal use mode.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

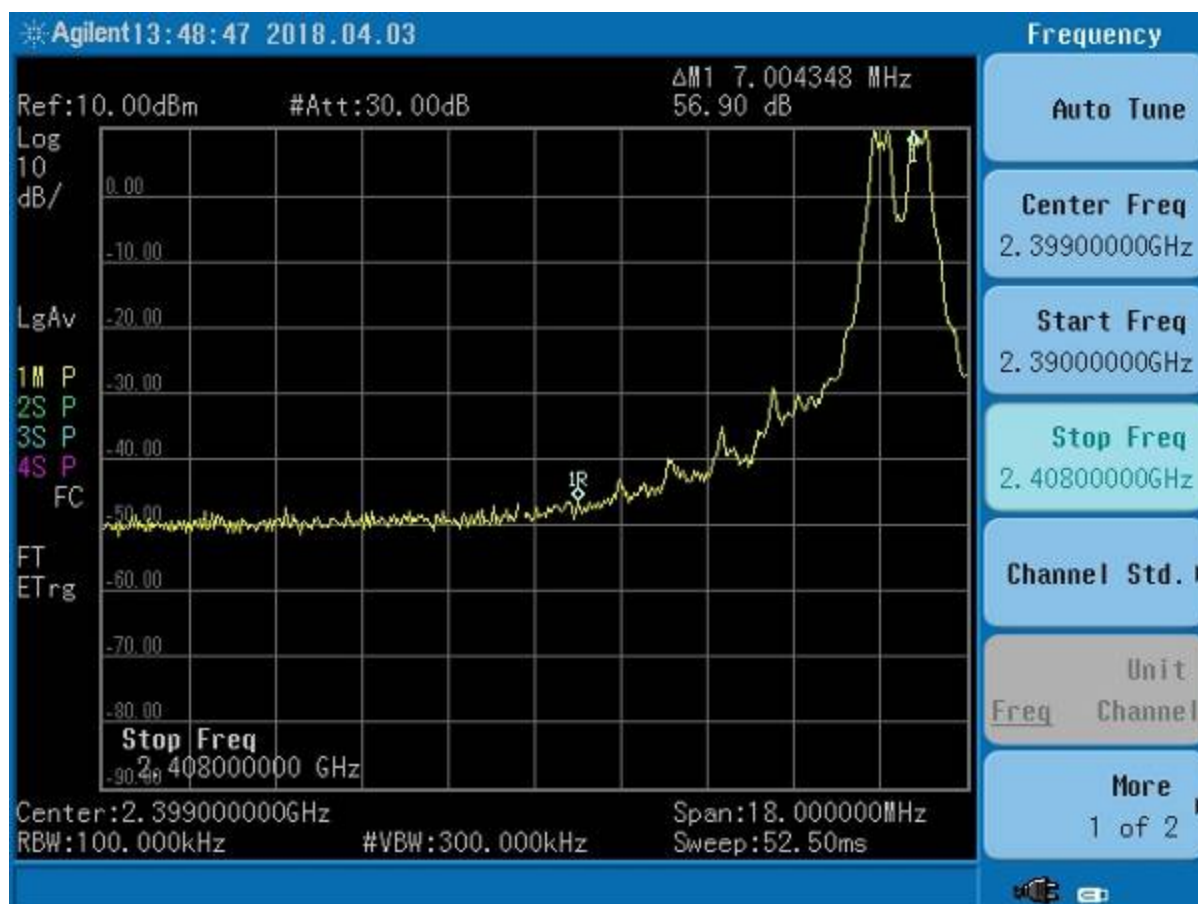


**Figure 17. Band Edge Compliance, Low Channel Delta – Peak**

Band edge must be 20 dB below the fundamental

|                  |       |    |
|------------------|-------|----|
| Measured Result  | 56.90 | dB |
| Band Edge Limit  | 20.00 | dB |
| Band Edge Margin | 36.90 | dB |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

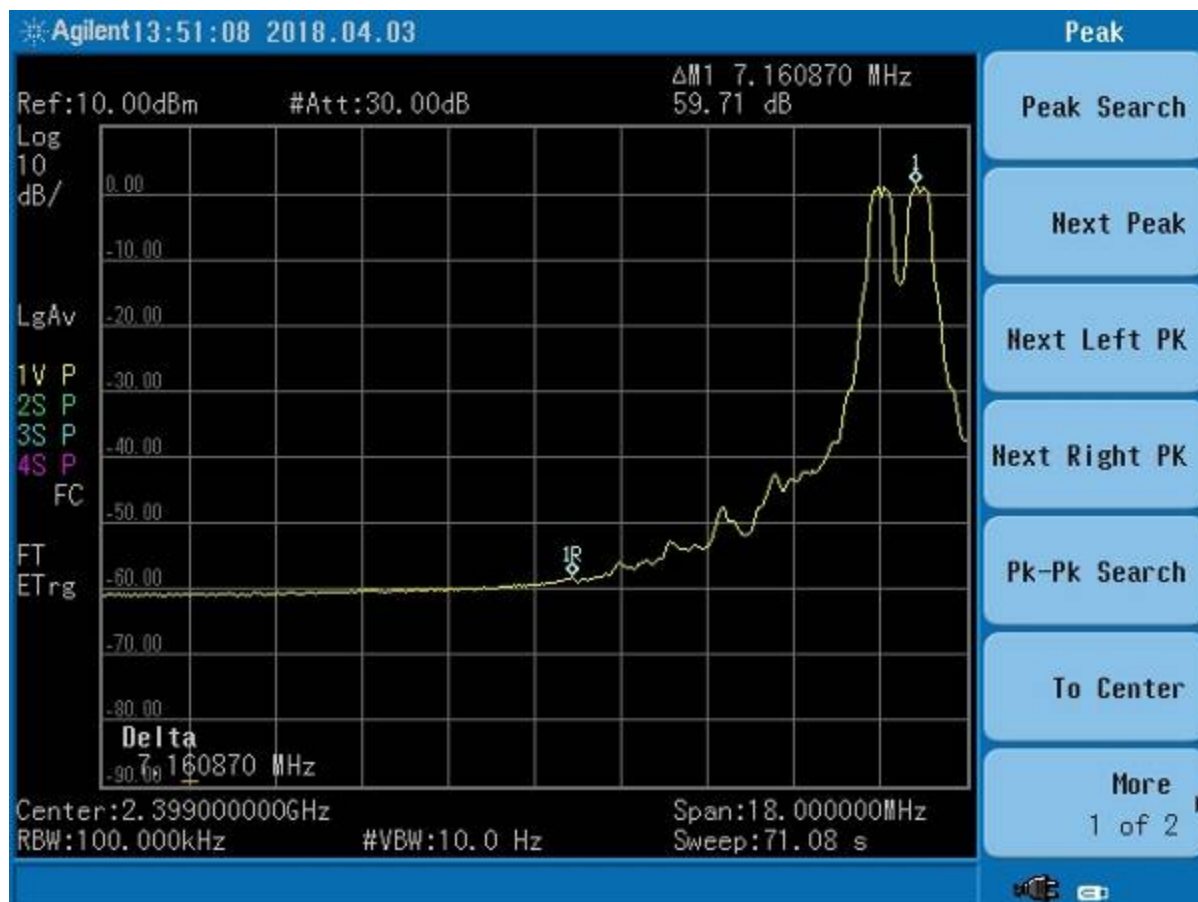


**Figure 18. Band Edge Compliance, Low Channel Delta – Average**

Band edge must be 20 dB below the fundamental

|                  |       |    |
|------------------|-------|----|
| Measured Result  | 59.17 | dB |
| Band Edge Limit  | 20.00 | dB |
| Band Edge Margin | 39.17 | dB |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

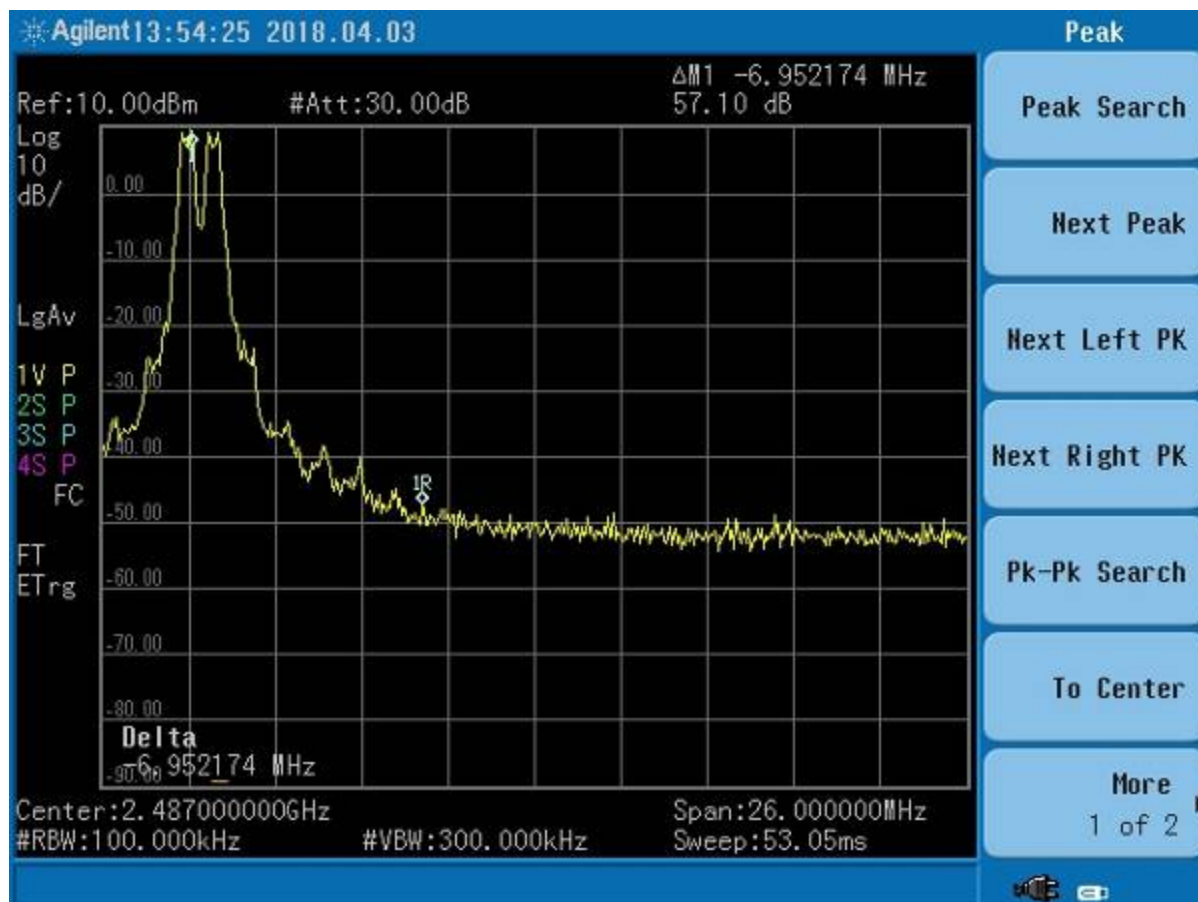


Band edge must be 20 dB below the fundamental

|                  |       |    |
|------------------|-------|----|
| Measured Result  | 57.10 | dB |
| Band Edge Limit  | 20.00 | dB |
| Band Edge Margin | 37.10 | dB |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

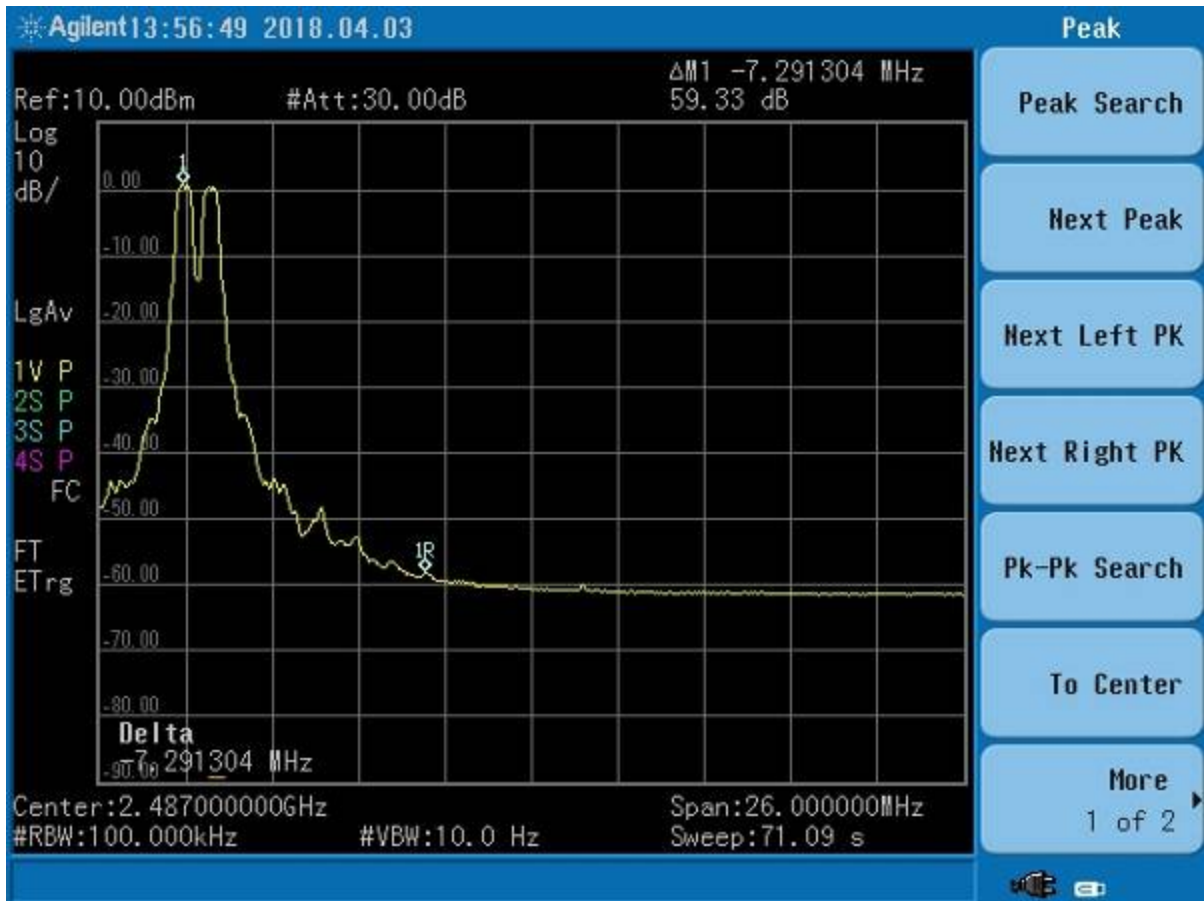


Band edge must be 20 dB below the fundamental

|                  |       |    |
|------------------|-------|----|
| Measured Result  | 59.33 | dB |
| Band Edge Limit  | 20.00 | dB |
| Band Edge Margin | 39.33 | dB |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

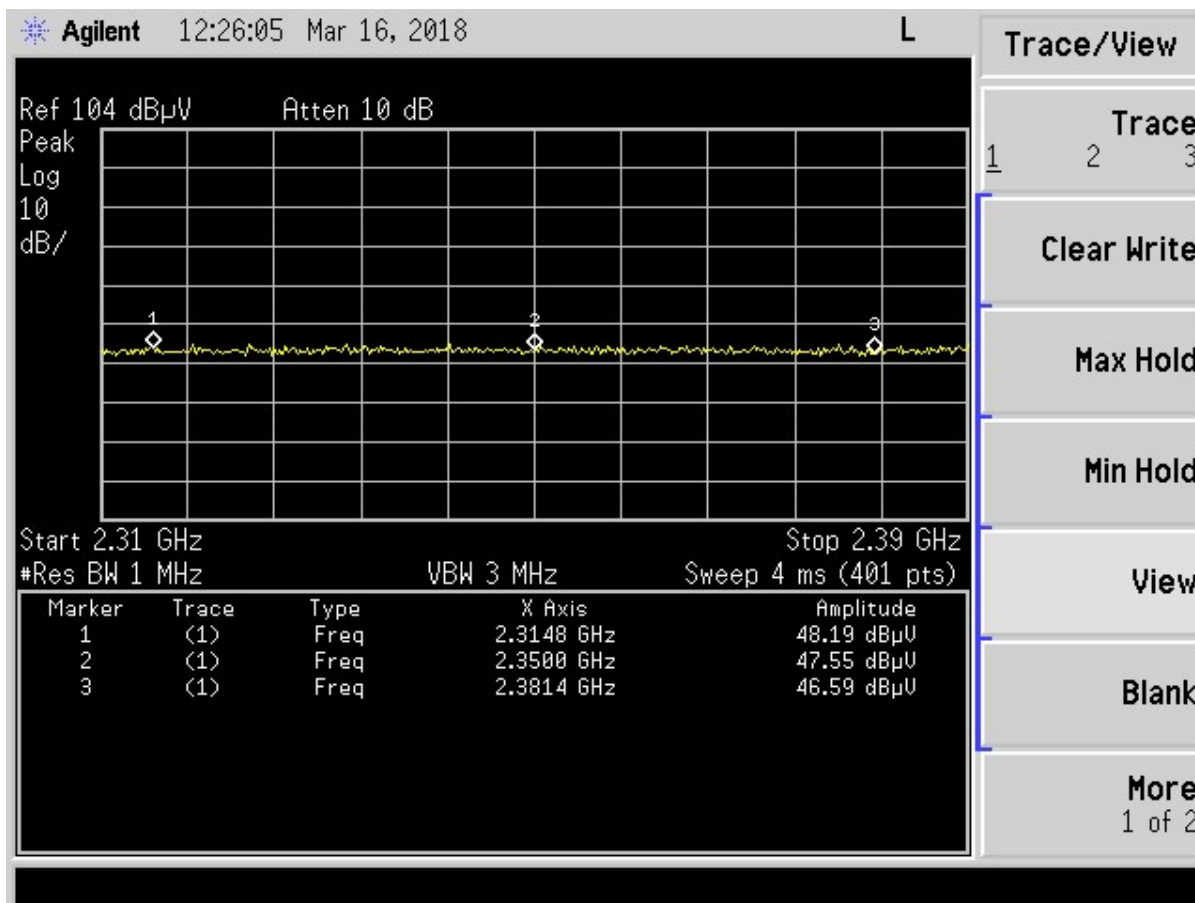


**Figure 19. Antenna 1 Restricted Band Measurements  
 2.31 GHz to 2.39 GHz –Peak**

**Table 16. Antenna 1 Restricted Band Data (Peak)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2314.80            | 48.19                  | -0.27                      | 47.92               | 74.0               | 3.0m./HORZ                 | 26.1           | PK                    |
| 2350.00            | 47.55                  | -0.25                      | 47.30               | 74.0               | 3.0m./HORZ                 | 26.7           | PK                    |
| 2381.40            | 46.59                  | -1.15                      | 45.44               | 74.0               | 3.0m./HORZ                 | 28.6           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

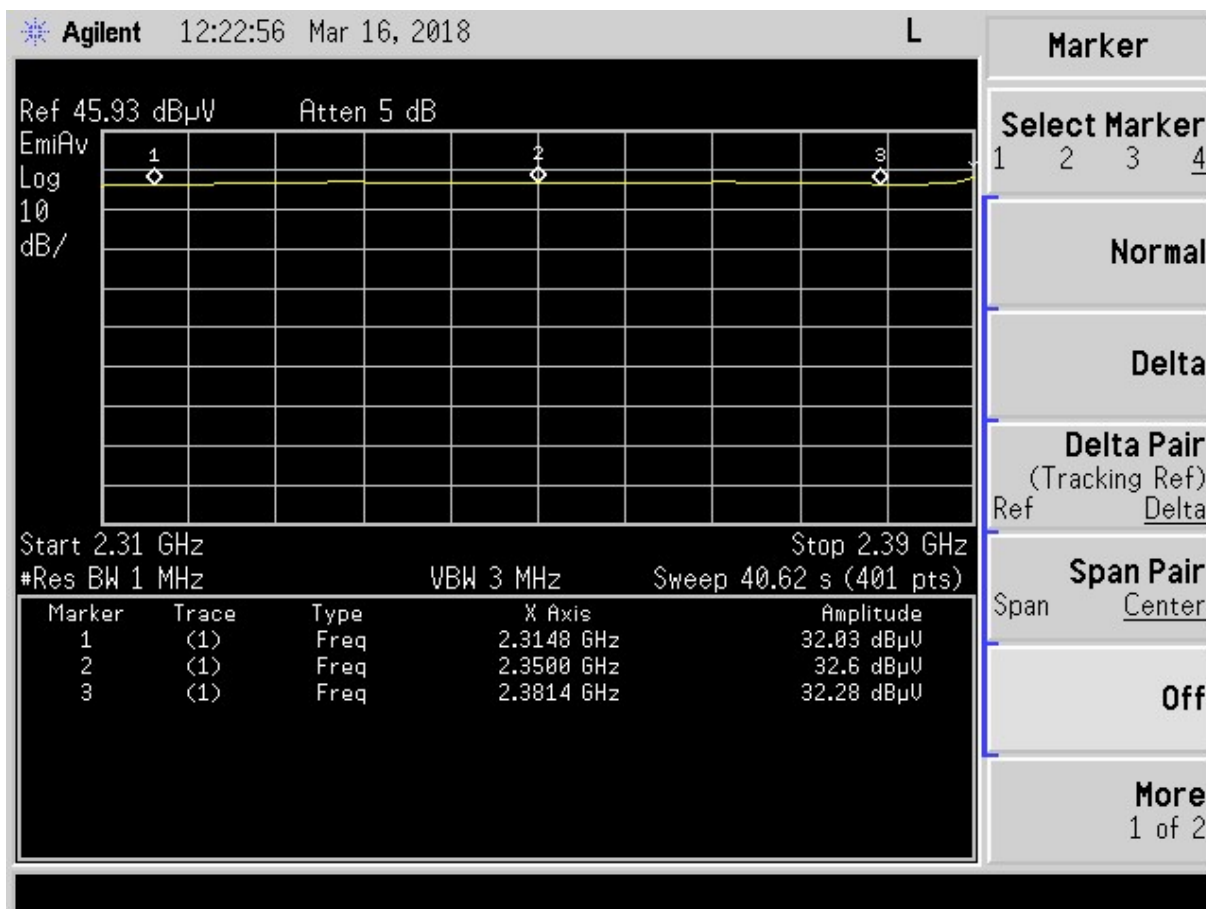


**Figure 20. Antenna 1 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 17. Antenna 1 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBμV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBμV/m) | Limits<br>(dBμV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2314.80            | 32.03                  | -0.27                      | 31.76               | 54.0               | 3.0m./HORZ                 | 22.2           | AVG                   |
| 2350.00            | 32.60                  | -0.25                      | 32.35               | 54.0               | 3.0m./HORZ                 | 21.7           | AVG                   |
| 2381.40            | 32.28                  | -1.15                      | 31.13               | 54.0               | 3.0m./HORZ                 | 22.9           | AVG                   |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

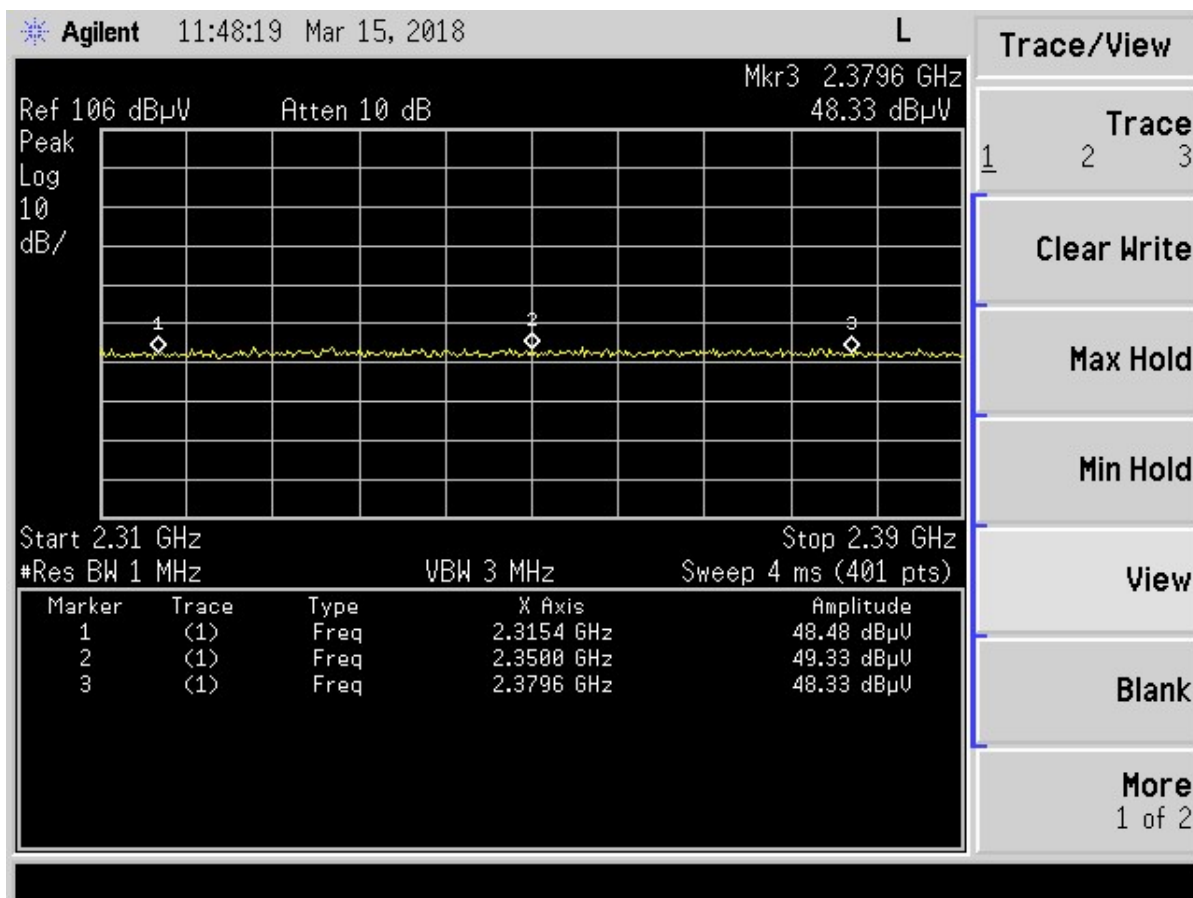


**Figure 21. Antenna 2 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Peak**

**Table 18. Antenna 2 Restricted Band Data (Peak)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.40            | 48.43                  | -0.27                      | 48.16               | 74.0               | 3.0m./HORZ                 | 25.8           | PK                    |
| 2350.00            | 49.33                  | -0.25                      | 49.08               | 74.0               | 3.0m./HORZ                 | 24.9           | PK                    |
| 2379.60            | 48.33                  | -1.15                      | 47.18               | 74.0               | 3.0m./HORZ                 | 26.8           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

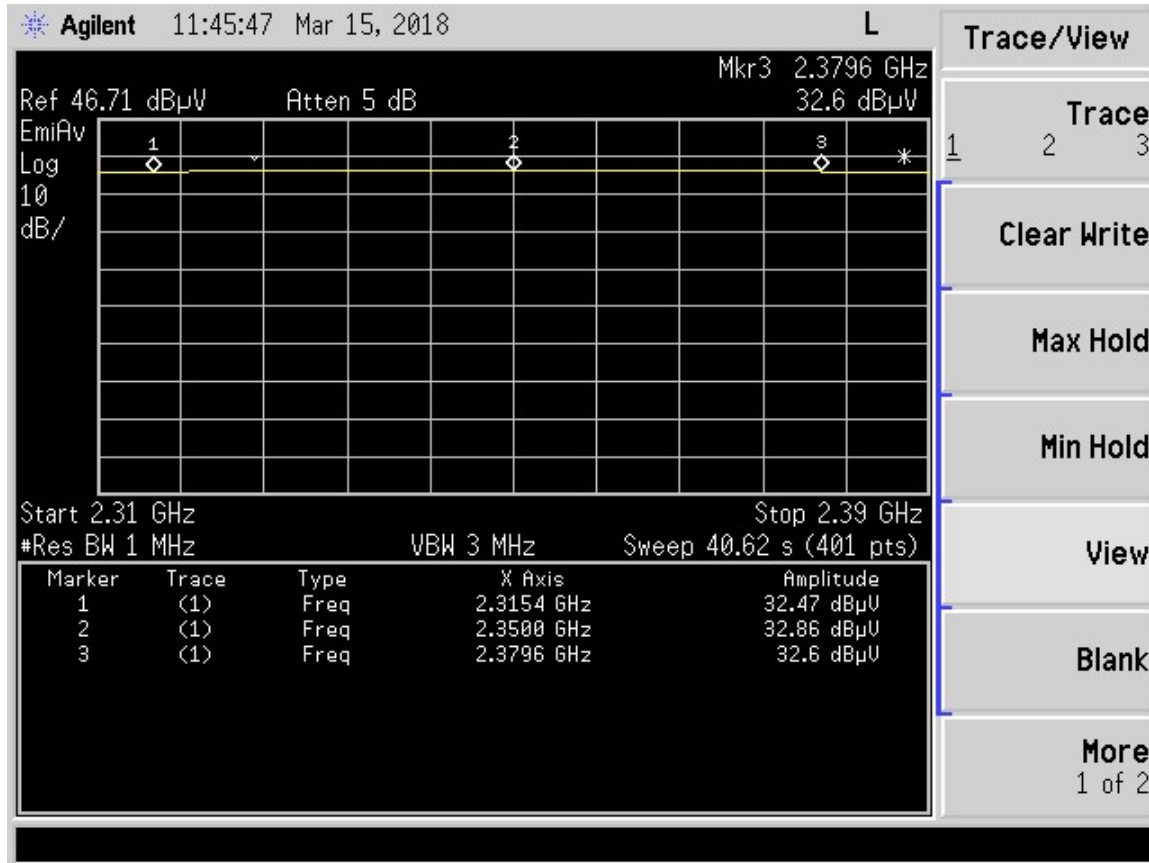


**Figure 22. Antenna 2 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 19. Antenna 2 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.40            | 32.47                  | -0.27                      | 32.20               | 54.0               | 3.0m./HORZ                 | 21.8           | AVG                   |
| 2350.00            | 32.86                  | -0.25                      | 32.61               | 54.0               | 3.0m./HORZ                 | 21.4           | AVG                   |
| 2379.60            | 32.60                  | -1.15                      | 31.45               | 54.0               | 3.0m./HORZ                 | 22.6           | AVG                   |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

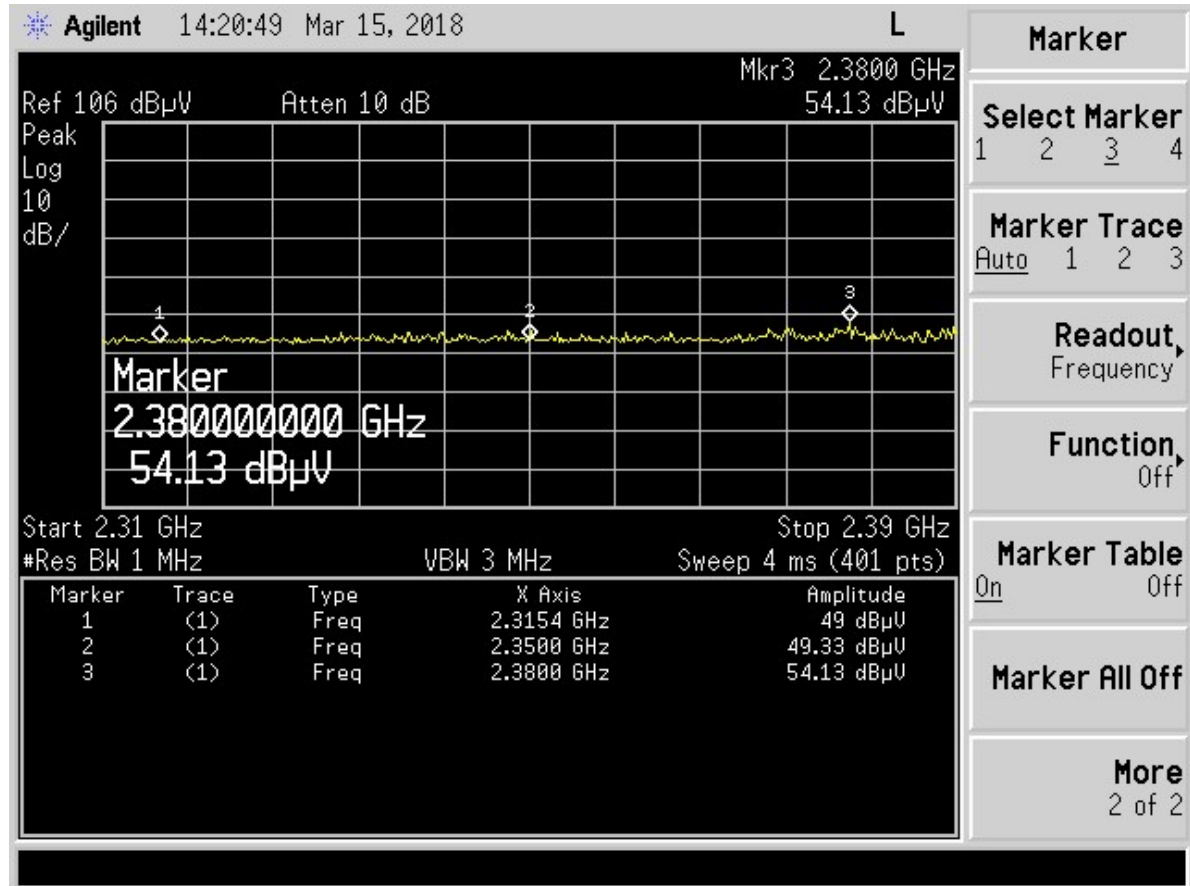


**Figure 23. Antenna 3 Restricted Band Measurements  
 2.31 GHz to 2.39 GHz – Peak**

**Table 20. Antenna 3 Restricted Band Data (Peak)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.40            | 49.00                  | -0.39                      | 48.61               | 74.0               | 3.0m./VERT                 | 25.4           | PK                    |
| 2350.00            | 49.33                  | -0.38                      | 48.95               | 74.0               | 3.0m./VERT                 | 25.0           | PK                    |
| 2380.00            | 54.13                  | -1.28                      | 52.85               | 74.0               | 3.0m./VERT                 | 21.1           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

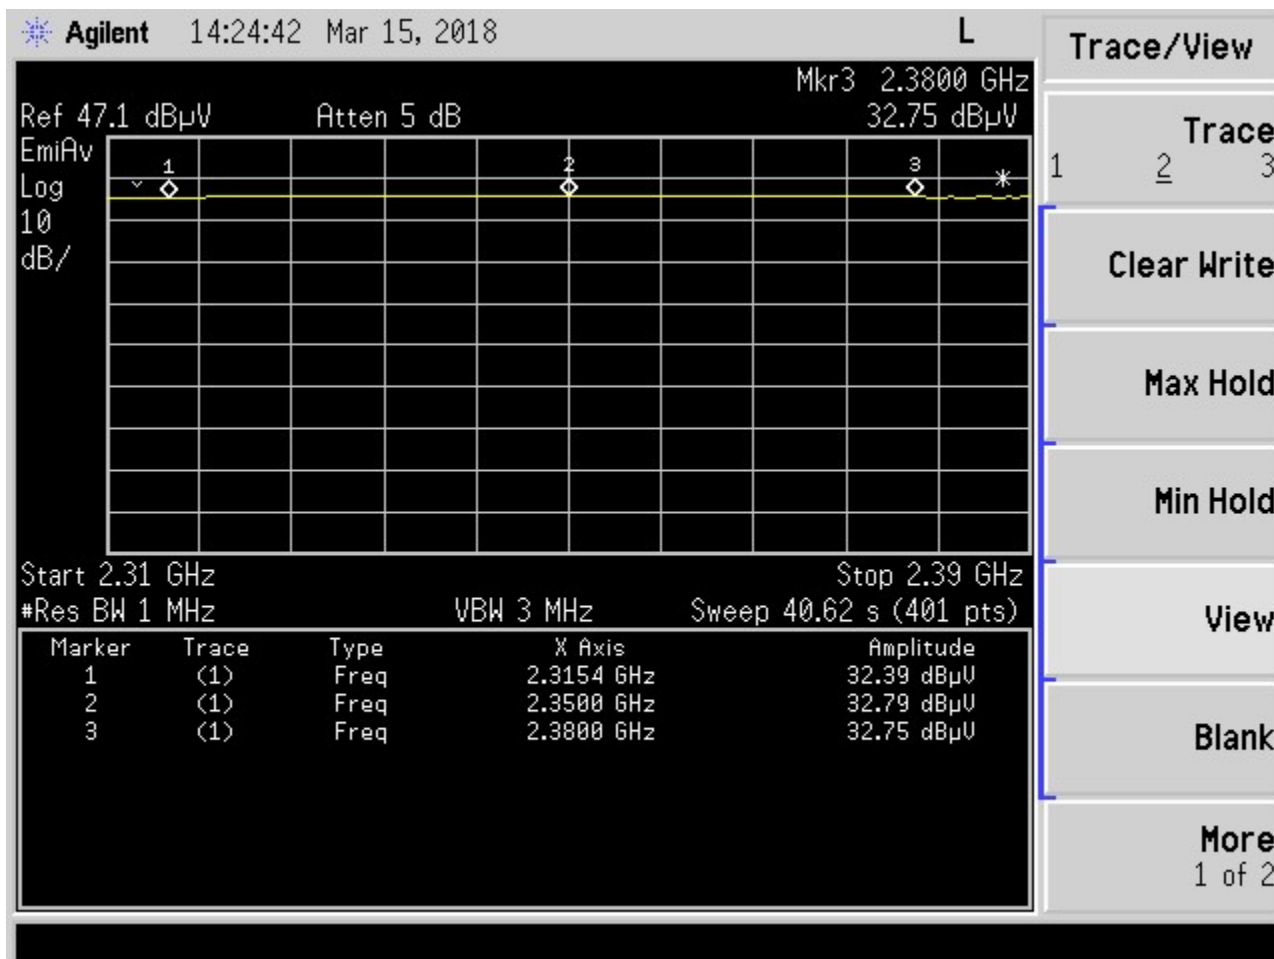


**Figure 24. Antenna 3 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 21. Antenna 3 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.40            | 32.39                  | -0.27                      | 32.12               | 54.0               | 3.0m./HORZ                 | 21.9           | AVG                   |
| 2350.00            | 32.79                  | -0.25                      | 32.54               | 54.0               | 3.0m./HORZ                 | 21.5           | AVG                   |
| 2380.00            | 32.75                  | -1.15                      | 31.60               | 54.0               | 3.0m./HORZ                 | 22.4           | AVG                   |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

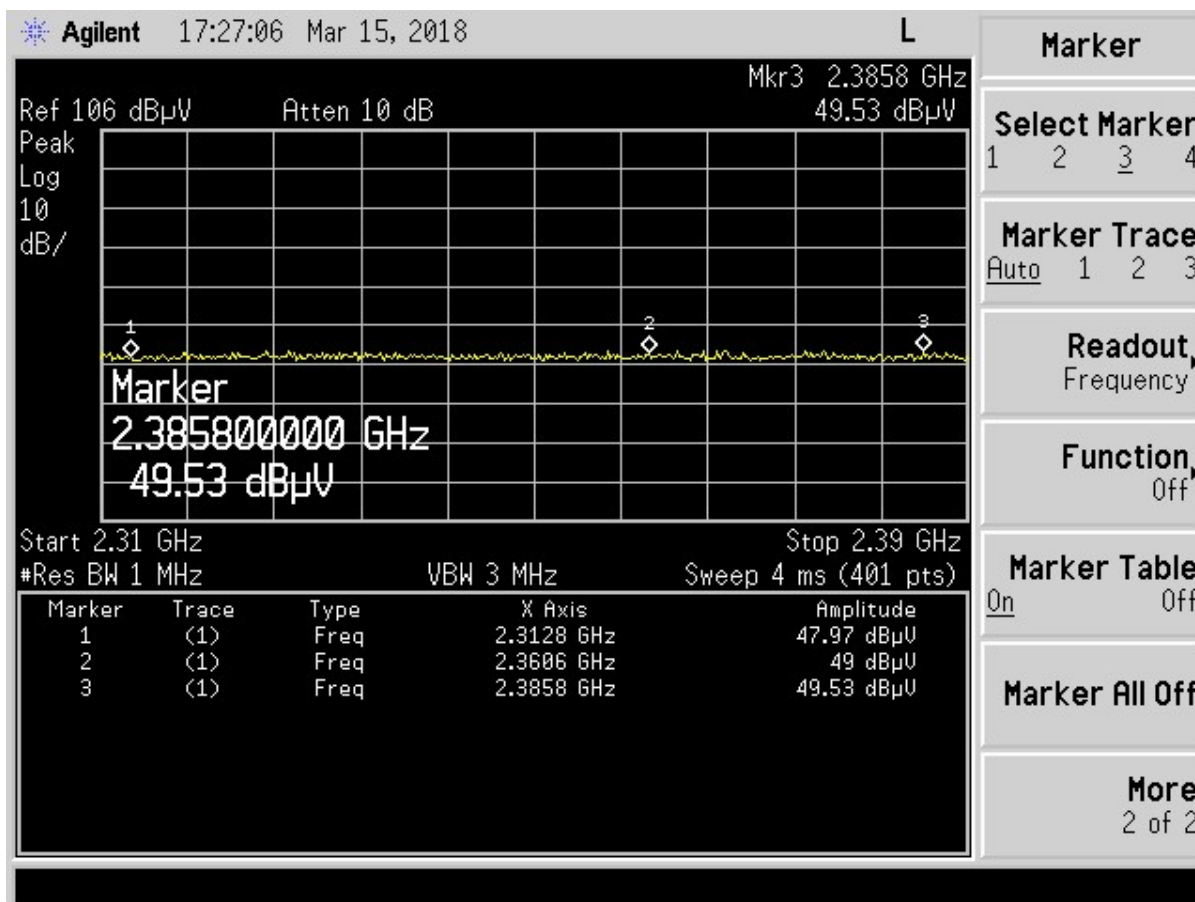


**Figure 25. Antenna 4 Restricted Band Measurements  
 2.31 GHz to 2.39 GHz – Peak**

**Table 22. Antenna 4 Restricted Band Data (Peak)- Low Channel**

| Frequency (MHz) | Test Data (dBuV) | AF+CA-AMP+DC (dB/m) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------|---------------------|------------------|-----------------|-------------------------|-------------|--------------------|
| 2312.80         | 47.97            | -0.19               | 47.78            | 74.0            | 3.0m./HORZ              | 26.2        | PK                 |
| 2360.60         | 49.00            | -1.15               | 47.85            | 74.0            | 3.0m./HORZ              | 26.2        | PK                 |
| 2385.80         | 49.53            | -1.15               | 48.38            | 74.0            | 3.0m./HORZ              | 25.6        | PK                 |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

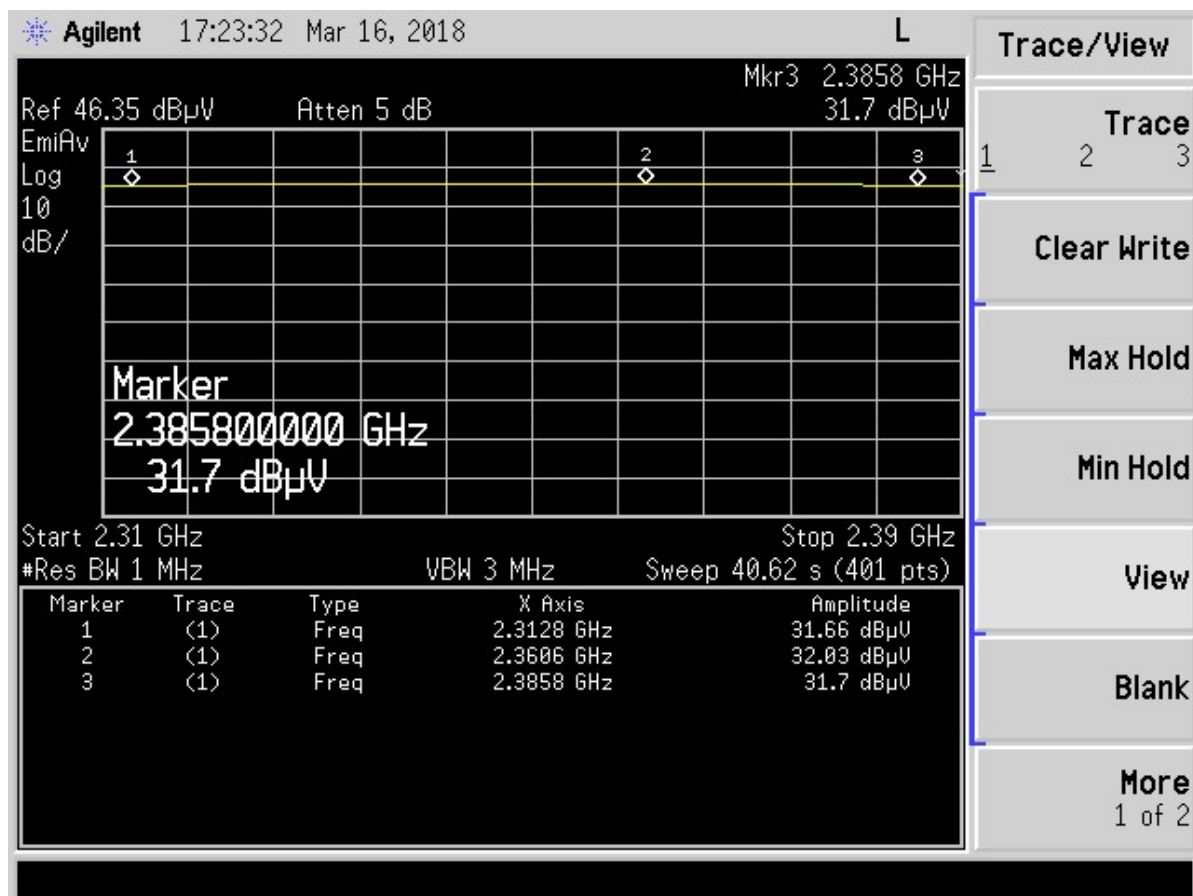


**Figure 26. Antenna 4 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 23. Antenna 4 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2312.80            | 31.66                  | -0.19                      | 31.47               | 54.0               | 3.0m./HORZ                 | 22.5           | AVG                   |
| 2360.60            | 32.03                  | -1.15                      | 30.88               | 54.0               | 3.0m./HORZ                 | 23.1           | AVG                   |
| 2385.80            | 31.70                  | -1.28                      | 30.42               | 54.0               | 3.0m./VERT                 | 23.6           | AVG                   |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

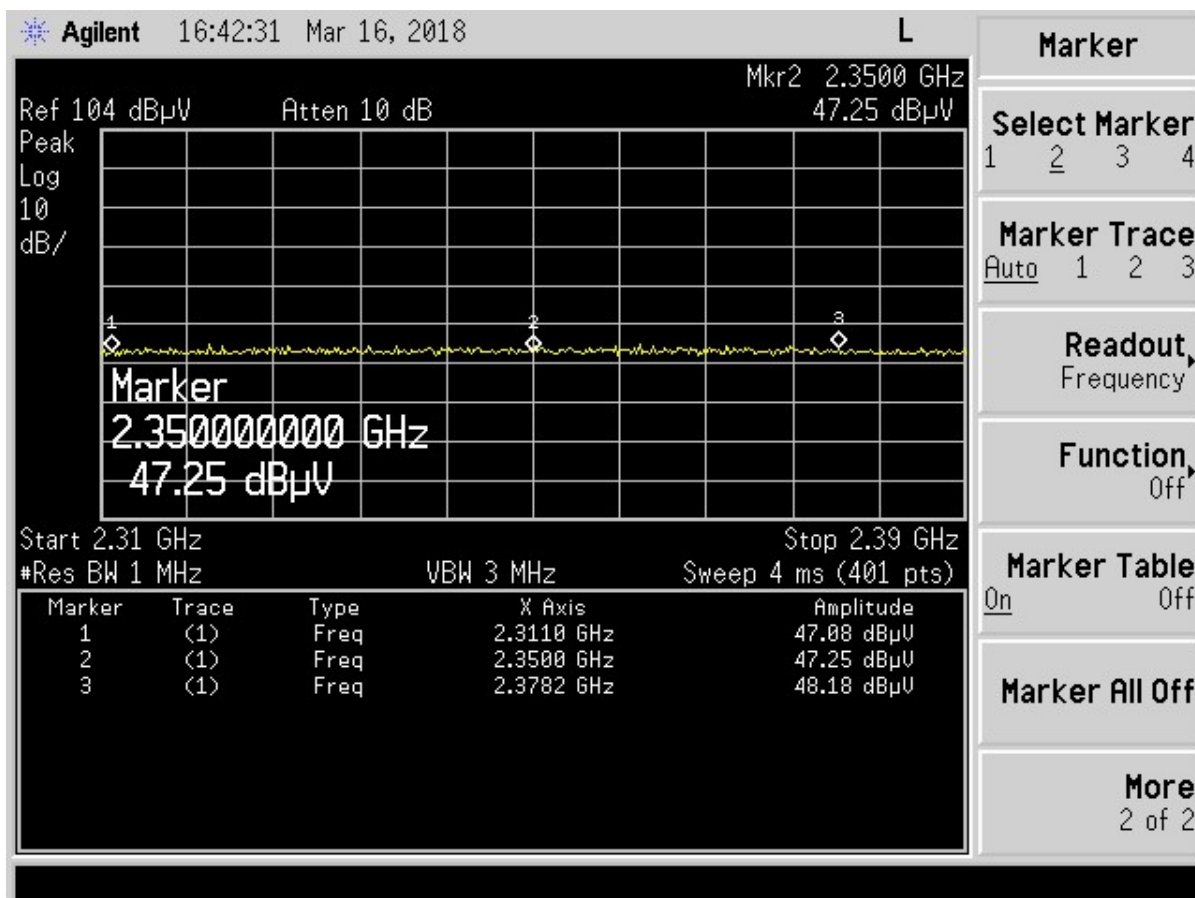


**Figure 27. Antenna 5 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Peak**

**Table 24. Antenna 5 Restricted Band Data (Peak)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2311.00            | 47.08                  | -0.19                      | 46.89               | 74.0               | 3.0m./HORZ                 | 27.1           | PK                    |
| 2350.00            | 47.25                  | -0.25                      | 47.00               | 74.0               | 3.0m./HORZ                 | 27.0           | PK                    |
| 2378.20            | 48.18                  | -1.15                      | 47.03               | 74.0               | 3.0m./HORZ                 | 27.0           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

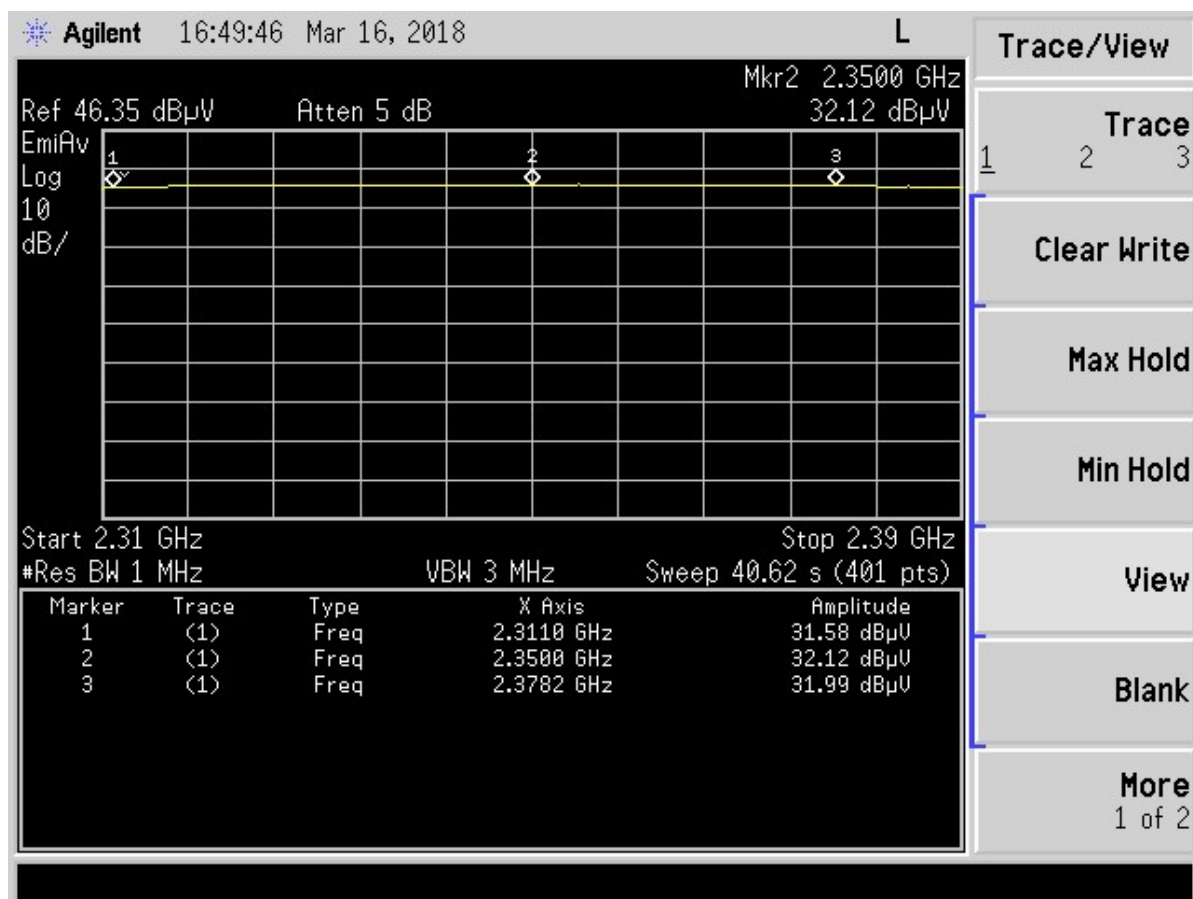


**Figure 28. Antenna 5 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 25. Antenna 5 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2311.00            | 31.58                  | -0.19                      | 31.39               | 54.0               | 3.0m./HORZ                 | 22.6           | AVG                   |
| 2350.00            | 32.12                  | -0.25                      | 31.87               | 54.0               | 3.0m./HORZ                 | 22.1           | AVG                   |
| 2378.20            | 31.99                  | -1.15                      | 30.84               | 54.0               | 3.0m./HORZ                 | 23.2           | AVG                   |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

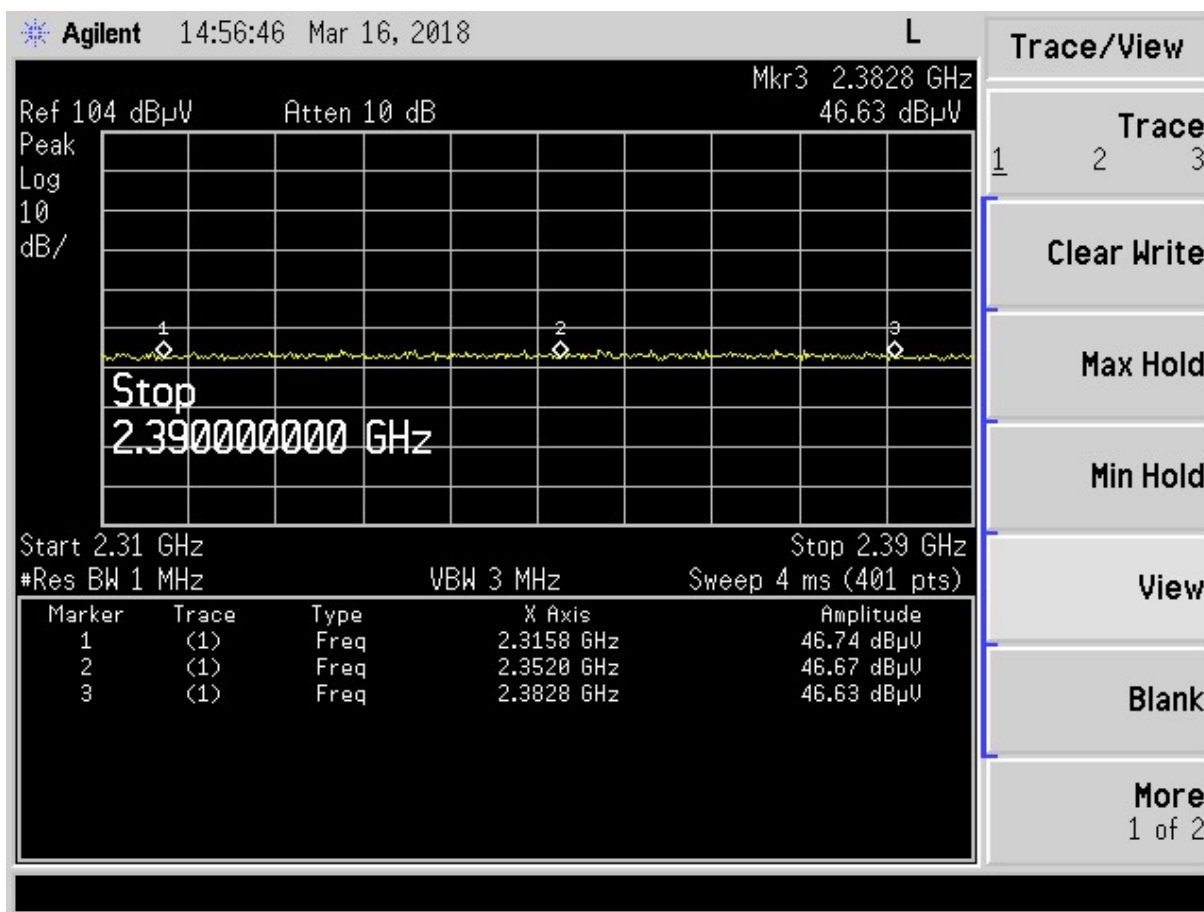


**Figure 29. Antenna 6 Restricted Band Measurements  
2.31 GHz to 2.39 GHz –Peak**

**Table 26. Antenna 6 Restricted Band Data (Peak)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.80            | 46.74                  | -0.27                      | 46.47               | 74.0               | 3.0m./HORZ                 | 27.5           | PK                    |
| 2352.00            | 46.67                  | -0.25                      | 46.42               | 74.0               | 3.0m./HORZ                 | 27.6           | PK                    |
| 2382.80            | 46.63                  | -1.15                      | 45.48               | 74.0               | 3.0m./HORZ                 | 28.5           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

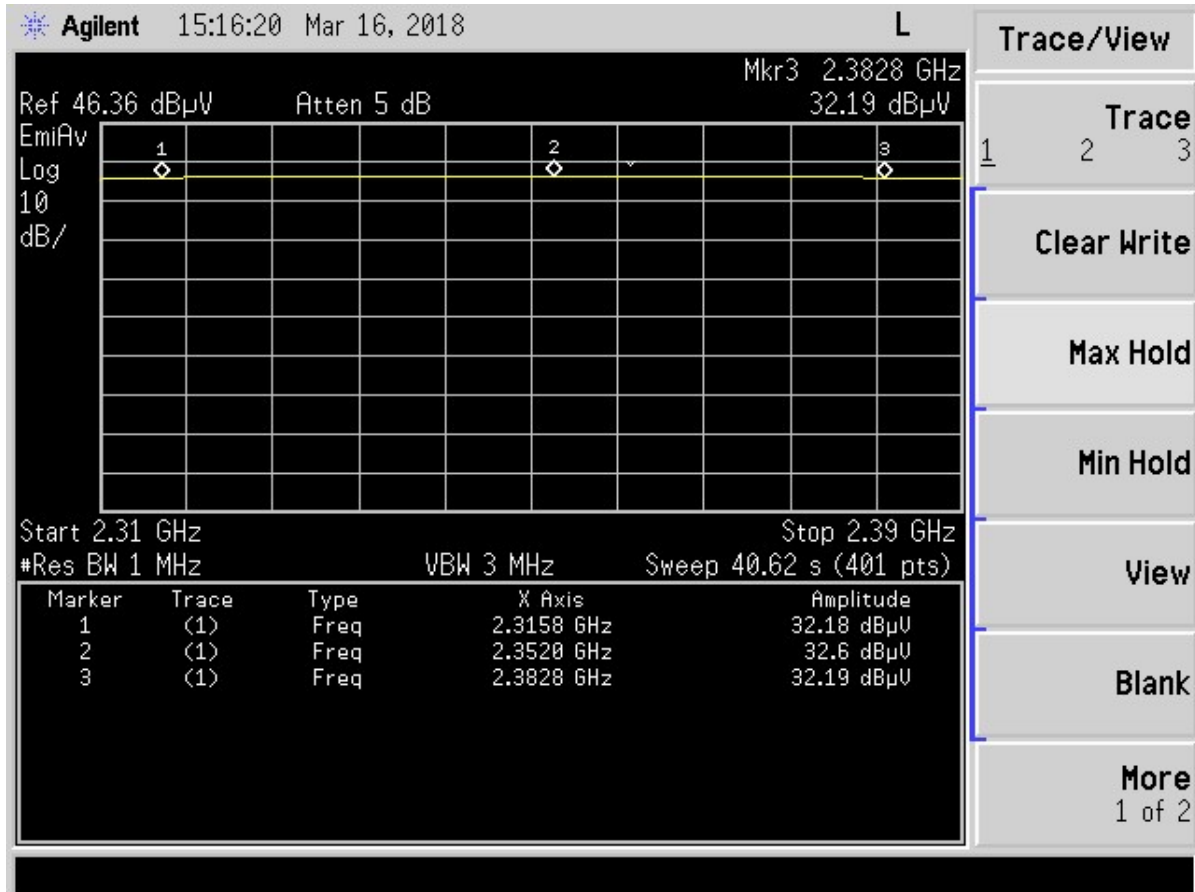

**Figure 30. Antenna 6 Restricted Band Measurements  
2.31 GHz to 2.39 GHz – Average**

**Table 27. Antenna 6 Restricted Band Data (AVG)- Low Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2315.80            | 32.18                  | -0.27                      | 31.91               | 54.0               | 3.0m./HORZ                 | 22.1           | AVG                   |
| 2352.00            | 32.60                  | -0.25                      | 32.35               | 54.0               | 3.0m./HORZ                 | 21.7           | AVG                   |
| 2382.80            | 32.19                  | -1.15                      | 31.04               | 54.0               | 3.0m./HORZ                 | 23.0           | AVG                   |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

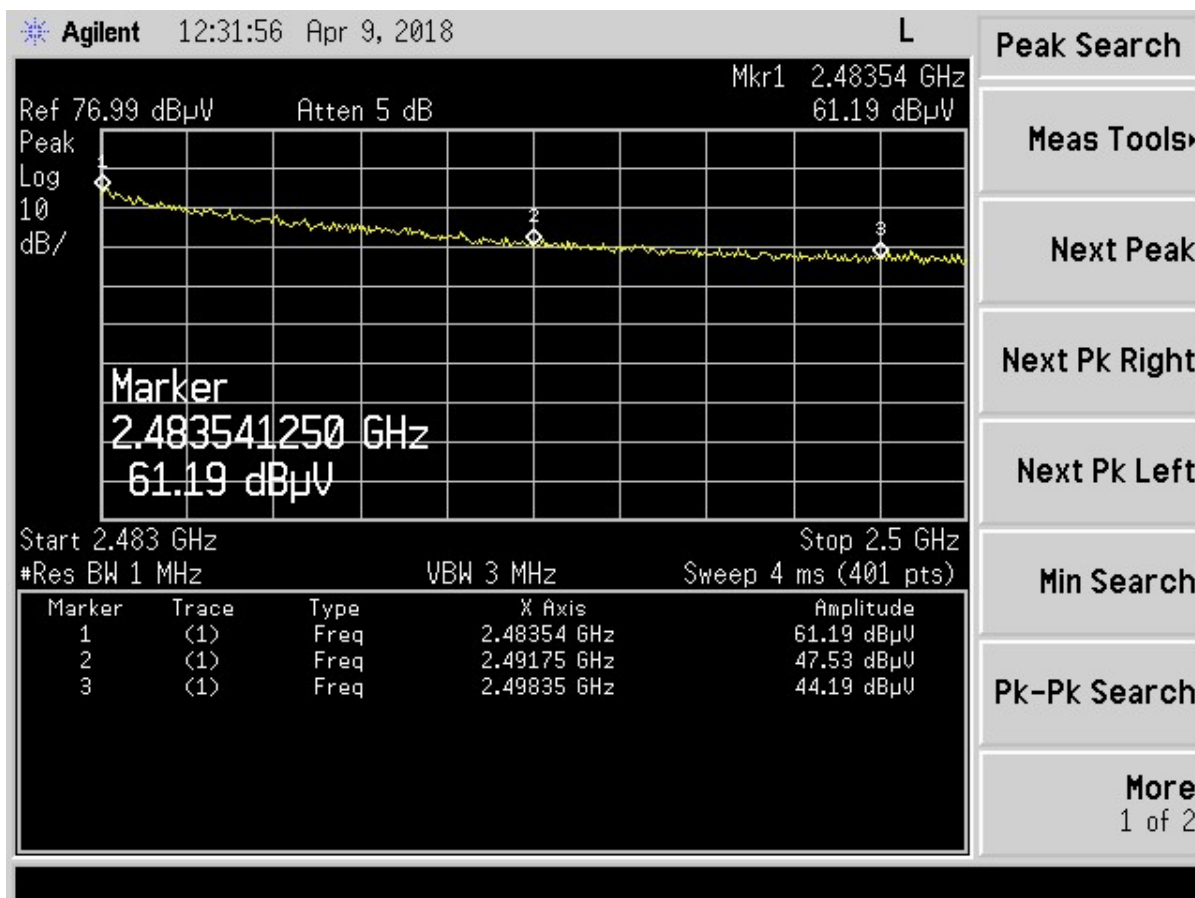



Figure 31. Antenna 1 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Peak

Table 28. Antenna 1 Restricted Band Data (Peak)- High Channel

| Frequency (MHz) | Test Data (dBuV) | AF+CA-AMP+DC (dB/m) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------|---------------------|------------------|-----------------|-------------------------|-------------|--------------------|
| 2483.54         | 65.63            | 0.29                | 61.48            | 74.0            | 3.0m./HORZ              | 12.5        | PK                 |
| 2491.75         | 51.14            | 0.29                | 47.82            | 74.0            | 3.0m./HORZ              | 26.2        | PK                 |
| 2498.35         | 47.56            | 0.29                | 44.48            | 74.0            | 3.0m./HORZ              | 29.5        | PK                 |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

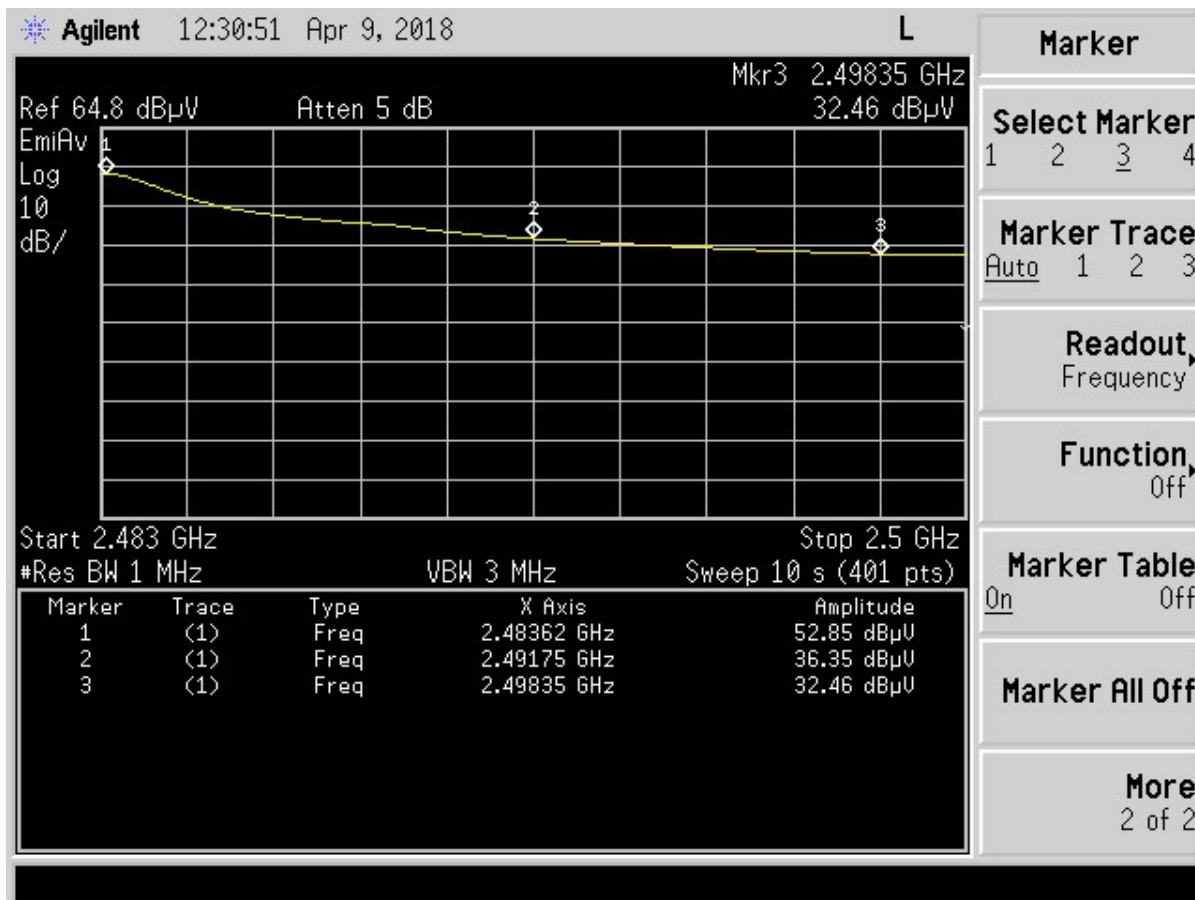


**Figure 32. Antenna 1 Restricted Band Measurements  
 2.4835 GHz to 2.5 GHz – Average**

**Table 29. Antenna 1 Restricted Band Data (AVG)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.54            | 52.85                  | 0.29                       | 53.14               | 54.0               | 3.0m./HORZ                 | .9             | AVG                   |
| 2491.75            | 36.35                  | 0.29                       | 36.64               | 54.0               | 3.0m./HORZ                 | 17.4           | AVG                   |
| 2498.35            | 32.46                  | 0.29                       | 32.75               | 54.0               | 3.0m./HORZ                 | 21.2           | AVG                   |

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24

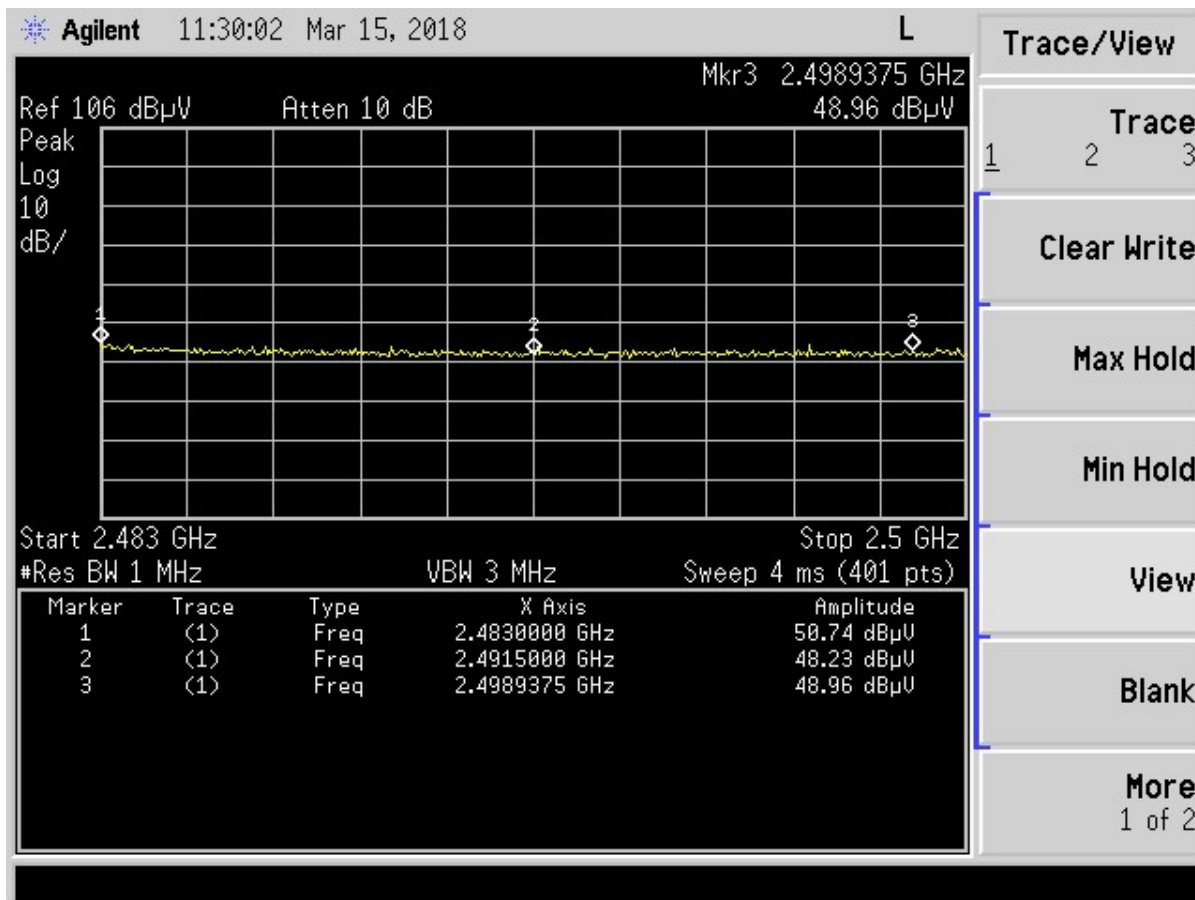

**Figure 33. Antenna 2 Restricted Band Measurements  
 2.4835 GHz to 2.5 GHz – Peak**

**Table 30. Antenna 2 Restricted Band Data (Peak)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.00            | 50.74                  | 0.29                       | 51.03               | 74.0               | 3.0m./HORZ                 | 23.0           | PK                    |
| 2491.50            | 48.23                  | 0.29                       | 48.52               | 74.0               | 3.0m./HORZ                 | 25.5           | PK                    |
| 2498.93            | 48.96                  | 0.29                       | 49.25               | 74.0               | 3.0m./HORZ                 | 24.7           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

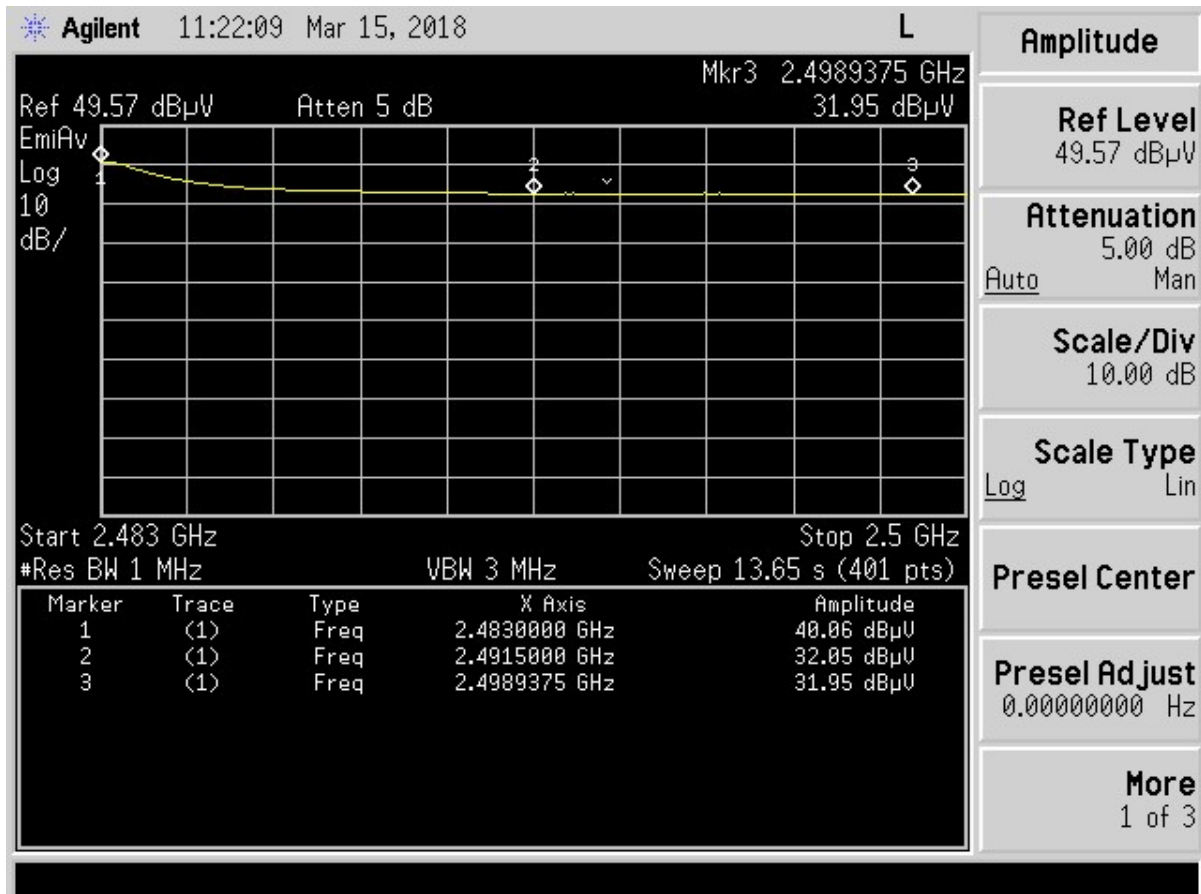



Figure 34. Antenna 2 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Average

Table 31. Antenna 2 Restricted Band Data (AVG)- High Channel

| Frequency (MHz) | Test Data (dBuV) | AF+CA-AMP+DC (dB/m) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------|---------------------|------------------|-----------------|-------------------------|-------------|--------------------|
| 2483.00         | 40.06            | 0.29                | 40.35            | 54.0            | 3.0m./HORZ              | 13.6        | AVG                |
| 2491.50         | 32.05            | 0.29                | 32.34            | 54.0            | 3.0m./HORZ              | 21.7        | AVG                |
| 2498.93         | 31.95            | 0.48                | 32.43            | 54.0            | 3.0m./VERT              | 21.6        | AVG                |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

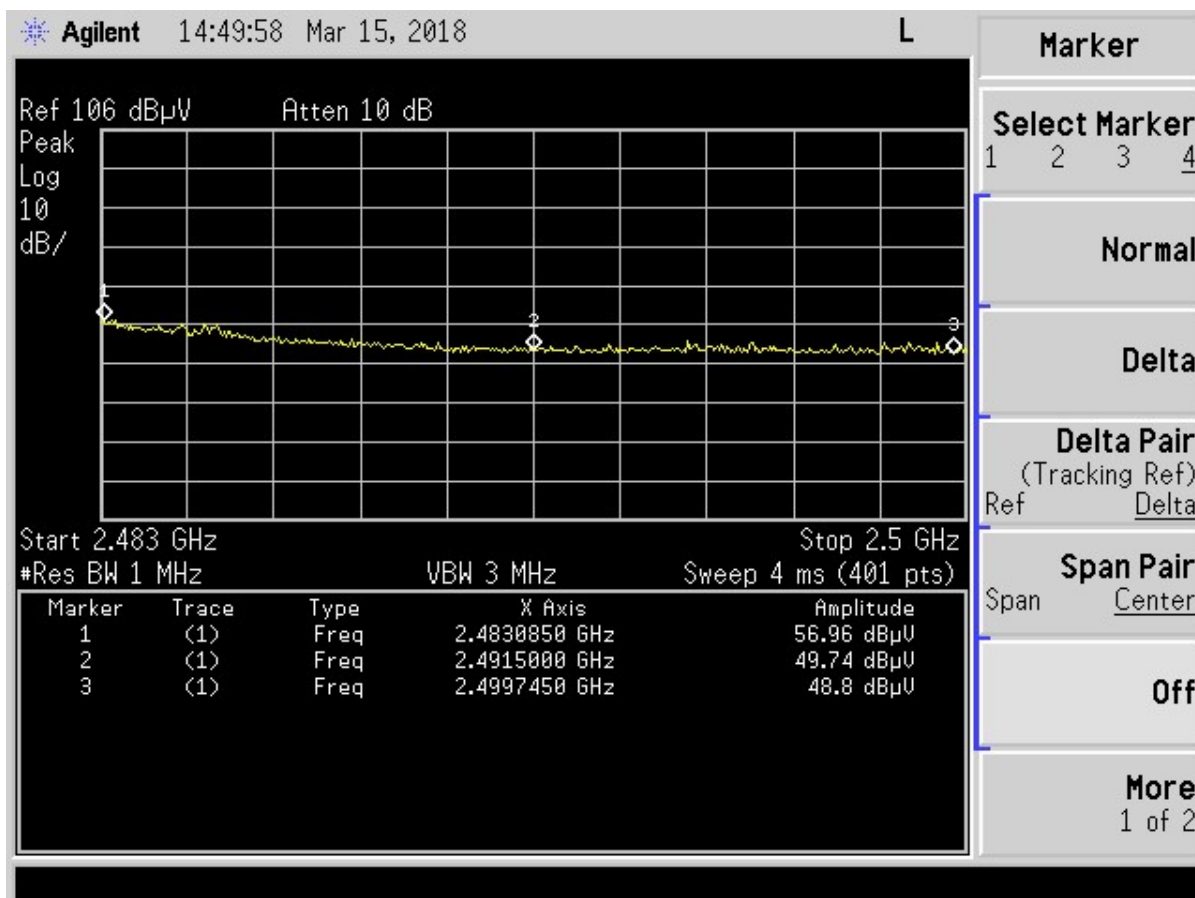


**Figure 35. Antenna 3 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Peak**

**Table 32. Antenna 3 Restricted Band Data (Peak)- High Channel**

| Frequency (MHz) | Test Data (dBuV) | AF+CA-AMP+DC (dB/m) | Results (dBuV/m) | Limits (dBuV/m) | Distance / Polarization | Margin (dB) | Detector PK/QP/AVG |
|-----------------|------------------|---------------------|------------------|-----------------|-------------------------|-------------|--------------------|
| 2483.09         | 56.96            | 0.29                | 57.25            | 74.0            | 3.0m./HORZ              | 16.7        | PK                 |
| 2491.50         | 49.74            | 0.29                | 50.03            | 74.0            | 3.0m./HORZ              | 24.0        | PK                 |
| 2499.74         | 48.80            | 0.29                | 49.09            | 74.0            | 3.0m./HORZ              | 24.9        | PK                 |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

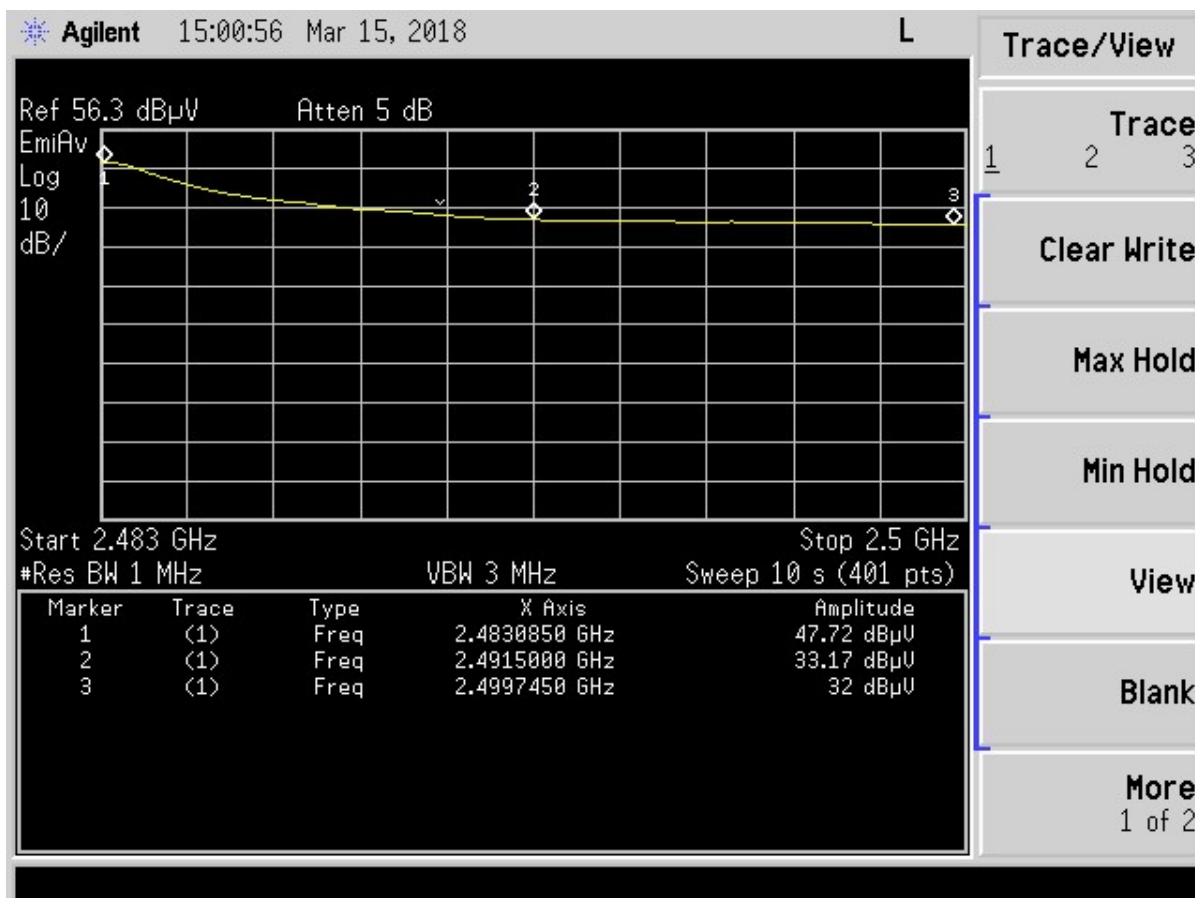


**Figure 36. Antenna 3 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Average**

**Table 33. Antenna 3 Restricted Band Data (AVG)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.09            | 47.72                  | 0.29                       | 48.01               | 54.0               | 3.0m./HORZ                 | 6.0            | <b>AVG</b>            |
| 2491.50            | 33.17                  | 0.29                       | 33.46               | 54.0               | 3.0m./HORZ                 | 20.5           | <b>AVG</b>            |
| 2499.75            | 32.00                  | 0.48                       | 32.48               | 54.0               | 3.0m./VERT                 | 21.5           | <b>AVG</b>            |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

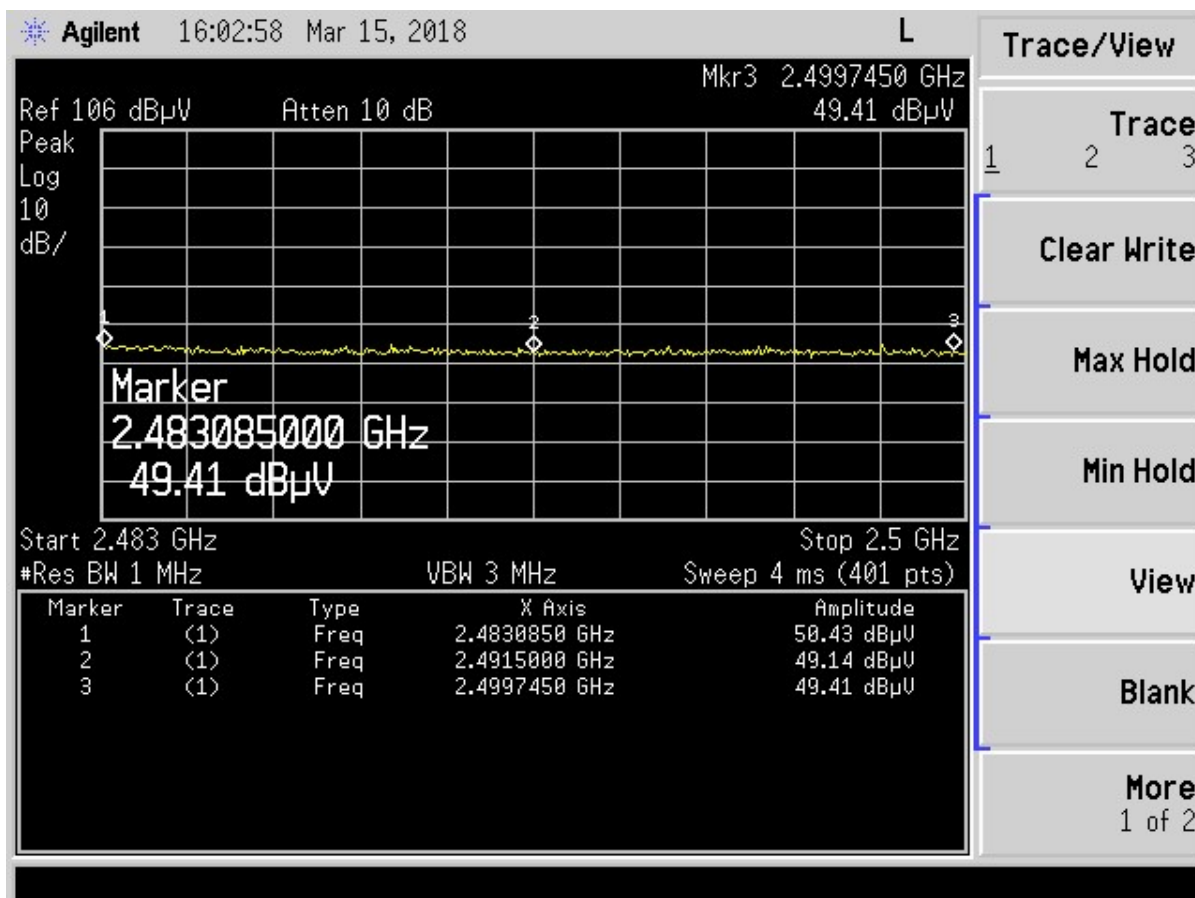


**Figure 37. Antenna 4 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz –Peak**

**Table 34. Antenna 4 Restricted Band Data (Peak)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.09            | 50.43                  | 0.29                       | 50.72               | 74.0               | 3.0m./HORZ                 | 23.3           | PK                    |
| 2491.50            | 49.14                  | 0.29                       | 49.43               | 74.0               | 3.0m./HORZ                 | 24.6           | PK                    |
| 2499.75            | 49.41                  | 0.29                       | 49.70               | 74.0               | 3.0m./HORZ                 | 24.3           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

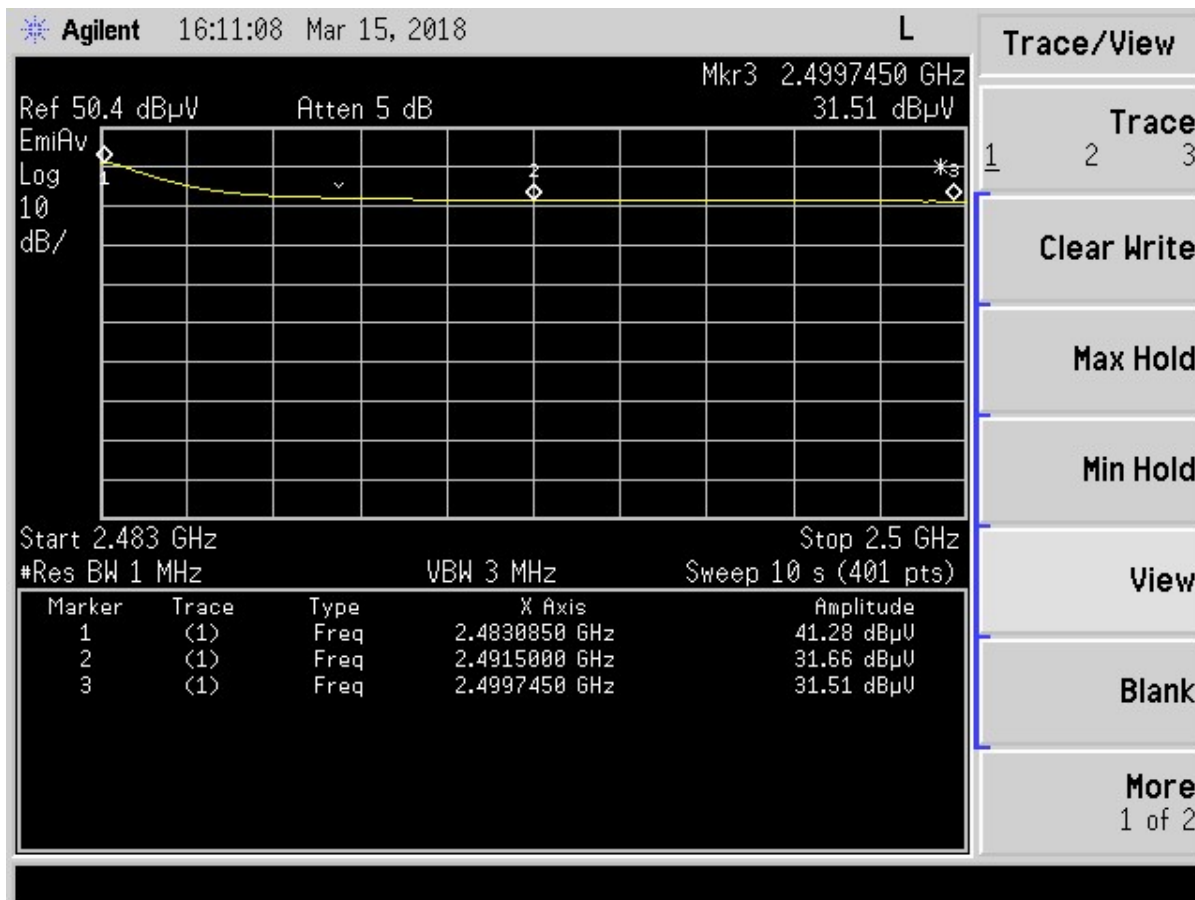


**Figure 38. Antenna 4 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Average**

**Table 35. Antenna 4 Restricted Band Data (AVG)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.09            | 41.28                  | 0.29                       | 41.57               | 54.0               | 3.0m./HORZ                 | 12.4           | AVG                   |
| 2491.50            | 31.66                  | 0.29                       | 31.95               | 54.0               | 3.0m./HORZ                 | 22.0           | AVG                   |
| 2499.75            | 31.51                  | 0.29                       | 31.80               | 54.0               | 3.0m./HORZ                 | 22.2           | AVG                   |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

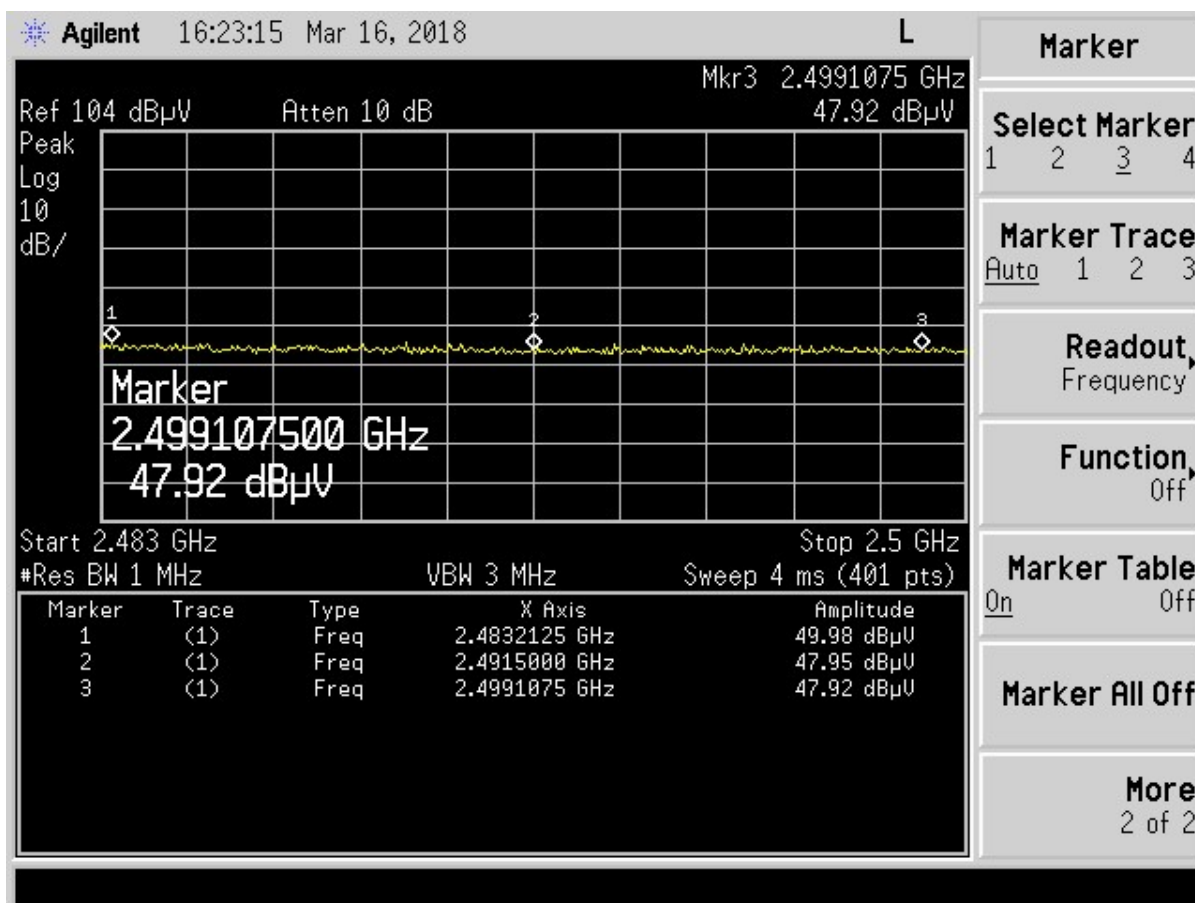


**Figure 39. Antenna 5 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz –Peak**

**Table 36. Antenna 5 Restricted Band Data (Peak)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.21            | 49.98                  | 0.29                       | 50.27               | 74.0               | 3.0m./HORZ                 | 23.7           | PK                    |
| 2491.50            | 47.95                  | 0.29                       | 48.24               | 74.0               | 3.0m./HORZ                 | 25.8           | PK                    |
| 2499.11            | 47.92                  | 0.29                       | 48.21               | 74.0               | 3.0m./HORZ                 | 25.8           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

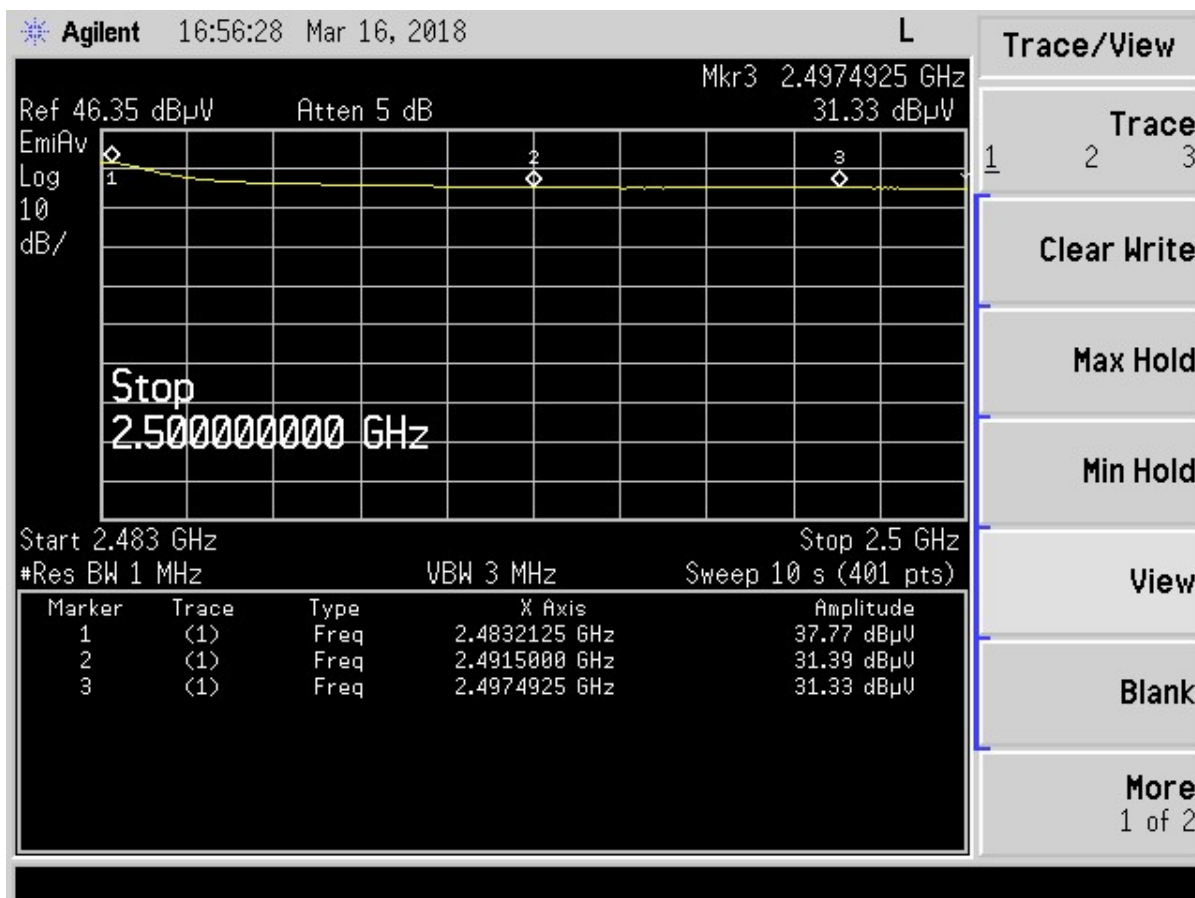


**Figure 40. Antenna 5 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Average**

**Table 37. Antenna 5 Restricted Band Data (AVG)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.21            | 37.77                  | 0.29                       | 38.06               | 54.0               | 3.0m./HORZ                 | 15.9           | <b>AVG</b>            |
| 2491.50            | 31.39                  | 0.29                       | 31.68               | 54.0               | 3.0m./HORZ                 | 22.3           | <b>AVG</b>            |
| 2499.11            | 31.33                  | 0.29                       | 31.62               | 54.0               | 3.0m./HORZ                 | 22.4           | <b>AVG</b>            |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

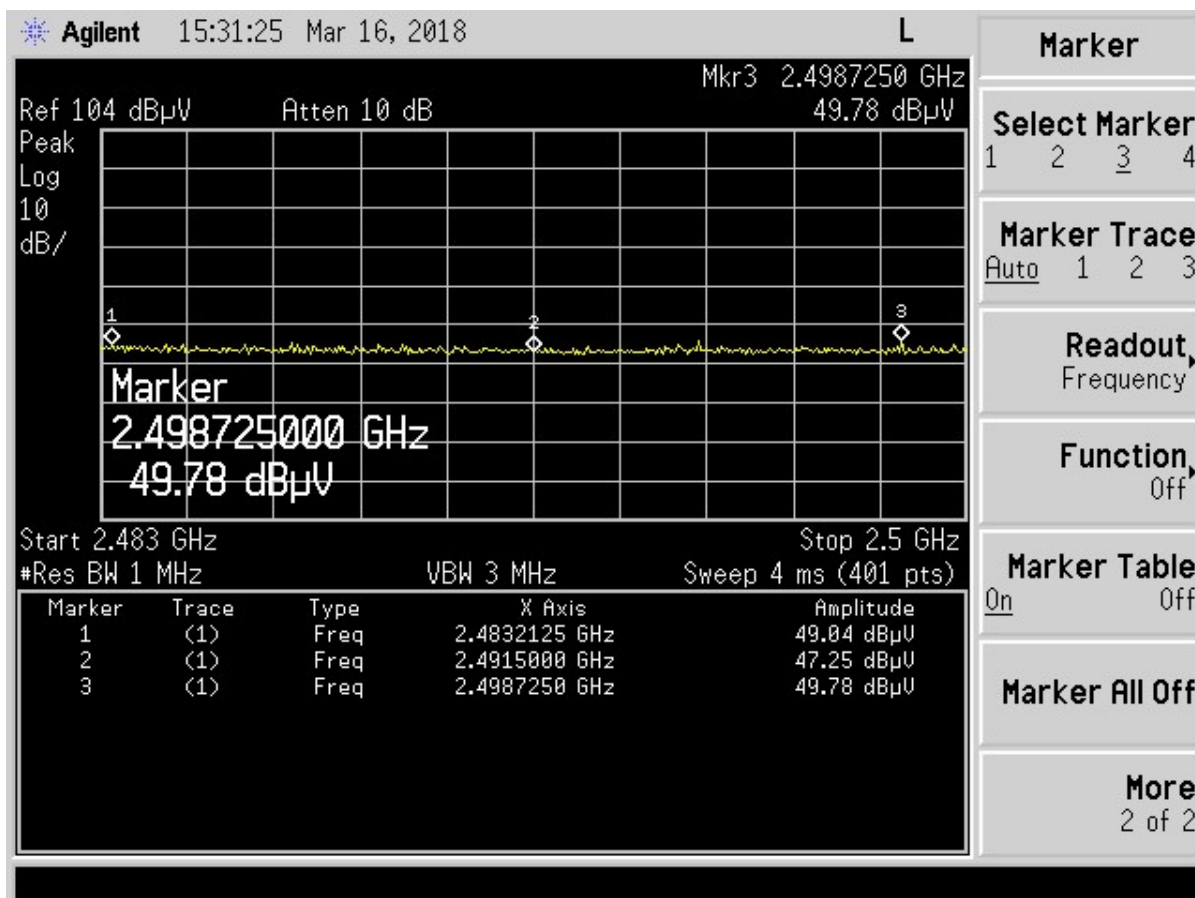


**Figure 41. Antenna 6 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Peak**

**Table 38. Antenna 6 Restricted Band Data (Peak)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.21            | 49.04                  | 0.29                       | 49.33               | 74.0               | 3.0m./HORZ                 | 24.7           | PK                    |
| 2491.50            | 47.25                  | 0.29                       | 47.54               | 74.0               | 3.0m./HORZ                 | 26.5           | PK                    |
| 2498.73            | 49.78                  | 0.29                       | 50.07               | 74.0               | 3.0m./HORZ                 | 23.9           | PK                    |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

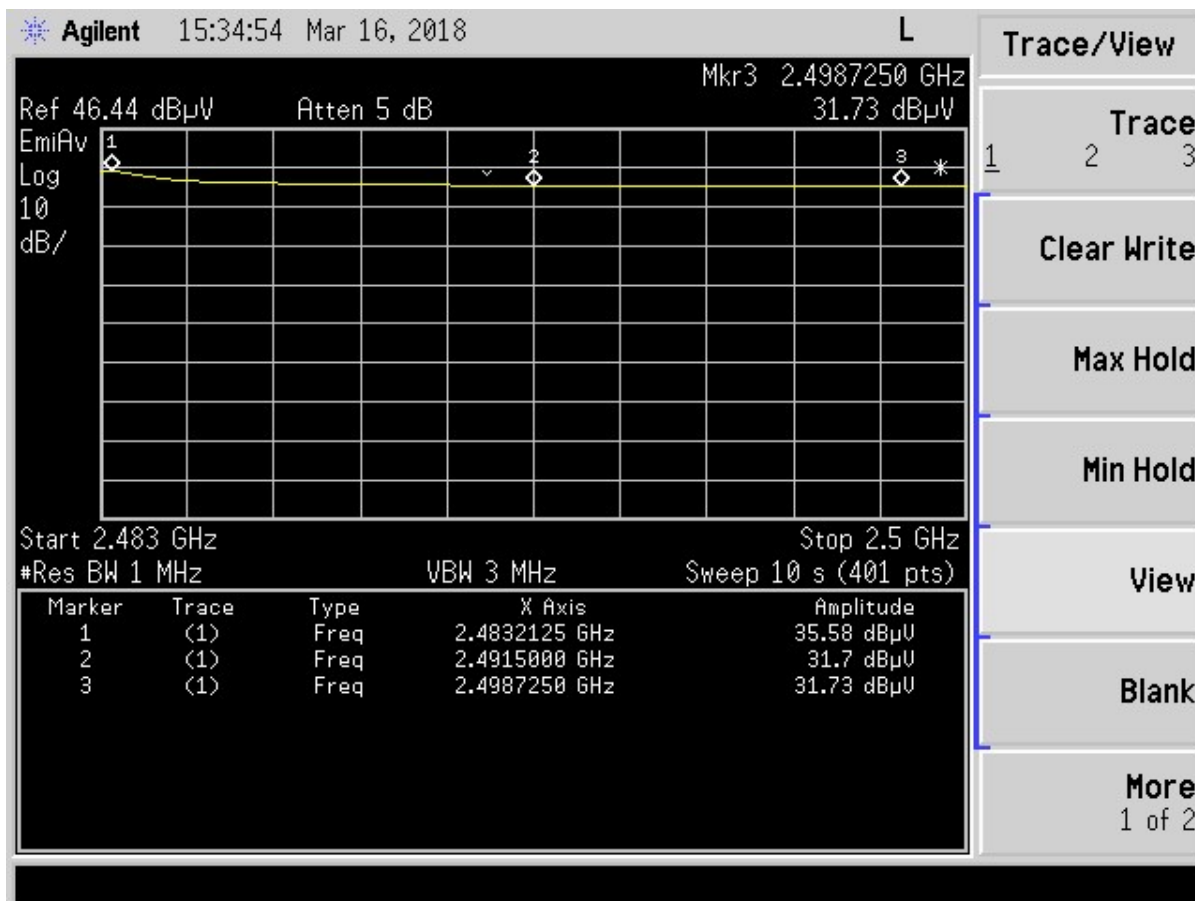

**Figure 42. Antenna 6 Restricted Band Measurements  
2.4835 GHz to 2.5 GHz – Average**

**Table 39. Antenna 6 Restrict Band Data (AVG)- High Channel**

| Frequency<br>(MHz) | Test<br>Data<br>(dBuV) | AF+CA-<br>AMP+DC<br>(dB/m) | Results<br>(dBuV/m) | Limits<br>(dBuV/m) | Distance /<br>Polarization | Margin<br>(dB) | Detector<br>PK/QP/AVG |
|--------------------|------------------------|----------------------------|---------------------|--------------------|----------------------------|----------------|-----------------------|
| 2483.21            | 35.58                  | 0.29                       | 35.87               | 54.0               | 3.0m./HORZ                 | 18.1           | <b>AVG</b>            |
| 2491.50            | 31.70                  | 0.29                       | 31.99               | 54.0               | 3.0m./HORZ                 | 22.0           | <b>AVG</b>            |
| 2498.73            | 31.73                  | 0.29                       | 32.02               | 54.0               | 3.0m./HORZ                 | 22.0           | <b>AVG</b>            |

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

## **2.12 Unintentional Radiator and Intentional Radiator, Radiated Emissions (CFR 15.109)**

The test data provided herein is to support the verification requirement for digital devices due to the changes made to the EUT. The EUT in the continuously transmitting state is considered the worst case condition and the data collected while the EUT was in this condition was compared to the Part 15.109 limits.

The EUT was evaluated from 30 MHz to 12.5 GHz the data is presented in the table below. The data presented is with the EUT and its transmitter ON and transmitting.

Measurements were made with the analyzer's resolution bandwidth set to 120 kHz for measurements made below 1 GHz and 1 MHz for measurements made above 1 GHz. The video bandwidth was set to three times the resolution bandwidth; 1 MHz RBW and 3 MHz VBW. The test data were maximized for magnitude by rotating the turn-table through 360 degrees and raising and lowering the receiving antenna between 1 to 4 meters in height as a part of the measurement procedure.

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
 HSW-CCT24  
 4492A-CCT24  
 17-0439  
 April 9, 2018  
 Murata Electronics North America  
 CCT24


**Table 40. Spurious Radiated Emissions (CFR 15.109), 30 MHz to 1000 MHz**

| 30 MHz to 1000 MHz              |                  |                        |                  |                       |                    |                                |             |                    |
|---------------------------------|------------------|------------------------|------------------|-----------------------|--------------------|--------------------------------|-------------|--------------------|
| <b>Test:</b> Radiated Emissions |                  |                        |                  | <b>Client:</b> Murata |                    |                                |             |                    |
| <b>Project:</b> 17-0439         |                  |                        |                  | <b>Model:</b> CCT24   |                    |                                |             |                    |
| Frequency (MHz)                 | Test Data (dBuV) | Additional Factor (dB) | AF+CA-AMP (dB/m) | Results (dBuV/m)      | QP Limits (dBuV/m) | Antenna Distance/ Polarization | Margin (dB) | Detector PK, or QP |
| 39.14                           | 31.92            | --                     | -13.81           | 18.11                 | 40.0               | 3m./HORZ                       | 21.9        | PK                 |
| 133.08                          | 43.16            | --                     | -14.73           | 28.43                 | 43.5               | 3m./HORZ                       | 15.1        | PK                 |
| 51.03                           | 39.71            | --                     | -17.17           | 22.54                 | 40.0               | 3m./VERT                       | 17.5        | PK                 |
| 124.50                          | 39.99            | --                     | -14.82           | 25.17                 | 43.5               | 3m./VERT                       | 18.3        | PK                 |
| 201.00                          | 33.88            | --                     | -13.59           | 20.29                 | 43.5               | 3m./HORZ                       | 23.2        | PK                 |
| 264.36                          | 34.98            | --                     | -11.83           | 23.15                 | 46.0               | 3m./HORZ                       | 22.8        | PK                 |
| 965.40                          | 29.95            | --                     | -1.30            | 28.65                 | 54.0               | 3m./HORZ                       | 25.3        | PK                 |
| 201.00                          | 32.98            | --                     | -13.89           | 19.09                 | 43.5               | 3m./VERT                       | 24.4        | PK                 |
| 262.50                          | 33.80            | --                     | -12.32           | 21.48                 | 46.0               | 3m./VERT                       | 24.5        | PK                 |
| 981.60                          | 29.80            | --                     | -2.19            | 27.61                 | 54.0               | 3m./VERT                       | 26.4        | PK                 |

**SAMPLE CALCULATION at: 39.14 MHz**

|                                                           |        |        |
|-----------------------------------------------------------|--------|--------|
| Magnitude of Measured Frequency                           | 31.92  | dBuV   |
| +Additional Factor (Distance Extrapolation)               | 0.0    | dB     |
| +Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle | -13.81 | dB/m   |
| Corrected Result                                          | 18.11  | dBuV/m |

Test Date: March 19, 2018

Tested By   
 Signature: \_\_\_\_\_

Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

**Table 41. Spurious Radiated Emissions (CFR 15.109) 1 GHz to 12.5 GHz**


| 1 GHz to 25 GHz, Part 15.209 Limits                                                                                   |                        |                     |                     |                           |                                      |                |                           |
|-----------------------------------------------------------------------------------------------------------------------|------------------------|---------------------|---------------------|---------------------------|--------------------------------------|----------------|---------------------------|
| Test: Radiated Emissions                                                                                              |                        |                     |                     | Client: Murata            |                                      |                |                           |
| Project: 17-0439                                                                                                      |                        |                     |                     | Model: CCT24              |                                      |                |                           |
| Frequency<br>(MHz)                                                                                                    | Test<br>Data<br>(dBuv) | AF+CA-AMP<br>(dB/m) | Results<br>(dBuV/m) | AVG<br>Limits<br>(dBuV/m) | Antenna<br>Distance/<br>Polarization | Margin<br>(dB) | Detector<br>PK, or<br>AVG |
| Besides the emissions reported in the table below, all other emissions were at least 20 dB from the applicable limit. |                        |                     |                     |                           |                                      |                |                           |

SAMPLE CALCULATION at: N/A

Test Date: March 19, 2018

Tested By

Signature:



Name: John Freeman

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15/ RSS 247 Class II Permissive Change  
HSW-CCT24  
4492A-CCT24  
17-0439  
April 9, 2018  
Murata Electronics North America  
CCT24

---

## **2.13 Measurement Uncertainty**

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of  $k=2$  was used to give a level of confidence of approximately 95%.

### **2.12.1 Conducted Emissions Measurement Uncertainty**

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm 2.78$  dB.

### **2.12.2 Radiated Emissions Measurement Uncertainty**

Measurement Uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm 5.40$  dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.19$  dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm 5.08$  dB.

## **3 Conclusions**

The EUT meets the requirements of the applicable standard when tested as presented in this test report.