



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd

Report No.: SUCR241200051801

Rev.: 01

Appendix B

Detailed Test Results

1.	WIFI 2.4G
2.	WIFI 5G
3.	Bluetooth

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Laboratory: SGS-SAR Lab

DTHA116 WIFI2.4G 802.11b Ch6 Top side 0mm

DUT: DTHA116; Type: LCD Android Tablet; Serial: OBL76T89V4LZRO6X

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.004

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 38.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.798 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.78 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.479 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.781 W/kg

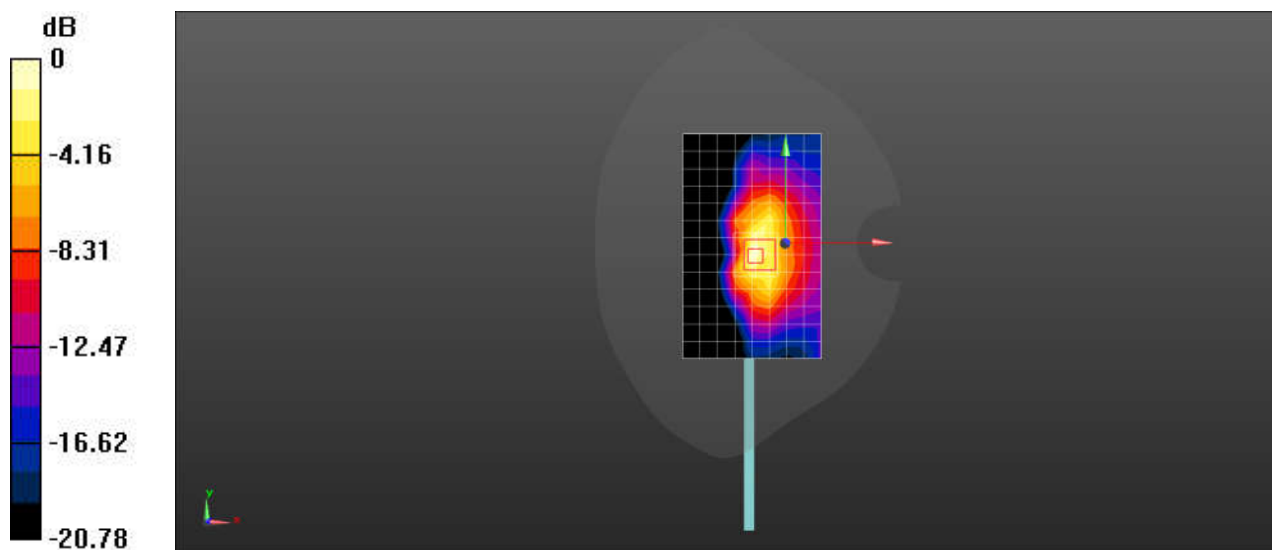

Test Laboratory: SGS-SAR Lab

DTHA116 WIFI5G 802.11a Ch100 Top side 0mm

DUT: DTHA116; Type: LCD Android Tablet; Serial: OBL76T89V4LZRO6X

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz; Duty Cycle: 1:1.026

Medium: HSL5000; Medium parameters used: $f = 5500$ MHz; $\sigma = 5.153$ S/m; $\epsilon_r = 35.998$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.1, 5.1, 5.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.35 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.89 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

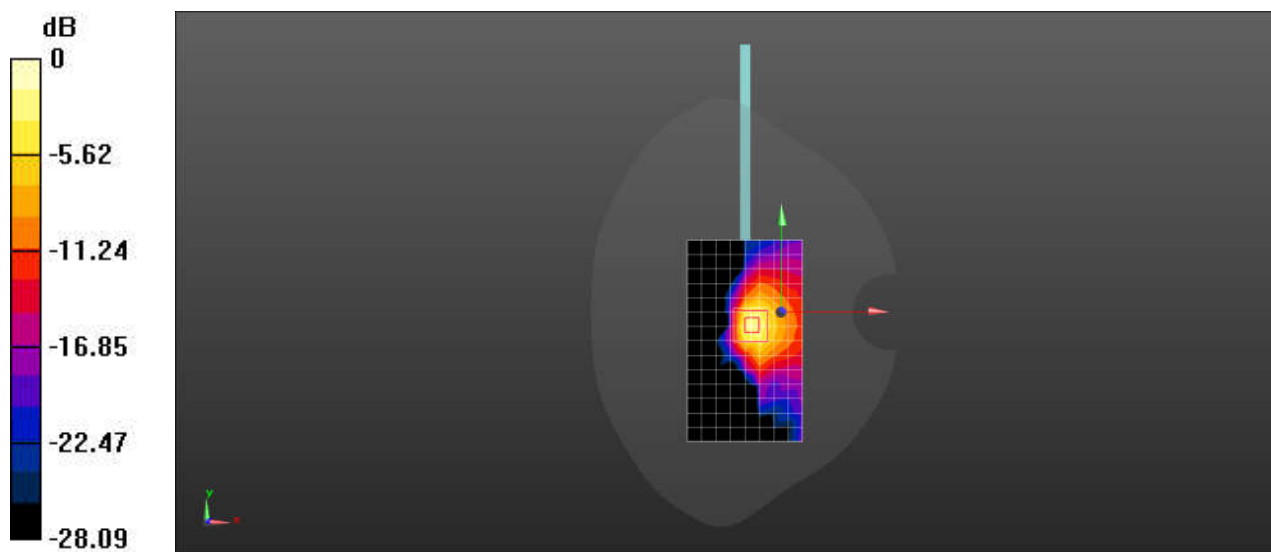

0 dB = 1.96 W/kg = 2.92 dBW/kg

Test Laboratory: SGS-SAR Lab

DTHA116 Bluetooth DH5 Ch0 Top side 0mm

DUT: DTHA116; Type: LCD Android Tablet; Serial: OBL76T89V4LZRO6X

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.295

Medium: HSL2450; Medium parameters used: $f = 2402$ MHz; $\sigma = 1.762$ S/m; $\epsilon_r = 38.726$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/04/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1484; Calibrated: 2024/10/15
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.121 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.948 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.136 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

