




EMI TEST REPORT


Test Report No. : 24KE0233-HO-1

Applicant : DENSO CORPORATION
Type of Equipment : Electronic Key
Model No. : 14AAF
Test standard : FCC Part 15 Subpart C Section 15.231:2004
Test Result : Complied
FCC ID : HYQ14AAF

1. This test report shall not be reproduced in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.

Date of test : July 2, 2004

Tested by : 
Hiroka Umeyama
EMC Service

Approved by : 
Hironobu Shimoji
Group Leader of EMC Service

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

CONTENTS	PAGE
-----------------	-------------

SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	6
SECTION 5: Radiated emission (Fundamental and Spurious Emission).....	7
APPENDIX 1: Photographs of test setup.....	8
Radiated emission.....	8
X, Y, Z axis.....	9
APPENDIX 2:Test Instruments	10
APPENDIX 3: Data of EMI test.....	11
Radiated emission.....	11
-20dB Bandwidth and Automatically deactivate	14
APPENDIX 4:Detail of Transmitting mode: Duty cycle	15

SECTION 1: Client information

Company Name : DENSO CORPORATION
Address : 1-1 Showa-cho, Kariya-city, Aichi-prefecture, 448-8661, Japan
Telephone Number : +81-566-61-7934
Facsimile Number : +81-566-25-4915
Contact Person : Mitsugi Ohtsuka

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Electronic Key
Model No. : 14AAF
Serial No. : No.1
Rating : DC3V
Country of Manufacture : Japan
Receipt Date of Sample : July 2, 2004
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)

2.2 Product Description

Model No: 14AAF(referred to as the EUT in this report) is an Electronic Key.

The specification is as following;

Carrier frequency : 314.35MHz
Local Frequency : 314.35MHz SAW resonator, 1MHz CR Oscillator Circuit
Type of Modulation : A1D
Information Antenna : Built-in type (Fixed)

FCC 15.31 (e) complies with the power supply:3VDC (one lithium battery).

*FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C :2004
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66 - 40.70MHz
and above 70MHz

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Deviation	Worst margin	Results
1	Automatically Deactivate	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.231(a)(1)	N/A	-	Complied
2	Electric Field Strength of Fundamental Emission	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.231(b)	N/A	4.1dB 314.338MHz Horizontal	Complied
3	Electric Field Strength of Spurious Emission	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.205 Section 15.209 Section 15.231(b)	N/A	2.3dB 1886.030MHz Vertical	Complied
4	-20dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators	Section 15.231(c)	N/A	-	Complied
5	Conducted emission AC Mains	ANSI C63.4:2003 7. AC powerline conducted emission measurements	Section 15.207	N/A*1)	N/A	N/A

Note: UL Apex's EMI Work procedures No. QPM05

*1) The test is not applicable since the EUT is DC drive and is not connected to the public utility (AC) power line.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

3.3 Uncertainty

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.5 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 5.2 dB

The measurement uncertainty (with a 95% confidence level) for this test using Horn Antenna is ± 6.6 dB.

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

3.4 Test Location

UL Apex Co., Ltd. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

	Listed date (for FCC)	FCC Registration Number	IC Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	February 01, 2002	313583	IC4247	19.2 x 11.2 x 7.7m	7.0 x 6.0m	Preparation room
No.2 semi-anechoic chamber	June 05, 2002	846015	IC4247-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 shielded room	-	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.4 measurement room	-	-	-	3.1 x 5.0 x 2.7m	N/A	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1 and No.2 semi-anechoic and No.3 shielded room.

3.5 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)


SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The EUT was operated in a manner similar to typical use during the tests.

Operation : Transmitting mode

4.2 Configuration and peripherals



Description of EUT

No.	Item	Model number	Serial number	Manufacturer	FCC ID
A	Electronic Key	14AAF	No.1	DENSO CORPORATION	HYQ14AAF

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

SECTION 5: Radiated emission (Fundamental and Spurious Emission)

5.1 Operating environment

Test place : No.1 semi anechoic chamber
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a platform of nominal size, 0.5 m by 0.5 m, raised 80cm above the conducting ground plane.
The EUT was set on the center of the tabletop.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.
A drawing of the set up is shown in the photos of APPENDIX 1.

5.3 Test conditions

Frequency range : 30MHz-3200MHz
Test distance : 3m
EUT position : Top of Polyurethane
EUT operation mode : Transmitting

5.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi anechoic chamber with a ground plane and at a distance of 3m.
The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization.

Frequency	Below 1GHz (Spurious)	Below 1GHz (Fundamental)	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK(BW:120kHz) – Duty Factor	PK: RBW:1MHz/VBW: 1MHz AV: RBW:1MHz/VBW:10Hz

- The carrier level was measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.
With the position, the noise levels of all the frequencies was measured.

5.5 Results

Summary of the test results: Pass

Date: July 2, 2004 Tested by: Hiroka Umeyama


APPENDIX 1: Photographs of test setup

Radiated emission

Front



Rear

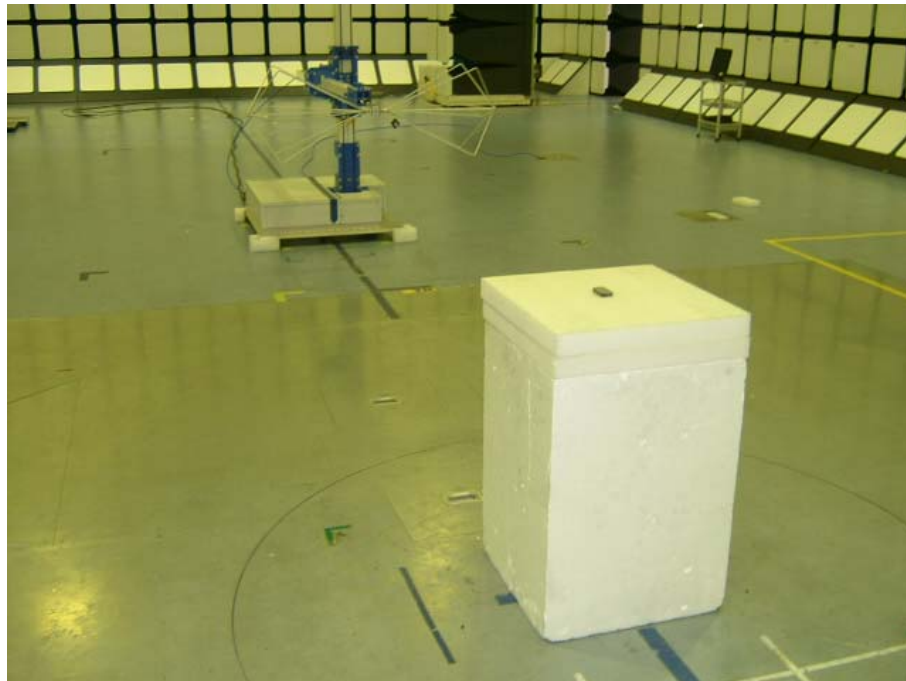

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

X, Y, Z axis

X-axis



Y-axis



Z-axis



UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

APPENDIX 2:Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-01	Anechoic Chamber	TDK	Semi Anechoic Chamber 10m	RE	2003/12/27 * 12
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE	2003/11/12 * 12
MAT-06	Attenuator(6dB)	Weinschel Corp	2	RE	2003/12/16 * 12
MBA-01	Biconical Antenna	Schwarzbeck	BBA9106	RE	2003/10/15 * 12
MLA-01	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2003/10/15 * 12
MHA-05	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2004/01/10 * 12
MPA-03	Microwave System Power Amplifier	Agilent	83050A	RE	2004/06/12 * 12
MPA-04	Pre Amplifier	Agilent	8447D	RE	2004/05/25 * 12
MCC-01	Coaxial Cable	Suhner/storm/ Agilent/TSJ	-	RE	2003/12/19 * 12
MCC-05	Microwave Cable	Storm	421-011	RE	2004/01/06 * 12
MCC-23	Microwave Cable	Storm	-	RE	2004/05/01 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

RE: Radiated emission

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

APPENDIX 3: Data of EMI test

Radiated emission

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber

Applicant : DENSO CORPORATION
Kind of EUT : Electronic key
Model No. : 14AAF
Serial No. : No.1
Report No. : 24KE0233-HO
Power : DC3.0V
Temp°C/Humi% : 25 / 55
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting Max-Axis Data (H:X-Axis, V:Z-Axis)

LIMIT : FCC 15C §15.209 3m

MARGIN : All the other spurious emission were less than 20dB for the limit.

No.	FREQ [MHz]	READING [dBμV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dBμV/m]	LIMIT [dBμV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEQ]
Horizontal										
1	314.338	74.0*	14.8	10.1	27.4	71.5	75.6	4.1	100	59
2	628.674	38.7	19.7	12.0	28.9	41.5	46.0	4.5	155	23
3	943.007	32.4	22.0	13.1	28.6	38.9	46.0	7.1	100	113
Vertical										
4	314.338	71.4*	14.8	10.1	27.4	68.9	75.6	6.7	177	76
5	628.674	37.7	19.7	12.0	28.9	40.5	46.0	5.5	100	110
6	943.007	30.0	22.0	13.1	28.6	36.5	46.0	9.5	115	76

*READING= S/A READING (PK) - Duty Factor:6(Duty Cycle 50%)

CHART:WITH FACTOR ANT TYPE : 30MHz LOOP, 30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber

Applicant : DENSO CORPORATION
Kind of EUT : Electronic key
Model No. : 14AAF
Serial No. : No.1
Report No. : 24KE0233-HO
Power : DC3.0V
Temp°C/Humi% : 25 / 55
Operator : Hiroka Uneyama

Mode / Remarks : Transmitting Max-Axis

LIMIT : FCC15C §15.231(b) & §15.209(a) above 1GHz PK
MARGIN : All the other spurious emission were less than 20dB for the limit.

No.	FREQ [MHz]	READING PK [dBμV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dBμV/m]	LIMIT [dBμV/m]	MARGIN [dB]
—— Horizontal ——								
1	1257.339	34.3	23.3	3.9	27.1	34.4	74.0	39.6
2	1571.690	42.9	25.1	4.4	27.3	45.1	74.0	28.9
3	1886.030	52.6	28.9	4.9	27.5	58.9	74.0	15.1
4	2200.339	33.3	30.5	5.3	27.5	41.6	74.0	32.4
5	2514.689	37.2	30.8	5.6	27.4	46.2	74.0	27.8
6	2829.150	32.1	31.9	6.0	27.2	42.8	74.0	31.2
7	3143.500	31.8	32.0	6.3	27.1	43.0	74.0	31.0
—— Vertical ——								
8	1257.339	32.5	23.3	3.9	27.1	32.6	74.0	41.4
9	1571.690	47.4	25.1	4.4	27.3	49.6	74.0	24.4
10	1886.030	52.8	28.9	4.9	27.5	59.1	74.0	14.9
11	2200.339	34.7	30.5	5.3	27.5	43.0	74.0	31.0
12	2514.689	38.1	30.8	5.6	27.4	47.1	74.0	26.9
13	2829.150	32.3	31.9	6.0	27.2	43.0	74.0	31.0
14	3143.500	30.3	32.0	6.3	27.1	41.5	74.0	32.5

CHART: WITH FACTOR ANT TYPE : ~30MHz LOOP, 30~300MHz BICONICAL, 300MHz~1000MHz LOGPERIODIC, 1000MHz~ HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

DATA OF RADIATED EMISSION TEST

UL Apex Co., Ltd. Head Office EMC Lab. No.1 Semi Anechoic Chamber

Applicant : DENSO CORPORATION
Kind of EUT : Electronic key
Model No. : 14AAF
Serial No. : No.1
Report No. : 24KE0233-HO
Power : DC3.0V
Temp°C/Humi% : 25 / 55
Operator : Hiroka Umeyama

Mode / Remarks : Transmitting Max-Axis

LIMIT : FCC 15C §15.209 3m

MARGIN : All the other spurious emission were less than 20dB for the limit.

No.	FREQ [MHz]	READING AV [dBμV]	ANT FACTOR [dB/m]	LOSS [dB]	GAIN [dB]	RESULT [dBμV/m]	LIMIT [dBμV/m]	MARGIN [dB]
—— Horizontal ——								
1	1257.339	23.0	23.3	3.9	27.1	23.1	54.0	30.9
2	1571.690	34.1	25.1	4.4	27.3	36.3	54.0	17.7
3	1886.030	45.2	28.9	4.9	27.5	51.5	54.0	2.5
4	2200.339	20.8	30.5	5.3	27.5	29.1	54.0	24.9
5	2514.689	26.9	30.8	5.6	27.4	35.9	54.0	18.1
6	2829.150	19.3	31.9	6.0	27.2	30.0	54.0	24.0
7	3143.500	18.9	32.0	6.3	27.1	30.1	54.0	23.9
—— Vertical ——								
8	1257.339	19.9	23.3	3.9	27.1	20.0	54.0	34.0
9	1571.690	39.3	25.1	4.4	27.3	41.5	54.0	12.5
10	1886.030	45.4	28.9	4.9	27.5	51.7	54.0	2.3
11	2200.339	21.3	30.5	5.3	27.5	29.6	54.0	24.4
12	2514.689	27.3	30.8	5.6	27.4	36.3	54.0	17.7
13	2829.150	19.8	31.9	6.0	27.2	30.5	54.0	23.5
14	3143.500	18.1	32.0	6.3	27.1	29.3	54.0	24.7

CHART:WITH FACTOR ANT TYPE : -30MHz LOOP,30-300MHz BICONICAL, 300MHz-1000MHz LOGPERIODIC, 1000MHz- HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)

-20dB Bandwidth and Automatically deactivate

UL Apex Co., Ltd.
Head Office EMC Lab. No.1 Semi Anechoic Chamber

COMPANY : DENSO CORPORATION
EQUIPMENT : Electronic Key
MODEL : 14AAF
S/N : No.1
POWER : DC3.0V
Mode : Transmitting

REPORT NO : 24KE233-HO
REGULATION : Fcc Part15 Subpart C 231(c)
TEST DISTANCE : 3m
DATE : 07/02/2004
TEMPERATURE : 25
HUMIDITY : 55%


ENGINEER : Hiroka Umeyama

Bandwidth Limit : $314.35\text{MHz} \times 0.25\% = 785.875$ kHz


-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
40.9	785.875	Pass

Time of Transmitting [sec]	Limit [sec]	Result
0.55	5.00	Pass

-20dB Bandwidth

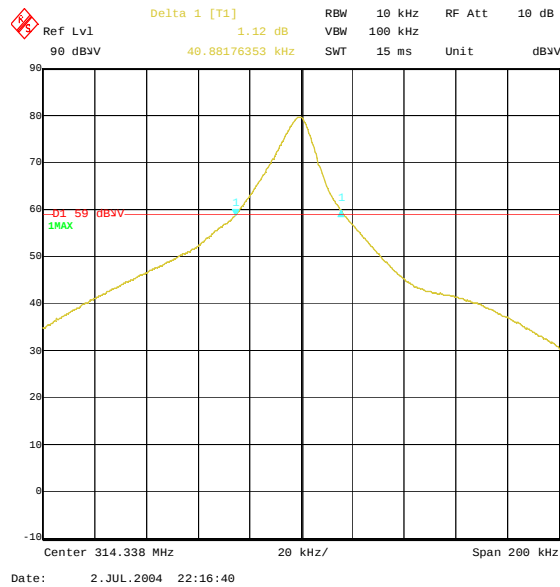

Automatically deactivate

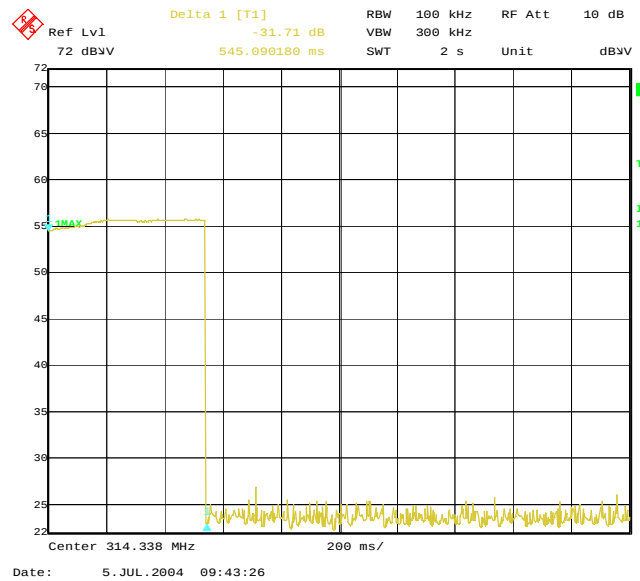

APPENDIX 4:Detail of Transmitting mode: Duty cycle


Frame Format:

Header (8bit)	Function bit (22bit)	ID and Counter bit (98bit)
------------------	-------------------------	-------------------------------

Data time: 1bit=1.4msec / TW1+TW2 = 1.4msec

	Tw1/Tw2	
Header	0.7 msec/0.7 msec	
Function bit	Data "0"	0.7 msec/0.7 msec
ID and Counter bit	Data "1"	0 msec/1.4 msec or 1.4 msec/0 msec *


* Data "0"

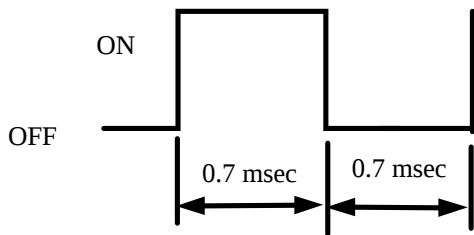


* Data "1"

Pattern A

Pattern B

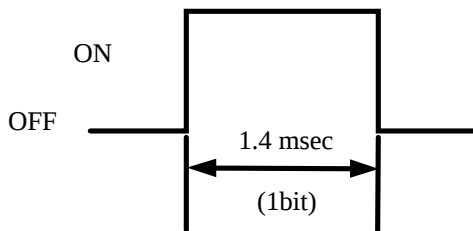

or

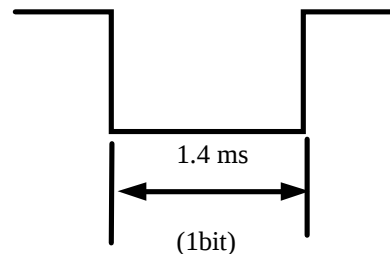

Calculation of the duty factor:

- Header 0.7 msec/0.7 msec x 8bit : Duty 50%

- Function bit, ID and Counter bit

When Data is "0" ;

0.7msec/0.7msec x 120bit : Duty 50%

When Data is "1" ;

Because, in the case Data 0, it has one cycle that is repeated by Duty50% of 0.7msec/0.7sec by turns. In the other case Data 1, they have 1.4msec ON or 1.4msec OFF in 1 cycle and they are repeated by turns. Thereby, that duty factor may become 50% in all the time.

Therefore

Duty Factor = 20 log 0.5 = -6.0

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b(10.04.03)