



RADIO TEST REPORT


Test Report No. : 12525890H

Applicant : **DENSO CORPORATION**
Type of Equipment : **Smart Card Key**
Model No. : **14CCL**
FCC ID : **HYQ14CCL**
Test regulation : **FCC Part 15 Subpart C: 2018**
Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.


Date of test: October 3, 2018

Representative test engineer:


Shuichi Ohyama
Engineer
Consumer Technology Division

Approved by:


Motoya Imura
Leader
Consumer Technology Division

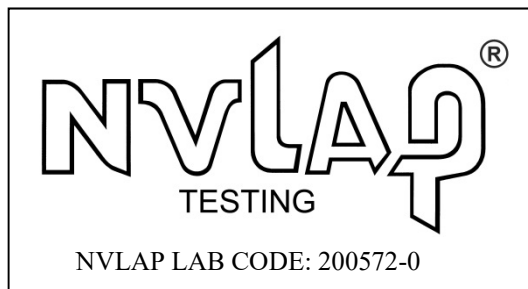

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
☒ There is no testing item of "Non-accreditation".

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission).....	10
SECTION 6: Automatically deactivate	12
SECTION 7: -20 dB and 99 % Occupied Bandwidth	12
APPENDIX 1: Test data	13
Automatically deactivate.....	13
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)	14
-20dB and 99% Occupied Bandwidth.....	18
APPENDIX 2: Test instruments	19
APPENDIX 3: Photographs of test setup	20
Radiated emission	20
Worst case position	21

SECTION 1: Customer information

Company Name	:	DENSO CORPORATION
Address	:	1-1 Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan
Telephone Number	:	+81-566-20-3955
Facsimile Number	:	+81-566-25-4837
Contact Person	:	TAKAYUKI HATTORI

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	:	Smart Card Key
Model No.	:	14CCL
Serial No.	:	Refer to Section 4, Clause 4.2
Rating	:	DC 3.0 V
Receipt Date of Sample	:	September 27, 2018
Country of Mass-production	:	Japan, United states of America and China
Condition of EUT	:	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	:	No Modification by the test lab

2.2 Product Description

Model: 14CCL (referred to as the EUT in this report) is a Smart Card Key.

Radio Type	:	Transceiver
Frequency of Operation	:	433.58 MHz / 434.42 MHz*
		*These two different frequencies are not emitted simultaneously.
Clock frequency(ies) in the system	:	13.081 MHz Crystal / 8 MHz (IC)
Modulation	:	FSK (F1D)
Type of Battery	:	One lithium battery
Antenna type	:	Built-in type (Fixed)
Receiving frequency of Operation	:	134.2 kHz *1)

*1) The test of receiver part was performed separately from this test report, and the conformability is confirmed.

* Model: 14CCL has two types; Type A and Type B.
The worst case was confirmed with Type A and Type B at pre check.
The test was performed with Type B, which had the worst result.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.10:2013 6 Standard test methods IC: RSS-Gen 8.8	FCC: Section 15.207 IC: RSS-Gen 8.8	N/A	N/A *1)	-
Automatically Deactivate	FCC: ANSI C63.10:2013 6 Standard test methods IC: -	FCC: Section 15.231(a)(1) IC: RSS-210 A1.1	N/A	Complied	Radiated
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.10:2013 6 Standard test methods IC: RSS-Gen 6.12	FCC: Section 15.231(b) IC: RSS-210 A1.2	6.2 dB 433.580 MHz Vertical PK with Duty factor	Complied#	Radiated
Electric Field Strength of Spurious Emission	FCC: ANSI C63.10:2013 6 Standard test methods IC: RSS-Gen 6.13	FCC: Section 15.205 Section 15.209 Section 15.231(b) IC: RSS-210 A1.2, 4.4 RSS-Gen 8.9	6.8 dB 4344.200 MHz Horizontal PK with Duty factor <434.42 MHz>	Complied	Radiated
-20dB Bandwidth	FCC: ANSI C63.10:2013 6 Standard test methods IC: -	FCC: Section 15.231(c) IC: Reference data	N/A	Complied	Radiated
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.					
*1) The test is not applicable since the EUT does not have AC Mains.					
Symbols:					
Complied		The data of this test item has enough margin, more than the measurement uncertainty.			
Complied#		The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.			

FCC 15.31 (e)

This test was performed with the New Battery (DC 3.0 V) during the tests. Therefore, the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	IC: RSS-Gen 6.7	IC: RSS-210 A1.3	N/A	Complied	Radiated

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*)(+/-)		(10 m*)(+/-)	
	30 MHz to 200 MHz	200 MHz to 1000 MHz	30 MHz to 200 MHz	200 MHz to 1000 MHz
Horizontal	4.8 dB	5.2 dB	4.8 dB	5.0 dB
Vertical	5.0 dB	6.3 dB	4.9 dB	5.0 dB

Radiated emission (Above 1 GHz)				
(3 m*)(+/-)		(1 m*)(+/-)		(10 m*)(+/-)
1 GHz to 6 GHz	6 GHz to 18 GHz	10 GHz to 26.5 GHz	26.5 GHz to 40 GHz	1 GHz to 18 GHz
5.2 dB	5.5 dB	5.9 dB	5.9 dB	5.5 dB

* Measurement distance

Automatically Deactivate
0.10 %

Bandwidth
0.96 %

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124
NV LAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test Item*	Mode
Automatically Deactivate	Normal use mode, 433.58 MHz *1) Normal use mode, 434.42 MHz *1)
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20 dB & 99 % Occupied Bandwidth	Transmitting mode (Tx), 433.58 MHz *2) Transmitting mode (Tx), 434.42 MHz *2)
* The system was configured in typical fashion (as a customer would normally use it) for testing. *1) The EUT transmits only when it receives 134.2 kHz radio signal. End users cannot change the settings of the output power of the product. *2) The software of this mode is the same as one of normal product, except that EUT continues to transmit when transmitter button is being pressed. This button was attached just for testing.(for making continuous transmission)	

4.2 Configuration and peripherals

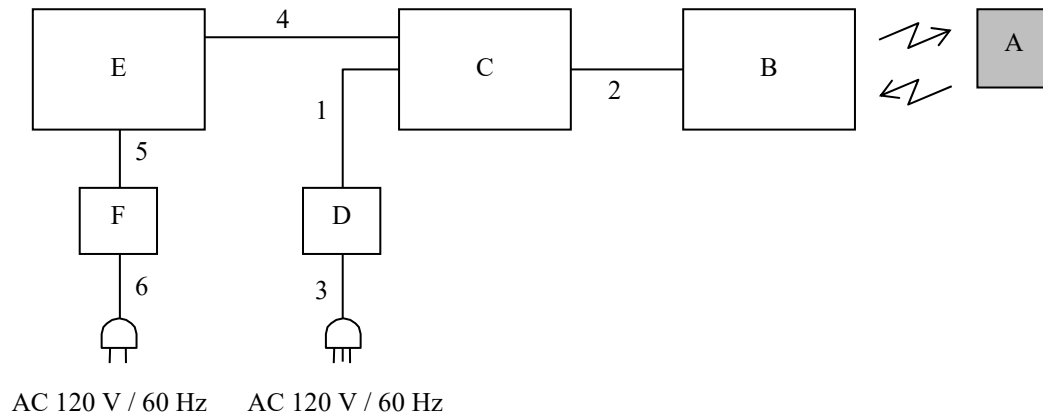

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Smart Card Key	14CCL	002 *1) 001 *2)	DENSO CORPORATION	EUT
B	Door handle unit	-	-	DENSO CORPORATION	*1)
C	Test bench	-	-	DENSO CORPORATION	*1)
D	AC Adapter	-	-	DENSO CORPORATION	*1)
E	Laptop PC	L540	R90B035F	Lenovo	*1)
F	AC Adapter	ADLX65NCC2A	11S45N0263Z1ZS9948C7 3U	Lenovo	*1)

*1) Used for Normal use mode only.

*2) Used for Transmitting mode only.

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	3.0	Unshielded	Unshielded	*1)
2	DC and Signal Cable	1.5	Unshielded	Unshielded	*1)
3	AC Cable	2.0	Unshielded	Unshielded	*1)
4	USB Cable	1.8	Shielded	Shielded	*1)
5	DC Cable	1.7	Unshielded	Unshielded	*1)
6	AC Cable	0.9	Unshielded	Unshielded	*1)

*1) Used for Normal use mode only.

SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)

Test Procedure and conditions

[For below 30 MHz]

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

[For 30 MHz to 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.


Test Antennas are used as below;

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	Above 1 GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200 Hz	200 Hz	9.1 kHz	9.1 kHz	120 kHz	PK: S/A: RBW 1 MHz, VBW: 3 MHz

[Test Setup]


Below 1 GHz

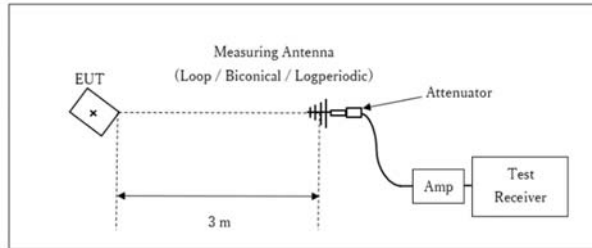

x : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

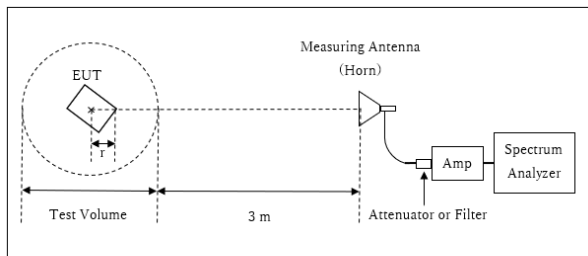

r : Radius of an outer periphery of EUT

x : Center of turn table

Distance Factor: $20 \times \log (3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

* Test Distance: $(3 + \text{Test Volume} / 2) - r = 3.75 \text{ m}$

Test Volume : 1.5 m

(Test Volume has been calibrated based on CISPR 16-1-4.)

$r = 0.0 \text{ m}$

* The test was performed with $r = 0.0 \text{ m}$ since EUT is small and it was the rather conservative condition.

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test without mechanical key was the worst case. Therefore the test without mechanical key was performed only.

*The result is rounded off to the second decimal place, so some differences might be observed.

Measurement range : 9 kHz - 4.4 GHz

Test data : APPENDIX

Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 6: Automatically deactivate

Test Procedure

The measurement was performed with Electric field strength using a spectrum analyzer.

Test data : APPENDIX

Test result : Pass

SECTION 7: -20 dB and 99 % Occupied Bandwidth

Test Procedure

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20 dB Bandwidth	150 kHz	1.5 kHz	5.1 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Peak hold was applied as Worst-case measurement.							

Test data : APPENDIX


Test result : Pass

APPENDIX 1: Test data

Automatically deactivate

Report No.	12525890H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	10/03/2018 (Night)
Temperature / Humidity	23 deg. C / 51 % RH
Engineer	Shuichi Ohyama
Mode	Normal use mode

Tx Freq	Time of Transmitting [sec]	Limit [sec]	Result
433.58 MHz	0.1516	5.00	Pass
434.42 MHz	0.1493	5.00	Pass

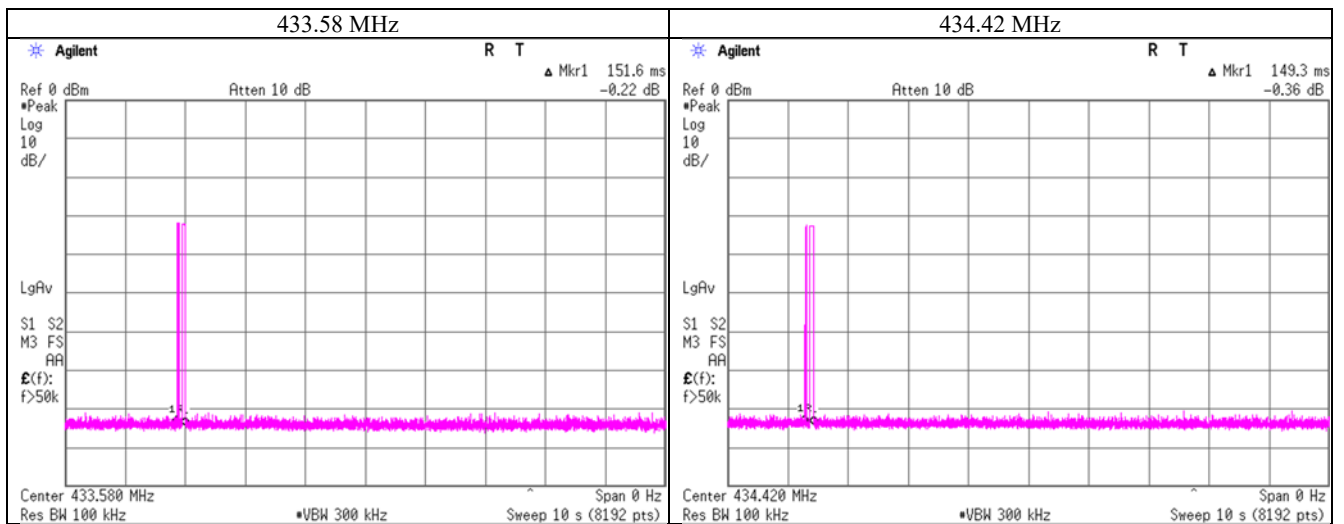

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 12525890H
Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Date 10/03/2018 (Day) 10/03/2018 (Night)
Temperature/ Humidity 23 deg. C / 51 % RH 23 deg. C / 51 % RH
Engineer Koji Yamamoto Shuichi Ohyama
(Below 1GHz) (Above 1GHz)
Mode Transmitting mode 433.58 MHz

QP or PK

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
433.580	PK	77.9	78.8	16.1	9.5	29.8	-	73.7	74.6	100.8	27.1	26.2	Carrier
867.160	PK	33.6	32.3	21.8	11.2	28.2	-	38.4	37.1	80.8	42.4	43.7	Outside
1300.740	PK	47.5	47.9	25.7	3.8	35.3	-	41.7	42.1	73.9	32.2	31.8	Inside
1734.320	PK	47.0	47.4	24.9	4.1	34.8	-	41.2	41.6	80.8	39.6	39.2	Outside
2167.900	PK	47.7	46.2	27.9	4.4	34.5	-	45.5	44.0	80.8	35.3	36.8	Outside
2601.480	PK	46.5	46.8	27.4	4.6	34.4	-	44.1	44.4	80.8	36.7	36.4	Outside
3035.060	PK	46.6	46.0	28.5	4.8	34.3	-	45.6	45.0	80.8	35.2	35.8	Outside
3468.640	PK	45.4	45.5	29.2	5.0	33.9	-	45.7	45.8	80.8	35.1	35.0	Outside
3902.220	PK	45.1	45.2	29.8	5.2	33.6	-	46.5	46.6	73.9	27.4	27.3	Inside
4335.800	PK	44.4	44.6	30.6	5.4	33.6	-	46.8	47.0	73.9	27.1	26.9	Inside

PK with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
433.580	PK	77.9	78.8	16.1	9.5	29.8	0.0	73.7	74.6	80.8	7.1	6.2	Carrier
867.160	PK	33.6	32.3	21.8	11.2	28.2	0.0	38.4	37.1	60.8	22.4	23.7	Outside
1300.740	PK	47.5	47.9	25.7	3.8	35.3	0.0	41.7	42.1	53.9	12.2	11.8	Inside
1734.320	PK	47.0	47.4	24.9	4.1	34.8	0.0	41.2	41.6	60.8	19.6	19.2	Outside
2167.900	PK	47.7	46.2	27.9	4.4	34.5	0.0	45.5	44.0	60.8	15.3	16.8	Outside
2601.480	PK	46.5	46.8	27.4	4.6	34.4	0.0	44.1	44.4	60.8	16.7	16.4	Outside
3035.060	PK	46.6	46.0	28.5	4.8	34.3	0.0	45.6	45.0	60.8	15.2	15.8	Outside
3468.640	PK	45.4	45.5	29.2	5.0	33.9	0.0	45.7	45.8	60.8	15.1	15.0	Outside
3902.220	PK	45.1	45.2	29.8	5.2	33.6	0.0	46.5	46.6	53.9	7.4	7.3	Inside
4335.800	PK	44.4	44.6	30.6	5.4	33.6	0.0	46.8	47.0	53.9	7.1	6.9	Inside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor: $20 \times \log(3.75 \text{ m}/3.0 \text{ m}) = 1.94 \text{ dB}$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

The result of AV (PK with Duty factor) was calculated by applying Duty 100%.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 12525890H
Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Date 10/03/2018 (Day) 10/03/2018 (Night)
Temperature/ Humidity 23 deg. C / 51 % RH 23 deg. C / 51 % RH
Engineer Koji Yamamoto Shuichi Ohyama
(Below 1GHz) (Above 1GHz)
Mode Transmitting mode 434.42 MHz

QP or PK

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
434.420	PK	77.3	78.0	16.1	9.5	29.8	-	73.1	73.8	100.8	27.7	27.0	Carrier
868.840	PK	33.9	33.5	21.8	11.2	28.2	-	38.7	38.3	80.8	42.1	42.5	Outside
1303.260	PK	47.8	47.4	25.8	3.8	35.3	-	42.1	41.7	73.9	31.8	32.2	Inside
1737.680	PK	47.1	47.0	24.9	4.1	34.8	-	41.3	41.2	80.8	39.5	39.6	Outside
2172.100	PK	47.9	46.3	27.9	4.4	34.5	-	45.7	44.1	80.8	35.1	36.7	Outside
2606.520	PK	46.3	46.4	27.5	4.6	34.4	-	44.0	44.1	80.8	36.8	36.7	Outside
3040.940	PK	46.9	46.5	28.5	4.8	34.3	-	45.9	45.5	80.8	34.9	35.3	Outside
3475.360	PK	45.3	45.0	29.2	5.0	33.9	-	45.6	45.3	80.8	35.2	35.5	Outside
3909.780	PK	45.6	45.4	29.8	5.2	33.6	-	47.0	46.8	73.9	26.9	27.1	Inside
4344.200	PK	44.7	44.5	30.6	5.4	33.6	-	47.1	46.9	73.9	26.8	27.0	Inside

PK with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
434.420	PK	77.3	78.0	16.1	9.5	29.8	0.0	73.1	73.8	80.8	7.7	7.0	Carrier
868.840	PK	33.9	33.5	21.8	11.2	28.2	0.0	38.7	38.3	60.8	22.1	22.5	Outside
1303.260	PK	47.8	47.4	25.8	3.8	35.3	0.0	42.1	41.7	53.9	11.8	12.2	Inside
1737.680	PK	47.1	47.0	24.9	4.1	34.8	0.0	41.3	41.2	60.8	19.5	19.6	Outside
2172.100	PK	47.9	46.3	27.9	4.4	34.5	0.0	45.7	44.1	60.8	15.1	16.7	Outside
2606.520	PK	46.3	46.4	27.5	4.6	34.4	0.0	44.0	44.1	60.8	16.8	16.7	Outside
3040.940	PK	46.9	46.5	28.5	4.8	34.3	0.0	45.9	45.5	60.8	14.9	15.3	Outside
3475.360	PK	45.3	45.0	29.2	5.0	33.9	0.0	45.6	45.3	60.8	15.2	15.5	Outside
3909.780	PK	45.6	45.4	29.8	5.2	33.6	0.0	47.0	46.8	53.9	6.9	7.1	Inside
4344.200	PK	44.7	44.5	30.6	5.4	33.6	0.0	47.1	46.9	53.9	6.8	7.0	Inside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss (Cable + Attenuator) - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor: $20 \times \log(3.75 \text{ m}/3.0 \text{ m}) = 1.94 \text{ dB}$

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

The result of AV (PK with Duty factor) was calculated by applying Duty 100%.

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Plot data, Worst case)

Report No. 12525890H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date 10/03/2018 (Day) 10/03/2018 (Night)
Temperature / Humidity 23 deg. C / 51 % RH 23 deg. C / 51 % RH
Engineer Koji Yamamoto Shuichi Ohyama
(Below 1GHz) (Above 1GHz)
Mode Transmitting mode 433.58 MHz

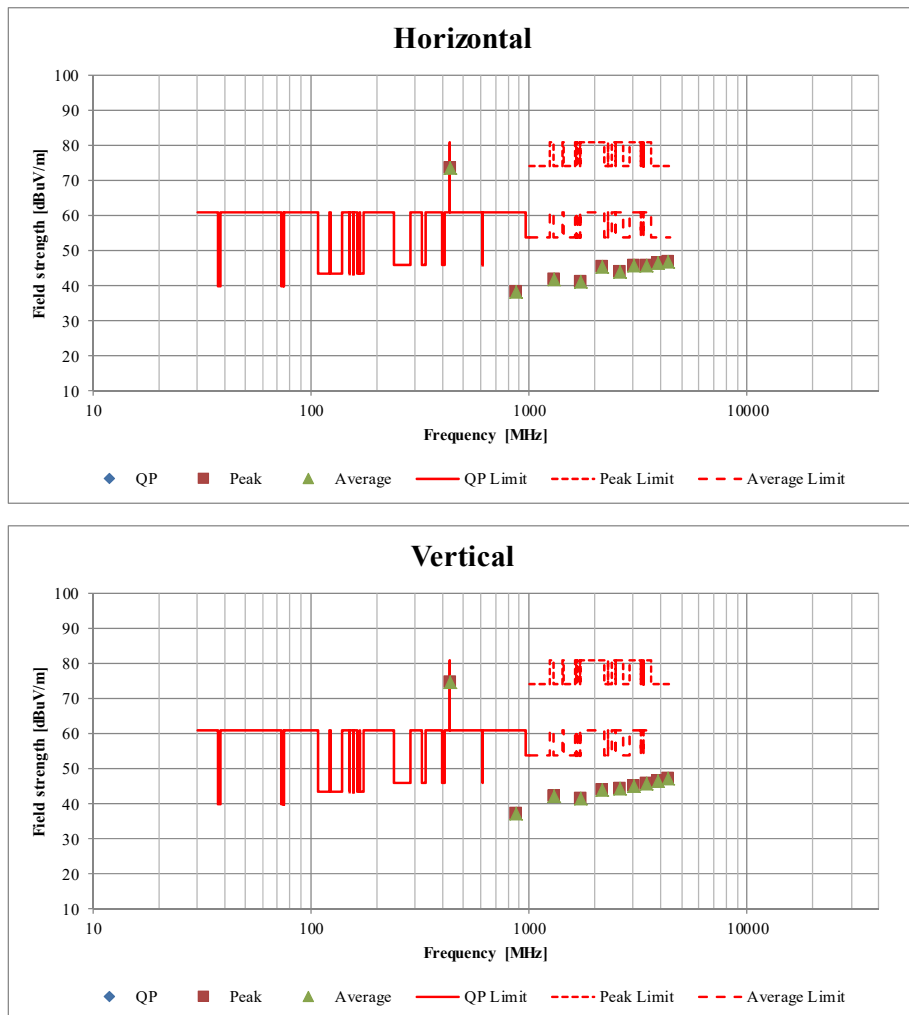

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

-20dB and 99% Occupied Bandwidth

Report No.	12525890H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	10/03/2018 (Night)
Temperature / Humidity	23 deg. C / 51 % RH
Engineer	Shuichi Ohyama
Mode	Transmitting mode 433.58 MHz / 434.42 MHz

Bandwidth Limit : Fundamental Frequency **433.58** MHz x 0.25% = 1083.95 kHz

* The above limit was calculated from more stringent nominal frequency.

* Method of KDB 926416 for systems employing non sweeping frequencies was referred.

433.58 MHz

-20dB Bandwidth [kHz]
37.16

434.42 MHz

-20dB Bandwidth [kHz]
37.04

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
37.16 + 37.04 = 74.20	1083.95	Pass

Bandwidth Limit : Fundamental Frequency **433.58** MHz x 0.25% = 1083.95 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
40.9072	1083.95	Pass


Bandwidth Limit : Fundamental Frequency **434.42** MHz x 0.25% = 1086.05 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
39.4052	1086.05	Pass


-20dB and 99% Occupied Bandwidth

Report No. 12525890H
Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date 10/03/2018 (Night)
Temperature / Humidity 23 deg. C / 51 % RH
Engineer Shuichi Ohyama
Mode Transmitting mode 433.58 MHz / 434.42 MHz

[433.58MHz]

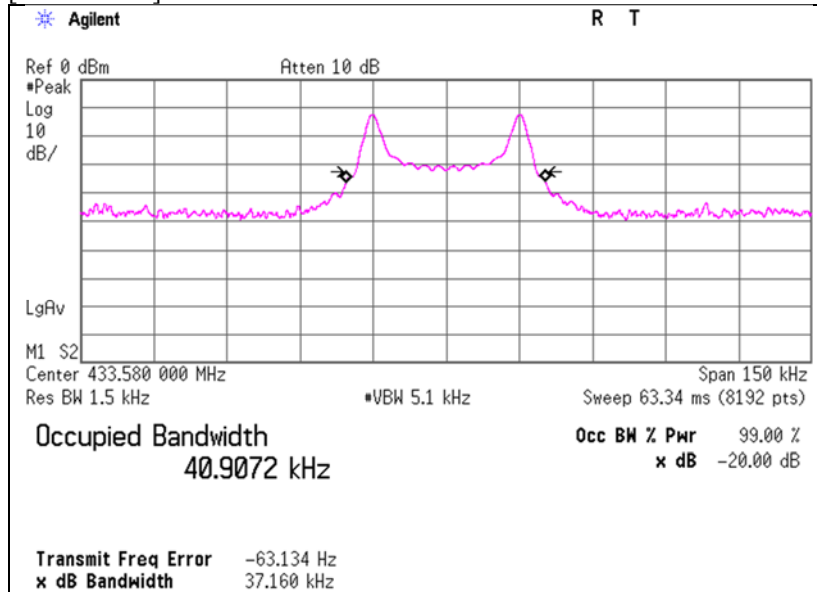

[434.42MHz]

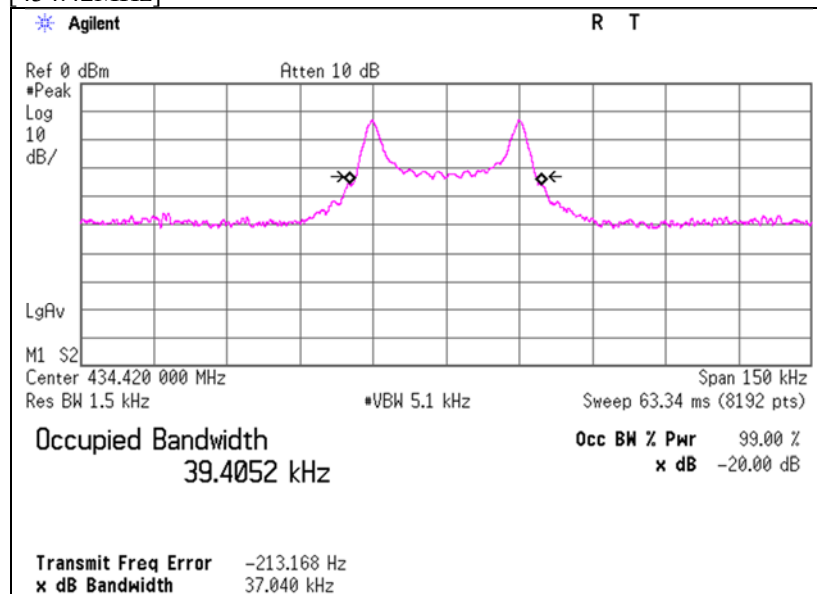

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test Instruments

Test item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Calibration Due Date	Cal Int
RE	141427	Biconical Antenna	Schwarzbeck	VHA9103B	8031	5/31/2018	5/31/2019	12
RE	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	4/2/2018	4/29/2019	12
RE	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	8/21/2018	8/31/2019	12
RE	141152	EMI measurement program	TSJ	TEPTO-DV	-	-	-	-
RE	141265	Logperiodic Antenna(200-1000 MHz)	Schwarzbeck	VUSLP9111B	911B-190	5/31/2018	5/31/2019	12
RE	142228	Measure	KOMELON	KMC-36	-	-	-	-
RE	141203	Attenuator(6dB)	Weinschel Corp	2	BK7970	11/14/2017	11/30/2018	12
RE	141578	Pre Amplifier	AGILENT	8447D	2944A10845	9/19/2018	9/30/2019	12
RE	141556	Thermo-Hygrometer	CUSTOM	CTH-201	0003	12/21/2017	12/31/2018	12
RE	141512	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	6/6/2018	6/30/2019	12
RE	141392	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	8/8/2018	8/31/2019	12
RE	141579	Pre Amplifier	AGILENT	8449B	3008A02142	1/23/2018	1/31/2019	12
RE	141885	Spectrum Analyzer	AGILENT	E4448A	US44300523	11/14/2017	11/30/2018	12
RE	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	6/29/2018	6/30/2020	24
RE	141942	Test Receiver	Rohde & Schwarz	ESCI	100300	8/8/2018	8/31/2019	12
RE	141317	Coaxial Cable	Fujikura/Agilent	-	-	2/23/2018	2/28/2019	12
RE	142645	Loop Antenna	UL Japan	-	-	-	-	-

*Hyphens for Last Calibration Date, Calibration Due Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test item:

RE: Radiated emission, 99 % Occupied Bandwidth, -20 dB bandwidth and Automatically deactivate tests

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124