



RF Exposure Evaluation Report

Equipment : 802.11 a/n PCIe Module
Brand Name : Proxim
Model No. : XB92HPW
FCC ID : HZB-XB92WFR
Standard : 47 CFR Part 2.1091
Applicant : Proxim Wireless Corporation
47633 Westinghouse Drive Fremont, CA 94539
United States

The product sample received on Apr. 29, 2013 and completely tested on Apr. 18, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with 47 CFR Part 2.1091, and pass the limit.

Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

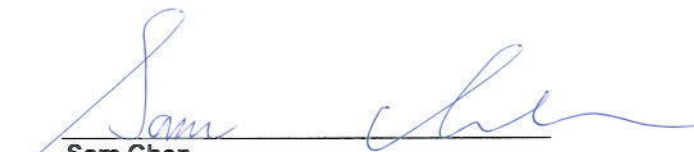

Sam Chen
SPORTON INTERNATIONAL INC.





TABLE OF CONTENTS

1	GENERAL DESCRIPTION	4
1.1	EUT General Information	4
1.2	Table for Class II Change.....	4
1.3	Testing Location	4
2	MAXIMUM PERMISSIBLE EXPOSURE	5
2.1	Limit of Maximum Permissible Exposure	5
2.2	MPE Calculation Method.....	6
2.3	Calculated Result and Limit.....	6

REVISION HISTORY

[illegible]

1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
5GHz WLAN	5725-5850	5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2 Table for Class II Change

This product is an extension of original one reported under Sporton project number: 342910-03 and 342910-04.

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Changing 5GHz Band 2 and Band 3 to "New Rules" from "Old Rules". 2. Changing Applicant address to 47633 Westinghouse Drive Fremont, CA 94539 United States. 3. Removing manufacturer and manufacturer address. 4. Ant. 1, Ant. 2 and Ant. 4 are equipped with p to p / p to m functions.	It is not necessary to re-test Maximum Permissible Exposure.
5. Updating test rule of 5GHz band 4 to "15.407 (b)(4)(i) of New Rules (ET Docket No. 13-49; FCC 16-24)" from "Old Rules". 6. Ant. 3 was replaced by another antenna (Model: SAA08-220570, Brand: SmartAnt).	Maximum Permissible Exposure.

Note: There is no change in hardware or in existing RF relevant portion.

1.3 Testing Location

Testing Location		
☐	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3 Calculated Result and Limit

For Antenna 1

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.8G;D1D	16.00	17.89	33.89	2.44906	20	0.48723	1

For Antenna 2

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.8G;D1D	8.00	22.72	30.72	1.18032	20	0.23482	1

For Antenna 3

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.8G;D1D	8.00	25.74	33.74	2.36592	20	0.47068	1